


Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

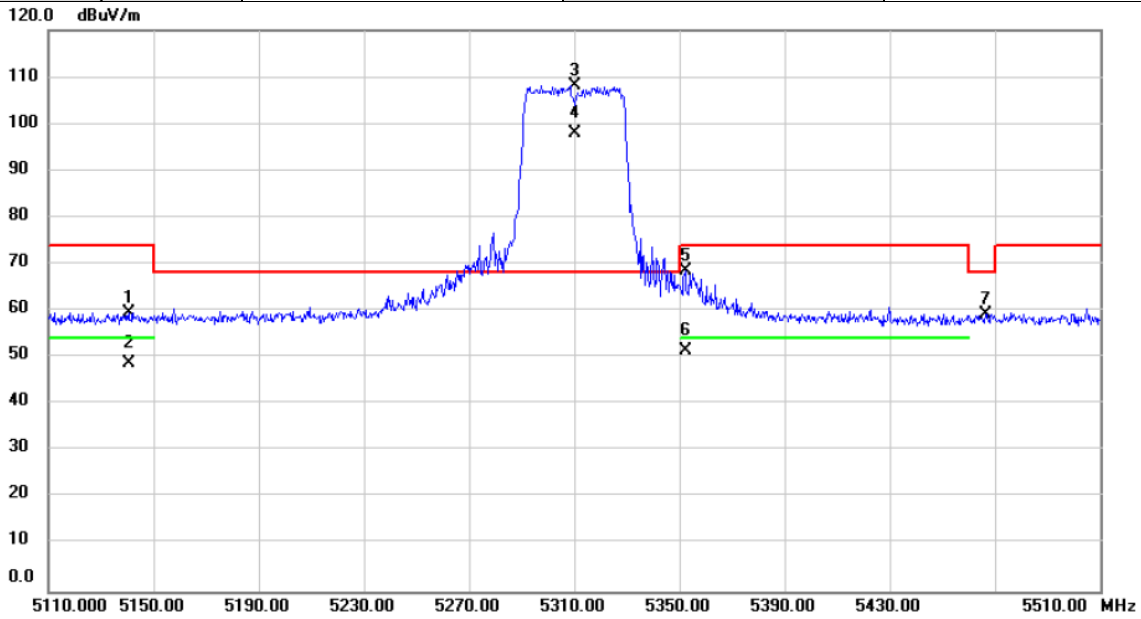


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5140.667	62.79	-3.17	59.62	74.00	-14.38			peak	
2		5140.667	51.78	-3.17	48.61	54.00	-5.39			AVG	
3	*	5310.000	111.13	-2.87	108.26	68.20	40.06			peak	No Limit
4	X	5310.000	100.73	-2.87	97.86	68.20	29.66			AVG	No Limit
5		5352.240	71.36	-2.80	68.56	74.00	-5.44			peak	
6		5352.240	54.36	-2.80	51.56	54.00	-2.44			AVG	
7		5466.440	61.96	-2.60	59.36	68.20	-8.84			peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

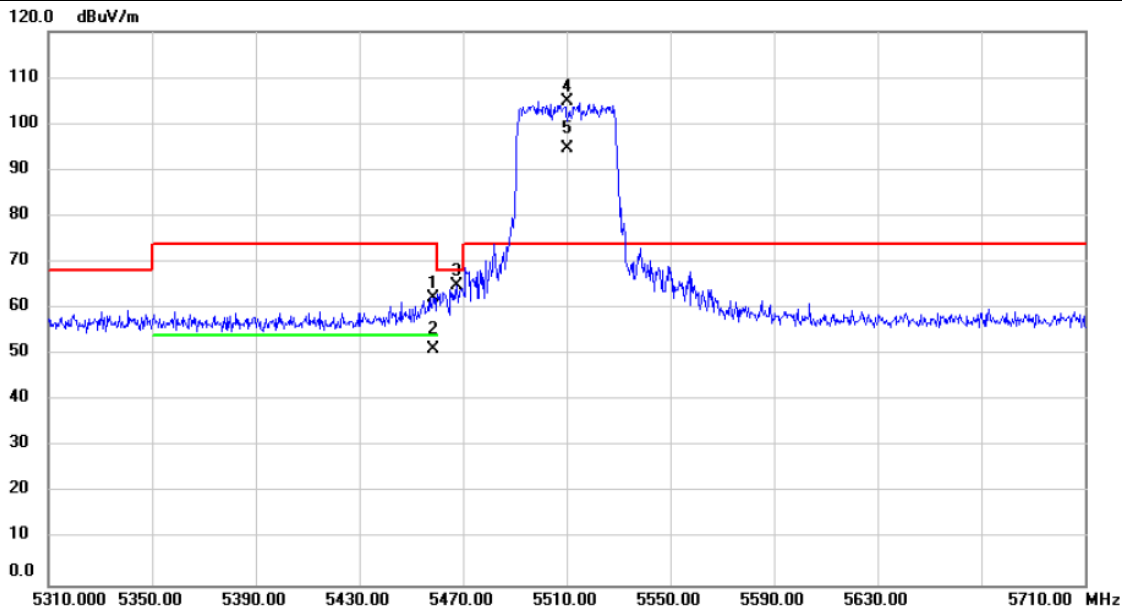


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5458.627	64.99	-2.61	62.38	74.00	-11.62	peak			
2		5458.627	53.90	-2.61	51.29	54.00	-2.71	AVG			
3		5467.800	67.46	-2.60	64.86	68.20	-3.34	peak			
4	*	5510.000	107.36	-2.52	104.84	74.00	30.84	peak			No Limit
5	X	5510.000	97.28	-2.52	94.76	74.00	20.76	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

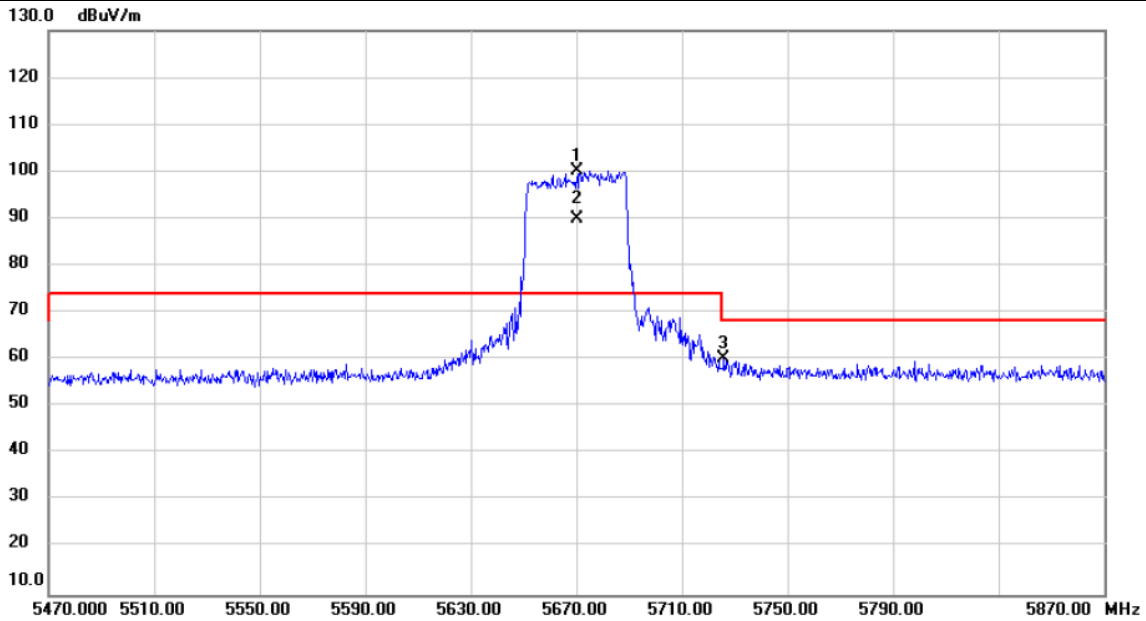


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1 *	5670.000	102.22	-2.18	100.04	74.00	26.04			peak	No Limit
2 X	5670.000	92.00	-2.18	89.82	74.00	15.82			AVG	No Limit
3	5725.827	62.40	-2.06	60.34	68.20	-7.86			peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

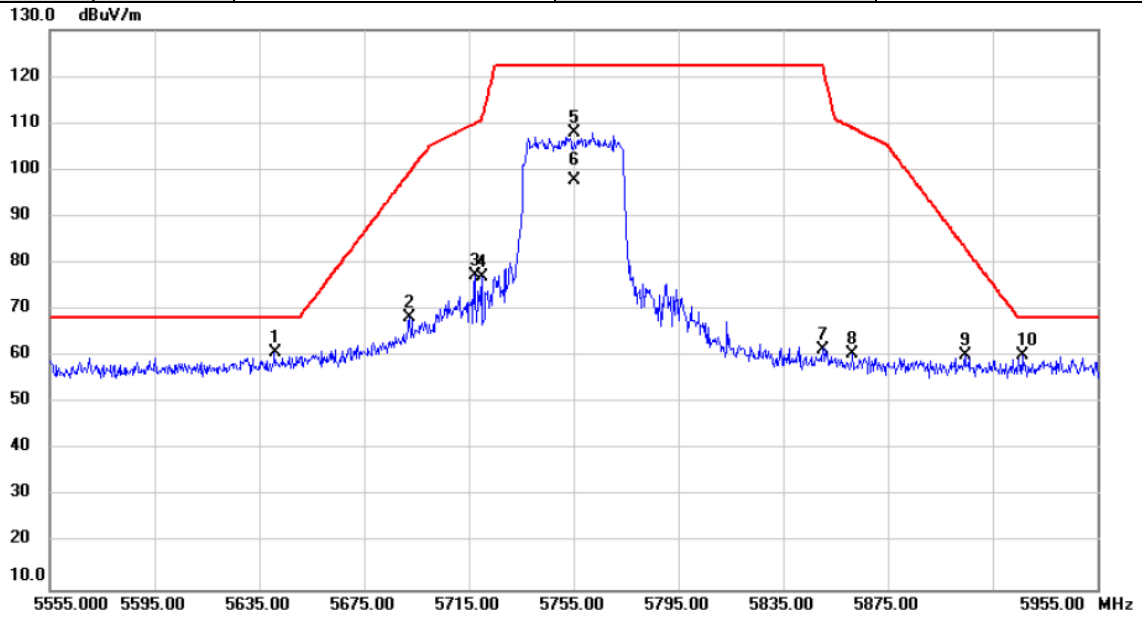


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5640.867	62.95	-2.24	60.71	68.20	-7.49	peak		
2		5692.413	70.46	-2.14	68.32	99.59	-31.27	peak		
3		5717.240	79.55	-2.09	77.46	110.03	-32.57	peak		
4		5719.893	79.11	-2.08	77.03	110.77	-33.74	peak		
5		5755.000	109.90	-2.00	107.90	122.20	-14.30	peak		No Limit
6		5755.000	99.65	-2.00	97.65	122.20	-24.55	AVG		No Limit
7		5850.093	63.41	-1.81	61.60	121.99	-60.39	peak		
8		5861.453	62.25	-1.77	60.48	108.99	-48.51	peak		
9		5904.360	61.91	-1.69	60.22	83.47	-23.25	peak		
10		5926.360	61.81	-1.64	60.17	68.20	-8.03	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

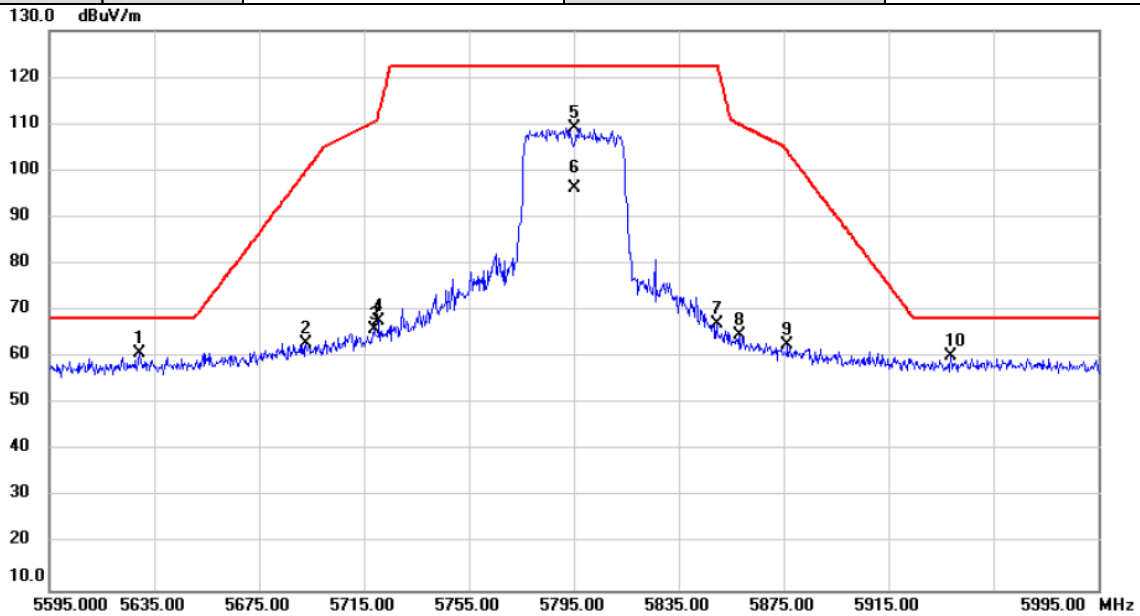


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5629.240	63.13	-2.27	60.86	68.20	-7.34			peak
2		5692.973	65.20	-2.14	63.06	100.00	-36.94			peak
3		5718.840	67.96	-2.08	65.88	110.48	-44.60			peak
4		5720.827	69.84	-2.08	67.76	112.69	-44.93			peak
5		5795.000	111.11	-1.93	109.18	122.20	-13.02			peak
6		5795.000	98.24	-1.93	96.31	122.20	-25.89			AVG
7		5849.587	69.11	-1.81	67.30	122.20	-54.90			peak
8		5858.147	66.60	-1.79	64.81	109.92	-45.11			peak
9		5876.253	64.50	-1.74	62.76	104.27	-41.51			peak
10		5938.907	61.73	-1.62	60.11	68.20	-8.09			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

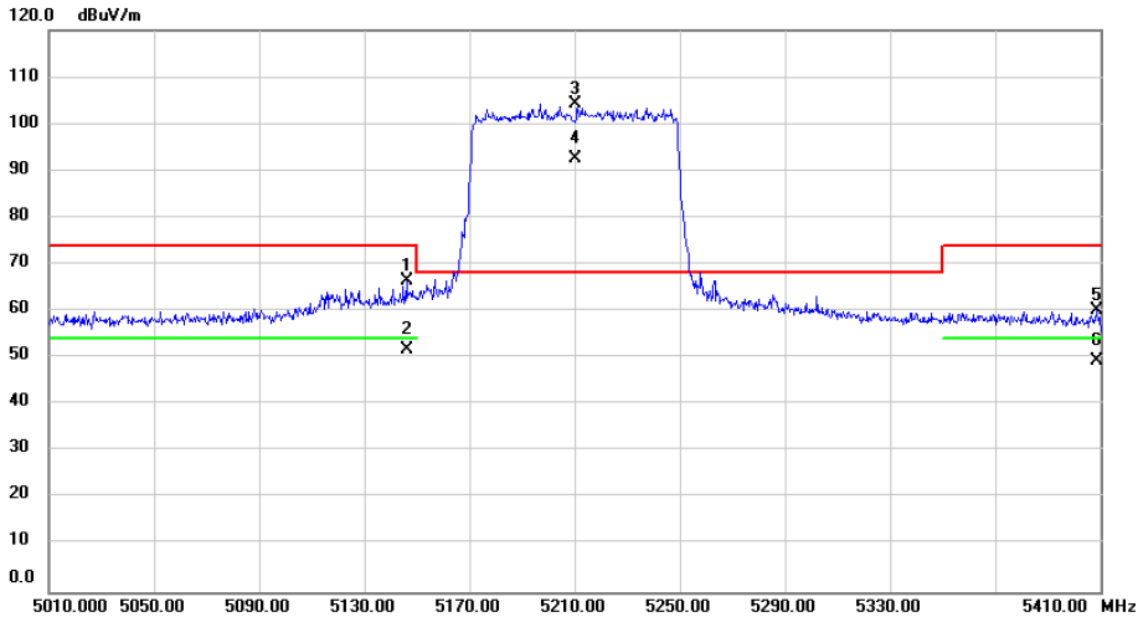


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.107	69.71	-3.15	66.56	74.00	-7.44	peak		
2		5146.107	54.89	-3.15	51.74	54.00	-2.26	AVG		
3	*	5210.000	107.30	-3.04	104.26	68.20	36.06	peak		No Limit
4	X	5210.000	95.46	-3.04	92.42	68.20	24.22	AVG		No Limit
5		5408.547	62.76	-2.70	60.06	74.00	-13.94	peak		
6		5408.547	51.96	-2.70	49.26	54.00	-4.74	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

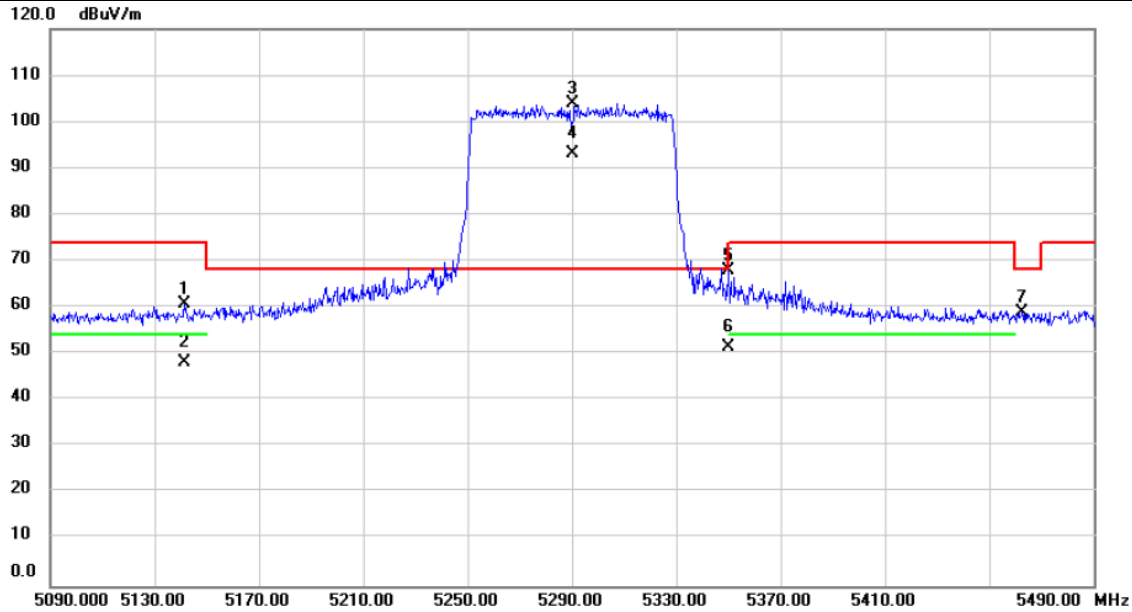


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		5141.627	64.03	-3.17	60.86	74.00	-13.14			peak	
2		5141.627	51.38	-3.17	48.21	54.00	-5.79			AVG	
3	*	5290.000	106.89	-2.91	103.98	68.20	35.78			peak	No Limit
4	X	5290.000	96.00	-2.91	93.09	68.20	24.89			AVG	No Limit
5		5350.027	70.90	-2.80	68.10	74.00	-5.90			peak	
6		5350.027	54.13	-2.80	51.33	54.00	-2.67			AVG	
7		5462.427	61.56	-2.60	58.96	68.20	-9.24			peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

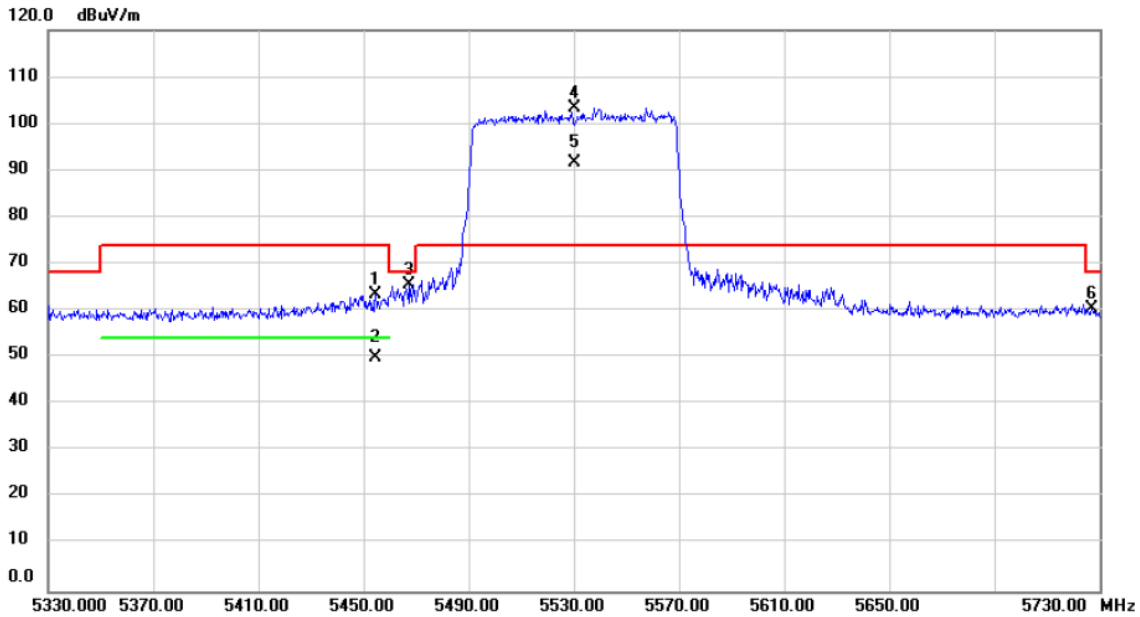


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	5454.693	66.03	-2.62	63.41	74.00	-10.59	peak			
2	5454.693	52.71	-2.62	50.09	54.00	-3.91	AVG			
3	5467.293	68.22	-2.60	65.62	68.20	-2.58	peak			
4 *	5530.000	105.83	-2.47	103.36	74.00	29.36	peak			No Limit
5 X	5530.000	94.05	-2.47	91.58	74.00	17.58	AVG			No Limit
6	5726.853	62.62	-2.06	60.56	68.20	-7.64	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

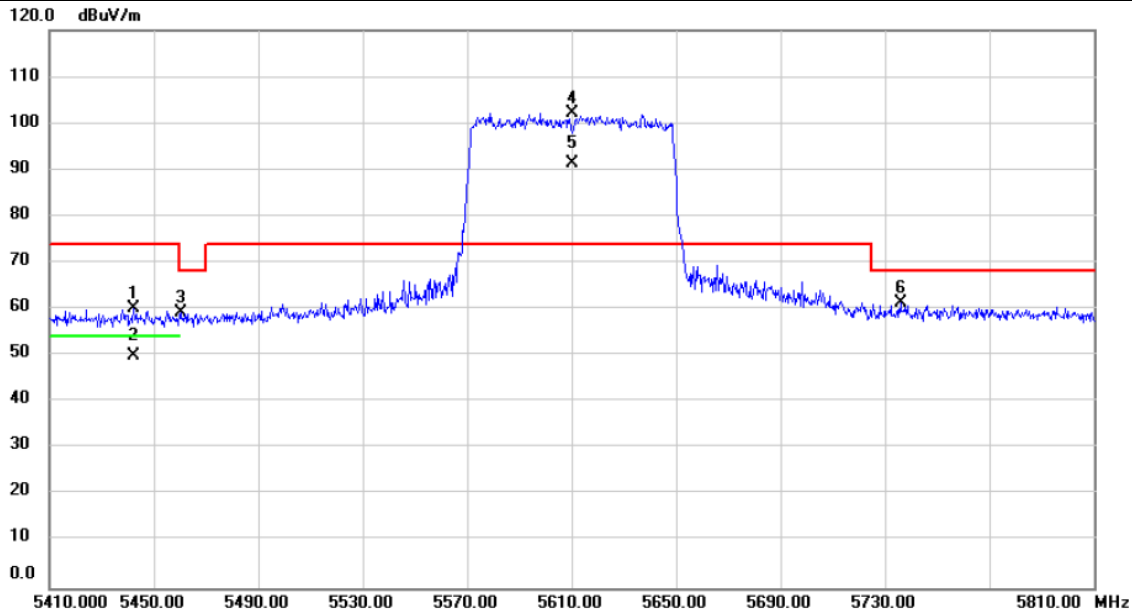


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	5442.093	62.66	-2.64	60.02	74.00	-13.98			peak	
2	5442.093	52.49	-2.64	49.85	54.00	-4.15			AVG	
3	5460.360	61.84	-2.61	59.23	68.20	-8.97			peak	
4 *	5610.000	104.42	-2.31	102.11	74.00	28.11			peak	No Limit
5 X	5610.000	93.52	-2.31	91.21	74.00	17.21			AVG	No Limit
6	5736.360	63.25	-2.05	61.20	68.20	-7.00			peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

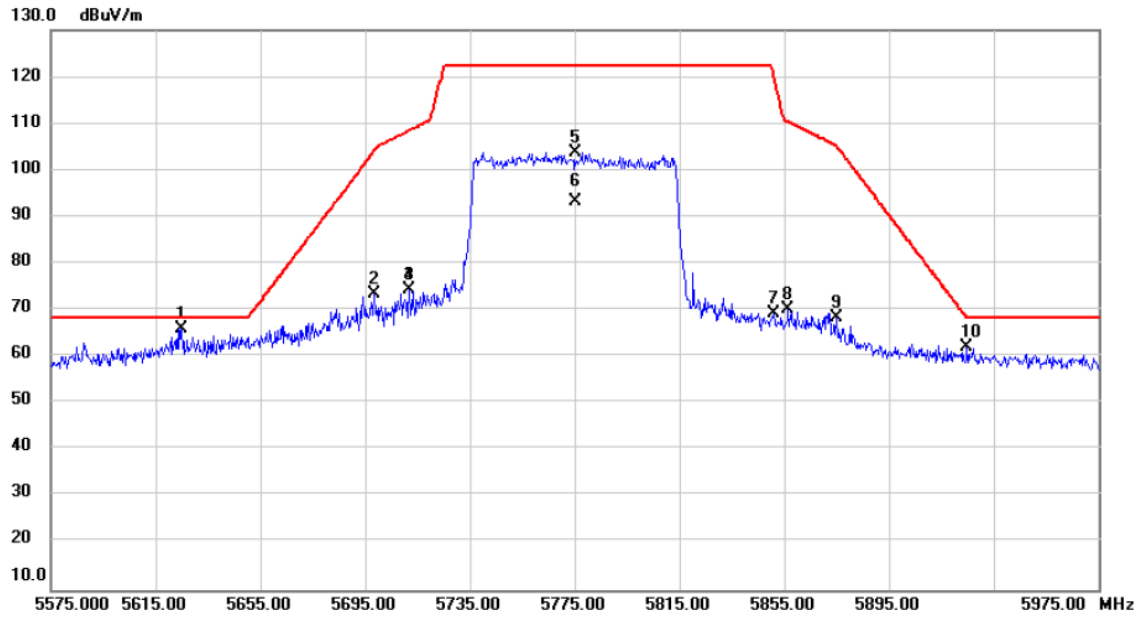


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5624.773	68.37	-2.29	66.08	68.20	-2.12	peak		
2		5698.693	75.47	-2.12	73.35	104.23	-30.88	peak		
3		5711.907	76.50	-2.09	74.41	108.53	-34.12	peak		
4		5711.907	76.50	-2.09	74.41	108.53	-34.12	peak		
5		5775.000	105.85	-1.96	103.89	122.20	-18.31	peak		No Limit
6		5775.000	95.22	-1.96	93.26	122.20	-28.94	AVG		No Limit
7		5851.000	70.98	-1.81	69.17	119.92	-50.75	peak		
8		5856.227	71.98	-1.79	70.19	110.46	-40.27	peak		
9		5874.867	70.02	-1.76	68.26	105.24	-36.98	peak		
10		5924.680	63.63	-1.65	61.98	68.44	-6.46	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

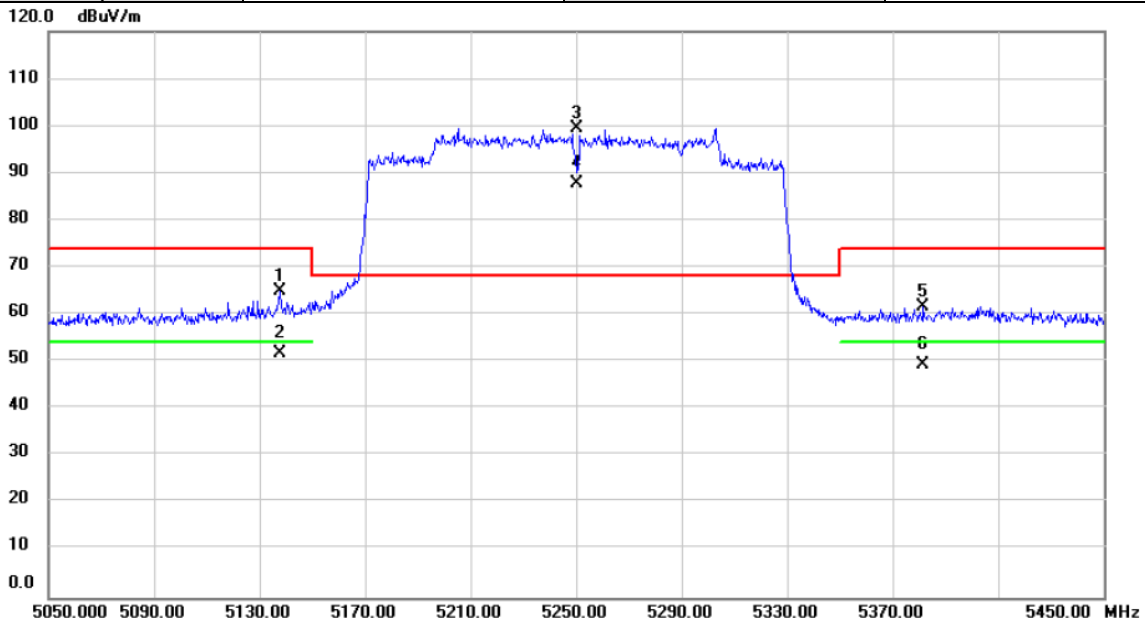


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5137.587	68.12	-3.16	64.96	74.00	-9.04	peak			
2	5137.587	54.87	-3.16	51.71	54.00	-2.29	AVG			
3 *	5250.000	102.43	-2.98	99.45	68.20	31.25	peak			No Limit
4 X	5250.000	90.67	-2.98	87.69	68.20	19.49	AVG			No Limit
5	5381.693	64.53	-2.75	61.78	74.00	-12.22	peak			
6	5381.693	52.12	-2.75	49.37	54.00	-4.63	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	60%

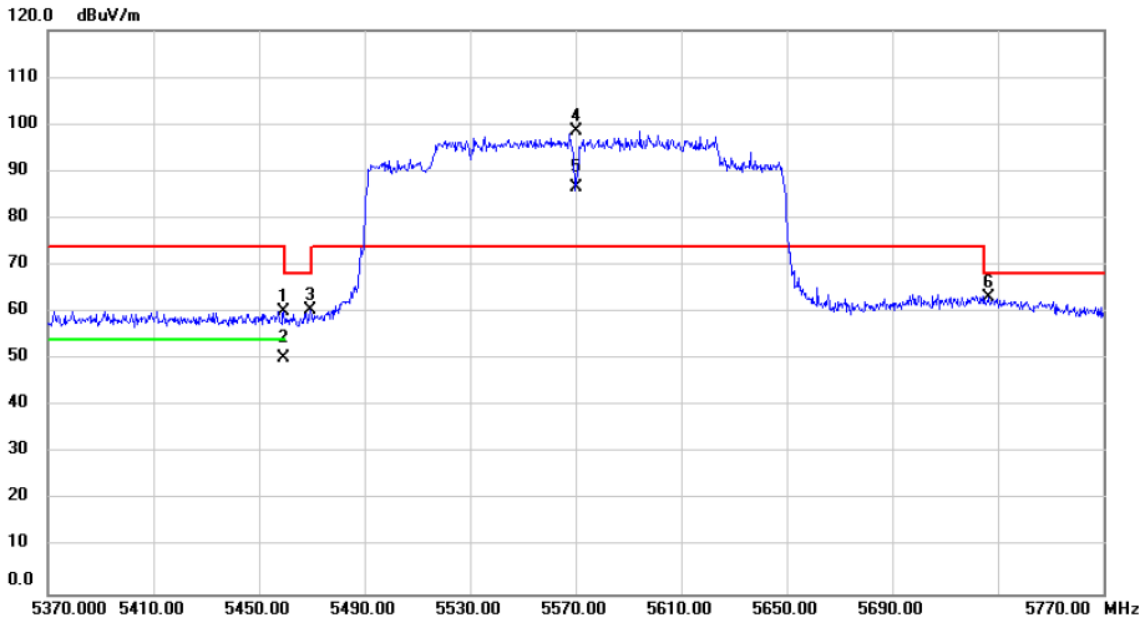


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5459.320	62.82	-2.61	60.21	74.00	-13.79			peak
2		5459.320	52.99	-2.61	50.38	54.00	-3.62			AVG
3		5469.667	63.10	-2.59	60.51	68.20	-7.69			peak
4	*	5570.000	101.00	-2.39	98.61	74.00	24.61			peak
5	X	5570.000	88.92	-2.39	86.53	74.00	12.53			AVG
6		5726.280	65.25	-2.06	63.19	68.20	-5.01			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

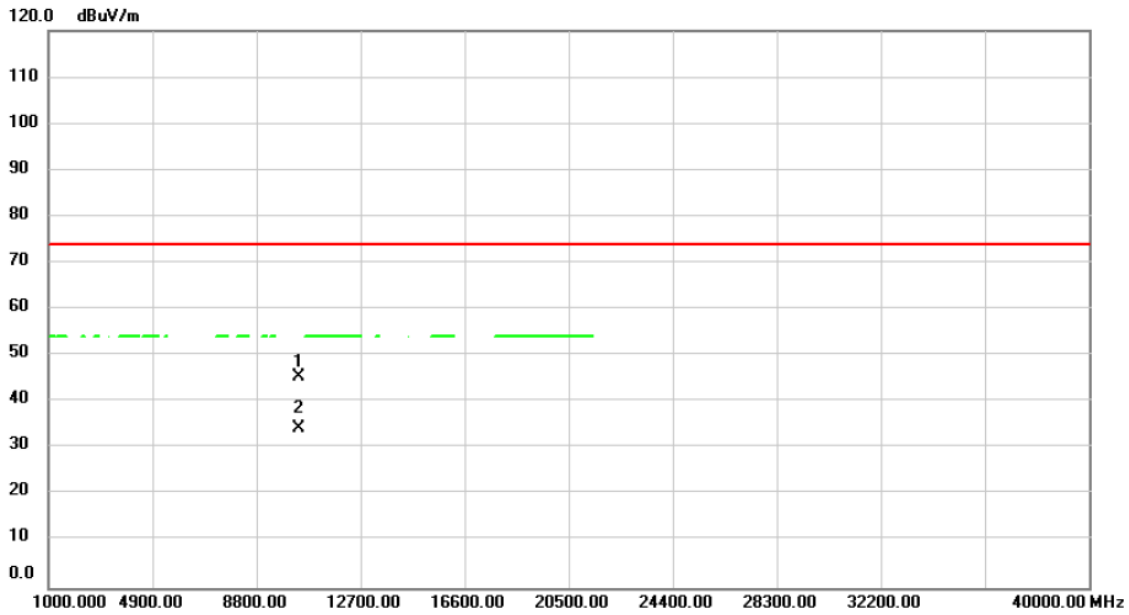


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10360.000	37.51	7.95	45.46	74.00	-28.54	peak		
2		10360.000	26.39	7.95	34.34	74.00	-39.66	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

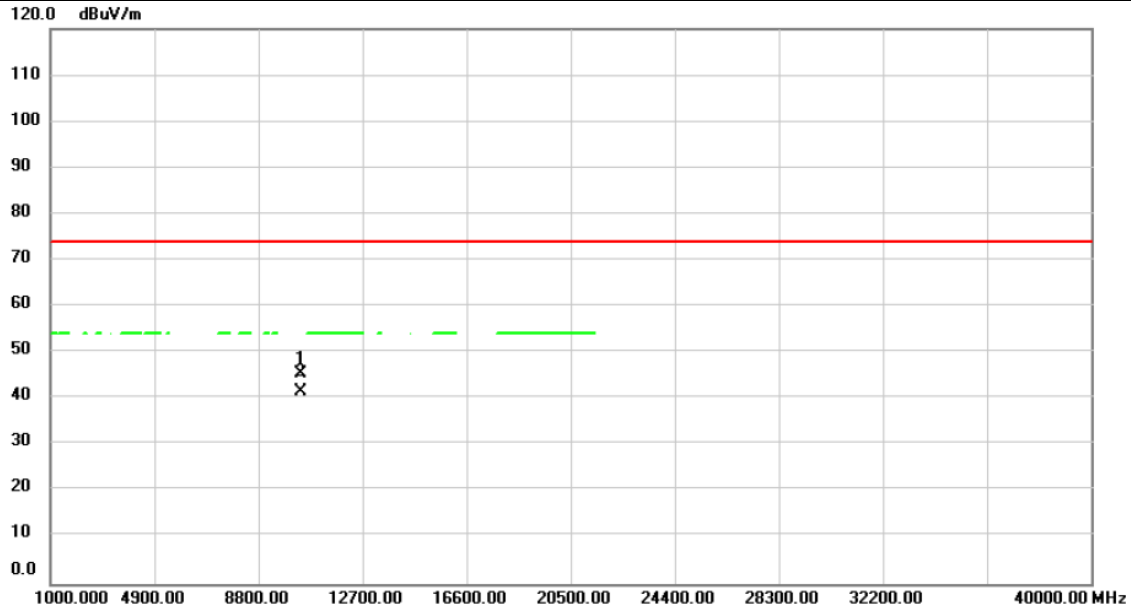


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10360.000	37.37	7.95	45.32	74.00	-28.68	peak		
2		10360.000	33.49	7.95	41.44	74.00	-32.56	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

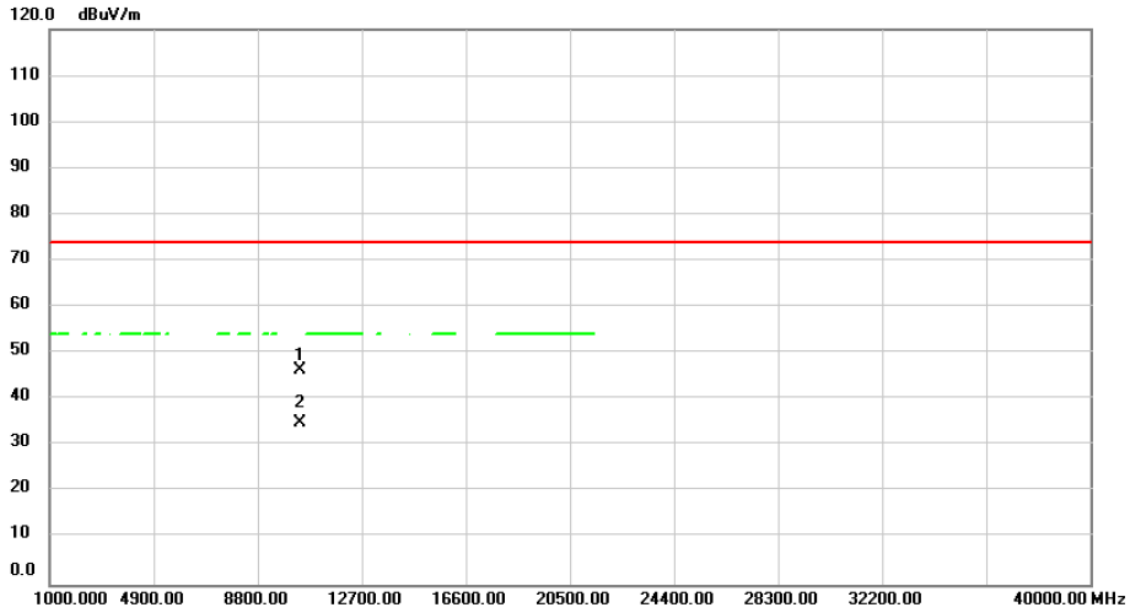


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	38.38	8.01	46.39	74.00	-27.61	peak		
2		10400.000	26.90	8.01	34.91	74.00	-39.09	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

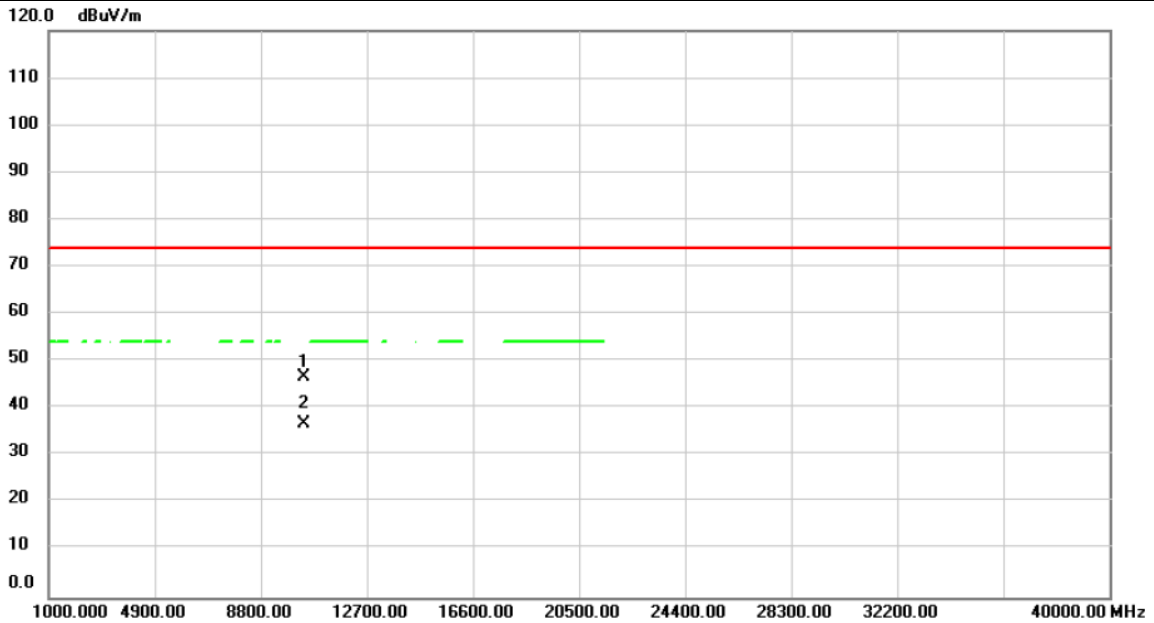


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.000	38.61	8.01	46.62	74.00	-27.38			peak
2		10400.000	28.65	8.01	36.66	74.00	-37.34			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

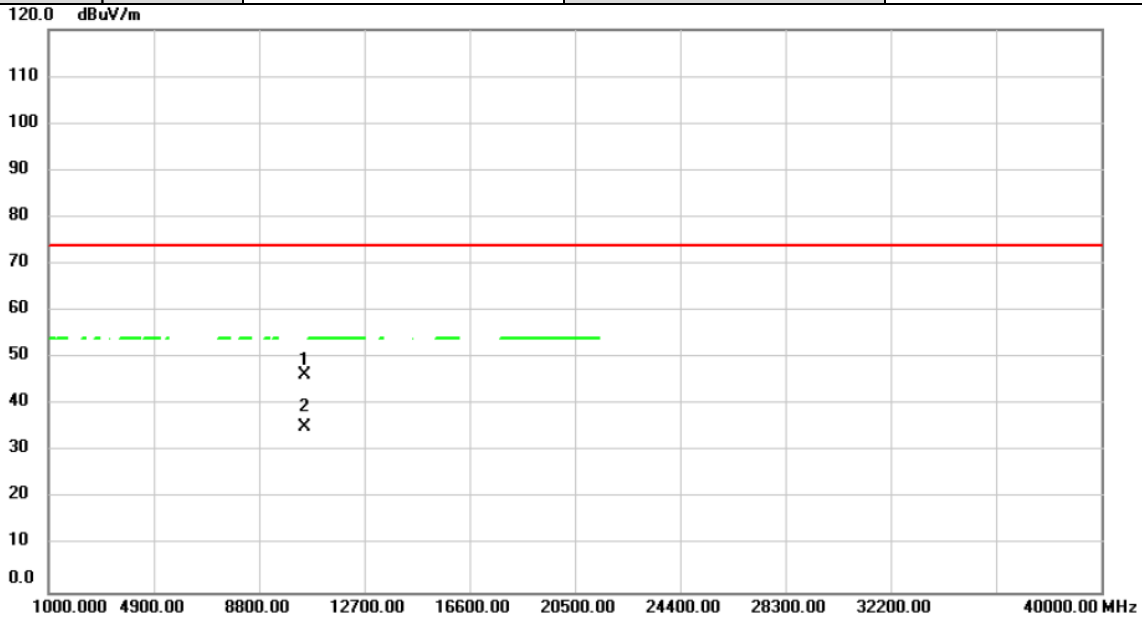


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10480.000	38.19	8.15	46.34	74.00	-27.66	peak		
2		10480.000	27.16	8.15	35.31	74.00	-38.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

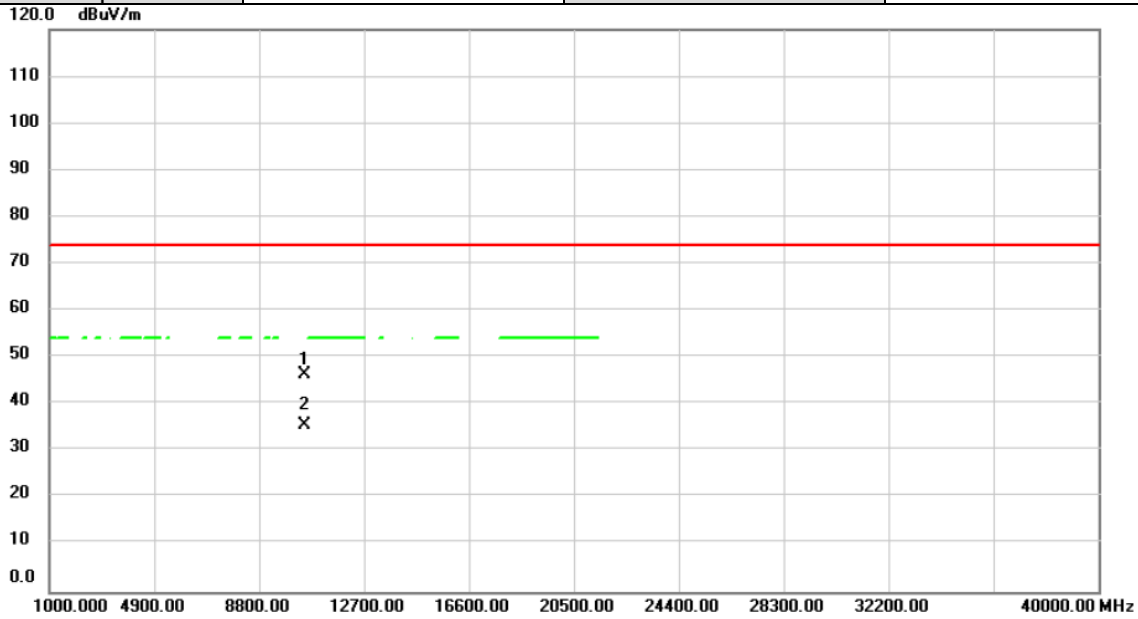


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1 *	10480.000	38.11	8.15	46.26	74.00	-27.74			peak	
2	10480.000	27.53	8.15	35.68	74.00	-38.32			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

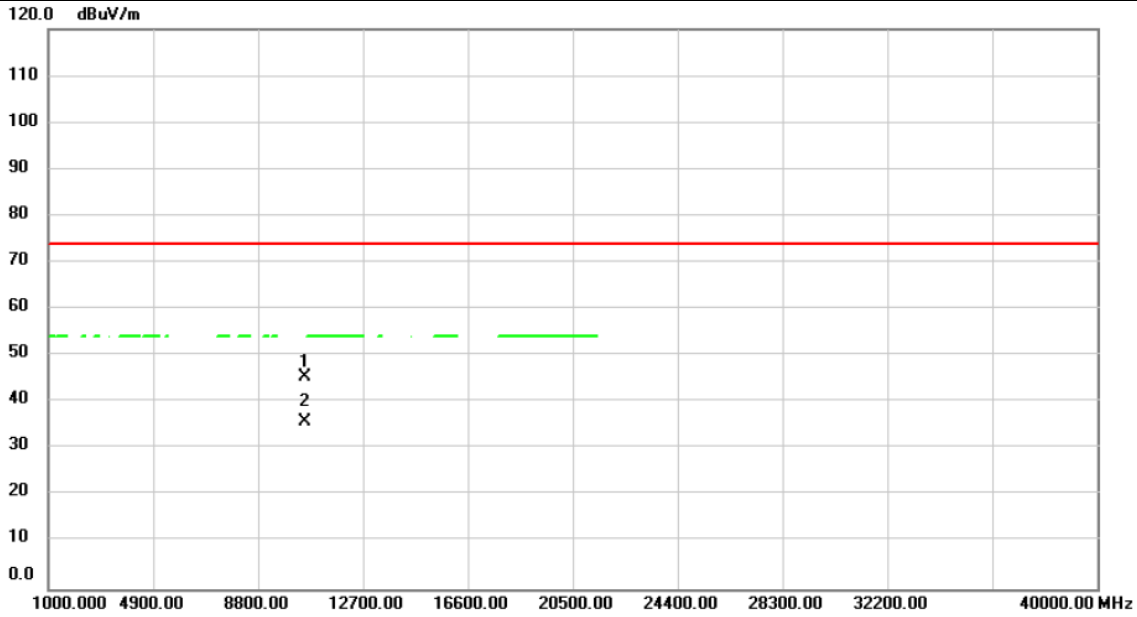


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1 *	10520.000	37.28	8.21	45.49	74.00	-28.51			peak	
2	10520.000	27.69	8.21	35.90	74.00	-38.10			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

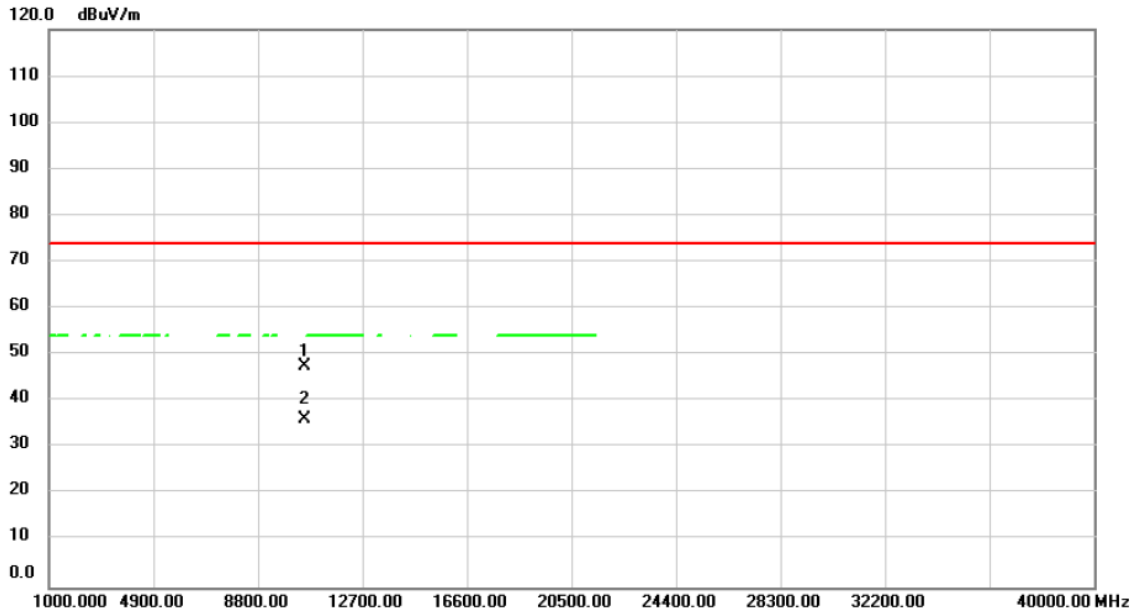


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.000	39.30	8.21	47.51	74.00	-26.49	peak		
2		10520.000	27.87	8.21	36.08	74.00	-37.92	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5300MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

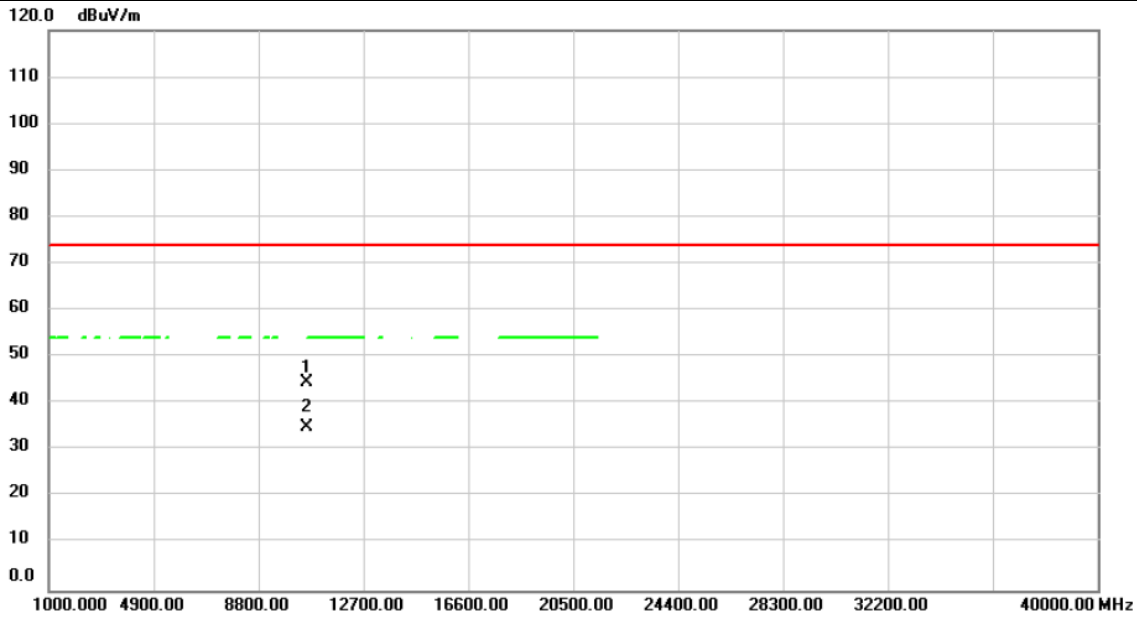


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	10600.000	36.16	8.26	44.42	74.00	-29.58			peak	
2 *	10600.000	26.79	8.26	35.05	54.00	-18.95			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5300MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

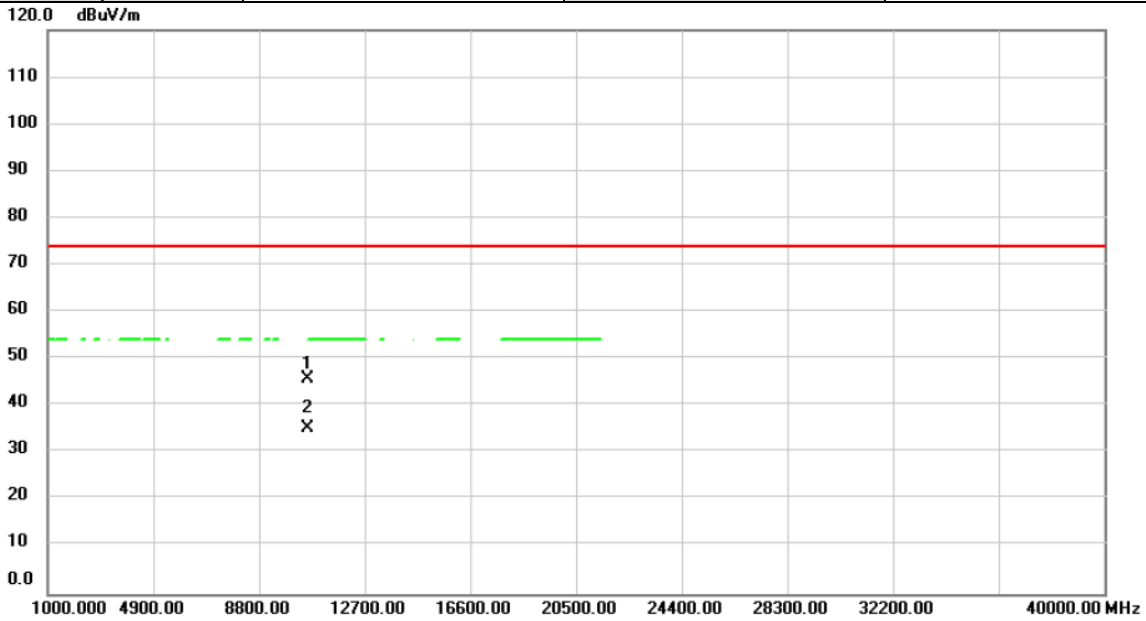


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	10600.000	37.47	8.26	45.73	74.00	-28.27			peak	
2 *	10600.000	26.99	8.26	35.25	54.00	-18.75			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

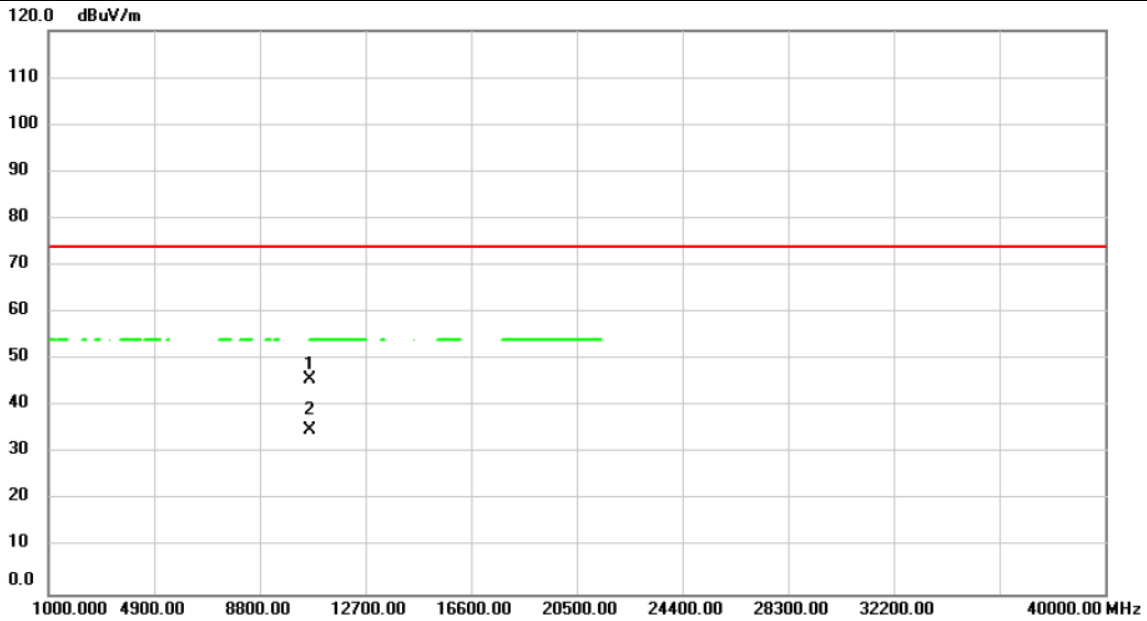


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.000	37.43	8.29	45.72	74.00	-28.28	peak		
2	*	10640.000	26.59	8.29	34.88	54.00	-19.12	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

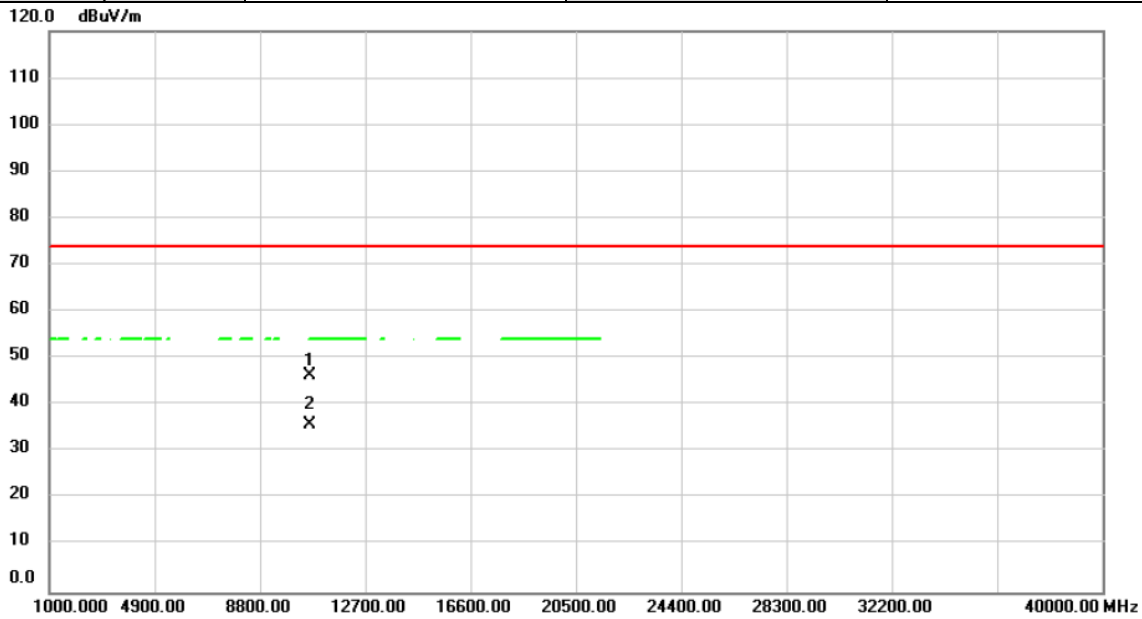


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	10640.000	38.08	8.29	46.37	74.00	-27.63			peak	
2 *	10640.000	27.65	8.29	35.94	54.00	-18.06			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5500MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

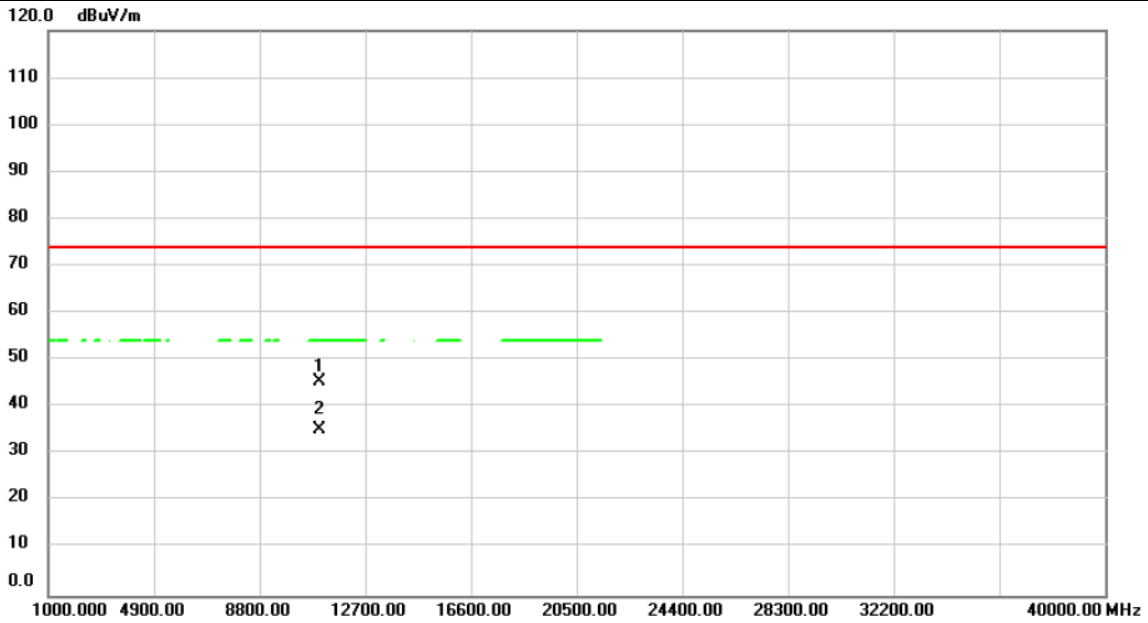


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		11000.000	36.93	8.53	45.46	74.00	-28.54	peak			
2	*	11000.000	26.79	8.53	35.32	54.00	-18.68	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

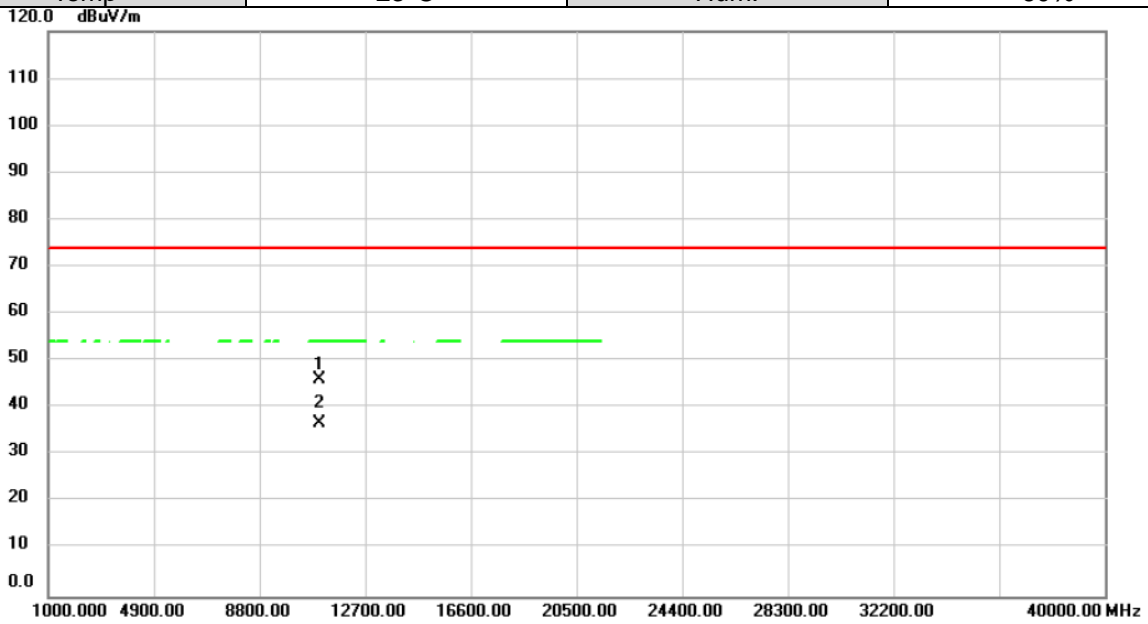


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11000.000	37.55	8.53	46.08	74.00	-27.92	peak		
2	*	11000.000	28.31	8.53	36.84	54.00	-17.16	CAV		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5580MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

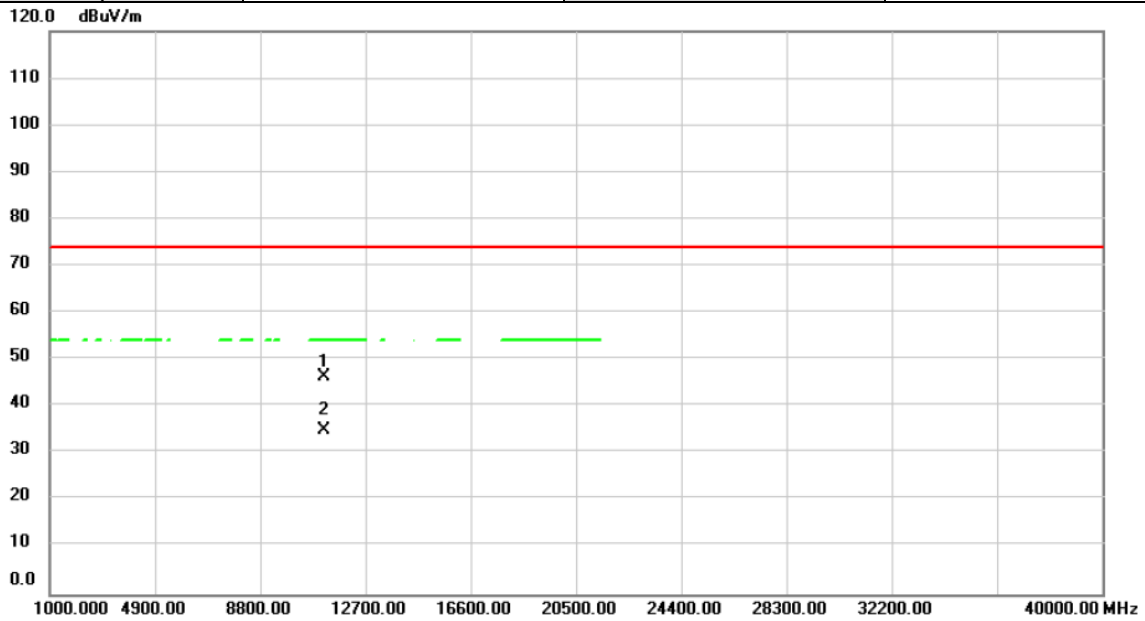


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	11160.000	37.74	8.75	46.49	74.00	-27.51			peak	
2 *	11160.000	26.19	8.75	34.94	54.00	-19.06			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5580MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

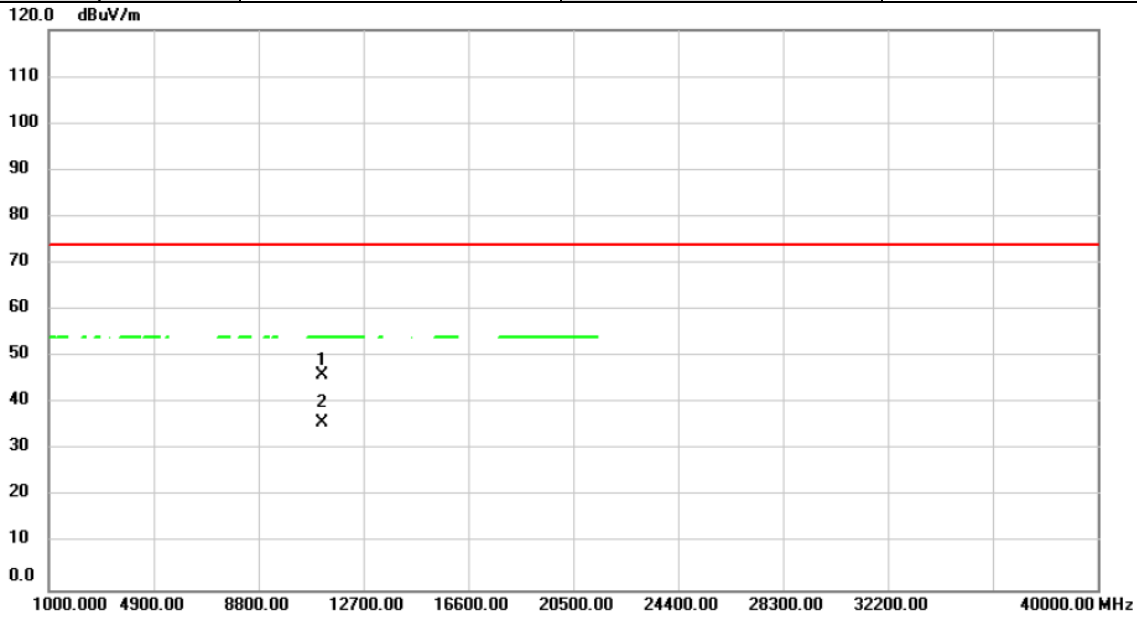


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11160.000	37.39	8.75	46.14	74.00	-27.86	peak		
2	*	11160.000	27.19	8.75	35.94	54.00	-18.06	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5700MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

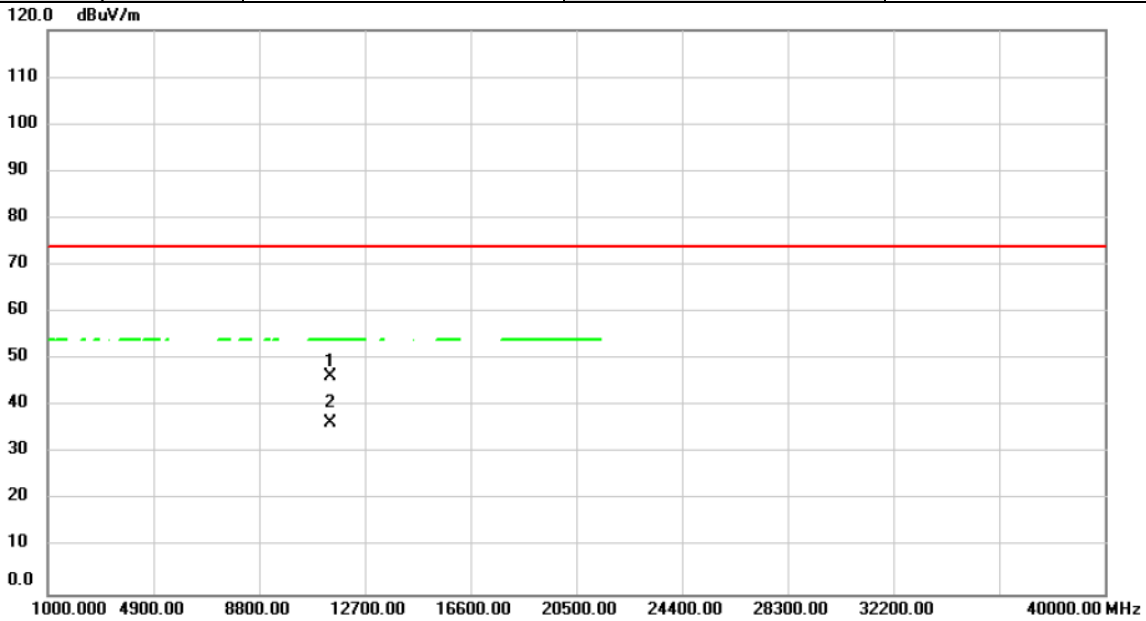


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	11400.000	37.18	9.08	46.26	74.00	-27.74			peak	
2 *	11400.000	27.25	9.08	36.33	54.00	-17.67			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

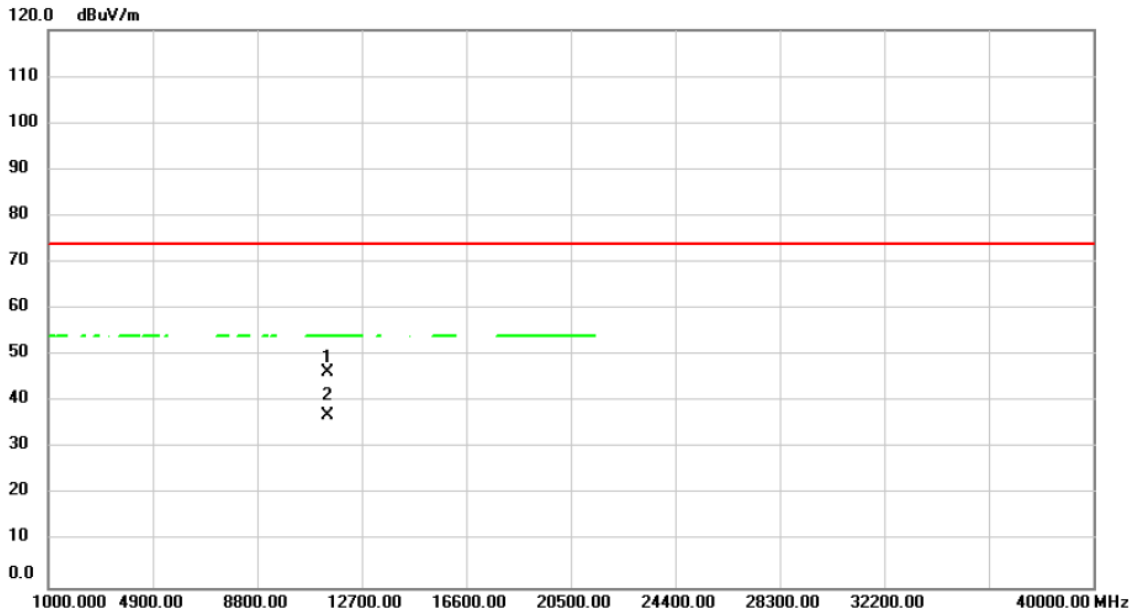


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	11400.000	37.26	9.08	46.34	74.00	-27.66			peak	
2 *	11400.000	27.88	9.08	36.96	54.00	-17.04			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5720MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

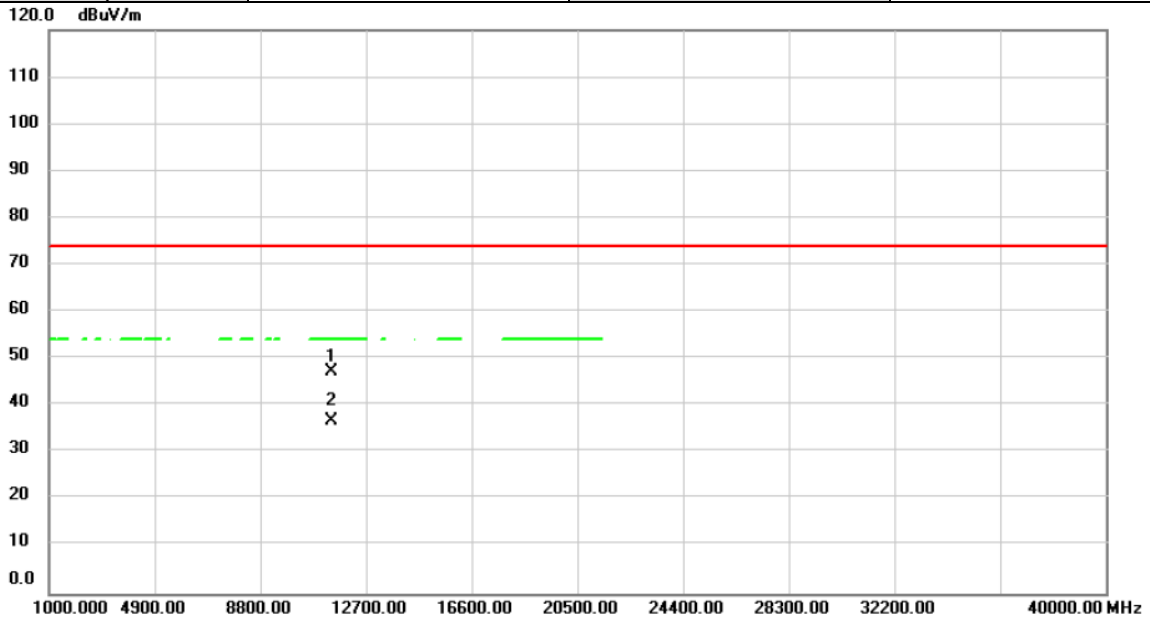


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11440.000	37.99	9.14	47.13	74.00	-26.87			peak
2	*	11440.000	27.46	9.14	36.60	54.00	-17.40			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5720MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

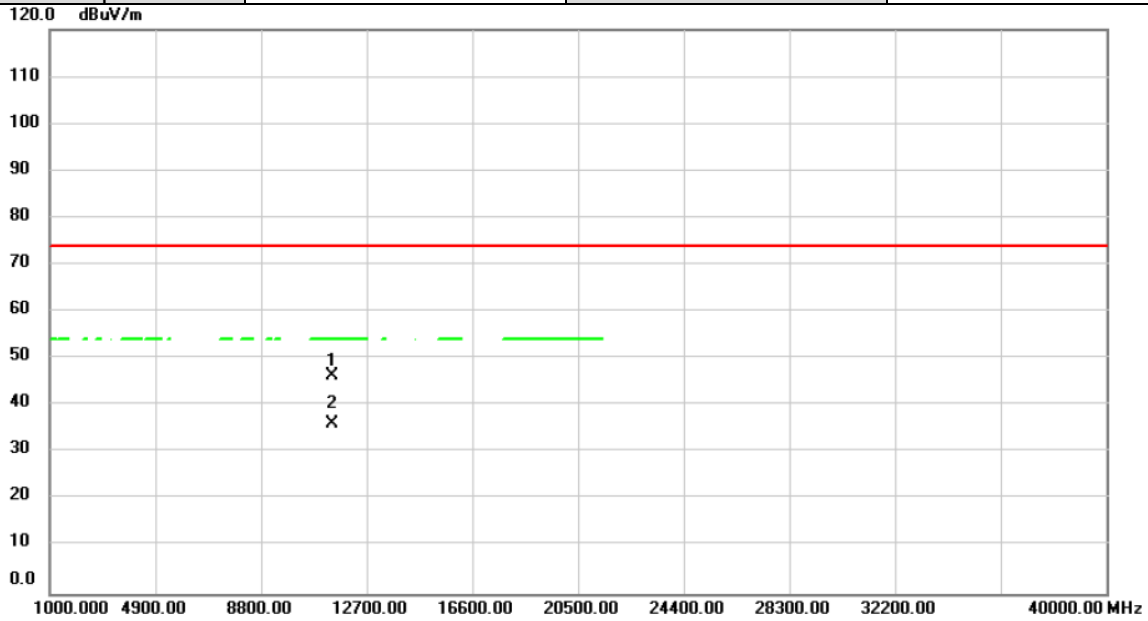


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11440.000	37.08	9.14	46.22	74.00	-27.78	peak		
2	*	11440.000	27.16	9.14	36.30	54.00	-17.70	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

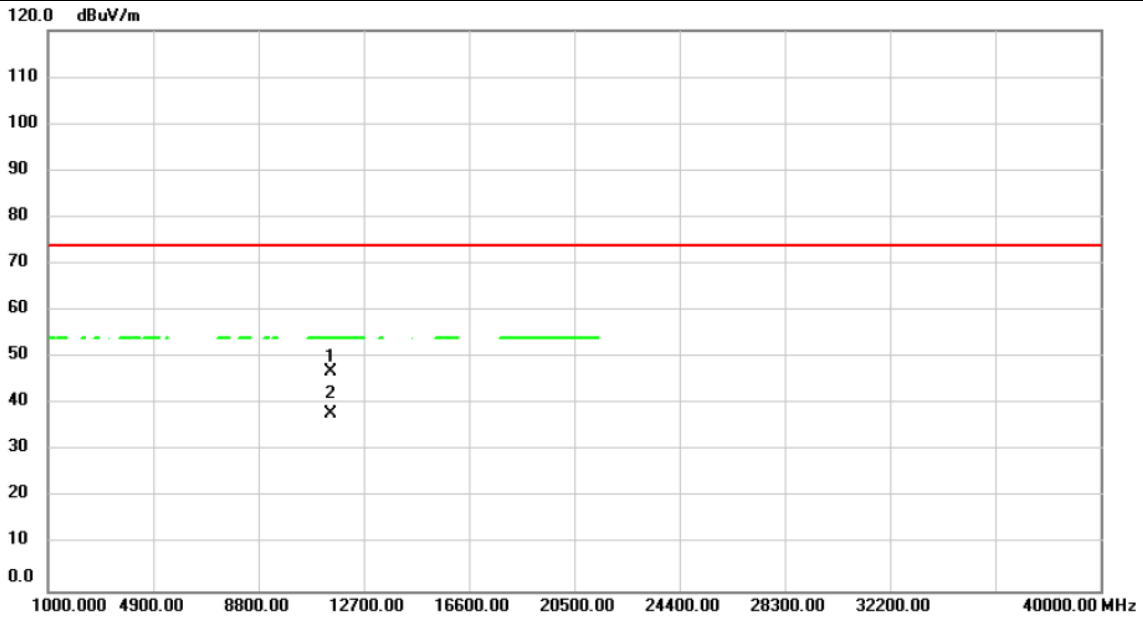


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	11490.000	37.88	9.20	47.08	74.00	-26.92			peak	
2 *	11490.000	28.64	9.20	37.84	54.00	-16.16			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

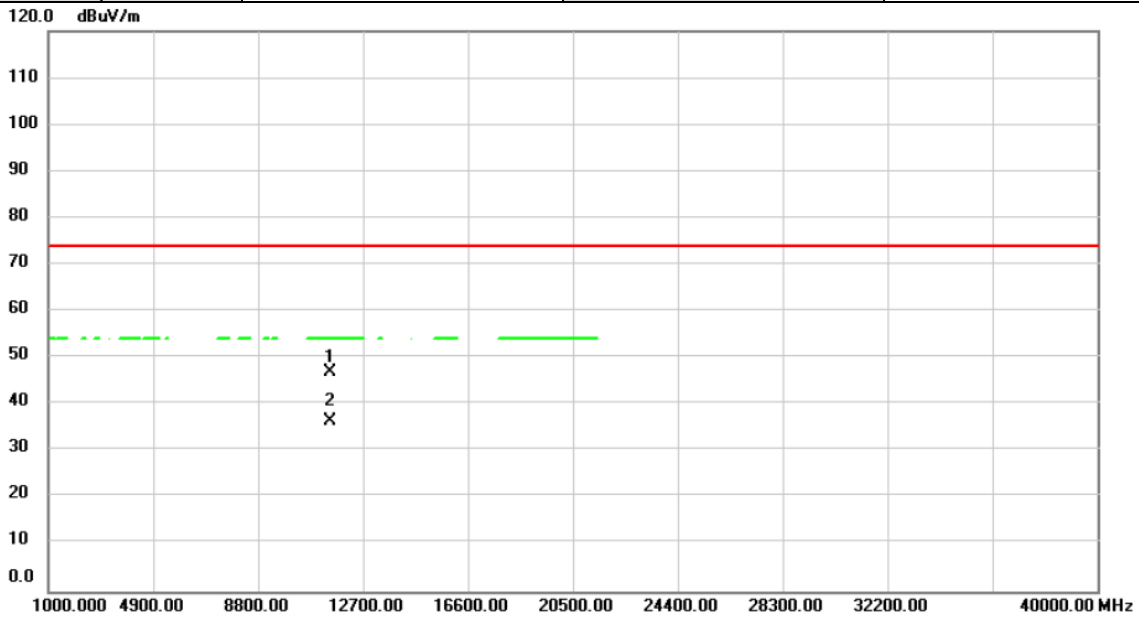


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	11490.000	37.74	9.20	46.94	74.00	-27.06			peak	
2 *	11490.000	27.14	9.20	36.34	54.00	-17.66			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

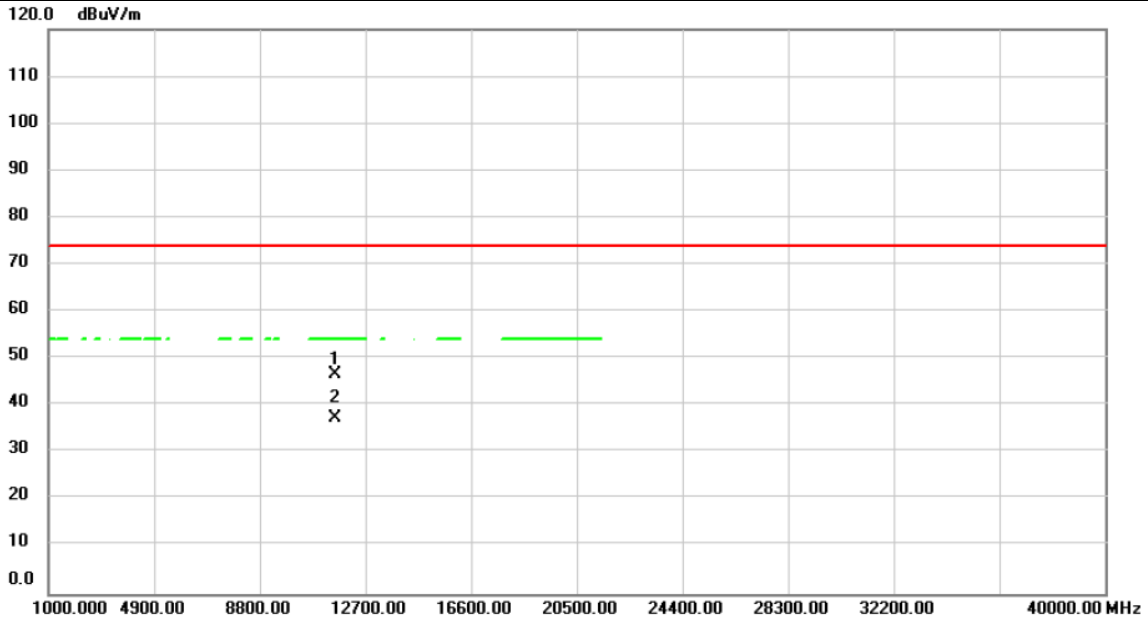


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	11570.000	37.63	9.04	46.67	74.00	-27.33	peak			
2 *	11570.000	28.45	9.04	37.49	54.00	-16.51	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

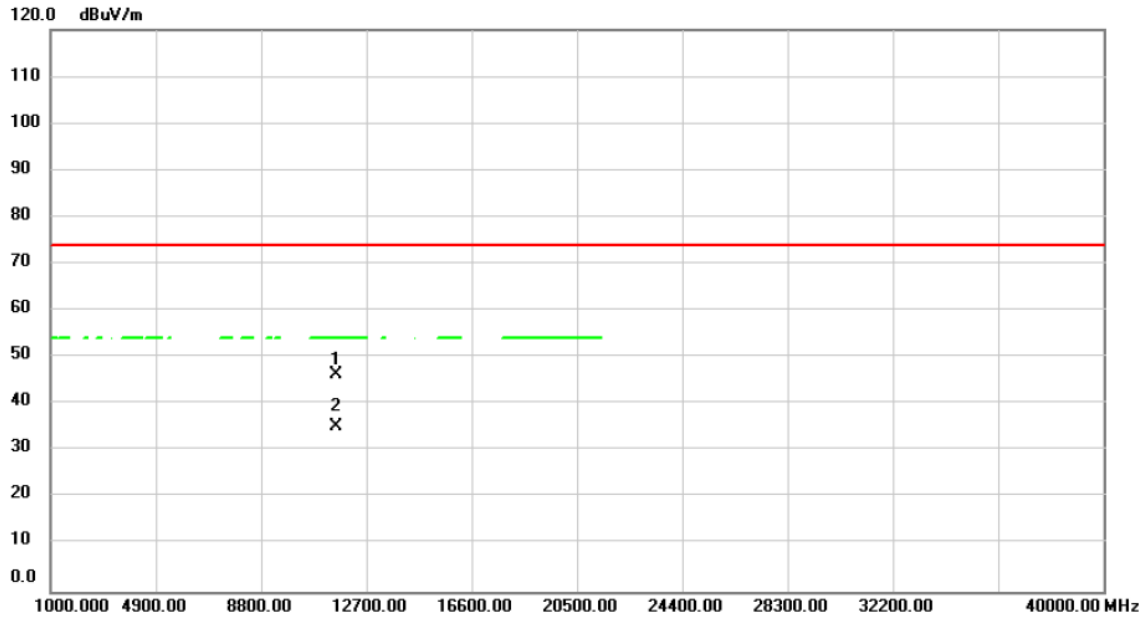


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11570.000	37.39	9.04	46.43	74.00	-27.57			peak
2	*	11570.000	26.16	9.04	35.20	54.00	-18.80			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

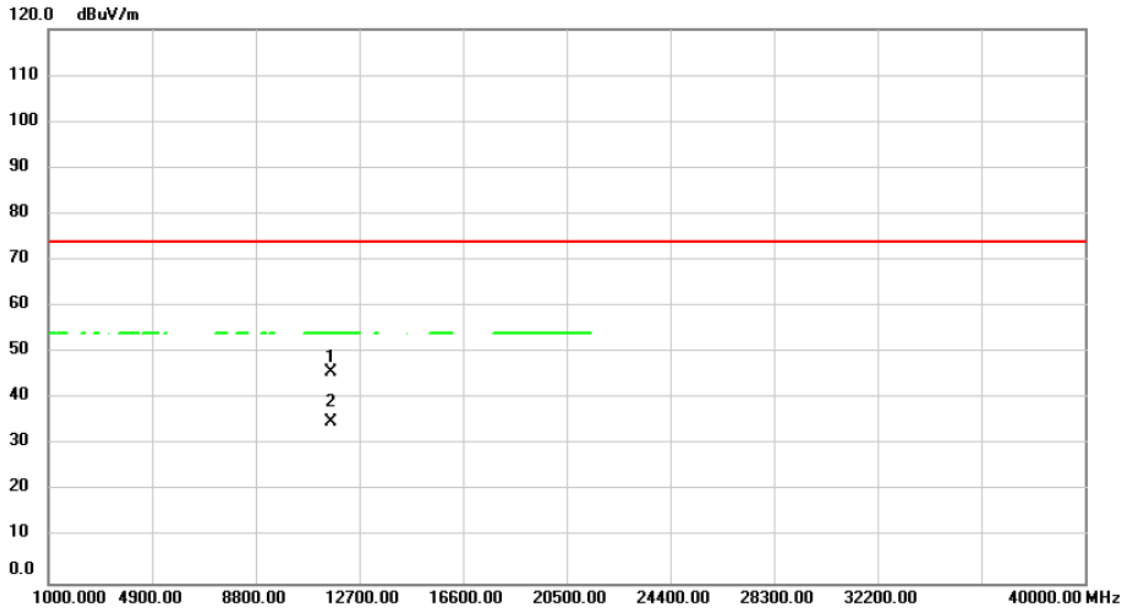


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	11650.000	36.96	8.85	45.81	74.00	-28.19	peak			
2 *	11650.000	26.13	8.85	34.98	54.00	-19.02	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/11/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

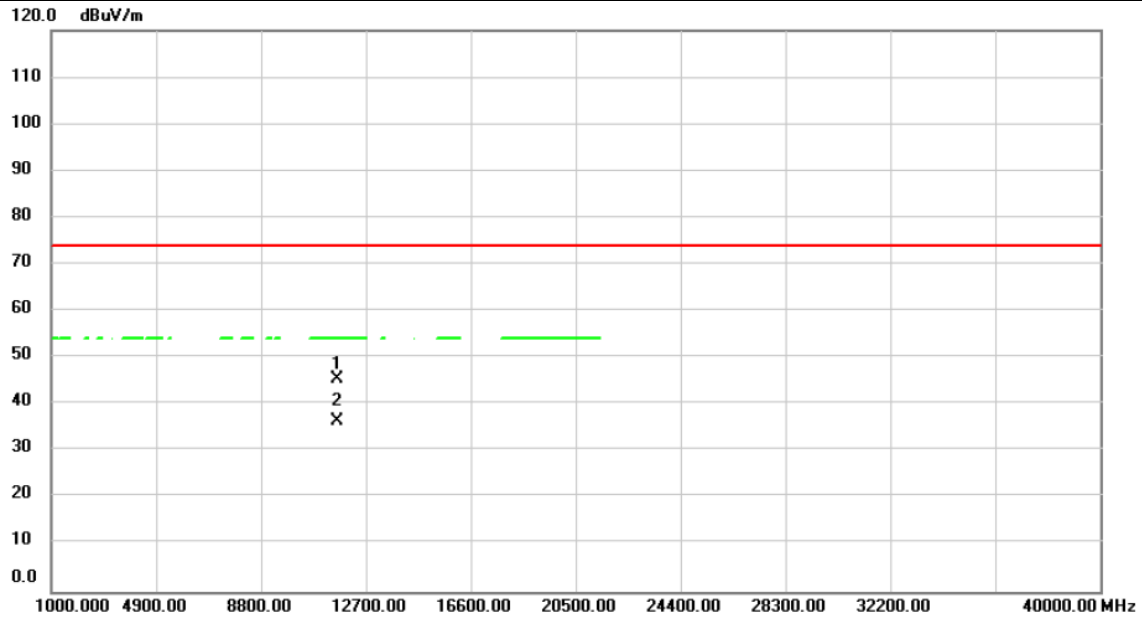


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11650.000	36.75	8.85	45.60	74.00	-28.40	peak		
2 *		11650.000	27.46	8.85	36.31	54.00	-17.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

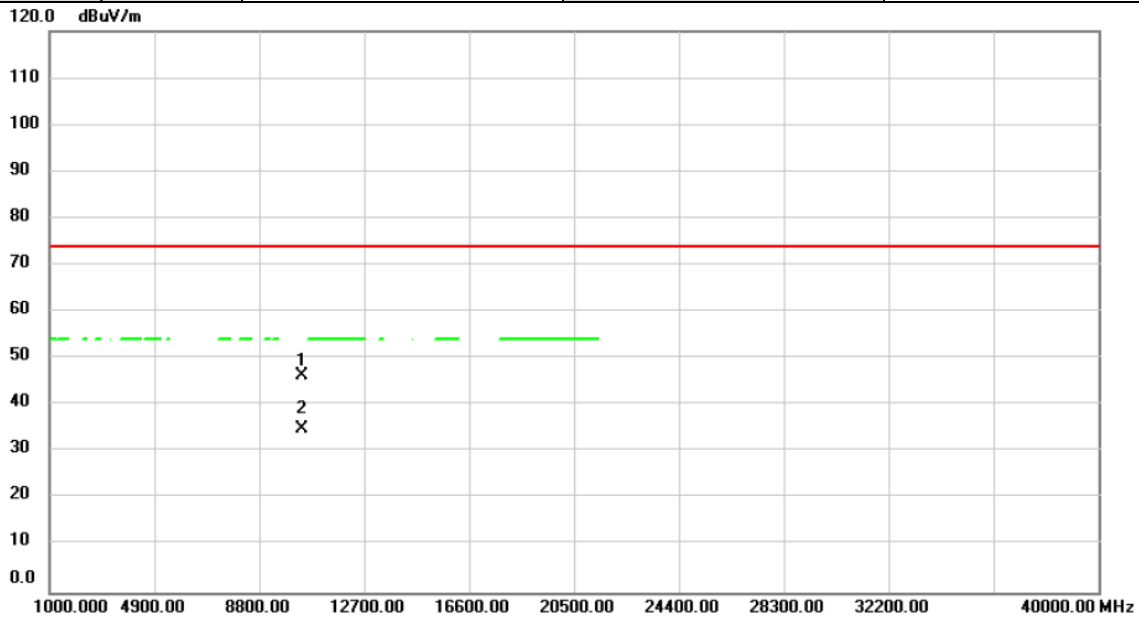


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	38.47	7.95	46.42	74.00	-27.58	peak		
2		10360.000	26.90	7.95	34.85	74.00	-39.15	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

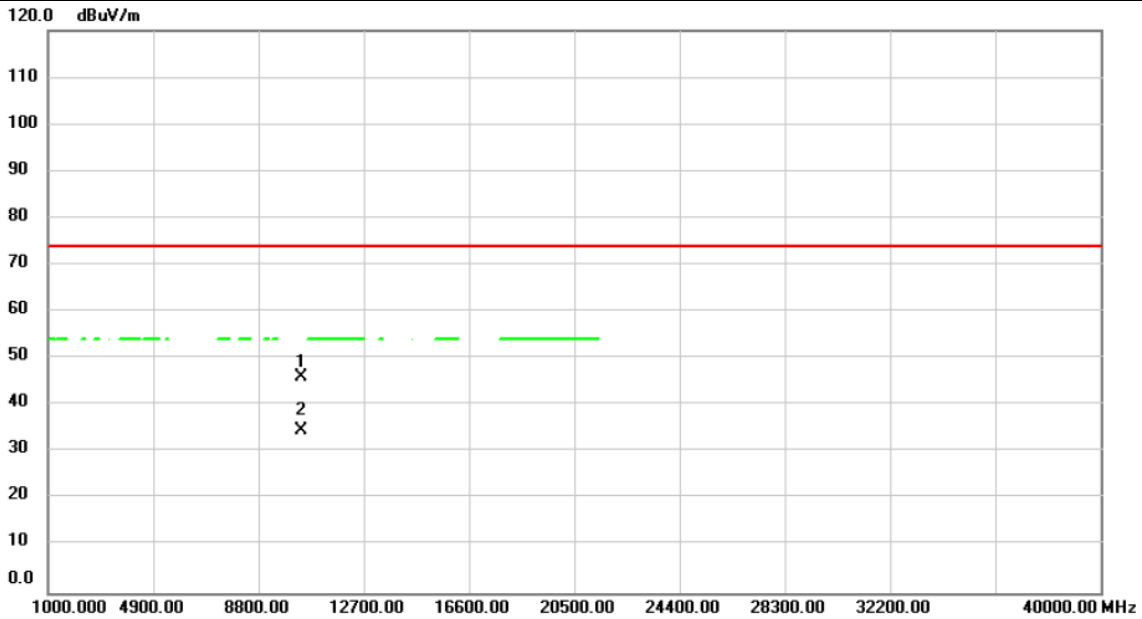


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	38.05	7.95	46.00	74.00	-28.00			peak
2		10360.000	26.71	7.95	34.66	74.00	-39.34			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

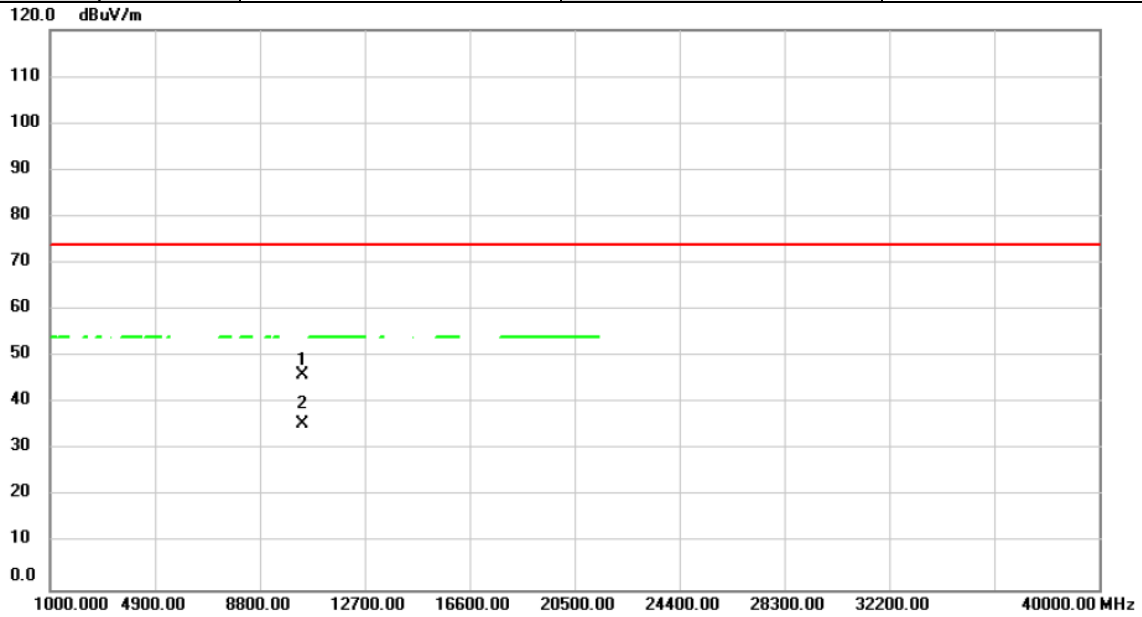


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10400.000	38.17	8.01	46.18	74.00	-27.82	peak		
2		10400.000	27.46	8.01	35.47	74.00	-38.53	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

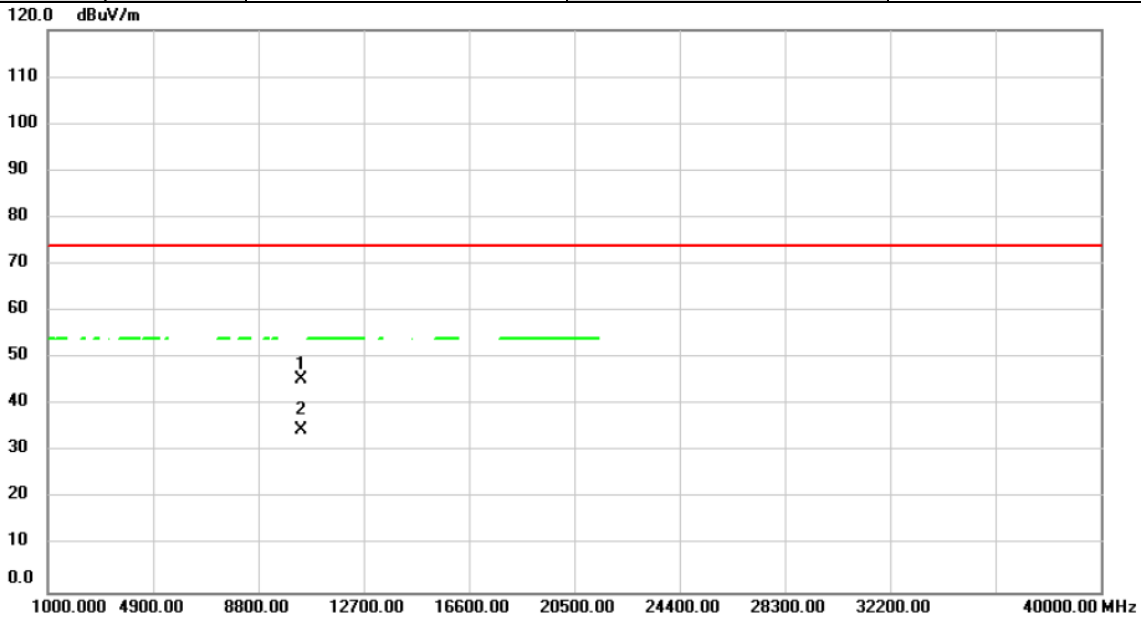


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10400.000	37.56	8.01	45.57	74.00	-28.43	peak		
2		10400.000	26.58	8.01	34.59	74.00	-39.41	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

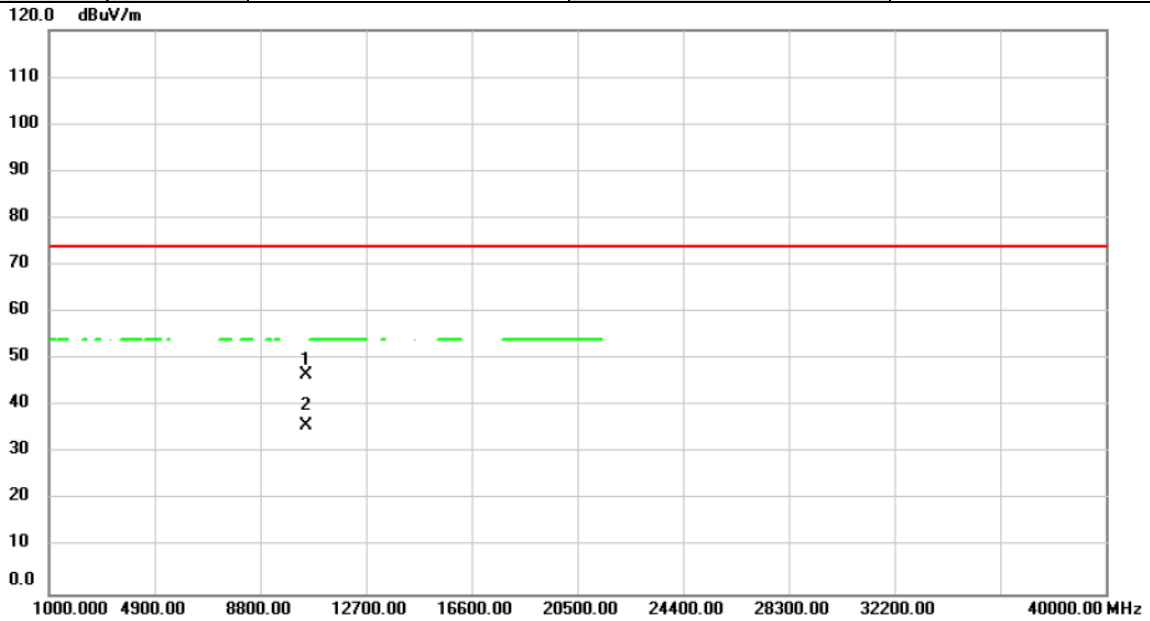


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.000	38.56	8.15	46.71	74.00	-27.29	peak		
2		10480.000	27.55	8.15	35.70	74.00	-38.30	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

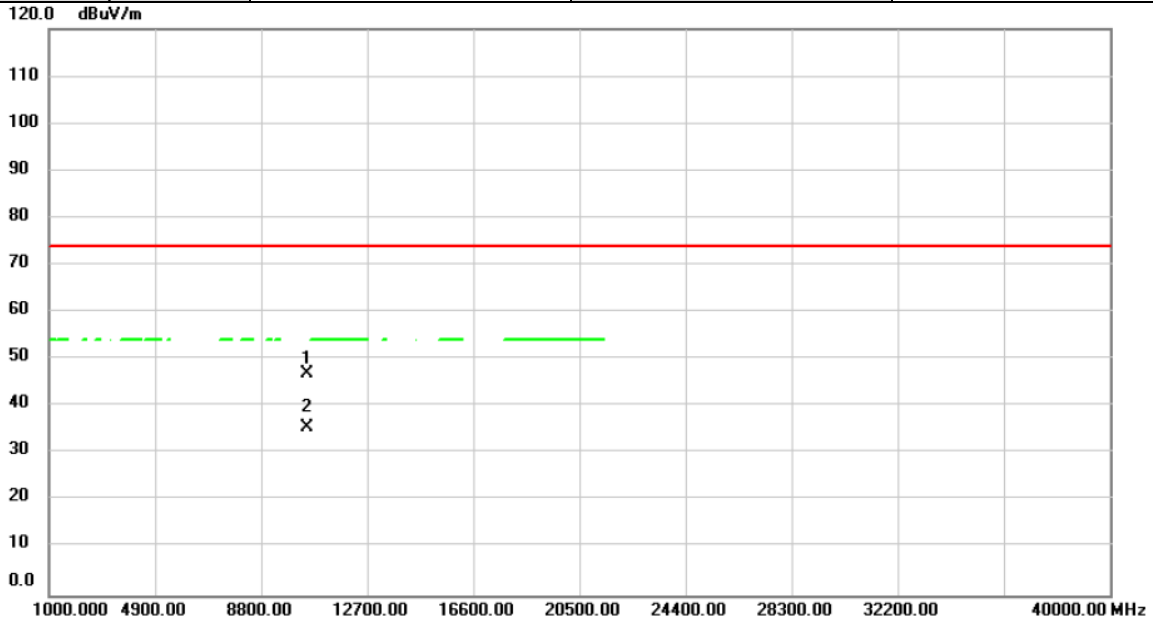


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.000	38.77	8.15	46.92	74.00	-27.08	peak		
2		10480.000	27.49	8.15	35.64	74.00	-38.36	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

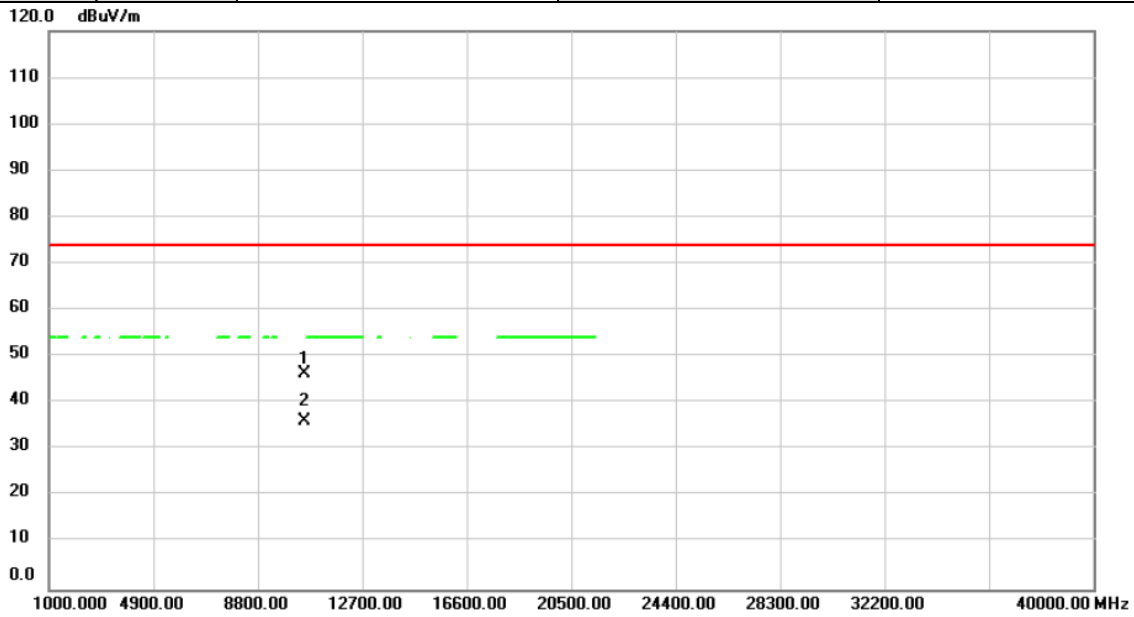


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	38.29	8.21	46.50	74.00	-27.50	peak		
2		10520.000	27.85	8.21	36.06	74.00	-37.94	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

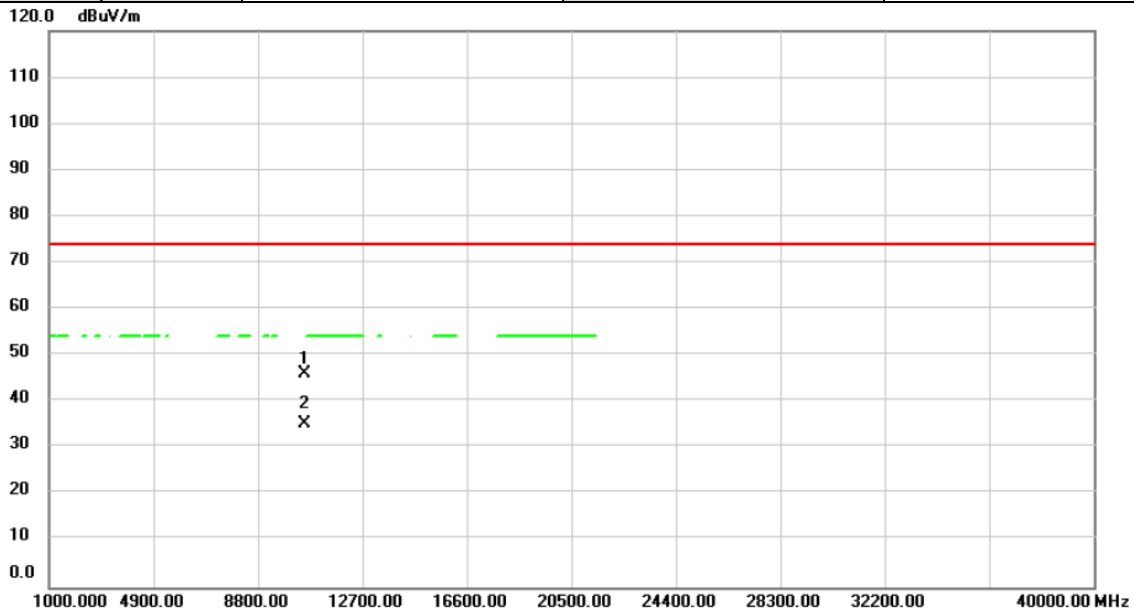


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10520.000	37.96	8.21	46.17	74.00	-27.83	peak		
2		10520.000	26.99	8.21	35.20	74.00	-38.80	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/22
Test Frequency	5300MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

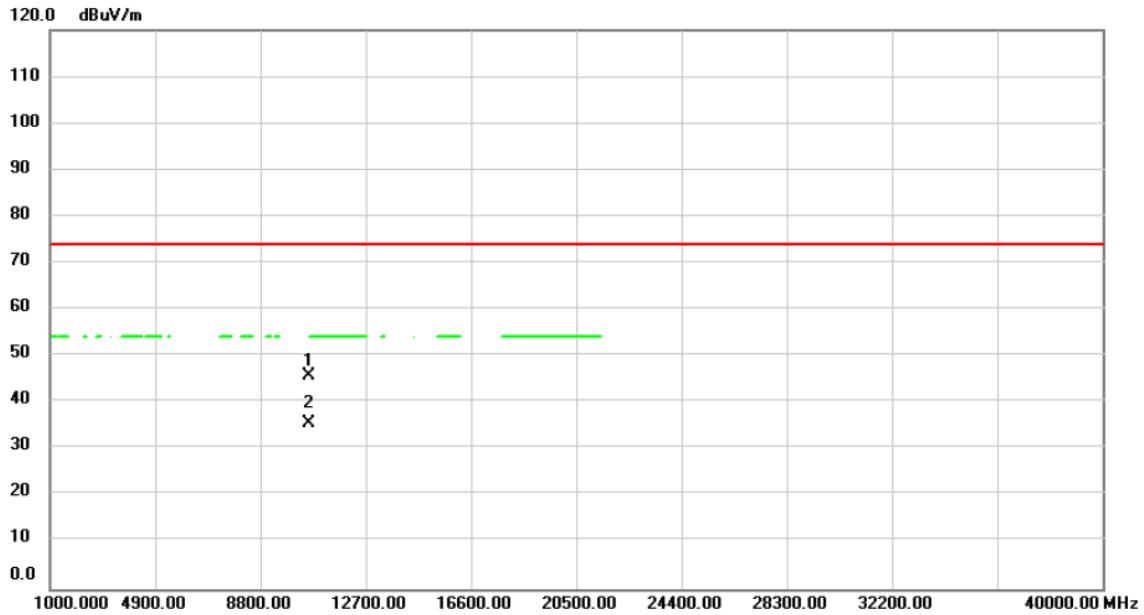


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	10600.000	37.63	8.26	45.89	74.00	-28.11	peak		
2 *	10600.000	27.18	8.26	35.44	54.00	-18.56	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/22
Test Frequency	5300MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

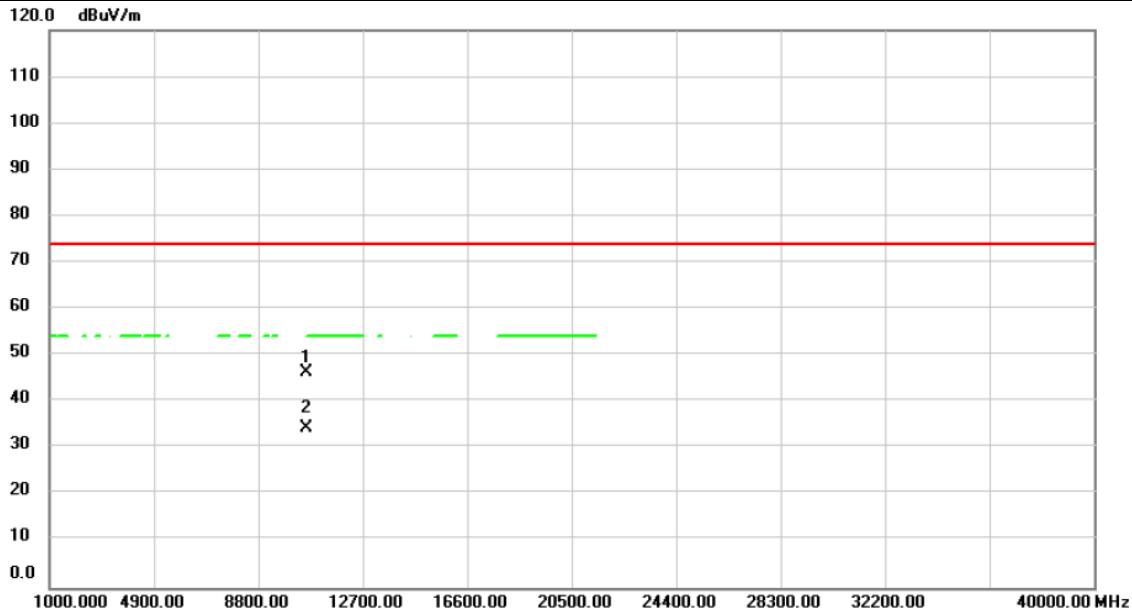


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		10600.000	38.08	8.26	46.34	74.00	-27.66	peak		
2	*	10600.000	26.20	8.26	34.46	54.00	-19.54	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/22
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

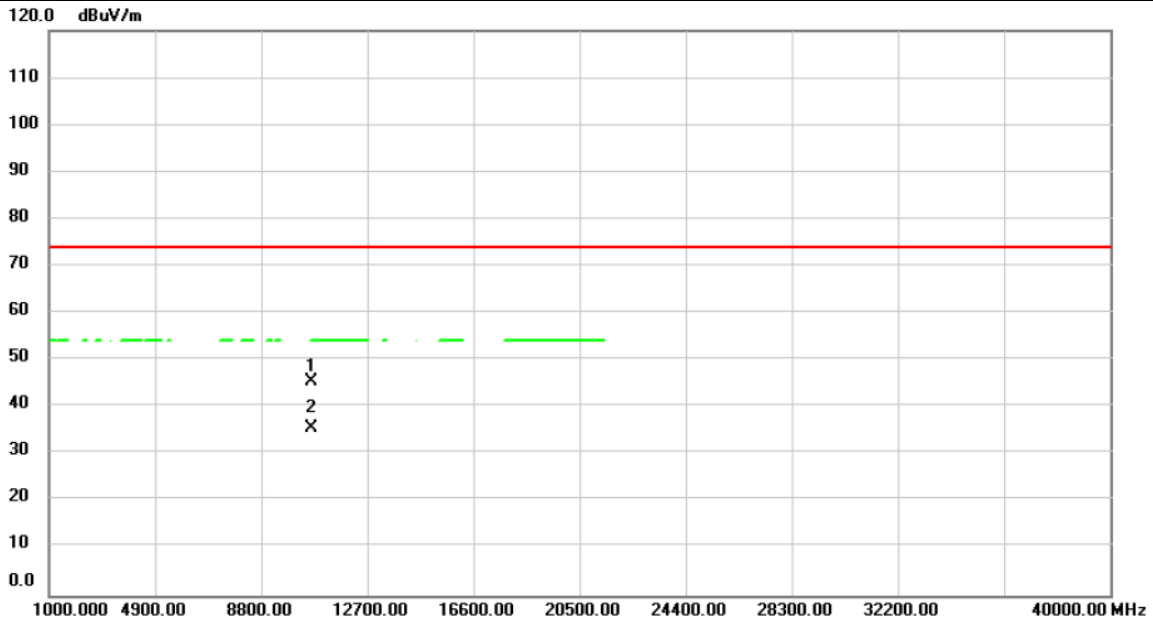


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	10640.000	37.17	8.29	45.46	74.00	-28.54	peak			
2 *	10640.000	27.25	8.29	35.54	54.00	-18.46	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/22
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

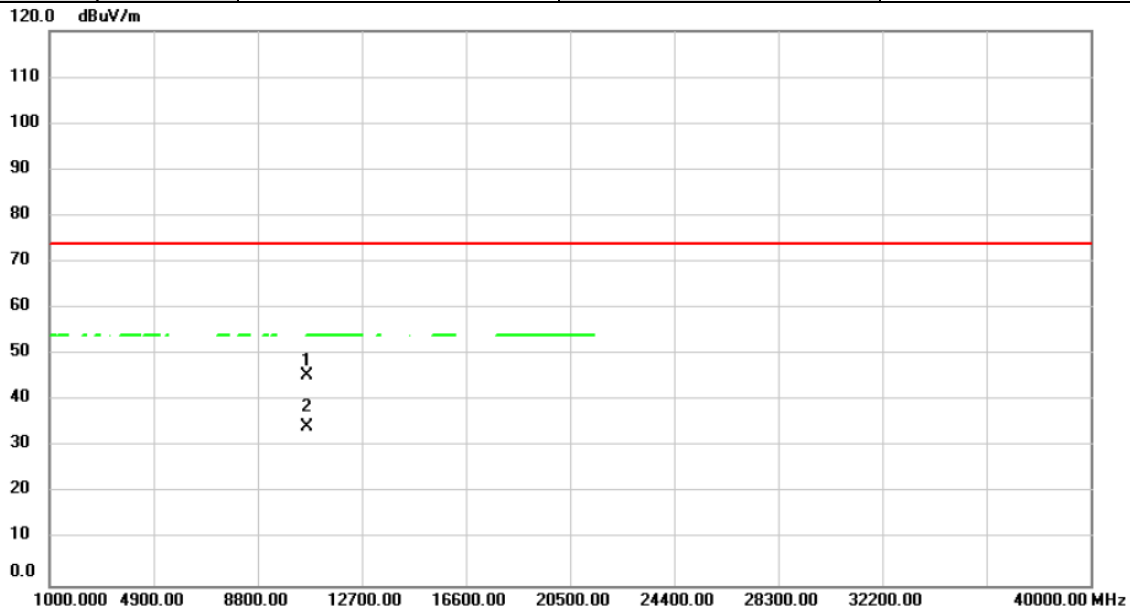


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		10640.000	37.12	8.29	45.41	74.00	-28.59	peak		
2	*	10640.000	26.18	8.29	34.47	54.00	-19.53	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5500MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

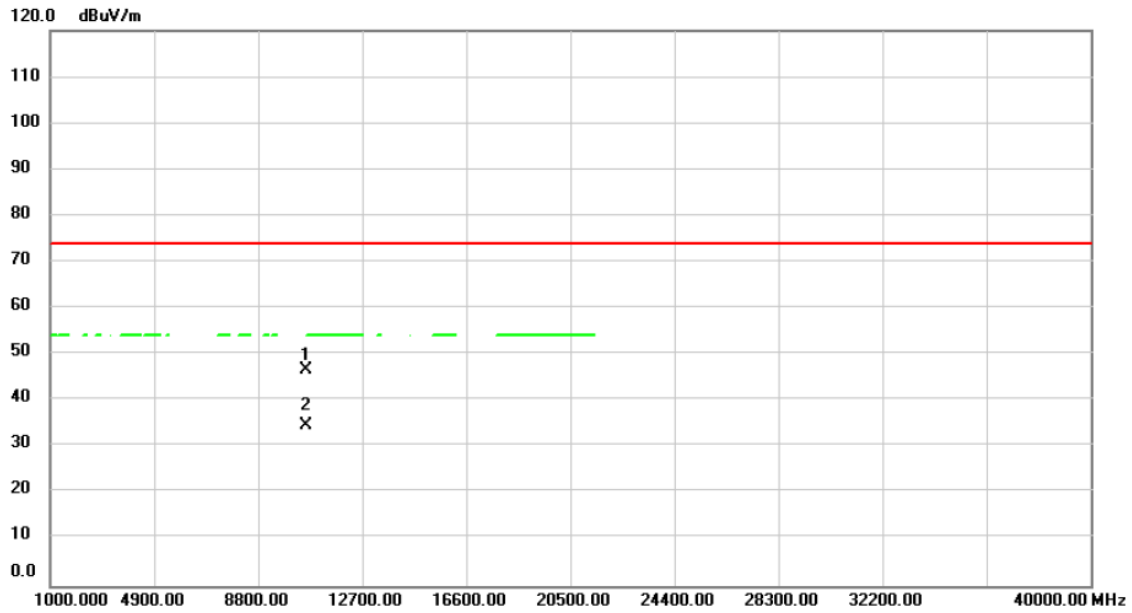


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		10600.000	38.50	8.26	46.76	74.00	-27.24	peak		
2	*	10600.000	26.46	8.26	34.72	54.00	-19.28	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

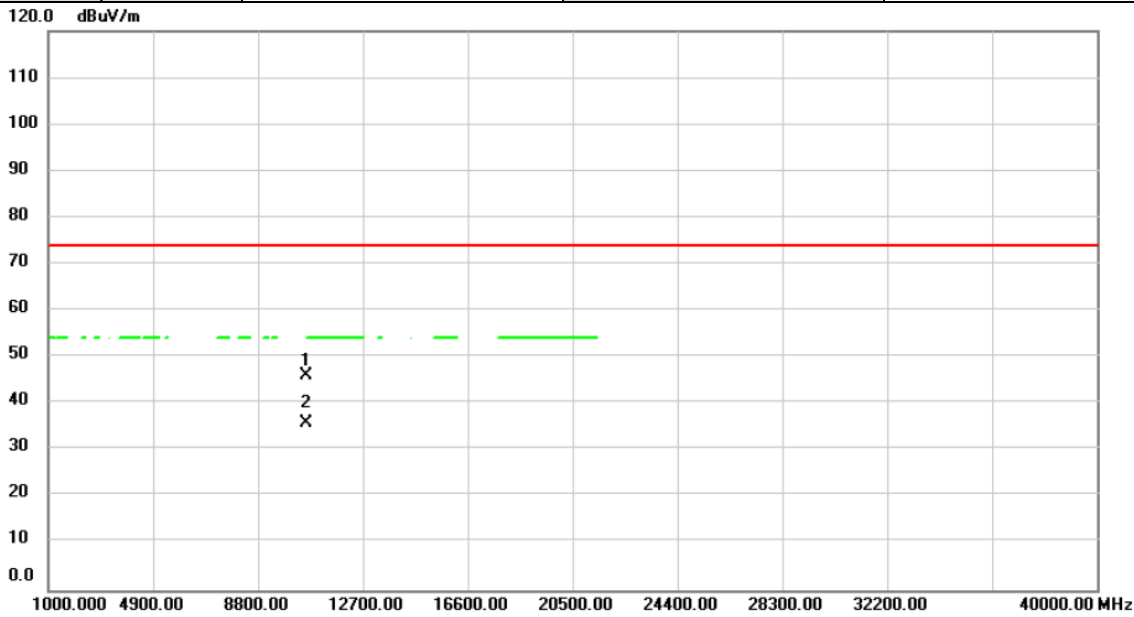


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	10600.000	37.68	8.26	45.94	74.00	-28.06	peak			
2 *	10600.000	27.46	8.26	35.72	54.00	-18.28	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5580MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

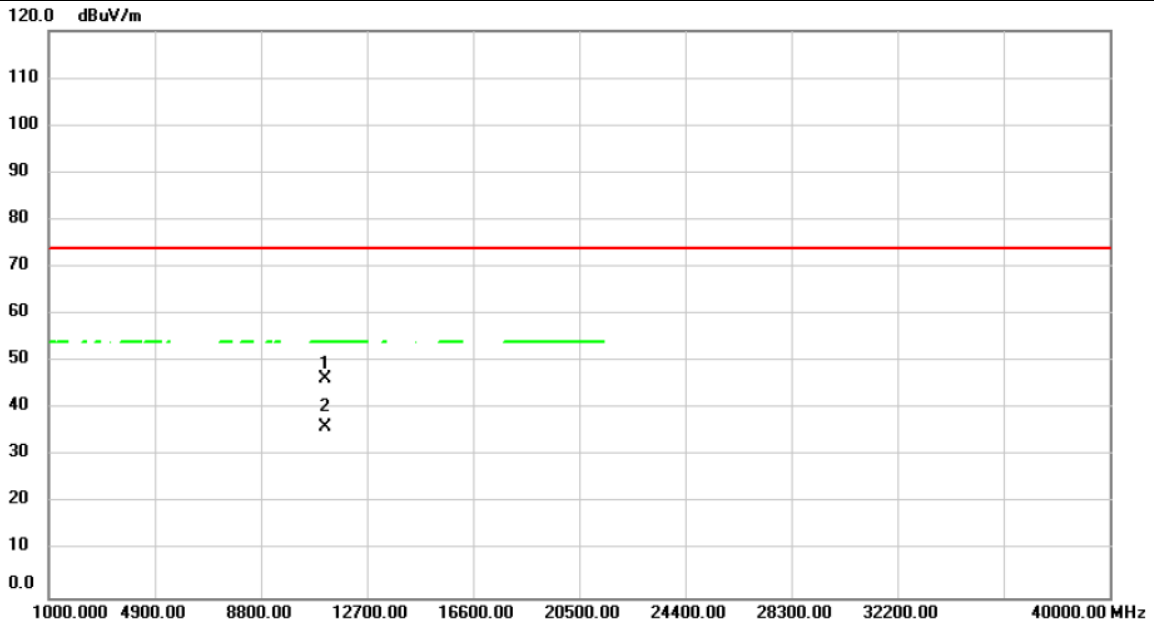


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.000	37.68	8.75	46.43	74.00	-27.57			peak
2	*	11160.000	27.49	8.75	36.24	54.00	-17.76			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5580MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

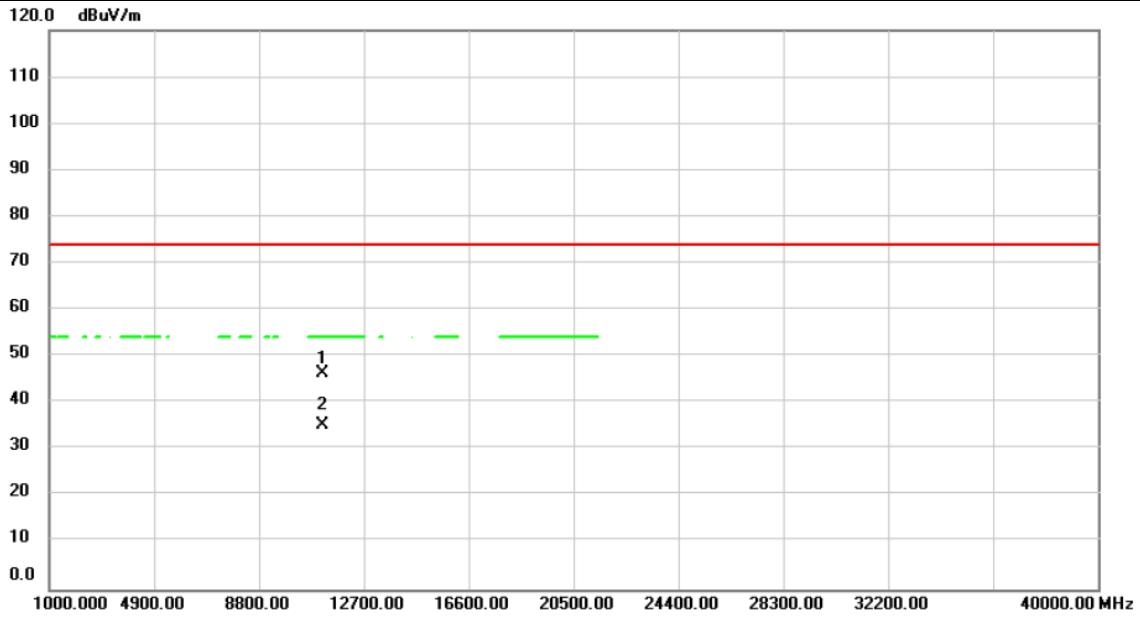


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11160.000	37.68	8.75	46.43	74.00	-27.57	peak		
2	*	11160.000	26.49	8.75	35.24	54.00	-18.76	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5700MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

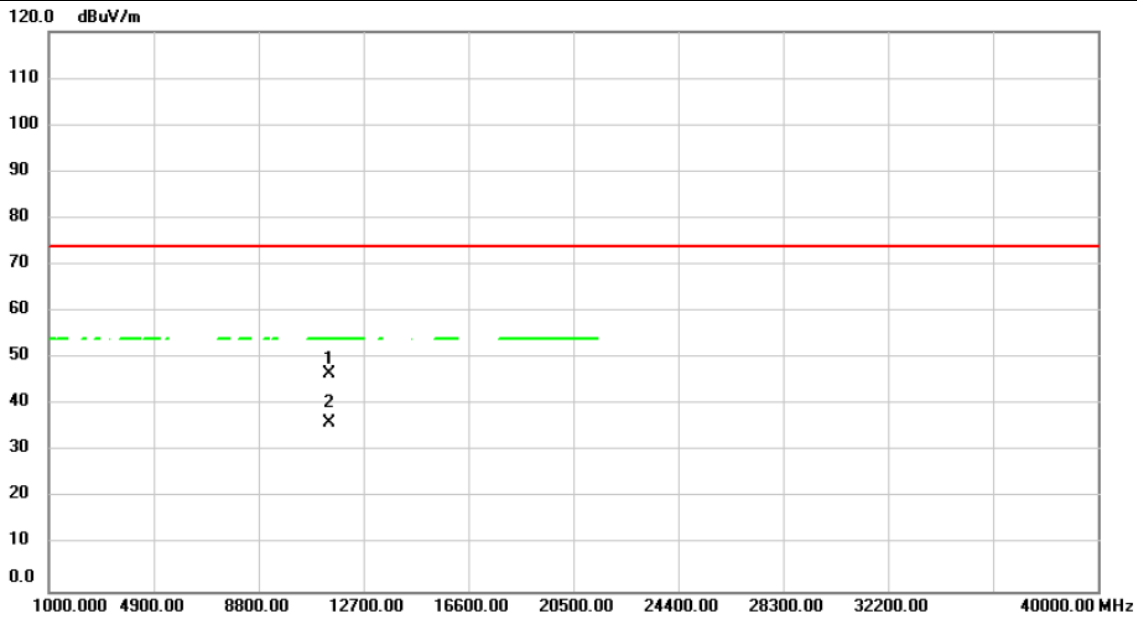


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	11400.000	37.64	9.08	46.72	74.00	-27.28	peak		
2 *	11400.000	26.99	9.08	36.07	54.00	-17.93	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

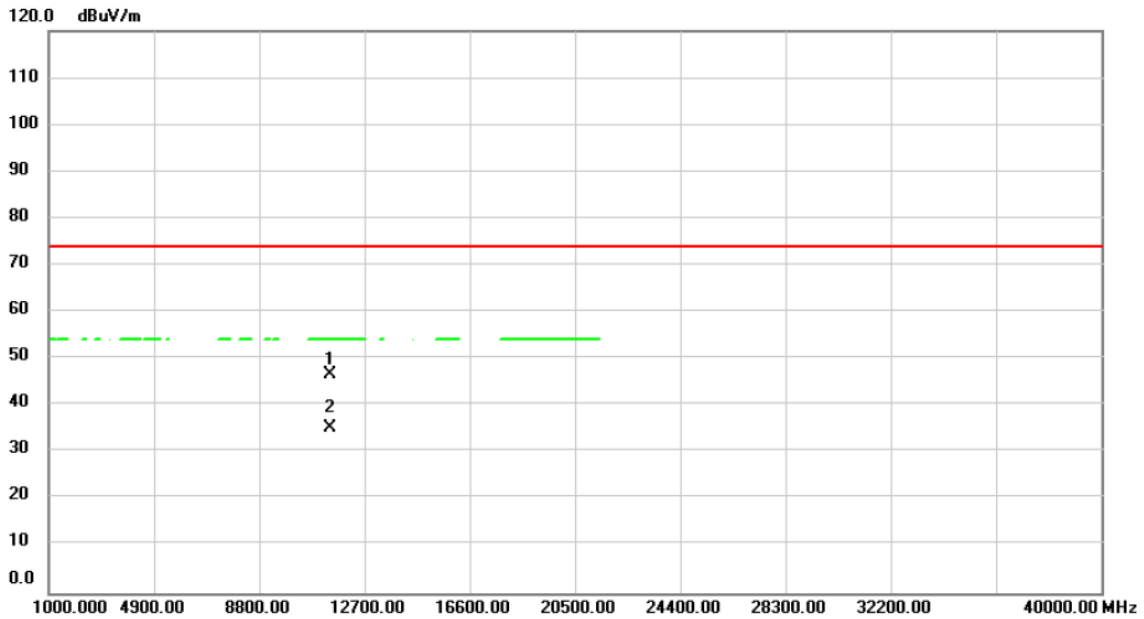


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11400.000	37.68	9.08	46.76	74.00	-27.24	peak		
2	*	11400.000	26.08	9.08	35.16	54.00	-18.84	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5720MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

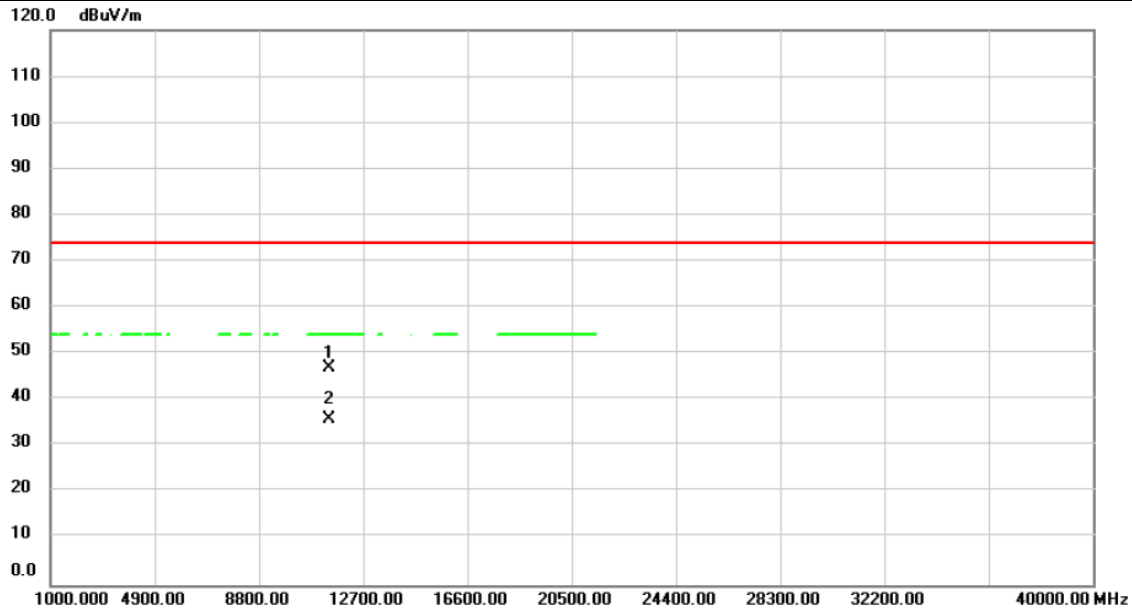


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		11440.000	37.95	9.14	47.09	74.00	-26.91	peak		
2	*	11440.000	26.79	9.14	35.93	54.00	-18.07	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5720MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

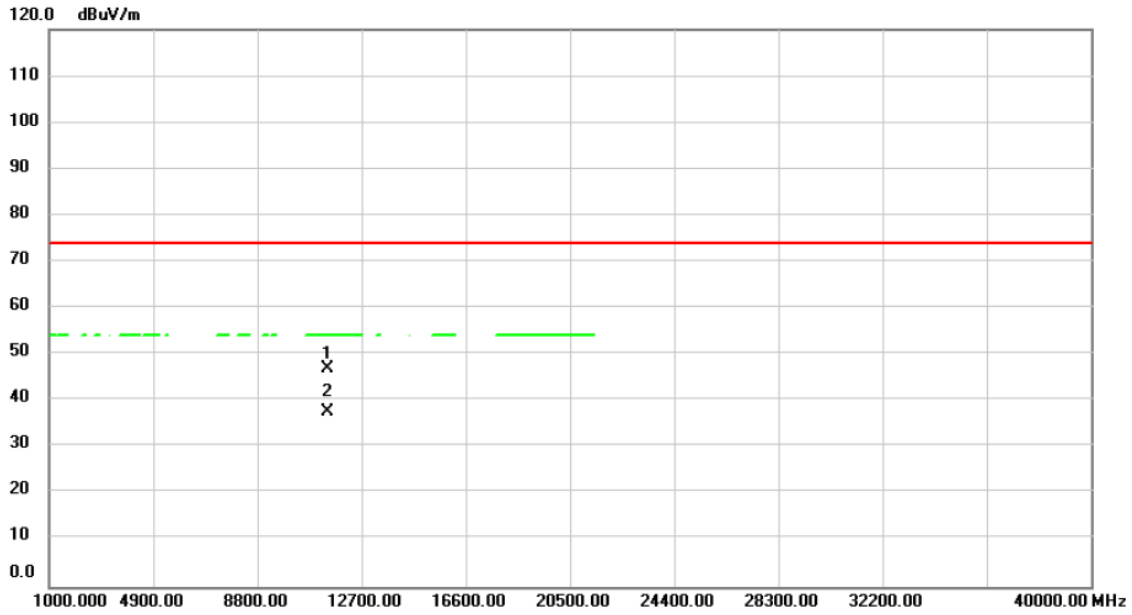


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11440.000	37.76	9.14	46.90	74.00	-27.10	peak		
2	*	11440.000	28.40	9.14	37.54	54.00	-16.46	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

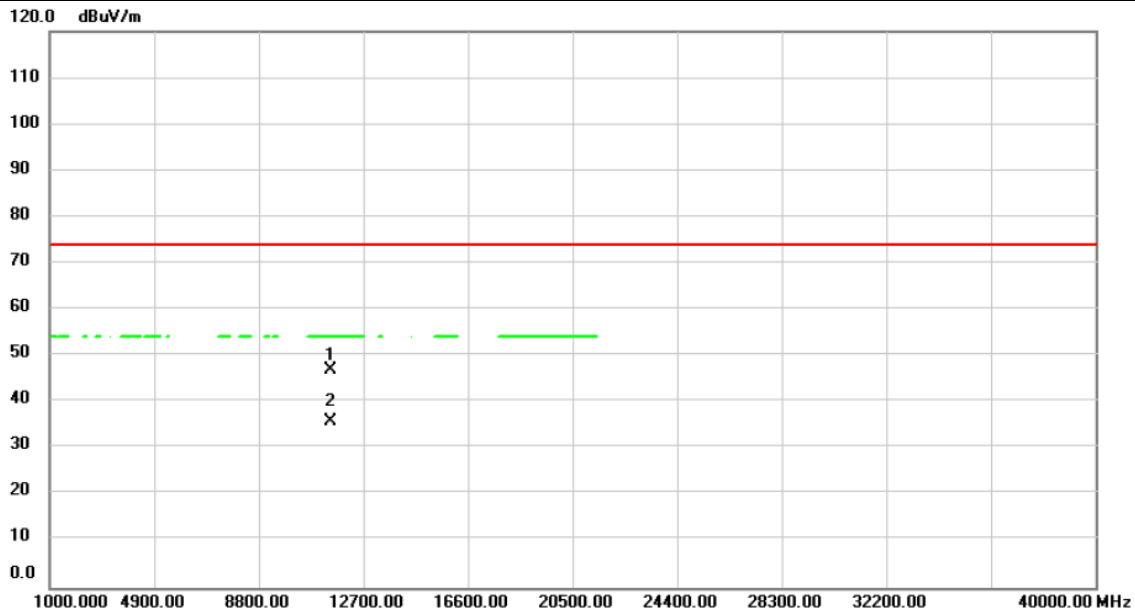


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Detector	Table Height cm	Table Degree	Comment
1	11490.000	37.63	9.20	46.83	74.00	-27.17	peak			
2 *	11490.000	26.79	9.20	35.99	54.00	-18.01	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

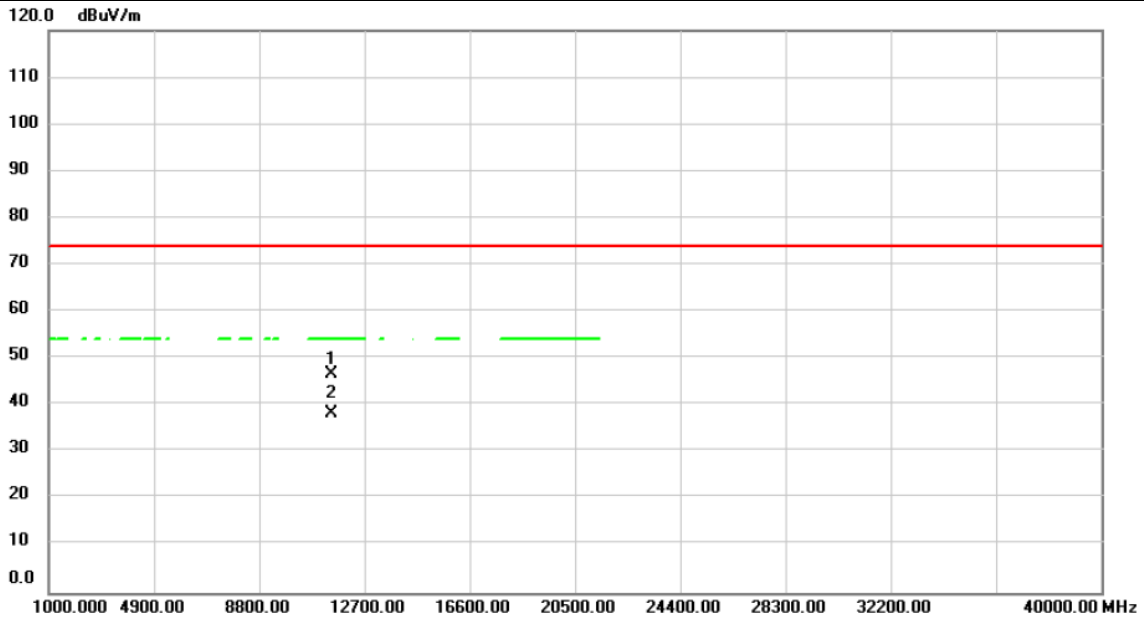


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11490.000	37.58	9.20	46.78	74.00	-27.22	peak		
2	*	11490.000	28.92	9.20	38.12	54.00	-15.88	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

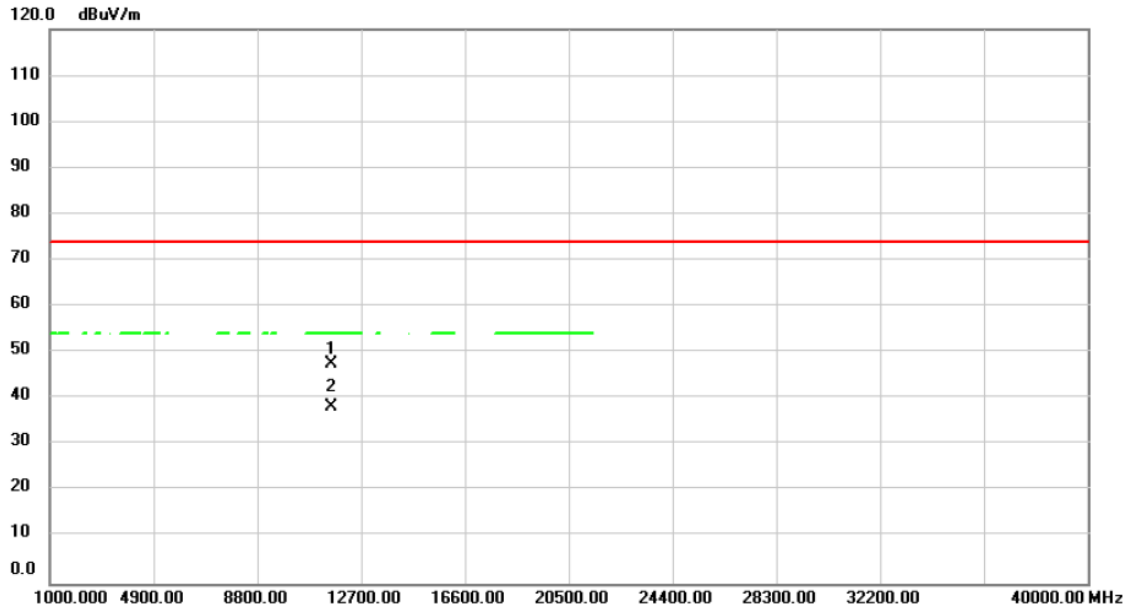


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11570.000	38.41	9.04	47.45	74.00	-26.55	peak		
2	*	11570.000	29.36	9.04	38.40	54.00	-15.60	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

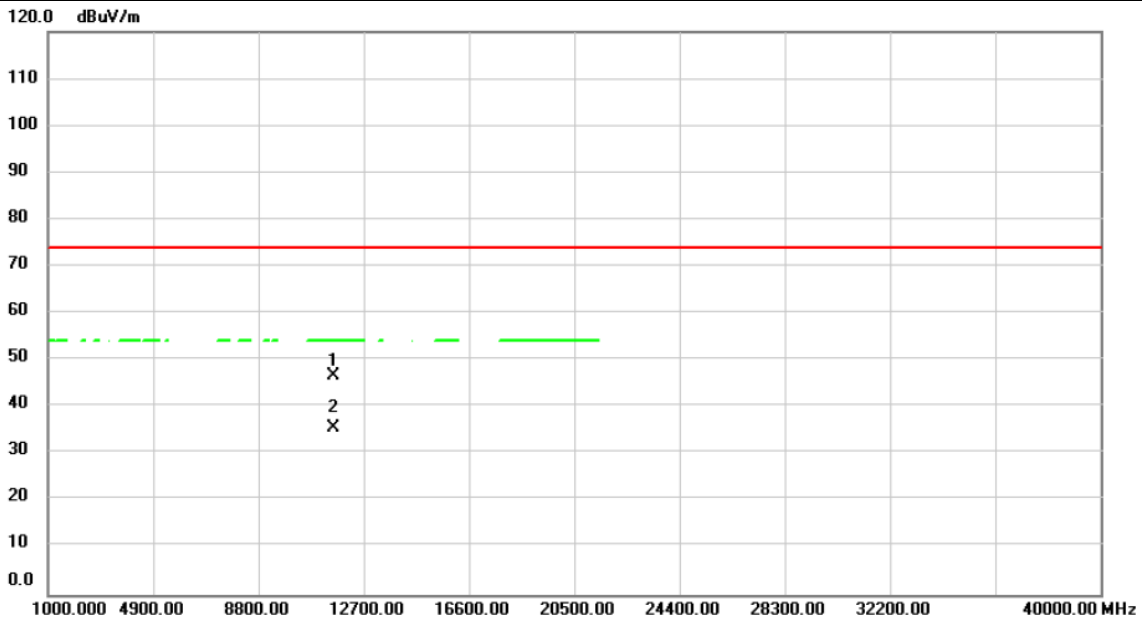


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11570.000	37.60	9.04	46.64	74.00	-27.36	peak		
2	*	11570.000	26.65	9.04	35.69	54.00	-18.31	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

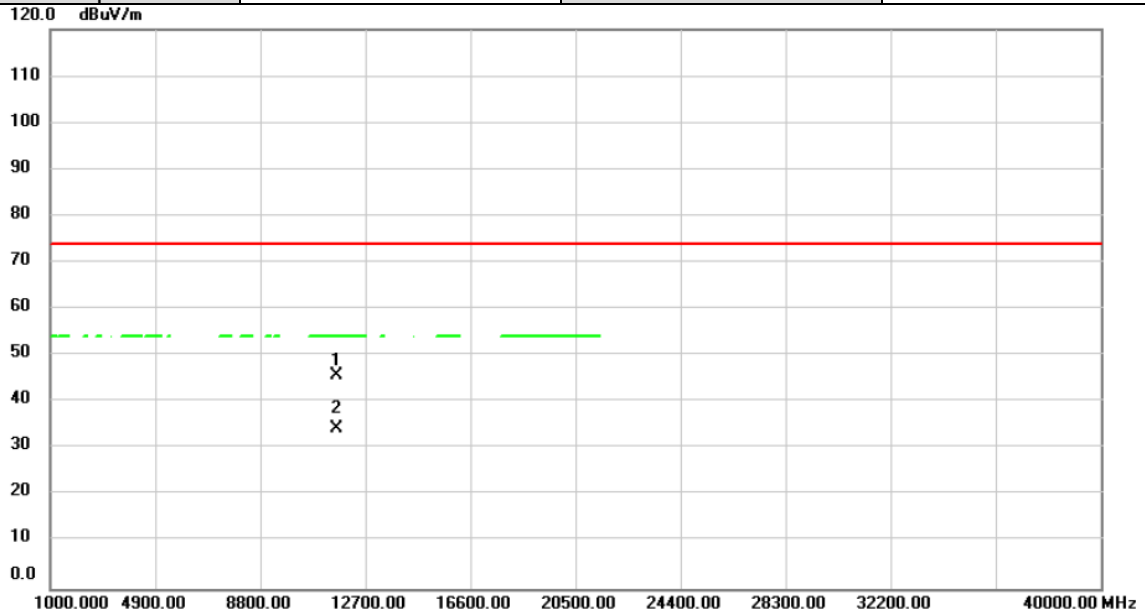


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11650.000	36.98	8.85	45.83	74.00	-28.17	peak		
2	*	11650.000	25.63	8.85	34.48	54.00	-19.52	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/11/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

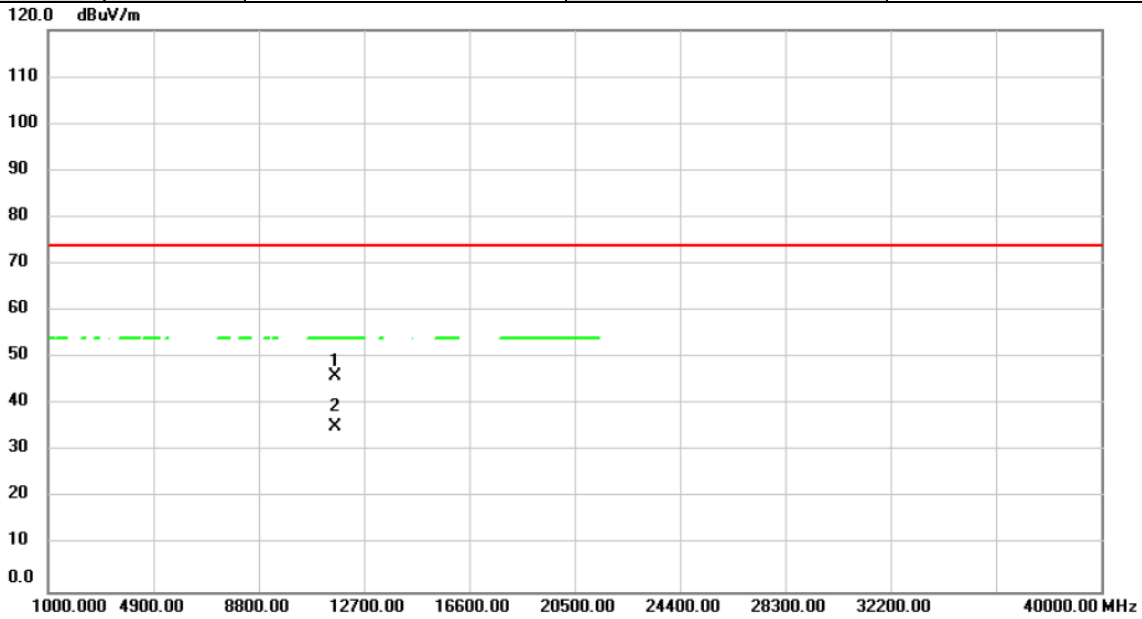


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	11650.000	37.18	8.85	46.03	74.00	-27.97	peak			
2 *	11650.000	26.50	8.85	35.35	54.00	-18.65	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5190MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

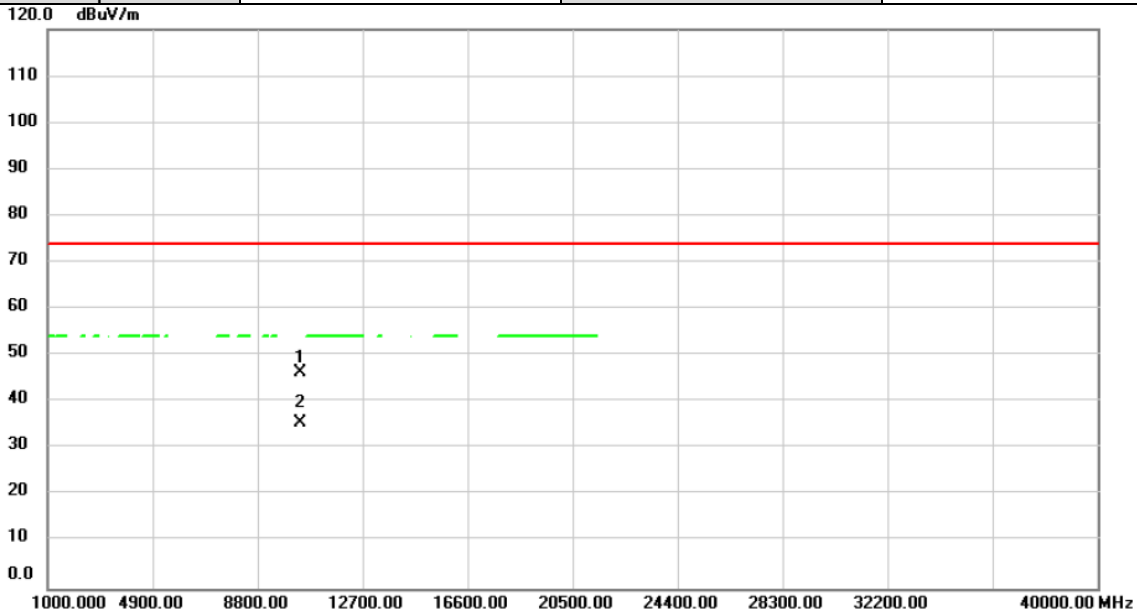


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1 *	10380.000	38.33	7.97	46.30	74.00	-27.70			peak	
2	10380.000	27.49	7.97	35.46	74.00	-38.54			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

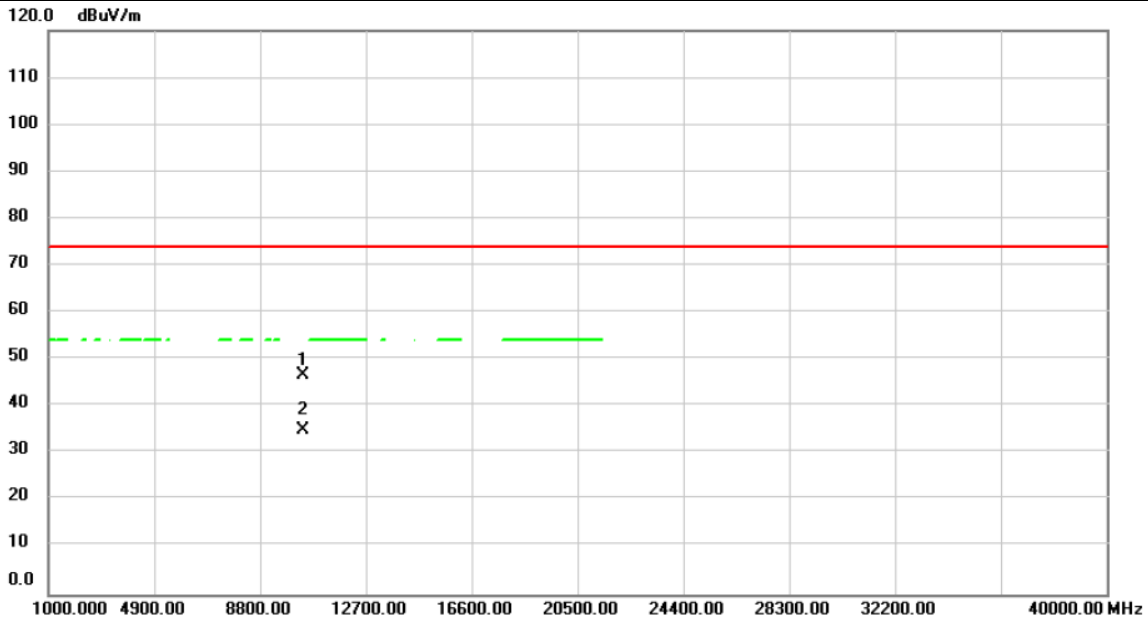


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	10380.000	38.71	7.97	46.68	74.00	-27.32	peak			
2		10380.000	27.03	7.97	35.00	74.00	-39.00	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

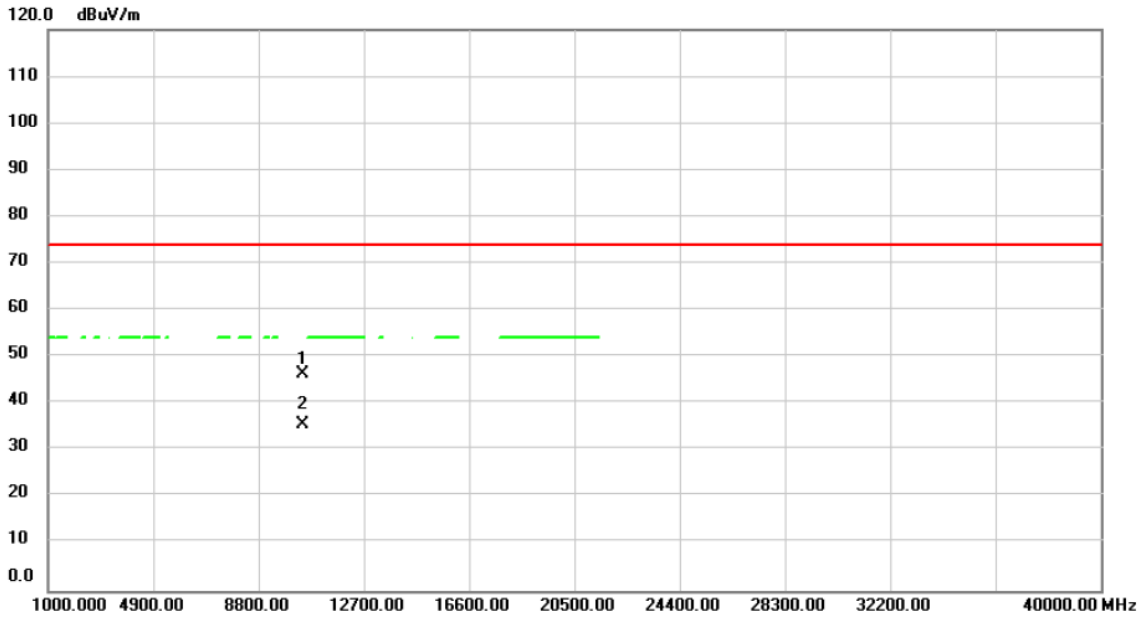


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10460.000	38.33	8.12	46.45	74.00	-27.55	peak		
2		10460.000	27.33	8.12	35.45	74.00	-38.55	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

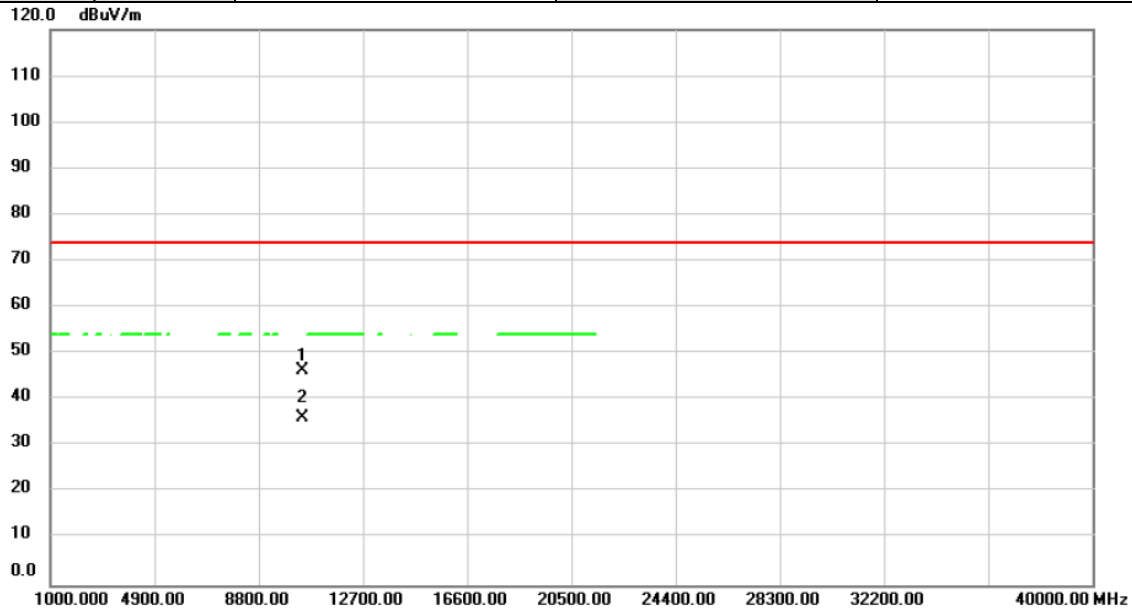


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10460.000	38.33	8.12	46.45	74.00	-27.55	peak		
2		10460.000	27.95	8.12	36.07	74.00	-37.93	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5270MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

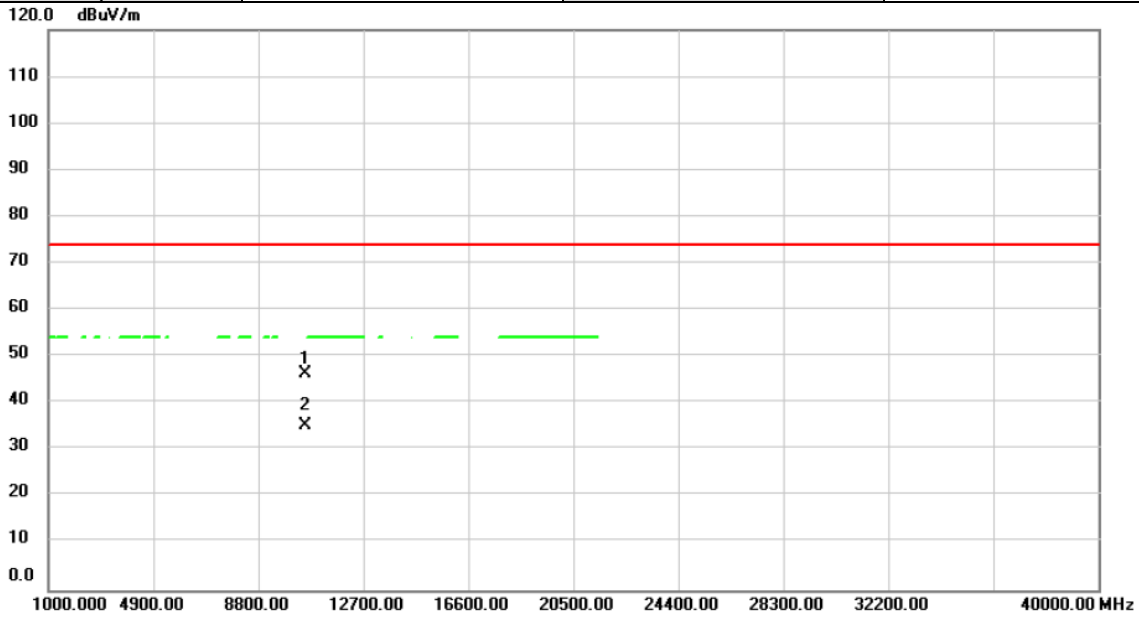


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Detector	Table Height cm	Table Degree	Comment
1 *	10540.000	38.01	8.21	46.22	74.00	-27.78	peak			
2	10540.000	26.99	8.21	35.20	74.00	-38.80	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

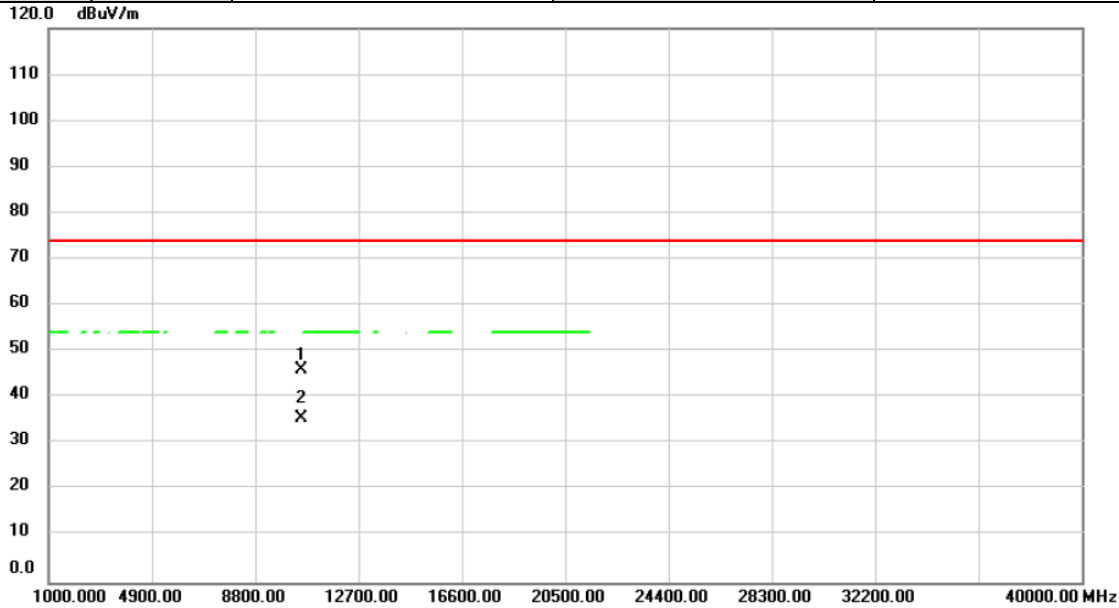


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10540.000	37.96	8.21	46.17	74.00	-27.83	peak		
2		10540.000	27.20	8.21	35.41	74.00	-38.59	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5310MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

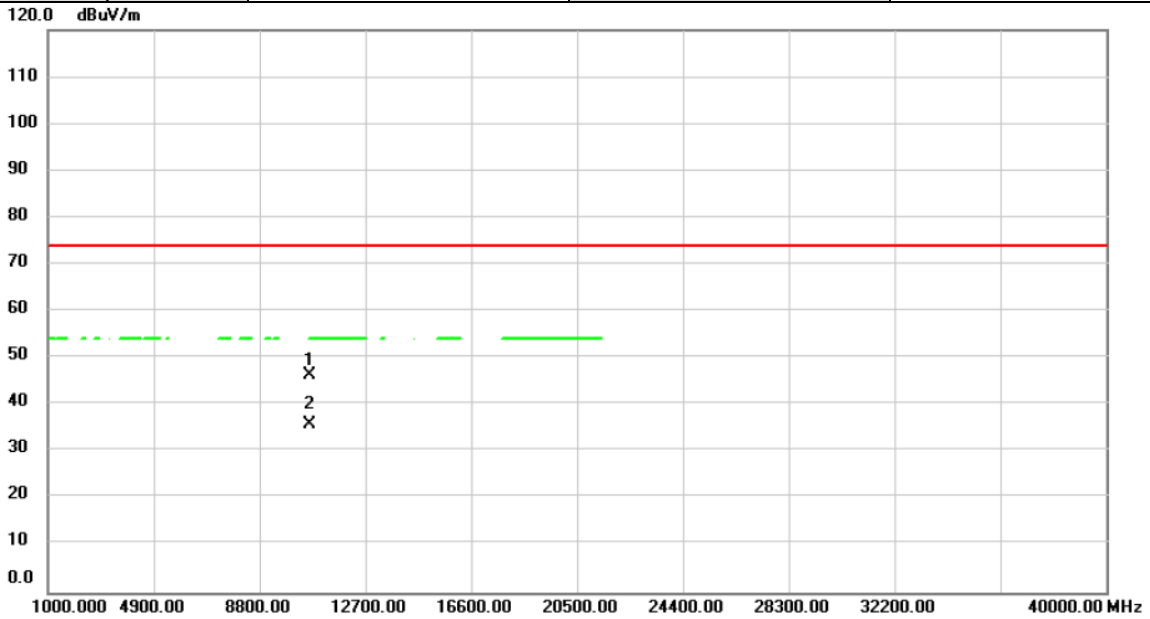


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		10620.000	38.04	8.27	46.31	74.00	-27.69	peak		
2	*	10620.000	27.55	8.27	35.82	54.00	-18.18	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

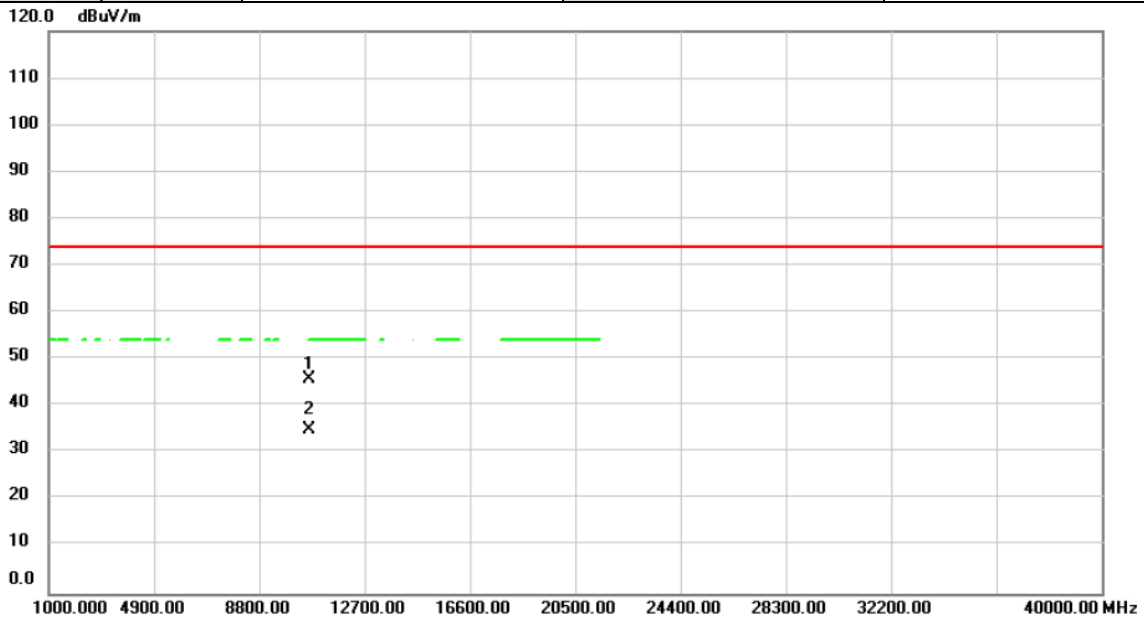


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	10620.000	37.60	8.27	45.87	74.00	-28.13			peak	
2 *	10620.000	26.70	8.27	34.97	54.00	-19.03			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5510MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

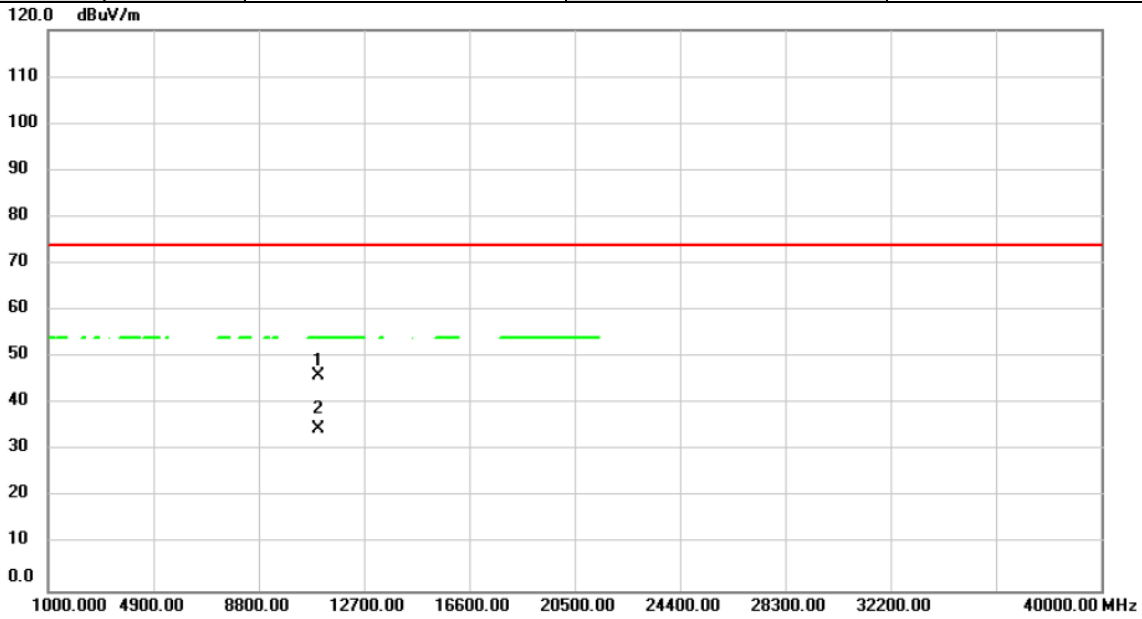


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	11020.000	37.43	8.55	45.98	74.00	-28.02	peak			
2 *	11020.000	26.15	8.55	34.70	54.00	-19.30	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

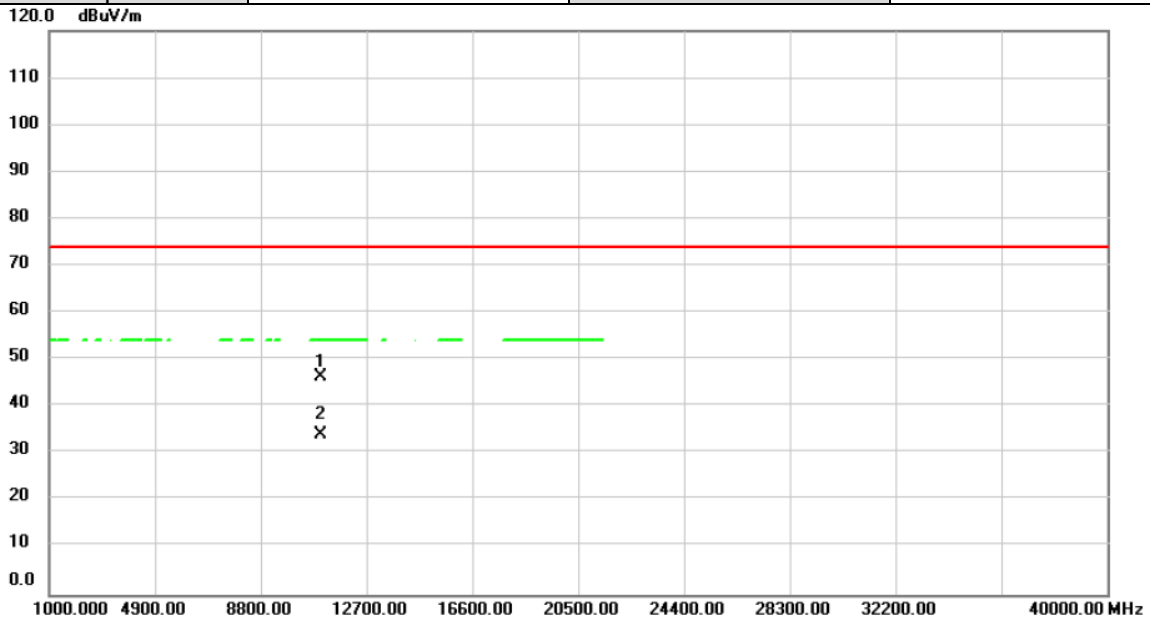


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		11020.000	37.90	8.55	46.45	74.00	-27.55	peak			
2	*	11020.000	25.56	8.55	34.11	54.00	-19.89	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5550MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

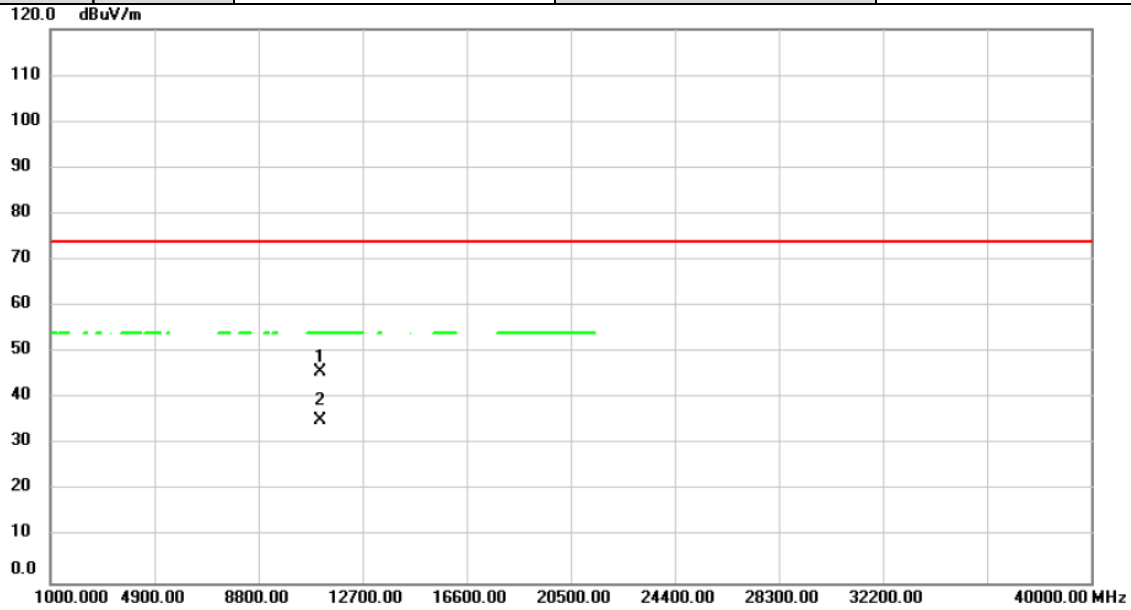


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree		
1		11100.000	36.97	8.67	45.64	74.00	-28.36			peak	
2	*	11100.000	26.61	8.67	35.28	54.00	-18.72			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5550MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

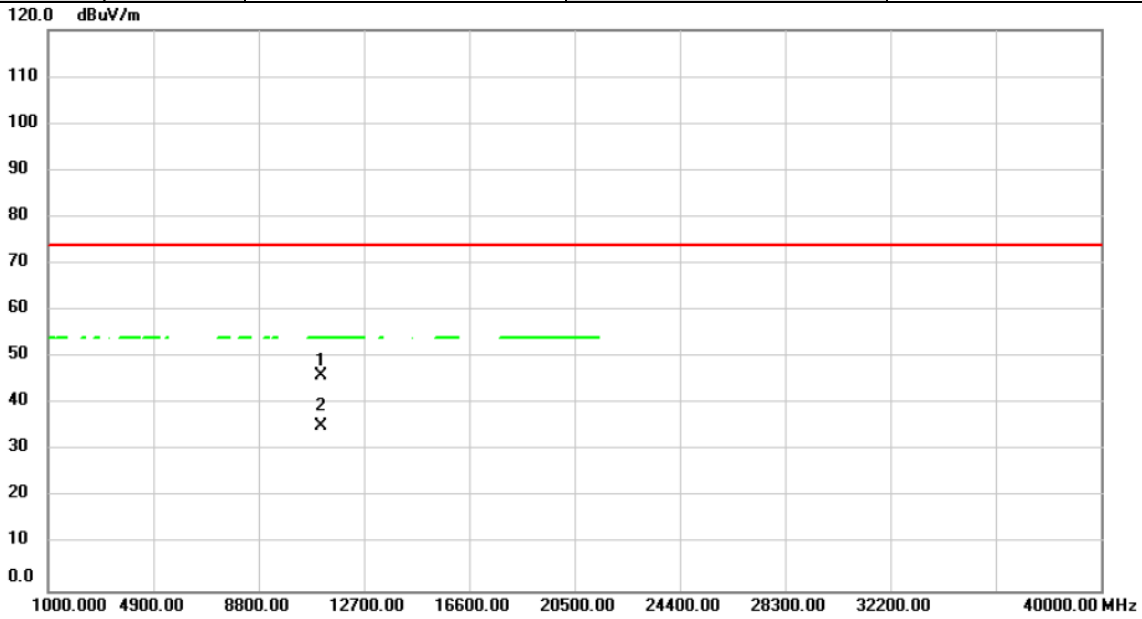


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11100.000	37.32	8.67	45.99	74.00	-28.01	peak		
2	*	11100.000	26.58	8.67	35.25	54.00	-18.75	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

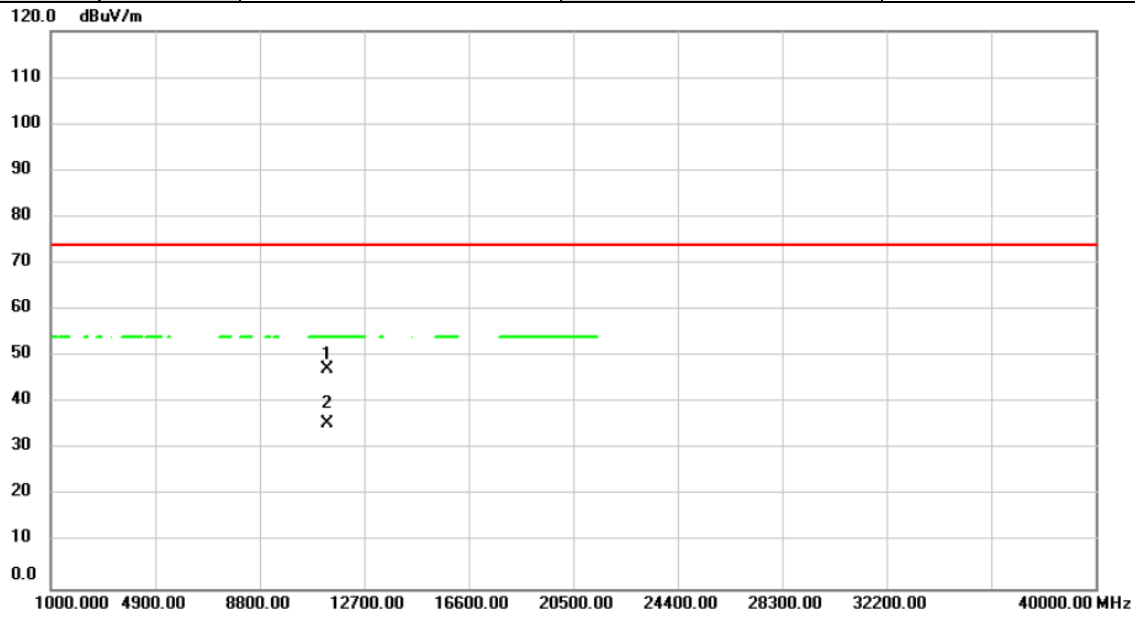


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11340.000	38.37	9.00	47.37	74.00	-26.63	peak		
2	*	11340.000	26.69	9.00	35.69	54.00	-18.31	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

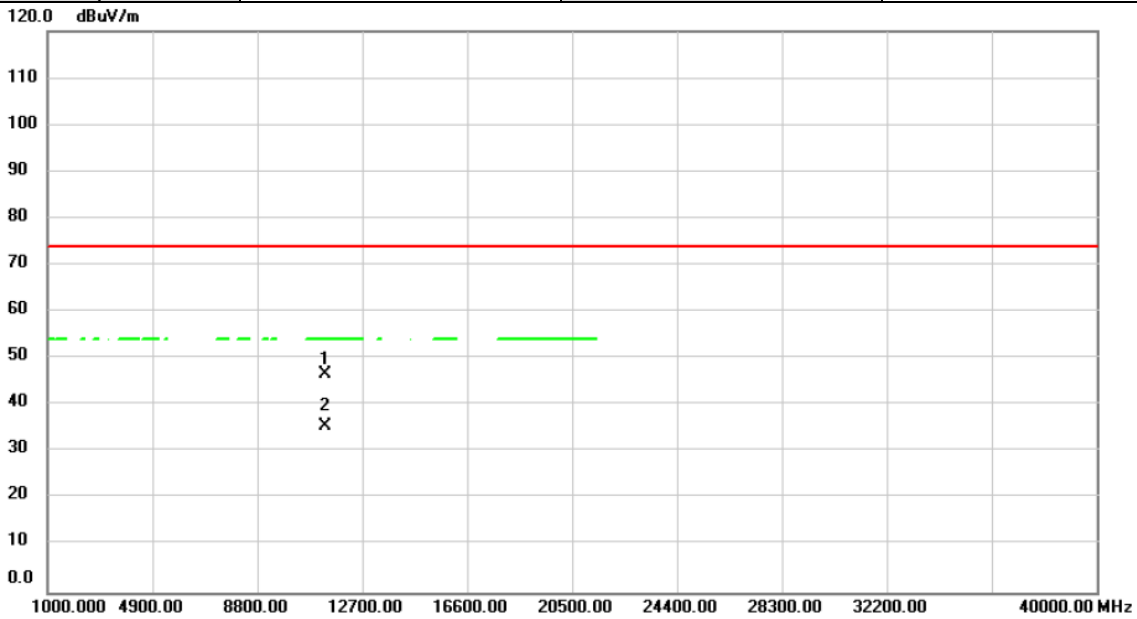


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11340.000	37.61	9.00	46.61	74.00	-27.39	peak		
2	*	11340.000	26.68	9.00	35.68	54.00	-18.32	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/22
Test Frequency	5710MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

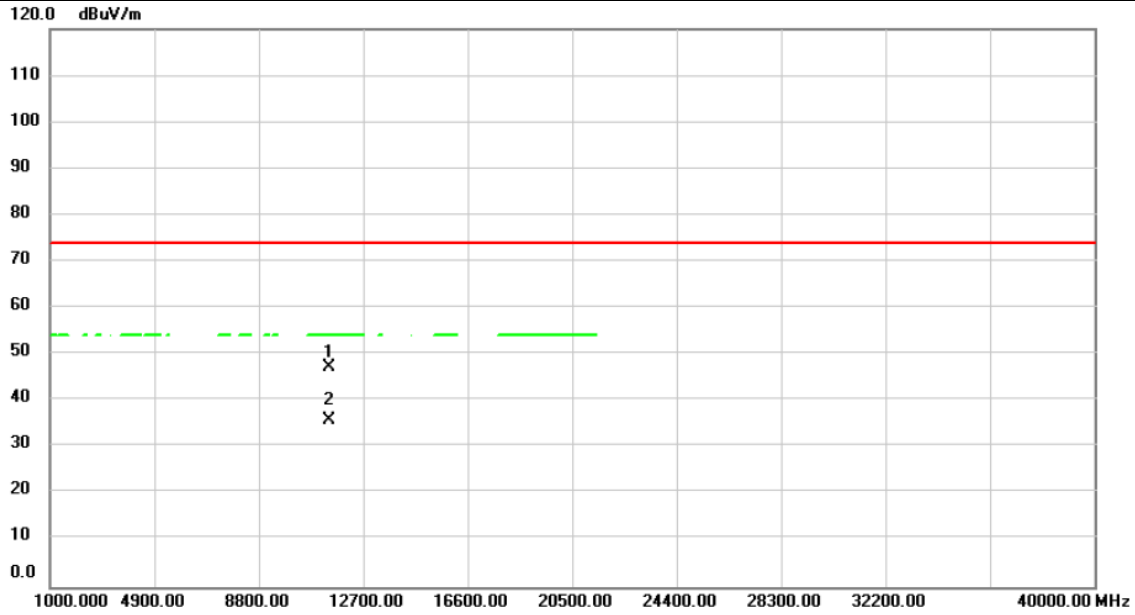


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11420.000	38.12	9.11	47.23	74.00	-26.77	peak		
2	*	11420.000	26.67	9.11	35.78	54.00	-18.22	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/22
Test Frequency	5710MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

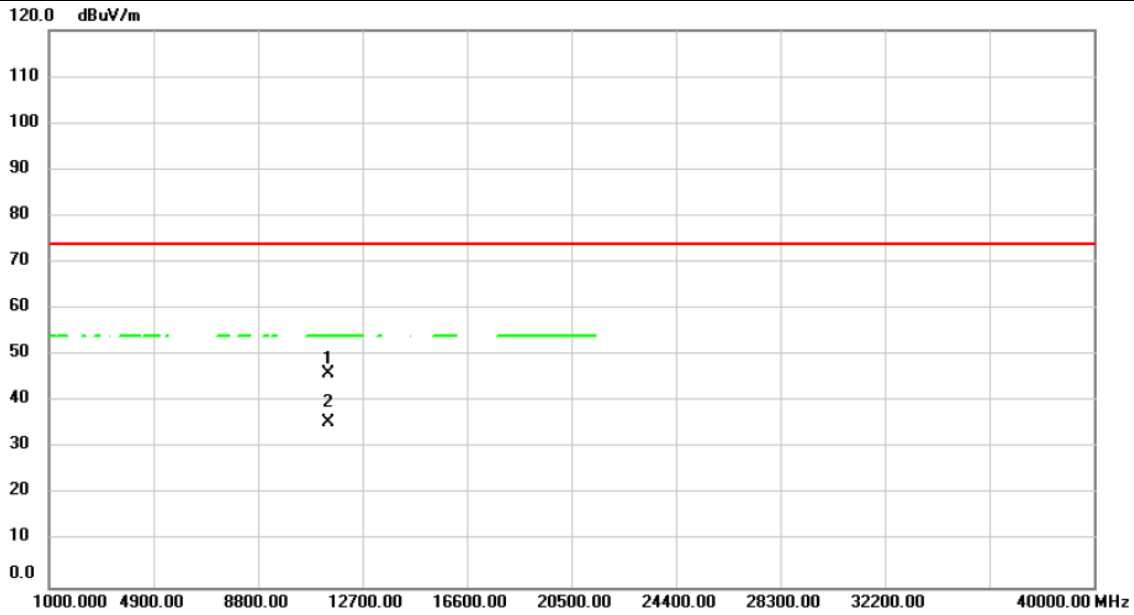


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11420.000	37.02	9.11	46.13	74.00	-27.87	peak		
2	*	11420.000	26.45	9.11	35.56	54.00	-18.44	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

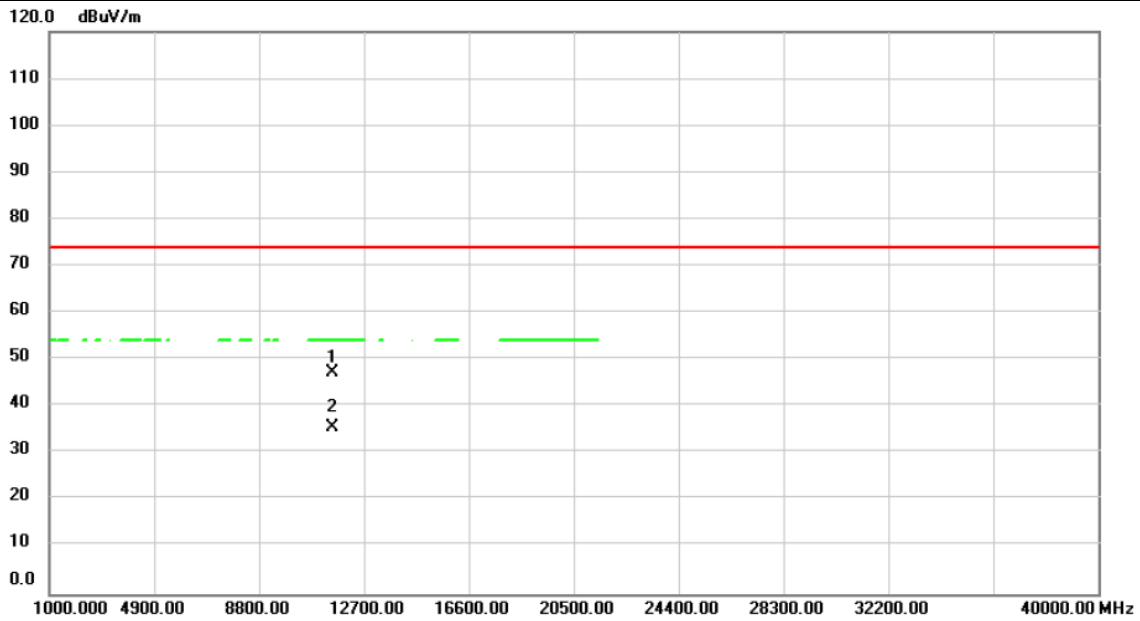


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11510.000	37.99	9.19	47.18	74.00	-26.82	peak		
2	*	11510.000	26.50	9.19	35.69	54.00	-18.31	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

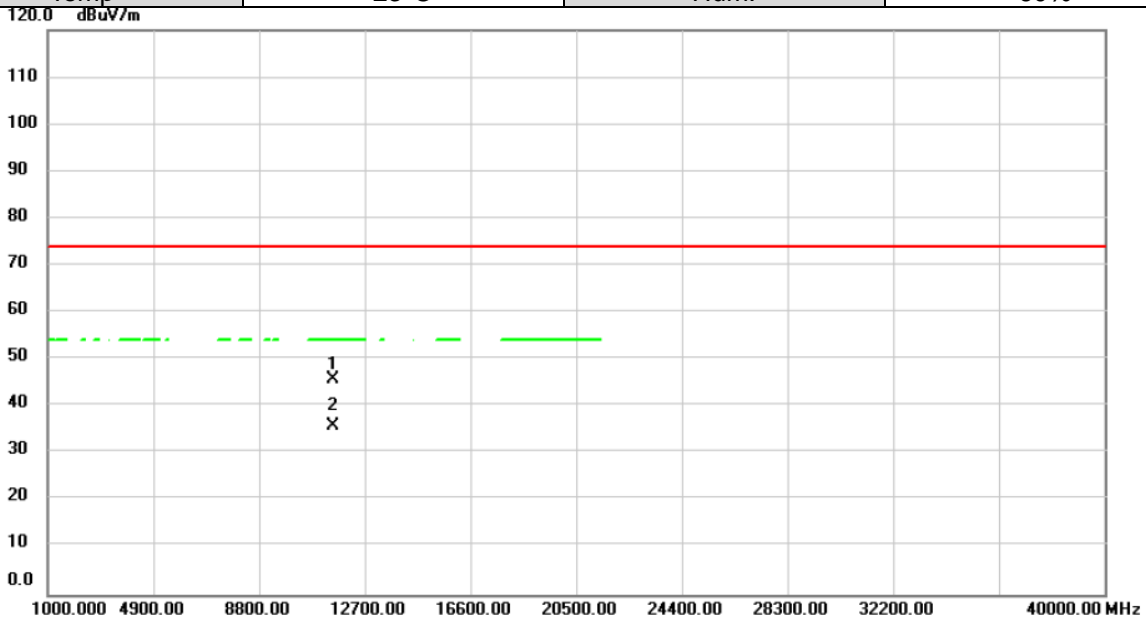


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	11510.000	36.43	9.19	45.62	74.00	-28.38	peak		
2 *	11510.000	26.57	9.19	35.76	54.00	-18.24	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

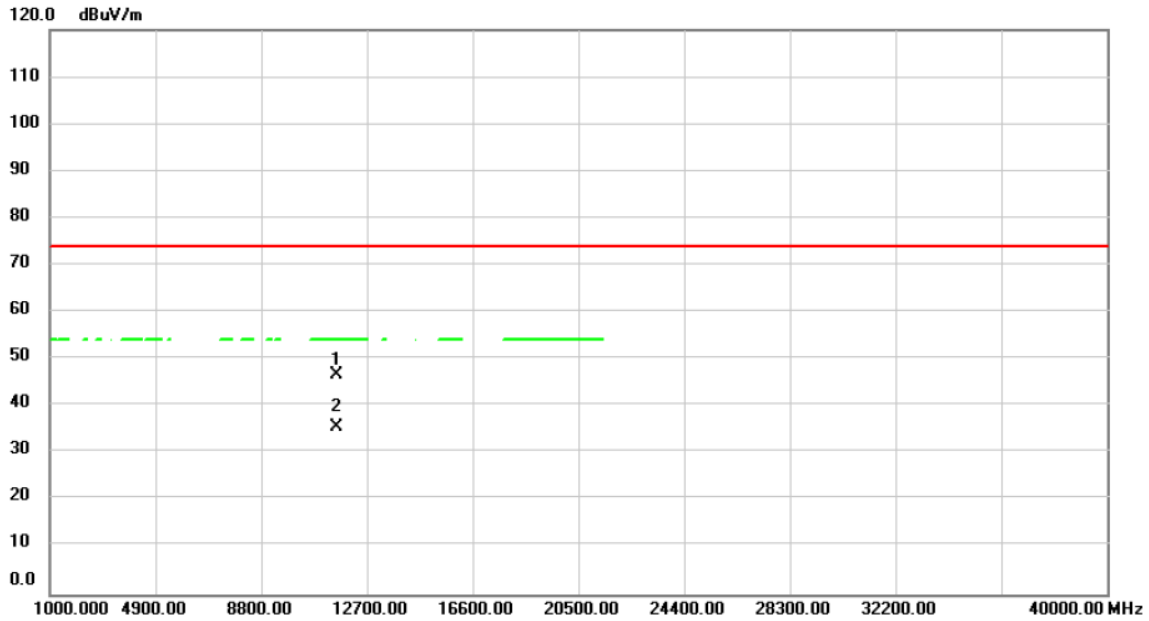


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11590.000	37.72	9.00	46.72	74.00	-27.28			peak
2	*	11590.000	26.61	9.00	35.61	54.00	-18.39			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/11/21
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

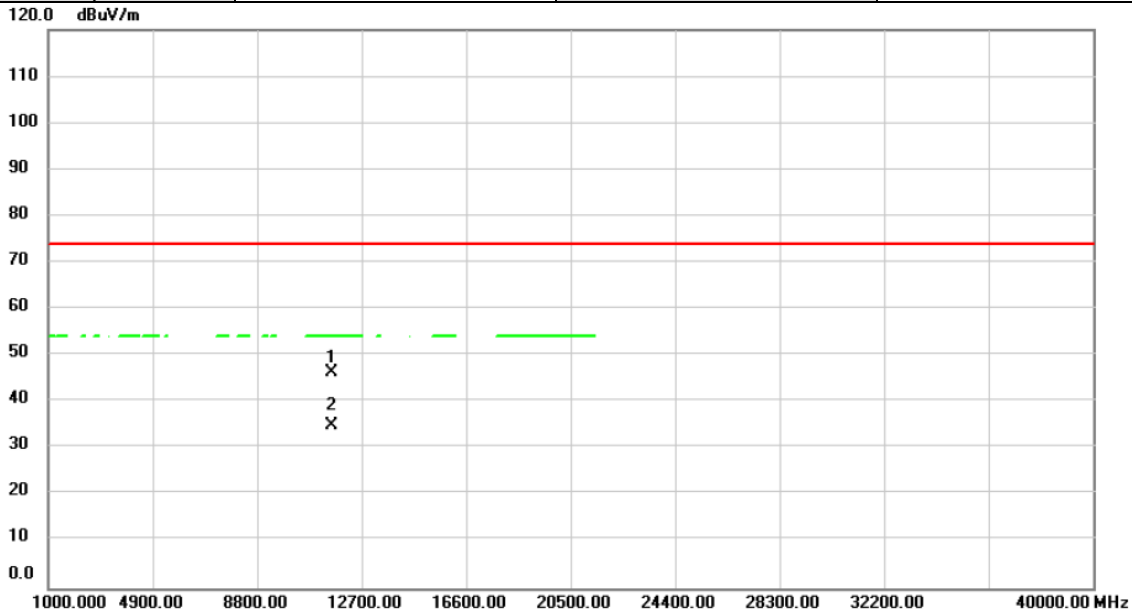


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11590.000	37.36	9.00	46.36	74.00	-27.64	peak		
2	*	11590.000	25.94	9.00	34.94	54.00	-19.06	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5210MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

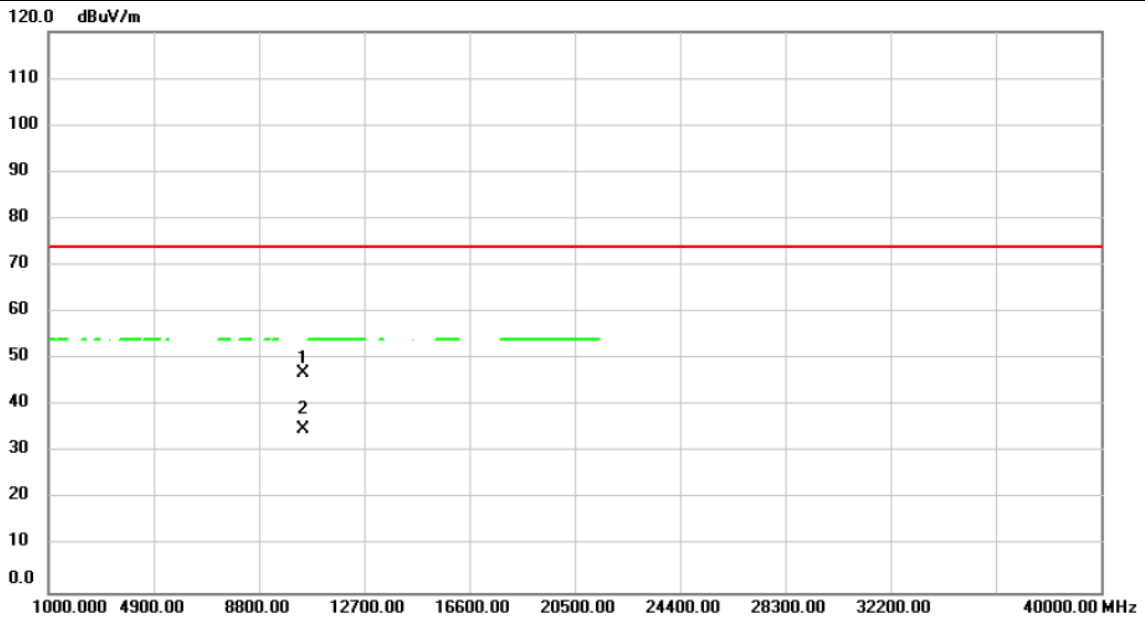


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1 *	10420.000	38.81	8.05	46.86	74.00	-27.14			peak	
2	10420.000	26.99	8.05	35.04	74.00	-38.96			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

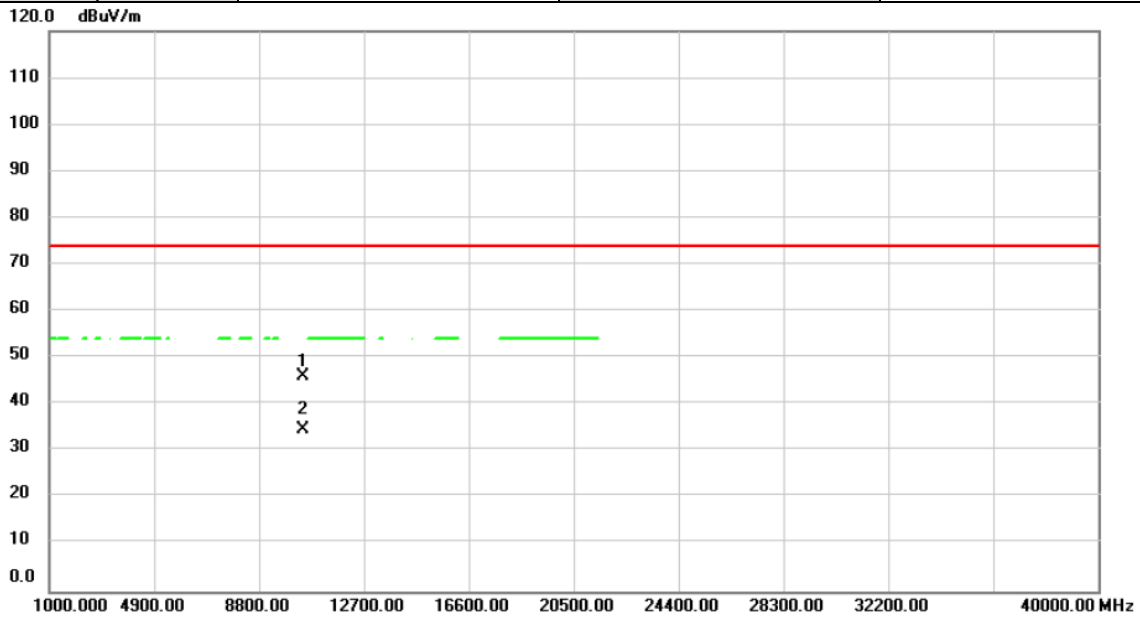


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10420.000	37.90	8.05	45.95	74.00	-28.05	peak		
2		10420.000	26.52	8.05	34.57	74.00	-39.43	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5290MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

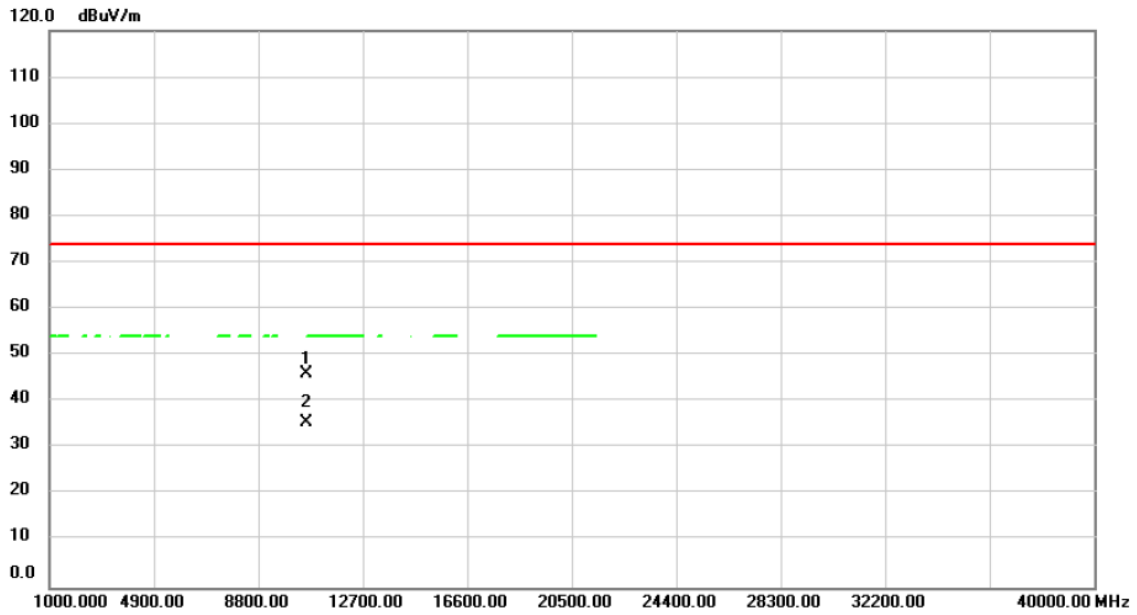


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10580.000	37.78	8.24	46.02	74.00	-27.98	peak		
2		10580.000	27.26	8.24	35.50	74.00	-38.50	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5290MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

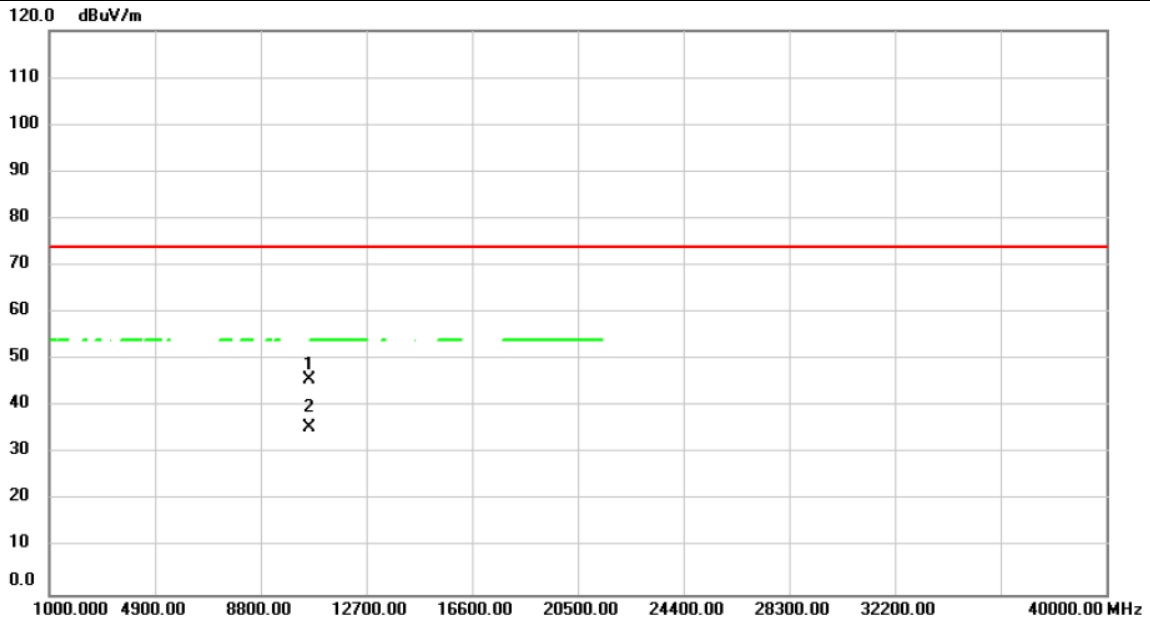


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10580.000	37.52	8.24	45.76	74.00	-28.24			peak
2		10580.000	27.45	8.24	35.69	74.00	-38.31			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5530MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

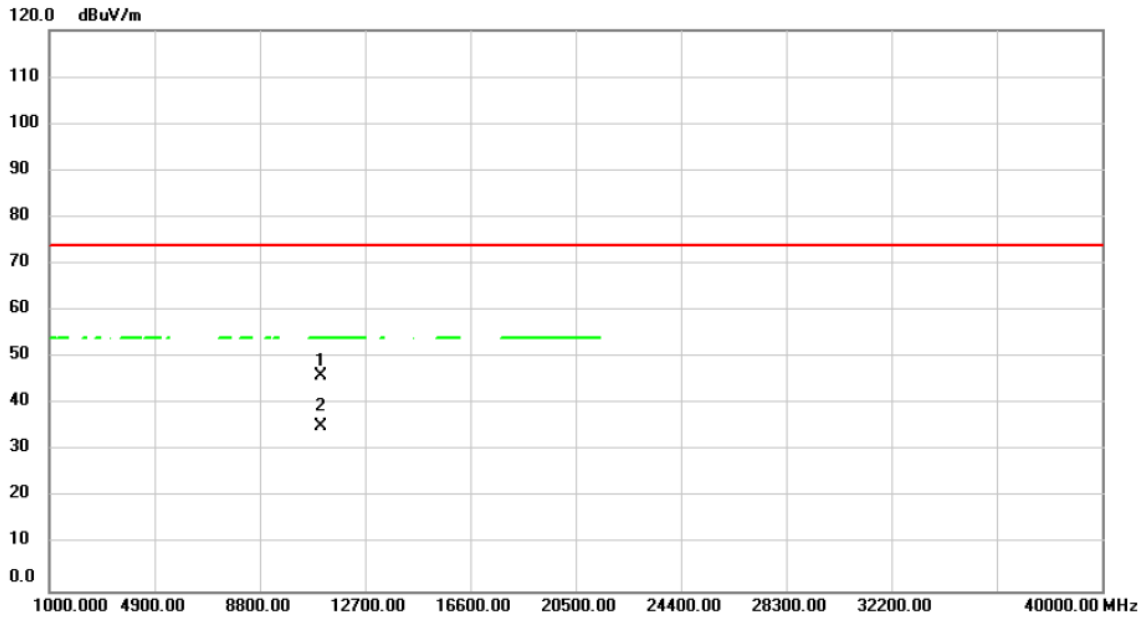


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11060.000	37.36	8.61	45.97	74.00	-28.03	peak		
2	*	11060.000	26.70	8.61	35.31	54.00	-18.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5530MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

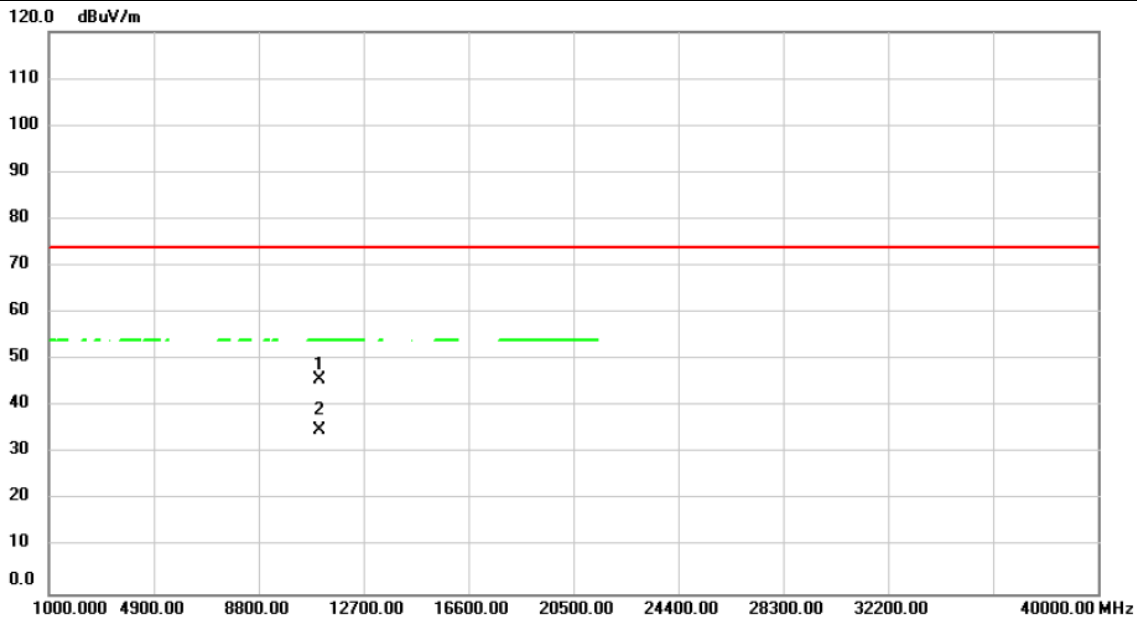


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11060.000	37.12	8.61	45.73	74.00	-28.27			peak
2	*	11060.000	26.35	8.61	34.96	54.00	-19.04			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5610MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

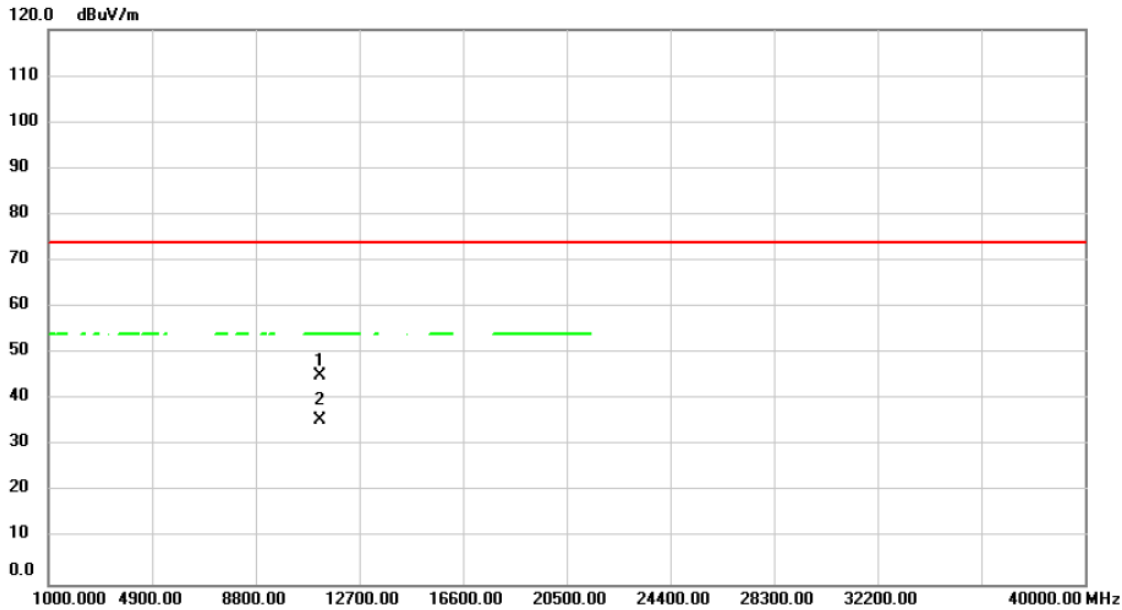


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11220.000	36.40	8.83	45.23	74.00	-28.77	peak		
2	*	11220.000	26.63	8.83	35.46	54.00	-18.54	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5610MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

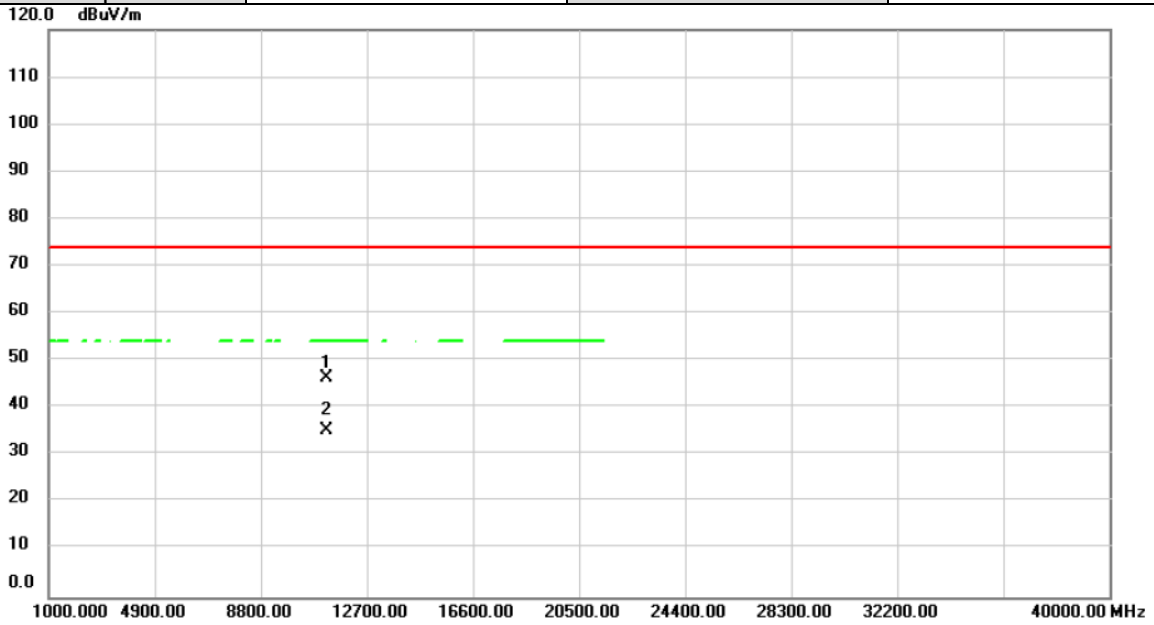


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11220.000	37.54	8.83	46.37	74.00	-27.63	peak		
2	*	11220.000	26.46	8.83	35.29	54.00	-18.71	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5690MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

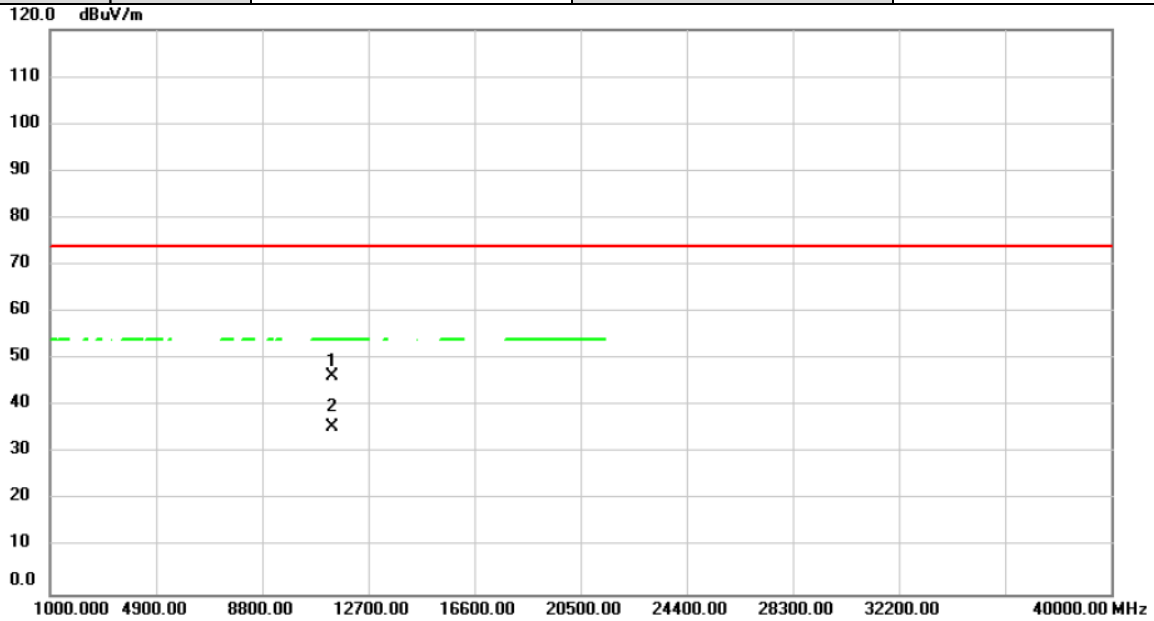


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	11380.000	37.19	9.06	46.25	74.00	-27.75	peak			
2 *	11380.000	26.48	9.06	35.54	54.00	-18.46	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5690MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

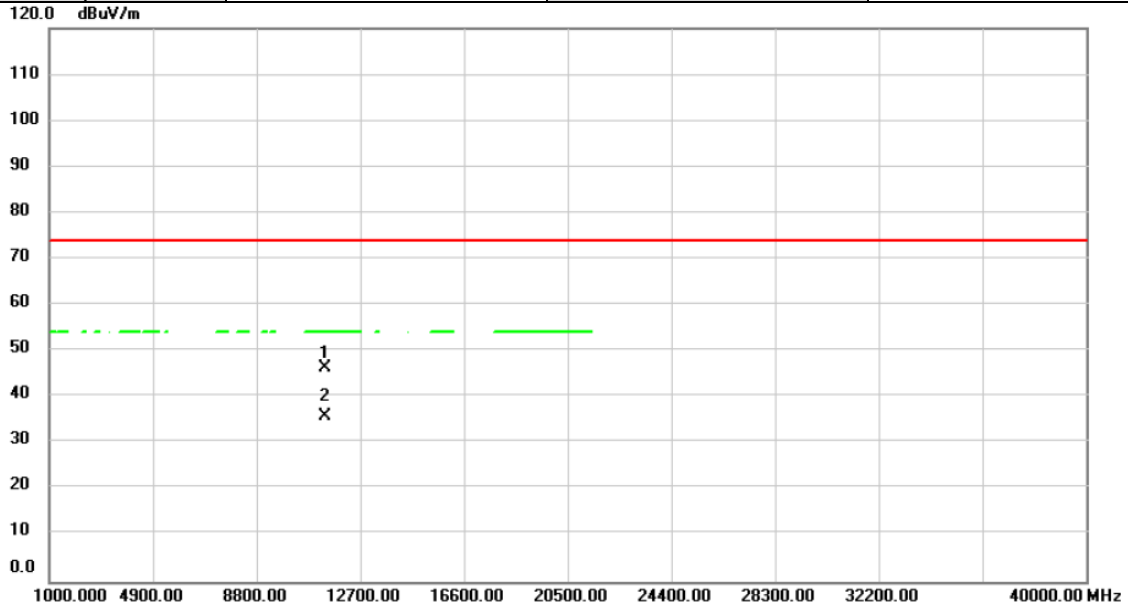


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11380.000	37.31	9.06	46.37	74.00	-27.63	peak		
2	*	11380.000	26.64	9.06	35.70	54.00	-18.30	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

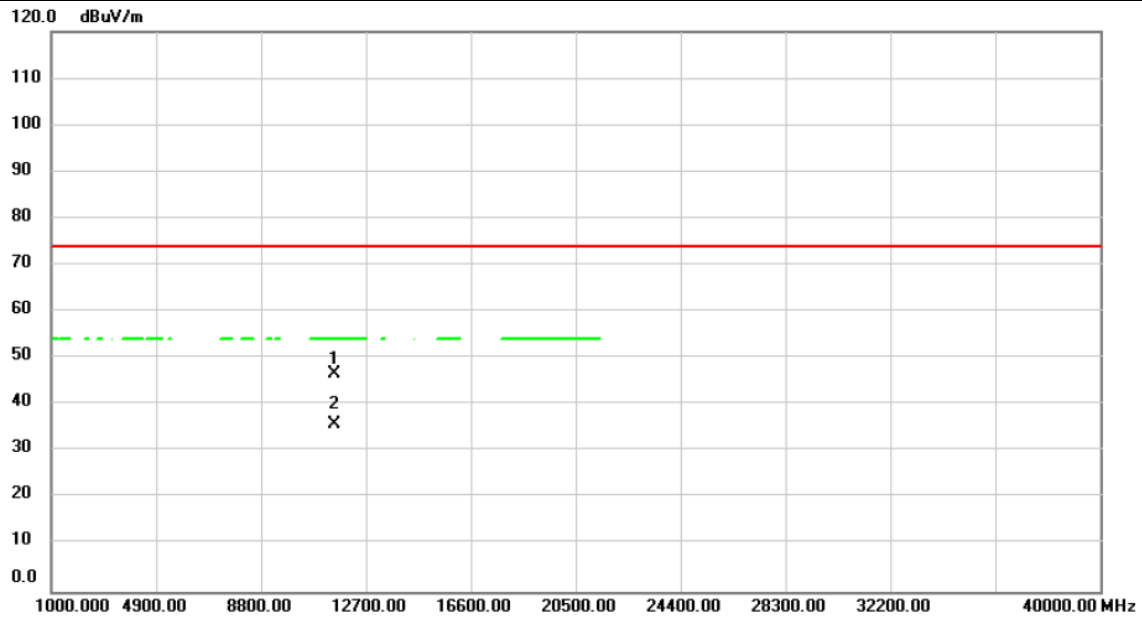


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11550.000	37.46	9.09	46.55	74.00	-27.45	peak		
2	*	11550.000	26.72	9.09	35.81	54.00	-18.19	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/11/21
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

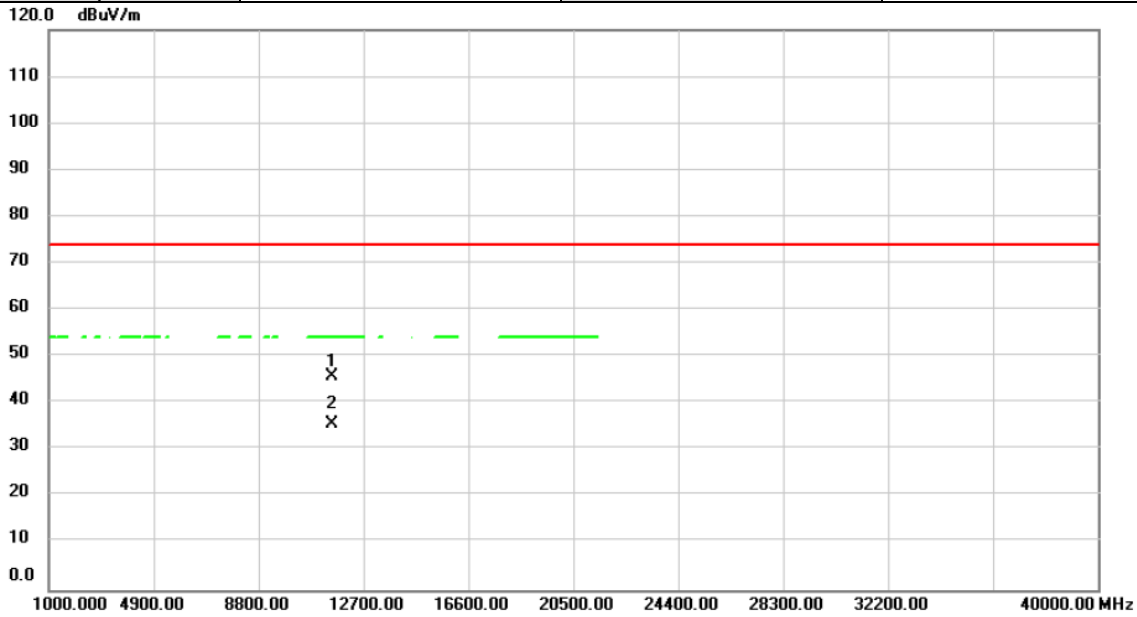


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		11550.000	36.74	9.09	45.83	74.00	-28.17	peak		
2	*	11550.000	26.57	9.09	35.66	54.00	-18.34	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/11/22
Test Frequency	5250MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

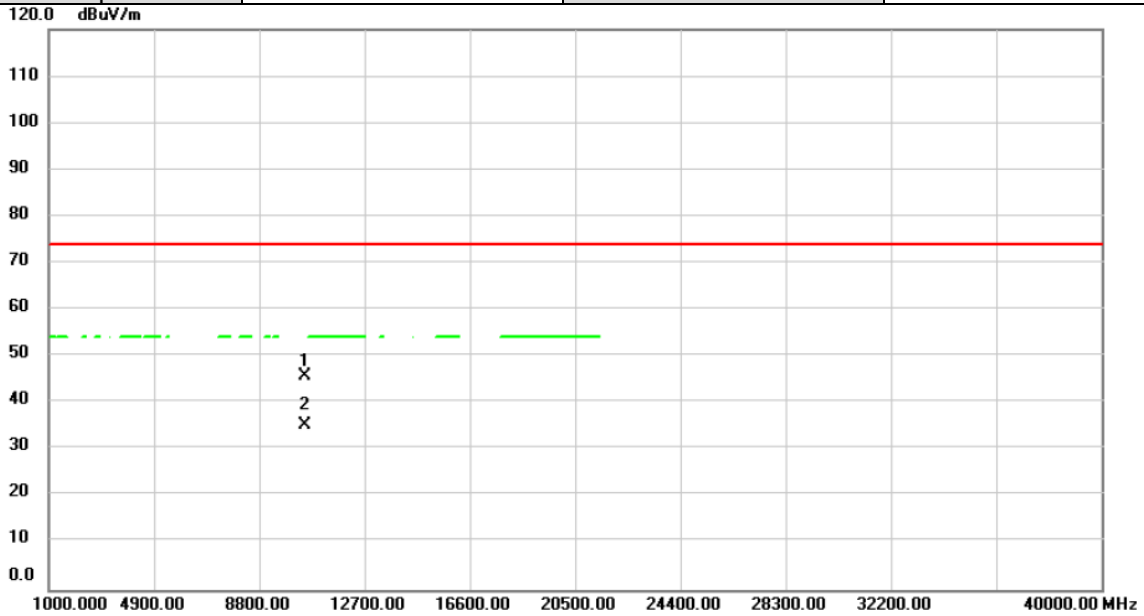


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1 *	10500.000	37.62	8.19	45.81	74.00	-28.19			peak	
2	10500.000	27.14	8.19	35.33	74.00	-38.67			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/11/22
Test Frequency	5250MHz	Polarization	Horizontal
Temp	23°C	Hum.	60%

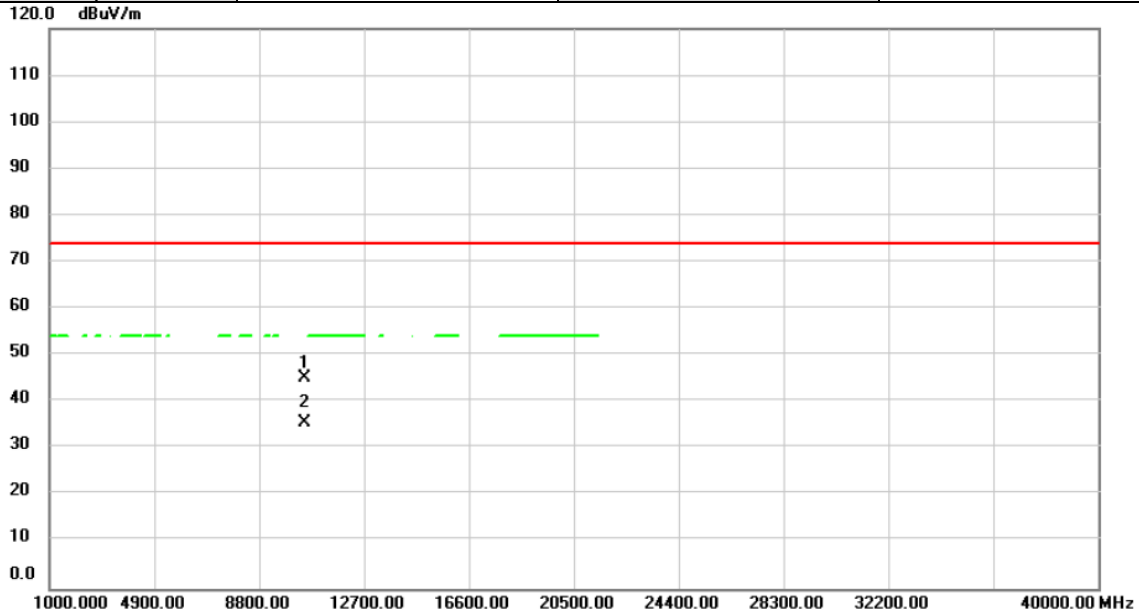


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10500.000	37.05	8.19	45.24	74.00	-28.76	peak		
2		10500.000	27.31	8.19	35.50	74.00	-38.50	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/11/22
Test Frequency	5570MHz	Polarization	Vertical
Temp	23°C	Hum.	60%

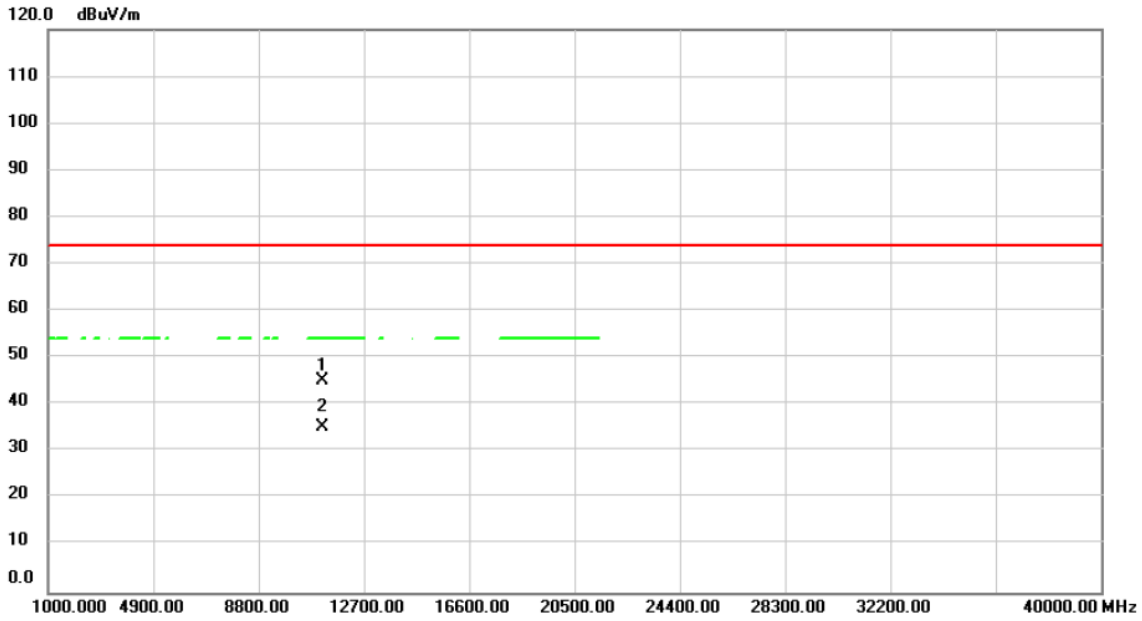

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11140.000	36.54	8.73	45.27	74.00	-28.73	peak		
2 *		11140.000	26.51	8.73	35.24	54.00	-18.76	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.