

InterLab[®]

FCC Measurement/Technical Report on

WLAN transceiver in

Tablet Computer

INARI10-LTBN-1

and IRARI10-WLAN-1

Report Reference: MDE_AAVAM_1402_FCCd

Test Laboratory:

7Layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H.-J. Meckelburg
Dr. H. Ansorge

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

Table of Contents

0	Applied Standards and Test Summary	3
0.1	Applied Standards	3
0.2	FCC and IC Correlation Table	4
0.3	Measurement Summary / Signatures	5
0.4	Report revision	8
1	Administrative Data	9
1.1	Testing Laboratory	9
1.2	Project Data	9
1.3	Applicant Data	9
1.4	Manufacturer Data	9
2	Test object Data	10
2.1	General EUT Description	10
2.2	EUT Main components	11
2.3	Ancillary Equipment	11
2.4	Auxiliary Equipment	12
2.5	EUT Setups	12
2.6	Operating Modes	13
2.7	Special software used for testing	14
2.8	Product labelling	14
3	Test Results	15
3.1	Conducted emissions (AC power line)	15
3.2	Occupied bandwidth	18
3.3	Peak power output	28
3.4	Spurious RF conducted emissions	36
3.5	Spurious radiated emissions	40
3.6	Band edge compliance	46
3.7	Power density	58
4	Test Equipment	66
5	Photo Report	76
6	Setup Drawings	76

0 Applied Standards and Test Summary

0.1 Applied Standards

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Notes:

The tests were selected and performed with reference to the FCC OET "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 v03r0, April 9, 2013" and is hereinafter referred to as "DTS-Guideline".

Instead of applying ANSI C63.4–1992, the newer ANSI C63.4–2009 is applied.

Testing performed with 100% Duty cycle

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.3 Measurement Summary / Signatures.

0.2 FCC and IC Correlation Table

Correlation of measurement requirements for DTS devices (e.g. WLAN 2.5/5 GHz) equipment

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Occupied bandwidth	§ 15.247 (a) (2)	RSS-210 Issue 8: A8.2 (a)
Peak power output	§ 15.247 (b) (3), (4)	RSS-210 Issue 8: A8.4 (4)
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Power density	§ 15.247 (e)	RSS-210 Issue 8: A8.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3 RSS Gen Issue 3: 6 *)

*) Receivers which are part of Transceivers are exempted with respect to Notice 2012-DRS0126.

0.3 Measurement Summary / Signatures

FCC Part 15, Subpart C

§ 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
n-Mode, CH 157, 20 MHz, 6.5 Mbps	Setup_ab01	AC port	passed

FCC Part 15, Subpart C

§ 15.247 (a) (1)

Occupied bandwidth

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
b-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 3, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 157, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz*	Setup_ag01	Temp.ant.connector	passed

FCC Part 15, Subpart C

§ 15.247 (b) (1)

Peak power output

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
b-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 3, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 157, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz*	Setup_ag01	Temp.ant.connector	passed

FCC Part 15, Subpart C

§§ 15.247 (d), 15.35 (b), 15.207

Spurious conducted emissions

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
b-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 3, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 157, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz*	Setup_ag01	Temp.ant.connector	passed

FCC Part 15, Subpart C

§ 15.247 (d), § 15.35 (b), § 15.209

Spurious radiated emissions

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
b-Mode, CH 1, 20 MHz	Setup_ae01	Enclosure	passed
b-Mode, CH 6, 20 MHz	Setup_ae01	Enclosure	passed
b-Mode, CH 11, 20 MHz	Setup_ae01	Enclosure	passed
g-Mode, CH 1, 20 MHz	Setup_ae01	Enclosure	passed
g-Mode, CH 6, 20 MHz	Setup_ae01	Enclosure	passed
g-Mode, CH 11, 20 MHz	Setup_ae01	Enclosure	passed
a-Mode, CH 149, 20 MHz	Setup_ae01	Enclosure	passed
a-Mode, CH 157, 20 MHz	Setup_ae01	Enclosure	passed
a-Mode, CH 165, 20 MHz	Setup_ae01	Enclosure	passed
n-Mode, CH 149, 20 MHz	Setup_ae01	Enclosure	passed
n-Mode, CH 157, 20 MHz	Setup_ae01	Enclosure	passed
n-Mode, CH 165, 20 MHz	Setup_ae01	Enclosure	passed
n-Mode, CH 151, 40 MHz*	Setup_ae01	Enclosure	passed
n-Mode, CH 159, 40 MHz*	Setup_ae01	Enclosure	passed

FCC Part 15, Subpart C

§ 15.247 (d)

Band edge compliance

The measurement was performed according to FCC § 15.31 / ANSI C63.4

OP-Mode	Setup	Port	Final Result
b-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 3, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 40 MHz*	Setup_ac01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 149, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 165, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
b-Mode, CH 11, 20 MHz	Setup_ae01	Enclosure	passed
g-Mode, CH 11, 20 MHz	Setup_ae01	Enclosure	passed
n-Mode, CH 11, 20 MHz *	Setup_ae01	Enclosure	passed
n-Mode, CH 11, 40 MHz*	Setup_ae01	Enclosure	passed

FCC Part 15, Subpart C

§ 15.247 (e)

Power density

The measurement was performed according to FCC § 15.31


OP-Mode	Setup	Port	Final Result
b-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
b-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
g-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 1, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 6, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 11, 20 MHz	Setup_ac01	Temp.ant.connector	passed
n-Mode, CH 3, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 6, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 11, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 157, 20 MHz	Setup_ag01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz*	Setup_ag01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz*	Setup_ag01	Temp.ant.connector	passed

N/A not applicable
 * MIMO operating mode

0.4 Report revision

Report version control			Previous version valid
Version	Release date	Changes	
001	29.09.2014	Initial version	Initial

Responsible for Accreditation Scope:



Responsible for Test Report:



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkKS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-04-16

1.2 Project Data

Responsible for testing and report: Patrick Lomax
Date of Test(s): 2014-02-28 to 2014-04-17
Date of Report: 2014-10-10

1.3 Applicant Data

Company Name: Aava Mobile OY
Address: Nahkatehtaankatu 2
90130 Oulu
Finland
Contact Person: Mr. Kari Räisänen

1.4 Manufacturer Data

Company Name: Please see applicant data
Address:
Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test:	IEEE 802.11a/b/g/n WLAN transceiver
Type Designation:	INARI10-LTBN-1 and INARI10-WLAN-1
Kind of Device:	Tablet Computer
(optional)	
Voltage Type:	DC
Voltage Level:	DC 4.8 V
Tested Modulation Type:	DBPSK; OFDM: BPSK; OFDM: 64-QAM

General product description:

Tablet Computer with integrated WiFi and cellular modem.

Specific product description for the EUT:

The EUT is a dual band WLAN (802.11 a/b/g/n, 2.4 and 5 GHz) and Bluetooth module with two antennas. The main antenna is used for WLAN and Bluetooth, the auxiliary antenna for WLAN MIMO modes. In IEEE 802.11n mode it supports 20 MHz and 40 MHz bandwidth channels (both with MCS7), providing 72.2 Mbit/s, and 150 Mbit/s transfer data rates respectively.

The EUT also supports MIMO technology with a maximum data rate of 300 Mbit/s (MCS15).

The object of this test report is the WLAN transceiver, consequently switched on the IEEE 802.11 b/g/n modes, working in the 2.4 and 5 GHz bands. In IEEE 802.11n mode, it was tested with 20 MHz and 40 MHz channel bandwidth.

The variants INARI10-LTBN-1 and INARI10-WLAN-1 are identical with the exception that the Huawei Cellular module used in the INARI10-LTBN-1 is depopulated in the INARI10-WLAN-1.

All testing was performed using the "worst case" variant, INARI8-3GAN-1.

This tablets (INARI10-LTBN-1) implements the identical WLAN radio system from the previously tested Inari8-3GAN-1 (FCC ID: 2ABVH-INAR81) and inherits the results from its testing.

The EUT provides the following ports:

Ports

Enclosure
AC-Port (at AE1)
DC Port (Micro-USB, only charging)
USB-Port
HDMI-Port

The main components of the EUT are listed and described in Chapter 2.2

2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: DE1004000a c01)	WLAN transceiver in Tablet Computer	INARI8-3GAN-1*	IN14060104	Pre-production sample	Windows 8.1
Remark: EUT equipped with a temporary antenna connector.					
EUT B (Code: DE1004000a g01)	WLAN transceiver in Tablet Computer	INARI8-3GAN-1*	IN14060102	Pre-production sample	Windows 8.1
Remark: EUT equipped with a temporary antenna connector.					
EUT C (Code: DE1004000a b01)	WLAN transceiver in Tablet Computer	INARI8-3GAN-1*	IN14060109	Pre-production sample	Windows 8.1
Remark: EUT equipped with integral antennas (2.4 GHz: 1.9 dBi gain / 5 GHz: 1.4 dBi gain)					
EUT E (Code: DE1004003a D01)	WLAN transceiver in Tablet Computer	INARI10-LTBN-1	KX1419023 2	Pre-production sample	Windows 8.1
Remark: EUT equipped with integral antennas (2.4 GHz: 1.9 dBi gain / 5 GHz: 1.4 dBi gain)					

NOTE: The short description used to simplify the identification of the EUT in this test report.

* This tablets (INARI10-LTBN-1) implements the identical WLAN radio system from the previously tested Inari8-3GAN-1 (FCC ID: 2ABVH-INAR81) and inherits the results from its testing.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment, which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status
AE1 (Code: DE104000ac dc03)	AC/DC power supply	Delta Electronics INC., ADP-10BW C	T01135100016 71A	REV.: 00	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment, which is used temporarily to enable operational and control features especially used for the tests of the EUT, which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status
AUX1	Dummy battery (for supply by external DC power source)	– (AAVAM self-built)	–	–	–

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_ac01	EUT A + AUX1	setup for the conducted tests
Setup_ag01	EUT B + AUX1	setup for the conducted tests
Setup_ab01	EUT C + AE1	setup for conducted measurements, AC-Power Line
Setup_ae01	EUT E + AE1	setup for radiated measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

2.6.1 Test Channels

Band:								
900 MHz 902 - 928 MHz			2.4 GHz ISM 2400 – 2483.5 MHz			5 GHz ISM 5725 – 5850 MHz		
20 MHz Test Channels: (Channel No./Frequency [MHz]):								
Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top
-	-	-	1	6	11	149	157	165
-	-	-	2412	2437	2462	5745	5785	5825
40 MHz Test Channels: (Channel No./Frequency [MHz]):								
Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top
-	-	-	3	6	11	151	-	159
-	-	-	2422	2437	2462	5755	-	5795

2.6.2 Datarates

SISO:

WLAN b-Mode; 20 MHz; 1 Mbit/s
WLAN g-Mode; 20 MHz; 6 Mbit/s
WLAN n-Mode; 20 MHz; 72.2 Mbit/s (MCS7, besides AC Mains emission test)
WLAN a-Mode, 20 MHz; 6 Mbit/s

MIMO:

WLAN n-Mode; 40 MHz; 300 Mbit/s (MCS15)

2.7 Special software used for testing

The applicant provided the prepared EUTs (i.e. pre-installed) where a software called "WLANCONTROLLER.EXE" can be started via an icon on the desktop.

All radiated tests have been performed while a power table was applied to reach a nominal RMS output power of approx. 12 dBm, all conducted tests have been performed with a changed power table reducing the nominal RMS by approx. 3 dB for the n-modes.

2.8 Product labelling

2.8.1 FCC ID label

Please refer to the documentation of the applicant.

Note: The requested FCC-ID is: 2ABVH-INARI81
The requested IC number is: 11875A-INARI81
This test report remains valid independently from the FCC-ID/IC Number.

2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.

3 Test Results

3.1 Conducted emissions (AC power line)

Standard FCC Part 15 Subpart C

The test was performed according to: ANSI C 63.4

3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

3.1.3 Test Protocol


Temperature: 24 °C
Air Pressure: 1009 hPa
Humidity: 36 %

Op. Mode	Setup	Port
5785 MHz, n-mode, 6.5 Mbps	Setup_ab01	AC port of AE1

Power line	Frequency MHz	Measured value QP dB μ V	Measured value AV dB μ V	QP Limit dB μ V	AV Limit dB μ V	Margin QP dB	Margin AV dB
N	0.20	53.9	–	63.6	–	9.7	–
N	0.51	42.6	–	56.0	–	13.4	–

Remark: The chosen operating mode is selected as representative mode to generate “worst-case” conditions, i.e. high power consumption.

3.1.4 Measurement Plot (showing the highest value, “worst case”)

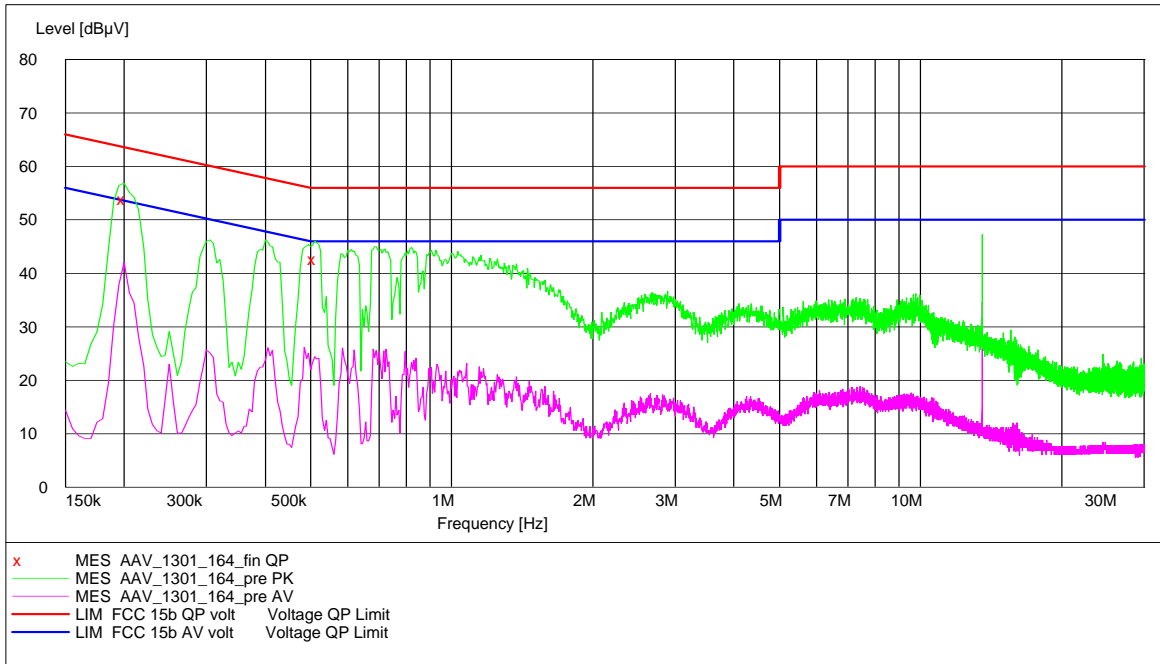

3.2 Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Detector: Peak
- Trace: Maxhold
- Sweeptime: auto (coupled)

Note:

The analyser settings are according to "DTS-Guideline" method "DTS bandwidth option 1".

3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

3.2.3 Test Protocol

Temperature: 21–24 °C
 Air Pressure: 1005–1014 hPa
 Humidity: 32-43 %

SISO:

WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	8.124	0.5	7.6
	6	2437	8.124	0.5	7.6
	11	2462	8.124	0.5	7.6

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	15.876	0.5	15.4
	6	2437	16.116	0.5	15.6
	11	2462	15.876	0.5	15.4


WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.016	0.5	16.5
	6	2437	17.076	0.5	16.6
	11	2462	17.076	0.5	16.6
5 GHz ISM	149	5745	17.548	0.5	17.0
	157	5785	17.500	0.5	17.0
	165	5825	17.500	0.5	17.0

WLAN a-Mode, 20 MHz; 6 Mbit/s					
ISM-Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
5 GHz ISM	149	5745	16.298	0.5	15.8
	157	5785	16.250	0.5	15.8
	165	5825	16.250	0.5	15.8

MIMO:


WLAN n-Mode; 40 MHz; 300 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	3	2422	36.774	0.5	36.3
	6	2437	36.703	0.5	36.2
	11	2462	36.753	0.5	36.3
5 GHz ISM	151	5755	36.699	0.5	36.2
	159	5795	36.619	0.5	36.1

3.2.4 Measurement Plots

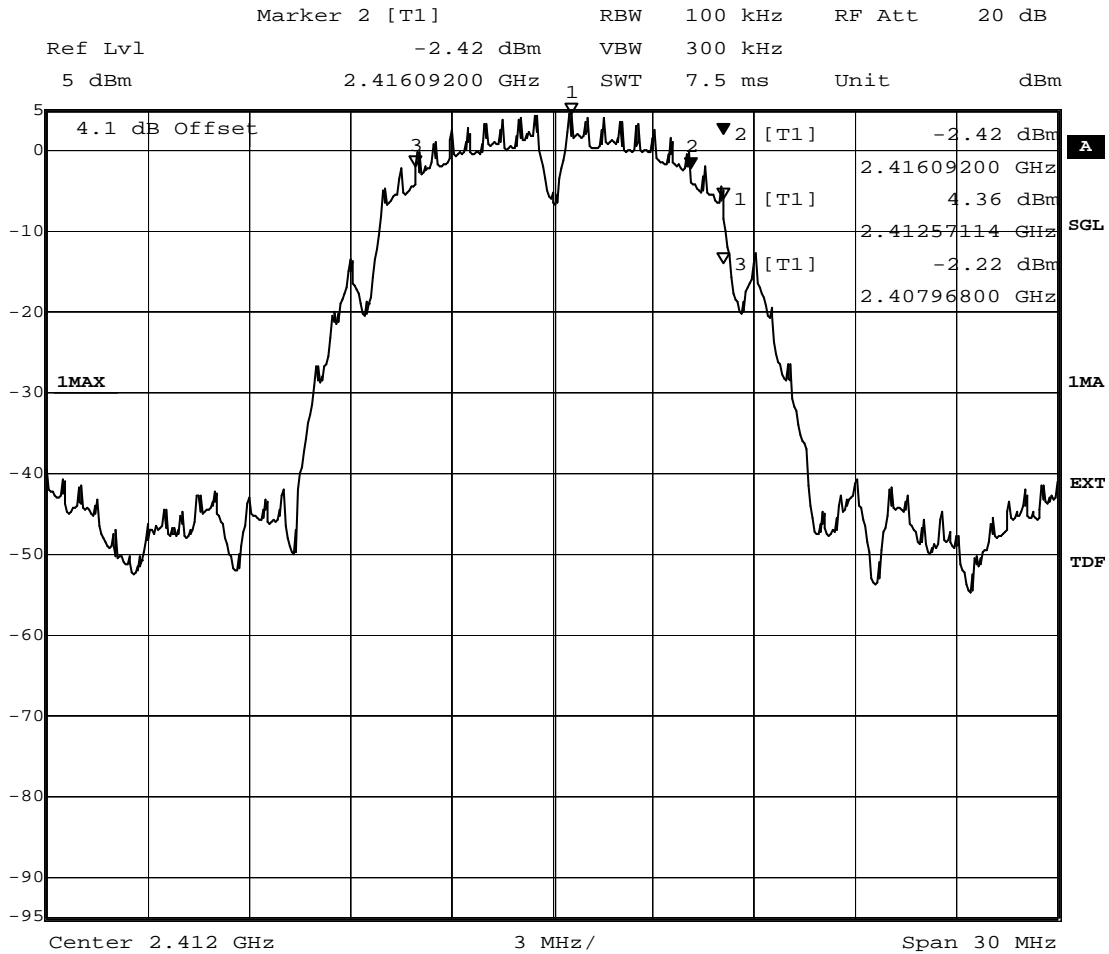


Title: 6dB Bandwidth
 Comment A: CH B: 2412 MHz; 6dB bandwidth (kHz):8124
 Date: 11.MAR.2014 10:10:39

6 dB bandwidth at 2412 MHz, WLAN b-Mode; 20 MHz; 1 Mbit/s

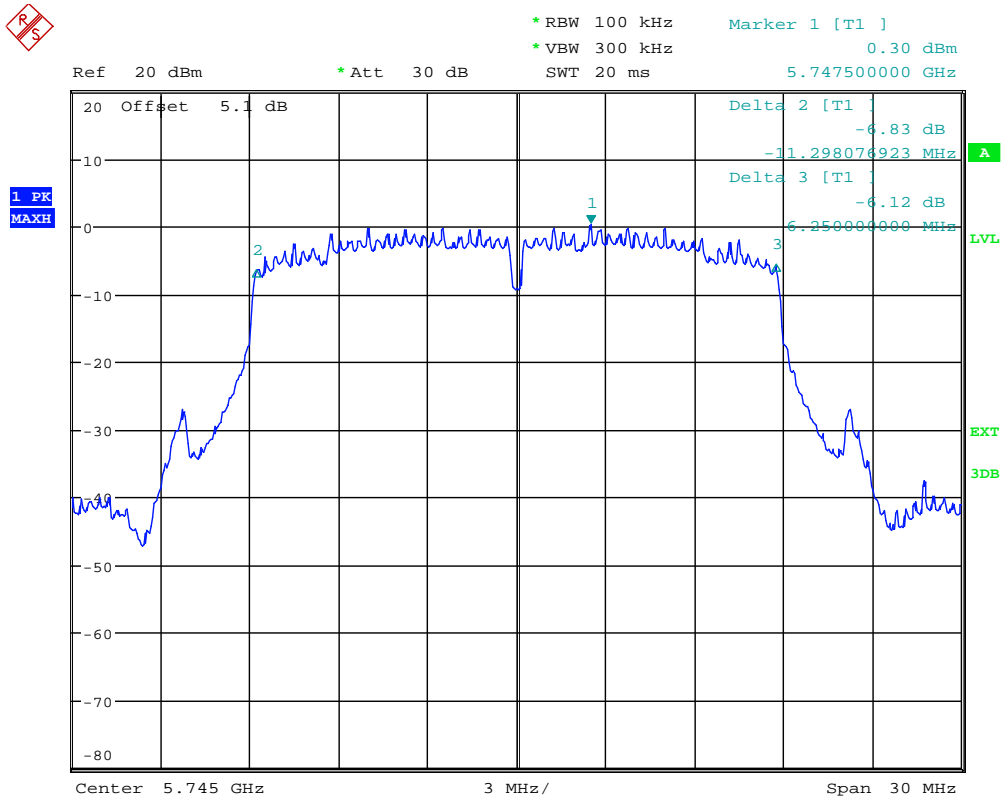


Date: 4.APR.2014 11:17:38

6 dB bandwidth at 5825 MHz, WLAN n-Mode; 20 MHz; 72.2 Mbit/s

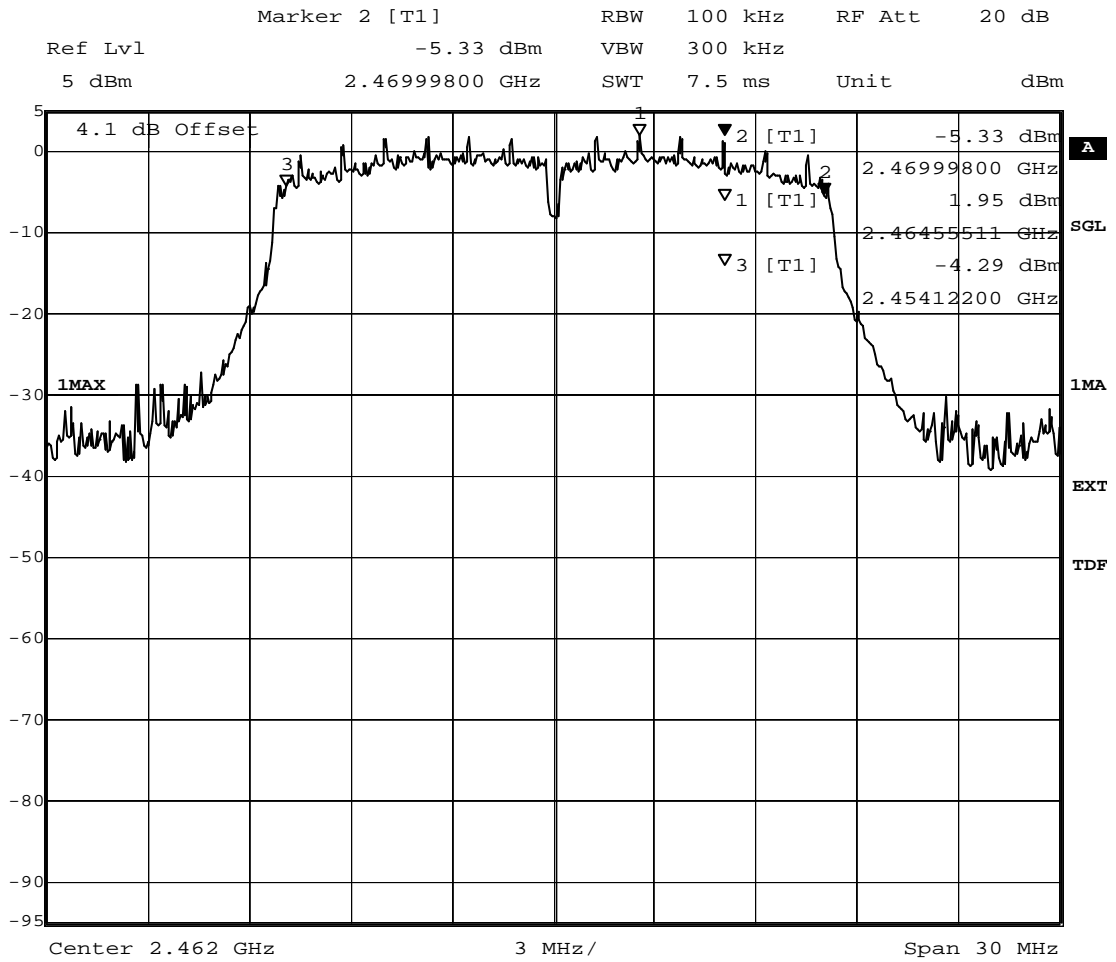


Title: 6dB Bandwidth
 Comment A: CH T: 2462 MHz; 6dB bandwidth (kHz):15876
 Date: 11.MAR.2014 13:26:00

6 dB bandwidth at 2462 MHz, WLAN g-Mode; 20 MHz; 6 Mbit/s

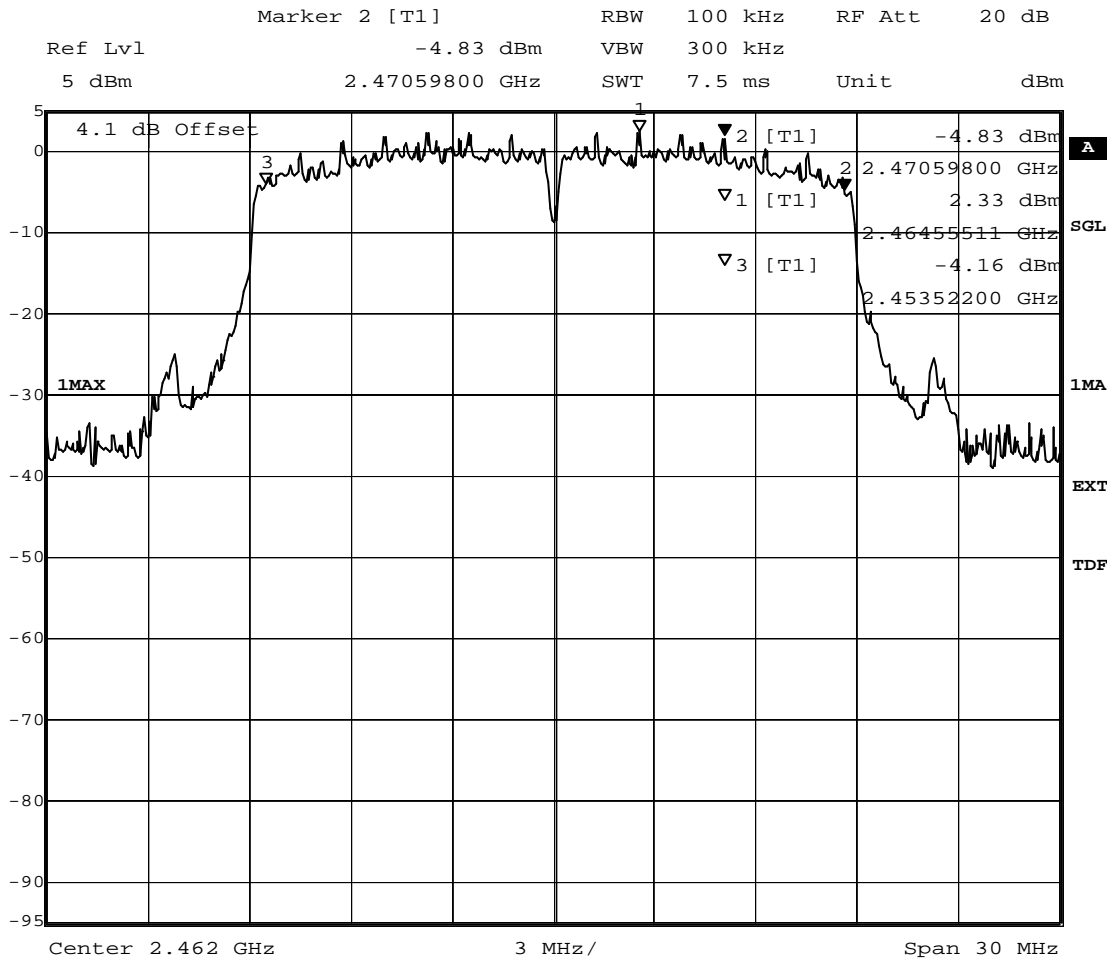

Title: 6dB Bandwidth
 Comment A: CH T: 2462 MHz; 6dB bandwidth (kHz):17076
 Date: 11.MAR.2014 15:02:33

6 dB bandwidth at 2462 MHz, WLAN n-Mode; 20 MHz; 72.2 Mbit/s

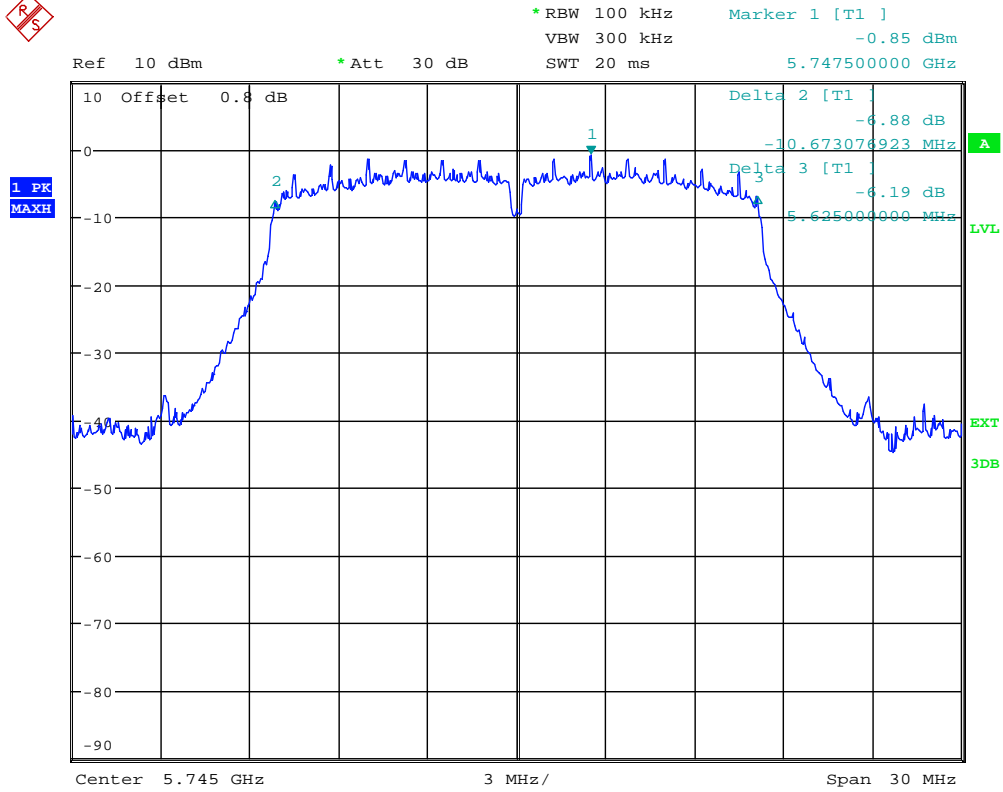


Date: 3.APR.2014 10:38:35

6 dB bandwidth at 5745 MHz, WLAN a-Mode; 20 MHz; 6 Mbit/s




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz -3.59 dBm
 SWT 20 ms 5.758766026 GHz

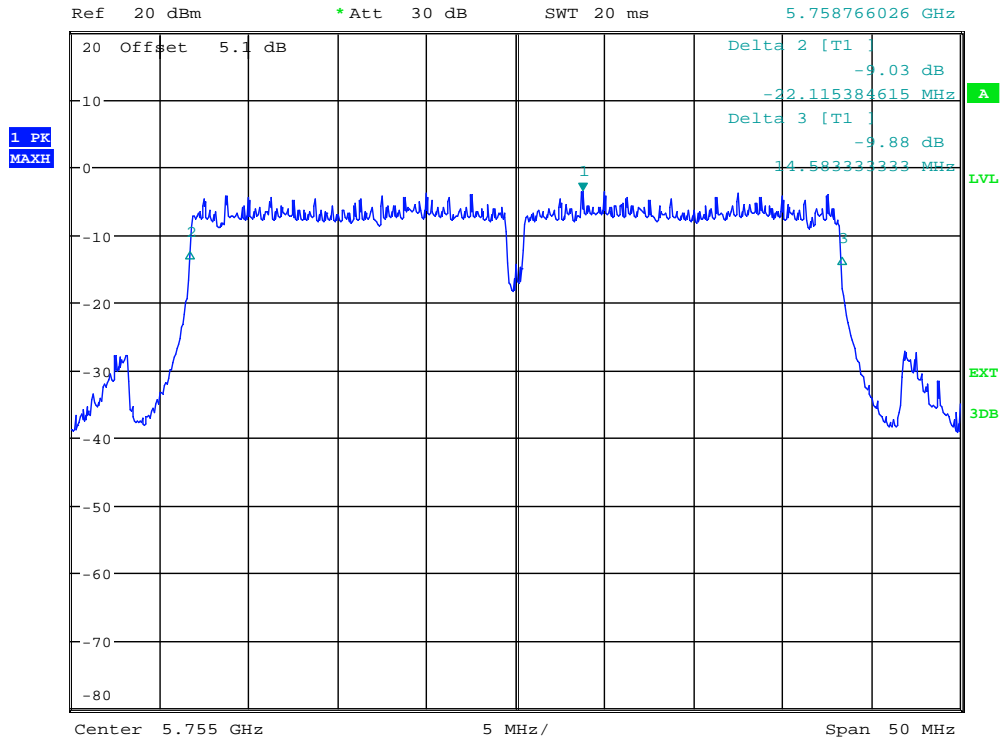

Date: 4.APR.2014 11:27:41

6 dB bandwidth at 5755 MHz, WLAN n-Mode; 40 MHz; 300 Mbit/s

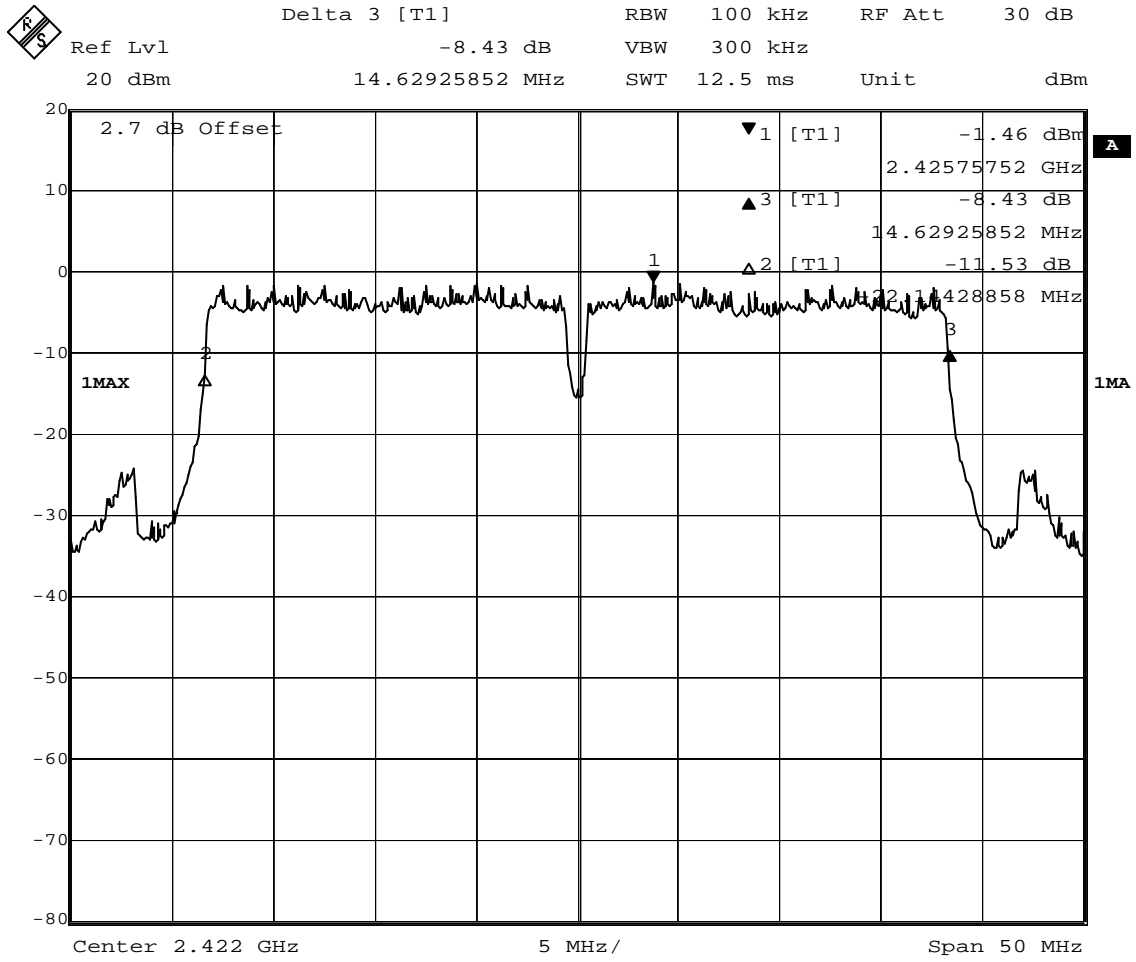

Date: 17.MAR.2014 10:06:29

6 dB bandwidth at 2412 MHz, WLAN n-Mode; 40 MHz; 300 Mbit/s

3.3 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.3.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak
- Trace: Maxhold
- Sweeptime: 5 ms / sweep (greater than auto)

Note:

The analyser settings are according to "DTS-Guideline" method "Integrated band power method".

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: $\text{Limit (dBm)} = 10 \log (\text{Limit (W)}/1\text{mW})$

3.3.3 Test Protocol

Temperature: 21–24 °C
Air Pressure: 1005–1014 hPa
Humidity: 32-43 %

SISO:

WLAN b-Mode; 20 MHz; 1 Mbit/s						
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	13.0	30.0	17.0	14.9
	6	2437	13.4	30.0	16.6	15.3
	11	2462	13.4	30.0	16.7	15.3

WLAN g-Mode; 20 MHz; 6 Mbit/s						
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	18.5	30.0	11.5	20.4
	6	2437	18.6	30.0	11.4	20.5
	11	2462	18.8	30.0	11.2	20.7

WLAN n-Mode; 20 MHz; 72.2 Mbit/s						
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	18.7	30.0	11.4	20.6
	6	2437	19.1	30.0	10.9	21.0
	11	2462	19.2	30.0	10.8	21.1
5 GHz ISM	149	5745	16.1	30.0	13.9	17.5
	157	5785	15.3	30.0	14.7	16.7
	165	5825	15.8	30.0	14.2	17.2


WLAN a-Mode, 20 MHz; 6 Mbit/s						
ISM-Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P. [dBm]
5 GHz ISM	149	5745	18.8	30.0	11.3	20.2
	157	5785	18.1	30.0	11.9	19.5
	165	5825	18.7	30.0	11.3	20.1

MIMO:

WLAN n-Mode; 40 MHz; 300 Mbit/s						
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P. [dBm]
2.4 GHz ISM	3	2422	20.9	30.0	9.1	22.8
	6	2437	20.3	30.0	9.7	22.2
	11	2462	20.0	30.0	10.0	21.9
5 GHz ISM	151	5755	17.2	30.0	12.8	18.6
	159	5795	18.0	30.0	12.0	19.4


3.3.4 Measurement Plot (showing the highest value, "worst case")

SISO:

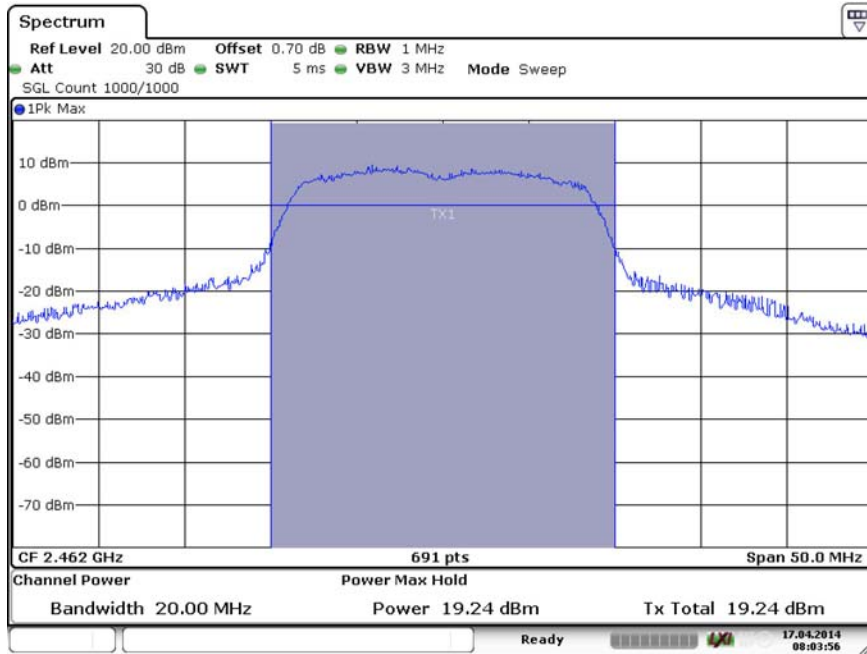


Date: 17.APR.2014 08:03:57

Peak output power, 2462 MHz, WLAN n-Mode; 20 MHz; 72.2 Mbit/s

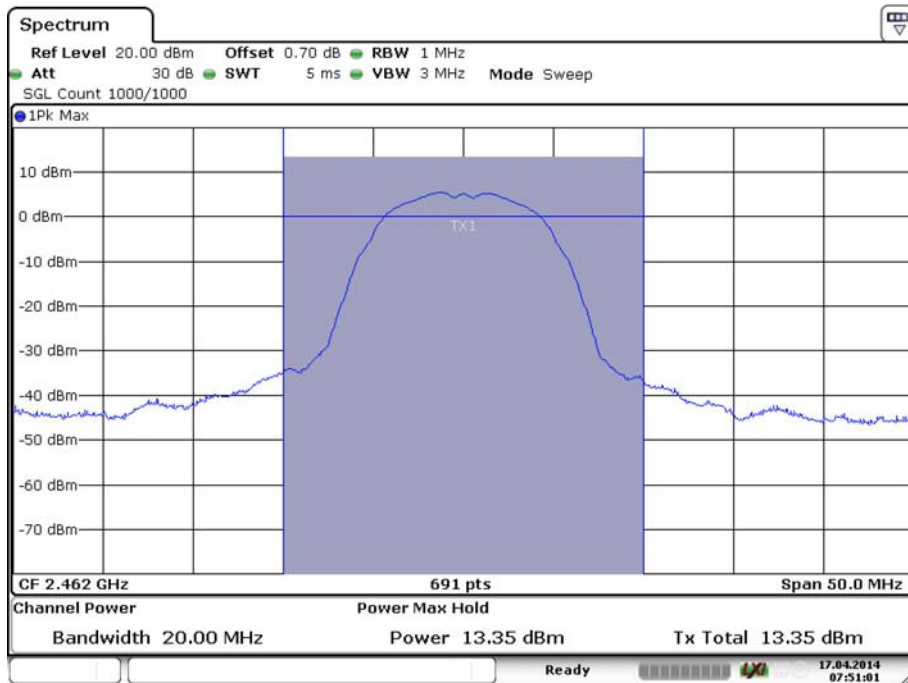


Date: 17.APR.2014 07:51:01

Peak output power, 2462 MHz, WLAN b-Mode; 20 MHz; 1 Mbit/s

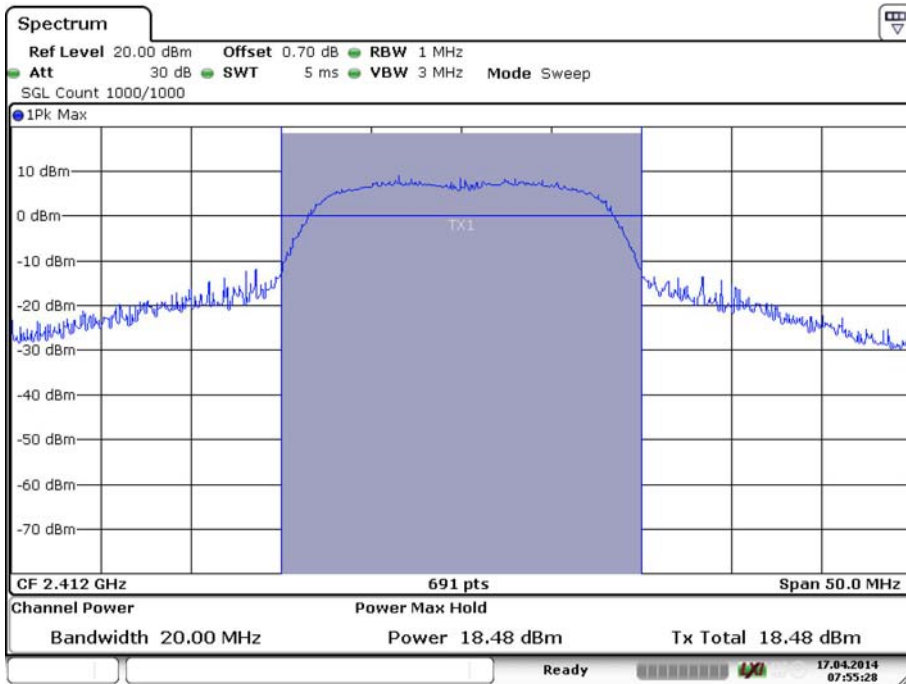


Date: 17.APR.2014 07:55:29

Peak output power, 2412 MHz, WLAN g-Mode; 20 MHz; 6 Mbit/s

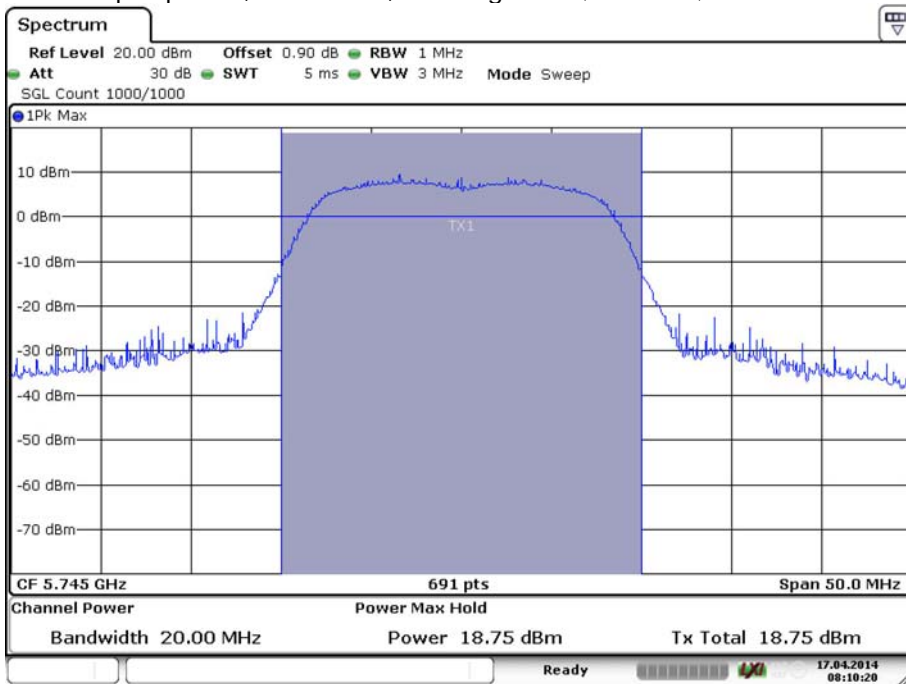

Date: 17.APR.2014 08:10:20

Peak output power, 5745 MHz, WLAN a-Mode; 20 MHz; 72.2 Mbit/s

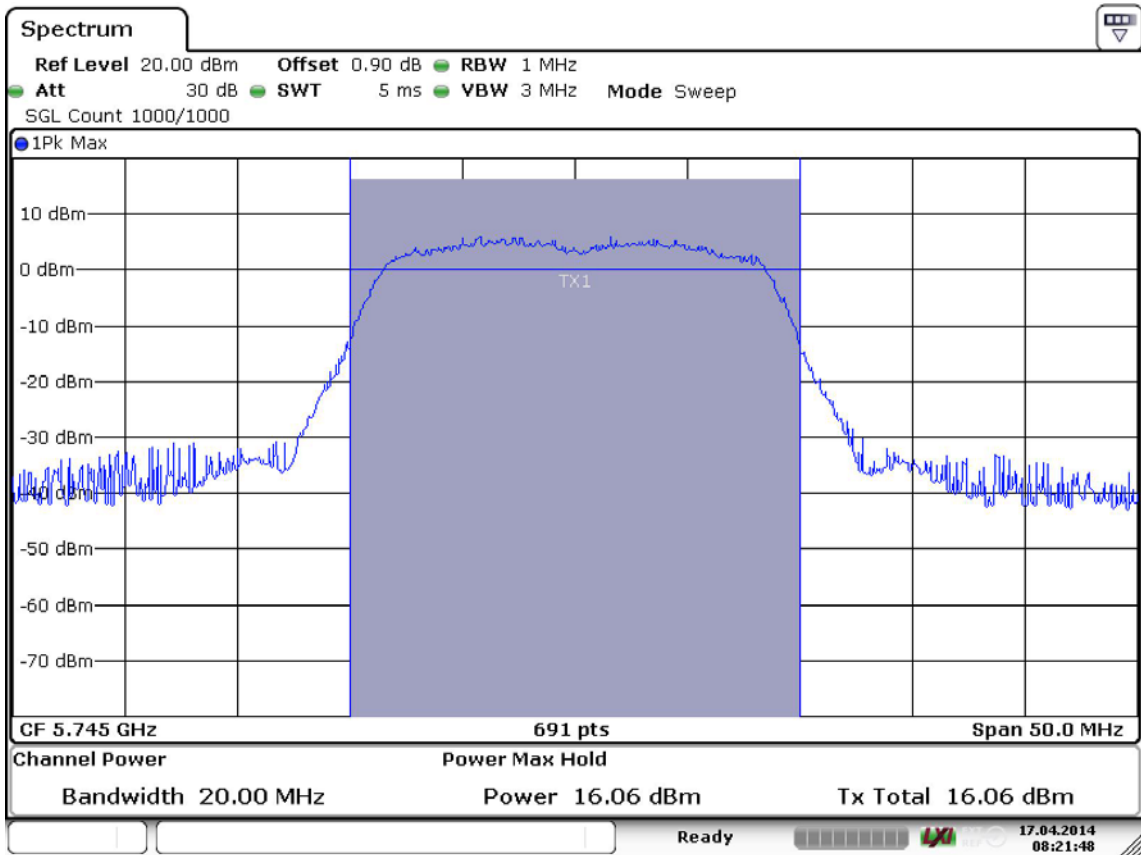


Date: 17.APR.2014 08:21:48

Peak output power, 5745 MHz, WLAN a-Mode; 20 MHz; 6 Mbit/s


MIMO:

AUX Antenna Port:

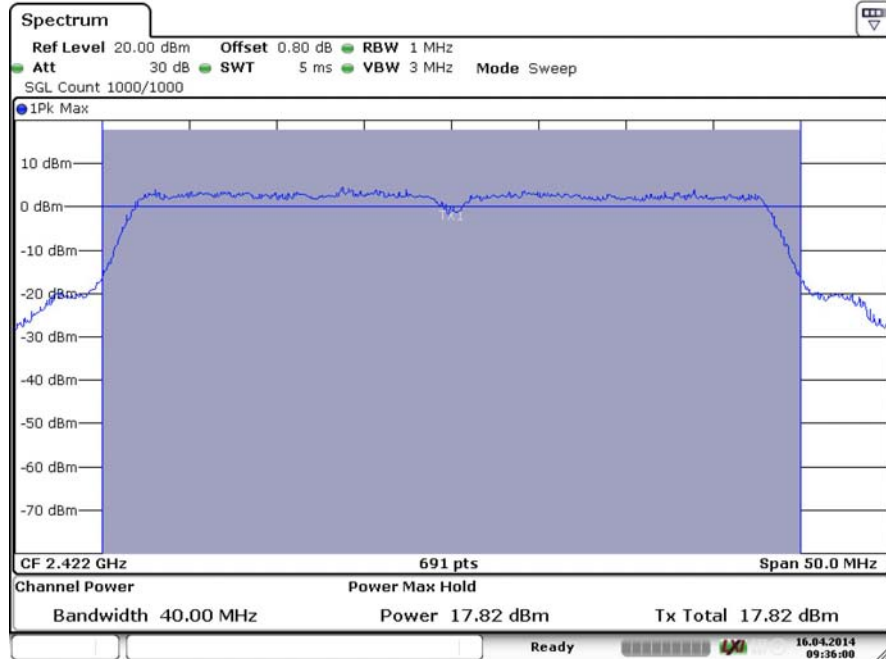

Date: 16.APR.2014 09:36:01


MAIN Antenna Port:

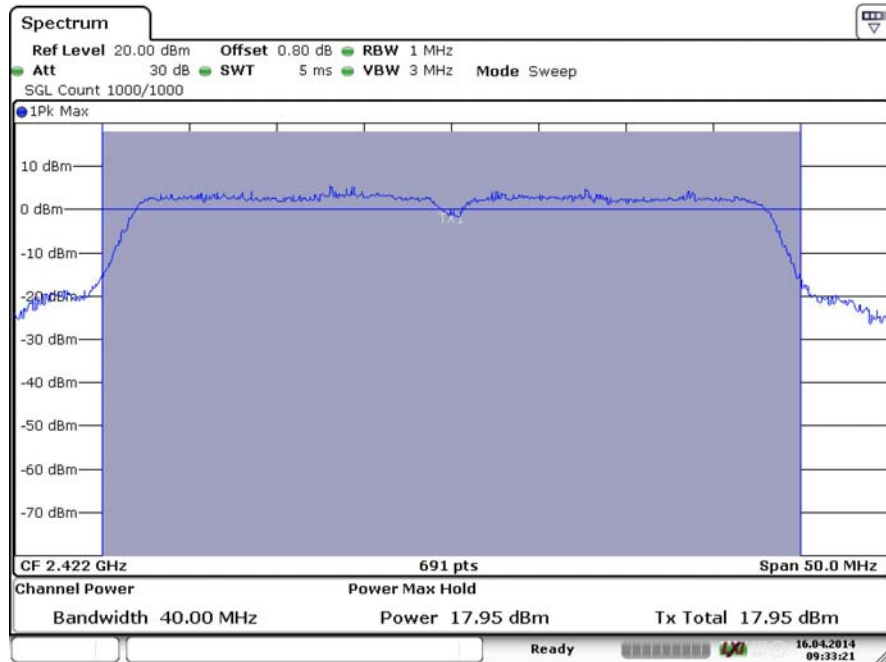

Date: 16.APR.2014 09:33:21


Peak output power, 2422 MHz, WLAN n-Mode; 40 MHz; 300 Mbit/s

Main antenna port:

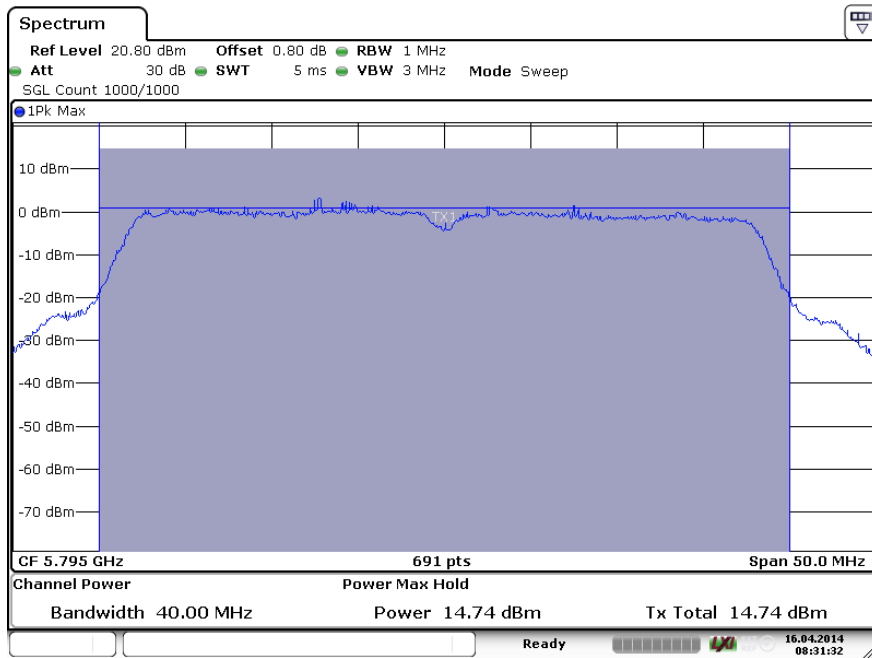

Date: 16 APR 2014 08:31:31

Aux Antenna port:

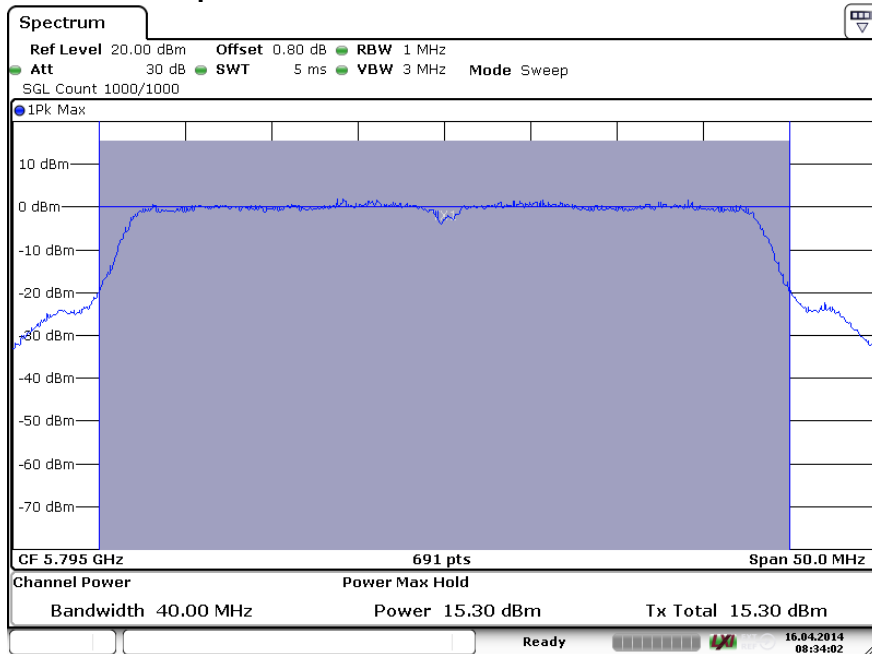

Date: 16 APR 2014 08:34:02

Peak output power, 5795 MHz, WLAN n-Mode; 40 MHz; 300 Mbit/s

3.4 Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.4.1 Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak
- Trace: Maxhold
- Frequency range: 30 – 25000 (2.4 GHz) / 40000 MHz (5 GHz)
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Note:

The analyser settings are according to “DTS-Guideline” method “Emission level measurement in non-restricted bands”.

3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.3 Test Protocol

Temperature: 21–24 °C
 Air Pressure: 1005–1014 hPa
 Humidity: 32-43 %

SISO

WLAN a-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
149	5745	–	–	PEAK	100	-0.9	-20.9	–
157	5785	–	–	PEAK	100	-0.9	-20.9	–
165	5825	–	–	PEAK	100	-1.3	-21.3	–

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	–	–	PEAK	100	4.1	-15.9	–
6	2437	–	–	PEAK	100	4.6	-15.4	–
11	2462	–	–	PEAK	100	4.7	-15.3	–

WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	–	–	PEAK	100	1.9	-18.1	–
6	2437	–	–	PEAK	100	1.7	-18.3	–
11	2462	–	–	PEAK	100	1.8	-18.2	–

WLAN n-Mode; 20 MHz; 72.2 Mbit/s								
Channel No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	–	–	PEAK	100	2.2	-17.8	–
6	2437	–	–	PEAK	100	2.0	-18.0	–
11	2462	–	–	PEAK	100	2.3	-17.7	–
149	5745	–	–	PEAK	100	-4.2	-24.2	–
157	5785	–	–	PEAK	100	-4.0	-24.0	–
164	5820	–	–	PEAK	100	-4.6	-24.6	–


MIMO

WLAN n-Mode; 40 MHz; 300 Mbit/s								
Channel No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	–	–	PEAK	100	-1.5	-21.5	–
6	2437	–	–	PEAK	100	-1.6	-21.6	–
11	2462	–	–	PEAK	100	-1.4	-21.4	–
151	5755	–	–	PEAK	100	-8.3	-28.3	–
159	5795	–	–	PEAK	100	-8.4	-28.4	–

Notes:

- Only values closer than 20 dB to the limit will be reported.
- Such values have not been found.

3.4.4 Measurement Plot (showing the highest value, "worst case")

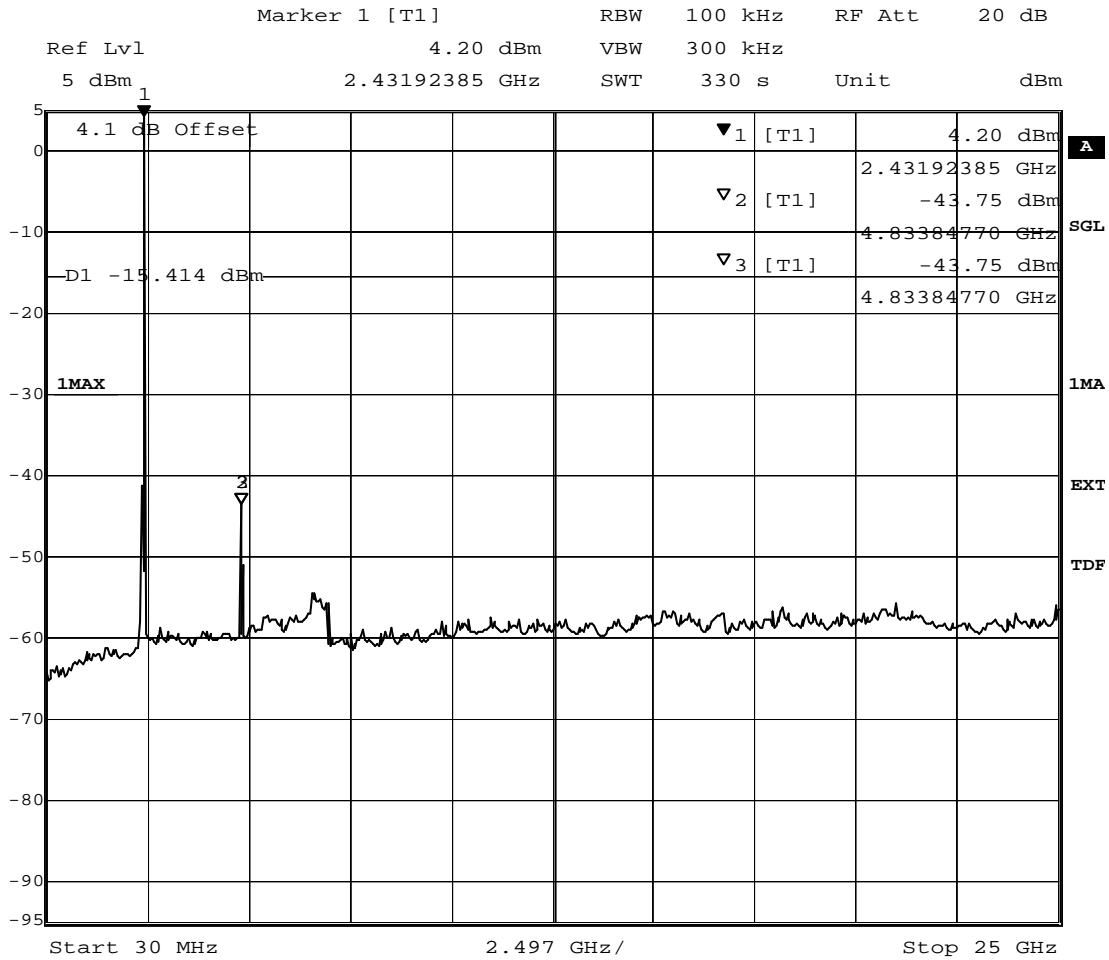

Title: spurious emissions
 Comment A: CH M: 2437 MHz
 Date: 11.MAR.2014 10:41:09

3.5 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4

3.5.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step, the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 22.5^{\circ}$ around this value.

During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 25 cm around the antenna height determined.

During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

Settings for step 3:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 22.5^\circ$ around the determined value
- Height variation range: ± 25 cm around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact, that in this frequency range a double-ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

In the frequency range 25 – 40 GHz the measurement was performed conducted.

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 8 GHz (to 15 GHz at 5 GHz) but it depends on the emissions found during the test for the modes b and g (mode n at 5 GHz). Please refer to the results for the used frequency range.

3.5.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Calculated Limits($\text{dB}\mu\text{V}/\text{m}$ @10m)
0.009 – 0.49	2400/F(kHz)	300 59.1 dB	(48.5 – 13.8) + 30 dB => 78.5 – 43.8
0.49 – 1.705	24000/F(kHz)	30 19.1 dB	(48.9 – 23.0) + 10 dB => 58.9 – 33.0
1.705 – 30	30	30 19.1 dB	29.5 + 10 dB => 39.5

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limit ($\text{dB}\mu\text{V}/\text{m}$)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit (}\mu\text{V}/\text{m)}/1\mu\text{V}/\text{m)}$

3.5.3 Test Protocol

Temperature: 21–24 °C
 Air Pressure: 994–1014 hPa
 Humidity: 34-43 %

SISO

WLAN b-Mode; 20 MHz; 1 Mbit/s							
Ch. No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBµV/m]	Detec -tor	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]
1	2412	4824.0	50.8	PEAK	1000	74.0	23.2
1	2412	4824.0	48.7	AV	1000	54.0	5.3
6	2437	4874.0	50.3	PEAK	1000	74.0	23.7
6	2437	4874.0	47.9	AV	1000	54.0	6.1
11	2462	4924.0	49.1	PEAK	1000	74.0	24.9
11	2462	4924.0	46.7	AV	1000	54.0	7.3

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

WLAN g-Mode; 20 MHz; 6 Mbit/s							
Ch. No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBµV/m]	Detec -tor	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]
1	2412	2390.0	64.2	PEAK	1000	74.0	9.8
1	2412	2390.0	41.8	QP	1000	54.0	12.2
1	2412	4826.0	49.4	PEAK	1000	74.0	24.6
1	2412	4826.0	36.2	AV	1000	54.0	17.8
6	2437	4878.0	48.6	PEAK	1000	74.0	25.4
6	2437	4878.0	35.2	AV	1000	54.0	18.8
11	2462	-		PEAK	1000	74.0	
11	2462	-		AV	1000	54.0	

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Tests were performed in the frequency range 1–8 GHz.

WLAN a-Mode; 20 MHz; 6 Mbit/s							
Ch. No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dBµV/m]	Detec -tor	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]
149	5745	-		PEAK	1000	74.0	
149	5745	-		AV	1000	54.0	
157	5785	5357.0	47.8	PEAK	1000	74.0	26.2
157	5785	5357.0	37.5	AV	1000	54.0	16.5
165	5825	5394.0	47.5	PEAK	1000	74.0	26.5
165	5825	5394.0	37.4	AV	1000	54.0	16.6

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Tests were performed in the frequency range 1–25 GHz.

WLAN n-Mode; 20 MHz; 72.2 Mbit/s							
Ch. No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]
149	5745	-		PEAK	1000	74.0	
149	5745	-		AV	1000	54.0	
157	5785	-		PEAK	1000	74.0	
157	5785	-		AV	1000	54.0	
165	5825	-		PEAK	1000	74.0	
165	5825	-		AV	1000	54.0	

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Tests were performed in the frequency range 1–15 GHz.

MIMO

WLAN n-Mode; 40 MHz; 300 Mbit/s							
Ch. No	Channel Frequency [MHz]	Spurious Frequency [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]
151	5755	-		PEAK	1000	74.0	
151	5755	-		AV	1000	54.0	
159	5795	-		PEAK	1000	74.0	
159	5795	-		AV	1000	54.0	

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Tests were performed in the frequency range 1–15 GHz.

3.6 Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4–2009, FCC §15.31

3.6.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower and higher band edge by a conducted measurement. For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room.

For the lower band edge the EUT is set to transmit as follows:

For WLAN transmitter working in 2.4 GHz band:

- lowest channel - ch. 1 = 2412 MHz with channel bandwidth of 20 MHz.

For WLAN transmitter working in 5 GHz band:

- lowest U-NII-3 sub-band channel - ch. 149 = 5745 MHz with channel bandwidth of 20 MHz,

- lowest U-NII-3 sub-band channel - ch. 151 – 5755 MHz with channel bandwidth of 40 MHz.

The lower band edge is 2400 MHz for 2.4 GHz band transmitter and 5725 MHz for 5 GHz band transmitter.

For the higher band edge the EUT is set to transmit as follows:

For the WLAN transmitter working in 2.4 GHz band:

- highest channel - ch. 11 = 2462 MHz with channel bandwidth of 20 MHz.

For the WLAN transmitter working in 5 GHz,

- highest U-NII-3 sub-band channel - ch. 165 = 5825 MHz with channel bandwidth of 20 MHz,

- highest U-NII-3 sub-band channel - ch. 159 = 5795 MHz with channel bandwidth of 40 MHz.

The higher band edge is 2483.5 MHz for 2.4 GHz band transmitter and 5850 MHz for 5 GHz band transmitter.

Analyzer settings for conducted measurement:

- Detector: Peak

- RBW / VBW = 100 / 300 kHz

- Trace: Maxhold

2. Showing compliance of the higher band edge falls in to restricted bands by a radiated measurement.

The radiated emissions measurements are performed in a typical installation configuration inside the fully anechoic chamber using a horn antenna at 1 m distance.

EMI receiver settings for radiated measurement:

- Detector: Peak, Average

- IF Bandwidth = 1 MHz

Note:

The analyser settings are according to "DTS-Guideline" method "Reference level measurement in non-restricted bands". Standard methods are used for "Band-edge measurements".

3.6.2 Test Requirements / Limits

FCC Part 15.247 (d)

“In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).”

For the conducted measurement the RF power at the band edge shall be “at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power...”

For the radiated measurement of the higher band edge connected to a restricted band the limit is “specified in Section 15.209(a)”.

3.6.3 Test Protocol

3.6.3.1 Conducted measurement

Temperature: 21–24 °C
 Air Pressure: 1005–1014 hPa
 Humidity: 32–43 %

SISO

WLAN a-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
149	5745	5725.0	-46.4	PEAK	100	-0.9	-20.9	25.5
165	5825	5850.0	-48.7	PEAK	100	-1.3	-21.3	27.4

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-44.0	PEAK	100	4.1	-15.9	28.1
11	2462	2483.5	-49.9	PEAK	100	4.7	-15.3	34.6


WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-35.1	PEAK	100	1.9	-18.1	17.0
11	2462	2483.5	-38.6	PEAK	100	1.8	-18.2	20.4

WLAN n-Mode; 20 MHz; 72.2 Mbit/s								
Channel No	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-34.3	PEAK	100	2.2	-17.8	16.5
11	2462	2483.5	-47.0	PEAK	100	2.3	-17.7	29.3
149	5745	5725.0	-51.3	PEAK	100	-4.2	-24.2	27.1
165	5825	5850.0	-52.0	PEAK	100	-4.6	-24.6	27.4


MIMO

WLAN n-Mode; 40 MHz; 300 Mbit/s								
Channel No	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	2400.0	-24.5	PEAK	100	-1.5	-21.5	3.0
11	2462	2483.5	-32.5	PEAK	100	-1.4	-21.4	11.1
151	5755	5725.0	-51.2	PEAK	100	-8.3	-28.3	22.9
159	5795	5850.0	-56.3	PEAK	100	-8.4	-28.4	27.9


3.6.3.2 Measurement Plot (showing the highest value, "worst case")

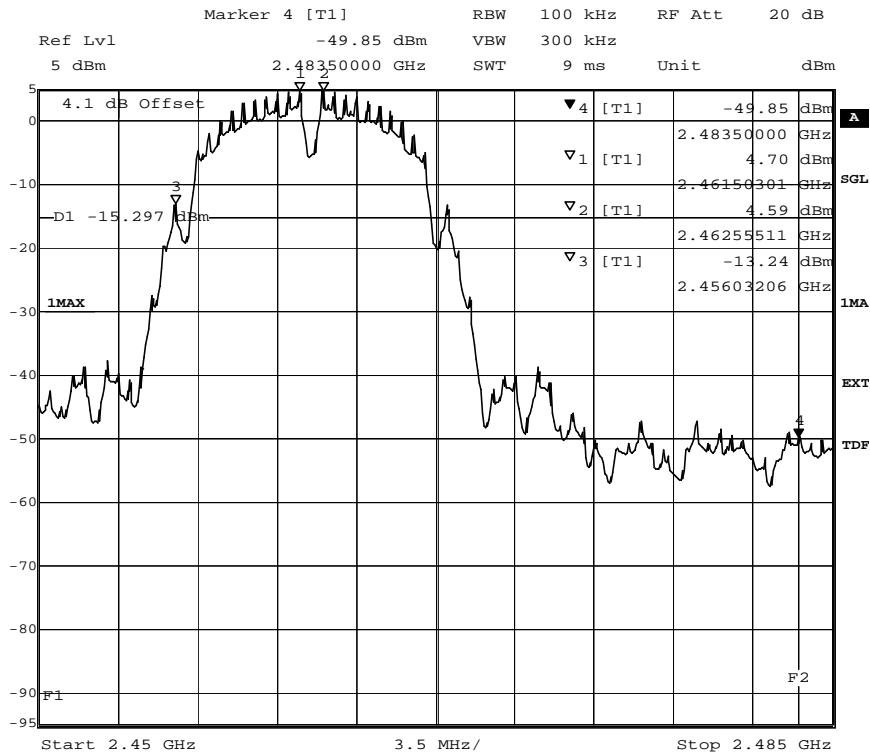


Title: Band Edge Compliance
 Comment A: CH T: 2462 MHz
 Date: 11.MAR.2014 11:02:47

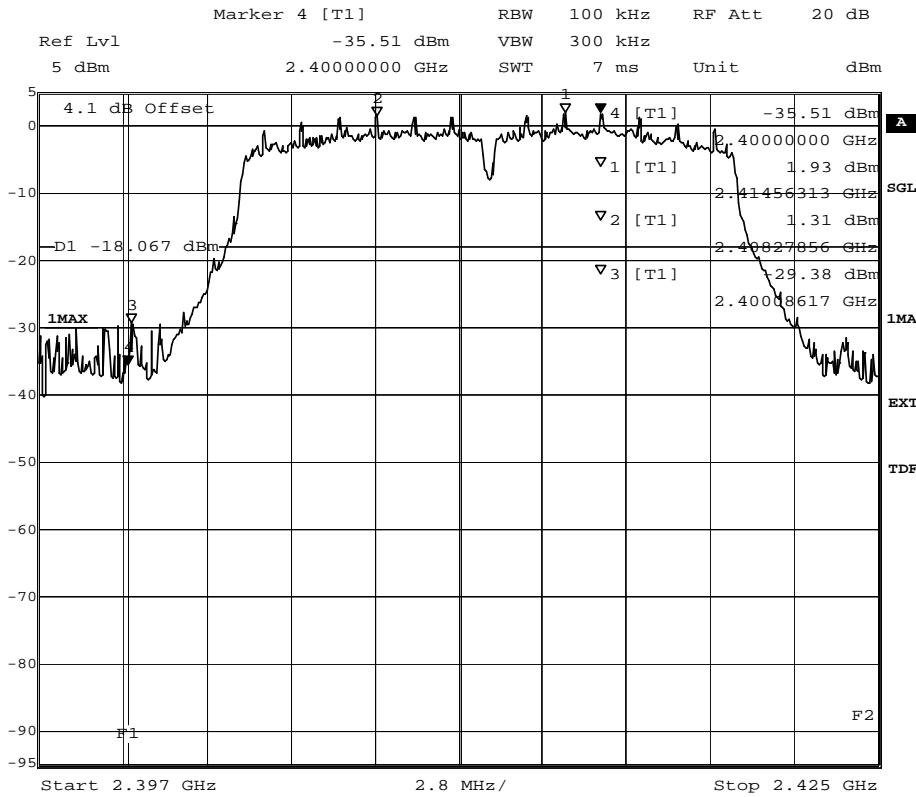


Title: Band Edge Compliance
 Comment A: CH B: 2412 MHz
 Date: 11.MAR.2014 11:35:07

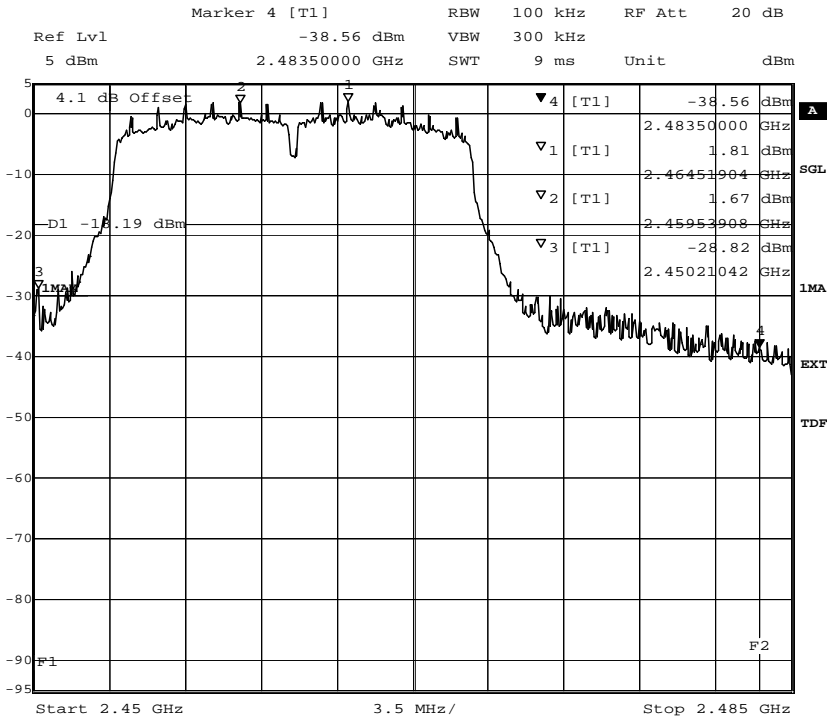


Title: Band Edge Compliance
 Comment A: CH T: 2462 MHz
 Date: 11.MAR.2014 13:12:23

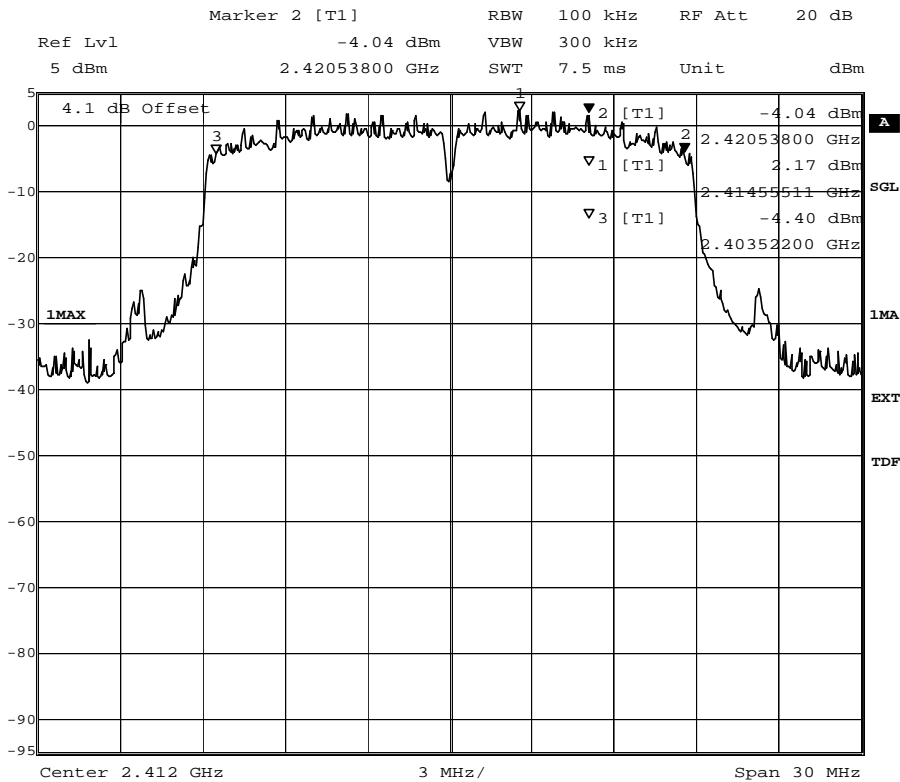


Title: 6dB Bandwidth
 Comment A: CH B: 2412 MHz; 6dB bandwidth (kHz):17016
 Date: 11.MAR.2014 13:59:31

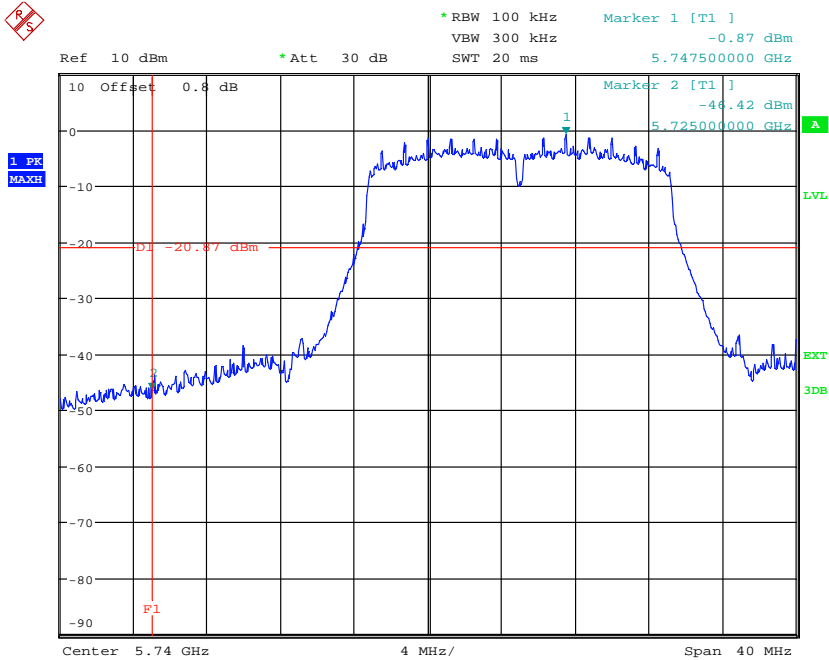


Date: 3.APR.2014 11:26:13

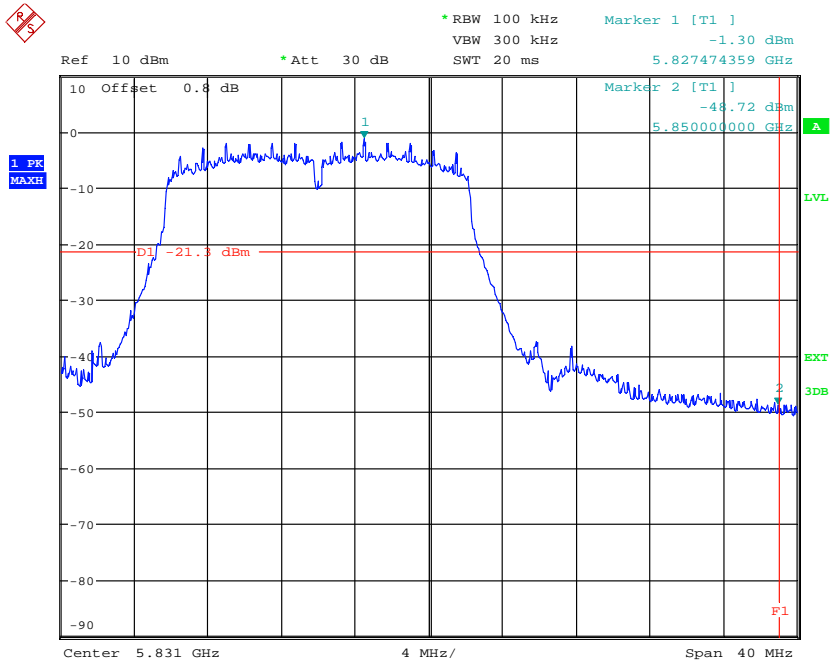

Date: 3.APR.2014 11:32:19

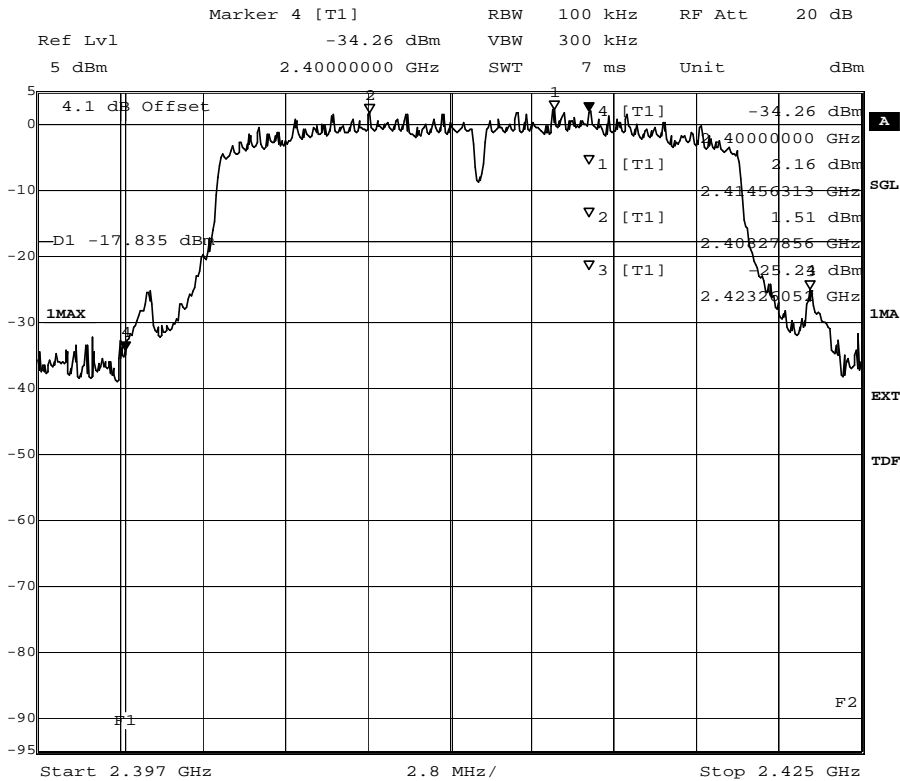


Title: Band Edge Compliance
 Comment A: CH B: 2412 MHz
 Date: 11.MAR.2014 13:46:00

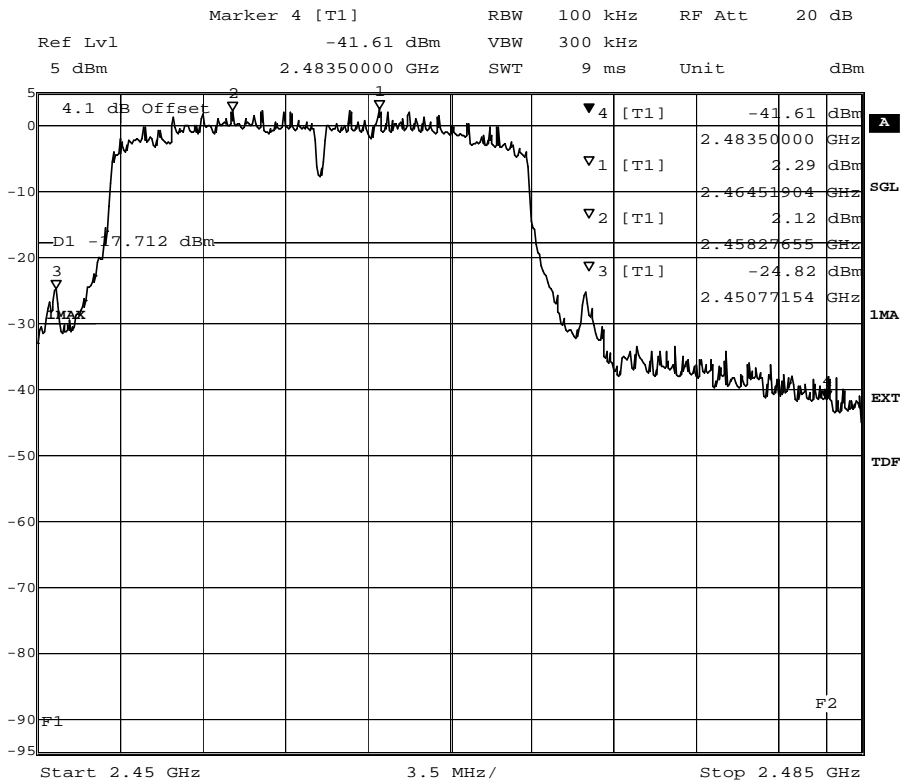


Title: Band Edge Compliance
 Comment A: CH T: 2462 MHz
 Date: 11.MAR.2014 14:49:03

MIMO

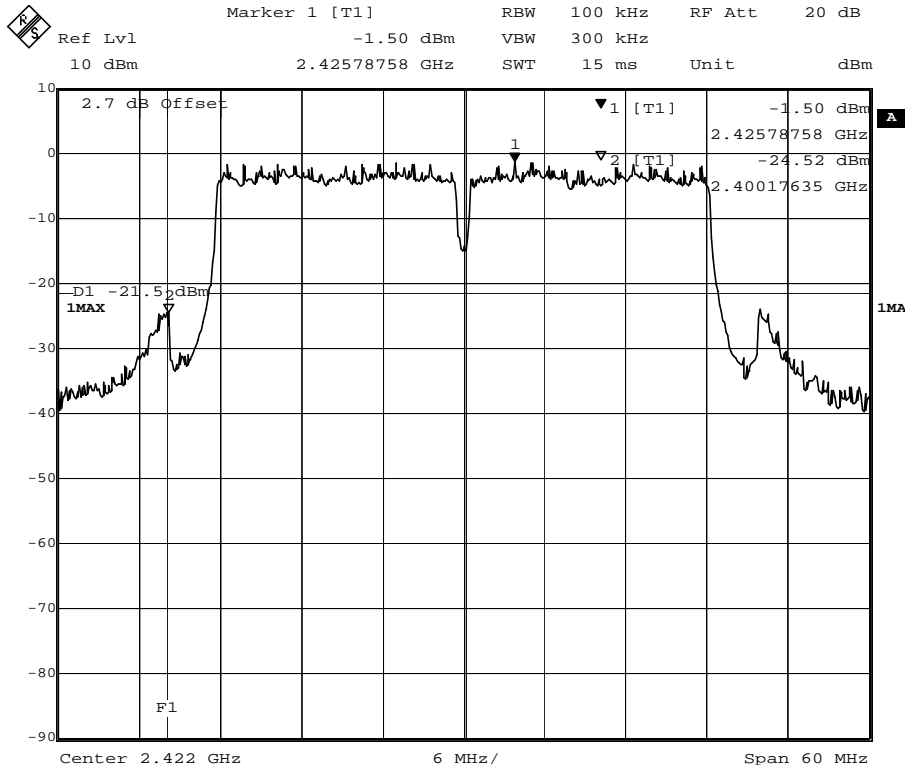


Date: 17.MAR.2014 08:58:29

K
S
 Marker 1 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -1.37 dBm VBW 300 kHz
 10 dBm 2.45701002 GHz SWT 15 ms Unit dBm

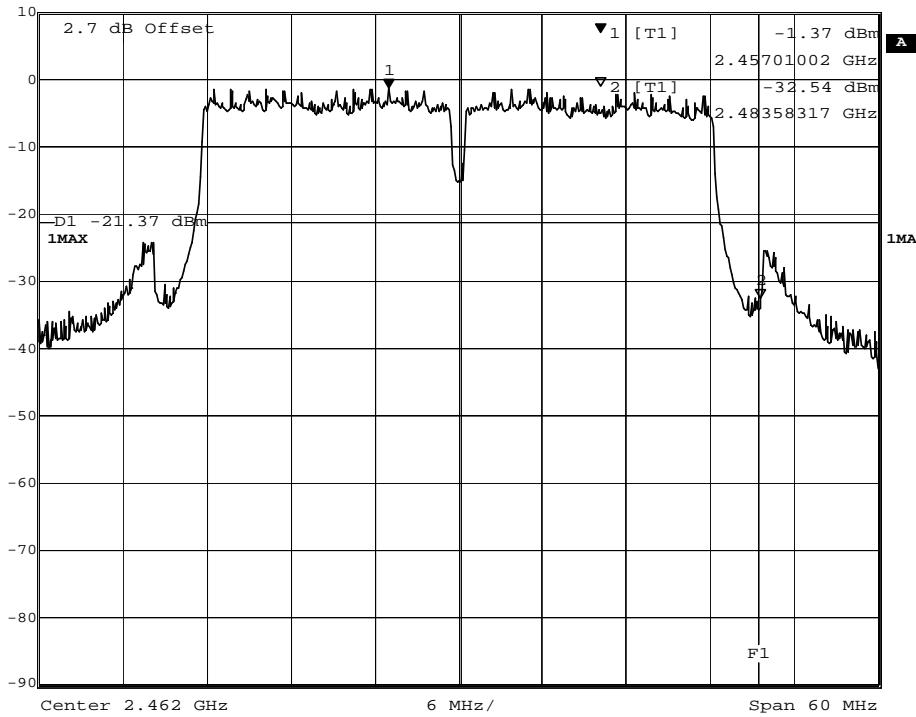


Date: 17.MAR.2014 09:06:42

K
S
 *RBW 100 kHz Marker 1 [T1]
 VBW 300 kHz -8.03 dBm
 Ref 10 dBm *Att 30 dB 5.758782051 GHz
 SWT 20 ms

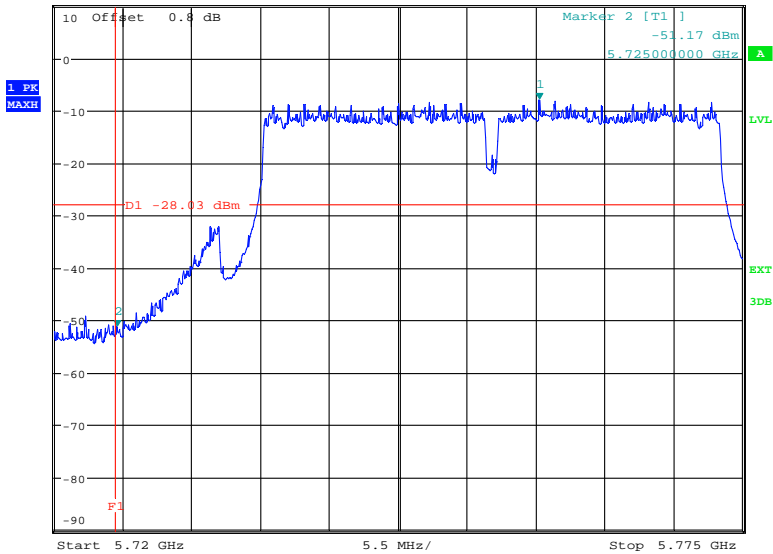

Date: 4.APR.2014 12:31:38

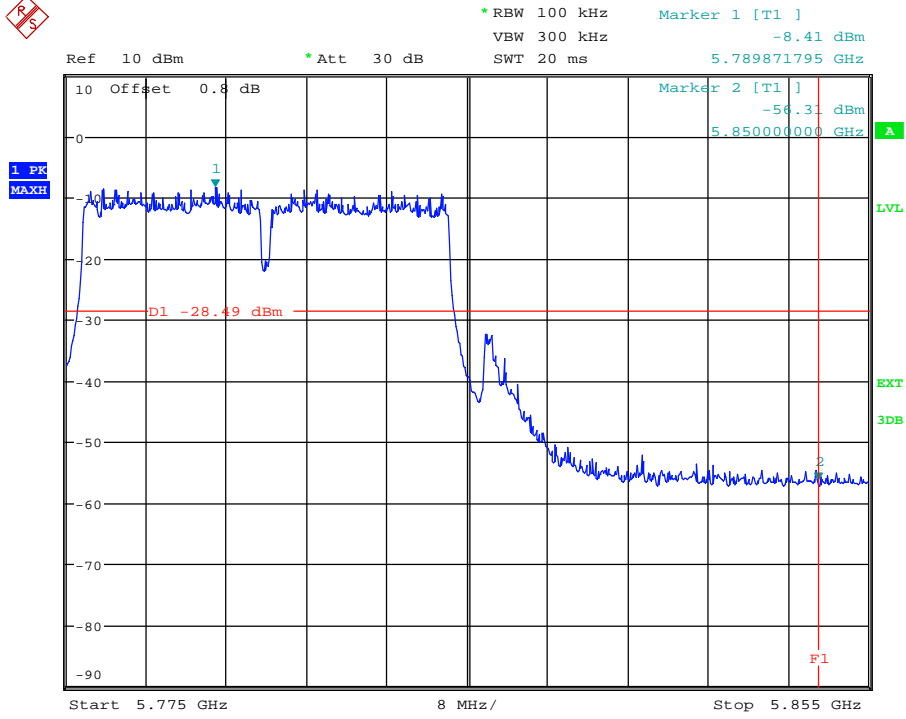

Date: 4.APR.2014 12:42:57

3.6.3.3 Radiated Measurement

Temperature: 21–24 °C
 Air Pressure: 994–1014 hPa
 Humidity: 34-43 %

SISO

WLAN b-Mode; 20 MHz; 1 Mbit/s							
Ch. No.	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dB μ V/m]	Detec -tor	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]
11	2462	2483.5	52.2	PEAK	1000	74.0	21.8
11	2462	2483.5	42.5	AV	1000	54.0	11.5

WLAN g-Mode; 20 MHz; 6 Mbit/s							
Ch. No.	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dB μ V/m]	Detec -tor	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]
11	2462	2483.5	62.4	PEAK	1000	74.0	11.6
11	2462	2483.5	43.9	AV	1000	54.0	10.1

MIMO


WLAN n-Mode; 20 MHz; 150 Mbit/s							
Ch. No.	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dB μ V/m]	Detec -tor	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]
11	2462	2483.5	47.2	PEAK	1000	74.0	26.8
11	2462	2483.5	28.3	AV	1000	54.0	25.7

WLAN n-Mode; 40 MHz; 300 Mbit/s							
Ch. No.	Channel Frequency [MHz]	Band Edge Frequency [MHz]	Spurious Level [dB μ V/m]	Detec -tor	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]
11	2462	2483.5	57.8	PEAK	1000	74.0	16.2
11	2462	2483.5	41.4	AV	1000	54.0	12.6

Note:

Transmitters in UNII sub-band 3 do not operate adjacent to a restricted band.

3.6.4 Measurement Plot (showing the highest value, “worst case”)

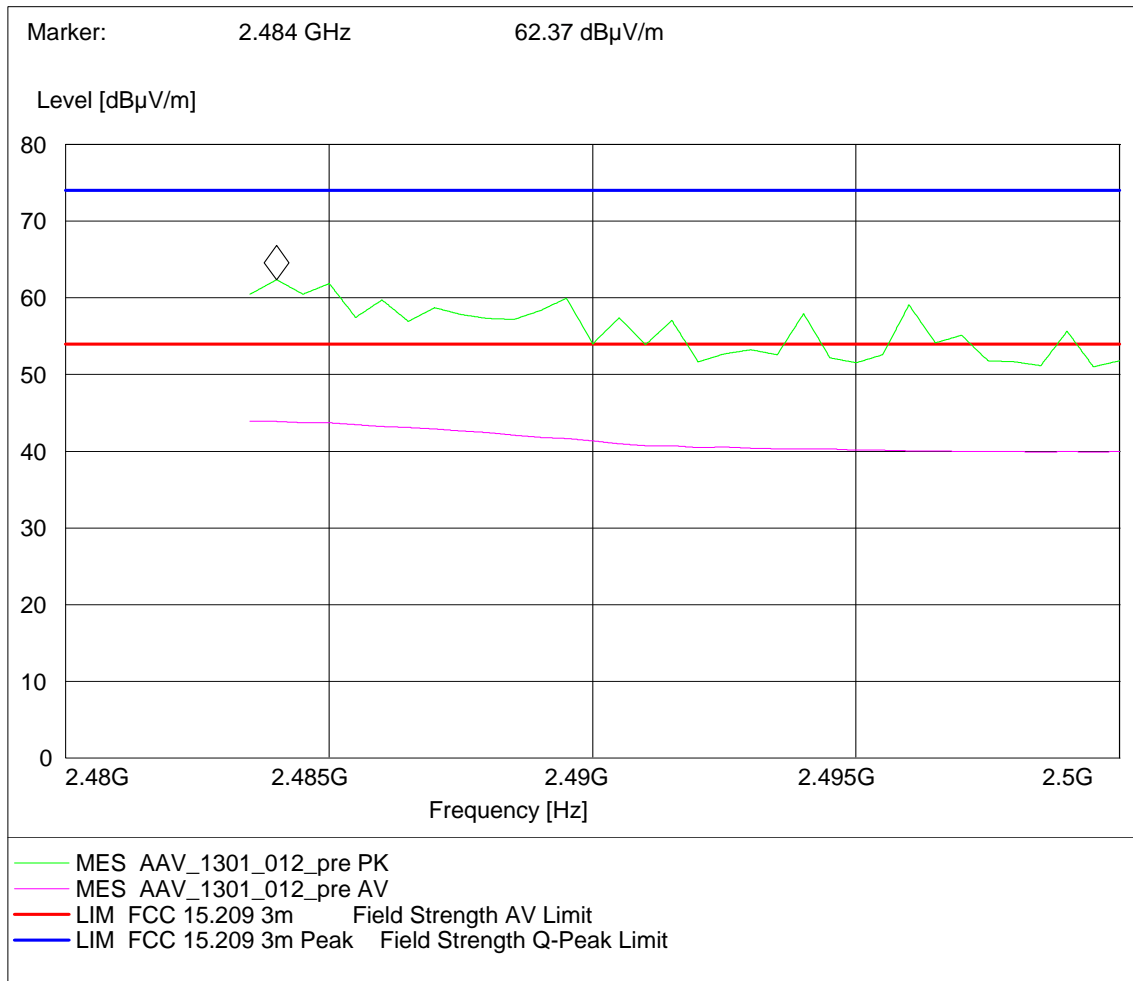

3.7 Power density

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.7.1 Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak
- Trace: Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: auto (coupled)

Note:

The analyser settings are according to "DTS-Guideline" method "Method PKPSD (peak PSD)".

3.7.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.3 Test Protocol

Temperature: 21–24 °C
 Air Pressure: 1005–1018 hPa
 Humidity: 32-43 %

The values in the tables contain no antenna gain.

SISO:

WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-9.7	8.0	17.7
	6	2437	-10.1	8.0	18.1
	11	2462	-9.3	8.0	17.3

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-13.0	8.0	21.0
	6	2437	-12.8	8.0	20.8
	11	2462	-12.9	8.0	20.9

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-13.5	8.0	21.5
	6	2437	-13.7	8.0	21.7
	11	2462	-13.4	8.0	21.4
5 GHz ISM	149	5745	-19.5	8.0	27.5
	157	5785	-18.7	8.0	26.7
	165	5825	-19.9	8.0	27.9


WLAN a-Mode, 20 MHz; 6 Mbit/s					
ISM-Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
5 GHz ISM	149	5745	-14.9	8.0	22.9
	157	5785	-16.0	8.0	24.0
	165	5825	-17.5	8.0	25.5

MIMO:


WLAN n-Mode; 40 MHz; 300 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	3	2422	3.0	8.0	5.0
	6	2437	3.1	8.0	4.9
	11	2462	3.1	8.0	4.9
5 GHz ISM	151	5755	3.0	8.0	5.0
	159	5795	3.0	8.0	5.0

3.7.4 Measurement Plot (showing the highest value, “worst case”)


SISO:

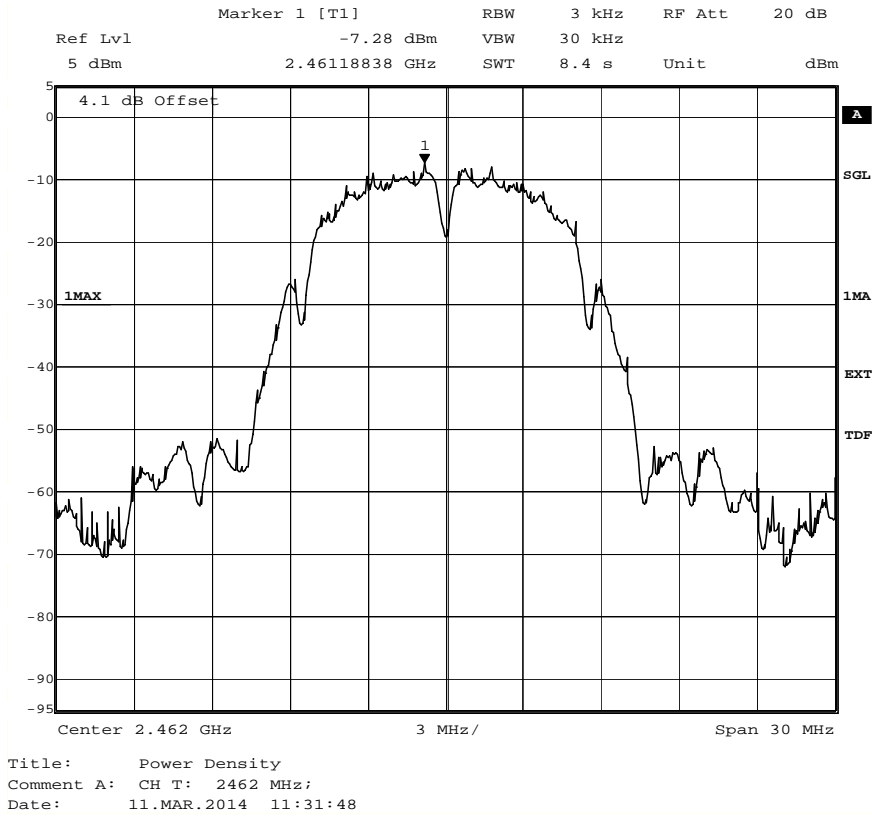


Remark: The plot contains the antenna gain

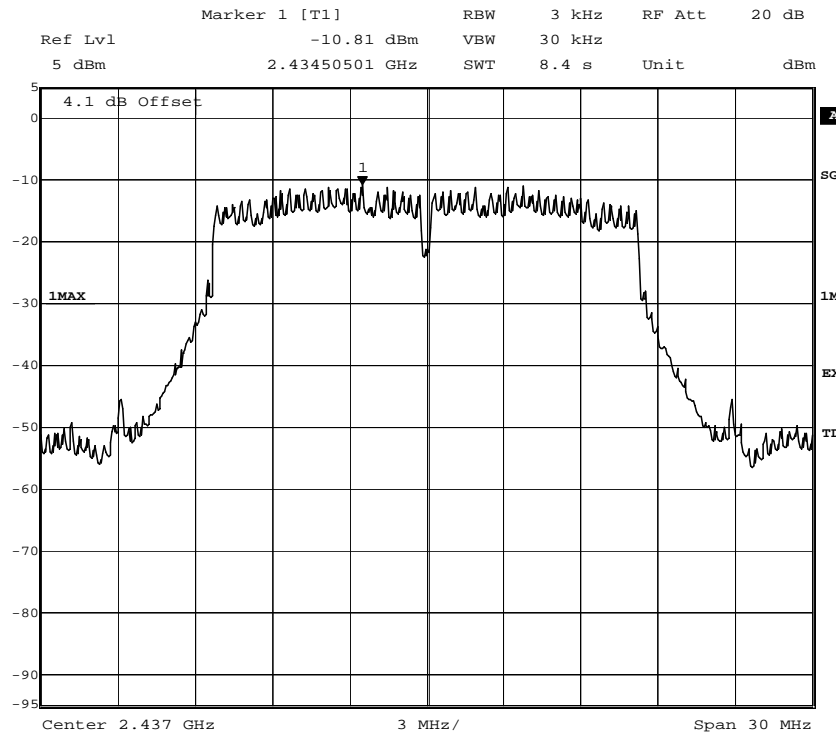


Title: Power Density
 Comment A: CH M: 2437 MHz;
 Date: 11.MAR.2014 13:07:28

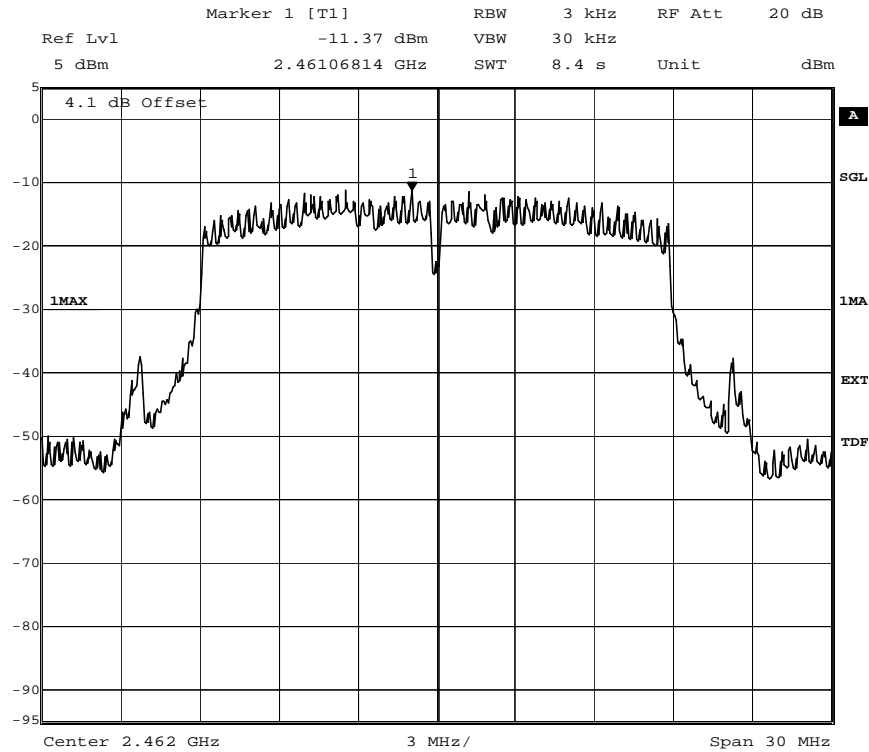

Title: Power Density
 Comment A: CH T: 2462 MHz;
 Date: 11.MAR.2014 15:17:15

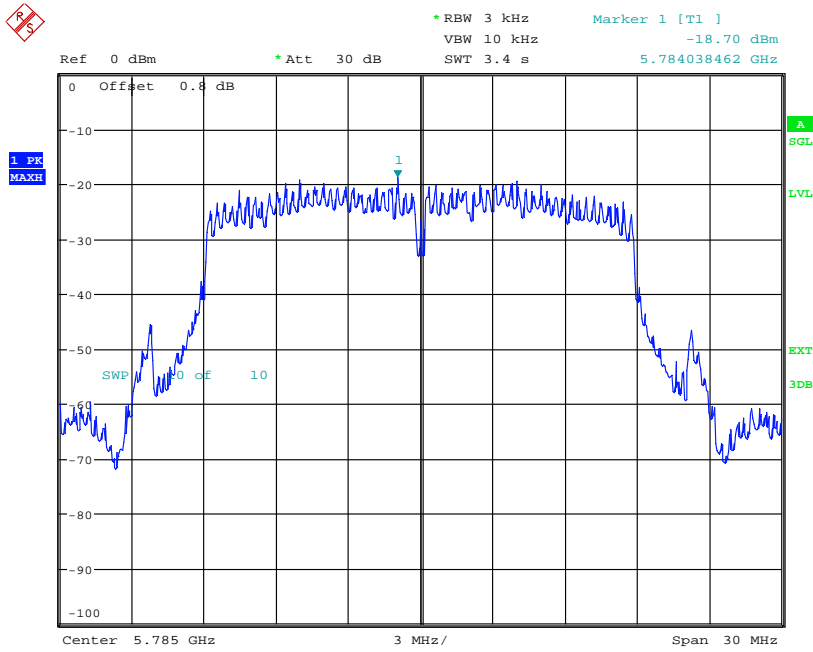


Date: 4.APR.2014 11:11:15

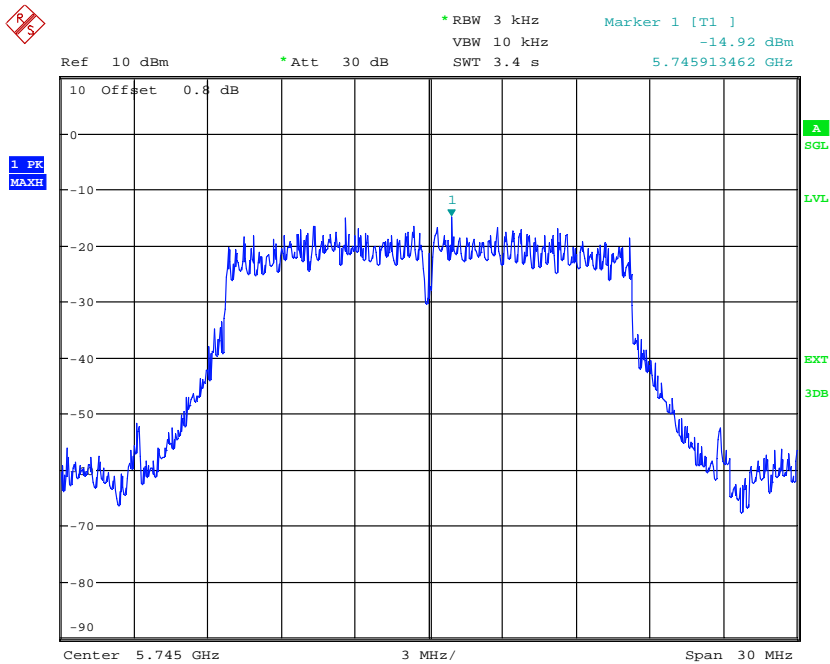


Date: 3.APR.2014 10:55:54

MIMO:

AUX Antenna Port:

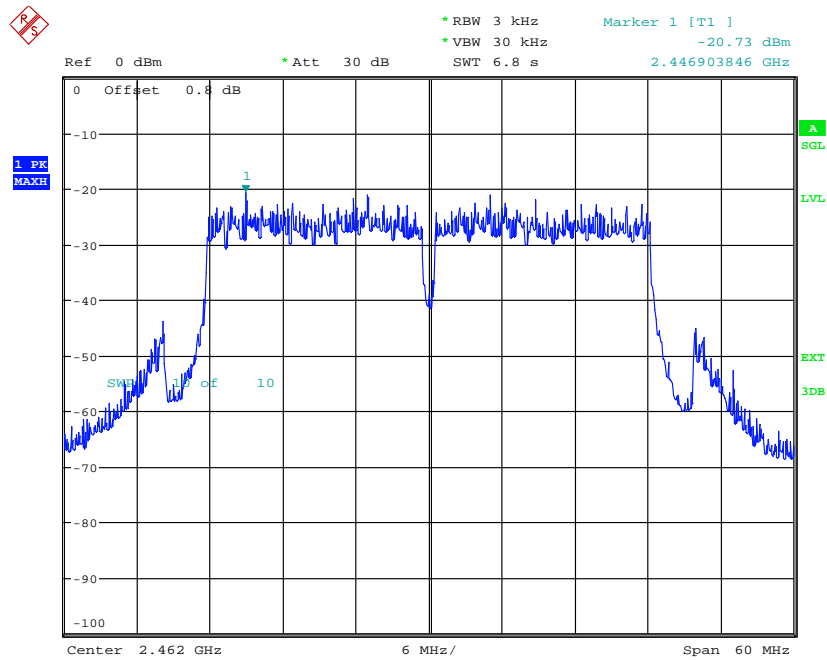


Date: 4.APR.2014 13:04:23

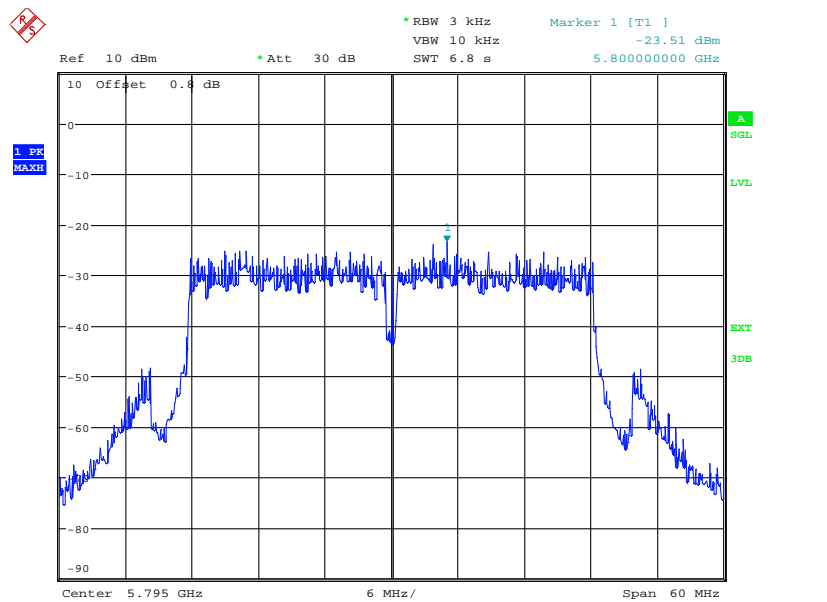


Date: 4.APR.2014 11:02:16

MAIN Antenna Port:

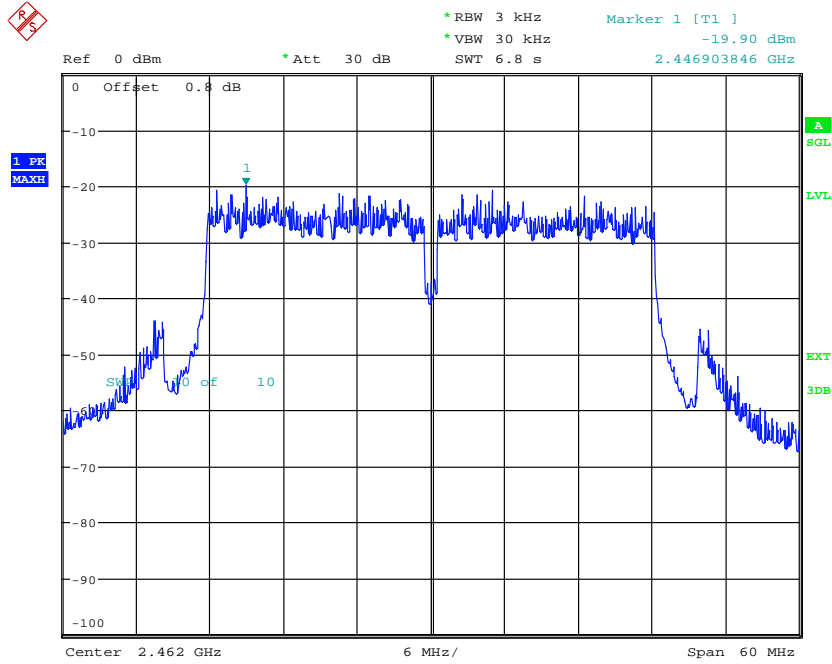

Date: 4.APR.2014 13:06:35

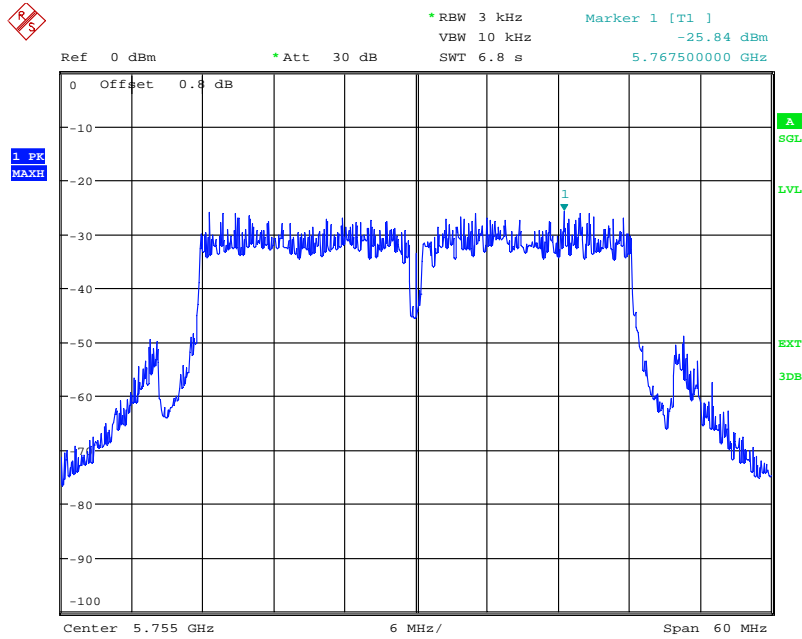

Date: 4.APR.2014 11:04:50

4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³ FCC listing 96716 3m Part15/18	none	Frankonia 2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH

Single Devices for Auxiliary Equipment for Conducted emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration		2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AM 4.0	AM4.0/180/119205	Maturo GmbH		
Antenna mast	AS 620 P	620/37	HD GmbH		
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2009/06/04	2014/06/03
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/01/18	2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch		
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax		
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/05/18	2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/06/26	2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170				
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/12/18	2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG		
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration			2011/10/27	2014/10/26

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2, Lab 3
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2, Lab 3
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/11/24	2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG	
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/11/28	2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG	
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16	
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/12/07	2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02	
	SW: K62, K69		2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG	

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Personal Computer	Dell	30304832059	Dell	
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG	
	Standard calibration		2014/05/03	2015/05/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG	
	Standard calibration		2014/04/30	2015/04/29
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2014/05/12	2015/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
	Standard Calibration		2014/01/07	2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03	

Test Equipment Multimeter 12

Lab ID: Lab 4, Lab 5
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Customized calibration		2013/12/04	2015/12/03

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 3
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD Standard calibration	828110/016	Rohde & Schwarz GmbH & Co.KG 2013/05/03 2014/05/02
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS Standard calibration	5489/001	Datum-Beverly 2014/06/24 2015/06/23
Sensor Head A	NRV-Z1 Standard calibration	827753/005	Rohde & Schwarz GmbH & Co.KG 2014/04/30 2015/04/29
Signal Generator SME	SME03 <i>Calibration Details</i> Standard calibration	827460/016	Rohde & Schwarz GmbH & Co.KG <i>Last Execution</i> <i>Next Exec.</i> 2011/11/25 2014/11/24
Signal Generator SMP	SMP02 <i>Calibration Details</i> Standard calibration	836402/008	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26 <i>Calibration Details</i> Standard Calibration	840061/005	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2013/02/12 2015/02/11
Temperature Chamber Vötsch 03	VT 4002 <i>Calibration Details</i> Customized calibration Customized calibration	58566002150010	Vötsch <i>Last Execution</i> <i>Next Exec.</i> 2012/03/12 2014/03/11 2014/03/11 2016/03/10

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 4
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT		100302	Rohde & Schwarz GmbH & Co.KG
	Standard calibration		2014/08/28 2015/08/27
Power Meter NRVD	NRVD	832025/059	
	Standard calibration		2014/08/26 2015/08/25
Power Sensor NRV Z1 A	PROBE	832279/013	
	Standard calibration		2014/08/28 2015/08/27
Power Supply	NGSM 32/10	2725	
	Standard calibration		2013/06/14 2015/06/13
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	Standard calibration		2014/08/27 2015/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIO3B	SMIO3B	832870/017	
	Standard calibration		2013/06/21 2016/06/20

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 4, Lab 5
Description: Shielded Room 4m x 6m

Test Equipment T/H Logger 04

Lab ID: Lab 4, Lab 5
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 04 (Environ)		7481	Lufft Mess- und Regeltechnik GmbH

Test Equipment Temperature Chamber 01

Lab ID: Lab 4, Lab 5
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Customized calibration		2012/03/12	2014/03/11
	Customized calibration		2014/03/12	2016/03/11

Test Equipment WLAN RF Test Solution

Lab ID: Lab 5
Manufacturer: 7 layers AG
Description: Regulatory WLAN RF Tests
Type: WLAN RF
Serial Number: 001


Single Devices for WLAN RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	
Arbitrary Waveform Generator	TGA12101	284482		
Power Meter NRVD	NRVD Standard calibration	832025/059	2014/08/26	2015/08/25
Power Sensor NRV Z1 A	PROBE Standard calibration	832279/013	2014/08/28	2015/08/27
Power Supply	NGSM 32/10 Standard calibration	2725	2013/06/14	2015/06/13
Rubidium Frequency Normal MFS	Datum MFS Standard calibration	002	Datum GmbH	
Signal Analyser FS1Q26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG	
Spectrum Analyser	FSU26 Standard Calibration Calibration <i>HW/SW Status</i>	100136	ROHDE & SCHWARZ GmbH & Co.KG	
	FSU FW Update to v4.61 SP3, K5 v4.60 and K73 v4.61		2011/12/05	
	FW 4.51 SP1		2012/11/23	
	Bios V5.1-22-1			
	Specification Version 14.00			
Spectrum Analyser	FSU3 Standard calibration <i>HW/SW Status</i>	200046	Rohde & Schwarz GmbH & Co.KG	
	Firmware Version 4.51 SP1		2014/06/20	2015/06/19
	Option FS-K72 4.50 SP1		2011/12/07	
	Option FS-K73 4.50 SP1			
TOCT Switching Unit	Switching Unit	040107	7 layers, Inc.	
Vector Signal Generator SMIOQ3B	SMIOQ3B Standard calibration	832870/017	2013/06/21	2016/06/20

5 Photo Report

Please refer to external report.

6 Setup Drawings

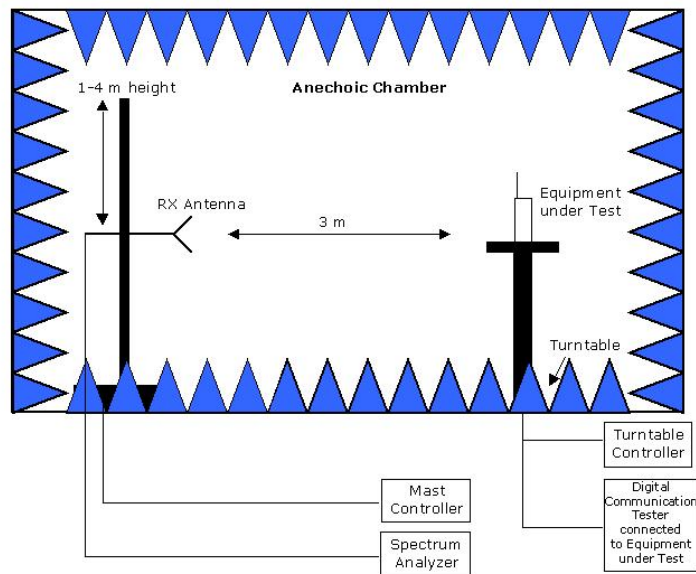

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane