



Inter**Lab**[®]

FCC Measurement/Technical Report on

WLAN transceiver in

Tablet computer
INARI8-LTDN-1

FCC ID: 2ABVH-INARI82
IC: 11875A-INARI82

Report Reference: MDE_AAVAM_1409_FCCa

Test Laboratory:

7Layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H. Ansorge

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company



Table of Contents

0	Applied Standards and Test Summary	3
0.1	Applied Standards	3
0.2	FCC-IC Correlation Table	4
0.3	Measurement Summary / Signatures	5
1	Administrative Data	10
1.1	Testing Laboratory	10
1.2	Project Data	10
1.3	Applicant Data	10
1.4	Manufacturer Data	10
2	Test object Data	11
2.1	General EUT Description	11
2.2	EUT Main components	12
2.3	Ancillary Equipment	12
2.4	Auxiliary Equipment	12
2.5	EUT Setups	13
2.6	Operating Modes	13
2.7	Special software used for testing	13
2.8	Product labelling	14
3	Test Results	15
3.1	26 / 6 dB Emission bandwidth / 99 % occupied bandwidth	15
	Maximum conducted output power	22
3.2	Maximum Power Spectral Density	27
3.3	Undesirable Emissions / General Field Strength Limits; Restricted Band and Radiated Emission Limits, Band Edge	32
	Test Equipment	40
4	Photo Report	49
5	Setup Drawings	49



0 Applied Standards and Test Summary

0.1 Applied Standards

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-13 Edition) and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v01, 2014-06-06".

Instead of applying ANSI C63.4–1992 which is referenced in the FCC Public Note, the newer ANSI C63.4–2009 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules") is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.3 Measurement Summary / Signatures.



0.2 FCC-IC Correlation Table

Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment

UNII equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-210 Issue 8: A9.2, 9.4 (99%)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-210 Issue 8: A9.2, 9.4
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-210 Issue 8: A9.2, 9.4
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	15.407 (b) § 15.209 (a)	RSS-Gen Issue4: 6.13/8.9/8.10; RSS-210 Issue 8: A9.2, 9.4
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 4: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-210 Issue 8: A9.2, 9.4
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	RSS-210 Issue 8: 2.3; RSS Gen Issue 4: 5/7 *)

*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.



0.3 Measurement Summary / Signatures

FCC Part 15, Subpart C

§ 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
-	-	AC Port (power line)	N/P 2)

FCC Part 15, Subpart E

§ 15.403 (i), 15.407 (e)

26 / 6 dB Emission bandwidth / 99 % occupied bandwidth

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
a-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 52, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 56, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 64, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 100, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 120, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 140, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 52, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 56, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 64, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 100, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 120, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 140, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 38, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 46, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 54, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 62, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 102, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 118, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 134, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz	Setup_01	Temp.ant.connector	passed



FCC Part 15, Subpart E

§ 15.407 (a)(1,2,3,4)

Maximum Conducted Output Power

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result	
			FCC	IC
a-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 52, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 56, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 64, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 100, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 120, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 140, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 52, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 56, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 64, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 100, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 120, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 140, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 38, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 46, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 54, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 62, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 102, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 118, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 134, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 151, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 159, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P



FCC Part 15, Subpart E

§ 15.407 (a)(1,2,3,5)

Maximum Power Spectral Density

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result	
			FCC	IC
a-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 52, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 56, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 64, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 100, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 120, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
a-Mode, CH 140, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 52, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 56, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 64, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 100, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 120, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 140, 20 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 38, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 46, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 54, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 62, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 118, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 110, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 134, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 151, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P
n-Mode, CH 159, 40 MHz	Setup_01	Temp.ant.connector	passed	N/P

FCC Part 15, Subpart E

§ 15.407 (g)

Frequency Stability

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
-	-	Temp.ant.connector	N/P



FCC Part 15, Subpart C & E

**§ 15.205, § 15.209
§ 15.407 (b)(1,2,3,4,5,6)**

Undesirable Emissions, General Field Strength Limits;
Restricted Bands and Radiated Emission Limits

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result	
			FCC	IC
a-Mode, CH 36, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 44, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 48, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 52, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 56, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 64, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 100, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 120, 20 MHz	Setup_02	Enclosure	passed	N/P
a-Mode, CH 140, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 36, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 44, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 48, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 52, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 56, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 64, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 100, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 120, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 140, 20 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 38, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 46, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 54, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 62, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 102, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 118, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 134, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 151, 40 MHz	Setup_02	Enclosure	passed	N/P
n-Mode, CH 159, 40 MHz	Setup_02	Enclosure	passed	N/P

FCC Part 15, Subpart E

§ 15.407 (h)

Dynamic Frequency selection

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result	
			FCC	IC
-	-	-	N/P ¹⁾	N/P

N/A Not applicable

N/P Not performed

1) DFS capability was already tested with another variant of the EUT and was not retested. Report Reference: 75926145 Report 02 Issue 1

2) No impact on result expected, see report "MDE_AAVAM_1301_FCCf" for result values of previously tested variant.



Responsible for
Accreditation Scope:

M. Kullik

Responsible
for Test Report:

D. Gell



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-11-24

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Daniel Gall
Employees who performed the tests: documented internally at 7Layers

Date of Test(s): 2015-02-05 to 2015-05-29
Date of Report: 2015-05-29

1.3 Applicant Data

Company Name: Aava Mobile Oy
Address: Nahkatehtaankatu 2
90130 Oulu
Finland

Contact Person: Mr. Antti Aho

1.4 Manufacturer Data

Company Name: Please see applicant data

Address:

Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test:	IEEE 802.11a/b/g/n WLAN transceiver (5 GHz)
Type Designation:	INARI8-LTDN-1
Kind of Device:	Tablet Computer
(optional)	
Voltage Type:	DC
Voltage Level:	3.8 V
Tested Modulation Type:	DBPSK; OFDM:BPSK; OFDM:64-QAM

General product description:

The WLAN Transceiver is operating in the 5 GHz band using Direct Sequence Spread Spectrum (DSSS) Modulation and Orthogonal Frequency Division Multiplexing (OFDM).

Specific product description for the EUT:

The EUT is a dual band WLAN (802.11 a/b/g/n, 2.4 and 5 GHz) and Bluetooth module with two antennas. The main antenna is used for WLAN and Bluetooth, the auxiliary antenna for WLAN MIMO modes. In IEEE 802.11n mode it supports 20 MHz and 40 MHz bandwidth channels (both with MCS7), providing 65 Mbit/s, and 135 Mbit/s transfer data rates respectively.

The EUT also supports MIMO technology with a maximum data rate of 270 Mbit/s (MCS15).

The object of this test report is the WLAN transceiver, consequently switched on the IEEE 802.11 a/n modes, working in the 5 GHz bands. In IEEE 802.11n mode, it was tested with 20 MHz and 40 MHz channel bandwidth in SISO and MIMO mode.

The INARI8-LTDN-1 is a variant of the previously tested variants INARI8-3GAN-1 and INARI8-WLAN-1 which are identical with the exception of the built in cellular module and increased WLAN output power in the new variant tested for this report.

The EUT provides the following ports:

Ports

Enclosure
AC-Port (at AE1)
DC Port (Micro-USB, only charging)
USB-Port
HDMI-Port

The main components of the EUT are listed and described in chapter 2.2



2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: DE1004007ae01)	WLAN transceiver	INARI8-LTDN-1	AB42400132	INARI8-LTDN-1	SWI9X15C_05.05 .16.00
Remark: EUT A is equipped with a temporary antenna connector.					
EUT B (Code: DE1004007ab01)	WLAN transceiver	INARI8-LTDN-1	AB42400380	INARI8-LTDN-1	SWI9X15C_05.05 .16.00
Remark: EUT B is equipped with a dual-band integral antenna with antenna gain = 1.9 dBi at 2.4 – 2.5 GHz frequency range and 1.4 dBi in 4.9 – 5.9 GHz frequency range.					

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
ANC1	-	-	-	-	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
AUX1	-	-	-	-	-

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
Setup_01	EUT A	setup for conducted radio measurements
Setup_02	EUT B	setup for radiated measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

2.6.1 Test Channels

UNII-Subband 1 5150 - 5250 MHz			UNII-Subband 2A 5250 - 5350 MHz			UNII-Subband 2C 5470 - 5725 MHz			UNII-Subband 3 5725 - 5850 MHz			Nom. BW
Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	20 MHz
36	44	48	52	56	64	100	116	140	149	157	165	Ch.-No.
5180	5220	5240	5260	5280	5320	5500	5580	5700	5745	5785	5825	MHz

Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	40 MHz
38	-	46	54	-	62	102	110	134	151	-	159	Ch.-No.
5190	-	5230	5270	-	5310	5510	5550	5670	5755	-	5795	MHz

2.6.2 Datarates

SISO:

WLAN a-Mode; 20 MHz; 6 Mbit/s

WLAN n-Mode; 20 MHz; 72.2 Mbit/s

MIMO:

WLAN n-Mode; 40 MHz; 300 Mbit/s

2.7 Special software used for testing

The applicant provided the prepared EUTs (i.e. pre-installed) where a software called "WLANCONTROLLER.EXE" can be started via an icon on the desktop.



2.8 Product labelling

2.8.1 FCC ID label

Please refer to the documentation of the applicant.

2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



3 Test Results

3.1 26 / 6 dB Emission bandwidth / 99 % occupied bandwidth

Standard FCC Part 15, Subpart E

The test was performed according to: FCC §15.31

3.1.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth (26 / 6 dB and 99%).

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

1) 26 bandwidth, sub-bands 1, 2A and 2C:

- Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
- Video Bandwidth (VBW): > RBW
- re-adjust RBW close to 1 % of measured bandwidth and repeat the measurement

2) 6 dB bandwidth, sub-band 3:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): ≥ 3 times the RBW

1+2) 26 / 6 dB bandwidth:

- Detector: Peak
- Trace: Maxhold
- Sweeps: ≥ 200
- Sweeptime: at least coupled

3) 99% occupied bandwidth:

- Span: 1.5 to 5 times the occupied bandwidth
- Resolution Bandwidth (RBW): approx. ≥ 1 % of the span, but not below
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Detector: Sample
- Trace: Maxhold
- Sweeps: ≥ 200
- Sweeptime: at least coupled

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.1.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1002 hPa
 Humidity: 32 %

1) 26 dB bandwidth

WLAN a-Mode; 20 MHz; 6 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	26 dB Bandwidth [MHz]
1	36	5180	19.740
	44	5220	19.682
	48	5240	19.740
2A	52	5260	19.740
	56	5280	19.682
	64	5320	19.797
2C	100	5500	19.740
	116	5580	19.624
	140	5700	19.740
3	149	5745	19.740
	157	5785	19.624
	165	5825	19.740

WLAN n-Mode; 20 MHz; 72.2 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	26 dB Bandwidth [MHz]
1	36	5180	19.913
	44	5220	19.913
	48	5240	19.913
2A	52	5260	19.913
	56	5280	19.913
	64	5320	19.913
2C	100	5500	19.855
	116	5580	19.913
	140	5700	19.855
3	149	5745	19.855
	157	5785	19.797
	165	5825	19.855



WLAN n-Mode; 40 MHz; 150 Mbit/s			
1	38	5190	46.107
	46	5230	46.194
2A	54	5270	46.194
	62	5310	46.107
2C	102	5510	46.760
	110	5550	45.760
	134	5670	46.107
3	151	5755	46.020
	159	5795	45.934



2) 6 dB bandwidth (UNII-band 3 only)

WLAN a-Mode; 20 MHz; 6 Mbit/s					
UNII-Subband	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
3	149	5745	16.367	0.500	15.867
	157	5785	16.281	0.500	15.781
	165	5825	16.325	0.500	15.825

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
UNII-Subband	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
3	149	5745	16.975	0.500	16.475
	157	5785	17.019	0.500	16.519
	165	5825	17.106	0.500	16.606

WLAN n-Mode; 40 MHz; 150 Mbit/s					
UNII-Subband	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
3	151	5755	36.816	0.500	36.316
	159	5795	36.729	0.500	36.229


3) 99% bandwidth

NOTE: The 99% bandwidth test was not performed because the report is not relating to IC certification.

3.1.4 Measurement Plot (showing the highest value, "worst case")

1) 26 dB bandwidth


a) 20 MHz nominal bandwidth

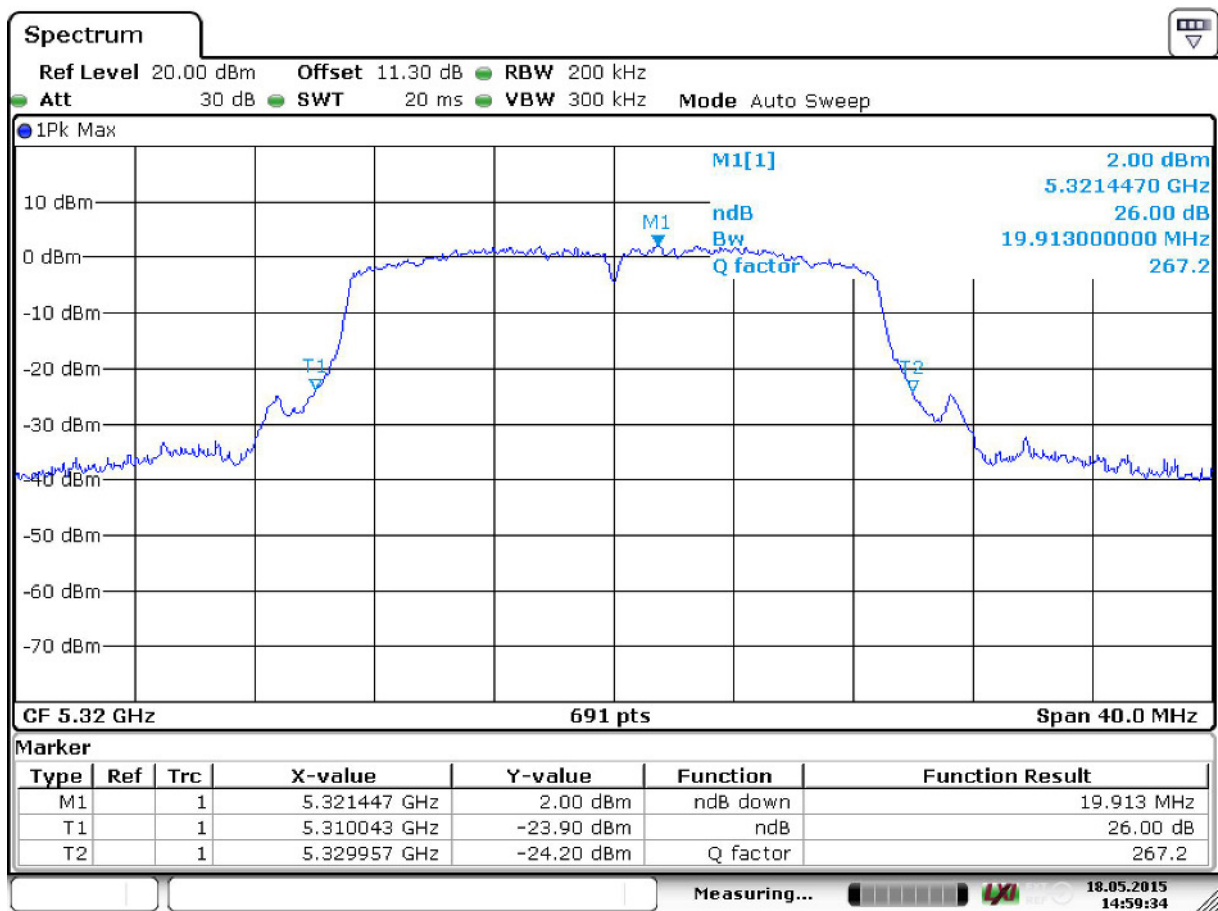

Date: 18.MAY.2015 14:59:34


WLAN mode n, Ch. 64

b) 40 MHz nominal bandwidth

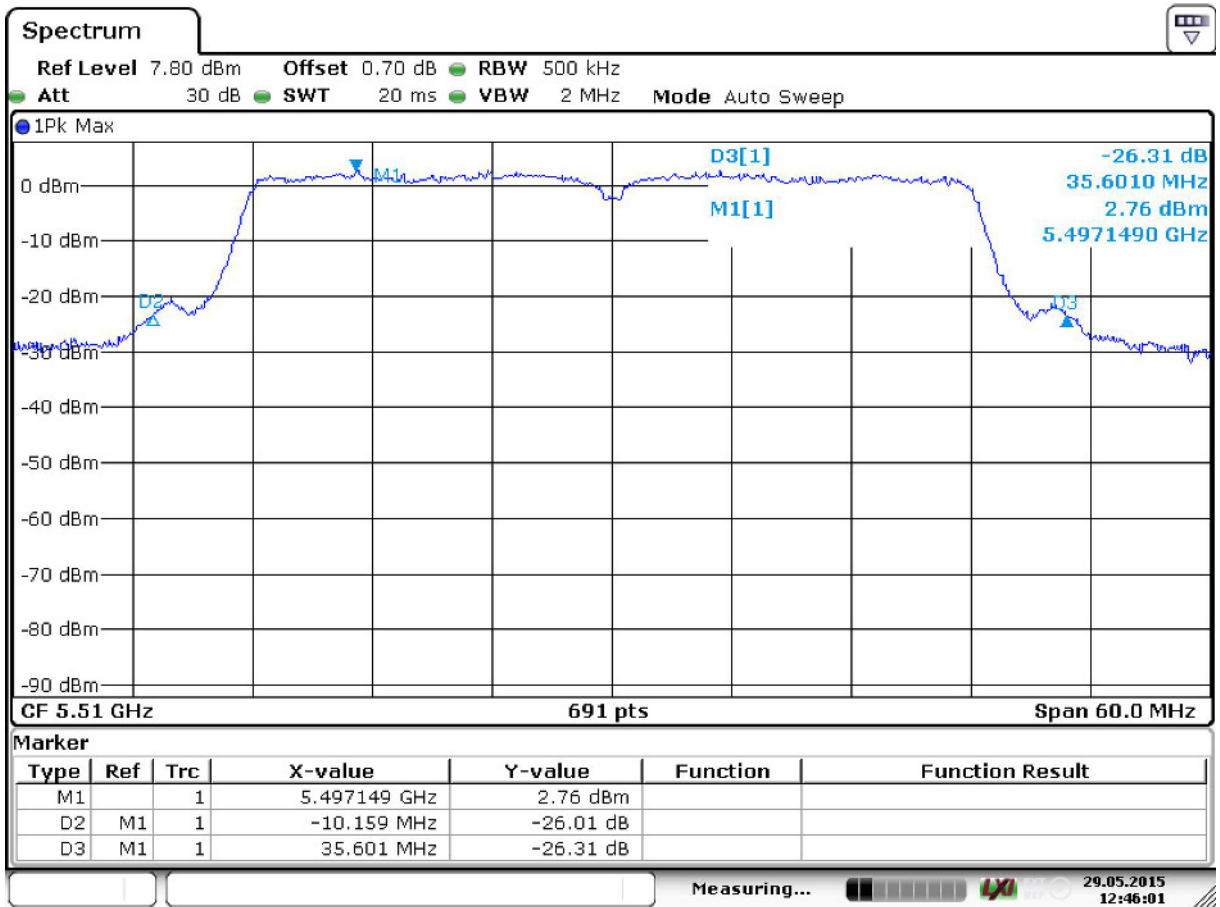

Date: 29.MAY.2015 12:46:01

2) 6 dB bandwidth

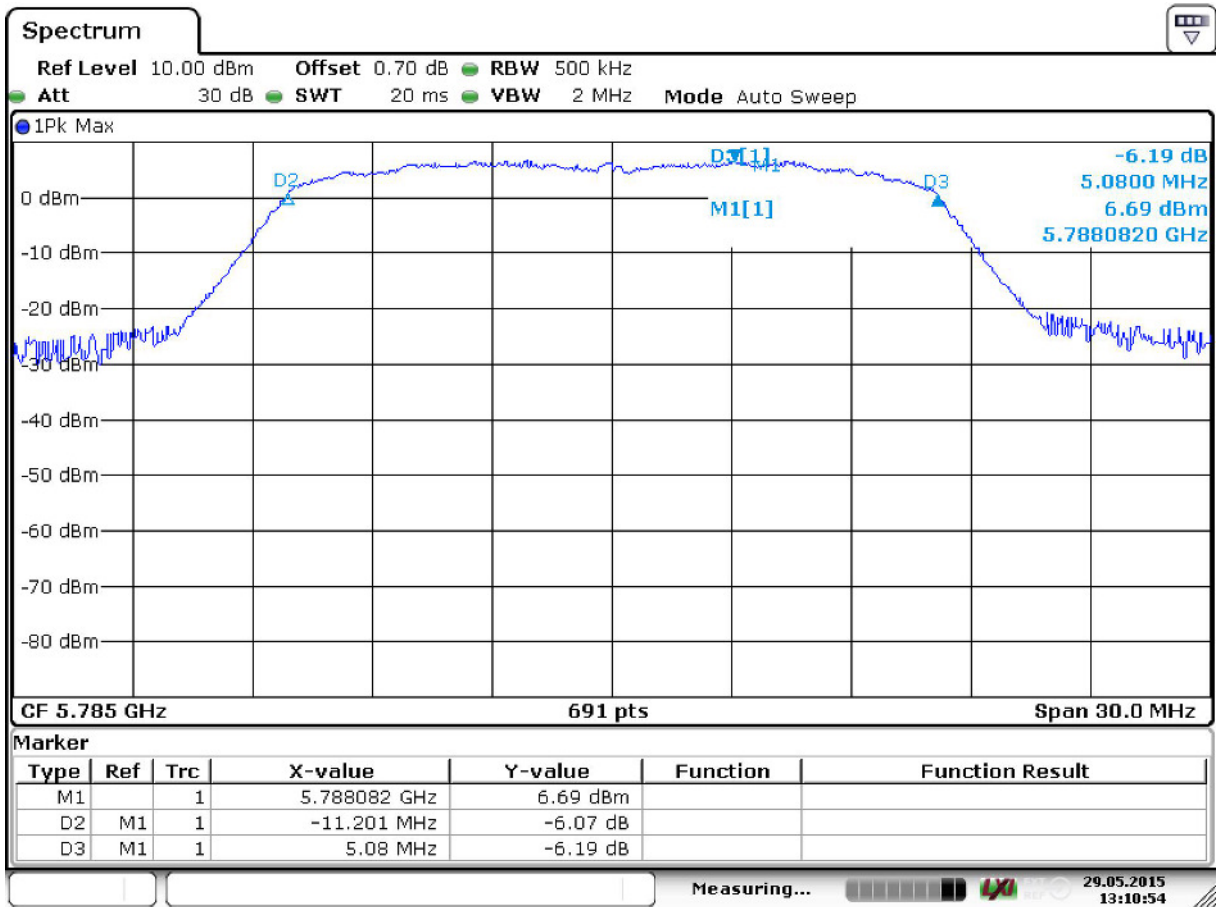

Date: 29.MAY.2015 13:10:53

"worst-case" plot of (smallest) 6 dB Bandwidth measurement



Maximum conducted output power

Standard FCC Part 15, Subpart E

The test was performed according to: FCC §15.31

3.1.5 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: RMS
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweeptime: coupled
- Trigger: gated mode

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08", method **SA-1**.

3.1.6 Test Requirements / Limits

A) FCC

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or 4 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or 11 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or 17 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.



FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”):
§15.407 (a) (3):
Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-210, A9.2 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or $10 + 10 \log_{10} B$ [dBm], whichever power is less.
B is the 99% emission bandwidth in MHz.

RSS-210, A9.2 (2), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-210, A9.2 (3), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

RSS-210, A9.2 (4), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or $23 + 10 \log_{10} B$ [dBm], whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

3.1.7 Test Protocol

Temperature: 23 °C
 Air Pressure: 1002 hPa
 Humidity: 32 %

WLAN a-Mode; 20 MHz; 6 Mbit/s					FCC	
UNII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]
1	36	5180	13.2	14.6	30.0	16.8
	44	5220	13.1	14.5	30.0	16.9
	48	5240	13.1	14.5	30.0	16.9
2A	52	5260	13.1	14.5	24.0	10.8
	56	5280	13.3	14.7	23.9	10.6
	64	5320	13.0	14.4	24.0	11.0
2C	100	5500	12.6	14.0	24.0	11.3
	116	5580	12.3	13.7	23.9	11.6
	140	5700	12.3	13.7	24.0	11.7
3	149	5745	12.0	13.4	30.0	18.0
	157	5785	12.0	13.4	30.0	18.0
	165	5825	12.1	13.5	30.0	17.9


WLAN n-Mode; 20 MHz; 72.2 Mbit/s					FCC	
UNII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]
1	36	5180	11.7	13.1	30.0	18.3
	44	5220	11.5	12.9	30.0	18.5
	48	5240	11.5	12.9	30.0	18.5
2A	52	5260	11.5	12.9	24.0	12.5
	56	5280	11.3	12.7	24.0	12.7
	64	5320	11.3	12.7	24.0	12.7
2C	100	5500	11.2	12.6	24.0	12.7
	116	5580	10.9	12.3	24.0	13.1
	140	5700	10.8	12.2	24.0	13.2
3	149	5745	10.9	12.3	30.0	19.2
	157	5785	10.9	12.3	30.0	19.1
	165	5825	10.9	12.3	30.0	19.1



WLAN n-Mode; 40 MHz; 150 Mbit/s				FCC		
UNII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]
1	38	5190	12.0	13.4	30.0	18.0
	46	5230	11.9	13.3	30.0	18.1
2A	54	5270	11.9	13.3	24.0	12.1
	62	5310	11.7	13.1	24.0	12.3
2C	102	5510	11.0	12.4	24.0	13.0
	110	5550	10.8	12.2	24.0	13.2
	134	5670	10.7	12.1	24.0	13.3
3	151	5755	10.6	12.0	30.0	19.4
	159	5795	10.6	12.0	30.0	19.4

Maximum [dBm]:	20 MHz:	13.3	40 MHz:	12.0
Maximum [dBm]:	20 MHz:	14.7	40 MHz:	13.4

3.1.8 Measurement Plot (showing the highest value, "worst case")

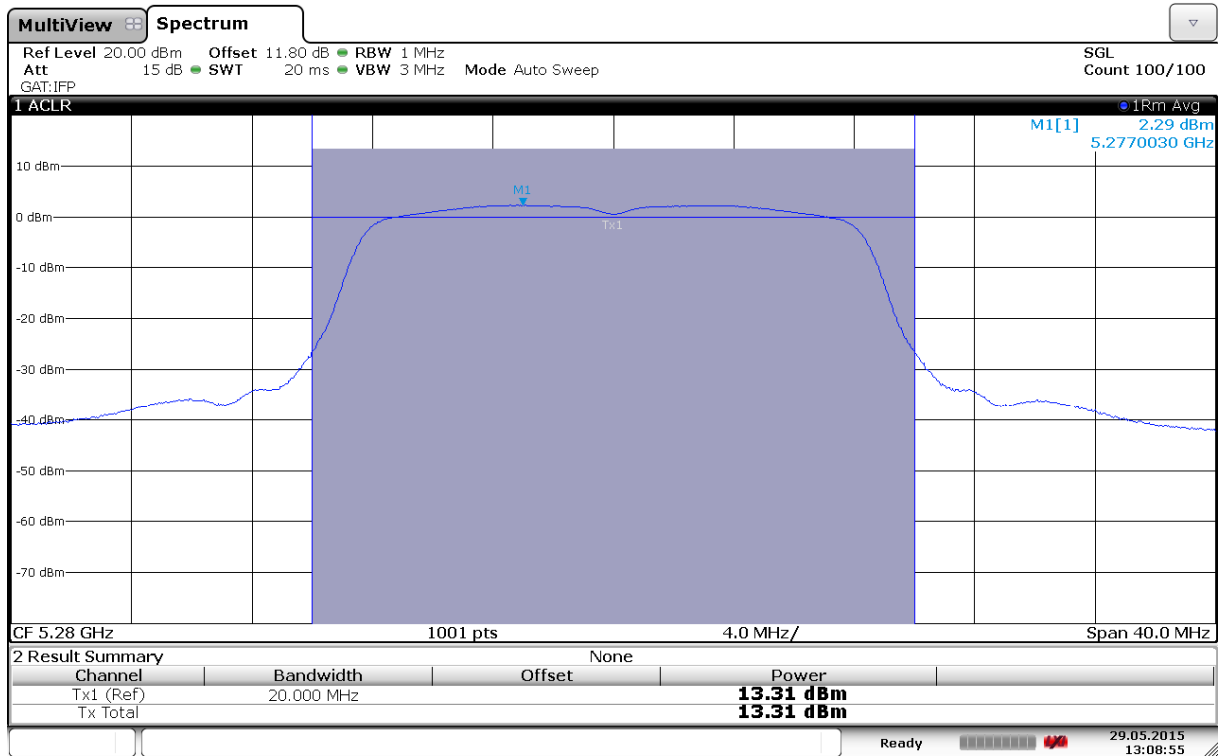

Date: 29.MAY.2015 13:08:55

3.2 Maximum Power Spectral Density

Standard FCC Part 15, Subpart E

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: RMS
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweeptime: coupled
- Marker: Peak
- Trigger: gated mode

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08", method **SA-1**.

3.2.2 Test Requirements / Limits

A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz. This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.



B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-210, A9.2 (1), Band 5150-5250 MHz, indoor operation only:
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-210, A9.2 (2), Band 5250-5350 MHz:
Limit: 11 dBm/MHz.

RSS-210, A9.2 (3), Bands 5470-5600 MHz and 5650-5725 MHz:
Limit: 11 dBm/MHz.

RSS-210, A9.2 (4), Band 5725-5825 MHz:
Limit: 17 dBm/MHz.



3.2.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1002 hPa
 Humidity: 32 %

The antenna gain is excluded in the table.

WLAN a-Mode; 20 MHz; 6 Mbit/s					
UNII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm]	Margin [dB]
1	36	5180	2.1	17.0	14.9
	44	5220	2.1	17.0	14.9
	48	5240	2.0	17.0	15.0
2A	52	5260	2.0	11.0	9.0
	56	5280	2.3	11.0	8.7
	64	5320	1.9	11.0	9.1
2C	100	5500	1.6	11.0	9.4
	116	5580	1.3	11.0	9.7
	140	5700	1.3	11.0	9.7
3	149	5745	1.0	30.0	29.0
	157	5785	1.0	30.0	29.0
	165	5825	1.1	30.0	28.9


WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
UNII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm]	Margin [dB]
1	36	5180	0.6	17.0	16.4
	44	5220	0.4	17.0	16.6
	48	5240	0.4	17.0	16.6
2A	52	5260	0.3	11.0	10.7
	56	5280	0.2	11.0	10.8
	64	5320	0.2	11.0	10.8
2C	100	5500	0.1	11.0	10.9
	116	5580	-0.2	11.0	11.2
	140	5700	-0.3	11.0	11.3
3	149	5745	-0.3	30.0	30.3
	157	5785	-0.2	30.0	30.2
	165	5825	-0.2	30.0	30.2



WLAN n-Mode; 40 MHz; 300.0 Mbit/s					
UNII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm]	Margin [dB]
1	38	5190	-0.2	17.0	17.2
	46	5230	-0.3	17.0	17.3
2A	54	5270	-0.1	11.0	11.1
	62	5310	0.1	11.0	10.9
2C	102	5510	-0.6	11.0	11.6
	110	5550	-0.9	11.0	11.9
	134	5670	-1.3	11.0	12.3
3	151	5755	-1.5	30.0	31.5
	159	5795	-1.2	30.0	31.2

Note: MPSD for subband 3 is measured at 1 MHz bandwidth.

3.2.4 Measurement Plot (showing the highest value, "worst case")

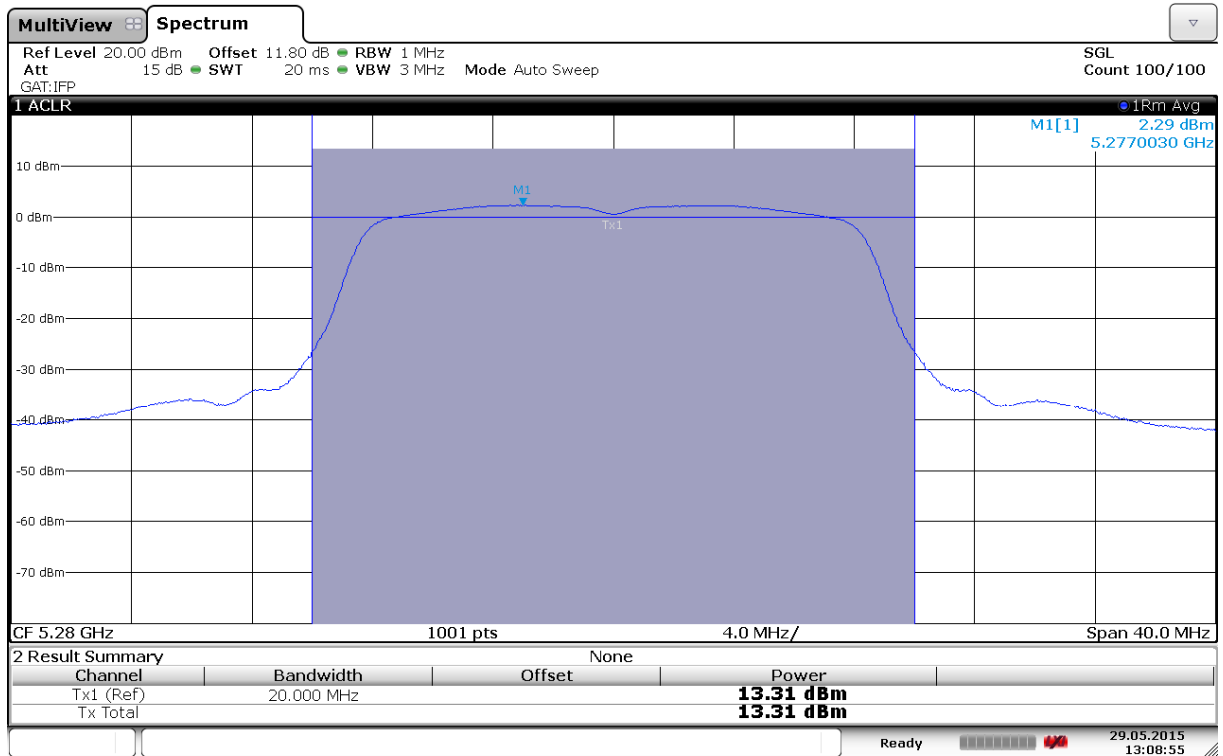

Date: 29.MAY.2015 13:08:55

3.3 Undesirable Emissions / General Field Strength Limits; Restricted Band and Radiated Emission Limits, Band Edge

Standard FCC Part 15, Subpart C & E

The test was performed according to: ANSI C 63.4

3.3.1 Test Description

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.



Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 15 GHz) and a horn antenna (15-26 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 15 GHz but it depends on the emissions found during the test for the modes b and g. Please refer to the results for the used frequency range.

In the frequency range 26 – 40 GHz the measurement was performed conducted.

3.3.2 Test Requirements / Limits

A) FCC

FCC Part 15 Subpart E , §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E , §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E , §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E , §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: –17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.



B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-210, A9.2 (1), Emissions outside the band 5150-5250 MHz, indoor operation only:
Limit: -27 dBm/MHz EIRP outside of the band 5150-5250 MHz.

RSS-210, A9.2 (2), Emissions outside the band 5250-5350 MHz:
Limit: -27 dBm/MHz EIRP outside of the band 5250-5350 MHz.

RSS-210, A9.2 (3), Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:
Limit: -27 dBm/MHz EIRP outside of the band 5470-5725 MHz.
Note: No operation is permitted for the frequency range 5600-5650 MHz.

RSS-210, A9.2 (4), Emissions outside the band 5725-5825 MHz:
Limit: -27 dBm/MHz EIRP outside of the band 5715-5835 MHz and additionally
Limit: -17 dBm/MHz EIRP within the frequency ranges 5715-5725 and 5825-5835 MHz.

C) FCC & IC

FCC Part 15 Subpart E , §15.405 and §15.407 (b)(6,7)
Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. The provisions of §§ 15.203 and 15.205 are included.

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)		Calculated Limits(dBµV/m @10m)	Limits(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	10	(48.5 – 13.8) + 59.1 dB	107.6 – 72.9
0.49 – 1.705	24000/F(kHz)	30	10	(33.8 – 23.0) + 19.1 dB	52.9 – 42.1
1.705 – 30	30	30	10	29.5 + 19.1 dB	48.6

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
 Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8
 where d is the measurement distance



3.3.3 Test Protocol

Limit types:

RB – Emissions falls into a “Restricted Band” according FCC §§15.205 and 15.209

UE – “Undesirable Emission Limit” according FCC §15.407

BE-RB – Band Edge Limit basing on “Restricted Band Limits”

BE-RB – Band Edge Limit basing on “Undesirable Emission Limit”

Temperature: 22–26 °C

Air Pressure: 1008–1022 hPa

Humidity: 32–36 %

3.3.3.1 Radiated spurious and undesired emissions

WLAN a-Mode; 20 MHz; 6 Mbit/s				Applied duty cycle correction (AV) [dB]:				0.2
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
36	5180	5149.5	57.3	PEAK	1000	74.0	16.7	RB
36	5180	5149.5	41.5	AV	1000	54.0	12.5	RB
44	5220	5251.5	55.4	PEAK	1000	68.0	12.6	UE
56	5280	5720.0	48.3	PEAK	1000	68.0	19.7	UE
64	5320	5350.0	58.5	PEAK	1000	74.0	15.5	RB
64	5320	5350.0	42.4	AV	1000	54.0	11.6	RB
100	5500	5469.5	58.1	PEAK	1000	68.0	9.9	UE
100	5500	5456.5	55.2	PEAK	1000	74.0	18.8	RB
100	5500	5469.5	39.9	AV	1000	54.0	14.1	RB
100	5500	5907.5	49.5	PEAK	1000	68.0	18.5	UE
116	5580	5166.5	52.0	PEAK	1000	68.0	16.0	UE
140	5700	5278.0	49.8	PEAK	1000	68.0	18.2	UE
140	5700	5725.5	57.6	PEAK	1000	68.0	10.4	UE
149	5745	5319.5	48.9	PEAK	1000	68.0	19.1	UE
149	5745	5724.0	61.0	PEAK	1000	74.0	13.0	RB

WLAN n-Mode; 20 MHz; 72.2 Mbit/s				Applied duty cycle correction (AV) [dB]:				1.7
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
36	5180	5150.0	51.3	PEAK	1000	74.0	22.7	RB
36	5180	5150.0	38.0	AV	1000	54.0	16.0	RB
44	5220	5250.0	53.1	PEAK	1000	68.0	14.9	UE
56	5280	5249.5	55.5	PEAK	1000	68.0	12.5	UE
64	5320	5350.0	54.3	PEAK	1000	74.0	19.7	RB
64	5320	5350.0	40.3	AV	1000	54.0	13.7	RB
100	5500	5469.5	56.7	PEAK	1000	68.0	11.3	UE
100	5500	5907.5	50.0	PEAK	1000	68.0	18.0	UE
116	5580	5166.0	48.7	PEAK	1000	68.0	19.3	UE
140	5700	5725.5	50.2	PEAK	1000	68.0	17.8	UE
149	5745	5724.5	57.8	PEAK	1000	74.0	16.2	RB

WLAN n-Mode; 40 MHz; 150 Mbit/s				Applied duty cycle correction (AV) [dB]: 2.7				
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin [dB]	Limit Type
38	5190	5150.0	60.2	PEAK	1000	74.0	13.8	RB
38	5190	5150.0	42.1	AV	1000	54.0	11.9	RB
62	5310	5351.0	64.6	PEAK	1000	74.0	9.4	RB
62	5310	5350.0	44.3	AV	1000	54.0	9.7	RB
102	5510	5457.5	57.4	PEAK	1000	74.0	16.6	RB
102	5510	5457.5	42.6	AV	1000	54.0	11.4	RB
102	5510	5470.0	60.7	PEAK	1000	68.0	7.3	UE

Note: No (further) spurious emissions in the range 20 dB below the limit found.

The tests for mode a have been performed in the frequency range 30–26500 MHz, for mode n 20 MHz in the range 1-15 GHz and for mode n 40 MHz in the range 1000-26500 MHz in order to check i.e. for harmonics in respect to the measured conducted output power and because at pre-measurements no significant spurious emissions have been found outside this frequency range.

3.3.3.2 Band Edge

WLAN a-Mode; 20 MHz; 6 Mbit/s					Applied duty cycle correction (AV) [dB]: 0.2					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	55.2	PEAK	1000	74.0	18.8	BE-RB	FCC&IC
	36	5180	5150.0	41.8	AV	1000	54.0	12.2	BE-RB	FCC&IC
2A	64	5320	5350.0	58.5	PEAK	1000	74.0	15.5	BE-RB	FCC&IC
	64	5320	5350.0	42.4	AV	1000	54.0	11.6	BE-RB	FCC&IC
2C	100	5500	5470.0	58.1	PEAK	1000	68.0	9.9	BE-UE	FCC&IC
	140	5700	5725.0	57.6	PEAK	1000	68.0	10.4	BE-UE	FCC&IC
3	149	5745	5725.0	61.0	PEAK	1000	78.0	17.0	BE-UE	FCC&IC
	165	5825	5850.0	56.1	PEAK	1000	78.0	21.9	BE-UE	FCC

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					Applied duty cycle correction (AV) [dB]: 1.7					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	51.3	PEAK	1000	74.0	22.7	BE-RB	FCC&IC
	36	5180	5150.0	38.0	AV	1000	54.0	16.0	BE-RB	FCC&IC
2A	64	5320	5350.0	54.3	PEAK	1000	74.0	19.7	BE-RB	FCC&IC
	64	5320	5350.0	40.3	AV	1000	54.0	13.7	BE-RB	FCC&IC
2C	100	5500	5470.0	56.7	PEAK	1000	68.0	11.4	BE-UE	FCC&IC
	140	5700	5725.0	50.2	PEAK	1000	68.0	17.8	BE-UE	FCC&IC
3	149	5745	5725.0	57.8	PEAK	1000	78.0	20.2	BE-UE	FCC&IC
	165	5825	5850.0	51.2	PEAK	1000	78.0	26.8	BE-UE	FCC

WLAN n-Mode; 40 MHz; 150 Mbit/s					Applied duty cycle correction (AV) [dB]: 2.7					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	60.2	PEAK	1000	74.0	13.8	BE-RB	FCC&IC
	38	5190	5150.0	42.1	AV	1000	54.0	11.9	BE-RB	FCC&IC
2A	62	5310	5350.0	62.39	PEAK	1000	74.0	11.6	BE-RB	FCC&IC
	62	5310	5350.0	44.2	AV	1000	54.0	9.8	BE-RB	FCC&IC
2C	102	5510	5470.0	60.7	PEAK	1000	68.0	7.3	BE-UE	FCC&IC
	134	5670	5725.0	51.6	PEAK	1000	68.0	16.4	BE-UE	FCC&IC
3	151	5755	5725.0	57.7	PEAK	1000	78.0	20.3	BE-UE	FCC&IC
	159	5795	5850.0	48.6	PEAK	1000	78.0	29.4	BE-UE	FCC

Note: Tests at the Band Edges are implicitly performed together with the undesired emission tests, which are performed as radiated test. The measurements are performed up to the band edges using the bandwidth specified for the undesired emissions.


If this test is passed, no additional test especially at the band edges will be performed, e.g. applying a reduced bandwidth or carrying out tests using the marker-delta method. Otherwise, the results will be reported in this sub-clause.

Band Edge tests are always performed and reported when the band directly adjacent to a Restricted Band.

Spurious emissions in the range 20 dB below the limit need not to be reported.

3.3.4 Measurement Plot Band Edge (showing the highest value, "worst case")

a) at restricted band

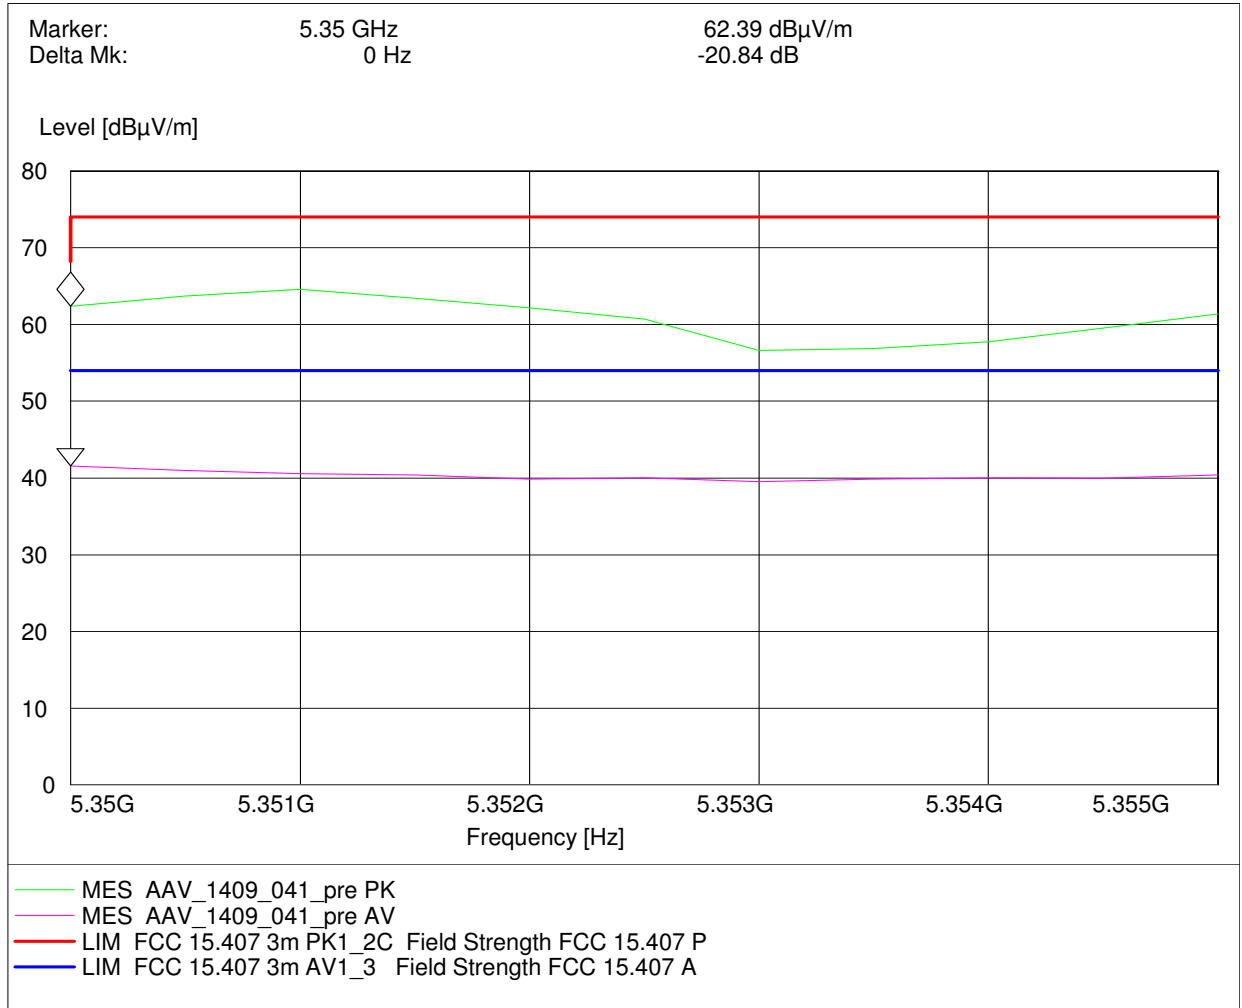



Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
<i>Manufacturer:</i>	Rohde & Schwarz GmbH & Co.KG
<i>Description:</i>	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31



Single Devices for Auxiliary Equipment for Conducted emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2014/06/18	2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/03/31
	DAkKS Calibration		2015/03/30	2017/03/31
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28
	DAkks Calibration		2015/03/30	2017/03/31



Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170	BBHA9170262	
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/12/18 2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD Calibration		2014/11/27 2017/11/27
Standard Gain / Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH



Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID: Lab 2, Lab 3
Manufacturer: see single devices
Description: Single Devices for various Test Equipment
Type: various
Serial Number: none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2, Lab 3
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standart calibration		2015/01/21 2018/01/19
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG



Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer		
EMI Receiver / Spectrum ESR 7 Analyser		101424	Rohde & Schwarz		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Initial Factory Calibration		2014/11/13	2016/11/12	
Personal Computer	Dell	30304832059	Dell		
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG		
			<i>Calibration Details</i>		
	Standard calibration		2014/05/13	2015/05/10	
	Standard calibration		2015/05/11	2016/05/10	
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG		
			<i>Calibration Details</i>		
	Standard calibration		2014/05/13	2015/05/10	
	Standard calibration		2015/05/11	2016/05/10	
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG		
			<i>Calibration Details</i>		
	Standard Calibration		2014/06/24	2017/06/23	
Spectrum Analyser	FSW 43	103779	Rohde & Schwarz		
			<i>Calibration Details</i>		
	Initial Factory Calibration		2014/11/17	2016/11/16	
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG		
			<i>Calibration Details</i>		
			Standard Calibration	2014/01/07	2016/01/31
			<i>HW/SW Status</i>	<i>Date of Start</i>	<i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03		



Test Equipment Radio Lab Test Equipment

Lab ID: Lab 3
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
	Standard calibration		2015/05/11 2016/05/10
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/03 2015/07/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
	Standard calibration		2015/05/11 2016/05/10
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/12/02 2017/12/01
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/02/12 2015/02/11
	Calibration after reparation		2015/04/02 2017/04/01



Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2, Lab 3
Description: Luftt Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer	
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Luftt Mess- und Regeltechnik GmbH	
<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
Customized calibration			2013/02/07	2015/02/26
Customized calibration			2015/02/27	2017/02/26

Test Equipment T/H Logger 02

Lab ID: Lab 1
Description: Luftt Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer	
ThermoHygro DataloggerOpus10 THI (8152.00) 02 (Environ)	Opus10 THI (8152.00)	7489	Luftt Mess- und Regeltechnik GmbH	
<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
Customized calibration			2013/02/07	2015/02/26
Customized calibration			2015/02/27	2017/02/26

Test Equipment T/H Logger 03

Lab ID: Lab 3
Description: Luftt Opus10
Serial Number: 7482

Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer	
ThermoHygro DataloggerOpus10 THI (8152.00) 03 (Environ)	Opus10 THI (8152.00)	7482	Luftt Mess- und Regeltechnik GmbH	
<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
Customized calibration			2013/02/07	2015/02/26
Customized calibration			2015/02/27	2017/02/26



Test Equipment T/H Logger 12

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 12 (Environ)		12482	Lufft Mess- und Regeltechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/01/07 2015/03/09
	Customized calibration		2015/03/10 2017/03/09

Test Equipment Temperature Chamber 05

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber VT4002
Type: Vötsch
Serial Number: see single devices


Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2014/03/11 2016/03/10

4 Photo Report

Please refer to external report.

5 Setup Drawings

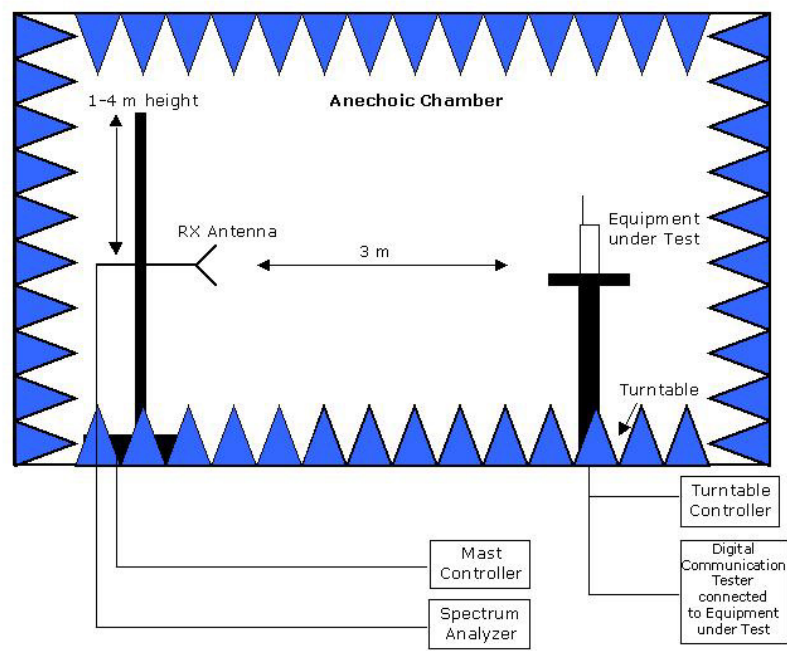

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.