

TEST REPORT

Product : Active Stylus
Trade mark : DELL
Model/Type reference : SPEN-DEL-02
Serial Number : N/A
Report Number : EED32M00002001
FCC ID : 2ABWESPEN-DEL-02
Date of Issue : Apr. 13, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Sunwoda Electronic Co., Ltd.

**1/F, 2/F of Area A&B&D, 3-9F, Administration Building,
No.2, Yihe Rd, Shilong Community, Shiyuan Street,
Bao' an District, Shenzhen, China**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested By:

mark.chen.

Mark Chen

Reviewed by:

Ware Xin

Ware Xin

Date:

Apr. 13, 2020

Compiled by:

Smile Zhong

Smile Zhong

Approved by:

Sam Chuang

Sam Chuang

Check No.:3096308653



2 Version

Version No.	Date	Description
00	Apr. 13, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
EUT DUTY CYCLE.....	14
Appendix A): 6dB Occupied Bandwidth.....	15
Appendix B): Conducted Peak Output Power.....	19
Appendix C): Band-edge for RF Conducted Emissions.....	22
Appendix D): RF Conducted Spurious Emissions.....	25
Appendix E): Power Spectral Density.....	30
Appendix F): Antenna Requirement.....	33
Appendix G): AC Power Line Conducted Emission.....	34
Appendix H): Restricted bands around fundamental frequency (Radiated).....	37
Appendix I) Radiated Spurious Emissions.....	46
PHOTOGRAPHS OF TEST SETUP	50
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	53

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

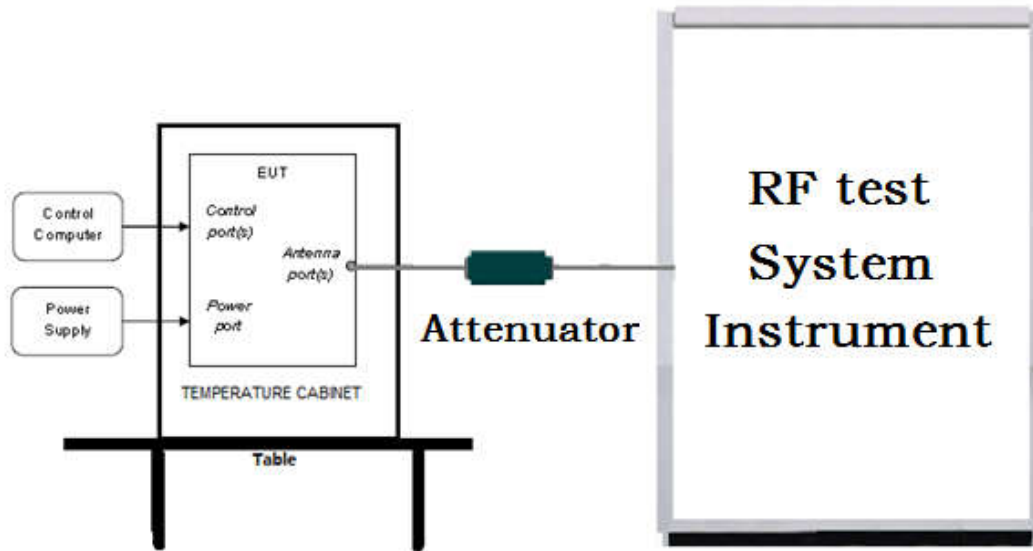

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

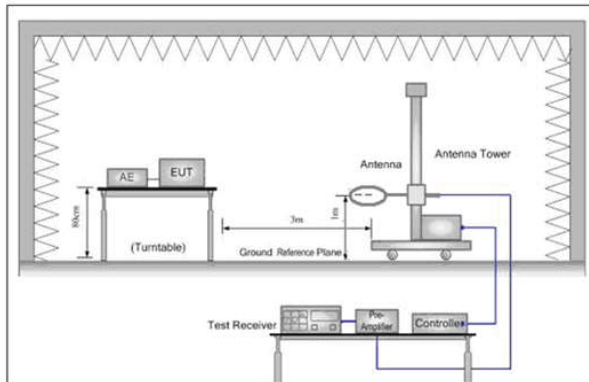


Figure 1. Below 30MHz

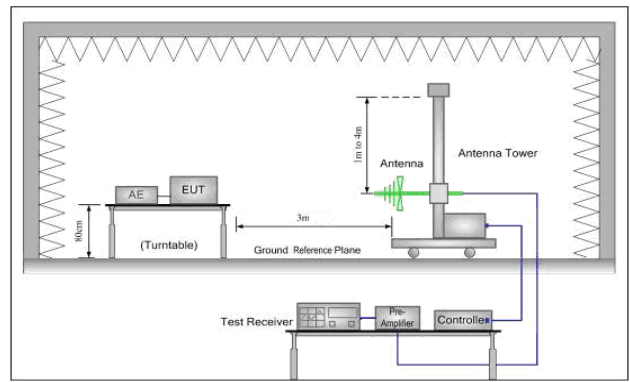


Figure 2. 30MHz to 1GHz

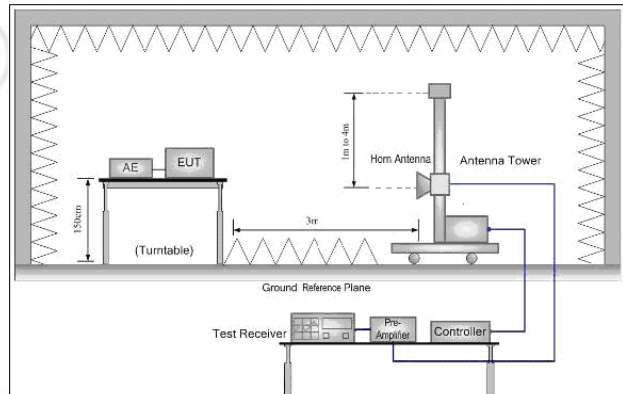


Figure 3. Above 1GHz

6 General Information

6.1 Client Information

Applicant:	Sunwoda Electronic Co., Ltd.
Address of Applicant:	1/F, 2/F of Area A&B&D, 3-9F, Administration Building, No.2, Yihe Rd, Shilong Community, Shiyao Street, Bao' an District, Shenzhen, China
Manufacturer:	Sunwoda Electronic Co., Ltd.
Address of Manufacturer:	1/F, 2/F of Area A&B&D, 3-9F, Administration Building, No.2, Yihe Rd, Shilong Community, Shiyao Street, Bao' an District, Shenzhen, China
Factory:	Shenzhen Sunwoda Intelligent Hardware Co., Ltd.
Address of Factory:	101, No. 6-6, Yanshan Road, Yanchuan Community, Yanluo Street, Bao'an District, Shenzhen City, Guangdong Province, P.R. China

6.2 General Description of EUT

Product Name:	Active Stylus	
Model No.(EUT):	SPEN-DEL-02	
Trade mark:	DELL	
EUT Supports Radios application:	5.0 BLE Single mode	
Power Supply:	Li-ion Cell Battery	30mAh 3.8V
Sample Received Date:	Jan. 03, 2020	
Sample tested Date:	Jan. 03, 2020 to Mar. 18, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	5.0						
Modulation Type:	GFSK						
Number of Channel:	40						
Test Power Grade:	Default						
Test Software of EUT:	smartsnippets_toolbox_v5.0.10.2434_windows						
Antenna Type and Gain:	Type: Chip antenna Gain:0.59 dBi						
Test Voltage:	DC 3.8V						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019 02-17-2020	02-29-2020 02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019 02-17-2020	02-29-2020 02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	03-01-2019 02-17-2020	02-29-2020 02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019 02-17-2020	02-29-2020 02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019 02-17-2020	02-29-2020 02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRIALOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESC17	100938-003	10-21-2019	10-20-2020
Multi device Controller	matur	NCD/070/107 11112	---	---	---
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BLE	0.3876	0.624433	62.07%

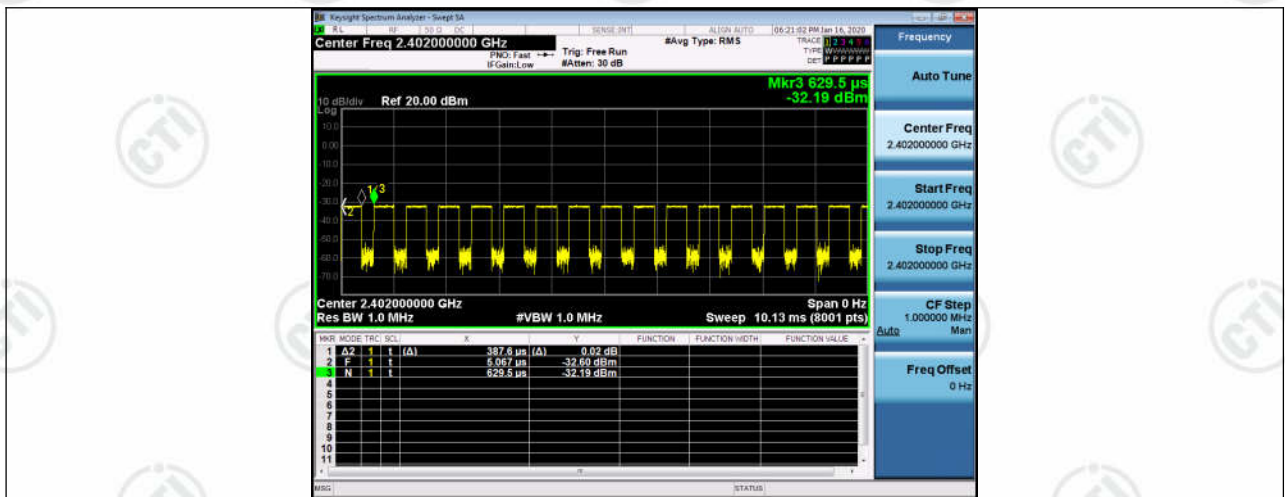

Appendix A): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------

Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01 , section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth.
4. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup



Test Result

Mode	Channel	6dB Bandwidth [MHz]	Verdict
BLE	LCH	0.6971	PASS
BLE	MCH	0.7033	PASS
BLE	HCH	0.7157	PASS

Mode	Channel	99% OBW[MHz]	Verdict
BLE	LCH	1.0769	PASS
BLE	MCH	1.0969	PASS
BLE	HCH	1.0940	PASS

Test Graphs
6dB Bandwidth

Graphs	
LCH	<p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 19.6 dB</p> <p>Ref: 0.00 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0988 MHz</p> <p>Total Power -7.80 dBm</p> <p>Transmit Freq Error 15.592 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 697.1 kHz</p> <p>x dB -6.00 dB</p>
MCH	<p>Center Freq 2.440000000 GHz</p> <p>Center Freq: 2.440000000 GHz</p> <p>Ref Offset: 19.77 dB</p> <p>Ref: 0.00 dBm</p> <p>Center 2.44 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.1152 MHz</p> <p>Total Power -8.16 dBm</p> <p>Transmit Freq Error 17.032 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 703.3 kHz</p> <p>x dB -6.00 dB</p>
HCH	<p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 19.77 dB</p> <p>Ref: 0.00 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.1115 MHz</p> <p>Total Power -8.24 dBm</p> <p>Transmit Freq Error 16.183 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 715.7 kHz</p> <p>x dB -6.00 dB</p>

99%OBW

Graphs	
LCH	<p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 20 dB</p> <p>Ref Offset 19.6 dB Ref 0.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0769 MHz</p> <p>Total Power -7.73 dBm</p> <p>Transmit Freq Error 13.281 kHz OBW Power 99.00 % x dB Bandwidth 682.4 kHz x dB -6.00 dB</p>
MCH	<p>Center Freq 2.440000000 GHz</p> <p>Center Freq: 2.440000000 GHz Trig: Free Run #Atten: 20 dB</p> <p>Ref Offset 19.77 dB Ref 0.00 dBm</p> <p>Center 2.44 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0969 MHz</p> <p>Total Power -8.08 dBm</p> <p>Transmit Freq Error 12.470 kHz OBW Power 99.00 % x dB Bandwidth 679.1 kHz x dB -6.00 dB</p>
HCH	<p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 20 dB</p> <p>Ref Offset 19.77 dB Ref 0.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0940 MHz</p> <p>Total Power -8.23 dBm</p> <p>Transmit Freq Error 13.036 kHz OBW Power 99.00 % x dB Bandwidth 677.6 kHz x dB -6.00 dB</p>

Appendix B): Conducted Peak Output Power

Test Limit

According to §15.247(b) and RSS-247 section 5.4(d)

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation
-------	---

Test Procedure

Test method Refer as KDB 558074 D01 , section 9.1.2.

1. The EUT RF output connected to spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows:
 - a) Set the $RBW \geq DTS$ bandwidth.
 - b) Set $VBW \geq [3 \times RBW]$.
 - c) Set $span \geq [3 \times RBW]$.
 - d) Sweep time = auto couple.
 - e) Detector = peak.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use peak marker function to determine the peak amplitude level
4. Measure and record the result in the test report.

Test Setup



Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	-12.444	PASS
BLE	MCH	-12.511	PASS
BLE	HCH	-12.877	PASS

Test Graphs

Graphs	
LCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr1 2.401763 GHz -12.444 dBm Center 2.40200 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Span 25.00 MHz</p>
MCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.44000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.439778 GHz -12.811 dBm Center 2.44000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Span 25.00 MHz</p>
HCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.479791 GHz -12.877 dBm Center 2.48000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Span 25.00 MHz</p>

Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01 , Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup



Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-14.791	-59.942	-34.79	PASS
BLE	HCH	-15.278	-56.179	-35.28	PASS

Test Graphs

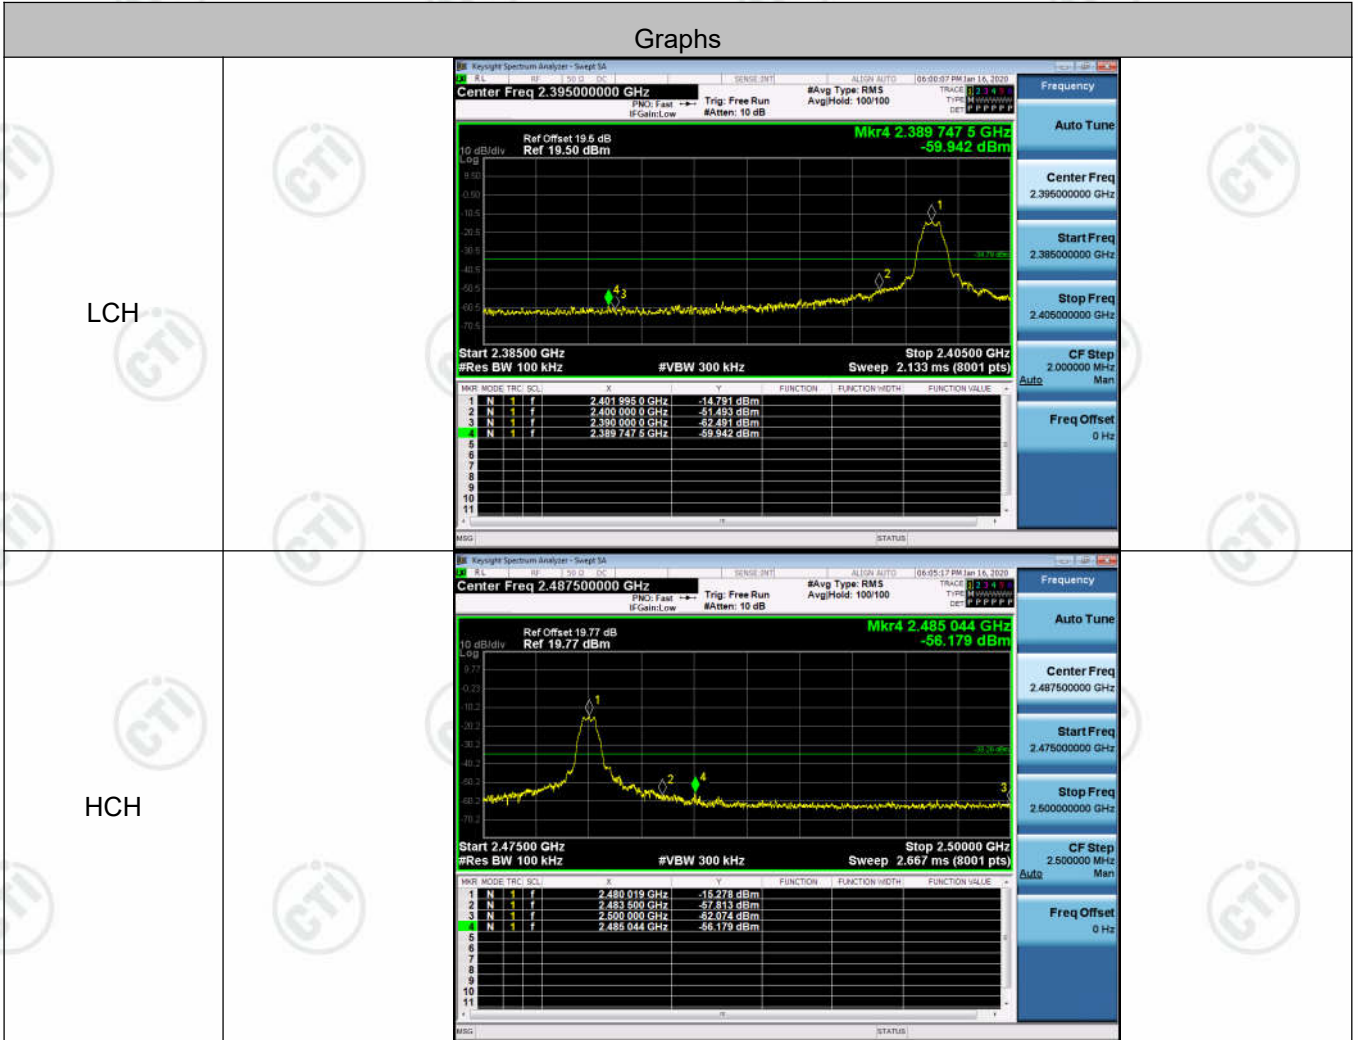

Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01 , Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup





Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	-14.947	<Limit	PASS
BLE	MCH	-15.074	<Limit	PASS
BLE	HCH	-15.316	<Limit	PASS

Test Graphs

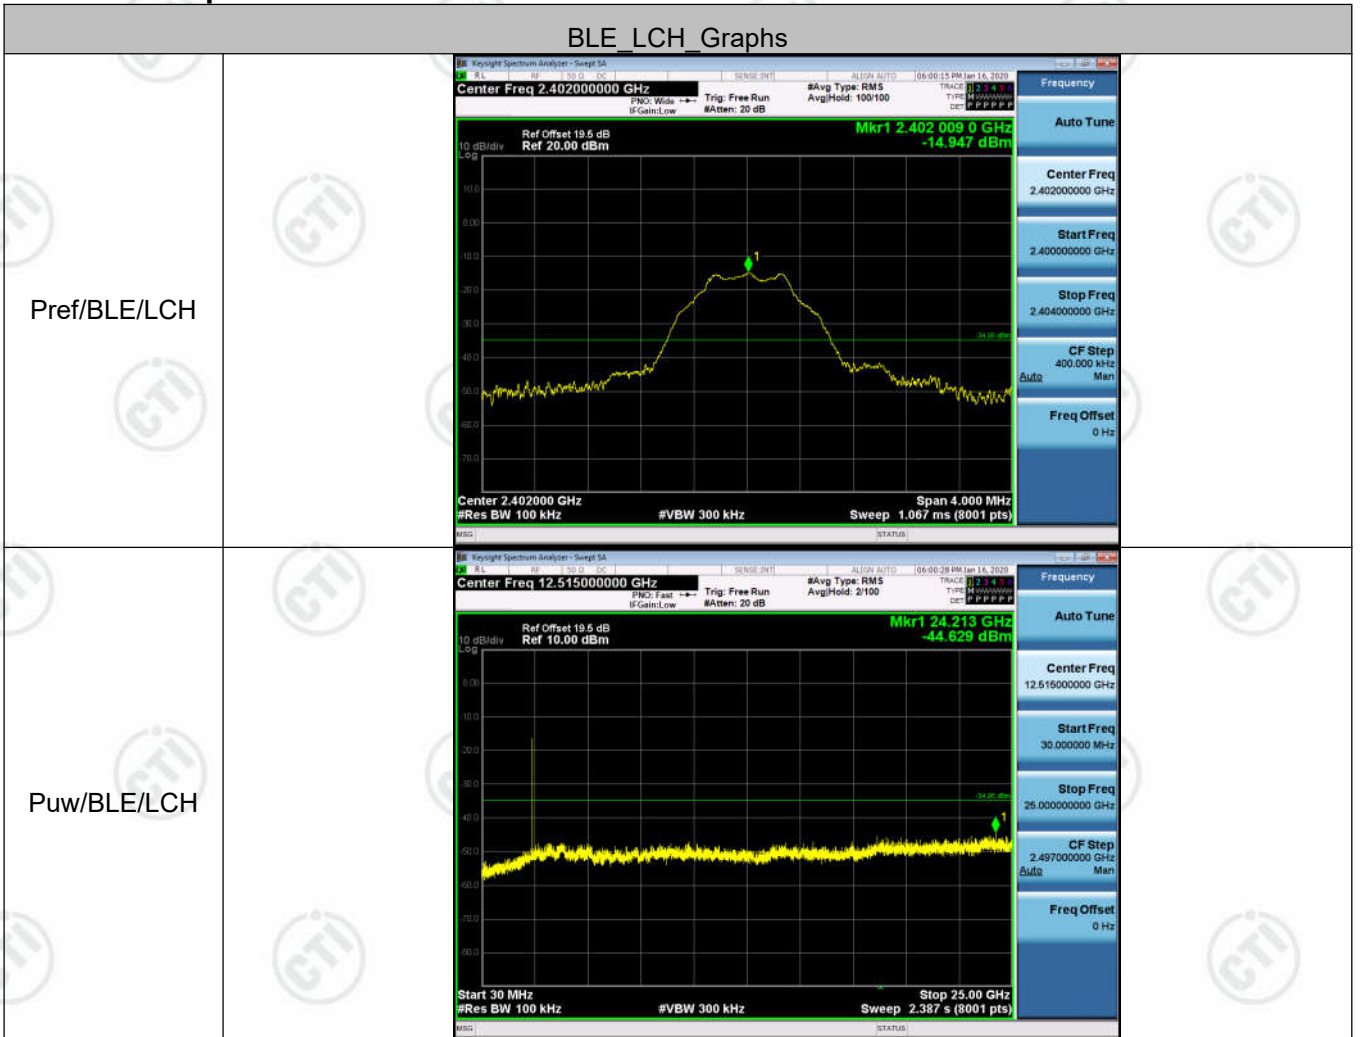

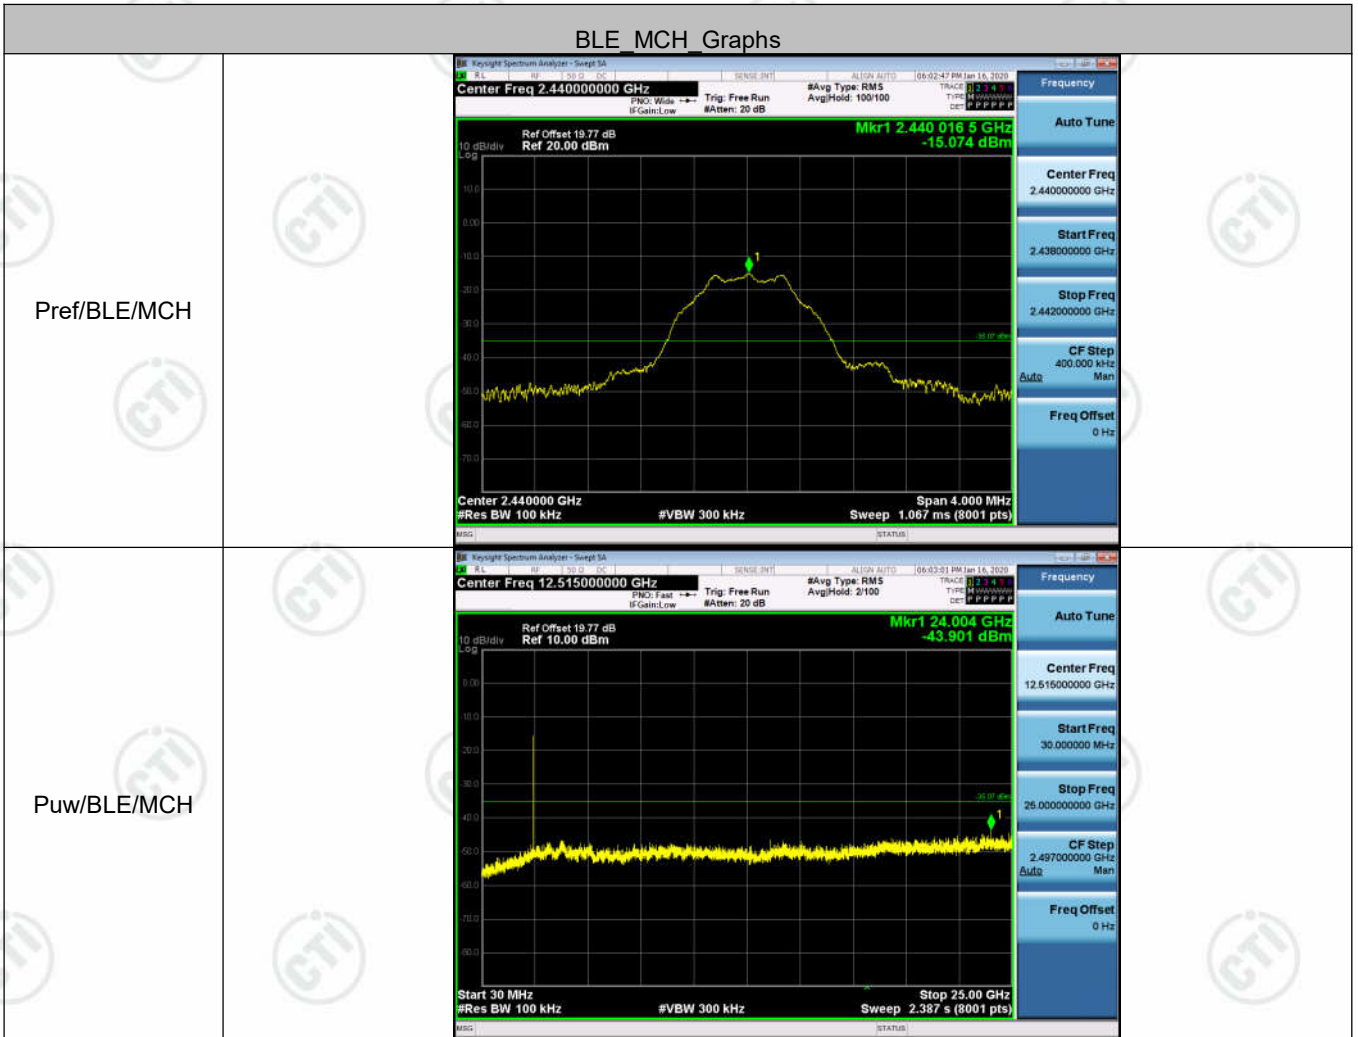

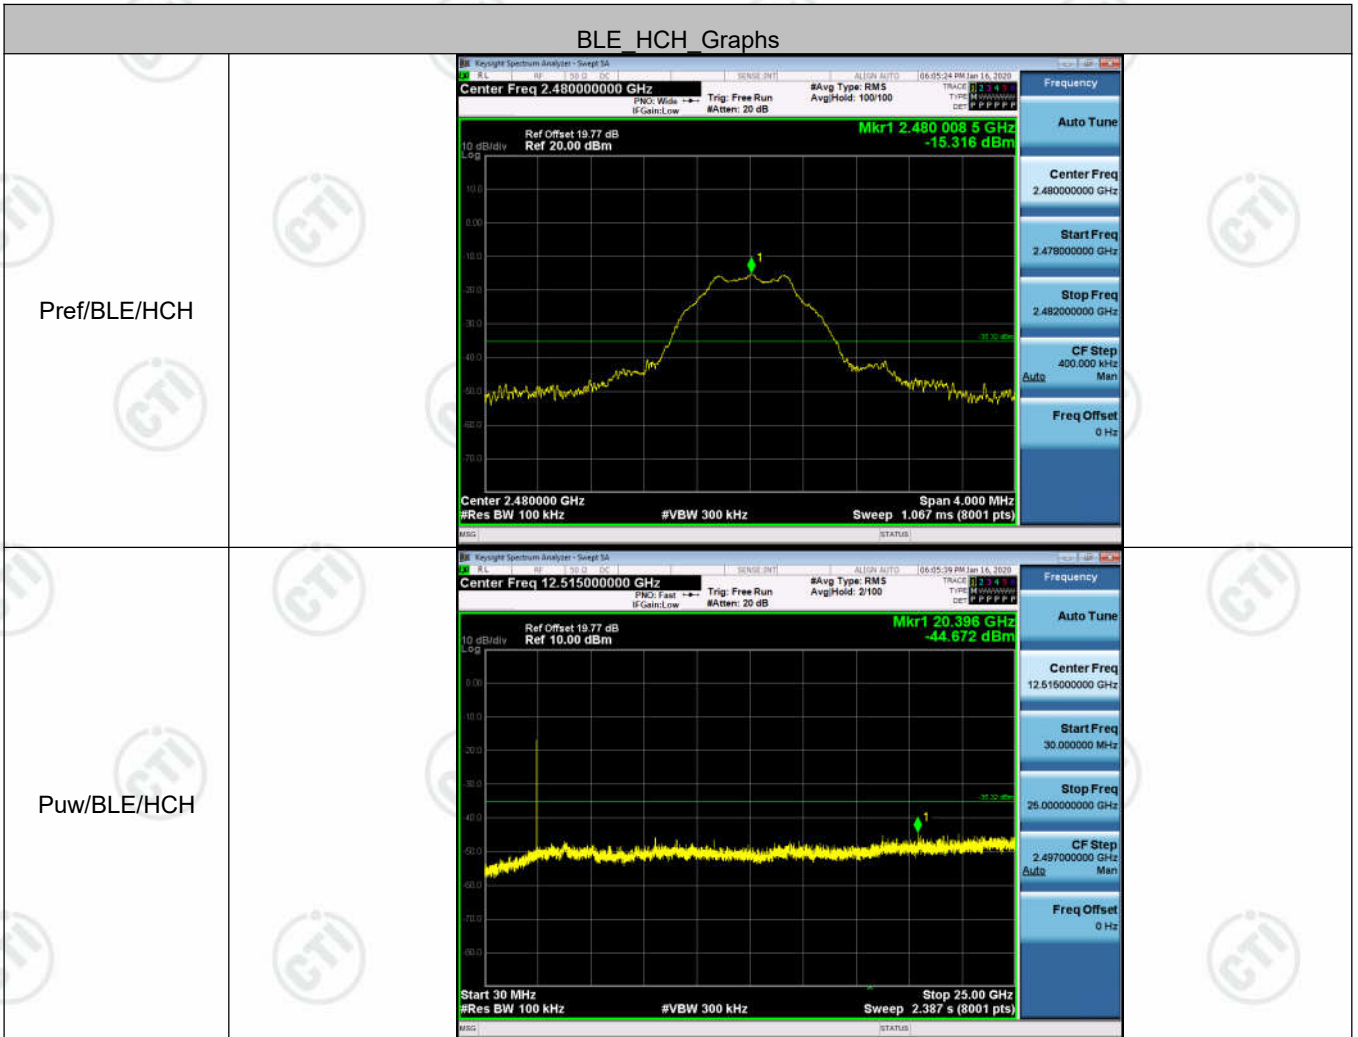

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---


Test Procedure

Test method Refer as KDB 558074 D01 , Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.

Measure and record the result of power spectral density. in the test report.

Test Setup



Result Table

Mode	Channel	PSD [dBm]	Verdict
BLE	LCH	-29.129	PASS
BLE	MCH	-29.455	PASS
BLE	HCH	-29.377	PASS

Test Graphs

Graphs	
LCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 19.5 dB Ref 10.00 dBm Mkr1 2.40198575 GHz -29.129 dBm Span 1.500 MHz Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts)</p>
MCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.44000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.43998519 GHz -29.455 dBm Span 1.500 MHz Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts)</p>
HCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.47998519 GHz -29.377 dBm Span 1.500 MHz Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts)</p>

Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

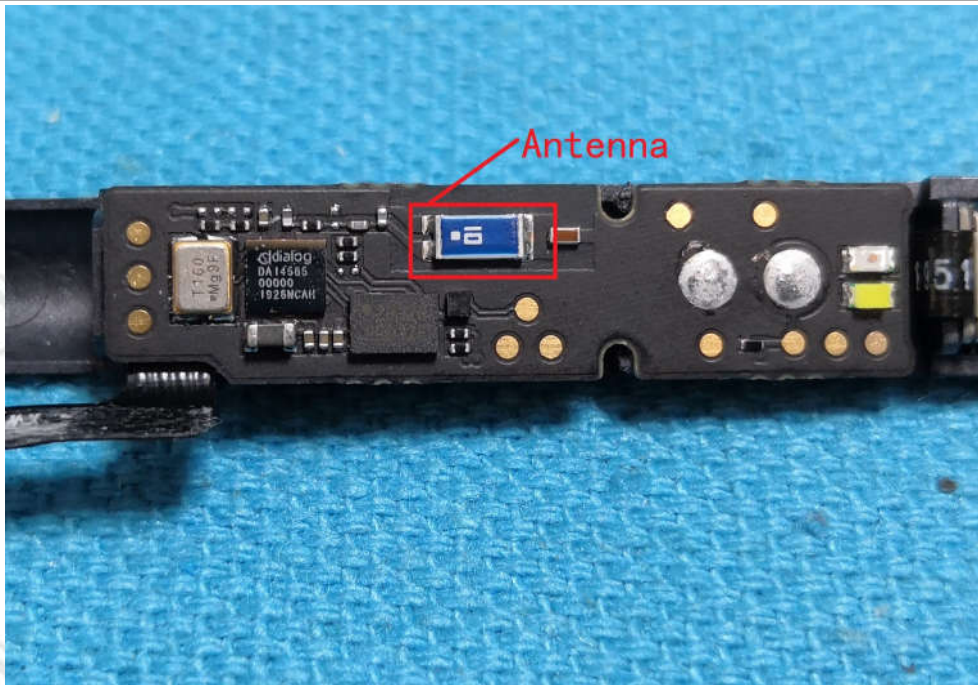

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.59 dBi.

Appendix G): AC Power Line Conducted Emission

<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="494 1176 1364 1400"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Product : Active Stylus
Temperature : 24°C


Model/Type reference : SPEN-DEL-02
Humidity : 52%

Live line:

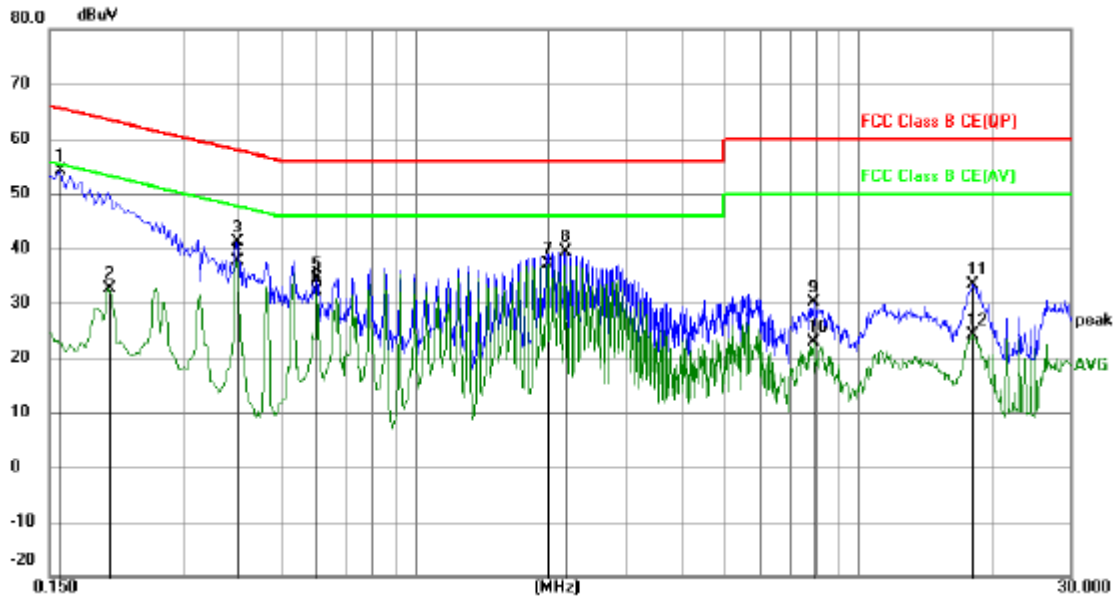

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	44.15	9.98	54.13	65.52	-11.39	QP	
2		0.2040	22.69	10.02	32.71	53.45	-20.74	AVG	
3		0.3975	31.15	10.00	41.15	57.91	-16.76	QP	
4		0.3975	27.51	10.00	37.51	47.91	-10.40	AVG	
5		0.6000	24.17	10.12	34.29	56.00	-21.71	QP	
6		0.6000	21.96	10.12	32.08	46.00	-13.92	AVG	
7	*	1.9950	27.30	9.83	37.13	46.00	-8.87	AVG	
8		2.1840	29.58	9.83	39.41	56.00	-16.59	QP	
9		7.8945	20.36	9.88	30.24	60.00	-29.76	QP	
10		7.8945	13.10	9.88	22.98	50.00	-27.02	AVG	
11		18.0465	23.32	9.95	33.27	60.00	-26.73	QP	
12		18.0465	14.09	9.95	24.04	50.00	-25.96	AVG	

Neutral line:

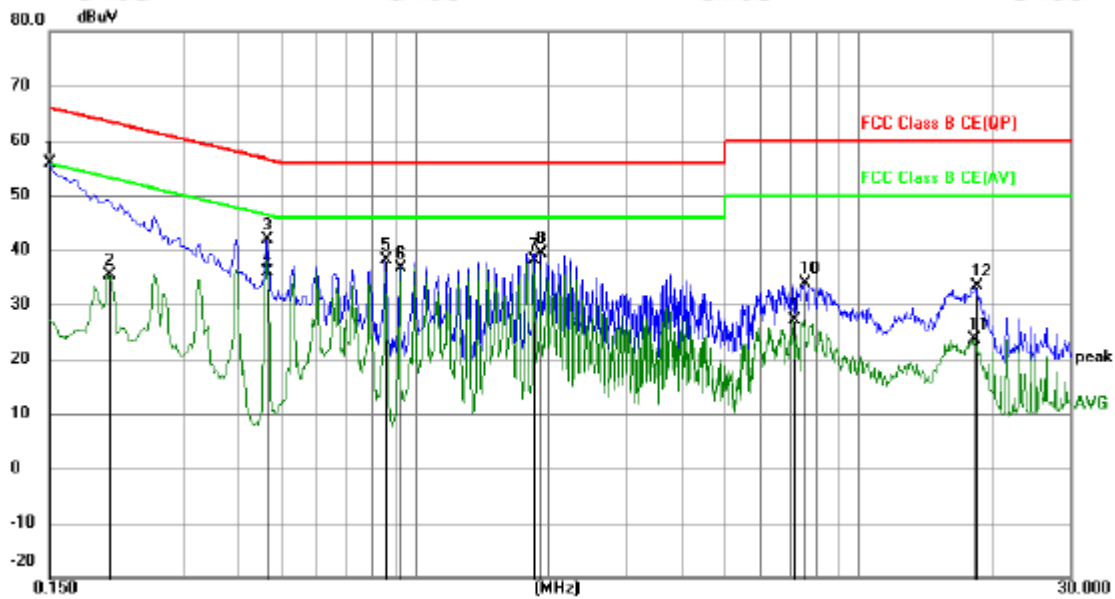

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.94	9.97	55.91	66.00	-10.09	peak	
2		0.2040	25.40	10.02	35.42	53.45	-18.03	AVG	
3		0.4650	31.93	10.00	41.93	56.60	-14.67	peak	
4		0.4661	26.00	10.00	36.00	46.58	-10.58	AVG	
5		0.8610	28.21	9.92	38.13	56.00	-17.87	peak	
6		0.9285	26.66	9.92	36.58	46.00	-9.42	AVG	
7	*	1.8555	28.35	9.84	38.19	46.00	-7.81	AVG	
8		1.9230	29.66	9.84	39.50	56.00	-16.50	peak	
9		7.1565	17.39	9.86	27.25	50.00	-22.75	AVG	
10		7.5615	23.89	9.87	33.76	60.00	-26.24	peak	
11		18.1545	13.72	9.95	23.67	50.00	-26.33	AVG	
12		18.3570	23.48	9.95	33.43	60.00	-26.57	peak	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <p>Test method Refer as KDB 558074 D01 , Section 12.1</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dB μ V/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Test plot as follows:

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

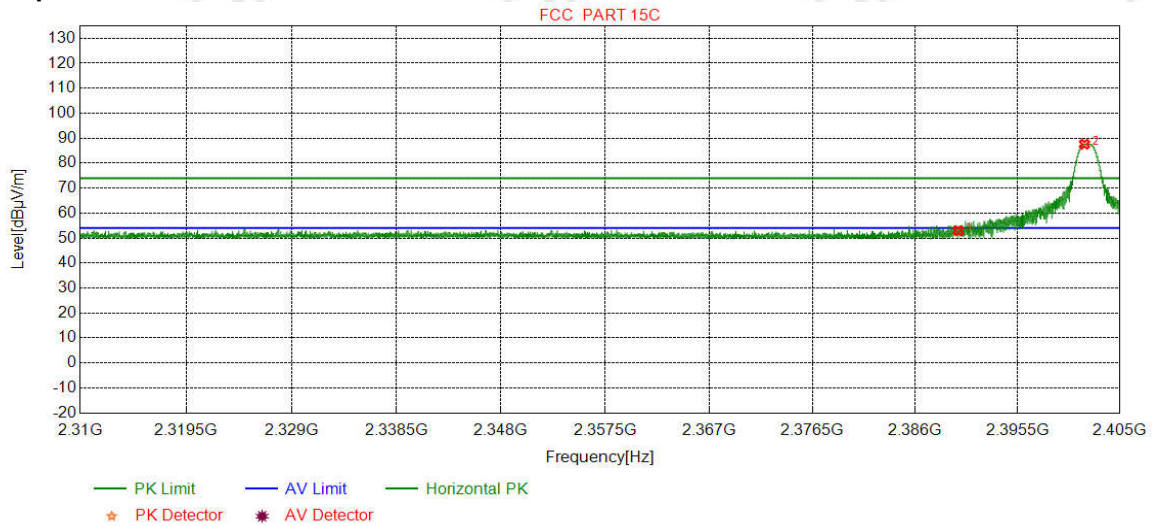

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	50.44	52.94	74.00	21.06	Pass	Horizontal
2	2401.7128	32.26	13.31	-43.12	85.15	87.60	74.00	-13.60	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

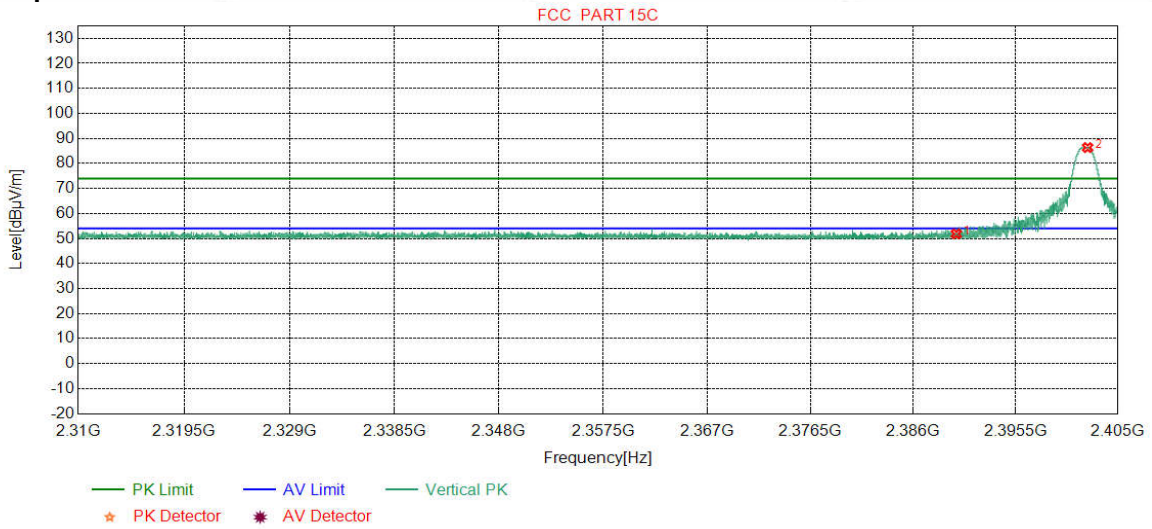

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	49.36	51.86	74.00	22.14	Pass	Vertical
2	2402.1941	32.26	13.31	-43.12	83.89	86.34	74.00	-12.34	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

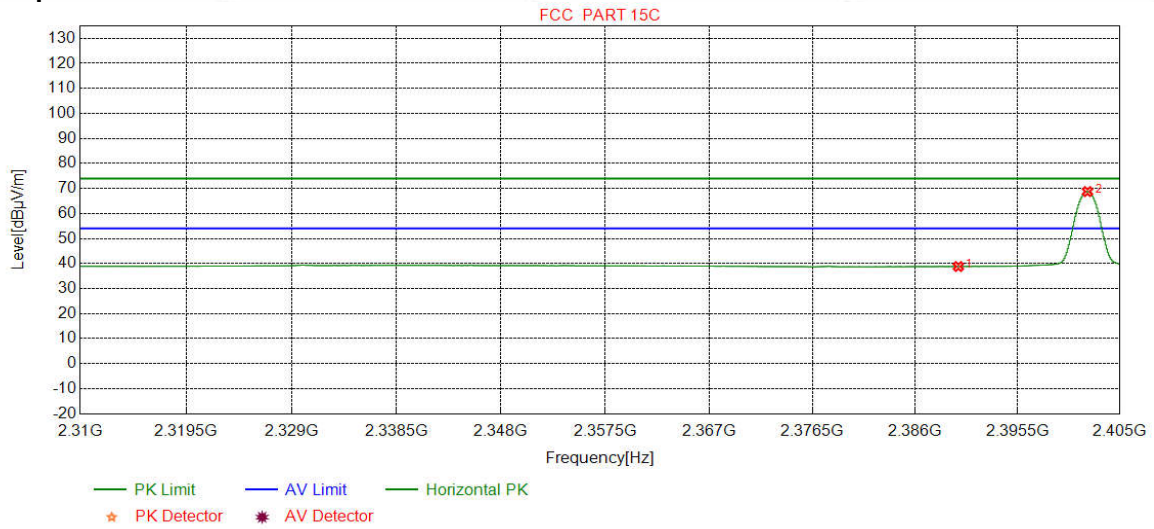

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.29	38.79	54.00	15.21	Pass	Horizontal
2	2401.9978	32.26	13.31	-43.12	66.31	68.76	54.00	-14.76	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

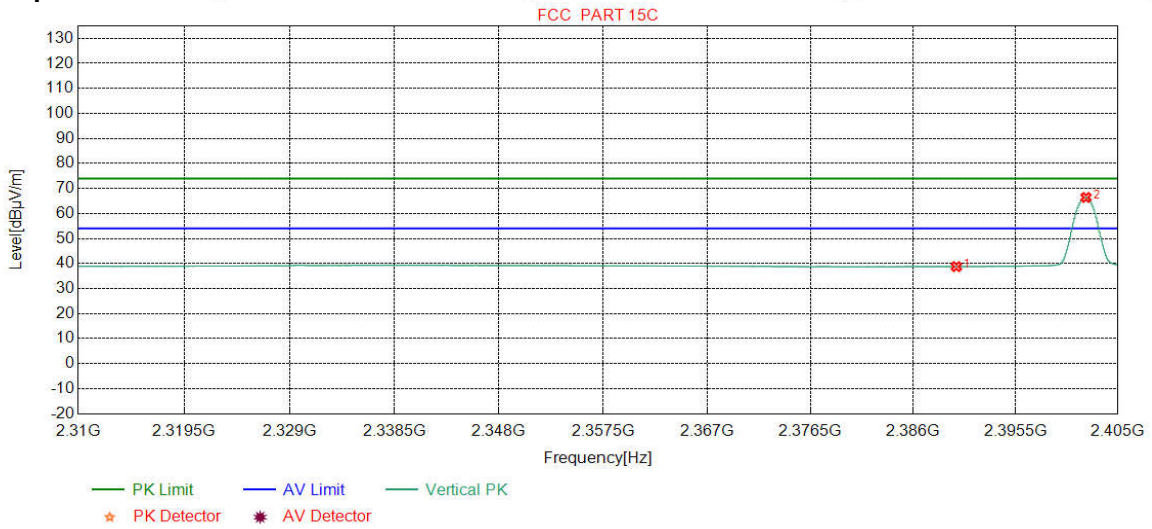

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.27	38.77	54.00	15.23	Pass	Vertical
2	2402.0421	32.26	13.31	-43.12	63.97	66.42	54.00	-12.42	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

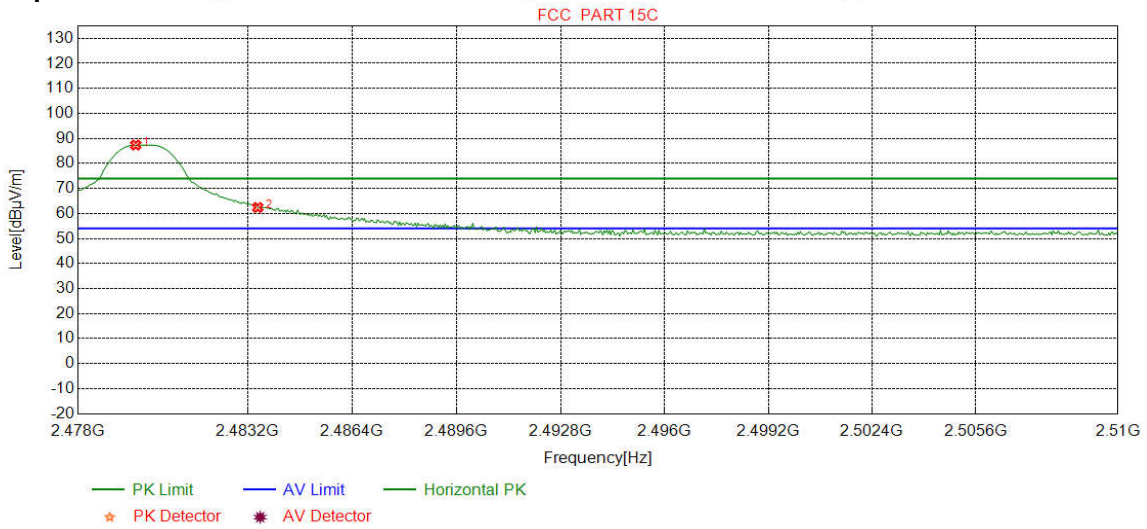

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.7622	32.37	13.39	-43.10	84.68	87.34	74.00	-13.34	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	59.74	62.39	74.00	11.61	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

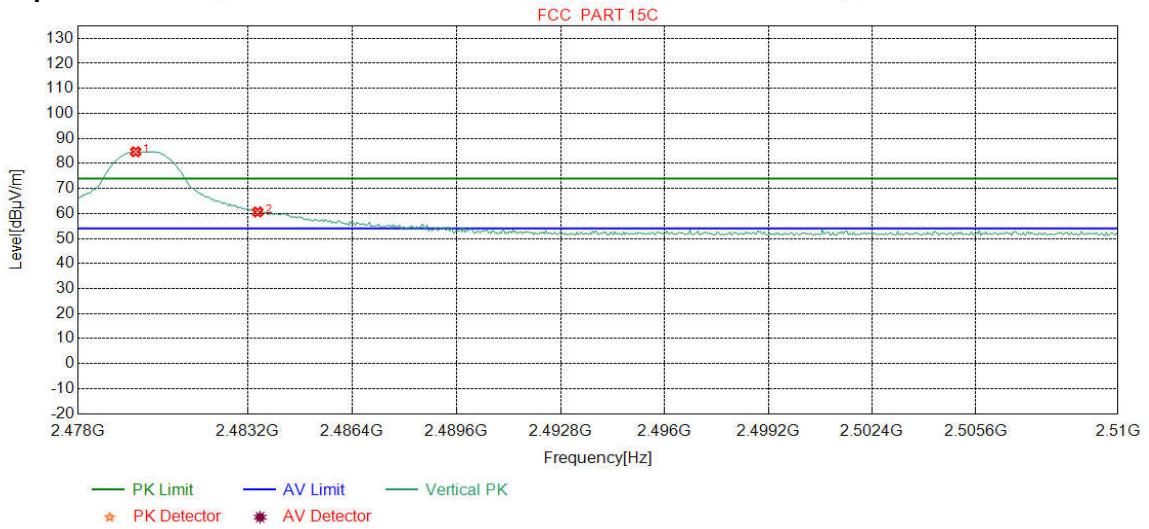

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.7622	32.37	13.39	-43.10	82.01	84.67	74.00	-10.67	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	57.95	60.60	74.00	13.40	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

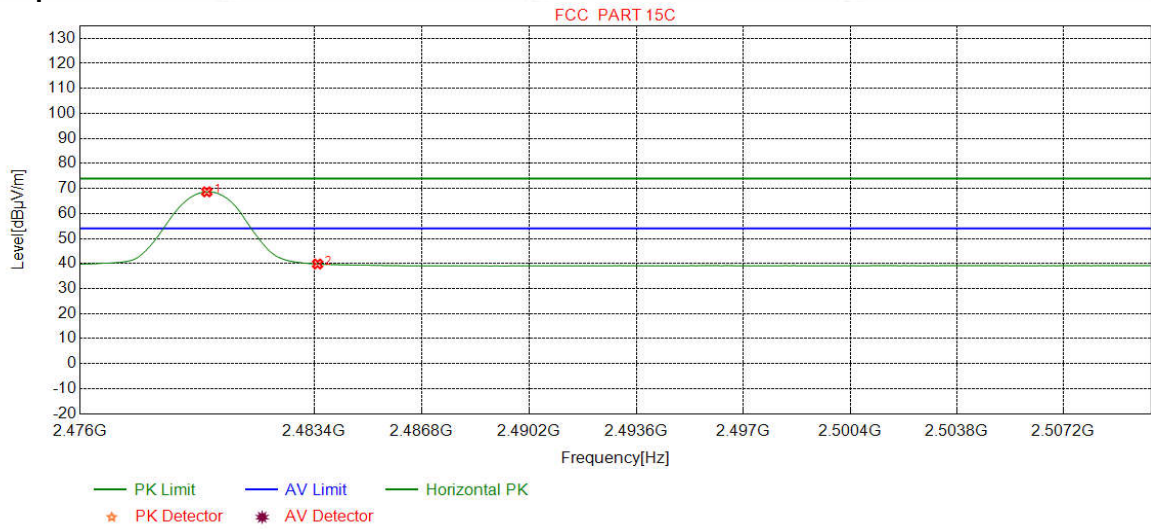

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	66.00	68.66	54.00	-14.66	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	37.17	39.82	54.00	14.18	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

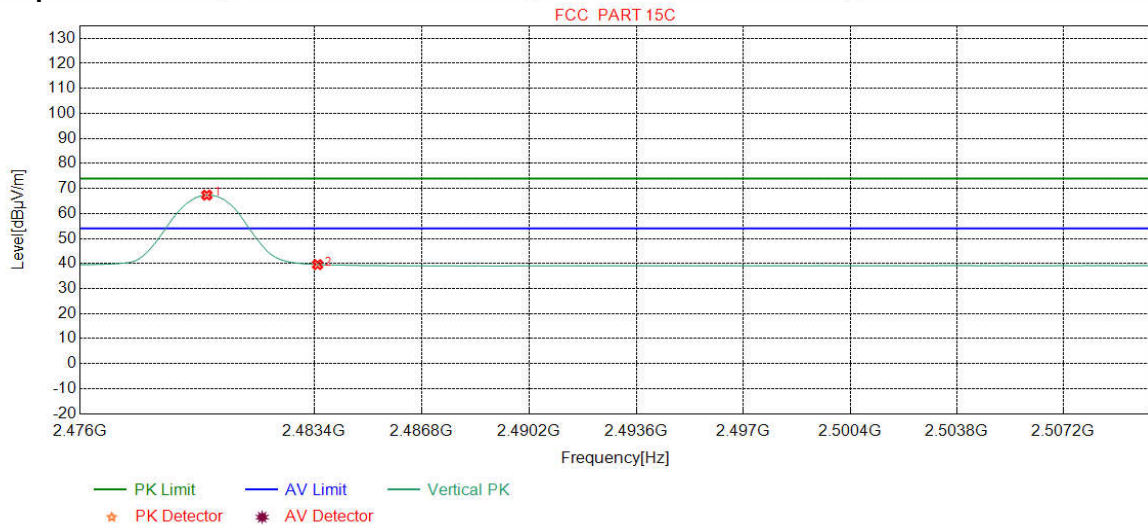

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	64.68	67.34	54.00	-13.34	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	36.91	39.56	54.00	14.44	Pass	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Appendix I) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:
 Test method Refer as KDB 558074 D01 , Section 12.1

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Mode:		BLE GFSK Transmitting					Channel:		2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	48.0438	13.20	0.78	-31.96	43.28	25.30	40.00	14.70	Pass	H	PK
2	71.8112	8.66	0.97	-32.03	45.89	23.49	40.00	16.51	Pass	H	PK
3	202.1922	10.96	1.68	-31.91	54.37	35.10	43.50	8.40	Pass	H	PK
4	306.4776	13.34	2.08	-31.72	51.92	35.62	46.00	10.38	Pass	H	PK
5	528.0478	17.56	2.75	-31.91	47.74	36.14	46.00	9.86	Pass	H	PK
6	594.6935	18.89	2.92	-31.72	45.90	35.99	46.00	10.01	Pass	H	PK
7	48.0438	13.20	0.78	-31.96	42.29	24.31	40.00	15.69	Pass	V	PK
8	72.0052	8.62	0.97	-32.02	49.94	27.51	40.00	12.49	Pass	V	PK
9	156.0156	7.76	1.46	-31.99	49.94	27.17	43.50	16.33	Pass	V	PK
10	291.2471	13.02	2.03	-31.81	53.10	36.34	46.00	9.66	Pass	V	PK
11	483.3263	16.73	2.62	-31.89	45.52	32.98	46.00	13.02	Pass	V	PK
12	618.0728	19.14	2.96	-31.98	42.45	32.57	46.00	13.43	Pass	V	PK

Transmitter Emission above 1GHz

Mode:		BLE GFSK Transmitting					Channel:			2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1591.4591	29.00	3.06	-42.91	52.94	42.09	74.00	31.91	Pass	H	PK	
2	2130.9131	31.88	3.62	-43.17	58.47	50.80	74.00	23.20	Pass	H	PK	
3	4804.0000	34.50	4.55	-42.80	55.61	51.86	74.00	22.14	Pass	H	PK	
4	7206.0000	36.31	5.81	-42.16	49.86	49.82	74.00	24.18	Pass	H	PK	
5	9608.0000	37.64	6.63	-42.10	47.48	49.65	74.00	24.35	Pass	H	PK	
6	12010.0000	39.31	7.60	-41.90	46.07	51.08	74.00	22.92	Pass	H	PK	
7	1799.0799	30.37	3.32	-42.71	54.46	45.44	74.00	28.56	Pass	V	PK	
8	2130.5131	31.88	3.62	-43.17	58.54	50.87	74.00	23.13	Pass	V	PK	
9	4804.0000	34.50	4.55	-42.80	53.76	50.01	74.00	23.99	Pass	V	PK	
10	7206.0000	36.31	5.81	-42.16	48.38	48.34	74.00	25.66	Pass	V	PK	
11	9608.0000	37.64	6.63	-42.10	49.16	51.33	74.00	22.67	Pass	V	PK	
12	12010.0000	39.31	7.60	-41.90	46.30	51.31	74.00	22.69	Pass	V	PK	

Mode:		BLE GFSK Transmitting					Channel:			2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1065.2065	27.97	2.53	-43.04	56.78	44.24	74.00	29.76	Pass	H	PK	
2	2128.7129	31.88	3.62	-43.17	56.51	48.84	74.00	25.16	Pass	H	PK	
3	4880.0000	34.50	4.80	-42.80	54.21	50.71	74.00	23.29	Pass	H	PK	
4	7320.0000	36.42	5.85	-42.14	48.72	48.85	74.00	25.15	Pass	H	PK	
5	9760.0000	37.70	6.73	-42.10	47.36	49.69	74.00	24.31	Pass	H	PK	
6	12200.0000	39.42	7.67	-41.90	45.85	51.04	74.00	22.96	Pass	H	PK	
7	1598.6599	29.05	3.07	-42.90	53.07	42.29	74.00	31.71	Pass	V	PK	
8	2124.9125	31.87	3.61	-43.17	57.85	50.16	74.00	23.84	Pass	V	PK	
9	4880.0000	34.50	4.80	-42.80	53.16	49.66	74.00	24.34	Pass	V	PK	
10	7320.0000	36.42	5.85	-42.14	49.17	49.30	74.00	24.70	Pass	V	PK	
11	9760.0000	37.70	6.73	-42.10	46.29	48.62	74.00	25.38	Pass	V	PK	
12	12200.0000	39.42	7.67	-41.90	45.65	50.84	74.00	23.16	Pass	V	PK	

Mode:		BLE GFSK Transmitting					Channel:			2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1063.8064	27.96	2.52	-43.03	58.45	45.90	74.00	28.10	Pass	H	PK
2	2126.3126	31.88	3.62	-43.18	56.36	48.68	74.00	25.32	Pass	H	PK
3	4960.0000	34.50	4.82	-42.80	53.92	50.44	74.00	23.56	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	46.34	46.62	74.00	27.38	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	45.87	48.33	74.00	25.67	Pass	H	PK
6	12400.0000	39.54	7.86	-41.90	46.33	51.83	74.00	22.17	Pass	H	PK
7	1595.6596	29.03	3.07	-42.91	55.21	44.40	74.00	29.60	Pass	V	PK
8	2129.7130	31.88	3.62	-43.17	61.20	53.53	74.00	20.47	Pass	V	PK
9	4960.0000	34.50	4.82	-42.80	50.72	47.24	74.00	26.76	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	48.38	48.66	74.00	25.34	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	47.06	49.52	74.00	24.48	Pass	V	PK
12	12400.0000	39.54	7.86	-41.90	46.36	51.86	74.00	22.14	Pass	V	PK

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.