

*FCC PART 15, SUBPART B and C; ICES-003, RSS-210 & RSS-GEN  
TEST REPORT*

*for*  
**EAS system**

**Model: CPP+380 RF TRX**

Prepared for

Callidus trading, spol. s r.o.  
 Pašerových 1270/1  
 709 00 Ostrava - Mariánské Hory, Česká republika

Prepared by: \_\_\_\_\_

**JAMES ROSS**

Approved by: \_\_\_\_\_

**KYLE FUJIMOTO**

**COMPATIBLE ELECTRONICS INC.**  
 114 OLINDA DRIVE  
 BREA, CALIFORNIA 92823  
 (714) 579-0500

**DATE: DECEMBER 6, 2022**

	REPORT BODY	APPENDICES					TOTAL
		<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	
<b>PAGES</b>	<b>22</b>	2	2	2	18	43	<b>89</b>

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## TABLE OF CONTENTS

Section / Title	PAGE
<b>GENERAL REPORT SUMMARY</b>	4
<b>SUMMARY OF TEST RESULTS</b>	5
<b>1. PURPOSE</b>	6
1.1    Decision Rule & Risk	7
<b>2. ADMINISTRATIVE DATA</b>	8
2.1    Location of Testing	8
2.2    Traceability Statement	8
2.3    Cognizant Personnel	8
2.4    Date Test Sample was Received	8
2.5    Disposition of the Test Sample	8
2.6    Abbreviations and Acronyms	8
<b>3. APPLICABLE DOCUMENTS</b>	9
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	10
4.1    Description of Test Configuration - Emissions	10
4.1.1    Cable Construction and Termination	10
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	12
5.1    EUT and Accessory List	12
5.2    Emissions Test Equipment	13
<b>6. TEST SITE DESCRIPTION</b>	14
6.1    Test Facility Description	14
6.2    EUT Mounting, Bonding and Grounding	14
6.3    Measurement Uncertainty	15
<b>7. TEST PROCEDURES</b>	16
7.1    RF Emissions	16
7.1.1    Radiated Emissions (Spurious and Harmonics) Test – Lab A	16
7.1.2    Radiated Emissions (Spurious and Harmonics) Test – Lab D	17
7.1.3    Conducted Emissions Test	18
7.1.4    RF Emissions Test Results	19
7.1.5    Sample Calculations	20
7.1.6    Variation of the Input Power	21
<b>8. CONCLUSIONS</b>	22

## LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Models Covered Under This Report
D	Diagrams and Charts <ul style="list-style-type: none"> <li>• Test Setup Diagrams</li> <li>• Antenna and Effective Gain Factors</li> </ul>
E	Data Sheets

## LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Radiated Site
2	Layout of the Semi-Anechoic Test Chamber
3	Conducted Emissions Test Setup

## LIST OF TABLES

TABLE	TITLE
1	Radiated Emission Results
2	Conducted Emission Results



## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested: EAS system  
 Model: CPP+380 RF TRX  
 P/N: 18-512.CP, 18.512.CBP; 18-513.CS  
 S/N: P0098144

Product Description: The EUT is a system to read RF tags and triggers a visual and acoustic alarm if the RF tag is activated. Used to prevent theft in retail environments. The EUT was tested respectively with two different power supplies, one was rated at 25 watts, while the other was rated at 65 watts.
 

- EUT operating frequency: 8.2 MHz
- Oscillators utilized: 32.768 kHz and 25 MHz
- EUT dimensions: 38 cm (W) x 5 cm (D) x 168 cm (H)

Modifications: The EUT was not modified during the testing.

Customer: Callidus trading, spol. s r.o.  
 Pašerových 1270/1  
 709 00 Ostrava - Mariánské Hory, Česká republika

Test Date: July 29, 2022; and August 1, 2022

Test Specifications: Emissions requirements  
 CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.223;  
 ICES-003, RSS-210 and RSS-Gen

Test Procedure: ANSI C63.4 and ANSI C63.10



Test Deviations: The test procedure was not deviated from during the testing.

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Spurious Radiated RF Emissions, 9 kHz – 1,000 MHz (Transmitter and Digital portion)	Complies with the <b>Class B</b> limits of ICES-003 and CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.223; RSS-Gen; and RSS-210
2	Conducted RF Emissions, 150 kHz to 30 MHz	Complies with the <b>Class B</b> limits of CFR Title 47, Part 15 Subpart B and ICES-003; and the limits of CFR Title 47, Part 15, Subpart C, section 15.207; RSS-Gen and RSS-210

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## 1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the EAS system, Model: CPP+380 RF TRX. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by ICES-003 and CFR Title 47, Part 15, Subpart B; and within the specification limits defined in Subpart C, sections 15.205, 15.207, 15.209, 15.223; RSS-Gen and RSS-210.



---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## 1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

## 2. ADMINISTRATIVE DATA

## 2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

## 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

## 2.3 Cognizant Personnel

Callidus trading, spol. s r.o.

Radim Hotovec Ing.

Compatible Electronics Inc.

James Ross Sr. Test Engineer  
Kyle Fujimoto Sr. Test Engineer

## 2.4 Date Test Sample was Received

The test sample was received prior to the initial test date.

## 2.5 Disposition of the Test Sample

The test sample has not yet been returned to Callidus trading, spol. s r.o. as of the date of this report.

## 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
EAS	Electronic Article Surveillance
AM	Acousto-Magnetic
Ing.	Inzenyr (Czech academic title engineer, corresponds to MSc)



### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC.	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators
ANSI C63.4: 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-210 Issue 10: 2019 + Amendment (April 2020)	License-exempt Radio Apparatus: Category I Equipment
RSS-Gen Issue 5: 2018 + Amendment 1: 2019 + Amendment 2: 2021	General Requirements for Compliance of Radio Apparatus
ICES-Gen Issue 1: July 2018	General Requirements for Compliance of Interference-Causing Equipment
ICES-003 Issue 7 October 2020	Information Technology Equipment (Including Digital Apparatus)
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation



## 4. DESCRIPTION OF TEST CONFIGURATION

### 4.1 Description of Test Configuration - Emissions

The EAS System, Model: CPP+380 RF TRX (EUT) was connected to a D-Link router via its two Ethernet port. The EUT was also connected to a switching adapter via its power port. The D-Link router was connected to a Wide Area Network (via a Netgear Ethernet Router) and an AC/DC Adapter. Finally, the EUT was fully tested, respectively, with two separate power supplies: a 25 watt and a 65 watt. See the EUT specific test setup diagram below.

The routers were located 50 feet away from the test site in an accessory room.


The EUT was continuously transmitting 8.2 MHz and pinging the Wide Area network.

A laptop was connected to the diagnostic port of the EUT prior to testing via the Smart EAS v1 software to allow the EUT to continuously transmit and to continuously sound the alarm.

The cables were moved to maximize the emissions. The final conducted and radiated data was taken in the continuously exercising mode of operation. All initial investigations were performed with the EMI Receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photograph in Appendix D.

#### Client's Statement of Rational:

It has been kept into reception mode, when undeactivated deactivable RF label has been search for. Once found one, the device triggers a visual and an acoustic alarm and come back into reception mode.

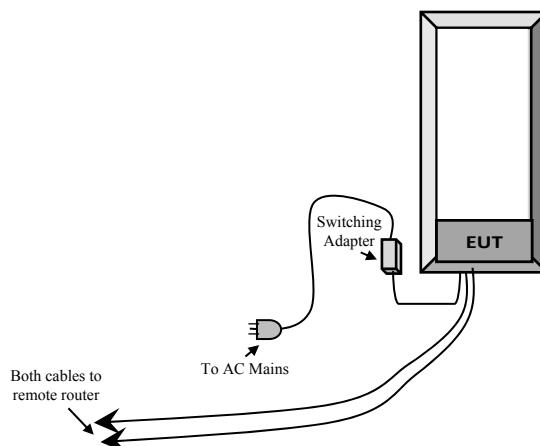

**EUT Specific Test Setup Diagram**



#### 4.1.1 **Cable Construction and Termination**

**Cable 1** This is a 15.24-meter unshielded cable connecting the EUT's Ethernet port #1 to the router. The cable has an RJ-45 connector at each end.

**Cable 2** This is a 15.24-meter unshielded cable connecting the EUT's Ethernet port #2 to the router. The cable has an RJ-45

**Cable 3** This is a 2-meter unshielded cable connecting the switching adapter to the EUT. The cable has a 2-pin terminal block at each end. The cable is bundled to a length of 1-meter.

**Cable 4** This is a 3-meter unshielded cable connecting the D-Link Router WAN port to the Netgear Router. The cable has an RJ-45 connector at each end.

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

### 5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
EAS system (EUT)	Callidus trading, spol. s r.o.	CPP+380 RF TRX	P0098144	2ABWHPCPP380R IC: 29314-PCPP380R
Software	Callidus trading, spol. s r.o.	Smart EAS v1	N/A	N/A
Router	D-Link	DI-704	0L00B02399	N/A
Adapter (for D-Link Router)	Jameco	S15AB050200	N/A	N/A
Ethernet Router	Netgear	EN 108	ENT8114202	N/A
25 Watt Switching Adapter (EUT)	Mean Well	GS25A4P	N/A	N/A
65 Watt Switching Adapter (EUT)	Adapter Tech.	ATS065T-P480	2128001915	N/A
Laptop*	Vostro	P89G	DQNH703	DoC

\*Only to program the EUT to be put into test mode for the testing, then it was removed.



## 5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
<b>RF RADIATED EMISSIONS TEST EQUIPMENT</b>					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies, Inc.	N9038A	MY51210510	September 17, 2021	September 17, 2022
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Mini, Low-Profile Turntable (2)	Compatible Electronics	N/A	N/A	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	February 10, 2025
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	December 14, 2023
LISN (EUT)	Com-Power	LI-215A	191951	August 4, 2021	August 4, 2022
Attenuator 10 dB	SureCall	SC-ATT-10	17100174	December 7, 2021	December 7, 2022
Multimeter	Fluke	115	36601149WS	November 21, 2021	November 21, 2022
Variable Autotransformer	Staco Energy Products	3PN2210	003	N/A	N/A
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A



## 6. TEST SITE DESCRIPTION

### 6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for emissions test location.

### 6.2 EUT Mounting, Bonding and Grounding

For below 30 MHz, the EUT was tested in a test area that had no ground plane. For above 30 MHz, the EUT was mounted on the turntable inside the test area with ground plane.

The EUT was not grounded during testing. However, the EUT switching adapters respectively had a 3<sup>rd</sup> wire earth ground on its AC mains side only.

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



### 6.3 Measurement Uncertainty

Compatible Electronics'  $U_{\text{lab}}$  value is less than  $U_{\text{cisp}}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		$U_{\text{cisp}}$	$U_{\text{lab}} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB



## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 RF Emissions

#### 7.1.1 Radiated Emissions (Spurious and Harmonics) Test – Lab A

The EMI Receiver was used as a measuring meter. A built-in, internal preamplifier was used to increase the sensitivity of the instrument. The EMI Receiver was used in the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. The final reading is then taken accurately, taking into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit.

The measurement bandwidth and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna

An open field test site, without ground plane, of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. Also, the antenna mast allowed axis variations of the antenna. Spurious data was collected in the worst case (highest emission) configuration of the EUT. At each reading per axis, the EUT was rotated 360 degrees (for E field radiated field strength).

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 10-meter test distance from 9 kHz to 30 MHz to obtain the final test data.

#### Test Results:

The EUT complies with the **Class B** limits of ICES-003; and CFR Title 47, Part 15, Subpart B; and the limits of RSS-Gen; RSS-210; and CFR Title 47, Part 15, Subpart C, Sections 15.205, 15.209, and 15.223 for radiated emissions. Please see Appendix E for the data sheets.



## 7.1.2 Radiated Emissions (Spurious and Harmonics) Test – Lab D

The EMI Receiver was used as the measuring meter. A built-in, internal preamplifier was used to increase the sensitivity of the instrument. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. A quasi-peak reading was taken only for those readings, which are marked accordingly on the data sheets.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is set up according to ANSI C63.4 and EN 50147-2. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT.

The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
30 MHz to 1 GHz	120 kHz	CombiLog Antenna

The EUT was tested at a 3-meter test distance to obtain the final test data. The six highest emissions are listed in Table 1.

### Test Results:

The EUT complies with the **Class B** limits of ICES-003; and CFR Title 47, Part 15, Subpart B; and the limits of RSS-Gen; RSS-210; and CFR Title 47, Part 15, Subpart C, Sections 15.205, 15.209, and 15.223 for radiated emissions. Please see Appendix E for the data sheets.



### 7.1.3 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. The data was collected with the EMI receiver in the peak detect mode with the “Max Hold” feature activated. A peak, quasi-peak, and average reading were taken for all readings and are marked accordingly on the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by TDK TestLab software in several overlapping sweeps. The final data is located in Appendix E.

The EUT was tested at 120 VAC. The six highest emissions are listed in Table 2.

#### Test Results:

The EUT complies with the **Class B** limits of ICES-003; and CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, sections 15.207. Please see Appendix E for the data sheets.

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



### 7.1.4 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS  
 EAS system, Model: CPP+380 RF TRX

Frequency (MHz)	Quasi-Peak Corrected Reading* (dB $\mu$ V)	Specification Limit (dB $\mu$ V)	Delta (Cor. Reading – Spec. Limit) (dB)
43.80 (V) (25 W)	39.32	40.00	-0.68
41.00 (V) (65 W)	38.49	40.00	-1.51
43.80 (V) (65 W)	38.39	40.00	-1.61
41.00 (V) (25 W)	38.36	40.00	-1.64
48.40 (V) (65 W)	35.36	40.00	-4.64
50.60 (V) (25 W)	35.01	40.00	-4.99

Table 2 CONDUCTED EMISSION RESULTS  
 EAS system, Model: CPP+380 RF TRX

Frequency (MHz)	Corrected Reading* (dB $\mu$ V)	Specification Limit (dB $\mu$ V)	Delta (Cor. Reading – Spec. Limit) (dB)
0.182 (BL) (25 W)	59.71 (QP)	63.56 (QP)	-3.85
0.186 (BL) (25 W)	59.61 (QP)	63.73 (QP)	-4.12
0.190 (BL) (25 W)	59.07 (QP)	63.45 (QP)	-4.38
0.182 (BL) (25 W)	48.77 (AV)	53.56 (AV)	-4.79
0.190 (BL) (25 W)	48.21 (AV)	53.45 (AV)	-5.24
0.186 (BL) (25 W)	47.96 (AV)	53.73 (AV)	-5.77

Notes:

\* The complete emissions data is given in Appendix E of this report.

(BL) Black Lead

(WL) White Lead

(QP) Quasi-Peak

(AV) Average

(PK) Peak

(25 W) Using 25 Watt Switching Power Supply

(65 W) Using 65 Watt Switching Power Supply

Brea Division  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

Newbury Park Division  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

Lake Forest Division  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



## 7.1.5 Sample Calculations

A correction factor for the antenna, cable, and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ( $\mu\text{V}/\text{m}$ )  $\log x 20$  = Specification Limit in  $\text{dBuV}/\text{m}$   
 To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: Limit in  $\mu\text{V}/\text{m}$  = 100 at 8.2 MHz per FCC 15.223 (a); Limit in  $\mu\text{V}/\text{m}$  = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics  $\text{dBuV}/\text{m}$  =  $20 \log (\mu\text{V}/\text{m})$

For measurements above 30 MHz: (Specification distance / test distance)  $\log x 20$  = distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F – A + C

where: F = antenna factor

A = amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^H [\text{dB}(\text{S}/\text{m})]$$

where:  $H$  is the magnetic field strength (to be compared with the limit),  
 $V$  is the voltage level measured by the receiver or spectrum analyzer,  
 $L_C$  is the cable loss,  
 $G_{PA}$  is the gain of the preamplifier (if used), and  
 $AF^H$  is the magnetic antenna factor.

The  $G_{PA}$  term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.



## Sample Calculations (Continued)

If the “electrical” antenna factor is used instead, the above equation becomes:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_c[\text{dB}] - G_{PA}[\text{dB}] + AF^E[\text{dB}(\text{m}^{-1})] - 51.5[\text{dB}\Omega]$$

where:  $AF^E$  is the “electric” antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_c[\text{dB}] - G_{PA}[\text{dB}] + AF^E[\text{dB}(\text{m}^{-1})]$$

or, if the magnetic antenna factor is used:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_c[\text{dB}] - G_{PA}[\text{dB}] + AF^H[\text{dB}(\text{S}/\text{m})] + 51.5[\text{dB}\Omega]$$

The display of the receiver (or spectrum analyzer) **shall not** be configured in units of current, e.g.  $\mu\text{A}$  or  $\text{dB}(\mu\text{A})$ . That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is  $50\ \Omega$ , while the magnetic field calculation is based on the free-space impedance of  $377\ \Omega$ .

### 7.1.6 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

#### Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart A section 15.31 (e) and RSS-Gen.

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## 8. CONCLUSIONS

The EAS system, Model: CPP+380 RF TRX (EUT) as tested, meets all of the **Class B** specification limits defined in ICES-003; and FCC Title 47, Part 15, Subpart B; RSS-Gen; RSS-210; and Subpart C, sections 15.205, 15.207, 15.209, and 15.223.



---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

## APPENDIX A

### **LABORATORY ACCREDITATIONS AND RECOGNITIONS**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

**For the most up-to-date version of our scopes and certificates please visit**

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

ISED Test Site Registration Number: 2154A

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## APPENDIX B

### ***MODIFICATIONS TO THE EUT***

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



## MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass ICES-003, RSS-Gen, RSS-210, FCC Subpart B and FCC Subpart C specifications

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

There were no modifications made to the EUT during testing.



---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

## **APPENDIX C**

### ***MODELS COVERED UNDER THIS REPORT***

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

## MODELS COVERED UNDER THIS REPORT

### USED FOR THE PRIMARY TEST

EAS system  
Model: CPP+380 RF TRX  
P/N: 18-512.CP, 18.512.CBP; 18-513.CS  
S/N: P0098144

There were no additional models covered under this report.



---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



## APPENDIX D


### **DIAGRAMS AND CHARTS**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**


**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

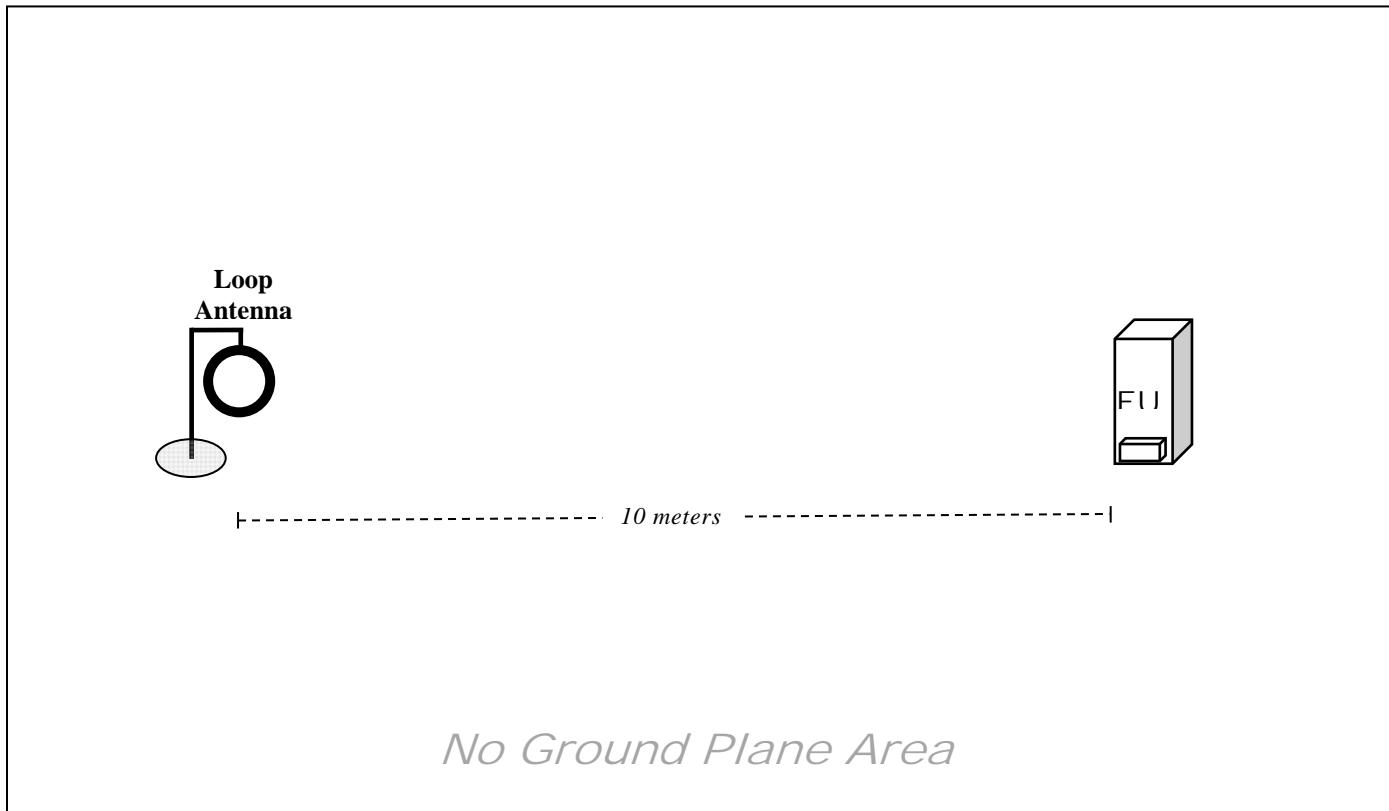
**FIGURE 1: PLOT MAP AND LAYOUT OF RADIATED SITE****LAB A****OPEN LAND > 15 METERS****OPEN LAND > 15 METERS**

**FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER**

**LAB D**

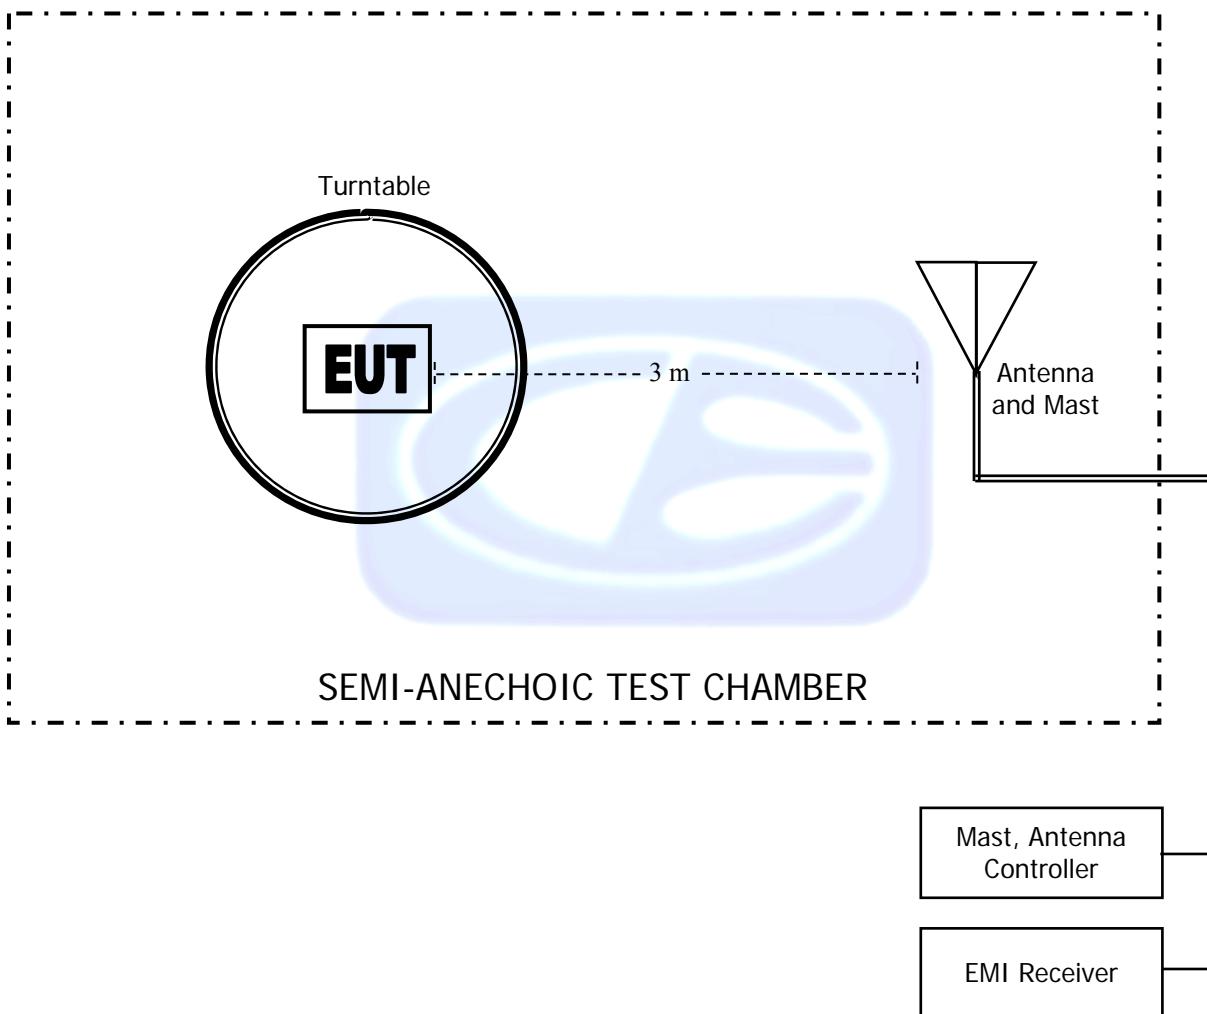

**FIGURE 3: CONDUCTED EMISSIONS TEST SETUP**

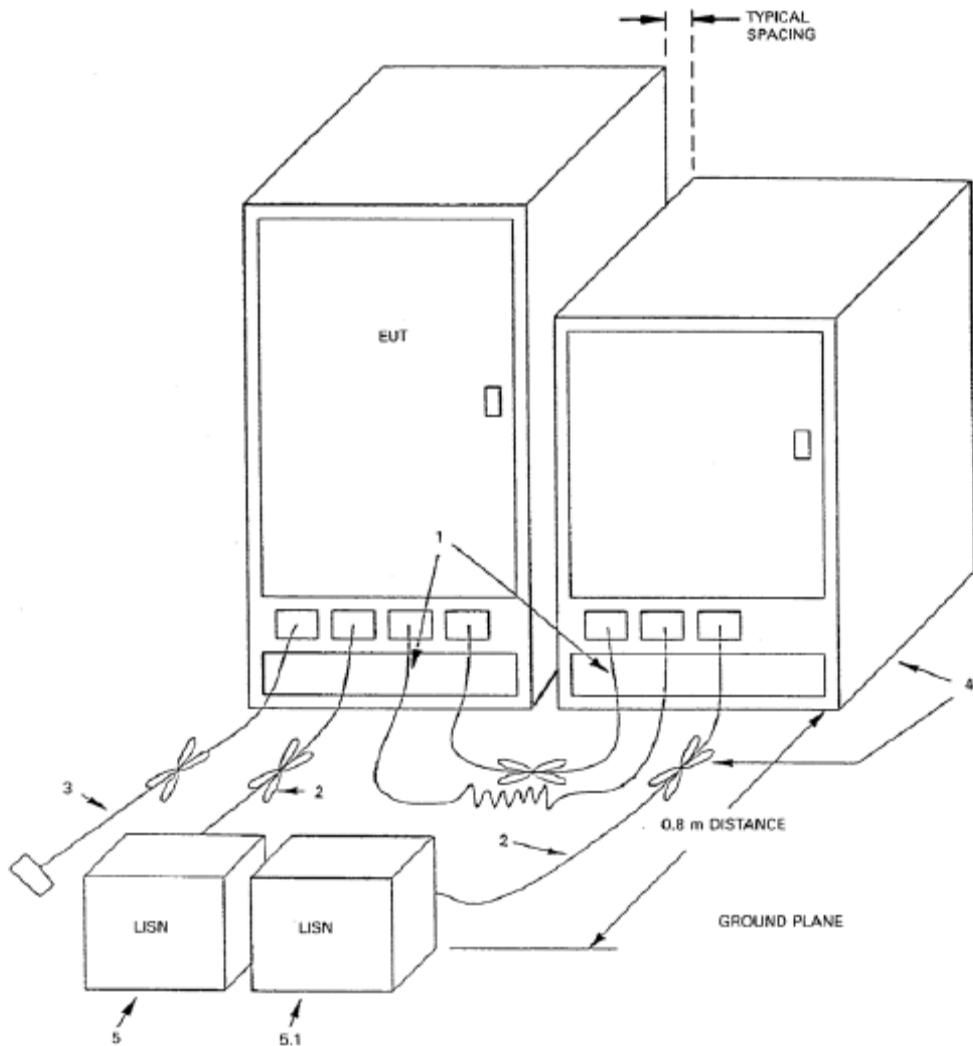



## COM-POWER AL-130R

### LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 10, 2022

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	15.6	-35.8
0.01	15.8	-35.6
0.02	14.8	-36.6
0.03	15.6	-35.9
0.04	15.0	-36.5
0.05	14.4	-37.1
0.06	14.6	-36.9
0.07	14.3	-37.2
0.08	14.3	-37.2
0.09	14.4	-37.0
0.10	14.1	-37.4
0.20	14.1	-37.4
0.30	14.0	-37.5
0.40	13.9	-37.6
0.50	14.1	-37.3
0.60	14.1	-37.3
0.70	14.2	-37.3
0.80	14.2	-37.3
0.90	14.2	-37.2
1.00	14.4	-37.0
2.00	14.6	-36.9
3.00	14.6	-36.8
4.00	14.9	-36.6
5.00	14.9	-36.7
6.00	14.8	-36.7
7.00	14.6	-36.8
8.00	14.5	-37.0
9.00	14.3	-37.2
10.00	14.5	-37.0
11.00	14.6	-36.9
12.00	14.7	-36.7
13.00	14.9	-36.6
14.00	15.0	-36.5
15.00	14.9	-36.6
16.00	14.9	-36.6
17.00	14.6	-36.8
18.00	14.4	-37.1
19.00	14.5	-37.0
20.00	14.5	-37.0
21.00	14.2	-37.3
22.00	13.9	-37.5
23.00	13.9	-37.5
24.00	13.8	-37.7
25.00	13.4	-38.0
26.00	13.2	-38.2
27.00	13.2	-38.3
28.00	12.7	-38.7
29.00	12.7	-38.8
30.00	12.4	-39.0

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



## COM-POWER AC-220

### COMBILOG ANTENNA

S/N: 061093

CALIBRATION DATE: DECEMBER 14, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	200	16.0
35	21.4	250	17.4
40	21.0	300	19.7
45	20.6	350	20.0
50	19.7	400	22.2
60	16.1	450	22.4
70	12.8	500	23.1
80	12.5	550	23.4
90	14.2	600	24.9
100	15.4	650	25.3
120	16.5	700	25.4
125	16.8	750	26.4
140	15.9	800	26.7
150	16.6	850	27.1
160	18.5	900	27.9
175	15.9	950	28.0
180	15.5	1000	28.0

## **SETUP PHOTOS**

***USING 25 WATT POWER SUPPLY***

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

WITH 25 WATT POWER SUPPLY



**LAB A**

Callidus trading, spol. s r.o.

EAS system

Model: CPP+380 RF TRX

FCC SUBPART B AND C, RSS-GEN, and RSS-210 – RADIATED EMISSIONS – BELOW 30 MHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**WITH 25 WATT POWER SUPPLY**



**LAB D**

**FRONT VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, RSS-GEN, and RSS-210  
RADIATED EMISSIONS – 30 MHz to 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

WITH 25 WATT POWER SUPPLY



**LAB D**

**REAR VIEW**

Callidus trading, spol. s r.o.  
*EAS system*  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, RSS-GEN, and RSS-210  
RADIATED EMISSIONS – 30 MHz to 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**


---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**WITH 25 WATT POWER SUPPLY**

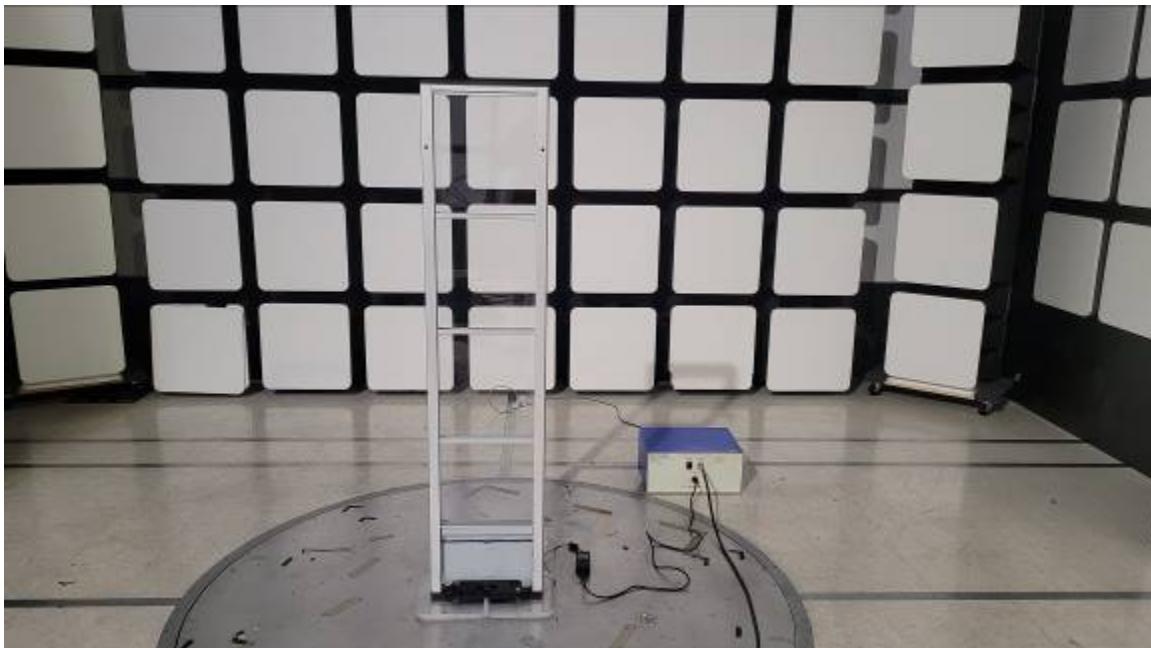

**FRONT VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, AND RSS-GEN  
CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**


---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

WITH 25 WATT POWER SUPPLY

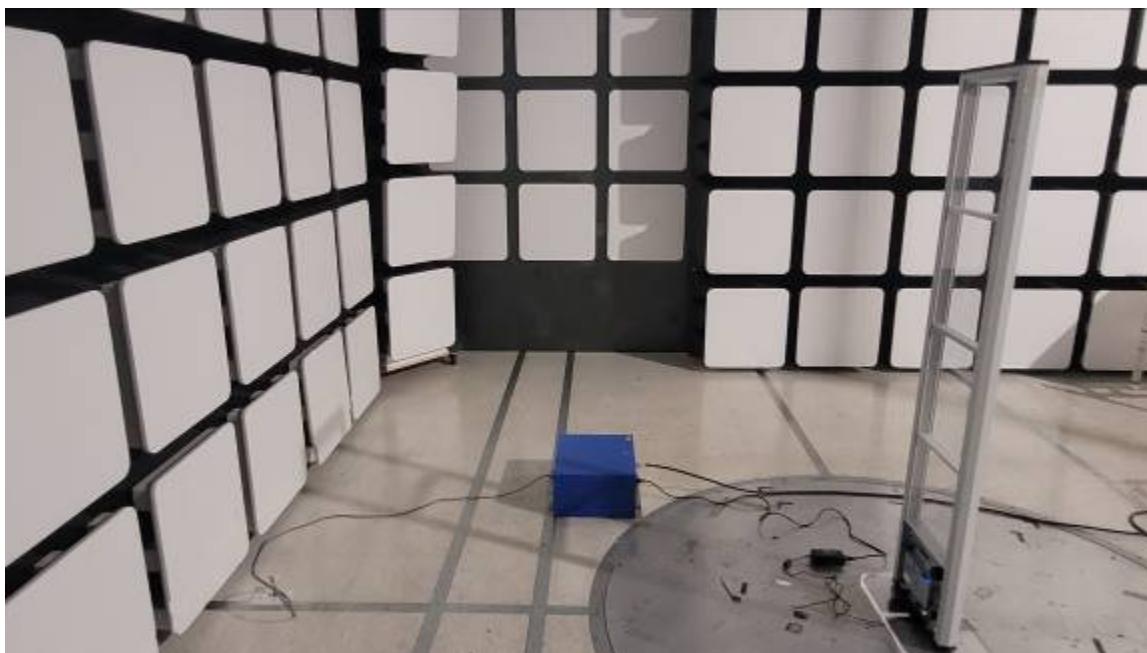

**REAR VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, AND RSS-GEN  
CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## **SETUP PHOTOS**

***USING 65 WATT POWER SUPPLY***

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

**WITH 65 WATT POWER SUPPLY**



**LAB A**

Callidus trading, spol. s r.o.

EAS system

Model: CPP+380 RF TRX

FCC SUBPART B AND C, RSS-GEN, and RSS-210 – RADIATED EMISSIONS – BELOW 30 MHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**


---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**WITH 65 WATT POWER SUPPLY**

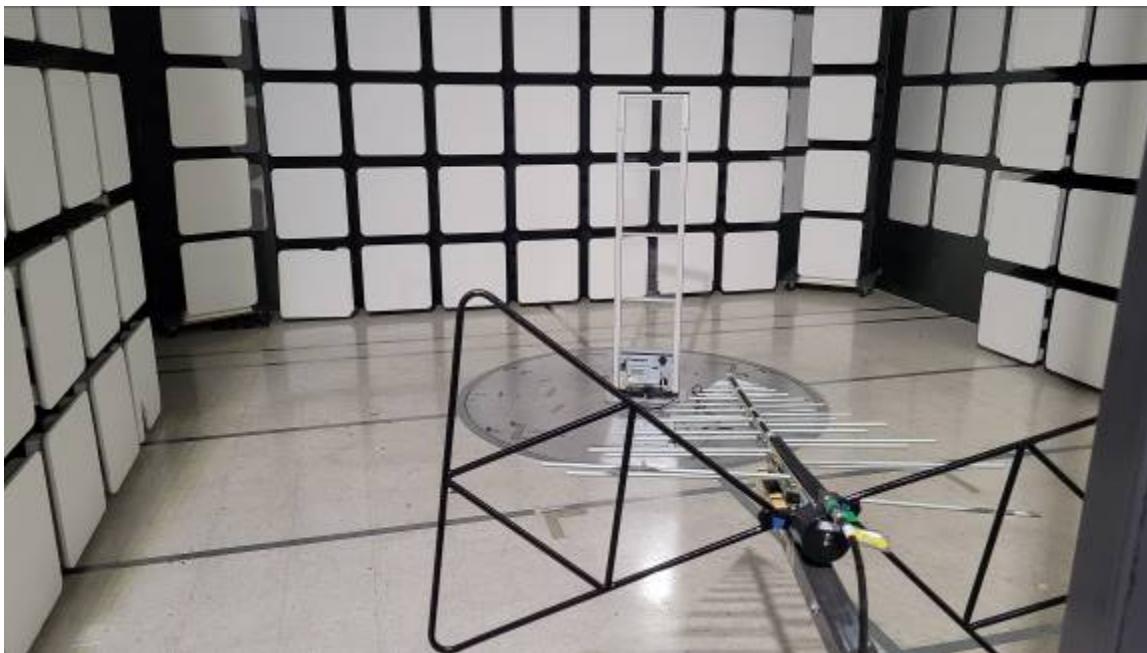

**LAB D**

**FRONT VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, RSS-GEN, and RSS-210  
RADIATED EMISSIONS – 30 MHz to 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**WITH 65 WATT POWER SUPPLY**



**LAB D**

**REAR VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, RSS-GEN, and RSS-210  
RADIATED EMISSIONS – 30 MHz to 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**


---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**WITH 65 WATT POWER SUPPLY**

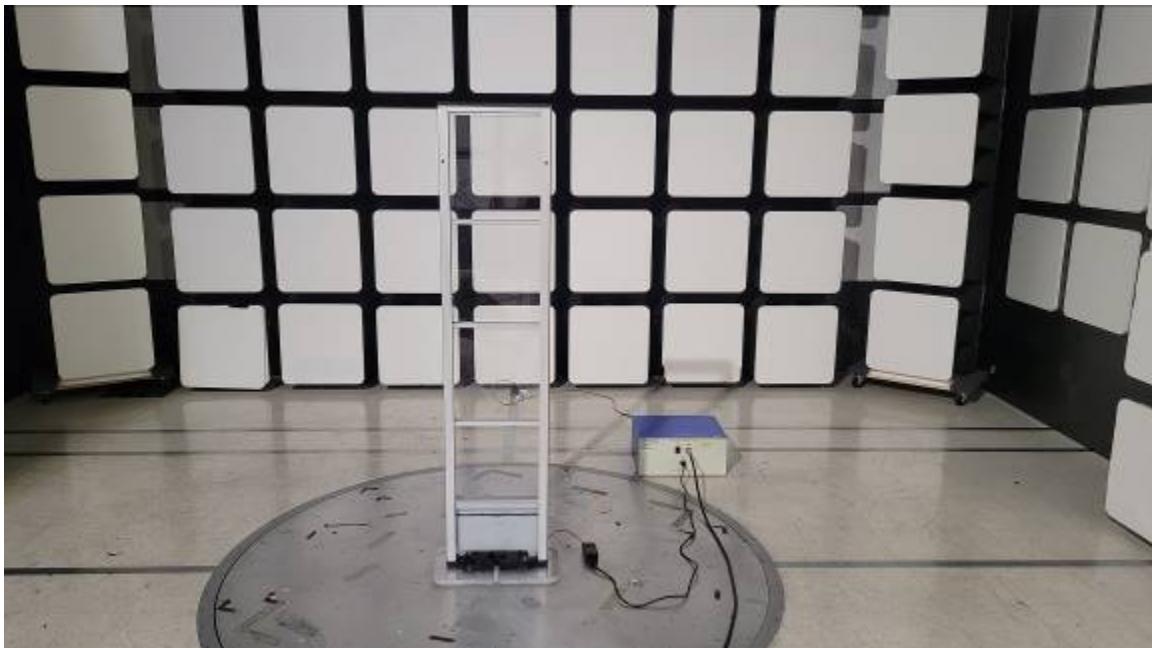

**FRONT VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, AND RSS-GEN  
CONDUCTED EMISSIONS


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

WITH 65 WATT POWER SUPPLY

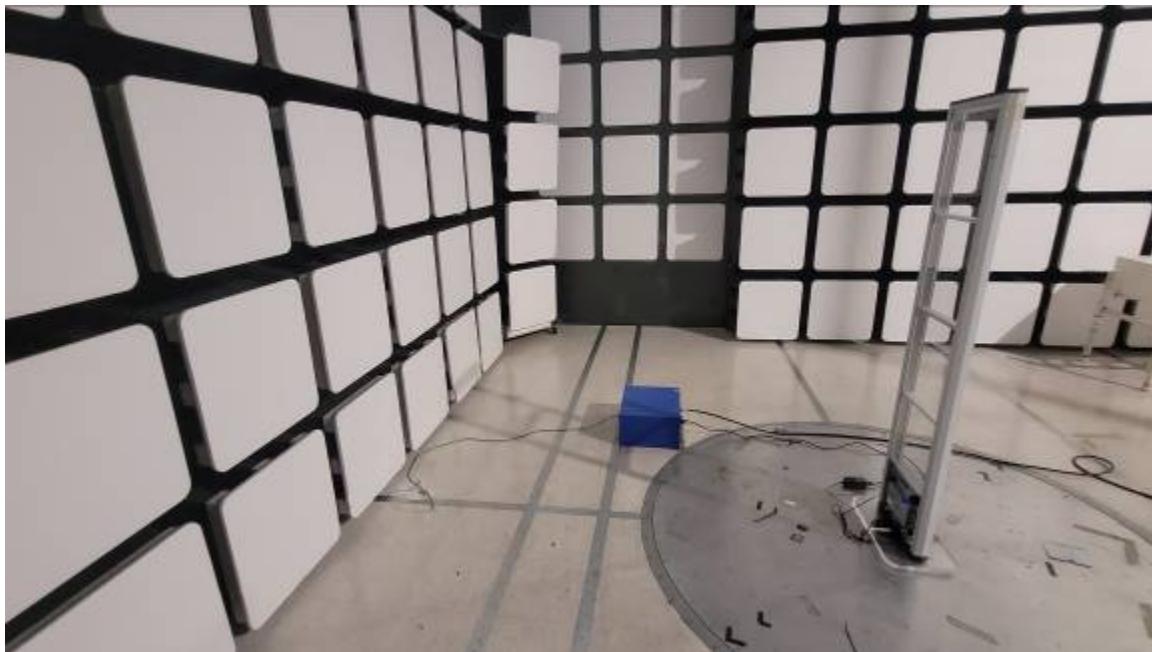

**REAR VIEW**

Callidus trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX  
FCC SUBPART B AND C, ICES-003, AND RSS-GEN  
CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**COMPATIBLE  
ELECTRONICS**

## APPENDIX E

### ***DATA SHEETS***

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



**COMPATIBLE  
ELECTRONICS**

## ***RADIATED EMISSIONS***

### ***DATA SHEETS***

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



**WITH 25 WATT POWER SUPPLY**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

**FCC 15.223**
 Callidus Trading, spol. S r.o.  
 EAS System  
 Model: CPP+380 RF TRX

 Date: 08/01/2022  
 Lab: A  
 Tested By: Kyle Fujimoto
**Transmit Mode - Maximum Power – X-Axis – 25 Watts****Test Distance: 10 Meters****Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]**

Freq. (MHz)	Level at 10 Meters (dBuV/m)	Level at 30 Meters (dBuV/m)	Axis (x/y/z)	Spec Limit (at 30 Meters)	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
8.20	42.68	33.14	X	40.00	-6.86	Peak	1.00	180.00	
16.40	31.89	22.35	X	29.54	-7.19	Peak	1.00	180.00	
24.60	32.21	22.67	X	29.54	-6.87	Peak	1.00	90.00	

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in uV/m = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

dBuV/m = 20 Log (uV/m)

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2

FCC 15.223

Callidus Trading, spol. S r.o.  
EAS System  
Model: CPP+380 RF TRX

Date: 08/01/2022  
Lab: A  
Tested By: Kyle Fujimoto

### Transmit Mode - Maximum Power – Y-Axis – 25 Watts

**Test Distance: 10 Meters**

Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in uV/m = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} = 20 \text{ Log } (\text{uV/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2.

FCC 15.223

Callidus Trading, spol. S r.o.  
EAS System  
Model: CPP+380 RF TRX

Date: 08/01/2022  
Lab: A  
Tested By: Kyle Fujimoto

Transmit Mode - Maximum Power – Z-Axis – 25 Watts

**Test Distance: 10 Meters**

Corrected Level at 30 MeV

Date: 08/01/2022

## Lab: A

Tested By: Kyle Fujimoto

---

Digitized by srujanika@gmail.com

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in uV/m = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} = 20 \text{ Log } (\text{uV/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2

FCC 15.223

Callidus Trading, spol. S r.o.  
EAS System  
Model: CPP+380 RF TRX

Date: 08/01/2022  
Lab: A  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power – X-Axis – 25 Watts - Band Edges

Test Distance: 10 Meters


Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in uV/m = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} = 20 \text{ Log } (\text{uV/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2

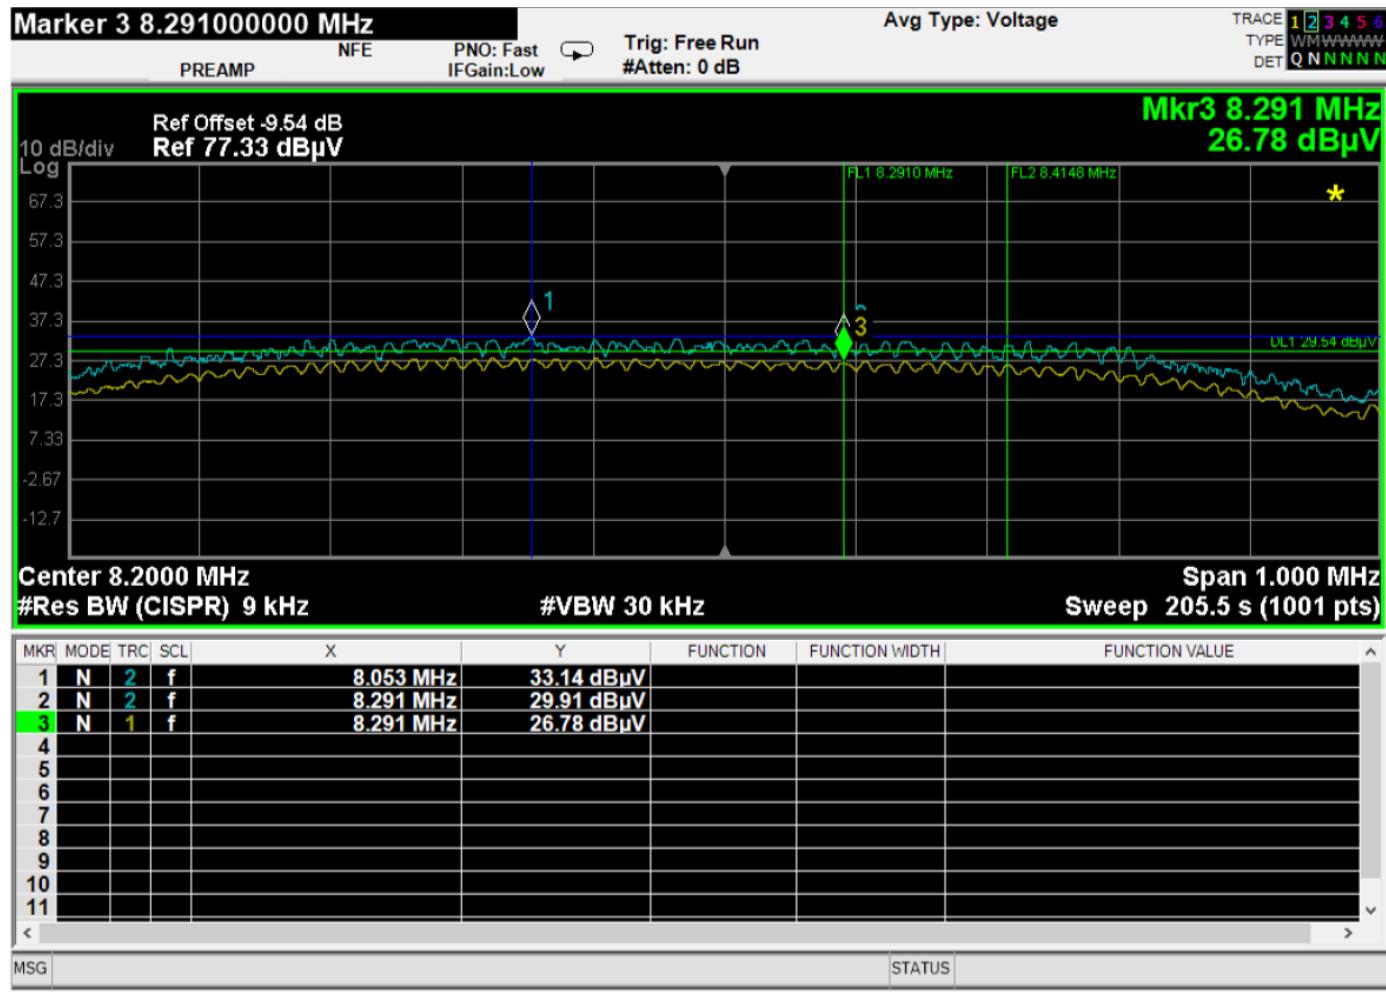
**COMPATIBLE  
ELECTRONICS**


Band Edge – 25 Watt Power Supply

Note: Offset of -9.54 dB is to correct the level to 30 Meters based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Bandwidth plot to prove emission is at least 10% of the center frequency – 25 Watt Power Supply

Brea Division  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

Newbury Park Division  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

Lake Forest Division  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

FCC 15.223

Callidus Trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX

Date: 07/29/2022  
Lab: D  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)

**Test Distance: 3 Meters**

### 100% Power - 25 Watt Power Supply

Date: 07/29/2022

## Lab: D

Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)

**Test Distance: 3 Meters**

## 100% Power - 25 Watt Power Supply

FCC 15.223

Callidus Trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX

Date: 07/29/2022  
Lab: D  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)

**Test Distance: 3 Meters**

### **100% Power - 25 Watt Power Supply**

Date: 07/29/2022

Lab: D

Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)


**Test Distance: 3 Meters**

### **100% Power - 25 Watt Power Supply**



Title: Pre-Scan - FCC Class B  
 File: LF - Pre-Scan - at 100 Percent - CPP+380 RF TRX - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz at 100% Power  
 Company: Callidus trading, spol, s.r.o.  
 Model: CPP+380 RF TRX  
 25 Watt Power Supply

7/29/2022 10:37:26 AM  
 Sequence: Preliminary Scan

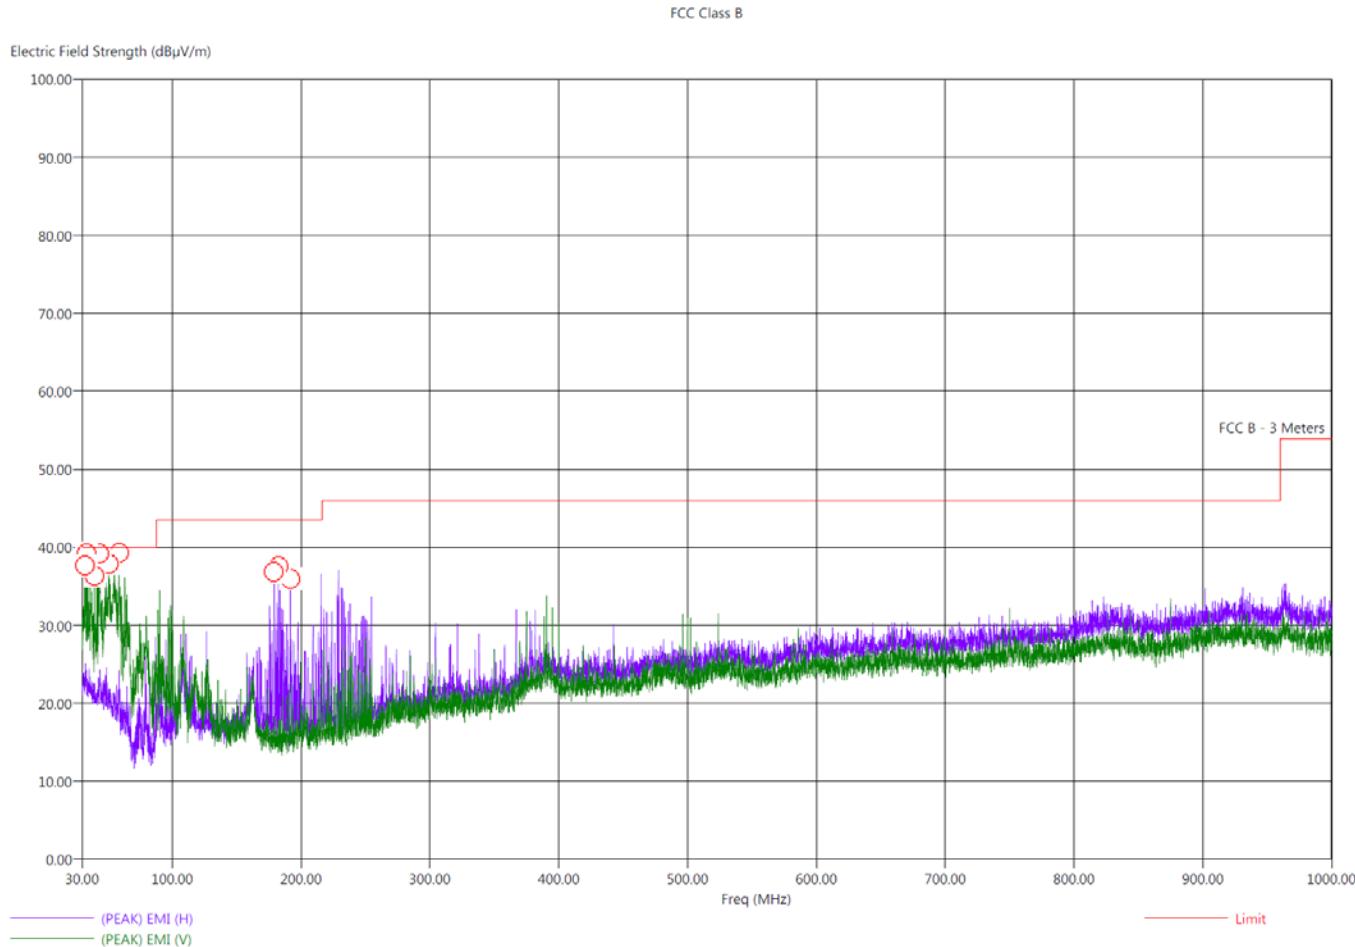

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: Radiated Final - FCC Class B  
 File: LF - Final Scan - at 100 Percent - CPP+380 RF TRX - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz at 100% Power  
 Company: Calidus trading, spol, s r.o.  
 Model: CPP+380 RF TRX  
 25 Watt Power Supply

7/29/2022 10:47:38 AM  
 Sequence: Final Measurements

## FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dB $\mu$ V/m)	(QP) EMI (dB $\mu$ V/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dB $\mu$ V/m)	Transducer (dB)	Cable (dB)	Ttbl AqI (deg)	Twr Ht (cm)
32.50	V	38.83	32.00	-1.17	-8.00	40.00	21.95	0.43	296.50	127.40
33.50	V	40.02	30.88	0.02	-9.12	40.00	21.59	0.44	220.50	127.28
39.50	V	39.91	31.81	-0.09	-8.19	40.00	21.00	0.46	217.25	111.34
43.80	V	42.15	39.32	2.15	-0.68	40.00	20.72	0.49	274.00	190.98
50.60	V	41.14	35.01	1.14	-4.99	40.00	19.47	0.53	225.75	127.28
58.80	V	39.40	30.56	-0.60	-9.44	40.00	16.66	0.57	328.75	400.11
179.00	H	37.86	32.24	-5.64	-11.26	43.50	15.50	1.12	172.75	174.80
182.50	H	41.84	35.40	-1.66	-8.10	43.50	15.40	1.13	170.00	158.98
191.60	H	34.93	29.50	-8.57	-14.00	43.50	15.50	1.16	176.50	111.34



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

**WITH 65 WATT POWER SUPPLY**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

FCC 15.223

Callidus Trading, spol. S r.o.  
EAS System  
Model: CPP+380 RF TRX

Date: 08/01/2022  
Lab: A  
Tested By: Kyle Fujimoto

### Transmit Mode - Maximum Power – X-Axis – 65 Watts

**Test Distance: 10 Meters**

Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]

Freq. (kHz)	Level at 10 Meters (dBuV/m)	Level at 30 Meters (dBuV/m)	Axis (x/y/z)	Spec Limit (at 30 Meters)	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
8.20	42.17	32.63	X	40.00	-7.37	Peak	1.00	180.00	
16.40	31.79	22.25	X	29.54	-7.29	Peak	1.00	180.00	
24.60	32.35	22.81	X	29.54	-6.73	Peak	1.00	90.00	

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in  $\mu\text{V/m}$  = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} = 20 \text{ Log } (\mu\text{V/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2.

FCC 15.223

Callidus Trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX

Date: 08/01/2022  
Lab: A  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power – Y-Axis – 65 Watts

**Test Distance: 10 Meters**

Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]

Freq. (kHz)	Level at 10 Meters (dBuV/m)	Level at 30 Meters (dBuV/m)	Axis (x/y/z)	Spec Limit (at 30 Meters)	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
8.20	36.40	26.86	Y	40.00	-13.14	Peak	1.00	0.00	
16.40	25.12	15.58	Y	29.54	-13.96	Peak	1.00	90.00	
24.60	27.93	18.39	Y	29.54	-11.15	Peak	1.00	180.00	

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in uV/m = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} = 20 \text{ Log } (\text{uV/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2

FCC 15.223

Callidus Trading, spol. s r.o.

## EAS system

Model: CPP+380 RF TRX

Date: 08/01/2022

## Lab: A

Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power – Z-Axis – 65 Watts

**Test Distance: 10 Meters**

Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]

Freq. (kHz)	Level at 10 Meters (dBuV/m)	Level at 30 Meters (dBuV/m)	Axis (x/y/z)	Spec Limit (at 30 Meters)	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
8.20	27.31	17.77	Z	40.00	-22.23	Peak	1.00	0.00	
16.40	25.33	15.78	Z	29.54	-13.76	Peak	1.00	0.00	
24.60	22.47	12.93	Z	29.54	-16.61	Peak	1.00	0.00	

Limit in  $\mu\text{V/m}$  = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in  $\mu\text{V/m}$  = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} \equiv 20 \text{ Log } (\mu\text{V/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2.

FCC 15.223

Callidus Trading, spol. S r.o.  
EAS System  
Model: CPP+380 RF TRX

Date: 08/01/2022  
Lab: A  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power – X-Axis – 65 Watts - Band Edges

Test Distance: 10 Meters

**Corrected Level at 30 Meters = (Level at 10 Meters) - [20 Log (spec test dist./actual test dist.)]**

Limit in uV/m = 100 at 8.2 MHz per FCC 15.223 (a)

Limit in uV/m = 30 at 30 Meters from 1705 kHz to 30 MHz for Harmonics

$$\text{dBuV/m} = 20 \text{ Log } (\text{uV/m})$$

Note: Corrected Level at 30 Meters is based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2


**COMPATIBLE  
ELECTRONICS**


Band Edge – 65 Watt Power Supply

Note: Offset of -9.54 dB is to correct the level to 30 Meters based on equation (3) of ANSI C63.10: 2013 section 6.4.4.2

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Bandwidth plot to prove emission is at least 10% of the center frequency – 65 Watt Power Supply

Brea Division  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

Newbury Park Division  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

Lake Forest Division  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

FCC 15.223

Callidus Trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX

Date: 07/29/2022  
Lab: D  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)

**Test Distance: 3 Meters**

### 100% Power - 65 Watt Power Supply

Date: 07/29/2022

## Lab: D

Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)

**Test Distance: 3 Meters**

### 100% Power - 65 Watt Power Supply

FCC 15.223

Callidus Trading, spol. s r.o.  
EAS system  
Model: CPP+380 RF TRX

Date: 07/29/2022  
Lab: D  
Tested By: Kyle Fujimoto

## Transmit Mode - Maximum Power (Worst Case)

Test Distance: 3 Meters


### 100% Power - 65 Watt Power Supply

Date: 07/29/2022  
Lab: D  
Tested By: Kyle Fujimoto



Title: Pre-Scan - FCC Class B  
 File: 999 - LF - Pre-Scan - at 100 Percent - 65 Watt Power Supply - CPP+380 RF TRX - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz at 100% Power  
 Company: Callidus trading, spol, s.r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 1:43:47 PM  
 Sequence: Preliminary Scan

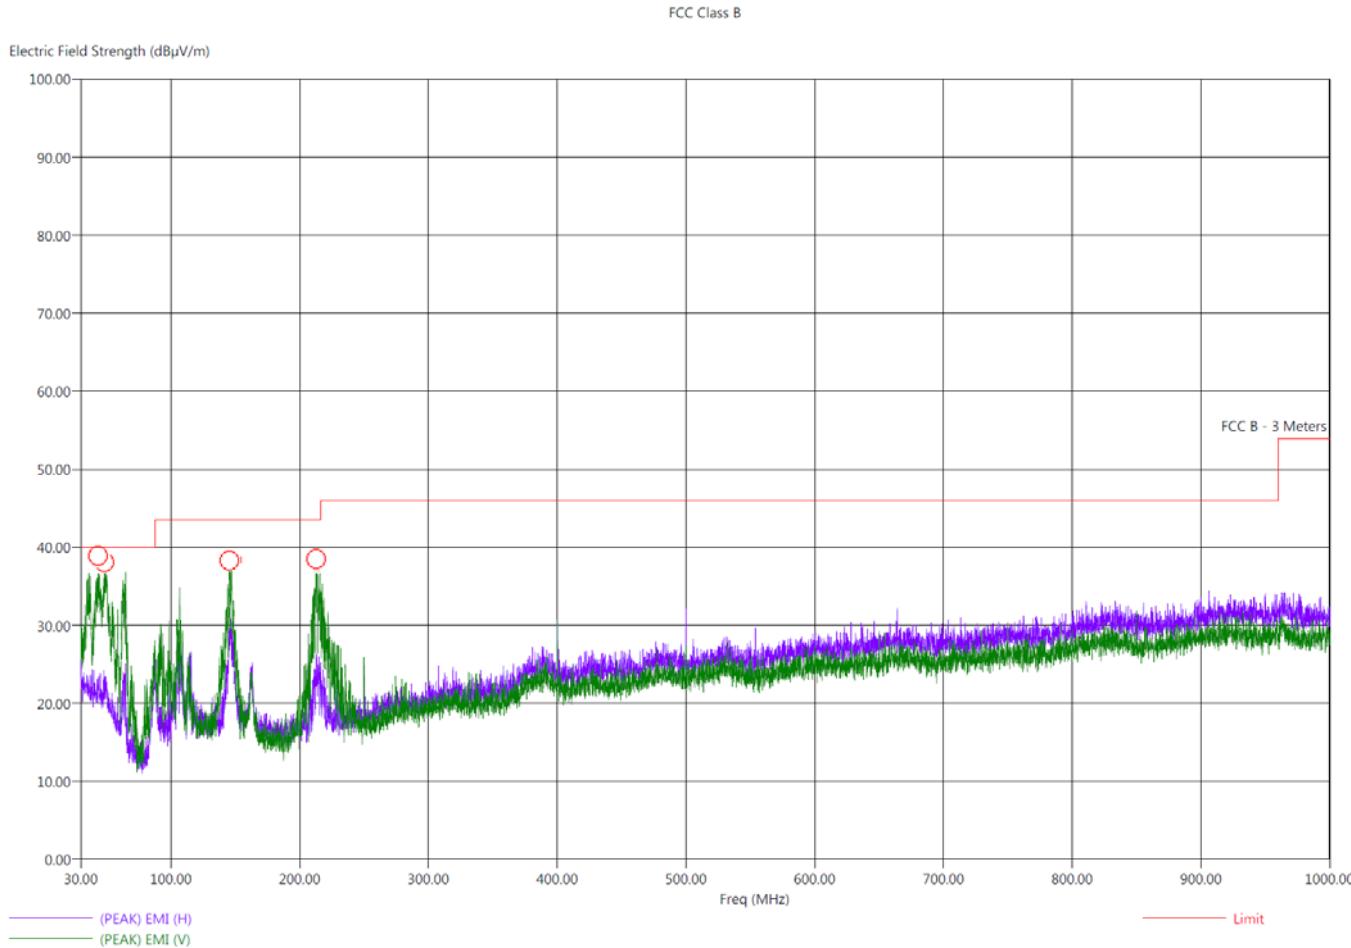

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: Radiated Final - FCC Class B  
 File: 999 - LF - Final Scan - at 100 Percent - 65 Watt Power Supply - CPP+380 RF TRX - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz at 100% Power  
 Company: Calidus trading, spol. s r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 1:52:44 PM  
 Sequence: Final Measurements

## FCC Class B


Freq (MHz)	Pol	(PEAK) EMI (dB $\mu$ V/m)	(QP) EMI (dB $\mu$ V/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dB $\mu$ V/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deg)	Twr Ht (cm)
43.80	V	42.03	38.39	2.03	-1.61	40.00	20.72	0.49	266.00	158.86
48.40	V	38.79	35.36	-1.21	-4.64	40.00	20.01	0.52	23.25	222.80
145.50	V	40.00	34.98	-3.50	-8.52	43.50	16.10	1.02	359.75	127.10
147.10	V	40.17	36.14	-3.33	-7.36	43.50	16.29	1.03	24.25	127.22
212.60	V	39.18	33.09	-4.32	-10.41	43.50	16.07	1.24	85.00	158.68
213.40	V	38.34	32.72	-5.16	-10.78	43.50	16.15	1.24	92.00	174.02



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

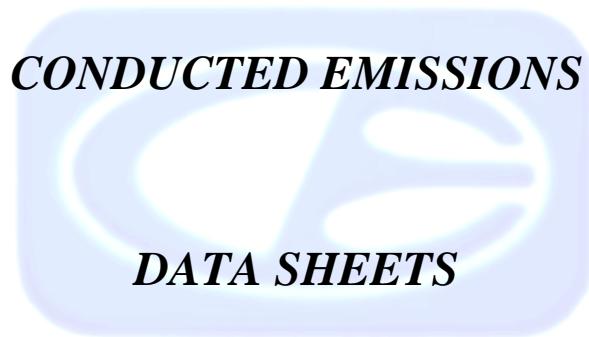**CONDUCTED EMISSIONS**  
  
**DATA SHEETS**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



**COMPATIBLE  
ELECTRONICS**

**WITH 25 WATT POWER SUPPLY**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**


**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - Black Lead  
 File: 1 - Pre-Scan - Black Lead - 25 Watts - FCC Class B - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS System  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Callidus trading, spol. s r.o.  
 Model: CPP+380 RF TRX  
 25 Watt Power Supply

7/29/2022 2:42:09 PM  
 Sequence: Preliminary Scan

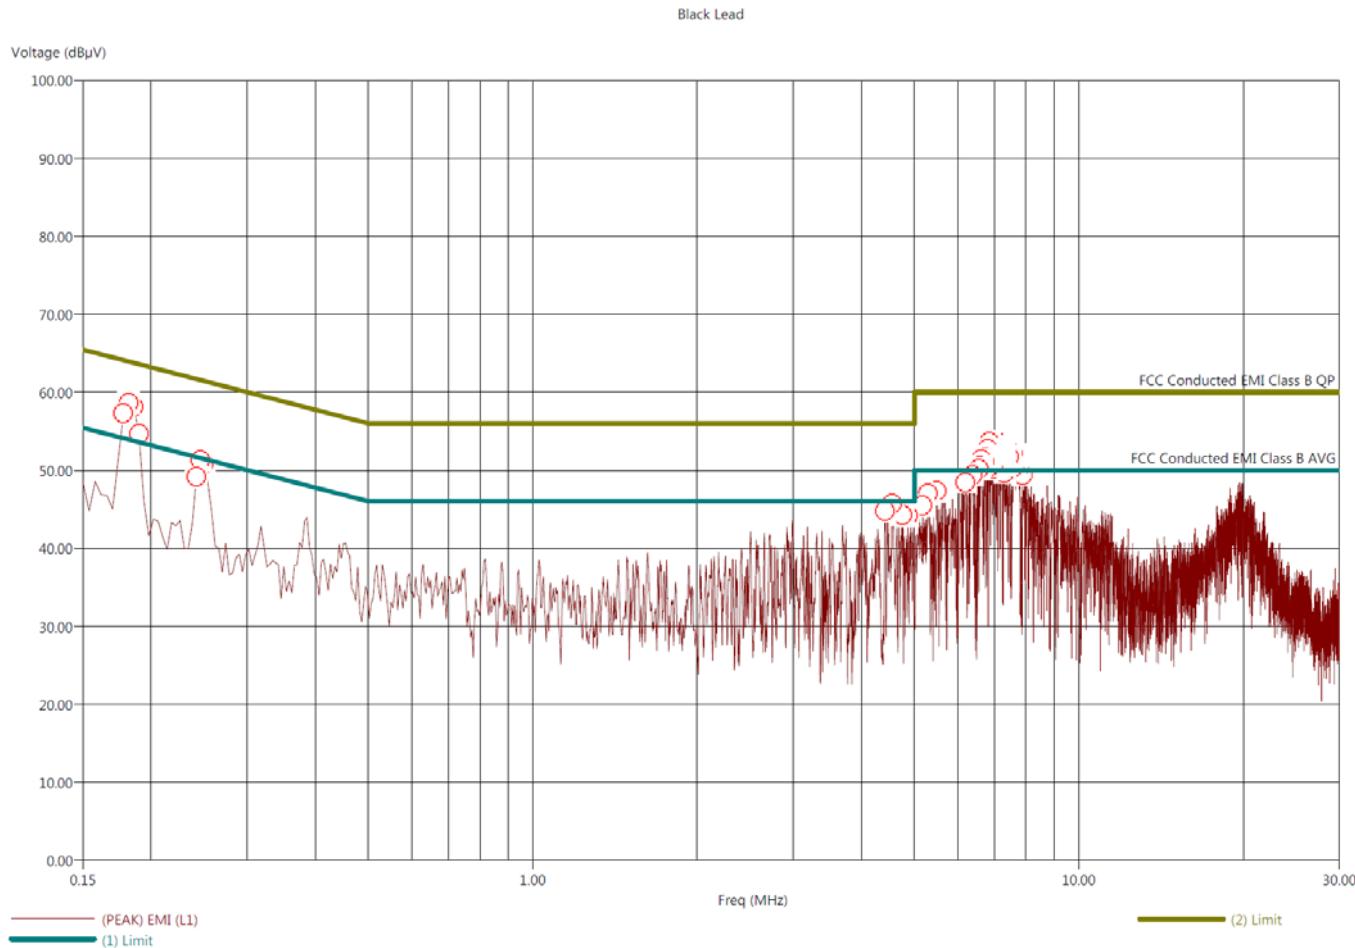

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - Black Lead

File: 1 - Final Scan - Black Lead - 25 Watts - FCC Class B - 07-29-2022.set

Operator: Kyle Fujimoto

EUT Type: EAS system

EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router

Company: Callidus trading, spol s r.o.

Model: CPP+380 RF TRX

25 Watt Power Supply

7/29/2022 2:45:01 PM

Sequence: Final Measurements

## Black Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(QP) EMI (dB $\mu$ V)	(PEAK) Margin (QP) (dB)	(QP) Margin (QP) (dB)	(QP) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.178	52.14	45.54	-12.33	-18.93	64.47	0.13	0.13	10.00
0.182	63.68	59.71	0.12	-3.85	63.56	0.12	0.12	10.00
0.186	64.18	59.61	0.45	-4.12	63.73	0.12	0.12	10.00
0.190	62.22	59.07	-1.23	-4.38	63.45	0.12	0.11	10.00
0.242	54.41	51.18	-7.10	-10.33	61.51	0.12	0.10	10.00
0.246	55.02	51.20	-6.55	-10.37	61.57	0.12	0.10	10.00
0.250	53.94	50.54	-7.35	-10.75	61.29	0.13	0.10	10.00
4.414	44.81	40.24	-11.19	-15.76	56.00	0.32	0.10	10.00
4.558	43.74	39.94	-12.26	-16.06	56.00	0.32	0.10	10.00
4.758	45.80	40.76	-10.20	-15.24	56.00	0.32	0.10	10.00
4.862	45.32	40.44	-10.68	-15.56	56.00	0.33	0.10	10.00
5.174	46.46	41.97	-13.54	-18.03	60.00	0.34	0.10	10.00
5.298	47.27	42.33	-12.73	-17.67	60.00	0.34	0.10	10.00
5.498	48.11	43.05	-11.89	-16.95	60.00	0.35	0.10	10.00
6.198	49.69	45.82	-10.31	-14.18	60.00	0.37	0.10	10.00
6.378	51.14	46.92	-8.86	-13.08	60.00	0.37	0.10	10.00
6.570	52.52	48.23	-7.48	-11.77	60.00	0.38	0.10	10.00
6.590	52.32	48.46	-7.68	-11.54	60.00	0.38	0.10	10.00
6.626	52.53	48.65	-7.47	-11.35	60.00	0.38	0.10	10.00
6.638	52.15	48.53	-7.85	-11.47	60.00	0.38	0.10	10.00
6.722	53.52	49.25	-6.48	-10.75	60.00	0.38	0.10	10.00
6.738	53.30	49.69	-6.70	-10.31	60.00	0.38	0.10	10.00
6.774	53.52	49.37	-6.48	-10.63	60.00	0.38	0.10	10.00
6.810	54.52	50.15	-5.48	-9.85	60.00	0.38	0.10	10.00
6.842	53.38	49.83	-6.62	-10.17	60.00	0.38	0.10	10.00
6.866	54.13	50.19	-5.87	-9.81	60.00	0.39	0.10	10.00
6.890	53.85	49.97	-6.15	-10.03	60.00	0.39	0.10	10.00
6.926	54.86	50.35	-5.14	-9.65	60.00	0.39	0.10	10.00
6.958	54.08	50.23	-5.92	-9.77	60.00	0.39	0.10	10.00
6.974	54.51	50.22	-5.49	-9.78	60.00	0.39	0.10	10.00
6.982	54.65	50.35	-5.35	-9.65	60.00	0.39	0.10	10.00
6.998	54.41	50.38	-5.59	-9.62	60.00	0.39	0.10	10.00
7.006	53.89	50.75	-6.11	-9.25	60.00	0.39	0.10	10.00
7.018	54.96	50.89	-5.04	-9.11	60.00	0.39	0.10	10.00
7.034	54.71	50.35	-5.29	-9.65	60.00	0.39	0.10	10.00
7.054	54.72	50.60	-5.28	-9.40	60.00	0.39	0.10	10.00
7.090	54.90	50.94	-5.10	-9.06	60.00	0.39	0.09	10.00
7.114	54.59	50.49	-5.41	-9.51	60.00	0.39	0.09	10.00
7.126	54.77	50.70	-5.23	-9.30	60.00	0.39	0.09	10.00
7.138	55.40	50.90	-4.60	-9.10	60.00	0.39	0.09	10.00
7.170	54.61	50.41	-5.39	-9.59	60.00	0.39	0.09	10.00
7.190	55.13	50.56	-4.87	-9.44	60.00	0.39	0.09	10.00
7.202	55.20	50.82	-4.80	-9.18	60.00	0.39	0.09	10.00
7.210	54.61	50.60	-5.39	-9.40	60.00	0.39	0.09	10.00
7.230	54.77	50.24	-5.23	-9.76	60.00	0.39	0.09	10.00
7.254	55.16	50.31	-4.84	-9.69	60.00	0.39	0.09	10.00

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(OP) EMI (dB $\mu$ V)	(PEAK) Margin (QP) (dB)	(QP) Margin (QP) (dB)	(QP) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
7.278	55.01	50.71	-4.99	-9.29	60.00	0.40	0.09	10.00
7.298	54.67	50.63	-5.33	-9.37	60.00	0.40	0.09	10.00
7.314	53.90	50.07	-6.10	-9.93	60.00	0.40	0.09	10.00
7.458	53.89	49.52	-6.11	-10.48	60.00	0.40	0.09	10.00
7.478	53.99	49.44	-6.01	-10.56	60.00	0.40	0.09	10.00
7.542	53.30	49.18	-6.70	-10.82	60.00	0.40	0.09	10.00
7.586	52.70	48.55	-7.30	-11.45	60.00	0.40	0.09	10.00
7.606	52.84	48.65	-7.16	-11.35	60.00	0.40	0.09	10.00
7.622	53.15	48.76	-6.85	-11.24	60.00	0.40	0.09	10.00
7.642	52.82	48.58	-7.18	-11.42	60.00	0.40	0.09	10.00
7.690	52.25	48.20	-7.75	-11.80	60.00	0.40	0.09	10.00
7.706	53.31	48.29	-6.69	-11.71	60.00	0.40	0.09	10.00
7.790	52.08	47.37	-7.92	-12.63	60.00	0.41	0.09	10.00
7.890	51.86	47.17	-8.14	-12.83	60.00	0.41	0.09	10.00
7.946	51.25	46.62	-8.75	-13.38	60.00	0.41	0.09	10.00



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - Black Lead

File: 1 - Final Scan - Black Lead - 25 Watts - FCC Class B - 07-29-2022.set

Operator: Kyle Fujimoto

EUT Type: EAS system

EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router

Company: Callidus trading, spol s r.o.

Model: CPP+380 RF TRX

25 Watt Power Supply

7/29/2022 2:45:01 PM

Sequence: Final Measurements

## Black Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(AVG) EMI (dB $\mu$ V)	(PEAK) Margin (dB)	(AVG) Margin (dB)	(AVG) Margin (dB)	(AVG) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.178	52.14	37.57	-2.33	-16.90	54.47	0.13	0.13	10.00	
0.182	63.68	48.77	10.12	-4.79	53.56	0.12	0.12	10.00	
0.186	64.18	47.96	10.45	-5.77	53.73	0.12	0.12	10.00	
0.190	62.22	48.21	8.77	-5.24	53.45	0.12	0.11	10.00	
0.242	54.41	39.76	2.90	-11.75	51.51	0.12	0.10	10.00	
0.246	55.02	39.79	3.45	-11.78	51.57	0.12	0.10	10.00	
0.250	53.94	39.50	2.65	-11.79	51.29	0.13	0.10	10.00	
4.414	44.81	31.26	-1.19	-14.74	46.00	0.32	0.10	10.00	
4.558	43.74	31.23	-2.26	-14.77	46.00	0.32	0.10	10.00	
4.758	45.80	31.73	-0.20	-14.27	46.00	0.32	0.10	10.00	
4.862	45.32	31.46	-0.68	-14.54	46.00	0.33	0.10	10.00	
5.174	46.46	33.19	-3.54	-16.81	50.00	0.34	0.10	10.00	
5.298	47.27	33.72	-2.73	-16.28	50.00	0.34	0.10	10.00	
5.498	48.11	34.15	-1.89	-15.85	50.00	0.35	0.10	10.00	
6.198	49.69	37.57	-0.31	-12.43	50.00	0.37	0.10	10.00	
6.378	51.14	38.46	1.14	-11.54	50.00	0.37	0.10	10.00	
6.570	52.52	39.91	2.52	-10.09	50.00	0.38	0.10	10.00	
6.590	52.32	40.45	2.32	-9.55	50.00	0.38	0.10	10.00	
6.626	52.53	40.32	2.53	-9.68	50.00	0.38	0.10	10.00	
6.638	52.15	40.26	2.15	-9.74	50.00	0.38	0.10	10.00	
6.722	53.52	40.96	3.52	-9.04	50.00	0.38	0.10	10.00	
6.738	53.30	41.57	3.30	-8.43	50.00	0.38	0.10	10.00	
6.774	53.52	40.98	3.52	-9.02	50.00	0.38	0.10	10.00	
6.810	54.52	41.94	4.52	-8.06	50.00	0.38	0.10	10.00	
6.842	53.38	41.63	3.38	-8.37	50.00	0.38	0.10	10.00	
6.866	54.13	42.16	4.13	-7.84	50.00	0.39	0.10	10.00	
6.890	53.85	41.73	3.85	-8.27	50.00	0.39	0.10	10.00	
6.926	54.86	42.17	4.86	-7.83	50.00	0.39	0.10	10.00	
6.958	54.08	41.91	4.08	-8.09	50.00	0.39	0.10	10.00	
6.974	54.51	41.95	4.51	-8.05	50.00	0.39	0.10	10.00	
6.982	54.65	42.15	4.65	-7.85	50.00	0.39	0.10	10.00	
6.998	54.41	42.26	4.41	-7.74	50.00	0.39	0.10	10.00	
7.006	53.89	42.65	3.89	-7.35	50.00	0.39	0.10	10.00	
7.018	54.96	42.87	4.96	-7.13	50.00	0.39	0.10	10.00	
7.034	54.71	42.21	4.71	-7.79	50.00	0.39	0.10	10.00	
7.054	54.72	42.46	4.72	-7.54	50.00	0.39	0.10	10.00	
7.090	54.90	42.78	4.90	-7.22	50.00	0.39	0.09	10.00	
7.114	54.59	42.43	4.59	-7.57	50.00	0.39	0.09	10.00	
7.126	54.77	42.39	4.77	-7.61	50.00	0.39	0.09	10.00	
7.138	55.40	42.81	5.40	-7.19	50.00	0.39	0.09	10.00	
7.170	54.61	42.30	4.61	-7.70	50.00	0.39	0.09	10.00	
7.190	55.13	42.34	5.13	-7.66	50.00	0.39	0.09	10.00	
7.202	55.20	42.60	5.20	-7.40	50.00	0.39	0.09	10.00	
7.210	54.61	42.31	4.61	-7.69	50.00	0.39	0.09	10.00	
7.230	54.77	42.28	4.77	-7.72	50.00	0.39	0.09	10.00	
7.254	55.16	42.21	5.16	-7.79	50.00	0.39	0.09	10.00	

1

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(AVG) EMI (dB $\mu$ V)	(PEAK) Margin (AVG)	(AVG) Margin (AVG)	(AVG) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
7.278	55.01	42.44	5.01	-7.56	50.00	0.40	0.09	10.00
7.298	54.67	42.65	4.67	-7.35	50.00	0.40	0.09	10.00
7.314	53.90	42.09	3.90	-7.91	50.00	0.40	0.09	10.00
7.458	53.89	41.37	3.89	-8.63	50.00	0.40	0.09	10.00
7.478	53.99	41.13	3.99	-8.87	50.00	0.40	0.09	10.00
7.542	53.30	40.85	3.30	-9.15	50.00	0.40	0.09	10.00
7.586	52.70	40.31	2.70	-9.69	50.00	0.40	0.09	10.00
7.606	52.84	40.38	2.84	-9.62	50.00	0.40	0.09	10.00
7.622	53.15	40.58	3.15	-9.42	50.00	0.40	0.09	10.00
7.642	52.82	40.30	2.82	-9.70	50.00	0.40	0.09	10.00
7.690	52.25	40.17	2.25	-9.83	50.00	0.40	0.09	10.00
7.706	53.31	40.37	3.31	-9.63	50.00	0.40	0.09	10.00
7.790	52.08	38.95	2.08	-11.05	50.00	0.41	0.09	10.00
7.890	51.86	38.93	1.86	-11.07	50.00	0.41	0.09	10.00
7.946	51.25	38.36	1.25	-11.64	50.00	0.41	0.09	10.00



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**


**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - White Lead  
 File: 2 - Pre-Scan - White Lead - 25 Watts - FCC Class B - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Callidus trading, spol s.r.o.  
 Model: CPP+380 RF TRX  
 25 Watt Power Supply

7/29/2022 2:53:12 PM  
 Sequence: Preliminary Scan

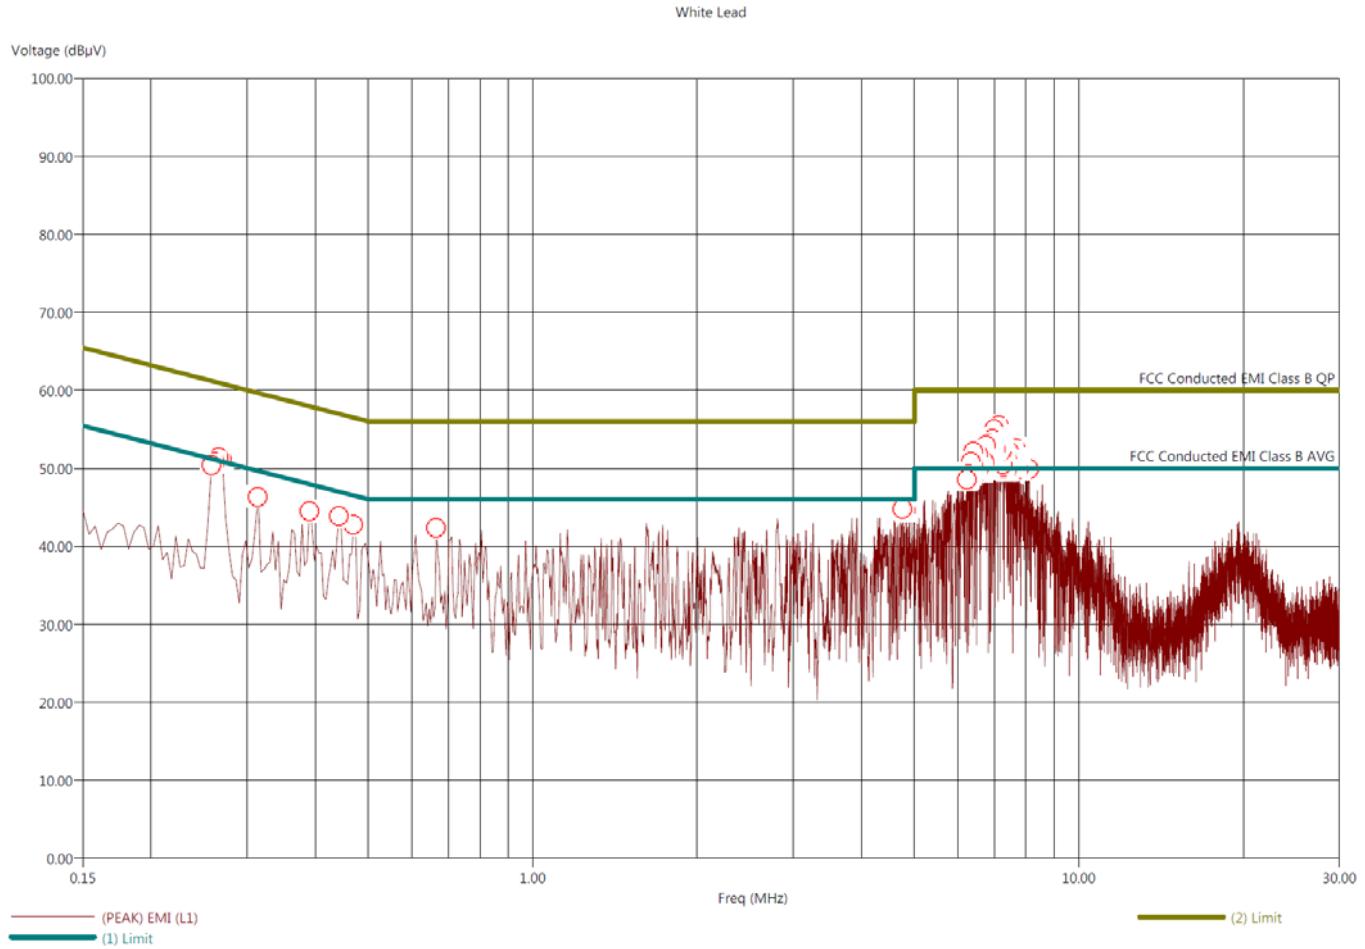

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - White Lead

7/29/2022 2:57:15 PM

File: 2 - Final Scan - White Lead - 25 Watts - FCC Class B - 07-29-2022.set

Sequence: Final Measurements

Operator: Kyle Fujimoto

EUT Type: EAS system

EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router

Company: Callidus trading, spol s r.o.

Model: CPP+380 RF TRX

25 Watt Power Supply

## White Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(QP) EMI (dB $\mu$ V)	(PEAK) Margin QP (dB)	(QP) Margin (QP) (dB)	(QP) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.258	53.31	49.27	-7.68	-11.72	61.00	0.13	0.10	10.00
0.262	54.34	49.53	-6.76	-11.57	61.11	0.13	0.10	10.00
0.266	53.15	49.43	-7.72	-11.44	60.87	0.13	0.10	10.00
0.270	53.44	49.32	-7.52	-11.64	60.96	0.13	0.10	10.00
0.314	50.02	44.81	-9.72	-14.93	59.74	0.13	0.09	10.00
0.390	47.73	42.79	-10.27	-15.21	58.00	0.13	0.08	10.00
0.442	47.40	43.02	-9.72	-14.10	57.11	0.14	0.08	10.00
0.470	46.32	42.69	-10.22	-13.85	56.54	0.14	0.08	10.00
0.666	43.50	39.04	-12.50	-16.96	56.00	0.15	0.08	10.00
4.758	45.99	41.83	-10.01	-14.17	56.00	0.32	0.09	10.00
4.822	46.19	41.93	-9.81	-14.07	56.00	0.33	0.09	10.00
6.238	51.25	46.87	-8.75	-13.13	60.00	0.37	0.10	10.00
6.274	50.49	46.71	-9.51	-13.29	60.00	0.37	0.10	10.00
6.290	50.75	46.90	-9.25	-13.10	60.00	0.37	0.10	10.00
6.330	51.33	47.58	-8.67	-12.42	60.00	0.37	0.10	10.00
6.346	50.94	47.66	-9.06	-12.34	60.00	0.37	0.10	10.00
6.402	52.03	47.95	-7.97	-12.05	60.00	0.37	0.10	10.00
6.418	51.64	47.91	-8.36	-12.09	60.00	0.37	0.10	10.00
6.430	51.83	48.00	-8.17	-12.00	60.00	0.37	0.10	10.00
6.462	52.60	48.55	-7.40	-11.45	60.00	0.37	0.10	10.00
6.470	52.25	48.32	-7.75	-11.68	60.00	0.37	0.10	10.00
6.538	53.32	48.90	-6.68	-11.10	60.00	0.38	0.10	10.00
6.562	53.05	48.82	-6.95	-11.18	60.00	0.38	0.10	10.00
6.638	52.64	49.23	-7.36	-10.77	60.00	0.38	0.10	10.00
6.710	53.81	49.85	-6.19	-10.15	60.00	0.38	0.10	10.00
6.742	54.20	50.15	-5.80	-9.85	60.00	0.38	0.10	10.00
6.758	54.43	49.87	-5.57	-10.13	60.00	0.38	0.10	10.00
6.786	54.05	50.13	-5.95	-9.87	60.00	0.38	0.10	10.00
6.814	53.69	50.16	-6.31	-9.84	60.00	0.38	0.10	10.00
6.842	54.65	50.48	-5.35	-9.52	60.00	0.38	0.10	10.00
6.874	54.32	50.88	-5.68	-9.12	60.00	0.39	0.10	10.00
6.910	54.25	50.70	-5.75	-9.30	60.00	0.39	0.10	10.00
6.918	55.52	50.94	-4.48	-9.06	60.00	0.39	0.10	10.00
6.938	54.91	51.01	-5.09	-8.99	60.00	0.39	0.10	10.00
6.950	55.19	51.14	-4.81	-8.86	60.00	0.39	0.10	10.00
6.962	54.22	50.70	-5.78	-9.30	60.00	0.39	0.10	10.00
6.994	54.95	51.09	-5.05	-8.91	60.00	0.39	0.10	10.00
7.034	55.10	50.91	-4.90	-9.09	60.00	0.39	0.10	10.00
7.046	54.66	50.97	-5.34	-9.03	60.00	0.39	0.10	10.00
7.074	54.79	51.29	-5.21	-8.71	60.00	0.39	0.10	10.00
7.094	54.98	51.16	-5.02	-8.84	60.00	0.39	0.10	10.00
7.138	55.20	51.20	-4.80	-8.80	60.00	0.39	0.10	10.00
7.150	55.09	51.28	-4.91	-8.72	60.00	0.39	0.10	10.00
7.182	55.31	50.96	-4.69	-9.04	60.00	0.39	0.10	10.00
7.210	55.25	51.22	-4.75	-8.78	60.00	0.39	0.10	10.00
7.238	54.59	50.67	-5.41	-9.33	60.00	0.39	0.10	10.00

Brea Division  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

Newbury Park Division  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

Lake Forest Division  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(QP) EMI (dB $\mu$ V)	(PEAK) Margin QP (dB)	(QP) Margin QP (dB)	(QP) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
7.250	55.21	50.77	-4.79	-9.23	60.00	0.39	0.10	10.00
7.270	54.87	50.84	-5.13	-9.16	60.00	0.39	0.10	10.00
7.282	55.47	51.19	-4.53	-8.81	60.00	0.40	0.10	10.00
7.294	55.26	50.85	-4.74	-9.15	60.00	0.39	0.10	10.00
7.386	54.20	50.08	-5.80	-9.92	60.00	0.40	0.10	10.00
7.410	54.21	50.07	-5.79	-9.93	60.00	0.40	0.10	10.00
7.426	53.92	50.20	-6.08	-9.80	60.00	0.40	0.10	10.00
7.454	53.71	49.74	-6.29	-10.26	60.00	0.40	0.10	10.00
7.470	53.65	49.76	-6.35	-10.24	60.00	0.40	0.10	10.00
7.478	53.82	49.70	-6.18	-10.30	60.00	0.40	0.10	10.00
7.494	53.93	49.87	-6.07	-10.13	60.00	0.40	0.10	10.00
7.506	52.89	49.25	-7.11	-10.75	60.00	0.40	0.10	10.00
7.518	53.50	49.29	-6.50	-10.71	60.00	0.40	0.10	10.00
7.538	53.37	49.16	-6.63	-10.84	60.00	0.40	0.10	10.00
7.550	53.55	49.40	-6.45	-10.60	60.00	0.40	0.10	10.00
7.558	53.80	49.45	-6.20	-10.55	60.00	0.40	0.10	10.00
7.582	53.28	48.76	-6.72	-11.24	60.00	0.40	0.10	10.00
7.598	52.97	48.75	-7.03	-11.25	60.00	0.40	0.10	10.00
7.626	53.20	48.85	-6.80	-11.15	60.00	0.40	0.10	10.00
7.646	52.38	48.17	-7.62	-11.83	60.00	0.40	0.10	10.00
7.662	51.60	48.22	-8.40	-11.78	60.00	0.40	0.10	10.00
7.702	52.63	48.51	-7.37	-11.49	60.00	0.40	0.10	10.00
7.758	51.96	47.88	-8.04	-12.12	60.00	0.41	0.10	10.00
8.106	49.36	45.65	-10.64	-14.35	60.00	0.41	0.10	10.00





Title: FCC Class B - White Lead

File: 2 - Final Scan - White Lead - 25 Watts - FCC Class B - 007-29-2022.set

Operator: Kyle Fujimoto

EUT Type: EAS system

EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router

Company: Callidus trading, spol s r.o.

Model: CPP+380 RF TRX

25 Watt Power Supply

7/29/2022 2:57:15 PM

Sequence: Final Measurements

## White Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(AVG) EMI (dB $\mu$ V)	(PEAK) Margin (dB)	(AVG) Margin (dB)	(AVG) Margin (dB)	(AVG) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.258	53.31	38.51	2.32	-12.48	51.00	0.13	0.10	0.10	10.00
0.262	54.34	38.67	3.24	-12.43	51.11	0.13	0.10	0.10	10.00
0.266	53.15	39.48	2.28	-11.39	50.87	0.13	0.10	0.10	10.00
0.270	53.44	39.12	2.48	-11.84	50.96	0.13	0.10	0.10	10.00
0.314	50.02	35.10	0.28	-14.64	49.74	0.13	0.09	0.09	10.00
0.390	47.73	34.09	-0.27	-13.91	48.00	0.13	0.08	0.08	10.00
0.442	47.40	34.34	0.28	-12.78	47.11	0.14	0.08	0.08	10.00
0.470	46.32	34.57	-0.22	-11.97	46.54	0.14	0.08	0.08	10.00
0.666	43.50	30.65	-2.50	-15.35	46.00	0.15	0.08	0.08	10.00
4.758	45.99	32.54	-0.01	-13.46	46.00	0.32	0.09	0.09	10.00
4.822	46.19	32.53	0.19	-13.47	46.00	0.33	0.09	0.09	10.00
6.238	51.25	38.36	1.25	-11.64	50.00	0.37	0.10	0.10	10.00
6.274	50.49	38.34	0.49	-11.66	50.00	0.37	0.10	0.10	10.00
6.290	50.75	38.45	0.75	-11.55	50.00	0.37	0.10	0.10	10.00
6.330	51.33	39.15	1.33	-10.85	50.00	0.37	0.10	0.10	10.00
6.346	50.94	39.26	0.94	-10.74	50.00	0.37	0.10	0.10	10.00
6.402	52.03	39.45	2.03	-10.55	50.00	0.37	0.10	0.10	10.00
6.418	51.64	39.39	1.64	-10.61	50.00	0.37	0.10	0.10	10.00
6.430	51.83	39.46	1.83	-10.54	50.00	0.37	0.10	0.10	10.00
6.462	52.60	40.01	2.60	-9.99	50.00	0.37	0.10	0.10	10.00
6.470	52.25	39.90	2.25	-10.10	50.00	0.37	0.10	0.10	10.00
6.538	53.32	40.56	3.32	-9.44	50.00	0.38	0.10	0.10	10.00
6.562	53.05	40.35	3.05	-9.65	50.00	0.38	0.10	0.10	10.00
6.638	52.64	40.98	2.64	-9.02	50.00	0.38	0.10	0.10	10.00
6.710	53.81	41.58	3.81	-8.42	50.00	0.38	0.10	0.10	10.00
6.742	54.20	42.19	4.20	-7.81	50.00	0.38	0.10	0.10	10.00
6.758	54.43	41.50	4.43	-8.50	50.00	0.38	0.10	0.10	10.00
6.786	54.05	41.87	4.05	-8.13	50.00	0.38	0.10	0.10	10.00
6.814	53.69	41.91	3.69	-8.09	50.00	0.38	0.10	0.10	10.00
6.842	54.65	42.31	4.65	-7.69	50.00	0.38	0.10	0.10	10.00
6.874	54.32	42.76	4.32	-7.24	50.00	0.39	0.10	0.10	10.00
6.910	54.25	42.37	4.25	-7.63	50.00	0.39	0.10	0.10	10.00
6.918	55.52	42.75	5.52	-7.25	50.00	0.39	0.10	0.10	10.00
6.938	54.91	42.86	4.91	-7.14	50.00	0.39	0.10	0.10	10.00
6.950	55.19	43.20	5.19	-6.80	50.00	0.39	0.10	0.10	10.00
6.962	54.22	42.56	4.22	-7.44	50.00	0.39	0.10	0.10	10.00
6.994	54.95	43.09	4.95	-6.91	50.00	0.39	0.10	0.10	10.00
7.034	55.10	42.87	5.10	-7.13	50.00	0.39	0.10	0.10	10.00
7.046	54.66	42.77	4.66	-7.23	50.00	0.39	0.10	0.10	10.00
7.074	54.79	43.45	4.79	-6.55	50.00	0.39	0.10	0.10	10.00
7.094	54.98	43.10	4.98	-6.90	50.00	0.39	0.10	0.10	10.00
7.138	55.20	43.11	5.20	-6.89	50.00	0.39	0.10	0.10	10.00
7.150	55.09	43.27	5.09	-6.73	50.00	0.39	0.10	0.10	10.00
7.182	55.31	42.70	5.31	-7.30	50.00	0.39	0.10	0.10	10.00
7.210	55.25	43.29	5.25	-6.71	50.00	0.39	0.10	0.10	10.00
7.238	54.59	42.69	4.59	-7.31	50.00	0.39	0.10	0.10	10.00

1

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



**COMPATIBLE  
ELECTRONICS**

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(AVG) EMI (dB $\mu$ V)	(PEAK) Margin (dB)	(AVG) Margin (dB)	(AVG) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
7.250	55.21	42.49	5.21	-7.51	50.00	0.39	0.10	10.00
7.270	54.87	42.80	4.87	-7.20	50.00	0.39	0.10	10.00
7.282	55.47	43.04	5.47	-6.96	50.00	0.40	0.10	10.00
7.294	55.26	42.86	5.26	-7.14	50.00	0.39	0.10	10.00
7.386	54.20	41.77	4.20	-8.23	50.00	0.40	0.10	10.00
7.410	54.21	42.12	4.21	-7.88	50.00	0.40	0.10	10.00
7.426	53.92	42.40	3.92	-7.60	50.00	0.40	0.10	10.00
7.454	53.71	41.35	3.71	-8.65	50.00	0.40	0.10	10.00
7.470	53.65	41.62	3.65	-8.38	50.00	0.40	0.10	10.00
7.478	53.82	41.70	3.82	-8.30	50.00	0.40	0.10	10.00
7.494	53.93	41.83	3.93	-8.17	50.00	0.40	0.10	10.00
7.506	52.89	41.00	2.89	-9.00	50.00	0.40	0.10	10.00
7.518	53.50	41.17	3.50	-8.83	50.00	0.40	0.10	10.00
7.538	53.37	41.21	3.37	-8.79	50.00	0.40	0.10	10.00
7.550	53.55	41.37	3.55	-8.63	50.00	0.40	0.10	10.00
7.558	53.80	41.25	3.80	-8.75	50.00	0.40	0.10	10.00
7.582	53.28	40.54	3.28	-9.46	50.00	0.40	0.10	10.00
7.598	52.97	40.61	2.97	-9.39	50.00	0.40	0.10	10.00
7.626	53.20	40.72	3.20	-9.28	50.00	0.40	0.10	10.00
7.646	52.38	40.23	2.38	-9.77	50.00	0.40	0.10	10.00
7.662	51.60	40.24	1.60	-9.76	50.00	0.40	0.10	10.00
7.702	52.63	40.44	2.63	-9.56	50.00	0.40	0.10	10.00
7.758	51.96	39.98	1.96	-10.02	50.00	0.41	0.10	10.00
8.106	49.36	37.56	-0.64	-12.44	50.00	0.41	0.10	10.00



**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**WITH 65 WATT POWER SUPPLY**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**


**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - Black Lead  
 File: 3 - Pre-Scan - Black Lead - 65 Watts - FCC Class B - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Callidus trading, spol. s r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 3:22:45 PM  
Sequence: Preliminary Scan

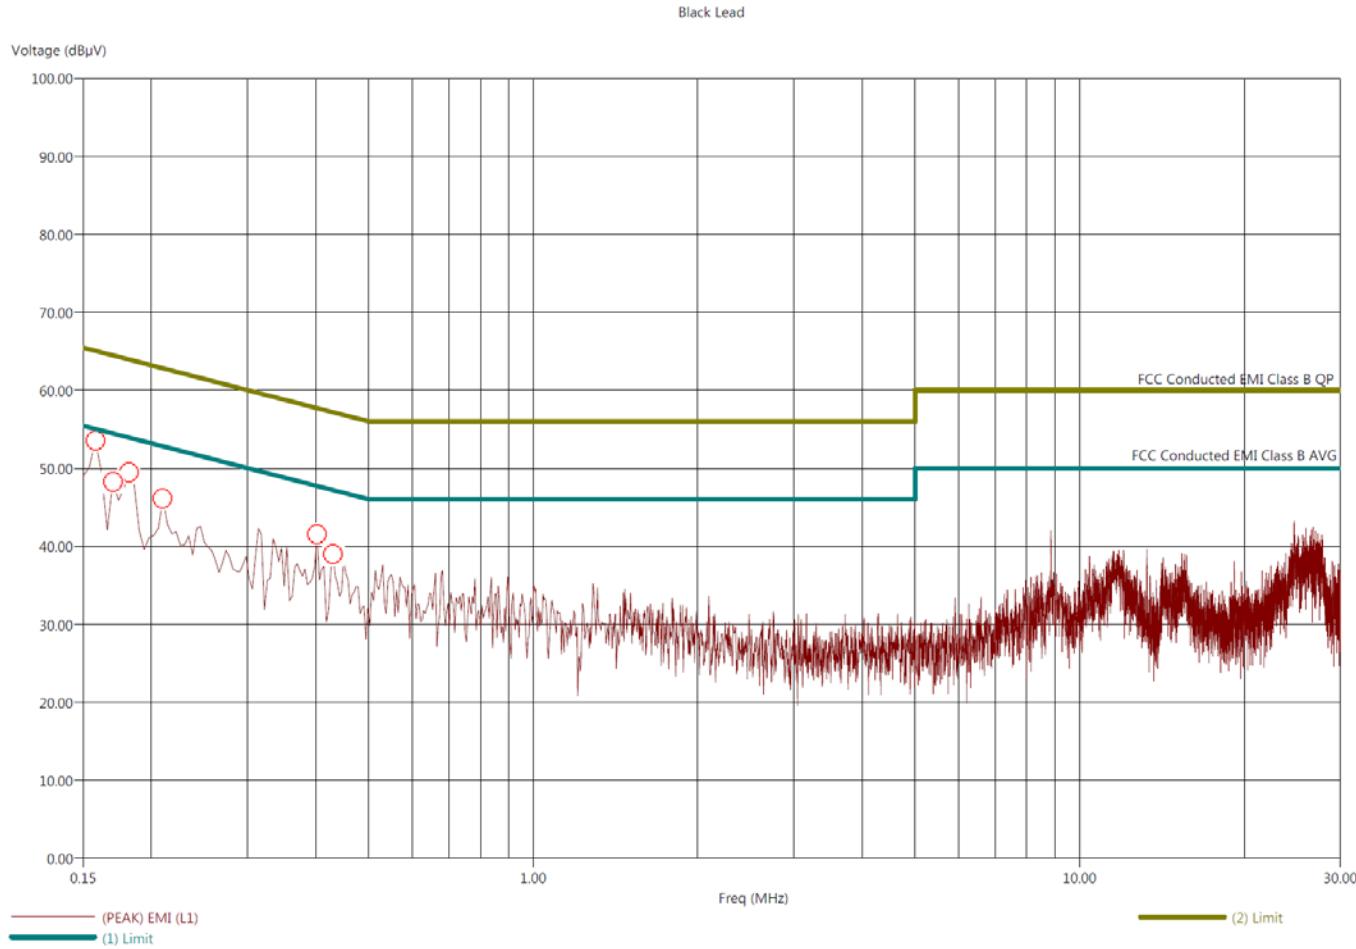

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - Black Lead

7/29/2022 3:23:50 PM

File: 3 - Final Scan - Black Lead - 65 Watts - FCC Class B - 07-29-2022.set

Sequence: Final Measurements

Operator: Kyle Fujimoto

EUT Type: EAS system

EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router

Company: Callidus trading, spol s r.o.

Model: CPP+380 RF TRX

65 Watt Power Supply

## Black Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(QP) EMI (dB $\mu$ V)	(PEAK) Margin (QP) (dB)	(QP) Margin (QP) (dB)	(QP) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.158	53.08	47.52	-12.22	-17.78	65.30	0.13	0.15	10.00
0.170	51.34	45.02	-13.19	-19.51	64.54	0.13	0.13	10.00
0.182	50.53	44.44	-13.26	-19.35	63.80	0.12	0.12	10.00
0.210	49.65	44.02	-13.46	-19.09	63.11	0.12	0.11	10.00
0.402	41.22	36.41	-16.39	-21.20	57.61	0.14	0.09	10.00
0.430	39.94	36.05	-17.37	-21.26	57.31	0.14	0.09	10.00



Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Title: FCC Class B - Black Lead  
 File: 3 - Final Scan - Black Lead - 65 Watts - FCC Class B - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Calidus trading, spol s r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 3:23:50 PM  
 Sequence: Final Measurements

Black Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(AVG) EMI (dB $\mu$ V)	(PEAK) Margin (AVG) (dB)	(AVG) Margin (AVG) (dB)	(AVG) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.158	53.08	38.19	-2.22	-17.11	55.30	0.13	0.15	10.00
0.170	51.34	37.27	-3.19	-17.26	54.54	0.13	0.13	10.00
0.182	50.53	36.58	-3.26	-17.21	53.80	0.12	0.12	10.00
0.210	49.65	37.17	-3.46	-15.94	53.11	0.12	0.11	10.00
0.402	41.22	30.47	-6.39	-17.14	47.61	0.14	0.09	10.00
0.430	39.94	30.27	-7.37	-17.04	47.31	0.14	0.09	10.00




**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

Title: FCC Class B - White Lead  
 File: 4 - Pre-Scan - White Lead - 65 Watts - FCC Class B - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Callidus trading, spol s.r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 3:14:47 PM  
 Sequence: Preliminary Scan

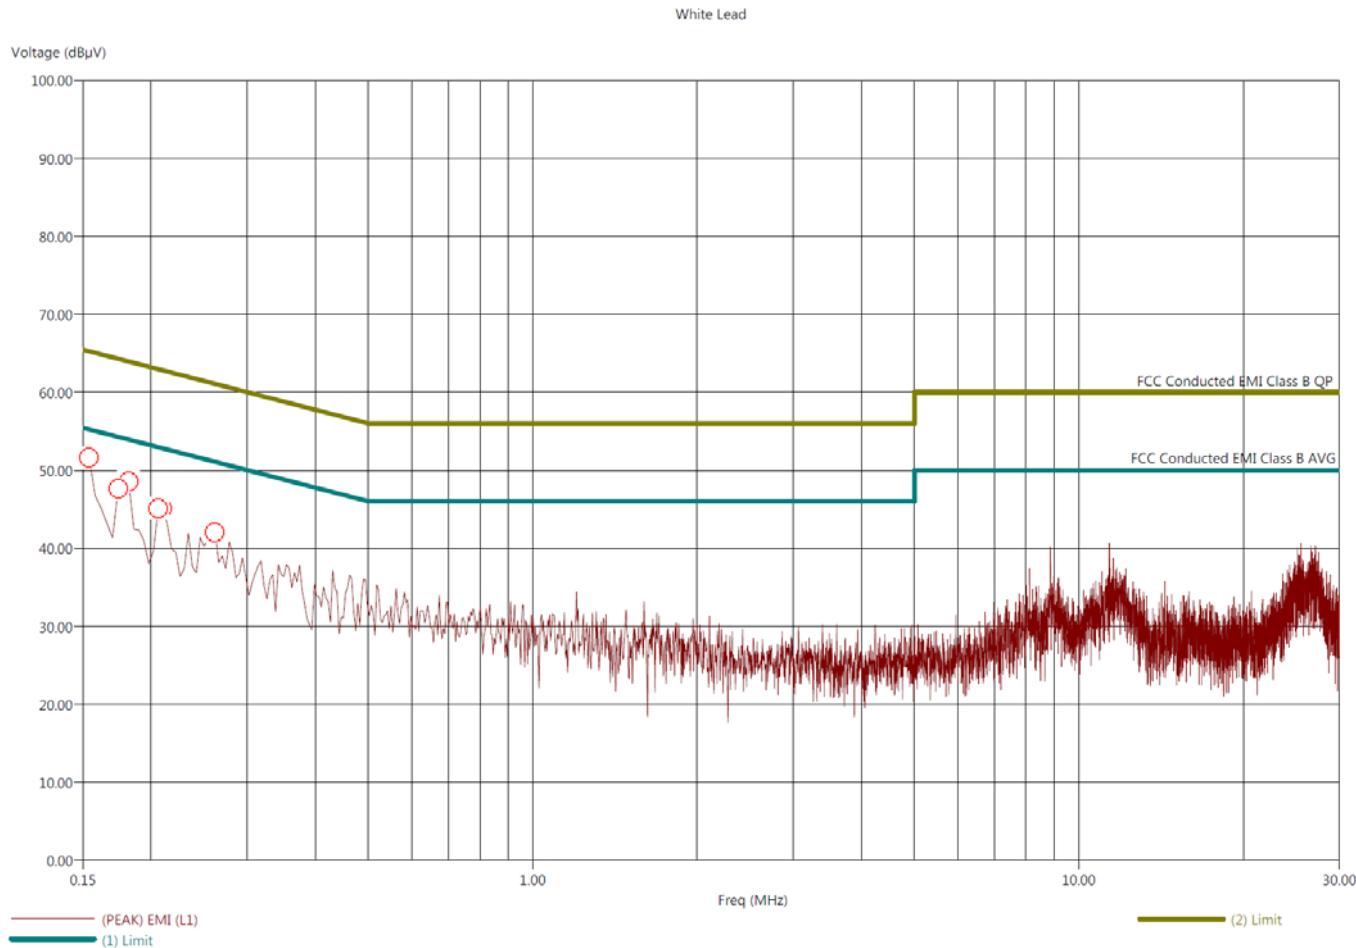

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - White Lead  
 File: 4 - Final Scan - White Lead - 65 Watts - FCC Class B - 07-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Calidus trading, spol s r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 3:15:57 PM  
 Sequence: Final Measurements

White Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(QP) EMI (dB $\mu$ V)	(PEAK) Margin QP (dB)	(QP) Margin (QP) (dB)	(QP) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.154	50.96	45.57	-14.06	-19.45	65.02	0.13	0.14	10.00
0.174	49.50	43.74	-15.22	-20.98	64.72	0.13	0.14	10.00
0.182	49.47	44.94	-14.55	-19.08	64.01	0.12	0.12	10.00
0.206	45.44	40.96	-17.29	-21.77	62.73	0.12	0.11	10.00
0.210	47.37	42.30	-15.59	-20.66	62.96	0.12	0.11	10.00
0.262	44.19	40.29	-16.68	-20.58	60.87	0.13	0.10	10.00



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



Title: FCC Class B - White Lead  
 File: 4 - Final Scan - White Lead - 65 Watts - FCC Class B - 007-29-2022.set  
 Operator: Kyle Fujimoto  
 EUT Type: EAS system  
 EUT Condition: The EUT is continuously transmitting at 8.2 MHz and pinging the router  
 Company: Callidus trading, spol s r.o.  
 Model: CPP+380 RF TRX  
 65 Watt Power Supply

7/29/2022 3:15:57 PM  
 Sequence: Final Measurements

White Lead

Freq (MHz)	(PEAK) EMI (dB $\mu$ V)	(AVG) EMI (dB $\mu$ V)	(PEAK) Margin (AVG) (dB)	(AVG) Margin (AVG) (dB)	(AVG) Limit (dB $\mu$ V)	Cable (dB)	Transducer (dB)	Filter (dB)
0.154	50.96	34.94	-4.06	-20.08	55.02	0.13	0.14	10.00
0.174	49.50	34.45	-5.22	-20.27	54.72	0.13	0.14	10.00
0.182	49.47	36.78	-4.55	-17.24	54.01	0.12	0.12	10.00
0.206	45.44	32.67	-7.29	-20.06	52.73	0.12	0.11	10.00
0.210	47.37	33.62	-5.59	-19.34	52.96	0.12	0.11	10.00
0.262	44.19	34.42	-6.68	-16.45	50.87	0.13	0.10	10.00



**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Newbury Park Division**  
**1050 Lawrence Drive**  
**Newbury Park, CA 91320**  
**(805) 480-4044**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**