



MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 Zigbee 802.15.4

FCC ID: 2ABX8SH-000000011

IC: 12219A-00000000011

APPLICANT: Zhejiang shenghui lighting Co., Ltd. Shanghai Branch

Application Type: Certification

Product: Element hub

Model No.: Z01-hub

Trademark: sengled

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15.247

IC Rule(s): RSS-247 Issue 1

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v03r03

Test Date: August 26 ~ September 06, 2015

Reviewed By : Robin Wu
(Robin Wu)

Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r03. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1508RSU01201	Rev. 01	Initial report	09-06-2015

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel List	7
2.4. Test Mode	7
2.5. Test Software	7
2.6. Device Capabilities	8
2.7. Test Configuration	8
2.8. EMI Suppression Device(s)/Modifications.....	9
2.9. Labeling Requirements.....	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS.....	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY	14
7. TEST RESULT	15
7.1. Summary	15
7.2. 6dB Bandwidth Measurement.....	16
7.2.1. Test Limit	16
7.2.2. Test Procedure used.....	16
7.2.3. Test Setting.....	16
7.2.4. Test Setup.....	16
7.2.5. Test Result.....	17
7.3. Output Power Measurement.....	18
7.3.1. Test Limit	18
7.3.2. Test Procedure Used	18
7.3.3. Test Setting.....	18

7.3.4.	Test Setup.....	18
7.3.5.	Test Result of Peak Output Power	19
7.4.	Power Spectral Density Measurement	20
7.4.1.	Test Limit	20
7.4.2.	Test Procedure Used	20
7.4.3.	Test Setting.....	20
7.4.4.	Test Setup.....	20
7.4.5.	Test Result of Power Spectral Density	21
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	22
7.5.1.	Test Limit	22
7.5.2.	Test Procedure Used	22
7.5.3.	Test Setting.....	22
7.5.4.	Test Setup.....	23
7.5.5.	Test Result.....	24
7.6.	Radiated Spurious Emission Measurement	26
7.6.1.	Test Limit	26
7.6.2.	Test Procedure Used	26
7.6.3.	Test Setting.....	26
7.6.4.	Test Setup.....	28
7.6.5.	Test Result.....	30
7.7.	Radiated Restricted Band Edge Measurement	39
7.7.1.	Test Result.....	39
7.8.	AC Conducted Emissions Measurement.....	51
7.8.1.	Test Limit	51
7.8.2.	Test Setup.....	51
7.8.3.	Test Result.....	52
8.	CONCLUSION.....	54

§2.1033 General Information

Applicant:	Zhejiang shenghui lighting Co., Ltd. Shanghai Branch
Applicant Address:	Rm. 801, 1st Xinye Building, 388 Tianlin Rd., Caohejing Development Zone, Shanghai, 200233, China
Manufacturer:	ZHEJIANG SHENGHUI LIGHTING Co., Ltd
Manufacturer Address:	South Jiachuang Rd., Xiuzhou Industrial Park Jiaxing, Zhejiang 314015 P.R. China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	809388
MRT IC Registration No.:	11384A
FCC Rule Part(s):	Part 15.247
IC Rule:	RSS-247 Issue 1
Model No.:	Z01-hub
FCC ID:	2ABX8SH-000000011
IC:	12219A-00000000011
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Element hub
Model No.	Z01-hub
Zigbee Specification	802.15.4
Wi-Fi Specification	802.11b/g/n

2.2. Product Specification Subjective to this Report

Frequency Range	2405 ~ 2480 MHz
Maximum Output Power	19.43dBm
Type of Modulation	O-QPSK
Antenna Type	PIFA Antenna
Antenna Gain	1.57dBi

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz
26	2480 MHz	--	--	--	--

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.15.4
-----------	------------------------------

2.5. Test Software

The test utility software used during testing was "SerialDebug.exe".


2.6. Device Capabilities

This device contains the following capabilities:

2.4GHz Zigbee (DTS) & 2.4GHz WLAN (DTS)

Note: 2.4GHz Zigbee (DTS) operation is possible in 5MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.15.4	100%

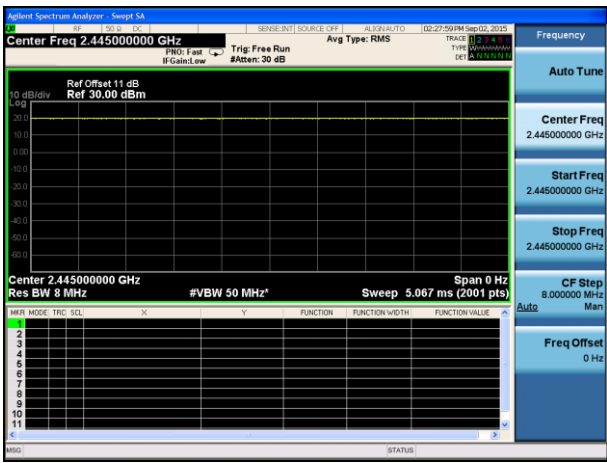

The screenshot shows an Agilent Spectrum Analyzer in zero-span mode. The center frequency is 2.445000000 GHz. The resolution bandwidth (RBW) is 8 MHz and the video bandwidth (VBW) is 50 MHz. The sweep time is 5.067 ms (2001 pts). The reference level is 30.00 dBm. The display shows a flat spectrum with a noise floor around -110 dBm.

2.7. Test Configuration

The **Element hub FCC ID: 2ABX8SH-000000011** was tested per the guidance of KDB 558074 D01v03r03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r03 were used in the measurement of the **Element hub FCC ID: 2ABX8SH-000000011**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the Element hub is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Element hub FCC ID: 2ABX8SH-000000011** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2015/11/07
Temperature/ Meter Humidity	Ouleinuo	N/A	MRTSUE06112	1 year	2015/11/20

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2015/10/09
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Preamplifier	Agilent	83017A	MRTSUE06020	1 year	2015/12/13
Preamplifier	Schwarzbeck	BBV9721	MRTSUE06121	1 year	2016/04/15
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2015/11/08
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2015/11/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2015/11/08
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2015/11/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2016/04/23
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2015/10/15
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06113	1 year	2015/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Company Name: Zhejiang shenghui lighting Co., Ltd. Shanghai Branch
FCC ID: 2ABX8SH-000000011
IC: 12219A-00000000011
FCC Classification: Digital Transmission System (DTS)
Data Rate(s) Tested: 250kbps

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	RSS-247 [5.4(4)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6&7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	N/A	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v03r03 – Section 8.2 Option 2

7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

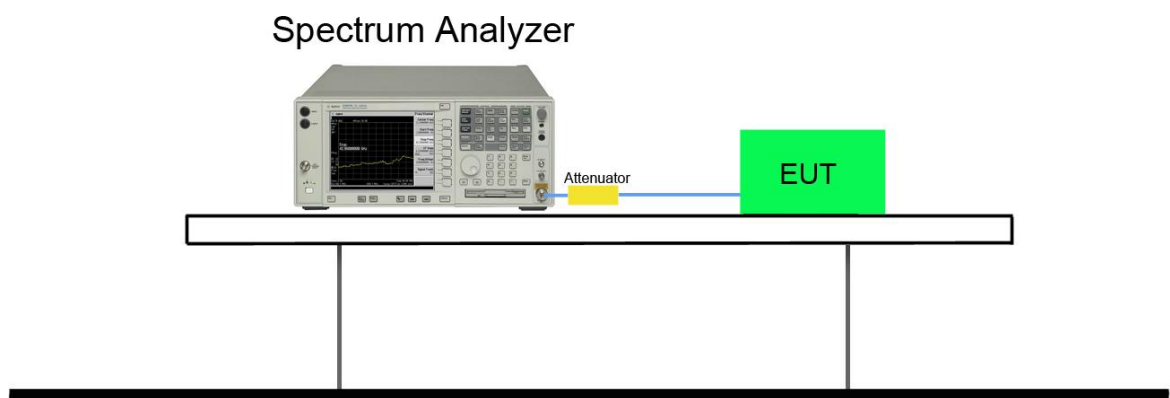

7.2.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.59	≥ 0.5	Pass
802.15.4	O-QPSK	19	2445	1.58	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.60	≥ 0.5	Pass

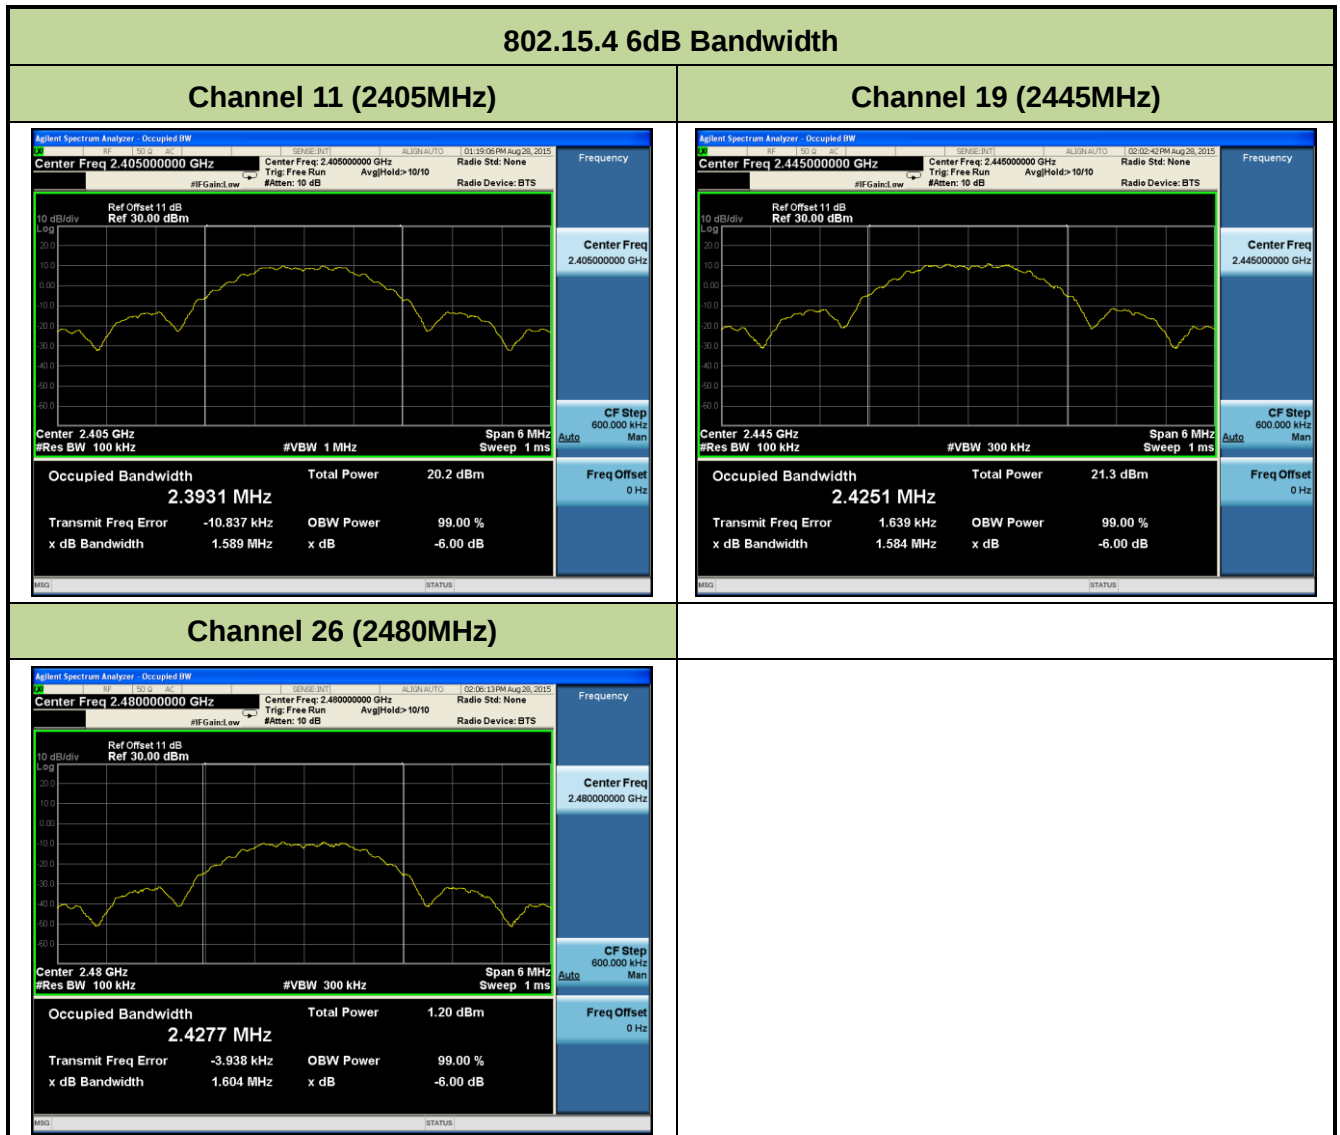

7.3. Output Power Measurement

7.3.1. Test Limit

For FCC

The maximum output power shall be less 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For IC

The maximum conducted output power shall be exceed 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

7.3.2. Test Procedure Used


KDB 558074 D01v03r03 - Section 9.1.2 PKPM1 Peak Power Method (for signals with BW $\leq$ 50MHz)

7.3.3. Test Setting

Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

7.3.4. Test Setup

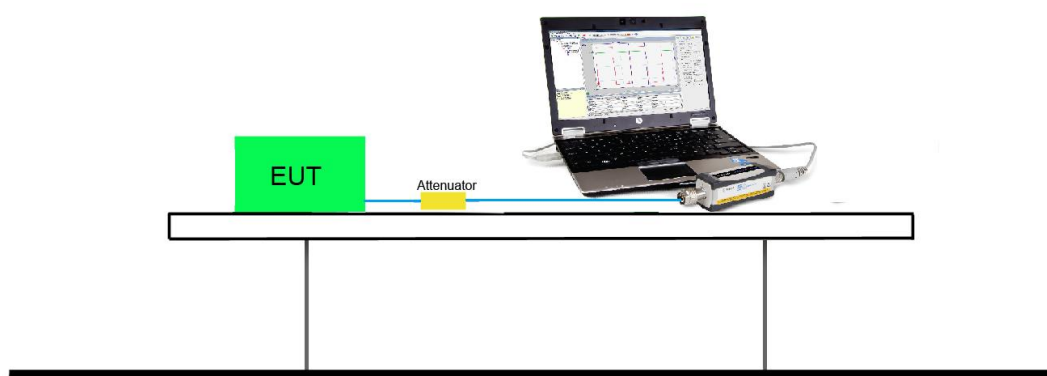

7.3.5. Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	18.52	≤ 30	20.09	≤ 36	Pass
802.15.4	O-QPSK	19	2445	19.43	≤ 30	21.00	≤ 36	Pass
802.15.4	O-QPSK	25	2475	14.93	≤ 30	16.50	≤ 36	Pass
802.15.4	O-QPSK	26	2480	-6.01	≤ 30	-4.44	≤ 36	Pass

Note: E.I.R.P. (dBm) = Peak Output Power (dBm) + Antenna Gain (dBi).

Test Result of Average Output Power for Report Only

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	18.39	≤ 30	19.96	≤ 36	Pass
802.15.4	O-QPSK	19	2445	19.24	≤ 30	20.81	≤ 36	Pass
802.15.4	O-QPSK	25	2475	14.75	≤ 30	16.32	≤ 36	Pass
802.15.4	O-QPSK	26	2480	-6.46	≤ 30	-4.89	≤ 36	Pass

Note: E.I.R.P. (dBm) = Average Output Power (dBm) + Antenna Gain (dBi).

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.4.2. Test Procedure Used

KDB 558074 D01v03r03 - Section 10.2 Method PKPSD

7.4.3. Test Setting


1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

7.4.4. Test Setup

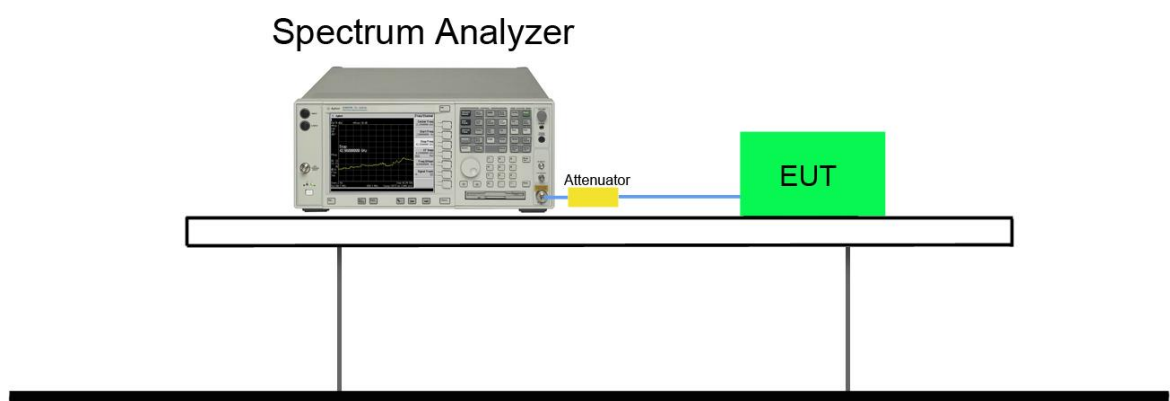

7.4.5. Test Result of Power Spectral Density

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.15.4	O-QPSK	11	2405	3.91	≤ 8	Pass
802.15.4	O-QPSK	19	2445	4.19	≤ 8	Pass
802.15.4	O-QPSK	26	2480	-21.10	≤ 8	Pass

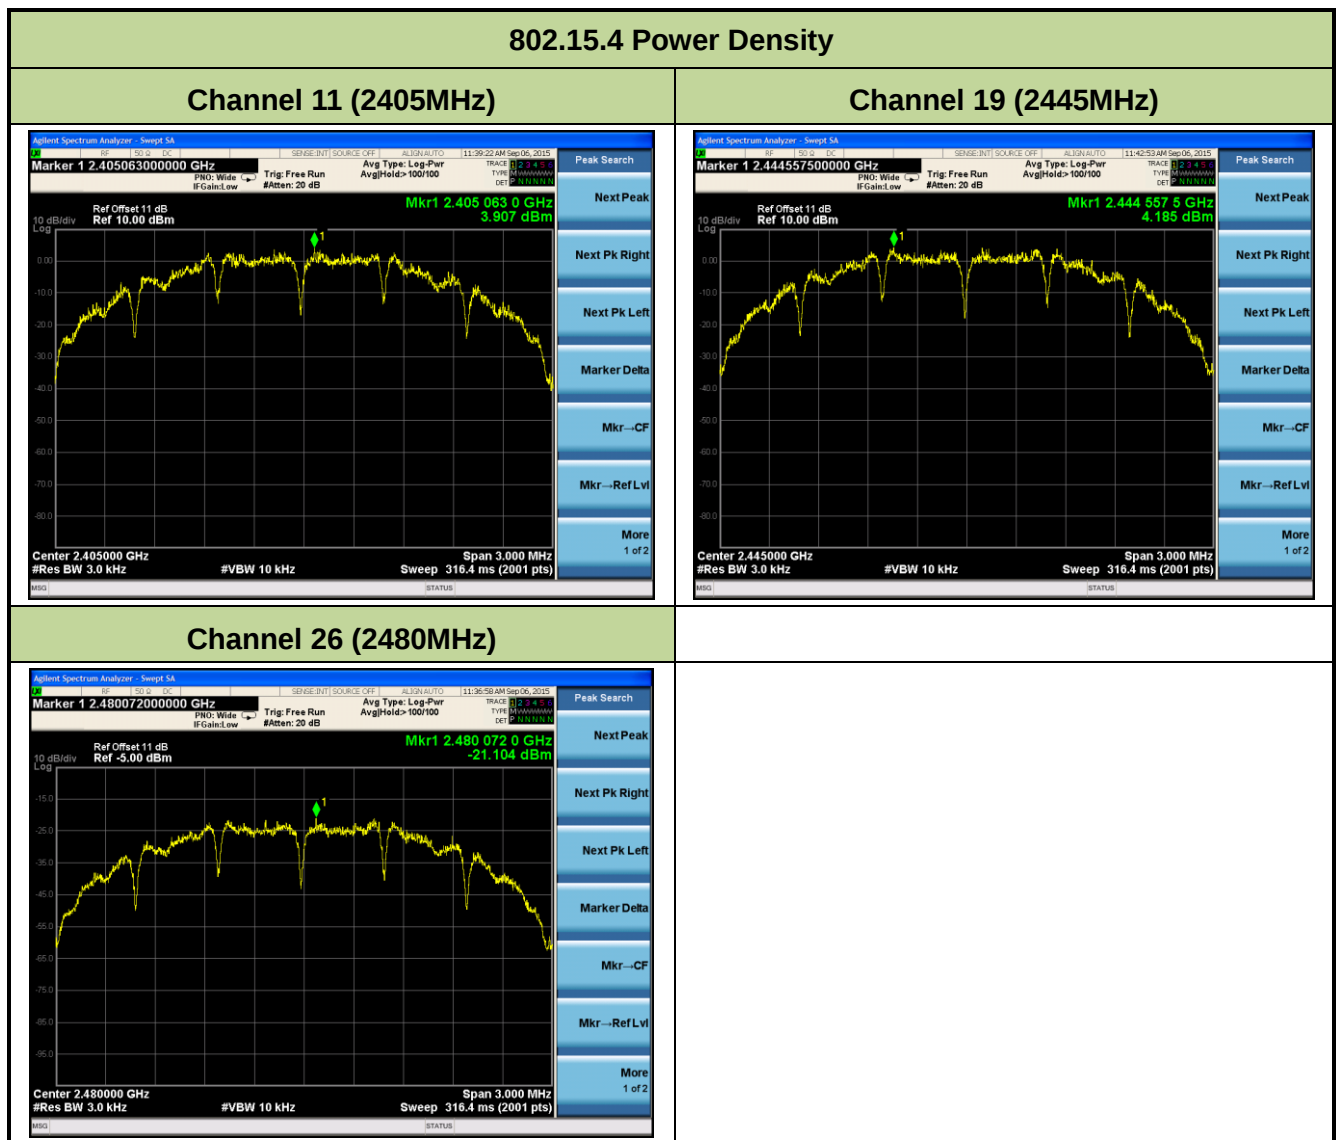

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

KDB 558074 D01v03r03 - Section 11.2 & Section 11.3

7.5.3. Test Settling


1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

7.5.4. Test Setup

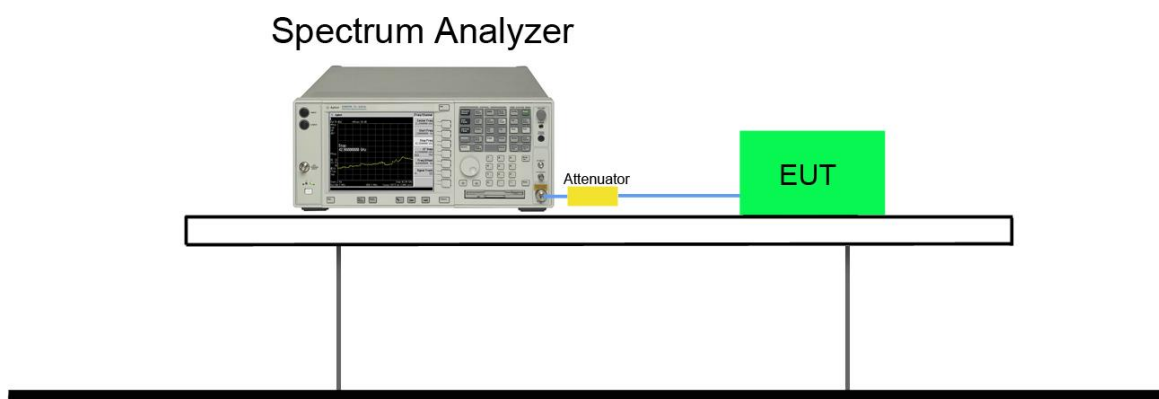


7.5.5. Test Result

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	Limit	Result
802.15.4	O-QPSK	11	2405	20dBc	Pass
802.15.4	O-QPSK	19	2445	20dBc	Pass
802.15.4	O-QPSK	26	2480	20dBc	Pass


802.15.4 Out-of-Band Emissions

Channel 11 (2405MHz)


100kHz PSD Reference Level

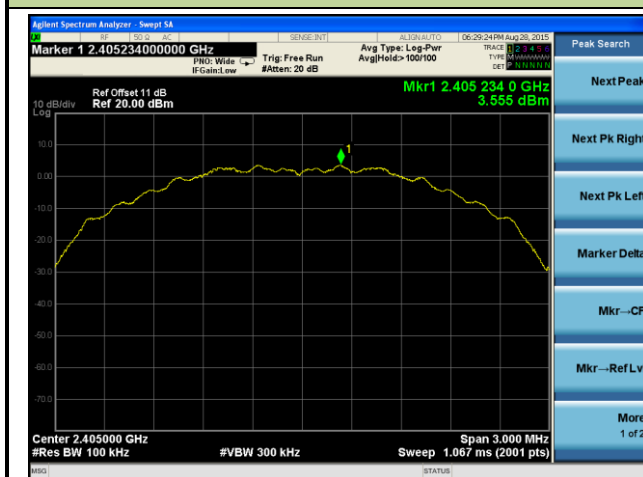

Low Band Edge

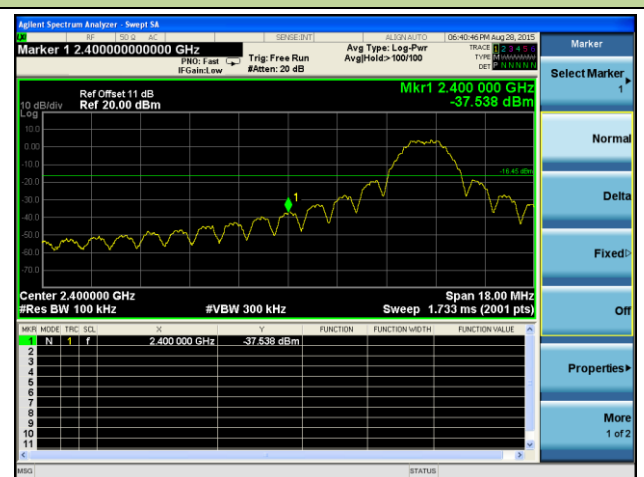

Spurious Emission

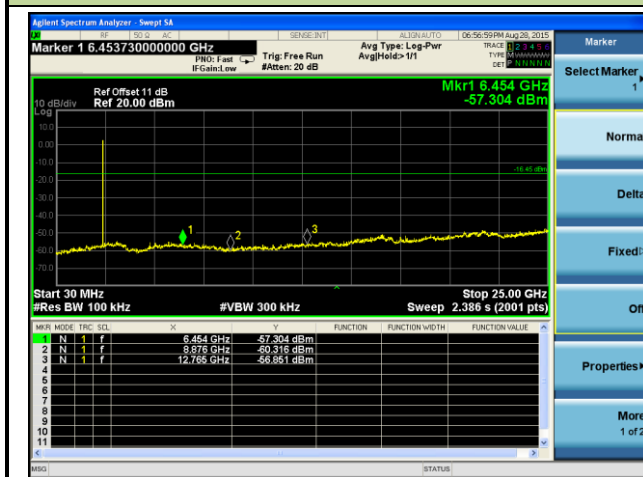


Channel 19 (2445MHz)

100kHz PSD Reference Level




Spurious Emission

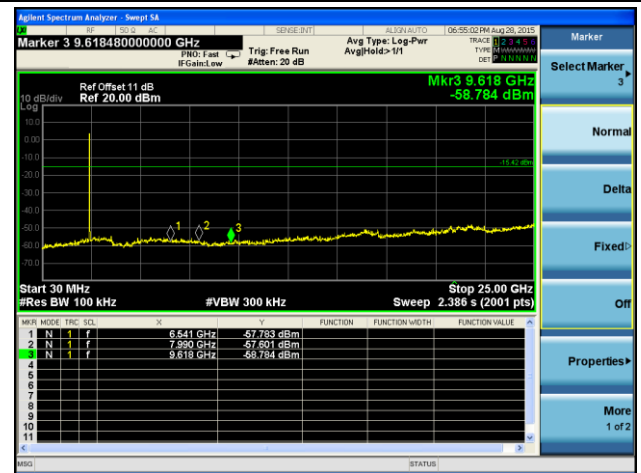

Channel 26 (2480MHz)

100kHz PSD Reference Level

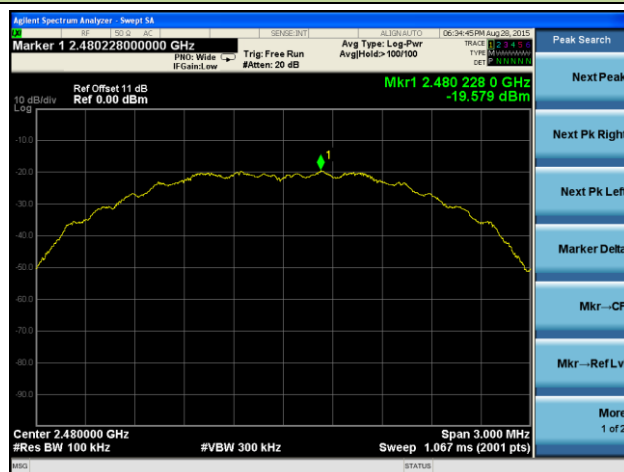

Low Band Edge



Spurious Emission



7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

KDB 558074 D01v03r03 – Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r03 – Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r03 – Section 12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r03

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements per Section 12.2.5.3 of KDB 558074 D01v03r03


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

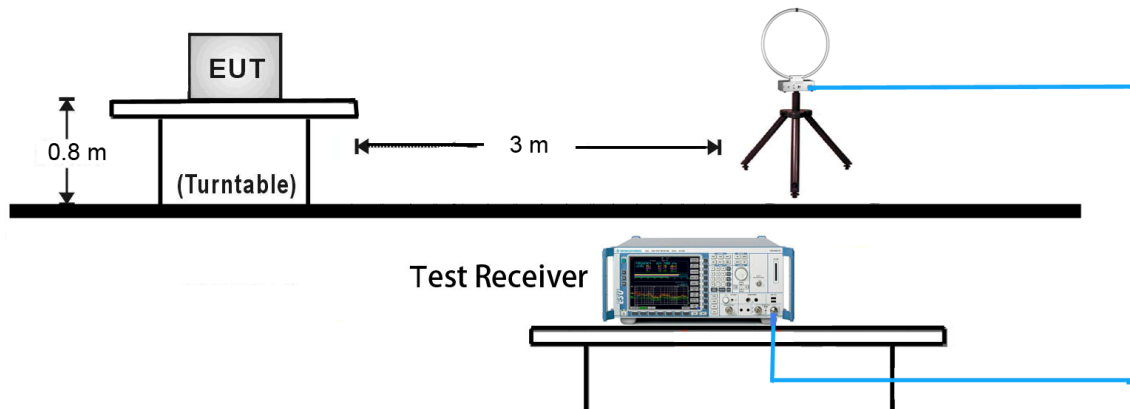


30MHz ~ 1GHz Test Setup:

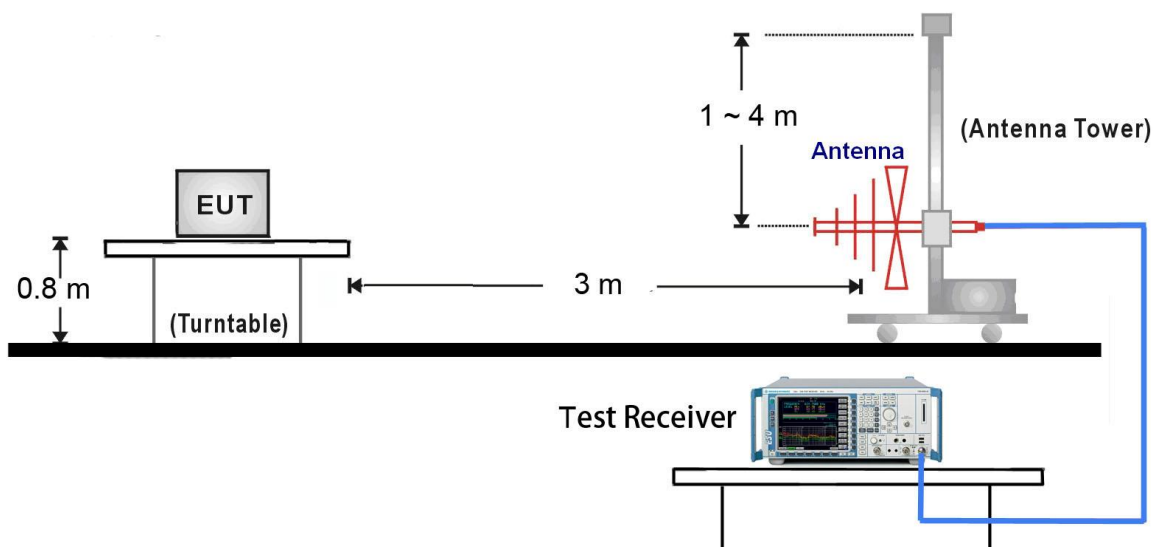

1GHz ~ 18GHz Test Setup:

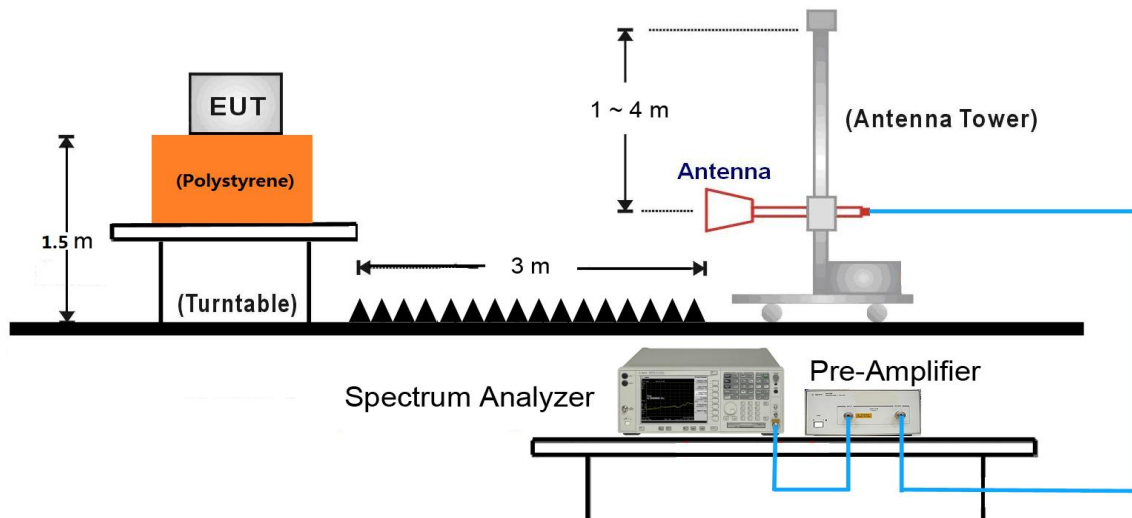

18GHz ~ 25GHz Test Setup:

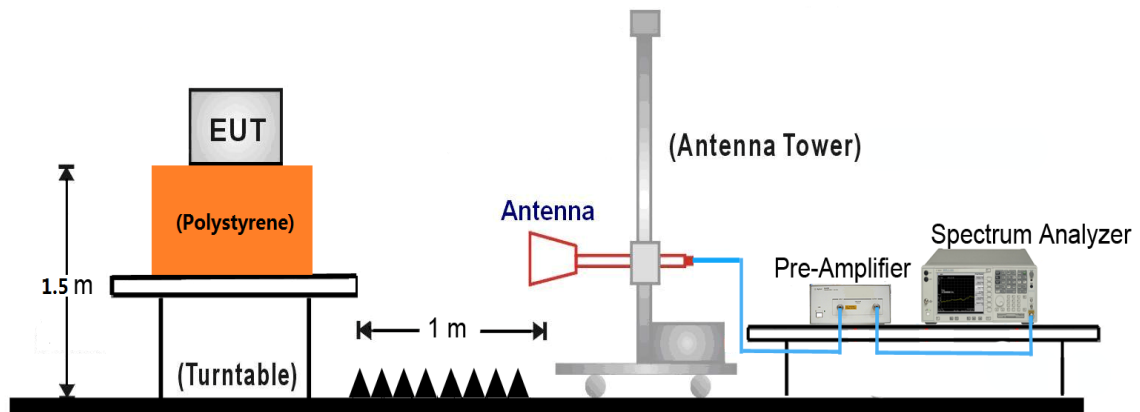

7.6.5. Test Result

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4809.9	57.0	2.7	59.7	74.0	-14.3	Peak	Horizontal
	4809.9	48.5	2.7	51.2	54.0	-2.8	Average	Horizontal
*	7213.5	49.8	7.8	57.6	88.7	-31.1	Peak	Horizontal
*	8616.0	43.5	1.7	45.2	88.7	-43.5	Peak	Horizontal
	12024.6	41.9	12.0	53.9	74.0	-20.1	Peak	Horizontal
	12024.6	36.6	12.0	48.6	54.0	-5.4	Average	Horizontal
	4810.0	56.8	2.7	59.5	74.0	-14.5	Peak	Vertical
	4810.0	48.0	2.7	50.7	54.0	-3.3	Average	Vertical
*	7213.5	47.6	7.8	55.4	88.7	-33.3	Peak	Vertical
*	7893.5	43.6	1.5	45.1	88.7	-43.6	Peak	Vertical
	12024.5	37.5	12.0	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (108.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	19	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3575.5	42.9	-5.2	37.7	87.6	-49.9	Peak	Horizontal
*	4408.5	41.0	-3.6	37.4	87.6	-50.2	Peak	Horizontal
	4893.0	48.6	2.7	51.3	74.0	-22.7	Peak	Horizontal
	7332.5	40.7	8.0	48.7	74.0	-25.3	Peak	Horizontal
*	3567.0	43.0	-5.3	37.7	87.6	-49.9	Peak	Vertical
*	4459.5	40.4	-3.5	36.9	87.6	-50.7	Peak	Vertical
	4893.0	49.8	2.7	52.5	74.0	-21.5	Peak	Vertical
	7332.5	37.1	8.0	45.1	74.0	-28.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (107.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre-Amplifier Gain (dB)

Test Mode:	802.15.4	Test Site:	AC1
Test Channel:	26	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6576.0	42.1	-0.1	42.0	74.0	-32.0	Peak	Horizontal
*	6933.0	42.1	0.3	42.4	74.0	-31.6	Peak	Horizontal
	7440.0	40.6	1.4	42.0	74.0	-32.0	Peak	Horizontal
	7630.0	42.7	1.3	44.0	74.0	-30.0	Peak	Horizontal
*	6584.5	41.6	-0.1	41.5	74.0	-32.5	Peak	Vertical
*	6848.0	42.6	0.1	42.7	74.0	-31.3	Peak	Vertical
	7341.0	42.4	1.5	43.9	74.0	-30.1	Peak	Vertical
	7440.0	40.9	1.4	42.3	74.0	-31.7	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (85.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre-Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC 1	Time: 2015/09/01 - 16:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Worse Case Mode: Transmit at channel 2405MHz	

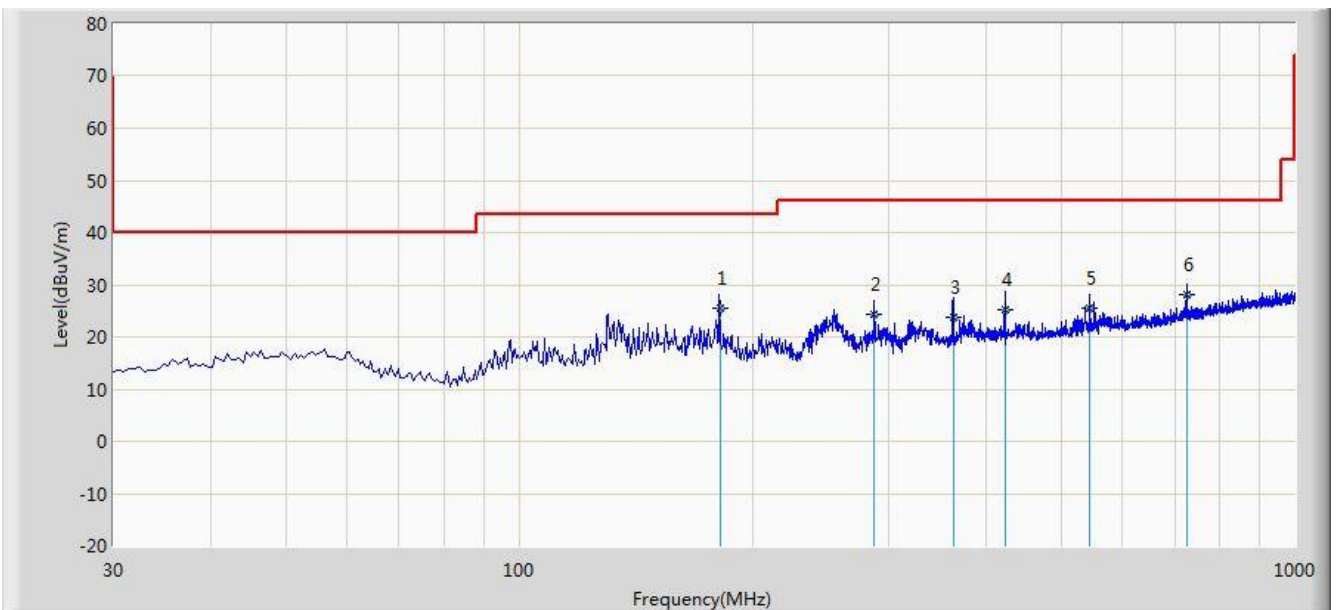


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	181.403	25.607	14.550	-17.893	43.500	11.057	QP
2			287.081	24.226	9.810	-21.774	46.000	14.416	QP
3			362.850	23.683	7.543	-22.317	46.000	16.140	QP
4			422.940	25.217	8.060	-20.783	46.000	17.157	QP
5			543.850	25.491	6.300	-20.509	46.000	19.190	QP
6			724.970	27.989	5.920	-18.011	46.000	22.069	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/09/01 - 16:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Worse Case Mode: Transmit at channel 2405MHz	

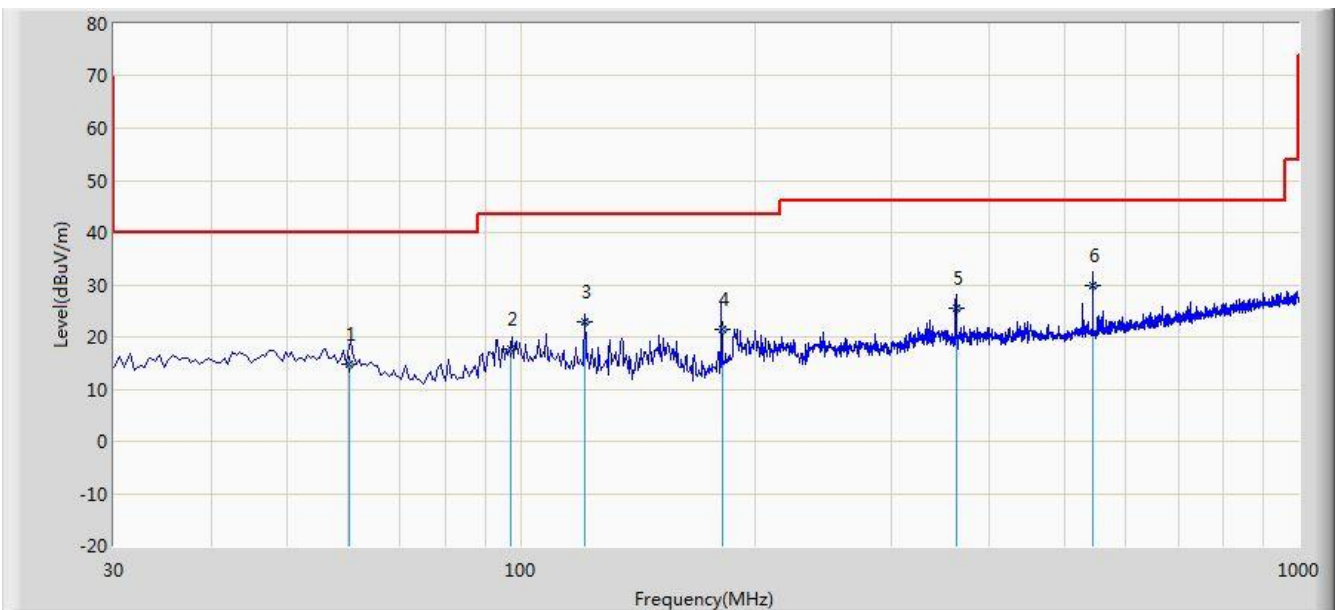


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			60.320	14.901	1.050	-25.099	40.000	13.851	QP
2			97.250	17.633	4.920	-25.867	43.500	12.713	QP
3			120.740	22.837	11.630	-20.663	43.500	11.207	QP
4			181.430	21.379	10.320	-22.121	43.500	11.059	QP
5			362.550	25.570	9.430	-20.430	46.000	16.139	QP
6		*	543.320	29.922	10.750	-16.078	46.000	19.173	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/09/01 - 18:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Element hub	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

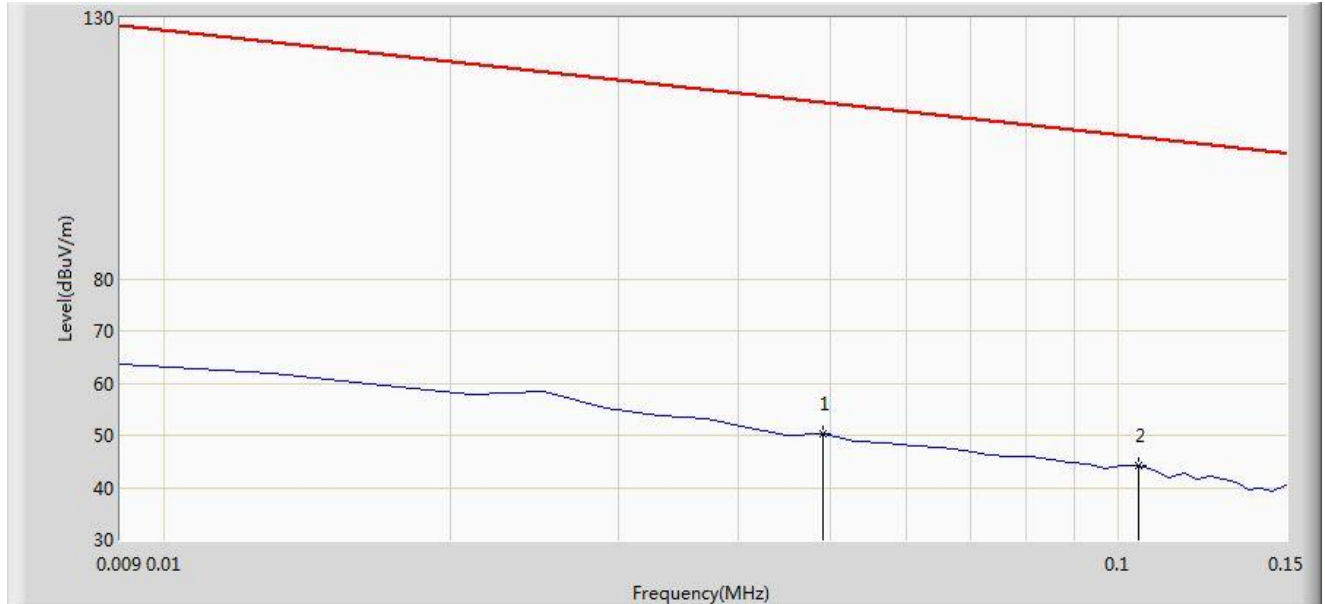


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.367	29.861	-63.422	113.789	20.505	QP
2		*	0.105	44.143	23.996	-63.029	107.173	20.147	QP

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor. (dB).

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/09/01 - 18:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Element hub	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

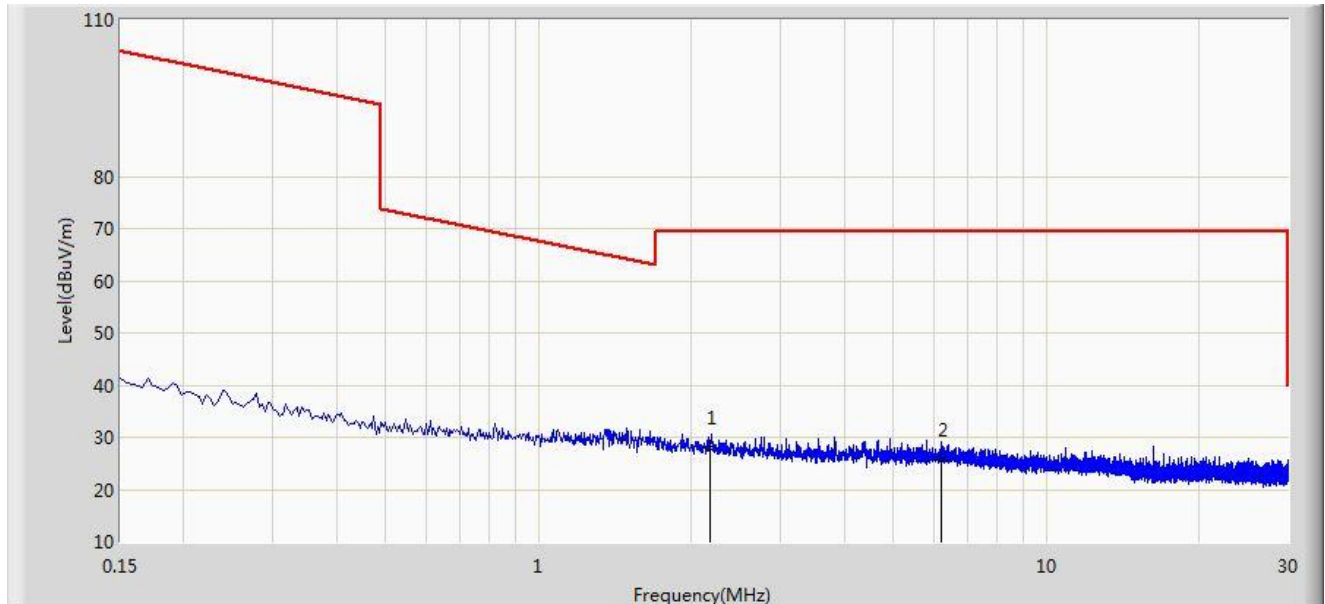


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2.175	27.894	7.735	-41.606	69.500	20.159	PK
2			6.216	25.672	5.318	-43.828	69.500	20.354	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Limit@3m = 20*Log(30uV/m) + 20*Log(30m/3m) = 49.5dBμv/m (Average detector), and 69.5dBμv/m (Peak detector).

Site: AC1	Time: 2015/09/01- 21:20
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

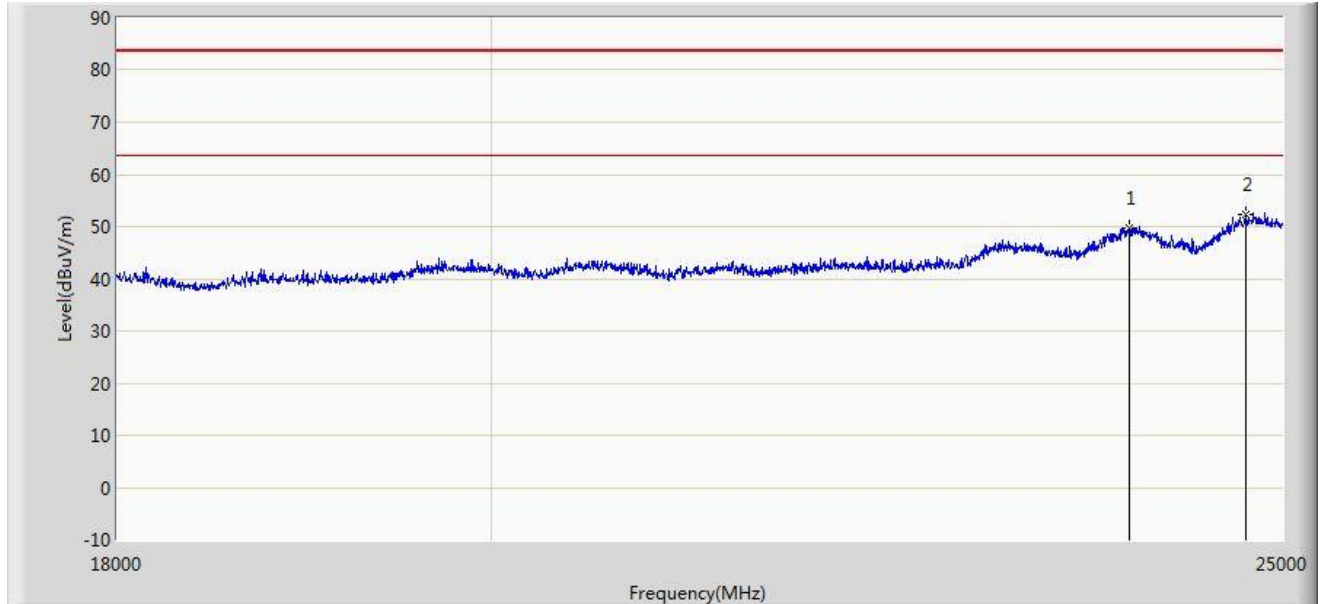


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23943.000	49.776	35.866	-33.724	83.500	13.910	PK
2		*	24741.000	52.375	37.681	-31.125	83.500	14.694	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre-Amplifier Gain (dB)

Limit@1m = 20*Log(500uV/m) + 20*Log(3m/1m) = 63.5dB μ v/m (Average detector), and 83.5dB μ v/m (Peak detector).

Site: AC1	Time: 2015/09/01 - 21:32
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

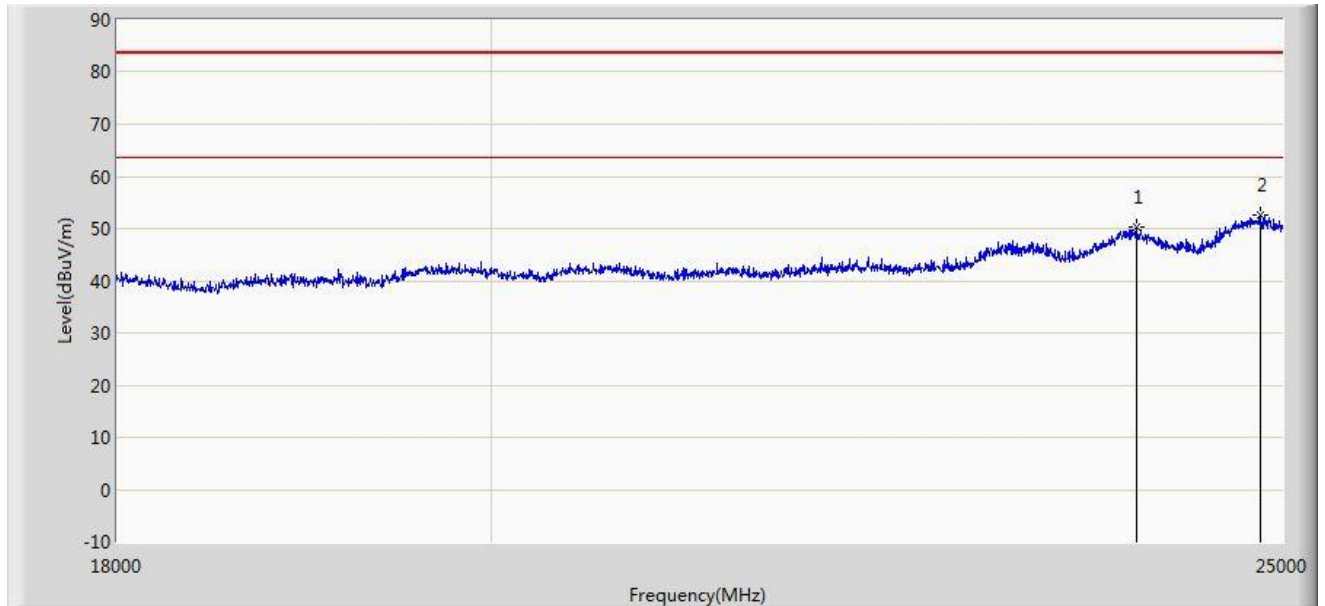

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23999.000	50.379	36.435	-33.121	83.500	13.944	PK
2		*	24846.000	52.503	37.735	-30.997	83.500	14.768	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre-Amplifier Gain (dB)

Limit@1m = 20*Log(500uV/m) + 20*Log(3m/1m) = 63.5dBμV/m (Average detector), and 83.5dBμV/m (Peak detector).

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Result

Site: AC 1	Time: 2015/08/28 - 13:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

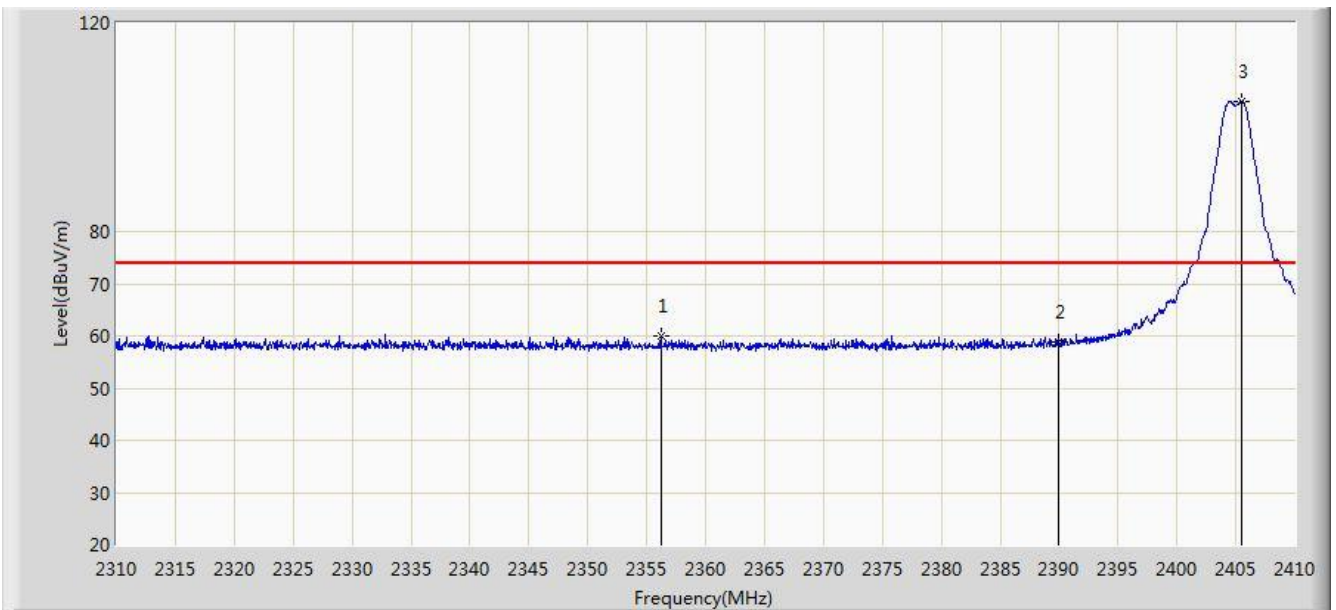


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2356.200	59.941	28.672	-14.059	74.000	31.269	PK
2			2390.000	58.728	27.525	-15.272	74.000	31.203	PK
3		*	2405.450	104.941	73.762	N/A	N/A	31.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 13:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

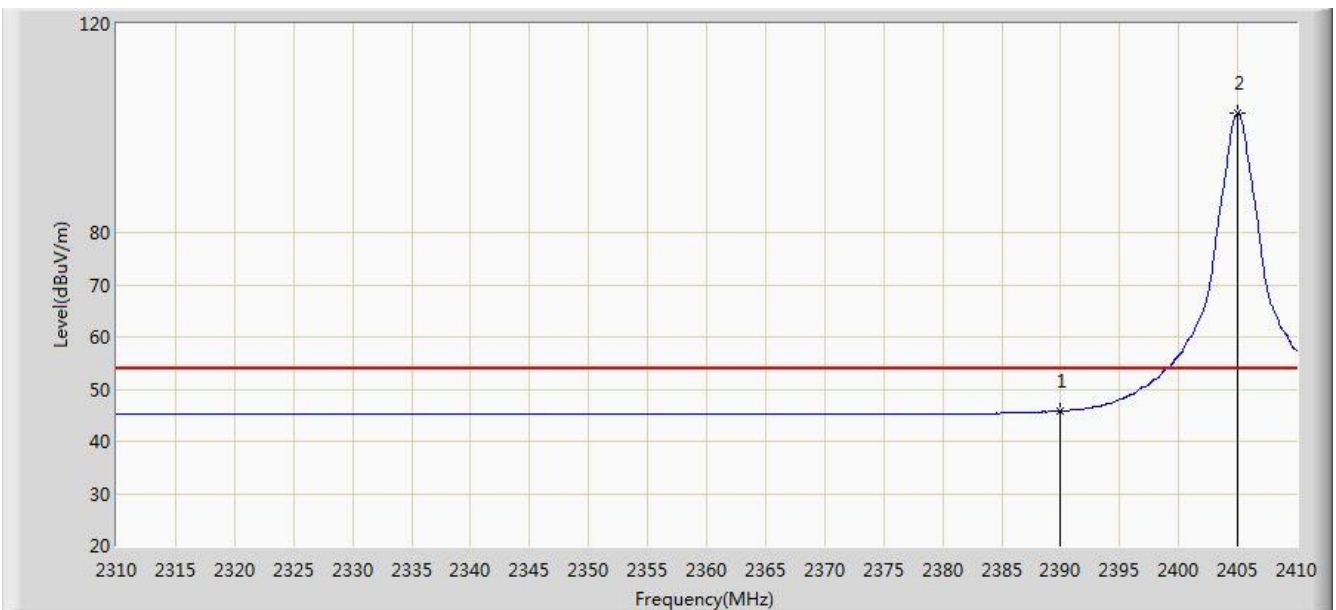


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.778	14.575	-8.222	54.000	31.203	AV
2		*	2404.950	102.790	71.610	N/A	N/A	31.180	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

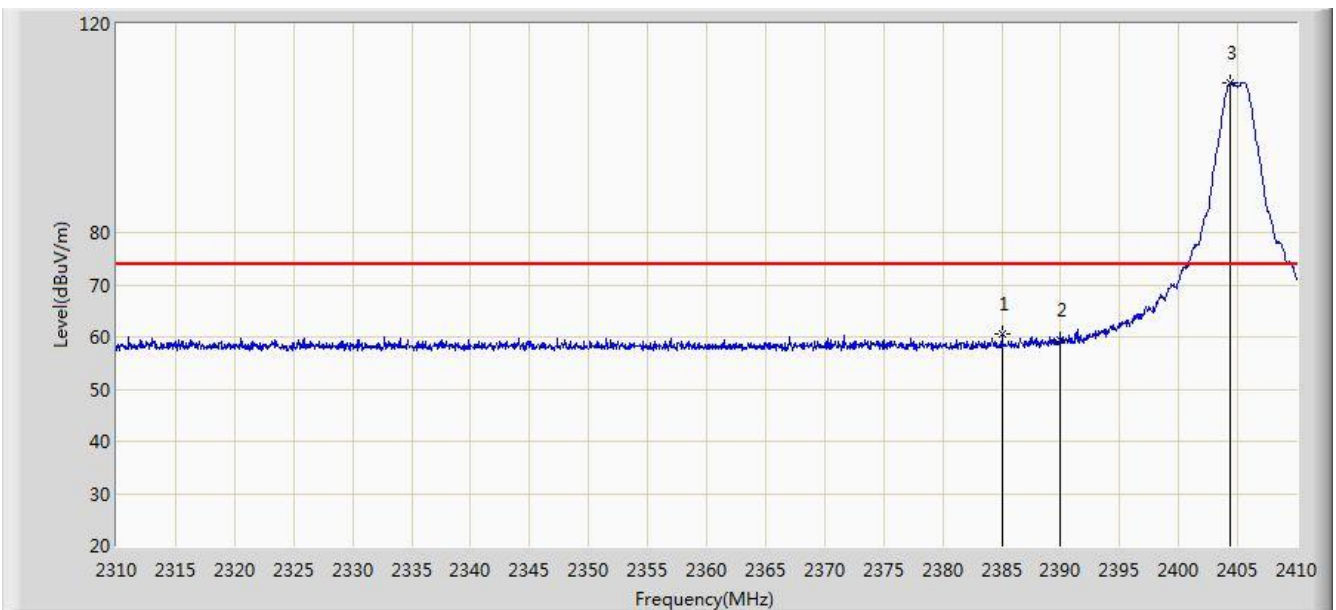


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.050	60.495	29.283	-13.505	74.000	31.212	PK
2			2390.000	59.334	28.131	-14.666	74.000	31.203	PK
3		*	2404.400	108.680	77.499	N/A	N/A	31.181	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 13:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2405MHz	

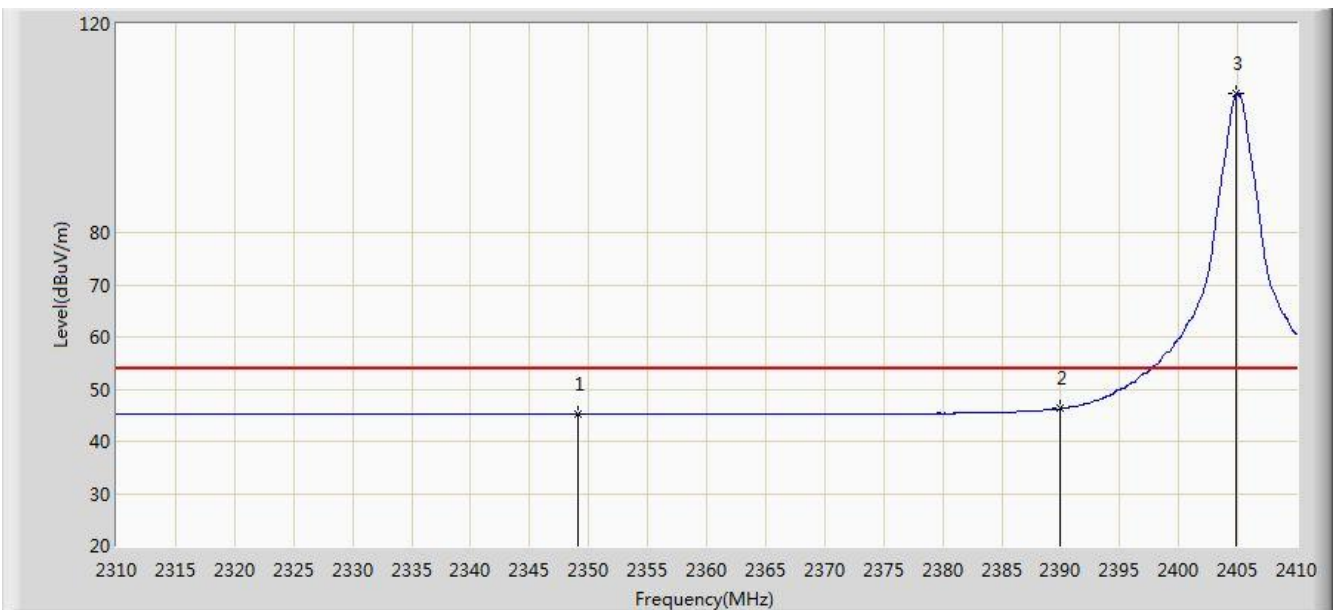


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2349.150	45.171	13.875	-8.829	54.000	31.296	AV
2			2390.000	46.260	15.057	-7.740	54.000	31.203	AV
3		*	2404.900	106.544	78.976	N/A	N/A	27.568	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 13:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

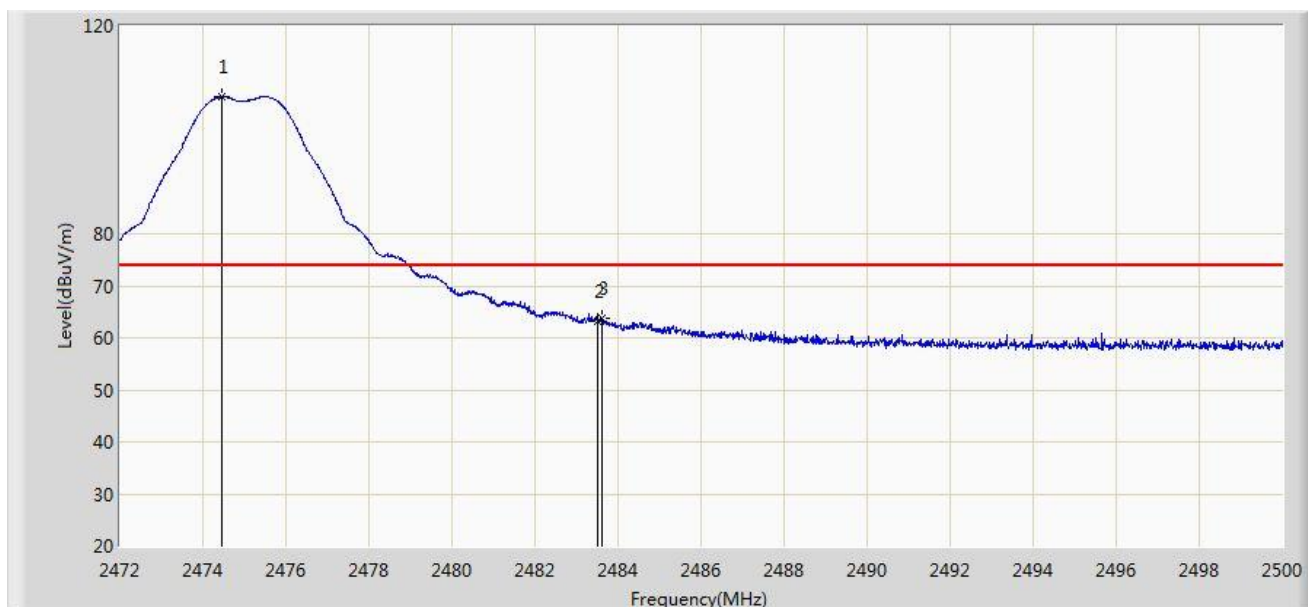


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.464	106.284	75.115	N/A	N/A	31.168	PK
2			2483.500	63.218	32.025	-10.782	74.000	31.194	PK
3			2483.620	63.726	32.532	-10.274	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 13:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

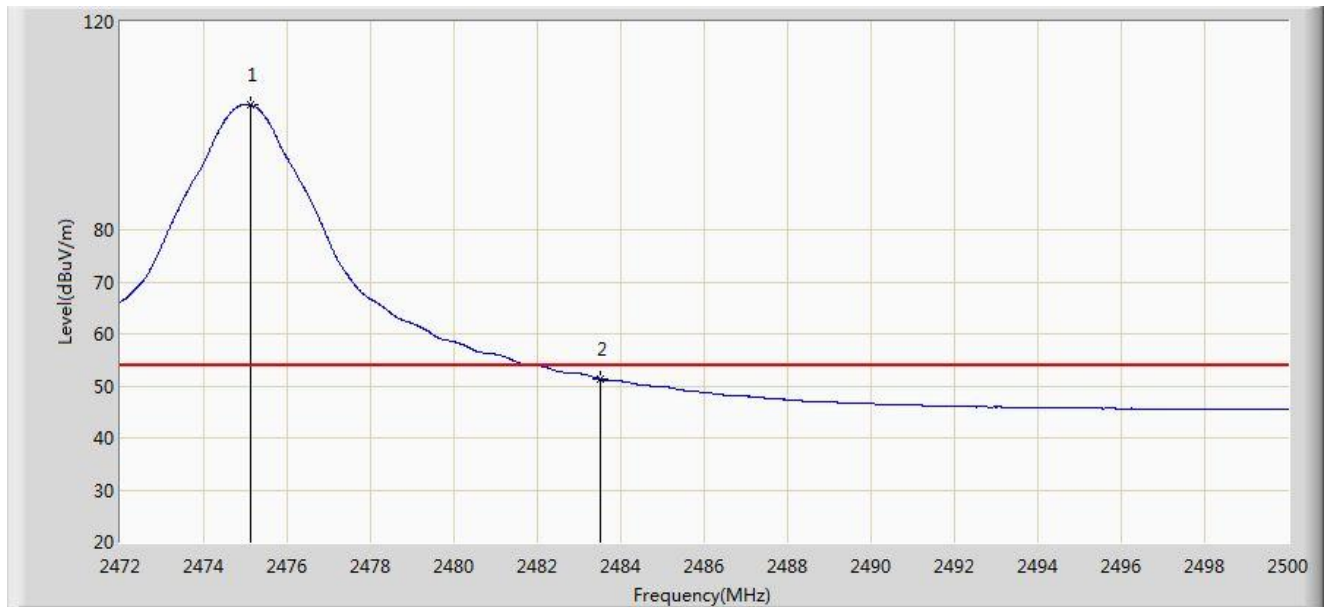


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2475.122	104.062	72.891	N/A	N/A	31.170	AV
2			2483.500	51.323	20.130	-2.677	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 14:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

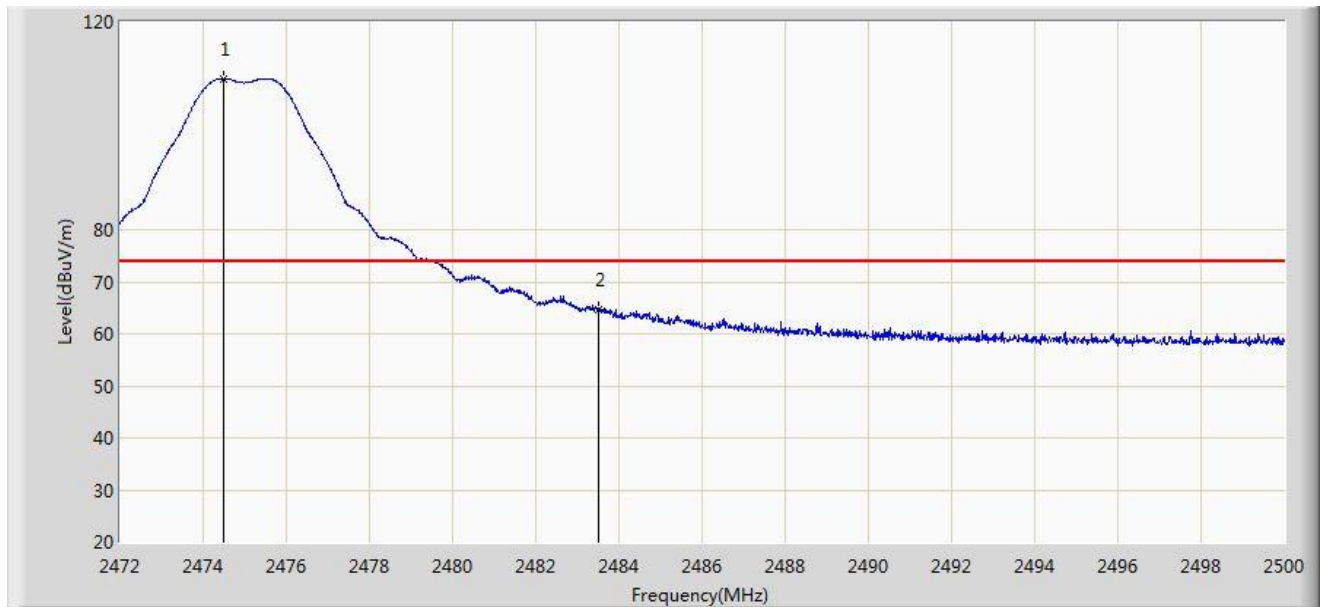


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.506	109.098	77.929	N/A	N/A	31.169	PK
2			2483.500	64.730	33.537	-9.270	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 14:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2475MHz	

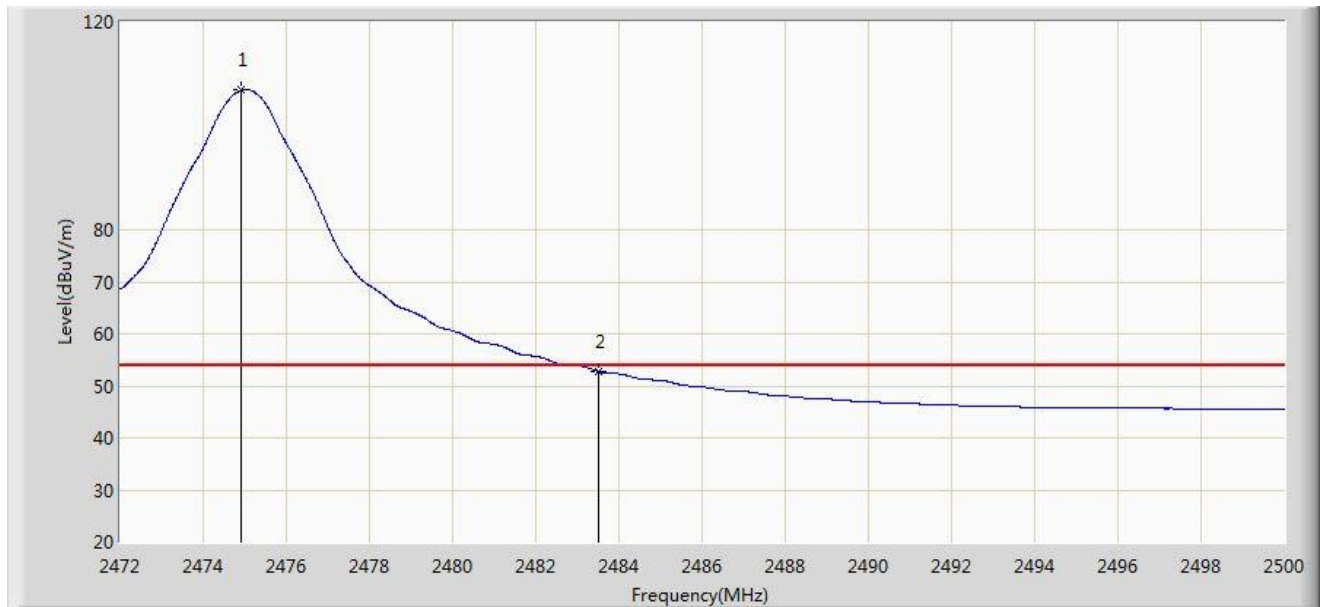


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.912	106.831	75.661	N/A	N/A	31.170	AV
2			2483.500	52.789	21.596	-1.211	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 14:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

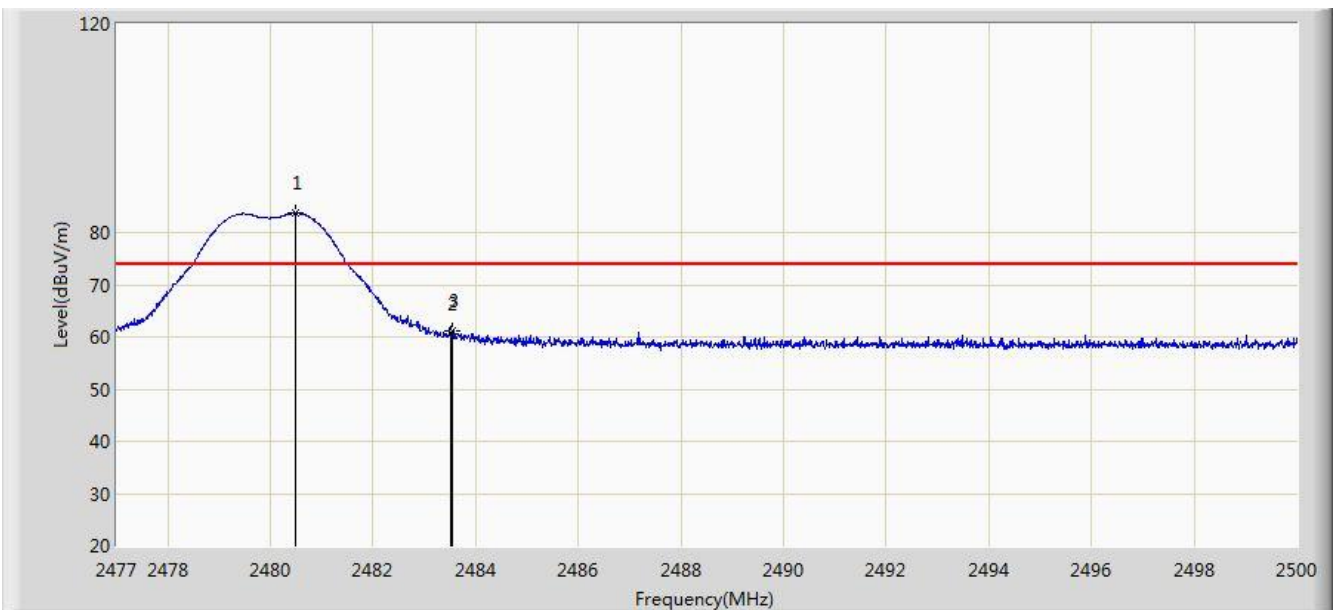


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.496	83.825	52.640	N/A	N/A	31.185	PK
2			2483.500	60.673	29.480	-13.327	74.000	31.194	PK
3			2483.555	61.249	30.056	-12.751	74.000	31.194	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

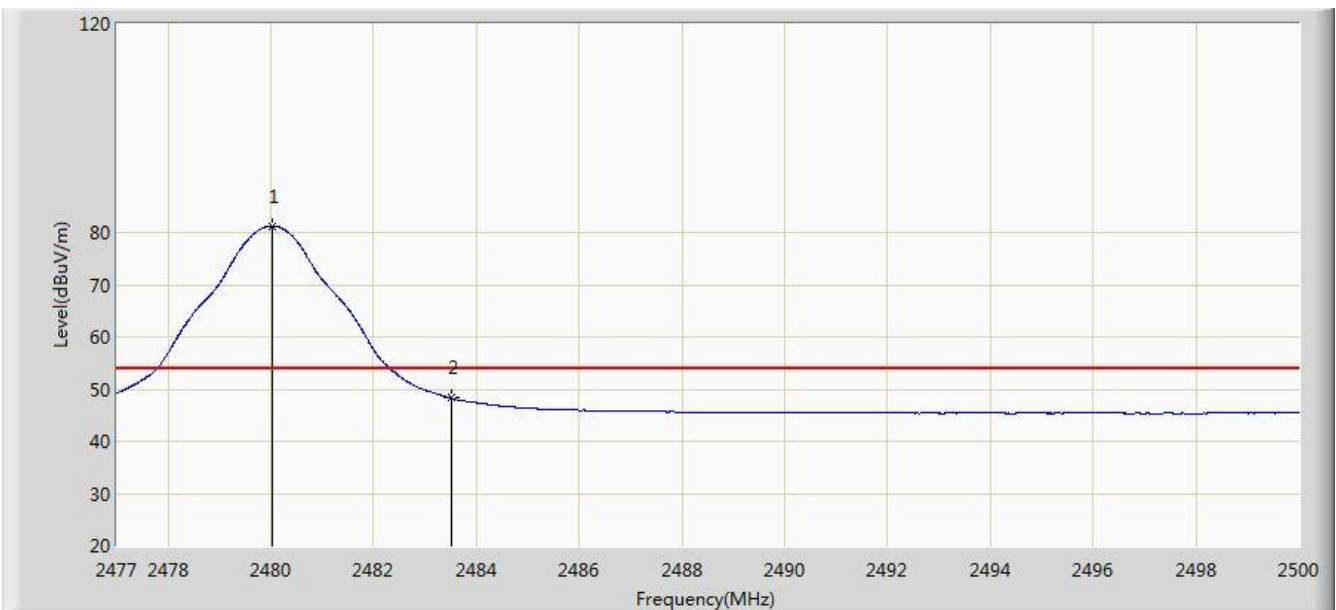


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	81.236	50.052	N/A	N/A	31.184	AV
2			2483.500	48.283	17.090	-5.717	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

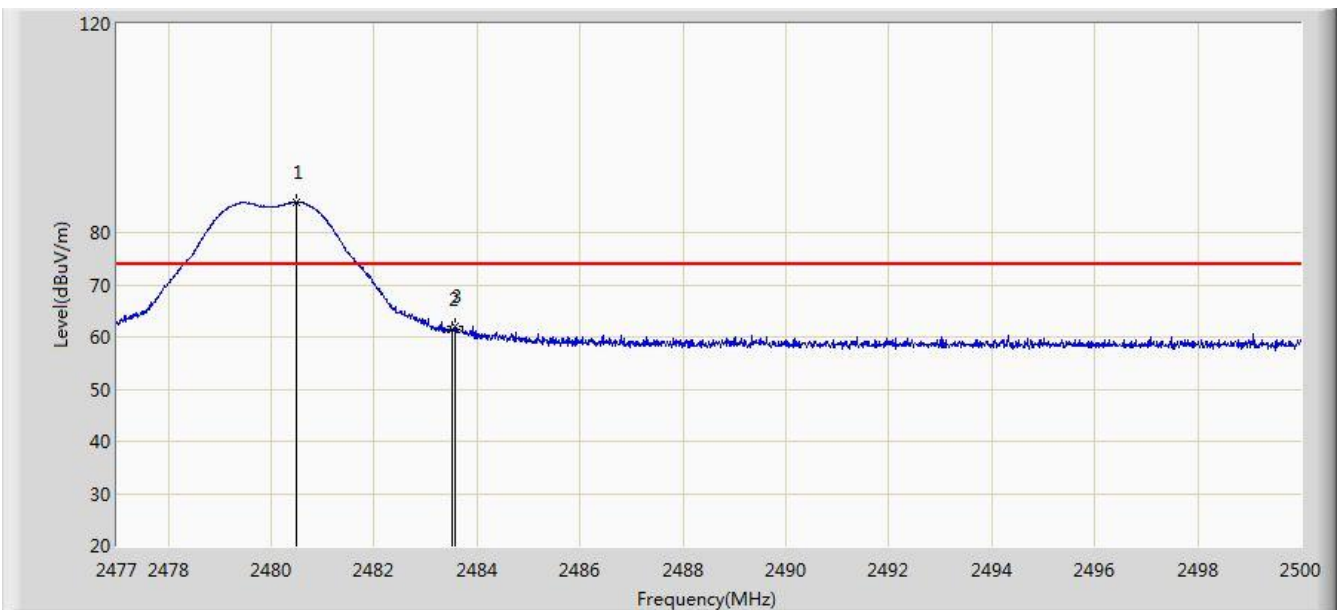


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.496	85.786	54.601	N/A	N/A	31.185	PK
2			2483.500	61.469	30.276	-12.531	74.000	31.194	PK
3			2483.578	61.952	30.758	-12.048	74.000	31.194	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/08/28 - 14:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Element hub	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 2480MHz	

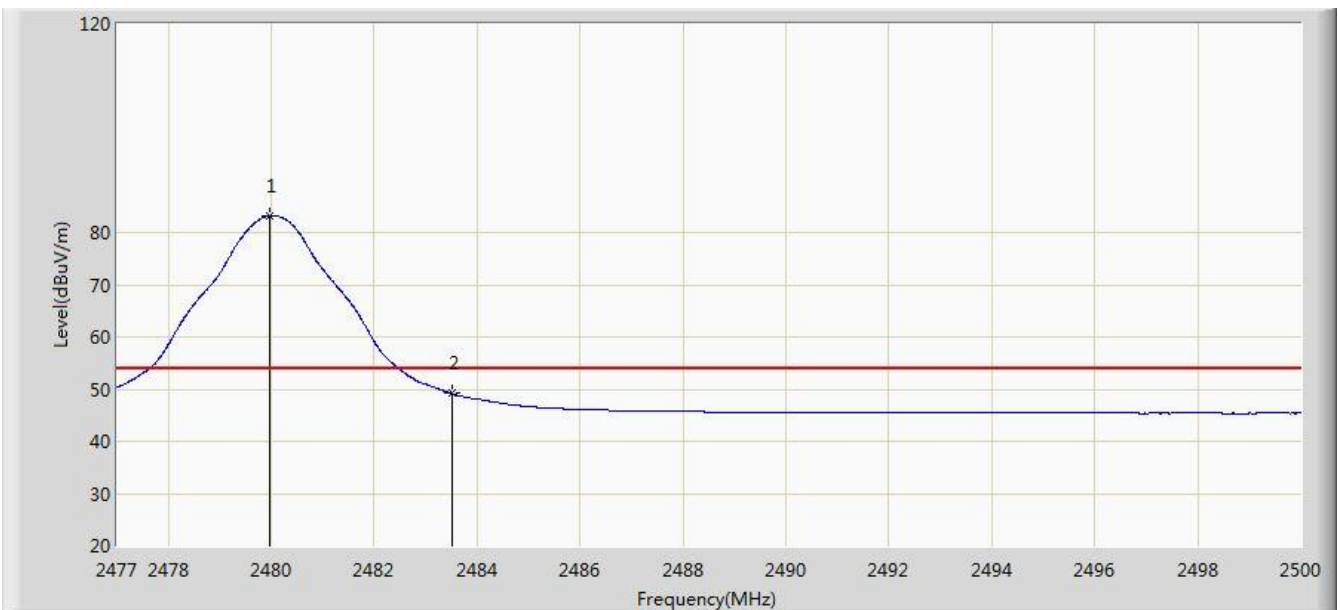

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.956	83.201	52.017	N/A	N/A	31.184	AV
2			2483.500	49.165	17.972	-4.835	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

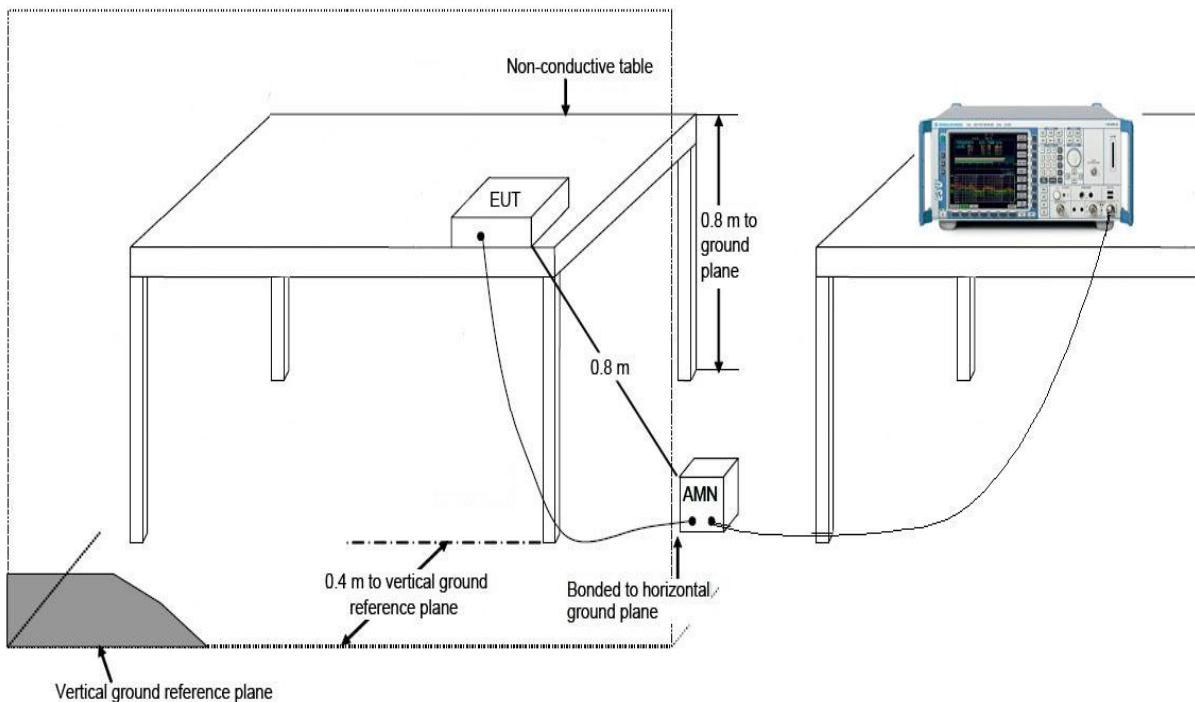

7.8.3. Test Result

Site: SR2	Time: 2015/09/01 - 09:49
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Element hub	Power: AC 120V/60Hz
Note: Mode 1	

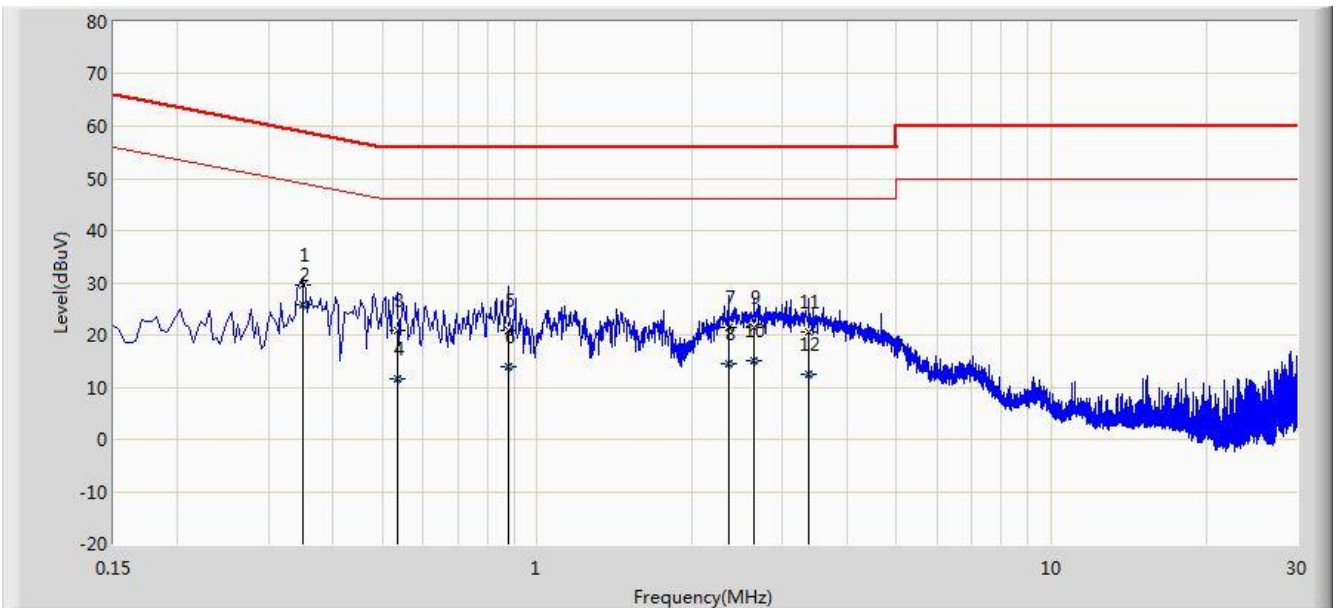


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.350	29.503	19.458	-29.460	58.962	10.044	QP
2		*	0.350	25.880	15.835	-23.083	48.962	10.044	AV
3			0.534	20.795	10.646	-35.205	56.000	10.149	QP
4			0.534	11.581	1.432	-34.419	46.000	10.149	AV
5			0.878	20.772	10.800	-35.228	56.000	9.972	QP
6			0.878	13.916	3.944	-32.084	46.000	9.972	AV
7			2.362	21.372	11.511	-34.628	56.000	9.861	QP
8			2.362	14.580	4.718	-31.420	46.000	9.861	AV
9			2.638	21.513	11.661	-34.487	56.000	9.852	QP
10			2.638	15.211	5.359	-30.789	46.000	9.852	AV
11			3.378	20.568	10.670	-35.432	56.000	9.898	QP
12			3.378	12.450	2.552	-33.550	46.000	9.898	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/09/01 - 10:06
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Element hub	Power: AC 120V/60Hz
Note: Mode 1	

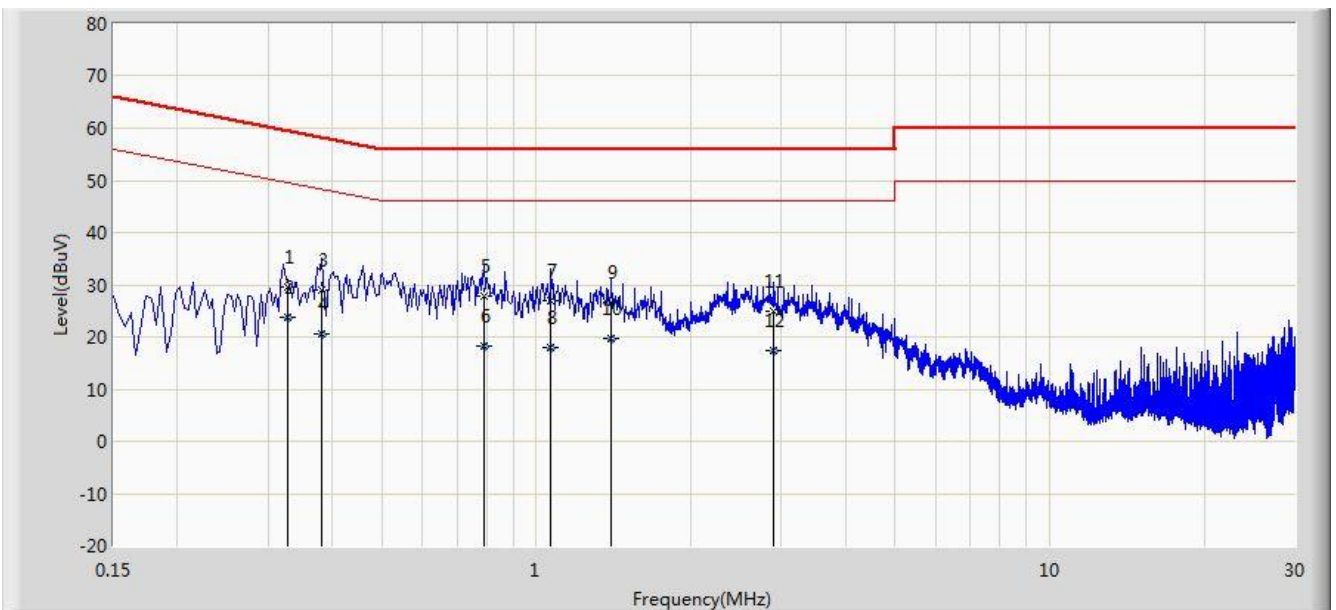

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.327	29.515	19.457	-30.004	59.518	10.058	QP
2		*	0.327	23.734	13.677	-25.784	49.518	10.058	AV
3			0.382	29.125	19.026	-29.111	58.236	10.099	QP
4			0.382	20.530	10.431	-27.706	48.236	10.099	AV
5			0.790	27.718	17.694	-28.282	56.000	10.025	QP
6			0.790	18.334	8.309	-27.666	46.000	10.025	AV
7			1.066	26.923	17.017	-29.077	56.000	9.907	QP
8			1.066	17.889	7.982	-28.111	46.000	9.907	AV
9			1.398	26.672	16.778	-29.328	56.000	9.894	QP
10			1.398	19.723	9.829	-26.277	46.000	9.894	AV
11			2.902	24.785	14.930	-31.215	56.000	9.855	QP
12			2.902	17.275	7.420	-28.725	46.000	9.855	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Element hub FCC ID:**

2ABX8SH-000000011 is in compliance with Part 15C of the FCC Rules.

The End