



FCC RADIO TEST REPORT

FCC ID : 2ABXLT1901A
Equipment : Wireless Transceiver
Brand Name : tile
Model Name : T1901A
Applicant : Life360, Inc.
1900 S NORFOLK ST. SUITE 310 SAN MATEO CA 94403
Manufacturer : Life360, Inc.
1900 S NORFOLK ST. SUITE 310 SAN MATEO CA 94403
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 24, 2024 and testing was performed from Apr. 26, 2024 to May 23, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test.....	6
2.1 Carrier Frequency Channel	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System	8
2.4 EUT Operation Test Setup	8
2.5 Measurement Results Explanation Example.....	8
3 Test Result.....	9
3.1 6dB and 99% Bandwidth Measurement	9
3.2 Output Power Measurement.....	10
3.3 Power Spectral Density Measurement	11
3.4 Conducted Band Edges and Spurious Emission Measurement	12
3.5 Radiated Band Edges and Spurious Emission Measurement	13
3.6 Antenna Requirements	17
4 List of Measuring Equipment	18
5 Measurement Uncertainty.....	19
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Setup Photographs	
Appendix E. Supplier Declaration of Conformity	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	5.76 dB under the limit at 12010.00 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.6	15.203	Antenna Requirement	Pass	-

Note: The power source method of the EUT is use power supply (DC power source), and there is no other AC power port, after assessing, AC Conduction Emission test is not required.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Mila Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth-LE	
Antenna Type Bluetooth: Integral Antenna	
Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi) 2.14

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. TH05-HY, 03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

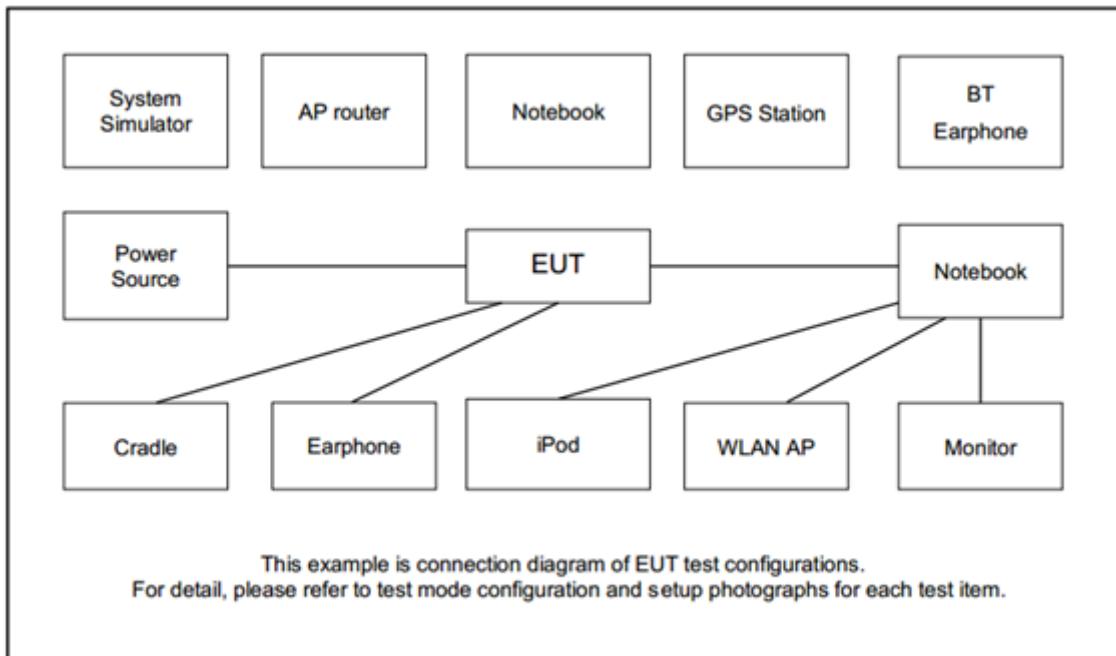

2.4 EUT Operation Test Setup

The RF test items, press the dome of EUT to make the EUT get into the engineering modes to provide channel selection, power level, data rate, and the application type for continuous transmitting signals

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$Offset = RF\ cable\ loss + attenuator\ factor.$

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}Offset(dB) &= RF\ cable\ loss(dB) + attenuator\ factor(dB). \\&= 4.2 + 10 = 14.2\ (dB)\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

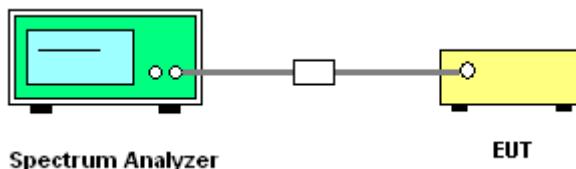

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

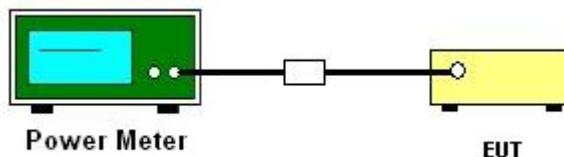

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

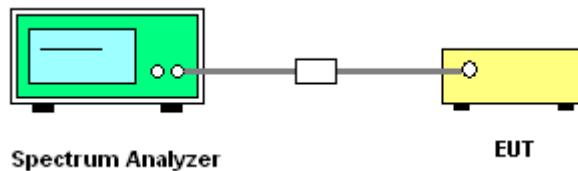

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

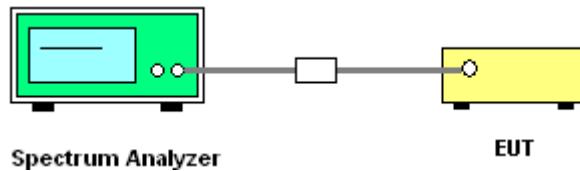

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.



7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “_”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

- (4) For average measurement: use duty cycle correction factor method per 15.35(c).

Duty cycle = On time/100 milliseconds

On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$


Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + $20 * \log_{10}$ (Duty cycle)


Duty cycle please refer to Appendix E. The average levels are calculated from the peak level corrected with duty cycle correction factor (-40.62 dB) derived from $20 \log_{10}$ (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.5.4 Test Setup


For radiated test below 30MHz

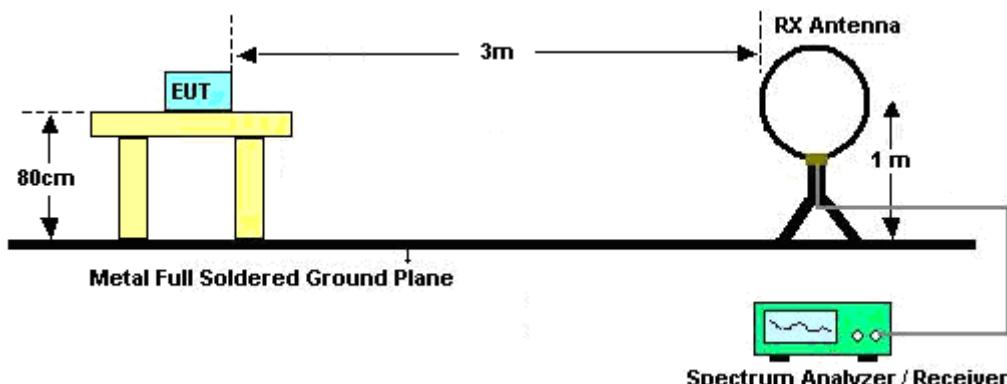


For radiated test from 30MHz to 1GHz

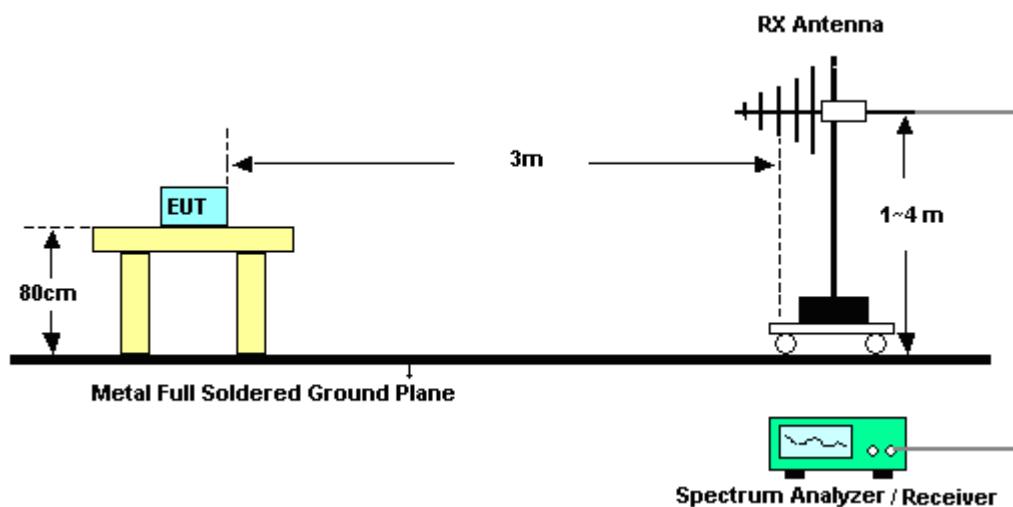

For radiated test from 1GHz to 18GHz

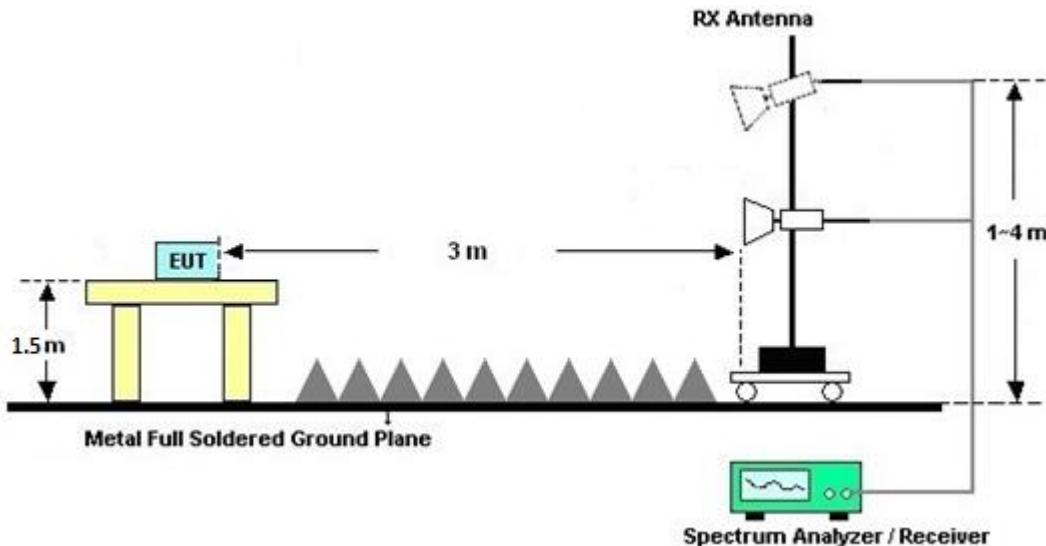

For radiated test above 18GHz

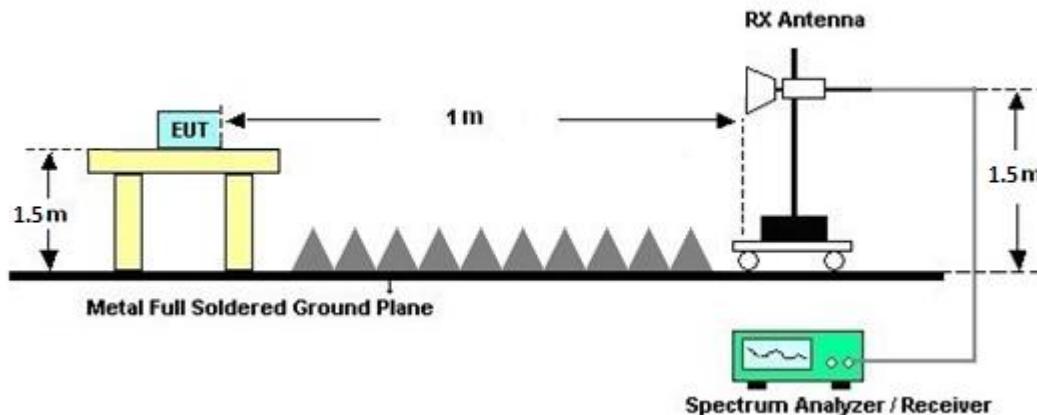

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Apr. 26, 2024~Apr. 27, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17100015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Apr. 26, 2024~Apr. 27, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Apr. 26, 2024~Apr. 27, 2024	Jan. 23, 2025	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz~30MHz	Feb. 23, 2024	May 21, 2024~May 23, 2024	Feb. 22, 2025	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	May 21, 2024~May 23, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	May 21, 2024~May 23, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	Jul. 12, 2023	May 21, 2024~May 23, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	May 21, 2024~May 23, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	May 21, 2024~May 23, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Sep. 06, 2023	May 21, 2024~May 23, 2024	Sep. 05, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	10Hz~44GHz	Jul. 06, 2023	May 21, 2024~May 23, 2024	Jul. 05, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Jan. 03, 2024	May 21, 2024~May 23, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 21, 2024~May 23, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 21, 2024~May 23, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 21, 2024~May 23, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019 122	RK-002347	N/A	N/A	May 21, 2024~May 23, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	May 21, 2024~May 23, 2024	Mar. 05, 2025	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804615/2	N/A	Oct. 24, 2023	May 21, 2024~May 23, 2024	Oct. 23, 2024	Radiation (03CH22-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{c(y)}$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{c(y)}$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{c(y)}$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{c(y)}$)	5.4 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu				Temperature:	21~25		°C
Test Date:	2024/04/26~2024/04/27				Relative Humidity:	51~54		%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>									
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail	
BLE	1Mbps	1	0	2402	1.049	0.687	0.50	Pass	
BLE	1Mbps	1	19	2440	1.056	0.683	0.50	Pass	
BLE	1Mbps	1	39	2480	1.055	0.699	0.50	Pass	


<u>TEST RESULTS DATA</u> <u>Average Power Table</u>									
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)
BLE	1Mbps	1	0	2402	3.62	30.00	2.14	5.76	36.00
BLE	1Mbps	1	19	2440	3.45	30.00	2.14	5.59	36.00
BLE	1Mbps	1	39	2480	3.81	30.00	2.14	5.95	36.00

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	3.00	-11.78	2.14	8.00	Pass
BLE	1Mbps	1	19	2440	2.86	-11.90	2.14	8.00	Pass
BLE	1Mbps	1	39	2480	3.20	-11.45	2.14	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.


**6dB Bandwidth**

<1Mbps>

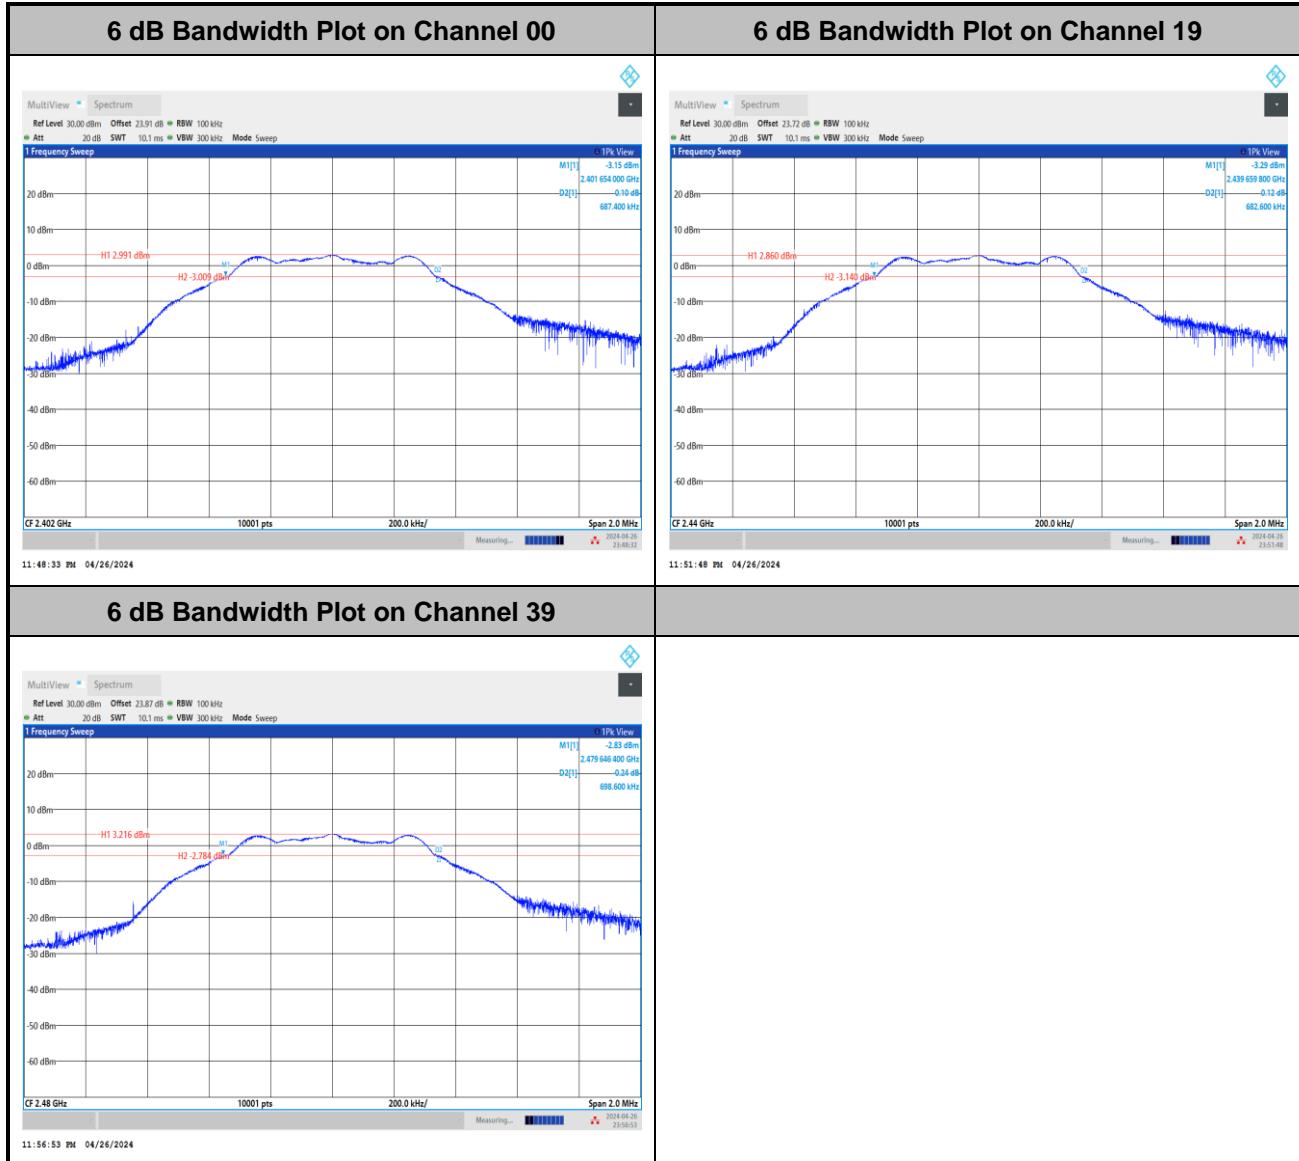


**99% Occupied Bandwidth**

<1Mbps>

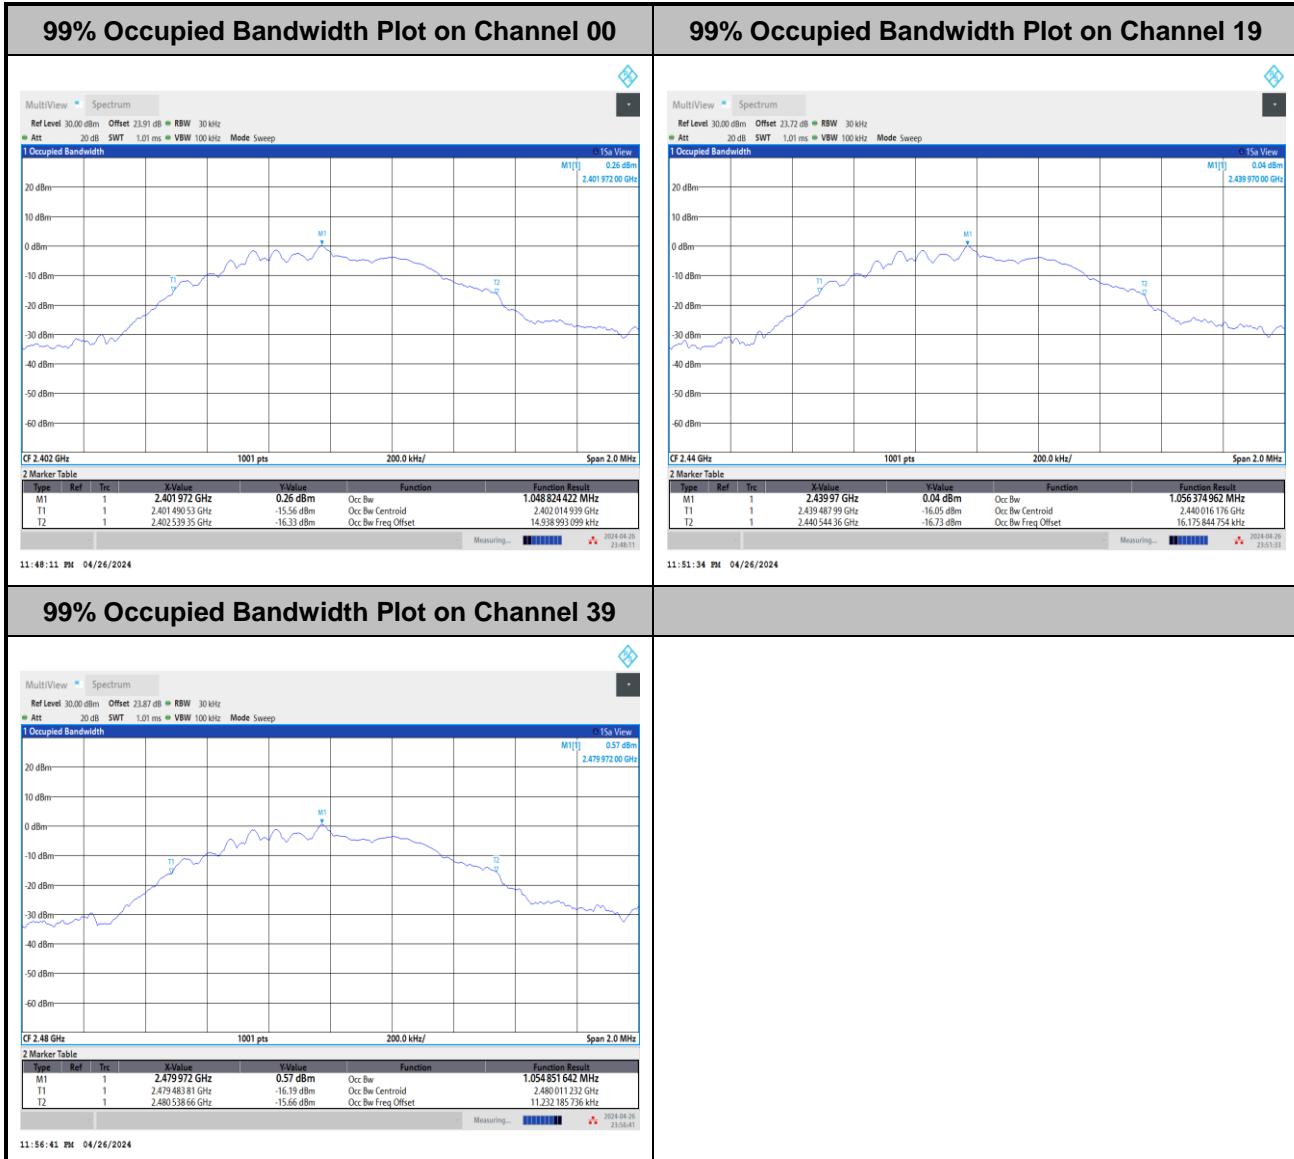


**Power Spectral Density (dBm/3kHz)**


<1Mbps>

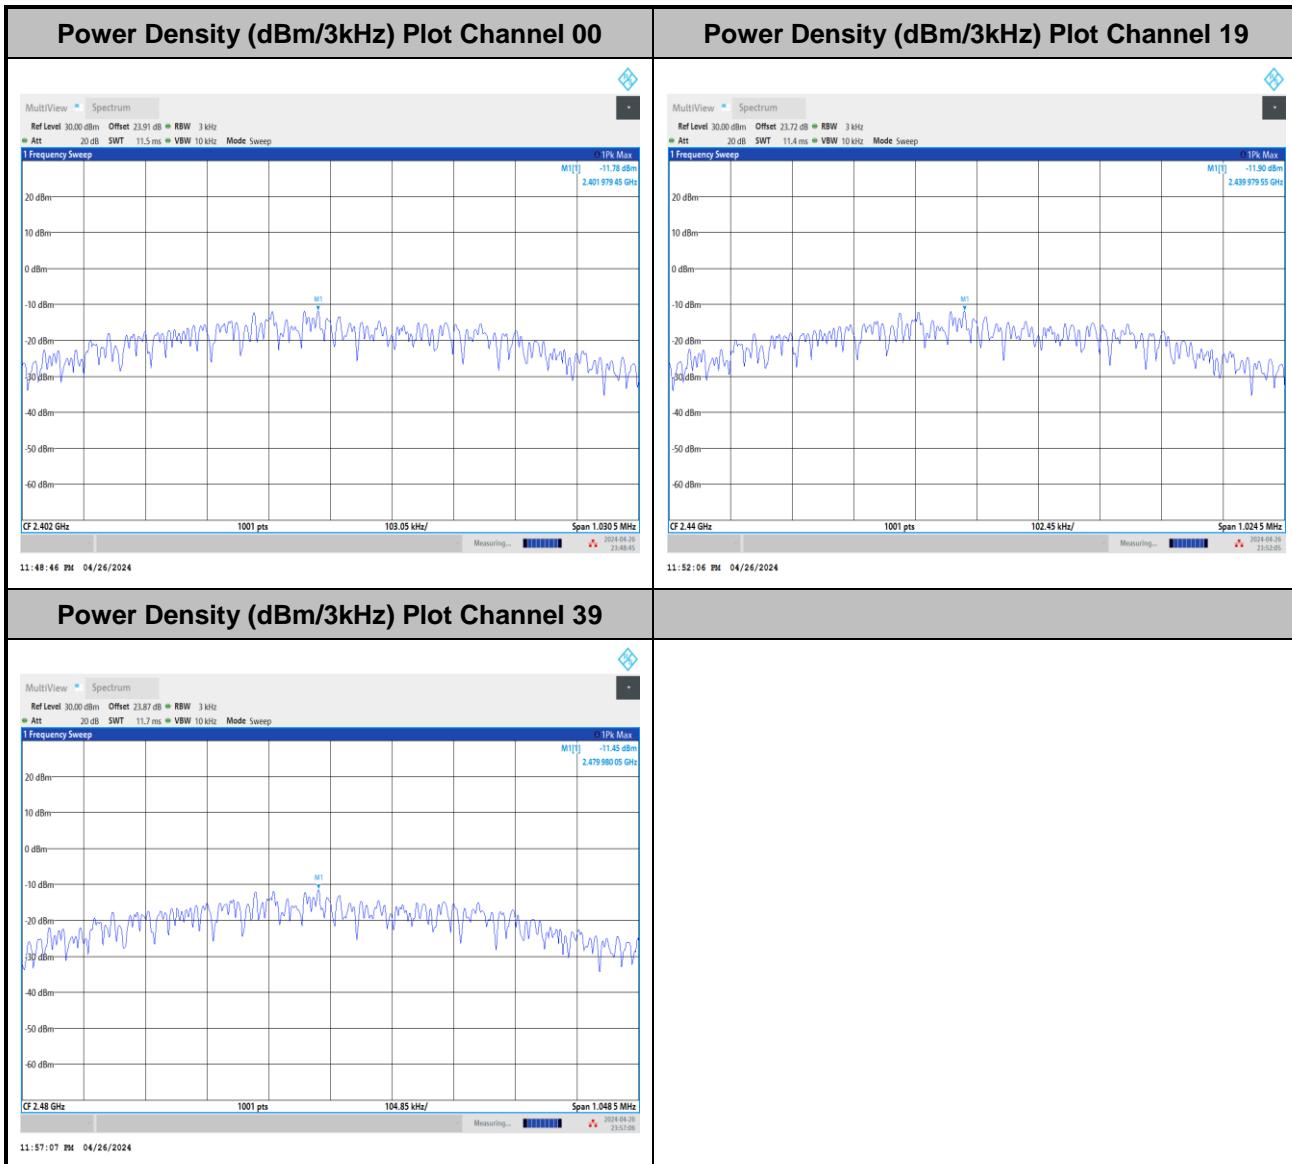


**Band Edge and Conducted Spurious Emission**

<1Mbps>

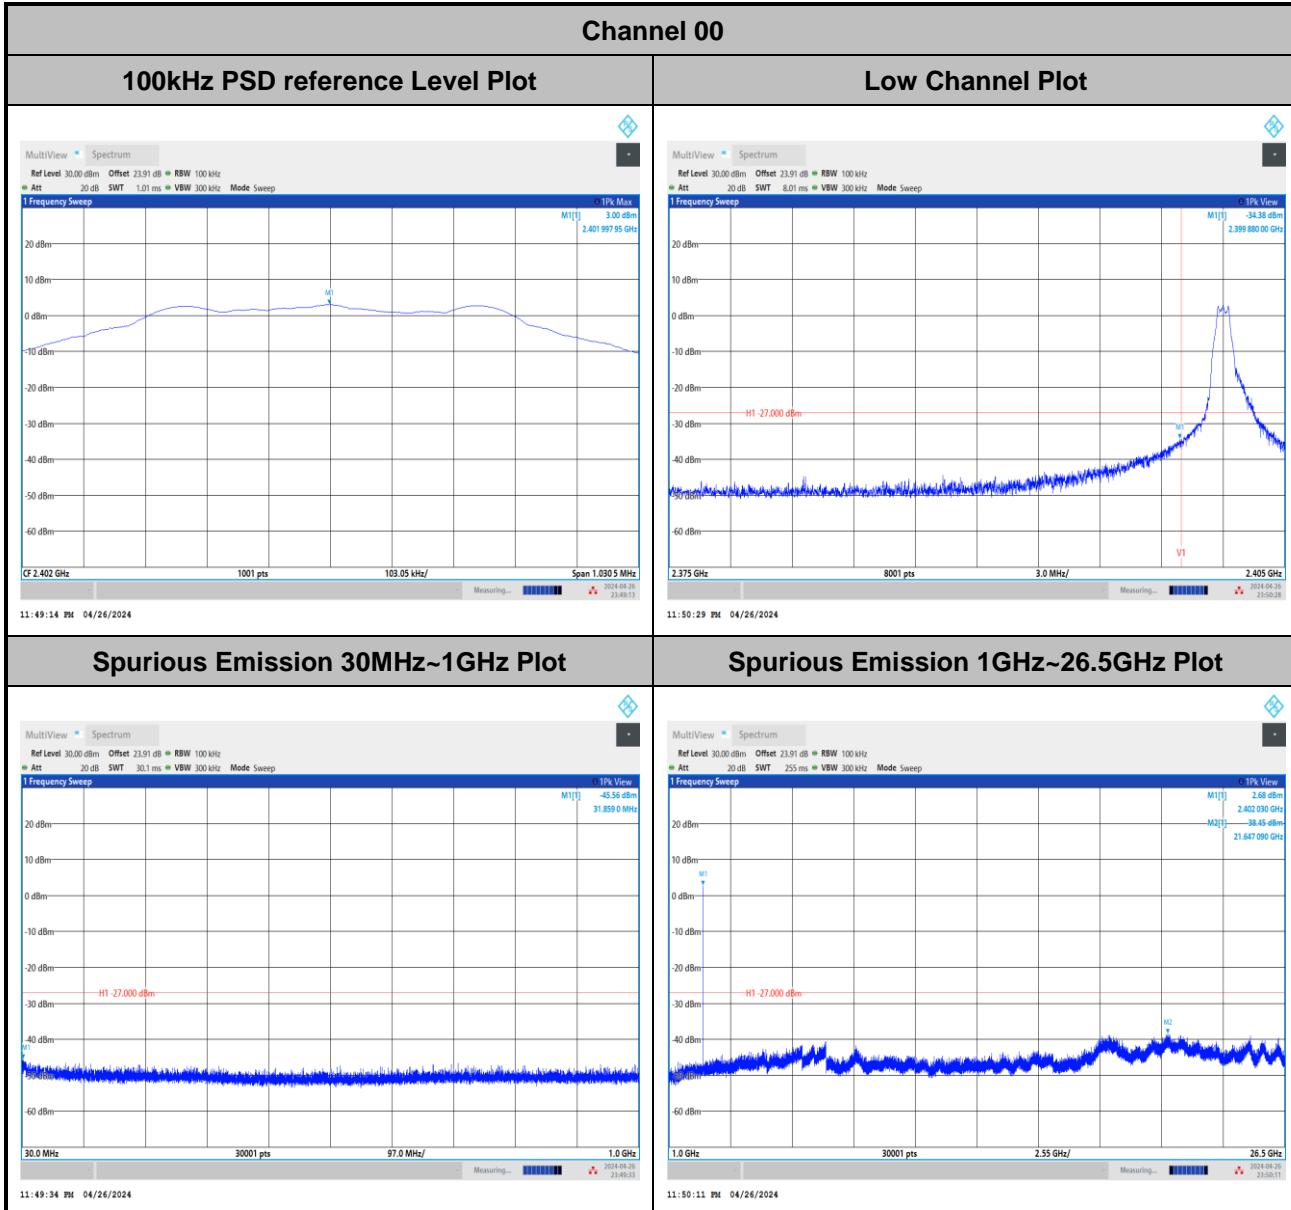

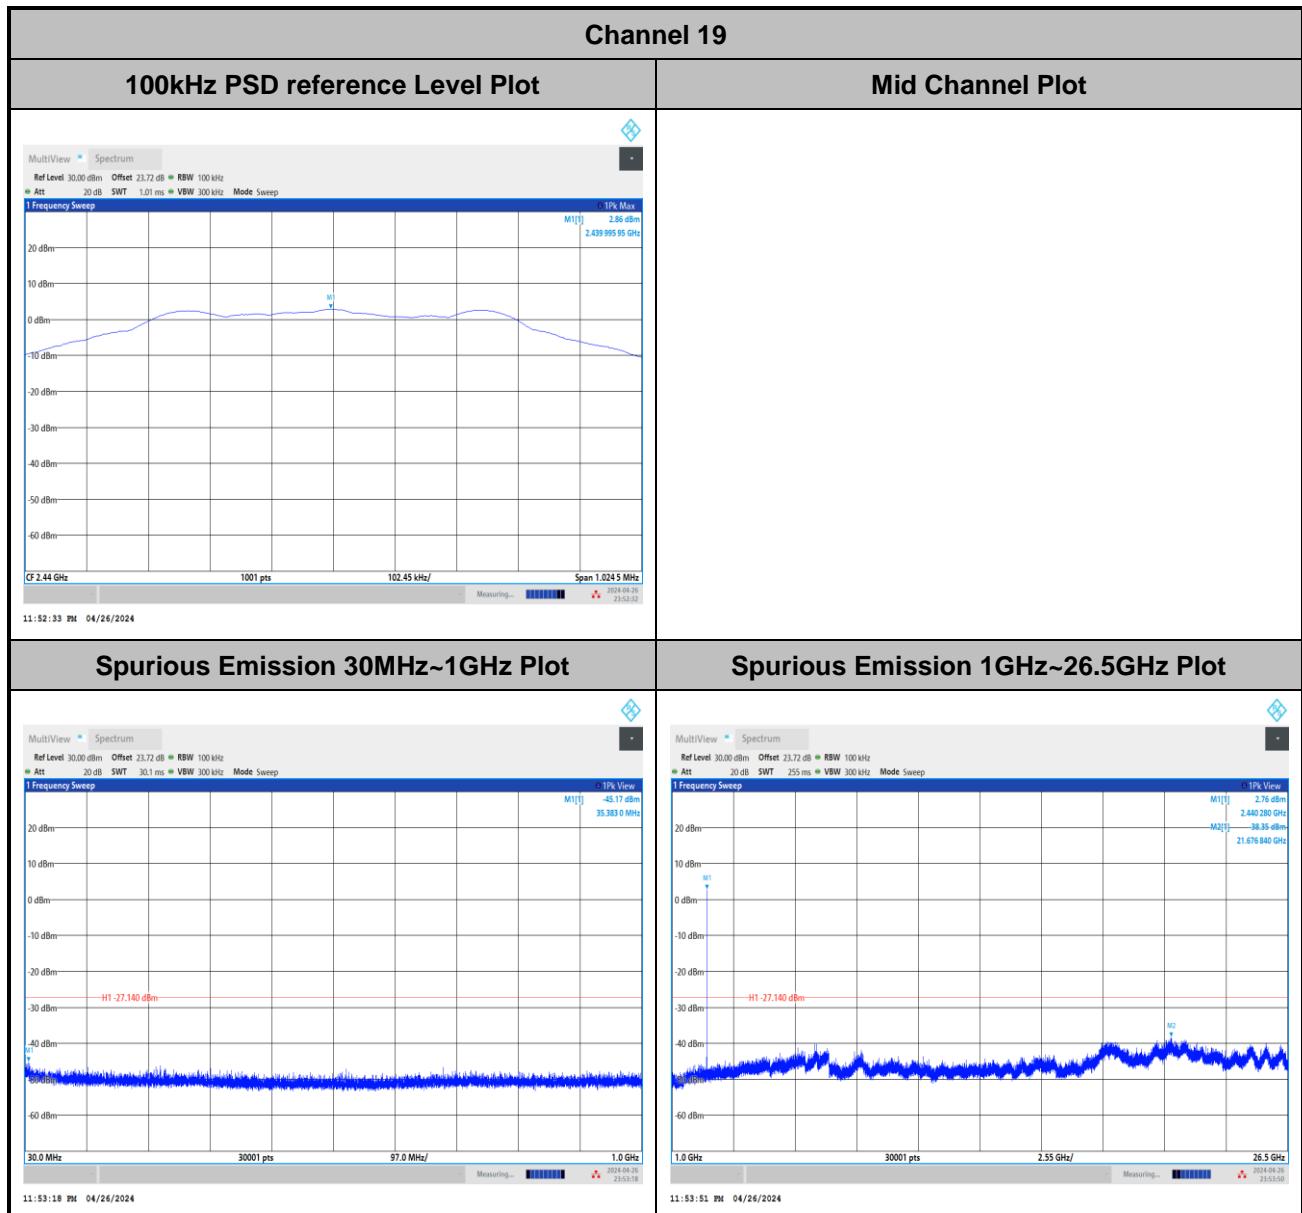

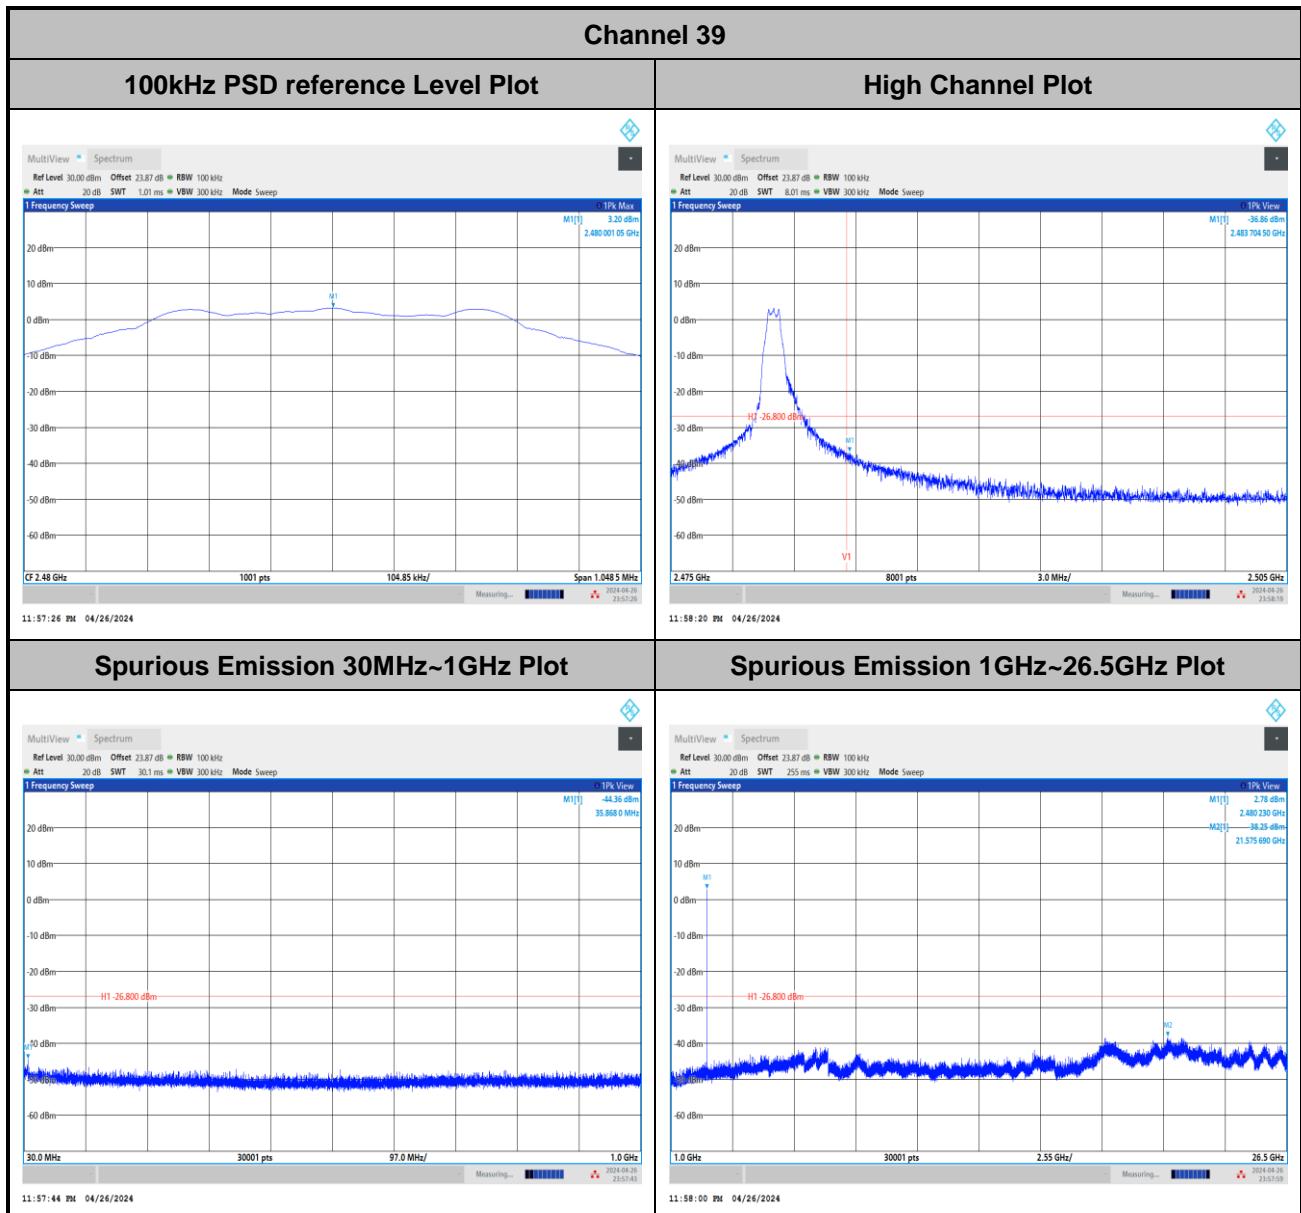



Appendix B. Radiated Spurious Emission

Test Engineer :	Bank Lin, Fred Tseng, and Karl Hou	Temperature :		22.1~24.2°C	
		Relative Humidity :		50~56%	

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2389.695	54.55	-19.45	74	41.64	26.9	18.36	32.35	200	192	P	H
		2389.695	13.93	-40.07	54	-	-	-	-	-	-	A	H
	*	2402	90.39	-	-	77.37	27	18.38	32.36	200	192	P	H
	*	2402	49.77	-	-	-	-	-	-	-	-	A	H
													H
		2390	55.31	-18.69	74	42.4	26.9	18.36	32.35	394	132	P	V
		2390	14.69	-39.31	54	-	-	-	-	-	-	A	V
	*	2402	92.29	-	-	79.27	27	18.38	32.36	394	132	P	V
	*	2402	51.67	-	-	-	-	-	-	-	-	A	V
													V
BLE CH 19 2440MHz		2343.44	50.6	-23.4	74	37.65	27	18.28	32.33	204	253	P	H
		2343.44	9.98	-44.02	54	-	-	-	-	-	-	A	H
	*	2440	94.93	-	-	82.06	26.8	18.45	32.38	204	253	P	H
	*	2440	54.31	-	-	-	-	-	-	-	-	A	H
		2485.84	51.9	-22.1	74	38.88	26.9	18.53	32.41	204	253	P	H
		2485.84	11.28	-42.72	54	-	-	-	-	-	-	A	H
		2354.8	50.72	-23.28	74	37.75	27	18.3	32.33	388	173	P	V
		2354.8	10.1	-43.9	54	-	-	-	-	-	-	A	V
	*	2440	91.87	-	-	79	26.8	18.45	32.38	388	173	P	V
	*	2440	51.25	-	-	-	-	-	-	-	-	A	V
		2490	50.2	-23.8	74	37.17	26.9	18.54	32.41	388	173	P	V
		2490	9.58	-44.42	54	-	-	-	-	-	-	A	V



BLE CH 39 2480MHz	*	2480	94.06	-	-	81.05	26.9	18.52	32.41	200	257	P	H
	*	2480	53.44	-	-	-	-	-	-	-	-	A	H
		2483.52	68.08	-5.92	74	55.06	26.9	18.53	32.41	200	257	P	H
		2483.52	27.46	-26.54	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	88.92	-	-	75.91	26.9	18.52	32.41	400	153	P	V
	*	2480	48.3	-	-	-	-	-	-	-	-	A	V
		2483.56	63.52	-10.48	74	50.5	26.9	18.53	32.41	400	153	P	V
		2483.56	22.9	-31.1	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Margin (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	54.06	-19.94	74	42.21	32.32	13.03	33.5	-	-	P	H
		4804	13.44	-40.56	54	-	-	-	-	-	-	A	H
		7206	54.55	-19.45	74	37.29	37.15	15.88	35.77	-	-	P	H
		4804	13.93	-40.07	54	-	-	-	-	-	-	A	H
		12010	66.71	-7.29	74	47.04	39.42	20.76	40.51	-	-	P	H
		4804	26.09	-27.91	54	-	-	-	-	-	-	A	H
		14412	55.97	-18.03	74	33.71	42.28	22.79	42.81	-	-	P	H
		4804	15.35	-38.65	54	-	-	-	-	-	-	A	H
		16814	53.37	-20.63	74	33.49	41.1	24.67	45.89	-	-	P	H
		4804	12.75	-41.25	54	-	-	-	-	-	-	A	H
													H
													H
		4804	51.42	-22.58	74	39.57	32.32	13.03	33.5	-	-	P	V
		4804	10.8	-43.2	54	-	-	-	-	-	-	A	V
		7206	52.18	-21.82	74	34.92	37.15	15.88	35.77	-	-	P	V
		4804	11.56	-42.44	54	-	-	-	-	-	-	A	V
		12010	68.24	-5.76	74	48.57	39.42	20.76	40.51	-	-	P	V
		4804	27.62	-26.38	54	-	-	-	-	-	-	A	V
		14412	58.12	-15.88	74	35.86	42.28	22.79	42.81	-	-	P	V
		4804	17.5	-36.5	54	-	-	-	-	-	-	A	V
		16814	55.34	-18.66	74	35.46	41.1	24.67	45.89	-	-	P	V
		4804	14.72	-39.28	54	-	-	-	-	-	-	A	V
													V
													V



BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Margin (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	53.35	-20.65	74	41.21	32.56	13.07	33.49	400	360	P	H
		4880	12.73	-41.27	54	-	-	-	-	-	-	A	H
		7320	57.16	-16.84	74	39.5	37.5	16.01	35.85	367	360	P	H
		7320	16.54	-37.46	54	-	-	-	-	-	-	A	H
		9760	50.09	-23.91	74	32.56	37.48	18.64	38.59	-	-	P	H
		9760	9.47	-44.53	54	-	-	-	-	-	-	A	H
		12200	64.79	-9.21	74	44.68	39.7	20.93	40.52	400	99	P	H
		12200	24.17	-29.83	54	-	-	-	-	-	-	A	H
		14640	56.1	-17.9	74	33.64	42.66	22.97	43.17	-	-	P	H
		14640	15.48	-38.52	54	-	-	-	-	-	-	A	H
		17080	53.5	-20.5	74	33.97	40.74	24.89	46.1	-	-	P	H
		17080	12.88	-41.12	54	-	-	-	-	-	-	A	H
		4880	51.32	-22.68	74	39.18	32.56	13.07	33.49	300	201	P	V
		4880	10.7	-43.3	54	-	-	-	-	-	-	A	V
		7320	54.71	-19.29	74	37.05	37.5	16.01	35.85	400	70	P	V
		7320	14.09	-39.91	54	-	-	-	-	-	-	A	V
		9760	53.51	-20.49	74	35.98	37.48	18.64	38.59	-	-	P	V
		9760	12.89	-41.11	54	-	-	-	-	-	-	A	V
		12200	67.29	-6.71	74	47.18	39.7	20.93	40.52	400	340	P	V
		12200	26.67	-27.33	54	-	-	-	-	-	-	A	V
		14640	56.17	-17.83	74	33.71	42.66	22.97	43.17	-	-	P	V
		14640	15.55	-38.45	54	-	-	-	-	-	-	A	V
		17080	53.29	-20.71	74	33.76	40.74	24.89	46.1	-	-	P	V
		17080	12.67	-41.33	54	-	-	-	-	-	-	A	V



BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Margin (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	55.12	-18.88	74	42.78	32.7	13.11	33.47	160	360	P	H
		4960	14.5	-39.5	54	-	-	-	-	-	-	A	H
		7440	56.11	-17.89	74	38.57	37.32	16.15	35.93	400	305	P	H
		7440	15.49	-38.51	54	-	-	-	-	-	-	A	H
		9920	55.03	-18.97	74	37.42	37.5	18.74	38.63	-	-	P	H
		9920	14.41	-39.59	54	-	-	-	-	-	-	A	H
		12400	61.76	-12.24	74	40.99	40.2	21.1	40.53	400	246	P	H
		12400	21.14	-32.86	54	-	-	-	-	-	-	A	H
		17360	54.08	-19.92	74	34.84	40.5	25.14	46.4	-	-	P	H
		17360	13.46	-40.54	54	-	-	-	-	-	-	A	H
													H
													H
		4960	53.75	-20.25	74	41.41	32.7	13.11	33.47	400	62	P	V
		4960	13.13	-40.87	54	-	-	-	-	-	-	A	V
		7440	54.11	-19.89	74	36.57	37.32	16.15	35.93	100	297	P	V
		7440	13.49	-40.51	54	-	-	-	-	-	-	A	V
		9920	56.04	-17.96	74	38.43	37.5	18.74	38.63	-	-	P	V
		9920	15.42	-38.58	54	-	-	-	-	-	-	A	V
		12400	64.61	-9.39	74	43.84	40.2	21.1	40.53	396	360	P	V
		12400	23.99	-30.01	54	-	-	-	-	-	-	A	V
		17360	55.78	-18.22	74	36.54	40.5	25.14	46.4	-	-	P	V
		17360	15.16	-38.84	54	-	-	-	-	-	-	A	V
													V
													V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



Emission above 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.									
												Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.			
												(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)
2.4GHz BLE SHF		19840	47.68	-26.32	74	56.66	38.02	16.46	63.46	100	86	P	H									
		19840	7.06	-46.94	54	-	-	-	-	-	-	A	H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
													H									
	Remark	1.	No other spurious found.																			
		2.	All results are PASS against limit line.																			
		3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.																			



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		31.62	22	-18	40	29.69	24.16	0.9	32.75	-	-	P	H
		149.34	19.55	-23.95	43.5	32.93	17.07	2.26	32.71	-	-	P	H
		261.12	20.32	-25.68	46	29.92	20.08	2.99	32.67	-	-	P	H
		456.1	24.66	-21.34	46	30.57	23.05	3.81	32.77	-	-	P	H
		652.8	28.85	-17.15	46	30.57	26.46	4.63	32.81	-	-	P	H
		880.3	37.19	-8.81	46	34.73	29.13	5.32	31.99	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
Remark	1.	No other spurious found.											
	2.	All results are PASS against limit line.											
	3.	The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.											

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dB μ V/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

3. Margin (dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB μ V) – 35.86 (dB)

= 55.45 (dB μ V/m)

2. Margin (dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 55.45(dB μ V/m) – 74(dB μ V/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB μ V) – 35.86 (dB)

= 43.54 (dB μ V/m)

2. Margin (dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 43.54(dB μ V/m) – 54(dB μ V/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix C. Radiated Spurious Emission Plots


Test Engineer :	Bank Lin, Fred Tseng, and Karl Hou	Temperature :	22.1~24.2°C
		Relative Humidity :	50~56%

2.4GHz 2400~2483.5MHz


BLE (Band Edge @ 3m)

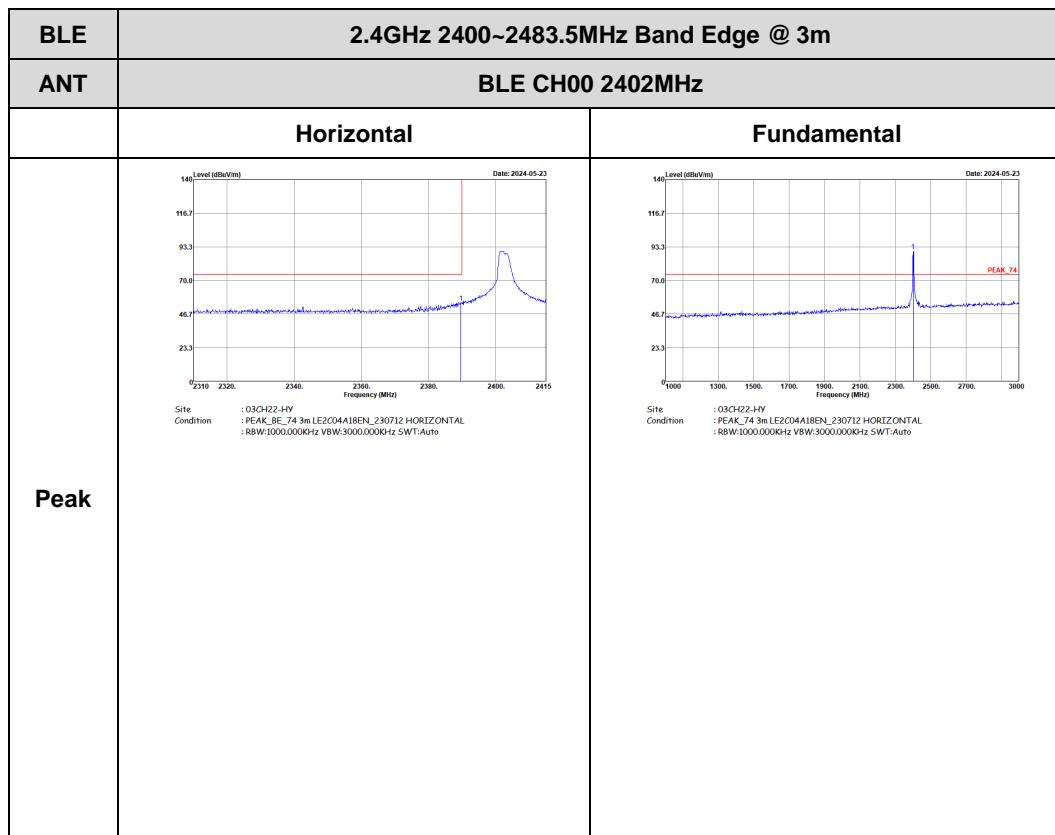


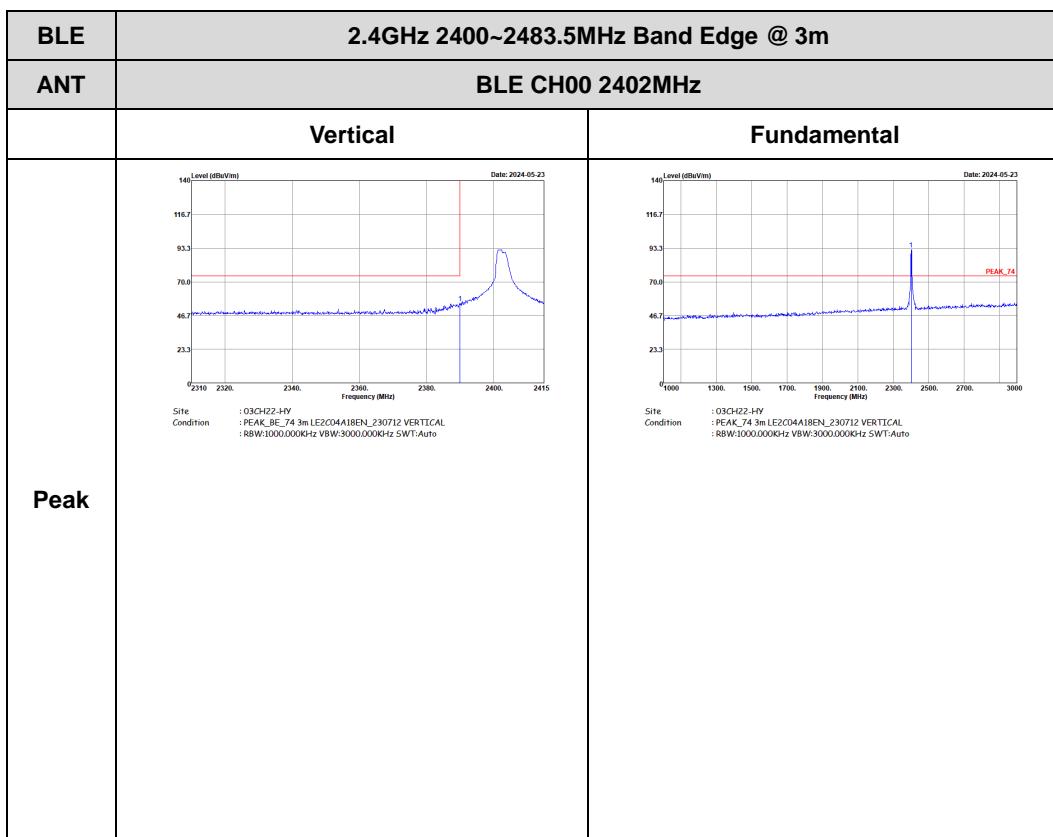

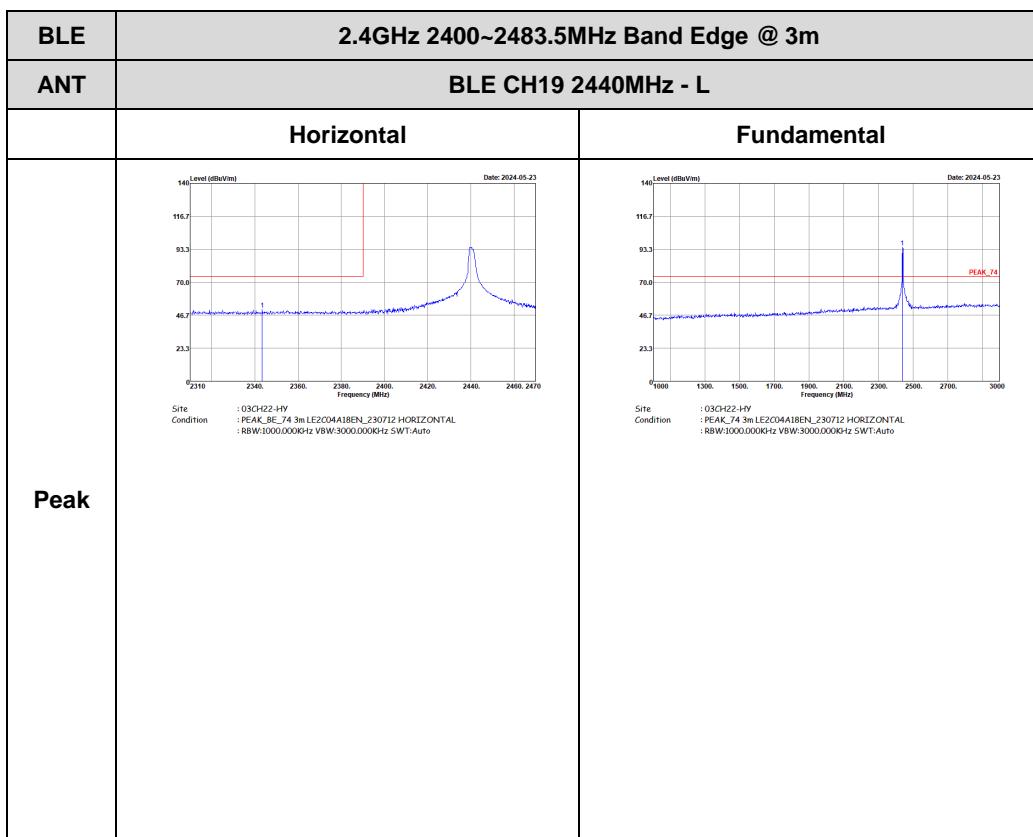


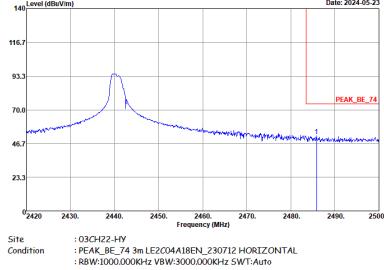



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site: 03, CH:24, AV: 1V Condition: PEAK_BE_74, 3m LE2004A18EN_230712 HORIZONTAL 88W:1000.000KHz V8W:3000.000Hz SWT:Auto</p>	Left blank

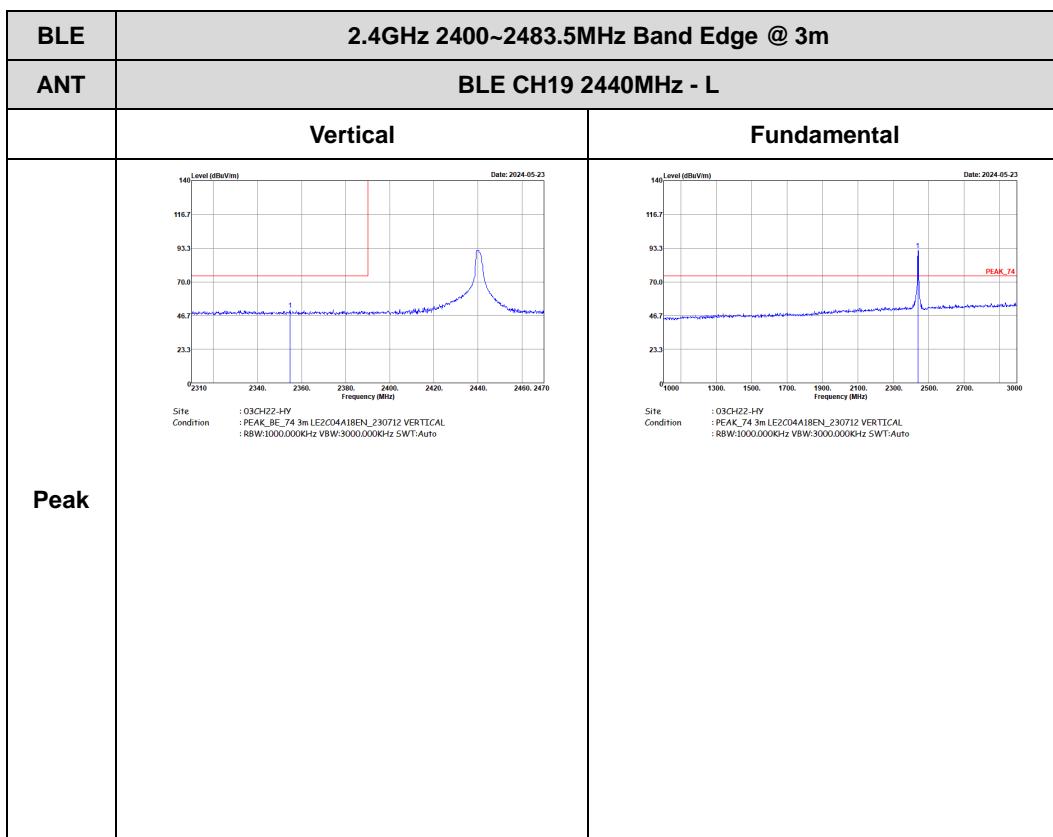

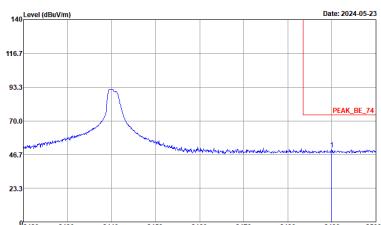

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Site : 03_CH25_A1V Condition : PEAK_BE_74 3m LE2004A18EN_230712 VERTICAL :88W:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>	Left blank

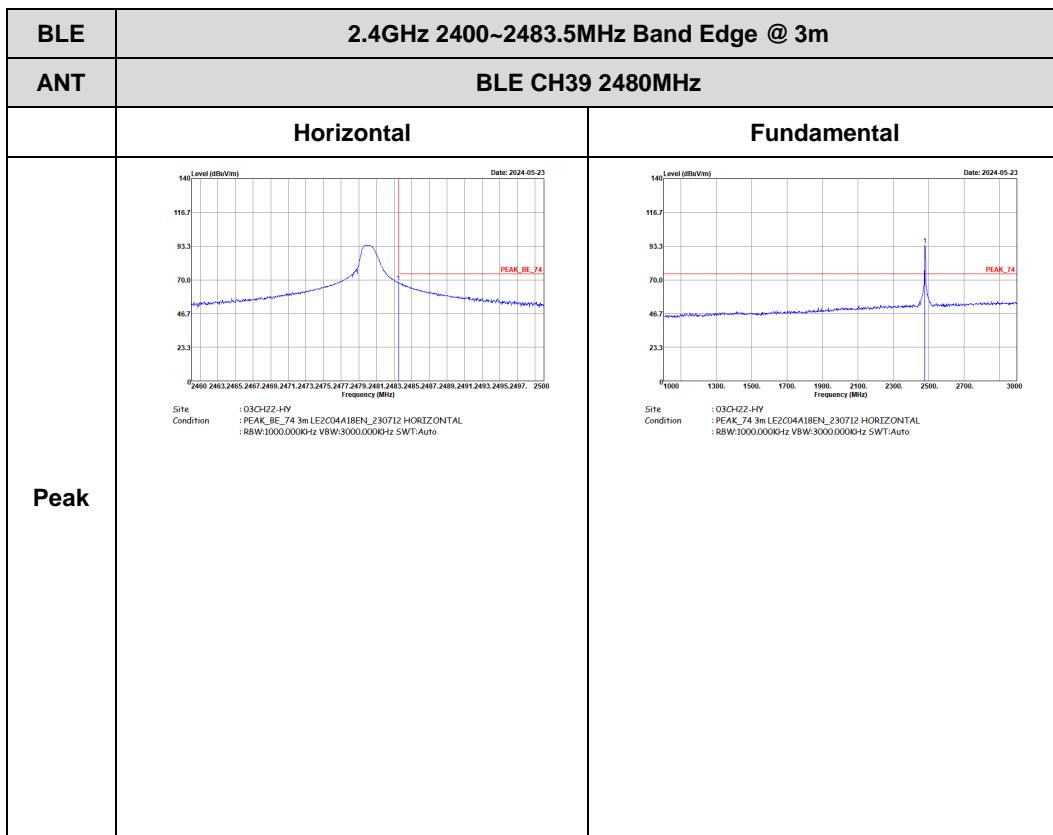


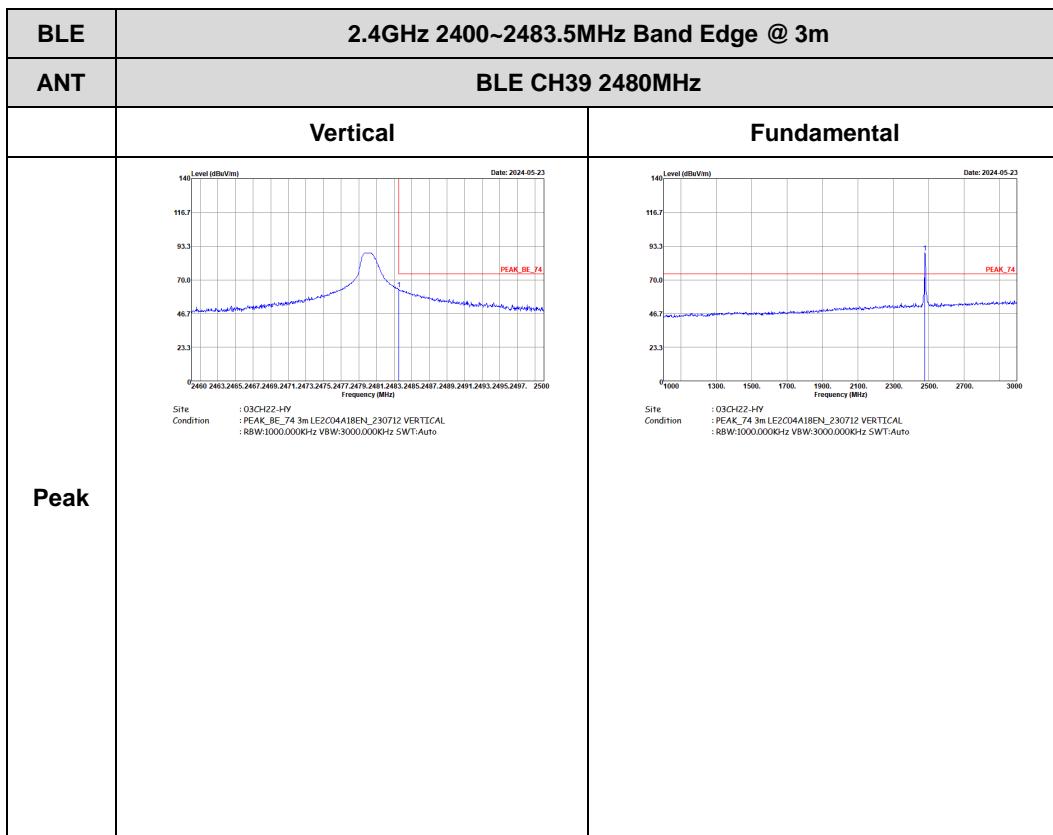






2.4GHz 2400~2483.5MHz


BLE (Harmonic @ 3m)

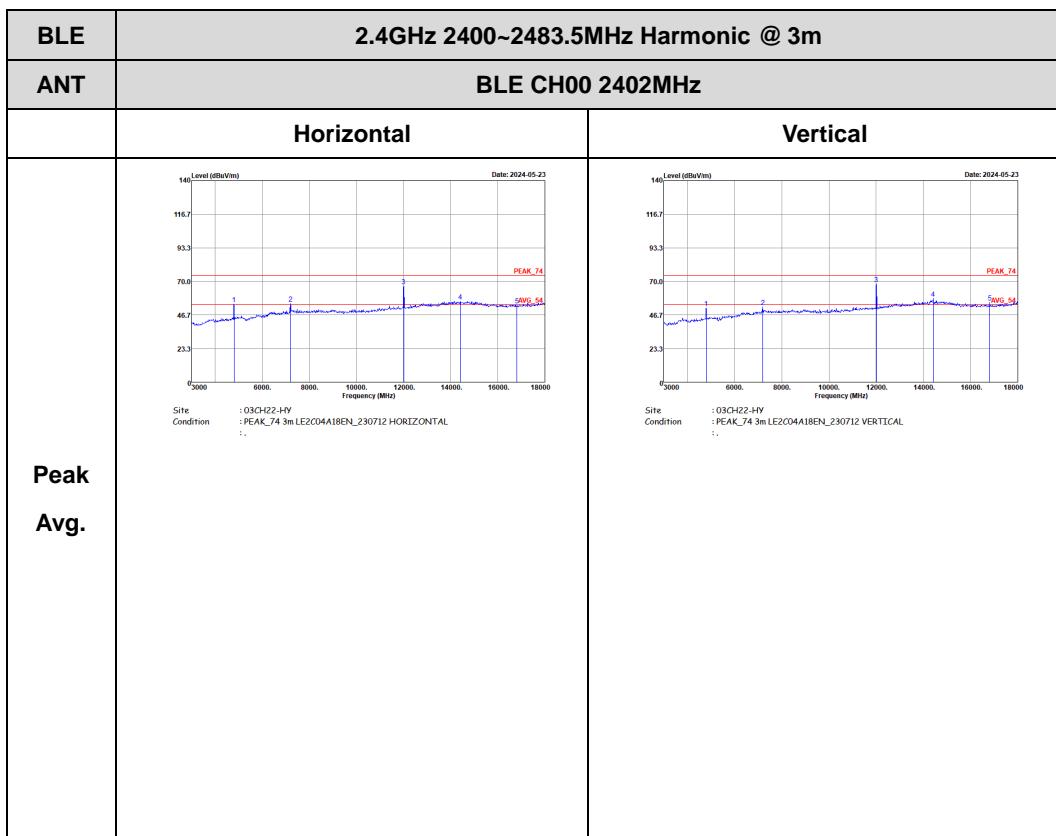


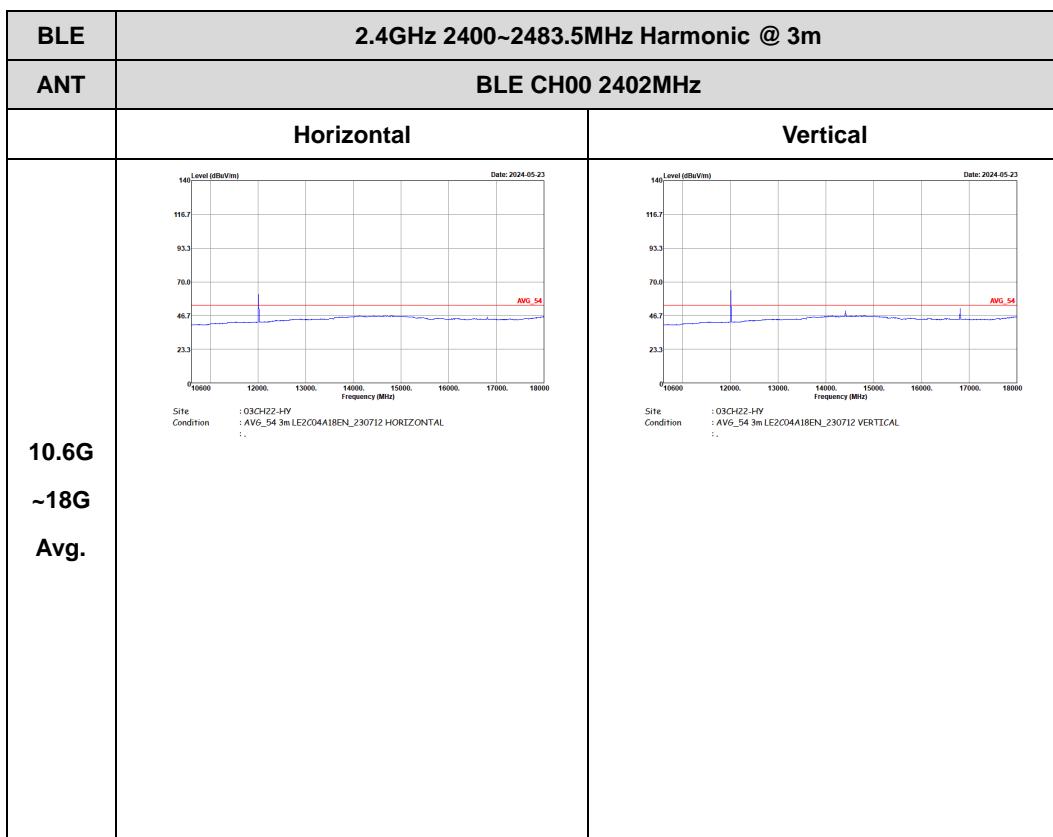

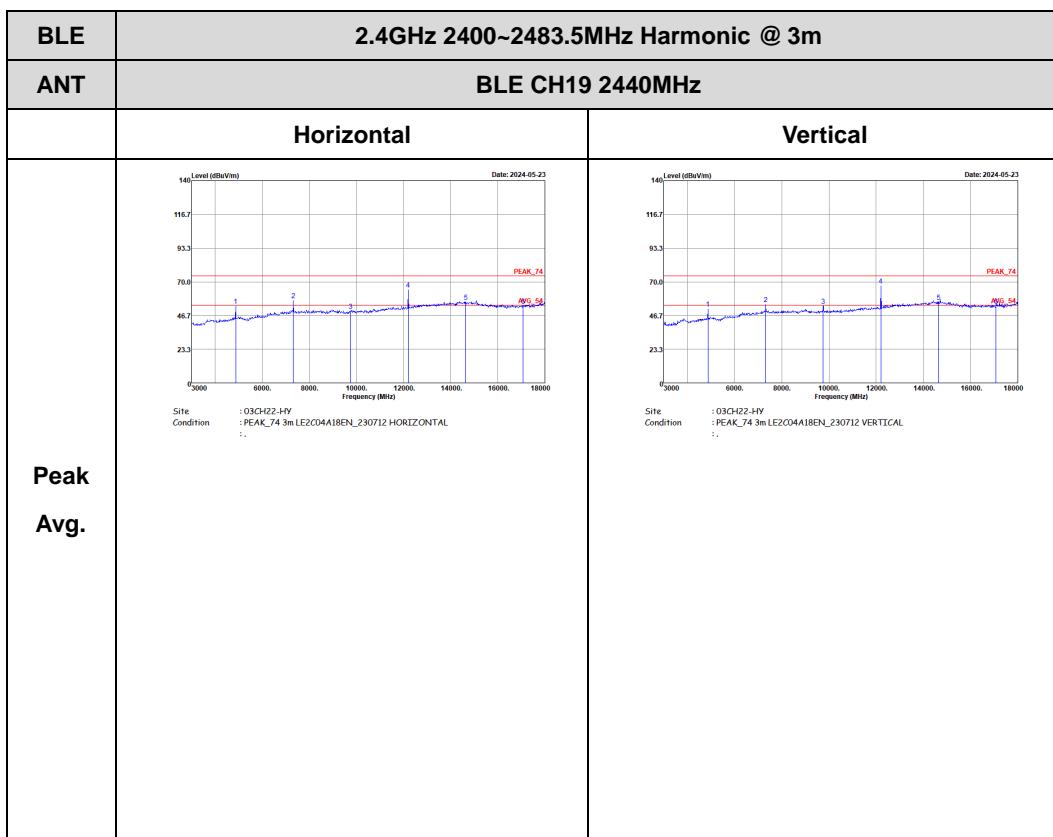

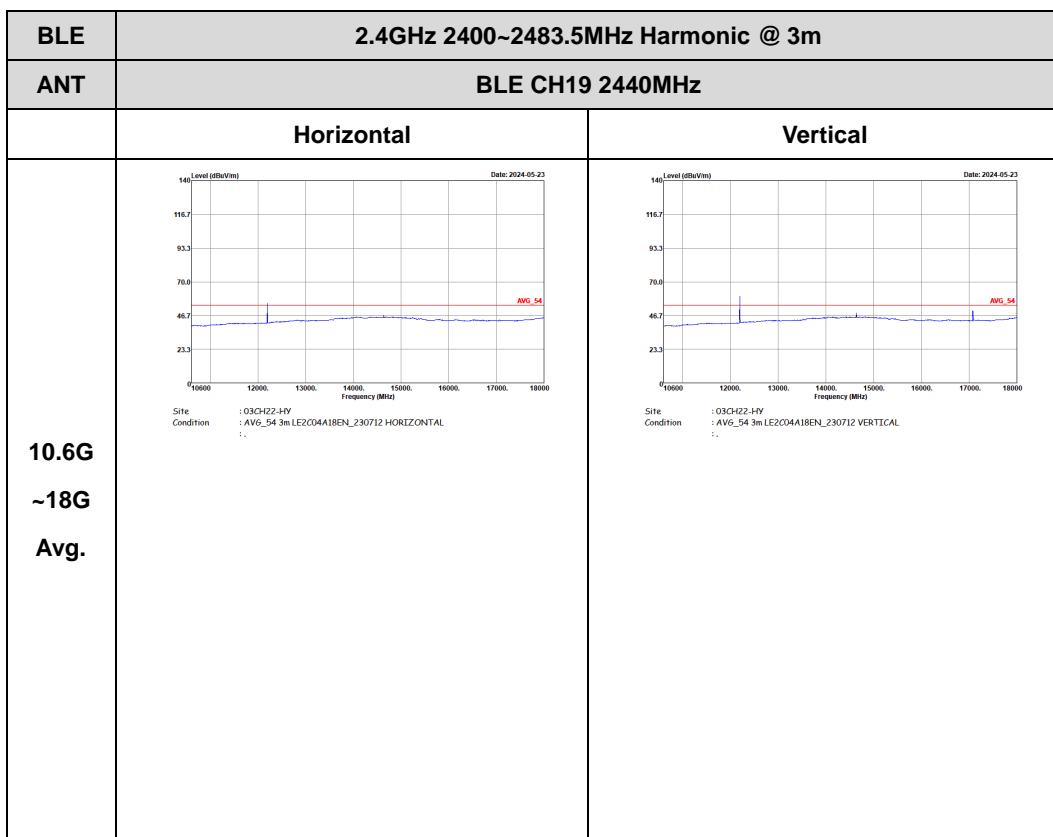

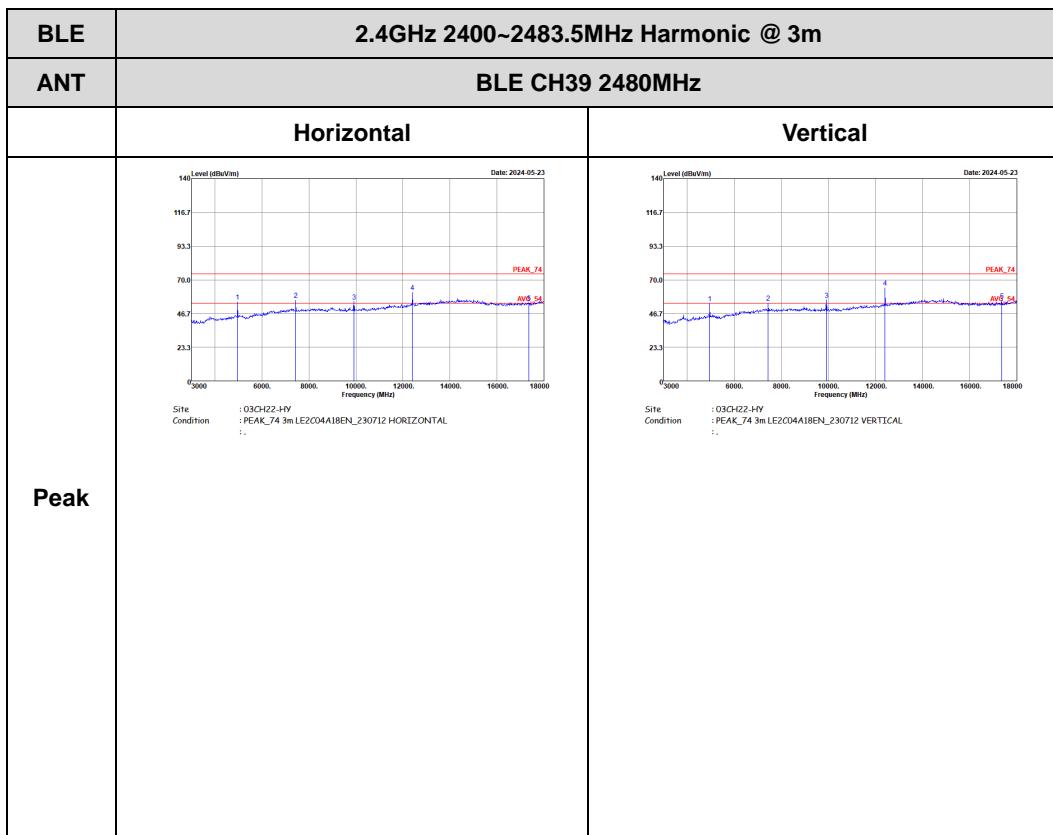


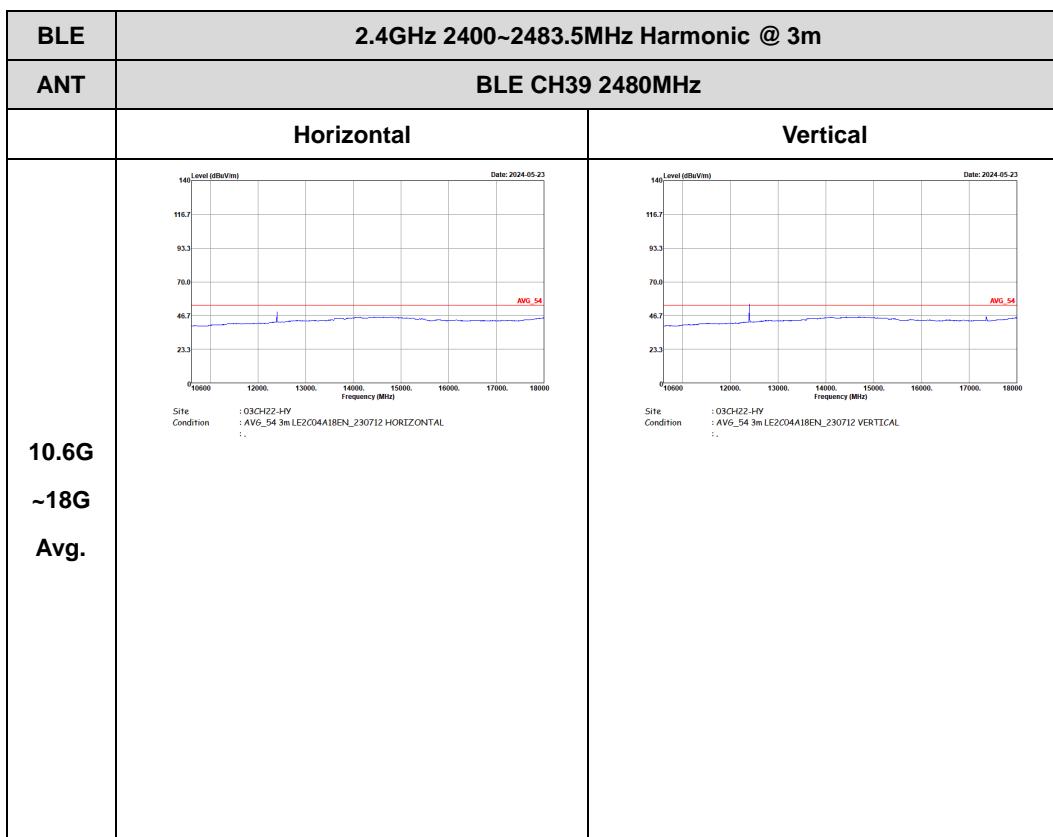



Emission above 18GHz

2.4GHz BLE (SHF @ 1m)

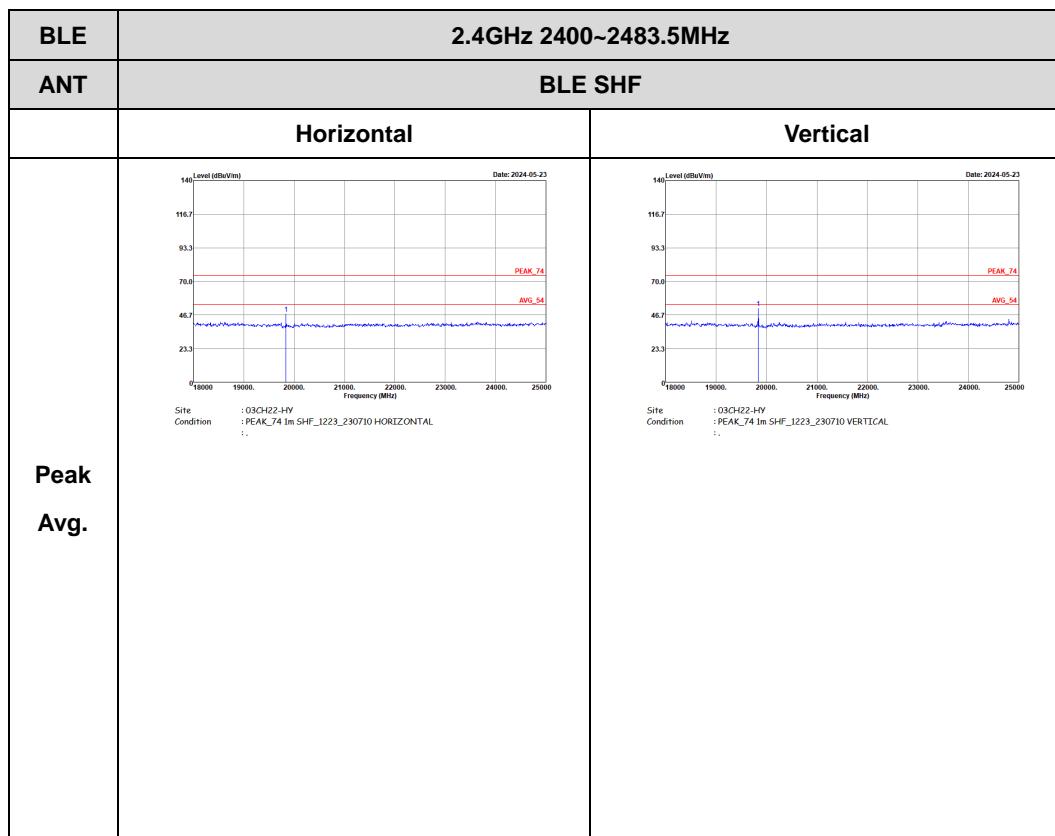



Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH22-HY Condition : QP 3m B1L0663304_231015_16 HORIZONTAL</p>	<p>Site : 03CH22-HY Condition : QP 3m B1L0663304_231015_16 VERTICAL</p>