

RADIO TEST REPORT

FCC ID: 2ABYN021

Product : Control Case

Trade Mark : Godox

Model Name : ESC45

Family Model : N/A

Report No. : S21012003004002

Prepared for

GODOX PHOTO EQUIPMENT CO.LTD

1st to 4th Floor, Building 2/1st to 4th Floor, Building 4, Yaochuan
Industrial Zone, Tangwei Community, Fuhai Street, Baoan District,
Shenzhen, 518103 China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel:400-800-6106,0755-2320 0050 / 2320 0090

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name GODOX PHOTO EQUIPMENT CO.LTD
Address 1st to 4th Floor, Building 2/1st to 4th Floor, Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, 518103 China

Manufacturer's Name..... GODOX Photo Equipment Co.,Ltd.
Address 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen 518103,China

Product description

Product name..... Control Case
Model and/or type reference ESC45
Family Model..... N/A

Standards FCC Part15.249

Test procedure ANSI C63.10-2013

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 20 Jan. 2021 ~ 15 Mar. 2021

Date of Issue..... 15 Mar. 2021

Test Result..... Pass

Testing Engineer : [Signature]
(Mary Hu)

Technical Manager : [Signature]
(Jason Chen)

Authorized Signatory : [Signature]
(Alex Li)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	13
3.1 STANDARD REQUIREMENT	13
3.2 EUT ANTENNA	13
3.3 CONDUCTED EMISSION MEASUREMENT	14
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.3.2 TEST PROCEDURE	14
3.3.3 DEVIATION FROM TEST STANDARD	14
3.3.4 TEST SETUP	15
3.2.5 TEST RESULT	16
3.4 RADIATED EMISSION MEASUREMENT	18
3.4.1 RADIATED EMISSION LIMITS	18
3.4.2 TEST PROCEDURE	19
3.4.3 DEVIATION FROM TEST STANDARD	19
3.4.4 TEST RESULTS (BELOW 30MHZ)	21
3.4.5 TEST RESULTS (BELOW 1000 MHZ)	22
3.4.6 TEST RESULTS (ABOVE 1000 MHZ)	24
3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	30
4. BANDWIDTH TEST	36
4.1 TEST PROCEDURE	36
4.2 DEVIATION FROM STANDARD	36
4.3 TEST SETUP	36
6. TEST RESULTS	37

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.249)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249 15.209	Radiated Spurious Emission	Pass	
15.249(2)	Frequency Tolerance	Pass	
15.249(a)	Fundamental Measurement	Pass	
15.205	Band Edge Emission	Pass	
15.249	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

Site Description

- CNAS-Lab.** : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
 The Certificate Registration Number is L5516.
- IC-Registration** : The Certificate Registration Number is 9270A.
 CAB identifier:CN0074
- FCC- Accredited** : Test Firm Registration Number: 463705.
 Designation Number: CN1184
- A2LA-Lab.** : The Certificate Registration Number is 4298.01
 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
 This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
- Name of Firm** : Shenzhen NTEK Testing Technology Co., Ltd.
- Site Location** : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
 Shenzhen, Guangdong, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Control Case
Trade Mark	N/A
Model Name	ESC45
Family Model	N/A
Model Difference	N/A
Product Description	The EUT is a Control Case
	Operation Frequency: 2413MHz-2464.5MHz
	Modulation Type: FSK
	Antenna Designation: PCB Antenna
	Antenna Gain(Peak) 0dBi
	Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Rating	DC 3.7V powered by Battery or DC 5V from type-c port
Adapter	N/A
Battery	DC 3.7V 500mAh 1.85Wh
HW Version	20150331C01
SW Version	V1.0

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel Number	Frequency (GHz)	Channel Number	Frequency (GHz)	Channel Number	Frequency (GHz)
1	2.4130	12	2.4310	23	2.4495
2	2.4145	13	2.4330	24	2.4510
3	2.4160	14	2.4345	25	2.4530
4	2.4180	15	2.4360	26	2.4545
5	2.4195	16	2.4380	27	2.4560
6	2.4210	17	2.4395	28	2.4580
7	2.4230	18	2.4410	29	2.4595
8	2.4245	19	2.4430	30	2.4610
9	2.4260	20	2.4445	31	2.4630
10	2.4280	21	2.4460	32	2.4645
11	2.4295	22	2.4480		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	0	Antenna

2.2 DESCRIPTION OF TEST MODES


Final Mode	Description
Mode 1	TX 2413MHz
Mode 2	TX 2438MHz
Mode 3	TX 2464.5MHz

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test

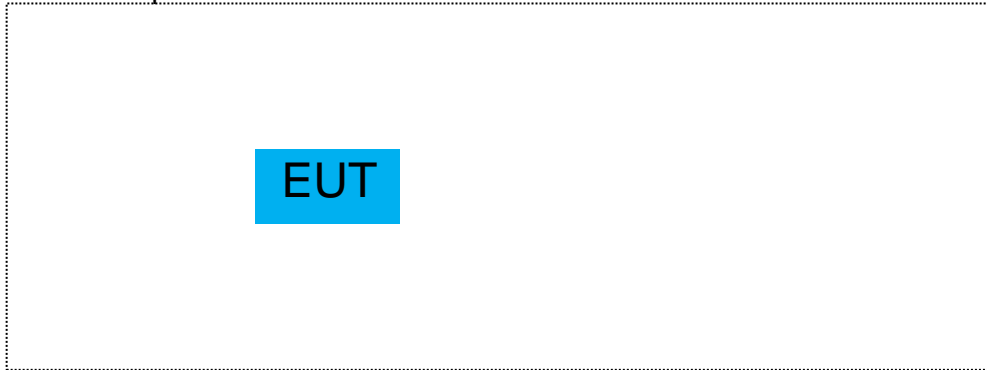

For Radiated Test Cases

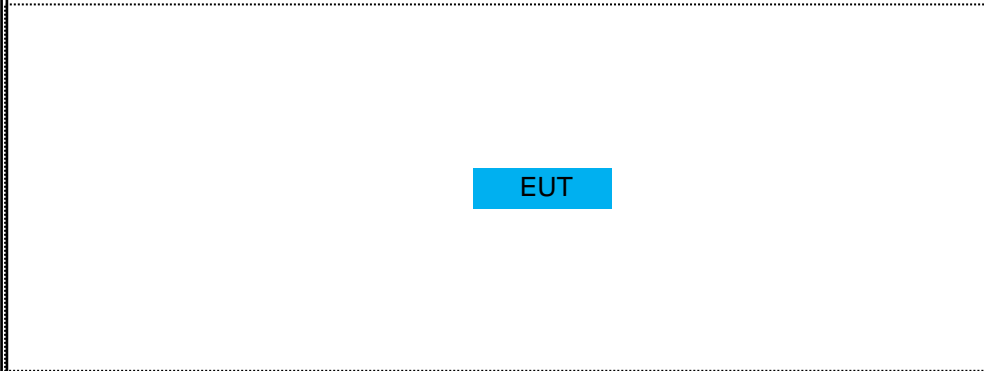

For Conducted Test Cases

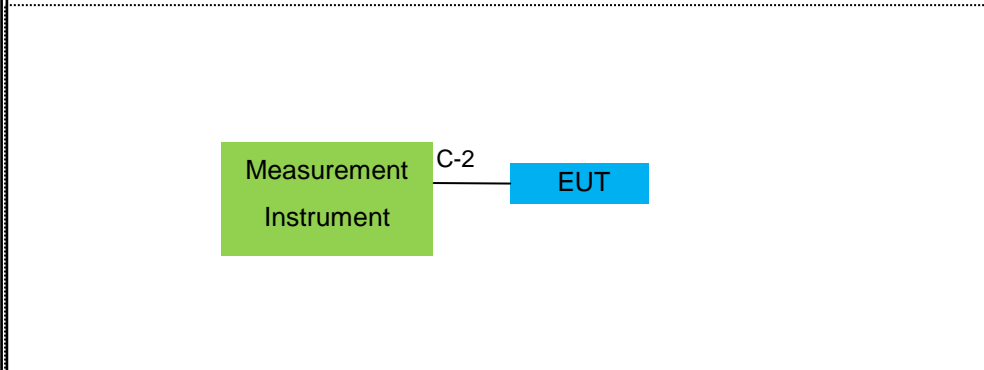

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Control Case	N/A	ESC45	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.07.13	2021.07.12	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.05.11	2021.05.10	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.08.07	2021.08.06	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2018.04.08	2021.04.07	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2020.05.11	2021.05.10	1 year
9	Amplifier	EMC	EMC051835SE	980246	2020.07.13	2021.07.12	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2020.05.11	2021.05.10	1 year
11	Power Meter	DARE	RPR3006W	15100041SN084	2020.07.13	2021.07.12	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2019.06.28	2022.06.27	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.04.07	2023.04.06	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2019.06.28	2022.06.27	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is permanent attached PCB antenna(Gain:0dBi). It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
 $\text{Margin} = \text{Measurement} - \text{Limits}$, $\text{Measurement} = \text{Reading level} + \text{Correct Factor}$

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

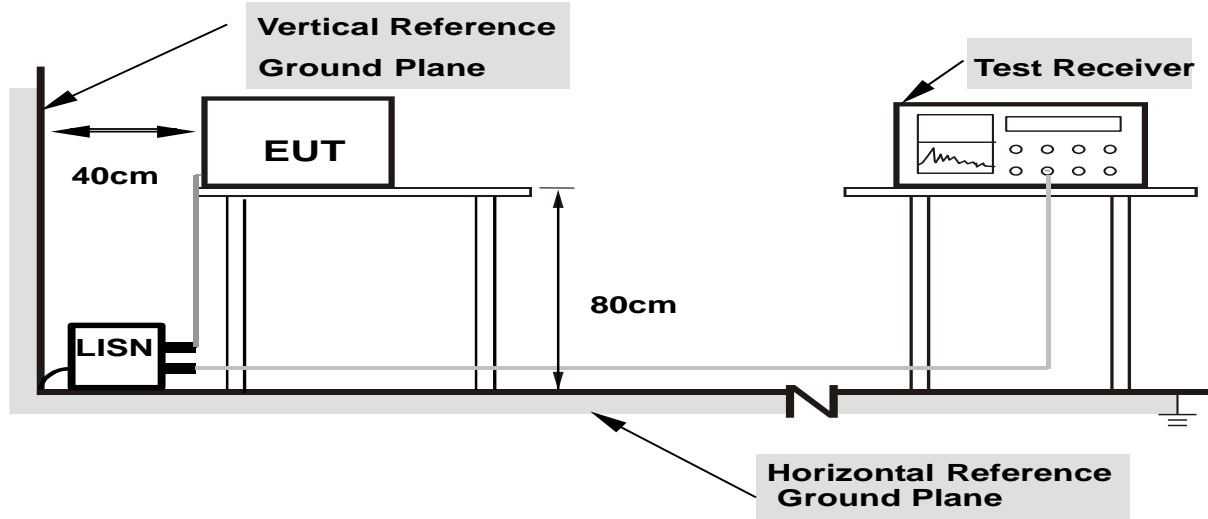

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.2.5 TEST RESULT

EUT :	Control Case	Model Name :	ESC45
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5620	28.96	9.55	38.51	56.00	-17.49	QP
0.5620	19.64	9.55	29.19	46.00	-16.81	AVG
0.8780	13.50	9.55	23.05	56.00	-32.95	QP
0.8780	23.50	9.55	33.05	46.00	-12.95	AVG
1.1660	21.36	9.56	30.92	56.00	-25.08	QP
1.1660	10.33	9.56	19.89	46.00	-26.11	AVG
1.5460	21.07	9.58	30.65	56.00	-25.35	QP
1.5460	11.36	9.58	20.94	46.00	-25.06	AVG
1.8740	19.65	9.58	29.23	56.00	-26.77	QP
1.8740	9.27	9.58	18.85	46.00	-27.15	AVG
2.9100	18.52	9.60	28.12	56.00	-27.88	QP
2.9100	8.34	9.60	17.94	46.00	-28.06	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

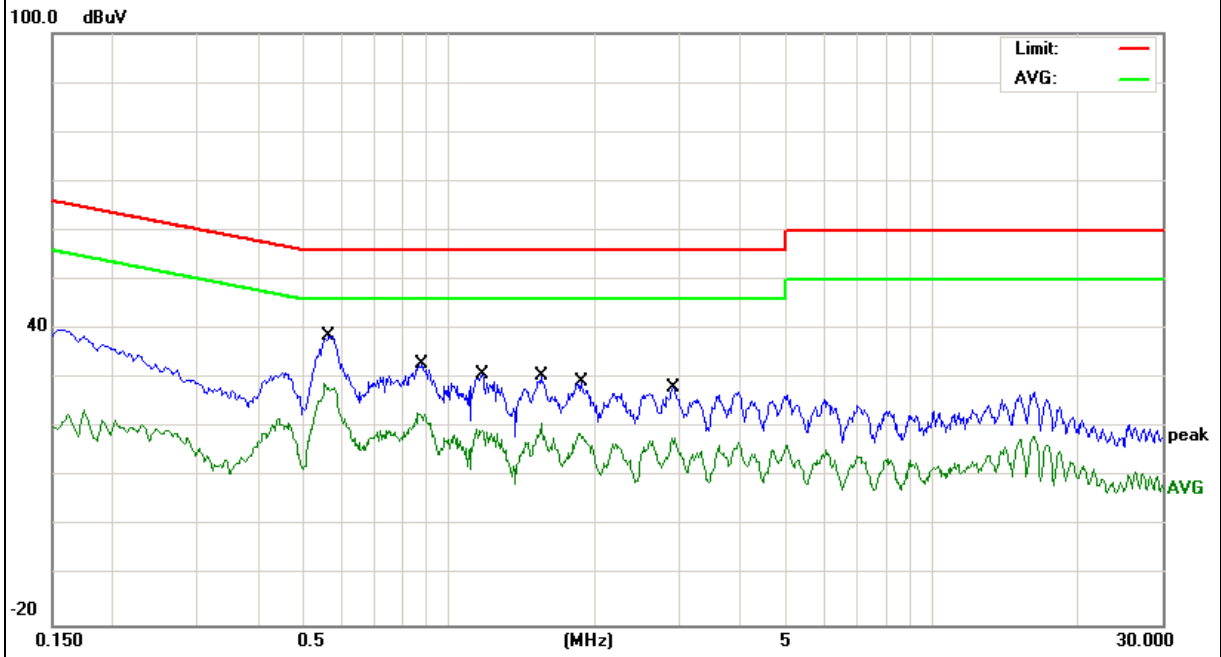


EUT :	Control Case	Model Name :	ESC45
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5740	31.42	9.54	40.96	56.00	-15.04	QP
0.5740	23.94	9.54	33.48	46.00	-12.52	AVG
0.8620	21.54	9.54	31.08	56.00	-24.92	QP
0.8620	13.98	9.54	23.52	46.00	-22.48	AVG
1.1660	21.11	9.55	30.66	56.00	-25.34	QP
1.1660	11.35	9.55	20.90	46.00	-25.10	AVG
1.5300	20.47	9.57	30.04	56.00	-25.96	QP
1.5300	13.06	9.57	22.63	46.00	-23.37	AVG
1.8780	18.88	9.57	28.45	56.00	-27.55	QP
1.8780	10.59	9.57	20.16	46.00	-25.84	AVG
2.2460	18.25	9.57	27.82	56.00	-28.18	QP
2.2460	10.34	9.57	19.91	46.00	-26.09	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

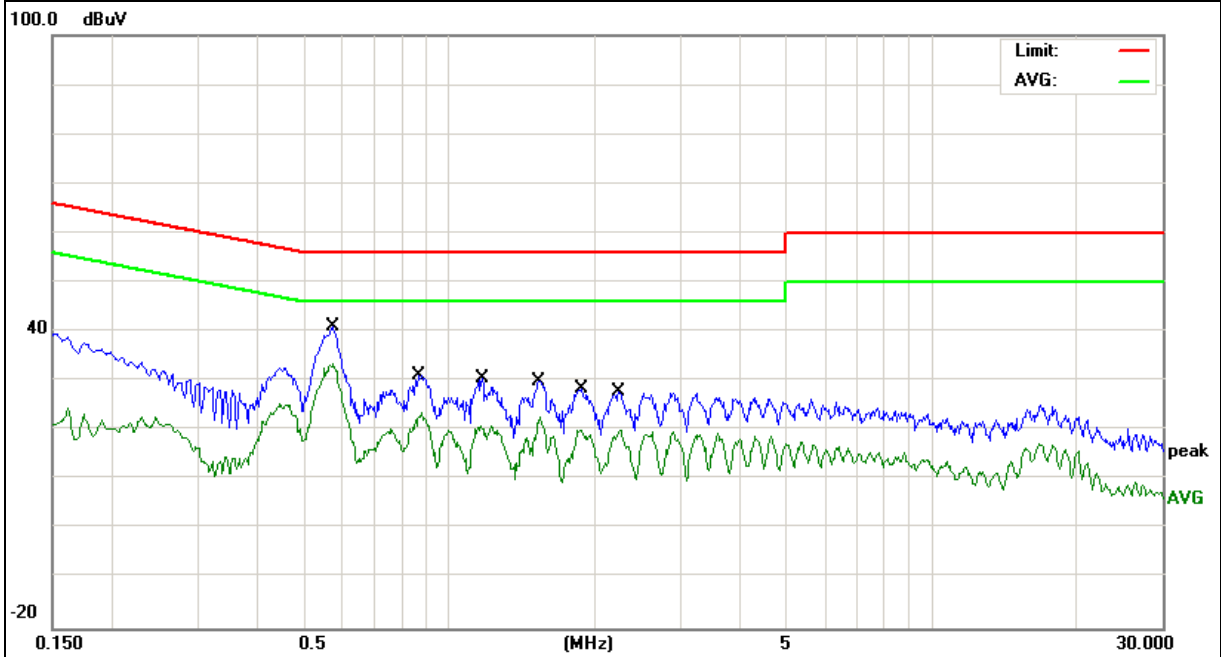

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
Frequency (MHz)	Limit (dBuV)	
30~88	40	3
88~216	43.5	3
216~960	46	3
960 -10000	54.00	3
*902 - 928	94.00	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) *Note: This is the limit for the fundamental frequency.

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
2400-2483.5	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.4.3 DEVIATION FROM TEST STANDARD


No deviation

(A) Radiated Emission Test-Up Frequency Below 30MHz


(a)

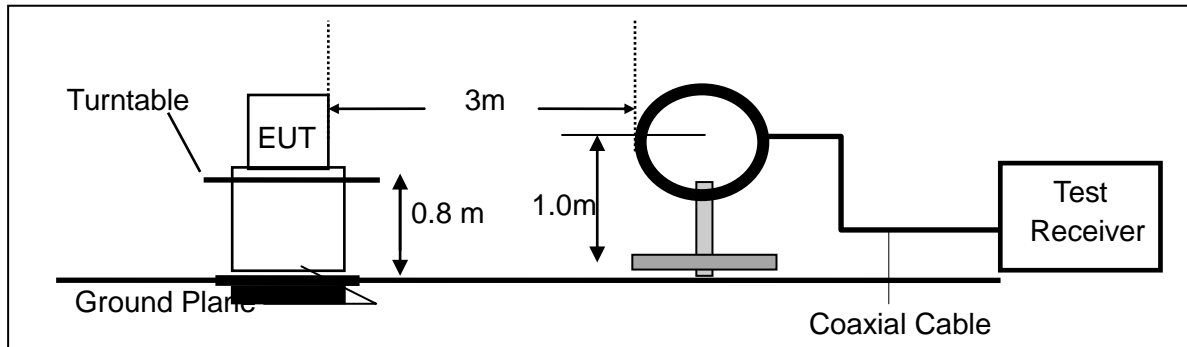

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

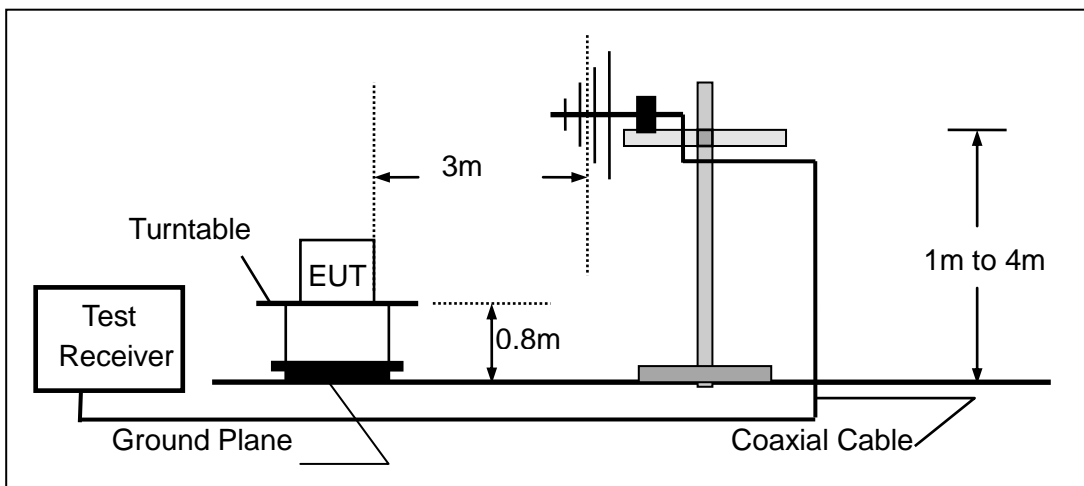

(C) Radiated Emission Test-Up Frequency Above 1GHz

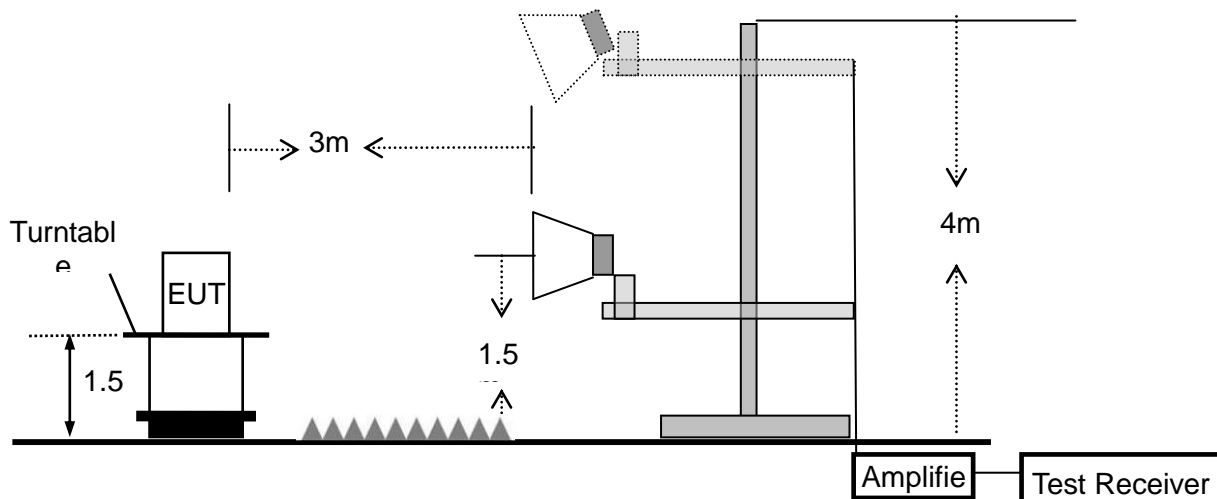

3.4.4 TEST RESULTS (BELOW 30MHz)

EUT :	Control Case	Model Name. :	ESC45
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Remark:1. Emission level in dBuV/m= $20 \log(uV/m)$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor = $40 \log(\text{Specific distance/ test distance})(dB)$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor = $20 \log(\text{Specific distance/ test distance})(dB)$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.4.5 TEST RESULTS (BELOW 1000 MHz)


All the modes have been tested, and the worst result was report as below:

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	63.5356	14.63	6.20	20.83	40.00	-19.17	QP
V	91.1746	15.37	9.96	25.33	43.50	-18.17	QP
V	129.4677	16.64	12.53	29.17	43.50	-14.33	QP
V	300.3672	17.60	14.77	32.37	46.00	-13.63	QP
V	549.0195	6.07	22.53	28.60	46.00	-17.40	QP
V	982.6200	7.71	28.15	35.86	54.00	-18.14	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

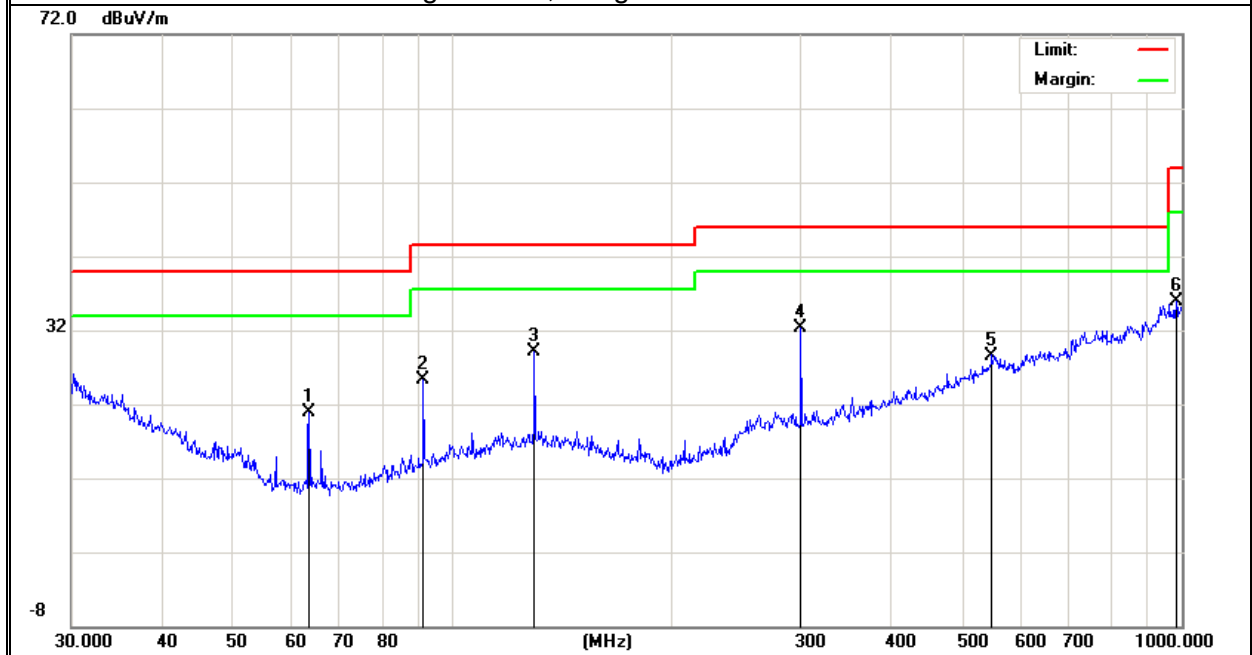

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	33.6802	7.44	17.39	24.83	40.00	-15.17	QP
H	57.1914	14.29	6.35	20.64	40.00	-19.36	QP
H	129.4677	6.21	12.53	18.74	43.50	-24.76	QP
H	281.0075	5.95	15.67	21.62	46.00	-24.38	QP
H	568.6127	6.70	21.93	28.63	46.00	-17.37	QP
H	734.4913	7.06	25.16	32.22	46.00	-13.78	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

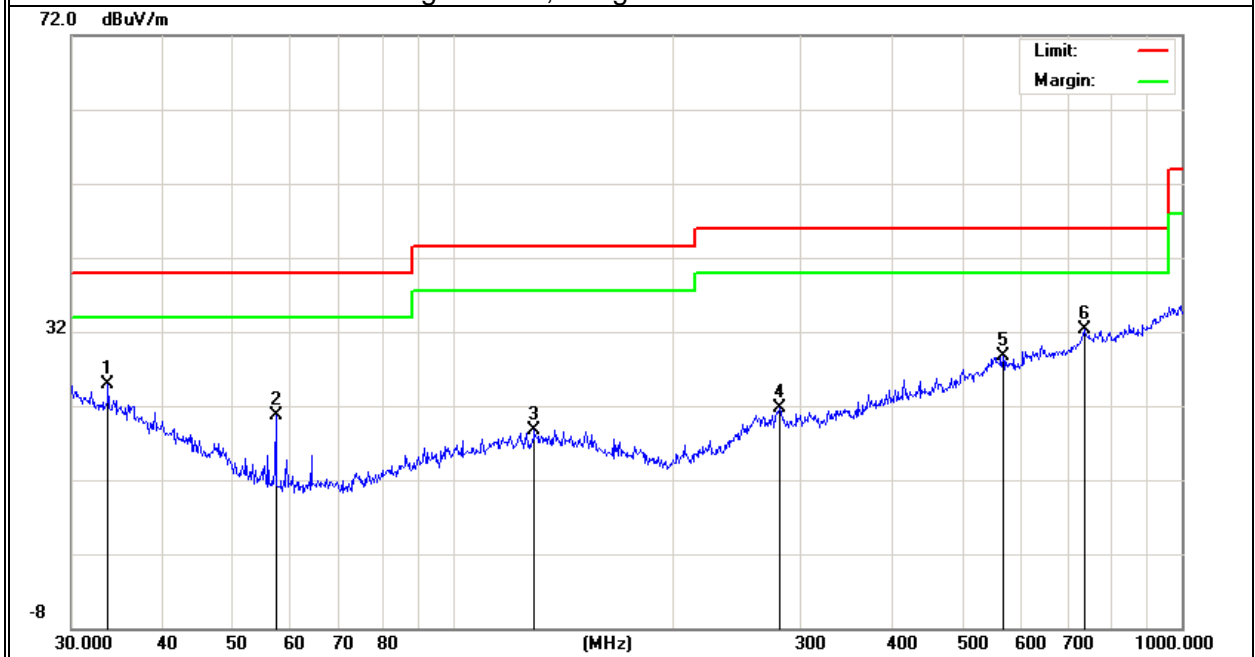


3.4.6 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2413MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4230.000	65.24	-15.84	49.40	74.00	-24.60	peak
4230.000	54.40	-15.84	38.56	54.00	-15.44	AVG
4825.000	70.27	-13.92	56.35	74.00	-17.65	peak
4825.000	60.67	-13.92	46.75	54.00	-7.25	AVG
14302.500	63.60	-3.33	60.27	74.00	-13.73	peak
14302.500	48.59	-3.33	45.26	74.00	-28.74	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
No emission above 18GHz.

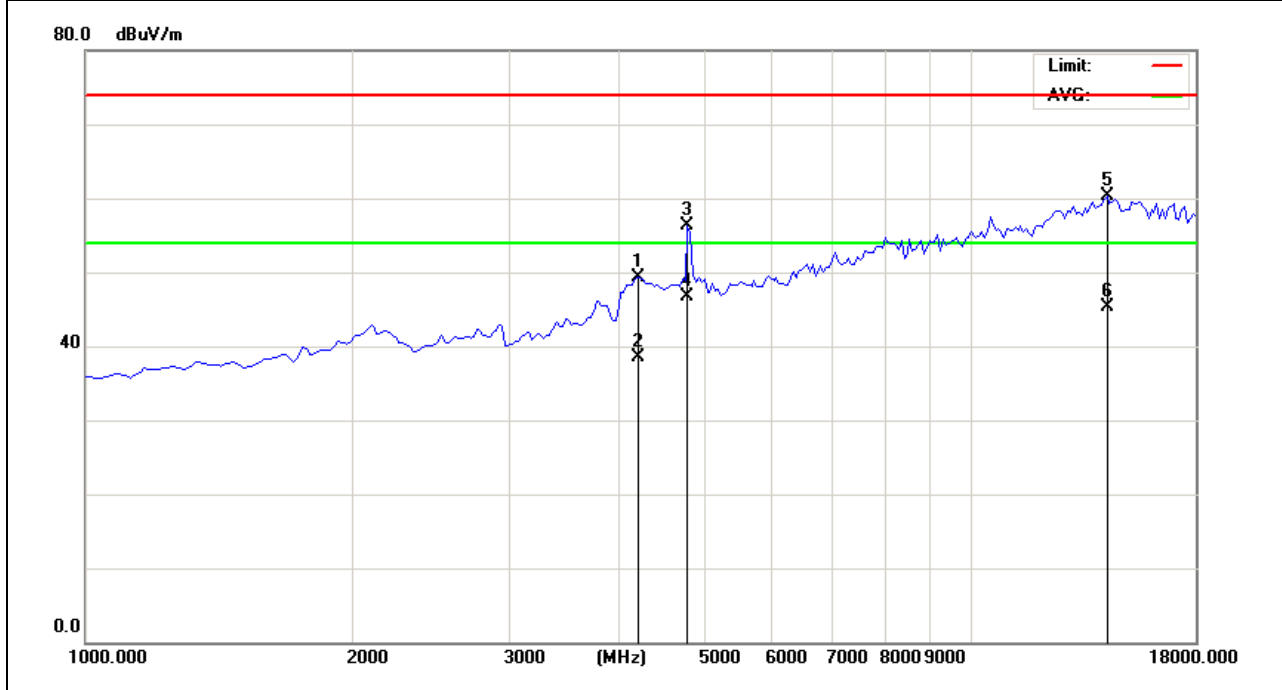

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2413MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4442.500	64.62	-15.11	49.51	74.00	-24.49	peak
4442.500	56.62	-15.11	41.51	54.00	-12.49	AVG
4825.000	68.84	-13.92	54.92	74.00	-19.08	peak
4825.000	60.27	-13.92	46.35	54.00	-7.65	AVG
17150.000	56.61	4.59	61.20	74.00	-12.80	peak
17150.000	42.64	4.59	47.23	54.00	-6.77	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 No emission above 18GHz.

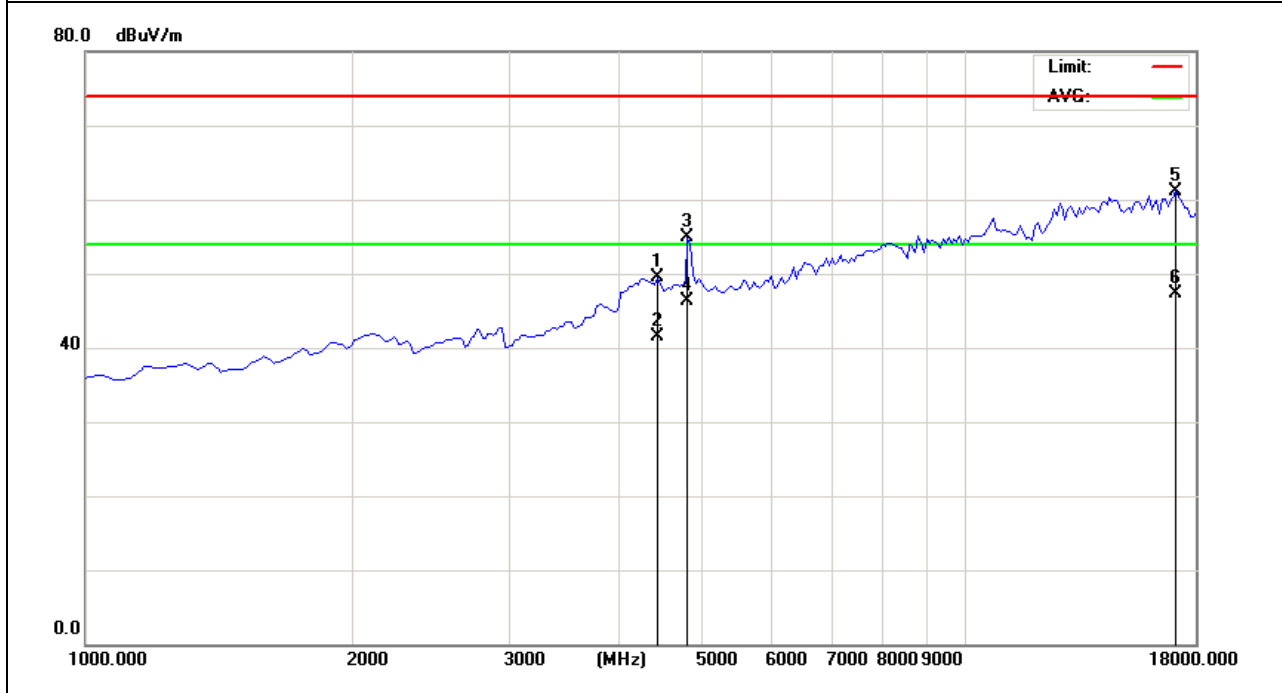


Note: EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2438MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4272.500	66.76	-15.65	51.11	74.00	-22.89	peak
4272.500	57.71	-15.65	42.06	54.00	-11.94	AVG
4867.500	67.85	-14.05	53.80	74.00	-20.20	peak
4867.500	57.31	-14.05	43.26	54.00	-10.74	AVG
16385.000	61.02	-0.28	60.74	74.00	-13.26	peak
16385.000	48.54	-0.28	48.26	54.00	-5.74	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
No emission above 18GHz.

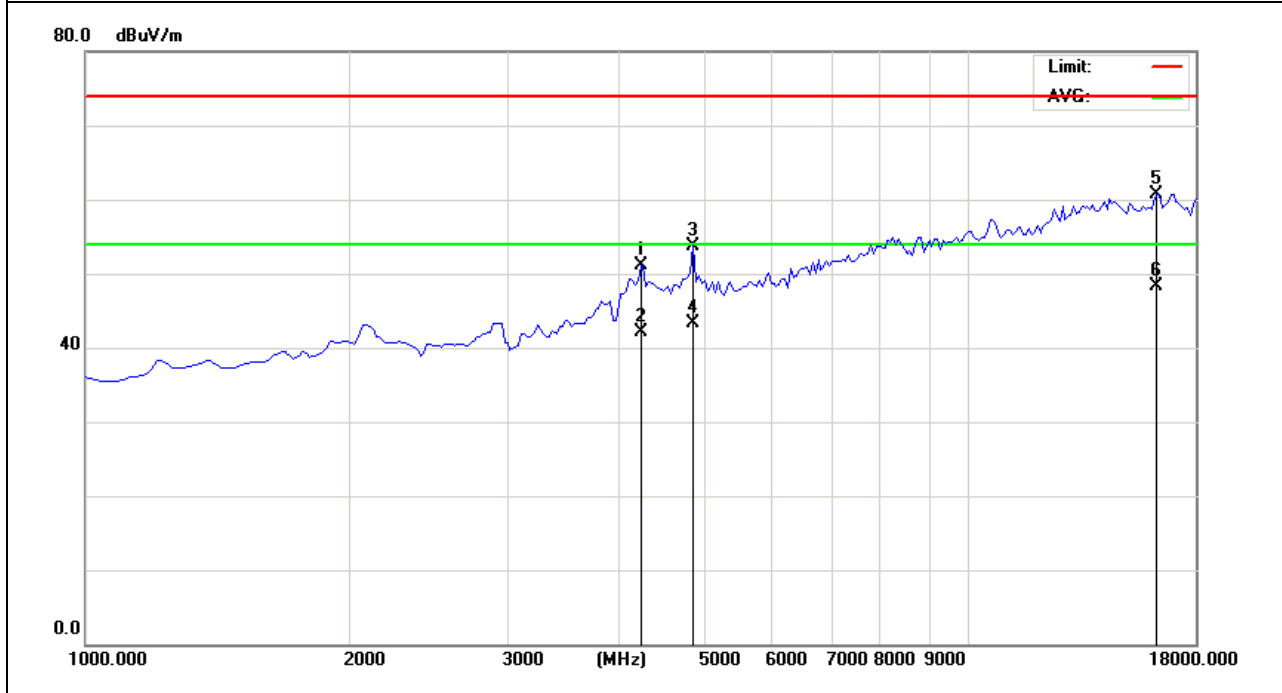

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2438MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4187.500	65.56	-16.02	49.54	74.00	-24.46	peak
4187.500	55.28	-16.02	39.26	54.00	-14.74	AVG
4867.500	66.64	-14.05	52.59	74.00	-21.41	peak
4867.500	57.11	-14.05	43.06	54.00	-10.94	AVG
16725.000	56.79	3.51	60.30	74.00	-13.70	peak
16725.000	42.18	3.51	45.69	54.00	-8.31	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
No emission above 18GHz.

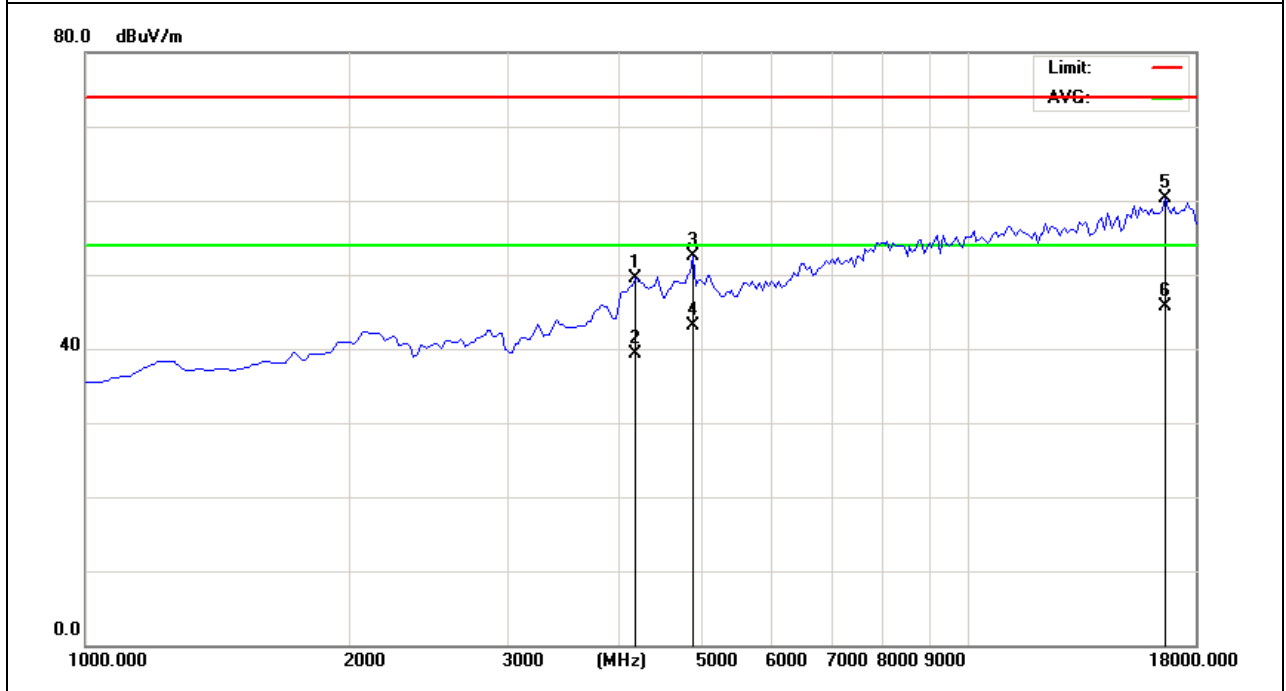


Note: EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2464.5MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4187.500	65.38	-16.02	49.36	74.00	-24.64	peak
4187.500	51.38	-16.02	35.36	54.00	-18.64	AVG
4952.500	72.34	-14.29	58.05	74.00	-15.95	peak
4952.500	62.36	-14.29	48.07	54.00	-5.93	AVG
17150.000	56.21	4.59	60.80	74.00	-13.20	peak
17150.000	40.64	4.59	45.23	74.00	-28.77	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
No emission above 18GHz.

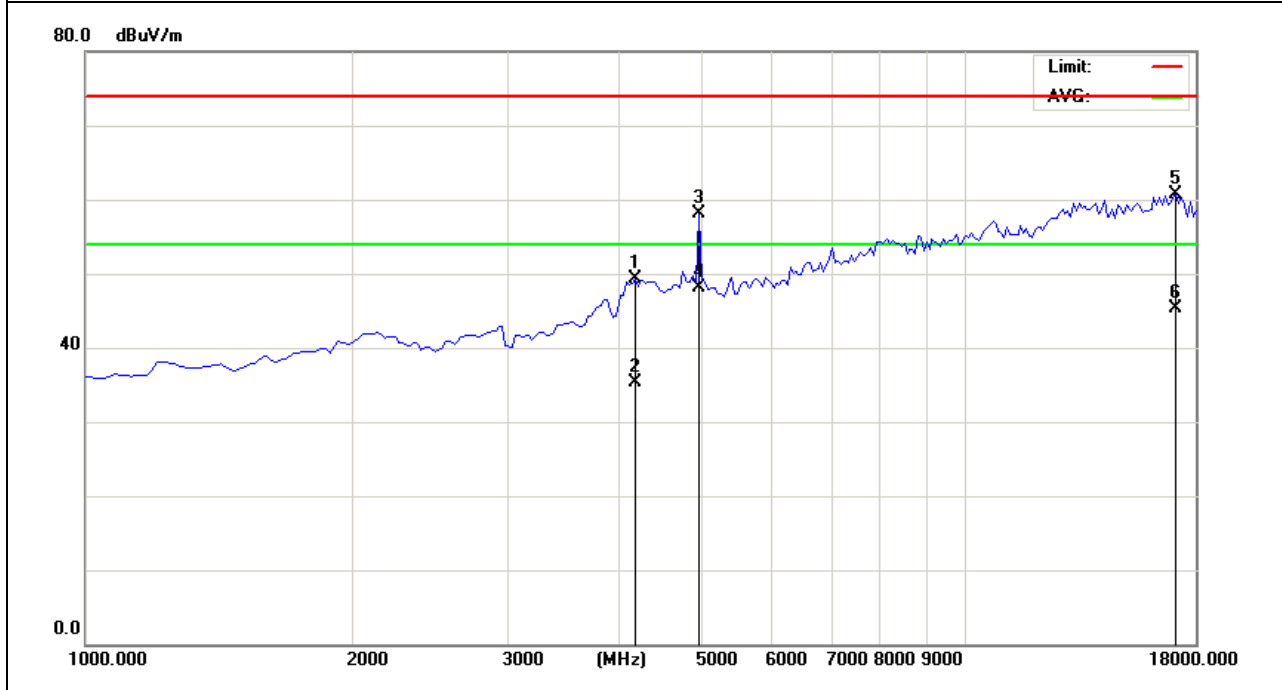

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2464.5MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4357.500	64.79	-15.24	49.55	74.00	-24.45	peak
4357.500	54.89	-15.24	39.65	54.00	-14.35	AVG
4952.500	67.78	-14.29	53.49	74.00	-20.51	peak
4952.500	53.58	-14.29	39.29	54.00	-14.71	AVG
16810.000	56.54	3.66	60.20	74.00	-13.80	peak
16810.000	41.70	3.66	45.36	54.00	-8.64	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
No emission above 18GHz.

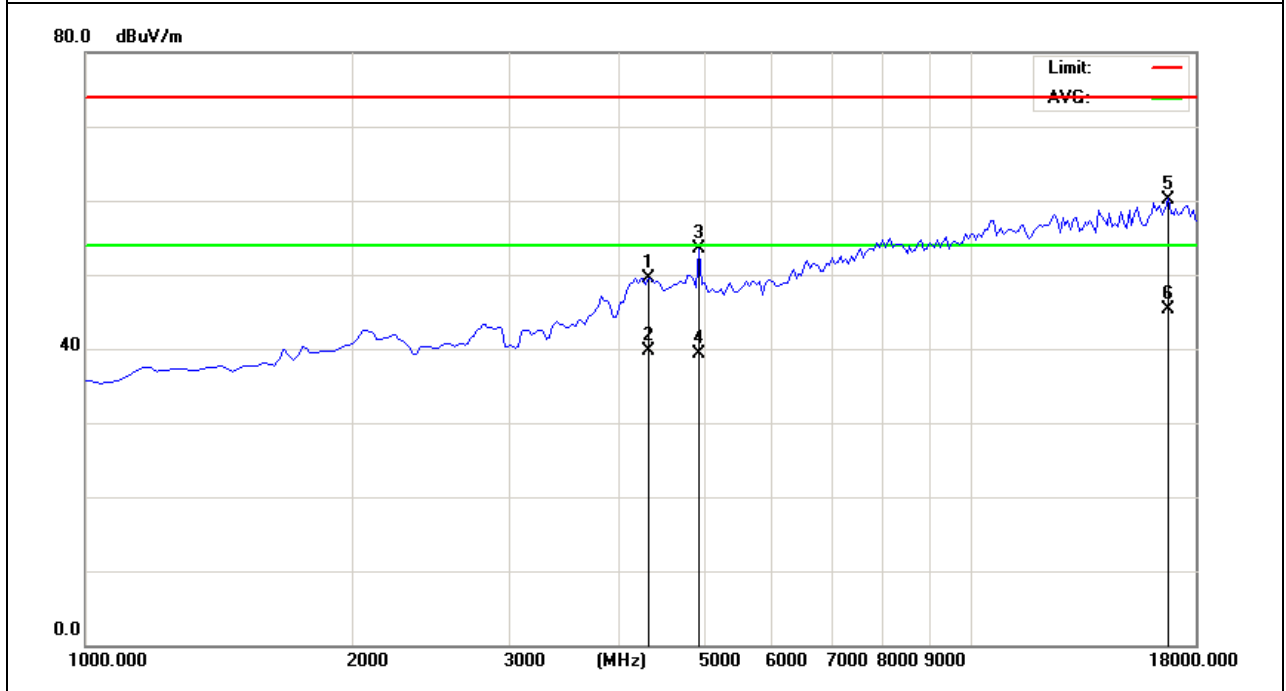


Note: EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).

3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2413MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.000	66.21	-23.24	42.97	74.00	-31.03	peak
2310.000	54.16	-23.24	30.92	54.00	-23.08	AVG
2390.000	72.34	-23.44	48.90	74.00	-25.10	peak
2390.000	57.70	-23.44	34.26	54.00	-19.74	AVG
2413.000	106.72	-23.43	83.29	114.00	-30.71	peak
2413.000	99.72	-23.43	76.29	94.00	-17.71	AVG
2483.500	66.77	-23.29	43.48	74.00	-30.52	peak
2483.500	56.53	-23.29	33.24	54.00	-20.76	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

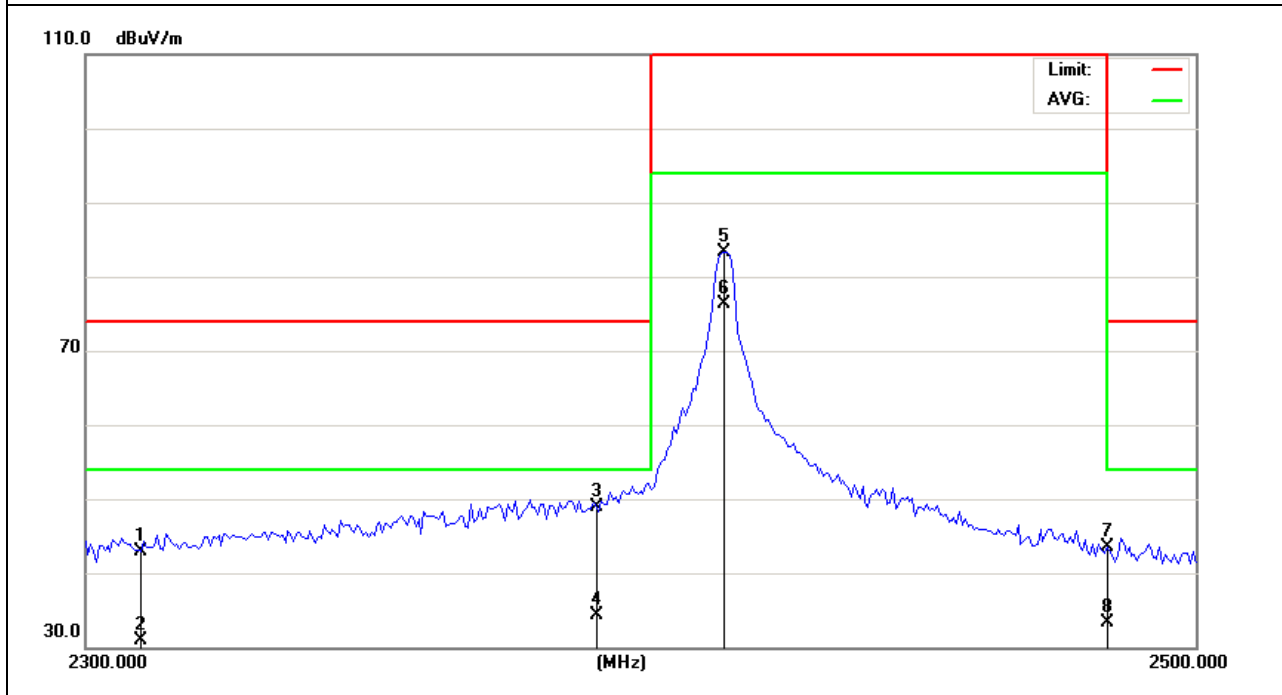

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2413MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.000	64.86	-23.24	41.62	74.00	-32.38	peak
2310.000	55.89	-23.24	32.65	54.00	-21.35	AVG
2390.000	70.05	-23.44	46.61	74.00	-27.39	peak
2390.000	61.03	-23.44	37.59	54.00	-16.41	AVG
2413.000	105.13	-23.43	81.70	114.00	-32.30	peak
2413.000	99.80	-23.43	76.37	94.00	-17.63	AVG
2483.500	64.55	-23.29	41.26	74.00	-32.74	peak
2483.500	54.94	-23.29	31.65	54.00	-22.35	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

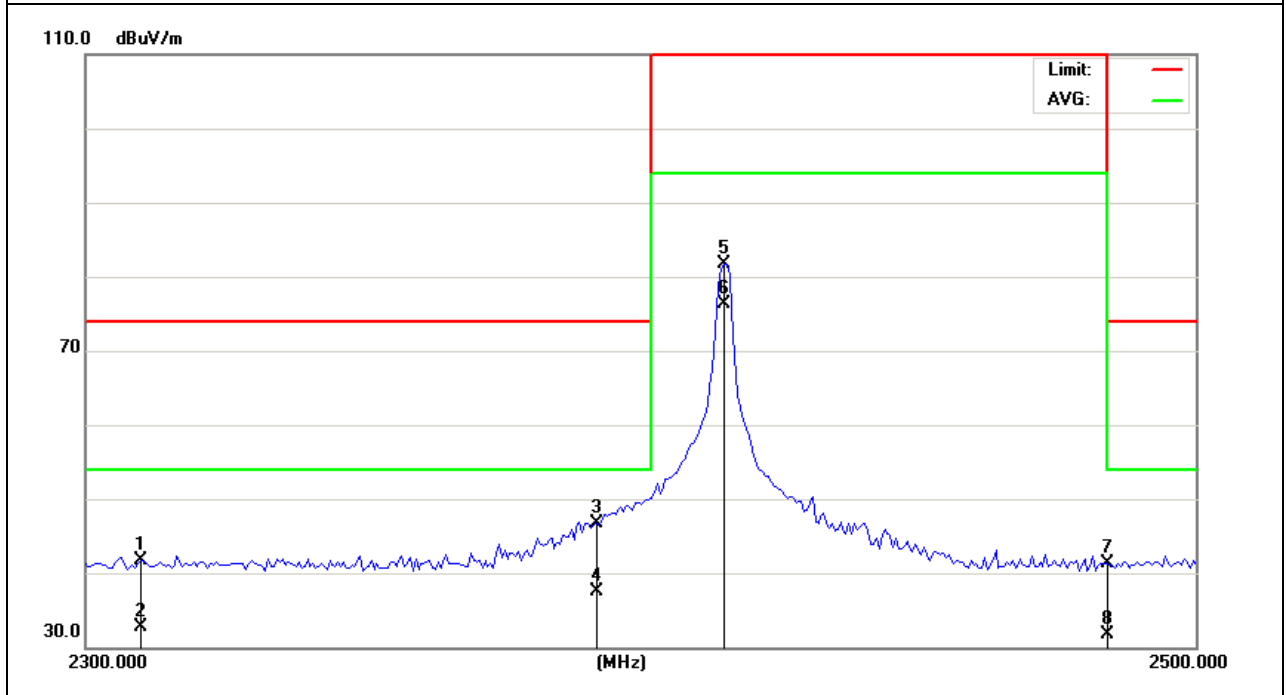

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2438MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.000	64.15	-23.24	40.91	74.00	-33.09	peak
2310.000	56.06	-23.24	32.82	54.00	-21.18	AVG
2390.000	71.77	-23.44	48.33	74.00	-25.67	peak
2390.000	62.00	-23.44	38.56	54.00	-15.44	AVG
2438.000	106.43	-23.38	83.05	114.00	-30.95	peak
2438.000	101.97	-23.38	78.59	94.00	-15.41	AVG
2483.500	68.91	-23.29	45.62	74.00	-28.38	peak
2483.500	57.92	-23.29	34.63	54.00	-19.37	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

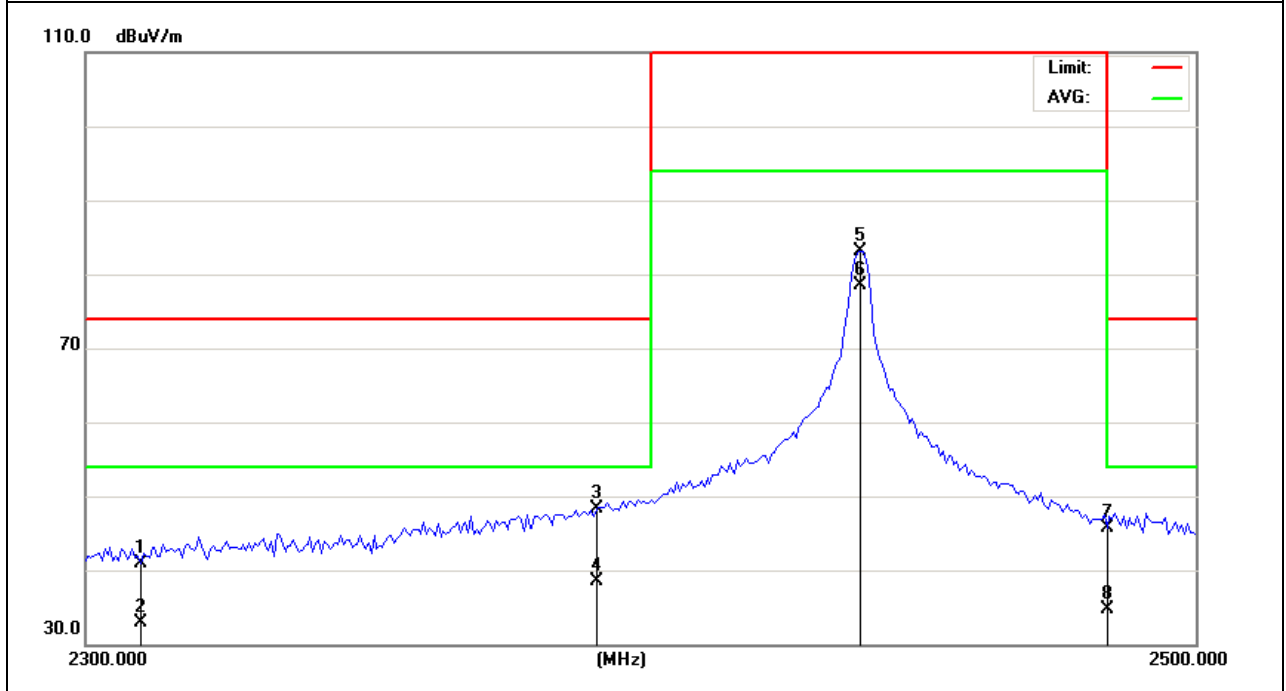

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2438MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.000	64.59	-23.24	41.35	74.00	-32.65	peak
2310.000	55.63	-23.24	32.39	54.00	-21.61	AVG
2390.000	64.13	-23.44	40.69	74.00	-33.31	peak
2390.000	55.09	-23.44	31.65	54.00	-22.35	AVG
2438.000	104.30	-23.38	80.92	114.00	-33.08	peak
2438.000	99.20	-23.38	75.82	94.00	-18.18	peak
2483.500	65.32	-23.29	42.03	74.00	-31.97	peak
2483.500	56.94	-23.29	33.65	54.00	-20.35	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

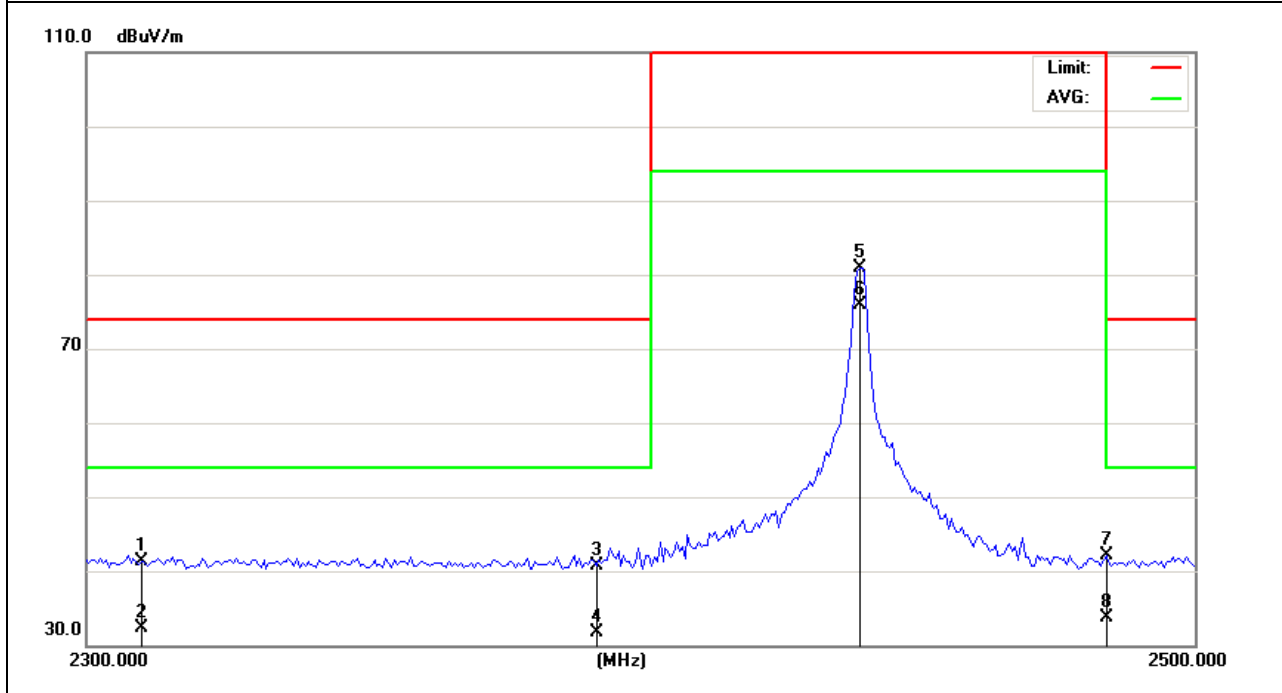

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2464.5MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.000	64.36	-23.24	41.12	74.00	-32.88	peak
2310.000	55.89	-23.24	32.65	54.00	-21.35	AVG
2390.000	68.16	-23.44	44.72	74.00	-29.28	peak
2390.000	59.06	-23.44	35.62	54.00	-18.38	AVG
2464.500	106.49	-23.33	83.16	114.00	-30.84	peak
2464.500	101.48	-23.33	78.15	94.00	-15.85	AVG
2483.500	75.89	-23.29	52.60	74.00	-21.40	peak
2483.500	66.88	-23.29	43.59	54.00	-10.41	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

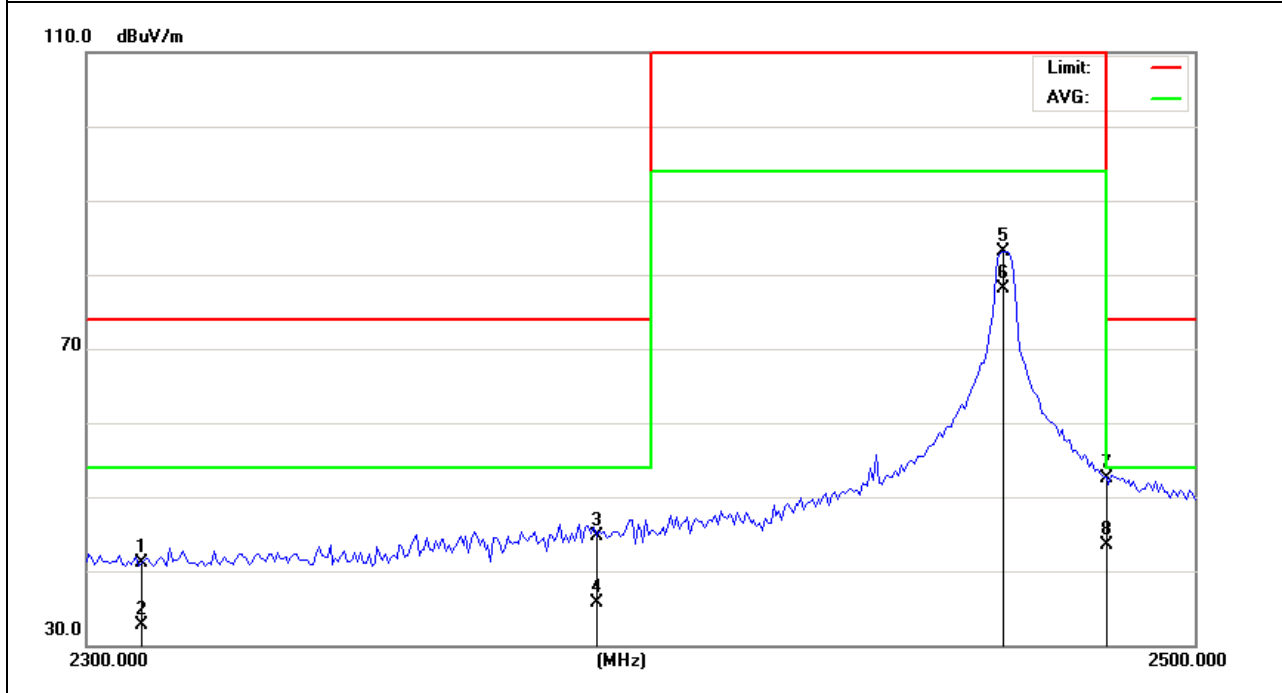

EUT :	Control Case	Model Name :	ESC45
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX 2464.5MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.000	64.41	-23.24	41.17	74.00	-32.83	peak
2310.000	55.26	-23.24	32.02	54.00	-21.98	AVG
2390.000	64.04	-23.44	40.60	74.00	-33.40	peak
2390.000	55.03	-23.44	31.59	54.00	-22.41	AVG
2464.500	103.70	-23.33	80.37	114.00	-33.63	peak
2464.500	98.77	-23.33	75.44	94.00	-18.56	AVG
2483.500	68.35	-23.29	45.06	74.00	-28.94	peak
2483.500	58.44	-23.29	35.15	54.00	-18.85	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

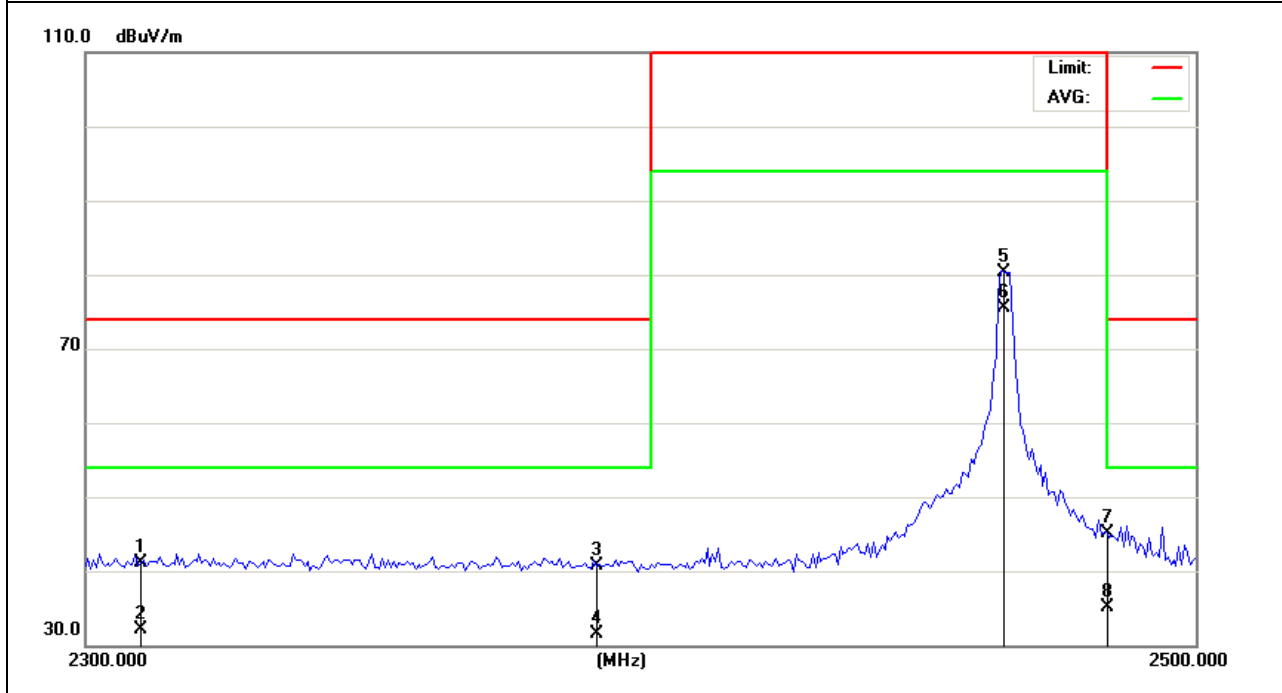

4. BANDWIDTH TEST


4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.
- c. Measured the spectrum width with power higher than 20dB below carrier.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP

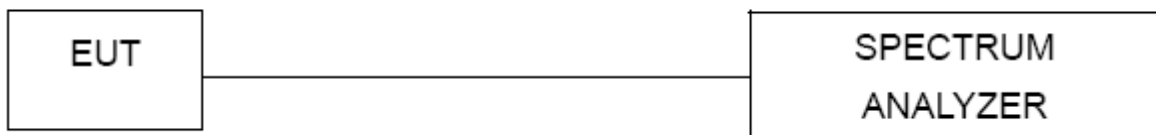


6. TEST RESULTS


EUT :	Control Case	Model Name :	ESC45
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	TX(2413MHz/2438MHz/2464.5MHz)		

Test Frequency (MHz)	20 dBc Bandwidth (MHz)
2413	0.764
2438	0.7633
2464.5	0.765


2413 MHz

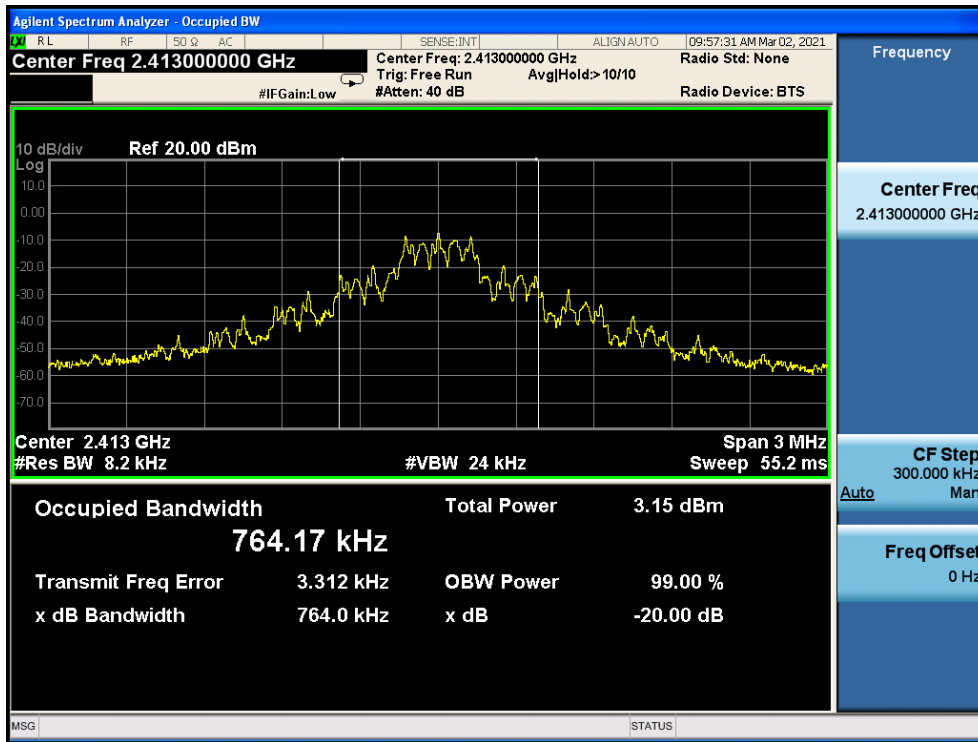

20 dBc Bandwidth 2438MHz

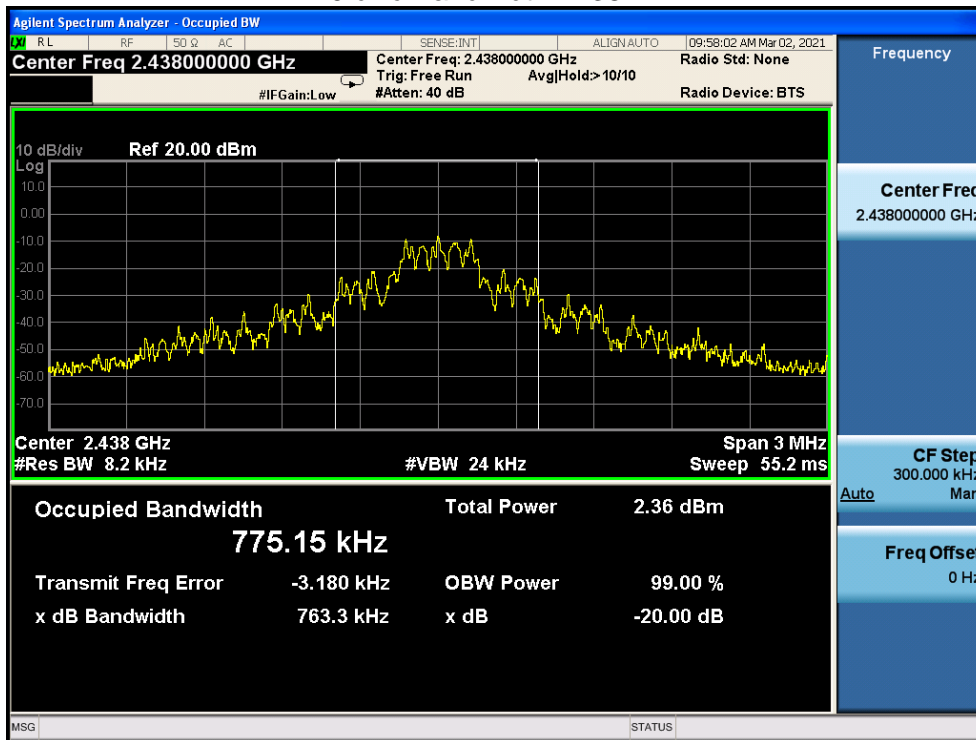

20 dBc Bandwidth 2464.5MHz

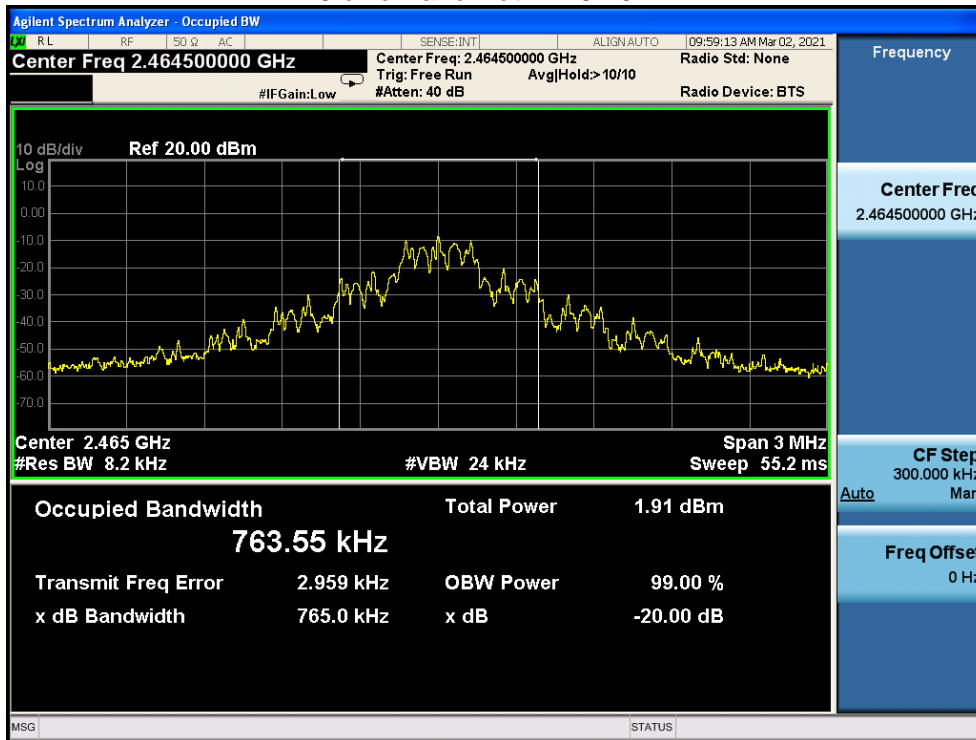

END OF REPORT