



FCC PART 15.249

TEST REPORT

For

GODOX PHOTO EQUIPMENT CO.LTD

19th Floor, Room 1902, Building Jinshan, 5033 Shennan East Road, Luohu District, Shenzhen 518001, China

FCC ID: 2ABYNTT350

Report Type: Original Report	Product Name: Thinklite TTL Camera Flash
Test Engineer: <i>Lorin Bian</i>	<i>Lorin Bian</i>
Report Number: RDG161214005B	
Report Date: 2017-01-04	
Reviewed By: Henry Ding EMC Leader	<i>Henry Ding</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China Tel: 028-65523123, Fax: 028-65525125 www.baclcorp.com

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY.....	3
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION.....	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC§15.203 - ANTENNA REQUIREMENT	8
APPLICABLE STANDARD.....	8
ANTENNA CONNECTOR CONSTRUCTION	8
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS	9
APPLICABLE STANDARD.....	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP	10
TEST EQUIPMENT SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS	12
TEST RESULTS SUMMARY.....	12
TEST DATA	12
FCC §15.215(C) – 20 DB BANDWIDTH TESTING	14
APPLICABLE STANDARD.....	14
TEST PROCEDURE	14
TEST EQUIPMENT LIST AND DETAILS	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **GODOX PHOTO EQUIPMENT CO.LTD**'s product, model number: **TT350s** (**FCC ID: 2ABYNTT350**) (the "EUT") in this report was a **Thinklite TTL Camera Flash**, which was measured approximately: 14.2 cm (L) x 6.2 cm (W) x 3.9 cm (H), rated input voltage: DC 3V from battery.

Note: The series product, model TT350s, TT350c, TT350n are electrically identical, the difference between them is the different hotshoe control function, we selected TT350s for fully testing, the details was explained in the declaration letter.

**All measurement and test data in this report was gathered from final production sample, serial number: 161214005 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2016-12-15, and EUT conformed to test requirement.*

Objective

This type approval report is prepared on behalf of **GODOX PHOTO EQUIPMENT CO.LTD** in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The uncertainty of any RF tests which use conducted method measurement is ± 3.17 dB, the uncertainty of any radiation on emissions measurement is:

30M~200MHz: ± 4.7 dB;
200M~1GHz: ± 6.0 dB;
1G~6GHz: ± 5.13 dB;
6G~25GHz: ± 5.47 dB;

And the uncertainty will not be taken into consideration for all test data recorded in the report.

Test Facility

The test site used by BACL to collect test data is located in the 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The Engineering mode was switched channel by keys.

The system was configured for testing in a testing mode which was selected by manufacturer.

16 channels are provided for testing: channel 1, 8 and 16 were selected to test.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2413	9	2426
2	2414.5	10	2428
3	2416	11	2429.5
4	2418	12	2431
5	2419.5	13	2433
6	2421	14	2434.5
7	2423	15	2436
8	2424.5	16	2438

And channel 1,8, 16 was chose for testing.

EUT Exercise Software

No software was used during testing.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Canon	Digital Camera	DS126131	N/A

Block Diagram of Test Setup

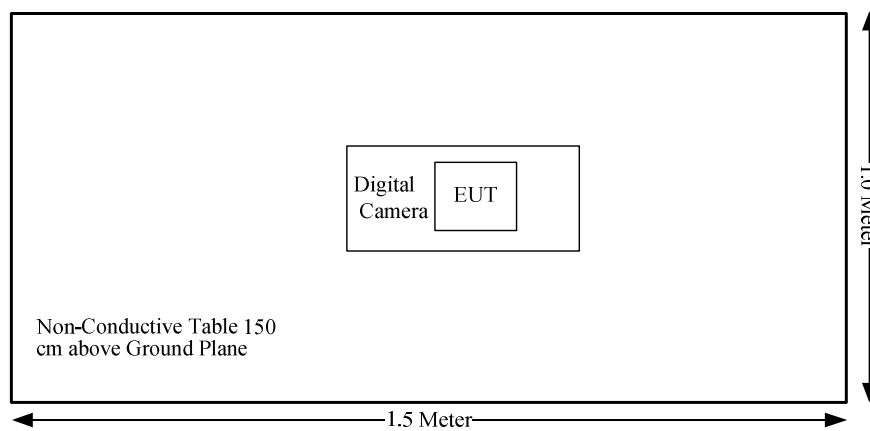

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Note: It is battery operated equipment.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has an internal antenna, the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

–compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
–non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

–compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
–non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Chengdu) is:

30M~200MHz: ±4.7 dB;

200M~1GHz: ±6.0 dB;

1G~6GHz: ±5.13dB;


6G~25GHz: ±5.47 dB;

Table 1 – Values of U_{CISPR}


Measurement	U_{CISPR}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

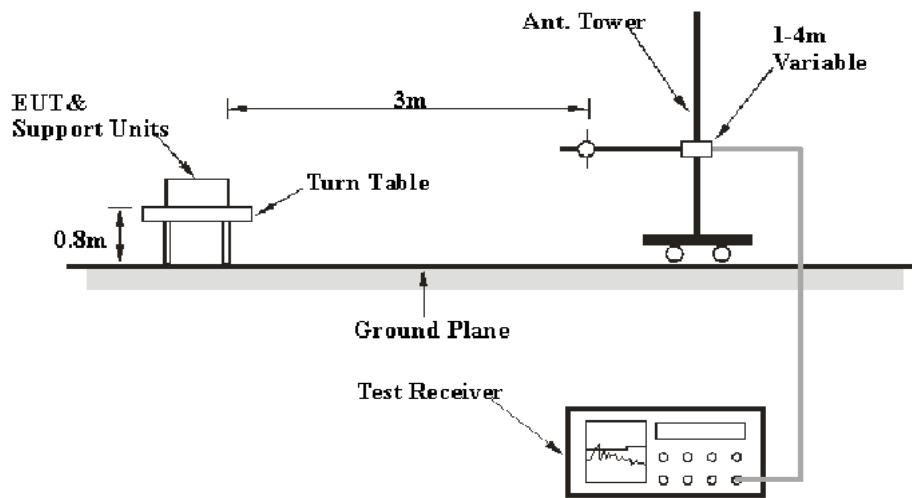

Above 1 GHz:

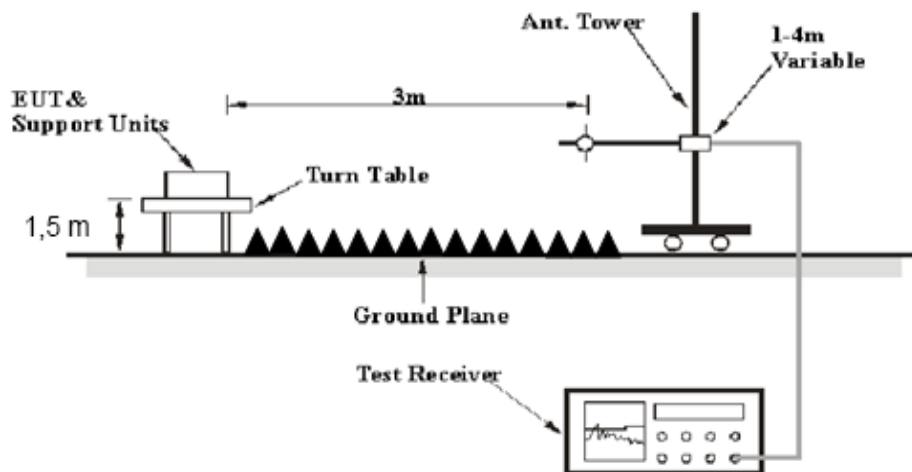

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013 The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A101808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2016-05-20	2017-05-19
HP	Amplifier	8449B	3008A00277	2016-12-02	2017-12-01
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2016-11-10	2017-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2016-11-10	2017-11-09
N/A	RF Cable (above 1GHz)	NO.2	N/A	2016-11-10	2017-11-09

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249.

Test Data

Environmental Conditions

Temperature:	24.6 °C
Relative Humidity:	42 %
ATM Pressure:	101.1 kPa

The testing was performed by Lorin Bian on 2016-12-26.

Test Mode: Transmitting

30MHz-25GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB(1/m))					
frequency: 2413 MHz									
2413	55.76	PK	H	23.50	3.00	0.00	82.26	114.00	31.74
2413	43.37	AV	H	23.50	3.00	0.00	69.87	94.00	24.13
2413	58.82	PK	V	23.50	3.00	0.00	85.32	114.00	28.68
2413	45.69	AV	V	23.50	3.00	0.00	72.19	94.00	21.81
2400	24.27	PK	V	23.54	3.00	0.00	50.81	74.00	23.19
2400	12.92	AV	V	23.54	3.00	0.00	39.46	54.00	14.54
4826	39.46	PK	V	30.84	5.11	26.87	48.54	74.00	25.46
4826	26.75	AV	V	30.84	5.11	26.87	35.83	54.00	18.17
7239	34.02	PK	V	34.78	6.18	26.37	48.61	74.00	25.39
7239	22.73	AV	V	34.78	6.18	26.37	37.32	54.00	16.68
2102	33.55	PK	V	24.55	3.04	26.83	34.31	74.00	39.69
2102	21.09	AV	V	24.55	3.04	26.83	21.85	54.00	32.15
468.44	42.25	QP	V	17.74	1.54	28.63	32.90	46.00	13.10
519.85	40	QP	V	18.30	1.66	28.82	31.14	46.00	14.86
frequency: 2424.5 MHz									
2424.5	56.41	PK	H	23.46	3.00	0.00	82.87	114.00	31.13
2424.5	44.27	AV	H	23.46	3.00	0.00	70.73	94.00	23.27
2424.5	59.48	PK	V	23.46	3.00	0.00	85.94	114.00	28.06
2424.5	46.54	AV	V	23.46	3.00	0.00	73.00	94.00	21.00
4849	39.81	PK	V	30.92	5.10	26.87	48.96	74.00	25.04
4849	27.23	AV	V	30.92	5.10	26.87	36.38	54.00	17.62
7273.5	34.08	PK	V	34.85	6.20	26.38	48.75	74.00	25.25
7273.5	22.79	AV	V	34.85	6.20	26.38	37.46	54.00	16.54
2145	33.14	PK	V	24.41	3.03	26.84	33.74	74.00	40.26
2145	20.85	AV	V	24.41	3.03	26.84	21.45	54.00	32.55
3012	32.55	PK	V	24.27	3.45	26.41	33.86	74.00	40.14
3012	20.13	AV	V	24.27	3.45	26.41	21.44	54.00	32.56
468.44	42.22	QP	V	17.74	1.54	28.63	32.87	46.00	13.13
519.85	40.29	QP	V	18.30	1.66	28.82	31.43	46.00	14.57
frequency: 2438 MHz									
2438	55.71	PK	H	23.41	3.00	0.00	82.12	114.00	31.88
2438	43.86	AV	H	23.41	3.00	0.00	70.27	94.00	23.73
2438	59.25	PK	V	23.41	3.00	0.00	85.66	114.00	28.34
2438	45.56	AV	V	23.41	3.00	0.00	71.97	94.00	22.03
2483.5	25.59	PK	V	23.26	2.99	0.00	51.84	74.00	22.16
2483.5	13.25	AV	V	23.26	2.99	0.00	39.50	54.00	14.50
4876	39.22	PK	V	31.00	5.09	26.87	48.44	74.00	25.56
4876	27.03	AV	V	31.00	5.09	26.87	36.25	54.00	17.75
7314	34.47	PK	V	34.93	6.21	26.40	49.21	74.00	24.79
7314	22.34	AV	V	34.93	6.21	26.40	37.08	54.00	16.92
3045	33.48	PK	V	24.45	3.50	26.43	35.00	74.00	39.00
3045	21.37	AV	V	24.45	3.50	26.43	22.89	54.00	31.11
468.44	42.39	QP	V	17.74	1.54	28.63	33.04	46.00	12.96
519.85	41.08	QP	V	18.30	1.66	28.82	32.22	46.00	13.78

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BAAC (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.3 °C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa

The testing was performed by Lorin Bian on 2016-12-28.


Test Result: Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2413	0.79
Middle	2424.5	0.90
High	2438	0.81


Low Channel

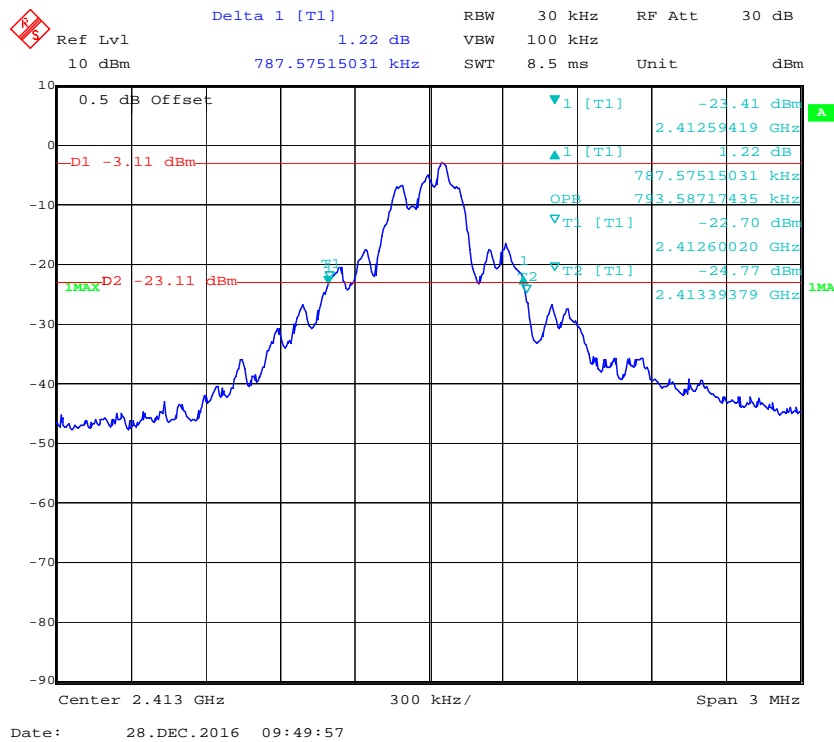

Middle Channel

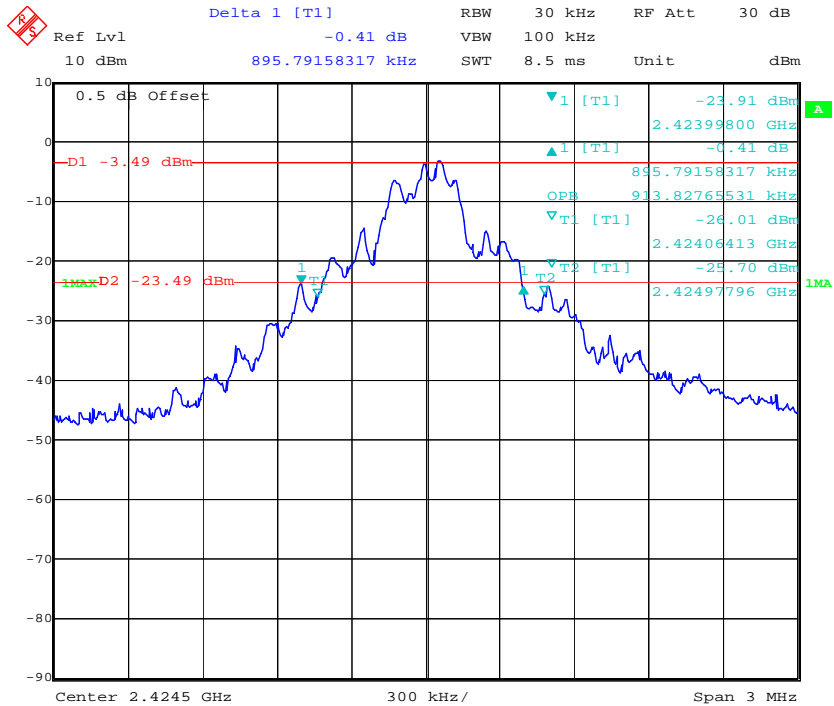

High Channel

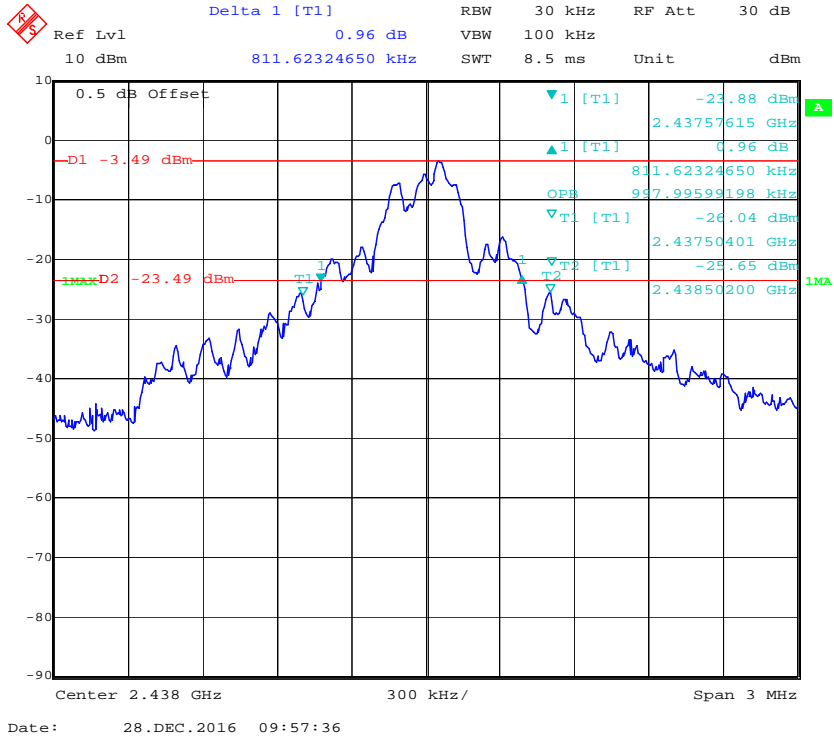

***** END OF REPORT *****