

# **FCC&IC** Radio Test Report

FCC ID: 2ABZ2-A2005

IC ID:12739A-A2005

This report concerns (check one): ⊠Original Grant □Class II Change

Project No. : 1506C242 Equipment : Mobile Phone Model Name : ONE A2005

Model Name : ONE A2005
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.

Address : 18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road,

Shenzhen, China

Date of Receipt : Jun. 13, 2015

**Date of Test** : Jun. 13, 2015 ~ Jul. 03, 2015

**Issued Date** : Jul. 06, 2015 **Tested by** : BTL Inc.

Testing Engineer : Yavid May

(David Mao)

Technical Manager :

(Leo Hung)

Authorized Signatory : Seem In

(Steven Lu)

# BTLINC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Report No.: BTL-FICP-2-1506C242 Page 1 of 65



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FICP-2-1506C242 Page 2 of 65



Table of Contents	Page
1. CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2. SUMMARY OF TEST RESULTS  2.1 TEST FACILITY	8
2.1 TEST FACILITY  2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION 3.1 GENERAL DESCRIPTION OF EUT	9
	9 11
3.2 DESCRIPTION OF TEST MODES  3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TI	
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	
4. EMC EMISSION TEST  4.1 CONDUCTED EMISSION MEASUREMENT	14 14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14 14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP 4.1.5 EUT OPERATING CONDITIONS	15 15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16 46
4.2.1 RADIATED EMISSION LIMITS 4.2.2 TEST PROCEDURE	16 17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS 4.2.6 EUT TEST CONDITIONS	19 19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . BANDWIDTH TEST	21
5.1 APPLIED PROCEDURES / LIMIT 5.1.1 TEST PROCEDURE	21 21
5.1.1 TEST PROCEDURE 5.1.2 DEVIATION FROM STANDARD	21 21
5.1.3 TEST SETUP	21
5.1.4 EUT OPERATION CONDITIONS	21
5.1.5 EUT TEST CONDITIONS 5.1.6 TEST RESULTS	21 21
	<del>-</del> -

Report No.: BTL-FICP-2-1506C242 Page 3 of 65



Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	22
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22 22
6.1.4 EUT OPERATION CONDITIONS 6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7. ANTENNA CONDUCTED SPURIOUS EMISSION	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP 7.1.4 EUT OPERATION CONDITIONS	23 23
7.1.4 EUT OPERATION CONDITIONS 7.1.5 EUT OPERATION CONDITIONS	23 23
7.1.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD 8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24 24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
ATTACHMENT A - CONDUCTED EMISSION	30
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	33
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	35
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	42
ATTACHMENT E - BANDWIDTH	55
ATTACHMENT F - MAXIMUM OUTPUT POWER TEST	58
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	59
ATTACHMENT H - POWER SPECTRAL DENSITY TEST	63

Report No.: BTL-FICP-2-1506C242 Page 4 of 65



# **REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FICP-2-1506C242	Original Issue.	Jul. 06, 2015

Report No.: BTL-FICP-2-1506C242 Page 5 of 65



### 1. CERTIFICATION

Equipment : Mobile Phone

Brand Name: ONEPLUS

Model Name: ONE A2005

Applicant : OnePlus Technology (Shenzhen) Co., Ltd. Manufacturer : OnePlus Technology (Shenzhen) Co., Ltd.

Address : 18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China

Factory: OnePlus Technology (Shenzhen) Co., Ltd.

Address : 18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China

Date of Test : Jun. 13, 2015 ~ Jul. 03, 2015 Test Sample : ENGINEERING SAMPLE

Standard(s): FCC Part15, Subpart C: 2014 (15.247) / ANSI C63.10-2013 /

RSS-247 Issue 1, May 2015 RSS-GEN Issue 4, Nov 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-2-1506C242) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FICP-2-1506C242



# 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

	Applied Standard(s): FCC Part15 (15.247) , Subpart C RSS-247 Issue 1, May 2015; RSS-GEN Issue 4, Nov 2014						
Standard	(s) Section	Test Item	Judgment	Remark			
15.207	RSS-GEN 8.8	Conducted Emission	PASS				
15.247(d)	RSS-247 5.5	Antenna conducted Spurious Emission	PASS				
15.247(a)(2)	RSS-247 5.2 (1)	6dB Bandwidth	PASS				
15.247(b)(3)	RSS-247 5.4 (4)	Peak Output Power	PASS				
15.247(e)	RSS-247 5.2 (2)	Power Spectral Density	PASS				
15.203	-	Antenna Requirement	PASS				
15.209/15.205	RSS-247 5.5	Transmitter Radiated Emissions	PASS				

### NOTE:

- (1)" N/A" denotes test is not applicable to this device.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r03 (Measurement Guidelines of DTS)

Report No.: BTL-FICP-2-1506C242 Page 7 of 65



### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330 BTL's test firm number for IC: 4428B-1

### 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2 U<sub>cispr</sub> requirement.

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expanded uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement:

Tes	t Site	Method	Measurement Frequency Range	U, (dB)	Note
DG	G-C02	CISPR	150 KHz ~ 30MHz	2.32	

### B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
		9KHz~30MHz	V	3.79	
		9KHz~30MHz	Н	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Ι	3.60	
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	3.86	
DG-CB03	CISER	200MHz ~ 1,000MHz	Ι	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	Ι	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	Ι	4.14	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Report No.: BTL-FICP-2-1506C242 Page 8 of 65



# 3. GENERAL INFORMATION

# 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone			
Brand Name	I ONEPLUS			
Model Name	ONE A2005			
Model Difference	N/A			
	Operation Frequency	2402~2480 MHz		
Product Description	Modulation Technology	GFSK(1Mbps)		
, , , , , , , , , , , , , , , , , , ,	Bit Rate of Transmitter	G. G. (Sps)		
	Output Power (Max.)	6.73 dBm (1Mbps)		
#1 DC Voltage supplied from AC/DC adapter.  1) Brand / Model: ONEPLUS / YJ1100				
Power Source	2) Brand / Model: ONEPLUS / AY0520 #2 Supplied from battery. Model: BLP597			
Power Rating	#1 1) I/P: 100-240V~ 50-60Hz 0.4A O/P: DC 5V 2A 2) I/P: 100-240V~ 50-60Hz 0.3A O/P: DC 5V 2A #2 DC 3.8V 3200mAh/3300mAh (min/typ)			

### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

Report No.: BTL-FICP-2-1506C242 Page 9 of 65



# 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

# 3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	-0.20

Report No.: BTL-FICP-2-1506C242 Page 10 of 65



### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>
Mode 2	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test		
Final Test Mode	Description	
Mode 2	TX Mode	

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX Mode <b>NOTE (1)</b>	

### Note:

(1) The measurements are performed at the high, middle, low available channels.

Report No.: BTL-FICP-2-1506C242 Page 11 of 65



### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test Software Version		0	
Frequency (MHz)	2402	2440	2480
BT LE	N/A	N/A	N/A

Report No.: BTL-FICP-2-1506C242 Page 12 of 65



# 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	-

Ite	em	Shielded Type	Ferrite Core	Length	Note
	-	-	-	-	-

### Note:

(1) For detachable type I/O cable should be specified the length in m in <code>"Length\_"</code> column.

Report No.: BTL-FICP-2-1506C242 Page 13 of 65



### 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Fraguency of Emission (MHz)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.5	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	60	50	

### Note:

- (1) The limit of " \* " decreases with the logarithm of the frequency
- (2) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use) Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### **4.1.2 TEST PROCEDURE**

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item -EUT Test Photos.

### 4.1.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FICP-2-1506C242 Page 14 of 65



Page 15 of 65

### 4.1.4 TEST SETUP

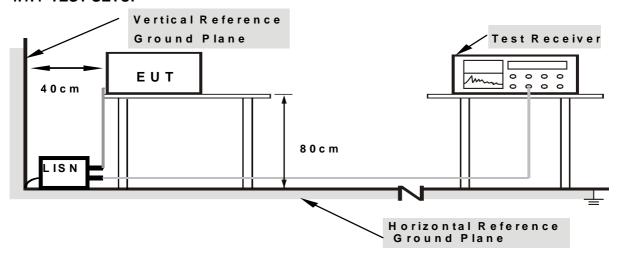

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80

from other units and other metal planes

### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### **4.1.6 EUT TEST CONDITIONS**

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

### 4.1.7 TEST RESULTS

### Please refer to the Attachment A.

### Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note In the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " \* " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) " N/A" denotes test is not applicable to this device.

Report No.: BTL-FICP-2-1506C242



### 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) & RSS-247 5.5, then the 15.209(a)& RSS-Gen limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
Frequency (Miriz)	PEAK	AVERAGE
Above 1000	74	54

### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	RBW 1MHz VBW 3MHz peak detector for Pk value
(Emission in restricted band)	RMS detector for AV value

Report No.: BTL-FICP-2-1506C242 Page 16 of 65



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

### **4.2.2 TEST PROCEDURE**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FICP-2-1506C242 Page 17 of 65




# 4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

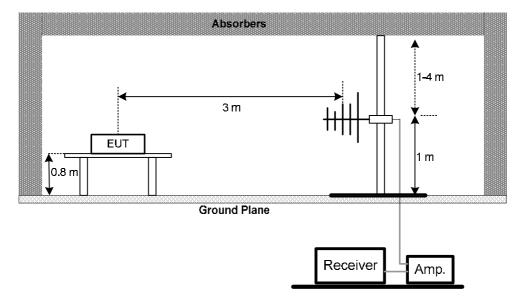


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

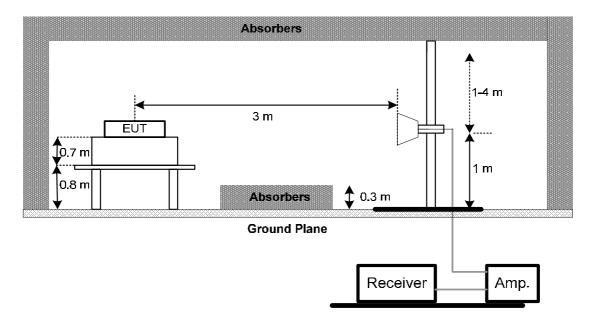

Report No.: BTL-FICP-2-1506C242 Page 18 of 65



## (C) For radiated emissions below 30MHz

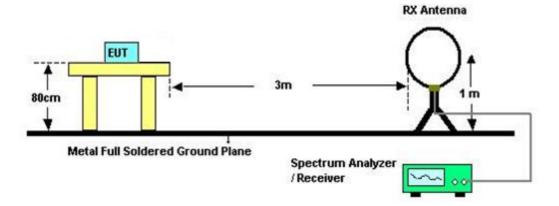

### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 4.2.6 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 60% Test Voltage: DC 3.8V

### 4.2.7TEST RESULTS (9KHZ TO 30MHZ)

### Please refer to the Attachment B

### Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

Report No.: BTL-FICP-2-1506C242 Page 19 of 65



### 4.2.8TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

### Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

### 4.2.9TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

### Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:
  - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (6) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Report No.: BTL-FICP-2-1506C242 Page 20 of 65



### **5. BANDWIDTH TEST**

### 5.1 Applied procedures / limit

FCC Part15 (15.247), Subpart C/RSS-GEN and RSS-247				
Section Test Item Limit Frequency Range (MHz) Result				Result
15.247(a)(2) RSS-GEN section 6.6 RSS-247 5.2 (1)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

### **5.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

### **5.1.2 DEVIATION FROM STANDARD**

No deviation.

### 5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

### **5.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### **5.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

# **5.1.6 TEST RESULTS**

Please refer to the Attachment E.

Report No.: BTL-FICP-2-1506C242 Page 21 of 65



### 6. MAXIMUM OUTPUT POWER TEST

### 6.1 Applied procedures / limit

FCC Part15 (15.247), Subpart C/ RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-247 5.4 (4)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

### **6.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r03.

### **6.1.2 DEVIATION FROM STANDARD**

No deviation.

### 6.1.3 TEST SETUP

EUT	Power Meter
	1 5 Well Wieler

### **6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### **6.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

Report No.: BTL-FICP-2-1506C242 Page 22 of 65



### 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

### 7.1.2 DEVIATION FROM STANDARD

No deviation.

### 7.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

### 7.1.6 TEST RESULTS

Please refer to the Attachment G.

Report No.: BTL-FICP-2-1506C242 Page 23 of 65



### 8. POWER SPECTRAL DENSITY TEST

### 8.1 Applied procedures / limit

	FCC Part15 (15.247) , Subpart C / RSS-247						
Section Test Item Limit Frequency Range (MHz)							
15.247(e) RSS-247 5.2 (2)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS			

### **8.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

### **8.1.2 DEVIATION FROM STANDARD**

No deviation.

### 8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

### **8.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### **8.1.5 EUT TEST CONDITIONS**

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 3.8V

### 8.1.6 TEST RESULTS

Please refer to the Attachment H.

Report No.: BTL-FICP-2-1506C242 Page 24 of 65



# 9. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016		
2	LISN	R&S	ENV216	101447	Mar. 28, 2016		
3	Test Cable	N/A	C_17	N/A	Mar. 13, 2016		
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016		
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016		
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-0 1	N/A	N/A		

	Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016	
2	Amplifier	HP	8447D	2944A09673	Nov. 17, 2015	
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015	
4	Test Cable	N/A	C-01_CB03	N/A	Jun. 28, 2016	
5	Controller	СТ	SC100	N/A	N/A	
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-0 1	N/A	N/A	
7	Antenna	ETS	3115	00075789	Mar. 28, 2016	
8	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015	
9	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015	
10	Test Cable	N/A	C-68	N/A	Jun. 28, 2016	
11	Controller	СТ	SC100	N/A	N/A	
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016	
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016	
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 16, 2015	

	6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015	

Report No.: BTL-FICP-2-1506C242 Page 25 of 65



	Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 28, 2016	
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 28, 2016	

	Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015	

	Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015	

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: BTL-FICP-2-1506C242 Page 26 of 65



# **10. EUT TEST PHOTO**







Report No.: BTL-FICP-2-1506C242 Page 27 of 65



# **Radiated Measurement Photos**

# 9KHz to 30MHz





Report No.: BTL-FICP-2-1506C242 Page 28 of 65



# **Radiated Measurement Photos**

# 30MHz to 1000MHz






Report No.: BTL-FICP-2-1506C242 Page 29 of 65




ATTACHMENT A - CONDUCTED EMISSION

Report No.: BTL-FICP-2-1506C242 Page 30 of 65



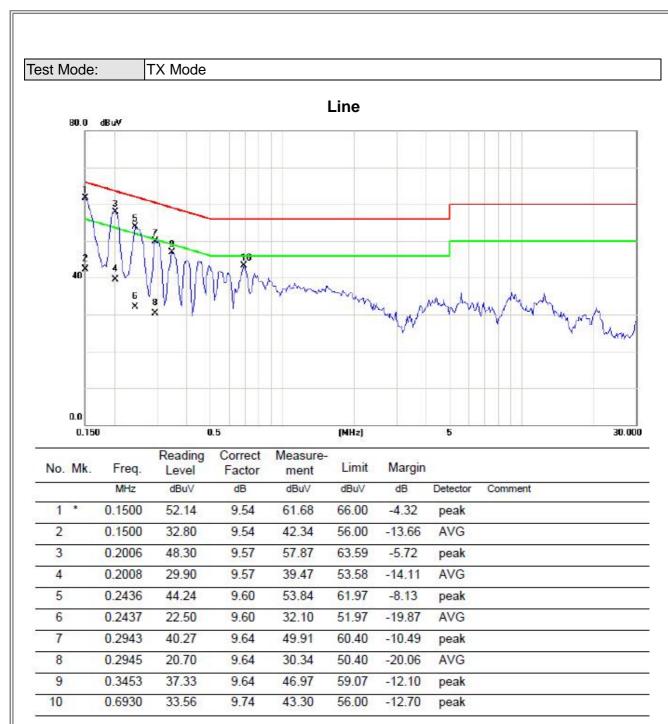



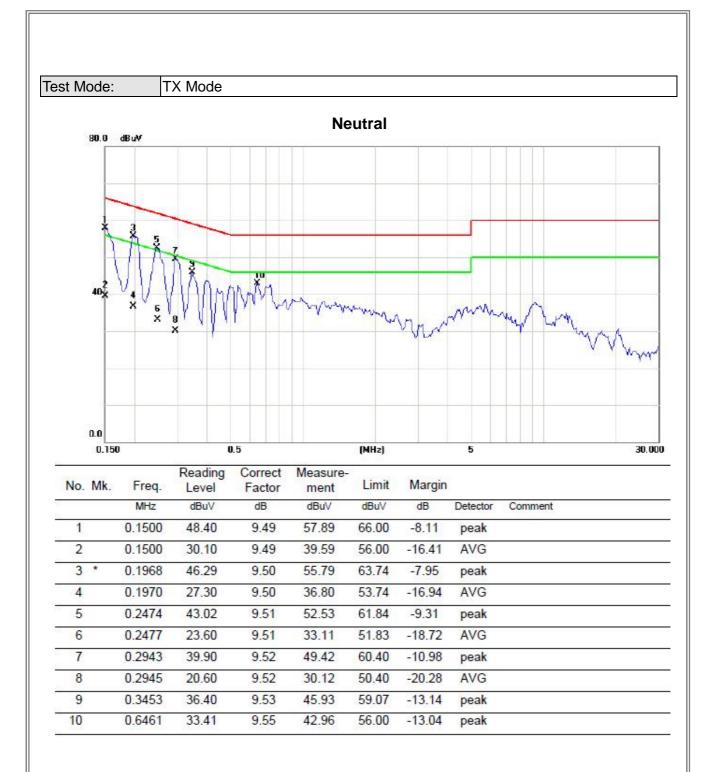



ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	)

Report No.: BTL-FICP-2-1506C242 Page 33 of 65



Test Mode: TX Mode

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0093	0°	12.67	24.98	37.65	128.27	-90.62	AVG
0.0093	0°	14.16	24.98	39.14	148.27	-109.13	PEAK
0.0236	0°	6.42	24.07	30.49	120.15	-89.65	AVG
0.0236	0°	7.53	24.07	31.60	140.15	-108.54	PEAK
0.0314	0°	3.48	23.58	27.06	117.67	-90.61	AVG
0.0314	0°	5.12	23.58	28.70	137.67	-108.97	PEAK
0.0419	0°	1.26	22.91	24.17	115.16	-90.99	AVG
0.0419	0°	2.54	22.91	25.45	135.16	-109.71	PEAK
0.4952	0°	19.87	19.81	39.68	73.71	-34.03	QP
1.7158	0°	23.11	19.53	42.64	69.54	-26.90	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0093	90°	13.68	24.30	37.98	128.20	-90.22	AVG
0.0093	90°	14.92	24.30	39.22	148.20	-108.98	PEAK
0.0247	90°	7.25	24.00	31.25	119.75	-88.50	AVG
0.0247	90°	8.69	24.00	32.69	139.75	-107.06	PEAK
0.0315	90°	5.27	23.57	28.84	117.64	-88.80	AVG
0.0315	90°	6.34	23.57	29.91	137.64	-107.73	PEAK
0.0443	90°	1.46	22.76	24.22	114.68	-90.46	AVG
0.0443	90°	2.78	22.76	25.54	134.68	-109.14	PEAK
0.4925	90°	22.16	19.82	41.98	73.76	-31.78	QP
1.7154	90°	24.21	19.53	43.74	69.54	-25.80	QP


Report No.: BTL-FICP-2-1506C242 Page 34 of 65




ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Report No.: BTL-FICP-2-1506C242 Page 35 of 65




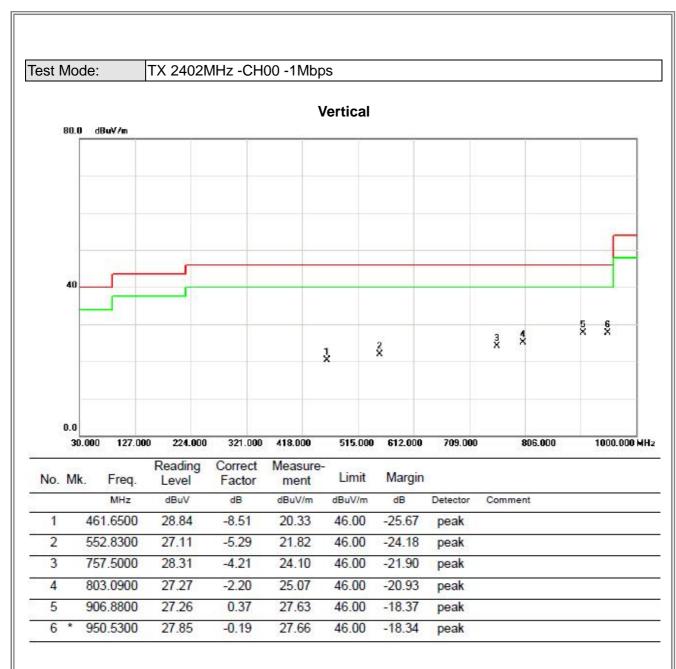



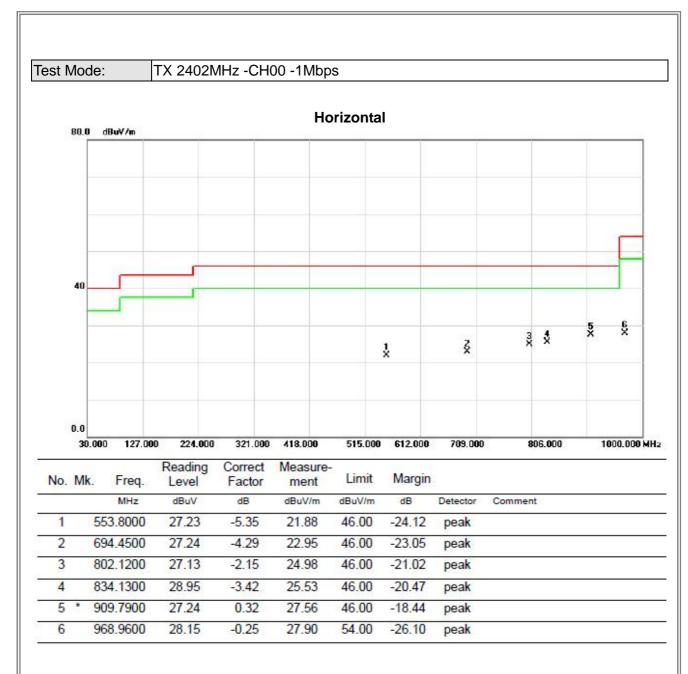




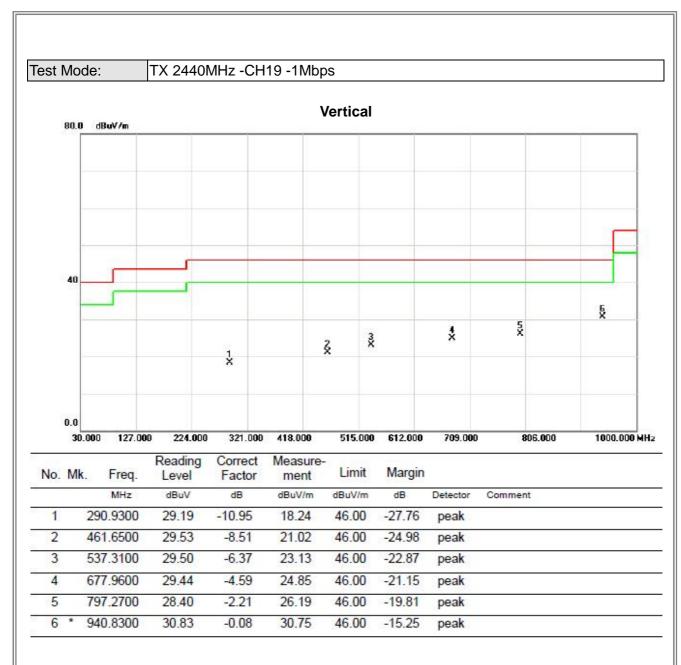


Report No.: BTL-FICP-2-1506C242 Page 38 of 65



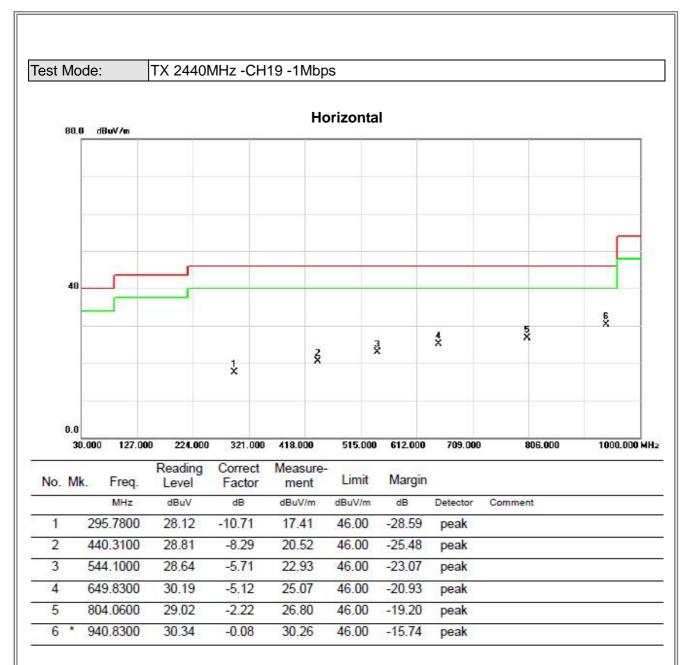


Report No.: BTL-FICP-2-1506C242 Page 39 of 65



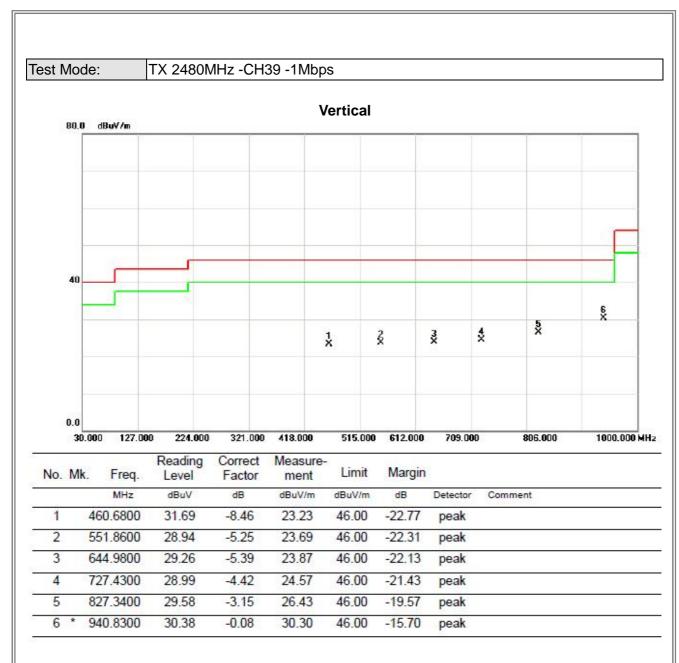



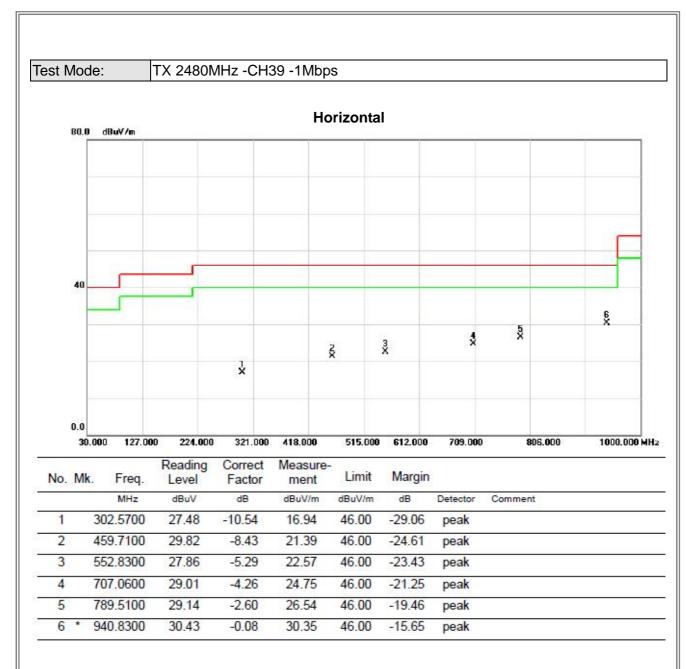




ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FICP-2-1506C242 Page 42 of 65




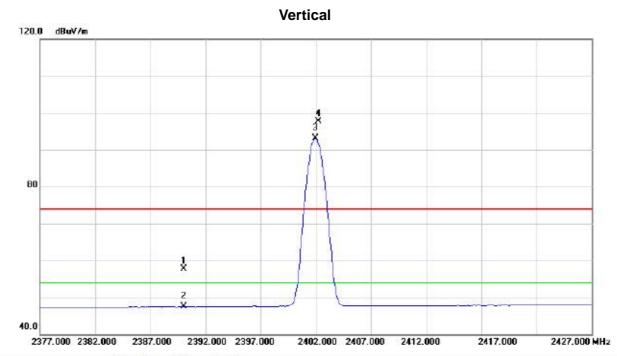

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	¥.	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	24.24	33.38	57.62	74.00	-16.38	peak	
2		2390.000	14.08	33.38	47.46	54.00	-6.54	AVG	
3	*	2401.950	59.65	33.41	93.06	54.00	39.06	AVG	no limit
4	Х	2402.250	64.26	33.41	97.67	74.00	23.67	peak	no limit

Report No.: BTL-FICP-2-1506C242 Page 43 of 65




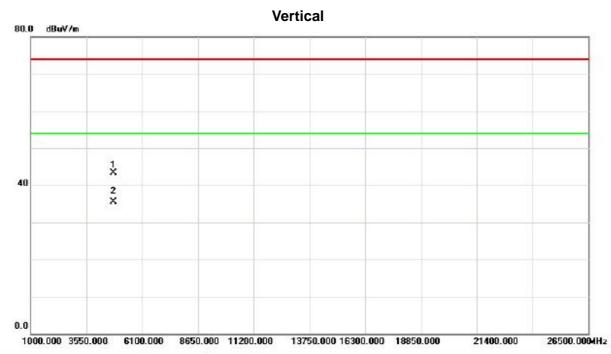

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4804.000	37.53	5.81	43.34	74.00	-30.66	peak		
2	*	4804.000	29.75	5.81	35.56	54.00	-18.44	AVG		

Report No.: BTL-FICP-2-1506C242 Page 44 of 65




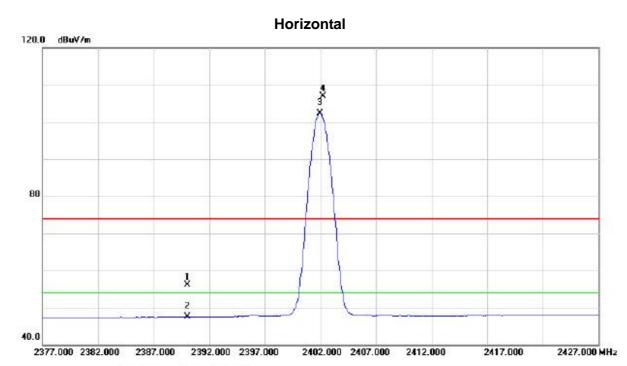

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	22.74	33.38	56.12	74.00	-17.88	peak	
2		2390.000	14.06	33.38	47.44	54.00	-6.56	AVG	
3	*	2401.950	68.90	33.41	102.31	54.00	48.31	AVG	no limit
4	X	2402.250	73.50	33.41	106.91	74.00	32.91	peak	no limit

Report No.: BTL-FICP-2-1506C242 Page 45 of 65




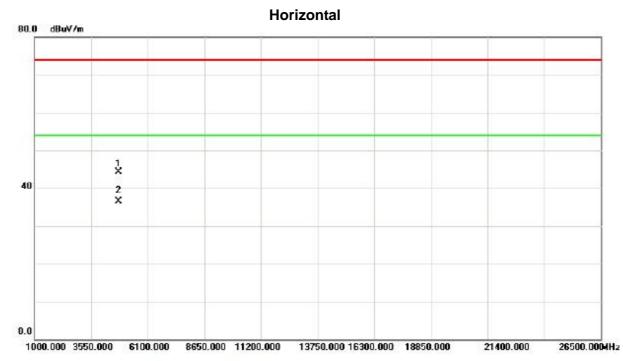

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4804.160	38.49	5.81	44.30	74.00	-29.70	peak		
2	*	4804.160	30.78	5.81	36.59	54.00	-17.41	AVG		

Report No.: BTL-FICP-2-1506C242 Page 46 of 65




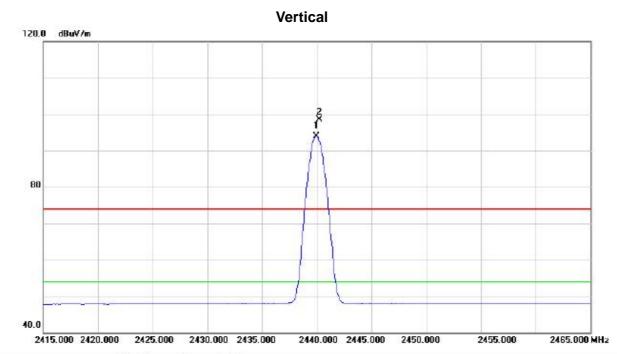

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	*	2439.950	60.49	33.51	94.00	54.00	40.00	AVG	no limit	
2	X	2440.250	65.07	33.51	98.58	74.00	24.58	peak	no limit	

Report No.: BTL-FICP-2-1506C242 Page 47 of 65




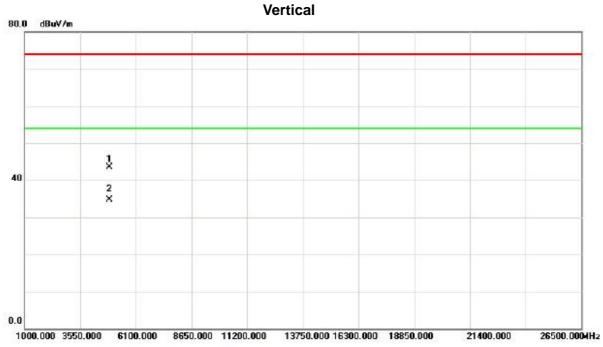

No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	9	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	9	4879.820	37.39	6.02	43.41	74.00	-30.59	peak	
2	*	4879.820	28.76	6.02	34.78	54.00	-19.22	AVG	

Report No.: BTL-FICP-2-1506C242 Page 48 of 65




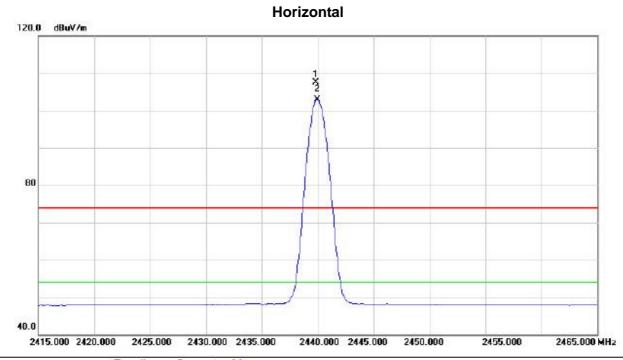

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	X	2439.800	74.06	33.51	107.57	74.00	33.57	peak	no limit	
2	×	2439.950	69.46	33.51	102.97	54.00	48.97	AVG	no limit	

Report No.: BTL-FICP-2-1506C242 Page 49 of 65




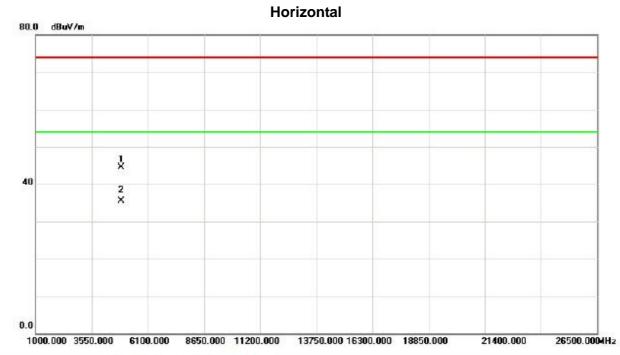

No.	Mk	. Freq.			Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	3	4880.100	38.45	6.02	44.47	74.00	-29.53	peak		
2	*	4880.100	29.40	6.02	35.42	54.00	-18.58	AVG		

Report No.: BTL-FICP-2-1506C242 Page 50 of 65



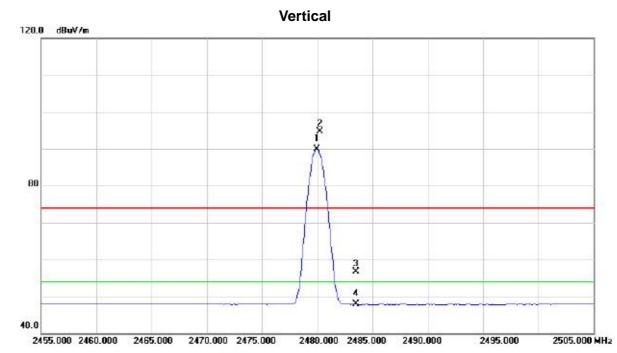

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2479.950	56.34	33.61	89.95	54.00	35.95	AVG	no limit
2	X	2480.250	61.03	33.61	94.64	74.00	20.64	peak	no limit
3	i i	2483.500	23.17	33.62	56.79	74.00	-17.21	peak	
4	1	2483.500	14.19	33.62	47.81	54.00	-6.19	AVG	

Report No.: BTL-FICP-2-1506C242 Page 51 of 65



## 

No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4960.160	37.19	6.23	43.42	74.00	-30.58	peak		
2	*	4960.160	29.66	6.23	35.89	54.00	-18.11	AVG		

Report No.: BTL-FICP-2-1506C242 Page 52 of 65




## Horizontal 120.0 d8uV/m 80 40.0 2455.000 2460.000 2485.000 2470.000 2475.000 2485.000 2490.000 2495.000 2505.000 MHz

No.	Mk	. Freq.		Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2479.950	67.09	33.61	100.70	54.00	46.70	AVG	no limit
2	X	2480.250	71.77	33.61	105.38	74.00	31.38	peak	no limit
3		2483.500	24.16	33.62	57.78	74.00	-16.22	peak	
4		2483.500	14.32	33.62	47.94	54.00	-6.06	AVG	

Report No.: BTL-FICP-2-1506C242 Page 53 of 65



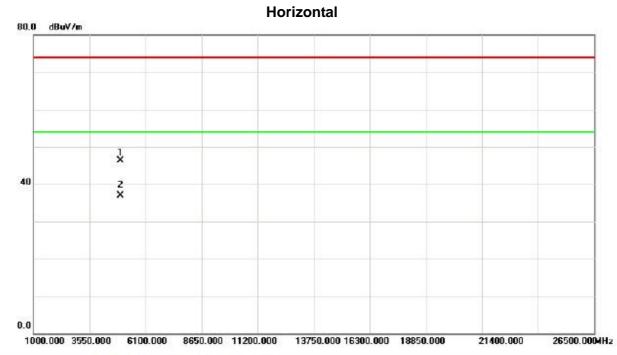

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4959.820	40.17	6.23	46.40	74.00	-27.60	peak		
2	*	4959.820	30.70	6.23	36.93	54.00	-17.07	AVG		

Report No.: BTL-FICP-2-1506C242 Page 54 of 65



ATTACHMENT E - BANDWIDTH						


Report No.: BTL-FICP-2-1506C242 Page 55 of 65



Test Mode: TX Mode - CH00, CH19, CH39 - 1Mbps


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.664	1.088	500	Complies
2440	0.676	1.092	500	Complies
2480	0.688	1.088	500	Complies

## TX CH00

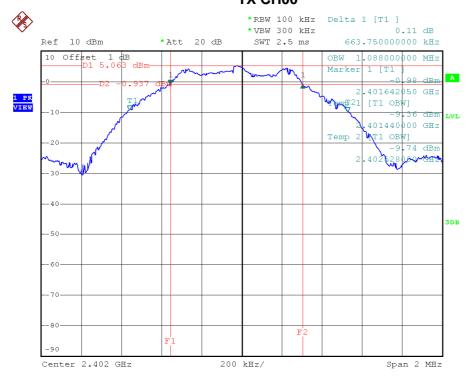


Date: 13.JUN.2015 03:11:09



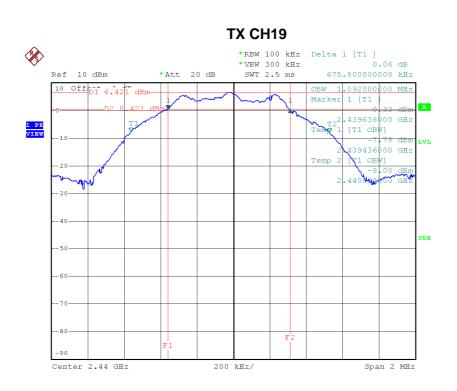

Date: 13.JUN.2015 03:12:57

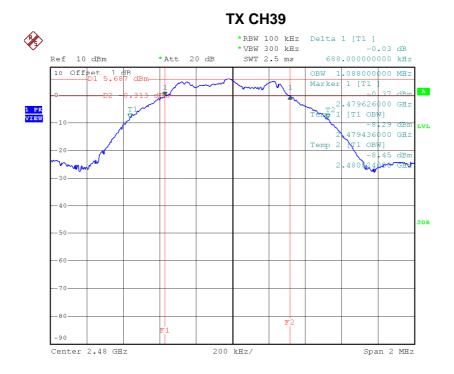

Date: 13.JUN.2015 03:15:10



## **ATTACHMENT F - MAXIMUM OUTPUT POWER TEST**

Test Mode :	TX Mode - CH00, CH19 , CH39 - 1Mbps
-------------	-------------------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watt)	Max. Limit (dBm)	Max. Limit (Watt)	Test Result
2402	5.39	0.0035	30.00	1.00	Complies
2440	6.73	0.0047	30.00	1.00	Complies
2480	6.03	0.0040	30.00	1.00	Complies


Report No.: BTL-FICP-2-1506C242 Page 58 of 65



# **ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION**


Report No.: BTL-FICP-2-1506C242 Page 59 of 65



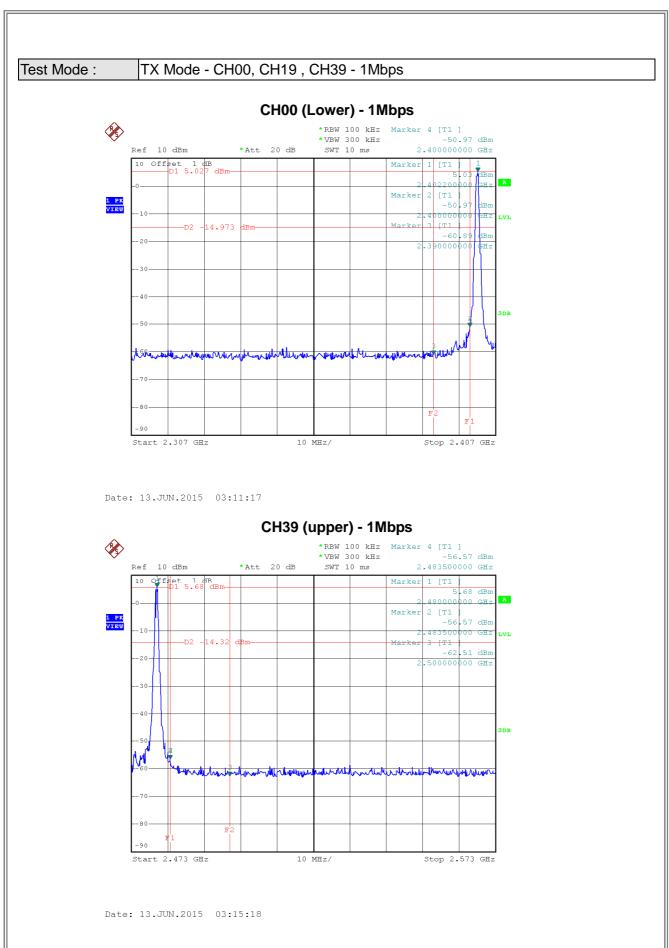






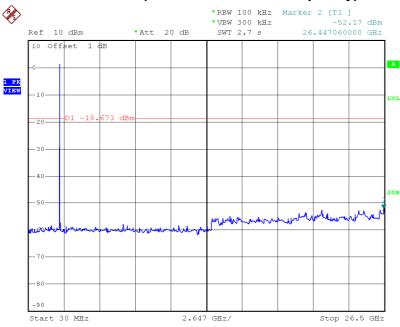

Date: 13.JUN.2015 03:11:31


## CH19 (10 Harmonic of the frequency)

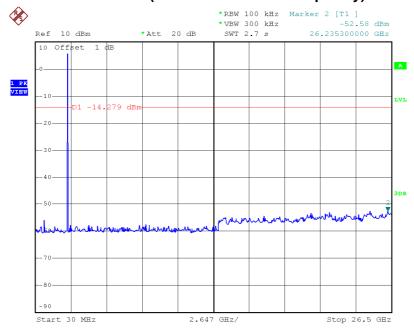

Date: 13.JUN.2015 03:13:22



## CH39 (10 Harmonic of the frequency)

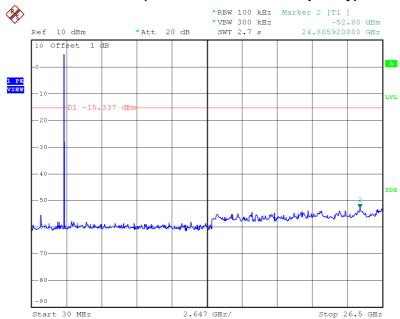

Date: 13.JUN.2015 03:15:31



ATTACHMENT H - POWER SPECTRAL DENSITY TEST


Report No.: BTL-FICP-2-1506C242 Page 63 of 65



Test Mode: TX Mode - CH00, CH19, CH39 - 1Mbps


Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm/ 3KHz)	Result
2402	-9.93	8	Complies
2440	-8.53	8	Complies
2480	-9.32	8	Complies

## TX CH00

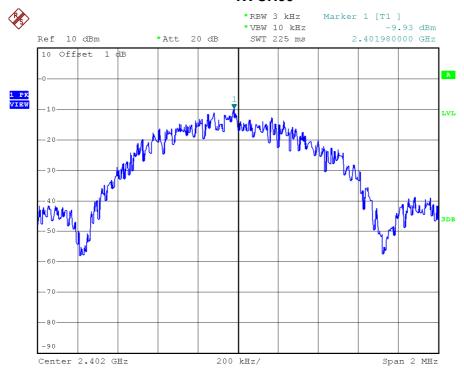


Date: 13.JUN.2015 03:11:37



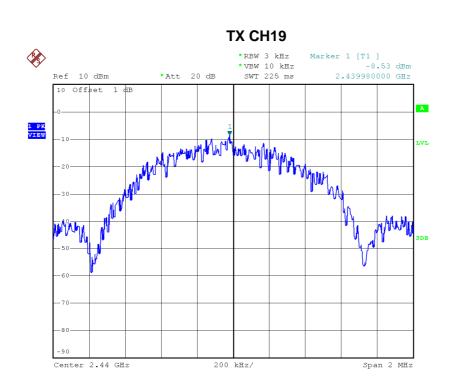

Date: 13.JUN.2015 03:13:28

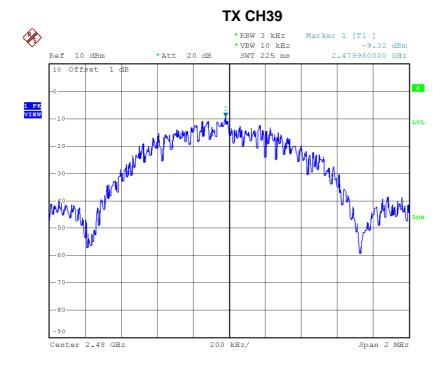

Date: 13.JUN.2015 03:15:37