

FCC

SAR

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Mobile Phone

ISSUED TO
OnePlus Technology(Shenzhen) Co., Ltd.

18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China



Tested by: Tu Lang
Tu Lang
(Engineer)

Date: May 23, 2016

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: May 23, 2016

Report No.: BL-SZ1640119-701

EUT Type: Mobile Phone

Model Name: ONEPLUS A3003

Brand Name: ONEPLUS

FCC ID: 2ABZ2-A3000

Test Standard: FCC 47 CFR Part 2.1093

ANSI C95.1: 1999, IEEE 1528: 2013

Maximum SAR: Head (1 g): 0.995W/kg

Body (1 g): 0.509W/kg

Hotspot(1 g): 0.645 W/kg

Test Conclusion: Pass

Test Date: Apr. 21, 2016 ~ May 3, 2016

Date of Issue: May 23, 2016

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>May 18, 2016</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>May 23, 2016</u>	<u>Added the note for WLAN power list in page 41 and 42.</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	5
1.1	Identification of the Testing Laboratory.....	5
1.2	Identification of the Responsible Testing Location.....	5
1.3	Test Environment Condition.....	5
1.4	Announce.....	6
2	PRODUCT INFORMATION.....	7
2.1	Applicant Information.....	7
2.2	Manufacturer Information.....	7
2.3	Factory Information.....	7
2.4	General Description for Equipment under Test (EUT).....	7
2.5	Ancillary Equipment.....	8
2.6	Technical Information.....	9
3	SUMMARY OF TEST RESULTS.....	10
3.1	Test Standards.....	10
3.2	Device Category and SAR Limit.....	10
3.3	Test Result Summary.....	12
3.4	Test Uncertainty.....	13
4	SAR MEASUREMENT SYSTEM.....	15
4.1	Definition of Specific Absorption Rate (SAR).....	15
4.2	SATIMO SAR System.....	15
5	SYSTEM VERIFICATION.....	24
5.1	Antenna Port Test Requirement.....	24
5.2	Purpose of System Check.....	24
5.3	System Check Setup.....	24
6	EUT TEST POSITION CONFIGURATUONS.....	25

6.1	Head Exposure Conditions	25
6.2	Body-worn Position Conditions	26
6.3	Hotspot Mode Exposure Position Conditions	27
7	SAR MEASUREMENT PROCEDURES	28
7.1	SAR Measurement Process Diagram	28
7.2	SAR Scan General Requirements	29
7.3	SAR Measurement Procedure	30
7.4	Area & Zoom Scan Procedures	30
8	CONDUCTED RF OUPUT POWER	31
8.1	GSM	31
8.2	WCDMA	32
8.3	CDMA	33
8.4	LTE	34
8.5	WIFI	41
8.6	Bluetooth	43
8.7	Power Reduction List	44
9	EUT ANTENNA LOCATION SKETCH	47
9.1	SAR Test Exclusion Consider Table	48
9.2	10g Extremity Exposure Consider	50
10	TEST RESULTS	51
10.1	GSM 850	51
10.2	GSM 1900	51
10.3	WCDMA Band 2	52
10.4	WCDMA Band 4	52
10.5	WCDMA Band 5	53
10.6	CDMA BC0	53
10.7	EVDO BC0	54
10.8	LTE Band 2 (20MHz Bandwidth)	55
10.9	LTE Band 4 (20MHz Bandwidth)	55
10.10	LTE Band 5 (20MHz Bandwidth)	56
10.11	LTE Band 7 (20MHz Bandwidth)	57
10.12	LTE Band 12 (20MHz Bandwidth)	58

10.13	LTE Band 17 (20MHz Bandwidth)	58
10.14	LTE Band 30 (20MHz Bandwidth)	59
10.15	WIFI 2.4GHz.....	60
10.16	WIFI 5GHz.....	61
11	SAR Measurement Variability	62
12	SIMULTANEOUS TRANSMISSION.....	63
12.1	Simultaneous Transmission Mode Consider	63
12.2	Estimated SAR Calculation.....	64
12.3	Sum SAR of Simultaneous Transmission	65
13	TEST EQUIPMENTS LIST	67
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	68
ANNEX B	SYSTEM CHECK RESULT	69
ANNEX C	TEST DATA.....	106
ANNEX D	EUT EXTERNAL PHOTOS	106
ANNEX E	SAR TEST SETUP PHOTOS	106
ANNEX F	CALIBRATION REPORT	107
F.1	E-Field Probe	107
F.2	750 MHz Dipole	117
F.3	835MHz Dipole	128
F.4	1800MHz Dipole	139
F.5	1900MHz Dipole	150
F.6	2450MHz Dipole	161
F.7	2600 MHz Dipole	172
F.8	Waveguide	183

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21 to 23°C
Ambient Relative Humidity	36 to 47%
Ambient Pressure	100 to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	OnePlus Technology(Shenzhen) Co., Ltd.
Address	18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	OnePlus Technology(Shenzhen) Co., Ltd.
Address	18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Type	Mobile Phone
Model Name Under Test	ONEPLUS A3003
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	16
Software Version	Qxygen OS 3.1.0
Dimensions (Approx.)	151 × 74 × 7mm
Weight (Approx.)	158.75 g
Network and Wireless connectivity	2G Network GSM 850/ 1900; 3G Network WCDMA Band 2/ 4/ 5; CDMA2000 BC0; 4G Network FDD LTE Band 2/ 4/ 5/ 7/ 12/ 17; TDD LTE Band 30; 2.4G WLAN, 5G WLAN, Bluetooth, GPS

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	BLP613
	Serial No.	N/A
	Capacitance	3000 mAh
	Rated Voltage	3.8 V
	Extreme Voltage	4.35 V
Ancillary Equipment 2	Charger 1	
	Brand Name	Power Supply Unit
	Model No.	HK0504
	Rated Input	100-240 V~, 0.6 A, 50/60 Hz
	Rated Output	5 V $\overline{\text{---}}$, 4 A
Ancillary Equipment 3	USB Cable	
	Length(Approx.)	1.1 m

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE, 2.4G WLAN, 5G WLAN, Bluetooth		
Frequency Range	GSM 850	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	GSM 1900	TX: 1850 MHz ~ 1910 MHz	RX: 1930 MHz ~ 1990 MHz
	WCDMA Band 2	TX: 1850 MHz ~ 1910 MHz	RX: 1930 MHz ~ 1990 MHz
	WCDMA Band 4	TX: 1710 MHz ~ 1755 MHz	RX: 2110 MHz ~ 2155 MHz
	WCDMA Band 5	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	CDMA2000 BC0	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	LTE Band 2	TX: 1850 MHz ~ 1910 MHz	RX: 1930 MHz ~ 1990 MHz
	LTE Band 4	TX: 1710 MHz ~ 1755 MHz	RX: 2110 MHz ~ 2155 MHz
	LTE Band 5	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	LTE Band 7	TX: 2500 MHz ~ 2570 MHz	RX: 2620 MHz ~ 2690 MHz
	LTE Band 12	TX: 699 MHz ~ 716 MHz	RX: 729 MHz ~ 746 MHz
	LTE Band 17	TX: 704 MHz ~ 716 MHz	RX: 734 MHz ~ 746 MHz
	LTE Band 30	TX: 2305 MHz ~ 2315 MHz	RX: 2350 MHz ~ 2360 MHz
	802.11b/g /n(HT20/HT40)	2400 MHz ~ 2483.5 MHz	
	802.11a/ /n(HT20/HT40) /ac(HT20/HT40) /HT80)	5150 MHz ~ 5250 MHz	
		5250 MHz ~ 5350 MHz	
5470 MHz ~ 5725 MHz			
5725 MHz ~ 5850 MHz			
Bluetooth	2400~2483.5 MHz		
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna		
DTM	Not Support		
Hotspot Function	Support		
Power Reduction	Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype	

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 941225 D01 v03r01	3G SAR MEAUREMENT PROCEDURES
6	FCC KDB 941225 D05 v02r04	SAR Evaluation Considerations for LTE Devices
7	FCC KDB 941225 D06 v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
8	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
9	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Band	Maximum Scaled SAR (W/kg)			Maximum Report SAR (W/kg)			Limit (W/kg)
	Head	Body-worn	Hotspot	Head	Body-worn	Hotspot	
GSM 850	0.221	0.219	0.373	0.995	0.509	0.645	1.6
GSM 1900	0.095	0.099	0.280				
WCDMA Band 2	0.268	0.262	0.645				
WCDMA Band 4	0.420	0.460	0.538				
WCDMA Band 5	0.121	0.145	0.297				
CDMA BC0	0.106	0.142	0.295				
EVDO BC0	--	0.173	0.317				
LTE Band 2	0.246	0.200	0.490				
LTE Band 4	0.381	0.509	0.444				
LTE Band 5	0.207	0.210	0.264				
LTE Band 7	0.268	0.291	0.188				
LTE Band 12	0.095	0.133	0.159				
LTE Band 17	0.092	0.111	0.144				
LTE Band 30	0.307	0.267	0.643				
2.4G WLAN 802.11b	0.460	0.077	0.144				
5G WLAN 802.11a	0.995	0.213	0.221				
Verdict	Pass						

3.3.2 Highest Simultaneous SAR

Position	Simultaneous Configuration	Simultaneous SAR (W/kg)	Limit (W/kg)	Verdict
Head	WCDMA RMC + 5G WLAN	1.415	1.6	Pass
Body-worn	LTE QPSK + 5G WLAN	0.722	1.6	Pass
Hotspot Mode	WCDMA RMC + 5G WLAN	0.866	1.6	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528 This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	V _i
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	0.7	0.7	1.41	1.41	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0.7	0.7	2.38	2.38	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test Sample Related								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	N-1
Device Holder Uncertainty	1.0	N	1	1	1	1.00	1.00	N-1
Output power Variation - SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2.00	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Liquid conductivity (deviation from target values)	2.5	N	$\sqrt{3}$	0.64	0.43	0.92	0.62	∞
Liquid conductivity - measurement uncertainty	5.0	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity (deviation from target values)	2.5	N	$\sqrt{3}$	0.60	0.49	0.87	0.71	∞
Liquid permittivity - measurement uncertainty	5.0	N	1	0.60	0.49	3.00	2.45	M
Combined Standard Uncertainty		RSS				10.14	9.67	
Expanded Uncertainty (95% Confidence interval)		k				20.29	19.35	

3.4.2 Measurement uncertainty evaluation for system check

This measurement uncertainty budget is suggested by IEEE 1528. The break down of the individual uncertainties is as follows:

Uncertainty Component	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	V _i
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	0.7	0.7	1.41	1.41	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0.7	0.7	2.38	2.38	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Probe Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Reponse Time	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental dipole	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Dipole axis to liquid distance	2.0	R	1	1	1	1.20	1.20	∞
Power drift	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Liquid conductivity (deviation from target values)	2.5	N	$\sqrt{3}$	0.64	0.43	0.92	0.62	∞
Liquid conductivity - measurement uncertainty	5.0	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity (deviation from target values)	2.5	N	$\sqrt{3}$	0.60	0.49	0.87	0.71	∞
Liquid permittivity - measurement uncertainty	5.0	N	1	0.60	0.49	3.00	2.45	M
Combined Standard Uncertainty		RSS				10.22	9.75	
Expanded Uncertainty (95% Confidence interval)		k				20.44	19.50	

4 SAR MEASUREMENT SYSTEM

4.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational / controlled exposure limits are higher than the limits for general population /uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 SATIMO SAR System

4.2.1 SATIMO SAR System Diagram

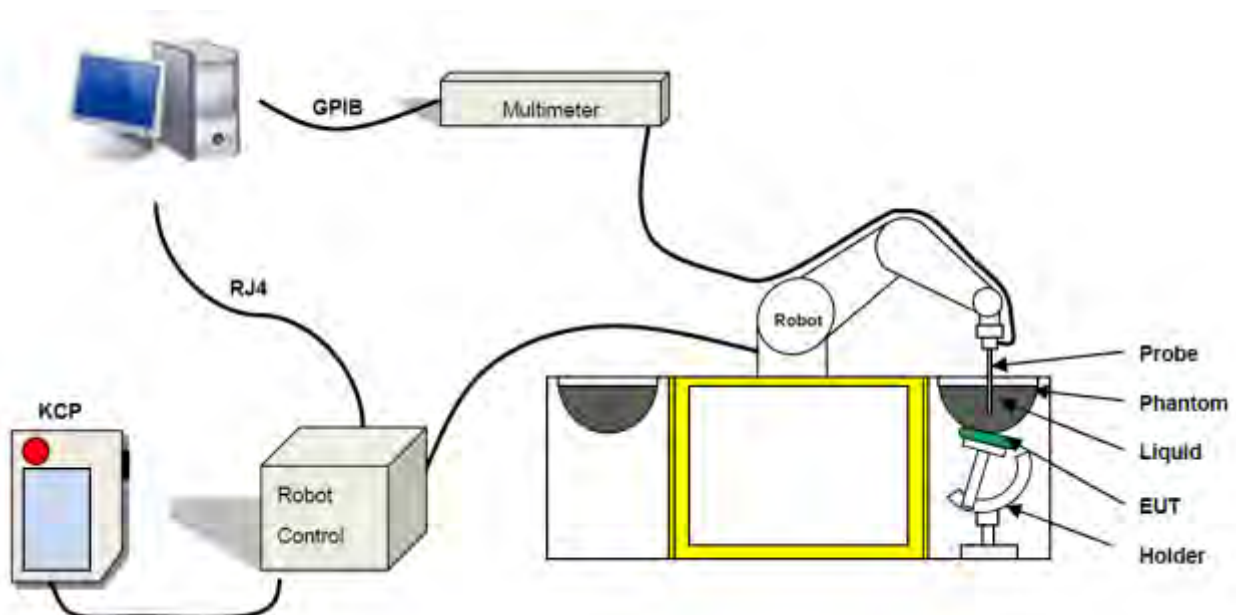

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

4.2.2 Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

4.2.3 E-Field Probe

For the measurements the Specific Dosimetric E-Field Probe SN 34/15 EPGO 265 with following specifications is used


- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Lower detection limit : 7 mW/kg
(repeatability better than ± 1 mm)
- Probe linearity: ± 0.07 dB
- Calibration range: 450 MHz to 5800 MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the IEC62209-1/2 annexe technique using reference guide at the five frequencies.

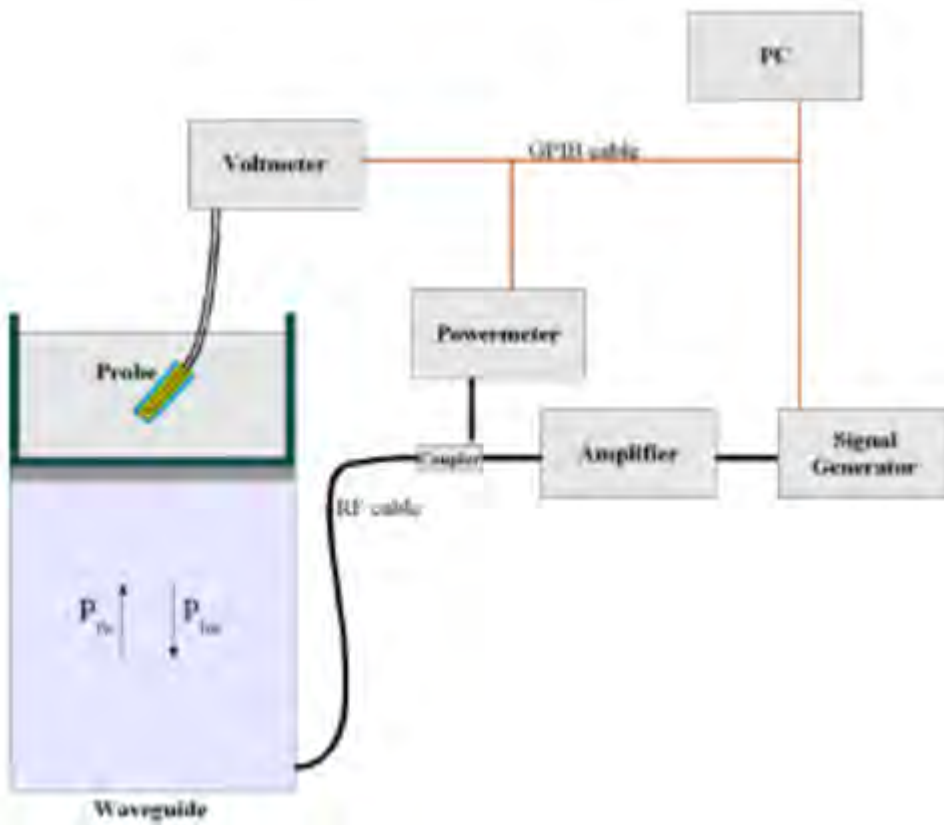

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) c^{(2\pi/\sigma)}$$

Where :		
P _{fw}	=	Forward Power
P _{bw}	=	Backward Power
a and b	=	Waveguide Dimensions
l	=	Skin Depth

Keithley configuration

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, $CF(N)$, for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where the DCP is the diode compression point in mV.

4.2.4 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


Photo of Phantom SN 30/13 SAM103



Photo of Phantom SN 30/13 SAM104



Serial Number	Positionner Material	Permittivity	Loss Tangent
SN 30/13 SAM103	Gelcoat with fiberglass	3.4	0.02
SN 30/13 SAM104	Gelcoat with fiberglass	3.4	0.02

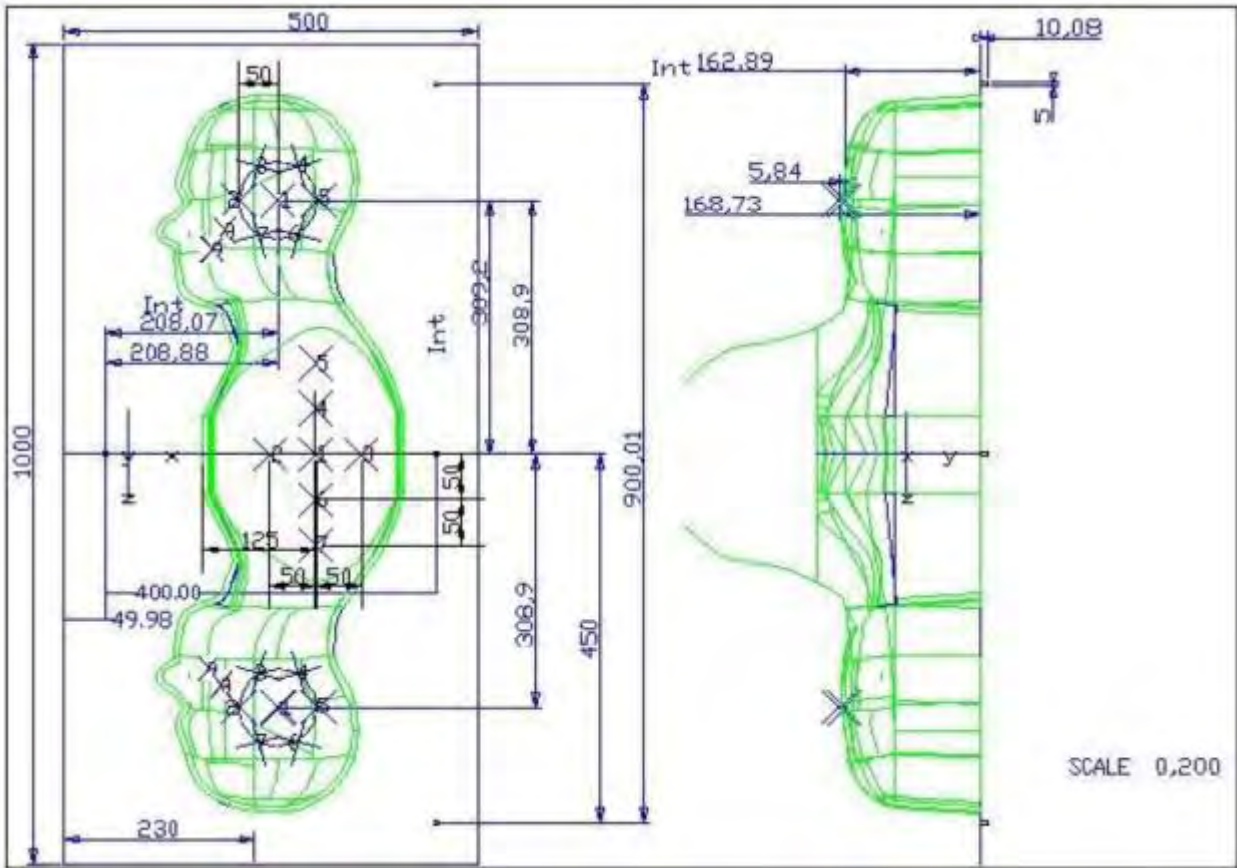

Serial Number	Left Head		Right Head		Flat Part	
SN 30/13 SAM103	2	2.00	2	2.03	1	2.09
	3	2.02	3	2.05	2	2.10
	4	2.04	4	2.04	3	2.09
	5	2.04	5	2.07	4	2.11
	6	2.02	6	2.07	5	2.11
	7	2.01	7	2.09	6	2.09
	8	2.04	8	2.10	7	2.11
	9	2.02	9	2.09	-	-
	SN 30/13 SAM104	2	2.05	2	2.06	1
3		2.08	3	2.03	2	2.03
4		2.05	4	2.03	3	2.01
5		2.06	5	2.02	4	2.03
6		2.08	6	2.02	5	2.03
7		2.06	7	2.04	6	2.00
8		2.07	8	2.04	7	1.98
9		2.07	9	2.05	-	-

4.2.5 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.




Serial Number	Holder Material	Permittivity	Loss Tangent
SN 25/13 MSH87	Deirin	3.7	0.005
SN 25/13 MSH88	Deirin	3.7	0.005

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

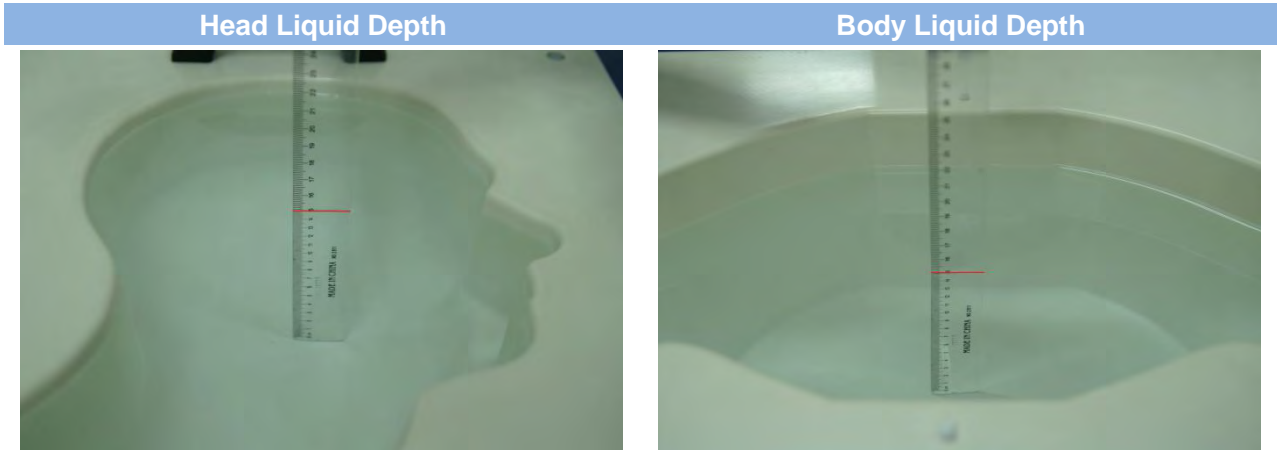

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency(MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5

Frequency(MHz)	Water	DGBE (%)	Salt (%)	Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40	/	5.54	47.86
5800	78.50	21.40	0.1	6.0	48.20

5 SYSTEM VERIFICATION

5.1 Antenna Port Test Requirement


The SATIMO SAR system is equipped with one or more system validation kits. These units together with the predefined measurement procedures within the SATIMO software enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

5.2 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.3 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

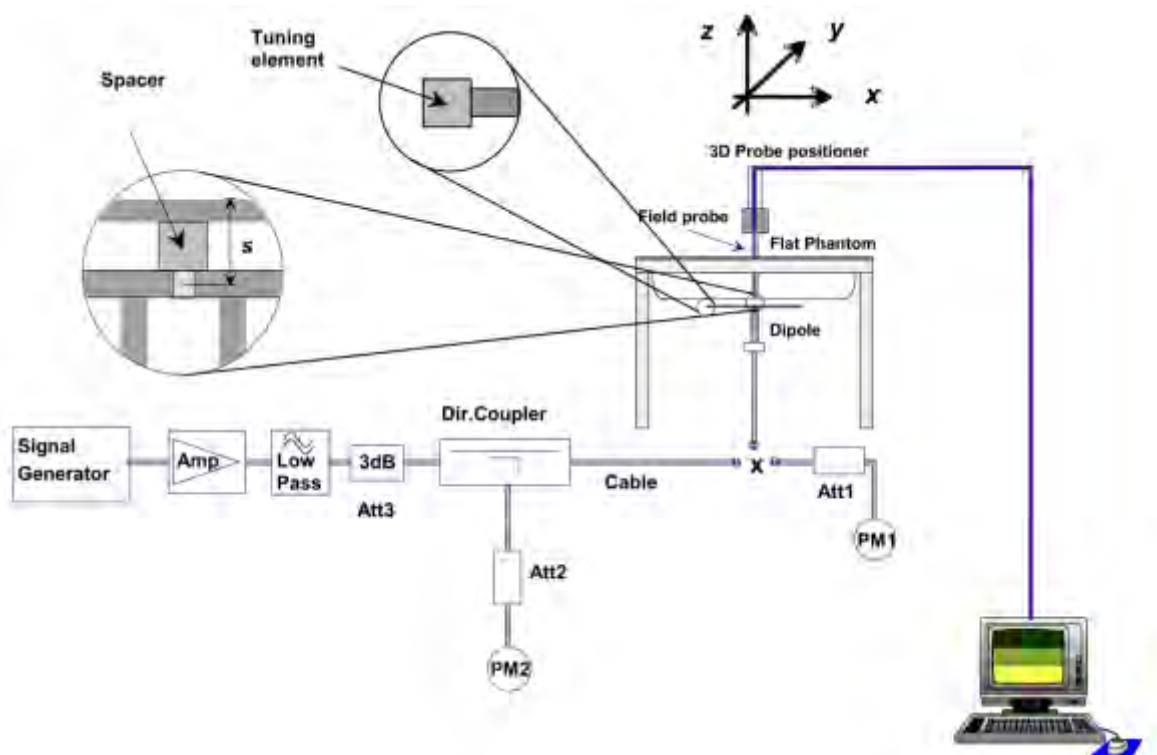

6 EUT TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

6.1.1 Define two imaginary lines on the handset

- (a) The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

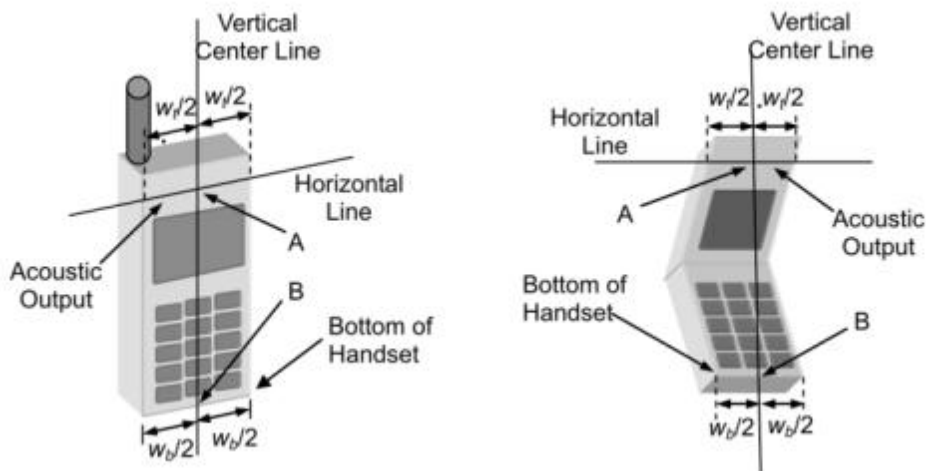

6.1.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



6.1.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.


Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be

acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

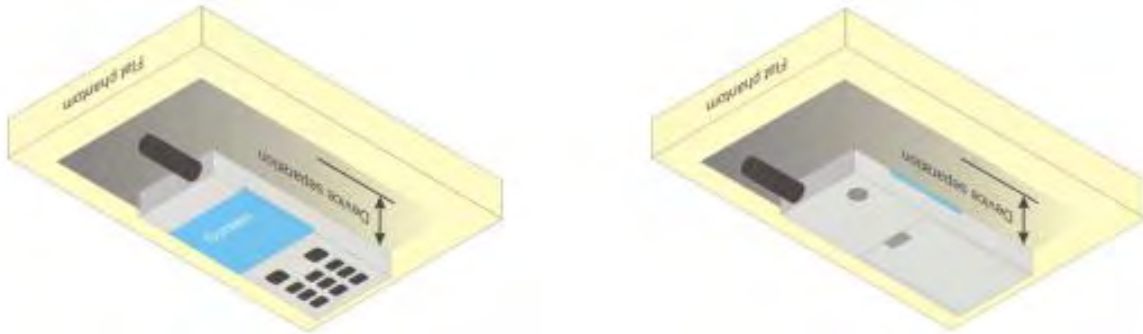


6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

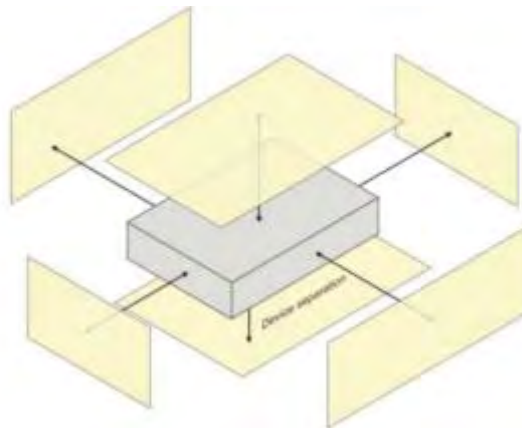

7 SAR MEASUREMENT PROCEDURES

7.1 SAR Measurement Process Diagram

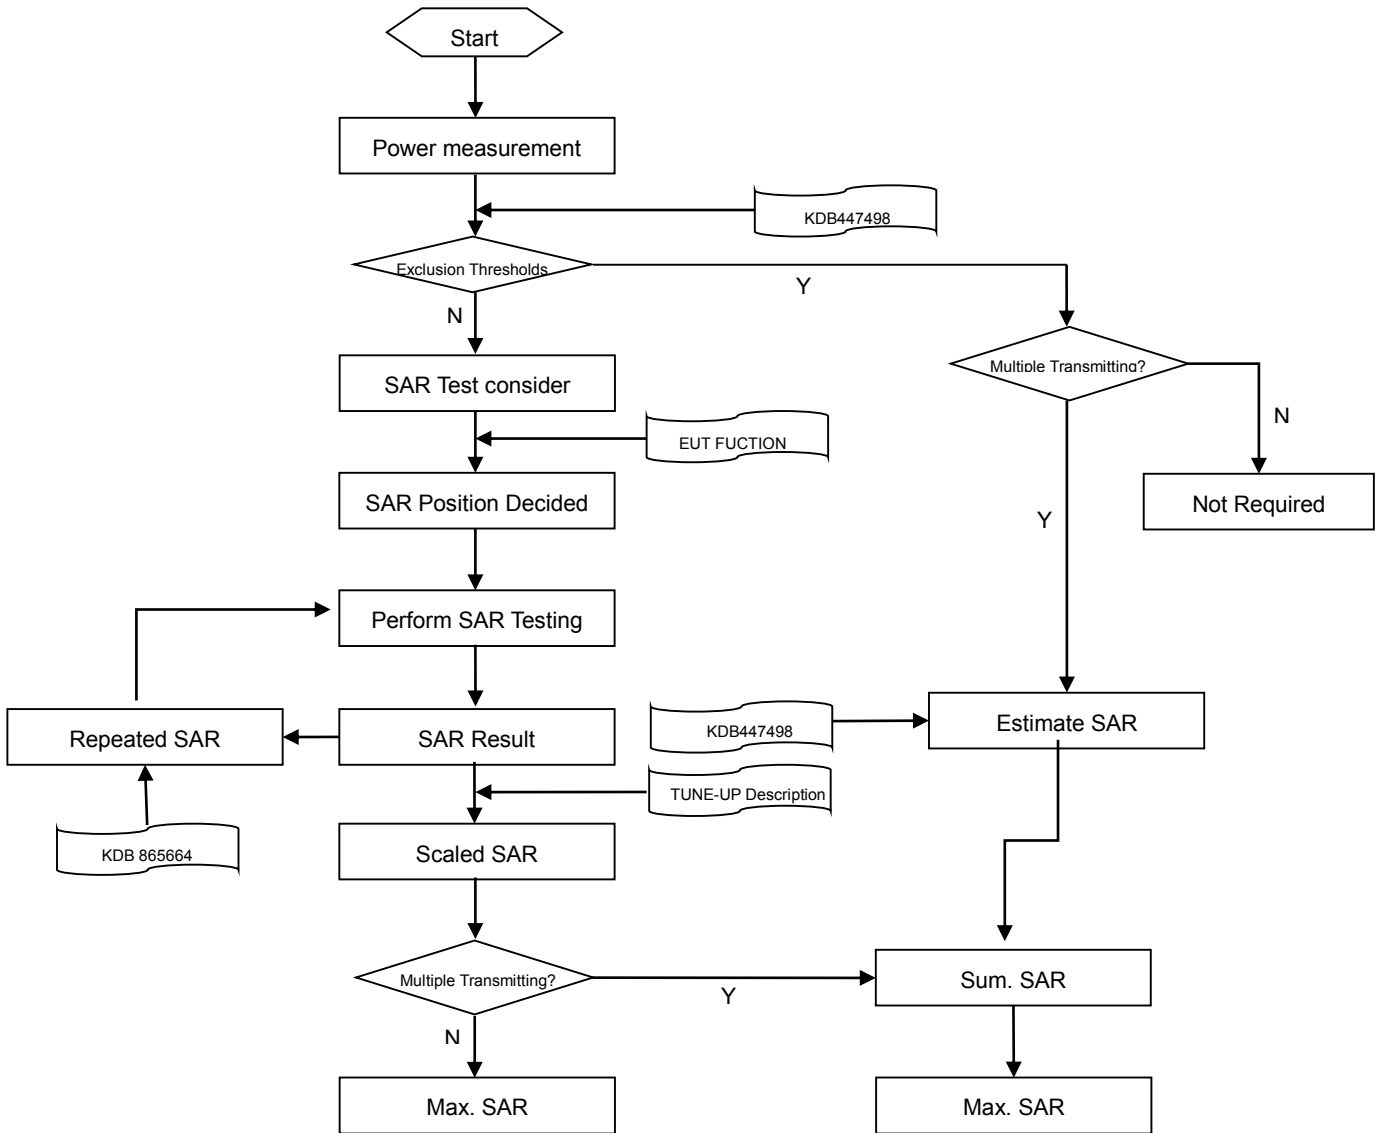

7.2 SAR Scan General Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

		≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)	≤ 5 mm	3–4 GHz: ≤ 4 mm
			4–5 GHz: ≤ 3 mm
			5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface Δz Zoom (n>1): between subsequent points	≤ 4 mm
4–5 GHz: ≤ 2.5 mm			
		≤ 1.5 · Δz Zoom (n-1)	
Minimum zoom scan volume	x, y, z	≥30 mm	3–4 GHz: ≥ 28 mm
			4–5 GHz: ≥ 25 mm
			5–6 GHz: ≥ 22 mm
Note: 1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. 2. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

7.3 SAR Measurement Procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 CONDUCTED RF OUTPUT POWER

8.1 GSM

GSM 850 Band	Burst Average Power(dBm)			Frame-averaged power(dBm)		
Channel	128	190	251	128	190	251
GSM (GMSK, 1-Slot)	33.19	33.14	33.14	24.16	24.11	24.11
GPRS (GMSK, 1-Slot)	33.17	33.03	33.09	24.14	24.00	24.06
GPRS (GMSK, 2-Slots)	31.06	31.14	31.15	25.04	25.12	25.13
GPRS (GMSK, 3-Slots)	29.33	29.49	29.55	25.08	25.24	25.30
GPRS (GMSK, 4-Slots)	28.02	28.10	28.12	25.01	25.09	25.11
EGPRS (8PSK, 1-Slot)	31.18	30.11	30.12	22.15	21.08	21.09
EGPRS (8PSK, 2-Slots)	28.10	28.12	28.03	22.08	22.10	22.01
EGPRS (8PSK, 3-Slots)	26.64	26.52	26.50	22.39	22.27	22.25
EGPRS (8PSK, 4-Slots)	25.70	25.80	25.87	22.69	22.79	22.86
GSM 1900 Band	Burst Average Power(dBm)			Frame-averaged power(dBm)		
Channel	512	661	810	512	661	810
GSM (GMSK, 1-Slot)	30.11	30.17	30.26	21.08	21.14	21.23
GPRS (GMSK, 1-Slot)	29.79	30.01	30.16	20.76	20.98	21.13
GPRS (GMSK, 2-Slots)	27.21	27.40	27.48	21.19	21.38	21.46
GPRS (GMSK, 3-Slots)	26.15	26.24	26.26	21.90	21.99	22.01
GPRS (GMSK, 4-Slots)	24.54	24.65	24.72	21.53	21.64	21.71
EGPRS (8PSK, 1-Slot)	28.50	28.52	28.49	19.47	19.49	19.46
EGPRS (8PSK, 2-Slots)	27.53	27.51	27.46	21.51	21.49	21.44
EGPRS (8PSK, 3-Slots)	26.38	26.40	26.31	22.13	22.15	22.06
EGPRS (8PSK, 4-Slots)	25.43	25.34	25.30	22.42	22.33	22.29

Note:

- SAR testing was performed on the maximum frame-Peaked power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = Burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Burst averaged power (4 Tx Slots) - 3 dB

8.2 WCDMA

WCDMA Band	Band 2			Band 4		
Channel	9262	9400	9538	1312	1412	1513
RMC 12.2Kbps	24.16	23.90	23.84	24.27	23.76	24.48
HSDPA Subtest-1	22.95	22.66	22.64	23.16	22.58	23.18
HSDPA Subtest-2	22.92	22.64	22.62	23.11	22.56	23.24
HSDPA Subtest-3	22.91	22.64	22.64	23.12	22.58	23.18
HSDPA Subtest-4	22.95	22.68	22.63	23.15	22.57	23.16
HSUPA Subtest-1	23.07	22.78	22.74	23.06	22.72	23.18
HSUPA Subtest-2	22.05	21.76	21.74	22.05	21.96	22.26
HSUPA Subtest-3	22.48	22.08	22.05	22.45	22.32	22.65
HSUPA Subtest-4	23.10	22.80	22.89	23.16	22.69	23.18
HSUPA Subtest-5	22.91	22.62	22.63	23.01	22.94	23.12
Band	Band 5			-		
Channel	4132	4183	4233	-	-	-
RMC 12.2Kbps	24.29	24.30	24.40	-	-	-
HSDPA Subtest-1	23.14	23.08	23.15	-	-	-
HSDPA Subtest-2	23.14	23.06	23.18	-	-	-
HSDPA Subtest-3	23.12	23.08	23.18	-	-	-
HSDPA Subtest-4	23.14	23.06	23.17	-	-	-
HSUPA Subtest-1	23.18	23.13	23.33	-	-	-
HSUPA Subtest-2	22.16	22.14	22.22	-	-	-
HSUPA Subtest-3	22.86	22.81	22.94	-	-	-
HSUPA Subtest-4	23.25	23.16	23.32	-	-	-
HSUPA Subtest-5	23.05	23.01	23.09	-	-	-

8.3 CDMA

CDMA BC0			
Channel	991	384	799
Frequency (MHz)	824.7	836.52	848.31
EVDO Rev 0	22.04	22.85	22.60
EVDO Rev A	21.91	22.20	22.56
RTT	21.77	22.90	22.83

8.4 LTE

FDD LTE Band 2							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18700	18900	19100	18700	18900	19100
20MHz	1 (RB_Pos:0)	23.94	24.04	23.36	23.65	23.56	22.59
	1 (RB_Pos:50)	23.11	23.07	22.59	22.61	22.47	21.99
	1 (RB_Pos:99)	23.39	23.30	22.82	22.98	22.74	22.26
	50 (RB_Pos:0)	22.59	22.52	21.97	21.57	21.50	20.98
	50 (RB_Pos:25)	22.18	22.20	21.71	21.24	21.14	20.71
	50 (RB_Pos:50)	22.27	22.23	21.72	21.28	21.18	20.68
	100 (RB_Pos:0)	22.34	22.42	21.88	21.36	21.32	20.85
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18675	18900	19125	18675	18900	19125
15MHz	1 (RB_Pos:0)	23.36	23.74	22.99	22.43	23.15	22.34
	1 (RB_Pos:38)	22.67	23.20	22.43	21.55	22.51	21.79
	1 (RB_Pos:74)	22.88	23.16	22.39	21.93	22.55	21.91
	36 (RB_Pos:0)	22.06	22.41	21.70	21.05	21.43	20.61
	36 (RB_Pos:20)	21.74	22.17	21.46	21.03	21.53	20.40
	36 (RB_Pos:39)	21.84	22.06	21.46	20.80	21.07	20.37
	75 (RB_Pos:0)	21.91	22.21	21.52	20.89	21.19	20.49
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18650	18900	19150	18650	18900	19150
10MHz	1 (RB_Pos:0)	23.09	23.52	22.76	22.02	22.95	21.70
	1 (RB_Pos:25)	22.69	23.13	22.31	21.53	22.43	21.39
	1 (RB_Pos:49)	22.62	23.19	22.48	21.57	22.55	21.41
	25 (RB_Pos:0)	21.85	22.29	21.59	20.85	21.22	20.66
	25 (RB_Pos:12)	21.76	22.13	21.49	20.75	21.13	20.49
	25 (RB_Pos:25)	21.70	22.07	21.45	20.65	21.08	20.49
	50 (RB_Pos:0)	21.73	22.18	21.47	20.69	21.14	20.45
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18625	18900	19175	18625	18900	19175
5MHz	1 (RB_Pos:0)	22.74	23.28	22.91	22.16	22.57	21.94
	1 (RB_Pos:13)	22.79	23.19	22.83	21.92	22.73	21.78
	1 (RB_Pos:24)	22.53	23.12	22.75	21.91	22.44	21.96
	12 (RB_Pos:0)	21.81	22.16	21.70	20.89	21.27	20.70
	12 (RB_Pos:6)	21.76	22.08	21.66	20.87	21.23	20.73
	12 (RB_Pos:13)	21.78	22.00	21.60	20.85	21.12	20.65
	25 (RB_Pos:0)	21.85	22.10	21.65	20.84	21.15	20.62
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		

	Channel	18615	18900	19185	18615	18900	19185
3.0MHz	1 (RB_Pos:0)	22.73	22.84	22.81	21.62	22.24	21.82
	1 (RB_Pos:8)	22.65	22.94	22.56	21.58	22.37	21.59
	1 (RB_Pos:14)	22.72	22.86	22.58	21.67	22.29	21.61
	8 (RB_Pos:0)	21.86	22.05	21.81	20.97	21.12	20.82
	8 (RB_Pos:3)	21.88	22.04	21.71	20.99	21.10	20.73
	8 (RB_Pos:7)	21.80	22.07	21.76	20.94	21.15	20.76
	15 (RB_Pos:0)	21.81	22.02	21.78	20.87	21.11	20.73
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18607	18900	19193	18607	18900	19193
1.4MHz	1 (RB_Pos:0)	22.81	22.98	22.75	21.92	22.36	21.84
	1 (RB_Pos:3)	22.93	23.01	22.84	21.93	22.35	21.94
	1 (RB_Pos:5)	22.77	23.02	22.73	21.88	22.30	21.86
	3 (RB_Pos:0)	22.85	23.08	22.84	21.95	22.25	22.01
	3 (RB_Pos:1)	22.78	23.09	22.99	22.05	22.18	21.99
	3 (RB_Pos:3)	22.85	23.06	22.84	21.96	22.21	22.03
	6 (RB_Pos:0)	21.81	22.00	21.79	20.97	20.89	20.96

FDD LTE Band 4							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20050	20175	20300	20050	20175	20300
20MHz	1 (RB_Pos:0)	23.88	24.01	23.87	23.39	23.38	23.31
	1 (RB_Pos:50)	22.99	23.16	23.02	22.56	22.54	22.46
	1 (RB_Pos:99)	23.31	23.29	23.17	22.97	22.83	22.71
	50 (RB_Pos:0)	22.37	22.40	22.34	21.37	21.40	21.32
	50 (RB_Pos:25)	22.11	22.10	22.12	21.11	21.06	21.06
	50 (RB_Pos:50)	22.16	22.18	22.15	21.17	21.12	21.06
	100 (RB_Pos:0)	22.26	22.34	22.21	21.27	21.26	21.14
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20025	20175	20325	20025	20175	20325
15MHz	1 (RB_Pos:0)	23.79	23.76	23.83	22.82	23.10	23.14
	1 (RB_Pos:38)	23.24	23.20	23.10	22.07	22.62	22.59
	1 (RB_Pos:74)	23.49	23.13	23.23	22.46	22.54	22.52
	36 (RB_Pos:0)	22.46	22.28	22.38	21.39	21.29	21.29
	36 (RB_Pos:20)	22.25	22.19	22.10	21.19	21.17	21.17
	36 (RB_Pos:39)	22.33	22.07	22.06	21.27	21.04	20.96
	75 (RB_Pos:0)	22.37	22.22	22.17	21.34	21.19	21.16
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20000	20175	20350	20000	20175	20350
10MHz	1 (RB_Pos:0)	23.62	23.47	23.49	22.62	22.80	22.53
	1 (RB_Pos:25)	23.37	23.13	23.24	22.13	22.41	22.25

	1 (RB_Pos:49)	23.47	23.16	23.28	22.42	22.62	22.28
	25 (RB_Pos:0)	22.39	22.22	22.36	21.33	21.19	21.39
	25 (RB_Pos:12)	22.38	22.11	22.27	21.33	21.11	21.28
	25 (RB_Pos:25)	22.38	22.09	22.22	21.36	21.06	21.28
	50 (RB_Pos:0)	22.41	22.12	22.27	21.31	21.11	21.27
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19975	20175	20375	19975	20175	20375
5MHz	1 (RB_Pos:0)	23.48	23.26	23.39	22.59	22.49	22.49
	1 (RB_Pos:13)	23.32	23.16	23.34	22.32	22.71	22.34
	1 (RB_Pos:24)	23.24	23.19	23.14	22.35	22.50	22.30
	12 (RB_Pos:0)	22.15	22.03	22.11	21.22	21.16	21.12
	12 (RB_Pos:6)	22.20	22.08	22.15	21.25	21.19	21.16
	12 (RB_Pos:13)	22.07	21.96	22.03	21.12	21.13	21.08
	25 (RB_Pos:0)	22.14	22.07	22.13	21.16	21.14	21.09
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19965	20175	20385	19965	20175	20385
3.0MHz	1 (RB_Pos:0)	22.99	23.04	22.93	21.91	22.25	22.12
	1 (RB_Pos:8)	22.98	23.08	22.83	21.91	22.29	22.02
	1 (RB_Pos:14)	23.06	23.15	22.76	21.97	22.38	21.95
	8 (RB_Pos:0)	22.07	21.96	22.02	21.18	21.03	21.05
	8 (RB_Pos:3)	22.06	22.00	22.05	21.10	21.06	21.12
	8 (RB_Pos:7)	22.00	21.99	22.07	21.09	21.04	21.07
	15 (RB_Pos:0)	22.00	22.00	22.08	21.05	21.11	20.98
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19957	20175	20393	19957	20175	20393
1.4MHz	1 (RB_Pos:0)	23.02	22.94	22.98	22.08	22.29	22.07
	1 (RB_Pos:3)	23.03	22.99	22.97	22.24	22.32	22.08
	1 (RB_Pos:5)	22.88	22.99	23.01	21.97	22.29	22.03
	3 (RB_Pos:0)	23.01	23.03	23.06	22.05	22.11	22.18
	3 (RB_Pos:1)	23.04	23.15	23.04	22.06	22.22	22.23
	3 (RB_Pos:3)	23.07	23.09	23.12	22.13	22.19	22.20
	6 (RB_Pos:0)	21.91	21.86	21.96	21.08	20.80	21.13

FDD LTE Band 5							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20450	20525	20600	20450	20525	20600
10MHz	1 (RB_Pos:0)	23.06	22.94	22.99	22.02	22.29	21.97
	1 (RB_Pos:25)	22.77	22.83	22.86	21.75	22.11	21.93
	1 (RB_Pos:49)	22.84	22.90	22.79	21.78	22.19	21.72
	25 (RB_Pos:0)	21.97	21.85	21.90	20.89	20.84	20.89
	25 (RB_Pos:12)	21.92	21.85	21.93	20.88	20.86	20.95
	25 (RB_Pos:25)	21.80	21.78	21.82	20.75	20.81	20.84
	50 (RB_Pos:0)	21.84	21.78	21.91	20.79	20.75	20.89
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20425	20525	20625	20425	20525	20625
5MHz	1 (RB_Pos:0)	23.15	23.04	23.18	22.31	22.17	22.23
	1 (RB_Pos:13)	23.04	22.91	23.08	22.06	22.44	22.07
	1 (RB_Pos:24)	22.90	22.85	22.89	22.06	22.21	22.14
	12 (RB_Pos:0)	21.93	21.82	21.91	20.92	20.94	20.93
	12 (RB_Pos:6)	21.82	21.78	21.86	20.84	20.92	20.90
	12 (RB_Pos:13)	21.78	21.73	21.89	20.82	20.87	20.90
	25 (RB_Pos:0)	21.91	21.85	21.83	20.87	20.87	20.80
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20415	20525	20635	20415	20525	20635
3.0 MHz	1 (RB_Pos:0)	22.78	22.73	22.98	21.50	22.26	22.17
	1 (RB_Pos:8)	22.66	22.70	22.77	21.64	22.23	21.95
	1 (RB_Pos:14)	22.64	22.75	22.49	21.54	22.30	21.70
	8 (RB_Pos:0)	21.85	21.84	21.82	20.94	20.93	20.82
	8 (RB_Pos:3)	21.81	22.00	21.70	20.85	20.98	20.72
	8 (RB_Pos:7)	21.87	21.75	21.84	20.95	20.82	20.83
	15 (RB_Pos:0)	21.84	21.75	21.89	20.87	20.77	20.79
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20407	20525	20643	20407	20525	20643
1.4MHz	1 (RB_Pos:0)	22.84	22.70	22.75	21.97	22.01	21.84
	1 (RB_Pos:3)	22.84	22.77	22.64	21.95	22.11	21.67
	1 (RB_Pos:5)	22.77	22.67	22.74	21.89	22.04	21.83
	3 (RB_Pos:0)	22.89	22.80	22.83	21.98	21.95	21.98
	3 (RB_Pos:1)	22.87	22.95	22.74	21.98	21.95	21.93
	3 (RB_Pos:3)	22.85	22.83	22.84	21.93	21.95	22.00
	6 (RB_Pos:0)	21.87	21.73	21.74	20.98	20.64	20.91

FDD LTE Band 7							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20850	21100	21350	20850	21100	21350
20MHz	1 (RB_Pos:0)	22.75	22.88	22.68	22.59	22.44	22.23
	1 (RB_Pos:50)	22.16	22.20	21.89	21.75	21.63	21.36
	1 (RB_Pos:99)	22.35	22.32	22.21	22.09	21.95	21.77
	50 (RB_Pos:0)	21.54	21.47	21.38	20.55	20.51	20.34
	50 (RB_Pos:25)	21.28	21.34	21.05	20.33	20.38	20.02
	50 (RB_Pos:50)	21.23	21.33	21.03	20.27	20.33	19.99
	100 (RB_Pos:0)	21.36	21.46	21.16	20.39	20.47	20.12
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20825	21100	21375	20825	21100	21375
15MHz	1 (RB_Pos:0)	22.87	22.76	22.61	21.75	22.10	21.89
	1 (RB_Pos:38)	22.28	22.31	21.97	21.15	21.61	21.35
	1 (RB_Pos:74)	22.40	22.31	22.09	21.38	21.72	21.56
	36 (RB_Pos:0)	21.44	21.49	21.18	20.45	20.50	20.09
	36 (RB_Pos:20)	21.29	21.28	20.87	20.32	20.25	19.84
	36 (RB_Pos:39)	21.24	21.30	21.01	20.25	20.35	19.91
	75 (RB_Pos:0)	21.31	21.35	21.07	20.32	20.42	20.07
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20800	21100	21400	20800	21100	21400
10MHz	1 (RB_Pos:0)	22.87	22.51	22.46	21.70	21.90	21.34
	1 (RB_Pos:25)	22.42	22.27	22.11	21.28	21.63	21.06
	1 (RB_Pos:49)	22.60	22.41	22.31	21.47	21.65	21.15
	25 (RB_Pos:0)	21.53	21.36	21.10	20.50	20.37	20.20
	25 (RB_Pos:12)	21.50	21.31	21.17	20.53	20.33	20.25
	25 (RB_Pos:25)	21.43	21.19	21.16	20.44	20.25	20.14
	50 (RB_Pos:0)	21.51	21.28	21.10	20.48	20.30	20.12
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20775	21100	21425	20775	21100	21425
5MHz	1 (RB_Pos:0)	22.78	22.46	22.16	21.58	21.88	21.40
	1 (RB_Pos:13)	22.72	22.36	22.44	21.56	21.89	21.47
	1 (RB_Pos:24)	22.52	22.29	22.43	21.72	21.66	21.18
	12 (RB_Pos:0)	21.45	21.27	21.28	20.52	20.45	20.32
	12 (RB_Pos:6)	21.45	21.27	21.25	20.52	20.44	20.29
	12 (RB_Pos:13)	21.41	21.23	21.23	20.48	20.41	20.30
	25 (RB_Pos:0)	21.44	21.27	21.21	20.46	20.32	20.21

FDD LTE Band 12							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23060	23095	23130	23060	23095	23130
10MHz	1 (RB_Pos:0)	22.79	22.83	22.71	21.72	22.09	21.56
	1 (RB_Pos:25)	22.70	22.65	22.61	21.60	22.00	21.60
	1 (RB_Pos:49)	22.78	22.64	22.63	21.66	21.83	21.61
	25 (RB_Pos:0)	21.79	21.66	21.61	20.76	20.66	20.66
	25 (RB_Pos:12)	21.79	21.66	21.68	20.73	20.65	20.73
	25 (RB_Pos:25)	21.74	21.58	21.65	20.70	20.64	20.66
	50 (RB_Pos:0)	21.72	21.67	21.69	20.67	20.65	20.66
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23035	23095	23155	23035	23095	23155
5MHz	1 (RB_Pos:0)	23.10	22.86	22.84	22.20	22.09	21.89
	1 (RB_Pos:13)	23.07	22.77	22.80	22.08	22.30	21.74
	1 (RB_Pos:24)	23.14	22.61	22.77	22.11	22.12	21.79
	12 (RB_Pos:0)	21.91	21.61	21.65	20.93	20.69	20.68
	12 (RB_Pos:6)	21.86	21.66	21.62	20.93	20.78	20.64
	12 (RB_Pos:13)	21.84	21.62	21.67	20.85	20.77	20.70
	25 (RB_Pos:0)	21.87	21.62	21.61	20.86	20.68	20.57
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23025	23095	23165	23025	23095	23165
3.0MHz	1 (RB_Pos:0)	22.75	22.65	22.46	21.79	22.03	21.58
	1 (RB_Pos:8)	22.78	22.67	22.42	21.78	22.06	21.56
	1 (RB_Pos:14)	22.76	22.62	22.53	21.77	22.03	21.69
	8 (RB_Pos:0)	21.91	21.62	21.57	20.98	20.72	20.58
	8 (RB_Pos:3)	21.98	21.76	21.47	21.07	20.68	20.61
	8 (RB_Pos:7)	21.86	21.66	21.64	20.94	20.73	20.64
	15 (RB_Pos:0)	21.89	21.58	21.66	20.92	20.60	20.57
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23017	23095	23173	21457	21625	21793
1.4MHz	1 (RB_Pos:0)	22.85	22.58	22.50	21.93	21.92	21.64
	1 (RB_Pos:3)	22.84	22.64	22.73	21.94	22.06	21.73
	1 (RB_Pos:5)	22.82	22.60	22.60	21.94	21.97	21.69
	3 (RB_Pos:0)	22.88	22.66	22.56	21.99	21.80	21.70
	3 (RB_Pos:1)	22.87	22.60	22.70	22.07	21.78	21.78
	3 (RB_Pos:3)	22.88	22.63	22.69	21.92	21.75	21.85
	6 (RB_Pos:0)	21.79	21.54	21.55	20.91	20.46	20.74

FDD LTE Band 17							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23780	23790	23800	23780	23790	23800
10MHz	1 (RB_Pos:0)	22.63	22.61	22.67	21.58	22.04	21.53
	1 (RB_Pos:25)	22.67	22.68	22.50	21.55	22.00	21.53
	1 (RB_Pos:49)	22.42	22.09	21.93	21.23	21.24	20.85
	25 (RB_Pos:0)	21.67	21.71	21.71	20.62	20.68	20.72
	25 (RB_Pos:12)	21.64	21.68	21.65	20.63	20.70	20.68
	25 (RB_Pos:25)	21.59	21.56	21.66	20.55	20.62	20.66
	50 (RB_Pos:0)	21.69	21.67	21.65	20.65	20.64	20.62
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23755	23790	23825	23755	23790	23825
5MHz	1 (RB_Pos:0)	22.81	22.73	22.74	21.96	22.16	21.79
	1 (RB_Pos:13)	22.95	22.72	22.69	21.96	22.26	21.63
	1 (RB_Pos:24)	22.83	22.66	22.32	21.97	21.94	21.27
	12 (RB_Pos:0)	21.70	21.69	21.62	20.74	20.82	20.68
	12 (RB_Pos:6)	21.76	21.59	21.27	20.80	20.76	20.57
	12 (RB_Pos:13)	21.71	21.51	21.56	20.74	20.68	20.59
	25 (RB_Pos:0)	21.63	21.66	21.61	20.63	20.70	20.55

TDD LTE Band 30							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	--	27710	--	--	27710	--
10MHz	1 (RB_Pos:0)	--	22.62	--	--	21.56	--
	1 (RB_Pos:25)	--	22.39	--	--	21.20	--
	1 (RB_Pos:49)	--	22.43	--	--	21.40	--
	25 (RB_Pos:0)	--	21.44	--	--	20.38	--
	25 (RB_Pos:12)	--	21.39	--	--	20.37	--
	25 (RB_Pos:25)	--	21.32	--	--	20.26	--
	50 (RB_Pos:0)	--	21.42	--	--	20.33	--
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	27685	27710	27735	27685	27710	27735
5MHz	1 (RB_Pos:0)	22.33	22.63	22.68	21.77	21.74	21.88
	1 (RB_Pos:13)	22.32	22.61	22.68	21.96	21.54	21.61
	1 (RB_Pos:24)	22.19	22.39	22.57	21.50	21.62	21.68
	12 (RB_Pos:0)	21.18	21.36	21.48	20.30	20.42	20.58
	12 (RB_Pos:6)	21.24	21.38	21.41	20.36	20.44	20.50
	12 (RB_Pos:13)	21.17	21.24	21.40	20.29	20.32	20.51
	25 (RB_Pos:0)	21.18	21.38	21.47	20.22	20.33	20.46

8.5 WIFI

8.5.1 2.4G WIFI

Band (GHz)	Mode	Channel	Freq. (MHz)	Avg. Power (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	14.05	No
		6	2437	14.30	Yes
		11	2462	14.09	No
	802.11g	1	2412	11.83	No
		6	2437	11.99	No
		11	2462	12.01	No
	802.11n(HT20)	1	2412	10.71	No
		6	2437	10.85	No
		11	2462	10.85	No

Note: The data rate 2 Mbps/6Mbps/MCS0 is selected as worst condition, so only listed worst condition power in this report.

8.5.2 5G WIFI

Band (GHz)	Mode	Channel	Freq. (MHz)	Avg. Power (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	11.33	No
		44	5220	11.32	No
		48	5240	11.25	No
	802.11n(HT20)	36	5180	9.26	No
		44	5220	9.24	No
		48	5240	9.17	No
	802.11n(HT40)	38	5190	7.87	No
		46	5230	8.09	No
	802.11ac(HT20)	36	5180	9.31	No
		44	5220	9.25	No
		48	5240	9.26	No
	802.11ac(HT40)	38	5190	7.93	No
		46	5230	7.85	No
	802.11ac(HT80)	42	5210	6.47	No
	5.3 (5.25~5.35)	802.11a	52	5260	11.73
60			5300	11.93	Yes
64			5320	11.87	No
802.11n(HT20)		52	5260	9.60	No
		60	5300	9.80	No
		64	5320	9.76	No
802.11n(HT40)		54	5270	8.26	No
		62	5310	8.43	No
802.11ac(HT20)		52	5260	9.69	No
		60	5300	9.89	No

		64	5320	9.84	No
	802.11ac(HT40)	54	5270	8.09	No
		62	5310	8.34	No
	802.11ac(HT80)	58	5290	6.67	No
5.6 (5.47~5.725)	802.11a	100	5500	12.35	Yes
		116	5580	11.75	No
		140	5700	11.21	No
	802.11n(HT20)	100	5500	10.27	No
		116	5580	9.52	No
		140	5700	8.99	No
	802.11n(HT40)	102	5510	8.92	No
		110	5550	8.50	No
		134	5670	7.73	No
	802.11ac(HT20)	100	5500	10.31	No
		116	5580	9.82	No
		140	5700	9.22	No
	802.11ac(HT40)	102	5510	8.71	No
		110	5550	8.43	No
		134	5670	7.68	No
802.11ac(HT80)	106	5530	6.53	No	
5.8 (5.725~5.850)	802.11a	149	5745	11.03	No
		157	5785	10.08	No
		161	5805	11.02	No
		165	5825	11.03	Yes
	802.11n(HT20)	149	5745	8.80	No
		157	5785	8.62	No
		161	5805	8.82	No
	802.11n(HT40)	151	5755	9.49	No
		159	5790	7.61	No
	802.11ac(HT20)	149	5745	8.93	No
		157	5785	8.94	No
		161	5805	9.11	No
		165	5825	9.08	No
	802.11ac(HT40)	151	5755	7.43	No
		159	5790	7.56	No
802.11ac(HT80)	155	5775	6.10	No	
Note: The data rate 6Mbps and MCS 0 is selected as worst condition, so only listed worst condition power in this report.					

8.6 Bluetooth

Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Peak Power (dBm)	7.27	8.82	6.61	6.18	7.74	5.55
Mode	8-DPSK			BLE		
Channel	0	39	78	0	19	39
Frequency (MHz)	2402	2441	2480	2402	2440	2480
Peak Power (dBm)	6.46	8.06	5.83	-1.16	0.82	-1.45

8.7 Power Reduction List

When device operating under hotspot mode, the WCDMA B4, LTE B4/B7 power reduction will applied for SAR compliance.


WCDMA Band	Band 4		
Channel	1312	1412	1513
RMC 12.2Kbps	20.25	20.31	20.23
HSDPA Subtest-1	19.21	19.21	19.14
HSDPA Subtest-2	19.19	19.19	19.12
HSDPA Subtest-3	18.73	18.73	18.70
HSDPA Subtest-4	18.75	18.46	18.68
HSUPA Subtest-1	19.15	19.11	19.01
HSUPA Subtest-2	17.32	17.21	17.12
HSUPA Subtest-3	18.35	18.28	18.12
HSUPA Subtest-4	17.19	17.23	17.10
HSUPA Subtest-5	19.36	19.18	19.26

LTE Band 4							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20050	20175	20300	20050	20175	20300
20 MHz	1 (RB_Pos:0)	21.44	21.45	21.30	22.06	21.95	21.85
	1 (RB_Pos:50)	20.51	20.60	20.43	21.02	20.90	20.97
	1 (RB_Pos:99)	20.75	20.76	20.62	21.36	21.32	21.26
	50 (RB_Pos:0)	20.84	20.88	20.77	20.83	20.87	20.81
	50 (RB_Pos:25)	20.51	20.55	20.57	20.58	20.55	20.57
	50 (RB_Pos:50)	20.64	20.59	20.59	20.64	20.60	20.53
	100 (RB_Pos:0)	20.67	20.77	20.67	20.76	20.73	20.65
15 MHz	Channel	20025	20175	20325	20025	20175	20325
	1 (RB_Pos:0)	21.33	21.14	21.28	21.24	21.55	21.67
	1 (RB_Pos:38)	20.60	20.63	20.49	20.52	21.00	20.92
	1 (RB_Pos:74)	20.94	20.60	20.60	20.91	21.03	20.98
	36 (RB_Pos:0)	20.91	20.74	20.84	20.88	20.77	20.75
	36 (RB_Pos:20)	20.73	20.65	20.89	20.68	20.67	20.67
	36 (RB_Pos:39)	20.77	20.51	20.51	20.74	20.54	20.45
75 (RB_Pos:0)	20.82	20.65	20.62	20.80	20.70	20.62	
10 MHz	Channel	20000	20175	20350	20000	20175	20350
	1 (RB_Pos:0)	21.16	20.94	20.94	21.06	21.37	20.98
	1 (RB_Pos:25)	20.78	20.57	20.65	20.62	20.89	20.70
	1 (RB_Pos:49)	20.98	20.64	20.77	20.81	21.05	20.66
	25 (RB_Pos:0)	20.83	20.69	20.82	20.84	20.68	20.86
	25 (RB_Pos:12)	20.81	20.58	20.72	20.84	20.58	20.75
	25 (RB_Pos:25)	20.83	20.53	20.68	20.83	20.54	20.73
50 (RB_Pos:0)	20.84	20.58	20.71	20.82	20.58	20.76	

5 MHz	Channel	19975	20175	20375	19975	20175	20375
	1 (RB_Pos:0)	20.65	20.70	20.78	20.73	20.96	20.95
	1 (RB_Pos:13)	20.82	20.63	20.81	20.85	21.18	20.78
	1 (RB_Pos:24)	20.76	20.47	20.68	20.86	20.84	20.92
	12 (RB_Pos:0)	20.59	20.50	20.55	20.69	20.65	20.60
	12 (RB_Pos:6)	20.63	20.52	20.61	20.74	20.67	20.62
	12 (RB_Pos:13)	20.49	20.47	20.47	20.61	20.60	20.58
	25 (RB_Pos:0)	20.61	20.53	20.58	20.62	20.61	20.58
3 MHz	Channel	19965	20175	20385	19965	20175	20385
	1 (RB_Pos:0)	20.55	20.42	20.56	20.51	20.80	20.58
	1 (RB_Pos:8)	20.50	20.48	20.48	20.48	20.86	20.50
	1 (RB_Pos:14)	20.75	20.55	20.42	20.56	20.94	20.45
	8 (RB_Pos:0)	20.55	20.44	20.51	20.65	20.54	20.52
	8 (RB_Pos:3)	20.48	20.53	20.47	20.68	20.64	20.58
	8 (RB_Pos:7)	20.45	20.46	20.51	20.55	20.54	20.58
	15 (RB_Pos:0)	20.49	20.49	20.52	20.54	20.58	20.50
1.4 MHz	Channel	19957	20175	20393	19957	20175	20393
	1 (RB_Pos:0)	20.47	20.38	20.43	20.56	20.76	20.59
	1 (RB_Pos:3)	20.34	20.42	20.63	20.62	20.91	20.48
	1 (RB_Pos:5)	20.35	20.41	20.40	20.39	20.79	20.58
	3 (RB_Pos:0)	20.47	20.50	20.52	20.51	20.65	20.67
	3 (RB_Pos:1)	20.39	20.49	20.61	20.53	20.63	20.77
	3 (RB_Pos:3)	20.53	20.52	20.56	20.62	20.67	20.67
	6 (RB_Pos:0)	20.39	20.36	20.41	20.53	20.31	20.63
LTE Band 7							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
20 MHz	Channel	20850	21100	21350	20850	21100	21350
	1 (RB_Pos:0)	19.89	19.98	19.73	20.57	20.49	20.24
	1 (RB_Pos:50)	19.21	19.23	18.97	19.70	19.57	19.27
	1 (RB_Pos:99)	19.41	19.38	19.23	20.01	19.96	19.83
	50 (RB_Pos:0)	19.54	19.55	19.38	19.54	19.50	19.33
	50 (RB_Pos:25)	19.31	19.41	19.03	19.34	19.41	19.01
	50 (RB_Pos:50)	19.30	19.38	19.04	19.32	19.34	19.02
	100 (RB_Pos:0)	19.43	19.50	19.16	19.44	19.49	19.14
15 MHz	Channel	20825	21100	21375	20825	21100	21375
	1 (RB_Pos:0)	19.74	19.73	19.53	19.83	20.12	19.94
	1 (RB_Pos:38)	19.28	19.31	18.97	19.13	19.62	19.38
	1 (RB_Pos:74)	19.32	19.33	19.01	19.45	19.77	19.67
	36 (RB_Pos:0)	19.47	19.49	19.20	19.47	19.50	19.14
	36 (RB_Pos:20)	19.30	19.24	18.90	19.26	19.33	18.88
	36 (RB_Pos:39)	19.28	19.34	18.98	19.26	19.36	18.94
	75 (RB_Pos:0)	19.33	19.42	19.10	19.34	19.43	19.07

10 MHz	Channel	20800	21100	21400	20800	21100	21400
	1 (RB_Pos:0)	19.69	19.54	19.50	19.75	19.94	19.37
	1 (RB_Pos:25)	19.50	19.29	19.07	19.28	19.59	19.09
	1 (RB_Pos:49)	19.52	19.42	19.26	19.53	19.68	19.18
	25 (RB_Pos:0)	19.49	19.38	19.19	19.51	19.40	19.18
	25 (RB_Pos:12)	19.53	19.32	19.19	19.53	19.31	19.24
	25 (RB_Pos:25)	19.42	19.24	19.10	19.42	19.25	19.13
	50 (RB_Pos:0)	19.42	19.33	19.08	19.46	19.30	19.11
5 MHz	Channel	20775	21100	21425	20775	21100	21425
	1 (RB_Pos:0)	19.73	19.46	19.41	19.70	20.01	19.36
	1 (RB_Pos:13)	19.72	19.34	19.45	19.61	19.95	19.43
	1 (RB_Pos:24)	19.38	19.22	19.45	19.79	19.58	19.39
	12 (RB_Pos:0)	19.48	19.29	19.23	19.48	19.45	19.27
	12 (RB_Pos:6)	19.46	19.27	19.25	19.54	19.42	19.28
	12 (RB_Pos:13)	19.40	19.23	19.20	19.49	19.39	19.24
	25 (RB_Pos:0)	19.38	19.24	19.23	19.45	19.33	19.20

9 EUT ANTENNA LOCATION SKETCH

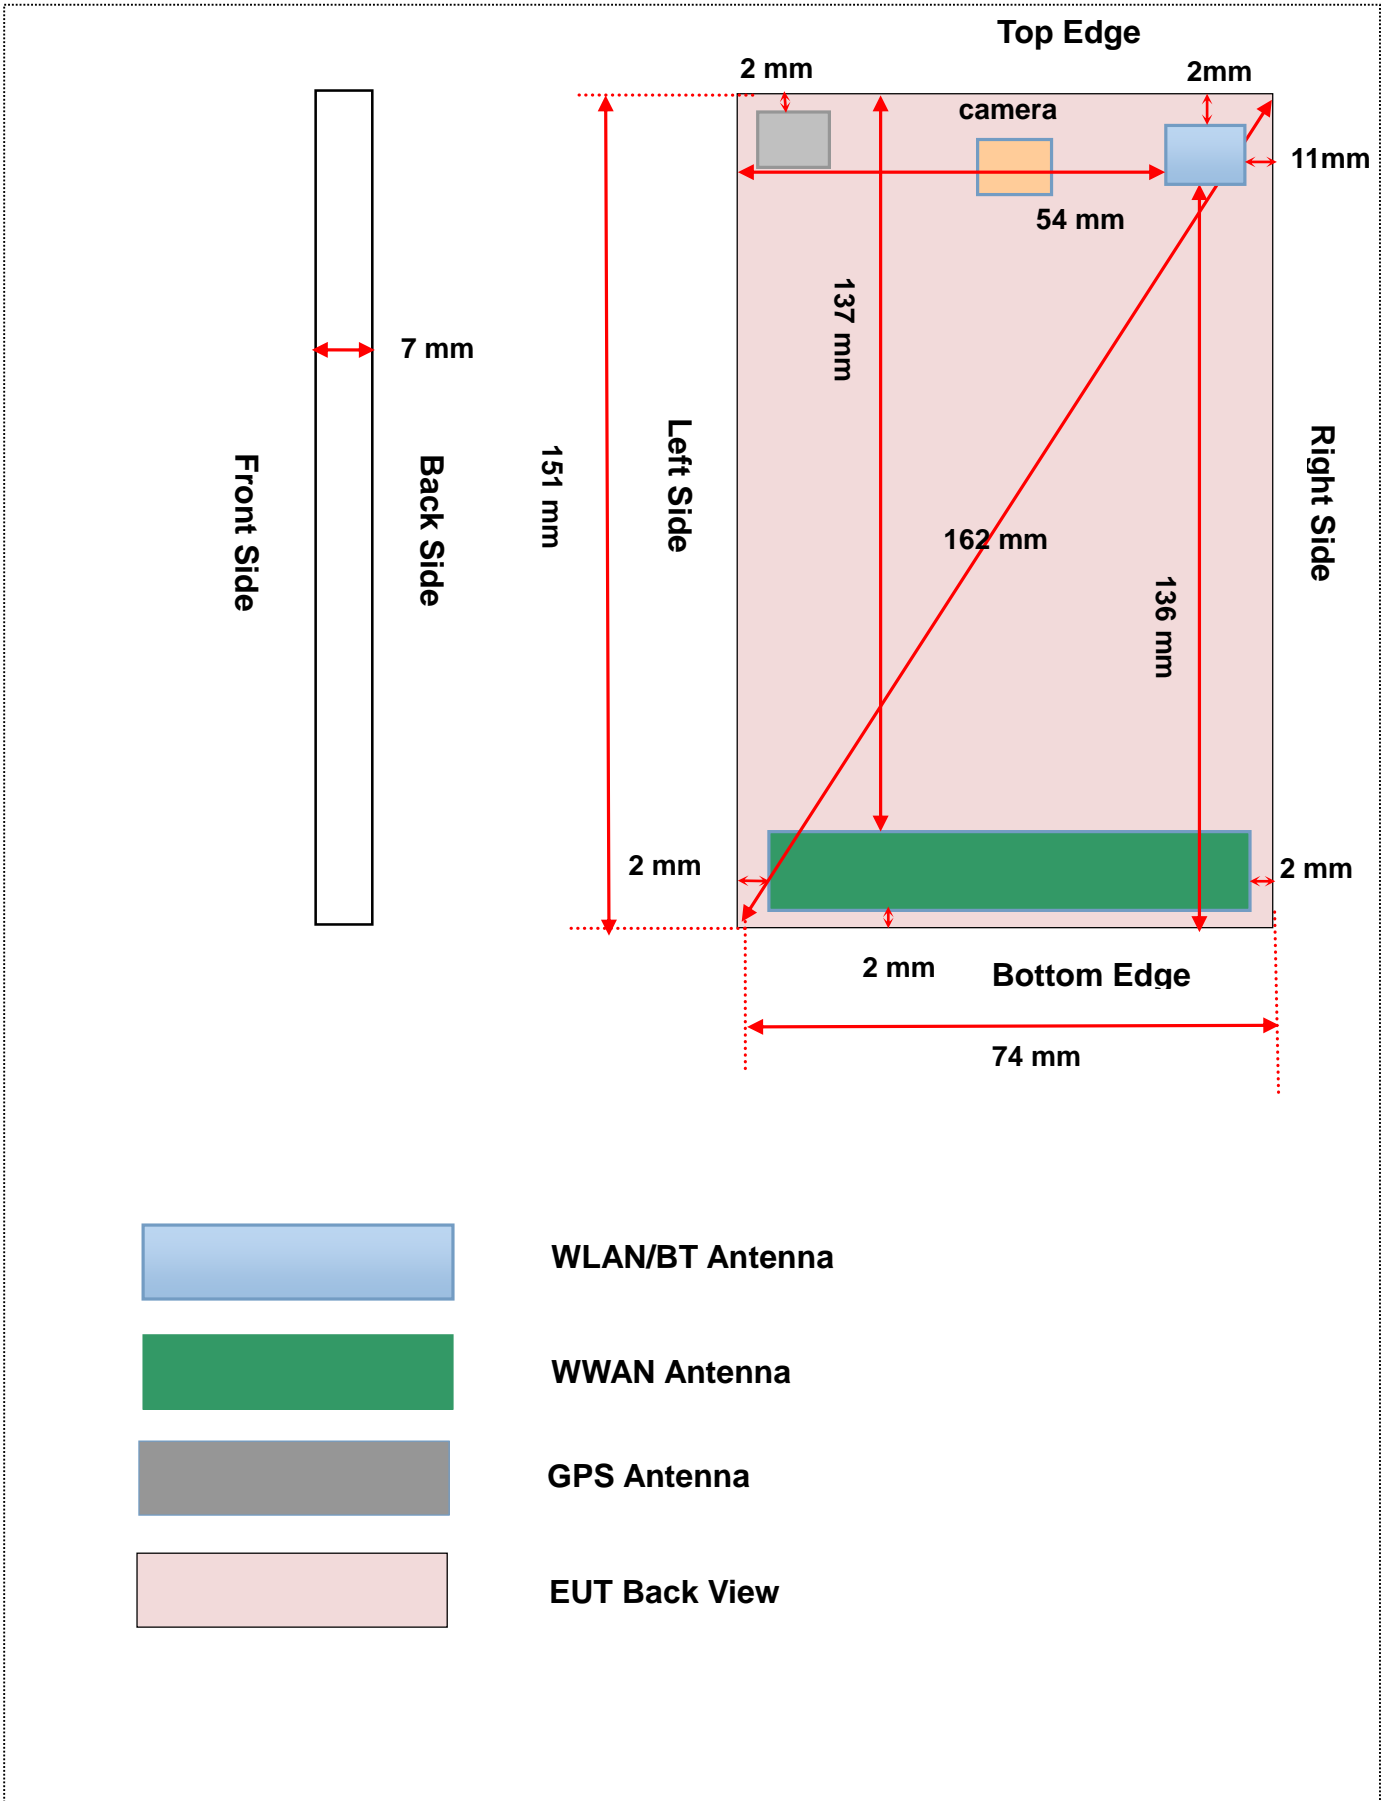

9.1 SAR Test Exclusion Consider Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz - 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

Band	Mode	Max. Peak Power		Test Position Configurations					
		dBm	mW	Head	Front/ Back	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM 850	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	Voice	33.25	2113.489	Yes	Yes	No	No	No	No
	Data	29.60	912.011	No	Yes	Yes	Yes	No	Yes
GSM 1900	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	Voice	30.40	1096.478	Yes	Yes	No	No	No	No
	Data	26.30	426.58	No	Yes	Yes	Yes	No	Yes
WCDMA Band 2	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	RMC	24.20	263.03	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band 4	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	RMC	24.60	288.40	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band 5	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	RMC	24.50	281.84	Yes	Yes	Yes	Yes	No	Yes
CDMA BC0	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	RMC	23.00	199.53	Yes	Yes	Yes	Yes	No	Yes
EVDO	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	RMC	22.90	194.98	No	Yes	Yes	Yes		Yes
LTE Band 2	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	24.10	257.04	Yes	Yes	Yes	Yes	No	Yes
LTE Band 4	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	24.10	257.04	Yes	Yes	Yes	Yes	No	Yes
LTE Band 5	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	23.10	204.17	Yes	Yes	Yes	Yes	No	Yes
LTE Band 7	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	22.90	194.98	Yes	Yes	Yes	Yes	No	Yes
LTE Band 12	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	22.90	194.98	Yes	Yes	Yes	Yes	No	Yes
LTE Band 17	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	22.70	186.21	Yes	Yes	Yes	Yes	No	Yes
LTE Band 30	Distance to User			<5mm	<5 mm	<5mm	<5mm	137 mm	<5mm
	QPSK	22.70	186.21	Yes	Yes	Yes	Yes	No	Yes
WLAN 2.4 G	Distance to User			<5mm	<5mm	54mm	11mm	<5mm	136 mm
	802.11b	14.40	27.54	Yes	Yes	No	Yes	Yes	No
	802.11g	12.10	16.22	Yes	Yes	No	Yes	Yes	No
WLAN 5 G	Distance to User			<5mm	<5mm	54mm	11mm	<5mm	136 mm
	802.11a	12.40	17.38	Yes	Yes	No	Yes	Yes	No
	802.11n(HT20)	10.30	10.72	Yes	Yes	No	Yes	Yes	No

	802.11n(HT40)	9.60	9.12	Yes	Yes	No	Yes	Yes	No
	802.11ac(HT20)	10.40	10.96	Yes	Yes	No	Yes	Yes	No
	802.11ac(HT40)	8.80	7.59	Yes	Yes	No	Yes	Yes	No
	802.11ac(HT80)	6.70	4.68	Yes	Yes	No	Yes	Yes	No
Bluetooth	Distance to User			<5mm	<5mm	54mm	11mm	<5mm	136 mm
	Bluetooth BR/EDR	8.90	7.76	No	No	No	No	No	No
	Bluetooth BLE	0.90	1.23	No	No	No	No	No	No

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{(\text{min. test separation distance, mm})} \cdot \sqrt{f(\text{GHz})} \right] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.
This formula is $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW.}$
- Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
- Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA /HSUPA /DC-HSDPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
- Per KDB 248227 D01 , choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
- Apply the test exclusion rule in KDB 248227 D01 v02 11g, 11n-HT20 and HT40 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

9.2 10g Extremity Exposure Consider

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

Conclusion:

The EUT hotspot mode 1-g reported SAR is 0.645 W/Kg, which is less than 1.2W/Kg, 10-g extremity SAR is not required.

10 TEST RESULTS

10.1 GSM 850

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
Voice	Left Cheek	0	128	824.20	0.95	0.215	33.19	33.30	1.03	0.221	1#
	Left Tilt	0	128	824.20	1.65	0.125	33.19	33.30	1.03	0.129	2#
	Right Cheek	0	128	824.20	-0.38	0.196	33.19	33.30	1.03	0.202	3#
	Right Tilt	0	128	824.20	-3.27	0.105	33.19	33.30	1.03	0.108	4#
Body-worn Accessory											
Voice	Front Side	15	128	824.20	1.89	0.213	33.19	33.30	1.03	0.219	5#
	Back Side	15	128	824.20	-3.28	0.209	33.19	33.30	1.03	0.215	6#
Hotspot											
GPRS 3 slots	Front Side	10	251	848.80	-0.10	0.222	29.55	29.60	1.01	0.225	7#
	Back Side	10	251	848.80	-2.18	0.369	29.55	29.60	1.01	0.373	8#
	Left Edge	10	251	848.80	0.20	0.089	29.55	29.60	1.01	0.090	9#
	Right Edge	10	251	848.80	-0.31	0.263	29.55	29.60	1.01	0.266	10#
	Bottom Edge	10	251	848.80	-3.28	0.208	29.55	29.60	1.01	0.210	11#

10.2 GSM 1900

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
Voice	Left Cheek	0	810	1909.80	3.31	0.060	30.26	30.40	1.03	0.062	12#
	Left Tilt	0	810	1909.80	-4.61	0.037	30.26	30.40	1.03	0.038	13#
	Right Cheek	0	810	1909.80	3.11	0.092	30.26	30.40	1.03	0.095	14#
	Right Tilt	0	810	1909.80	-3.02	0.032	30.26	30.40	1.03	0.033	15#
Body-worn Accessory											
Voice	Front Side	15	810	1909.80	-4.26	0.067	30.26	30.40	1.03	0.069	16#
	Back Side	15	810	1909.80	-2.65	0.096	30.26	30.40	1.03	0.099	17#
Hotspot											
GPRS 3 slots	Front Side	10	810	1909.80	-3.44	0.142	26.26	26.30	1.01	0.143	18#
	Back Side	10	810	1909.80	-1.42	0.277	26.26	26.30	1.01	0.280	19#
	Left Edge	10	810	1909.80	-4.54	0.222	26.26	26.30	1.01	0.224	20#
	Right Edge	10	810	1909.80	-4.65	0.020	26.26	26.30	1.01	0.020	21#
	Bottom Edge	10	810	1909.80	-2.34	0.270	26.26	26.30	1.01	0.272	22#

10.3 WCDMA Band 2

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Left Cheek	0	9262	1852.40	-4.48	0.152	24.16	24.30	1.01	0.157	23#
	Left Tilt	0	9262	1852.40	-2.26	0.094	24.16	24.30	1.01	0.097	24#
	Right Cheek	0	9262	1852.40	-2.78	0.259	24.16	24.30	1.01	0.268	25#
	Right Tilt	0	9262	1852.40	-2.39	0.080	24.16	24.30	1.01	0.082	26#
Body-worn Accessory											
RMC	Front Side	15	9262	1852.40	-1.29	0.173	24.16	24.30	1.01	0.178	27#
	Back Side	15	9262	1852.40	-1.03	0.254	24.16	24.30	1.01	0.262	28#
Hotspot											
RMC	Front Side	10	9262	1852.40	-1.81	0.330	24.16	24.30	1.01	0.340	29#
	Back Side	10	9262	1852.40	-0.47	0.510	24.16	24.30	1.01	0.525	30#
	Left Edge	10	9262	1852.40	-1.63	0.405	24.16	24.30	1.01	0.417	31#
	Right Edge	10	9262	1852.40	-0.62	0.042	24.16	24.30	1.01	0.043	32#
	Bottom Edge	10	9262	1852.40	-0.94	0.624	24.16	24.30	1.01	0.645	33#
Note: For this band, the EUT does not support Power Reduction under Hotspot mode.											

10.4 WCDMA Band 4

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Left Cheek	0	1513	1752.60	-3.41	0.226	24.48	24.60	1.03	0.232	34#
	Left Tilt	0	1513	1752.60	-2.37	0.144	24.48	24.60	1.03	0.148	35#
	Right Cheek	0	1513	1752.60	1.20	0.409	24.48	24.60	1.03	0.420	36#
	Right Tilt	0	1513	1752.60	-2.26	0.148	24.48	24.60	1.03	0.152	37#
Body-worn Accessory											
RMC	Front Side	15	1513	1752.60	-1.29	0.314	24.48	24.60	1.03	0.323	38#
	Back Side	15	1513	1752.60	0.09	0.447	24.48	24.60	1.03	0.460	39#
Hotspot											
RMC	Front Side	10	1412	1732.40	3.72	0.269	20.31	20.40	1.02	0.274	40#
	Back Side	10	1412	1732.40	1.47	0.366	20.31	20.40	1.02	0.373	41#
	Left Edge	10	1412	1732.40	-2.16	0.475	20.31	20.40	1.02	0.485	42#
	Right Edge	10	1412	1732.40	-3.12	0.051	20.31	20.40	1.02	0.052	43#
	Bottom Edge	10	1412	1732.40	-2.81	0.527	20.31	20.40	1.02	0.538	44#
Note: For this band, the EUT support Power Reduction under Hotspot mode.											

10.5WCDMA Band 5

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Left Cheek	0	4233	846.60	-1.87	0.082	24.40	24.50	1.02	0.084	45#
	Left Tilt	0	4233	846.60	1.63	0.042	24.40	24.50	1.02	0.043	46#
	Right Cheek	0	4233	846.60	-3.52	0.118	24.40	24.50	1.02	0.121	47#
	Right Tilt	0	4233	846.60	-0.93	0.085	24.40	24.50	1.02	0.087	48#
Body-worn Accessory											
RMC	Front Side	15	4233	846.60	-3.15	0.136	24.40	24.50	1.02	0.139	49#
	Back Side	15	4233	846.60	-3.27	0.142	24.40	24.50	1.02	0.145	50#
Hotspot											
RMC	Front Side	10	4233	846.60	0.82	0.183	24.40	24.50	1.02	0.187	51#
	Back Side	10	4233	846.60	-1.63	0.290	24.40	24.50	1.02	0.297	52#
	Left Edge	10	4233	846.60	-3.31	0.071	24.40	24.50	1.02	0.073	53#
	Right Edge	10	4233	846.60	0.09	0.156	24.40	24.50	1.02	0.160	54#
	Bottom Edge	10	4233	846.60	-2.11	0.191	24.40	24.50	1.02	0.195	55#
Note: For this band, the EUT does not supports Power Reduction under Hotspot mode.											

10.6CDMA BC0

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Left Cheek	0	384	836.52	-3.69	0.104	22.90	23.00	1.02	0.106	56#
	Left Tilt	0	384	836.52	-2.32	0.047	22.90	23.00	1.02	0.048	57#
	Right Cheek	0	384	836.52	3.13	0.078	22.90	23.00	1.02	0.080	58#
	Right Tilt	0	384	836.52	-0.88	0.048	22.90	23.00	1.02	0.049	59#
Body-worn Accessory											
RMC	Front Side	15	384	836.52	-1.73	0.116	22.90	23.00	1.02	0.119	60#
	Back Side	15	384	836.52	-3.09	0.139	22.90	23.00	1.02	0.142	61#
Hotspot											
RMC	Front Side	10	384	836.52	-4.34	0.181	22.90	23.00	1.02	0.185	62#
	Back Side	10	384	836.52	-3.61	0.288	22.90	23.00	1.02	0.295	63#
	Left Edge	10	384	836.52	0.32	0.053	22.90	23.00	1.02	0.054	64#
	Right Edge	10	384	836.52	-1.18	0.164	22.90	23.00	1.02	0.168	65#
	Bottom Edge	10	384	836.52	-3.85	0.166	22.90	23.00	1.02	0.170	66#
Note: For this band, the EUT does not supports Power Reduction under Hotspot mode.											

10.7EVDO BC0

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Body-worn Accessory											
RMC	Front Side	15	384	836.52	-2.47	0.142	22.85	22.90	1.01	0.144	67#
	Back Side	15	384	836.52	0.50	0.171	22.85	22.90	1.01	0.173	68#
Hotspot											
RMC	Front Side	10	384	836.52	-2.98	0.200	22.85	22.90	1.01	0.202	69#
	Back Side	10	384	836.52	-1.25	0.313	22.85	22.90	1.01	0.317	70#
	Left Edge	10	384	836.52	-1.29	0.062	22.85	22.90	1.01	0.063	71#
	Right Edge	10	384	836.52	-2.02	0.177	22.85	22.90	1.01	0.179	72#
	Bottom Edge	10	384	836.52	-2.27	0.178	22.85	22.90	1.01	0.180	73#
Note: For this band, the EUT does not supports Power Reduction under Hotspot mode.											

10.8LTE Band 2 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Num b.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	18900	1880.00	1	Low	-2.48	0.141	24.04	24.10	1.01	0.142	74#
			18700	1860.00	50	Low	-2.30	0.104	22.59	22.70	1.03	0.107	75#
	Left Tilt	0	18900	1880.00	1	Low	0.12	0.097	24.04	24.10	1.01	0.098	76#
			18700	1860.00	50	Low	-4.35	0.075	22.59	22.70	1.03	0.077	77#
	Right Cheek	0	18900	1880.00	1	Low	-3.93	0.243	24.04	24.10	1.01	0.246	78#
			18700	1860.00	50	Low	-3.73	0.172	22.59	22.70	1.03	0.177	79#
	Right Tilt	0	18900	1880.00	1	Low	-3.51	0.075	24.04	24.10	1.01	0.076	80#
			18700	1860.00	50	Low	-4.78	0.065	22.59	22.70	1.03	0.067	81#
Body-worn Accessory													
QPSK	Front Side	15	18900	1880.00	1	Low	-2.50	0.143	24.04	24.10	1.01	0.144	82#
			18700	1860.00	50	Low	-0.54	0.106	22.59	22.70	1.03	0.109	83#
	Back Side	15	18900	1880.00	1	Low	-3.36	0.198	24.04	24.10	1.01	0.200	84#
			18700	1860.00	50	Low	-1.96	0.148	22.59	22.70	1.03	0.152	85#
Hotspot													
QPSK	Front Side	10	18900	1880.00	1	Low	4.00	0.230	24.04	24.10	1.01	0.232	86#
			18700	1860.00	50	Low	-2.64	0.177	22.59	22.70	1.03	0.182	87#
	Back Side	10	18900	1880.00	1	Low	0.40	0.349	24.04	24.10	1.01	0.352	88#
			18700	1860.00	50	Low	-0.82	0.282	22.59	22.70	1.03	0.290	89#
	Left Edge	10	18900	1880.00	1	Low	-1.31	0.316	24.04	24.10	1.01	0.319	90#
			18700	1860.00	50	Low	-2.73	0.243	22.59	22.70	1.03	0.250	91#
	Right Edge	10	18900	1880.00	1	Low	-2.01	0.040	24.04	24.10	1.01	0.040	92#
			18700	1860.00	50	Low	-3.24	0.048	22.59	22.70	1.03	0.049	93#
	Bottom Edge	10	18900	1880.00	1	Low	-1.69	0.483	24.04	24.10	1.01	0.490	94#
			18700	1860.00	50	Low	-0.62	0.375	22.59	22.70	1.03	0.386	95#
Note: For this band, the EUT does not supports Power Reduction under Hotspot mode.													

10.9LTE Band 4 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	20175	1732.50	1	Low	3.68	0.179	24.01	24.10	1.02	0.183	96#
			20175	1732.50	50	Low	-2.70	0.156	22.40	22.50	1.02	0.159	97#
	Left Tilt	0	20175	1732.50	1	Low	-2.96	0.159	24.01	24.10	1.02	0.162	98#
			20175	1732.50	50	Low	-4.18	0.127	24.01	24.10	1.02	0.130	99#
	Right	0	20175	1732.50	1	Low	-4.38	0.373	24.01	24.10	1.02	0.381	100#

	Cheek	0	20175	1732.50	50	Low	-2.58	0.293	24.01	24.10	1.02	0.299	101#
	Right Tilt		20175	1732.50	1	Low	-2.35	0.144	24.01	24.10	1.02	0.147	102#
			20175	1732.50	50	Low	-3.82	0.117	24.01	24.10	1.02	0.119	103#
Body-worn Accessory													
QPSK	Front Side	15	20175	1732.50	1	Low	-1.51	0.358	24.01	24.10	1.02	0.365	104#
			20175	1732.50	50	Low	-0.17	0.274	24.01	24.10	1.02	0.280	105#
	Back Side	15	20175	1732.50	1	Low	-0.80	0.499	24.01	24.10	1.02	0.509	106#
			20175	1732.50	50	Low	-1.04	0.380	24.01	24.10	1.02	0.388	107#
Hotspot													
QPSK	Front Side	10	20175	1732.50	1	Low	-2.05	0.207	21.45	21.50	1.01	0.209	108#
			20175	1732.50	50	Low	-1.67	0.190	20.88	21.00	1.03	0.196	109#
	Back Side	10	20175	1732.50	1	Low	-0.92	0.355	21.45	21.50	1.01	0.359	110#
			20175	1732.50	50	Low	-0.18	0.322	20.88	21.00	1.03	0.332	111#
	Left Edge	10	20175	1732.50	1	Low	-3.06	0.168	21.45	21.50	1.01	0.170	112#
			20175	1732.50	50	Low	-4.40	0.155	20.88	21.00	1.03	0.160	113#
	Right Edge	10	20175	1732.50	1	Low	-4.24	0.032	21.45	21.50	1.01	0.032	114#
			20175	1732.50	50	Low	-3.36	0.032	20.88	21.00	1.03	0.033	115#
	Bottom Edge	10	20175	1732.50	1	Low	-1.07	0.440	21.45	21.50	1.01	0.444	116#
			20175	1732.50	50	Low	-1.35	0.401	20.88	21.00	1.03	0.413	117#
Note: For this band, the EUT support Power Reduction under Hotspot mode.													

10.10 LTE Band 5 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Num b.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	20450	829.00	1	Low	-0.65	0.205	23.06	23.10	1.01	0.207	118#
			20450	829.00	25	Low	-4.07	0.166	21.97	22.10	1.03	0.171	119#
	Left Tilt	0	20450	829.00	1	Low	-0.71	0.063	23.06	23.10	1.01	0.064	120#
			20450	829.00	25	Low	-1.24	0.049	21.97	22.10	1.03	0.050	121#
	Right Cheek	0	20450	829.00	1	Low	1.25	0.180	23.06	23.10	1.01	0.182	122#
			20450	829.00	25	Low	-2.24	0.143	21.97	22.10	1.03	0.147	123#
	Right Tilt	0	20450	829.00	1	Low	-1.40	0.112	23.06	23.10	1.01	0.113	124#
			20450	829.00	25	Low	-0.43	0.091	21.97	22.10	1.03	0.094	125#
Body-worn Accessory													
QPSK	Front Side	15	20450	829.00	1	Low	-0.73	0.208	23.06	23.10	1.01	0.210	126#
			20450	829.00	25	Low	-2.75	0.166	21.97	22.10	1.03	0.171	127#
	Back Side	15	20450	829.00	1	Low	-1.61	0.186	23.06	23.10	1.01	0.188	128#
			20450	829.00	25	Low	-2.55	0.149	21.97	22.10	1.03	0.153	129#
Hotspot													
QPSK	Front Side	10	20450	829.00	1	Low	-1.95	0.210	23.06	23.10	1.01	0.212	130#
			20450	829.00	25	Low	-2.30	0.171	21.97	22.10	1.03	0.176	131#
	Back Side	10	20450	829.00	1	Low	-0.42	0.261	23.06	23.10	1.01	0.264	132#

	Left Edge	10	20450	829.00	25	Low	0.42	0.220	21.97	22.10	1.03	0.227	133#
			20450	829.00	1	Low	-1.98	0.142	23.06	23.10	1.01	0.143	134#
			20450	829.00	25	Low	0.54	0.110	21.97	22.10	1.03	0.113	135#
	Right Edge	10	20450	829.00	1	Low	-1.01	0.268	23.06	23.10	1.01	0.271	136#
			20450	829.00	25	Low	-0.29	0.217	21.97	22.10	1.03	0.224	137#
	Bottom Edge	10	20450	829.00	1	Low	-1.84	0.149	23.06	23.10	1.01	0.150	138#
			20450	829.00	25	Low	-1.72	0.132	21.97	22.10	1.03	0.136	139#

Note: For this band, the EUT does not supports **Power Reduction** under Hotspot mode.

10.11 LTE Band 7 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	21100	2535.00	1	Low	0.22	0.116	22.88	23.00	1.03	0.119	140#
			20850	2510.00	50	Low	-2.24	0.084	21.54	21.60	1.01	0.085	141#
	Left Tilt	0	21100	2535.00	1	Low	-1.58	0.093	22.88	23.00	1.03	0.096	142#
			20850	2510.00	50	Low	-2.36	0.073	21.54	21.60	1.01	0.074	143#
	Right Cheek	0	21100	2535.00	1	Low	2.83	0.263	22.88	23.00	1.03	0.268	144#
			20850	2510.00	50	Low	-1.17	0.199	21.54	21.60	1.01	0.201	145#
	Right Tilt	0	21100	2535.00	1	Low	-2.85	0.081	22.88	23.00	1.03	0.083	146#
			20850	2510.00	50	Low	-1.04	0.063	21.54	21.60	1.01	0.064	147#
Body-worn Accessory													
QPSK	Front Side	15	21100	2535.00	1	Low	-1.67	0.206	22.88	23.00	1.03	0.212	148#
			20850	2510.00	50	Low	-1.55	0.158	21.54	21.60	1.01	0.160	149#
	Back Side	15	21100	2535.00	1	Low	-0.45	0.283	22.88	23.00	1.03	0.291	150#
			20850	2510.00	50	Low	-4.37	0.215	21.54	21.60	1.01	0.217	151#
Hotspot													
QPSK	Front Side	10	21100	2535.00	1	Low	-1.67	0.141	19.98	20.10	1.03	0.145	152#
			21100	2535.00	50	Low	-4.17	0.128	19.55	19.60	1.01	0.129	153#
	Back Side	10	21100	2535.00	1	Low	-3.65	0.183	19.98	20.10	1.03	0.188	154#
			21100	2535.00	50	Low	-1.12	0.170	19.55	19.60	1.01	0.172	155#
	Left Edge	10	21100	2535.00	1	Low	2.23	0.163	19.98	20.10	1.03	0.168	156#
			21100	2535.00	50	Low	-2.86	0.153	19.55	19.60	1.01	0.155	157#
	Right Edge	10	21100	2535.00	1	Low	-2.36	0.054	19.98	20.10	1.03	0.056	158#
			21100	2535.00	50	Low	-1.84	0.046	19.55	19.60	1.01	0.046	159#
	Bottom Edge	10	21100	2535.00	1	Low	-3.52	0.108	19.98	20.10	1.03	0.111	160#
			21100	2535.00	50	Low	0.03	0.098	19.55	19.60	1.01	0.099	161#

Note: For this band, the EUT does support **Power Reduction** under Hotspot mode.

10.12 LTE Band 12 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Num b.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	23095	707.50	1	Low	-4.41	0.093	22.83	22.90	1.02	0.095	162#
			23060	704.00	25	Low	1.32	0.066	21.79	21.90	1.03	0.068	163#
	Left Tilt	0	23095	707.50	1	Low	-0.43	0.050	22.83	22.90	1.02	0.051	164#
			23060	704.00	25	Low	1.83	0.043	21.79	21.90	1.03	0.044	165#
	Right Cheek	0	23095	707.50	1	Low	-1.45	0.084	22.83	22.90	1.02	0.086	166#
			23060	704.00	25	Low	-1.88	0.071	21.79	21.90	1.03	0.073	167#
	Right Tilt	0	23095	707.50	1	Low	-2.60	0.055	22.83	22.90	1.02	0.056	168#
			23060	704.00	25	Low	-2.42	0.047	21.79	21.90	1.03	0.048	169#
Body-worn Accessory													
QPSK	Front Side	15	23095	707.50	1	Low	-3.08	0.111	22.83	22.90	1.02	0.113	170#
			23060	704.00	25	Low	-1.19	0.080	21.79	21.90	1.03	0.081	171#
	Back Side	15	23095	707.50	1	Low	-3.71	0.131	22.83	22.90	1.02	0.133	172#
			23060	704.00	25	Low	-1.74	0.110	21.79	21.90	1.03	0.112	173#
Hotspot													
QPSK	Front Side	10	23095	707.50	1	Low	-3.35	0.131	22.83	22.90	1.02	0.134	174#
			23060	704.00	25	Low	-0.76	0.089	21.79	21.90	1.03	0.092	175#
	Back Side	10	23095	707.50	1	Low	-2.30	0.156	22.83	22.90	1.02	0.159	176#
			23060	704.00	25	Low	-1.48	0.124	21.79	21.90	1.03	0.128	177#
	Left Edge	10	23095	707.50	1	Low	-1.69	0.147	22.83	22.90	1.02	0.150	178#
			23060	704.00	25	Low	-3.22	0.107	21.79	21.90	1.03	0.110	179#
	Right Edge	10	23095	707.50	1	Low	1.58	0.094	22.83	22.90	1.02	0.096	180#
			23060	704.00	25	Low	-2.44	0.080	21.79	21.90	1.03	0.082	181#
	Bottom Edge	10	23095	707.50	1	Low	-4.84	0.035	22.83	22.90	1.02	0.036	182#
			23060	704.00	25	Low	-4.74	0.033	21.79	21.90	1.03	0.034	183#
Note: For this band, the EUT does not support Power Reduction under Hotspot mode.													

10.13 LTE Band 17 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Num b.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	23790	710.00	1	Mid	4.02	0.089	22.68	22.80	1.03	0.092	184#
			23790	710.00	25	Low	1.29	0.078	21.71	21.80	1.02	0.080	185#
	Left Tilt	0	23790	710.00	1	Mid	2.09	0.053	22.68	22.80	1.03	0.055	186#
			23790	710.00	25	Low	-0.60	0.046	21.71	21.80	1.02	0.047	187#
	Right Cheek	0	23790	710.00	1	Mid	-3.16	0.089	22.68	22.80	1.03	0.092	188#
			23790	710.00	25	Low	-3.24	0.075	21.71	21.80	1.02	0.077	189#

	Right Tilt	0	23790	710.00	1	Mid	-0.95	0.052	22.68	22.80	1.03	0.054	190#	
			23790	710.00	25	Low	-0.97	0.049	21.71	21.80	1.02	0.050	191#	
Body-worn Accessory														
QPSK	Front Side	15	23790	710.00	1	Mid	-2.60	0.097	22.68	22.80	1.03	0.100	192#	
			23790	710.00	25	Low	-3.34	0.083	21.71	21.80	1.02	0.085	193#	
	Back Side	15	23790	710.00	1	Mid	-0.68	0.108	22.68	22.80	1.03	0.111	194#	
			23790	710.00	25	Low	-1.99	0.096	21.71	21.80	1.02	0.098	195#	
Hotspot														
QPSK	Front Side	10	23790	710.00	1	Mid	3.35	0.094	22.68	22.80	1.03	0.097	196#	
			23790	710.00	25	Low	1.39	0.088	21.71	21.80	1.02	0.090	197#	
	Back Side	10	23790	710.00	1	Mid	0.12	0.140	22.68	22.80	1.03	0.144	198#	
			23790	710.00	25	Low	-2.72	0.112	21.71	21.80	1.02	0.114	199#	
	Left Edge	10	23790	710.00	1	Mid	-2.57	0.118	22.68	22.80	1.03	0.122	200#	
			23790	710.00	25	Low	-1.90	0.105	21.71	21.80	1.02	0.107	201#	
	Right Edge	10	23790	710.00	1	Mid	-3.27	0.134	22.68	22.80	1.03	0.138	202#	
			23790	710.00	25	Low	-2.50	0.098	21.71	21.80	1.02	0.100	203#	
	Bottom Edge	10	23790	710.00	1	Mid	-4.45	0.033	22.68	22.80	1.03	0.034	204#	
			23790	710.00	25	Low	-3.45	0.033	21.71	21.80	1.02	0.034	205#	
	Note: For this band, the EUT does not support Power Reduction under Hotspot mode.													

10.14 LTE Band 30 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Num b.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek	0	27710	2310.00	1	Low	-3.57	0.154	22.62	22.70	1.02	0.157	206#
			27710	2310.00	25	Low	0.18	0.124	21.44	21.50	1.01	0.125	207#
	Left Tilt	0	27710	2310.00	1	Low	-2.84	0.104	22.62	22.70	1.02	0.106	208#
			27710	2310.00	25	Low	-1.50	0.089	21.44	21.50	1.01	0.090	209#
	Right Cheek	0	27710	2310.00	1	Low	-1.75	0.301	22.62	22.70	1.02	0.307	210#
			27710	2310.00	25	Low	4.44	0.224	21.44	21.50	1.01	0.226	211#
	Right Tilt	0	27710	2310.00	1	Low	-3.44	0.084	22.62	22.70	1.02	0.086	212#
			27710	2310.00	25	Low	-2.46	0.074	21.44	21.50	1.01	0.075	213#
Body-worn Accessory													
QPSK	Front Side	15	27710	2310.00	1	Low	-3.98	0.215	22.62	22.70	1.02	0.219	214#
			27710	2310.00	25	Low	-4.46	0.171	21.44	21.50	1.01	0.173	215#
	Back Side	15	27710	2310.00	1	Low	-4.58	0.262	22.62	22.70	1.02	0.267	216#
			27710	2310.00	25	Low	-3.27	0.211	21.44	21.50	1.01	0.213	217#
Hotspot													
QPSK	Front Side	10	27710	2310.00	1	Low	-1.74	0.358	22.62	22.70	1.02	0.365	218#
			27710	2310.00	25	Low	-3.71	0.336	21.44	21.50	1.01	0.339	219#
	Back Side	10	27710	2310.00	1	Low	-2.49	0.631	22.62	22.70	1.02	0.643	220#
			27710	2310.00	25	Low	-3.65	0.397	21.44	21.50	1.01	0.401	221#

	Left Edge	10	27710	2310.00	1	Low	1.65	0.418	22.62	22.70	1.02	0.426	222#
			27710	2310.00	25	Low	0.57	0.311	21.44	21.50	1.01	0.314	223#
	Right Edge	10	27710	2310.00	1	Low	-2.33	0.061	22.62	22.70	1.02	0.062	224#
			27710	2310.00	25	Low	-2.01	0.054	21.44	21.50	1.01	0.055	225#
	Bottom Edge	10	27710	2310.00	1	Low	-3.58	0.247	22.62	22.70	1.02	0.252	226#
			27710	2310.00	25	Low	-2.93	0.184	21.44	21.50	1.01	0.186	227#

Note: For this band, the EUT does not support **Power Reduction** under Hotspot mode.

10.15 WIFI 2.4GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
802.11 b	Left Cheek	0	6	2437.00	-2.55	0.137	14.30	14.40	1.02	0.140	228#
	Left Tilt	0	6	2437.00	1.88	0.157	14.30	14.40	1.02	0.161	229#
	Right Cheek	0	6	2437.00	1.75	0.450	14.30	14.40	1.02	0.460	230#
	Right Tilt	0	6	2437.00	-4.45	0.397	14.30	14.40	1.02	0.406	231#
Body-worn Accessory											
802.11 b	Front Side	15	6	2437.00	-0.80	0.052	14.30	14.40	1.02	0.053	232#
	Back Side	15	6	2437.00	1.48	0.075	14.30	14.40	1.02	0.077	233#
Hotspot											
802.11 b	Front Side	10	6	2437.00	0.46	0.099	14.30	14.40	1.02	0.101	234#
	Back Side	10	6	2437.00	2.56	0.141	14.30	14.40	1.02	0.144	235#
	Right Edge	10	6	2437.00	-1.57	0.100	14.30	14.40	1.02	0.102	236#
	Top Edge	10	6	2437.00	-4.62	0.071	14.30	14.40	1.02	0.073	237#

10.16 WIFI 5GHz

Fre. Band	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head												
5.3G	802.11 a	Left Cheek	0	60	5300.00	-3.66	0.312	11.93	12.00	1.02	0.317	238#
		Left Tilt	0	60	5300.00	-2.12	0.254	11.93	12.00	1.02	0.258	239#
		Right Cheek	0	60	5300.00	-3.01	0.892	11.93	12.00	1.02	0.906	240#
			0	52	5260.00	-4.34	0.901	11.73	12.00	1.06	0.959	241#
			0	64	5320.00	-2.76	0.686	11.87	12.00	1.03	0.707	242#
		Right Tilt	0	60	5300.00	-4.82	0.639	11.93	12.00	1.02	0.649	243#
5.6G	802.11 a	Left Cheek	0	100	5500.00	-1.05	0.428	12.35	12.40	1.01	0.433	244#
		Left Tilt	0	100	5500.00	-3.94	0.403	12.35	12.40	1.01	0.408	245#
		Right Cheek	0	100	5500.00	2.10	0.983	12.35	12.40	1.01	0.995	246#
			0	116	5580.00	-4.42	0.741	12.35	12.40	1.16	0.860	247#
			0	140	5700.00	-3.59	0.735	12.35	12.40	1.32	0.970	248#
		Right Tilt	0	100	5500.00	-2.66	0.761	12.35	12.40	1.01	0.770	249#
5.8G	802.11 a	Left Cheek	0	165	5825.00	-4.97	0.412	11.03	11.10	1.02	0.419	250#
		Left Tilt	0	165	5825.00	-4.66	0.346	11.03	11.10	1.02	0.352	251#
		Right Cheek	0	165	5825.00	-2.97	0.913	11.03	11.10	1.02	0.928	252#
			0	149	5745.00	-1.01	0.786	11.03	11.10	1.02	0.799	253#
			0	161	5805.00	-2.44	0.837	11.02	11.10	1.02	0.851	254#
		Right Tilt	0	165	5825.00	-3.64	0.715	11.03	11.10	1.02	0.727	255#
Body-worn Accessory												
5.3G	802.11 a	Front Side	15	60	5300.00	-1.25	0.124	11.93	12.00	1.02	0.126	256#
		Back Side	15	60	5300.00	-3.19	0.098	11.93	12.00	1.02	0.100	257#
5.6G	802.11 a	Front Side	15	100	5500.00	-2.17	0.211	12.35	12.40	1.01	0.213	258#
		Back Side	15	100	5500.00	-2.80	0.101	12.35	12.40	1.01	0.102	259#
5.8G	802.11 a	Front Side	15	165	5825.00	-2.48	0.150	11.03	11.10	1.02	0.152	260#
		Back Side	15	165	5825.00	-4.89	0.102	11.03	11.10	1.02	0.104	261#
Hotspot												
5.3G	802.11 a	Front Side	10	60	5300.00	-3.28	0.164	11.93	12.00	1.02	0.167	262#
		Back Side	10	60	5300.00	-1.02	0.108	11.93	12.00	1.02	0.110	263#
		Right Edge	10	60	5300.00	1.74	0.141	11.93	12.00	1.02	0.143	264#
		Top Edge	10	60	5300.00	-2.11	0.116	11.93	12.00	1.02	0.118	265#
5.6G	802.11 a	Front Side	10	100	5500.00	-1.17	0.218	12.35	12.40	1.01	0.221	266#
		Back Side	10	100	5500.00	3.01	0.100	12.35	12.40	1.01	0.101	267#
		Right Edge	10	100	5500.00	-4.44	0.191	12.35	12.40	1.01	0.193	268#
		Top Edge	10	100	5500.00	-2.98	0.118	12.35	12.40	1.01	0.119	269#
5.8G	802.11 a	Front Side	10	165	5825.00	-1.70	0.178	11.03	11.10	1.02	0.181	270#
		Back Side	10	165	5825.00	-3.57	0.115	11.03	11.10	1.02	0.117	271#
		Right Edge	10	165	5825.00	-3.01	0.173	11.03	11.10	1.02	0.176	272#
		Top Edge	10	165	5825.00	-2.99	0.142	11.03	11.10	1.02	0.144	273#

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
5300	WIFI 802.11 a	Head	Right Cheek	0.892	Yes	0.897	1.00
5260	WIFI 802.11 a	Head	Right Cheek	0.901	Yes	0.884	1.02
5500	WIFI 802.11 a	Head	Right Cheek	0.983	Yes	0.963	1.02
5825	WIFI 802.11 a	Head	Right Cheek	0.913	Yes	0.928	1.02
5805	WIFI 802.11 a	Head	Right Cheek	0.837	Yes	0.855	1.02

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Consider

NO.	Mode	2.4G WLAN & 5G WLAN & 2.4G Bluetooth		
		Head	Body-worn	Hotspot
1	GSM (Voice)	+ 2.4G WLAN	+ 2.4G WLAN	--
		+ 5G WLAN	+ 5G WLAN	--
		--	+ Bluetooth	--
2	GSM (Data)	--	--	+ 2.4G WLAN
		--	--	+ 5G WLAN
3	WCDMA RMC	+ 2.4G WLAN	+ 2.4G WLAN	+ 2.4G WLAN
		+ 5G WLAN	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--
4	CDMA RMC	+ 2.4G WLAN	+ 2.4G WLAN	+ 2.4G WLAN
		+ 5G WLAN	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--
5	EVDO RMC	--	+ 2.4G WLAN	+ 2.4G WLAN
		--	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--
4	LTE	+ 2.4G WLAN	+ 2.4G WLAN	+ 2.4G WLAN
		+ 5G WLAN	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--

Note:

1. 2G&3G&4G share the same antenna and can't transmit simultaneously.
2. The Bluetooth and 2.4G WLAN share the same antenna, can't transmitting together.
3. Both the 2.4G WLAN and 5G WLAN can transmit simultaneously with each WWAN.
4. Both 2.4G WLAN and 5G WLAN supports hotspot mode.

12.2 Estimated SAR Calculation

According to KDB 447498 D01 when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune Up Power}(mw)}{\text{Min Test Separation Distance}} * \frac{\sqrt{f_{GHz}}}{x} \quad (\text{where } x = 7.5 \text{ for 1-g SAR})$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Band	Mode	Position	Antenna To user (mm)	SAR Testing	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Frequency (GHz)	Calculation Distance/Gap (mm)	Estimated SAR (W/kg)
Bluetooth	GFSK	Right Cheek	5	NO	8.90	7.76	2441	5	0.323
		Left Cheek	5	NO	8.90	7.76	2441	5	0.323
		Front side	10	NO	8.90	7.76	2441	10	0.162
		Back Side	10	NO	8.90	7.76	2441	10	0.162
		Right Edge	10	NO	8.90	7.76	2441	10	0.162
		Top Edge	10	NO	8.90	7.76	2441	10	0.162

12.3 Sum SAR of Simultaneous Transmission

12.3.1 Sum Head SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
GSM Voice + 2.4G WLAN	GSM Voice	0.221	0.681	No
	2.4G WLAN	0.460		
GSM Voice + 5G WLAN	GSM Voice	0.221	1.216	No
	5G WLAN	0.995		
WCDMA RMC +2.4G WLAN	WCDMA RMC	0.420	0.880	No
	2.4G WLAN	0.460		
WCDMA RMC +5G WLAN	WCDMA RMC	0.420	1.415	No
	5G WLAN	0.995		
CDMA +2.4G WLAN	CDMA	0.106	0.566	No
	2G WLAN	0.460		
CDMA +5G WLAN	CDMA	0.106	1.101	No
	5G WLAN	0.995		
LTE QPSK + 2.4G WLAN	LTE QPSK	0.381	0.841	No
	2.4G WLAN	0.460		
LTE QPSK + 5G WLAN	LTE QPSK	0.381	1.376	No
	5G WLAN	0.995		

12.3.2 Sum Body-worn SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
GSM Voice + 2.4G WLAN	GSM Voice	0.219	0.296	No
	2.4G WLAN	0.077		
GSM Voice + 5G WLAN	GSM Voice	0.219	0.432	No
	5G WLAN	0.213		
WCDMA RMC +2.4G WLAN	WCDMA RMC	0.460	0.537	No
	2.4G WLAN	0.077		
WCDMA RMC + 5G WLAN	WCDMA RMC	0.460	0.673	No
	5G WLAN	0.213		
CDMA +2.4G WLAN	CDMA	0.142	0.219	No
	2.4G WLAN	0.077		
CDMA + 5G WLAN	CDMA	0.142	0.355	No
	5G WLAN	0.213		
EVDO +2.4G WLAN	EVDO	0.173	0.250	No
	2.4G WLAN	0.077		
EVDO + 5G WLAN	EVDO	0.173	0.386	No
	5G WLAN	0.213		
LTE QPSK + 2.4G WLAN	LTE QPSK	0.509	0.586	No
	2.4G WLAN	0.077		

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
LTE QPSK + 5G WLAN	LTE QPSK	0.509	0.722	No
	5G WLAN	0.213		

12.3.3 Sum Hotspot mode SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
GSM DATA + 2.4G WLAN	GSM DATA	0.373	0.517	No
	2.4G WLAN	0.144		
GSM DATA + 5G WLAN	GSM DATA	0.373	0.594	No
	5G WLAN	0.221		
WCDMA RMC + 2.4G WLAN	WCDMA RMC	0.645	0.789	No
	2.4G WLAN	0.144		
WCDMA RMC +5G WLAN	WCDMA RMC	0.645	0.866	No
	5G WLAN	0.221		
CDMA +2.4G WLAN	CDMA	0.295	0.439	No
	2.4G WLAN	0.144		
CDMA + 5G WLAN	CDMA	0.295	0.516	No
	5G WLAN	0.221		
EVDO +2.4G WLAN	EVDO	0.317	0.461	No
	2.4G WLAN	0.144		
EVDO + 5G WLAN	EVDO	0.317	0.538	No
	5G WLAN	0.221		
LTE QPSK + 2.4G WLAN	LTE QPSK	0.643	0.787	No
	2.4G WLAN	0.144		
LTE QPSK + 5G WLAN	LTE QPSK	0.643	0.864	No
	5G WLAN	0.221		

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
750MHz Dipole	SATIMO	SID 750	S/N 25/13 DIP 0G750-253	2015/03/16	2018/03/15
835MHz Dipole	SATIMO	SID 835	S/N 25/13 DIP 0G835-246	2015/03/16	2018/03/15
1800MHz Dipole	SATIMO	SID 1900	S/N 25/13 DIP 1G800-248	2015/03/16	2018/03/15
1900MHz Dipole	SATIMO	SID 1900	S/N 25/13 DIP 1G900-249	2015/03/16	2018/03/15
2450MHz Dipole	SATIMO	SID 2450	S/N 25/13 DIP 2G450-251	2015/03/16	2018/03/15
2600MHz Dipole	SATIMO	SID 2600	SN 25/13 DIP 2G600-254	2015/03/16	2018/03/15
Waveguide	SATIMO	SWG5500	S/N 30/13 DIP WGA24	2015/03/16	2018/03/15
E-Field Probe	MVG	SSE2	S/N 34/15 EPGO 265	2015/10/12	2016/10/11
Antenna	SATIMO	ANTA3	SN 17/13 ZNTA45	N/A	N/A
Phantom1	SATIMO	SAM	SN 30/13 SAM103	N/A	N/A
Phantom2	SATIMO	SAM	SN 30/13 SAM104	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	2015/08/17	2016/08/16
MultiMeter	Keithley	MultiMeter 2000	4024022	2015/07/16	2016/07/15
Signal Generator	R&S	SMF100A	1167.0000k02/104260	2015/07/16	2016/07/15
Power Meter	Agilent	E4419B	GB40201833	2015/10/14	2016/10/13
Power Sensor	R&S	NRP-Z21	103971	2015/07/16	2016/07/15
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Wireless Communication Test Set	R&S	CMW 500	138884	2015/07/16	2016/07/15
Network Analyzer	R&S	ZVL-6	101380	2015/07/16	2016/07/15
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: Per KDB 50824 Dipole SAR Validation Verification, BALUN LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2016.04.27	Head	750	21.2	0.89	41.92	0.89	41.90	0.00	0.05
2016.04.29	Body	750	21.7	0.94	57.19	0.96	55.50	-2.08	3.05
2016.04.27	Head	835	21.2	0.90	41.82	0.90	41.50	0.00	0.77
2016.04.28	Body	835	22.1	1.00	55.70	0.97	55.20	3.09	0.91
2016.04.22	Head	1800	22.1	1.43	39.61	1.40	40.00	2.14	-0.98
2016.04.22	Body	1800	22.1	1.51	53.56	1.52	53.30	-0.66	0.49
2016.04.24	Head	1900	21.4	1.41	39.80	1.40	40.00	0.71	-0.50
2016.04.23	Body	1900	21.4	1.54	52.76	1.52	53.30	1.32	-1.01
2016.04.25	Head	2450	21.5	1.88	37.97	1.80	39.20	4.44	-3.14
2016.04.26	Body	2450	21.1	1.95	52.61	1.95	52.70	0.00	-0.17
2016.04.25	Head	2600	21.5	1.96	38.38	1.96	39.00	0.00	-1.59
2016.04.21	Body	2600	21.0	2.13	50.48	2.16	52.50	-1.39	-3.85
2016.05.02	Head	5200	22.3	4.73	35.97	4.66	36.00	1.50	-0.08
2016.05.03	Body	5200	22.0	5.22	49.09	5.30	49.01	-1.51	0.16
2016.05.02	Head	5600	22.3	5.19	34.77	5.07	35.50	2.37	-2.06
2016.05.03	Body	5600	22.0	5.63	48.57	5.77	48.50	-2.43	0.14
2016.05.02	Head	5800	22.3	5.39	34.20	5.27	35.30	2.28	-3.12
2016.05.03	Body	5800	22.0	5.78	48.36	6.00	48.20	-3.67	0.33

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10%(for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)	Targeted SAR(W/kg)	Tolerance (%)
2016.04.27	Head	750	100	0.850	8.50	8.60	-1.16	8.49	0.12
2016.04.29	Body	750	100	0.886	8.86	8.91	-0.56	8.49	4.36
2016.04.27	Head	835	100	0.929	9.29	9.81	-5.30	9.56	-2.82
2016.04.28	Body	835	100	1.013	10.13	10.53	-3.80	9.56	5.96
2016.04.22	Head	1800	100	3.922	39.22	38.72	1.29	38.40	2.14
2016.04.22	Body	1800	100	4.011	40.11	40.42	-0.77	38.40	4.45
2016.04.24	Head	1900	100	3.910	39.10	40.75	-4.05	39.70	-1.51
2016.04.23	Body	1900	100	4.116	41.16	42.06	-2.14	39.70	3.68
2016.04.25	Head	2450	100	5.356	53.56	54.29	-1.34	52.40	2.21
2016.04.26	Body	2450	100	5.463	54.63	54.70	-0.13	52.40	4.26
2016.04.25	Head	2600	100	5.358	53.58	57.37	-6.61	55.30	-3.11
2016.04.21	Body	2600	100	5.787	57.87	57.62	0.43	55.30	4.65
2016.05.02	Head	5200	100	15.723	157.23	157.80	-0.36	159.00	-1.11
2016.05.03	Body	5200	100	15.392	153.92	155.12	-0.77	159.00	-3.19
2016.05.02	Head	5600	100	17.240	172.40	171.22	0.69	173.80	-0.81
2016.05.03	Body	5600	100	16.391	163.91	167.13	-1.93	173.80	-5.69
2016.05.02	Head	5800	100	16.978	169.78	179.53	-5.43	181.20	-6.30
2016.05.03	Body	5800	100	16.896	168.96	173.19	-2.44	181.20	-6.75


Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data(750 MHz Head)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.27
 Measurement duration: 13 minutes 27 seconds

Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	750MHz
Signal	CW
Frequency (MHz)	750.000000
Relative permittivity (real part)	41.923526
Conductivity (S/m)	0.893686
Power drift (%)	-0.310000
Ambient Temperature:	21.9C
Liquid Temperature:	21.2C
ConvF:	1.81
Crest factor:	1:1

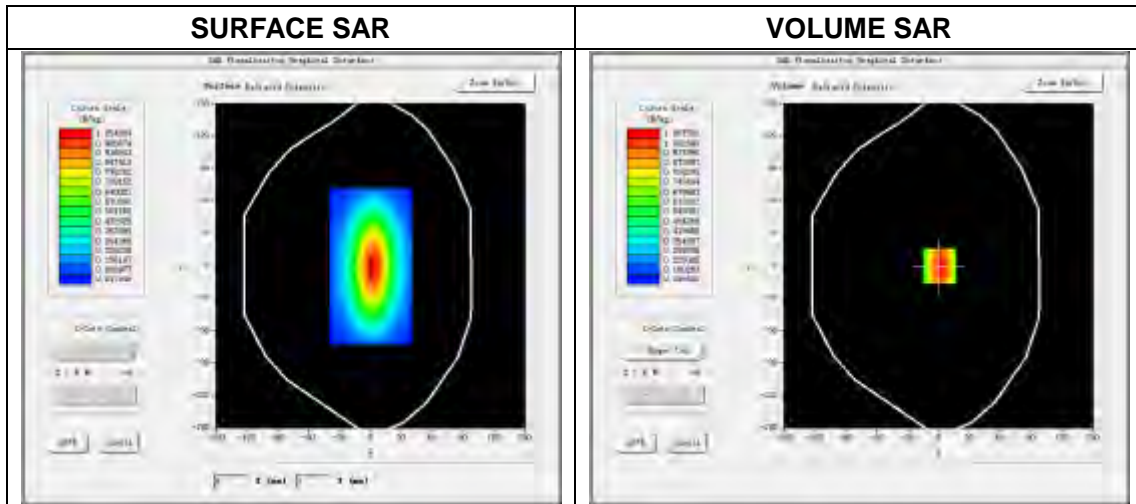


Maximum location: X=0.00, Y=0.00
 SAR Peak: 1.19 W/kg

SAR 10 g (W/Kg)	0.588563
SAR 1g (W/Kg)	0.850356

Z Axis Scan

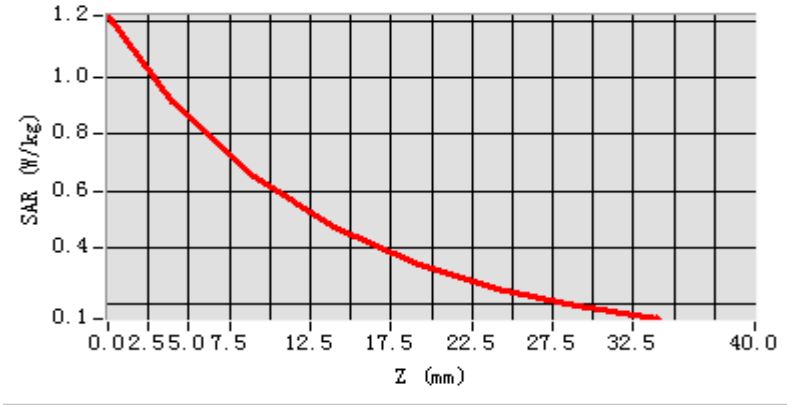

3D screen shot	Hot spot position
-----------------------	--------------------------

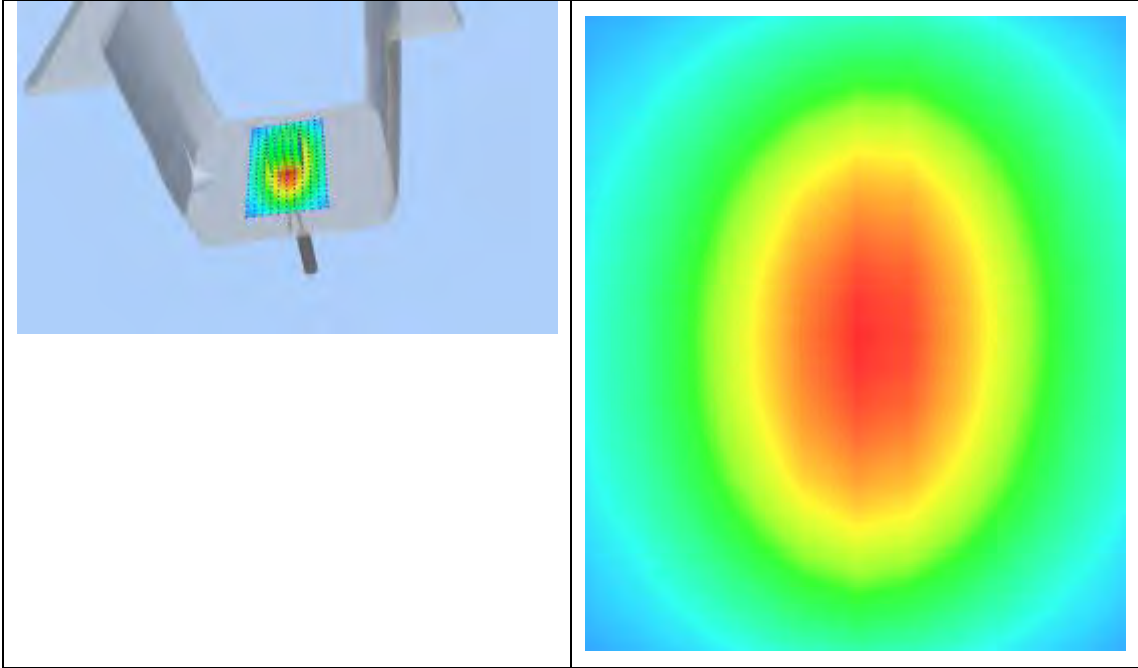


System Performance Check Data(750 MHz Body)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.29
 Measurement duration: 13 minutes 13 seconds



Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	750MHz
Signal	CW
Frequency (MHz)	750.000000
Relative permittivity (real part)	57.188739
Conductivity (S/m)	0.943268
Power drift (%)	-0.600000
Ambient Temperature:	22.5C
Liquid Temperature:	21.7C
ConvF:	1.88
Crest factor:	1:1

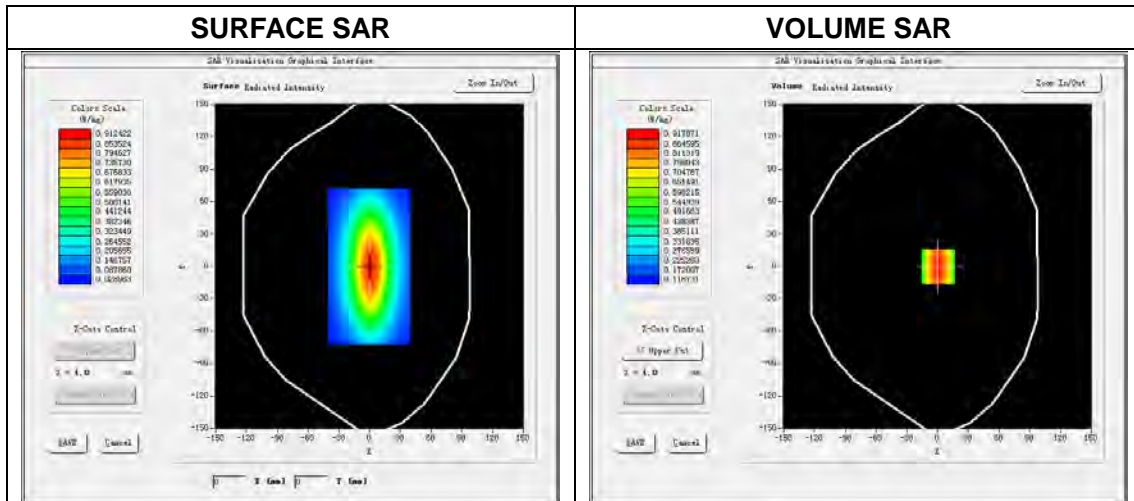

Maximum location: X=0.00, Y=0.00
SAR Peak: 1.25 W/kg

SAR 10 g (W/Kg)	0.595395
SAR 1g (W/Kg)	0.885736

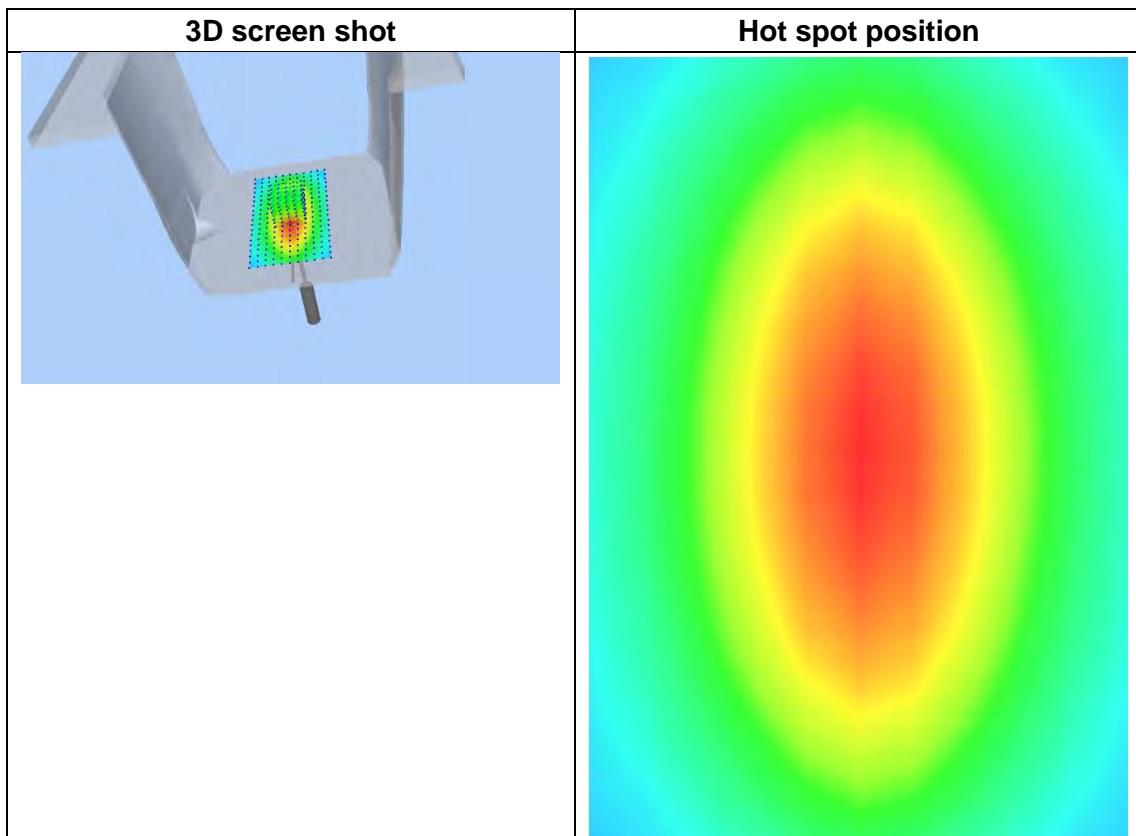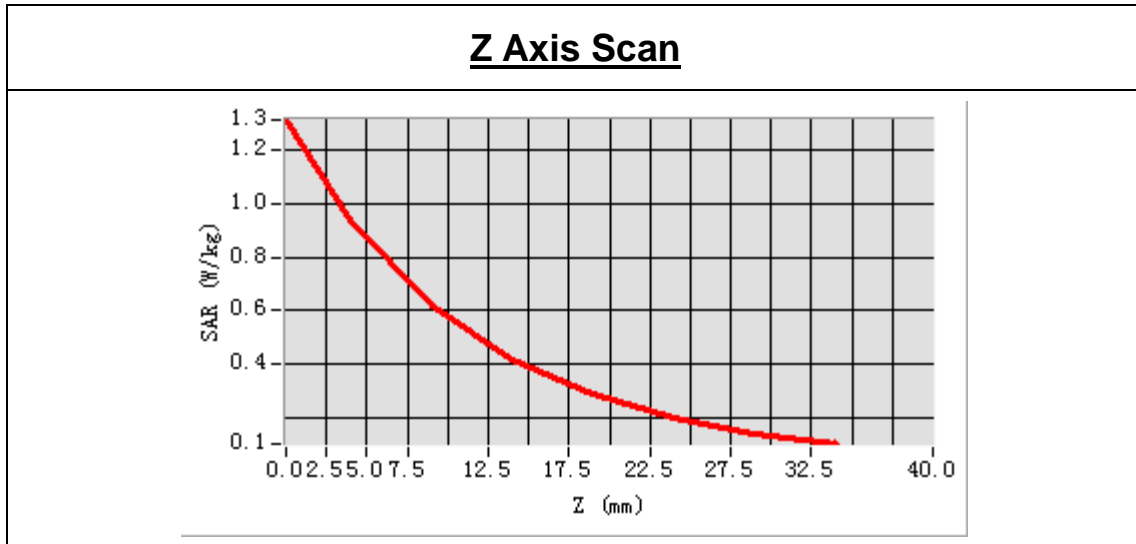


System Performance Check Data(835 MHz Head)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.27
 Measurement duration: 13 minutes 27 seconds


Experimental conditions.



Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	835MHz
Signal	CW
Frequency (MHz)	835.000000
Relative permittivity (real part)	41.823651
Conductivity (S/m)	0.896943
Power drift (%)	-0.100000
Ambient Temperature:	21.9C
Liquid Temperature:	21.2C
ConvF:	2.04
Crest factor:	1:1

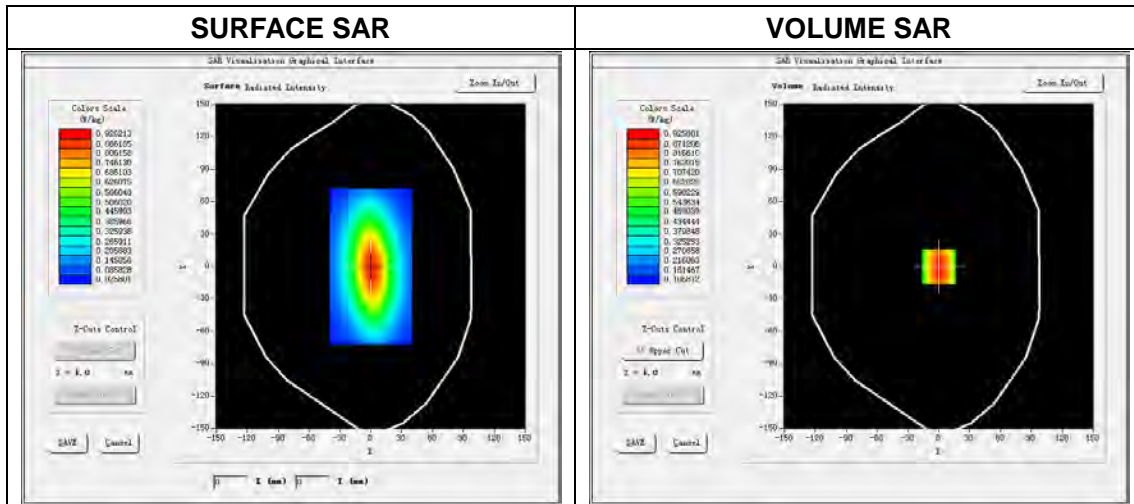

Maximum location: X=0.00, Y=0.00
 SAR Peak: 1.26 W/kg

SAR 10 g (W/Kg)	0.597177
SAR 1g (W/Kg)	0.928599

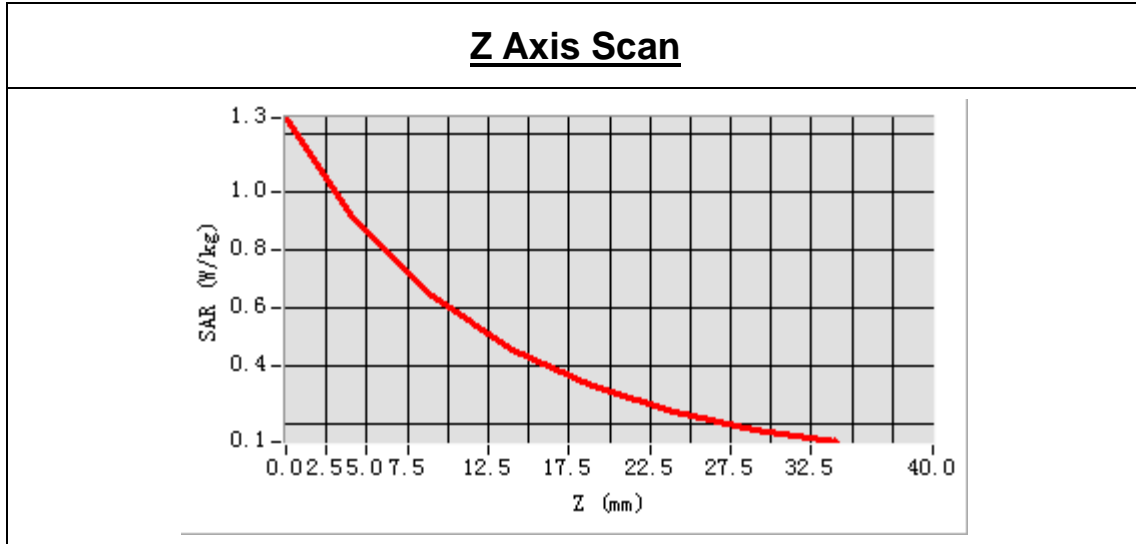

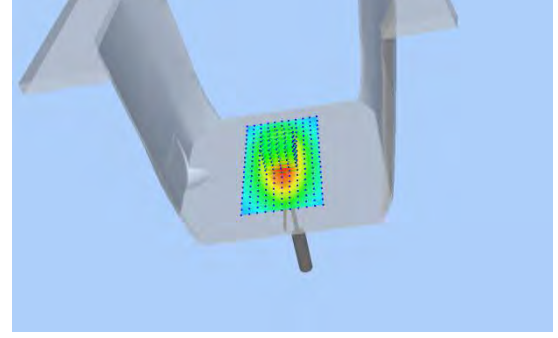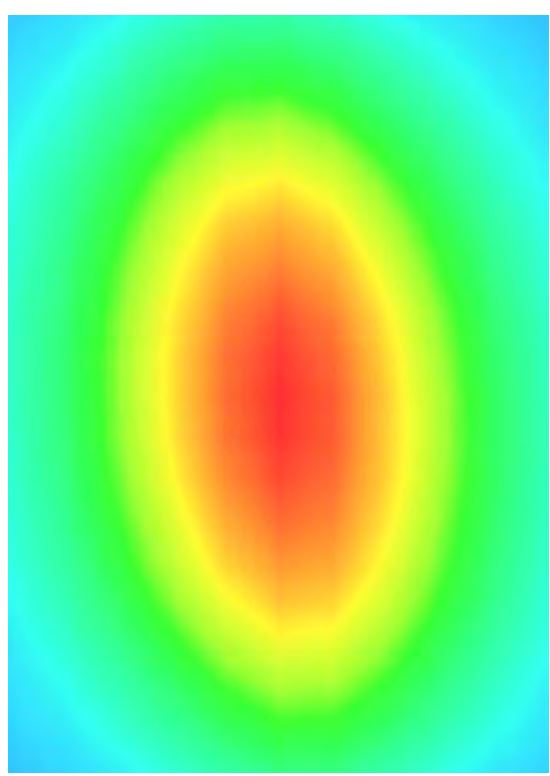
3D screen shot	Hot spot position
	

System Performance Check Data(835 MHz Body)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.28
 Measurement duration: 13 minutes 31 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	835MHz
Signal	CW
Frequency (MHz)	835.000000
Relative permittivity (real part)	55.704595
Conductivity (S/m)	0.998147
Power drift (%)	0.390000
Ambient Temperature:	22.7C
Liquid Temperature:	22.1C
ConvF:	2.12
Crest factor:	1:1

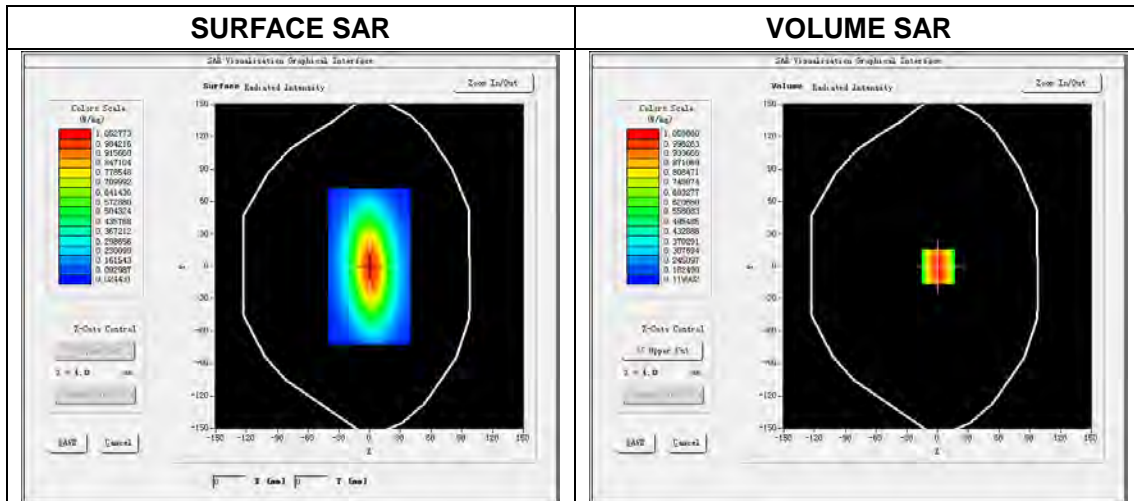

Maximum location: X=1.00, Y=0.00
 SAR Peak: 1.41 W/kg

SAR 10 g (W/Kg)	0.639168
SAR 1g (W/Kg)	1.013364

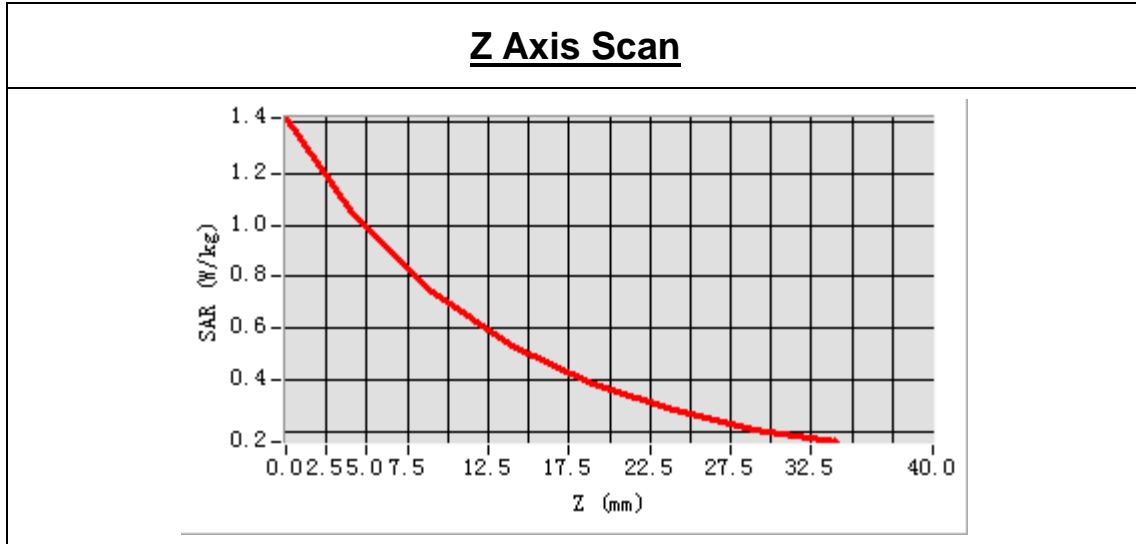


3D screen shot	Hot spot position

System Performance Check Data(1800MHz Head)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.22
 Measurement duration: 13 minutes 25 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	1800MHz
Signal	CW
Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.611029
Conductivity (S/m)	1.433274
Power drift (%)	0.260000
Ambient Temperature:	22.6C
Liquid Temperature:	22.1C
ConvF:	2.04
Crest factor:	1:1

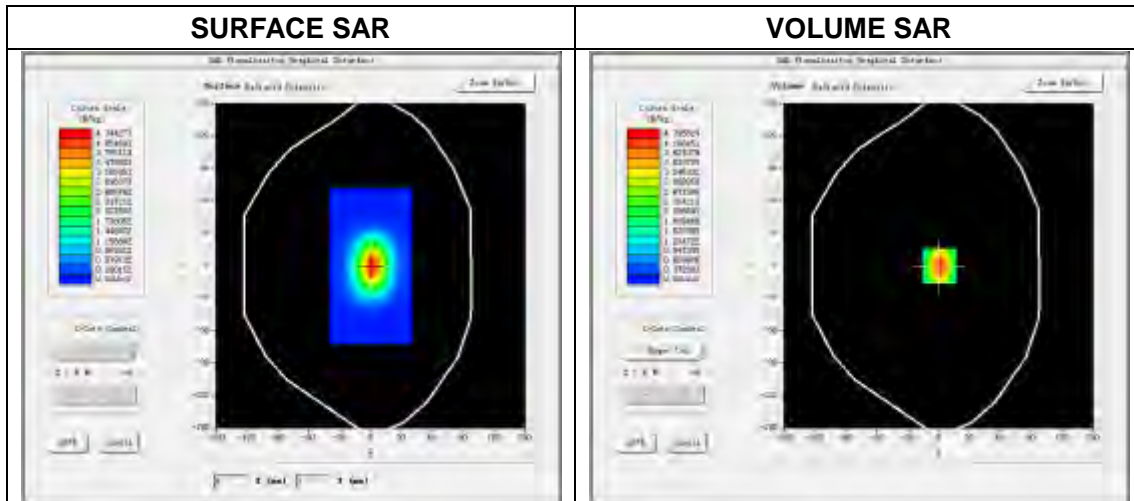

Maximum location: X=0.00, Y=0.00
 SAR Peak: 6.41 W/kg

SAR 10 g (W/Kg)	2.034125
SAR 1g (W/Kg)	3.922053

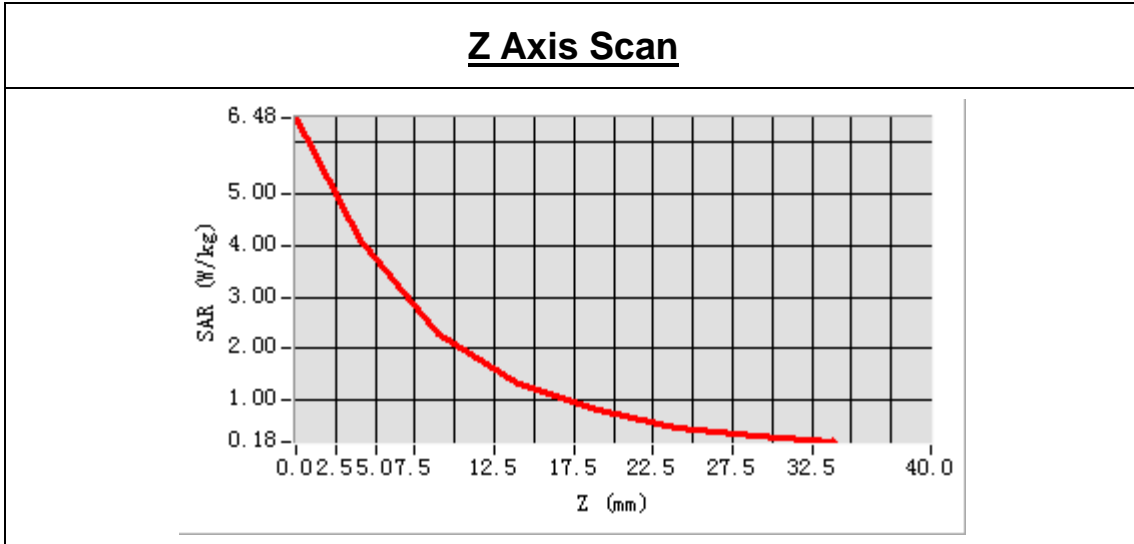


3D screen shot	Hot spot position

System Performance Check Data(1800MHz)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.22
 Measurement duration: 14 minutes 46 seconds



Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	1800MHz
Signal	CW
Frequency (MHz)	1800.000000
Relative permittivity (real part)	53.562143
Conductivity (S/m)	1.513568
Power drift (%)	0.310000
Ambient Temperature:	22.6C
Liquid Temperature:	22.1C
ConvF:	2.08
Crest factor:	1:1

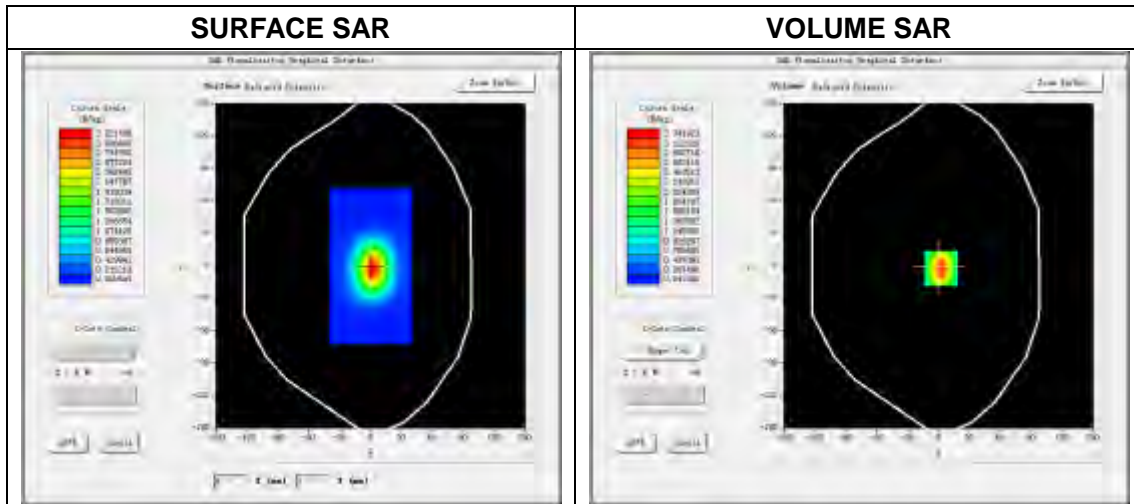

Maximum location: X=2.00, Y=2.00
 SAR Peak: 6.86 W/kg

SAR 10 g (W/Kg)	2.087632
SAR 1g (W/Kg)	4.010863

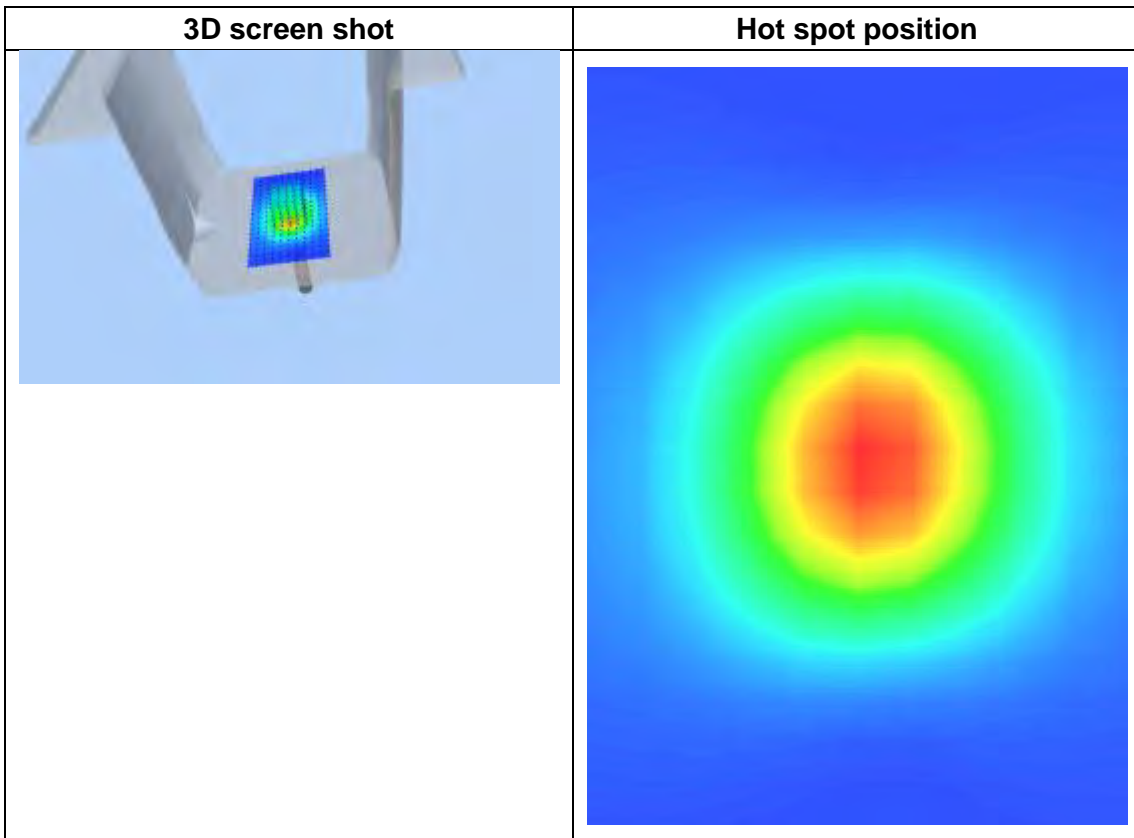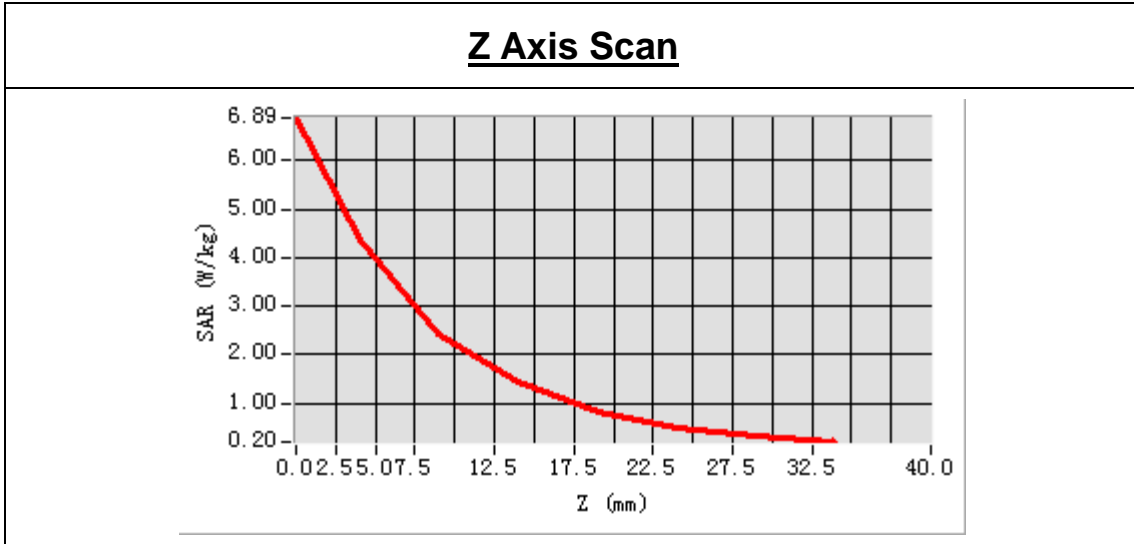


System Performance Check Data(1900MHz Head)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.24
 Measurement duration: 13 minutes 20 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	1900MHz
Signal	CW
Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.802471
Conductivity (S/m)	1.413474
Power drift (%)	1.150000
Ambient Temperature:	21.8C
Liquid Temperature:	21.4C
ConvF:	2.35
Crest factor:	1:1

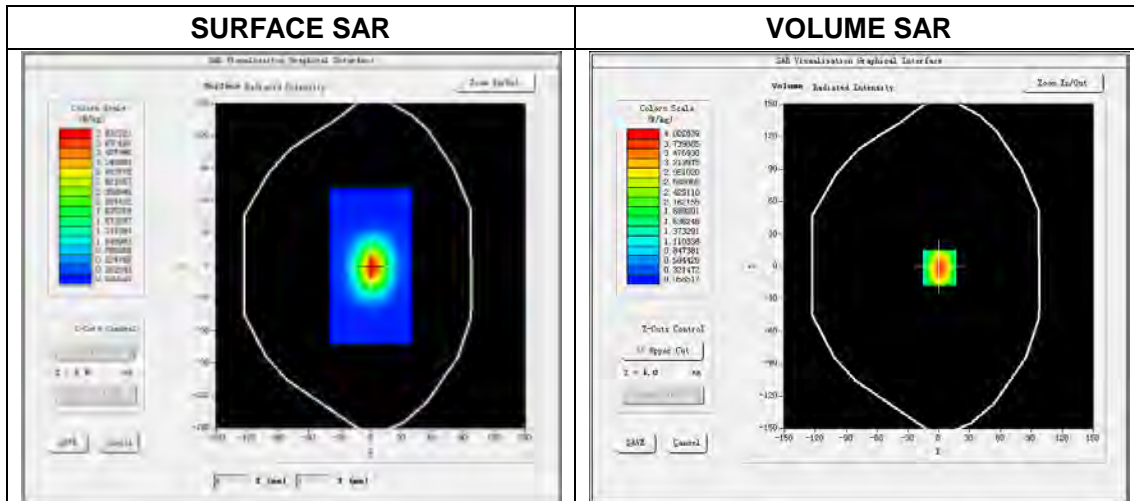

Maximum location: X=1.00, Y=0.00
 SAR Peak: 6.58W/kg

SAR 10g (W/Kg)	1.974124
SAR 1g (W/Kg)	3.910074

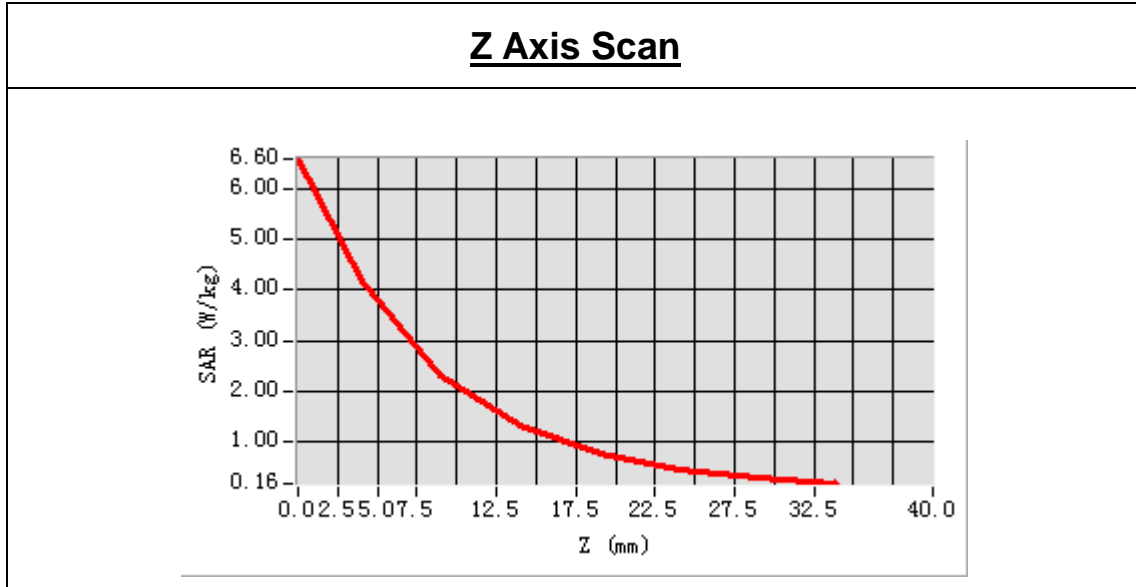


3D screen shot	Hot spot position

System Performance Check Data(1900MHz Body)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.23
 Measurement duration: 13 minutes 26 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	1900MHz
Signal	CW
Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.763122
Conductivity (S/m)	1.540021
Power drift (%)	0.370000
Ambient Temperature:	21.9C
Liquid Temperature:	21.4C
ConvF:	2.42
Crest factor:	1:1

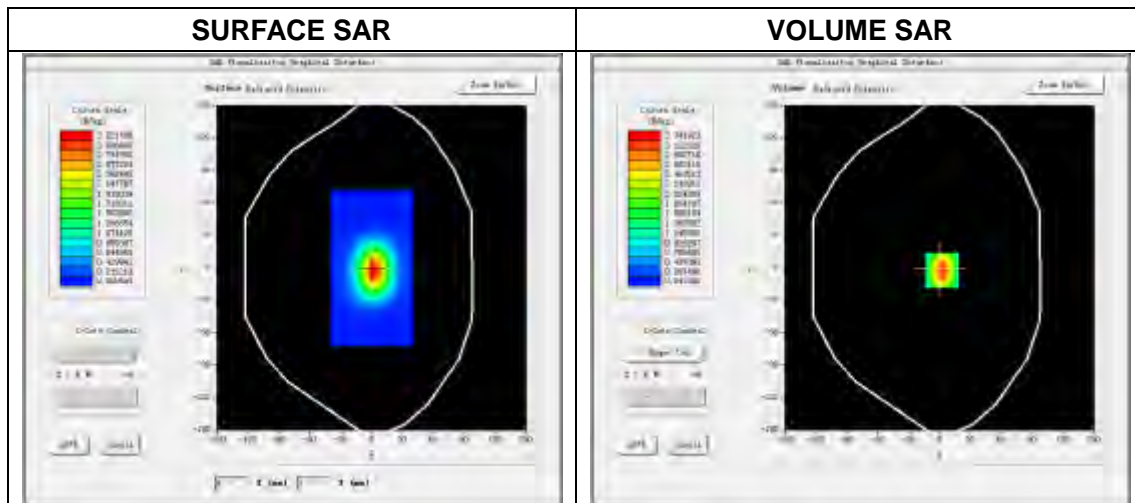

Maximum location: X=2.00, Y=-2.00
 SAR Peak: 6.92W/kg

SAR 10g (W/Kg)	1.985632
SAR 1g (W/Kg)	4.115863

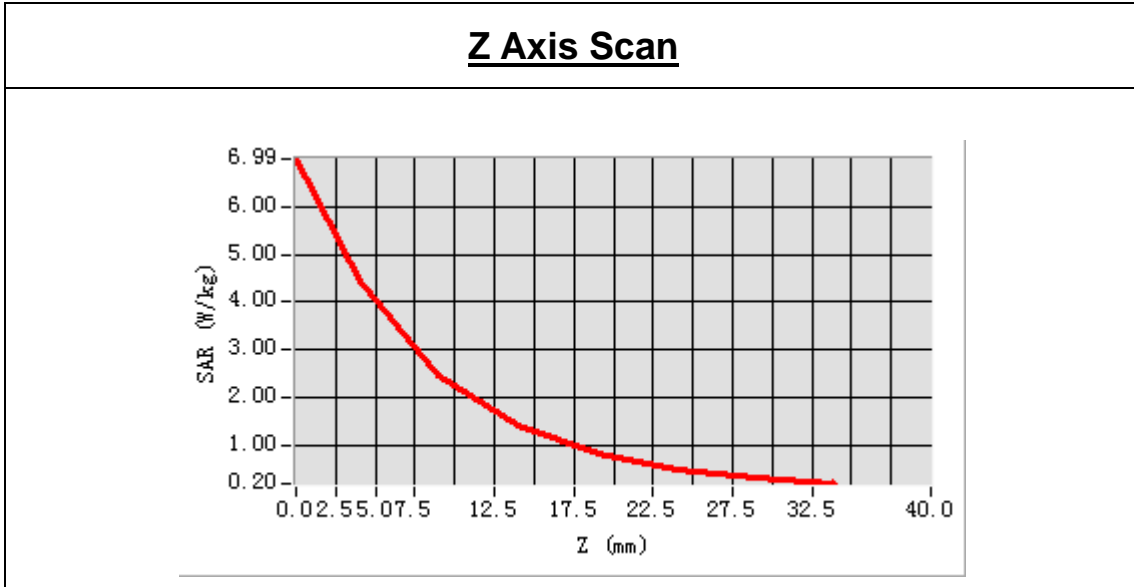


3D screen shot	Hot spot position

System Performance Check Data(2450MHz Head)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.25
 Measurement duration: 13 minutes 38 seconds


Experimental conditions.



Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	2450MHz
Signal	CW
Frequency (MHz)	2450.000000
Relative permittivity (real part)	37.970052
Conductivity (S/m)	1.883262
Power drift (%)	-1.200000
Ambient Temperature:	22.3C
Liquid Temperature:	21.5C
ConvF:	2.47
Crest factor:	1:1

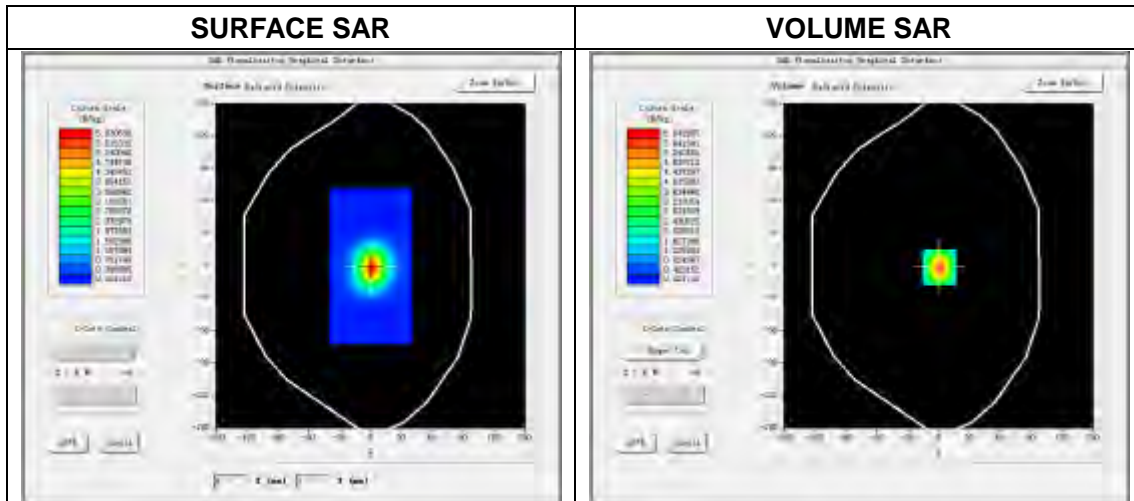

Maximum location: X=1.00, Y=-1.00
 SAR Peak: 9.56W/kg

SAR 10g (W/Kg)	2.287836
SAR 1g (W/Kg)	5.356203

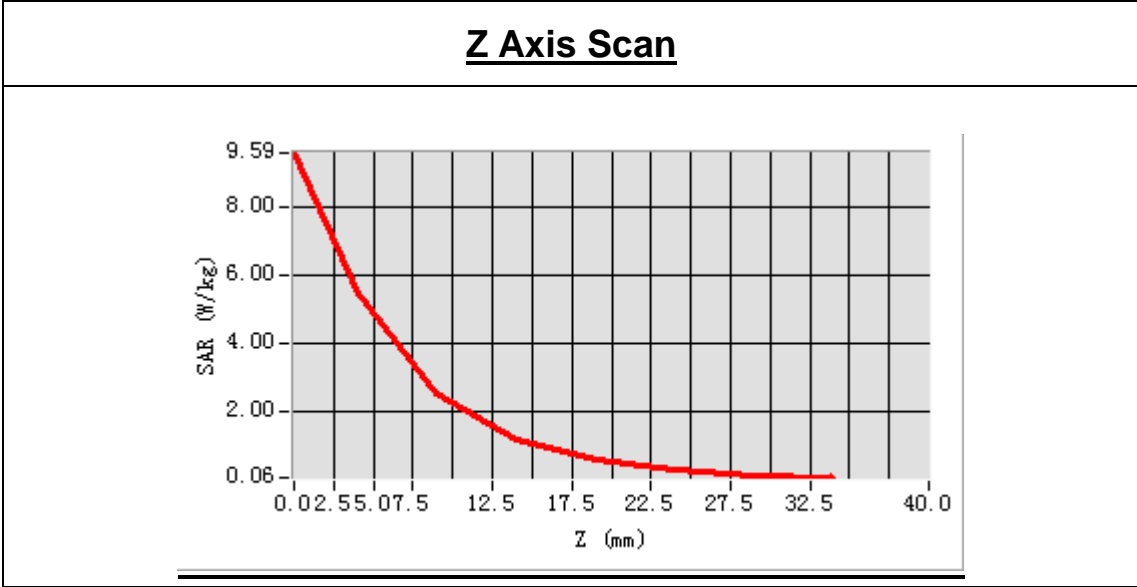

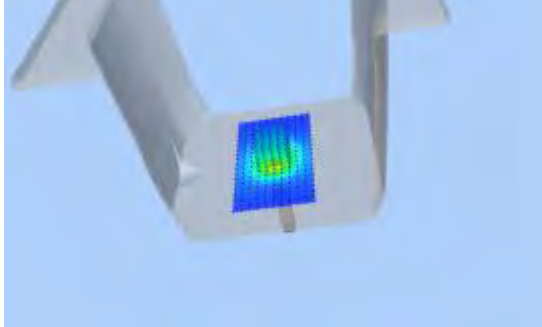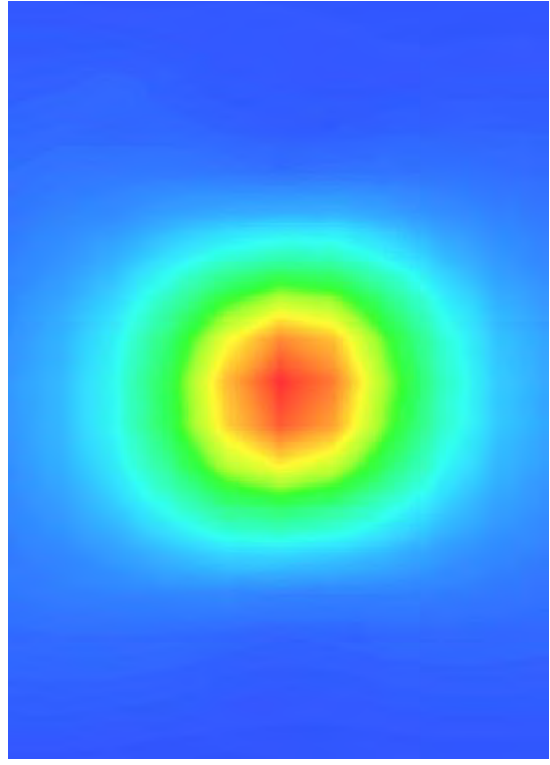
3D screen shot	Hot spot position
	

System Performance Check Data(2450MHz Body)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.26
 Measurement duration: 14 minutes 46 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	2450MHz
Signal	CW
Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.609845
Conductivity (S/m)	1.954598
Power drift (%)	0.200000
Ambient Temperature:	22.0C
Liquid Temperature:	21.1C
ConvF:	2.55
Crest factor:	1:1

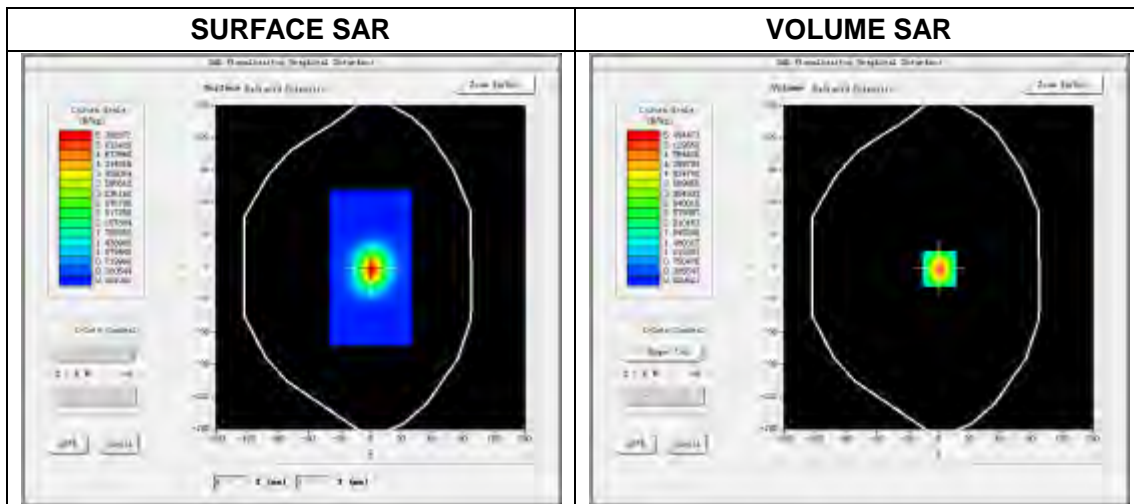

Maximum location: X=1.00, Y=-1.00
 SAR Peak: 9.68W/kg

SAR 10g (W/Kg)	2.302133
SAR 1g (W/Kg)	5.462953

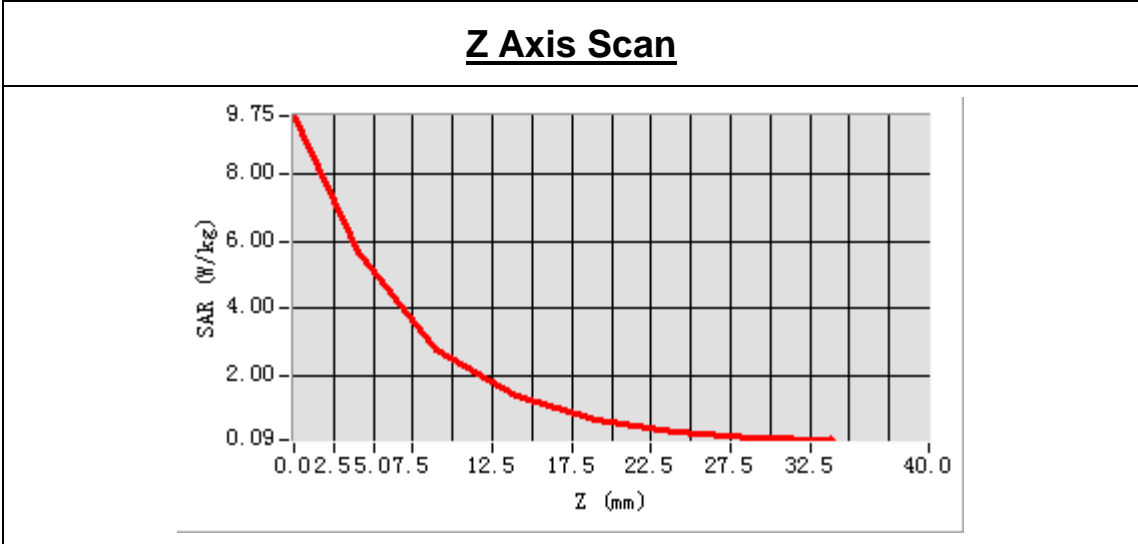


3D screen shot	Hot spot position

System Performance Check Data(2600MHz Head)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.25
 Measurement duration: 13 minutes 20 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	2600MHz
Signal	CW
Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.376951
Conductivity (S/m)	1.960794
Power drift (%)	2.250000
Ambient Temperature:	22.3C
Liquid Temperature:	21.5C
ConvF:	2.36
Crest factor:	1:1

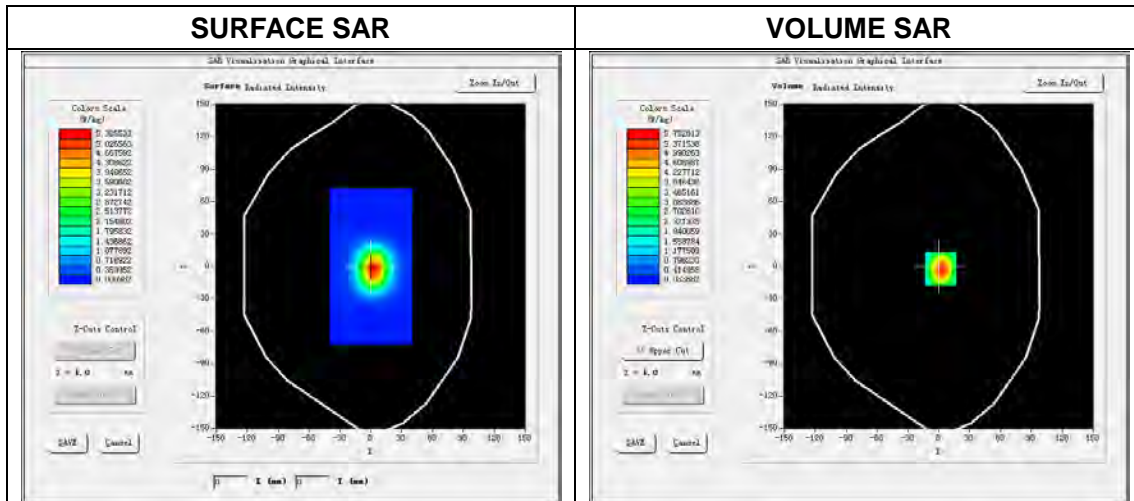

Maximum location: X=3.00, Y=1.00
 SAR Peak: 9.48W/kg

SAR 10g (W/Kg)	2.283244
SAR 1g (W/Kg)	5.358480

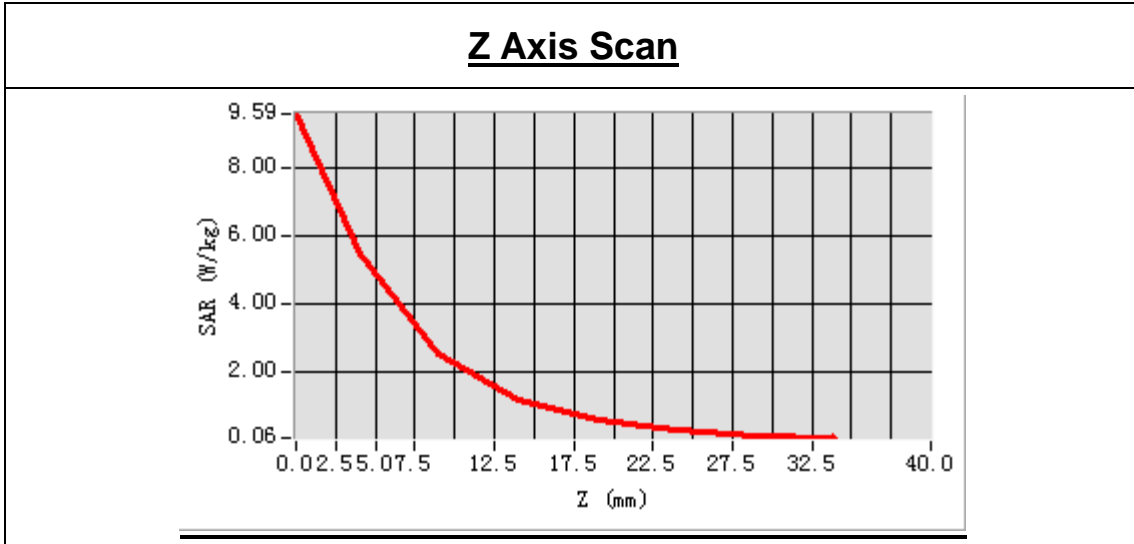


3D screen shot	Hot spot position

System Performance Check Data(2600MHz Body)

Type: Phone measurement (Complete)
 E-Field Probe: SN 34/15 SSE2 EPGO265
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016.04.21
 Measurement duration: 13 minutes 36 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	2600MHz
Signal	CW
Frequency (MHz)	2600.000000
Relative permittivity (real part)	50.480214
Conductivity (S/m)	2.133247
Power drift (%)	-1.210000
Ambient Temperature:	21.6C
Liquid Temperature:	21.0C
ConvF:	2.43
Crest factor:	1:1

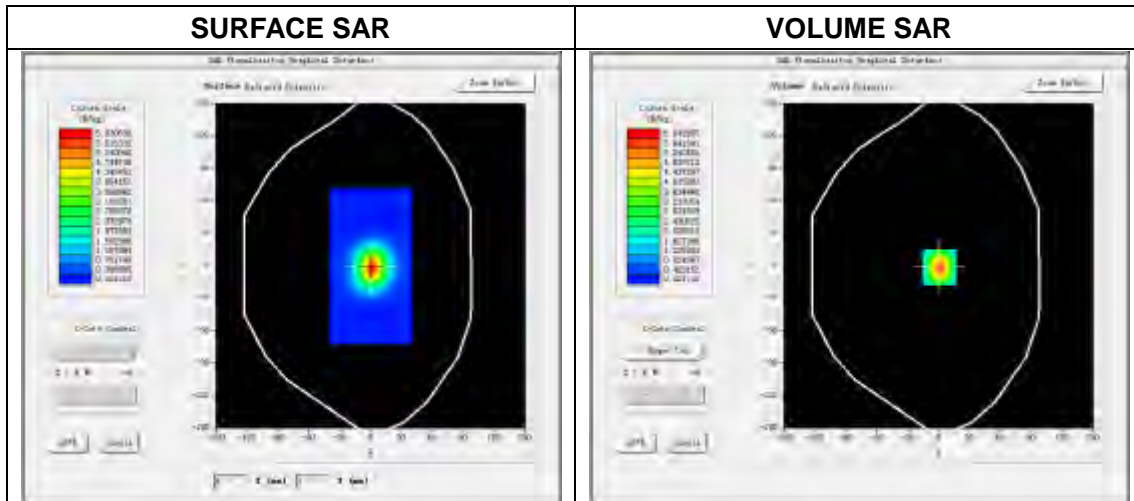

Maximum location: X=1.00, Y=-1.00
 SAR Peak: 9.81W/kg

SAR 10g (W/Kg)	2.387846
SAR 1g (W/Kg)	5.786582

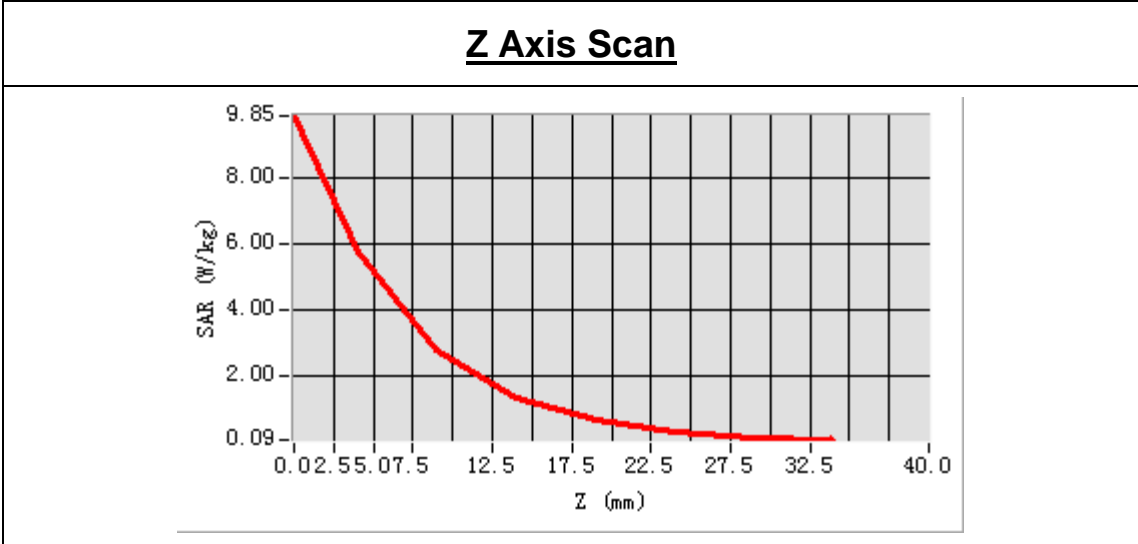


3D screen shot	Hot spot position

System Performance Check Data(5200 MHz Head)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8 mm,dy=8 mm
 Zoom scan resolution: dx=4 mm, dy=4 mm, dz=2 mm
 Date of measurement: 2016.05.02
 Measurement duration: 30 minutes 08 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	5200 MHz
Signal	CW
Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.972607
Conductivity (S/m)	4.733941
Power drift (%)	1.440000
Ambient Temperature:	22.9C
Liquid Temperature:	22.3C
ConvF:	1.81
Crest factor:	1:1

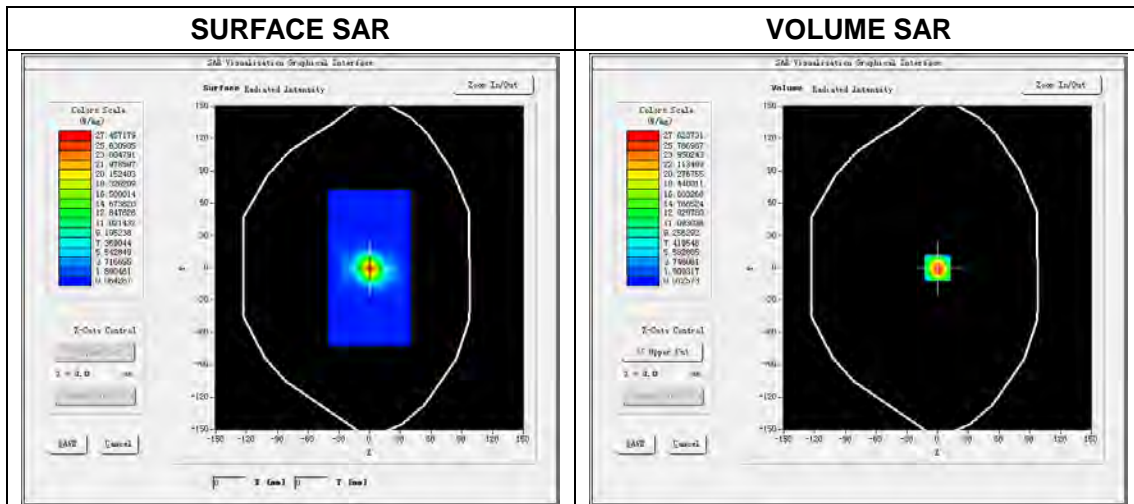

Maximum location: X=0.00, Y=0.00
 SAR Peak: 46.77 W/kg

SAR 10 g (W/Kg)	5.380974
SAR 1 g (W/Kg)	15.722962

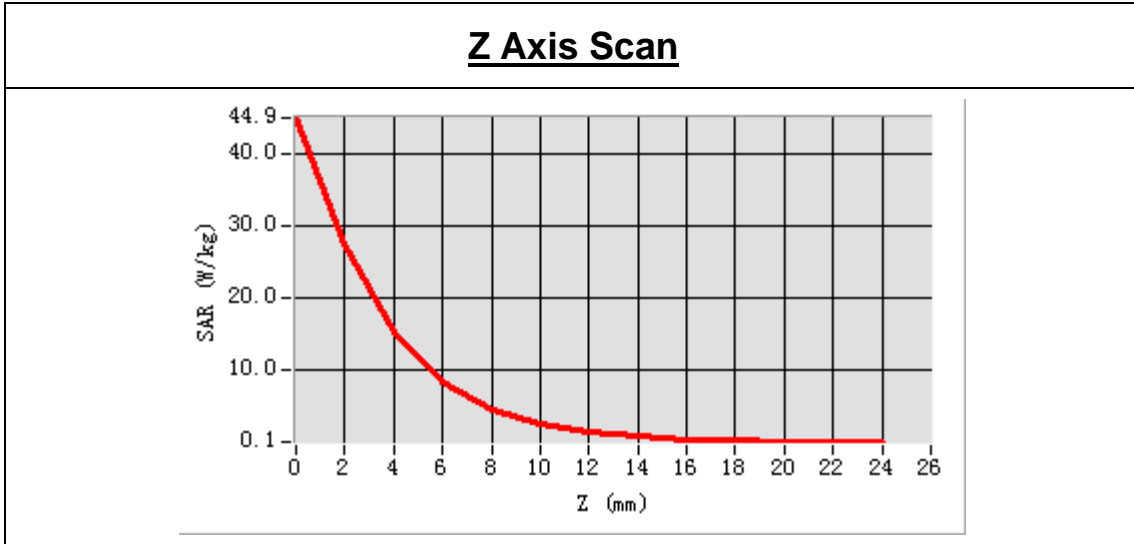


3D screen shot	Hot spot position

System Performance Check Data(5200 MHz Body)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8 mm,dy=8 mm
 Zoom scan resolution: dx=4 mm, dy=4 mm, dz=2 mm
 Date of measurement: 2016.05.03
 Measurement duration: 29 minutes 35 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	5200 MHz
Signal	CW
Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.085241
Conductivity (S/m)	5.215241
Power drift (%)	0.150000
Ambient Temperature:	22.8C
Liquid Temperature:	22.0C
ConvF:	1.85
Crest factor:	1:1

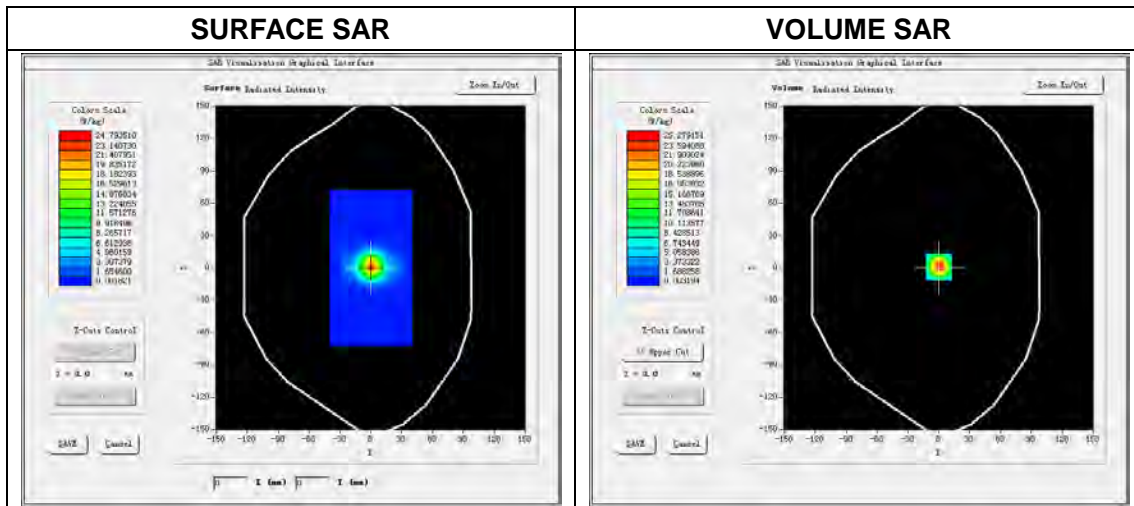

Maximum location: X=0.00, Y=0.00
 SAR Peak: 41.08 W/kg

SAR 10 g (W/Kg)	5.286824
SAR 1 g (W/Kg)	15.392051

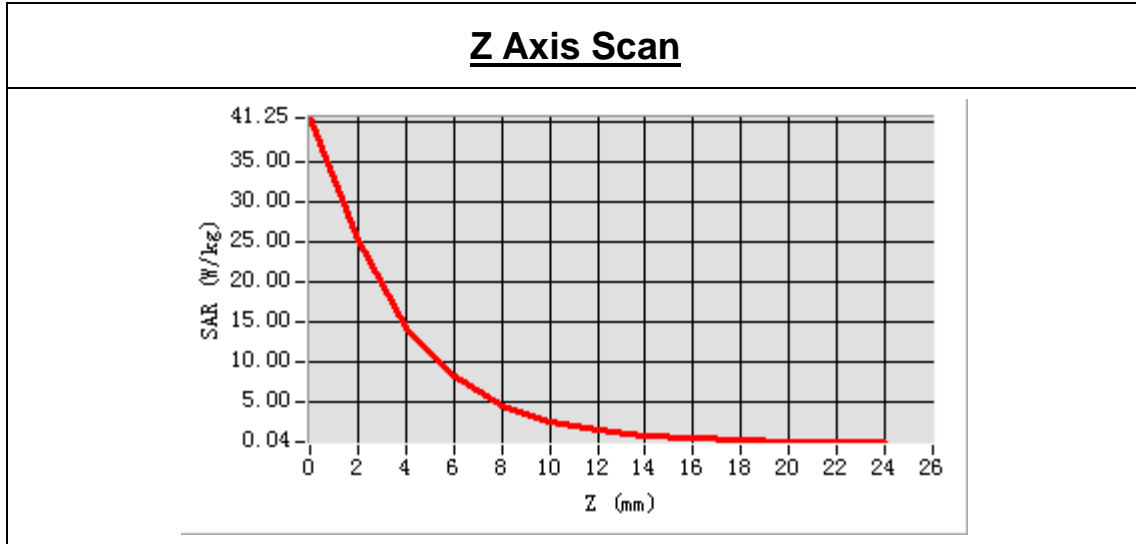


3D screen shot	Hot spot position

System Performance Check Data(5600 MHz Head)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8 mm,dy=8 mm
 Zoom scan resolution: dx=4 mm, dy=4 mm, dz=2 mm
 Date of measurement: 2016.05.02
 Measurement duration: 29 minutes 32 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	5600 MHz
Signal	CW
Frequency (MHz)	5600.000000
Relative permittivity (real part)	34.765521
Conductivity (S/m)	5.186236
Power drift (%)	0.770000
Ambient Temperature:	22.9C
Liquid Temperature:	22.3C
ConvF:	2.08
Crest factor:	1:1

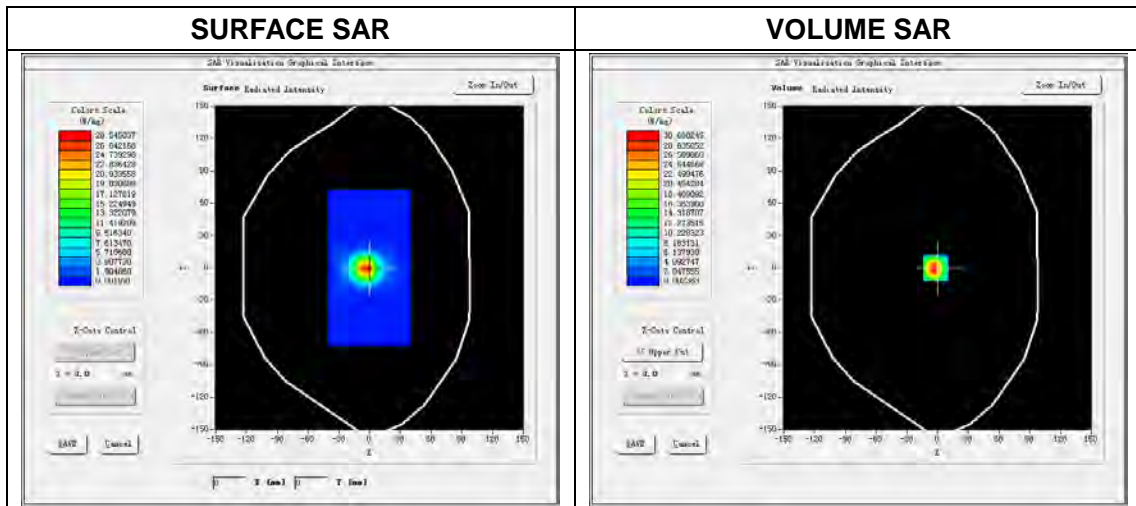

Maximum location: X=-3.00, Y=0.00
SAR Peak: 48.7 W/kg

SAR 10 g (W/Kg)	5.764423
SAR 1 g (W/Kg)	17.239689

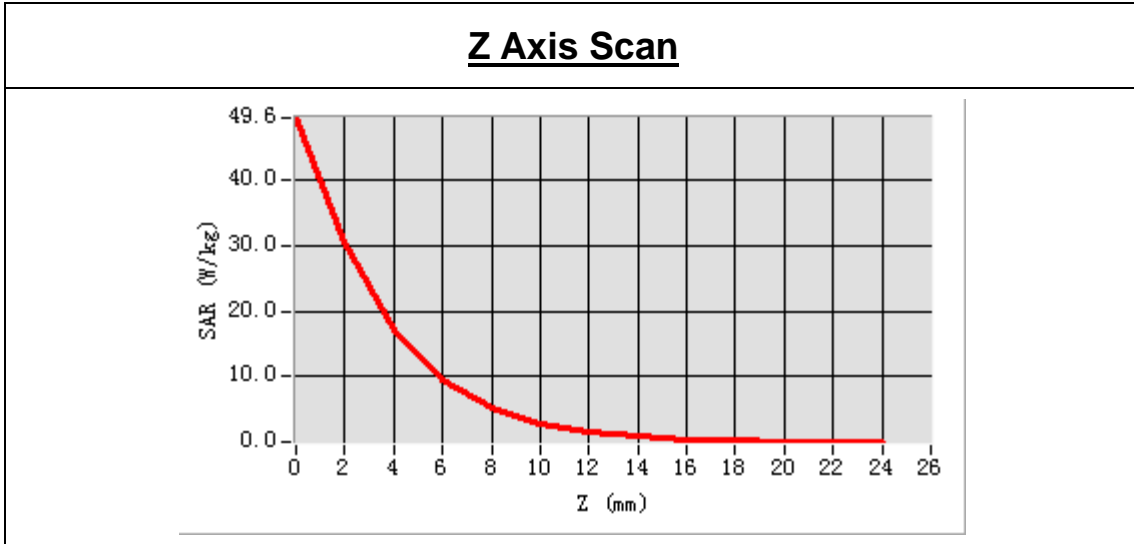


3D screen shot	Hot spot position

System Performance Check Data(5600 MHz Body)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8 mm,dy=8 mm
 Zoom scan resolution: dx=4 mm, dy=4 mm, dz=2 mm
 Date of measurement: 2016.05.03
 Measurement duration: 30 minutes 41 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	5800 MHz
Signal	CW
Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.573317
Conductivity (S/m)	5.628422
Power drift (%)	0.770000
Ambient Temperature:	22.8C
Liquid Temperature:	22.0C
ConvF:	2.15
Crest factor:	1:1

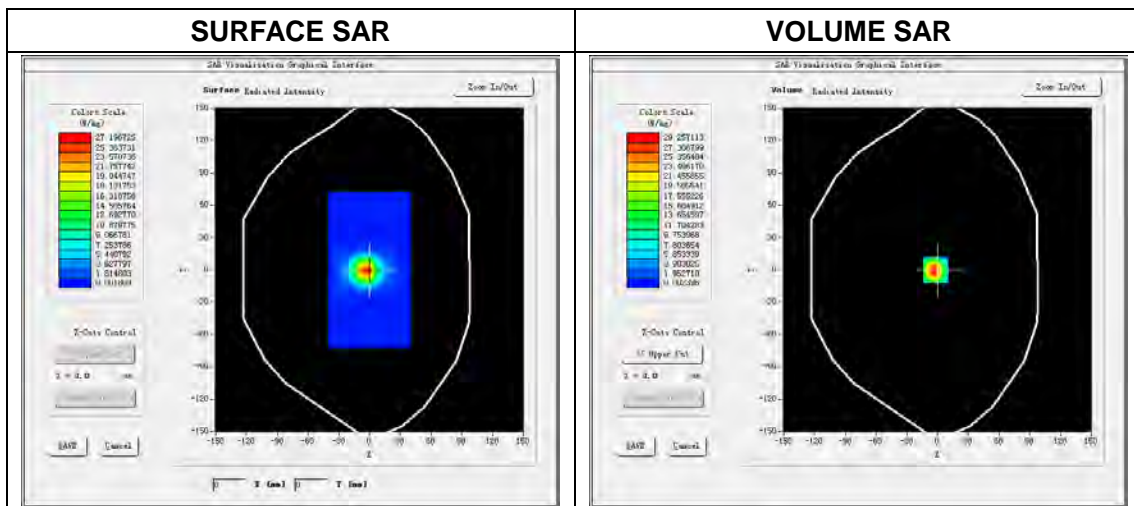

Maximum location: X=-2.00, Y=0.00
 SAR Peak: 45.77 W/kg

SAR 10 g (W/Kg)	5.622711
SAR 1 g (W/Kg)	16.390830

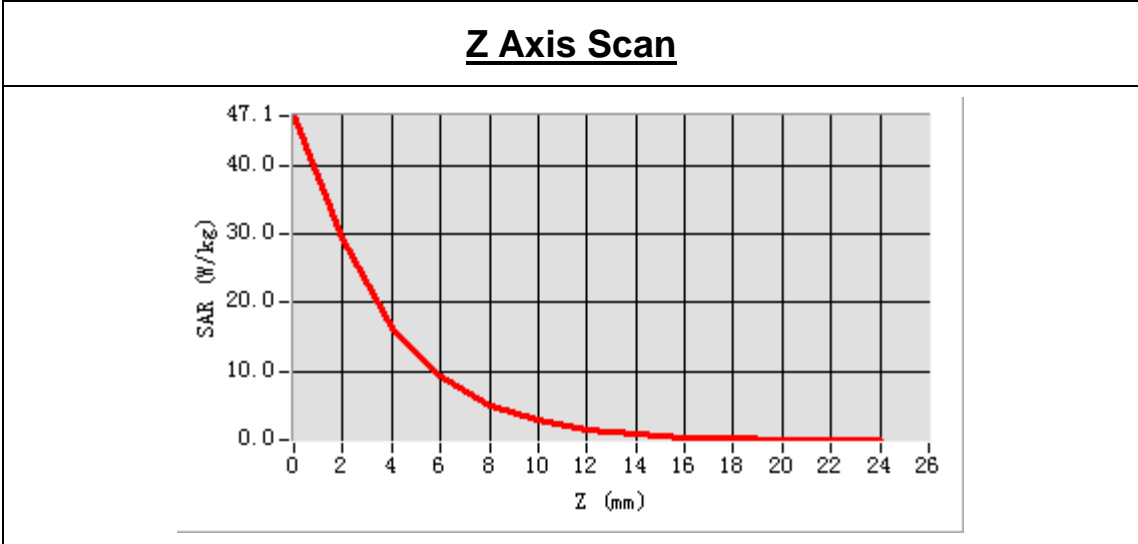


3D screen shot	Hot spot position

System Performance Check Data(5800 MHz Head)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8 mm,dy=8 mm
 Zoom scan resolution: dx=4 mm, dy=4 mm, dz=2 mm
 Date of measurement: 2016.05.02
 Measurement duration: 30 minutes 16 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	5800 MHz
Signal	CW
Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.201623
Conductivity (S/m)	5.389236
Power drift (%)	2.130000
Ambient Temperature:	22.9C
Liquid Temperature:	22.3C
ConvF:	1.88
Crest factor:	1:1

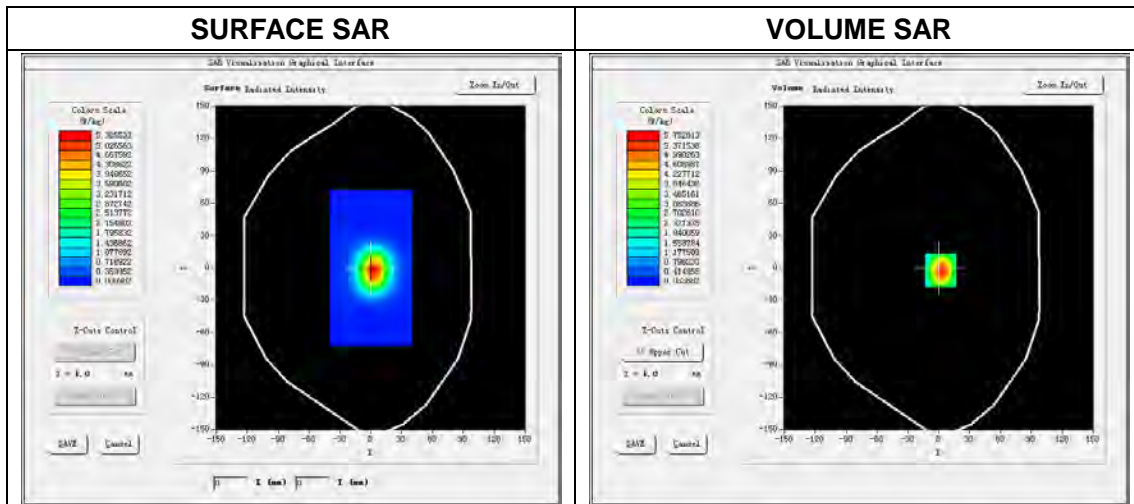

Maximum location: X=3.00, Y=1.00
 SAR Peak: 51.95 W/kg

SAR 10 g (W/Kg)	6.018365
SAR 1 g (W/Kg)	16.978480

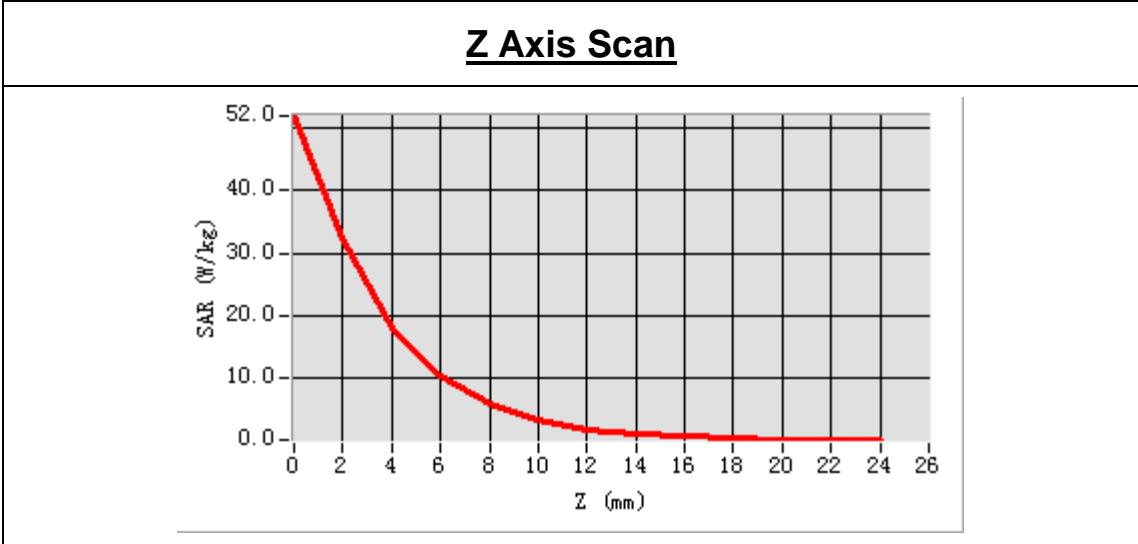


3D screen shot	Hot spot position

System Performance Check Data(5800 MHz Body)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8 mm,dy=8 mm
 Zoom scan resolution: dx=4 mm, dy=4 mm, dz=2 mm
 Date of measurement: 2016.05.03
 Measurement duration: 29 minutes 36 seconds


Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	5800 MHz
Signal	CW
Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.362468
Conductivity (S/m)	5.777851
Power drift (%)	0.190000
Ambient Temperature:	22.8C
Liquid Temperature:	22.0C
ConvF:	1.93
Crest factor:	1:1

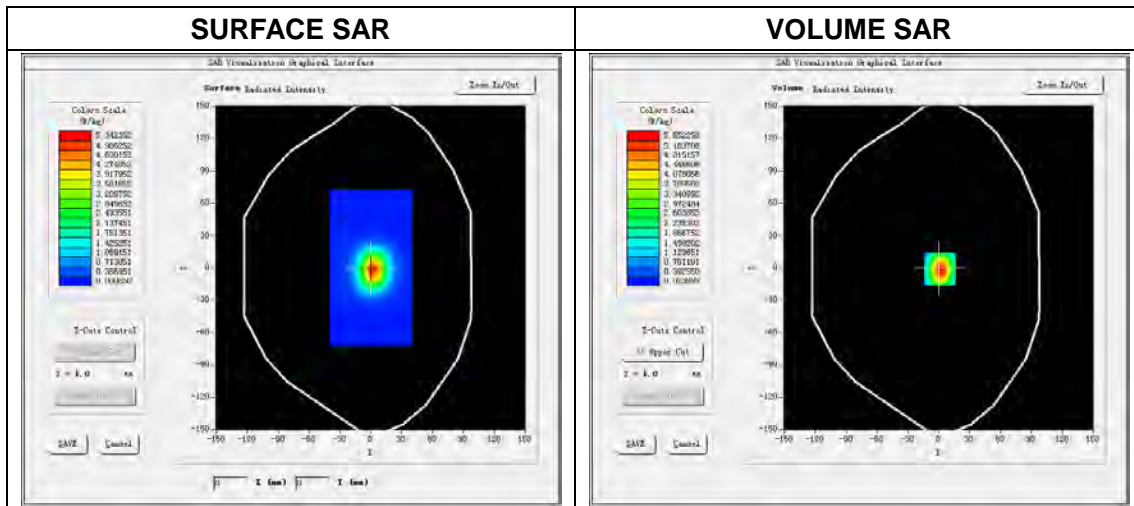

Maximum location: X=0.00, Y=0.00
 SAR Peak: 51.25 W/kg

SAR 10 g (W/Kg)	5.886241
SAR 1 g (W/Kg)	16.895898

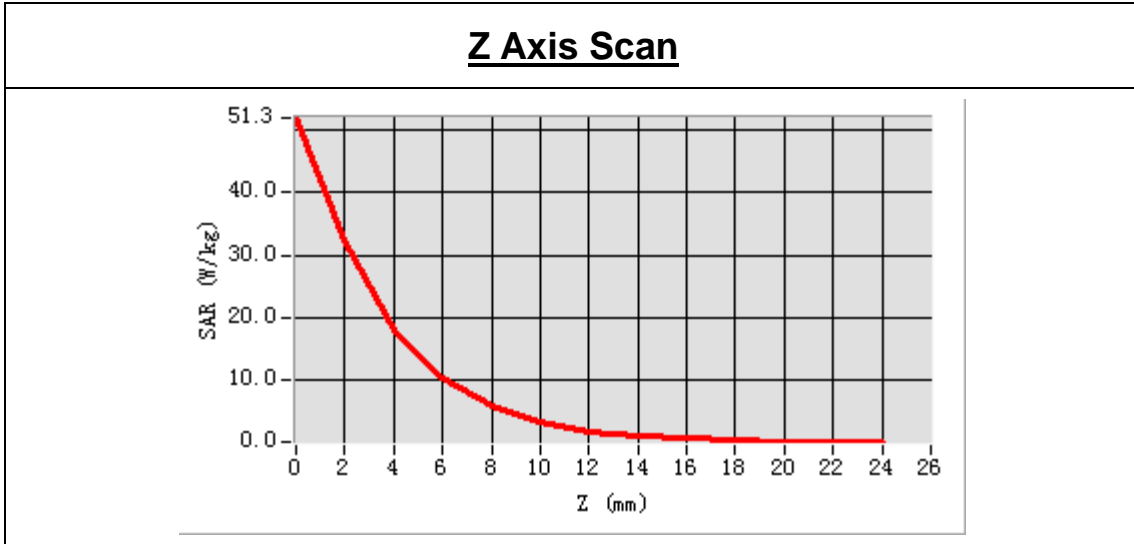

3D screen shot	Hot spot position

ANNEX C TEST DATA

Please refer the document "Test Data.pdf".

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1640119-AW.pdf".

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document "BL-SZ1640119-AS.pdf".

ANNEX F CALIBRATION REPORT

F.1 E-Field Probe



COMOSAR E-Field Probe Calibration Report

Ref : ACR.299.1.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 34/15 EPGO265

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 10/12/2015

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.299.1.15.SATU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	10/26/2015	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	10/26/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	10/26/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	10/26/2015	Initial release



TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10

Page: 3/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MVG.*



1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 34/15 EPGO265
Product Condition (new / used)	New
Frequency Range of Probe	0.45 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.192 MΩ Dipole 2: R2=0.230 MΩ Dipole 3: R3=0.205 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.299.1.15.SATU.A

Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level k = 2					12.0%

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.72	0.81	0.85

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
92	90	95

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain E-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

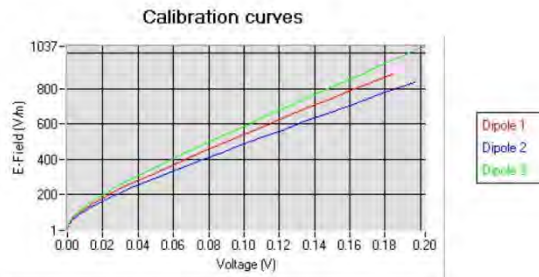


Page: 6/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



5.2 LINEARITY

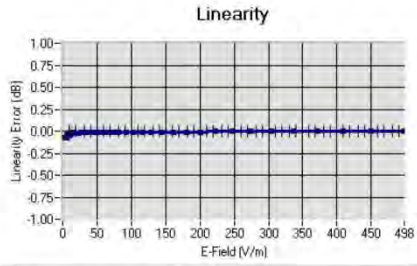

Linearity: $\pm 1.61\%$ ($\pm 0.07\text{dB}$)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL450	450	44.12	0.88	1.85
BL450	450	58.92	1.00	1.90
HL750	750	42.24	0.90	1.81
BL750	750	56.85	0.99	1.88
HL850	835	43.02	0.90	2.04
BL850	835	53.72	0.98	2.12
HL900	900	42.47	0.99	1.86
BL900	900	56.97	1.09	1.92
HL1800	1800	42.24	1.40	2.04
BL1800	1800	53.53	1.53	2.08
HL1900	1900	40.79	1.42	2.35
BL1900	1900	54.47	1.57	2.42
HL2000	2000	40.52	1.44	2.23
BL2000	2000	54.18	1.56	2.32
HL2450	2450	38.73	1.81	2.47
BL2450	2450	53.23	1.96	2.55
HL2600	2600	38.54	1.95	2.36
BL2600	2600	52.07	2.23	2.43
HL5200	5200	36.80	4.84	1.81
BL5200	5200	51.21	5.16	1.85
HL5400	5400	36.35	4.96	2.04
BL5400	5400	50.51	5.70	2.11
HL5600	5600	35.57	5.23	2.08
BL5600	5600	49.83	5.91	2.15
HL5800	5800	35.30	5.47	1.88
BL5800	5800	49.03	6.28	1.93

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/10


This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.06 dB



HL1800 MHz


- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.06 dB





HL5600 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.09 dB





6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Reference Probe	MVG	EP 94 SN 37/08	10/2015	10/2016
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.

F.2 750 MHz Dipole

**SAR Reference Dipole Calibration Report**

Ref: ACR.75.7.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 750 MHZ
SERIAL NO.: SN 25/13 DIP 0G750-253

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144

**03/16/2015***Summary:*

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF: ADEL75115.8RT1.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release

Page: 2/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 750 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID750
Serial Number	SN 25/13 DIP 0G750-253
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement.

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11


*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

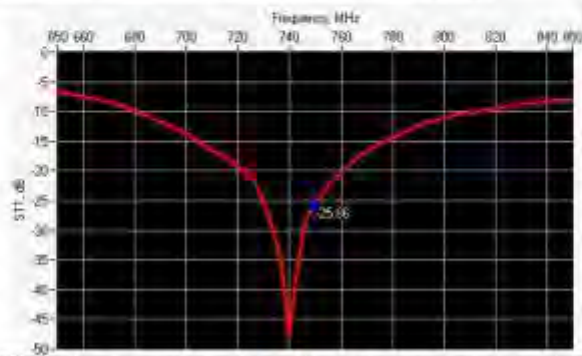

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-25.86	-20	54.5 Ω - 2.7 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

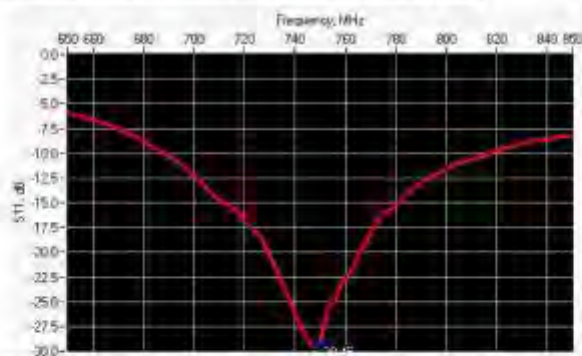

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-29.45	-20	52.6 Ω + 2.3 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: AICL75.1.03.5.011.A

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %	PASS	100.0 ±1 %	PASS	6.35 ±1 %	PASS
835	161.0 ±1 %		89.8 ±1 %		3.6 ±1 %	
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.8 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %	
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		36.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %	
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %	
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %	PASS	0.89 ±5 %	PASS
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.75.7.15.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps' : 41.8 sigma : 0.90
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49	8.60 (0.86)	5.55	5.65 (0.56)
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACL75.7.15.S&T1.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

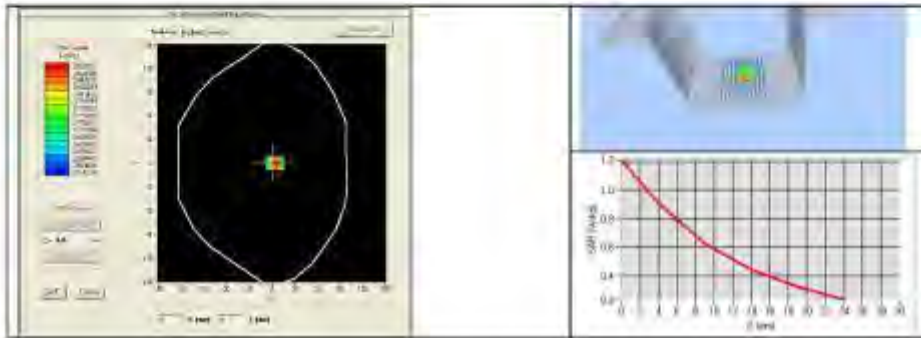

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %	PASS	0.96 ±5 %	PASS
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.85 ±5 %	

Page: 9/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACL75.115.S&T1.A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps = 56.3 sigma = 0.98
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
750	8.91 (0.89)	5.91 (0.59)

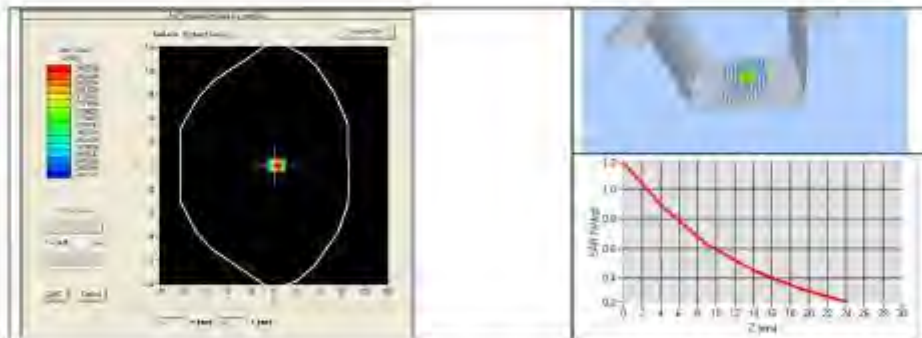

Page: 10/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY48070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

Page: 11/11

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

F.3 835MHz Dipole



SAR Reference Dipole Calibration Report

Ref : ACR.75.8.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 835 MHZ
SERIAL NO.: SN 25/13 DIP 0G835-246

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



03/16/2015

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF: AGL 75.8.15 SAR11 A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release

**TABLE OF CONTENTS**

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 835 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID835
Serial Number	SN 25/13 DIP 0G835-24G
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.


Scan Volume	Expanded Uncertainty
1 g	20.3 %



10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

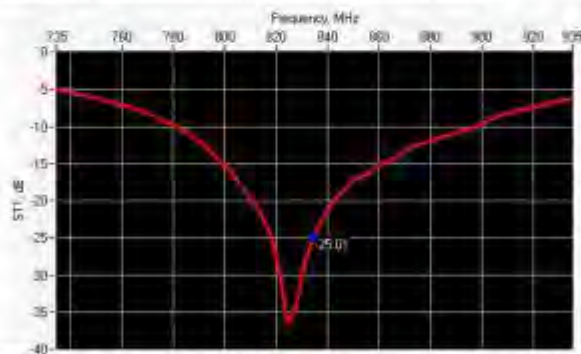

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-25.01	-20	55.9 Ω + 0.9 jΩ

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

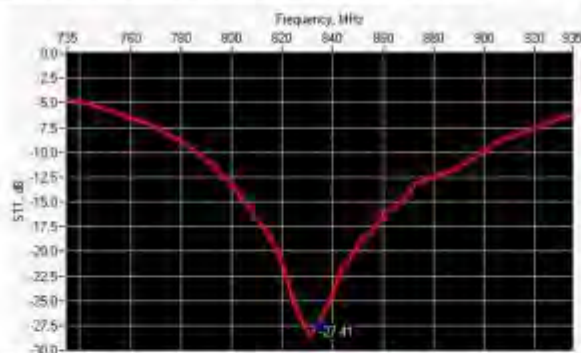

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-27.41	-20	52.1 Ω + 3.8 jΩ

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
900	420.0 ±1 %		250.0 ±1 %		6.35 ±1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %	
835	161.0 ±1 %	PASS	89.8 ±1 %	PASS	3.6 ±1 %	PASS
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.8 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %	
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		36.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %	
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %	
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.88 ±5 %	
835	41.5 ±5 %	PASS	0.90 ±5 %	PASS
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: A/C/L 75.8.15.S&T/J.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.92 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm); within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 2009 SAM71
Probe	SN 18711 BPG122
Liquid	Head Liquid Values: eps = 42.1 sigma = 0.92
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm /dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56	9.61 (0.98)	6.22	6.34 (0.83)
900	10.9		6.98	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACL75.8.15.S&TJ.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

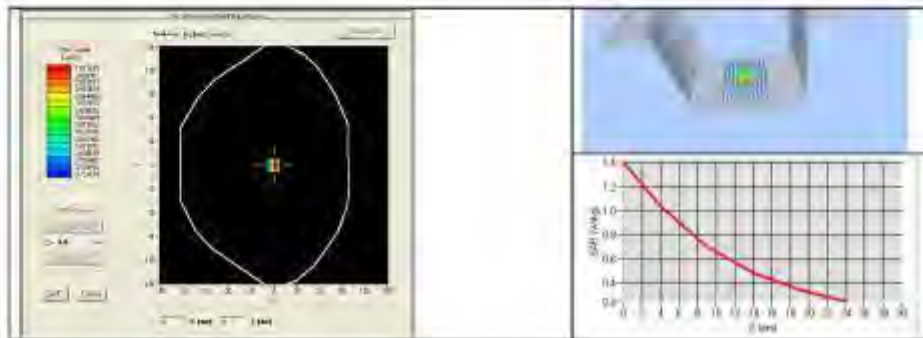

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %	PASS	0.97 ±5 %	PASS
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.85 ±5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACL75.8.15.S&T/A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps = 53.8 sigma = 0.98
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8mm/dz=5mm
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
835	10.53 (1.05)	6.89 (0.69)

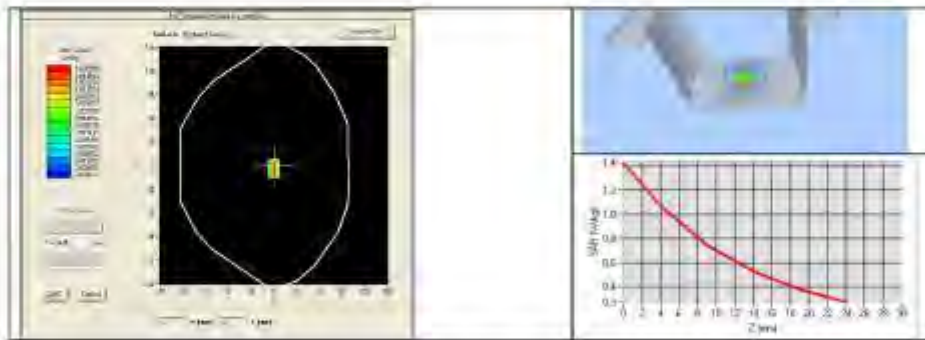

Page: 10/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY48070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

F.4 1800MHz Dipole



SAR Reference Dipole Calibration Report

Ref: ACR.75.10.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 1800 MHZ
SERIAL NO.: SN 25/13 DIP 1G800-248

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



03/16/2015

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACS-75-10-13-S&IT/A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Checked by :</i>	Jerôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release

Page: 2/11

*This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MVG.*



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 1800 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID1800
Serial Number	SN 25/13 DIP 1G800-248
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement.

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11


*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

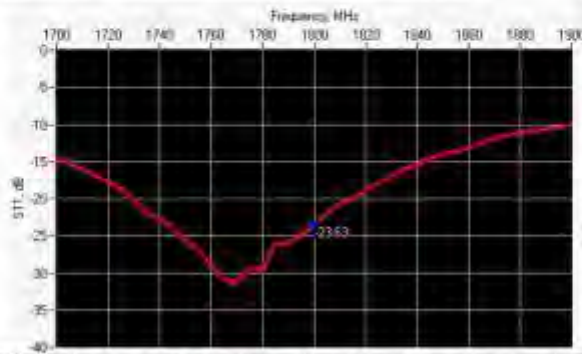

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1800	-23.63	-20	45.1 Ω + 4.0 jΩ

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

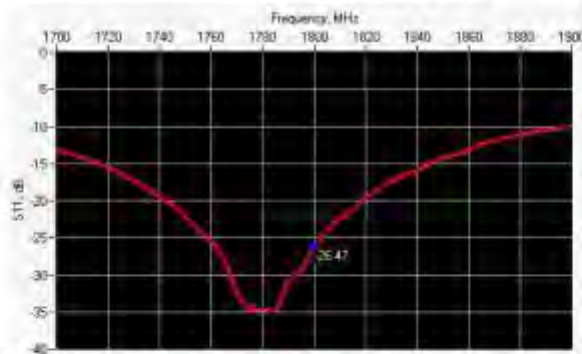

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1800	-26.47	-20	45.5 Ω - 0.3 jΩ

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 ± 1 %		250.0 ± 1 %		6.35 ± 1 %	

Page: 6/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACS-75-10-03-S&T/A

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %	
835	161.0 ±1 %		89.8 ±1 %		3.6 ±1 %	
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.8 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %	PASS	41.7 ±1 %	PASS	3.6 ±1 %	PASS
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		36.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %	
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %	
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACS-75-10-13-S&T/A

1800	40.0 ±5 %	PASS	1.40 ±5 %	PASS
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.95 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps = 41.1 sigma = 1.39
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	1800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4	38.72 (3.87)	20.1	20.37 (2.04)

Page: 8/11


This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.75.10.15.S&T1.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

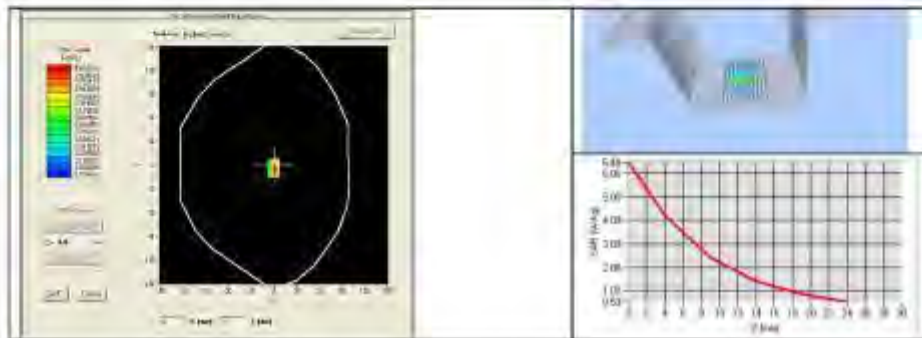

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %	PASS	1.52 ±5 %	PASS
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.85 ±5 %	

Page: 9/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR-15-10-15-S&T/A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps = 53.0 sigma = 1.52
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	1800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
1800	40.42 (4.04)	21.53 (2.15)

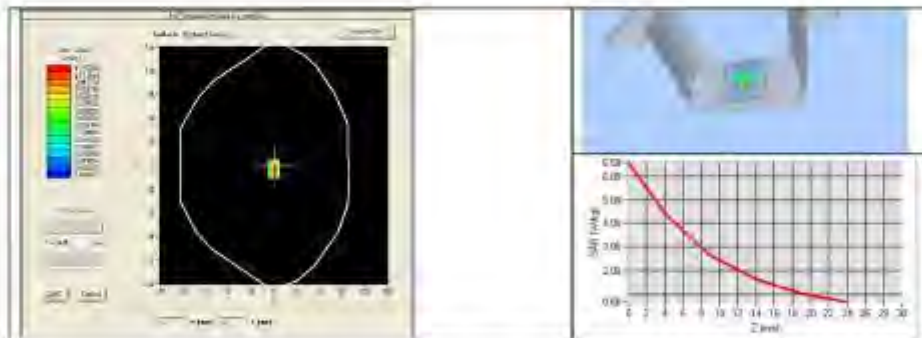

Page: 10/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY48070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

F.5 1900MHz Dipole

**SAR Reference Dipole Calibration Report**

Ref: ACR.75.11.15.SATII.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 1900 MHZ
SERIAL NO.: SN 25/13 DIP 1G900-249

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



03/16/2015

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-75.11.15.B&TU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CE/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 1900 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID1900
Serial Number	SN 25/13 DIP 1G900-249
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CE/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11


*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

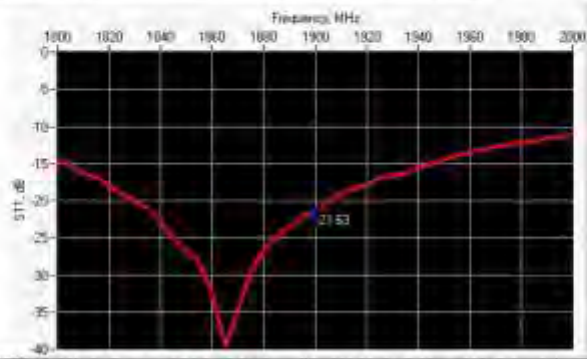

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1900	-21.63	-20	53.9 Ω + 7.7 jΩ

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

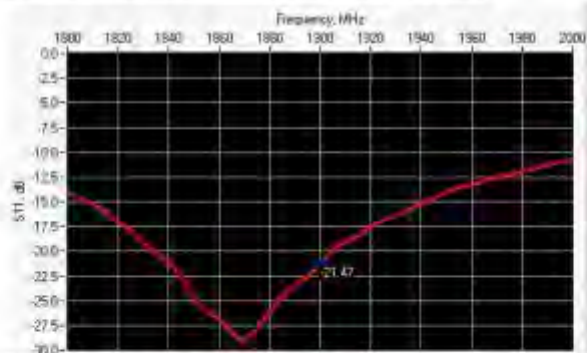

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1900	-21.47	-20	48.9 Ω + 8.4 jΩ

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 ±1 %		250.0 ±1 %		6.35 ±1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-75.11.15.B&TU.A

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %
835	161.0 ±1 %		89.8 ±1 %		3.6 ±1 %
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %
1750	75.2 ±1 %		42.8 ±1 %		3.6 ±1 %
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %
1900	68.0 ±1 %	PASS	39.5 ±1 %	PASS	3.6 ±1 %
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %
2100	61.0 ±1 %		35.7 ±1 %		3.6 ±1 %
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.88 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-75.11.15.B&TJ.A

1800	-40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %	PASS	1.40 ±5 %	PASS
1950	-40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.92 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 2009 SAM71
Probe	SN 18/11 BPG122
Liquid	Head Liquid Values: eps = 40.9 sigma = 1.43
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm /dy=8mm
Zoon Scan Resolution	dx=8mm /dy=8m /dz=5mm
Frequency	1500 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.3	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-75.11.15.S&TJ.A

1900	39.7	40.75 (4.08)	20.5	20.82 (2.08)
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

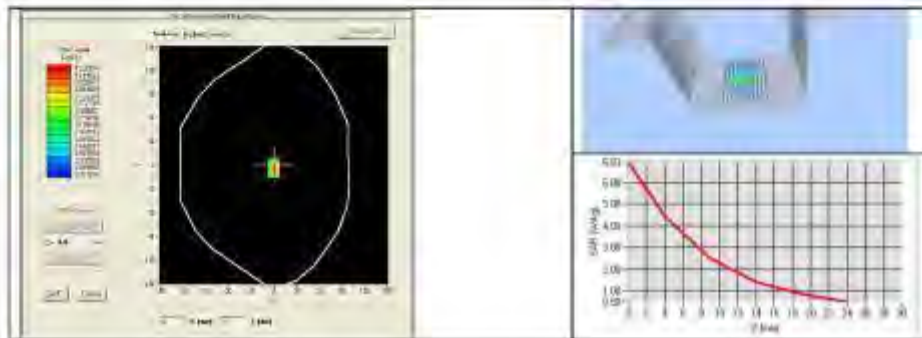

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %	PASS	1.52 ±5 %	PASS
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.85 ±5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Rev: ACR-75.11.15 S&TU A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps = 53.9 sigma = 1.55
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	1900 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
1900	12.05 (4.21)	21.87 (2.19)

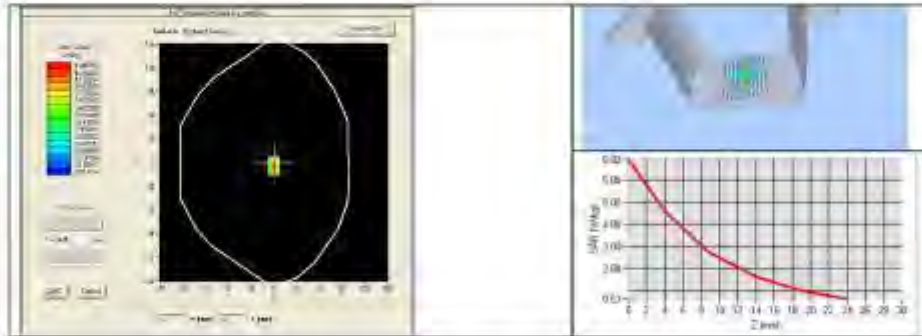

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015



SAR Reference Dipole Calibration Report

Ref: ACR.75.13.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 2450 MHZ
SERIAL NO.: SN 25/13 DIP 2G450-251

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



03/16/2015

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-70.13.03 SAR01.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CE/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2450 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2450
Serial Number	SN 25/13 DIP 2G450-251
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CE/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.


Scan Volume	Expanded Uncertainty
1 g	20.3 %



10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

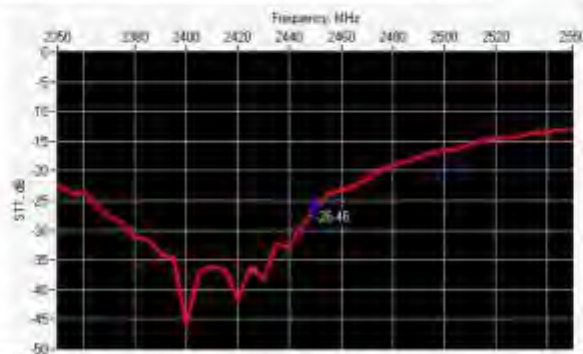

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-26.46	-20	49.3 Ω - 4.7 jΩ

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

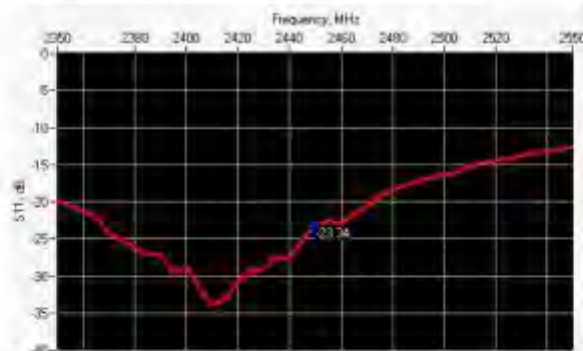

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-23.34	-20	53.4 Ω - 6.2 jΩ

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 ±1 %		250.0 ±1 %		6.35 ±1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %	
835	161.0 ±1 %		89.8 ±1 %		3.6 ±1 %	
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.8 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %	
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		35.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %	PASS	30.4 ±1 %	PASS	3.6 ±1 %	PASS
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %	
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.88 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-70.13.03 SAR(U)-A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %	PASS	1.80 ±5 %	PASS
2600	39.0 ±5 %		1.86 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.92 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 2009 SAM71
Probe	SN 18/11 BPG122
Liquid	Head Liquid Values: eps = 38.9 sigma = 1.79
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm dy=8mm
Zoon Scan Resolution	dz= 5mm/dy=5m/dx=5mm
Frequency	2450 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.3	

Page: 8/11


This document shall not be reproduced, copied in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR-75.13.15.S&TJ.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4	54.29 (5.03)	24	24.20 (2.02)
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

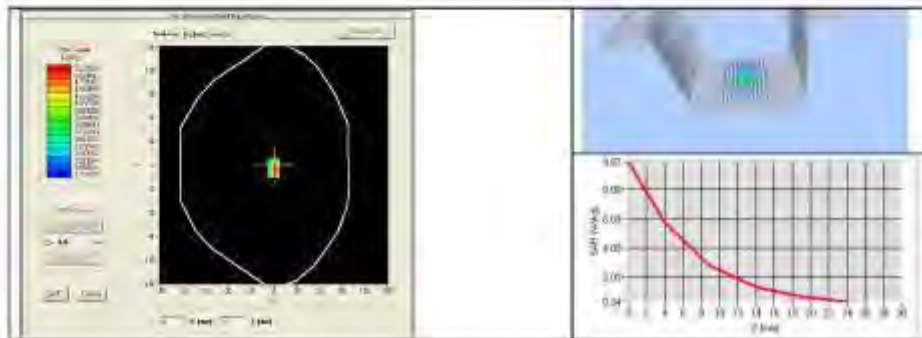

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %	PASS	1.85 ±5 %	PASS

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR-75.13.15.SAR11.A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps = 52.7 sigma = 1.94
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5m/dz=5mm
Frequency	2450 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
2450	54.70 (5.47)	24.86 (2.49)

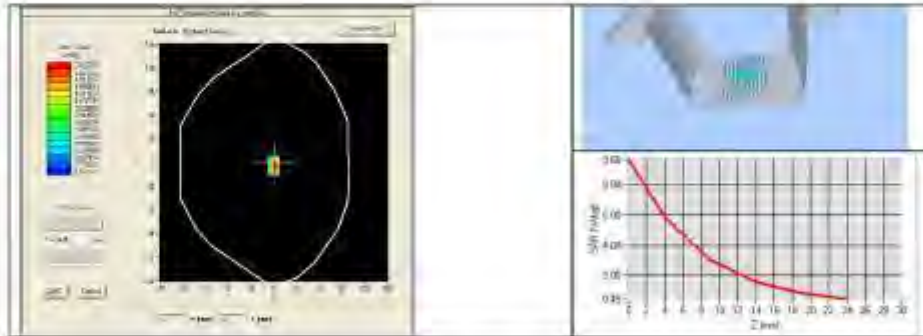

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.


8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
CCMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Kelthley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR Reference Dipole Calibration Report

Ref: ACR.75.14.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 2600 MHZ
SERIAL NO.: SN 25/13 DIP 2G600-254

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



03/16/2015

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACS.75.14.03 SAR/1/A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co.,Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release

Page: 2/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2600 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2600
Serial Number	SN 25/13 DIP 2G600-254
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement.

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.75.14.15.SATT.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

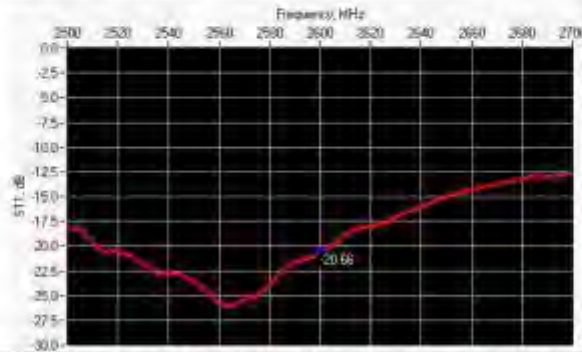

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2600	-20.66	-20	51.0 Ω + 9.4 jΩ

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

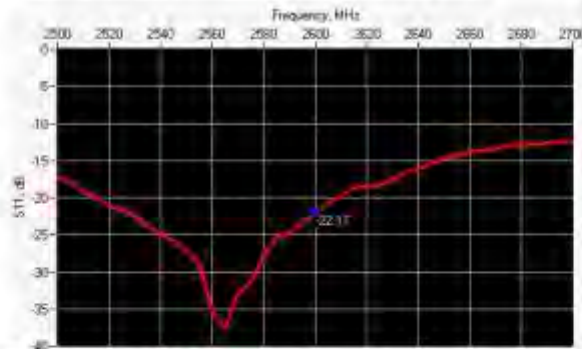

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2600	-22.17	-20	47.9 Ω + 7.5 jΩ

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 ± 1 %		250.0 ± 1 %		6.35 ± 1 %	

Page: 6/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACB.75.14.03.5.011/A

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %	
835	161.0 ±1 %		89.8 ±1 %		3.6 ±1 %	
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.8 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %	
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		36.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %	
2600	48.5 ±1 %	PASS	28.8 ±1 %	PASS	3.6 ±1 %	PASS
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACS.75.14.03 SAR/1/A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %	PASS	1.96 ±5 %	PASS
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.95 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps = 38.2 sigma = 1.93
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx= 5mm/dy=5mm/dz= 5mm
Frequency	2600 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.75.14.15.S&T1.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3	57.37 (5.74)	24.6	24.68 (2.47)
3000	63.8		25.7	
3500	67.1		25	

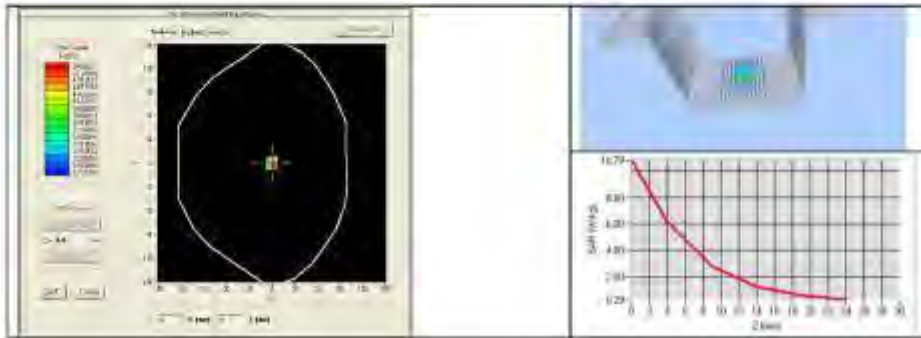

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	

Page: 9/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.75.14.15.BATT.A

2600	52.5 ±5 %	PASS	2.16 ±5 %	PASS
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps = 51.6 sigma = 2.21
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoom Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	2600 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
2600	57.62 (5.76)	25.39 (2.54)

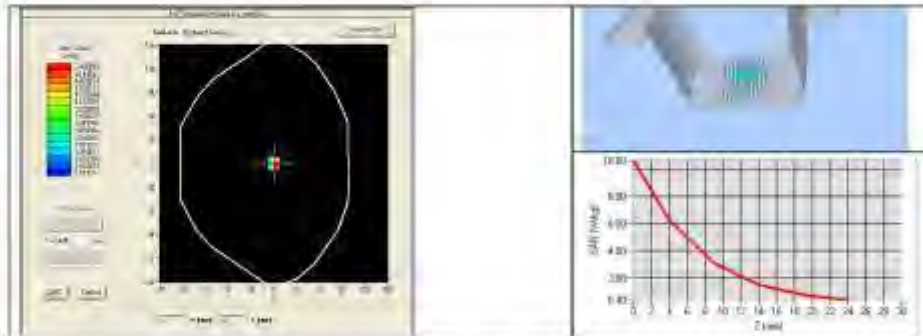

Page: 10/11

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.


8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-2009-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 16/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070681	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

Page: 11/11

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

F.8 Waveguide

**SAR Reference Waveguide Calibration Report**

Ref.: ACR.75.15.15.SATU.A

SHENZHEN BALUN TECHNOLOGY CO.,LTD.
BLOCK B, FL 1, BAISHA SCIENCE AND TECHNOLOGY
PARK, SHAHE XI ROAD,
NANSHAN DISTRICT, SHENZHEN, GUANGDONG
PROVINCE, P.R. CHINA 518055
MVG COMOSAR REFERENCE WAVEGUIDE
FREQUENCY: 5000-6000 MHZ
SERIAL NO.: SN 30/13 WGA24

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



03/16/2015

Summary:

This document presents the method and results from an accredited SAR reference waveguide calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACS.75.15.14.S&T1.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>[Signature]</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	3/16/2015	<i>[Signature]</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	3/16/2015	<i>[Signature]</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN BALUN TECHNOLOGY Co., Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	3/16/2015	Initial release



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	4
4.1	Return Loss Requirements	4
4.2	Mechanical Requirements	4
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	5
6.1	Return Loss	5
6.2	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	Measurement Result	7
7.3	Body Measurement Result	10
8	List of Equipment.....	13



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528 and CEI/IEC 62209 standards for reference waveguides used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 5000-6000 MHz REFERENCE WAVEGUIDE
Manufacturer	MVG
Model	SWG5500
Serial Number	SN 30/13 WGA24
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Waveguides are built in accordance to the IEEE 1528 and CEI/IEC 62209 standards.

4 MEASUREMENT METHOD

The IEEE 1528 and CEI/IEC 62209 standards provide requirements for reference waveguides used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The waveguide used for SAR system validation measurements and checks must have a return loss of +8 dB or better. The return loss measurement shall be performed with matching layer placed in the open end of the waveguide, with the waveguide and matching layer in direct contact with the phantom shell as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE 1528 and CEI/IEC 62209 standards specify the mechanical dimensions of the validation waveguide, the specified dimensions are as shown in Section 6.2 Figure 1 shows how the dimensions relate to the physical construction of the waveguide.

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm


5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %
10 g	20.1 %

6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS IN HEAD LIQUID

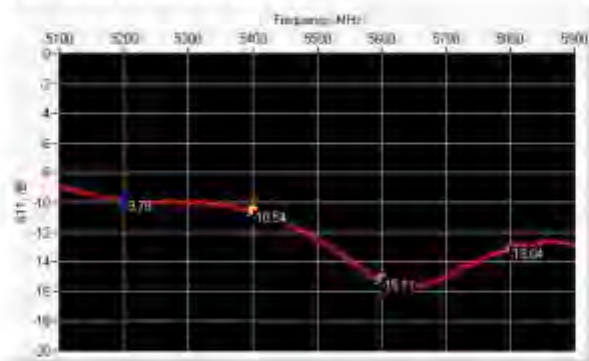

Page: 5/13

This document shall not be reproduced, stored in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACS.75.15.14.S&T1.A

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
5200	-9.78	-8	$26.6 \Omega + 9.1 j\Omega$
5400	-10.54	-8	$89.7 \Omega + 12.3 j\Omega$
5600	-15.11	-8	$38.1 \Omega - 9.8 j\Omega$
5800	-13.04	-8	$54.0 \Omega + 23.4 j\Omega$

6.2 RETURN LOSS IN BODY LIQUID

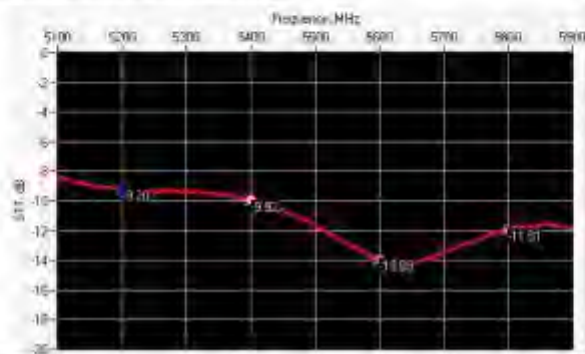

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
5200	-9.20	-8	$25.7 \Omega + 10.6 j\Omega$
5400	-9.92	-8	$95.8 \Omega + 8.8 j\Omega$
5600	-13.89	-8	$35.3 \Omega - 9.2 j\Omega$
5800	-11.91	-8	$56.0 \Omega + 27.2 j\Omega$

6.3 MECHANICAL DIMENSIONS

Frequency (MHz)	L (mm)		W (mm)		L ₂ (mm)		W ₂ (mm)		T (mm)	
	Require d	Measure d	Require d	Measure d	Require d	Measure d	Require d	Measure d	Require d	Measure d
5200	40.39 ± 0.13	PASS	20.19 ± 0.13	PASS	81.03 ± 0.13	PASS	61.98 ± 0.13	PASS	4.3*	PASS
5800	40.39 ± 0.13	PASS	20.19 ± 0.13	PASS	81.03 ± 0.13	PASS	61.98 ± 0.13	PASS	4.3*	PASS

* The tolerance for the matching layer is included in the return loss measurement.

Page: 6/13

This document shall not be reproduced, copied in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

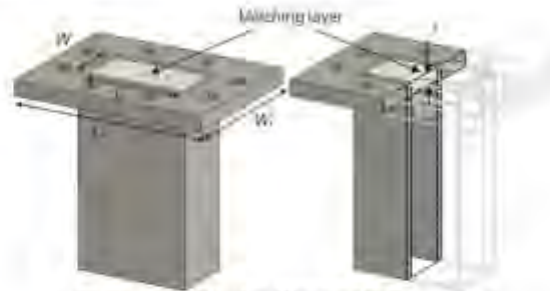


Figure 1: Validation Waveguide Dimensions

7 VALIDATION MEASUREMENT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference waveguide meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed with the matching layer placed in the open end of the waveguide, with the waveguide and matching layer in direct contact with the phantom shell.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
5000	36.2 ±10 %		4.45 ±10 %	
5100	36.1 ±10 %		4.56 ±10 %	
5200	36.0 ±10 %	PASS	4.66 ±10 %	PASS
5300	35.9 ±10 %		4.76 ±10 %	
5400	35.8 ±10 %	PASS	4.86 ±10 %	PASS
5500	35.6 ±10 %		4.97 ±10 %	
5600	35.5 ±10 %	PASS	5.07 ±10 %	PASS
5700	35.4 ±10 %		5.17 ±10 %	
5800	35.3 ±10 %	PASS	5.27 ±10 %	PASS
5900	35.2 ±10 %		5.38 ±10 %	
6000	35.1 ±10 %		5.48 ±10 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

At those frequencies, the target SAR value can not be generic. Hereunder is the target SAR value defined by MVG, within the uncertainty for the system validation. All SAR values are normalized to 1 W net power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACB-75-15-14-S&T/A

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 BPG122
Liquid	Head Liquid Values 5200 MHz: eps' :36.44 sigma : 4.79 Head Liquid Values 5400 MHz: eps' :35.99 sigma : 4.91 Head Liquid Values 5600 MHz: eps' :35.22 sigma : 5.18 Head Liquid Values 5800 MHz: eps' :34.95 sigma : 5.42
Distance between dipole waveguide and liquid	0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=4mm/dy=4m/dz=2mm
Frequency	5200 MHz 5400 MHz 5600 MHz 5800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


Frequency (MHz)	1 g SAR (W/kg)		10 g SAR (W/kg)	
	required	measured	required	measured
5200	159.00	157.80 (15.78)	56.90	55.01 (5.50)
5400	166.40	162.69 (16.27)	58.43	56.17 (5.62)
5600	173.80	171.22 (17.12)	59.97	58.57 (5.86)
5800	181.20	179.53 (17.95)	61.50	60.55 (6.05)

SAR MEASUREMENT PLOTS @ 5200 MHz

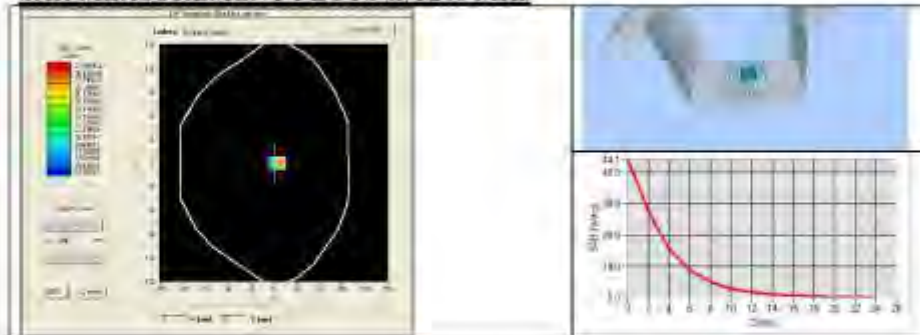





SAR MEASUREMENT PLOTS @ 5400 MHz

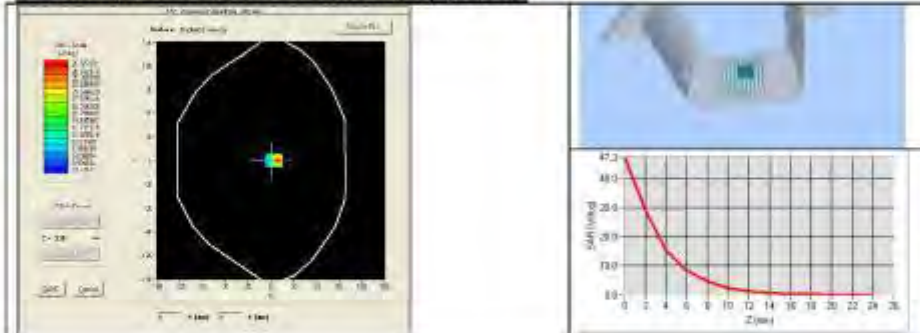

SAR MEASUREMENT PLOTS @ 5600 MHz

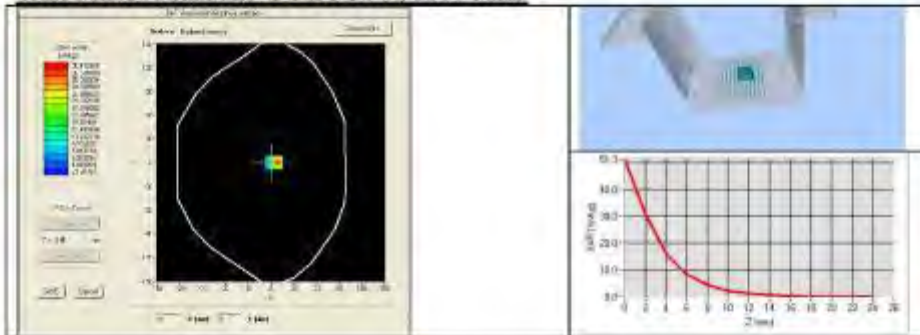

SAR MEASUREMENT PLOTS @ 5800 MHz

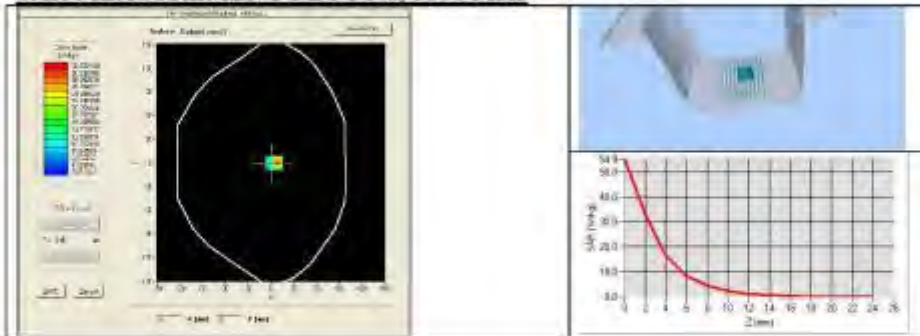



7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
5200	49.0 ±10 %	PASS	5.30 ±10 %	PASS
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %	PASS	5.53 ±10 %	PASS
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %	PASS	5.77 ±10 %	PASS
5800	48.2 ±10 %	PASS	6.00 ±10 %	PASS


7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 2009 SAM71
Probe	SN 18/11 EP6122
Liquid	Body Liquid Values 5200 MHz: ϵ_r' 50.70 sigma : 5.11 Body Liquid Values 5400 MHz: ϵ_r' 50.01 sigma : 5.64 Body Liquid Values 5600 MHz: ϵ_r' 49.34 sigma : 5.85 Body Liquid Values 5800 MHz: ϵ_r' 48.54 sigma : 6.22
Distance between dipole waveguide and liquid	0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=4mm/dy=4m/dz=2mm$
Frequency	5200 MHz 5400 MHz 5600 MHz 5800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


Frequency (MHz)	1 g SAR (W/kg)	10 g SAR (W/kg)
	measured	measured
5200	155.12 (15.51)	54.66 (5.47)
5400	162.06 (16.21)	56.46 (5.65)
5600	167.13 (16.71)	57.78 (5.78)
5800	173.19 (17.32)	59.30 (5.93)




BODY SAR MEASUREMENT PLOTS @ 5200 MHz

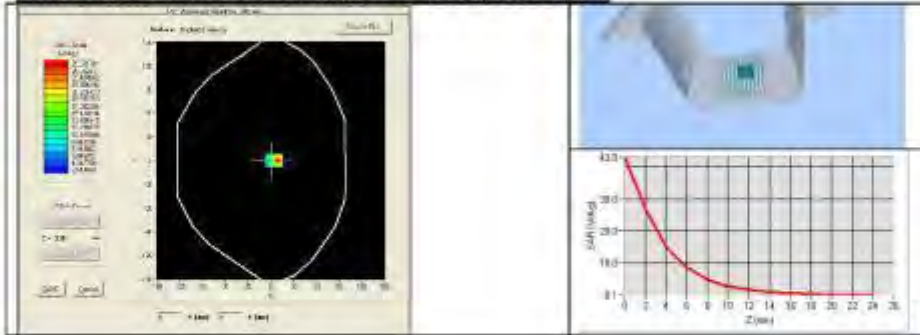

BODY SAR MEASUREMENT PLOTS @ 5400 MHz

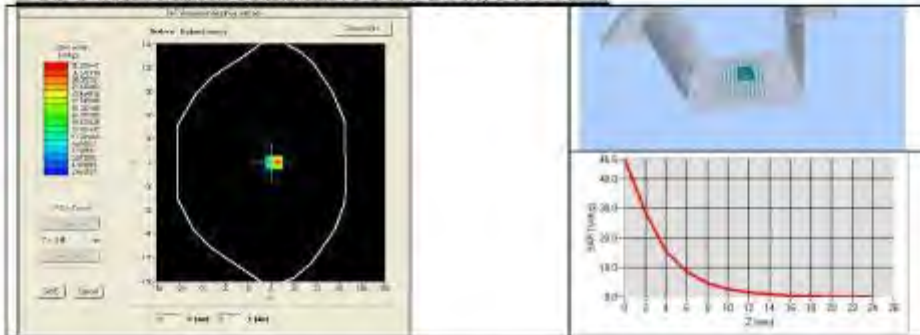

BODY SAR MEASUREMENT PLOTS @ 5600 MHz

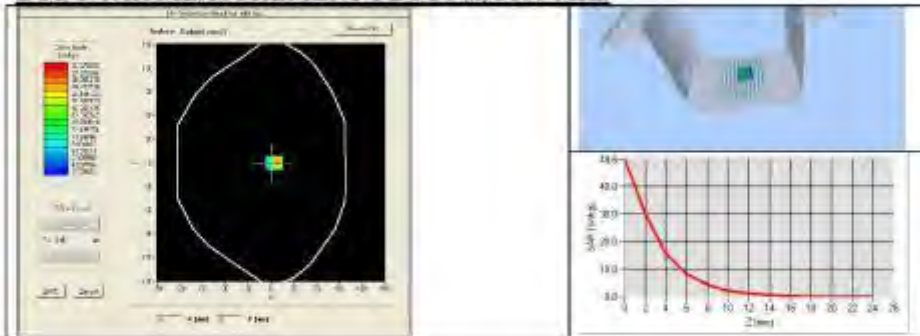



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY48070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

Page: 13/13

*This document shall not be reproduced, copied in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Calipers	Carrera	CALIPER-01	12/2013	12/2016
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY48070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181480	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015

Page: 13/13

*This document shall not be reproduced, stored in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

--END OF REPORT--