

# FCC RF Test Report

APPLICANT	:	OnePlus Technology (shenzhen) Co., Ltd.
EQUIPMENT	:	Smart Phone
BRAND NAME	:	ONEPLUS
MODEL NAME	:	ONEPLUS A5010
FCC ID	:	2ABZ2-A5010
STANDARD	:	FCC 47 CFR Part 2, and 90(S)
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 25, 2017 and testing was completed on Oct. 17, 2017. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-D-2010 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

File Shih

Approved by: Eric Shih / Manager

TESTING NVLAP LAB CODE 600156-0

**Sporton International (Shenzhen) Inc.** 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China



# TABLE OF CONTENTS

RE	VISIOI	N HISTORY	3
SU	MMAF	Y OF TEST RESULT	4
1	GENE	ERAL DESCRIPTION	5
	<ol> <li>1.1.</li> <li>1.2.</li> <li>1.3.</li> <li>1.4.</li> <li>1.5.</li> <li>1.6.</li> <li>1.7.</li> <li>1.8.</li> </ol>	Applicant Manufacturer Feature of Equipment Under Test Product Specification of Equipment Under Test Modification of EUT Maximum Frequency Tolerance, Emission Designator and Conducted Power Testing Site Applied Standards	5 5 5 6 6 6 7
2		CONFIGURATION OF EQUIPMENT UNDER TEST Test Mode Connection Diagram of Test System Support Unit used in test configuration and system Measurement Results Explanation Example Frequency List of Low/Middle/High Channels	8 9 9 9
3	<b>TEST</b> 3.1 3.2 3.3 3.4 3.5 3.6	<b>RESULT</b> Conducted Output Power Measurement.         99% Occupied Bandwidth and 26dB Bandwidth Measurement.         Emissions Mask Measurement         Emissions Mask – Out Of Band Emissions Measurement.         Field Strength of Spurious Radiation Measurement         Frequency Stability Measurement.	11 12 13 15 17
4	LIST	OF MEASURING EQUIPMENT	21
5	UNCE	ERTAINTY OF EVALUATION	22

### APPENDIX A. TEST RESULTS OF CONDUCTED TEST

#### APPENDIX B. TEST RESULTS OF RADIATED TEST

**APPENDIX C. SETUP PHOTOGRAPHS** 



# **REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW782510-01	Rev. 01	Initial issue of report	Oct. 23, 2017



# SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log <sub>10</sub> (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 41.55 dB at 2468.61 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



# **1** General Description

## 1.1. Applicant

#### OnePlus Technology (shenzhen) Co., Ltd.

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

### 1.2. Manufacturer

#### OnePlus Technology (shenzhen) Co., Ltd.

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

## 1.3. Feature of Equipment Under Test

Product Feature & Specification								
Equipment	Smart Phone							
Brand Name	ONEPLUS							
Model Name	ONEPLUS A5010							
FCC ID	2ABZ2-A5010							
EUT supports Radios application	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA /HSPA+/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE/ Bluetooth v5.0 LE							
IMEI Code	Conducted: 866817030000863/866817030000863 Radiation: 866817030000939/866817030000939 866817030000954/866817030000954							
HW Version	EC017							
SW Version	oxygen version 4.7							
EUT Stage	Production Unit							

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



## 1.4. Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	LTE Band 26 : 814.7 ~ 823.3 MHz						
Rx Frequency	LTE Band 26 : 859.7 ~ 868.3 MHz						
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz						
Maximum Output Power to Antenna	23.35 dBm						
Antenna Type	PIFA Antenna						
Type of Modulation	QPSK / 16QAM / 64QAM						

**Remark:** This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

# 1.6. Maximum Frequency Tolerance, Emission Designator and Conducted Power

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M09G7D	0.2084
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M10W7D	0.1742
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M09W7D	0.1352
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M73G7D	0.2104
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M73W7D	0.1795
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M72W7D	0.1303
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M50G7D	0.2065
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M49W7D	0.1816
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M51W7D	0.1330
Part 90S	LTE Band 26	QPSK	10 MHz	0.0327 ppm	9M05G7D	0.2163
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M03W7D	0.1722
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M03W7D	0.1327
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M5G7D	0.2028
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M4W7D	0.1824
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M5W7D	0.1455



# 1.7. Testing Site

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.						
	1/F, 2/F, Bldg 5, Shiling Industrial Zone, 3	Kinwei Village, Xili, Nanshan Shenzhen					
Test Oite Lesstier	City Guangdong Province 518055 China						
Test Site Location	TEL: +86-755-8637-9589						
	FAX: +86-755-8637-9595						
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.					
Test Site No.	TH01-SZ	251365					
Test Site	Sporton International (Shenzhen) Inc.						
	No. 3 Bldg the third floor of south, Shah	e River west, Fengzeyuan Warehouse,					
Test Site Location	Nanshan District Shenzhen City Guangdong Province 518055 China						
	TEL: +86-755-3320-2398						
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.					
Test Sile NO.	03CH03-SZ	577730					

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### **1.8. Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

#### Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



# 2 Test Configuration of Equipment Under Test

## 2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

			Ba	ndwid	lth (MH	łz)		Modulation			RB #			Test Channel		
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	м	н
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v	v			v	v	v	v
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v	v	v	v			v	v	v
Frequency Stability	26				v		-	v					v		v	
Radiated	26	v	v	v			-	v			v			v	v	v
Spurious Emission	26				v			v			v				v	
Note	2. Th 3. LT 15	<ol> <li>The mark "v " means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> </ol>														

Frequency range investigated for radiated emission is 30 MHz to 10th harmonic.



# 2.2 Connection Diagram of Test System

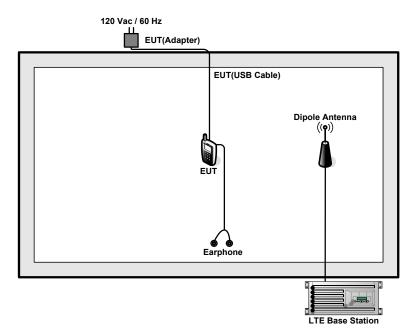

# 2.3 Support Unit used in test configuration and system

ltem	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A

# 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator. Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.0 + 10 = 14.0 (dB)



# 2.5 Frequency List of Low/Middle/High Channels

	LTE Band 26 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
15	Channel	26765	-	-							
15	Frequency	821.5	-	-							
40	Channel	-	26740	-							
10	Frequency	-	819	-							
5	Channel	26715	26740	26765							
5	Frequency	816.5	819	821.5							
3	Channel	26705	26740	26775							
3	Frequency	815.5	819	822.5							
1.4	Channel	26697	26740	26783							
1.4	Frequency	814.7	819	823.3							



# 3 Test Result

### 3.1 Conducted Output Power Measurement

#### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

#### 3.1.4 Test Setup



#### 3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.



### 3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

#### 3.2.4 Test Setup

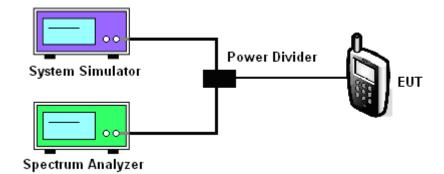

#### 3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.



### 3.3 Emissions Mask Measurement

#### 3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC

Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116  $\log_{10}(f/6.1)$  decibels or 50 + 10  $\log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of

the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 +  $10Log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

#### 3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.



#### 3.3.4 Test Setup

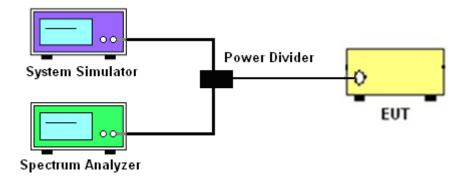

#### 3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.



### 3.4 Emissions Mask – Out Of Band Emissions Measurement

#### 3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least  $43 + 10 \log (P) dB$ . It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its  $10^{th}$  harmonic.

#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)


= P(W)- [43 + 10log(P)] (dB)

= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)

= -13dBm.



### 3.4.4 Test Setup

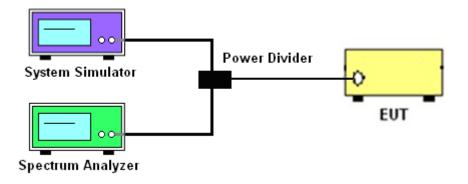

### 3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

### 3.5 Field Strength of Spurious Radiation Measurement

#### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43+10\log_{10}(P[Watts])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


= P(W) - [43 + 10log(P)] (dB)

- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.




#### 3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

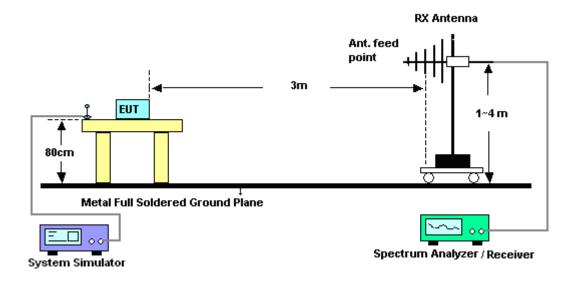

#### For radiated test above 1GHz

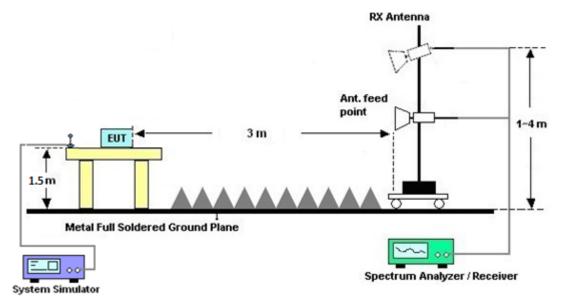

#### 3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.



#### 3.6 Frequency Stability Measurement

#### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$ ppm) of the center frequency according to FCC Part 90.213.

#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures for Temperature Variation


- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.



### 3.6.5 Test Setup



Thermal Chamber

#### 3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



# 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 20. 2017	Sep. 30, 2017~ Oct. 17, 2017	Apr. 19. 2018	Conducted (TH01-SZ)
Radio Communicatio	Anritsu	MT8820C	6201563777	2G/3G/4G (CDMA)	Jan. 03, 2017	Sep. 30, 2017~ Oct. 17, 2017	Jan. 02, 2018	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 20, 2017	Sep. 30, 2017~ Oct. 17, 2017	Jul. 19, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 20, 2017	Sep. 26, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Anaiyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 20, 2017	Sep. 26, 2017	Apr. 19, 2018	Radiation (03CH03-SZ
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	May. 14, 2017	Sep. 26, 2017	May. 13, 2018	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Nov. 19, 2016	Sep. 26, 2017	Nov. 18, 2017	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Jun.16, 2017	Sep. 26, 2017	Jun.15, 2018	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 11, 2016	Sep. 26, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan.06, 2017	Sep. 26, 2017	Jan.05, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 21. 2017	Sep. 26, 2017	Jul. 20. 2018	Radiation (03CH03-SZ
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Sep. 26, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 26, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 26, 2017	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



# 5 Uncertainty of Evaluation

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.0dB
Confidence of 95% (U = 2Uc(y))	3.008

#### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.6dB
Confidence of 95% (U = 2Uc(y))	3.0UD

#### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.8dB



# **Appendix A. Test Results of Conducted Test**

# Conducted Output Power (Average power)

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
15	1	0		23.07						
15	1	37		23.04						
15	1	74		23.06						
15	36	0	QPSK	22.15						
15	36	20		22.05						
15	36	39		22.12						
15	75	0		22.07						
15	1	0		22.56						
15	1	37		22.61						
15	1	74		22.53						
15	36	0	16-QAM	21.09	-	-				
15	36	20		21.1						
15	36	39		21.19						
15	75	0		21.04						
15	1	0		21.63						
15	1	37		21.43						
15	1	74		21.52						
15	36	0	64-QAM	20.38						
15	36	20		20.44						
15	36	39		20.52						
15	75	0		20.39						



LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
10	1	0			23.17				
10	1	25			23.35				
10	1	49			23.12				
10	25	0	QPSK		22.12				
10	25	12			22.18				
10	25	25			22.18				
10	50	0			22.12				
10	1	0			22.36				
10	1	25			22.33				
10	1	49			22.27				
10	25	0	16-QAM	-	21.15	-			
10	25	12			21.11				
10	25	25			21.11				
10	50	0			21.15				
10	1	0			21.22				
10	1	25			21.23				
10	1	49			21.15				
10	25	0	64-QAM		20.28				
10	25	12			20.21				
10	25	25			20.29				
10	50	0			20.05				



	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
5	1	0		23.09	23.15	23.07				
5	1	12		23.07	23.01	23.07				
5	1	24		23.11	22.98	23.02				
5	12	0	QPSK	22.18	22.20	22.07				
5	12	7		22.13	22.11	22.10				
5	12	13		22.12	22.09	22.05				
5	25	0		22.15	22.07	22.13				
5	1	0		22.27	22.37	22.25				
5	1	12	-	22.41	22.06	22.59				
5	1	24		22.15	22.14	22.48				
5	12	0	16-QAM	21.15	21.11	21.11				
5	12	7		21.18	21.14	21.06				
5	12	13		21.07	21.12	21.09				
5	25	0		21.22	21.11	21.02				
5	1	0		21.24	21.23	21.23				
5	1	12		21.15	21.21	21.15				
5	1	24		21.09	21.18	21.13				
5	12	0	64-QAM	20.28	20.25	20.08				
5	12	7		20.21	20.08	20.09				
5	12	13		20.18	20.09	19.88				
5	25	0		20.11	20.06	20.10				



LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
3	1	0		23.21	23.03	23.10			
3	1	8		23.23	23.12	23.06			
3	1	14		23.11	23.06	22.97			
3	8	0	QPSK	22.14	22.08	22.11			
3	8	4		22.15	22.14	22.10			
3	8	7		22.19	22.11	22.05			
3	15	0		22.14	22.12	22.09			
3	1	0		22.24	22.27	22.01			
3	1	8		22.24	22.04	22.23			
3	1	14	16-QAM	22.10	22.54	22.49			
3	8	0		21.10	21.04	21.04			
3	8	4		21.14	21.11	21.10			
3	8	7		21.22	21.19	21.13			
3	15	0		21.21	21.08	21.11			
3	1	0		21.15	21.11	20.88			
3	1	8		21.13	21.08	20.89			
3	1	14		21.05	21.05	21.06			
3	8	0	64-QAM	20.17	20.08	20.01			
3	8	4		20.15	20.03	20.06			
3	8	7		20.08	20.09	19.78			
3	15	0		20.06	20.15	20.08			



Report No. : FW782510-01


LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
1.4	1	0		23.05	23.05	23.04			
1.4	1	3		23.16	23.03	23.01			
1.4	1	5		23.08	22.97	22.99			
1.4	3	0	QPSK	23.06	23.04	23.06			
1.4	3	1		23.19	23.06	23.13			
1.4	3	3		23.06	23.04	22.95			
1.4	6	0		22.06	22.01	22.01			
1.4	1	0		22.25	22.17	22.14			
1.4	1	3	-	22.32	22.19	22.41			
1.4	1	5		22.30	22.35	21.89			
1.4	3	0	16-QAM	22.02	21.98	22.06			
1.4	3	1		22.12	22.01	22.13			
1.4	3	3		22.16	22.04	22.02			
1.4	6	0		21.06	21.04	21.02			
1.4	1	0		21.15	21.08	21.06			
1.4	1	3		21.22	21.06	21.05			
1.4	1	5		21.18	21.11	21.08			
1.4	3	0	64-QAM	21.08	21.18	21.23			
1.4	3	1		21.03	21.02	21.31			
1.4	3	3		21.15	21.08	21.04			
1.4	6	0		20.03	20.00	20.05			



# Peak-to-Average Ratio

Mode		LTE Band 26 / 10MHz								
Mod.	QP	SK	16C	16QAM						
RB Size	1RB	Full RB	1RB	Full RB	Result					
Lowest CH	-	-	-	-						
Middle CH	3.39	4.81	4.23	5.83	PASS					
Highest CH	-	-	-	-						
Mod.	640	AM	Limit: 13dB							
RB Size	1RB	Full RB	Result							
Lowest CH										
Middle CH	4.00	5.83	PASS							
Highest CH										



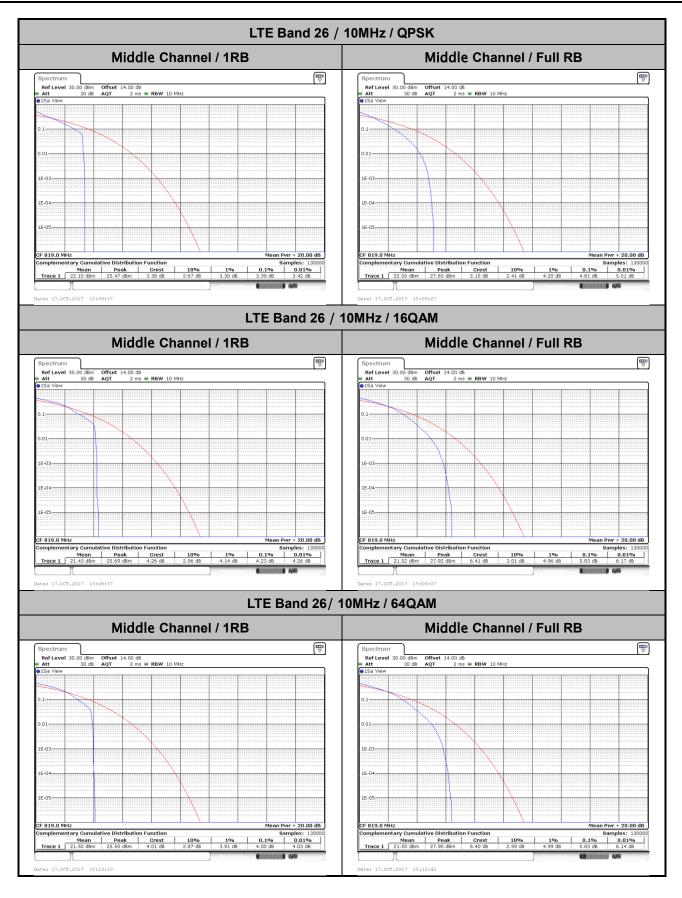


**Sporton International (Shenzhen) Inc.** TEL : +86-755-8637-9589 FAX : +86-755-8637-9595 FCC ID : 2ABZ2-A5010




# 26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	MHz	3N	IHz	5MHz 10MHz			15MHz				
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Lowest CH	1.231	1.228	3.033	3.021	4.825	4.925	-	-	14.176	14.595	-	-
Middle CH	1.222	1.231	2.991	3.045	4.925	4.945	9.93	9.59	-	-	-	-
Highest CH	1.222	1.211	3.063	3.009	4.905	4.885	-	-	-	-	-	-
Mode					LTE Ba	and 25 : 2	26dB BV	V(MHz)				
BW	1.4	MHz	3N	IHz	5N	IHz	10	٨Hz	15	٨Hz		
Mod.	640	QAM	640	QAM	64QAM 64QAM		QAM	64QAM				
Lowest CH	1.	24	3.	03	4.	93			14	4.3		
Middle CH	1.	23	2.	99	4.	84	9.	89				
Highest CH	1.	23	3.	02	4.	88						




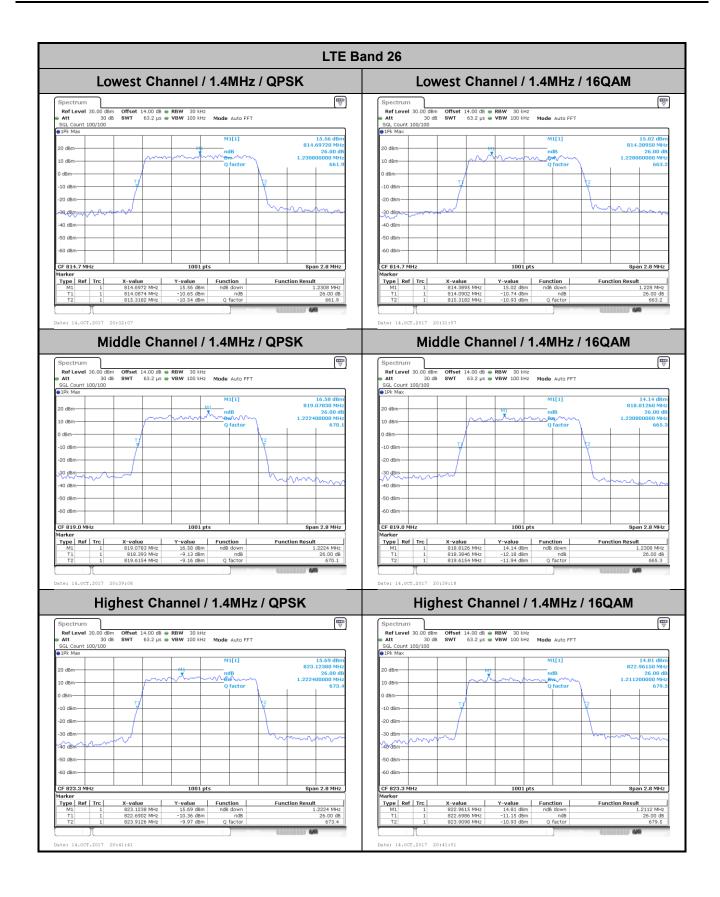




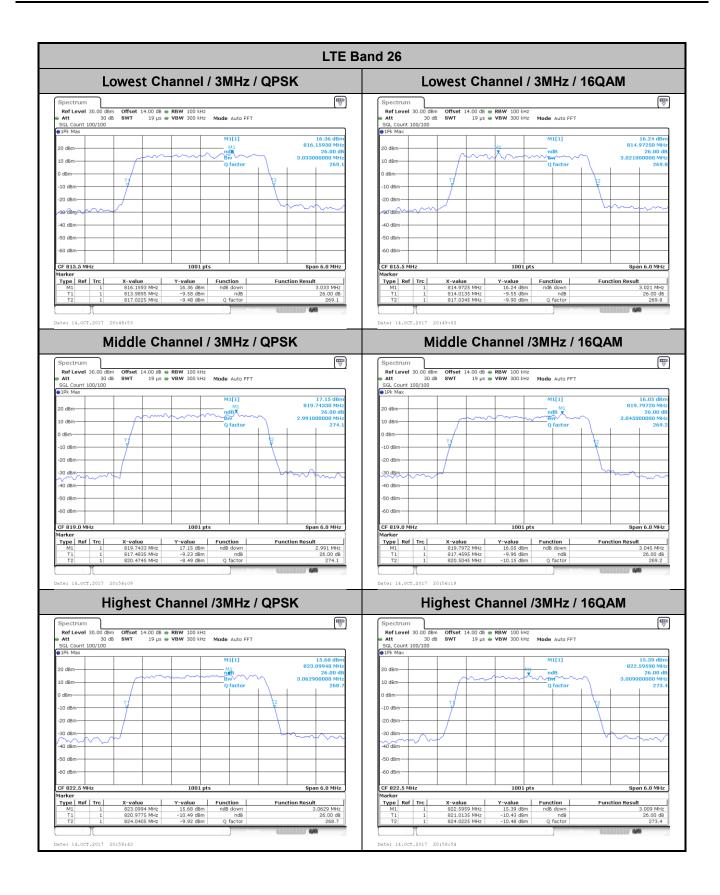




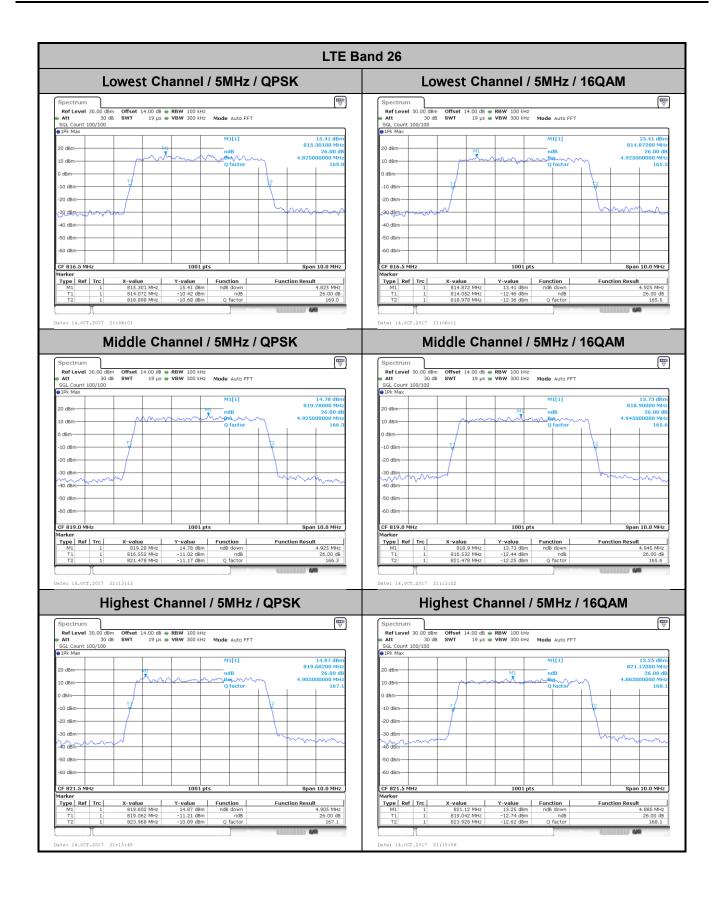




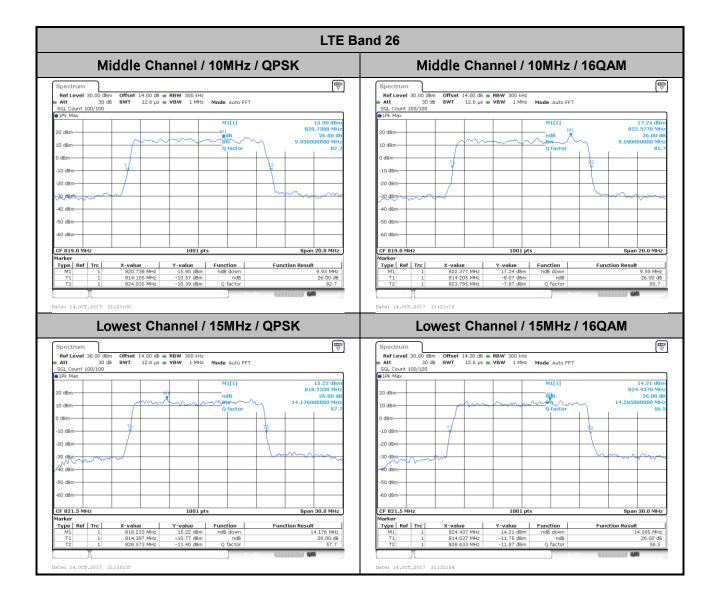



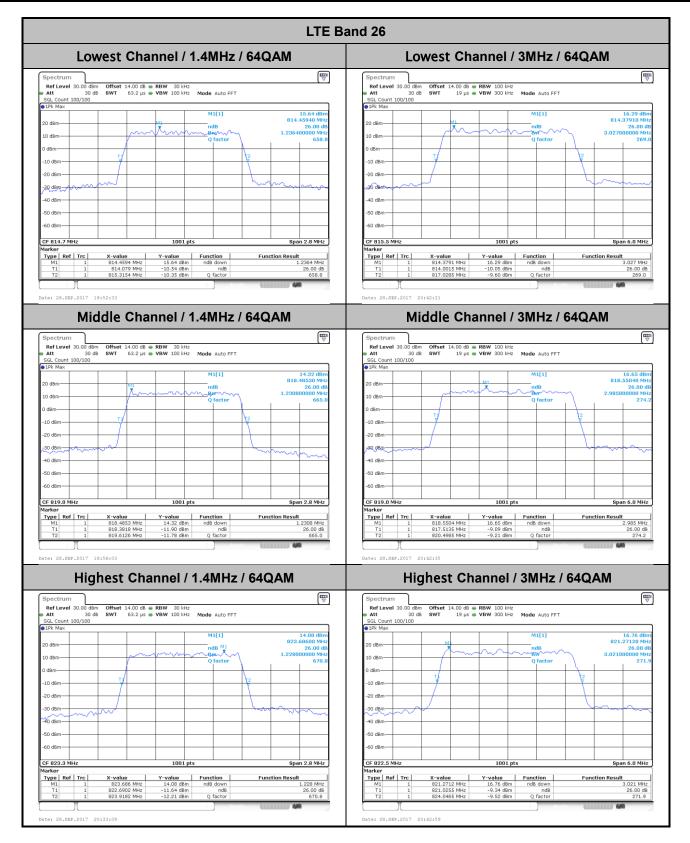



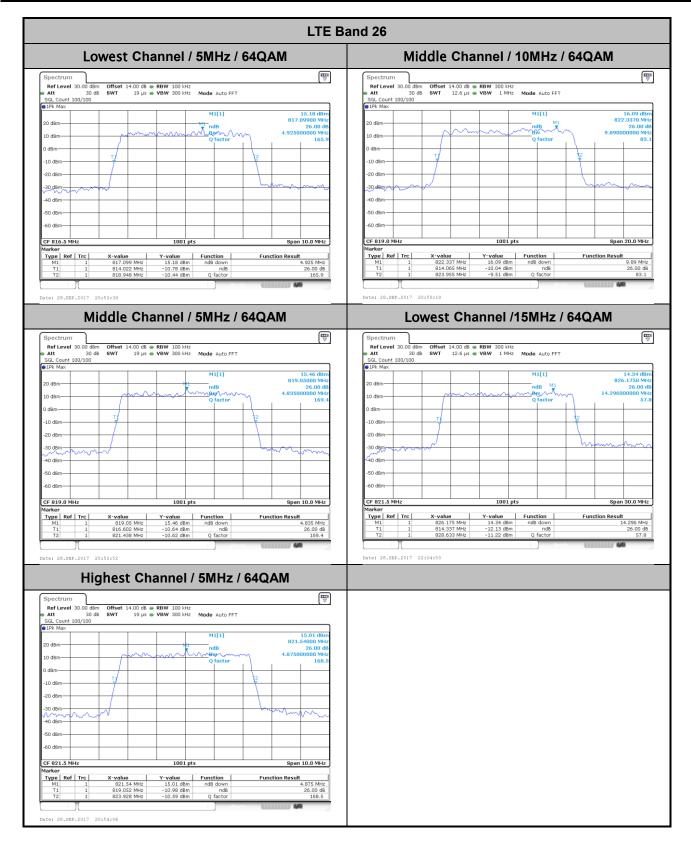





## **Occupied Bandwidth**

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.10	2.73	2.70	4.50	4.46	-	-	13.49	13.37	-	-
Middle CH	1.09	1.08	2.73	2.71	4.48	4.49	9.05	9.03	-	-	-	-
Highest CH	1.09	1.09	2.72	2.73	4.49	4.48	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz			
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM			
Lowest CH	1.08		2.71		4.49				13.46			
Middle CH	1.09		2.72		4.49		9.03					
Highest CH	1.08		2.72		4.51							




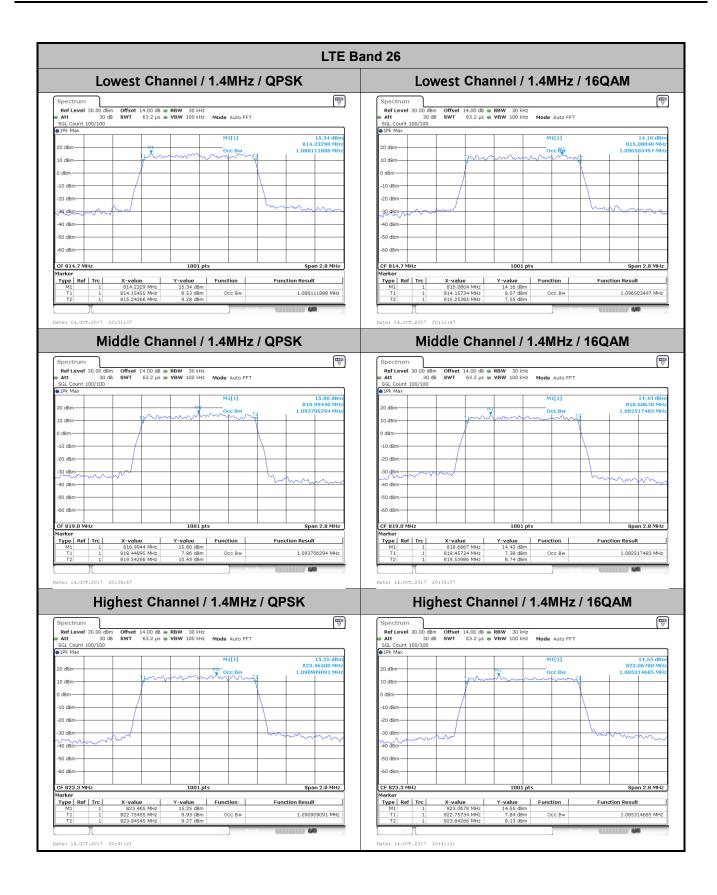




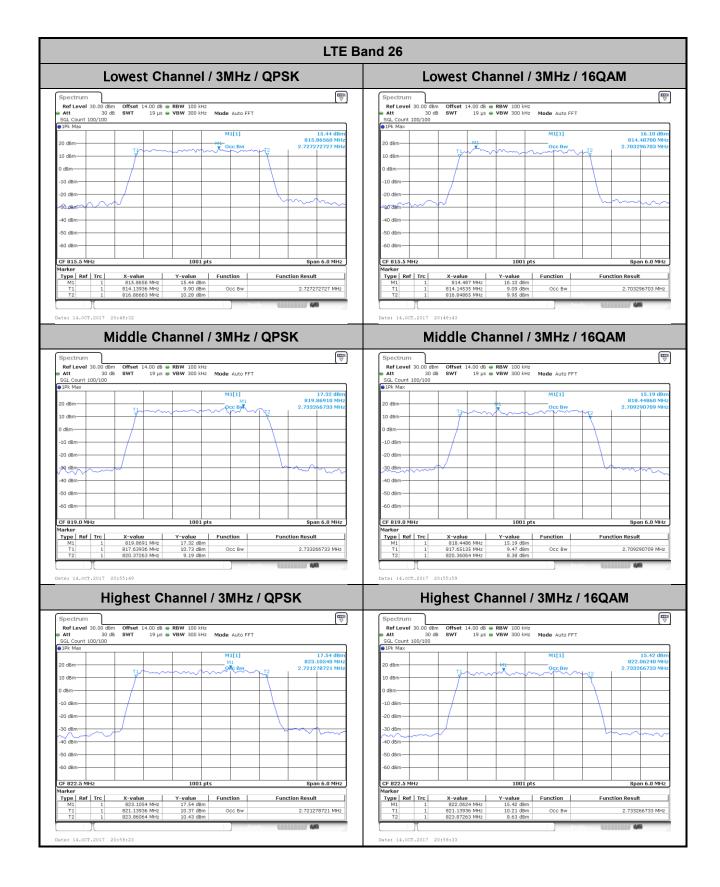




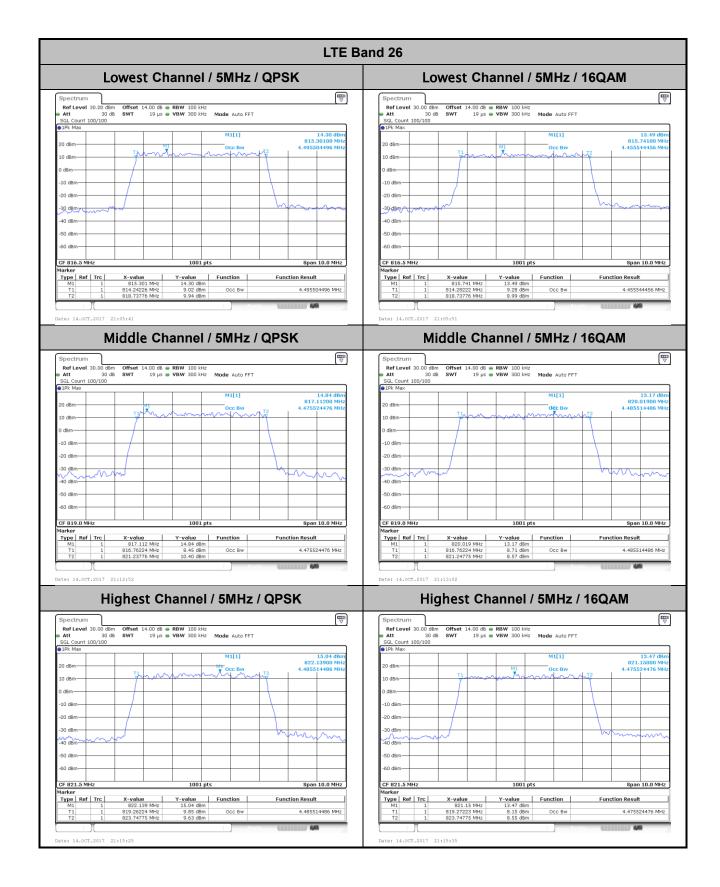




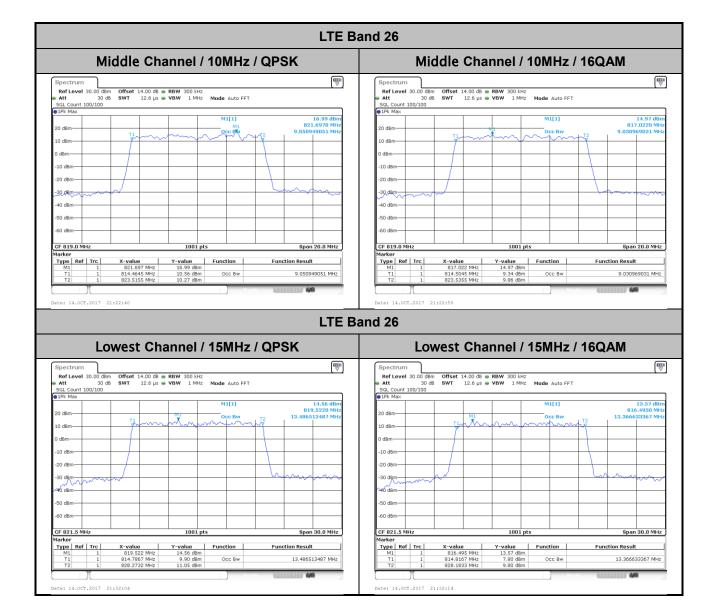



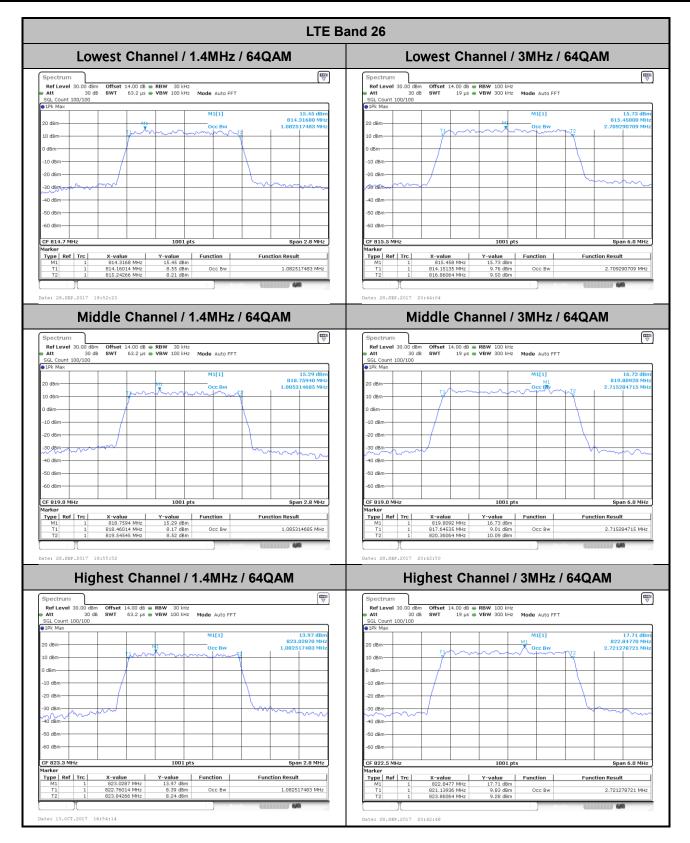




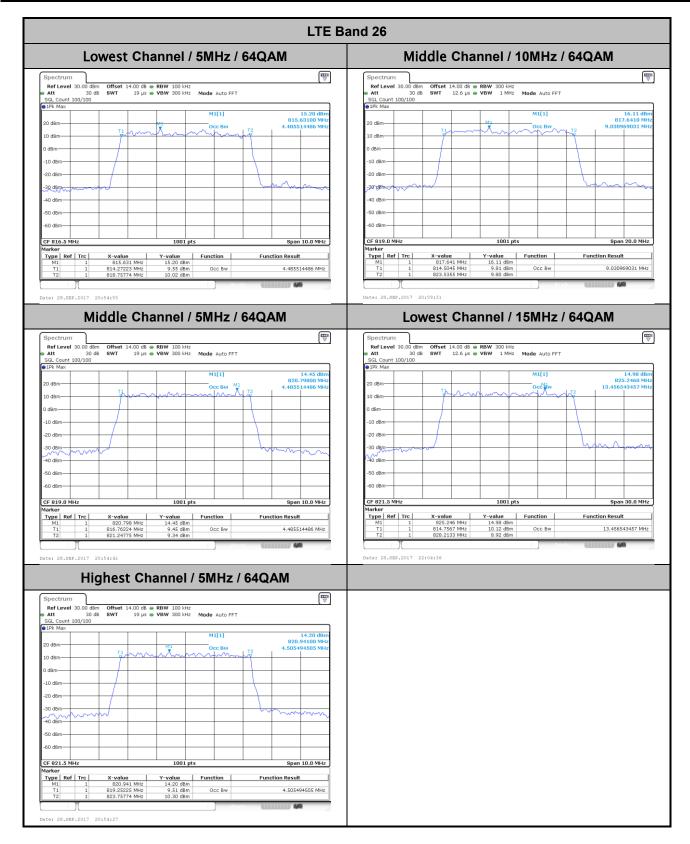



## Conducted Band Edge

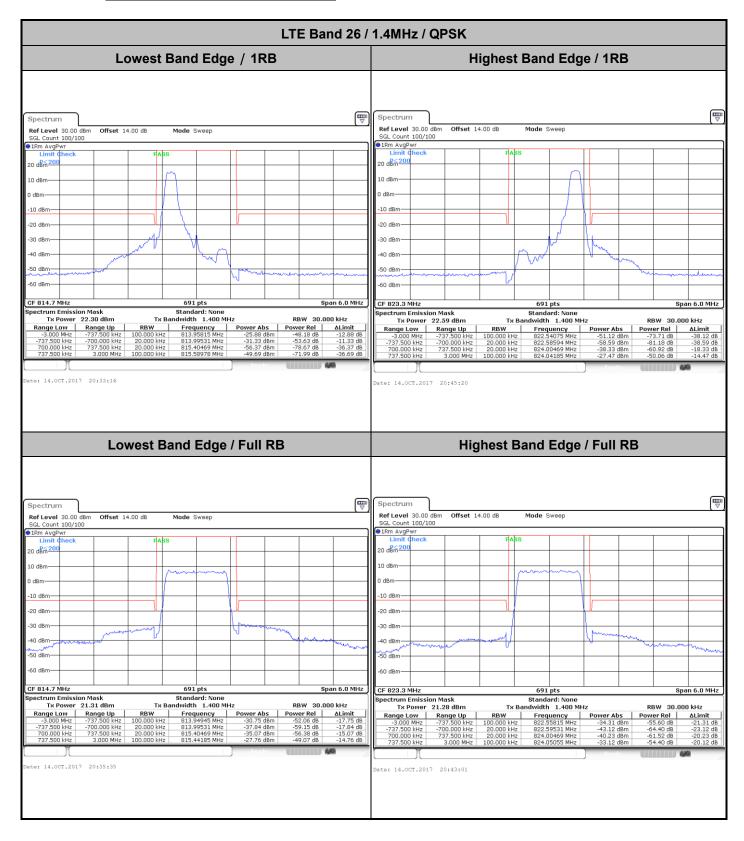

**Sporton International (Shenzhen) Inc.** TEL : +86-755-8637-9589 FAX : +86-755-8637-9595 FCC ID : 2ABZ2-A5010

