



# TEST REPORT

## No. I21Z62312-EMC01

For

**Smart Phone**

**Model Name: GN2200**

**FCC ID: 2ABZ2-AA455**

with

**Hardware Version: 11**

**Software Version: GN2200\_11\_A.02**

**Issued Date: 2022-01-29**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21Z62312-EMC01	Rev.0	1 <sup>st</sup> edition	2022-1-13
I21Z62312-EMC01	Rev.1	2 <sup>st</sup> edition, The missed editing text LTE B13/17/26/71 were adding, and the worse-case-statement was reported at page 12.	2022-1-29

Note: the latest revision of the test report supersedes all previous versions.



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION .....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.4. PROJECT DATA .....</b>	<b>4</b>
<b>1.5. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>6</b>
<b>3.5. EUT SET-UPS .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>11</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>24</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#:24849). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

#### **CTTL(Huayuan North Road)**

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191

### **1.3. Testing Environment**

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### **1.4. Project data**

Testing Start Date: 2021-11-23

Testing End Date: 2021-11-28


### **1.5. Signature**



---

Zhang Xia

(Prepared this test report)



---

Zhang Ying

(Reviewed this test report)



---

Zang Qi

(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: OnePlus Technology (Shenzhen) Co.,Ltd.  
Address: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
Contact: Jathan.Liu  
Email: Jathan.liu@oneplus.com  
Telephone: 0086-755-61898696-7023

### **2.2. Manufacturer Information**

Company Name: OnePlus Technology (Shenzhen) Co.,Ltd.  
Address: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
Contact: Jathan.Liu  
Email: Jathan.liu@oneplus.com  
Telephone: 0086-755-61898696-7023

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model Name	GN2200
FCC ID	2ABZ2-AA455
Extreme vol. Limits	3.4VDC to 4.45VDC (nominal: 3.87VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
UT07a	866966050029649/31741cf2	11	GN2200_11_A.02

\*EUT ID: is used to identify the test sample in the lab internally. The HW and SW versions were provided by the applicant.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Charger1	H121415BA1500104	CH001
AE2	Charger2	J21401GA1000034	CH012
AE3	Charger3	C621404AA1000041	CH020

AE1

Model	VCB3HDUH
Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO LTD
Length of cable	1 meter

AE2

Model	VCB3HDUH
Manufacturer	HUIZHOU GOLDEN LAKE INDUSTRIAL CO., LTD
Length of cable	1 meter

AE3

Model	VCB3HDUH
Manufacturer	Dongguan YOHO Electronic Technology Co., LTD.
Length of cable	1 meter

Note: the SN and manufacturer information were provided by the applicant.

#### **3.4. General Description**

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM 850, WCDMA850, LTE Band 5/12/13/17/26/71 and support MP3, Camera, USB data transfer, memory card, power reduction on hotspot mode.

#### **3.5. EUT set-ups**

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1	Charger H
Set.2	EUT1+ AE2	Charger J
Set.3	EUT1 + PC	Computer

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17 meters×10 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω





## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(Huayuan North Road)
2	Conducted Emission	15.107(a)	A.2	P	CTTL(Huayuan North Road)

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2022-10-28	1 year
2	LISN	ENV216	101200	R&S	2022-05-30	1 year
3	BiLog Antenna	VULB9163	9163-1223	Schwarzbeck	2022-03-22	1 year
4	EMI Antenna	3115	6914	ETS-Lindgren	2022-02-03	1 year
5	Universal Radio Communication Tester	CMW500	116588	R&S	2022-05-17	1 year
6	Test Receiver	ESCI	100344	R&S	2022-02-23	1 year

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01.00	R&S
Conducted Emission	EMC32 V8.52.0	R&S

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode**

The MS is operating in the charging mode and USB mode.

The EUT was tested while operating in licensed band RX mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in the Section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

Limit (10m) = limit (3m) + 20(log (3/10))

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.40dB, 1GHz-18GHz: 4.32dB,  $k=2$ .

The worse-case measurement results of typical receiving modes were presented in the following pages.

### Measurement results

#### Charging and camera mode

##### Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17970.533	46.0	-29.1	46.7	28.401	54	8.0	H
17951.267	45.9	-28.9	46.7	28.183	54	8.1	H
17952.967	45.8	-28.9	46.7	28.083	54	8.2	V
17852.100	45.8	-29.3	46.0	29.182	54	8.2	H
17750.100	45.8	-29.6	46.0	29.456	54	8.2	H
17878.733	45.7	-29.4	46.0	29.139	54	8.3	V

##### Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17960.333	55.9	-29.1	46.7	38.301	74	18.1	V
17887.800	55.4	-29.5	46.0	38.980	74	18.6	H
17343.233	55.2	-30.0	43.4	41.812	74	18.8	V
17975.633	54.9	-29.1	46.7	37.301	74	19.1	H
17878.733	54.7	-29.4	46.0	38.139	74	19.3	V
17997.167	54.7	-29.1	46.7	37.098	74	19.3	H

### Charging and GSM 850 RX mode

#### Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17962.600	46.6	-29.1	46.7	29.001	54	7.4	H
17993.200	46.0	-29.1	46.7	28.398	54	8.0	V
17946.733	46.0	-28.9	46.7	28.283	54	8.0	V
17985.267	46.0	-29.1	46.7	28.398	54	8.0	V
17960.333	45.8	-29.1	46.7	28.201	54	8.2	H
17971.100	45.7	-29.1	46.7	28.101	54	8.3	V

#### Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17897.433	54.9	-29.5	46.0	38.480	74	19.1	H
17976.200	54.8	-29.1	46.7	37.201	74	19.2	H
17726.300	54.6	-29.7	45.2	39.021	74	19.4	H
17581.233	54.4	-29.7	45.2	38.849	74	19.6	V
17947.867	54.4	-28.9	46.7	36.683	74	19.6	H
17649.233	54.4	-29.6	45.2	38.753	74	19.6	V

### USB mode

#### Average detector


Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17997.167	46.2	-29.1	46.7	28.598	54	7.8	H
17946.167	46.0	-28.9	46.7	28.283	54	8.0	H
17953.533	46.0	-28.9	46.7	28.283	54	8.0	V
17962.600	46.0	-29.1	46.7	28.401	54	8.0	V
17585.767	46.0	-29.7	45.2	30.449	54	8.0	V
17457.133	45.9	-29.9	44.4	31.417	54	8.1	V

#### Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17990.367	55.8	-29.1	46.7	38.198	74	18.2	H
17958.067	55.6	-28.9	46.7	37.883	74	18.4	V
17957.500	55.4	-28.9	46.7	37.683	74	18.6	V
17951.267	55.4	-28.9	46.7	37.683	74	18.6	H
17712.133	55.2	-29.7	45.2	39.687	74	18.8	H
17568.767	55.1	-29.8	45.2	39.646	74	18.9	V

### Charging and camera mode

#### Full Spectrum

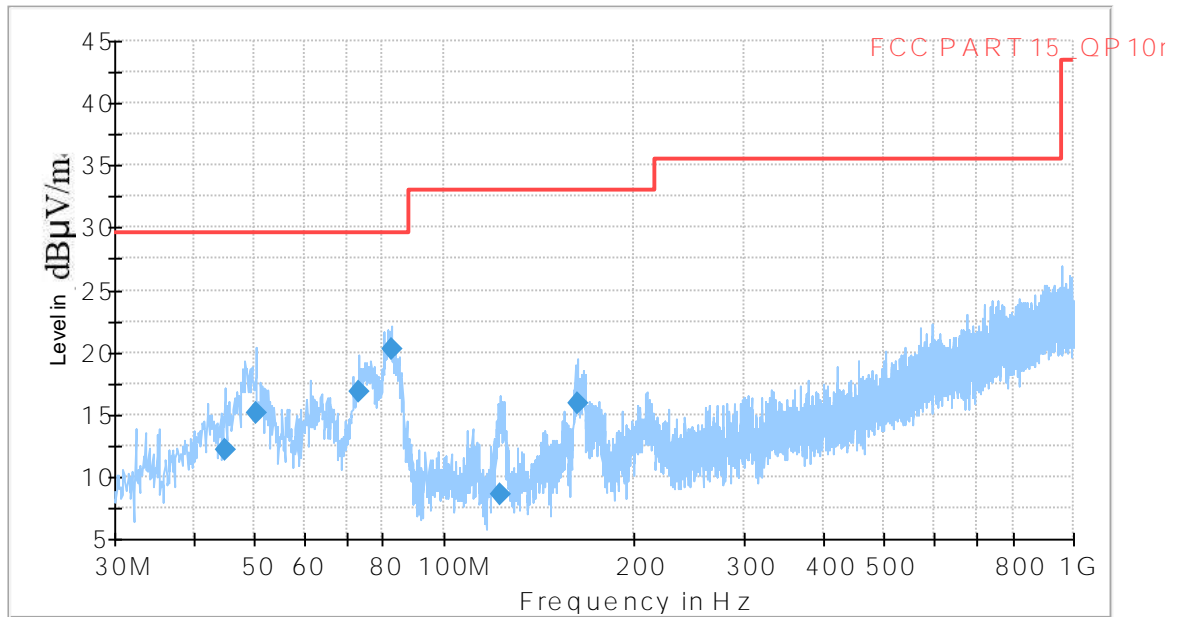


- Preview Result1-PK+ [Preview Result1.Result:1]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15\_QP 10m [.\]
- ◆ Final\_Result QPK [Final\_Result.Result:4]

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
44.938000	12.16	29.54	17.38	2000.0	120.000	210.0	V	210.0	-11.5
50.273000	15.16	29.54	14.38	2000.0	120.000	125.0	V	30.0	-10.9
73.262000	16.86	29.54	12.68	2000.0	120.000	221.0	V	61.0	-15.9
82.380000	20.30	29.54	9.24	2000.0	120.000	175.0	V	63.0	-16.7
122.732000	8.53	33.06	24.53	2000.0	120.000	125.0	V	120.0	-14.6
162.890000	15.82	33.06	17.24	2000.0	120.000	100.0	V	30.0	-15.0

Full Spectrum

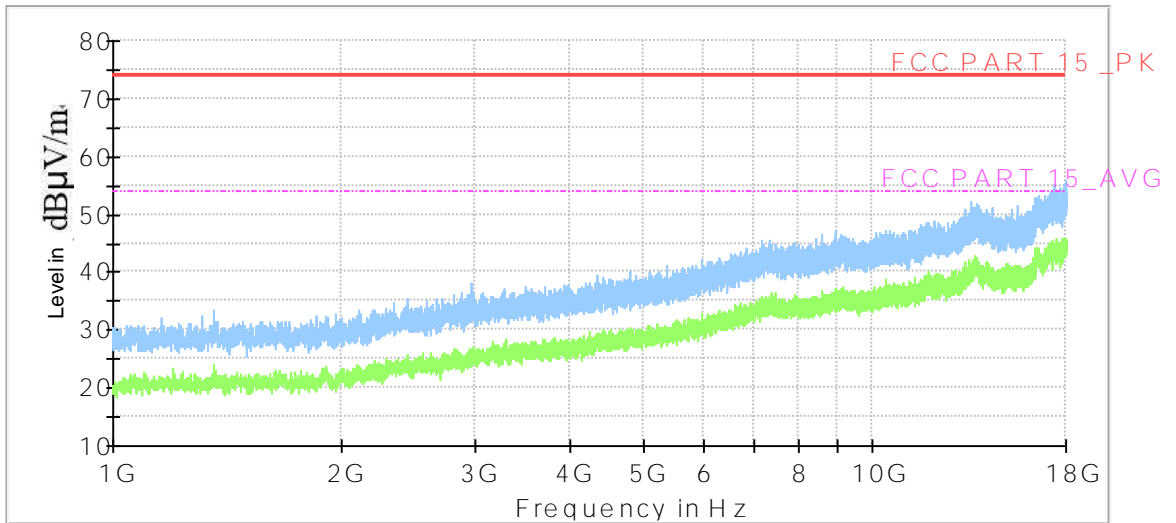


- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15 \_PK [..]
- - - FCC PART 15 \_AVG [..]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Figure A.2 Radiated Emission from 1GHz to 18GHz**

**Charging and GSM 850 RX mode**

Full Spectrum

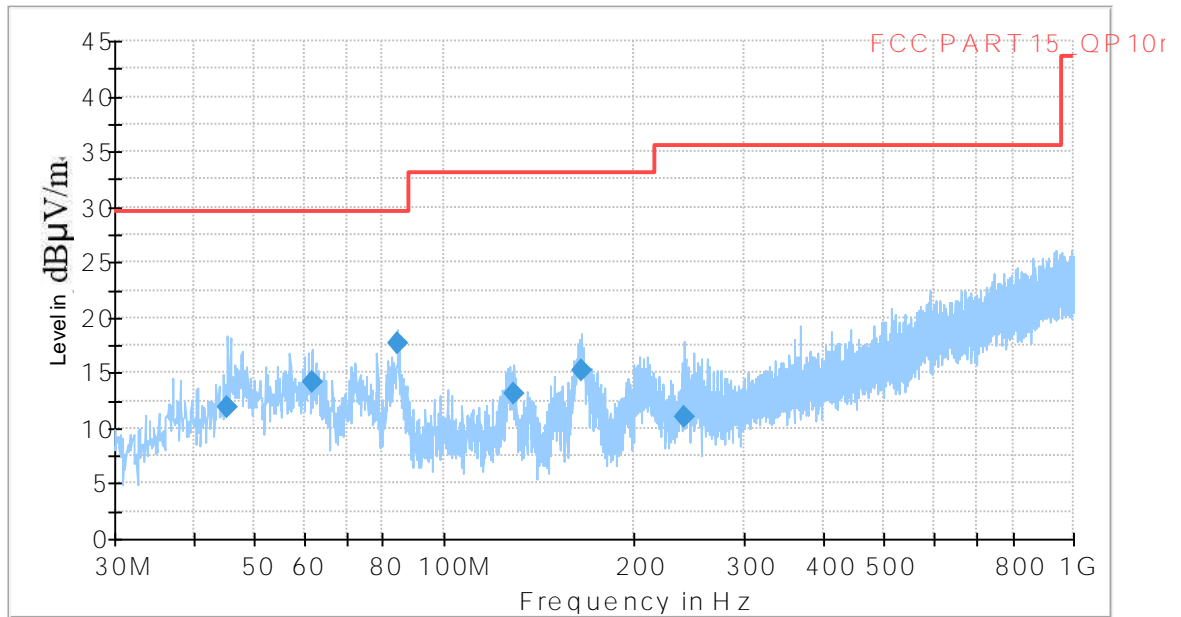


- Preview Result1-PK+ [Preview Result1.Result:1]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15\_QP 10m [.\]
- ◆ Final\_Result QPK [Final\_Result.Result:4]

**Figure A.3 Radiated Emission from 30MHz to 1GHz**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
45.326000	11.93	29.54	17.61	2000.0	120.000	195.0	V	190.0	-11.5
61.622000	14.15	29.54	15.39	2000.0	120.000	101.0	V	300.0	-12.6
84.320000	17.67	29.54	11.87	2000.0	120.000	200.0	V	30.0	-16.3
129.522000	13.10	33.06	19.96	2000.0	120.000	220.0	V	120.0	-15.4
165.703000	15.25	33.06	17.81	2000.0	120.000	183.0	V	30.0	-14.9
240.975000	11.11	35.56	24.45	2000.0	120.000	200.0	V	179.0	-10.3



Full Spectrum

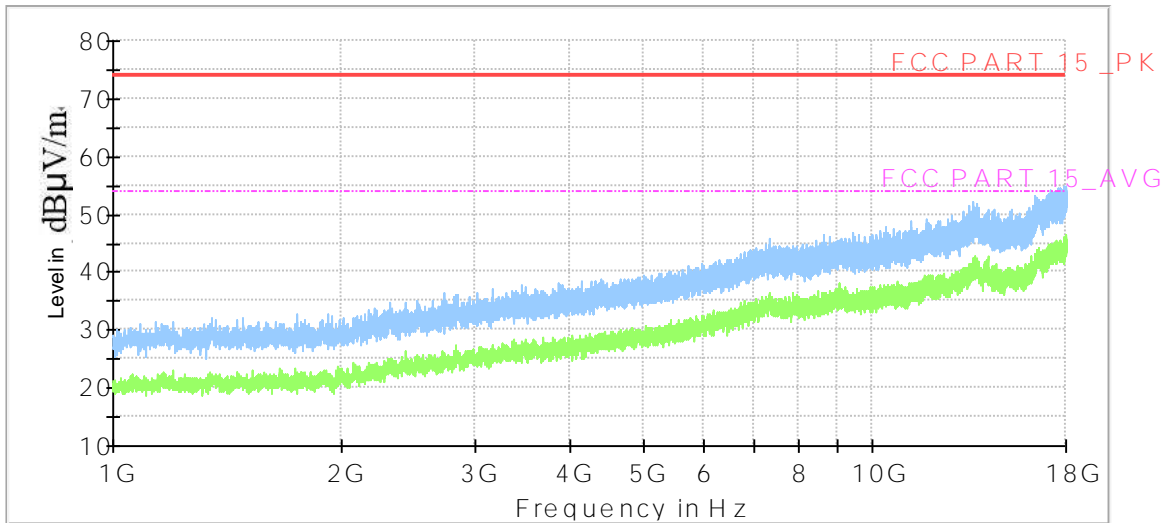


- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- \* Critical\_Freqs AVG [Critical\_Freqs.Result:5]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15 \_PK [..]
- - - FCC PART 15 \_AVG [..]
- ◆ Final\_Result PK+ [Final\_Result.Result:4]
- ◆ Final\_Result AVG [Final\_Result.Result:5]

**Figure A.4 Radiated Emission from 1GHz to 18GHz**

**USB mode**

## Full Spectrum

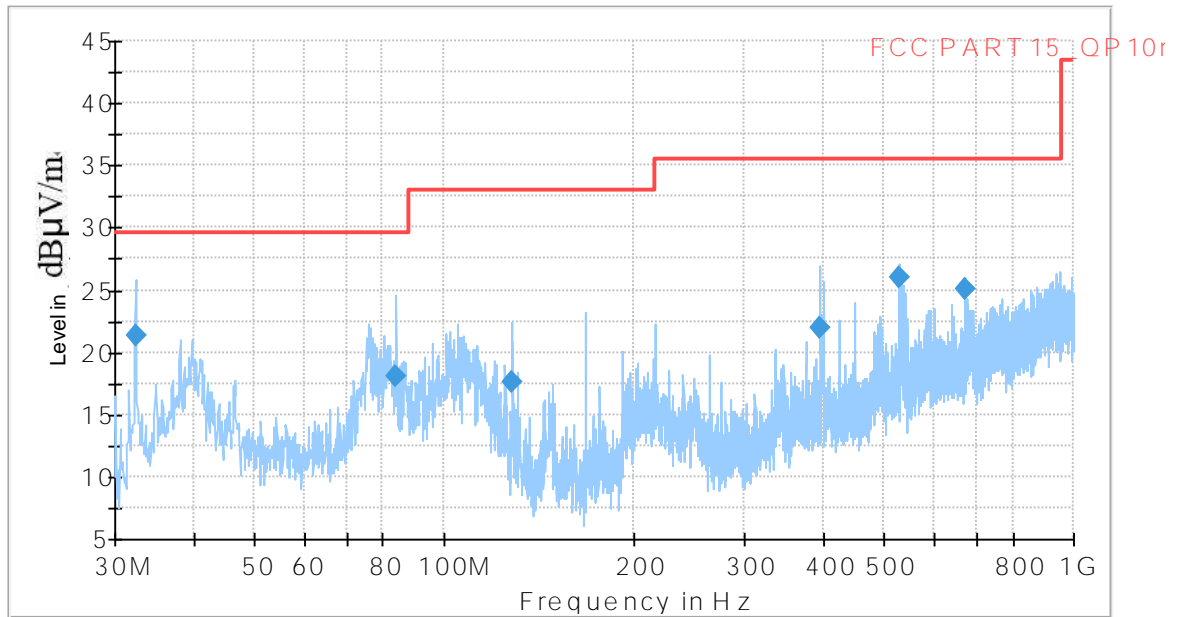

- Preview Result1-PK+ [Preview Result1.Result:1]
- \* Critical\_Freqs PK+ [Critical\_Freqs.Result:4]
- FCC PART 15\_QP 10m [..]
- ◆ Final\_Result QPK [Final\_Result.Result:4]

**Figure A.11 Radiated Emission from 30MHz to 1GHz**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
32.328000	21.32	29.54	8.22	2000.0	120.000	118.0	V	189.0	-14.4
84.029000	18.01	29.54	11.53	2000.0	120.000	125.0	V	30.0	-16.3
128.067000	17.61	33.06	15.45	2000.0	120.000	100.0	V	30.0	-15.2
396.369000	21.99	35.56	13.57	2000.0	120.000	100.0	V	260.0	-6.0
530.326000	25.94	35.56	9.62	2000.0	120.000	276.0	V	300.0	-3.0
672.237000	25.02	35.56	10.54	2000.0	120.000	200.0	V	269.0	-0.2

Full Spectrum

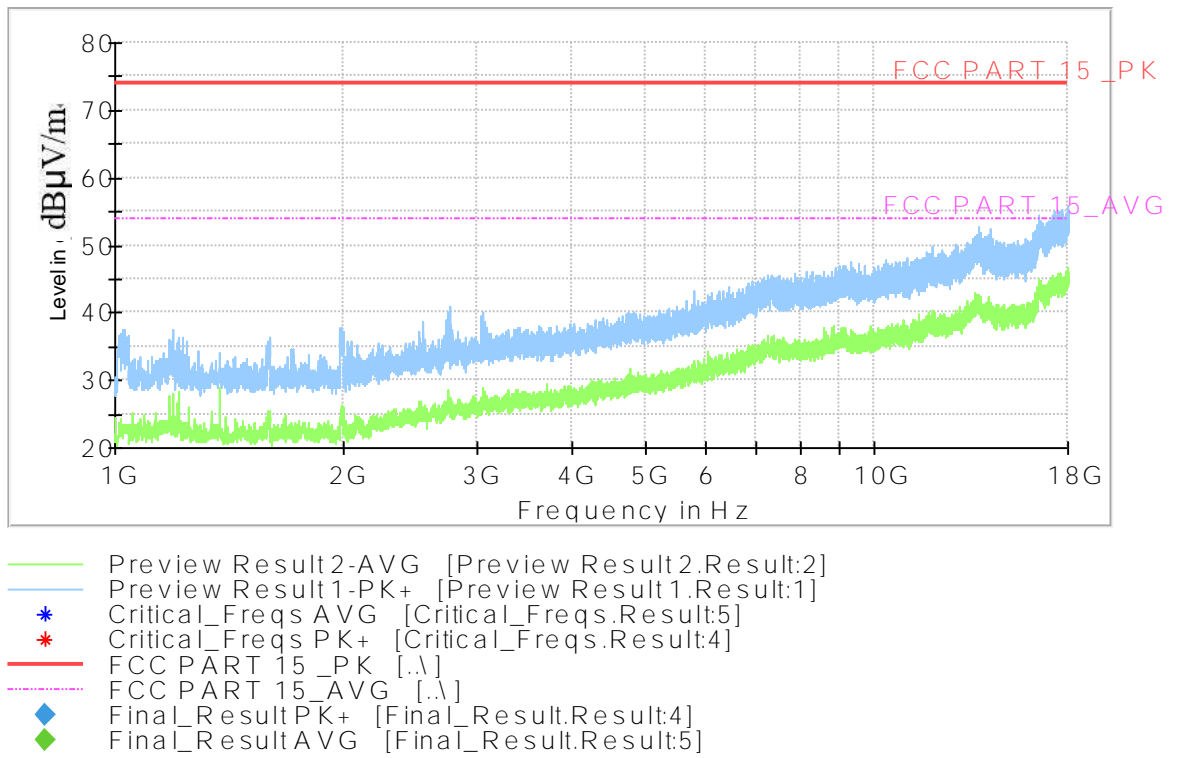


Figure A.12 Radiated Emission from 1GHz to 18GHz

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the charging mode and USB mode.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60


  

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U= 3.10$  dB,  $k=2$ .

#### Charging and camera mode

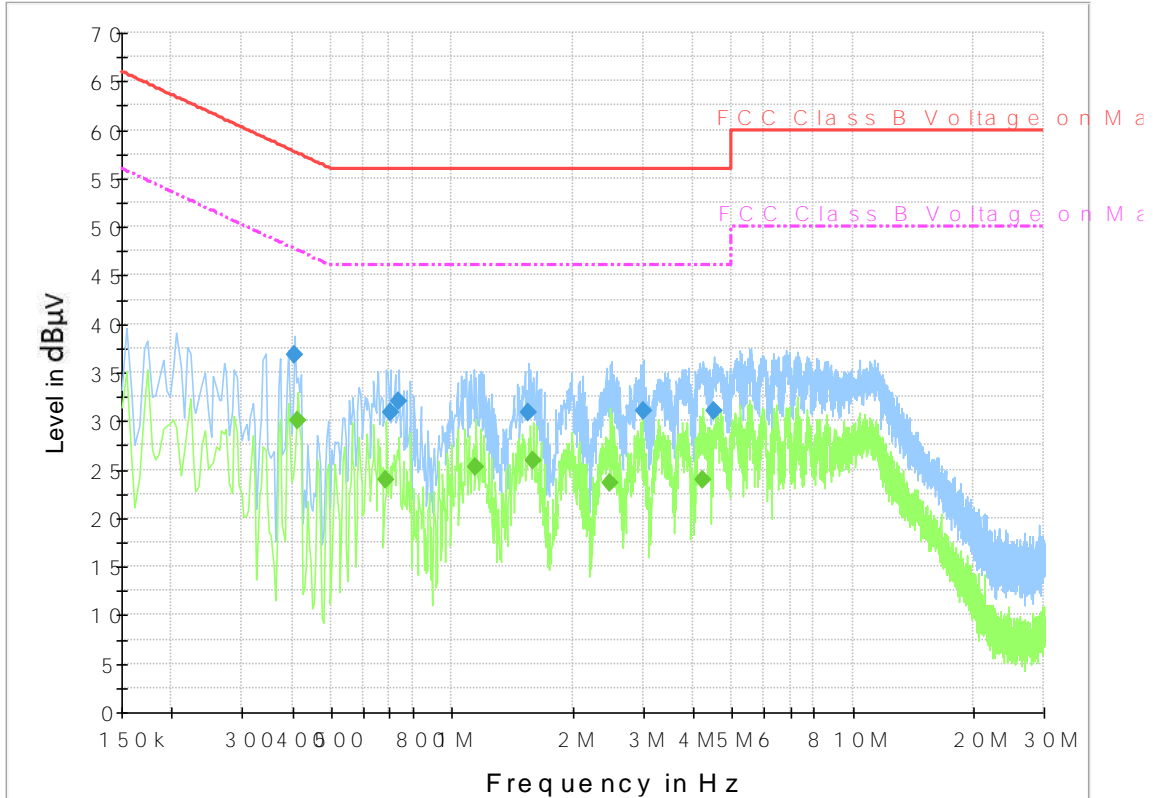

**Figure A.15 Conducted Emission**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	36.8	GND	N	19.9	21.0	57.7
0.702000	30.9	GND	N	19.8	25.1	56.0
0.738000	32.0	GND	N	19.8	24.0	56.0
1.554000	30.9	GND	N	19.7	25.1	56.0
3.010000	31.1	GND	N	19.7	24.9	56.0
4.518000	31.1	GND	N	19.7	24.9	56.0

#### Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.414000	30.0	GND	L1	19.9	17.6	47.6
0.686000	23.9	GND	N	19.8	22.1	46.0
1.150000	25.3	GND	N	19.8	20.7	46.0
1.598000	25.9	GND	N	19.8	20.1	46.0
2.482000	23.6	GND	N	19.7	22.4	46.0
4.242000	24.0	GND	L1	19.6	22.0	46.0

### Charging and GSM 850 RX mode

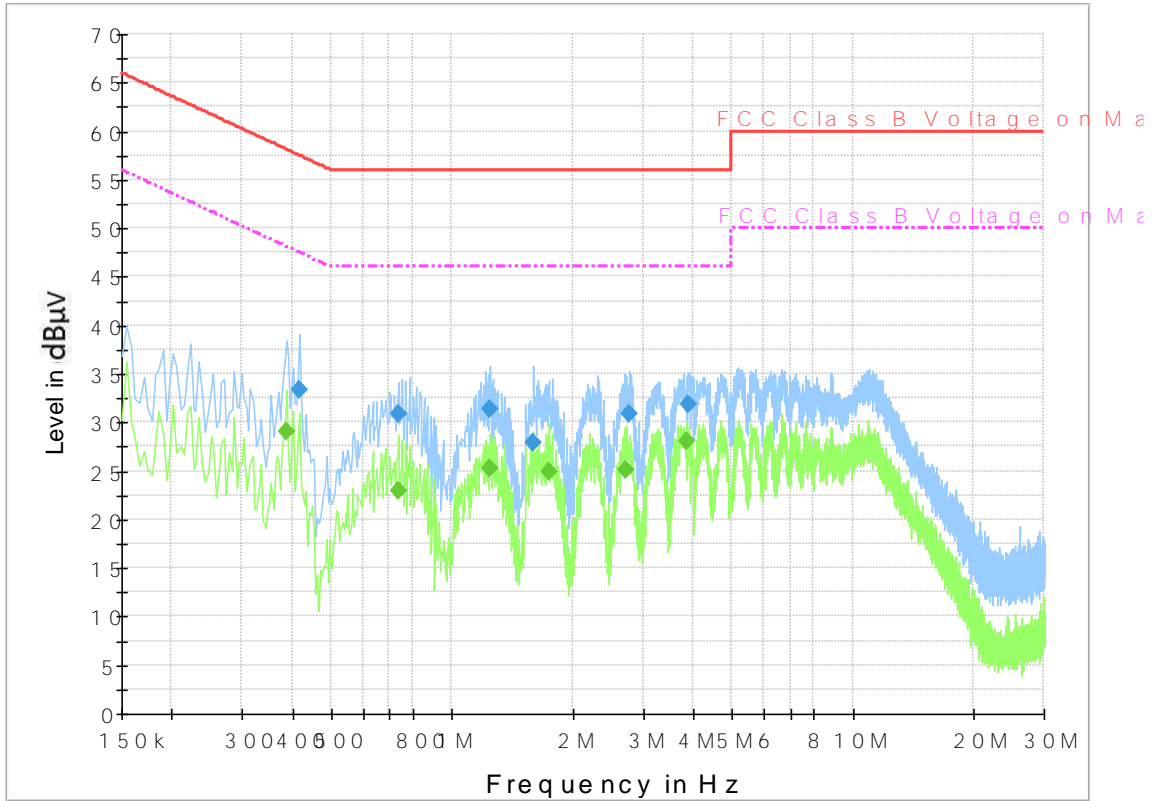

**Figure A.16 Conducted Emission**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.418000	33.4	GND	N	19.9	24.1	57.5
0.734000	30.9	GND	N	19.8	25.1	56.0
1.246000	31.4	GND	N	19.8	24.6	56.0
1.598000	27.8	GND	N	19.8	28.2	56.0
2.762000	30.9	GND	N	19.7	25.1	56.0
3.882000	31.9	GND	L1	19.5	24.1	56.0

#### Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.386000	29.0	GND	N	19.9	19.1	48.1
0.734000	22.9	GND	N	19.8	23.1	46.0
1.246000	25.2	GND	N	19.8	20.8	46.0
1.742000	25.0	GND	N	19.7	21.0	46.0
2.730000	25.0	GND	N	19.7	21.0	46.0
3.858000	28.1	GND	L1	19.5	17.9	46.0

### USB mode

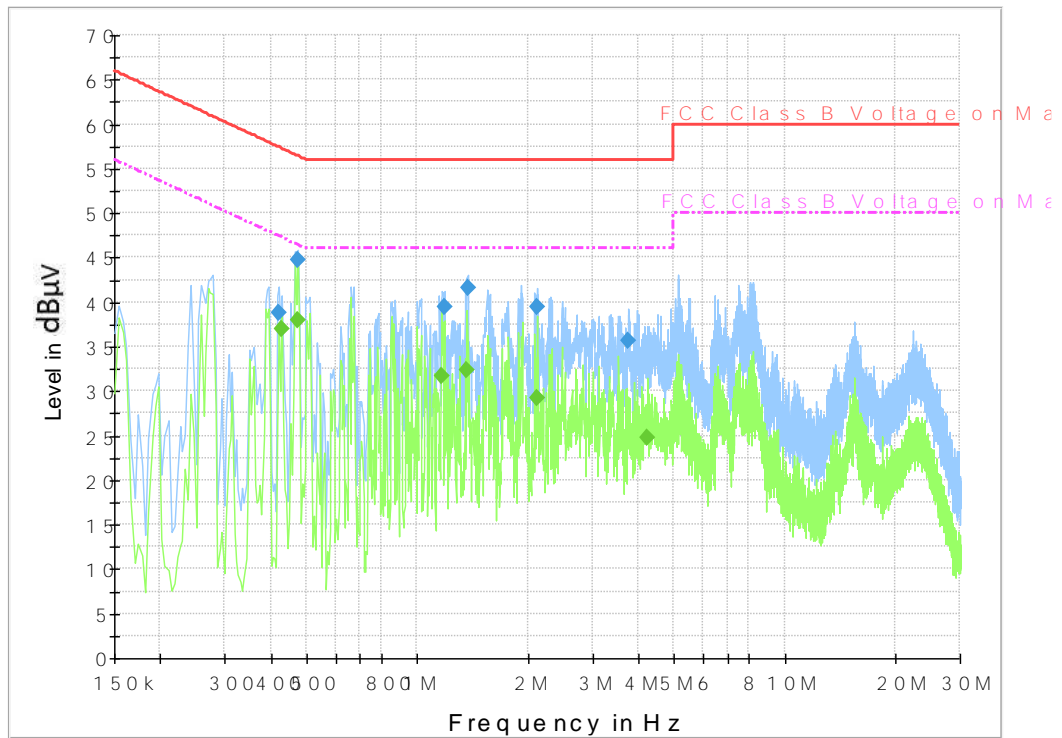

**Figure A.17 Conducted Emission**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	38.8	GND	N	19.9	18.6	57.4
0.474000	44.8	GND	N	20.0	11.6	56.4
1.186000	39.5	GND	N	19.8	16.5	56.0
1.374000	41.6	GND	L1	19.5	14.4	56.0
2.126000	39.4	GND	N	19.8	16.6	56.0
3.766000	35.7	GND	N	19.7	20.3	56.0

### Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	37.0	GND	N	19.9	10.3	47.3
0.474000	38.0	GND	N	20.0	8.4	46.4
1.162000	31.8	GND	N	19.8	14.2	46.0
1.370000	32.3	GND	N	19.8	13.7	46.0
2.126000	29.2	GND	N	19.8	16.8	46.0
4.246000	24.8	GND	L1	19.6	21.2	46.0



**ANNEX B: Persons involved in this testing**

Test Item	Tester
Radiated Emission	Li Pengfei, Yan Hanchen
Conducted Emission	Zhang Xia, Meng Qingbo

**\*\*\*END OF REPORT\*\*\***