

Channel 143

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17941.950	50.51	-29.55	45.95	34.11	74.00	23.49	V
17985.600	50.48	-29.55	45.95	34.08	74.00	23.52	V
13318.200	47.50	-31.26	40.65	38.11	74.00	26.50	H
13775.850	47.12	-31.06	41.20	36.98	88.20	41.08	H
12777.300	45.81	-31.36	39.80	37.37	88.20	42.39	H
11912.850	45.76	-32.63	39.10	39.29	74.00	28.24	H

Channel 207

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.700	50.87	-29.55	45.95	34.47	74.00	23.13	H
17989.650	50.73	-29.55	45.95	34.33	74.00	23.27	H
13949.550	47.50	-31.02	41.40	37.12	88.20	40.70	V
13281.300	47.44	-31.62	40.60	38.46	74.00	26.56	H
7176.810	55.10	-26.05	35.90	45.25	88.20	33.10	V
7222.818	54.84	-25.94	36.20	44.58	88.20	33.36	H

802.11be-320M full RU

Channel 31

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.450	50.75	-29.55	45.95	34.35	74.00	23.25	H
17525.700	49.57	-29.62	44.90	34.29	88.20	38.63	V
13699.350	46.78	-31.08	41.00	36.86	88.20	41.42	V
13834.350	46.11	-30.55	41.25	35.41	88.20	42.09	V
5915.152	51.51	-27.15	34.30	44.36	88.20	36.69	V
5871.122	51.32	-27.12	34.20	44.24	88.20	36.88	H

Channel 63

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.050	50.20	-29.55	45.95	33.80	74.00	23.80	V
17533.800	49.76	-29.62	44.90	34.48	88.20	38.44	V
13938.300	46.23	-31.02	41.40	35.85	88.20	41.97	H
13626.000	46.20	-31.48	40.90	36.78	88.20	42.00	V
12776.400	45.27	-31.36	39.80	36.83	88.20	42.93	V
12764.250	45.14	-31.94	39.65	37.43	88.20	43.06	V

Channel 95

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17954.100	50.08	-29.55	45.95	33.68	74.00	23.92	V
17958.150	49.89	-29.55	45.95	33.49	74.00	24.11	V
13341.600	46.25	-31.26	40.65	36.86	74.00	27.75	V
13985.550	46.23	-30.97	41.50	35.70	88.20	41.97	V
12704.400	45.05	-31.50	39.50	37.05	88.20	43.15	V
12760.200	44.76	-31.94	39.65	37.05	88.20	43.44	V

Channel 127

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17959.050	51.14	-29.55	45.95	34.74	74.00	22.86	H
17996.850	50.75	-29.55	45.95	34.35	74.00	23.25	V
13973.400	46.87	-30.97	41.50	36.34	88.20	41.33	V
13608.900	46.62	-31.29	40.80	37.11	88.20	41.58	V
12087.450	46.24	-32.26	38.90	39.60	74.00	27.76	V
12653.550	46.14	-31.89	39.40	38.63	74.00	27.86	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.050	50.79	-29.55	45.95	34.39	74.00	23.21	V
17994.600	50.66	-29.55	45.95	34.26	74.00	23.34	V
13920.750	46.71	-31.02	41.40	36.33	88.20	41.49	V
14671.350	46.66	-30.35	41.50	35.51	88.20	41.54	H
11870.550	45.97	-32.13	39.15	38.95	74.00	28.03	V
12681.000	45.44	-31.50	39.50	37.44	74.00	28.56	V

802.11ax-20M partial RU

Channel 1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.100	50.31	-29.55	45.95	33.91	74.00	23.69	V
17325.450	49.65	-29.74	42.90	36.49	88.20	38.55	V
13298.400	46.78	-31.62	40.60	37.80	74.00	27.22	V
13898.700	46.64	-31.40	41.30	36.74	88.20	41.56	V
5923.622	51.30	-27.15	34.30	44.15	88.20	36.90	V
5902.174	51.27	-27.15	34.30	44.12	88.20	36.93	V

Channel 45

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17977.500	50.49	-29.55	45.95	34.09	74.00	23.51	V
17995.950	50.41	-29.55	45.95	34.01	74.00	23.59	V
13341.150	46.75	-31.26	40.65	37.36	74.00	27.25	V
14594.850	46.58	-29.81	41.90	34.49	88.20	41.62	V
12777.300	45.93	-31.36	39.80	37.49	88.20	42.27	V
12695.400	45.58	-31.50	39.50	37.58	74.00	28.42	V

Channel 93

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17955.900	50.89	-29.55	45.95	34.49	74.00	23.11	H
17977.050	50.55	-29.55	45.95	34.15	74.00	23.45	H
13894.650	47.01	-31.40	41.30	37.11	88.20	41.19	H
14095.350	47.01	-30.70	41.70	36.01	88.20	41.19	H
12761.550	45.97	-31.94	39.65	38.26	88.20	42.23	V
11863.800	45.59	-32.13	39.15	38.57	74.00	28.41	H

Channel 97

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17290.800	50.12	-29.74	42.90	36.96	88.20	38.08	V
17999.100	50.07	-29.55	45.95	33.67	74.00	23.93	V
13265.100	46.22	-31.65	40.50	37.37	74.00	27.78	V
13277.700	46.15	-31.62	40.60	37.17	74.00	27.85	H
12762.000	45.40	-31.94	39.65	37.69	88.20	42.80	H
12782.250	44.86	-31.36	39.80	36.42	88.20	43.34	H

Channel 105

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17950.050	50.10	-29.55	45.95	33.70	74.00	23.90	H
17619.750	50.02	-29.77	45.15	34.64	88.20	38.18	V
13192.650	46.55	-30.98	40.40	37.13	88.20	41.65	V
13902.750	46.21	-31.40	41.30	36.31	88.20	41.99	V
11360.700	45.51	-33.13	38.85	39.79	74.00	28.49	V
12694.950	45.27	-31.50	39.50	37.27	74.00	28.73	V

Channel 113

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.950	49.95	-29.55	45.95	33.55	74.00	24.05	H
17972.550	49.64	-29.55	45.95	33.24	74.00	24.36	H
13413.600	46.27	-32.05	40.70	37.62	88.20	41.93	H
13688.100	46.21	-31.08	41.00	36.29	88.20	41.99	H
12770.550	45.21	-31.94	39.65	37.50	88.20	42.99	V
11848.500	45.03	-32.13	39.15	38.01	74.00	28.97	H

Channel 117

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17964.000	50.31	-29.55	45.95	33.91	74.00	23.69	H
17647.200	50.28	-29.80	45.40	34.68	88.20	37.92	H
13850.550	47.10	-30.55	41.25	36.40	88.20	41.10	V
13950.450	46.58	-31.02	41.40	36.20	88.20	41.62	V
12776.400	45.37	-31.36	39.80	36.93	88.20	42.83	V
9108.450	45.35	-33.79	37.70	41.44	74.00	28.65	V

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.700	50.39	-29.55	45.95	33.99	74.00	23.61	V
17975.700	50.32	-29.55	45.95	33.92	74.00	23.68	V
13996.350	46.71	-30.97	41.50	36.18	88.20	41.49	V
14579.550	46.68	-29.81	41.90	34.59	88.20	41.52	V
12775.500	45.88	-31.36	39.80	37.44	88.20	42.32	V
11866.500	45.53	-32.13	39.15	38.51	74.00	28.47	V

Channel 181

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.550	50.61	-29.55	45.95	34.21	74.00	23.39	H
17994.150	50.45	-29.55	45.95	34.05	74.00	23.55	V
13954.050	46.72	-31.02	41.40	36.34	88.20	41.48	V
13276.350	46.64	-31.62	40.60	37.66	74.00	27.36	V
10724.400	45.63	-33.39	38.40	40.62	74.00	28.37	V
12770.550	45.51	-31.94	39.65	37.80	88.20	42.69	V

Channel 185

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17949.600	50.03	-29.55	45.95	33.63	74.00	23.97	H
17964.900	50.01	-29.55	45.95	33.61	74.00	23.99	V
14135.850	46.97	-31.00	41.70	36.27	88.20	41.23	V
14584.950	46.71	-29.81	41.90	34.62	88.20	41.49	V
12695.400	45.45	-31.50	39.50	37.45	74.00	28.55	V
9749.700	45.38	-34.12	37.80	41.70	88.20	42.82	V

Channel 209

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.650	51.40	-29.55	45.95	35.00	74.00	22.60	V
17982.900	50.27	-29.55	45.95	33.87	74.00	23.73	V
13175.100	46.81	-30.98	40.40	37.39	88.20	41.39	V
14616.450	46.65	-30.76	41.70	35.71	88.20	41.55	V
9497.250	45.83	-34.13	37.70	42.26	74.00	28.17	V
11889.900	45.27	-32.63	39.10	38.80	74.00	28.73	V

Channel 233

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17539.200	49.89	-29.62	44.90	34.61	88.20	38.31	V
17995.500	49.82	-29.55	45.95	33.42	74.00	24.18	V
13902.750	46.73	-31.40	41.30	36.83	88.20	41.47	V
13890.600	46.35	-31.40	41.30	36.45	88.20	41.85	V
7125.014	61.45	-25.93	35.70	51.68	88.20	26.75	V
7125.154	60.16	-25.93	35.70	50.39	88.20	28.04	V

802.11ax-40M partial RU

Channel 3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17599.050	49.92	-29.77	45.15	34.54	88.20	38.28	H
17982.000	49.91	-29.55	45.95	33.51	74.00	24.09	V
13903.650	46.70	-31.40	41.30	36.80	88.20	41.50	H
13812.750	46.61	-30.55	41.25	35.91	88.20	41.59	H
5862.806	51.63	-27.12	34.20	44.55	88.20	36.57	V
5913.584	51.52	-27.15	34.30	44.37	88.20	36.68	V

Channel 43

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.400	50.58	-29.55	45.95	34.18	74.00	23.42	V
17945.100	50.35	-29.55	45.95	33.95	74.00	23.65	V
13917.600	46.80	-31.02	41.40	36.42	88.20	41.40	V
13707.000	46.60	-31.08	41.00	36.68	88.20	41.60	H
10715.400	45.40	-33.39	38.40	40.39	74.00	28.60	H
12736.350	45.39	-31.94	39.65	37.68	88.20	42.81	H

Channel 91

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.100	51.21	-29.55	45.95	34.81	74.00	22.79	V
17997.300	50.77	-29.55	45.95	34.37	74.00	23.23	H
13875.750	47.30	-31.40	41.30	37.40	88.20	40.90	V
13840.200	47.29	-30.55	41.25	36.59	88.20	40.91	H
12730.500	46.47	-31.94	39.65	38.76	88.20	41.73	V
12686.400	46.40	-31.50	39.50	38.40	74.00	27.60	V

Channel 99

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17931.600	50.36	-29.55	45.95	33.96	74.00	23.64	V
17994.600	50.03	-29.55	45.95	33.63	74.00	23.97	V
13928.850	46.27	-31.02	41.40	35.89	88.20	41.93	H
13685.850	46.11	-31.08	41.00	36.19	88.20	42.09	H
11689.650	45.28	-33.00	39.20	39.08	74.00	28.72	V
11121.750	44.96	-32.83	38.60	39.19	74.00	29.04	V

Channel 107

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.500	50.71	-29.55	45.95	34.31	74.00	23.29	V
17990.550	50.28	-29.55	45.95	33.88	74.00	23.72	H
13924.350	46.43	-31.02	41.40	36.05	88.20	41.77	V
13900.050	46.27	-31.40	41.30	36.37	88.20	41.93	V
11873.250	45.00	-32.13	39.15	37.98	74.00	29.00	V
12766.050	44.81	-31.94	39.65	37.10	88.20	43.39	V

Channel 115

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.600	50.63	-29.55	45.95	34.23	74.00	23.37	V
17996.850	50.53	-29.55	45.95	34.13	74.00	23.47	V
13842.900	47.10	-30.55	41.25	36.40	88.20	41.10	H
13259.700	47.03	-31.65	40.50	38.18	74.00	26.97	H
12760.200	46.00	-31.94	39.65	38.29	88.20	42.20	H
12783.600	45.87	-31.36	39.80	37.43	88.20	42.33	V

Channel 123

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.150	52.03	-29.55	45.95	35.63	74.00	21.97	H
17993.700	51.43	-29.55	45.95	35.03	74.00	22.57	V
13932.900	48.59	-31.02	41.40	38.21	88.20	39.61	H
13798.800	48.48	-31.06	41.20	38.34	88.20	39.72	H
12526.200	47.30	-31.58	39.20	39.68	74.00	26.70	V
13065.750	47.25	-30.95	40.15	38.05	88.20	40.95	H

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17527.950	51.95	-29.62	44.90	36.67	88.20	36.25	V
17426.700	50.72	-29.07	44.20	35.59	88.20	37.48	H
13869.000	47.34	-31.40	41.30	37.44	88.20	40.86	V
13794.750	47.10	-31.06	41.20	36.96	88.20	41.10	V
10524.150	46.00	-33.01	38.20	40.81	88.20	42.20	V
12728.700	45.73	-31.94	39.65	38.02	88.20	42.47	V

Channel 179

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17238.150	51.03	-29.62	42.40	38.25	88.20	37.17	V
17046.450	50.86	-29.73	41.10	39.48	88.20	37.34	V
13311.900	47.38	-31.62	40.60	38.40	74.00	26.62	V
13894.200	47.04	-31.40	41.30	37.14	88.20	41.16	H
12294.900	45.65	-31.98	39.00	38.63	74.00	28.35	V
12773.250	45.59	-31.36	39.80	37.15	88.20	42.61	V

Channel 187

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17484.750	50.04	-29.14	44.55	34.63	88.20	38.16	V
17536.500	50.00	-29.62	44.90	34.72	88.20	38.20	V
13929.750	47.54	-31.02	41.40	37.16	88.20	40.66	V
13742.550	46.55	-31.33	41.10	36.78	88.20	41.65	V
11864.250	45.67	-32.13	39.15	38.65	74.00	28.33	V
11839.950	45.58	-32.13	39.15	38.56	74.00	28.42	H

Channel 211

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.700	49.89	-29.55	45.95	33.49	74.00	24.11	V
17572.950	49.77	-29.62	44.90	34.49	88.20	38.43	V
13734.000	46.75	-31.33	41.10	36.98	88.20	41.45	V
13308.300	46.62	-31.62	40.60	37.64	74.00	27.38	H
12768.300	45.48	-31.94	39.65	37.77	88.20	42.72	V
13085.550	45.37	-31.67	40.20	36.84	88.20	42.83	V

Channel 227

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.900	50.04	-29.55	45.95	33.64	74.00	23.96	H
17939.700	49.92	-29.55	45.95	33.52	74.00	24.08	V
13872.600	47.02	-31.40	41.30	37.12	88.20	41.18	V
13928.850	46.68	-31.02	41.40	36.30	88.20	41.52	V
7154.360	54.97	-26.05	35.90	45.12	88.20	33.23	H
7179.770	54.91	-25.94	36.20	44.65	88.20	33.29	V

802.11ax-80M partial RU

Channel 7

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.900	50.60	-29.55	45.95	34.20	74.00	23.40	H
17974.350	50.00	-29.55	45.95	33.60	74.00	24.00	H
14108.400	46.65	-30.70	41.70	35.65	88.20	41.55	V
13274.550	46.43	-31.62	40.60	37.45	74.00	27.57	H
5842.338	52.00	-27.12	34.20	44.92	88.20	36.20	H
5902.132	51.86	-27.15	34.30	44.71	88.20	36.34	H

Channel 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.600	50.11	-29.55	45.95	33.71	74.00	23.89	V
17956.350	49.96	-29.55	45.95	33.56	74.00	24.04	V
13846.950	46.57	-30.55	41.25	35.87	88.20	41.63	H
13974.300	46.33	-30.97	41.50	35.80	88.20	41.87	V
11302.200	45.44	-32.76	38.70	39.50	74.00	28.56	H
11864.250	45.20	-32.13	39.15	38.18	74.00	28.80	V

Channel 87

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17589.150	50.28	-29.77	45.15	34.90	88.20	37.92	V
17519.850	50.03	-29.14	44.55	34.62	88.20	38.17	H
13759.200	47.03	-31.33	41.10	37.26	88.20	41.17	V
14558.400	46.48	-29.81	41.90	34.39	88.20	41.72	H
12292.200	45.92	-31.98	39.00	38.90	74.00	28.08	V
10714.500	45.79	-33.39	38.40	40.78	74.00	28.21	V

Channel 103

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.650	50.55	-29.55	45.95	34.15	74.00	23.45	H
17992.350	50.19	-29.55	45.95	33.79	74.00	23.81	V
13680.000	47.56	-31.08	41.00	37.64	88.20	40.64	V
13934.700	46.91	-31.02	41.40	36.53	88.20	41.29	H
12770.100	45.66	-31.94	39.65	37.95	88.20	42.54	V
12306.150	45.34	-31.98	39.00	38.32	74.00	28.66	V

Channel 119

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17940.600	50.49	-29.55	45.95	34.09	74.00	23.51	V
17988.300	49.94	-29.55	45.95	33.54	74.00	24.06	H
13299.750	47.24	-31.62	40.60	38.26	74.00	26.76	V
13255.200	46.89	-31.65	40.50	38.04	74.00	27.11	H
12776.400	45.72	-31.36	39.80	37.28	88.20	42.48	H
12778.650	45.62	-31.36	39.80	37.18	88.20	42.58	V

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.400	51.16	-29.55	45.95	34.76	74.00	22.84	V
17980.650	50.35	-29.55	45.95	33.95	74.00	23.65	V
13846.950	47.23	-30.55	41.25	36.53	88.20	40.97	V
13754.700	47.07	-31.33	41.10	37.30	88.20	41.13	H
12743.100	45.73	-31.94	39.65	38.02	88.20	42.47	H
11896.200	45.72	-32.63	39.10	39.25	74.00	28.28	V

Channel 183

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.800	50.28	-29.55	45.95	33.88	74.00	23.72	H
17559.450	49.94	-29.62	44.90	34.66	88.20	38.26	H
14623.200	46.98	-30.76	41.70	36.04	88.20	41.22	V
14598.900	46.57	-29.81	41.90	34.48	88.20	41.63	H
11213.550	45.54	-32.65	38.60	39.59	74.00	28.46	H
12492.000	45.11	-31.21	39.10	37.22	74.00	28.89	V

Channel 199

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17958.150	50.14	-29.55	45.95	33.74	74.00	23.86	V
17994.150	49.76	-29.55	45.95	33.36	74.00	24.24	V
13893.750	47.16	-31.40	41.30	37.26	88.20	41.04	V
13310.100	47.14	-31.62	40.60	38.16	74.00	26.86	H
10732.500	45.66	-33.39	38.40	40.65	74.00	28.34	V
12740.850	45.59	-31.94	39.65	37.88	88.20	42.61	H

Channel 215

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.000	50.32	-29.55	45.95	33.92	74.00	23.68	V
17986.950	50.24	-29.55	45.95	33.84	74.00	23.76	V
13779.000	47.06	-31.06	41.20	36.92	88.20	41.14	V
14552.100	46.61	-30.71	41.90	35.42	88.20	41.59	V
7180.260	55.21	-25.94	36.20	44.95	88.20	32.99	V
7182.940	54.80	-25.94	36.20	44.54	88.20	33.40	V

802.11ax-160M partial RU

Channel 15

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.700	49.90	-29.55	45.95	33.50	74.00	24.10	V
17523.450	49.84	-29.14	44.55	34.43	88.20	38.36	H
13315.050	46.65	-31.62	40.60	37.67	74.00	27.35	H
13875.300	46.47	-31.40	41.30	36.57	88.20	41.73	H
5924.336	58.96	-27.15	34.30	51.81	88.20	29.24	H
5924.266	58.23	-27.15	34.30	51.08	88.20	29.97	V

Channel 47

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17533.800	50.31	-29.62	44.90	35.03	88.20	37.89	H
17996.400	50.26	-29.55	45.95	33.86	74.00	23.74	V
13803.750	46.61	-31.06	41.20	36.47	88.20	41.59	V
13324.050	46.49	-31.26	40.65	37.10	74.00	27.51	H
12305.250	45.88	-31.98	39.00	38.86	74.00	28.12	H
12767.850	45.50	-31.94	39.65	37.79	88.20	42.70	H

Channel 79

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.400	49.69	-29.55	45.95	33.29	74.00	24.31	H
17989.650	49.42	-29.55	45.95	33.02	74.00	24.58	H
13940.550	46.36	-31.02	41.40	35.98	88.20	41.84	H
13922.100	46.25	-31.02	41.40	35.87	88.20	41.95	H
12766.050	45.24	-31.94	39.65	37.53	88.20	42.96	V
11290.500	45.13	-32.76	38.70	39.19	74.00	28.87	V

Channel 143

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17972.100	49.89	-29.55	45.95	33.49	74.00	24.11	V
17941.050	49.75	-29.55	45.95	33.35	74.00	24.25	V
13744.350	46.88	-31.33	41.10	37.11	88.20	41.32	V
13293.000	46.74	-31.62	40.60	37.76	74.00	27.26	V
11304.900	45.96	-32.76	38.70	40.02	74.00	28.04	V
11872.350	45.42	-32.13	39.15	38.40	74.00	28.58	V

Channel 207

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17965.800	49.84	-29.55	45.95	33.44	74.00	24.16	H
17970.300	49.82	-29.55	45.95	33.42	74.00	24.18	V
13979.700	46.58	-30.97	41.50	36.05	88.20	41.62	H
13927.950	46.48	-31.02	41.40	36.10	88.20	41.72	H
7169.016	54.58	-26.05	35.90	44.73	88.20	33.62	V
7132.104	54.39	-26.05	35.90	44.54	88.20	33.81	V

802.11be-20M partial RU

Channel 1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17935.200	50.52	-29.55	45.95	34.12	74.00	23.48	V
17998.650	50.25	-29.55	45.95	33.85	74.00	23.75	V
13929.300	47.14	-31.02	41.40	36.76	88.20	41.06	V
13890.600	46.71	-31.40	41.30	36.81	88.20	41.49	V
5904.204	52.24	-27.15	34.30	45.09	88.20	35.96	H
5913.696	51.64	-27.15	34.30	44.49	88.20	36.56	H

Channel 45

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.000	50.65	-29.55	45.95	34.25	74.00	23.35	H
17959.500	50.49	-29.55	45.95	34.09	74.00	23.51	V
13911.750	47.05	-31.02	41.40	36.67	88.20	41.15	H
13711.950	46.40	-31.08	41.00	36.48	88.20	41.80	V
11783.250	45.78	-32.20	39.20	38.77	74.00	28.22	V
12772.350	45.34	-31.36	39.80	36.90	88.20	42.86	H

Channel 93

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17940.600	50.56	-29.55	45.95	34.16	74.00	23.44	H
17951.850	50.45	-29.55	45.95	34.05	74.00	23.55	V
13155.300	46.97	-31.63	40.30	38.30	88.20	41.23	H
13902.300	46.86	-31.40	41.30	36.96	88.20	41.34	V
9013.050	45.79	-33.67	37.80	41.67	74.00	28.21	H
12499.200	45.56	-31.21	39.10	37.67	74.00	28.44	H

Channel 97

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17601.750	49.94	-29.77	45.15	34.56	88.20	38.26	H
17945.100	49.74	-29.55	45.95	33.34	74.00	24.26	V
13940.550	47.02	-31.02	41.40	36.64	88.20	41.18	V
13866.750	46.39	-31.40	41.30	36.49	88.20	41.81	H
12775.500	45.96	-31.36	39.80	37.52	88.20	42.24	V
12715.650	45.12	-31.50	39.50	37.12	88.20	43.08	V

Channel 105

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17622.450	49.64	-29.77	45.15	34.26	88.20	38.56	V
17998.200	49.63	-29.55	45.95	33.23	74.00	24.37	H
13711.050	47.48	-31.08	41.00	37.56	88.20	40.72	V
13707.000	46.85	-31.08	41.00	36.93	88.20	41.35	V
11116.800	45.24	-32.83	38.60	39.47	74.00	28.76	V
11911.500	44.92	-32.63	39.10	38.45	74.00	29.08	V

Channel 113

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.200	50.07	-29.55	45.95	33.67	74.00	23.93	V
17973.900	49.54	-29.55	45.95	33.14	74.00	24.46	H
13849.650	46.29	-30.55	41.25	35.59	88.20	41.91	H
13947.750	46.25	-31.02	41.40	35.87	88.20	41.95	V
11874.150	45.56	-32.13	39.15	38.54	74.00	28.44	V
10530.900	45.26	-33.01	38.20	40.07	88.20	42.94	V

Channel 117

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.350	50.23	-29.55	45.95	33.83	74.00	23.77	V
17311.950	50.07	-29.74	42.90	36.91	88.20	38.13	H
14179.500	46.89	-30.97	41.70	36.16	88.20	41.31	V
13923.900	46.81	-31.02	41.40	36.43	88.20	41.39	H
11857.050	45.90	-32.13	39.15	38.88	74.00	28.10	V
12287.700	45.64	-31.98	39.00	38.62	74.00	28.36	V

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.300	50.09	-29.55	45.95	33.69	74.00	23.91	V
17993.250	49.85	-29.55	45.95	33.45	74.00	24.15	V
13950.900	46.89	-31.02	41.40	36.51	88.20	41.31	V
13826.700	46.48	-30.55	41.25	35.78	88.20	41.72	V
11859.300	45.91	-32.13	39.15	38.89	74.00	28.09	V
11861.100	45.14	-32.13	39.15	38.12	74.00	28.86	H

Channel 181

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.800	50.37	-29.55	45.95	33.97	74.00	23.63	V
17993.250	50.07	-29.55	45.95	33.67	74.00	23.93	V
12023.100	48.18	-32.70	39.00	41.88	74.00	25.82	V
13264.650	46.59	-31.65	40.50	37.74	74.00	27.41	V
13258.800	46.49	-31.65	40.50	37.64	74.00	27.51	V
12780.000	45.60	-31.36	39.80	37.16	88.20	42.60	V

Channel 185

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.100	50.16	-29.55	45.95	33.76	74.00	23.84	V
17956.350	50.05	-29.55	45.95	33.65	74.00	23.95	V
13636.800	47.14	-31.48	40.90	37.72	88.20	41.06	V
13762.800	46.80	-31.06	41.20	36.66	88.20	41.40	V
12790.800	45.80	-31.36	39.80	37.36	88.20	42.40	V
11881.800	45.36	-32.63	39.10	38.89	74.00	28.64	V

Channel 209

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.650	50.06	-29.55	45.95	33.66	74.00	23.94	H
17622.000	50.02	-29.77	45.15	34.64	88.20	38.18	V
13881.150	46.65	-31.40	41.30	36.75	88.20	41.55	V
14105.250	46.58	-30.70	41.70	35.58	88.20	41.62	V
12692.700	45.90	-31.50	39.50	37.90	74.00	28.10	V
12634.200	45.35	-31.89	39.40	37.84	74.00	28.65	V

Channel 233

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17449.200	50.11	-29.07	44.20	34.98	88.20	38.09	V
17992.800	49.59	-29.55	45.95	33.19	74.00	24.41	H
14554.800	47.84	-29.81	41.90	35.75	88.20	40.36	H
14603.400	46.72	-29.81	41.90	34.63	88.20	41.48	V
7125.532	59.57	-25.93	35.70	49.80	88.20	28.63	V
7125.350	59.37	-25.93	35.70	49.60	88.20	28.83	V

802.11be-40M partial RU

Channel 3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17625.600	50.44	-29.80	45.40	34.84	88.20	37.76	V
17998.200	50.41	-29.55	45.95	34.01	74.00	23.59	V
13943.250	47.15	-31.02	41.40	36.77	88.20	41.05	H
13330.800	46.69	-31.26	40.65	37.30	74.00	27.31	H
5908.978	51.98	-27.15	34.30	44.83	88.20	36.22	V
5911.876	51.35	-27.15	34.30	44.20	88.20	36.85	V

Channel 43

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17541.900	50.49	-29.62	44.90	35.21	88.20	37.71	V
17988.300	50.35	-29.55	45.95	33.95	74.00	23.65	V
13935.150	46.95	-31.02	41.40	36.57	88.20	41.25	H
13310.550	46.70	-31.62	40.60	37.72	74.00	27.30	V
11867.400	45.49	-32.13	39.15	38.47	74.00	28.51	H
11234.700	45.44	-32.65	38.60	39.49	74.00	28.56	H

Channel 91

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.850	50.24	-29.55	45.95	33.84	74.00	23.76	H
17525.700	50.22	-29.62	44.90	34.94	88.20	37.98	V
14715.900	46.96	-30.18	41.35	35.79	88.20	41.24	H
10714.500	46.56	-33.39	38.40	41.55	74.00	27.44	V
13936.500	46.56	-31.02	41.40	36.18	88.20	41.64	V
11887.200	45.61	-32.63	39.10	39.14	74.00	28.39	H

Channel 99

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.050	49.98	-29.55	45.95	33.58	74.00	24.02	V
17986.500	49.97	-29.55	45.95	33.57	74.00	24.03	H
13862.250	46.52	-31.40	41.30	36.62	88.20	41.68	V
13325.850	46.42	-31.26	40.65	37.03	74.00	27.58	H
11821.950	44.99	-32.20	39.20	37.98	74.00	29.01	V
12768.300	44.97	-31.94	39.65	37.26	88.20	43.23	H

Channel 107

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.000	50.32	-29.55	45.95	33.92	74.00	23.68	V
17950.500	50.19	-29.55	45.95	33.79	74.00	23.81	V
13861.350	47.16	-30.55	41.25	36.46	88.20	41.04	H
13888.350	46.94	-31.40	41.30	37.04	88.20	41.26	V
12674.250	45.57	-31.50	39.50	37.57	74.00	28.43	V
12768.750	45.55	-31.94	39.65	37.84	88.20	42.65	V

Channel 115

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.750	50.94	-29.55	45.95	34.54	74.00	23.06	V
17990.100	50.32	-29.55	45.95	33.92	74.00	23.68	H
13941.900	47.83	-31.02	41.40	37.45	88.20	40.37	V
13330.800	47.40	-31.26	40.65	38.01	74.00	26.60	H
10462.500	46.33	-33.89	38.20	42.02	88.20	41.87	V
12697.650	46.18	-31.50	39.50	38.18	74.00	27.82	H

Channel 123

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17939.250	51.00	-29.55	45.95	34.60	74.00	23.00	V
17483.850	50.87	-29.14	44.55	35.46	88.20	37.33	V
13873.050	47.23	-31.40	41.30	37.33	88.20	40.97	V
13978.350	47.06	-30.97	41.50	36.53	88.20	41.14	V
12771.900	46.24	-31.94	39.65	38.53	88.20	41.96	H
11892.600	46.18	-32.63	39.10	39.71	74.00	27.82	V

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17439.750	50.73	-29.07	44.20	35.60	88.20	37.47	H
17503.200	50.35	-29.14	44.55	34.94	88.20	37.85	V
13923.450	47.97	-31.02	41.40	37.59	88.20	40.23	V
13297.050	47.86	-31.62	40.60	38.88	74.00	26.14	V
11511.450	45.85	-32.96	39.10	39.71	74.00	28.15	V
12767.400	45.84	-31.94	39.65	38.13	88.20	42.36	V

Channel 179

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17593.650	50.47	-29.77	45.15	35.09	88.20	37.73	V
17996.850	50.22	-29.55	45.95	33.82	74.00	23.78	V
13321.350	47.34	-31.26	40.65	37.95	74.00	26.66	H
13686.300	46.84	-31.08	41.00	36.92	88.20	41.36	H
11883.600	45.37	-32.63	39.10	38.90	74.00	28.63	V
12689.100	45.29	-31.50	39.50	37.29	74.00	28.71	V

Channel 187

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17622.450	50.05	-29.77	45.15	34.67	88.20	38.15	V
17935.650	49.91	-29.55	45.95	33.51	74.00	24.09	V
13266.900	46.92	-31.65	40.50	38.07	74.00	27.08	V
13155.750	46.85	-31.63	40.30	38.18	88.20	41.35	H
11866.050	45.46	-32.13	39.15	38.44	74.00	28.54	V
11860.650	45.26	-32.13	39.15	38.24	74.00	28.74	V

Channel 211

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17946.000	50.53	-29.55	45.95	34.13	74.00	23.47	V
17989.650	50.21	-29.55	45.95	33.81	74.00	23.79	V
13719.150	47.33	-31.33	41.10	37.56	88.20	40.87	V
13886.100	47.08	-31.40	41.30	37.18	88.20	41.12	H
11918.250	45.45	-32.63	39.10	38.98	74.00	28.55	V
9155.700	45.43	-33.82	37.70	41.55	74.00	28.57	V

Channel 227

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.900	50.73	-29.55	45.95	34.33	74.00	23.27	V
17969.400	49.61	-29.55	45.95	33.21	74.00	24.39	V
13287.150	46.56	-31.62	40.60	37.58	74.00	27.44	V
13916.700	46.56	-31.02	41.40	36.18	88.20	41.64	V
7196.780	55.85	-25.94	36.20	45.59	88.20	32.35	H
7194.862	54.95	-25.94	36.20	44.69	88.20	33.25	H

802.11be-80M partial RU

Channel 7

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.050	50.34	-29.55	45.95	33.94	74.00	23.66	H
17992.800	50.26	-29.55	45.95	33.86	74.00	23.74	V
13268.700	47.04	-31.62	40.60	38.06	74.00	26.96	H
13277.700	46.69	-31.62	40.60	37.71	74.00	27.31	H
5909.510	52.55	-27.15	34.30	45.40	88.20	35.65	V
5913.024	51.80	-27.15	34.30	44.65	88.20	36.40	H

Channel 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.900	50.54	-29.55	45.95	34.14	74.00	23.46	H
17997.750	49.95	-29.55	45.95	33.55	74.00	24.05	H
13930.200	46.36	-31.02	41.40	35.98	88.20	41.84	V
14100.750	46.22	-30.70	41.70	35.22	88.20	41.98	V
12703.950	45.39	-31.50	39.50	37.39	88.20	42.81	H
11287.350	45.31	-32.76	38.70	39.37	74.00	28.69	H

Channel 87

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.850	50.66	-29.55	45.95	34.26	74.00	23.34	H
17982.450	50.18	-29.55	45.95	33.78	74.00	23.82	V
13945.050	46.69	-31.02	41.40	36.31	88.20	41.51	V
14687.100	46.50	-30.35	41.50	35.35	88.20	41.70	H
11018.700	45.73	-32.98	38.60	40.11	74.00	28.27	V
12367.350	45.46	-32.38	38.95	38.89	74.00	28.54	H

Channel 103

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17962.650	50.05	-29.55	45.95	33.65	74.00	23.95	H
17253.000	49.67	-29.62	42.40	36.89	88.20	38.53	V
13846.500	46.65	-30.55	41.25	35.95	88.20	41.55	V
13314.600	46.57	-31.62	40.60	37.59	74.00	27.43	V
12262.950	45.28	-32.39	38.95	38.72	74.00	28.72	H
12767.400	45.17	-31.94	39.65	37.46	88.20	43.03	V

Channel 119

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17624.700	50.70	-29.80	45.40	35.10	88.20	37.50	H
17996.850	50.39	-29.55	45.95	33.99	74.00	23.61	V
13699.350	46.67	-31.08	41.00	36.75	88.20	41.53	V
13941.900	46.59	-31.02	41.40	36.21	88.20	41.61	V
11889.900	46.05	-32.63	39.10	39.58	74.00	27.95	V
11889.000	45.73	-32.63	39.10	39.26	74.00	28.27	V

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17624.700	50.06	-29.80	45.40	34.46	88.20	38.14	V
17983.800	50.01	-29.55	45.95	33.61	74.00	23.99	H
13649.400	46.86	-31.48	40.90	37.44	88.20	41.34	V
13871.250	46.58	-31.40	41.30	36.68	88.20	41.62	V
11856.150	45.81	-32.13	39.15	38.79	74.00	28.19	V
12689.100	45.77	-31.50	39.50	37.77	74.00	28.23	V

Channel 183

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.750	50.10	-29.55	45.95	33.70	74.00	23.90	V
17636.400	50.09	-29.80	45.40	34.49	88.20	38.11	H
14097.600	46.63	-30.70	41.70	35.63	88.20	41.57	V
13874.400	46.52	-31.40	41.30	36.62	88.20	41.68	V
11920.050	45.36	-32.63	39.10	38.89	74.00	28.64	V
11870.100	45.22	-32.13	39.15	38.20	74.00	28.78	V

Channel 199

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17536.500	50.35	-29.62	44.90	35.07	88.20	37.85	H
17961.750	49.90	-29.55	45.95	33.50	74.00	24.10	V
13880.250	47.07	-31.40	41.30	37.17	88.20	41.13	V
13183.200	46.41	-30.98	40.40	36.99	88.20	41.79	V
12288.600	45.39	-31.98	39.00	38.37	74.00	28.61	V
11898.900	45.35	-32.63	39.10	38.88	74.00	28.65	V

Channel 215

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.750	50.64	-29.55	45.95	34.24	74.00	23.36	H
17533.350	50.40	-29.62	44.90	35.12	88.20	37.80	V
13913.100	46.56	-31.02	41.40	36.18	88.20	41.64	V
14238.450	46.49	-31.02	41.75	35.76	88.20	41.71	V
7159.520	54.74	-26.05	35.90	44.89	88.20	33.46	H
7162.540	54.65	-26.05	35.90	44.80	88.20	33.55	V

802.11be-160M partial RU

Channel 15

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.900	49.96	-29.55	45.95	33.56	74.00	24.04	V
17995.050	49.56	-29.55	45.95	33.16	74.00	24.44	V
13916.700	45.79	-31.02	41.40	35.41	88.20	42.41	V
13915.800	45.49	-31.02	41.40	35.11	88.20	42.71	V

5924.756	58.80	-27.15	34.30	51.65	88.20	29.40	H
5923.132	58.35	-27.15	34.30	51.20	88.20	29.85	H

Channel 47

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.300	49.57	-29.55	45.95	33.17	74.00	24.43	V
17980.200	49.27	-29.55	45.95	32.87	74.00	24.73	V
13916.700	45.96	-31.02	41.40	35.58	88.20	42.24	V
13773.600	45.94	-31.06	41.20	35.80	88.20	42.26	V
12690.900	44.43	-31.50	39.50	36.43	74.00	29.57	V
12001.500	44.32	-32.70	39.00	38.02	74.00	29.68	V

Channel 79

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.850	49.65	-29.55	45.95	33.25	74.00	24.35	V
17994.150	49.27	-29.55	45.95	32.87	74.00	24.73	V
13946.400	46.89	-31.02	41.40	36.51	88.20	41.31	V
13730.850	45.88	-31.33	41.10	36.11	88.20	42.32	V
12780.450	44.97	-31.36	39.80	36.53	88.20	43.23	V
11878.650	44.93	-32.13	39.15	37.91	74.00	29.07	V

Channel 143

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17543.250	50.28	-29.62	44.90	35.00	88.20	37.92	V
17526.150	49.94	-29.62	44.90	34.66	88.20	38.26	V
13872.150	46.52	-31.40	41.30	36.62	88.20	41.68	H
13293.450	46.51	-31.62	40.60	37.53	74.00	27.49	H
11868.750	46.15	-32.13	39.15	39.13	74.00	27.85	V
12714.750	45.65	-31.50	39.50	37.65	88.20	42.55	H

Channel 207

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17552.250	50.13	-29.62	44.90	34.85	88.20	38.07	V
17996.400	50.00	-29.55	45.95	33.60	74.00	24.00	V
13305.600	47.10	-31.62	40.60	38.12	74.00	26.90	V
13305.150	47.08	-31.62	40.60	38.10	74.00	26.92	V

7187.688	55.25	-25.94	36.20	44.99	88.20	32.95	H
7190.928	54.54	-25.94	36.20	44.28	88.20	33.66	V

802.11be-320M partial RU

Channel 31

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17909.550	50.59	-29.55	45.95	34.19	74.00	23.41	H
17585.550	50.56	-29.77	45.15	35.18	88.20	37.64	H
13768.650	47.38	-31.06	41.20	37.24	88.20	40.82	V
13266.000	47.30	-31.65	40.50	38.45	74.00	26.70	V
5921.662	58.87	-27.15	34.30	51.72	88.20	29.33	H
5923.720	58.84	-27.15	34.30	51.69	88.20	29.36	V

Channel 63

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17414.550	51.06	-29.51	43.80	36.77	88.20	37.14	H
17860.050	50.90	-29.55	45.95	34.50	74.00	23.10	H
14071.500	48.11	-30.70	41.70	37.11	88.20	40.09	V
13311.900	47.82	-31.62	40.60	38.84	74.00	26.18	V
13079.700	47.13	-31.67	40.20	38.60	88.20	41.07	H
13010.400	46.14	-32.03	40.10	38.07	88.20	42.06	H

Channel 95

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17942.850	51.05	-29.55	45.95	34.65	74.00	22.95	H
17437.500	50.96	-29.07	44.20	35.83	88.20	37.24	H
14082.750	47.98	-30.70	41.70	36.98	88.20	40.22	V
13803.750	47.41	-31.06	41.20	37.27	88.20	40.79	V
11019.150	46.80	-32.98	38.60	41.18	74.00	27.20	H
13083.750	46.41	-31.67	40.20	37.88	88.20	41.79	V

Channel 127

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17859.150	51.52	-29.55	45.95	35.12	74.00	22.48	V
17834.400	50.97	-29.55	45.95	34.57	74.00	23.03	V
13312.800	47.73	-31.62	40.60	38.75	74.00	26.27	V
13767.750	47.49	-31.06	41.20	37.35	88.20	40.71	V
12795.750	46.19	-31.36	39.80	37.75	88.20	42.01	V
13061.700	46.11	-30.95	40.15	36.91	88.20	42.09	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17276.400	51.67	-29.62	42.40	38.89	88.20	36.53	V
17954.100	50.98	-29.55	45.95	34.58	74.00	23.02	H
13235.850	48.30	-31.65	40.50	39.45	88.20	39.90	V
14657.850	47.65	-30.35	41.50	36.50	88.20	40.55	V
10516.950	46.54	-33.01	38.20	41.35	88.20	41.66	V
12429.900	46.39	-31.82	39.00	39.21	74.00	27.61	V

Conclusion: PASS
Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

Note: The measurement results showed here are worst cases

A.9. Band Edges Compliance
A9.1 Band Edges - Radiated
Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3

88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

Measurement Result for full RU:

Mode	Channel	Test Results	Conclusion
802.11a 20M	CH1	Fig.1	P
	CH233	Fig.2	P
802.11ax 20M	CH1	Fig.3	P
	CH233	Fig.4	P
802.11ax 40M	CH3	Fig.5	P
	CH227	Fig.6	P
802.11ax 80M	CH7	Fig.7	P
	CH215	Fig.8	P
802.11ax 160M	CH15	Fig.9	P
	CH207	Fig.10	P
802.11be 20M	CH1	Fig.11	P
	CH233	Fig.12	P
802.11be 40M	CH3	Fig.13	P
	CH227	Fig.14	P
802.11be 80M	CH7	Fig.15	P
	CH215	Fig.16	P
802.11be 160M	CH15	Fig.17	P
	CH207	Fig.18	P
802.11be 320M	CH31	Fig.19	P

Measurement Result for Partial RU:

Mode	Channel	RU size and index	Test Results	Conclusion
802.11ax 20M	CH1	26RU-index0	Fig.20	P
	CH233	6RU-index8	Fig.21	P
802.11ax 40M	CH3	26RU-index0	Fig.22	P
	CH227	26RU-index17	Fig.23	P
802.11ax 80M	CH7	26RU-index0	Fig.24	P
	CH215	26RU-index36	Fig.25	P
802.11ax 160M	CH15	26RU-index0	Fig.26	P
	CH207	26RU-index72	Fig.27	P
802.11be 20M	CH1	26RU-index0	Fig.28	P
	CH233	6RU-index8	Fig.29	P
802.11be 40M	CH3	26RU-index0	Fig.30	P
	CH227	26RU-index17	Fig.31	P
802.11be 80M	CH7	26RU-index0	Fig.32	P

	CH215	26RU-index36	Fig.33	P
802.11be 160M	CH15	26RU-index0	Fig.34	P
	CH207	26RU-index72	Fig.35	P
802.11be 320M	CH31	26RU-index0	Fig.36	P

Note1: All partial RU have been tested, only the worst cases were reported.

Note2: All SISO and MIMO emissions have been checked, only the worst cases were reported.

Conclusion: PASS

Test graphs as below:

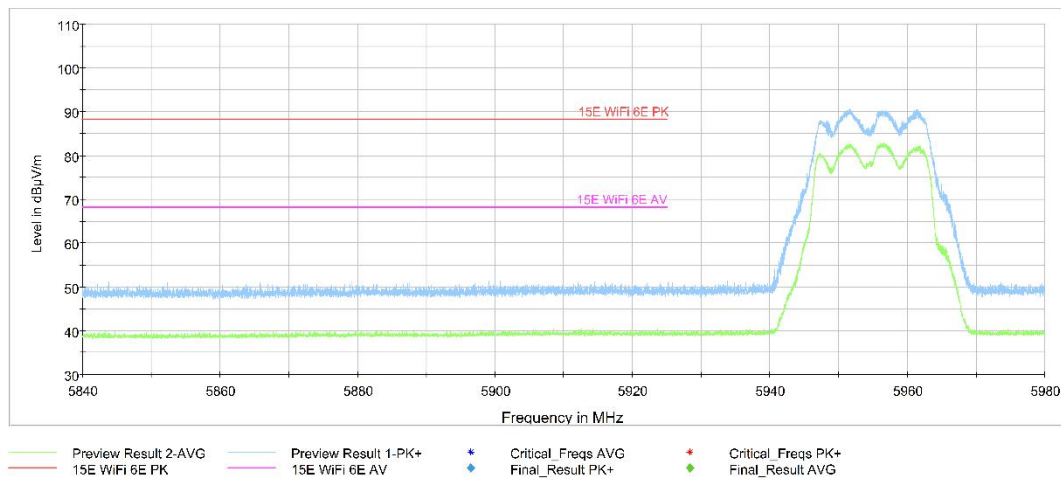


Fig.1 Band Edges (802.11a 20M Ch1 MIMO)

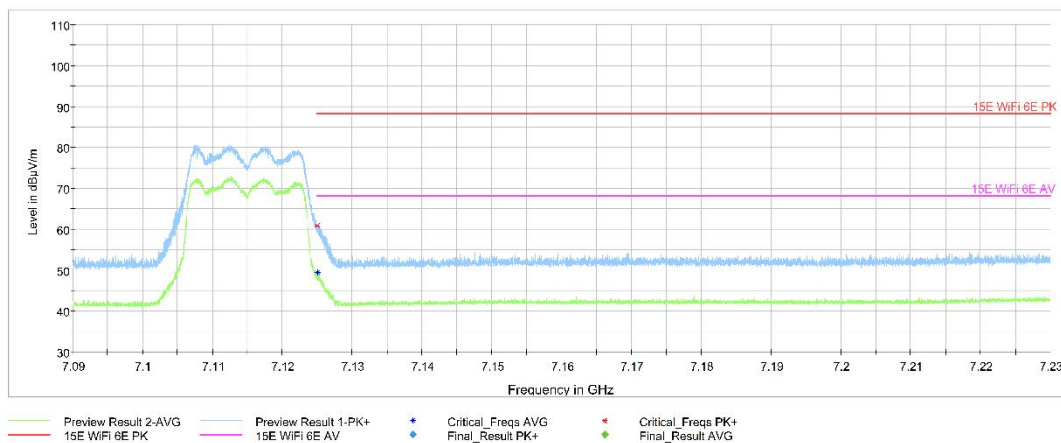


Fig.2 Band Edges (802.11ax 20M Ch233 MIMO)

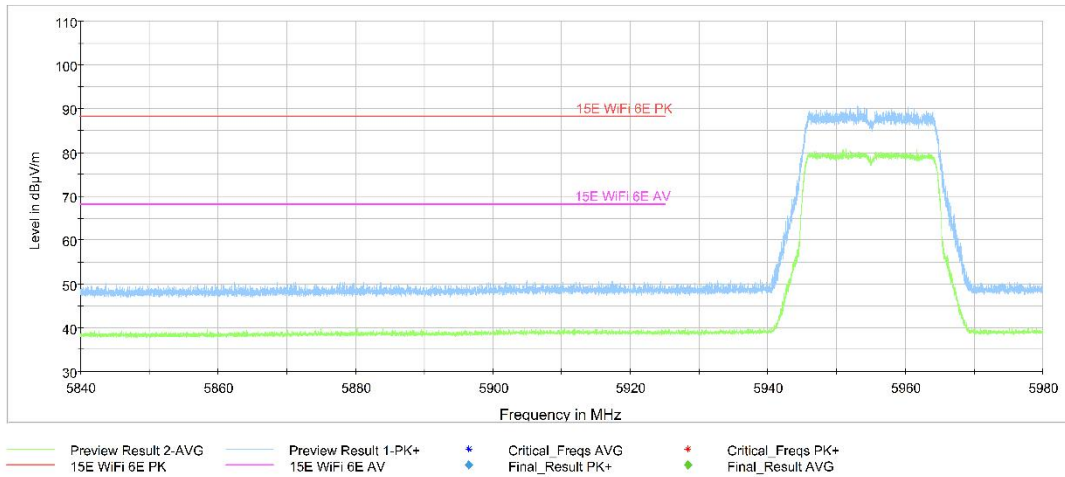


Fig.3 Band Edges (802.11ax 20M Ch1 full RU MIMO)

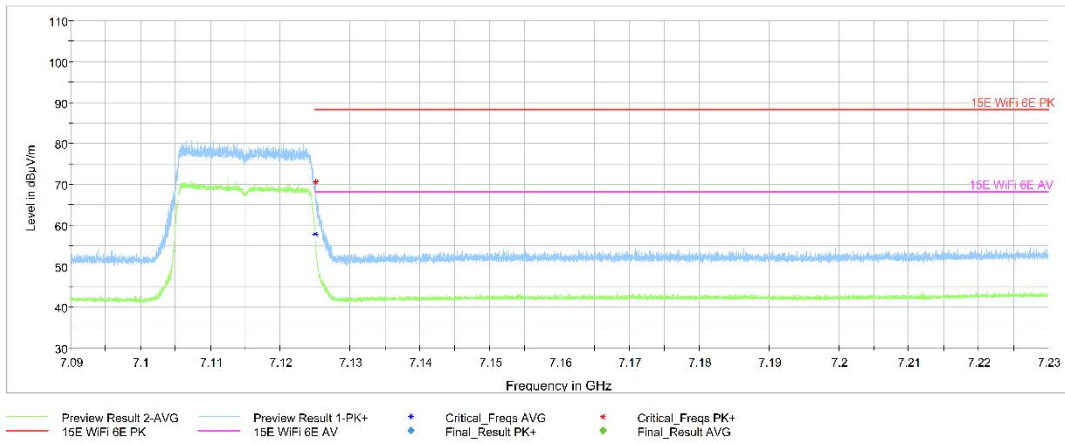


Fig.4 Band Edges (802.11ax 20M Ch233 full RU MIMO)

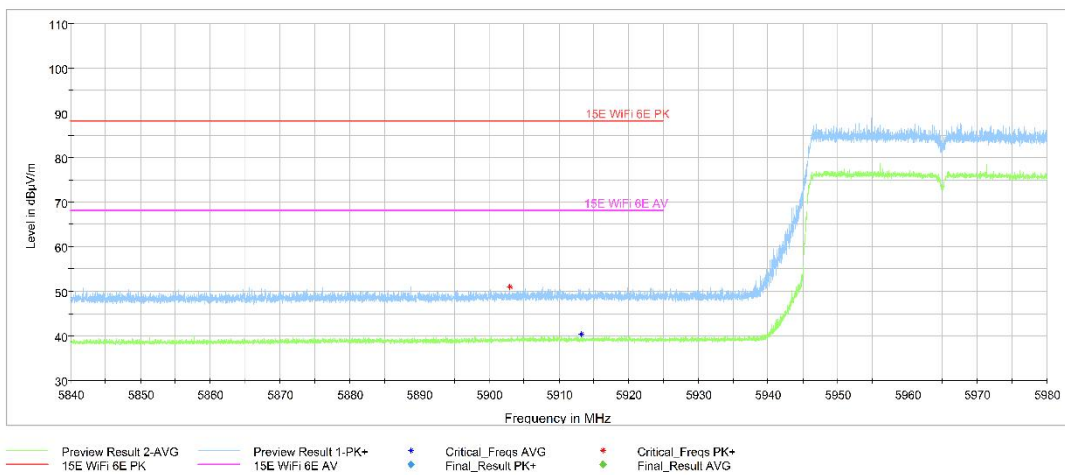


Fig.5 Band Edges (802.11ax 40M Ch3 full RU MIMO)

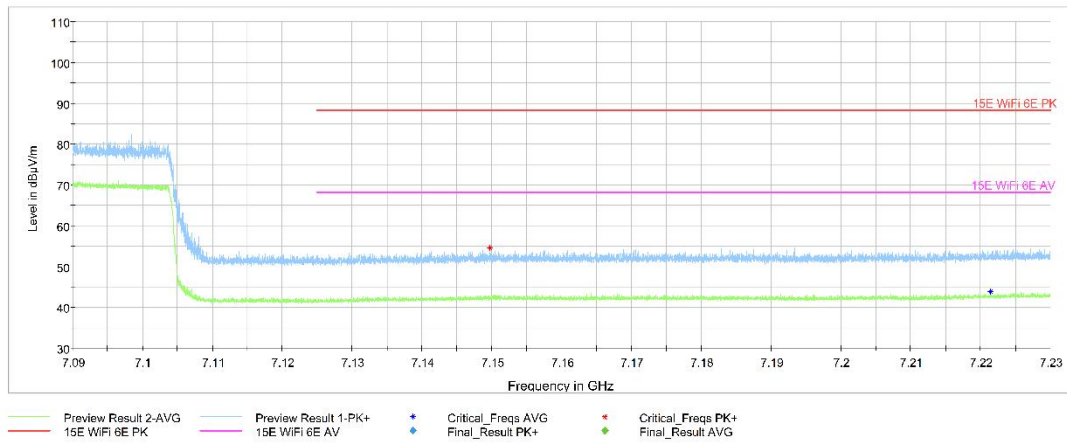


Fig.6 Band Edges (802.11ax 40M Ch227 full RU MIMO)

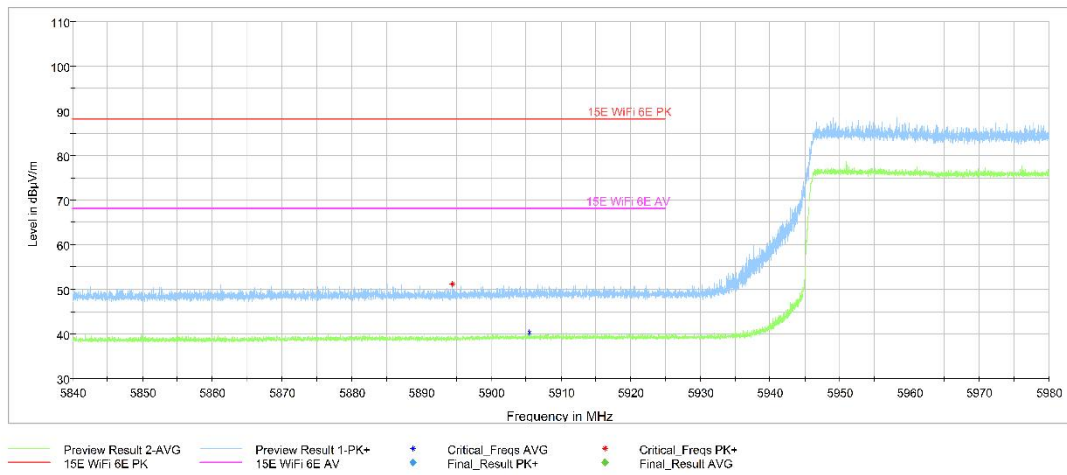


Fig.7 Band Edges (802.11ax 80M Ch7 full RU MIMO)

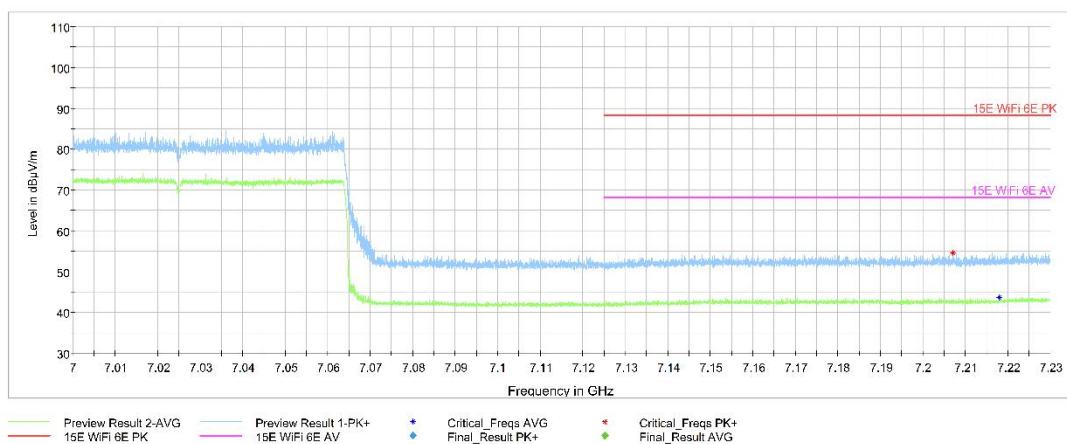


Fig.8 Band Edges (802.11ax 80M Ch215 full RU MIMO)

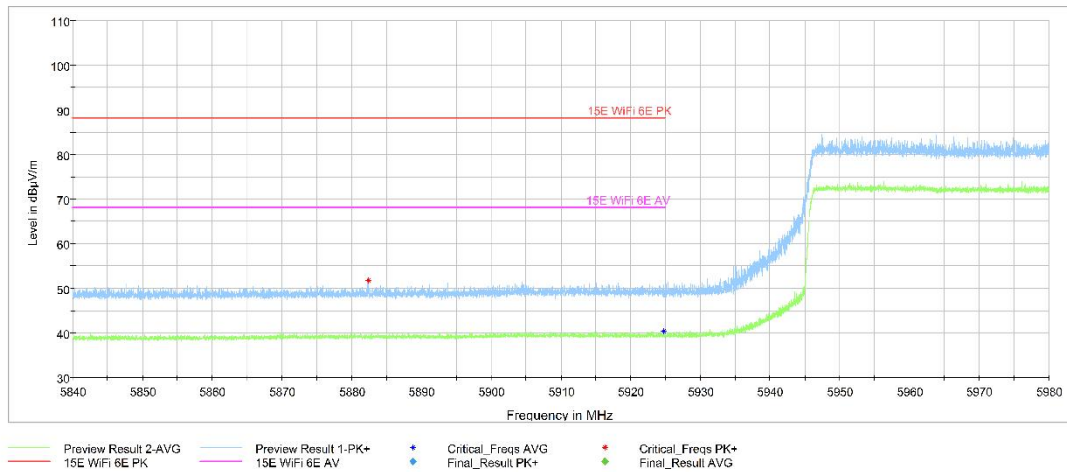


Fig.9 Band Edges (802.11ax 160M Ch15 full RU MIMO)

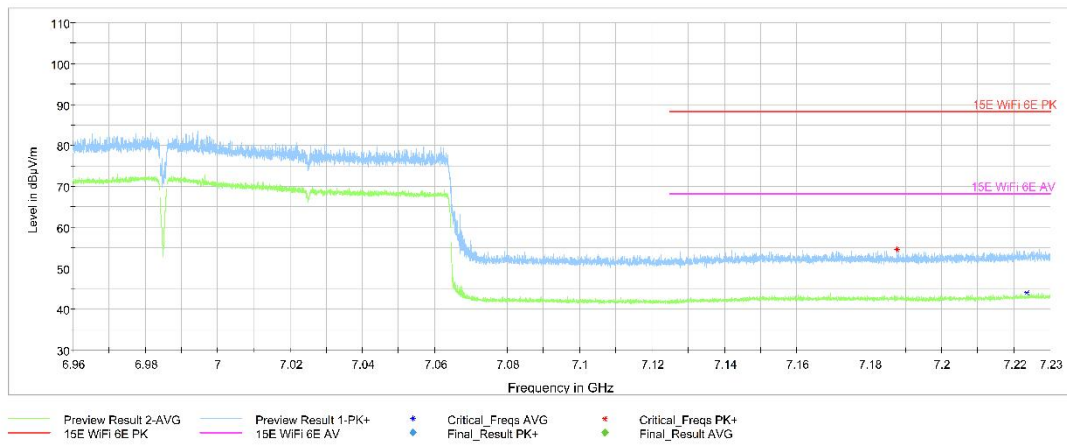


Fig.10 Band Edges (802.11ax 160M Ch207 full RU MIMO)

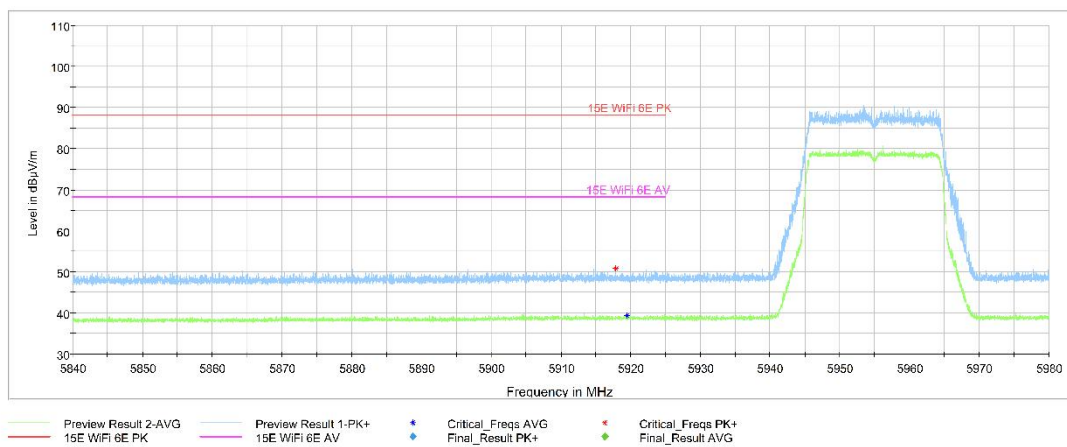


Fig.11 Band Edges (802.11be 20M Ch1 full RU MIMO)

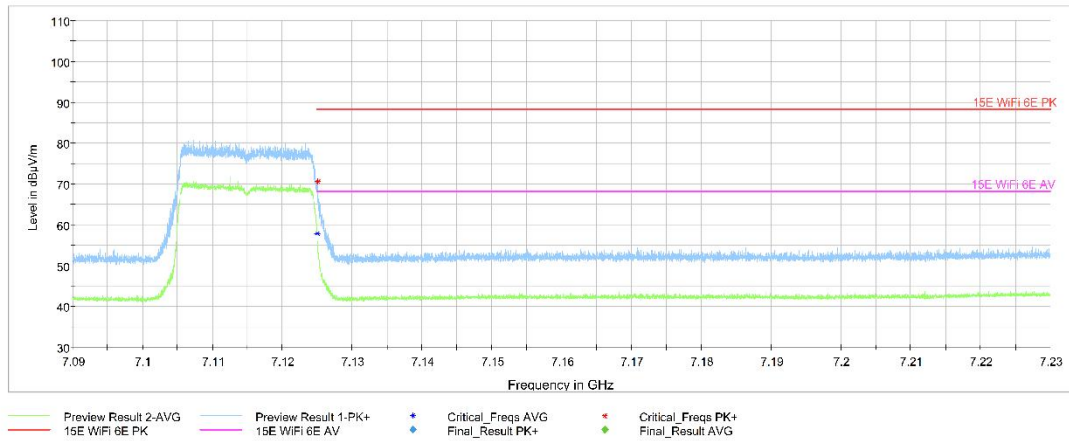


Fig.12 Band Edges (802.11be 20M Ch233 full RU MIMO)

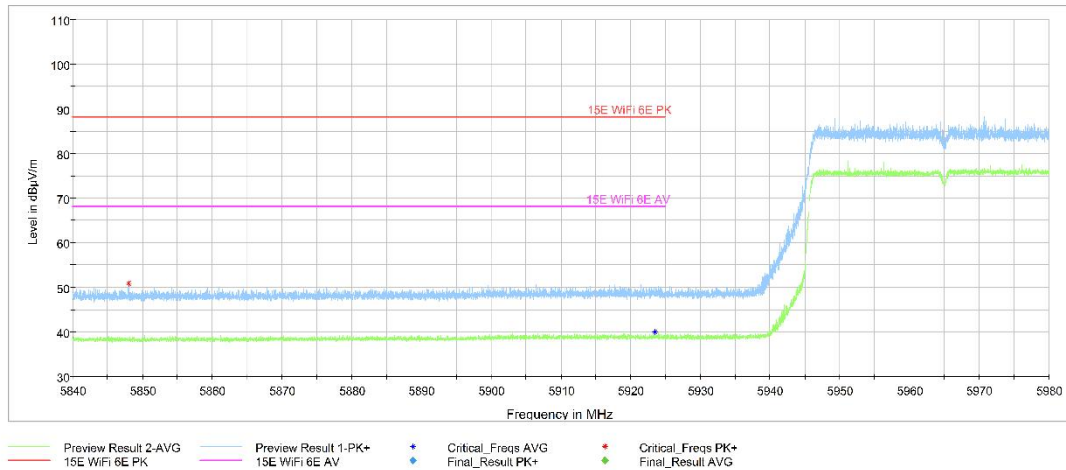


Fig.13 Band Edges (802.11be 40M Ch3 full RU MIMO)

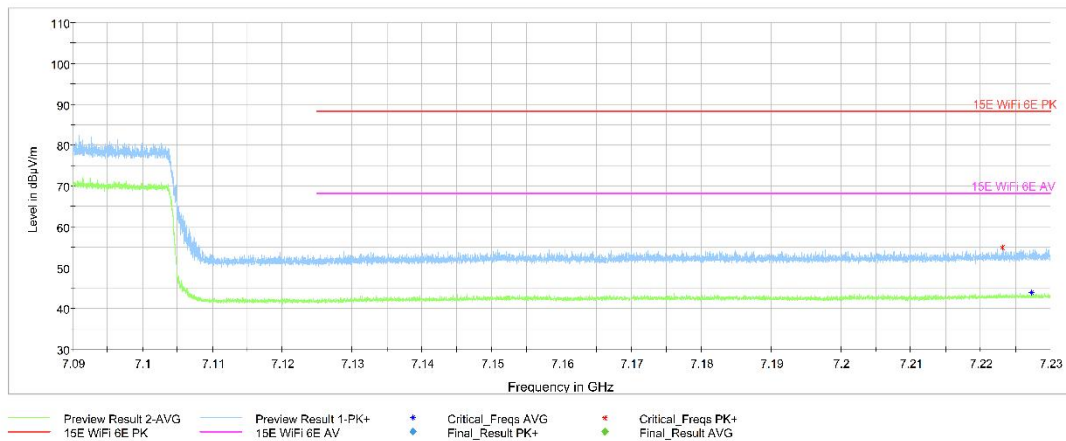


Fig.14 Band Edges (802.11be 40M Ch227 full RU MIMO)

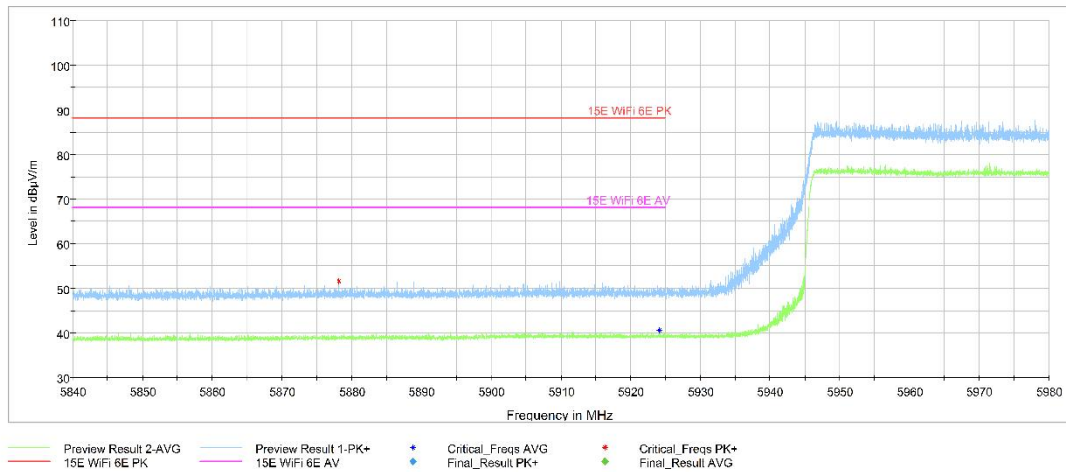


Fig.15 Band Edges (802.11be 80M Ch7 full RU MIMO)

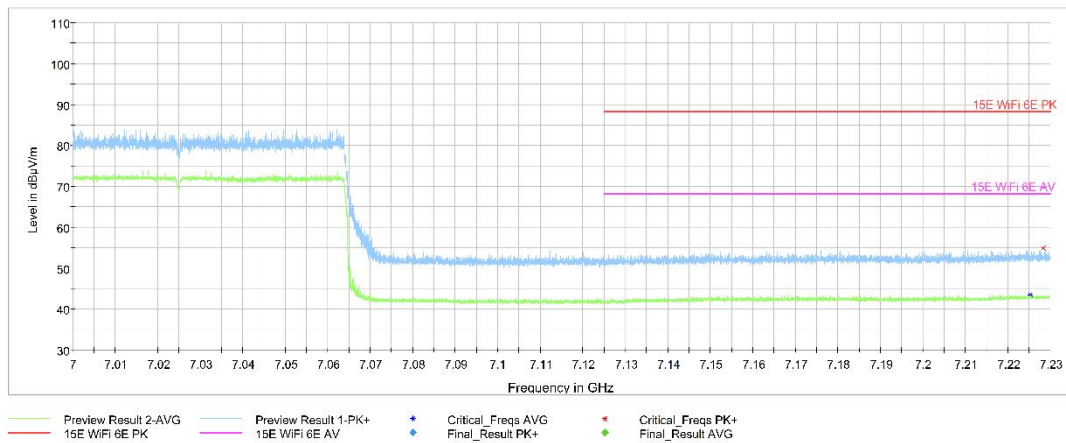


Fig.16 Band Edges (802.11be 80M Ch215 full RU MIMO)

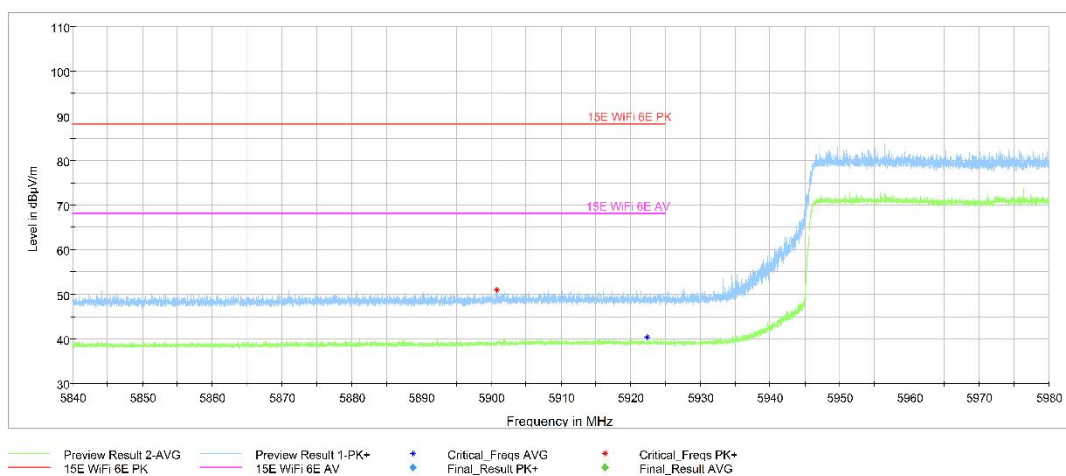


Fig.17 Band Edges (802.11be 160M Ch15 full RU MIMO)

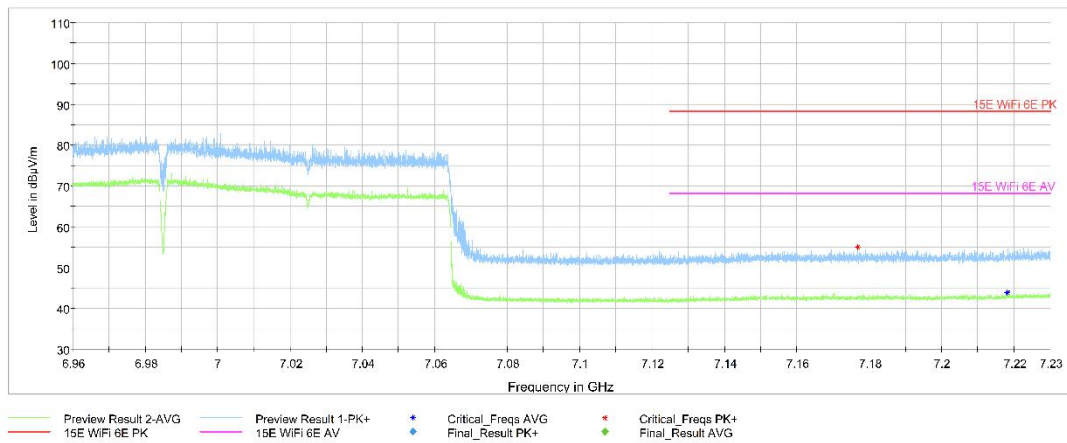


Fig.18 Band Edges (802.11be 160M Ch207 full RU MIMO)

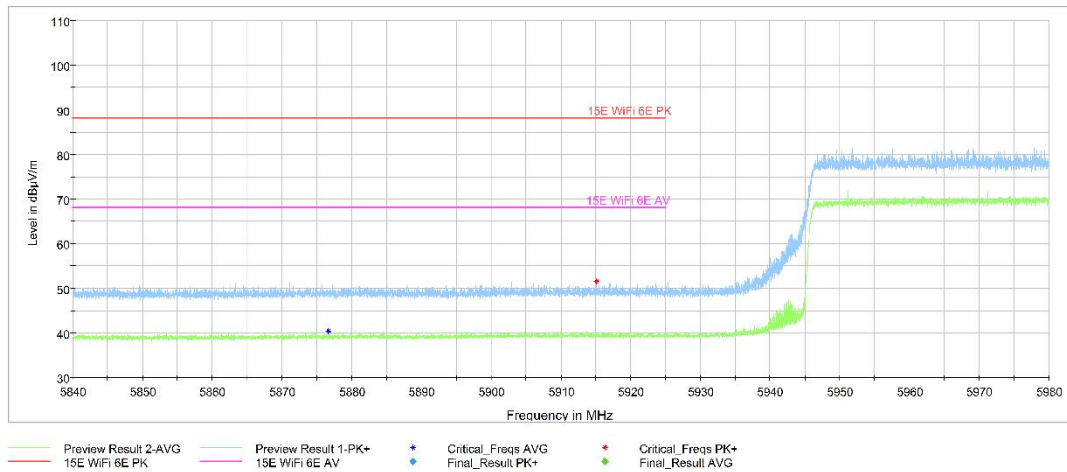


Fig.19 Band Edges (802.11be 320M Ch31 full RU MIMO)

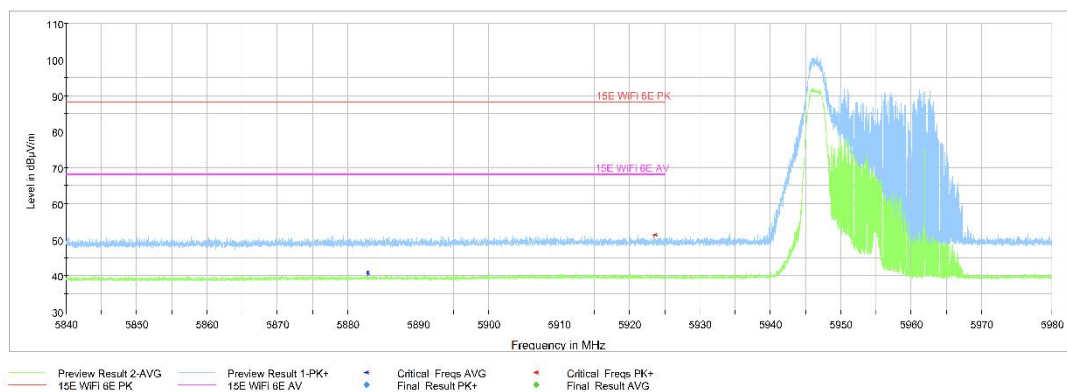


Fig.20 Band Edges (802.11ax 20M Ch1 partial RU MIMO)

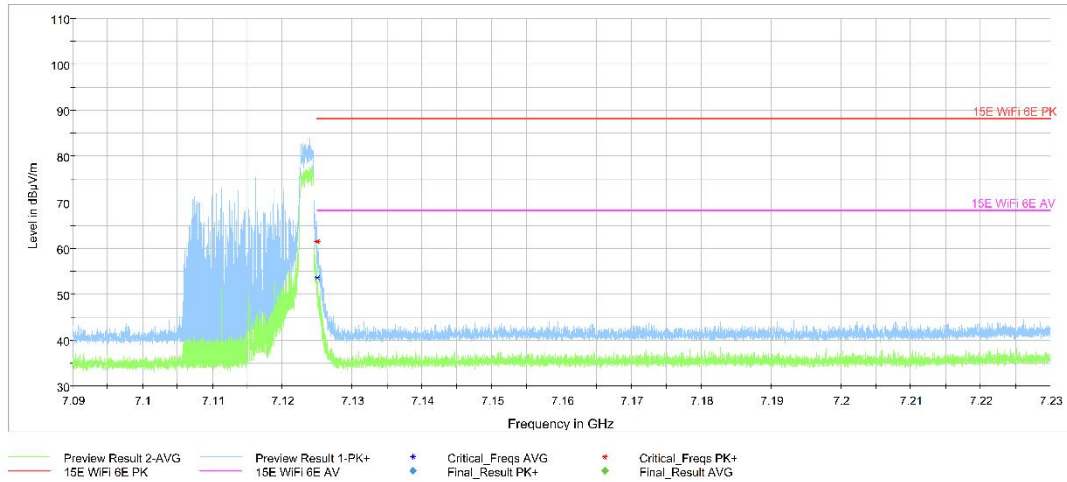


Fig.21 Band Edges (802.11ax 20M Ch233 partial RU MIMO)

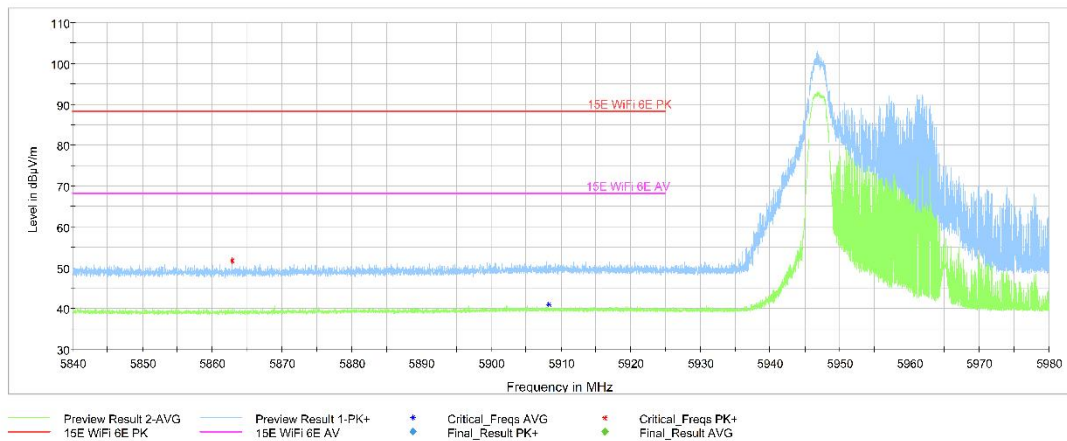


Fig.22 Band Edges (802.11ax 40M Ch3 partial RU MIMO)

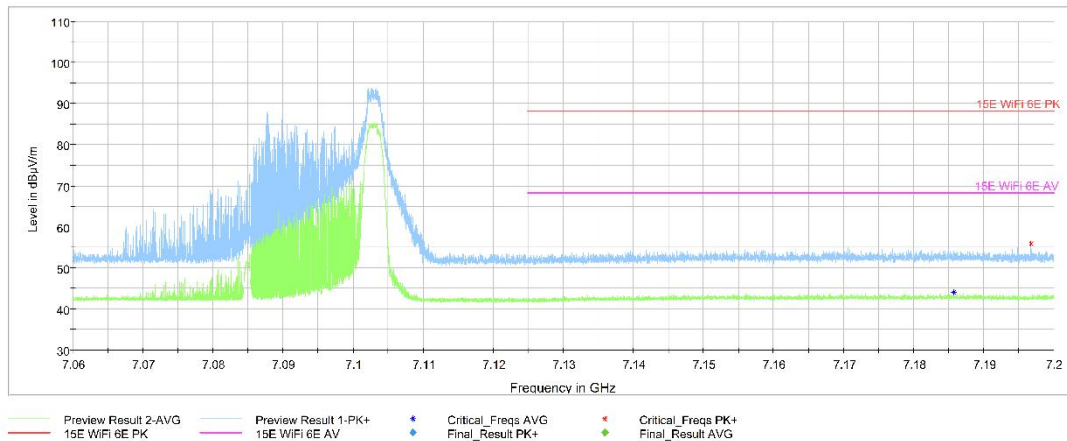


Fig.23 Band Edges (802.11ax 40M Ch227 partial RU MIMO)

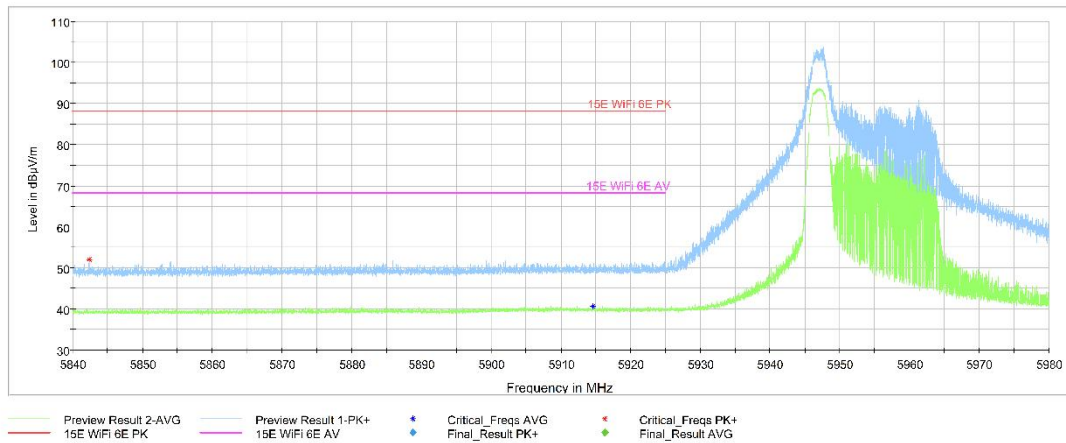


Fig.24 Band Edges (802.11ax 80M Ch7 partial RU MIMO)

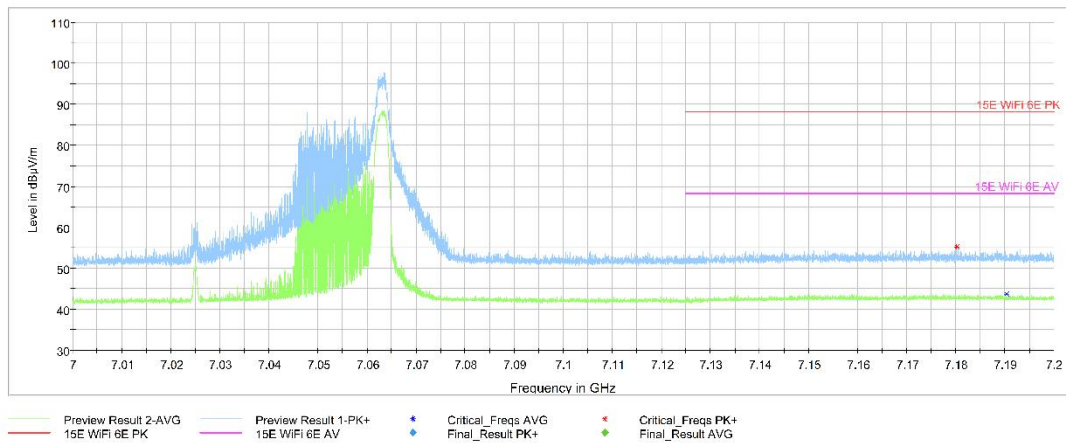


Fig.25 Band Edges (802.11ax 80M Ch215 partial RU MIMO)

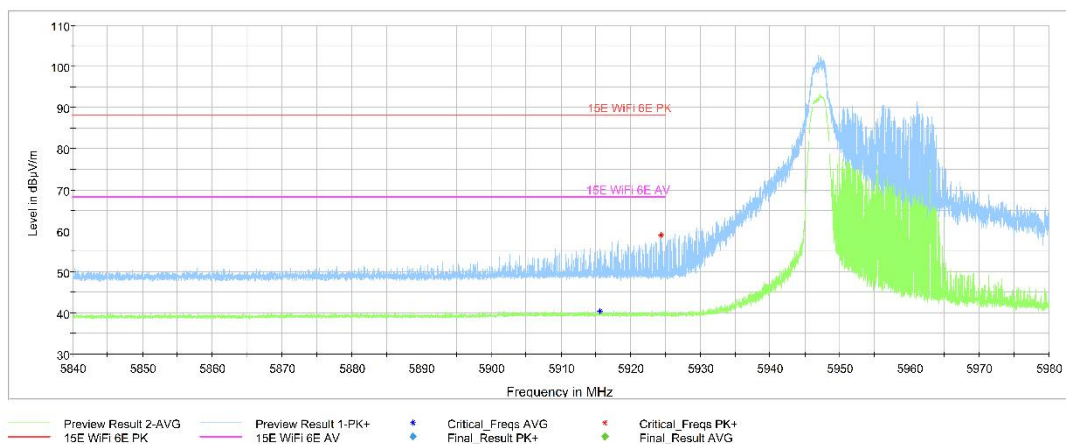


Fig.26 Band Edges (802.11ax 160M Ch15 partial RU MIMO)

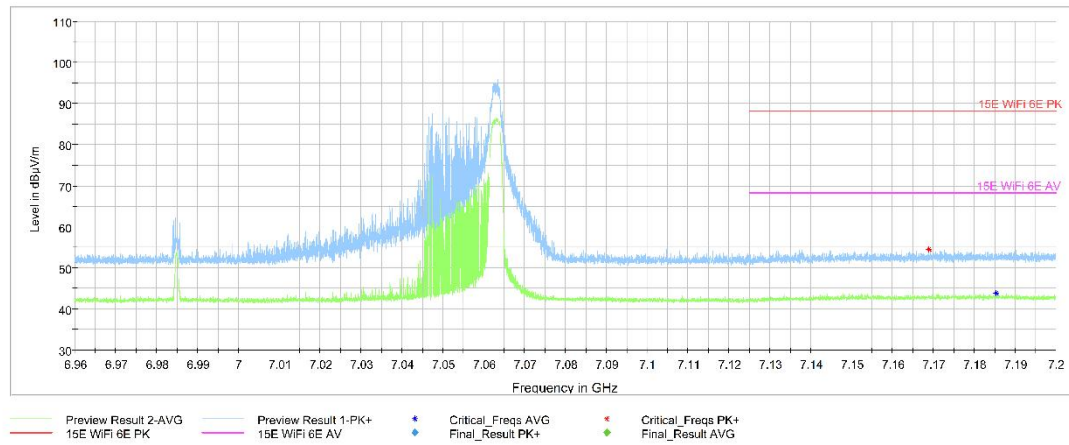


Fig.27 Band Edges (802.11ax 160M Ch207 partial RU MIMO)

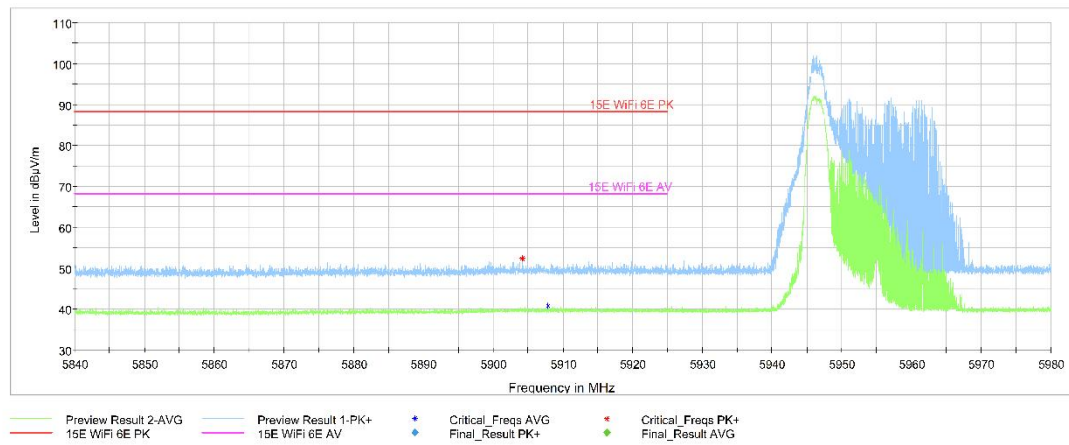


Fig.28 Band Edges (802.11be 20M Ch1 partial RU MIMO)

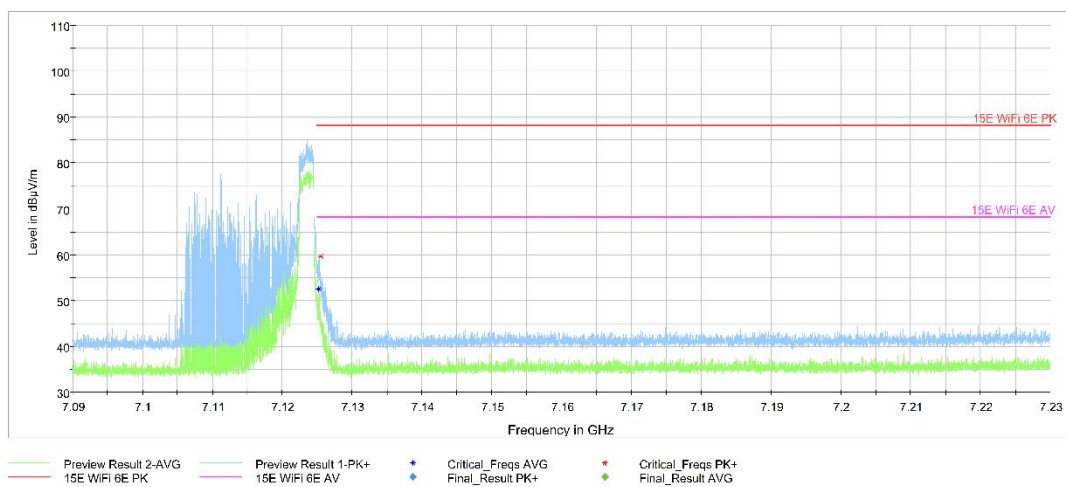


Fig.29 Band Edges (802.11be 20M Ch233 partial RU MIMO)

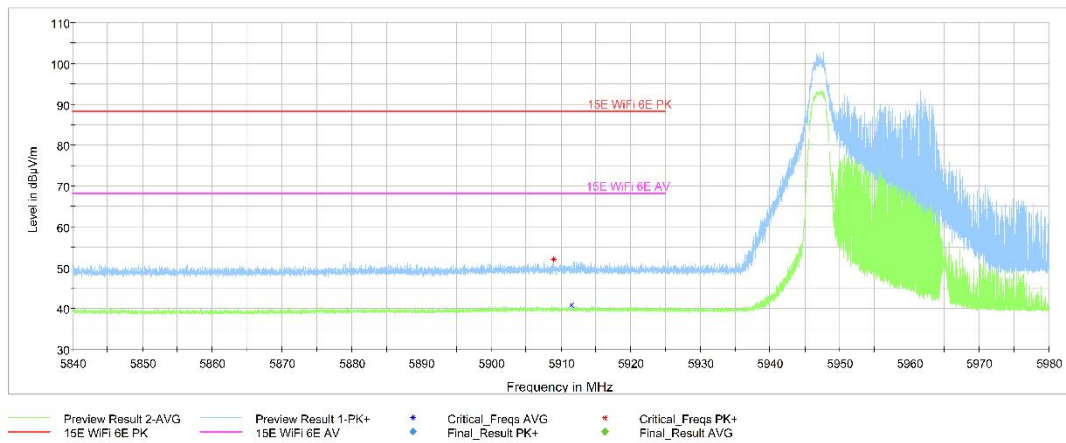


Fig.30 Band Edges (802.11be 40M Ch3 partial RU MIMO)

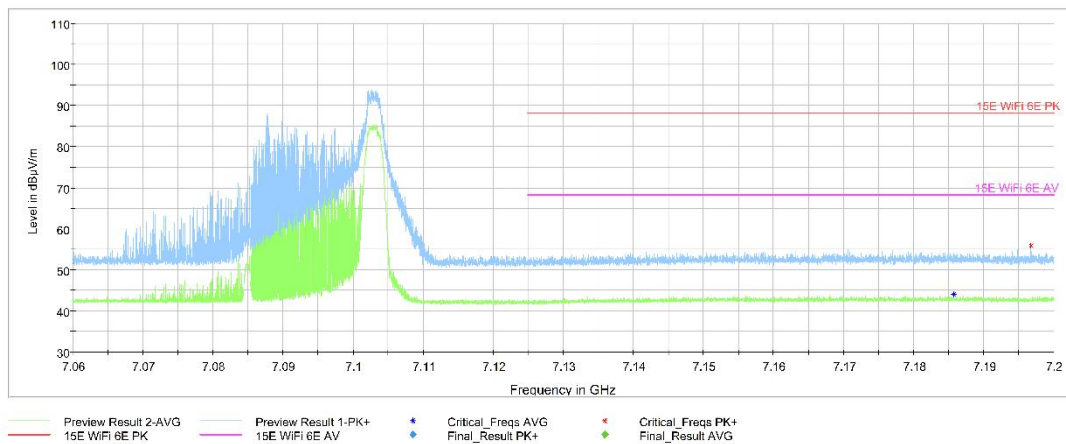


Fig.31 Band Edges (802.11be 40M Ch227 partial RU MIMO)

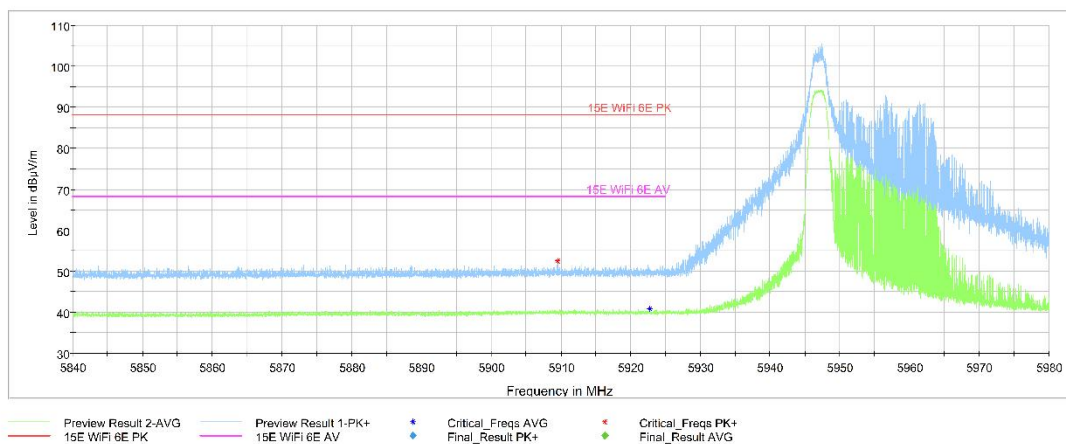


Fig.32 Band Edges (802.11be 80M Ch7 partial RU MIMO)

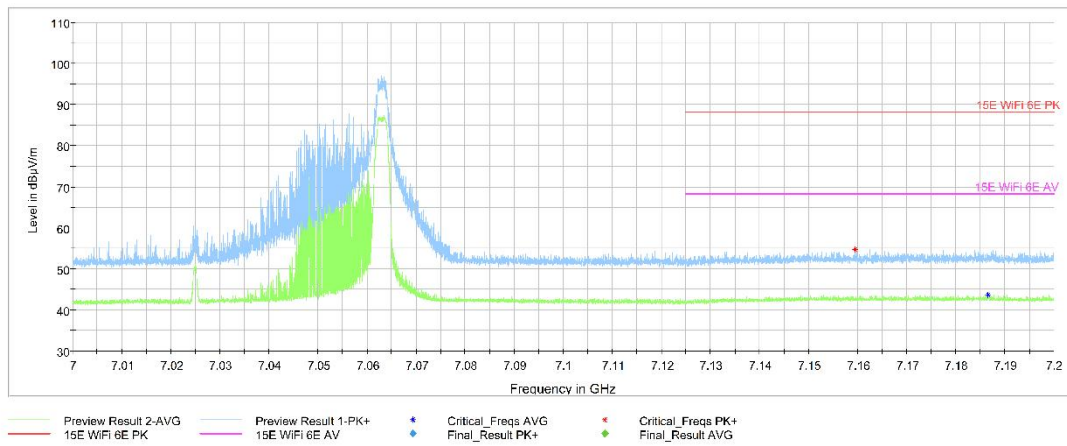


Fig.33 Band Edges (802.11be 80M Ch215 partial RU MIMO)

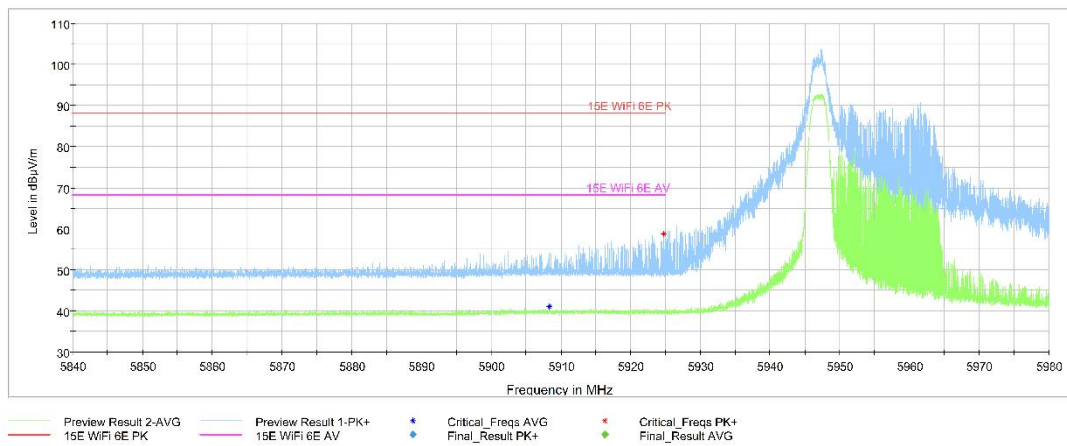


Fig.34 Band Edges (802.11be 160M Ch15 partial RU MIMO)

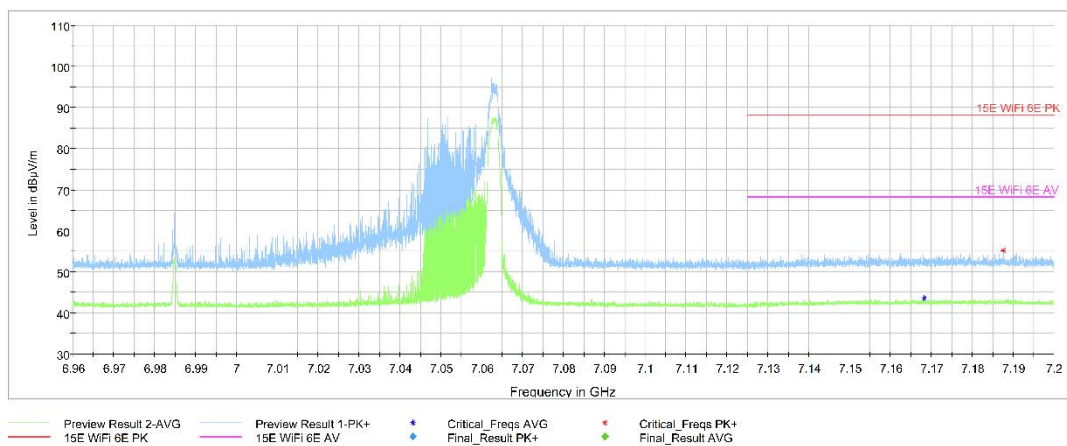


Fig.35 Band Edges (802.11be 160M Ch207 partial RU MIMO)

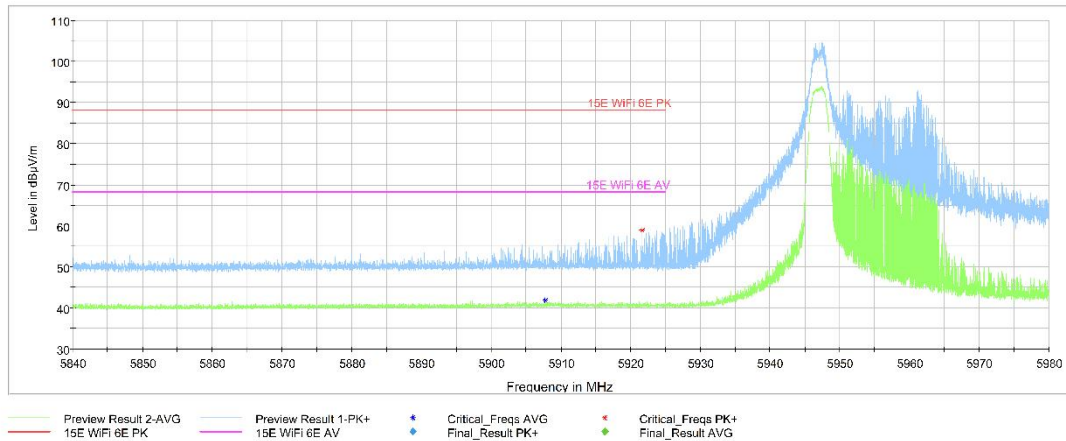


Fig.36 Band Edges (802.11be 320M Ch31 partial RU MIMO)

A.10. AC Powerline Conducted Emission (150kHz- 30MHz)

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.08dB, k=2.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBµV)	Result (dBµV)		Conclusion
		With charger		
		802.11ax	Idle	
0.15 to 0.5	66 to 56	Fig.37	Fig.38	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBµV)	Result (dBµV)		Conclusion
		With charger		
		802.11ax	Idle	
0.15 to 0.5	67 56 to 46	Fig.37	Fig.38	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

Traffic:

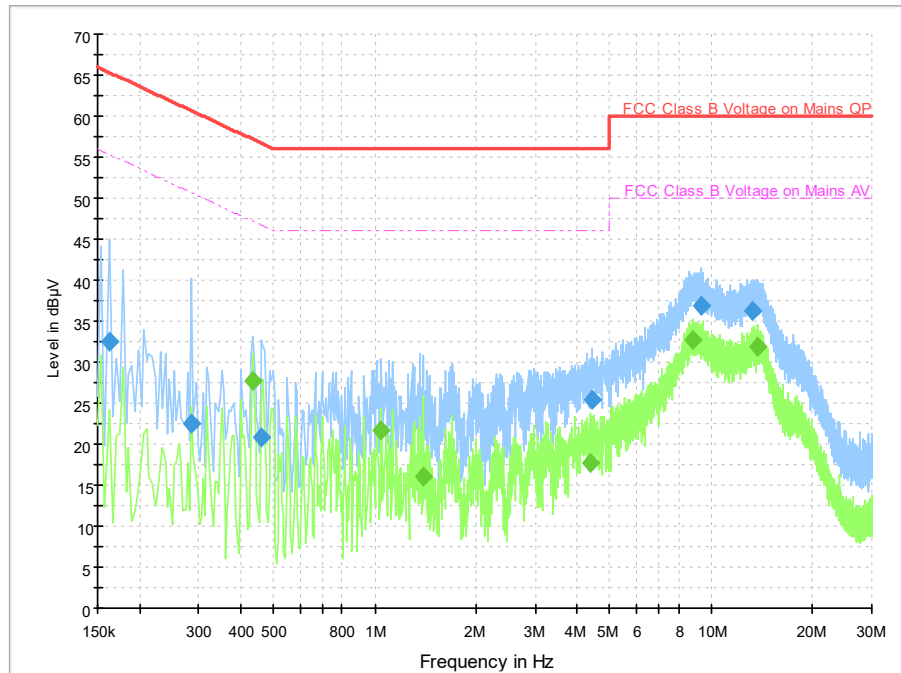


Fig.37 Conducted Emission (802.11ax, Ch1, TX)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.162000	32.4	2000.0	9.000	On	N	19.7	33.0	65.4
0.286000	22.5	2000.0	9.000	On	L1	19.7	38.1	60.6
0.462000	20.7	2000.0	9.000	On	N	19.7	35.9	56.7
4.422000	25.3	2000.0	9.000	On	N	19.6	30.7	56.0
9.330000	36.9	2000.0	9.000	On	N	19.6	23.1	60.0
13.194000	36.2	2000.0	9.000	On	N	19.7	23.8	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.434000	27.7	2000.0	9.000	On	L1	19.7	19.5	47.2
1.046000	21.6	2000.0	9.000	On	L1	19.7	24.4	46.0
1.394000	16.1	2000.0	9.000	On	L1	19.6	29.9	46.0
4.362000	17.8	2000.0	9.000	On	N	19.6	28.2	46.0
8.786000	32.8	2000.0	9.000	On	N	19.6	17.2	50.0
13.726000	32.0	2000.0	9.000	On	N	19.7	18.0	50.0

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

Idle:

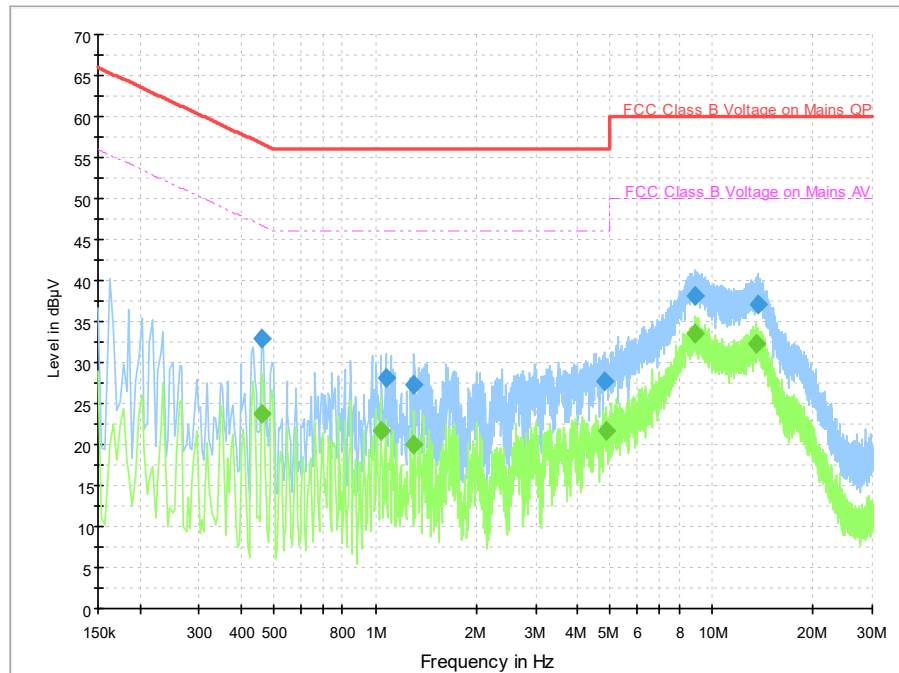


Fig.38 Conducted Emission(802.11ax, CH1 IDLE)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.462000	32.9	2000.0	9.000	On	N	19.7	23.7	56.7
1.078000	28.1	2000.0	9.000	On	L1	19.7	27.9	56.0
1.306000	27.2	2000.0	9.000	On	L1	19.6	28.8	56.0
4.782000	27.7	2000.0	9.000	On	N	19.6	28.3	56.0
8.942000	38.0	2000.0	9.000	On	N	19.6	22.0	60.0
13.750000	37.1	2000.0	9.000	On	N	19.7	22.9	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.462000	23.8	2000.0	9.000	On	L1	19.7	22.8	46.7
1.042000	21.6	2000.0	9.000	On	L1	19.7	24.4	46.0
1.306000	20.0	2000.0	9.000	On	L1	19.6	26.0	46.0
4.858000	21.7	2000.0	9.000	On	N	19.6	24.3	46.0
8.942000	33.5	2000.0	9.000	On	N	19.6	16.5	50.0
13.614000	32.3	2000.0	9.000	On	N	19.7	17.7	50.0

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



*** END OF REPORT BODY ***