Page: 1 of 45

FCC TEST REPORT

Application No: ZR/2019/B0019

Applicant: OnePlus Technology (Shenzhen) Co., Ltd.

Address of Applicant 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue

North, Futian District, Shenzhen

Manufacturer: OnePlus Technology (Shenzhen) Co., Ltd.

Address of Manufacturer 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue

North, Futian District, Shenzhen

Factory: Jiangxi Risound Electronics Co.,Ltd.

Address of Factory No.271, Innovation Avenue, Jinggangshan Economic and Technological

Development Zone, Ji'an City, Jiangxi Province.

EUT Description: OnePlus Bullets Wireless Z

Model No.: E303A

Trade Mark: ONEPLUS

FCC ID: 2ABZ2-E303A

Standards: 47 CFR FCC Part 2, Subpart J

47 CFR Part 15, Subpart C

Test Method KDB558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10 (2013)

Date of Receipt: 2019/12/20

Date of Test: 2019/12/22 to 2019/12/31

Date of Issue: 2019/12/31

Test Result: PASS *

Authorized Signature:

Derde yang

Derek Yang

Wireless Laboratory Manager



^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: ZR/2019/B001901

2 of 45 Page:

Version

	Revision Record						
Version Chapter Date Modifier Remark							
00		2019/12/31		Original			

Authorized for issue by:		
Tested By	Mike Mu	2019/12/31
	(Mike Hu) /Project Engineer	Date
Checked By	David Chen	2019/12/31
	(David Chen) /Reviewer	Date



中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2019/B001901

3 of 45 Page:

Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	Clause 4.2	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.3	PASS
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.4	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	Clause 4.5	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.6	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS
Radiated Spurious Emissions	15.205/15.209	ANSI C63.10 2013	Clause 4.8	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS





Report No.: ZR/2019/B001901

4 of 45 Page:

Contents

1	1 VERSION	
2	2 TEST SUMMARY	3
3		5
J		
	3.1 CLIENT INFORMATION	
	3.2 Test Location	
	3.3 TEST FACILITY	
	3.5 TEST ENVIRONMENT	
	3.6 DESCRIPTION OF SUPPORT UNITS	
4	4 TEST RESULTS AND MEASUREMENT DATA	7
	4.1 Antenna Requirement	
	4.2 AC Power Line Conducted Emissions	
	4.3 DUTY CYCLE	
	4.3.1 Test Results	
	4.3.1 Test Plots	
	4.4 CONDUCTED OUTPUT POWER	
	4.4.1 Test Results	
	4.4.2 Test plots:	
	4.5 DTS (6 DB) BANDWIDTH & 99% OCCUPIED BANDWIDTH	
	4.5.1 Test Results	
	4.6 Power Spectral Density	
	4.6.1 Test Results	
	4.6.2 Test plots	
	4.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	4.7.1 Test plots	
	4.8 Spurious RF Conducted Emissions	
	4.8.1 Test plots:	25
	4.9 RADIATED SPURIOUS EMISSION	27
	4.9.1 Radiated Emission below 1GHz	
	4.9.2 Transmitter Emission above 1GHz	
	4.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
	4.10.1 Test plots	39
5	5 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2	2)43
6	6 EQUIPMENT LIST	44
7	7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	45



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, National Research and the content of the

Page: 5 of 45

3 General Information

3.1 Client Information

Applicant:	OnePlus Technology (Shenzhen) Co., Ltd.	
Address of Applicant:	18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen	
Manufacturer:	OnePlus Technology (Shenzhen) Co., Ltd.	
Address of Manufacturer:	18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen	
Factory:	Jiangxi Risound Electronics Co.,Ltd.	
Address of Factory:	No.271, Innovation Avenue, Jinggangshan Economic and Technological Development Zone, Ji'an City, Jiangxi Province.	

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention. To check the authenticity of testing /inspection report 2 certificate, please contact us at telephone: (86-755) 8307 1443, or small CND Ploccheck-Ricas.com.

or small: CM. Doccheck@sgs_com Mo. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技園中区M-10栋一号厂房 邮錦: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

Page: 6 of 45

3.4 General Description of EUT

EUT Description:	OnePlus Bullets Wireless Z	
Model No.:	E303A	
Trade Mark:	ONEPLUS	
Hardware Version:	V3.0	
Software Version:	V2.2	
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 0 to 39.	
Bluetooth Version:	Bluetooth V5.0 LE	
Modulation Type:	GFSK	
Number of Channel:	40	
Sample Type:	⊠ Portable Device,	
Antenna Type:	☐ External, ⊠ Integrated	
Antenna Gain:	-1.75dBi	
Power Supply:	☐ AC/DC Adapter; ☐ Battery;☐ PoE:; ☐ Other:	

	Operation Frequency of each channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing /inspection report 2 certificate, please contact us at telephone: (86-755) 8307 1443, or small CND Doccheck-Rosos.com.

or small: CM. Doccheck@sgs_com Mo. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技園中区M-10栋一号厂房 邮錦: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com

Page: 7 of 45

3.5 **Test Environment**

Operating Environment		
Temperature: 25.0 °C		
Humidity:	50 % RH	
Atmospheric Pressure:	101.32 KPa	

3.6 **Description of Support Units**

The EUT has been tested independent unit.

Test results and Measurement Data

4.1 **Antenna Requirement**

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
-----------------------	--

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.75dBi.






Report No.: ZR/2019/B001901

Page: 8 of 45

4.2 **AC Power Line Conducted Emissions**

Test Method: ANSI C63.10: 2013	Test Requirement:	47 CFR Part 15C Section 15.207			
Limit: Limit (dBuV) Quasi-peak Average	Test Method:	ANSI C63.10: 2013			
Limit: Comparison	Test Frequency Range:	150kHz to 30MHz			
Council Description Council Description		Fraguency range (MUz)	Limit (dBuV)		
Test Procedure: 0.5-5 56 5-30 * Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.		rrequency range (MHZ)	Quasi-peak	Average	
Test Procedure: Test Procedure: Test Procedure: 1.56 5-30 60 50 50	Limit	0.15-0.5	66 to 56*	56 to 46*	
* Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.	LIIIII.	0.5-5	56	46	
 The mains terminal disturbance voltage test was conducted in a shielded room. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. 		5-30	60	50	
 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. 		* Decreases with the logarit	hm of the frequency.		
other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.	Test Procedure:	 The mains terminal disturbance voltage test was conducted in a shielded room. The EUT was connected to AC power source through a LISN 1 (Line Impedanc Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to conne multiple power cables to a single LISN provided the rating of the LISN was nexceeded. The tabletop EUT was placed upon a non-metallic table 0.8m above the grour reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LIS 1 was placed 0.8 m from the boundary of the unit under test and bonded to ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. A other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and of the interface cables must be changed according to 			

Test Setup:

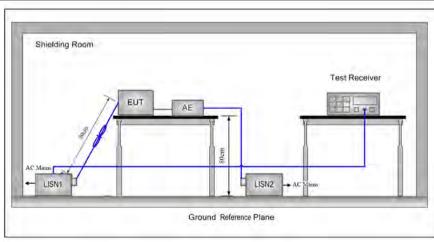



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2019/B001901

9 of 45 Page:


Test Mode: Transmitting with GFSK modulation. Charge +Transmitting mode.	
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

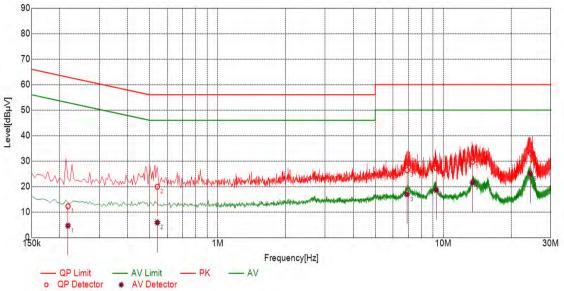

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	ΑV Limit [dBμV]	AV Margin [dB]	Туре
1	0.2174	10.10	12.26	62.92	50.66	4.66	52.92	48.26	L
2	0.5410	10.10	19.93	56.00	36.07	5.89	46.00	40.11	L
3	6.9122	10.10	26.43	60.00	33.57	16.94	50.00	33.06	L
4	9.3138	10.10	27.29	60.00	32.71	18.64	50.00	31.36	L
5	13.4925	10.11	29.72	60.00	30.28	21.53	50.00	28.47	L
6	24.3508	10.11	33.14	60.00	26.86	25.02	50.00	24.98	L






Report No.: ZR/2019/B001901

10 of 45 Page:

Neutral line:

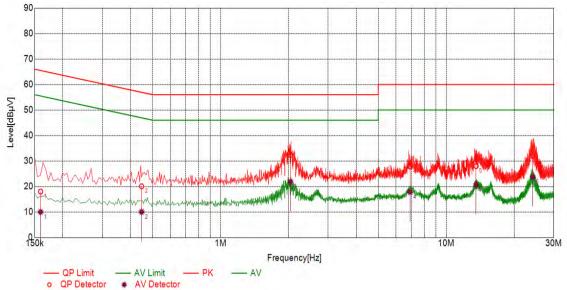

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Туре
1	0.1594	10.10	18.00	65.49	47.49	10.00	55.49	45.49	N
2	0.4469	10.10	20.07	56.93	36.86	10.03	46.93	36.90	N
3	2.0424	10.10	32.36	56.00	23.64	21.90	46.00	24.10	N
4	6.9153	10.10	27.84	60.00	32.16	17.85	50.00	32.15	N
5	13.5665	10.11	27.99	60.00	32.01	20.65	50.00	29.35	N
6	24.2247	10.11	31.92	60.00	28.08	23.82	50.00	26.18	Ν

Remarks:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.





Report No.: ZR/2019/B001901

Page: 11 of 45


4.3 Duty Cycle

4.3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
BLE	CH0	61.72

4.3.1 Test Plots

4.3.1.1 **BLE**

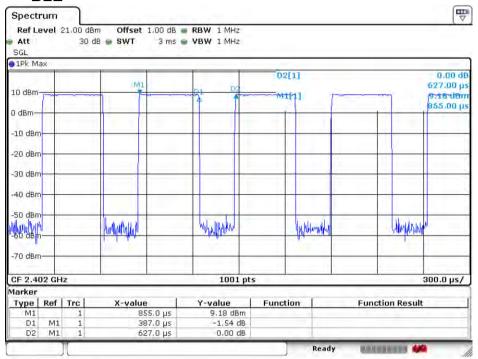

Date: 17.DEC.2019 07:28:32



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,


or small: CM. Doccheck@sgs_com Mo. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技園中区M-10栋一号厂房 邮錦: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 12 of 45

4.4 Conducted Output Power

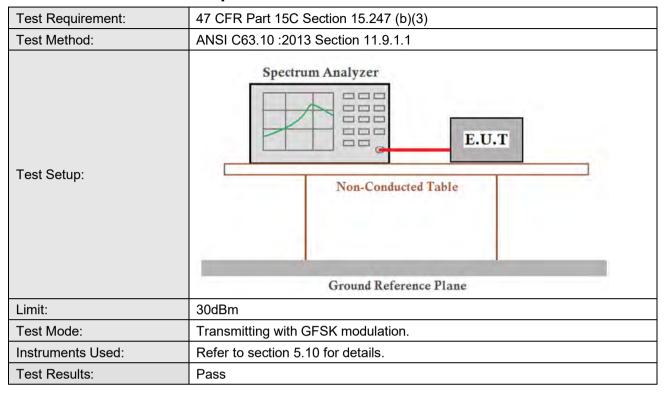

4.4.1 Test Results

Measurement Data of Average Power

GFSK mode						
Test channel	Average Output Power (dBm)	Result				
Lowest	8.75	Report purpose only				
Middle	8.54	Report purpose only				
Highest	8.42	Report purpose only				

Measurement Data of Peak Power:

Measurement Data of Fear Fower.							
GFSK mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	9.14	30.00	Pass				
Middle	8.84	30.00	Pass				
Highest	8.62	30.00	Pass				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ** **Email: **Email:



Report No.: ZR/2019/B001901

Page: 13 of 45

4.4.2 Test plots:

4.4.2.1 GFSK Lowest Channel



Date: 15.DEC.2019 09:30:09

4.4.2.2 GFSK Middle Channel



Date: 15.DEC.2019 09:30:48



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ** **Email: EMB ***Deckhed@cas.certificate**.

or smail: GN_Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 14 of 45

4.4.2.3 **GFSK** Highest Channel



Date: 15.DEC.2019 09:31:22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594


sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 15 of 45

DTS (6 dB) Bandwidth & 99% Occupied Bandwidth 4.5

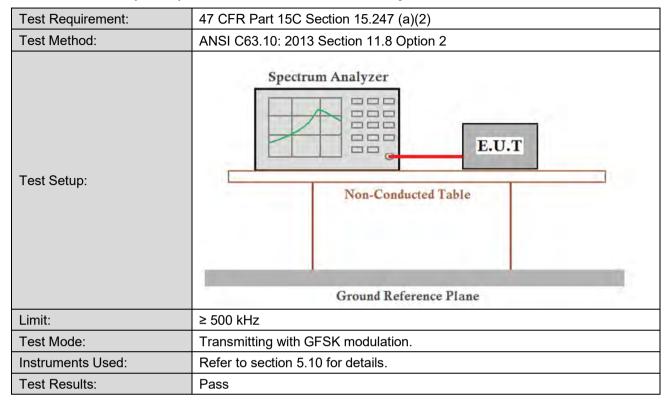

Test Results 4.5.1

		•			
Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
	Lowest	1.03	0.72	≥500	Pass
GFSK	Middle	1.03	0.72	≥500	Pass
	Highest	1.03	0.71	≥500	Pass



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2019/B001901


Page: 16 of 45

4.5.2 Test plots

4.5.2.1 GFSK Lowest Channel



Date: 17.DEC.2019 07:32:11

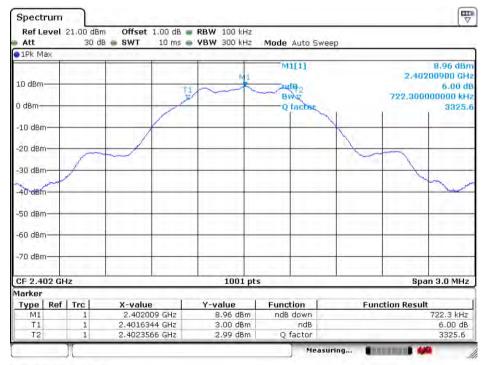

Date: 17.DEC.2019 07:41:45



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, National Research and the content of the

or email: CN_Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国・深圳・科技図中区M-10核一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 17 of 45

4.5.2.2 GFSK _Middle Channel



Date: 17.DEC.2019 07:32:59



Date: 17.DEC.2019 07:41:02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Naccestated and such sample(s) are retained for 30 days only.

Or Smail: GN_Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 18 of 45

4.5.2.3 GFSK _Highest Channel



Date: 17.DEC:2019 07:33:15



Date: 17.DEC.2019 07:36:52



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Naccestated and such sample(s) are retained for 30 days only.

of email: CM.Doccheck@sgs_com No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技図中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 19 of 45

4.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)					
Test Method:	ANSI C63.10 :2013 Section 11.10.2					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
Limit:	≤8.00dBm/3kHz					
Test Mode:	Transmitting with GFSK modulation.					
Instruments Used:	Refer to section 5.10 for details.					
Test Results:	Pass					

4.6.1 Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK	Lowest	-6.24	≤8.00	Pass
	Middle	-6.33	≤8.00	Pass
	Highest	-6.32	≤8.00	Pass






Report No.: ZR/2019/B001901

Page: 20 of 45


4.6.2 Test plots

4.6.2.1 GFSK Lowest Channel

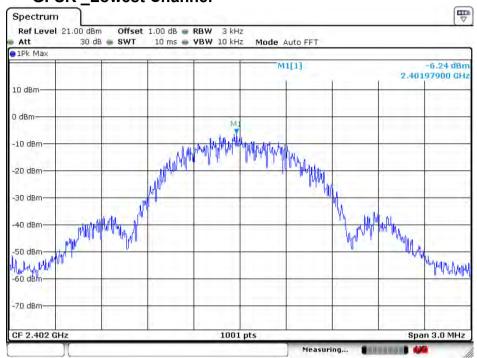

Date: 17.DEC.2019 07:42:44

4.6.2.2 GFSK Middle Channel

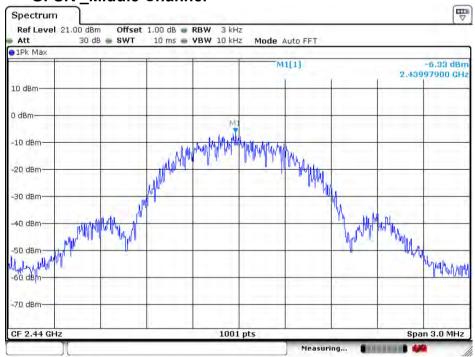

Date: 17.DEC.2019 07:43:06



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ** **Email: **Email:


OF Benalt: CNLDOCENEEK@Sigs_COM No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技図中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 21 of 45

4.6.2.3 **GFSK** Highest Channel

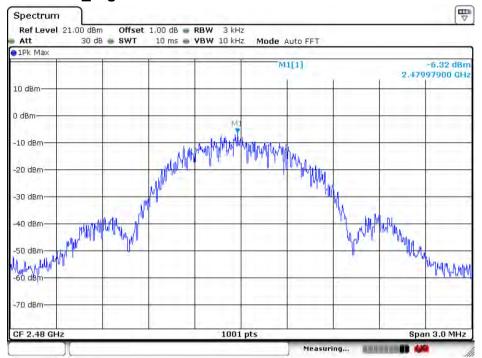

Date: 17.DEC.2019 07:43:22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com

22 of 45 Page:

Band-edge for RF Conducted Emissions 4.7

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table
	400 111 1 1111 4 11 4 1
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass





Report No.: ZR/2019/B001901

Page: 23 of 45

4.7.1 Test plots

4.7.1.1 GFSK Lowest Channel



Date: 17.DEC.2019 07:44:50

4.7.1.2 GFSK _Highest Channel



Date: 17.DEC.2019 07:44:08



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ** **Email: **Email:

of small: CM.Doccheck@sgs_com Mo.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技図中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

24 of 45 Page:

Spurious RF Conducted Emissions 4.8

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass






Report No.: ZR/2019/B001901

Page: 25 of 45


4.8.1 Test plots:

4.8.1.1 GFSK Lowest Channel

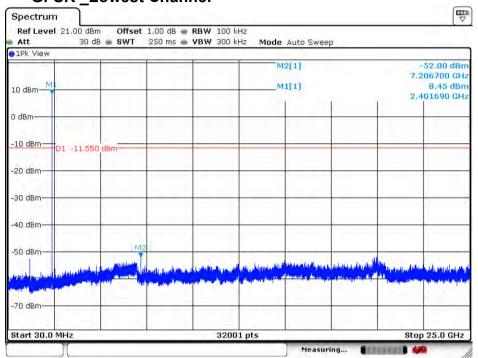

Date: 17.DEC.2019 07:45:49

4.8.1.2 GFSK Middle Channel

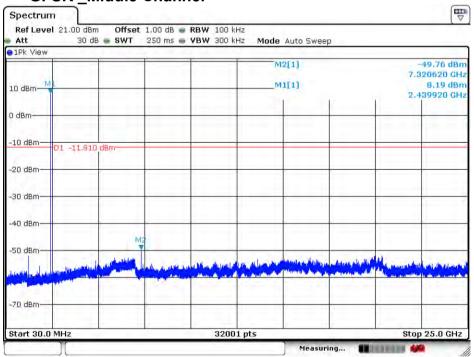

Date: 17.DEC.2019 07:47:02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ** **Email: **Email:


of small: CM.Doccheck@sgs_com Mo.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技図中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 26 of 45

4.8.1.3 **GFSK** Highest Channel

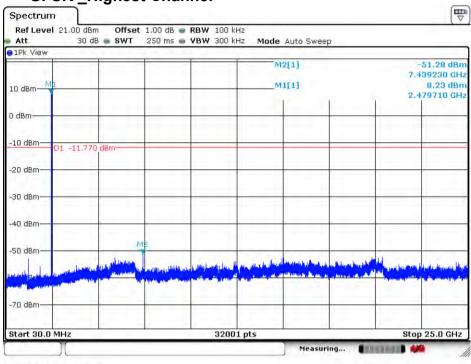

Date: 17.DEC.2019 07:47:57

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.





Report No.: ZR/2019/B001901

27 of 45 Page:

Radiated Spurious Emission 4.9

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 :2013 Sec	tion 11.12						
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)							
	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
Dogoiyor Cotuny	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
Receiver Setup:	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
	Above 1CH	Peak	1MHz	3MHz	Peak			
	Above 1GHz	Peak	1MHz	10Hz	Average			
	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
Limit:	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							






Report No.: ZR/2019/B001901

Page: 28 of 45

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594





中国·深圳·科技园中区M-10栋一号厂房

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CR. Doccheck (86-855) 8007 1443, or email: CR. Doccheck (86-855) 26012053 f (86-755) 26012053 f (86-755) 26012053 f (86-755) 26012053 f (86-755) 26012053 f (86-855) 26012055 f (86-855) 26012055 f (86-855) 26012055 f (86-85

sgs.china@sgs.com



Report No.: ZR/2019/B001901

29 of 45 Page:

	Bandwidth with Maximum Hold Mode.				
	g. If the emission level of the EUT in peak mode was 10dB lower than the				
	limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB				
	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
	h. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)				
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.				
	j. Repeat above procedures until all frequencies measured was complete.				
Exploratory Test Mode:	Transmitting with GFSK modulation.				
Exploratory rest Mode.	Charge + Transmitting mode.				
	Transmitting with GFSK modulation.				
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode,				
Tital Test Mode.	For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 5.10 for details.				
Test Results:	Pass				






Report No.: ZR/2019/B001901

30 of 45 Page:

4.9.1 Radiated Emission below 1GHz

4.9.1.1 Charge + Transmitting, Vertical

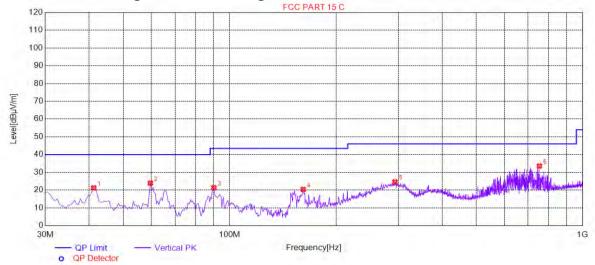

Suspe	Suspected List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity					
1	41.1606	21.22	-30.94	40.00	18.78	100	198	Vertical					
2	59.5998	23.96	-31.58	40.00	16.04	100	326	Vertical					
3	90.1701	21.34	-33.40	43.50	22.16	100	121	Vertical					
4	161.5008	20.38	-34.20	43.50	23.12	100	118	Vertical					
5	293.9720	24.64	-28.03	46.00	21.36	100	70	Vertical					
6	754.4672	33.55	-17.38	46.00	12.45	100	244	Vertical					






Report No.: ZR/2019/B001901

31 of 45 Page:

Charge + Transmitting, Horizontal 4.9.1.2

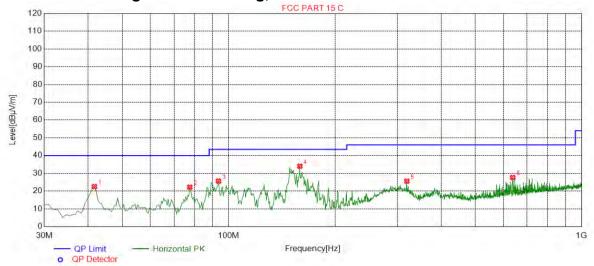

Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	41.6458	22.52	-30.85	40.00	17.48	100	181	Horizontal				
2	77.5538	22.21	-35.46	40.00	17.79	100	190	Horizontal				
3	93.5668	25.66	-32.81	43.50	17.84	100	190	Horizontal				
4	159.0745	34.02	-34.34	43.50	9.48	100	233	Horizontal				
5	319.6898	25.59	-27.27	46.00	20.41	100	271	Horizontal				
6	638.0090	27.69	-19.55	46.00	18.31	100	107	Horizontal				






Report No.: ZR/2019/B001901

32 of 45 Page:

4.9.2 Transmitter Emission above 1GHz

GFSK Lowest Channel Vertical 4.9.2.1

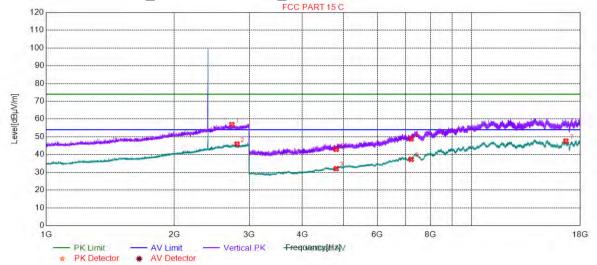

Susne	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2730.4326	56.95	11.06	74.00	17.05	150	260	Vertical
2	2808.9522	45.95	11.17	54.00	8.05	150	139	Vertical
3	4804.0000	32.02	-14.99	54.00	21.98	150	271	Vertical
4	4804.0000	42.91	-14.99	74.00	31.09	150	45	Vertical
5	7206.0000	48.81	-7.05	74.00	25.19	150	271	Vertical
6	7206.0000	37.29	-7.05	54.00	16.71	150	129	Vertical
7	16647.4324	47.63	2.75	54.00	6.37	150	144	Vertical






Report No.: ZR/2019/B001901

33 of 45 Page:

GFSK Middle Channel Vertical 4.9.2.2

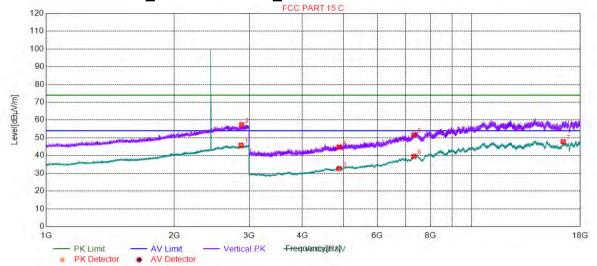

Susp	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2872.4681	45.79	11.45	54.00	8.21	150	193	Vertical
2	2880.9702	57.31	11.44	74.00	16.69	150	57	Vertical
3	4880.0000	32.65	-14.65	54.00	21.35	150	207	Vertical
4	4880.0000	44.80	-14.65	74.00	29.20	150	72	Vertical
5	7320.0000	51.68	-6.17	74.00	22.32	150	18	Vertical
6	7320.0000	39.55	-6.17	54.00	14.45	150	45	Vertical
7	16400.4200	47.85	2.48	54.00	6.15	150	243	Vertical






Report No.: ZR/2019/B001901

34 of 45 Page:

GFSK High Channel Vertical 4.9.2.3

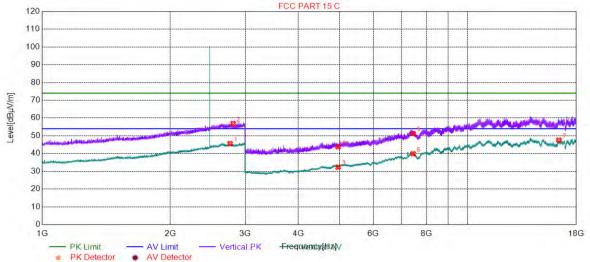

Suspe	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2763.9410	45.59	11.19	54.00	8.41	150	288	Vertical
2	2809.4524	56.92	11.17	74.00	17.08	150	342	Vertical
3	4960.0000	32.33	-14.23	54.00	21.67	150	360	Vertical
4	4960.0000	43.78	-14.23	74.00	30.22	150	46	Vertical
5	7440.0000	51.27	-5.89	74.00	22.73	150	290	Vertical
6	7440.0000	39.90	-5.89	54.00	14.10	150	344	Vertical
7	16380.4190	47.58	2.56	54.00	6.42	150	342	Vertical






Report No.: ZR/2019/B001901

35 of 45 Page:

GFSK Lowest Channel Horizontal 4.9.2.4

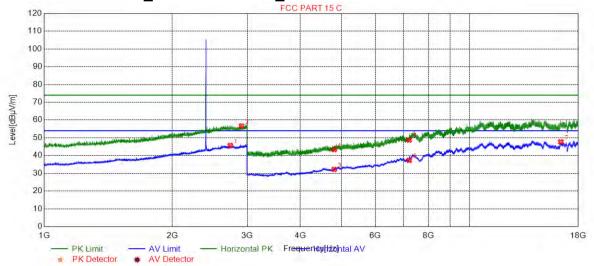

Susp	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2737.4344	45.67	11.12	54.00	8.33	150	357	Horizontal
2	2910.4776	56.66	11.46	74.00	17.34	150	72	Horizontal
3	4804.0000	32.23	-14.99	54.00	21.77	150	18	Horizontal
4	4804.0000	43.38	-14.99	74.00	30.62	150	99	Horizontal
5	7206.0000	48.76	-7.05	74.00	25.24	150	181	Horizontal
6	7206.0000	37.37	-7.05	54.00	16.63	150	360	Horizontal
7	16374.4187	47.72	2.59	54.00	6.28	150	243	Horizontal






Report No.: ZR/2019/B001901

36 of 45 Page:

GFSK Middle Channel Horizontal 4.9.2.5

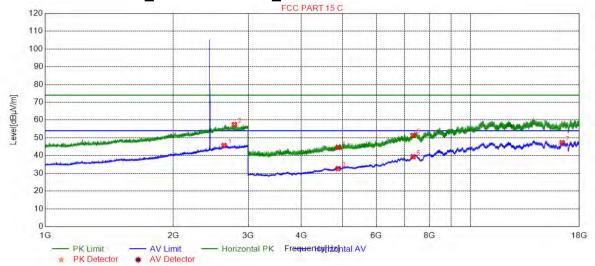

Suspe	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2632.9082	45.66	10.74	54.00	8.34	150	319	Horizontal
2	2783.9460	57.46	11.14	74.00	16.54	150	306	Horizontal
3	4880.0000	32.66	-14.65	54.00	21.34	150	234	Horizontal
4	4880.0000	44.57	-14.65	74.00	29.43	150	45	Horizontal
5	7320.0000	51.32	-6.17	74.00	22.68	150	72	Horizontal
6	7320.0000	39.29	-6.17	54.00	14.71	150	360	Horizontal
7	16398.4199	47.27	2.49	54.00	6.73	150	193	Horizontal






Report No.: ZR/2019/B001901

Page: 37 of 45

4.9.2.6 **GFSK High Channel Horizontal**

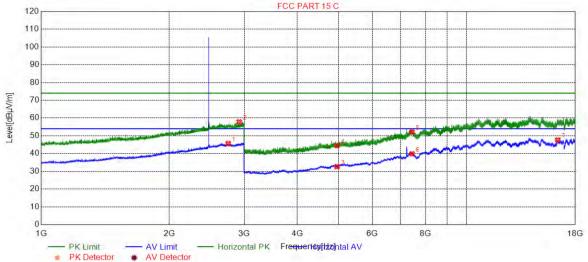

Susp	Suspected List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2750.9377	45.61	11.22	54.00	8.39	150	244	Horizontal			
2	2921.4804	57.81	11.51	74.00	16.19	150	231	Horizontal			
3	4960.0000	32.65	-14.23	54.00	21.35	150	261	Horizontal			
4	4960.0000	44.56	-14.23	74.00	29.44	150	45	Horizontal			
5	7440.0000	52.12	-5.89	74.00	21.88	150	180	Horizontal			
6	7440.0000	39.84	-5.89	54.00	14.16	150	289	Horizontal			
7	16366.4183	47.66	2.62	54.00	6.34	150	193	Horizontal			

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report a certificate, please contact us at telephone: [86-755] 8307 1443.

Attention:To check the authenticity of testing inspection report a certificate, please contact us at telephone: [86-755] 8307 1443.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn sgs.china@sgs.com


Report No.: ZR/2019/B001901

Page: 38 of 45

4.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section	n 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Sec	tion 11.12		
Test Site:	Measurement Distance:	3m or 10m (Semi-Anechoic	Chamber)	
	Frequency	Limit (dBuV/m @3m)	Remark	
	30MHz-88MHz	40.0	Quasi-peak Value	
	88MHz-216MHz	43.5	Quasi-peak Value	
Limit:	216MHz-960MHz	46.0	Quasi-peak Value	
	960MHz-1GHz	54.0	Quasi-peak Value	
	Above 1GHz	54.0	Average Value	
	Above IGHZ	74.0	Peak Value	
Test Setup:				





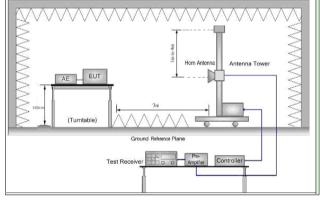


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
- Test the EUT in the lowest channel, the Highest channel



Test Procedure:

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

or email: CN_Doccheck@sqs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, C 中国・深圳・科技園中区M-10栋一号厂房 邮

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com




Report No.: ZR/2019/B001901

39 of 45 Page:

	 i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.10.1 **Test plots**

Worst Case Mode (GFSK) Lowest Channel_ Vertical 4.10.1.1

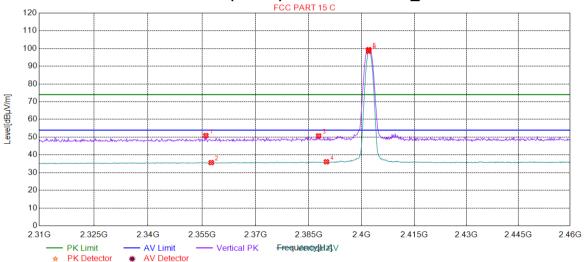

Suspe	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2356.0961	50.91	9.60	74.00	23.09	150	6	Vertical
2	2357.5976	35.65	9.60	54.00	18.35	150	323	Vertical
3	2387.7778	50.74	9.64	74.00	23.26	150	302	Vertical
4	2390.0000	36.10	9.65	54.00	17.90	150	314	Vertical
5	2402.0000	99.39	9.67	74.00	-25.39	150	319	Vertical
6	2402.0000	98.46	9.67	54.00	-44.46	150	319	Vertical



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and his document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, National Research and the content of the

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594


sgs.china@sgs.com



Report No.: ZR/2019/B001901

40 of 45 Page:

Worst Case Mode (GFSK) Highest Channel Vertical 4.10.1.2

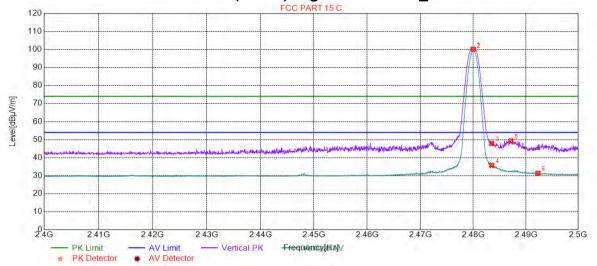

Suspe	Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2480.0000	100.11	10.09	74.00	-26.11	150	336	Vertical	
2	2480.0000	99.62	10.09	54.00	-45.62	150	331	Vertical	
3	2483.5000	47.84	10.10	74.00	26.16	150	326	Vertical	
4	2483.5000	35.77	10.10	54.00	18.23	150	341	Vertical	
5	2487.1436	49.25	10.11	74.00	24.75	150	326	Vertical	
6	2492.2961	31.39	10.13	54.00	22.61	150	341	Vertical	






Report No.: ZR/2019/B001901

Page: 41 of 45

Worst Case Mode (GFSK) Lowest Channel Horizontal 4.10.1.3

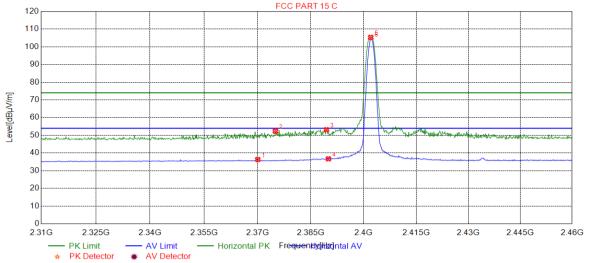

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2370.0601	36.31	9.62	54.00	17.69	150	294	Horizontal
2	2375.0150	52.32	9.63	74.00	21.68	150	285	Horizontal
3	2389.4294	53.16	9.65	74.00	20.84	150	50	Horizontal
4	2390.0000	36.70	9.65	54.00	17.30	150	54	Horizontal
5	2402.0000	105.36	9.67	74.00	-31.36	150	54	Horizontal
6	2402.0000	104.61	9.67	54.00	-50.61	150	50	Horizontal






Report No.: ZR/2019/B001901

Page: 42 of 45

4.10.1.4 Worst Case Mode (GFSK) Highest Channel Horizontal

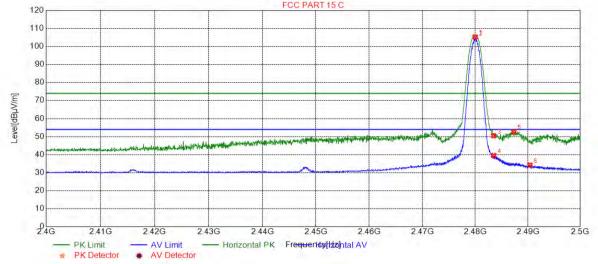

Suspe	Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2480.0000	105.22	10.09	74.00	-31.22	150	287	Horizontal	
2	2480.0000	104.81	10.09	54.00	-50.81	150	287	Horizontal	
3	2483.5000	50.47	10.10	74.00	23.53	150	293	Horizontal	
4	2483.5000	39.50	10.10	54.00	14.50	150	287	Horizontal	
5	2487.3437	52.69	10.11	74.00	21.31	150	287	Horizontal	
6	2490.3952	34.18	10.12	54.00	19.82	150	287	Horizontal	

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor All Modes have been tested, but only the worst case data displayed in this report.





Report No.: ZR/2019/B001901

Page: 43 of 45

Measurement Uncertainty (95% confidence levels, k=2) 5

No.	Item	Measurement Uncertainty		
1	Total RF power, conducted	±0.75dB		
2	RF power density, conducted	±2.84dB		
3	Spurious emissions, conducted	±0.75dB		
4	Radiated Spurious emission test	±4.5dB (30MHz-1GHz)		
4	Radiated Spurious emission test	±4.8dB (1GHz-25GHz)		
5	Conduct emission test	±3.12 dB(9KHz- 30MHz)		
6	Temperature test	±1°C		
7	Humidity test	±3%		
8	DC and low frequency voltages	±0.5%		





Report No.: ZR/2019/B001901

44 of 45 Page:

Equipment List

Conducted Emission								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate			
rest Equipment	Manufacturer	Wiodel No.	inventory No.	(yyyy-mm-dd)	(yyyy-mm-dd)			
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9			
LISN	Rohde & Schwarz	ENV216	SEM007-01	2019/7/14	2020/7/14			
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2019/4/1	2020/3/31			
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A			
Coaxial Cable	SGS	N/A	SEM024-01	2019/6/12	2020/6/11			
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2019/2/11	2020/2/10			
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2019/3/2	2020/3/1			

RF conducted test								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate			
rest Equipment	Wallulacturei	woder No.	inventory No.	(yyyy-mm-dd)	(yyyy-mm-dd)			
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2019/7/15	2020/7/15			
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2019/1/13	2020/1/12			
Coaxial Cable	SGS	N/A	SEM031-01	2019/6/12	2020/6/11			
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A			
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019/7/14	2020/7/14			
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27			
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2019/7/14	2020/7/14			
	RE	in Chamber						
				0-1 -1-4-	O-I Dura data			

RE in Chamber								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date			
rest Equipment	Manufacturer	Widdel No.	inventory No.	(yyyy-mm-dd)	(yyyy-mm-dd)			
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017/8/5	2020/8/4			
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A			
Coaxial Cable	SGS	N/A	SEM025-01	2019/6/12	2020/6/11			
MXE EMI Receiver (20Hz- 8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2019/7/14	2020/7/14			
BiConiLog Antenna (26- 3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017/6/27	2020/6/26			
Pre-amplifier (0.1-1.3GHz)	Agilent Technologies	8447D	SEM005-01	2019/3/2	2020/3/1			

RE in Chamber								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date			
Test Equipment	Manuacturer	woder No.	inventory No.	(yyyy-mm-dd)	(yyyy-mm-dd)			
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12			
Measurement Software	AUDIX	e3V8.2014-6-27	N/A	N/A	N/A			
Coaxial Cable	SGS	N/A	SEM026-01	2019/6/12	2020/6/11			
EXA Signal Analyzer (10Hz- 26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2019/3/12	2020/3/11			
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017/6/27	2020/6/26			
Horn Antenna (0.8-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12			
Pre-amplifier(0.1-1.3GHz)	HP	8447D	SEM005-02	2019/7/14	2020/7/14			
Low Noise Amplifier(100MHz- 18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2019/9/3	2020/9/2			
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017/10/17	2020/10/16			
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2019/3/2	2020/3/1			
Band filter	N/A	N/A	SEM023-01	N/A	N/A			



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn

中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2019/B001901

Page: 45 of 45

RE in Chamber								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)			
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30			
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2019/3/2	2020/3/1			
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2018/3/15	2020/3/14			
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2019/3/12	2020/3/11			
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017/8/22	2020/8/21			
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A			
Coaxial Cable	SGS	N/A	SEM029-01	2019/6/12	2020/6/11			

Photographs - EUT Constructional Details 7

Refer to Appendix A - Photographs of Set-Up for ZR/2019/B0019.

The End

