# **FCC RF Test Report**

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd

EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : IN2025

FCC ID : 2ABZ2-EE007

STANDARD : 47 CFR Part 2, and 90(S)

**CLASSIFICATION**: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Nov. 20, 2019 and completely tested on Mar. 04, 2020. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Fire Shih

Donale Chen

Approved by: Eric Shih / Manager

Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 1 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

# **TABLE OF CONTENTS**

RE	VISIO	N HISTORY	3
ÇI	1 N N N A 1	RY OF TEST RESULT	4
J			
1	GEN	ERAL DESCRIPTION	
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	
	1.4	Product Specification of Equipment Under Test	
	1.5	Modification of EUT	
	1.6	Maximum Conducted Power, Frequency Tolerance and Emission Designator	
	1.7	Testing Site	
	1.8	Test Software	
	1.9	Applied Standards	7
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	8
	2.1	Test Mode	8
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	TEST	Г RESULT	11
	3.1	Conducted Output Power Measurement	11
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	12
	3.3	Emissions Mask Measurement	13
	3.4	Emissions Mask – Out Of Band Emissions Measurement	15
	3.5	Field Strength of Spurious Radiation Measurement	
	3.6	Frequency Stability Measurement	18
4	LIST	OF MEASURING EQUIPMENT	20
5	UNC	ERTAINTY OF EVALUATION	21
ΑF	PEND	OIX A. TEST RESULTS OF CONDUCTED TEST	

APPENDIX B. TEST RESULTS OF RADIATED TEST

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 2 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

# **REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW9N2009-01B	Rev. 01	Initial issue of report	Mar. 19, 2020

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 3 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report No.: FW9N2009-01B

# **SUMMARY OF TEST RESULT**

Report FCC Rule		Description	Limit	Result	Remark
3.1	§2.1049 Occupied Bandwidth and		Reporting only	PASS	-
3.2			Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log <sub>10</sub> (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.5	§2.1053 Field Strength of Spuri		< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 49.87 dB at 2452.950 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 4 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

# 1 General Description

# 1.1 Applicant

#### OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

### 1.2 Manufacturer

#### OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

# 1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	IN2025
FCC ID	2ABZ2-EE007
	CDMA/GSM/WCDMA/LTE/5G NR
	WLAN 2.4GHz 802.11b/g/n HT20
	WLAN 2.4GHz 802.11ax HE20/HE40
EUT supports Radios application	WLAN 5GHz 802.11a/n HT20/HT40
Lot supports readios application	WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
	WLAN 5GHz 802.11ax HE20/HE40/HE80
	Bluetooth BR/EDR/LE
	GNSS/NFC/WPC
IMEI Code	Conducted: 865422040000341/865422040002875
IIWEI Code	Radiation: 865422040066037/865422040066029
HW Version	15
SW Version	Oxygen OS 10.5.IN11AA
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 5 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

# 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard						
Tx Frequency	814.7 ~ 823.3 MHz					
Rx Frequency	859.7 ~ 868.3 MHz					
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz					
Maximum Output Power to Antenna	Top Antenna: 23.54 dBm					
Maximum Output Fower to Antenna	Bottom Antenna: 23.10 dBm					
Antenna Gain	Top Antenna: -3.0 dBi					
Antenna Gain	Bottom Antenna: -2.0 dBi					
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM					

**Remark**: Top antenna power is worse than the bottom antenna, so choose the bottom antenna for full test.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

# 1.6 Maximum Conducted Power, Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M09G7D	0.2239
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M09W7D	0.1901
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M09W7D	0.1419
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M73G7D	0.2259
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M73W7D	0.1936
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M73W7D	0.1435
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M50G7D	0.2234
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M51W7D	0.1871
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M50W7D	0.1416
Part 90S	LTE Band 26	QPSK	10 MHz	0.0055	8M97G7D	0.2239
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M03W7D	0.1910
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M01W7D	0.1419
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M5G7D	0.2259
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M5W7D	0.1972
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M4W7D	0.1452

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 6 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

# 1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Sh	Sporton International (Shenzhen) Inc.							
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shei 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595								
Took Cita No	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.						
Test Site No.	TH01-SZ	CN1256	421272						

Test Firm	Sporton International (Sh	Sporton International (Shenzhen) Inc.						
Test Site Location No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nans Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398								
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.					
rest Site No.	03CH02-SZ	CN1256	421272					

#### 1.8 Test Software

Item	Site	Manufacture	Name	Version	
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a	

# 1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

#### Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 7 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report No.: FW9N2009-01B

#### **Test Configuration of Equipment Under Test** 2

#### **Test Mode** 2.1

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

	_	Bandwidth (MHz)				Modulation		RB#			Test Channel					
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	н
Max. Output Power	26	٧	v	v	v	v	-	v	v	v	v	v	v	v	v	٧
26dB and 99% Bandwidth	26	<b>v</b>	v	v	v	v	-	v	v	v			v	v	v	<
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	٧	v	v	v	v	-	v	v	v	v			v	v	v
Frequency Stability	26				v		-	v					v		v	
Radiated Spurious Emission	26	v	v	v	v	-	-	v			v			v	v	v
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 32 also complies.															


falls within part 22 also complies.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007

: 8 of 21 Page Number Report Issued Date: Mar. 19, 2020 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

# 2.2 Connection Diagram of Test System

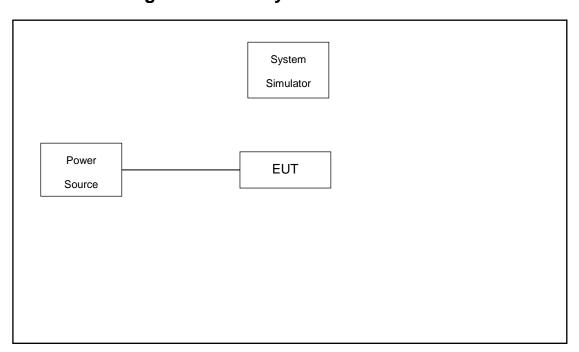

### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord	
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m	

# 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

 $Offset = RF \ cable \ loss + attenuator \ factor.$ 

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ 

= 4.0 + 10 = 14.0 (dB)

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 9 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report No.: FW9N2009-01B

# 2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
15	Channel	26765	-	-					
15	Frequency	821.5	-	-					
10	Channel	-	26740	-					
10	Frequency	-	819	-					
5	Channel	26715	26740	26765					
5	Frequency	816.5	819	821.5					
3	Channel	26705	26740	26775					
3	Frequency	815.5	819	822.5					
1.4	Channel	26697	26740	26783					
1.4	Frequency	814.7	819	823.3					

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 10 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

#### 3 Test Result

# 3.1 Conducted Output Power Measurement

#### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

#### 3.1.4 Test Setup



#### 3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 11 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

### 3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

#### 3.2.4 Test Setup

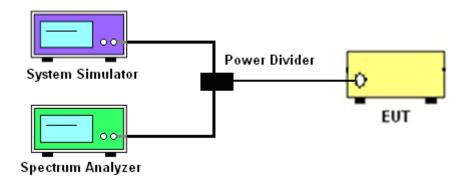

#### 3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 12 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

#### 3.3 Emissions Mask Measurement

#### 3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log<sub>10</sub>(f/6.1) decibels or 50 + 10 Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

Report No.: FW9N2009-01B

# C RF Test Report No.: FW9N2009-01B

# 3.3.4 Test Setup

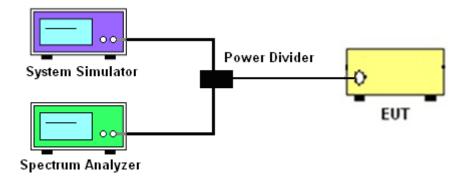

# 3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 14 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

#### 3.4 Emissions Mask - Out Of Band Emissions Measurement

#### 3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
   The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

### 3.4.4 Test Setup

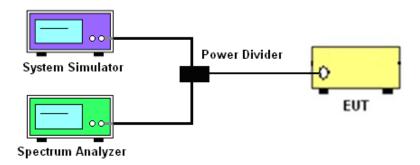

### 3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 15 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report No.: FW9N2009-01B

### 3.5 Field Strength of Spurious Radiation Measurement

#### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43+10\log_{10}(P[Watts])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures


- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

#### 3.5.4 Test Setup

#### For radiated test from 30MHz to 1GHz

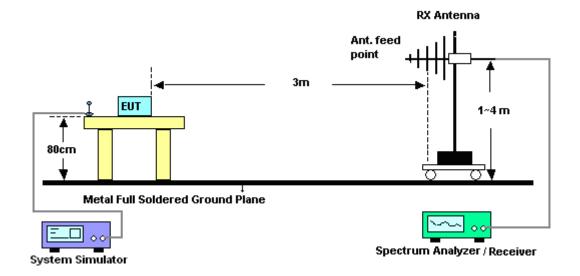

#### For radiated test above 1GHz

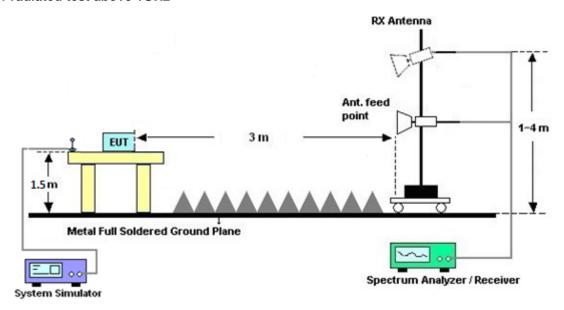

# 3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 17 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

# 3.6 Frequency Stability Measurement

#### 3.6.1 **Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

#### 3.6.2 **Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 **Test Procedures for Temperature Variation**


- 1. The EUT was set up in the thermal chamber and connected with the base station.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized 3. at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.6.4 **Test Procedures for Voltage Variation**

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

Report No.: FW9N2009-01B

### 3.6.5 Test Setup

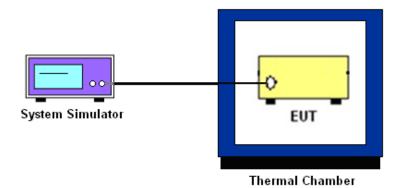

# 3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 19 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report No.: FW9N2009-01B

# 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	Dec. 16, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangrou p	LP-150U	H201408180 3	-40~+150°C	Dec. 22, 2018	Dec. 16, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz	Apr. 19, 2019	Mar. 04, 2020	Apr. 18, 2020	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 19, 2019	Mar. 04, 2020	Jul. 18, 2020	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Aug. 27, 2019	Mar. 04, 2020	Aug. 26, 2020	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr.18, 2019	Mar. 04, 2020	Apr. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 22. 2019	Mar. 04, 2020	Jul. 21. 2020	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2019	Mar. 04, 2020	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY5327010 5	0.5GHz~26.5Gh z	Oct. 18, 2019	Mar. 04, 2020	Oct. 17, 2020	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	6160100024 70	N/A	NCR	Mar. 04, 2020	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Mar. 04, 2020	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Mar. 04, 2020	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 20 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

# 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2.540
Confidence of 95% (U = 2Uc(y))	2.5dB

#### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

- 1		
	Measuring Uncertainty for a Level of	3.3dB
	Confidence of 95% (U = 2Uc(y))	3.3ub

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : 21 of 21
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

# **Appendix A. Test Results of Conducted Test**

# **Conducted Output Power (Average power)**

#### **Top Antenna:**

			LTE Ban	d 26 Maximum Average F	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0		23.54		
15	1	37		23.48		
15	1	74		23.46		
15	36	0	QPSK	22.53		
15	36	20		22.59		
15	36	39		22.56		
15	75	0		22.49		
15	1	0		22.95		
15	1	37		22.92		
15	1	74		22.90		
15	36	0	16-QAM	21.58	-	-
15	36	20		21.61		
15	36	39		21.55		
15	75	0		21.56		
15	1	0		21.56		
15	1	37		21.62		
15	1	74		21.57		
15	36	0	64-QAM	20.37		
15	36	20		20.47		
15	36	39		20.47		
15	75	0		20.37		

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007

Page Number : A1 of A49 Report Issued Date: Mar. 19, 2020

Report No.: FW9N2009-01B

Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0			23.50	
10	1	25			23.40	
10	1	49			23.33	
10	25	0	QPSK		22.37	
10	25	12			22.46	
10	25	25			22.44	
10	50	0			22.38	
10	1	0			22.81	
10	1	25			22.80	
10	1	49			22.62	
10	25	0	16-QAM	-	21.36	-
10	25	12			21.50	
10	25	25			21.45	
10	50	0			21.37	
10	1	0			21.45	
10	1	25			21.49	
10	1	49			21.52	
10	25	0	64-QAM		20.21	
10	25	12			20.30	
10	25	25			20.31	
10	50	0			20.21	

Page Number : A2 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle **Highest** 23.40 23.41 23.34 5 1 0 23.49 23.40 23.39 5 1 12 24 23.46 23.46 23.39 5 1 22.42 22.41 5 12 0 **QPSK** 22.56 22.56 22.45 5 7 22.60 12 22.55 22.51 22.42 5 12 13 22.38 0 22.56 22.44 5 25 5 1 0 22.68 22.69 22.68 22.69 22.68 22.66 5 1 12 22.72 5 1 24 22.71 22.61 16-QAM 21.57 21.46 21.45 0 5 12 5 12 7 21.61 21.59 21.47 21.55 21.55 21.45 5 12 13 5 25 0 21.57 21.47 21.39 5 1 0 21.40 21.43 21.39 5 1 12 21.41 21.46 21.51 21.37 21.40 21.39 5 1 24 5 12 0 **64-QAM** 20.43 20.32 20.33 7 20.48 20.46 20.39 12 5 5 12 13 20.46 20.43 20.39 5 25 0 20.42 20.29 20.31

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A3 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		23.52	23.41	23.40
3	1	8		23.54	23.46	23.42
3	1	14		23.52	23.42	20.93
3	8	0	QPSK	22.56	22.52	22.49
3	8	4		22.61	22.55	22.53
3	8	7		22.57	22.53	22.47
3	15	0		22.57	22.47	22.45
3	1	0		22.86	22.71	22.74
3	1	8		22.82	22.79	22.73
3	1	14		22.87	22.73	20.15
3	8	0	16-QAM	21.62	21.50	21.50
3	8	4		21.65	21.61	21.55
3	8	7		21.59	21.55	21.49
3	15	0		21.60	21.50	21.47
3	1	0		21.57	21.37	21.50
3	1	8		21.53	21.51	21.48
3	1	14		21.44	21.42	21.40
3	8	0	64-QAM	20.45	20.36	20.43
3	8	4		20.50	20.46	20.44
3	8	7		20.47	20.44	20.41
3	15	0		20.45	20.31	20.37

Page Number : A4 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle **Highest** 23.39 23.30 23.25 1.4 1 0 23.50 23.44 23.38 1.4 1 3 5 23.43 23.34 23.28 1.4 1 1.4 3 0 **QPSK** 23.45 23.30 23.28 23.30 3 23.46 23.36 1.4 1 23.43 23.25 1.4 3 3 23.35 22.36 22.54 22.39 1.4 6 0 22.74 1.4 1 0 22.53 22.55 22.75 22.60 1.4 1 3 22.79 1.4 1 5 22.71 22.61 22.56 16-QAM 22.51 22.42 22.36 0 1.4 3 1.4 3 1 22.56 22.46 22.42 22.51 22.47 22.35 3 3 1.4 1.4 6 0 21.63 21.52 21.43 1.4 1 0 21.42 21.39 21.35 1.4 1 3 21.47 21.43 21.41 21.38 21.32 21.45 1.4 1 5 1.4 3 0 **64-QAM** 21.47 21.34 21.40 21.52 21.40 21.44 3 1 1.4 21.42 1.4 3 3 21.45 21.40 1.4 6 0 20.35 20.22 20.26

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A5 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

#### **Bottom Antenna:**

			LTE Ban	d 26 Maximum Average F	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0		22.98		
15	1	37		22.98		
15	1	74		23.10		
15	36	0	QPSK	22.04		
15	36	20		22.24		
15	36	39		22.18		
15	75	0		22.10		
15	1	0		22.61		
15	1	37		22.73		
15	1	74		22.51		
15	36	0	16-QAM	21.10	-	-
15	36	20		21.19		
15	36	39		21.03		
15	75	0		21.15		
15	1	0		21.18		
15	1	37		21.25		
15	1	74		21.20		
15	36	0	64-QAM	20.00		
15	36	20		20.30		
15	36	39		20.23		
15	75	0		20.20		

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A6 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0			22.93	
10	1	25			22.89	
10	1	49			22.80	
10	25	0	QPSK		21.81	
10	25	12			22.01	
10	25	25			21.96	
10	50	0			21.88	
10	1	0			22.60	
10	1	25			22.51	
10	1	49			22.37	
10	25	0	16-QAM	-	20.89	-
10	25	12			21.06	
10	25	25			21.09	
10	50	0			20.86	
10	1	0			21.23	
10	1	25			21.21	
10	1	49			21.30	
10	25	0	64-QAM		20.00	
10	25	12			20.05	
10	25	25			19.97	
10	50	0			20.00	

Page Number : A7 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0		22.85	22.84	23.00
5	1	12		22.99	22.95	23.10
5	1	24		23.08	23.10	22.99
5	12	0	QPSK	22.02	22.01	22.00
5	12	7		22.02	22.05	22.04
5	12	13		22.09	22.03	22.06
5	25	0		22.11	22.00	21.96
5	1	0		22.01	21.90	21.91
5	1	12		21.96	21.82	21.83
5	1	24		22.01	22.02	21.96
5	12	0	16-QAM	21.06	21.01	21.03
5	12	7		21.22	21.06	21.10
5	12	13		21.02	20.95	21.04
5	25	0		21.01	21.00	21.02
5	1	0		21.31	21.31	21.19
5	1	12		21.16	21.24	21.26
5	1	24		21.13	21.20	21.06
5	12	0	64-QAM	20.18	20.09	20.04
5	12	7		20.23	20.25	20.15
5	12	13		20.13	20.16	20.02
5	25	0		20.10	20.09	20.05

Page Number : A8 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		22.87	22.92	23.01
3	1	8		22.99	23.00	23.07
3	1	14		22.90	22.98	20.93
3	8	0	QPSK	22.12	22.03	22.01
3	8	4		22.14	22.11	22.05
3	8	7		22.10	22.05	22.02
3	15	0		22.09	22.04	22.08
3	1	0		22.53	22.31	22.33
3	1	8		22.45	22.33	22.31
3	1	14		22.55	22.36	20.15
3	8	0	16-QAM	21.09	20.99	21.11
3	8	4		21.13	21.06	21.06
3	8	7		21.17	21.05	20.95
3	15	0		21.10	20.97	21.04
3	1	0		21.35	21.00	21.08
3	1	8		21.03	21.11	20.96
3	1	14		21.02	21.01	21.00
3	8	0	64-QAM	20.02	20.08	19.98
3	8	4		20.16	20.12	20.01
3	8	7		20.16	20.07	20.14
3	15	0		19.99	19.91	20.15

Page Number : A9 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle **Highest** 22.85 22.85 22.72 1.4 1 0 23.09 23.02 22.95 1.4 1 3 5 22.84 22.93 22.82 1.4 1 1.4 3 0 **QPSK** 22.93 22.82 22.91 22.84 22.85 3 22.93 1.4 1 22.98 22.91 22.84 1.4 3 3 22.00 21.96 21.95 1.4 6 0 22.29 1.4 1 0 21.96 22.04 22.29 22.11 22.27 1.4 1 3 1.4 1 5 22.28 21.93 22.09 16-QAM 22.02 21.99 0 21.96 1.4 3 22.00 1.4 3 1 22.06 21.95 22.01 22.11 22.03 3 3 1.4 1.4 6 0 21.19 21.11 21.04 1.4 1 0 21.24 21.08 20.86 1.4 1 3 21.08 21.10 20.93 20.99 20.91 20.80 1.4 1 5 1.4 3 0 **64-QAM** 21.01 20.94 21.18 21.04 20.97 21.21 3 1 1.4 1.4 3 3 21.13 21.10 20.96 1.4 6 0 20.11 19.94 19.86

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A10 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01


# 26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	1.4MHz 3MHz			5MHz 10MHz		15MHz		20MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.22	2.95	2.98	4.88	5.00	-	-	14.24	14.60	-	-
Middle CH	1.23	1.23	3.02	3.00	4.90	4.96	9.75	9.65	-	-	-	-
Highest CH	1.22	1.23	3.04	3.03	4.88	4.94	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4	ИHz	3M	lHz	5M	5MHz 10MHz				ИHz	201	ИHz
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.22	-	3.06	-	4.87	-	-	-	14.69	-	-	-
Middle CH	1.23	-	3.03	-	4.91	-	9.77	-	-	-	-	-
Highest CH	1.22	-	3.06	-	4.91	-	-	-	-	-	-	-

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A11 of A49 Report Issued Date : Mar. 19, 2020

Report No.: FW9N2009-01B

Report Version : Rev. 01

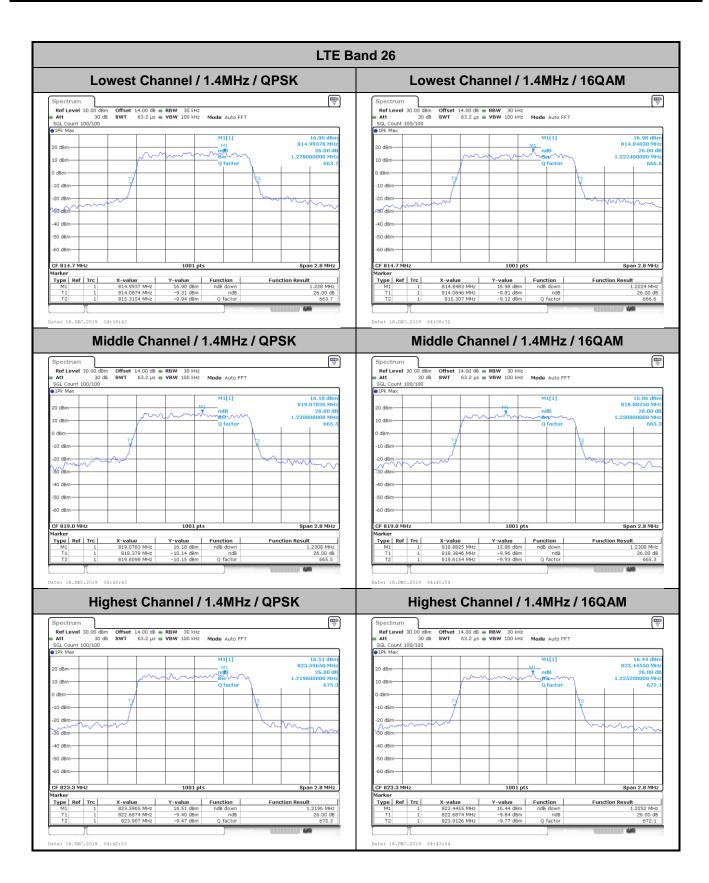

Page Number : A12 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01


LTE Band 26 Lowest Channel / 3MHz / QPSK Lowest Channel / 3MHz / 16QAM Ref Level 30.00 dBm

Att 30 dB


SGL Count 100/100

1Pk Max 16.62 dB 815.45200 MF 26.00 c 2.949100000 MF 40 dBm Span 6.0 MHz Function Result 2.9491 MHz 26.00 dB 276.5 Type Ref Trc Type Ref Trc Middle Channel / 3MHz / QPSK Middle Channel / 3MHz / 16QAM **□**□□ .00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT 14.00 dB **RBW** 100 kHz 19 μs **VBW** 300 kHz **Mode** Auto FFT 17.50 dBr 817.77720 M 18.06 dB 818.25070 MH 20 dB Y-value Type | Ref | Trc | Function Type | Ref | Trc | **Function Result** Function Highest Channel / 3MHz / QPSK Highest Channel / 3MHz / 16QAM M1[1] 17.73 dB 821.96050 MH 822.68580 MH 10 dBm -60 dBm-Type Ref Trc Type | Ref | Trc |

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A13 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

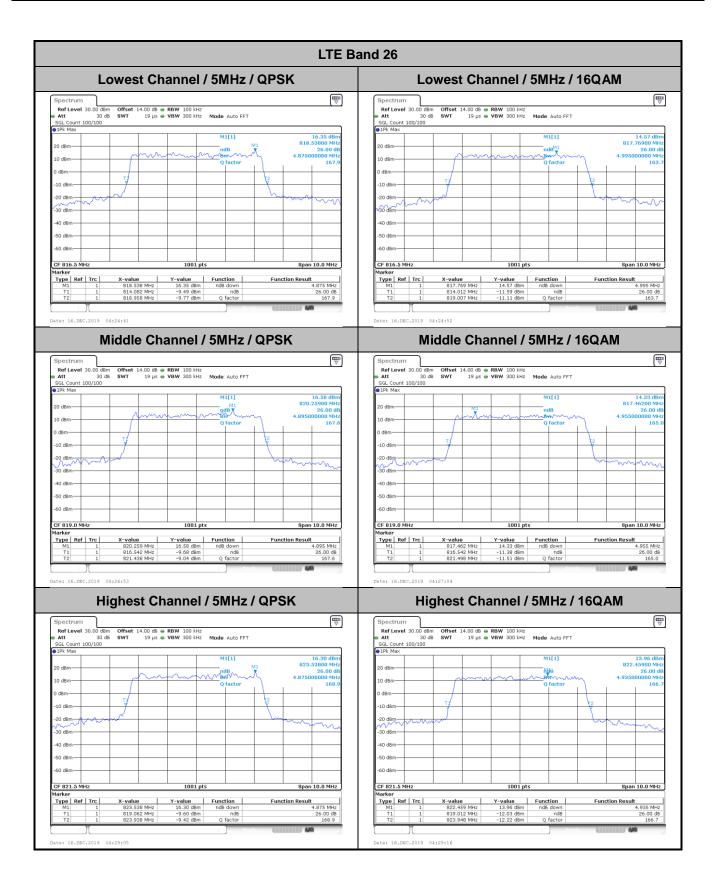

Page Number : A14 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

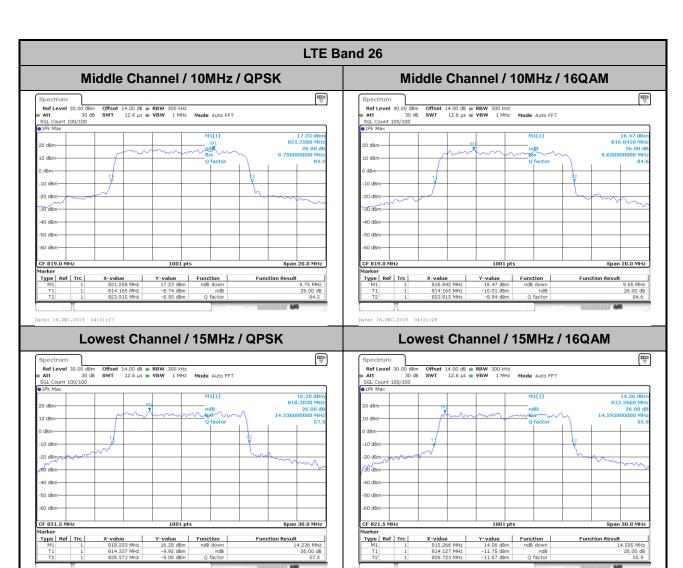

Page Number : A15 of A49 Report Issued Date: Mar. 19, 2020

Report No.: FW9N2009-01B

Report Version : Rev. 01

LTE Band 26 Lowest Channel / 1.4MHz / 64QAM Lowest Channel / 3MHz / 64QAM Ref Level 30.00 dBm

Att 30 dB

SGL Count 100/100

1Pk Max 1.2168000 40 dBm Span 2.8 MHz Type Ref Trc Middle Channel / 1.4MHz / 64QAM Middle Channel / 3MHz / 64QAM **□**□□ 14.00 dB • RBW 30 kHz 63.2 µs • VBW 100 kHz Mode Auto FFT 14.00 dB **RBW** 100 kHz 19 μs **VBW** 300 kHz **Mode** Auto FFT 14.93 dB 819.44200 MF Function Result 1,2336 MHz 26.00 dB 664.3 Type | Ref | Trc | Function Type | Ref | Trc | Function Highest Channel / 1.4MHz / 64QAM Highest Channel / 3MHz / 64QAM M1[1] 16.06 dB 822.91120 MF 822.3 Function Result Function Result 3.0569 MHz 
 X-value
 Y-value
 Function

 822.3561 MHz
 16.71 dBm
 ndB down

 X-value
 Y-value
 Function

 822.9112 MHz
 16.06 dBm
 ndB down
 Type Ref Trc Type | Ref | Trc | 821.0015 MHz 824.0584 MHz

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A16 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 5MHz / 64QAM Middle Channel / 10MHz / 64QAM Ref Level 30.00 dBm

Att 30 dB

SGL Count 100/100

1Pk Max Span 10.0 MHz Span 20.0 MHz Type Ref Trc Middle Channel / 5MHz / 64QAM Lowest Channel / 15MHz / 64QAM **□**□□ .00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Mode Auto FFT 14.94 dB 817.69100 MF Function Result 14.685 MHz 26.00 dB 56.1 Type | Ref | Trc | X-value 823.568 MHz 814.217 MHz 828.903 MHz Function Type | Ref | Trc | **Function Result** Highest Channel / 5MHz / 64QAM 14.83 dE 819.91200 M

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007

Type | Ref | Trc |

Page Number : A17 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

## **Occupied Bandwidth**

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.72	4.50	4.51	-	-	13.49	13.46	-	-
Middle CH	1.09	1.09	2.72	2.73	4.48	4.49	8.97	9.03	-	-	-	-
Highest CH	1.09	1.08	2.73	2.72	4.48	4.48	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.72	-	4.49	-	-	-	13.43	-	-	-
Middle CH	1.09	-	2.73	-	4.49	-	9.01	-	-	-	-	-
Highest CH	1.09	-	2.72	-	4.50	-	-	-	-	-	-	-

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007

: A18 of A49 Page Number Report Issued Date: Mar. 19, 2020

Report No.: FW9N2009-01B

Report Version : Rev. 01

LTE Band 26 Lowest Channel / 1.4MHz / QPSK Lowest Channel / 1.4MHz / 16QAM vel 30.00 dBm Offset t 30 dB SWT CF 814.7 MI Type Ref Trc Type Ref Trc X-value 814.3895 MHz 814.15455 MHz 815.24825 MHz Function **Function Result** Function Occ Bw 1.088111888 MHz 1.093706294 MHz Middle Channel / 1.4MHz / QPSK Middle Channel / 1.4MHz / 16QAM Ref Level 30.00 dBm Offset 14.00 dB ● RBW 30 kHz ■ Att 30 dB SWT 63.2 μs ● VBW 100 kHz Mode Auto FFT SGL Count 100/100 ■ 1Pk Max Ref Level 30.00 16.03 dB 819.33010 MH 1.09090909 M1E11 M1[1] -60 dBm Marker Type | Ref | Trc | Type | Ref | Trc | Occ Bw Occ Bw 1.088111888 MHz Highest Channel / 1.4MHz / QPSK Highest Channel / 1.4MHz / 16QAM 30 dBm 30 dB SGL Count 100/100 16.47 dBr 16.22 dBr M1[1] M1[1] 10 dBm--60 dBm-Type Ref Trc

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A19 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 3MHz / QPSK Lowest Channel / 3MHz / 16QAM Ref Level 30.00 dBm

Att 30 dB

SGL Count 100/100

1Pk Max -10 dBm 40 dBm CF 815.5 MHz Y-value Function
17.36 dBm
10.96 dBm Occ Bw
12.30 dBm Type Ref Trc **Function Result** Type Ref Trc 2.715284715 MHz 2.721278721 MHz Middle Channel / 3MHz / 16QAM Middle Channel / 3MHz / QPSK 14.00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 14.00 dB ● RBW 100 kHz SWT 19 µs ● VBW 300 kHz Mode Auto FFT 18.24 dBi 819.86910 MF 2.715284715 MF 16.30 dBn 818.10690 MH 2.727272727 MH 20 dBm CF 819.0 MHz Y-value 16.30 dB Type | Ref | Trc | Type | Ref | Trc | Y-value Function 18.24 dBm X-value 818.1069 MHz 817.63337 MHz 820.36064 MHz Function Function Result **Function Result** Occ Bw 2.727272727 MHz 2.715284715 MHz Occ Bw Highest Channel / 3MHz / QPSK Highest Channel / 3MHz / 16QAM 14.00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 14.00 dB ● RBW 100 kHz SWT 19 µs ● VBW 300 kHz Mode Auto FFT 17.26 dBr 823.06940 MH 2.727272727 MH 17.00 dBn 822.52400 MH 2.715284715 MH M1[1] M1[1] -10 dBm 20 dBm--30 dBm-Span 6.0 MHz 
 X-value
 Y-value
 Function

 822.524 MHz
 17.00 dBm
 Type Ref Trc Type | Ref | Trc | 
 X-value
 Y-value
 Function

 823.0694 MHz
 17.26 dBm
 Function Result **Function Result** 10.58 dBm Occ Bw 11.05 dBm 2.727272727 MHz Occ Bw 2.715284715 MHz

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A20 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 5MHz / QPSK Lowest Channel / 5MHz / 16QAM Ref Level 30.00 dBm

Att 30 dB

SGL Count 100/100

1Pk Max -20 dBm 30 dBm-40 dBm Span 10.0 MHz CF 816.5 MHz Y-value Function
15.47 dBm
11.19 dBm Occ Bw
10.16 dBm Y-value Function

15.20 dBm

9.29 dBm Occ Bw


9.94 dBm Type Ref Trc **Function Result** Type Ref Trc 4.495504496 MHz 4.505494505 MHz Middle Channel / 5MHz / QPSK Middle Channel / 5MHz / 16QAM **□**□□ 14.00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 14.00 dB ● RBW 100 kHz SWT 19 µs ● VBW 300 kHz Mode Auto FFT 15.67 dBi 818.80000 MF 4.475524476 MF CF 819.0 MHz 
 X-value
 Y-value
 Function

 818.8 MHz
 15.67 dBm
 816.76224 MHz

 815.76224 MHz
 10.92 dBm
 Occ Bw

 821.23776 MHz
 9.08 dBm
 Y-value 14.97 dBr Type | Ref | Trc | Type | Ref | Trc | Function Function Result **Function Result** 4.475524476 MHz Occ Bw 4.485514486 MHz Highest Channel / 5MHz / QPSK Highest Channel / 5MHz / 16QAM 14.00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 14.00 dB ● RBW 100 kHz SWT 19 µs ● VBW 300 kHz Mode Auto FFT 16.03 dBr 821.83000 MH 4.475524476 MH 15.09 dBn 822.82900 MH 4.475524476 MH M1[1] M1[1] -10 dBm CF 821.5 M Type Ref Trc Type | Ref | Trc | Function Result Function Result 9.68 dBm Occ Bw 9.72 dBm 4.475524476 MHz Occ Bw 4.475524476 MHz

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A21 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

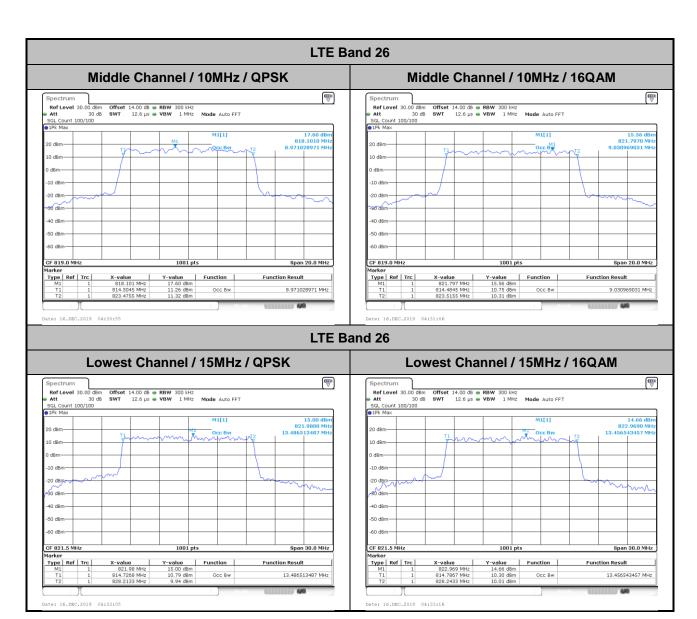

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A22 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 1.4MHz / 64QAM Lowest Channel / 3MHz / 64QAM count 100/100 Max Offset 14.00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT CF 815.5 MI Type Ref Trc Type Ref Trc X-value 814.6608 MHz 814.13936 MHz 816.86064 MHz Function **Function Result** Function Occ Bw 1.088111888 MHz 2.721278721 MHz Middle Channel / 1.4MHz / 64QAM Middle Channel / 3MHz / 64QAM Ref Level 30.00 dBm Offset 14.00 dB ● RBW 100 kHz ■ Att 30 dB SWT 19 μs ● VBW 300 kHz Mode Auto FFT 5GL Count 100/100 ■ 1Pk Max 16.49 dBi 818.60840 MF 1.085314685 MF M1[1] M1E11 -10 dBm -60 dBm Marker Type | Ref | Trc | Type Ref Trc 820.2827 MHz 817.63337 MHz 820.36663 MHz Occ Bw 1.085314685 MHz Occ Bw 2.733266733 MHz Highest Channel / 1.4MHz / 64QAM Highest Channel / 3MHz / 64QAM 30.00 dB 30 d SGL Count 100/100 17.67 dBn 822.03250 MH; 2.715284715 MH; 14.75 dBi 823.62170 MF 1.088111888 MF M1[1] M1[1] 10 dBm--60 dBm-Type Ref Trc

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A23 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

LTE Band 26 Lowest Channel / 5MHz / 64QAM Middle Channel / 10MHz / 64QAM Ref Level 30.00 dBm

Att 30 dB

SGL Count 100/100

1Pk Max 40 dBm 40 dBm CF 819.0 MHz Type Ref Trc Function **Function Result** Type Ref Trc Occ Bw 4.485514486 MHz 9.010989011 MHz Middle Channel / 5MHz / 64QAM Lowest Channel / 15MHz / 64QAM 14.00 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT Offset 14.00 dB ● RBW 300 kHz SWT 12.6 µs ● VBW 1 MHz Mode Auto FFT 14.93 dBn 816.5250 MH 13.426573427 MH 14.84 dBi 819.57900 MF 4.485514486 MF CF 821.5 MHz Y-value Function Y-value 2 14.93 dBm 2 11.26 dBm 2 8.53 dBm Type | Ref | Trc | Type | Ref | Trc | Function Result Function **Function Result** Occ Bw 4.485514486 MHz Occ Bw 13.426573427 MHz Highest Channel / 5MHz / 64QAM 14.48 dBi 822.25900 MF 4.495504496 MF M1[1]

 X-value
 Y-value
 Function

 822.259 MHz
 14.48 dBm

9.02 dBm Occ Bw 10.17 dBm Function Result


4.495504496 MHz

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007

Type Ref Trc


Page Number : A24 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

## **Conducted Band Edge**

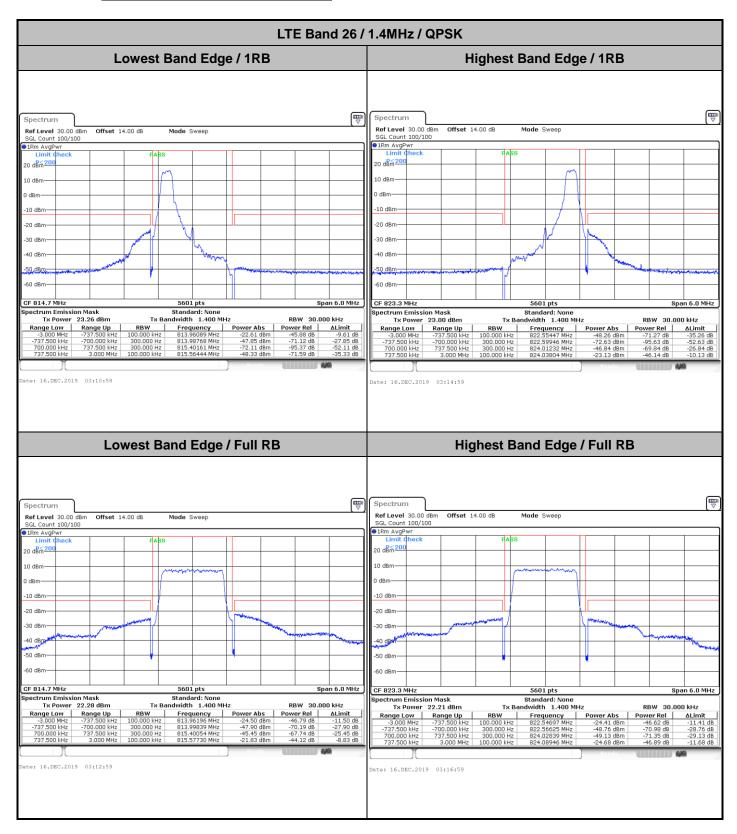


Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A25 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

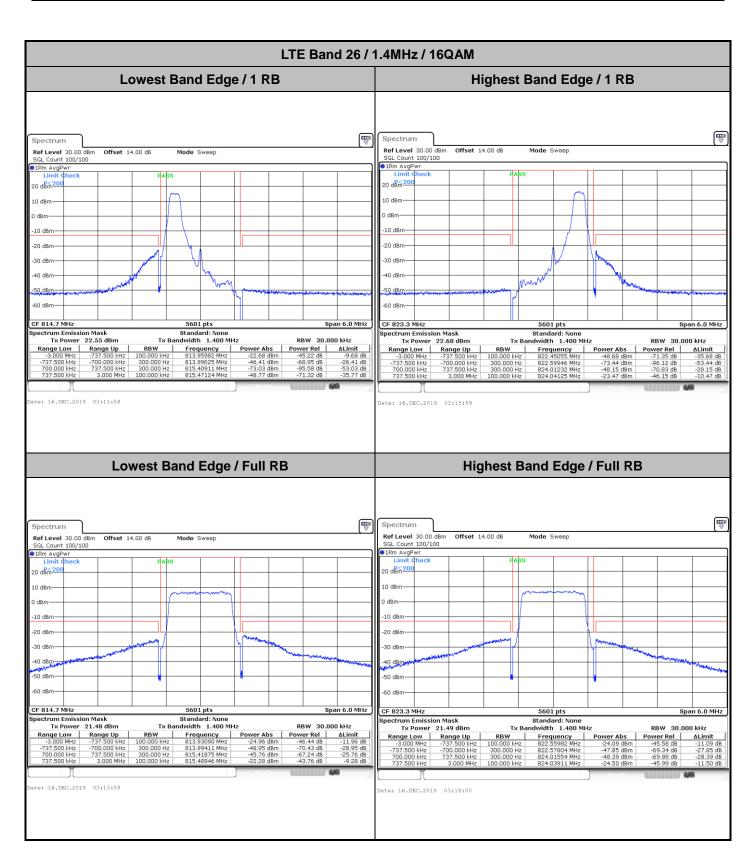


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A26 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

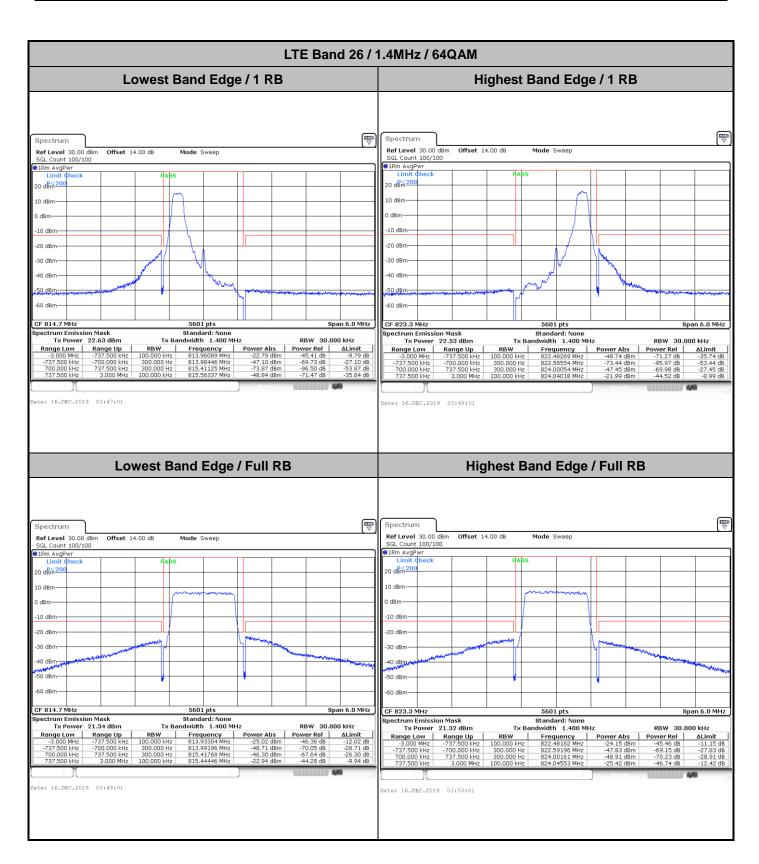

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A27 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

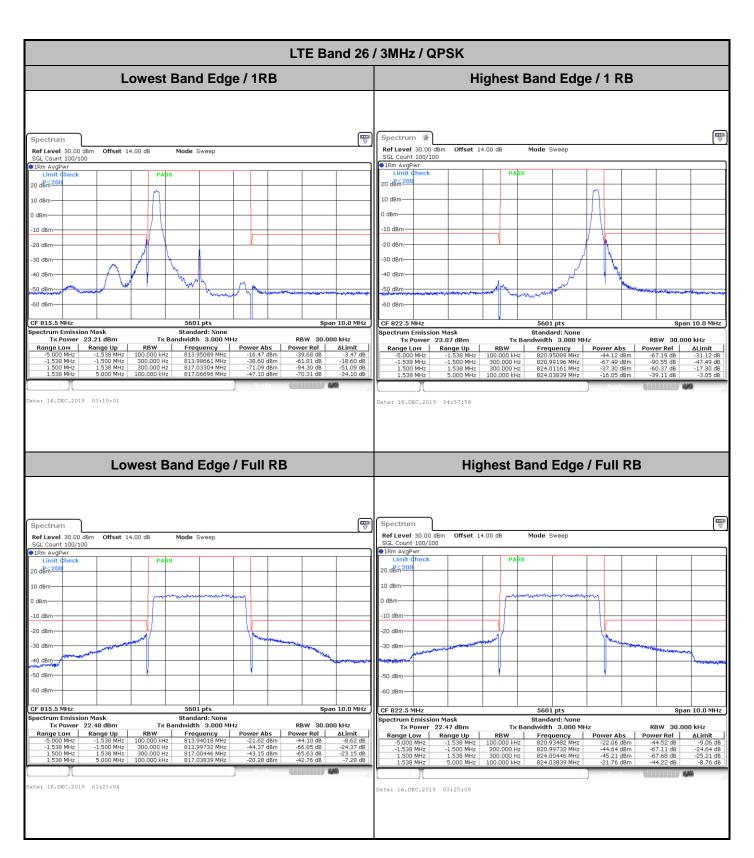

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A28 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01

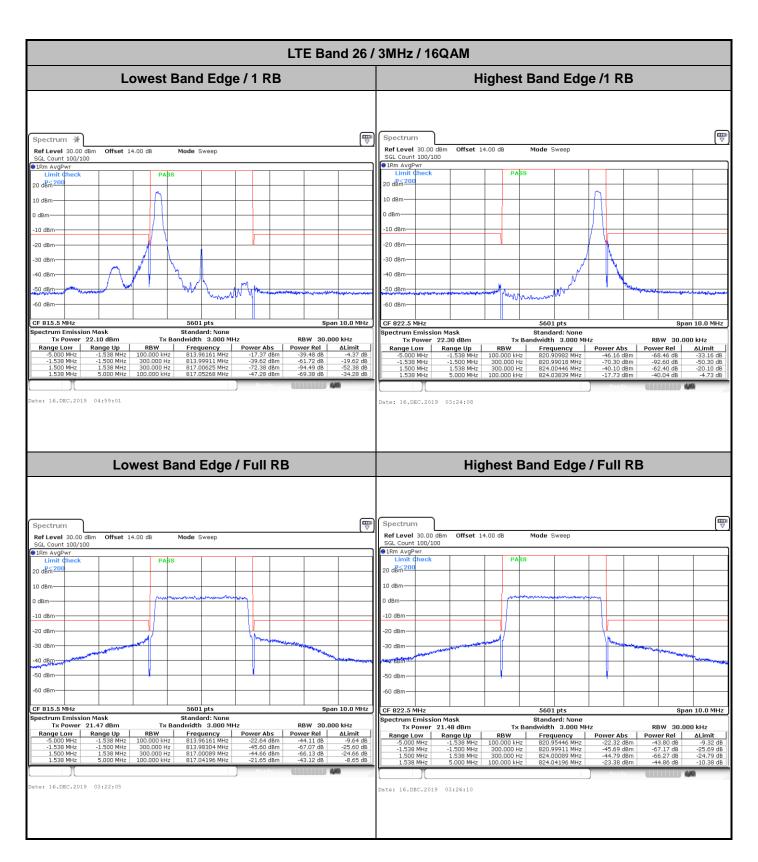

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EE007 Page Number : A29 of A49
Report Issued Date : Mar. 19, 2020
Report Version : Rev. 01