



FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : IN2015
FCC ID : 2ABZ2-EE103
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Nov. 20, 2019 and testing was completed on Dec. 21, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 16

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement..... 24

 3.6 Automatically Discontinue Transmission 26

 3.7 Antenna Requirements 27

4 LIST OF MEASURING EQUIPMENT 28

5 UNCERTAINTY OF EVALUATION 29

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR9N2025-02F	Rev. 01	Initial issue of report	Mar. 19, 2020



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 11.13 dB at 30.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.52 dB at 0.470 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	IN2015
FCC ID	2ABZ2-EE103
EUT supports Radios application	CDMA/ GSM/ WCDMA/ LTE / 5GNR WLAN 2.4GHz 802.11b/g/n (HT20) WLAN 2.4GHz 802.11ax (HE20/HE40) WLAN 5GHz 802.11a/n/ac (HT20/HT40/VHT20/VHT40/VHT80) WLAN 5GHz 802.11ax (HE20/HE40/HE80) Bluetooth BR / EDR / LE GNSS / NFC
IMEI/MEID Code	Conducted: 99001575002227 Conduction: 001003902897498 Radiation: 001003902672834
HW Version	15
SW Version	Oxygen OS 10.5.IN21AA
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report, the difference is to change the model name and SW version for market segment. The change has no influence on the test results, all the test results are leveraged from original report FR9N2025-01F.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification								
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz							
Maximum Output Power	<MIMO Ant. 1+2> <5745 MHz ~ 5825 MHz> 802.11a : 19.57 dBm / 0.0906 W 802.11n HT20 : 19.12 dBm / 0.0817 W 802.11n HT40 : 20.52 dBm / 0.1127 W 802.11ac VHT20: 19.11 dBm / 0.0815 W 802.11ac VHT40: 20.47 dBm / 0.1114 W 802.11ac VHT80: 18.24 dBm / 0.0667 W 802.11ax HE20 : 19.21 dBm / 0.0834 W 802.11ax HE 40 : 20.15 dBm / 0.1035 W 802.11ax HE 80 : 18.49 dBm / 0.0706 W							
99% Occupied Bandwidth	802.11a : 16.38 MHz 802.11n HT20 : 17.53 MHz 802.11n HT40 : 36.16 MHz 802.11ac VHT80 : 76.24 MHz 802.11ax HE20 : 18.93 MHz 802.11ax HE40 : 37.86 MHz 802.11ax HE80 : 77.68 MHz							
Type of Modulation	802.11a/n/ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM/1024QAM)							
Antenna Type / Gain	<Ant. 1> : PIFA Antenna with gain -3.00 dBi <Ant. 2> : PIFA Antenna with gain -3.00 dBi							
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac/ax MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>			Ant. 1	Ant. 2	802.11 a/n/ac/ax MIMO	V	V
	Ant. 1	Ant. 2						
802.11 a/n/ac/ax MIMO	V	V						

Note:

1. For 11ax, manufacturer declared the EUT supports for OFDMA of Resource unit combination (26 tones, 52 tones, 106 tones, 242 tones). Pre-scanned conducted power for Resource unit combination, we choice 26 tones and full Resource unit combination to test.
2. The EUT supports for WLAN MIMO mode only.
3. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE 40
2. The above Frequency and Channel in "#n" were 802.11ac VHT80 and 802.11ax HE 80



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE 80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 1(Charging from Adapter)

Ch. #		Band IV : 5745-5825 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-


Ch. #		Band IV : 5725-5850 MHz		
		802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

For Radiation

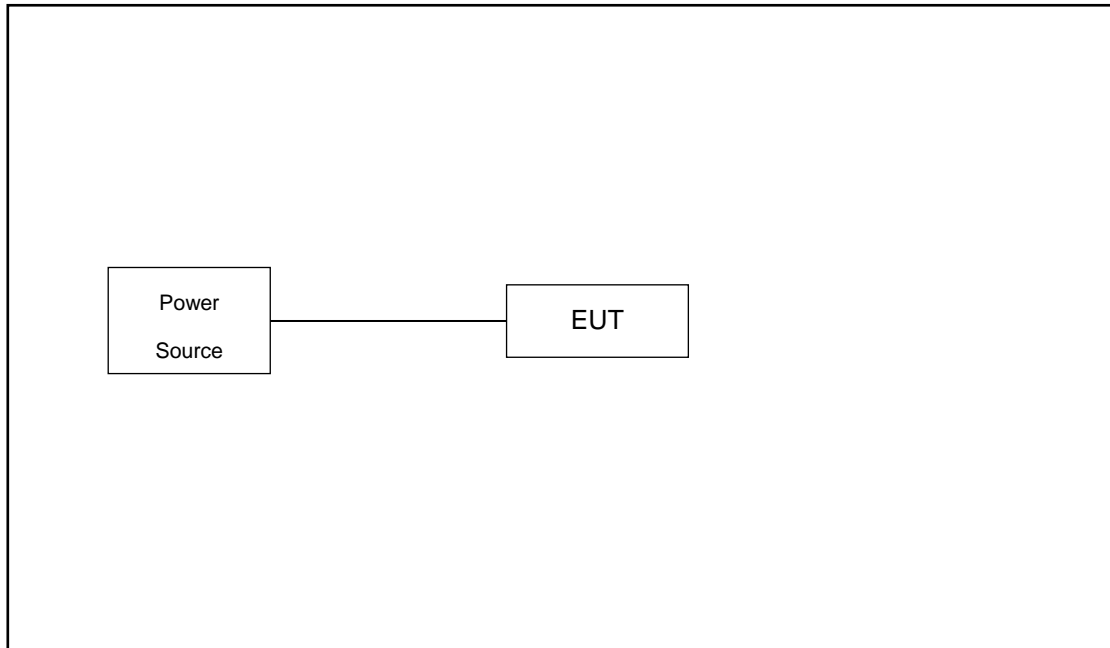

For Conducted Emission

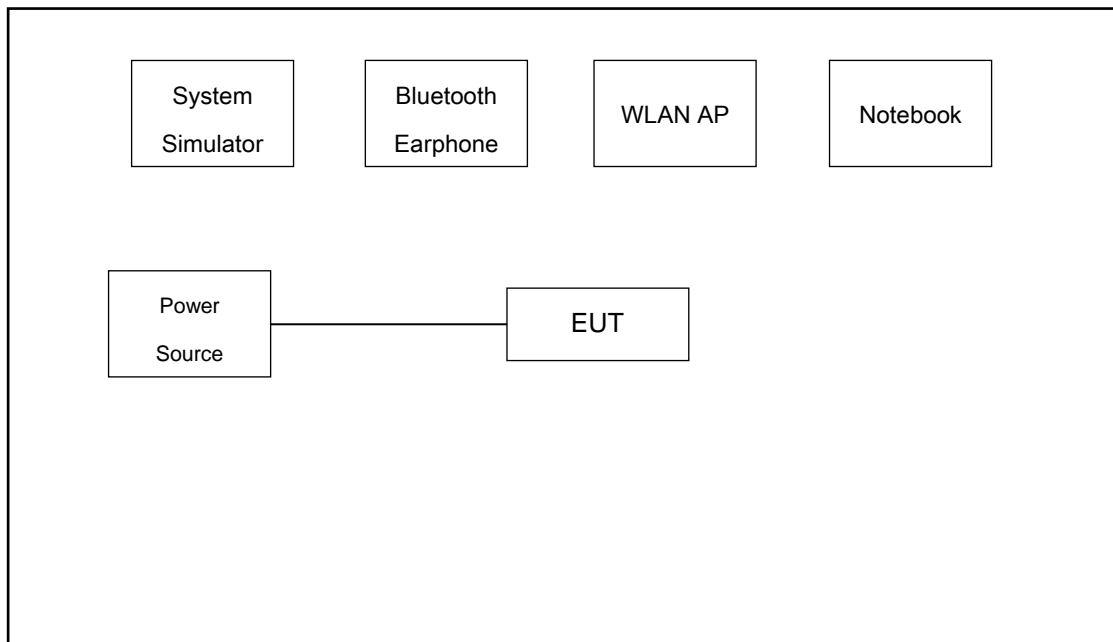



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.50 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.50 + 20 = 22.50 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

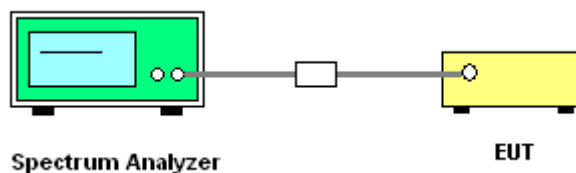

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

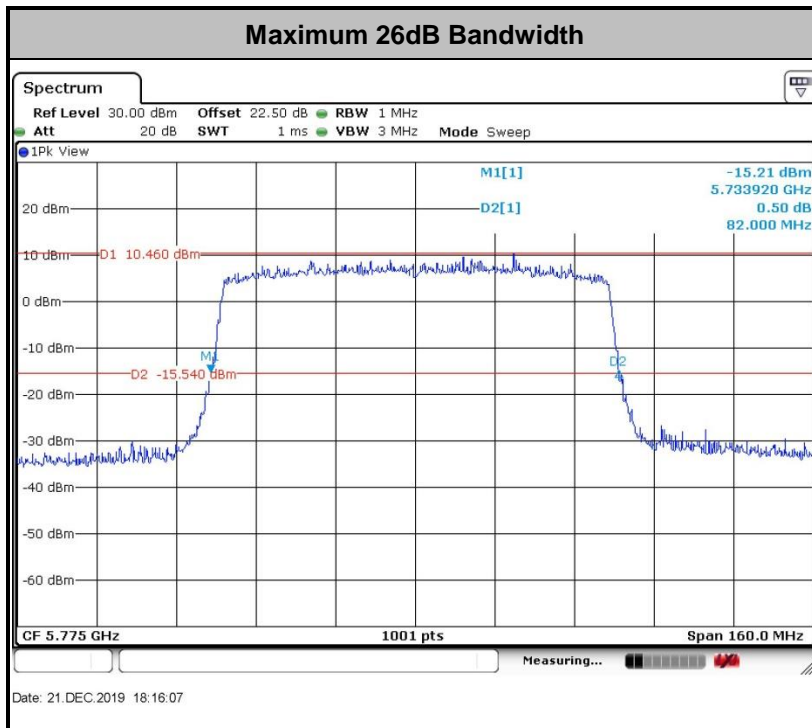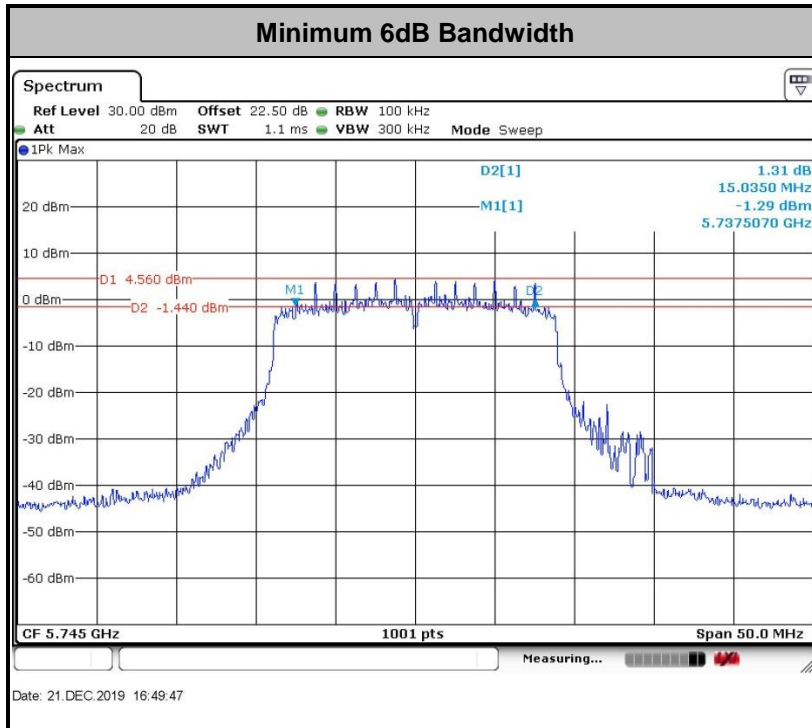

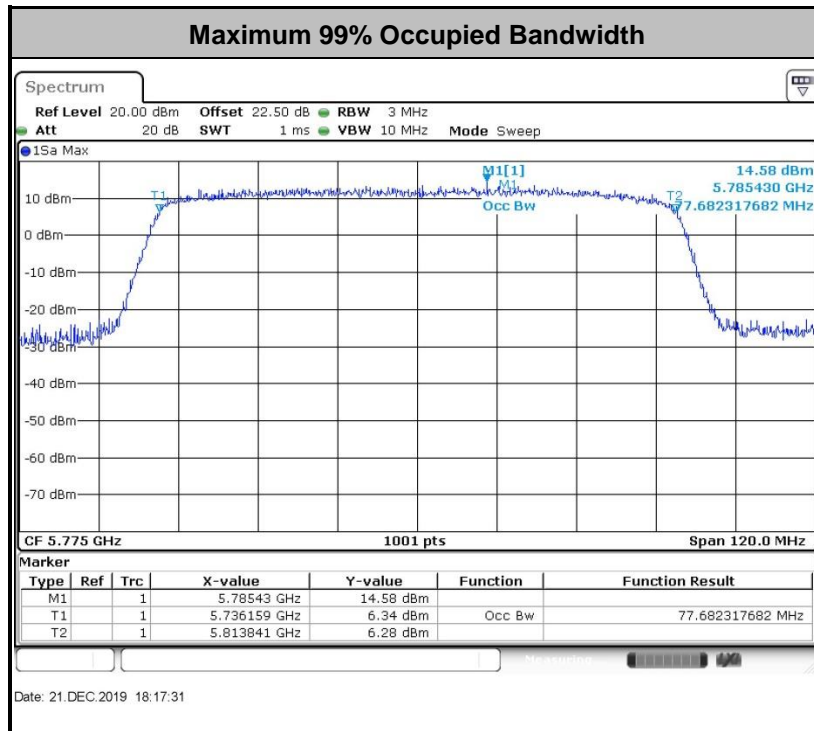

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

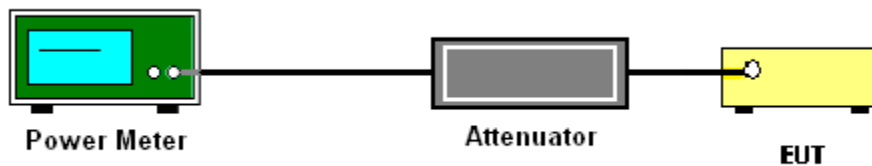

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.


3.3.4 Test Setup

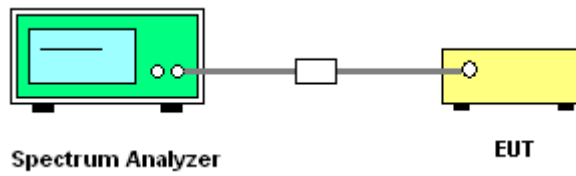



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

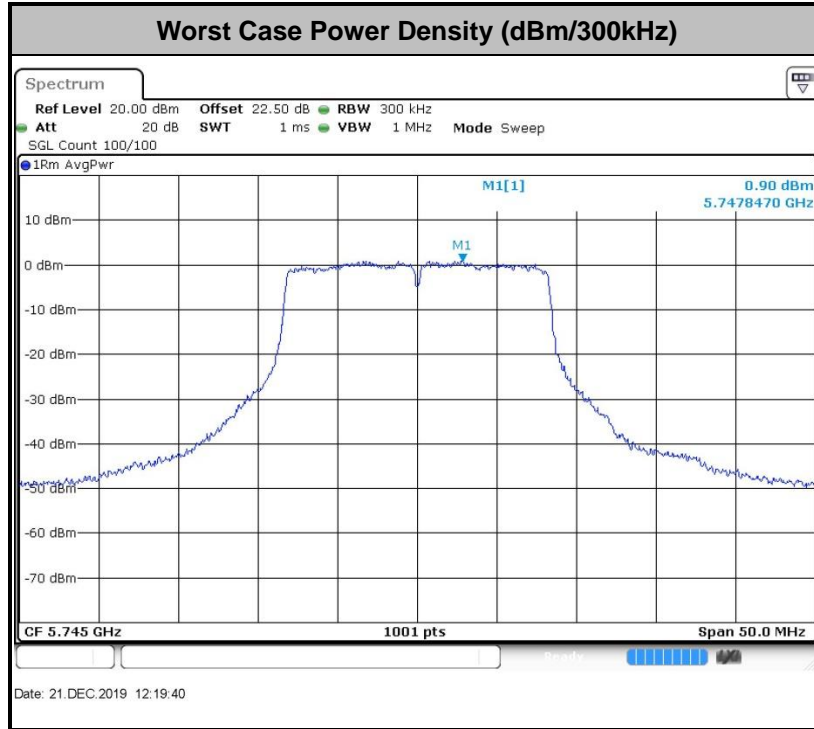



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

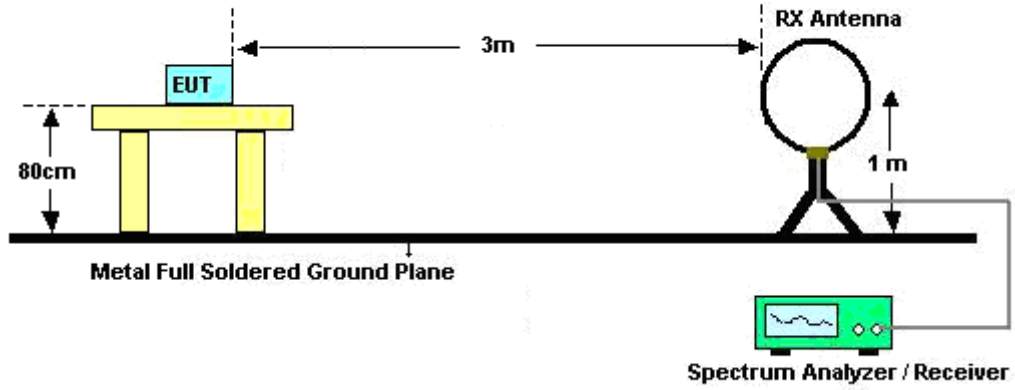

For radiated emissions from 30MHz to 1GHz

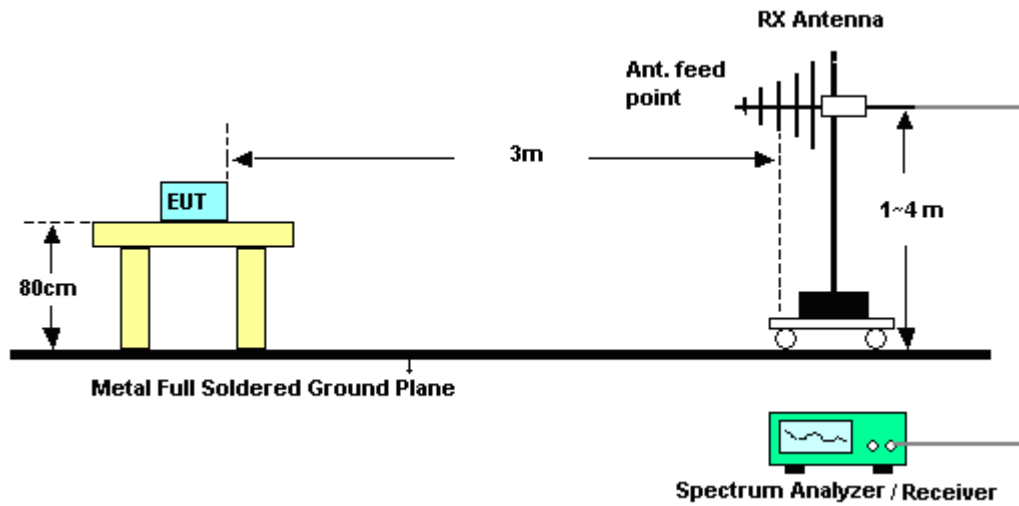

For radiated emissions above 1GHz

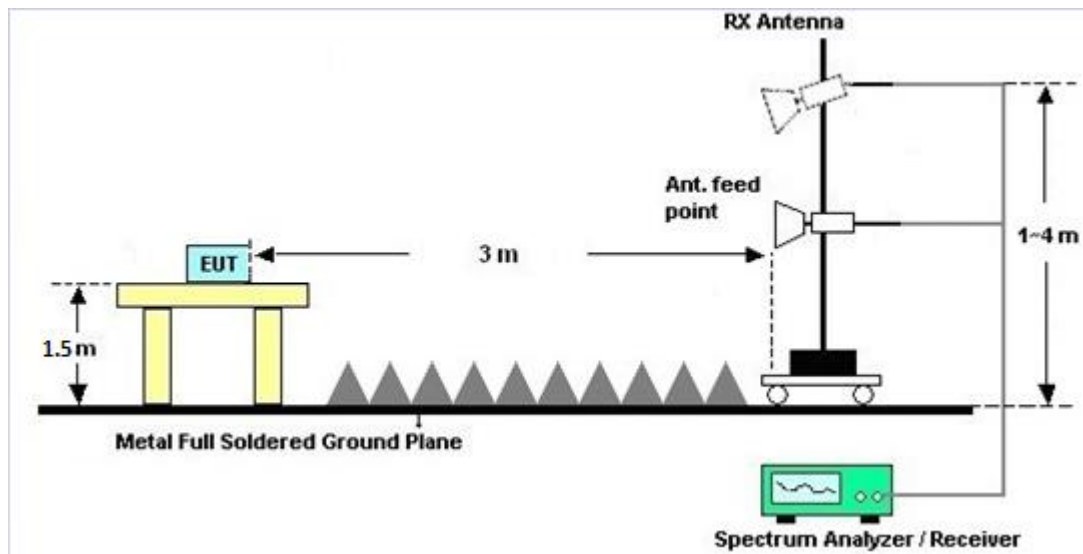

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

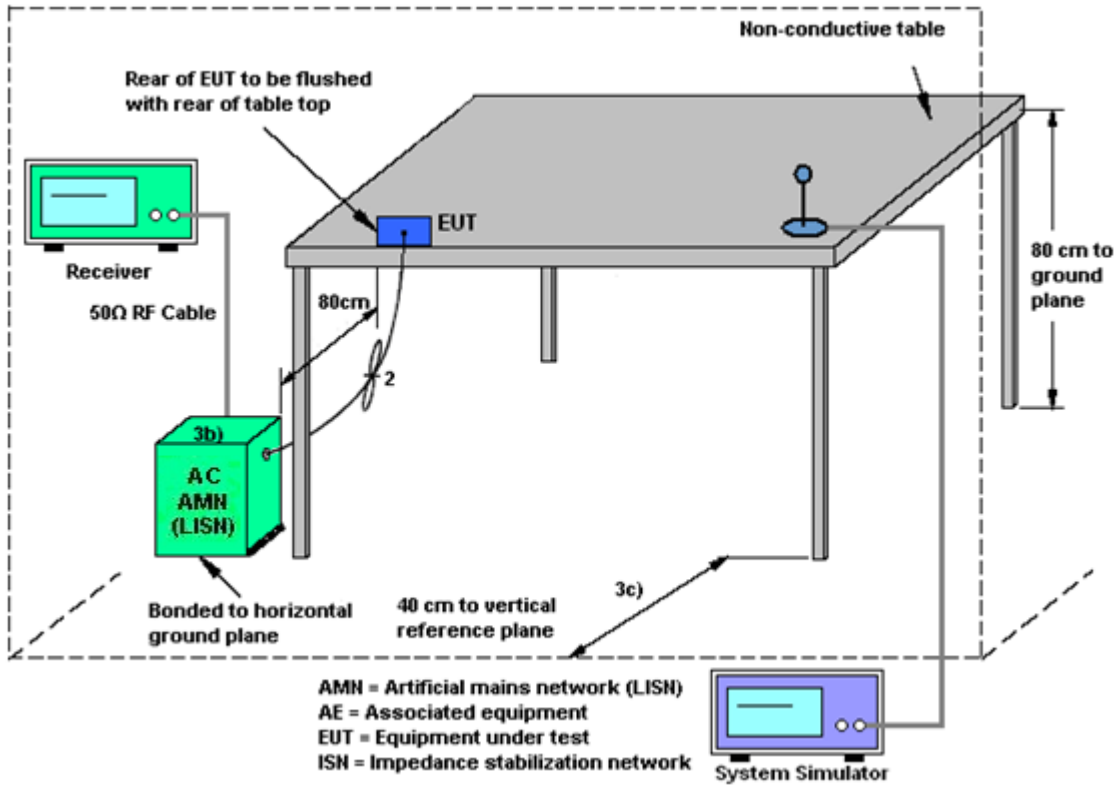

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
Band IV	-3.00	-3.00	-3.00	0.01	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	Dec. 21, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 22, 2018	Dec. 21, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 22, 2018	Dec. 21, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2019	Dec.12, 2019~Dec. 14, 2019	Apr. 18, 2020	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2019	Dec.12, 2019~Dec. 14, 2019	May 28, 2020	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 19, 2019	Dec.12, 2019~Dec. 14, 2019	Jul. 18, 2020	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 07, 2019	Dec.12, 2019~Dec. 14, 2019	Jan. 06, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 22, 2019	Dec.12, 2019~Dec. 14, 2019	Jul. 21, 2020	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 18, 2019	Dec.12, 2019~Dec. 14, 2019	Apr. 17, 2020	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2019	Dec.12, 2019~Dec. 14, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2019	Dec.12, 2019~Dec. 14, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2019	Dec.12, 2019~Dec. 14, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Dec.12, 2019~Dec. 14, 2019	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Dec.12, 2019~Dec. 14, 2019	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Dec.12, 2019~Dec. 14, 2019	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Dec.13, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 17, 2019	Dec.13, 2019	Oct. 16, 2020	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Dec.13, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 23, 2019	Dec.13, 2019	Jul. 22, 2020	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.6dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.4dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Hayden Chen	Temperature:	21~25	°C
Test Date:	2019/12/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	16.33	16.38	20.83	20.53	15.63	16.23	0.5		Pass
11a	6Mbps	2	157	5785	16.38	16.38	20.33	20.53	15.63	16.28	0.5		Pass
11a	6Mbps	2	165	5825	16.38	16.38	20.88	20.43	15.73	16.28	0.5		Pass
HT20	MCS0	2	149	5745	17.53	17.53	21.53	22.28	15.14	15.04	0.5		Pass
HT20	MCS0	2	157	5785	17.53	17.53	21.63	21.58	16.73	15.68	0.5		Pass
HT20	MCS0	2	165	5825	17.53	17.53	21.73	21.28	15.14	15.68	0.5		Pass
HT40	MCS0	2	151	5755	36.16	36.06	40.55	40.46	35.34	35.07	0.5		Pass
HT40	MCS0	2	159	5795	36.16	36.16	40.64	40.55	35.25	35.07	0.5		Pass
VHT80	MCS0	2	155	5775	76.24	76.12	81.84	81.36	75.12	75.12	0.5		Pass
HE20	MCS0	2	149	5745	18.93	18.88	22.83	24.53	18.03	15.09	0.5		Pass
HE20	MCS0	2	157	5785	18.83	18.93	27.22	21.68	18.08	17.08	0.5		Pass
HE20	MCS0	2	165	5825	18.88	18.88	21.98	21.68	18.03	17.63	0.5		Pass
HE40	MCS0	2	151	5755	37.86	37.76	41.36	41.09	37.58	36.77	0.5		Pass
HE40	MCS0	2	159	5795	37.86	37.76	41.18	41.09	37.13	37.49	0.5		Pass
HE80	MCS0	2	155	5775	77.68	77.68	82.00	82.00	76.24	75.12	0.5		Pass

TEST RESULTS DATA
Average Power Table


Band IV																	
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting	
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
11a	6Mbps	2	149		5745	0.07	0.04	17.52	15.33	19.57	30.00		-3.00	Pass	17		
11a	6Mbps	2	157		5785	0.07	0.04	17.32	14.99	19.32	30.00		-3.00	Pass	17		
11a	6Mbps	2	165		5825	0.07	0.04	17.31	14.94	19.29	30.00		-3.00	Pass	17		
HT20	MCS0	2	149		5745	0.05	0.04	16.99	15.00	19.12	30.00		-3.00	Pass	17		
HT20	MCS0	2	157		5785	0.05	0.04	16.80	14.59	18.85	30.00		-3.00	Pass	17		
HT20	MCS0	2	165		5825	0.05	0.04	16.81	14.60	18.86	30.00		-3.00	Pass	17		
HT40	MCS0	2	151		5755	0.07	0.08	18.43	16.34	20.52	30.00		-3.00	Pass	17		
HT40	MCS0	2	159		5795	0.07	0.08	18.11	16.09	20.23	30.00		-3.00	Pass	17		
VHT20	MCS0	2	149		5745	0.08	0.07	16.98	14.98	19.11	30.00		-3.00	Pass	17		
VHT20	MCS0	2	157		5785	0.08	0.07	16.78	14.57	18.83	30.00		-3.00	Pass	17		
VHT20	MCS0	2	165		5825	0.08	0.07	16.72	14.58	18.79	30.00		-3.00	Pass	17		
VHT40	MCS0	2	151		5755	0.18	0.15	18.42	16.22	20.47	30.00		-3.00	Pass	17		
VHT40	MCS0	2	159		5795	0.18	0.15	18.08	15.95	20.15	30.00		-3.00	Pass	17		
VHT80	MCS0	2	155		5775	0.31	0.28	16.22	13.94	18.24	30.00		-3.00	Pass	16		
HE20	MCS0	2	149	Full	5745	0.10	0.03	17.12	15.03	19.21	30.00		-3.00	Pass	17		
HE20	MCS0	2	149	26/0	5745	0.10	0.03	6.97	5.82	9.44	30.00		-3.00	Pass	6		
HE20	MCS0	2	149	26/4	5745	0.10	0.03	6.89	5.94	9.45	30.00		-3.00	Pass	6		
HE20	MCS0	2	149	26/8	5745	0.10	0.03	7.00	5.85	9.47	30.00		-3.00	Pass	6		
HE20	MCS0	2	157	Full	5785	0.10	0.03	16.85	14.78	18.95	30.00		-3.00	Pass	17		
HE20	MCS0	2	157	26/0	5785	0.10	0.03	7.24	5.56	9.49	30.00		-3.00	Pass	6		
HE20	MCS0	2	157	26/4	5785	0.10	0.03	7.26	5.71	9.56	30.00		-3.00	Pass	6		
HE20	MCS0	2	157	26/8	5785	0.10	0.03	7.27	5.62	9.53	30.00		-3.00	Pass	6		
HE20	MCS0	2	165	Full	5825	0.10	0.03	16.82	14.71	18.90	30.00		-3.00	Pass	17		
HE20	MCS0	2	165	26/0	5825	0.10	0.03	7.31	5.52	9.52	30.00		-3.00	Pass	6		
HE20	MCS0	2	165	26/4	5825	0.10	0.03	7.32	5.64	9.57	30.00		-3.00	Pass	6		
HE20	MCS0	2	165	26/8	5825	0.10	0.03	7.35	5.51	9.54	30.00		-3.00	Pass	6		
HE40	MCS0	2	151	Full	5755	0.12	0.10	18.07	15.96	20.15	30.00		-3.00	Pass	17		
HE40	MCS0	2	151	26/0	5755	0.12	0.10	5.39	3.98	7.75	30.00		-3.00	Pass	4		
HE40	MCS0	2	151	26/8	5755	0.12	0.10	5.71	4.08	7.98	30.00		-3.00	Pass	4		
HE40	MCS0	2	151	26/17	5755	0.12	0.10	5.43	3.69	7.66	30.00		-3.00	Pass	4		
HE40	MCS0	2	159	Full	5795	0.12	0.10	17.67	15.70	19.80	30.00		-3.00	Pass	17		
HE40	MCS0	2	159	26/0	5795	0.12	0.10	5.36	3.80	7.66	30.00		-3.00	Pass	4		
HE40	MCS0	2	159	26/8	5795	0.12	0.10	5.79	3.62	7.85	30.00		-3.00	Pass	4		
HE40	MCS0	2	159	26/17	5795	0.12	0.10	5.42	3.88	7.73	30.00		-3.00	Pass	4		
HE80	MCS0	2	155	Full	5775	0.20	0.18	16.44	14.25	18.49	30.00		-3.00	Pass	16		
HE80	MCS0	2	155	26/0	5775	0.20	0.18	0.56	-0.14	3.23	30.00		-3.00	Pass	0.5		
HE80	MCS0	2	155	26/18	5775	0.20	0.18	0.44	-0.16	3.16	30.00		-3.00	Pass	0.5		
HE80	MCS0	2	155	26/36	5775	0.20	0.18	0.52	-0.26	3.16	30.00		-3.00	Pass	0.5		

TEST RESULTS DATA
Power Spectral Density

Band IV																	
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149		5745	0.07	0.04	2.22				6.20	30.00		0.01		Pass
11a	6Mbps	2	157		5785	0.07	0.04	2.22				6.04	30.00		0.01		Pass
11a	6Mbps	2	165		5825	0.07	0.04	2.22				6.03	30.00		0.01		Pass
HT20	MCS0	2	149		5745	0.05	0.04	2.22				5.66	30.00		0.01		Pass
HT20	MCS0	2	157		5785	0.05	0.04	2.22				5.56	30.00		0.01		Pass
HT20	MCS0	2	165		5825	0.05	0.04	2.22				5.26	30.00		0.01		Pass
HT40	MCS0	2	151		5755	0.07	0.08	2.22				3.91	30.00		0.01		Pass
HT40	MCS0	2	159		5795	0.07	0.08	2.22				3.45	30.00		0.01		Pass
VHT80	MCS0	2	155		5775	0.31	0.28	2.22				-1.04	30.00		0.01		Pass
HE20	MCS0	2	149	Full	5745	0.10	0.03	2.22				5.54	30.00		0.01		Pass
HE20	MCS0	2	149	26/0	5745	0.10	0.03	2.22				4.71	30.00		0.01		Pass
HE20	MCS0	2	149	26/4	5745	0.10	0.03	2.22				4.83	30.00		0.01		Pass
HE20	MCS0	2	149	26/8	5745	0.10	0.03	2.22				4.62	30.00		0.01		Pass
HE20	MCS0	2	157	Full	5785	0.10	0.03	2.22				5.53	30.00		0.01		Pass
HE20	MCS0	2	157	26/0	5785	0.10	0.03	2.22				5.11	30.00		0.01		Pass
HE20	MCS0	2	157	26/4	5785	0.10	0.03	2.22				4.46	30.00		0.01		Pass
HE20	MCS0	2	157	26/8	5785	0.10	0.03	2.22				5.30	30.00		0.01		Pass
HE20	MCS0	2	165	Full	5825	0.10	0.03	2.22				5.82	30.00		0.01		Pass
HE20	MCS0	2	165	26/0	5825	0.10	0.03	2.22				5.11	30.00		0.01		Pass
HE20	MCS0	2	165	26/4	5825	0.10	0.03	2.22				5.06	30.00		0.01		Pass
HE20	MCS0	2	165	26/8	5825	0.10	0.03	2.22				5.46	30.00		0.01		Pass
HE40	MCS0	2	151	Full	5755	0.12	0.10	2.22				3.41	30.00		0.01		Pass
HE40	MCS0	2	151	26/0	5755	0.12	0.10	2.22				2.91	30.00		0.01		Pass
HE40	MCS0	2	151	26/8	5755	0.12	0.10	2.22				3.30	30.00		0.01		Pass
HE40	MCS0	2	151	26/17	5755	0.12	0.10	2.22				3.22	30.00		0.01		Pass
HE40	MCS0	2	159	Full	5795	0.12	0.10	2.22				3.15	30.00		0.01		Pass
HE40	MCS0	2	159	26/0	5795	0.12	0.10	2.22				3.02	30.00		0.01		Pass
HE40	MCS0	2	159	26/8	5795	0.12	0.10	2.22				2.75	30.00		0.01		Pass
HE40	MCS0	2	159	26/17	5795	0.12	0.10	2.22				3.04	30.00		0.01		Pass
HE80	MCS0	2	155	Full	5775	0.20	0.18	2.22				-2.40	30.00		0.01		Pass
HE80	MCS0	2	155	26/0	5775	0.20	0.18	2.22				-2.65	30.00		0.01		Pass
HE80	MCS0	2	155	26/18	5775	0.20	0.18	2.22				-3.16	30.00		0.01		Pass
HE80	MCS0	2	155	26/36	5775	0.20	0.18	2.22				-2.43	30.00		0.01		Pass




Appendix B. AC Conducted Emission Test Results

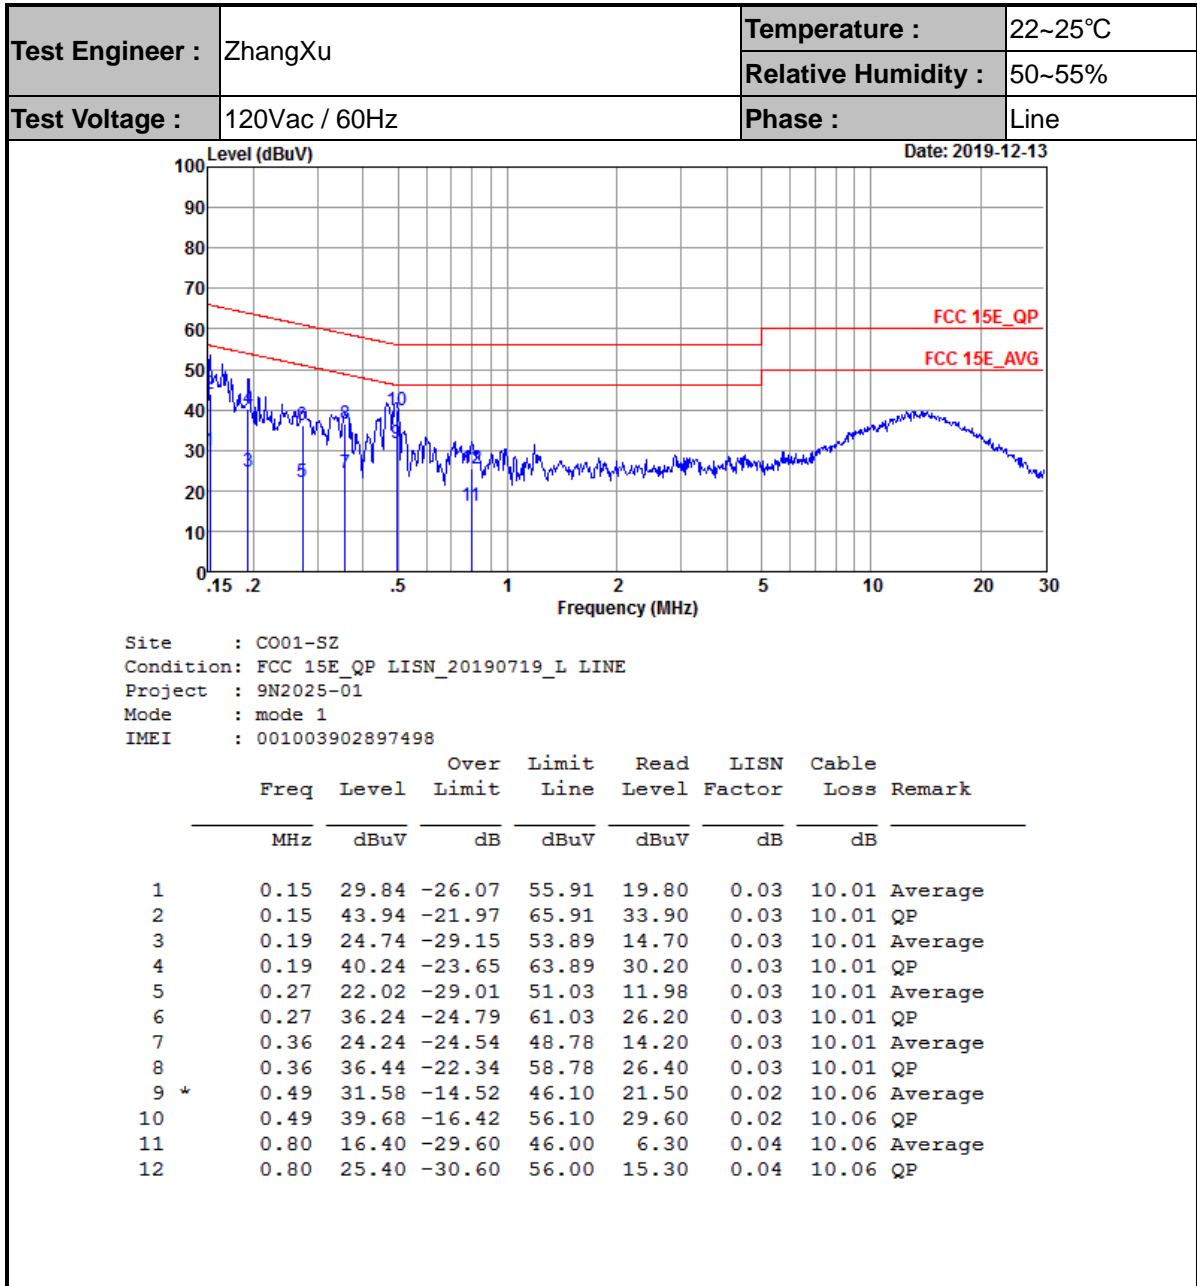



Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

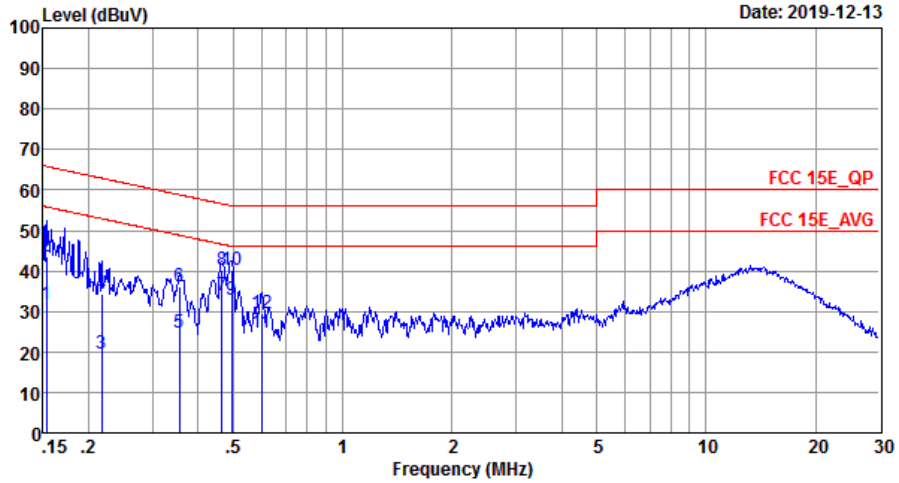

Site : CO01-SZ
 Condition: FCC 15E_QP LISN_20190719_N NEUTRAL
 Project : 9N2025-01
 Mode : mode 1
 IMEI : 001003902897498

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	31.74	-24.08	55.82	21.70	0.03	10.01	Average
2	0.15	43.64	-22.18	65.82	33.60	0.03	10.01	QP
3	0.22	19.54	-33.38	52.92	9.50	0.03	10.01	Average
4	0.22	34.34	-28.58	62.92	24.30	0.03	10.01	QP
5	0.36	24.83	-24.00	48.83	14.80	0.02	10.01	Average
6	0.36	36.03	-22.80	58.83	26.00	0.02	10.01	QP
7 *	0.47	34.06	-12.52	46.58	24.00	0.02	10.04	Average
8	0.47	40.06	-16.52	56.58	30.00	0.02	10.04	QP
9	0.49	32.88	-13.22	46.10	22.80	0.02	10.06	Average
10	0.49	40.18	-15.92	56.10	30.10	0.02	10.06	QP
11	0.60	24.69	-21.31	46.00	14.60	0.02	10.07	Average
12	0.60	29.49	-26.51	56.00	19.40	0.02	10.07	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5612	47.97	-20.23	68.2	38.71	31.8	10.56	33.1	107	326	P	H
		5652.6	47.51	-22.62	70.13	38.33	31.7	10.58	33.1	107	326	P	H
		5718.4	49.6	-60.75	110.35	40.02	32.07	10.61	33.1	107	326	P	H
		5724.2	53.8	-66.58	120.38	44.22	32.07	10.61	33.1	107	326	P	H
	*	5745	96.59	-	-	86.97	32.1	10.62	33.1	107	326	P	H
		5745	84.15	-	-	74.53	32.1	10.62	33.1	107	326	A	H
		5625.4	47.26	-20.94	68.2	38.01	31.77	10.58	33.1	138	335	P	V
		5697.6	47.15	-56.28	103.43	37.66	32	10.59	33.1	138	335	P	V
		5719.8	48.45	-62.29	110.74	38.87	32.07	10.61	33.1	138	335	P	V
		5721	50.59	-62.49	113.08	41.01	32.07	10.61	33.1	138	335	P	V
	*	5745	93.63	-	-	84.01	32.1	10.62	33.1	138	335	P	V
		5745	81.31	-	-	71.69	32.1	10.62	33.1	138	335	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5625	46.6	-21.6	68.2	37.35	31.77	10.58	33.1	140	28	P	H
		5690.8	47.06	-51.36	98.42	37.57	32	10.59	33.1	140	28	P	H
		5702	47.3	-58.46	105.76	37.76	32.03	10.61	33.1	140	28	P	H
		5721.2	47.19	-66.35	113.54	37.61	32.07	10.61	33.1	140	28	P	H
	*	5785	101.88	-	-	92.17	32.17	10.64	33.1	140	28	P	H
		5785	95.86	-	-	86.15	32.17	10.64	33.1	140	28	A	H
		5854.6	46.53	-65.18	111.71	36.52	32.43	10.68	33.1	140	28	P	H
		5866.2	47.96	-59.7	107.66	37.92	32.43	10.71	33.1	140	28	P	H
		5891	46.9	-46.43	93.33	36.79	32.5	10.71	33.1	140	28	P	H
		5934.6	47.24	-20.96	68.2	36.93	32.63	10.78	33.1	140	28	P	H
		5637.8	47.02	-21.18	68.2	37.81	31.73	10.58	33.1	186	12	P	V
		5667	46.84	-33.98	80.82	37.5	31.85	10.59	33.1	186	12	P	V
		5708.8	45.95	-61.72	107.67	36.41	32.03	10.61	33.1	186	12	P	V
		5722.6	46.05	-70.68	116.73	36.47	32.07	10.61	33.1	186	12	P	V
	*	5785	102.62	-	-	92.91	32.17	10.64	33.1	186	12	P	V
		5785	95.49	-	-	85.78	32.17	10.64	33.1	186	12	A	V
		5850.8	45.79	-74.59	120.38	35.81	32.4	10.68	33.1	186	12	P	V
		5872.2	47.62	-58.36	105.98	37.54	32.47	10.71	33.1	186	12	P	V
		5909.4	47.51	-32.2	79.71	37.29	32.57	10.75	33.1	186	12	P	V
	5938.8	47.74	-20.46	68.2	37.36	32.7	10.78	33.1	186	12	P	V	



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	97.51	-	-	87.6	32.33	10.68	33.1	100	320	P	H
	*	5825	85.54	-	-	75.63	32.33	10.68	33.1	100	320	A	H
		5851.2	47.82	-71.64	119.46	37.84	32.4	10.68	33.1	100	320	P	H
		5863	48.52	-60.04	108.56	38.48	32.43	10.71	33.1	100	320	P	H
		5920.8	49.04	-22.26	71.3	38.82	32.57	10.75	33.1	100	320	P	H
		5929.2	48.42	-19.78	68.2	38.14	32.63	10.75	33.1	100	320	P	H
	*	5825	96.17	-	-	86.26	32.33	10.68	33.1	100	318	P	V
	*	5825	86.53	-	-	76.62	32.33	10.68	33.1	100	318	A	V
		5853.4	47.71	-66.74	114.45	37.73	32.4	10.68	33.1	100	318	P	V
		5855.4	47.96	-62.73	110.69	37.95	32.43	10.68	33.1	100	318	P	V
		5902.8	49.04	-35.55	84.59	38.89	32.5	10.75	33.1	100	318	P	V
		5947.2	48.21	-19.99	68.2	37.83	32.7	10.78	33.1	100	318	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include channels 149, 157, and 165 at various frequencies.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5630.4 to 5745 MHz with various level and limit values.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5623.4	46.57	-21.63	68.2	37.32	31.77	10.58	33.1	140	28	P	H
		5665.6	47.36	-32.42	79.78	38.17	31.7	10.59	33.1	140	28	P	H
		5713	45.74	-63.1	108.84	36.2	32.03	10.61	33.1	140	28	P	H
		5720.8	46.3	-66.32	112.62	36.72	32.07	10.61	33.1	140	28	P	H
	*	5785	102.08	-	-	92.37	32.17	10.64	33.1	140	28	P	H
		5785	96.03	-	-	86.32	32.17	10.64	33.1	140	28	A	H
		5854.2	47.2	-65.42	112.62	37.19	32.43	10.68	33.1	140	28	P	H
		5862.6	47.71	-60.96	108.67	37.67	32.43	10.71	33.1	140	28	P	H
		5882	47.28	-52.72	100	37.2	32.47	10.71	33.1	140	28	P	H
		5942.2	46.96	-21.24	68.2	36.58	32.7	10.78	33.1	140	28	P	H
		5602.2	46.01	-22.19	68.2	36.75	31.8	10.56	33.1	100	82	P	V
		5672	47.89	-36.63	84.52	38.55	31.85	10.59	33.1	100	82	P	V
		5704	46.31	-60.01	106.32	36.77	32.03	10.61	33.1	100	82	P	V
		5723.6	45.75	-73.26	119.01	36.17	32.07	10.61	33.1	100	82	P	V
	*	5785	102.99	-	-	93.28	32.17	10.64	33.1	100	82	P	V
		5785	96.07	-	-	86.36	32.17	10.64	33.1	100	82	A	V
		5853.4	46.83	-67.62	114.45	36.85	32.4	10.68	33.1	100	82	P	V
		5870.2	46.79	-59.75	106.54	36.75	32.43	10.71	33.1	100	82	P	V
	5914.4	47.99	-28.03	76.02	37.77	32.57	10.75	33.1	100	82	P	V	
	5941.2	47.31	-20.89	68.2	36.93	32.7	10.78	33.1	100	82	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	101.79	-	-	91.88	32.33	10.68	33.1	140	28	P	H
	*	5825	95.58	-	-	85.67	32.33	10.68	33.1	140	28	A	H
		5850.2	47.65	-74.09	121.74	37.67	32.4	10.68	33.1	140	28	P	H
		5868.4	47.25	-59.8	107.05	37.21	32.43	10.71	33.1	140	28	P	H
		5896.8	48.59	-40.44	89.03	38.44	32.5	10.75	33.1	140	28	P	H
		5930.2	47.35	-20.85	68.2	37.07	32.63	10.75	33.1	140	28	P	H
	*	5825	102.53	-	-	92.62	32.33	10.68	33.1	100	82	P	V
	*	5825	95.55	-	-	85.64	32.33	10.68	33.1	100	82	A	V
		5851.6	48.14	-70.41	118.55	38.16	32.4	10.68	33.1	100	82	P	V
		5870.2	48.27	-58.27	106.54	38.23	32.43	10.71	33.1	100	82	P	V
		5908.2	48.53	-32.07	80.6	38.31	32.57	10.75	33.1	100	82	P	V
		5934	47.88	-20.32	68.2	37.57	32.63	10.78	33.1	100	82	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11490	46.83	-27.17	74	44.25	40.07	15.12	52.61	160	360	P	H
		17235	47.58	-20.62	68.2	37.18	40.33	22.6	52.53	170	360	P	H
CH 149 5745MHz		11490	46.62	-27.38	74	44.04	40.07	15.12	52.61	163	196	P	V
		17235	47.16	-21.04	68.2	36.76	40.33	22.6	52.53	175	153	P	V
802.11n HT20		11570	46.11	-27.89	74	43.66	39.9	15.18	52.63	186	156	P	H
		17355	47.42	-20.78	68.2	36.16	40.95	22.96	52.65	189	143	P	H
CH 157 5785MHz		11570	45.38	-28.62	74	42.93	39.9	15.18	52.63	186	175	P	V
		17355	47.72	-20.48	68.2	36.46	40.95	22.96	52.65	189	156	P	V
802.11n HT20		11650	46.23	-27.77	74	44.05	39.6	15.24	52.66	156	347	P	H
		17475	47.65	-20.55	68.2	35.61	41.5	23.31	52.77	150	360	P	H
CH 165 5825MHz		11650	46.14	-27.86	74	43.96	39.6	15.24	52.66	186	42	P	V
		17475	47.68	-20.52	68.2	35.64	41.5	23.31	52.77	175	175	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5619.4	46.05	-22.15	68.2	36.82	31.77	10.56	33.1	140	28	P	H
		5699.2	54.07	-50.54	104.61	44.58	32	10.59	33.1	140	28	P	H
		5717.2	58.71	-51.31	110.02	49.17	32.03	10.61	33.1	140	28	P	H
		5722.2	62.15	-53.67	115.82	52.57	32.07	10.61	33.1	140	28	P	H
	*	5755	101.37	-	-	91.72	32.13	10.62	33.1	140	28	P	H
		5755	95.3	-	-	85.65	32.13	10.62	33.1	140	28	A	H
		5853	46.75	-68.61	115.36	36.77	32.4	10.68	33.1	140	28	P	H
		5860.8	47.71	-61.46	109.17	37.67	32.43	10.71	33.1	140	28	P	H
		5916.6	47.68	-26.71	74.39	37.46	32.57	10.75	33.1	140	28	P	H
		5937.8	46.41	-21.79	68.2	36.1	32.63	10.78	33.1	140	28	P	H
		5602.8	47.27	-20.93	68.2	38.01	31.8	10.56	33.1	108	80	P	V
		5697.8	51.46	-52.12	103.58	41.97	32	10.59	33.1	108	80	P	V
		5717.6	62.59	-47.54	110.13	53.01	32.07	10.61	33.1	108	80	P	V
		5724.6	62.75	-58.54	121.29	53.17	32.07	10.61	33.1	108	80	P	V
	*	5755	101.48	-	-	91.83	32.13	10.62	33.1	108	80	P	V
		5755	94.6	-	-	84.95	32.13	10.62	33.1	108	80	A	V
		5850.4	47.17	-74.12	121.29	37.19	32.4	10.68	33.1	108	80	P	V
		5862.6	47.4	-61.27	108.67	37.36	32.43	10.71	33.1	108	80	P	V
	5901.6	47.98	-37.5	85.48	37.83	32.5	10.75	33.1	108	80	P	V	
	5925.4	48.94	-19.26	68.2	38.66	32.63	10.75	33.1	108	80	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5643.6	46.69	-21.51	68.2	37.48	31.73	10.58	33.1	140	28	P	H
		5666.4	46.37	-34	80.37	37.18	31.7	10.59	33.1	140	28	P	H
		5701	46.92	-58.56	105.48	37.38	32.03	10.61	33.1	140	28	P	H
		5724.8	48.63	-73.11	121.74	39.05	32.07	10.61	33.1	140	28	P	H
	*	5795	100.93	-	-	91.19	32.2	10.64	33.1	140	28	P	H
		5795	94.77	-	-	85.03	32.2	10.64	33.1	140	28	A	H
		5850.4	50.84	-70.45	121.29	40.86	32.4	10.68	33.1	140	28	P	H
		5855.6	49.56	-61.07	110.63	39.52	32.43	10.71	33.1	140	28	P	H
		5908	47.66	-33.08	80.74	37.44	32.57	10.75	33.1	140	28	P	H
		5930.2	47.33	-20.87	68.2	37.05	32.63	10.75	33.1	140	28	P	H
		5631	46.01	-22.19	68.2	36.76	31.77	10.58	33.1	108	80	P	V
		5691.6	46.74	-52.27	99.01	37.25	32	10.59	33.1	108	80	P	V
		5714.8	46.35	-63	109.35	36.81	32.03	10.61	33.1	108	80	P	V
		5722.6	45.31	-71.42	116.73	35.73	32.07	10.61	33.1	108	80	P	V
	*	5795	101.3	-	-	91.56	32.2	10.64	33.1	108	80	P	V
		5795	94.41	-	-	84.67	32.2	10.64	33.1	108	80	A	V
		5852.6	51.27	-65	116.27	41.29	32.4	10.68	33.1	108	80	P	V
		5855.2	48.82	-61.92	110.74	38.81	32.43	10.68	33.1	108	80	P	V
	5878.4	47.55	-55.12	102.67	37.47	32.47	10.71	33.1	108	80	P	V	
	5928.8	47.93	-20.27	68.2	37.65	32.63	10.75	33.1	108	80	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT40 CH 151 and 5755MHz, and 802.11n HT40 CH 159 and 5795MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5639.2 to 5938.8 MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	47.45	-26.55	74	44.94	39.95	15.18	52.62	160	360	P	H
VHT80		17325	47.9	-20.3	68.2	36.84	40.72	22.96	52.62	170	360	P	H
CH 155		11550	47.73	-26.27	74	45.22	39.95	15.18	52.62	150	224	P	V
5775MHz		17325	47.29	-20.91	68.2	36.23	40.72	22.96	52.62	120	310	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies like 5648, 5659.6, 5718.6, 5724.6, 5745, 5745, 5625, 5664.4, 5716.6, 5724.2, 5745, 5745.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 157 5785MHz		5625	46.6	-21.6	68.2	37.35	31.77	10.58	33.1	140	28	P	H
		5690.8	47.06	-51.36	98.42	37.57	32	10.59	33.1	140	28	P	H
		5702	47.3	-58.46	105.76	37.76	32.03	10.61	33.1	140	28	P	H
		5721.2	47.19	-66.35	113.54	37.61	32.07	10.61	33.1	140	28	P	H
		5785	101.88	-	-	92.17	32.17	10.64	33.1	140	28	P	H
		5785	95.86	-	-	86.15	32.17	10.64	33.1	140	28	A	H
		5854.6	46.53	-65.18	111.71	36.52	32.43	10.68	33.1	140	28	P	H
		5866.2	47.96	-59.7	107.66	37.92	32.43	10.71	33.1	140	28	P	H
		5891	46.9	-46.43	93.33	36.79	32.5	10.71	33.1	140	28	P	H
		5934.6	47.24	-20.96	68.2	36.93	32.63	10.78	33.1	140	28	P	H
		5637.8	47.02	-21.18	68.2	37.81	31.73	10.58	33.1	186	12	P	V
		5667	46.84	-33.98	80.82	37.5	31.85	10.59	33.1	186	12	P	V
		5708.8	45.95	-61.72	107.67	36.41	32.03	10.61	33.1	186	12	P	V
		5722.6	46.05	-70.68	116.73	36.47	32.07	10.61	33.1	186	12	P	V
		5785	102.62	-	-	92.91	32.17	10.64	33.1	186	12	P	V
		5785	95.49	-	-	85.78	32.17	10.64	33.1	186	12	A	V
		5850.8	45.79	-74.59	120.38	35.81	32.4	10.68	33.1	186	12	P	V
		5872.2	47.62	-58.36	105.98	37.54	32.47	10.71	33.1	186	12	P	V
	5909.4	47.51	-32.2	79.71	37.29	32.57	10.75	33.1	186	12	P	V	
	5938.8	47.74	-20.46	68.2	37.36	32.7	10.78	33.1	186	12	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 165 5825MHz		5825	102.08	-	-	92.17	32.33	10.68	33.1	140	28	P	H
		5825	95.96	-	-	86.05	32.33	10.68	33.1	140	28	A	H
		5850.2	49.56	-72.18	121.74	39.58	32.4	10.68	33.1	140	28	P	H
		5861.6	47.8	-61.15	108.95	37.76	32.43	10.71	33.1	140	28	P	H
		5893.2	46.92	-44.78	91.7	36.81	32.5	10.71	33.1	140	28	P	H
		5941	47.32	-20.88	68.2	36.94	32.7	10.78	33.1	140	28	P	H
		5825	102.22	-	-	92.31	32.33	10.68	33.1	186	12	P	V
		5825	95.27	-	-	85.36	32.33	10.68	33.1	186	12	A	V
		5852.2	49.01	-68.17	117.18	39.03	32.4	10.68	33.1	186	12	P	V
		5862.6	49.55	-59.12	108.67	39.51	32.43	10.71	33.1	186	12	P	V
		5876	47.24	-57.22	104.46	37.16	32.47	10.71	33.1	186	12	P	V
	5937	46.78	-21.42	68.2	36.47	32.63	10.78	33.1	186	12	P	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz

WIFI 802.11ax HE20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11490	46.87	-27.13	74	44.29	40.07	15.12	52.61	160	360	P	H
HE20		17235	47.12	-21.08	68.2	36.72	40.33	22.6	52.53	170	360	P	H
CH 149		11490	46.53	-27.47	74	43.95	40.07	15.12	52.61	163	196	P	V
5745MHz		17235	47.48	-20.72	68.2	37.08	40.33	22.6	52.53	175	153	P	V
802.11ax		11570	46.73	-27.27	74	44.28	39.9	15.18	52.63	186	156	P	H
HE20		17355	47.09	-21.11	68.2	35.83	40.95	22.96	52.65	189	143	P	H
CH 157		11570	46.58	-27.42	74	44.13	39.9	15.18	52.63	186	175	P	V
5785MHz		17355	47.02	-21.18	68.2	35.76	40.95	22.96	52.65	189	156	P	V
802.11ax		11650	45.96	-28.04	74	43.78	39.6	15.24	52.66	156	347	P	H
HE20		17475	47.74	-20.46	68.2	35.7	41.5	23.31	52.77	150	360	P	H
CH 165		11650	45.94	-28.06	74	43.76	39.6	15.24	52.66	186	42	P	V
5825MHz		17475	47.31	-20.89	68.2	35.27	41.5	23.31	52.77	175	175	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Verify data of Partial Ru:

Band 4 5725~5850MHz

WIFI 802.11ax HE20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 149 5745MHz		5612	47.97	-20.23	68.2	38.71	31.8	10.56	33.1	107	326	P	H
		5652.6	47.51	-22.62	70.13	38.33	31.7	10.58	33.1	107	326	P	H
		5718.4	49.6	-60.75	110.35	40.02	32.07	10.61	33.1	107	326	P	H
		5724.2	53.8	-66.58	120.38	44.22	32.07	10.61	33.1	107	326	P	H
		5745	96.59	-	-	86.97	32.1	10.62	33.1	107	326	P	H
		5745	84.15	-	-	74.53	32.1	10.62	33.1	107	326	A	H
		5625.4	47.26	-20.94	68.2	38.01	31.77	10.58	33.1	138	335	P	V
		5697.6	47.15	-56.28	103.43	37.66	32	10.59	33.1	138	335	P	V
		5719.8	48.45	-62.29	110.74	38.87	32.07	10.61	33.1	138	335	P	V
		5721	50.59	-62.49	113.08	41.01	32.07	10.61	33.1	138	335	P	V
		5745	93.63	-	-	84.01	32.1	10.62	33.1	138	335	P	V
	5745	81.31	-	-	71.69	32.1	10.62	33.1	138	335	A	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 165 5825MHz		5825	97.51	-	-	87.6	32.33	10.68	33.1	100	320	P	H
		5825	85.54	-	-	75.63	32.33	10.68	33.1	100	320	A	H
		5851.2	47.82	-71.64	119.46	37.84	32.4	10.68	33.1	100	320	P	H
		5863	48.52	-60.04	108.56	38.48	32.43	10.71	33.1	100	320	P	H
		5920.8	49.04	-22.26	71.3	38.82	32.57	10.75	33.1	100	320	P	H
		5929.2	48.42	-19.78	68.2	38.14	32.63	10.75	33.1	100	320	P	H
		5825	96.17	-	-	86.26	32.33	10.68	33.1	100	318	P	V
		5825	86.53	-	-	76.62	32.33	10.68	33.1	100	318	A	V
		5853.4	47.71	-66.74	114.45	37.73	32.4	10.68	33.1	100	318	P	V
		5855.4	47.96	-62.73	110.69	37.95	32.43	10.68	33.1	100	318	P	V
		5902.8	49.04	-35.55	84.59	38.89	32.5	10.75	33.1	100	318	P	V
	5947.2	48.21	-19.99	68.2	37.83	32.7	10.78	33.1	100	318	P	V	
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20		11490	47.19	-26.81	74	44.61	40.07	15.12	52.61	160	360	P	H
		17235	47.26	-20.94	68.2	36.86	40.33	22.6	52.53	170	360	P	H
CH 149 5745MHz		11490	47.4	-26.6	74	44.82	40.07	15.12	52.61	160	360	P	V
		17235	47.64	-20.56	68.2	37.24	40.33	22.6	52.53	170	360	P	V
802.11ax HE20 CH 165 5825MHz		11650	47.55	-26.45	74	45.37	39.6	15.24	52.66	156	347	P	H
		17475	47.1	-21.1	68.2	35.06	41.5	23.31	52.77	150	360	P	H
		11650	47.97	-26.03	74	45.79	39.6	15.24	52.66	156	347	P	V
		17475	47.51	-20.69	68.2	35.47	41.5	23.31	52.77	150	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5616.6 to 5948.2 MHz.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 CH 159 5795MHz		5634.4	45.95	-22.25	68.2	36.74	31.73	10.58	33.1	140	28	P	H
		5660.2	46.24	-29.53	75.77	37.06	31.7	10.58	33.1	140	28	P	H
		5702	47.33	-58.43	105.76	37.79	32.03	10.61	33.1	140	28	P	H
		5721.2	46.52	-67.02	113.54	36.94	32.07	10.61	33.1	140	28	P	H
		5795	99.77	-	-	90.03	32.2	10.64	33.1	140	28	P	H
		5795	93.53	-	-	83.79	32.2	10.64	33.1	140	28	A	H
		5850	50.04	-72.16	122.2	40.06	32.4	10.68	33.1	140	28	P	H
		5863.2	47.96	-60.54	108.5	37.92	32.43	10.71	33.1	140	28	P	H
		5919.2	47.09	-25.39	72.48	36.87	32.57	10.75	33.1	140	28	P	H
		5926.2	47.73	-20.47	68.2	37.45	32.63	10.75	33.1	140	28	P	H
		5619.2	45.76	-22.44	68.2	36.53	31.77	10.56	33.1	134	12	P	V
		5672.4	46.3	-38.52	84.82	36.96	31.85	10.59	33.1	134	12	P	V
		5702	46.18	-59.58	105.76	36.64	32.03	10.61	33.1	134	12	P	V
		5721.6	46.71	-67.74	114.45	37.13	32.07	10.61	33.1	134	12	P	V
		5795	100.87	-	-	91.13	32.2	10.64	33.1	134	12	P	V
		5795	94.87	-	-	85.13	32.2	10.64	33.1	134	12	A	V
		5852.2	50.78	-66.4	117.18	40.8	32.4	10.68	33.1	134	12	P	V
		5860.8	47.77	-61.4	109.17	37.73	32.43	10.71	33.1	134	12	P	V
	5883	47.49	-51.77	99.26	37.41	32.47	10.71	33.1	134	12	P	V	
	5942.4	46.58	-21.62	68.2	36.2	32.7	10.78	33.1	134	12	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11510	47.62	-26.38	74	45	40.1	15.12	52.6	176	186	P	H
HE40		17265	47.37	-20.83	68.2	36.75	40.47	22.72	52.57	189	163	P	H
CH 151		11510	47.58	-26.42	74	44.96	40.1	15.12	52.6	160	360	P	V
5755MHz		17265	47.64	-20.56	68.2	37.02	40.47	22.72	52.57	170	360	P	V
802.11ax		11590	47.29	-26.71	74	44.86	39.85	15.21	52.63	170	300	P	H
HE40		17385	47.05	-21.15	68.2	35.47	41.18	23.08	52.68	150	200	P	H
CH 159		11590	47.32	-26.68	74	44.89	39.85	15.21	52.63	173	38	P	V
5795MHz		17385	47.27	-20.93	68.2	35.69	41.18	23.08	52.68	186	153	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Verify data of Partial Ru:

Band 4 5725~5850MHz

WIFI 802.11ax HE40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 CH 151 5755MHz		5614.8	46.77	-21.43	68.2	37.51	31.8	10.56	33.1	100	326	P	H
		5678.4	47.16	-42.1	89.26	37.82	31.85	10.59	33.1	100	326	P	H
		5708.4	49.24	-58.31	107.55	39.7	32.03	10.61	33.1	100	326	P	H
		5723.8	54.02	-65.44	119.46	44.44	32.07	10.61	33.1	100	326	P	H
		5755	93.62	-	-	83.97	32.13	10.62	33.1	100	326	P	H
		5755	83.31	-	-	73.66	32.13	10.62	33.1	100	326	A	H
		5851.6	47.63	-70.92	118.55	37.65	32.4	10.68	33.1	100	326	P	H
		5874.6	48.19	-57.12	105.31	38.11	32.47	10.71	33.1	100	326	P	H
		5912.8	48.77	-28.43	77.2	38.55	32.57	10.75	33.1	100	326	P	H
		5945.8	48.87	-19.33	68.2	38.49	32.7	10.78	33.1	100	326	P	H
		5644.6	47.13	-21.07	68.2	37.92	31.73	10.58	33.1	100	317	P	V
		5680	47.38	-43.06	90.44	38.04	31.85	10.59	33.1	100	317	P	V
		5719.2	47.25	-63.33	110.58	37.67	32.07	10.61	33.1	100	317	P	V
		5721.2	48.78	-64.76	113.54	39.2	32.07	10.61	33.1	100	317	P	V
		5755	90.65	-	-	81	32.13	10.62	33.1	100	317	P	V
		5755	81.29	-	-	71.64	32.13	10.62	33.1	100	317	A	V
		5852.6	47.45	-68.82	116.27	37.47	32.4	10.68	33.1	100	317	P	V
		5857.2	47.91	-62.27	110.18	37.87	32.43	10.71	33.1	100	317	P	V
	5899.2	48.72	-38.53	87.25	38.57	32.5	10.75	33.1	100	317	P	V	
	5937	48.07	-20.13	68.2	37.76	32.63	10.78	33.1	100	317	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 CH 159 5795MHz		5644.8	46.79	-21.41	68.2	37.58	31.73	10.58	33.1	100	324	P	H
		5662.6	46.73	-30.82	77.55	37.54	31.7	10.59	33.1	100	324	P	H
		5714.6	47.71	-61.58	109.29	38.17	32.03	10.61	33.1	100	324	P	H
		5722.8	46.21	-70.97	117.18	36.63	32.07	10.61	33.1	100	324	P	H
		5795	95.28	-	-	85.54	32.2	10.64	33.1	100	324	P	H
		5795	83.39	-	-	73.65	32.2	10.64	33.1	100	324	A	H
		5852.6	48.15	-68.12	116.27	38.17	32.4	10.68	33.1	100	324	P	H
		5868.2	48.49	-58.61	107.1	38.45	32.43	10.71	33.1	100	324	P	H
		5879.2	49.19	-52.89	102.08	39.11	32.47	10.71	33.1	100	324	P	H
		5925.4	48.5	-19.7	68.2	38.22	32.63	10.75	33.1	100	324	P	H
		5615.4	47.5	-20.7	68.2	38.24	31.8	10.56	33.1	100	322	P	V
		5664.4	47.59	-31.3	78.89	38.4	31.7	10.59	33.1	100	322	P	V
		5719.4	46.92	-63.71	110.63	37.34	32.07	10.61	33.1	100	322	P	V
		5720.6	46.74	-65.43	112.17	37.16	32.07	10.61	33.1	100	322	P	V
		5795	91.14	-	-	81.4	32.2	10.64	33.1	100	322	P	V
		5795	80.95	-	-	71.21	32.2	10.64	33.1	100	322	A	V
		5854	48.22	-64.86	113.08	38.21	32.43	10.68	33.1	100	322	P	V
		5873	48.85	-56.91	105.76	38.77	32.47	10.71	33.1	100	322	P	V
	5893.8	49.46	-41.79	91.25	39.35	32.5	10.71	33.1	100	322	P	V	
	5950	49.79	-18.41	68.2	39.41	32.7	10.78	33.1	100	322	P	V	
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11510	47.32	-26.68	74	44.7	40.1	15.12	52.6	176	186	P	H
HE40		17265	47.74	-20.46	68.2	37.12	40.47	22.72	52.57	189	163	P	H
CH 151		11510	47.57	-26.43	74	44.95	40.1	15.12	52.6	176	186	P	V
5755MHz		17265	47.54	-20.66	68.2	36.92	40.47	22.72	52.57	189	163	P	V
802.11ax		11590	47.02	-26.98	74	44.59	39.85	15.21	52.63	170	300	P	H
HE40		17385	47.6	-20.6	68.2	36.02	41.18	23.08	52.68	150	200	P	H
CH 159		11590	47.87	-26.13	74	45.44	39.85	15.21	52.63	170	300	P	V
5795MHz		17385	47.51	-20.69	68.2	35.93	41.18	23.08	52.68	150	200	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5640.8 to 5948.2 MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ax HE80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11550	47.66	-26.34	74	45.15	39.95	15.18	52.62	160	360	P	H
HE80		17325	47.93	-20.27	68.2	36.87	40.72	22.96	52.62	170	360	P	H
CH 155		11550	47.92	-26.08	74	45.41	39.95	15.18	52.62	160	360	P	V
5775MHz		17325	47.57	-20.63	68.2	36.51	40.72	22.96	52.62	170	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Verify data of Partial Ru:

Band 4 5725~5850MHz

WIFI 802.11ax HE80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 CH 155 5775MHz		5613.8	47.72	-20.48	68.2	38.46	31.8	10.56	33.1	121	322	P	H
		5684.2	50.05	-43.49	93.54	40.56	32	10.59	33.1	121	322	P	H
		5718.6	52.58	-57.83	110.41	43	32.07	10.61	33.1	121	322	P	H
		5723.6	54.83	-64.18	119.01	45.25	32.07	10.61	33.1	121	322	P	H
		5775	85.09	-	-	75.4	32.17	10.62	33.1	121	322	P	H
		5775	77.21	-	-	67.52	32.17	10.62	33.1	121	322	A	H
		5851.4	52.2	-66.81	119.01	42.22	32.4	10.68	33.1	121	322	P	H
		5859.4	51.79	-57.78	109.57	41.75	32.43	10.71	33.1	121	322	P	H
		5907.6	48.37	-32.67	81.04	38.15	32.57	10.75	33.1	121	322	P	H
		5942	49.04	-19.16	68.2	38.66	32.7	10.78	33.1	121	322	P	H
		5611	46.85	-21.35	68.2	37.59	31.8	10.56	33.1	110	358	P	V
		5686.6	47	-48.32	95.32	37.51	32	10.59	33.1	110	358	P	V
		5715	49.66	-59.74	109.4	40.12	32.03	10.61	33.1	110	358	P	V
		5722.4	52.49	-63.78	116.27	42.91	32.07	10.61	33.1	110	358	P	V
		5775	82.91	-	-	73.22	32.17	10.62	33.1	110	358	P	V
		5775	78.32	-	-	68.63	32.17	10.62	33.1	110	358	A	V
		5852.4	51.46	-65.27	116.73	41.48	32.4	10.68	33.1	110	358	P	V
		5860.6	49.56	-59.67	109.23	39.52	32.43	10.71	33.1	110	358	P	V
	5883.8	49.03	-49.64	98.67	38.95	32.47	10.71	33.1	110	358	P	V	
	5948.4	47.85	-20.35	68.2	37.47	32.7	10.78	33.1	110	358	P	V	

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ax HE80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11550	46.66	-27.34	74	44.15	39.95	15.18	52.62	160	360	P	H
HE80		17325	46.93	-21.27	68.2	35.87	40.72	22.96	52.62	170	360	P	H
CH 155		11550	47.92	-26.08	74	45.41	39.95	15.18	52.62	160	360	P	V
5775MHz		17325	46.57	-21.63	68.2	35.51	40.72	22.96	52.62	170	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT40 LF		30.97	22.23	-17.77	40	29.48	24.62	0.53	32.4	-	-	P	H
		208.48	20.5	-23	43.5	35.68	15.5	1.37	32.05	-	-	P	H
		383.08	24.75	-21.25	46	32.96	21.43	1.87	31.51	-	-	P	H
		527.61	28.48	-17.52	46	32.88	24.41	2.21	31.02	100	0	P	H
		644.98	28.28	-17.72	46	31.44	25.17	2.46	30.79	-	-	P	H
		986.42	29.27	-24.73	54	29.92	27.47	3.03	31.15	-	-	P	H
		30	28.87	-11.13	40	35.55	25.2	0.52	32.4	100	0	P	V
		70.74	19.78	-20.22	40	38.75	12.57	0.81	32.35	-	-	P	V
		161.92	24.63	-18.87	43.5	39.39	16.2	1.22	32.18	-	-	P	V
		204.6	29.15	-14.35	43.5	44.35	15.5	1.36	32.06	-	-	P	V
		526.64	29.04	-16.96	46	33.48	24.39	2.21	31.04	-	-	P	V
	880.69	28.43	-17.57	46	30.35	26.68	2.86	31.46	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	99.18	-	-	10Hz
1+2	802.11n HT20	99.12	-	-	10Hz
1+2	802.11n HT40	98.31	-	-	10Hz
1+2	802.11ac VHT80	93.70	0.259	3.865	10KHZ
1+2	802.11ax HE20	99.33	-	-	10Hz
1+2	802.11ax HE40	97.82	0.781	1.280	3KHz
1+2	802.11ax HE80	95.88	0.404	2.473	3KHz



802.11a

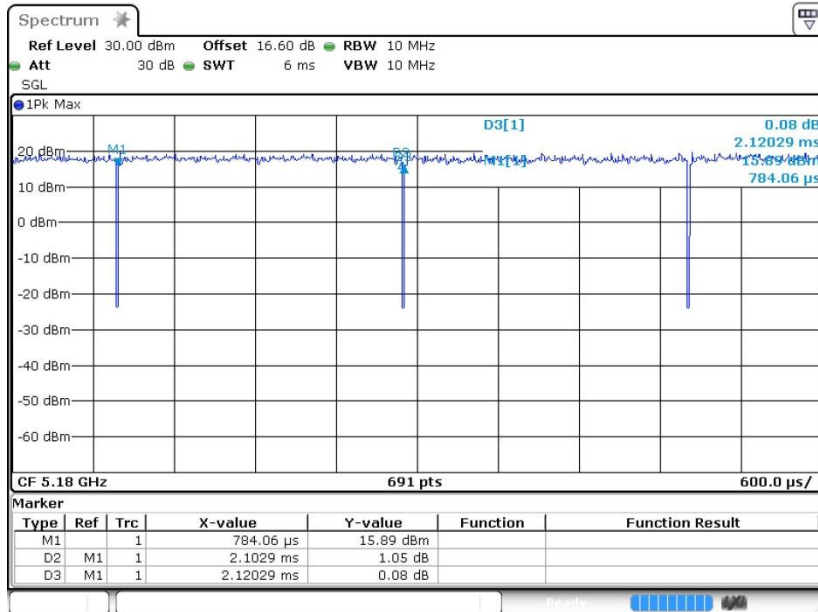


802.11n HT20

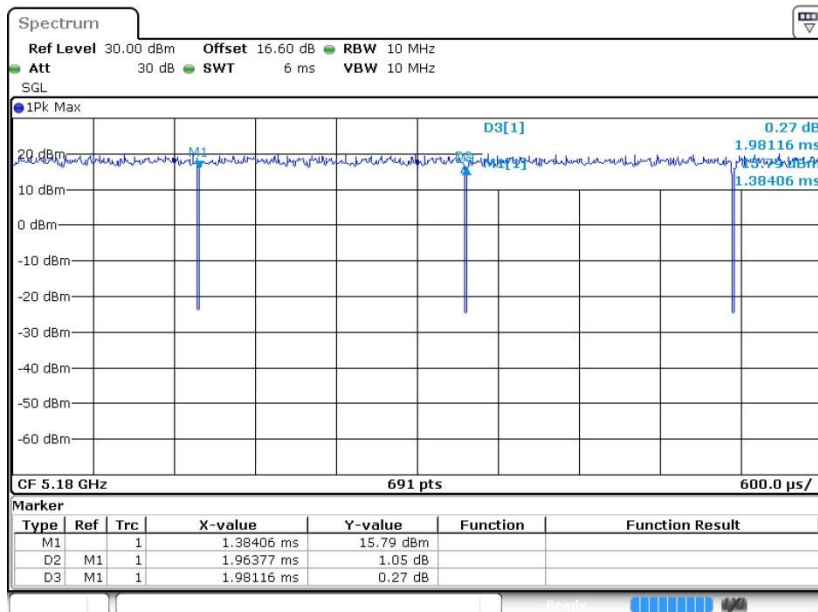




802.11n HT40

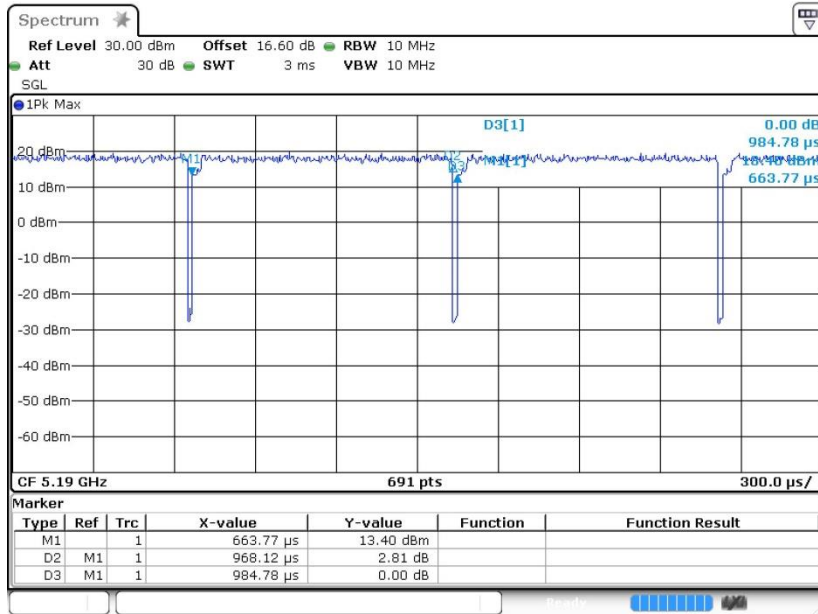


802.11ac VHT80

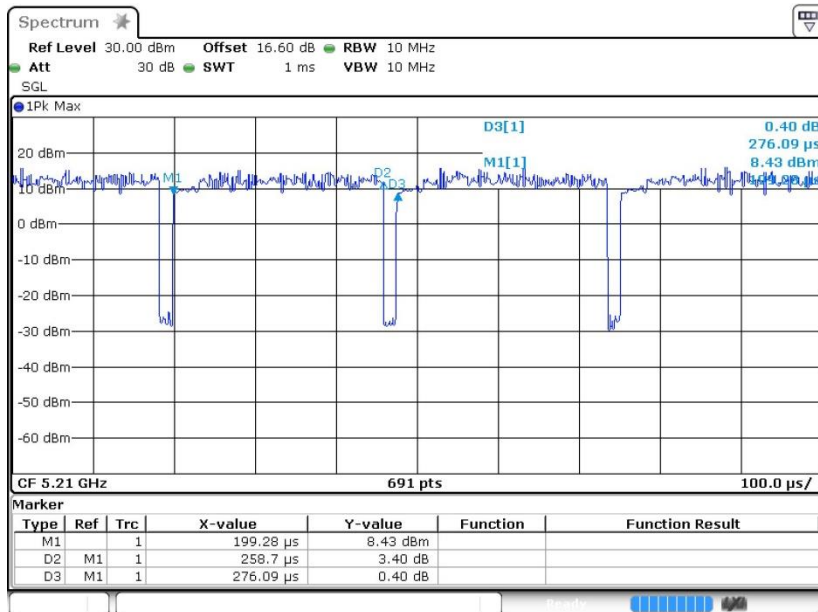




802.11ax HE20

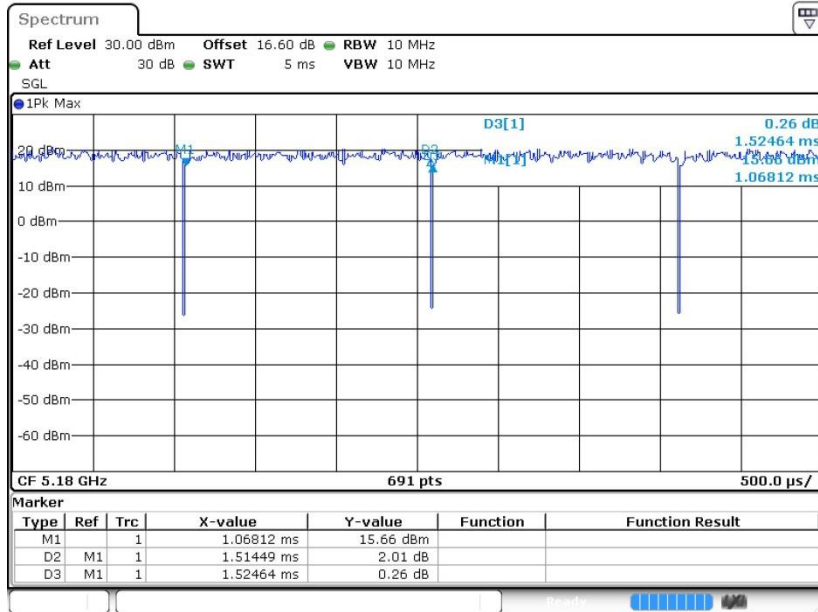

802.11ax HE40

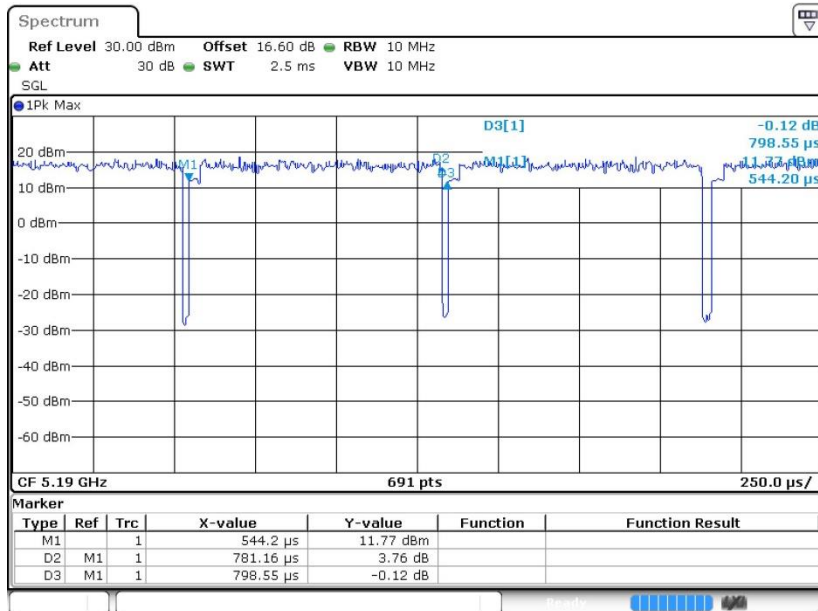



802.11ax HE80

