

FCC RF Test Report

APPLICANT	:	OnePlus Technology (Shenzhen) Co., Ltd
EQUIPMENT	:	Smart Phone
BRAND NAME	:	ONEPLUS
MODEL NAME	:	HD1905
FCC ID	:	2ABZ2-EE133
STANDARD	:	47 CFR Part 2, and 90(S)
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 04, 2019 and completely tested on Aug. 08, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

File Shih

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc. 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China



TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
รเ	ММА	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	6
	1.5	Modification of EUT	
	1.6	Maximum Conducted Power, Frequency Tolerance and Emission Designator	6
	1.7	Testing Site	7
	1.8	Applied Standards	7
2	TES	CONFIGURATION OF EQUIPMENT UNDER TEST	8
	2.1	Test Mode	8
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	9
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	TES	RESULT	11
	3.1	Conducted Output Power Measurement	11
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	13
	3.4	Emissions Mask – Out Of Band Emissions Measurement	15
	3.5	Field Strength of Spurious Radiation Measurement	16
	3.6	Frequency Stability Measurement	18
4	LIST	OF MEASURING EQUIPMENT	20
5	UNC	ERTAINTY OF EVALUATION	21
AF	PEND	IX A. TEST RESULTS OF CONDUCTED TEST	

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW970213-03B	Rev. 01	Initial issue of report	Sep. 24, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 26.58 dB at 2442.450 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	HD1905
FCC ID	2ABZ2-EE133
EUT supports Radios application	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/NFC
IMEI Code	Conducted: 990013830029836 Radiation: 990013830040874
HW Version	14
SW Version	Oxygen OS 10.0.HD65AA
EUT Stage	Production Unit

Remark:

- **1.** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- 2. This is a variant report for HD1905. The difference between previous and current is changing from single SIM card to dual SIM card, and the model name changed. Since the test result is not affected by the changes, all the test results are leveraged from original report which can be referred to Sporton Report Number FW970213B.



1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	814.7 ~ 823.3 MHz (LTE Band 26)						
Rx Frequency	859.7 ~ 868.3 MHz (LTE Band 26)						
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz						
Maximum Output Power to Antenna	22.97 dBm						
Antenna Type / Gain	PIFA Antenna/ -2.0 dBi						
Type of Modulation	QPSK / 16QAM / 64QAM						

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power, Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M09G7D	0.1941
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M10W7D	0.1644
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M09W7D	0.1245
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M72G7D	0.1945
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M74W7D	0.1656
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M74W7D	0.1279
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M51G7D	0.1914
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M51W7D	0.1629
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M50W7D	0.1262
Part 90S	LTE Band 26	QPSK	10 MHz	0.0035	8M97G7D	0.1914
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M07G7D	0.1607
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M01G7D	0.1265
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M4G7D	0.1982
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M5W7D	0.1675
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M4W7D	0.1297



1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for

Test Firm	Sporton International (Shenzhen) Inc.									
Test Site Location	518055 People's Republ									
T (0%)	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.							
Test Site No.	TH01-SZ	CN1256	421272							
Test Firm	Sporton International (Sh	ienzhen) Inc.								
Test Site Location		No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398								
Test Offe Ne	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.							
Test Site No.	03CH02-SZ	CN1256	421272							

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

		Bandwidth (MHz)				Modulation		RB #			Test Channel					
Test Items	Band	1.4	3	5	10	15	20	QPSK	16Q AM	64QA M	1	Hal f	Full	L	м	н
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v	v			v	v	v	v
Emission masks In-band emissions	26	v	v	×	v	×	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v	v	v	v			v	v	~
Frequency Stability	26				v	-	-	v					v		v	
Radiated Spurious Emission	26	v	v	v	v	-	-	v			v			v	v	v
Note	 The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 															

Frequency range investigated for radiated emission is 30 MHz to 10th harmonic.



2.2 Connection Diagram of Test System

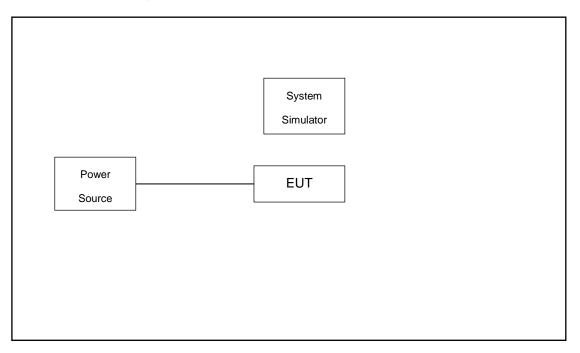

2.3 Support Unit used in test configuration and system

lte	em	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1		System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2		DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator. Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.0 + 10 = 14.0 (dB)



2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
15	Channel	26765	-	-					
15	Frequency	821.5	-	-					
10	Channel	-	26740	-					
10	Frequency	-	819	-					
5	Channel	26715	26740	26765					
5	Frequency	816.5	819	821.5					
3	Channel	26705	26740	26775					
3	Frequency	815.5	819	822.5					
1.4	Channel	26697	26740	26783					
1.4	Frequency	814.7	819	823.3					



3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.



3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

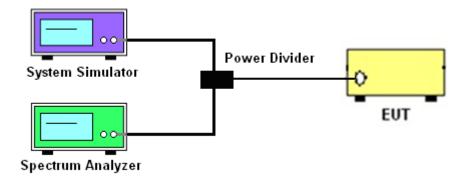

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.



3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $Log_{10}(f/6.1)$ decibels or 50 + 10 $Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.



3.3.4 Test Setup

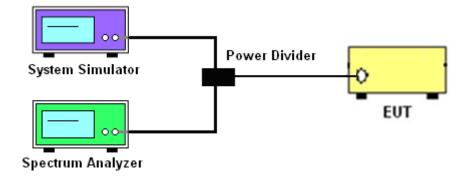

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.



3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P) dB$. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10^{th} harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

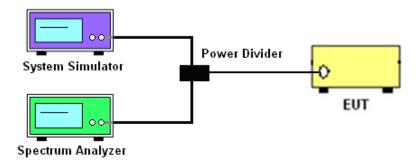

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Shenzhen) Inc. TEL : 86-755-8637-9589 FAX : 86-755-8637-9595 FCC ID : 2ABZ2-EE133

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.5.3 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)




3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

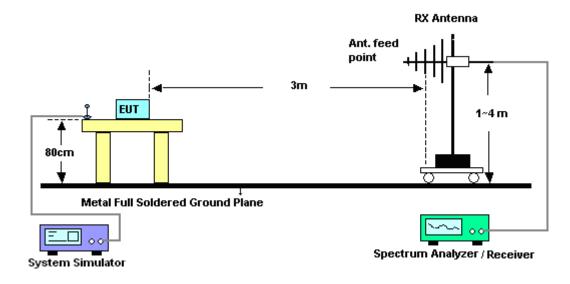

For radiated test above 1GHz

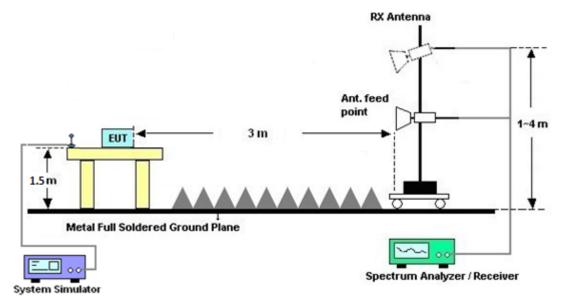

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.



3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation


- 1. The EUT was set up in the thermal chamber and connected with the base station.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.



3.6.5 Test Setup

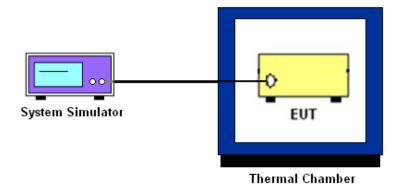

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	Jul. 24, 2019~ Aug. 06, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Dec. 22, 2018	Jul. 24, 2019~ Aug. 06, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2019	Aug. 08, 2019	Apr. 18, 2020	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jun. 05, 2019	Aug. 08, 2019	Jun. 04, 2020	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 07, 2019	Aug. 08, 2019	Jan. 06, 2020	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2018	Aug. 08, 2019	Oct. 18, 2019	Radiation (03CH02-SZ
HF Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 18, 2018	Aug. 08, 2019	Oct. 17, 2019	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Aug. 08, 2019	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Aug. 08, 2019	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Aug. 08, 2019	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2.5 dB
Confidence of 95% (U = 2Uc(y))	2.5 00

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.3 dB
Confidence of 95% (U = 2Uc(y))	3.3 UB



Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

			LTE Ban	d 26 Maximum Average F	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0		22.97		
15	1	37		22.88		
15	1	74		22.88		
15	36	0	QPSK	22.03		
15	36	20		22.03		
15	36	39		21.95		
15	75	0		21.96		
15	1	0		22.24		
15	1	37		22.14		
15	1	74		22.20		
15	36	0	16-QAM	21.07	-	-
15	36	20		21.07		
15	36	39		20.97		
15	75	0		21.03		
15	1	0		21.06		
15	1	37		21.03		
15	1	74		21.13		
15	36	0	64-QAM	20.00		
15	36	20		20.01		
15	36	39		19.94		
15	75	0		19.94		



	LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
10	1	0			22.82						
10	1	25			22.76						
10	1	49			22.65						
10	25	0	QPSK		21.88						
10	25	12			21.90						
10	25	25			21.84						
10	50	0			21.88						
10	1	0			22.06						
10	1	25			22.00						
10	1	49			21.88						
10	25	0	16-QAM	-	20.87	-					
10	25	12			20.90						
10	25	25			20.87						
10	50	0			20.86						
10	1	0			21.02						
10	1	25			20.92						
10	1	49			20.88						
10	25	0	64-QAM		19.84						
10	25	12			19.87						
10	25	25			19.84						
10	50	0			19.86						



			LTE Ban	d 26 Maximum Average I	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0		22.77	22.69	22.58
5	1	12		22.82	22.74	22.61
5	1	24		22.78	22.68	22.51
5	12	0	QPSK	21.84	21.86	21.69
5	12	7		21.93	21.83	21.74
5	12	13		21.90	21.87	21.72
5	25	0		21.92	21.81	21.64
5	1	0		22.07	22.00	21.88
5	1	12		22.11	22.05	21.89
5	1	24		22.12	21.98	21.79
5	12	0	16-QAM	20.87	20.88	20.70
5	12	7		20.95	20.88	20.78
5	12	13		20.94	20.90	20.70
5	25	0		20.90	20.86	20.69
5	1	0		20.89	20.92	20.81
5	1	12		21.01	20.97	20.81
5	1	24		21.01	20.89	20.73
5	12	0	64-QAM	19.84	19.83	19.73
5	12	7		19.91	19.85	19.80
5	12	13		19.92	19.92	19.70
5	25	0		19.89	19.79	19.64



	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
3	1	0		20.87	22.70	22.63				
3	1	8		22.89	22.84	22.66				
3	1	14		22.80	22.72	20.93				
3	8	0	QPSK	21.88	21.82	21.71				
3	8	4		21.92	21.88	21.71				
3	8	7		21.86	21.89	21.67				
3	15	0		21.90	21.84	21.70				
3	1	0		20.11	22.02	21.87				
3	1	8		22.19	22.10	21.93				
3	1	14		22.05	21.97	20.15				
3	8	0	16-QAM	20.96	20.89	20.79				
3	8	4		21.04	20.95	20.77				
3	8	7		21.00	20.94	20.72				
3	15	0		20.95	20.87	20.70				
3	1	0		20.90	20.82	20.74				
3	1	8		21.07	21.02	20.78				
3	1	14		20.98	20.85	20.69				
3	8	0	64-QAM	19.84	19.81	19.75				
3	8	4		19.92	19.85	19.76				
3	8	7		19.83	19.85	19.68				
3	15	0		19.86	19.77	19.71				




			LTE Ban	d 26 Maximum Average F	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0		22.75	22.70	22.51
1.4	1	3		22.86	22.83	22.59
1.4	1	5		22.79	22.67	22.46
1.4	3	0	QPSK	22.79	22.70	22.53
1.4	3	1		22.88	22.75	22.58
1.4	3	3		22.81	22.77	22.50
1.4	6	0		21.87	21.85	21.63
1.4	1	0		22.04	21.95	21.75
1.4	1	3		22.16	22.08	21.84
1.4	1	5		22.08	21.99	21.73
1.4	3	0	16-QAM	21.81	21.75	21.57
1.4	3	1		21.90	21.79	21.65
1.4	3	3		21.85	21.79	21.55
1.4	6	0		20.98	20.94	20.74
1.4	1	0		20.87	20.84	20.86
1.4	1	3		20.85	20.95	20.84
1.4	1	5		20.89	20.83	20.83
1.4	3	0	64-QAM	20.84	20.83	20.88
1.4	3	1		20.83	20.88	20.87
1.4	3	3		20.86	20.84	20.83
1.4	6	0		19.87	19.83	19.89



Peak-to-Average Ratio

Mode		LTE Band 26 / 10MHz							
Mod.	QP	SK	160	Limit: 13dB					
RB Size	1RB	Full RB	1RB	Full RB	Result				
Lowest CH	-	-	-	-					
Middle CH	3.71	5.16	4.35	6.12	PASS				
Highest CH	-	-	-	-					
Mod.		640	AM	Limit: 13dB					
RB Size	1R	В	Full	Result					
Lowest CH	-		-						
Middle CH	4.20		6.03		PASS				
Highest CH	-		-						



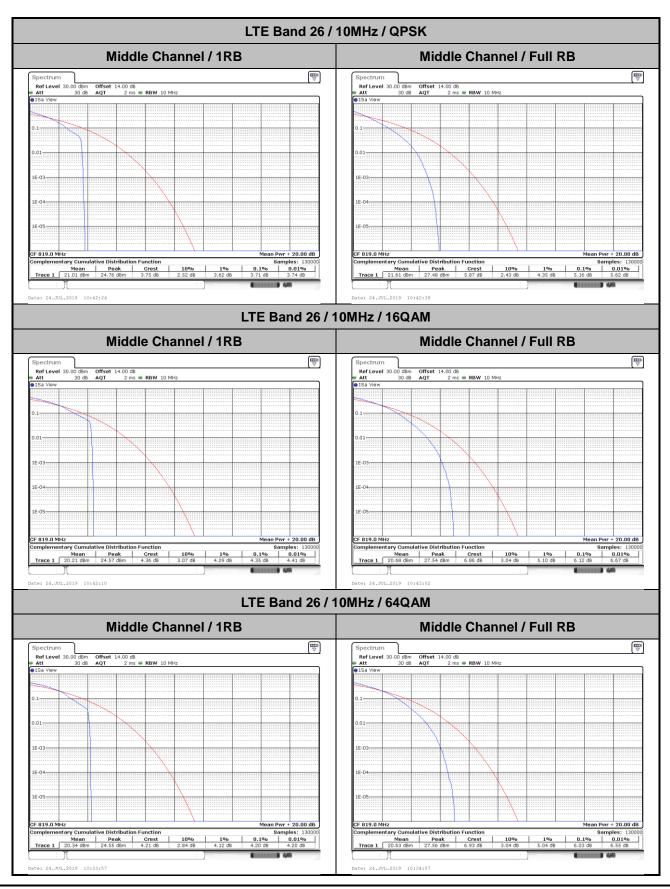


Sporton International (Shenzhen) Inc. TEL : 86-755-8637-9589 FAX : 86-755-8637-9595 FCC ID : 2ABZ2-EE133 Page Number: A7 of A46Report Issued Date: Sep. 24, 2019Report Version: Rev. 01




26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	1.4MHz		Hz 3MHz		5MHz		10MHz		15MHz		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Lowest CH	1.228	1.228	3.063	3.015	4.835	4.775	-	-	14.356	14.266		
Middle CH	1.225	1.220	3.003	3.009	4.925	4.895	9.79	9.63	-	-		
Highest CH	1.231	1.220	2.985	3.021	4.815	4.915	-	-	-	-		
BW	1.4	MHz	3MHz		5N	IHz	10	ИНz	15MHz			
Mod.	640	QAM	64QAM		64QAM		64QAM		64QAM			
Lowest CH	1.2	225	3.021		4.835		-		14.266			
Middle CH	1.2	1.222		3.057		925	9.69		-			
Highest CH	1.2	234	3.0	009	4.915		-		-			




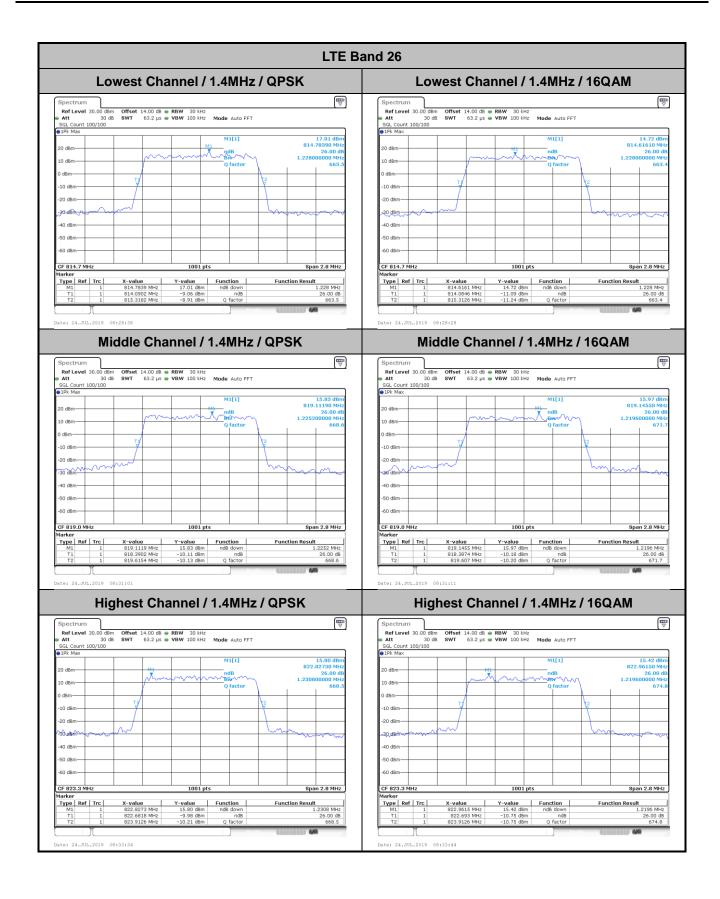




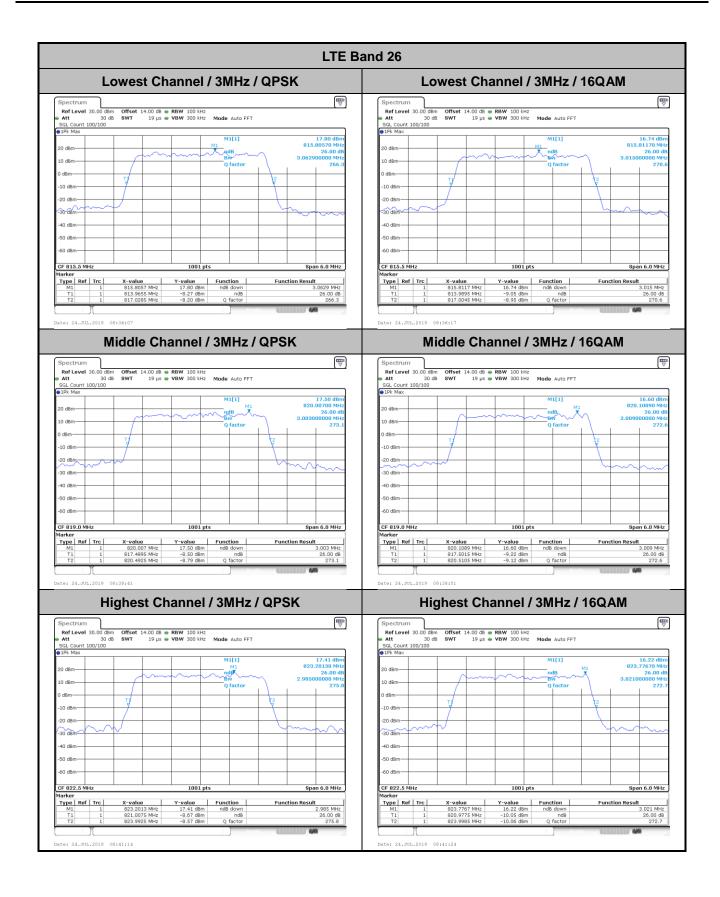




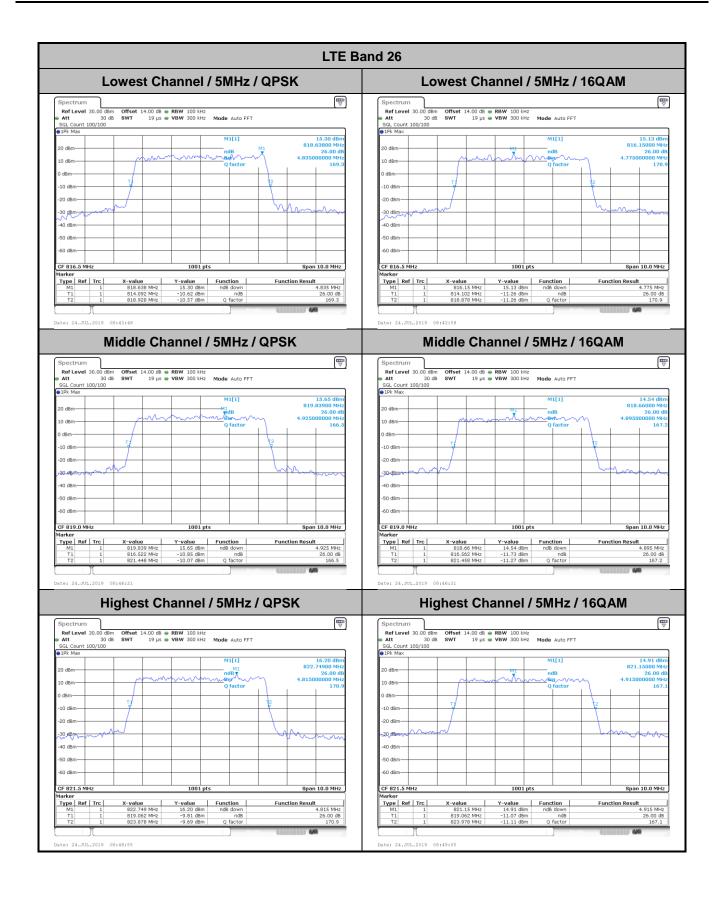




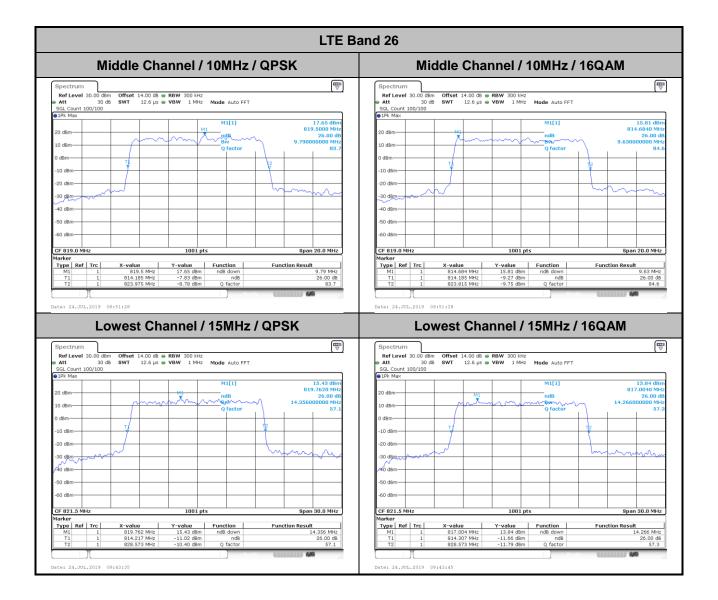



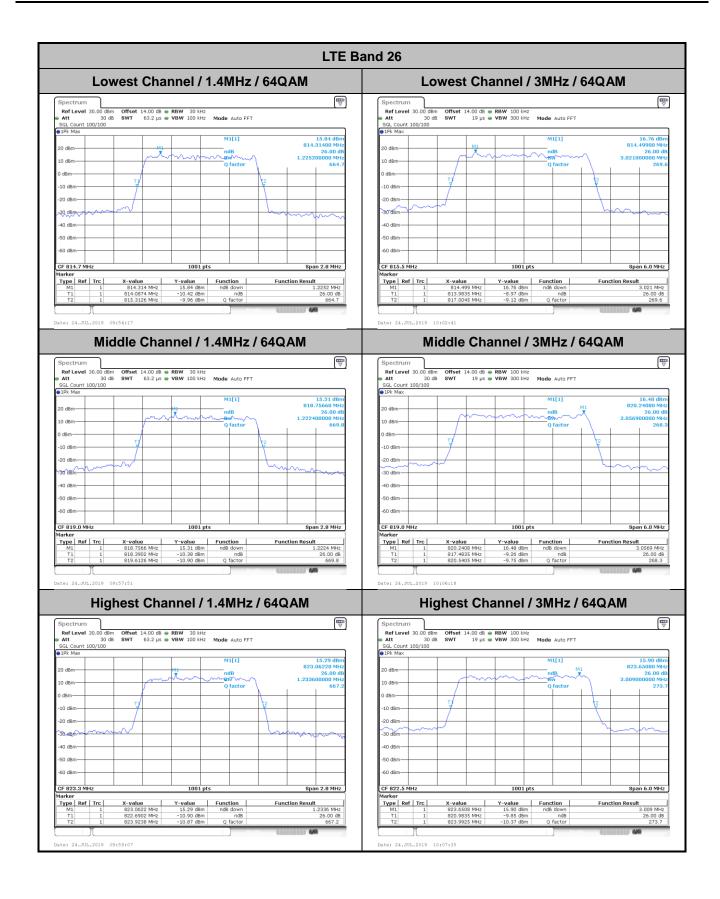



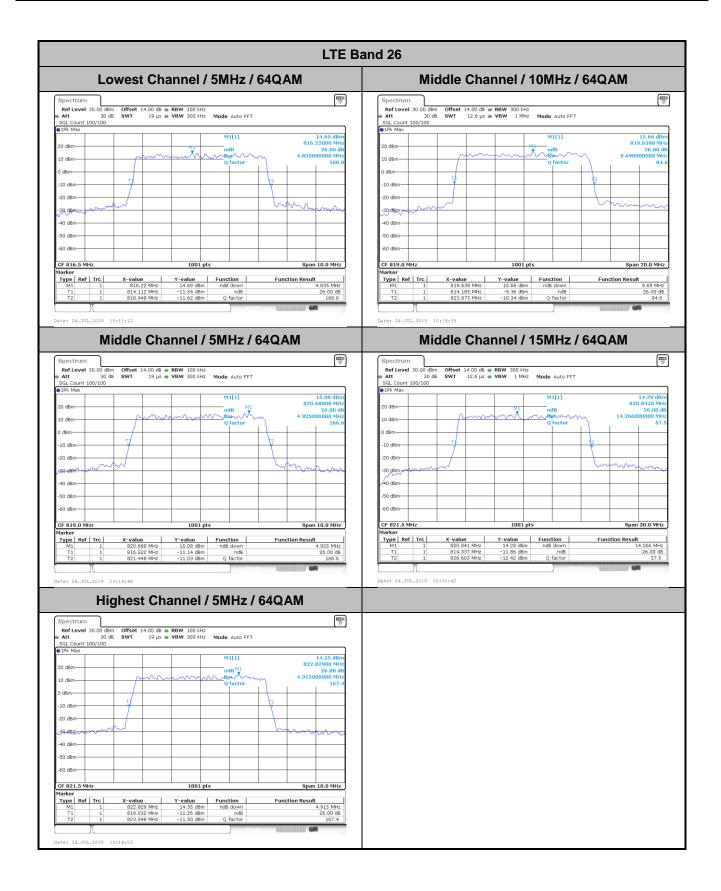





Occupied Bandwidth

Mode		LTE Band 26 : 99%OBW(MHz)										
BW	1.4	1.4MHz		3MHz		5MHz		10MHz		ИНz		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Lowest CH	1.09	1.09	2.72	2.72	4.50	4.50	-	-	13.37	13.46		
Middle CH	1.09	1.10	2.72	2.71	4.49	4.51	8.97	9.07	-	-		
Highest CH	1.09	1.09	2.72	2.74	4.51	4.49	-	-	-	-		
BW	1.4	MHz	3MHz		5N	IHz	10	MHz	15MHz			
Mod.	640	QAM	64Q	64QAM		64QAM		QAM	64QAM			
Lowest CH	1.	09	2.	72	4.	50	-		13.43			
Middle CH	1.	1.09		2.73		50	9.01		-			
Highest CH	1.	09	2.	74	4.50		-		-			




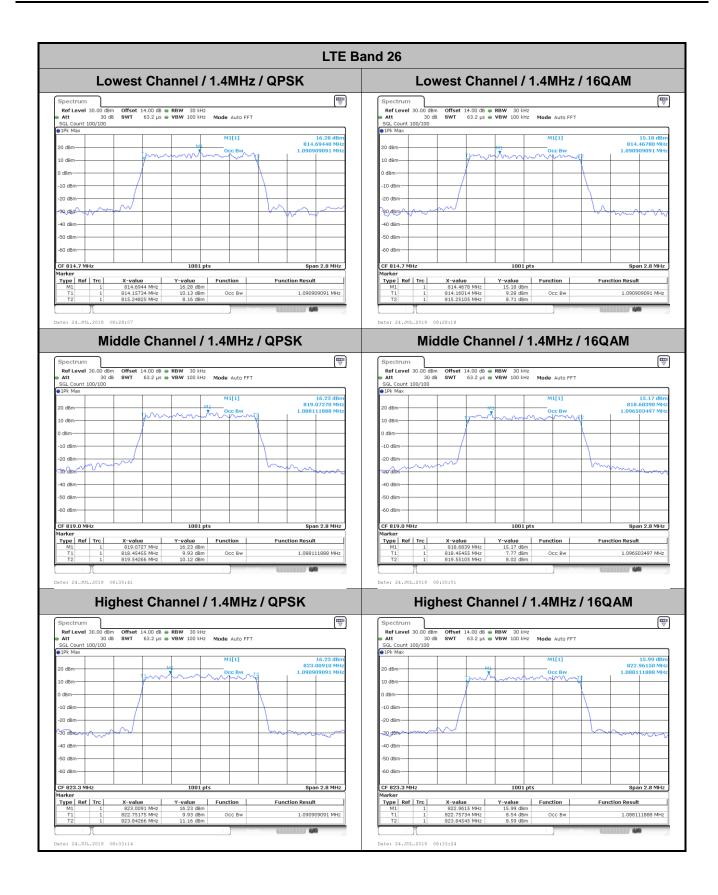




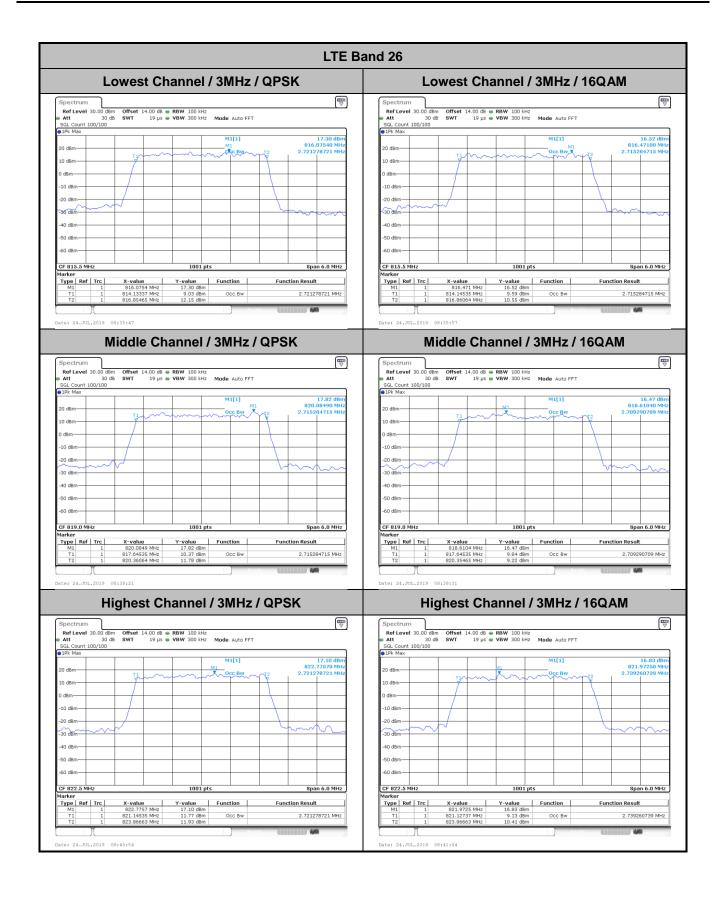




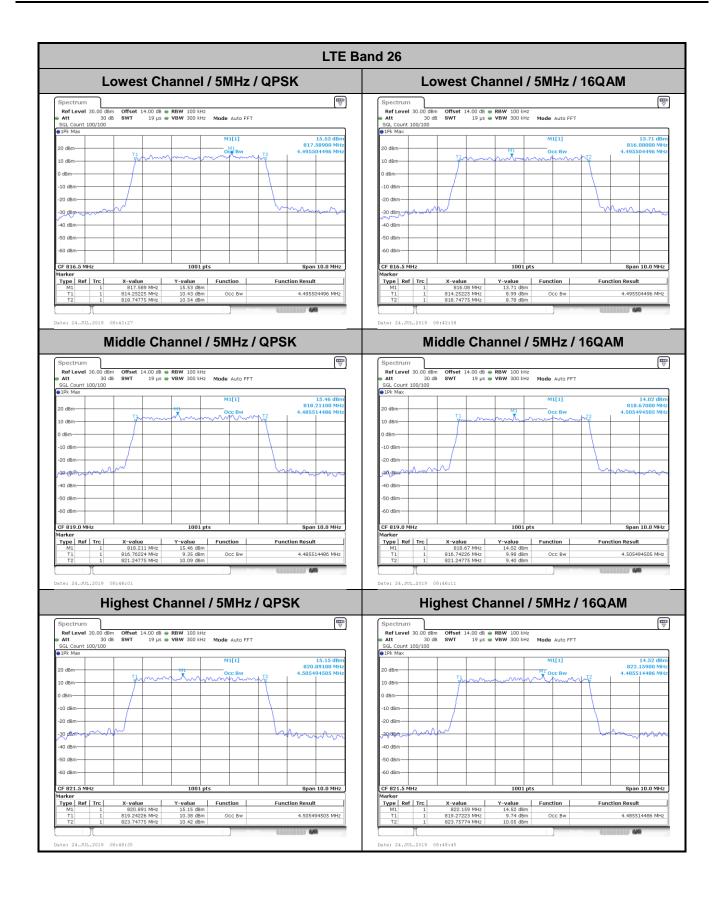




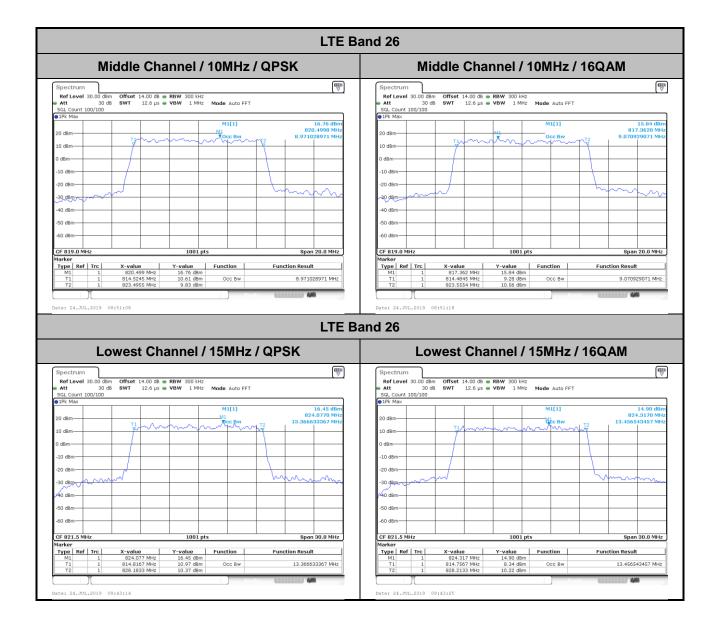



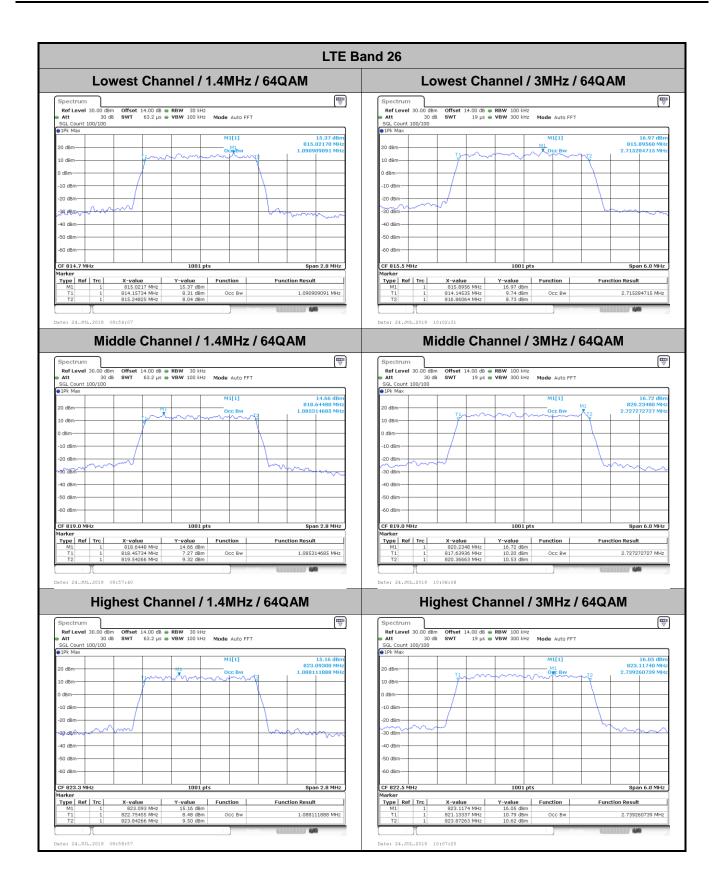




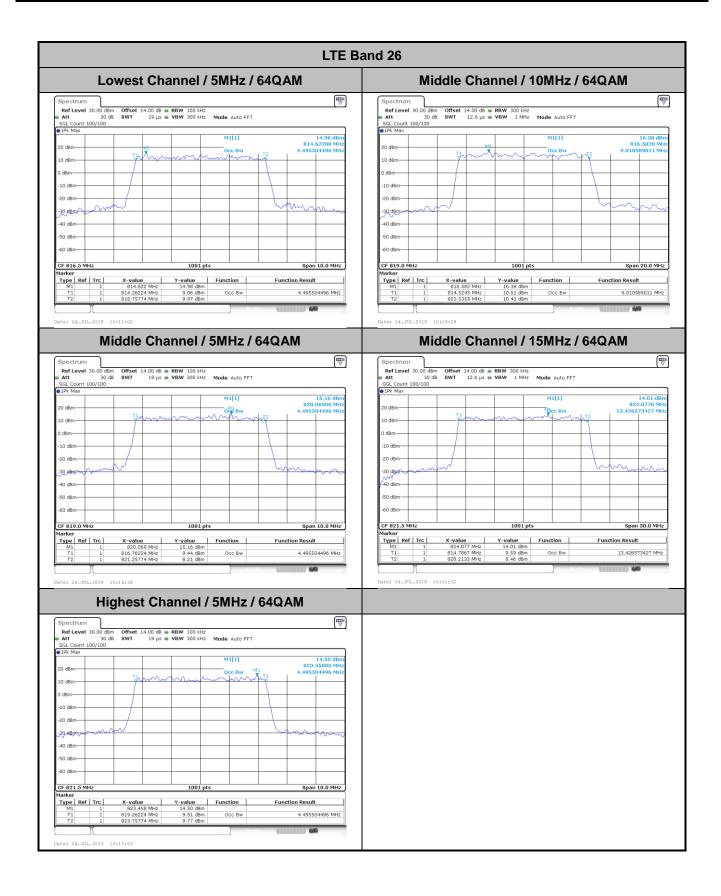



Conducted Band Edge

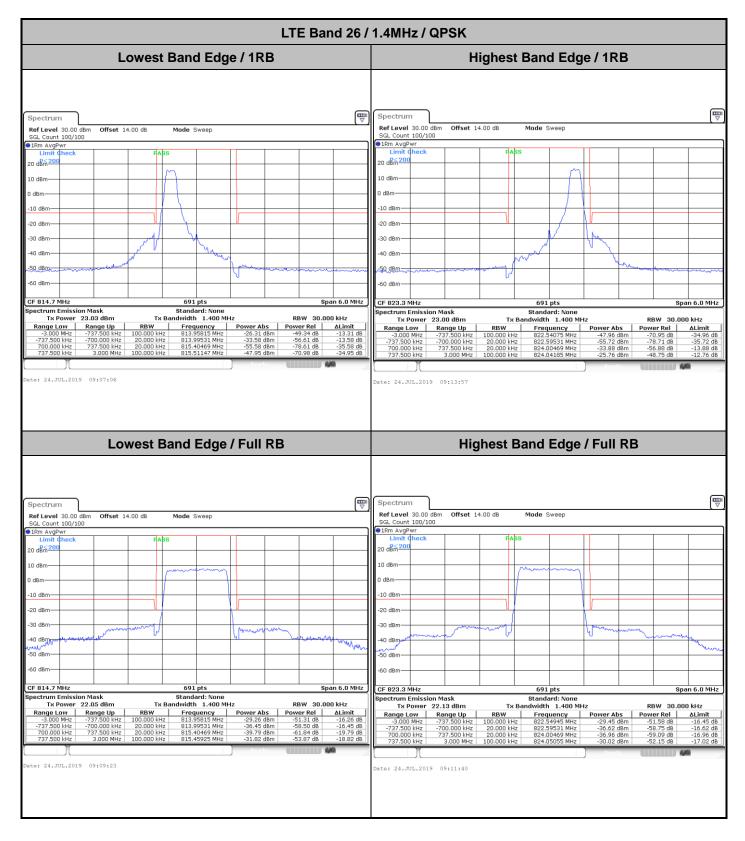

Sporton International (Shenzhen) Inc. TEL : 86-755-8637-9589 FAX : 86-755-8637-9595 FCC ID : 2ABZ2-EE133





