



# TEST REPORT

No.I19Z61344-WMD05

for

**OnePlus Technology (Shenzhen) Co., Ltd.**

**Smart Phone**

**Model Name: HD1925**

**FCC ID: 2ABZ2-EE143**

with

**Hardware Version: 46**

**Software Version: Oxygen OS 10.0.HD61CB**

**Issued Date: 2019-11-01**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z61344-WMD05	Rev.0	1st edition	2019-10-25
I19Z61344-WMD05	Rev.1	Adjust the EUT Voltage information.	2019-11-01

Note: the latest revision of the test report supersedes all previous version.



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION.....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE.....</b>	<b>5</b>
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT.....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>12</b>
<b>A.1 OUTPUT POWER .....</b>	<b>12</b>
<b>A.2 FREQUENCY STABILITY.....</b>	<b>14</b>
<b>A.3 OCCUPIED BANDWIDTH .....</b>	<b>16</b>
<b>A.4 EMISSION BANDWIDTH.....</b>	<b>19</b>
<b>A.5 CONDUCTED SPURIOUS EMISSION.....</b>	<b>21</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>28</b>



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### 1.3. Testing Environment

Normal Temperature: 15-35℃  
Relative Humidity: 20-80%

### 1.4. Project data

Testing Start Date: 2019-08-30  
Testing End Date: 2019-10-25

### 1.5. Signature



---

Dong Yuan  
(Prepared this test report)



---

Zhang Yufeng  
(Reviewed this test report)



---

Zhao Hui Lin  
Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: OnePlus Technology (Shenzhen) Co., Ltd.  
Address /Post: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
Contact Person: Ariel Cheng  
Contact Email: ariel.cheng@oneplus.com  
Telephone: 13823398081

### **2.2. Manufacturer Information**

Company Name: OnePlus Technology (Shenzhen) Co., Ltd.  
Address /Post: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
Contact Person: Ariel Cheng  
Contact Email: ariel.cheng@oneplus.com  
Telephone: 13823398081

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model	HD1925
FCC ID	2ABZ2-EE143
Frequency	CDMA2ND800MHz(BC10)
Antenna	Integrated
Extreme vol. Limits	3.6VDC to 4.3VDC (nominal: 3.87VDC)
Extreme temp. Tolerance	0°C to +35°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT05a	990013820050933	46	Oxygen OS 10.0.HD61CB	2019-08-30

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE2	Battery

AE1

Model	BLP745
Manufacturer	Sunwoda Electronic Co.,Ltd.
Capacitance	4010mAh

AE2

Model	BLP745
Manufacturer	SUNWODA ELECTRONIC INDIA PRIVATE LIMITED
Capacitance	4010mAh

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-18 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS;GENERAL RULES AND REGULATIONS	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
KDB971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01



## 5. LABORATORY ENVIRONMENT

**Shielding chamber** did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %

## 6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	90.635	Pass
2	Frequency Stability	2.1055/90.213	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	90.1215	Pass
5	Conducted Spurious Emission	90.691	Pass

The device supports two antennas (UAT or LAT). All the test items of UAT are tested while output power, occupied bandwidth and emission bandwidth of LAT are tested.

## 7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALIBRATION INTERVAL	CAL DUE DATE
1	Spectrum Analyzer	FSV30	101576	R&S	1 Year	2020-05-03
2	Wireless Communications Test Set	8960(E5515C)	MY483609 50	Agilent	2 Years	2020-08-29
3	Climatic chamber	SH-641	92009050	ESPEC	2 Years	2019-12-21

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Agilent Wireless Communications Test Set (8960(E5515C)) to ensure max power transmission and proper modulation.

This result is peak output power conducted measurements for the EUT. In all cases, output power is within the specified limits.

#### **A.1.2 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSV30 (average).

These measurements were done at 2 frequencies of CDMA BC10 (bottom and top of operational frequency range) for 1x RTT and 1xEVDO.

The measurement method is from KDB 971168 D01 5.2.1:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Set number of points in sweep  $\geq 2 \times$  span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle  $\geq 98\%$ ), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle  $< 98\%$ ), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

**A.1.3 Measurement results**

**CDMA BC10**

**UAT Measurement Results:**

**Measurement result**

Channel	Frequency(MHz)	Channel power(dBm)		
		1xRTT	1xEVDO	
			Rel0	RevA
476	817.9	23.91	23.94	23.97
684	823.1	23.89	23.96	23.93

**LAT Measurement Results:**

**Measurement result**

Channel	Frequency(MHz)	Channel power(dBm)		
		1xRTT	1xEVDO	
			Rel0	RevA
476	817.9	23.81	23.81	23.91
684	823.1	23.87	23.82	23.95

## **A.2 FREQUENCY STABILITY**

### **A.2.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of Agilent 8960(E5515C) Wireless Communications Test Set.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at 0°C.
3. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on mid channel of CDMA BC10, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from 0°C to +30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +30°C.
7. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C decrements from +30°C to 0°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.2.2 Measurement Limit**

#### **A.2.2.1 For Hand carried battery powered equipment**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.3VDC, with a nominal voltage of 3.87VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.2.2.2 For equipment powered by primary supply voltage

For Part 90.213, the frequency stability of the transmitter shall be maintained within  $\pm 2.5$ ppm of the center frequency. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

### A.2.3 Measurement results

#### CDMA BC 10

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	15.40	0.0187
3.87V	10.73	0.0130
4.3	11.11	0.0135

##### Frequency Error vs Temperature

temperature( $^{\circ}$ C)	Frequency error(Hz)	Frequency error(ppm)
0	11.22	0.0136
10	-4.07	-0.0049
20	-13.78	-0.0167
30	-10.72	-0.0130

### A.3 OCCUPIED BANDWIDTH

#### A.3.1 Occupied Bandwidth Results

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

#### Test Condition

RBW	VBW	Span	Sweeptime	Detector	Trace Mode
20KHz	100KHz	5MHz	40ms	Peak	Max Hold

The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 99% bandwidth.


#### UAT Measurement Results:

##### CDMA BC10 (99% BW)

Channel	Occupied Bandwidth (99% BW)(MHz)
476	1.267
684	1.278

#### CDMA BC10


##### Channel 476-Occupied Bandwidth (99% BW)

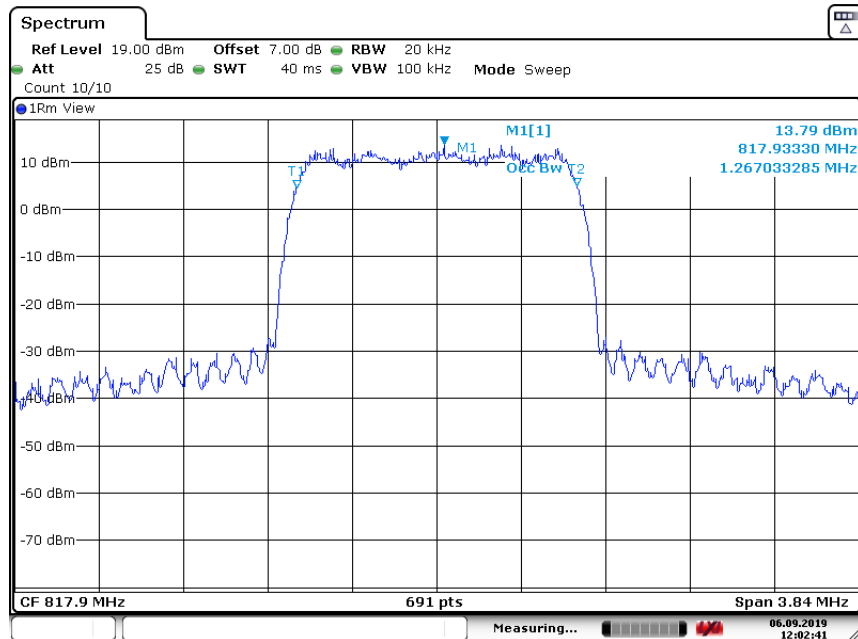

Date: 6.SEP.2019 12:02:41



### Channel 684-Occupied Bandwidth (99% BW)

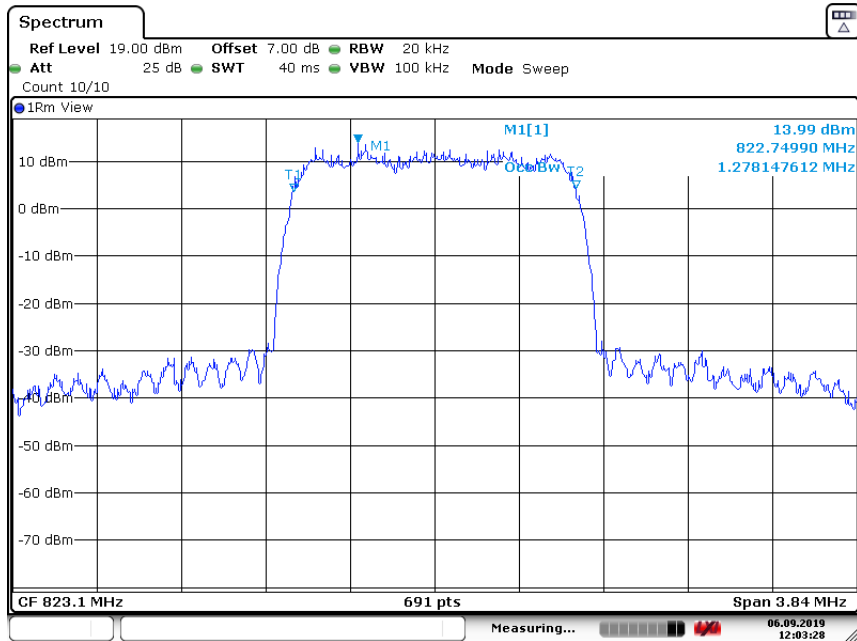


Date: 6.SEP.2019 12:03:28

**LAT Measurement Results:  
CDMA BC10 (99% BW)**

Channel	Occupied Bandwidth (99% BW)(MHz)
684	1.267

**CDMA BC10  
Channel 684-Occupied Bandwidth (99% BW)**

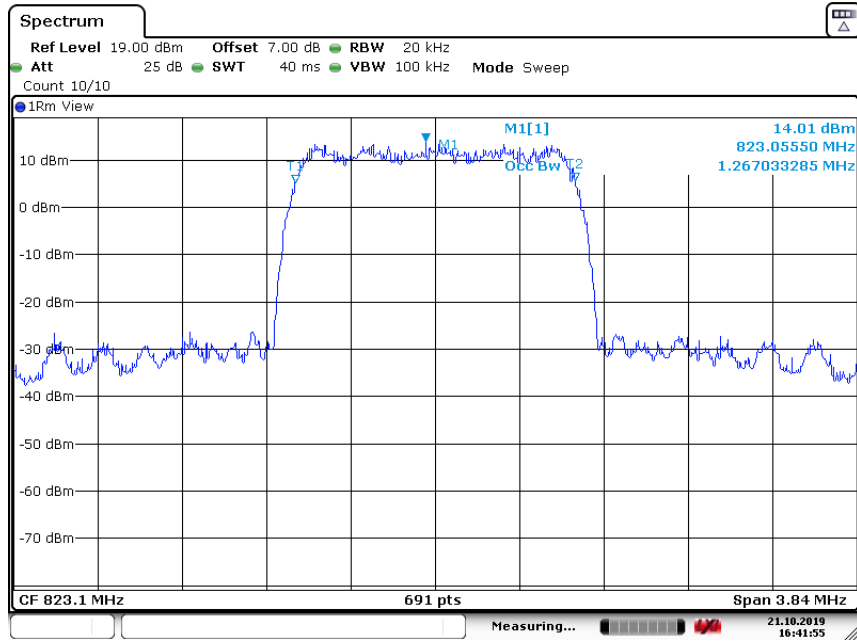

Date: 21.OCT.2019 16:41:54

## A.4 EMISSION BANDWIDTH

### A.4.1 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### Test Condition

RBW	VBW	Span	Sweeptime	Detector	Trace Mode
20KHz	100KHz	3.84MHz	40ms	Peak	Max Hold

The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 26dBc bandwidth.


#### UAT Measurement Results:

##### CDMA BC10 (-26dBc BW)


Channel	Emission Bandwidth (-26dBc BW) ( MHz)
476	1.417
684	1.412

#### CDMA BC10

##### Channel 476- Emission Bandwidth (-26dBc BW)

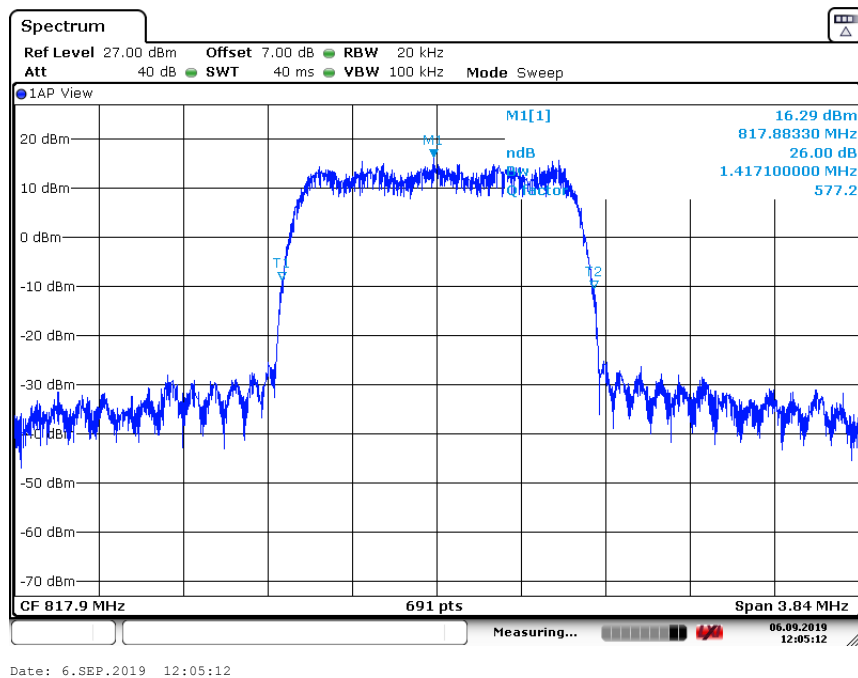


### Channel 684- Emission Bandwidth (-26dBc BW)

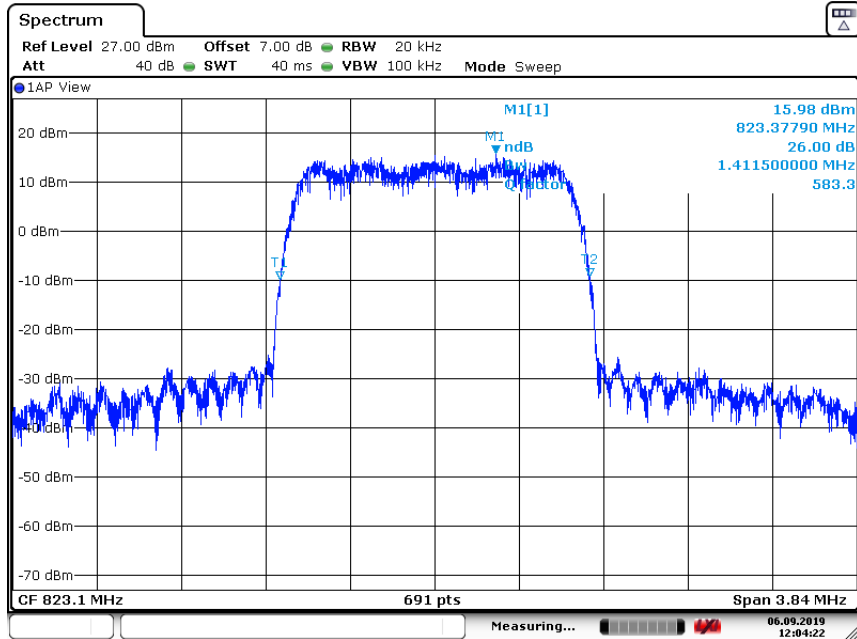

### LAT Measurement Results: CDMA BC10 (-26dBc BW)

Channel	Emission Bandwidth (-26dBc BW) ( MHz)
684	1.423

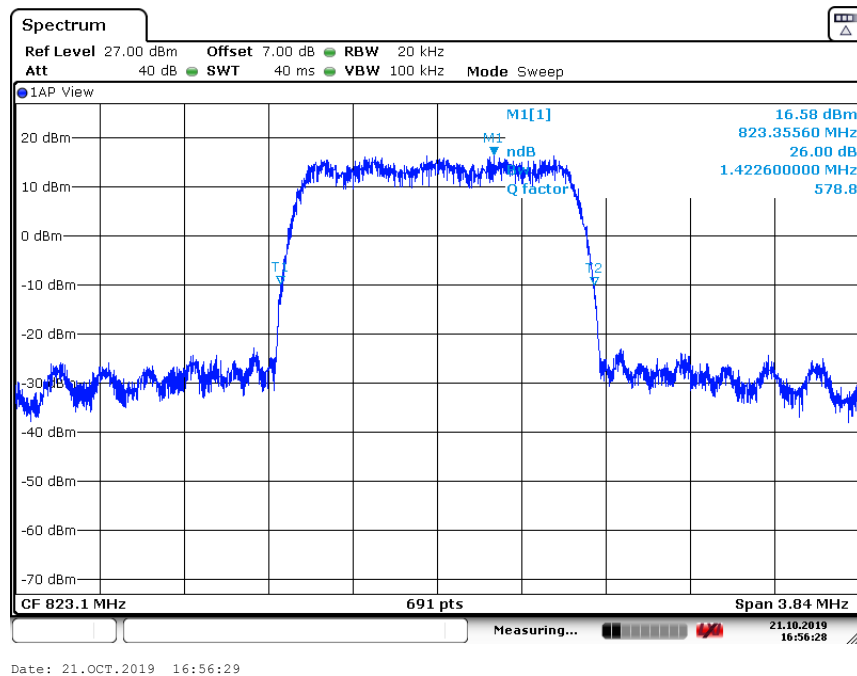

## **A.5 CONDUCTED SPURIOUS EMISSION**

### **A.5.1 Measurement Method**

The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For CDMA BC10, data taken from 30 MHz to 10GHz.

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116\text{Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee’s frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

#### **CDMA BC10 Transmitter**

Channel	Frequency (MHz)
476	817.9
684	823.1


### A.5.2 Measurement result

#### CDMA BC10

##### A. 5.2.1 Channel 476: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

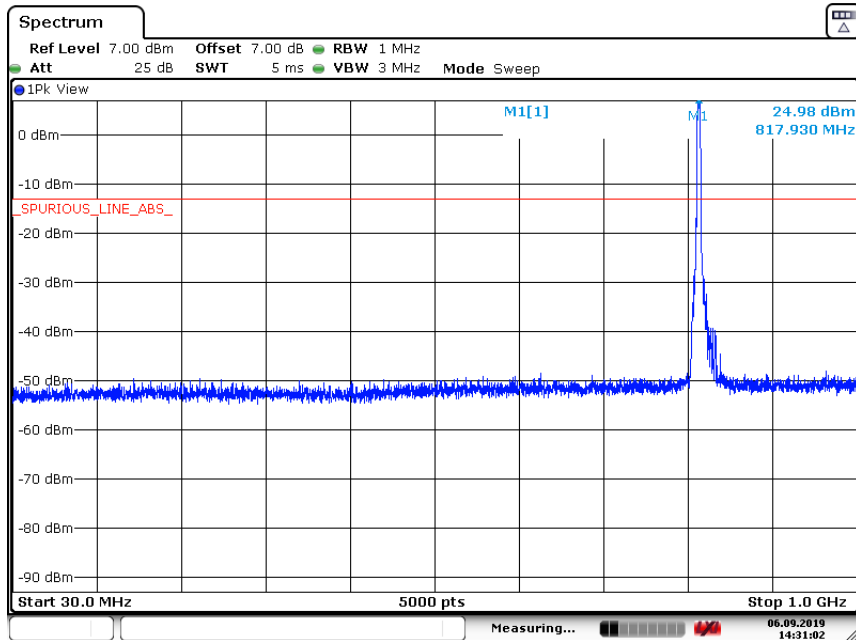

Date: 6.SEP.2019 14:31:02


##### A.5.2.2 Channel 476: 1GHz –2.5GHz

Spurious emission limit –13dBm.

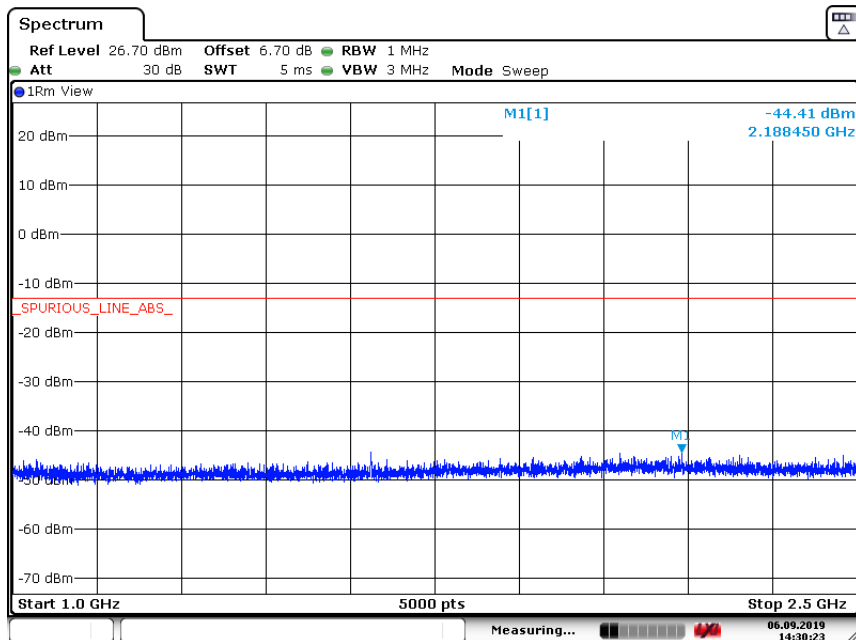


Date: 6.SEP.2019 14:30:24

**A.5.2.3 Channel 476: 2.5GHz –7.5GHz**  
 Spurious emission limit –13dBm.

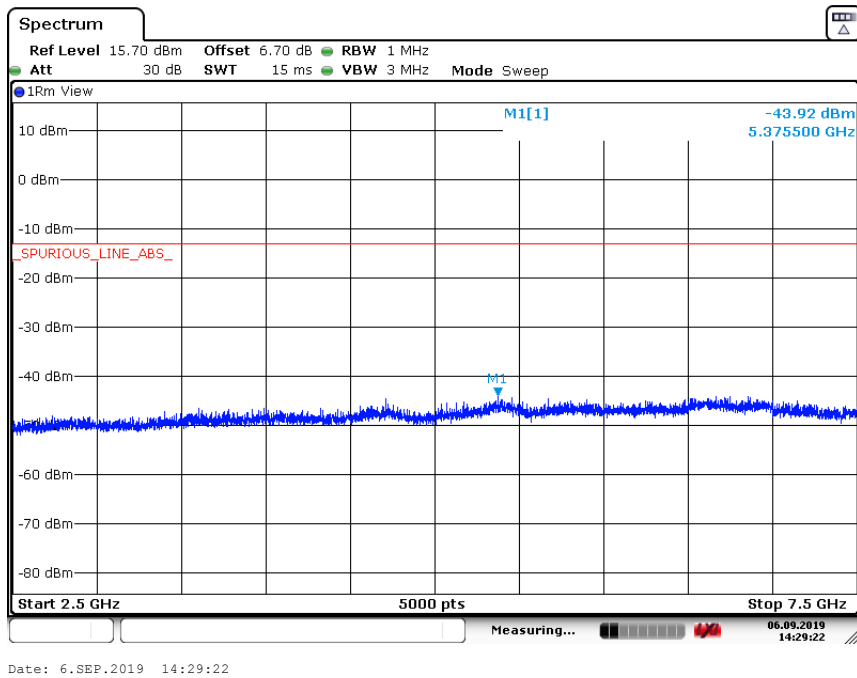


**A.5.2.4 Channel 476: 7.5GHz –10GHz**  
 Spurious emission limit –13dBm.

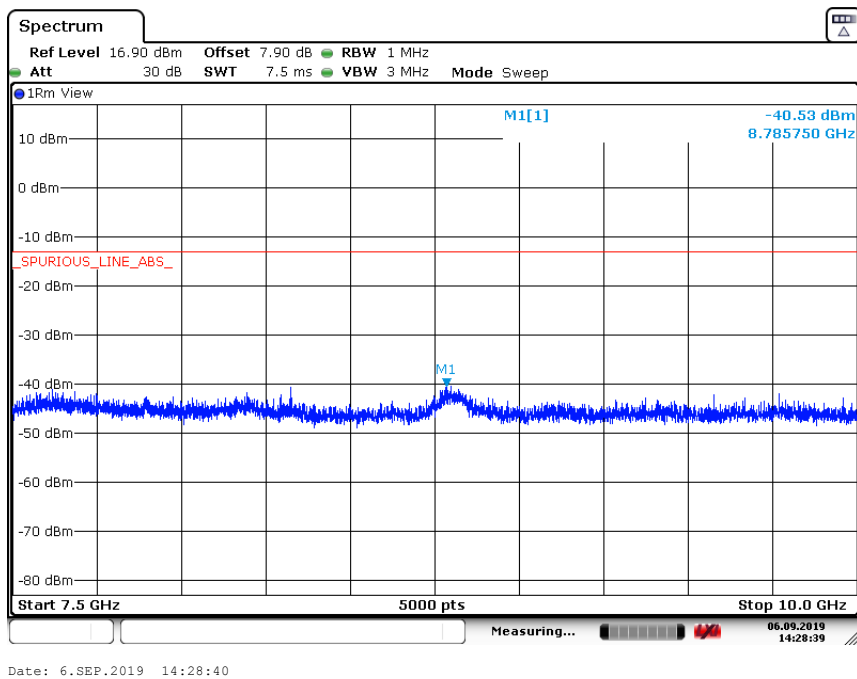


### A.5.2.5 Channel 476: Band Edge

Spurious emission limit -20dBm.

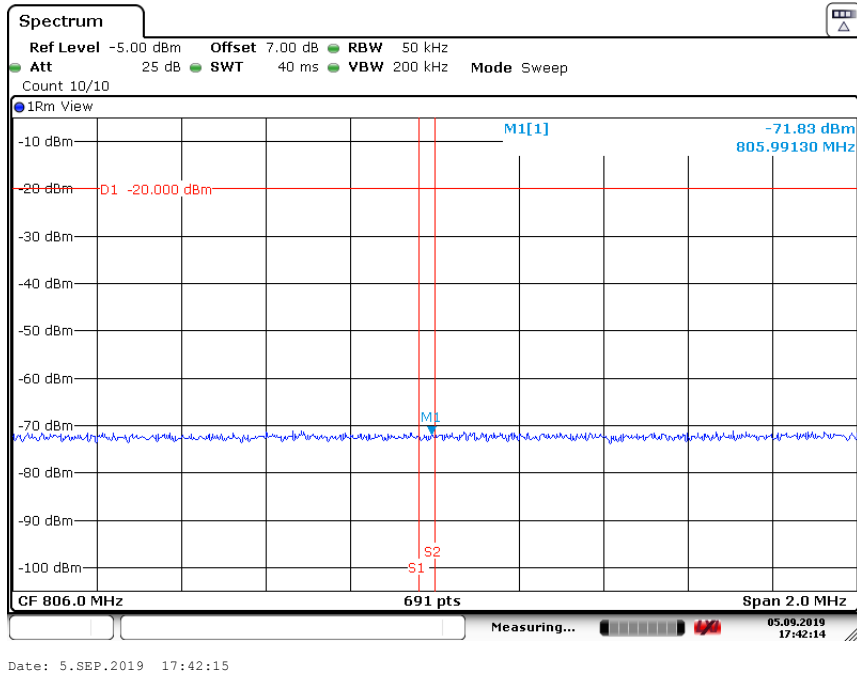

### A.5.2.6 Channel 476: Outer Extended Band Edge

Spurious emission limit -13dBm.

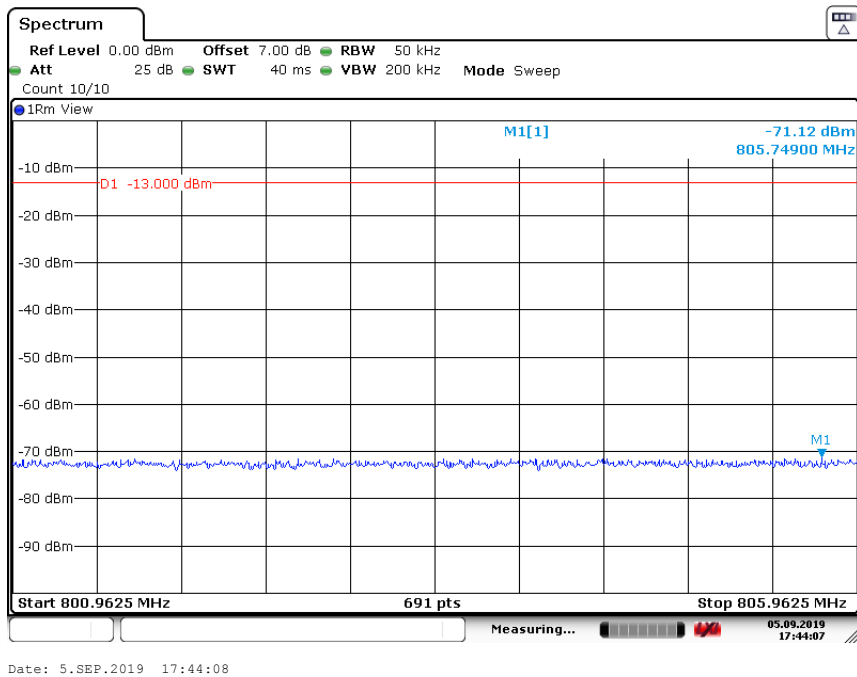




### A. 5.2.7 Channel 684: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

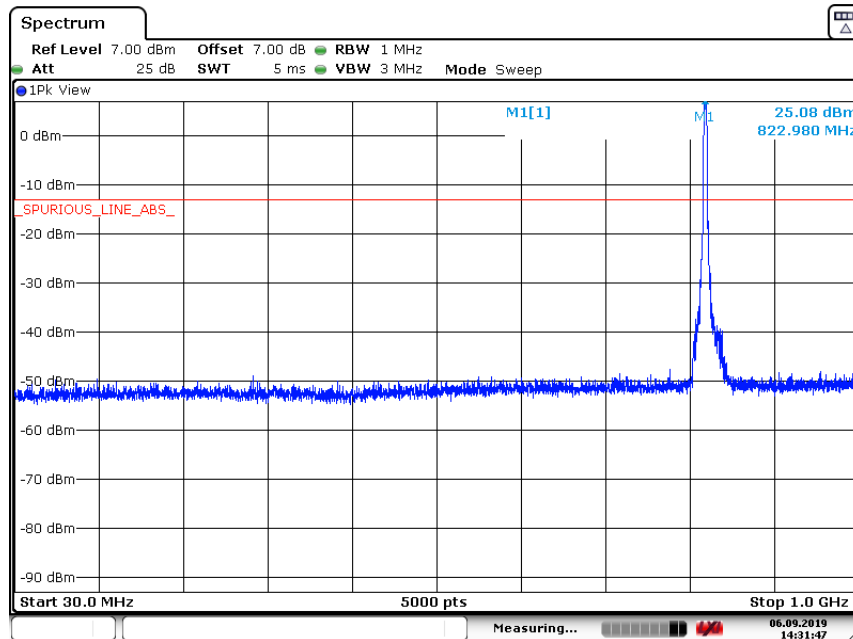

Date: 6.SEP.2019 14:31:47


### A.5.2.8 Channel 684: 1GHz –2.5GHz

Spurious emission limit –13dBm.

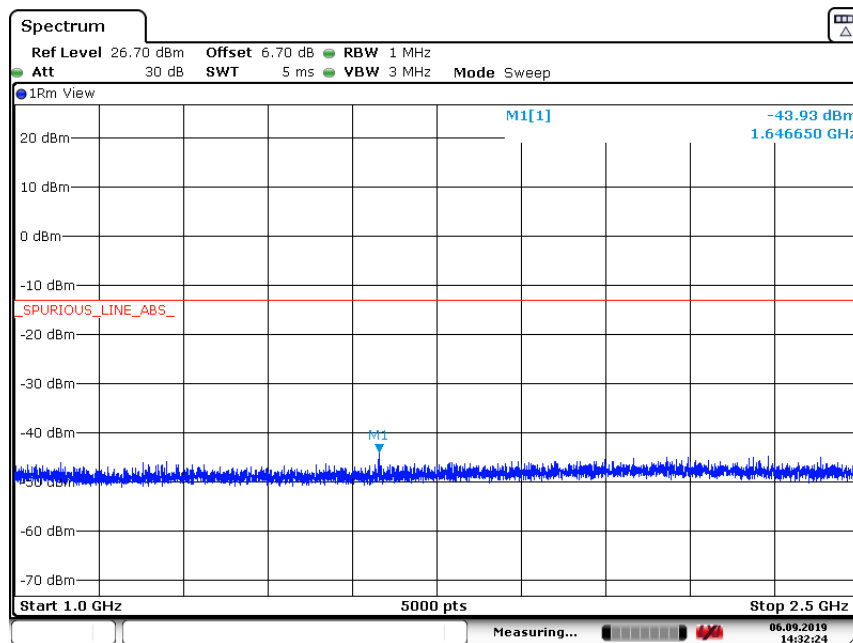


Date: 6.SEP.2019 14:32:24

**A.5.2.9 Channel 684: 2.5GHz –7.5GHz**  
 Spurious emission limit –13dBm.

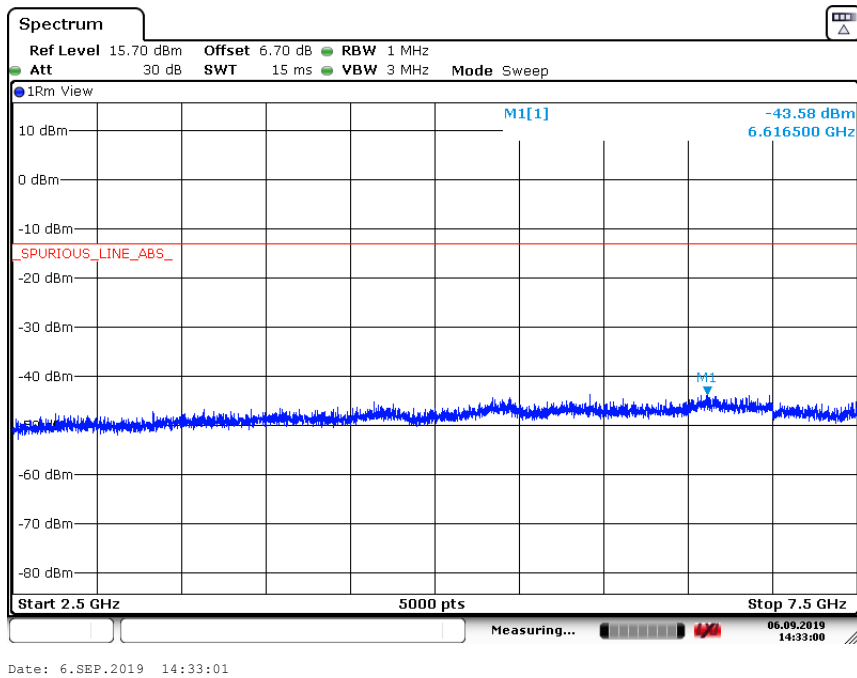


**A.5.2.10 Channel 684: 7.5GHz –10GHz**  
 Spurious emission limit –13dBm.

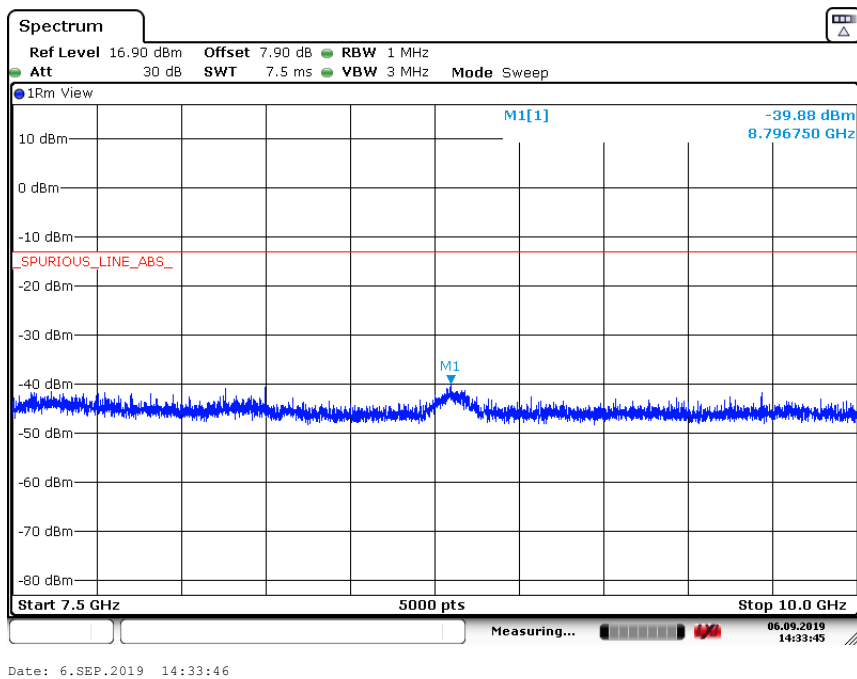


### A.5.2.11 Channel 684: Band Edge

Spurious emission limit -20dBm.

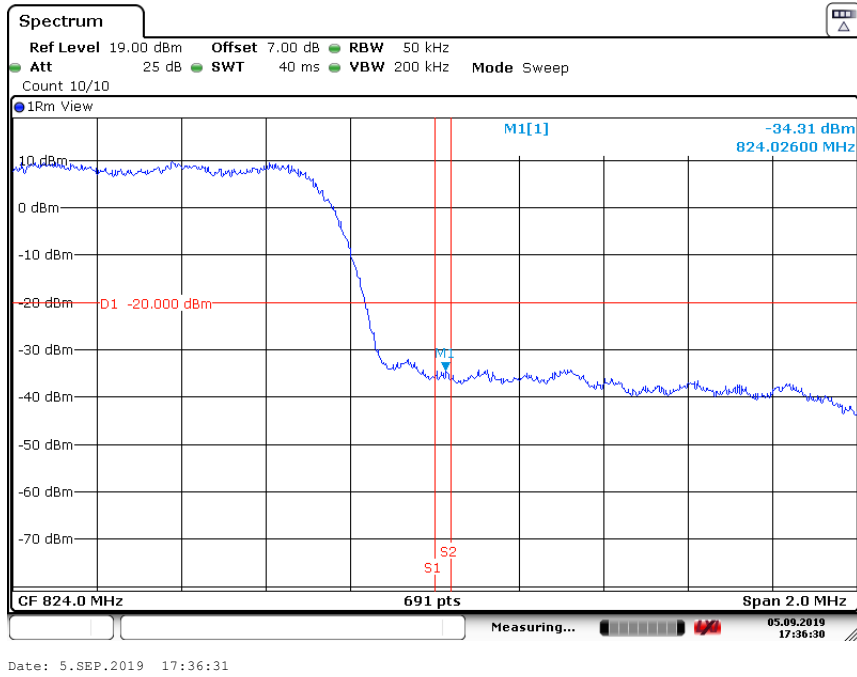

### A.5.2.12 Channel 684: Outer Extended Band Edge

Spurious emission limit -13dBm.

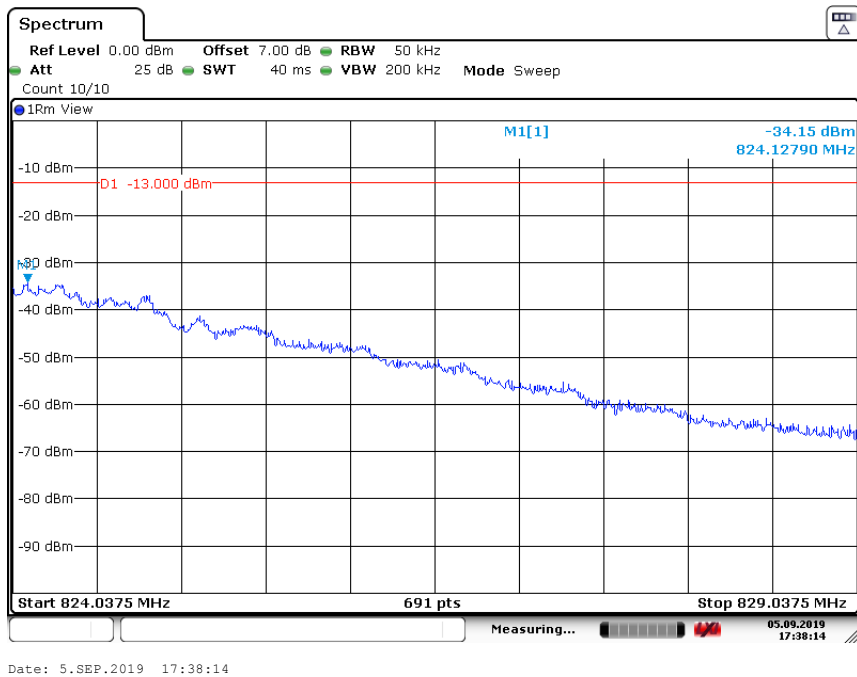

## ANNEX B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> 	
<hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2005</b></p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

\*\*\*END OF REPORT\*\*\*