



TEST REPORT

No. I19Z62071-WMD01

for

OnePlus Technology (shenzhen) Co., Ltd

Smart Phone

Model Name: HD1925

FCC ID: 2ABZ2-EE143

with

Hardware Version: 46

Software Version: 10.0.16.HD61CB

Issued Date: 2019-12-23

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z62071-WMD01	Rev.0	1 st edition	2019-12-23

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATA	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULT	10
7. TEST EQUIPMENT UTILIZED	12
ANNEX A: MEASUREMENT RESULTS	13
A.1 OUTPUT POWER.....	13
A.2 EMISSION LIMIT	19
A.3 FREQUENCY STABILITY	27
A.4 OCCUPIED BANDWIDTH.....	30
A.5 EMISSION BANDWIDTH	48
A.6 BAND EDGE COMPLIANCE	67
A.7 CONDUCTED SPURIOUS EMISSION	79
A.8 PEAK-TO-AVERAGE POWER RATIO	81
ANNEX B: ACCREDITATION CERTIFICATE	82



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL (Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-10-08
Testing End Date: 2019-12-20

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: OnePlus Technology (shenzhen) Co., Ltd
Address /Post: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen
Contact: Ariel Cheng
Email: ariel.cheng@oneplus.com
Telephone: 13823398081

2.2. Manufacturer Information

Company Name: OnePlus Technology (Shenzhen) Co., Ltd.
Address /Post: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen
Contact: Ariel Cheng
Email: ariel.cheng@oneplus.com
Telephone: 13823398081

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	HD1925
FCC ID	2ABZ2-EE143
Antenna	Integrated
Output power	19.98dBm maximum ERP measured for n71
Extreme vol. Limits	3.6VDC to 4.3VDC (nominal: 4VDC)
Extreme temp. Tolerance	0°C to +35°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT73a	990013820111214	46	10.0.16.HD61CB	2019-11-15
UT66a	990013820080781	46	10.0.16.HD61CB	2019-08-30
UT75a	990013820111255	46	10.0.16.HD61CB	2019-11-15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID* Description

AE1	Battery
AE2	Battery

AE1

Model	BLP745
Manufacturer	Sunwoda Electronic Co.,Ltd.
Capacitance	4010mAh

AE2

Model	BLP745
Manufacturer	SUNWODA ELECTRONIC INDIA PRIVATE LIMITED
Capacitance	4010mAh

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI/TIA-102.CAAA -E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 M Ω
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	>2 M Ω
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ± 3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULT

n41

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

n71

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	BR
2	Emission Limit	2.1051/27.53	BR
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	27.53	BR
6	Band Edge Compliance	27.53	BR
7	Conducted Spurious Emission	27.53	BR
8	Peak-to-Average Power Ratio	27.50	BR

Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

This device supports 5G NR (EN-DC) for LTE and n41. The technical specifications are as below:

Combination type: LTE B2-n41,LTE B25-n41,LTE B26-n41, LTE B66-n41

NR SCS: 30 kHz

NR modulation: DFT-s-OFDM QPSK / 16QAM / 64QAM/256QAM

CP-OFDM QPSK / 16QAM / 64QAM / 256QAM

NR BW: 20/40/50/60/80/90/100MHz

The n41 result given in the report is tested under the LTE B26-n41 combination.



This device supports 5G NR (EN-DC) for LTE and n71. The technical specifications are as below:

Combination type: LTE B2-n71, LTE B66-n71

NR SCS: 15 kHz

NR modulation: DFT-s-OFDM QPSK / 16QAM / 64QAM

CP-OFDM QPSK / 16QAM / 64QAM / 256QAM

NR BW: 5/10/15/20MHz

The n71 result given in the report is tested under the LTE B2-n71 combination.

The Equipment Under Test (EUT) model HD1925 (FCC ID: 2ABZ2-EE143) is a variant product of HD1925 (FCC ID:2ABZ2-EE143), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, n71 Frequency Stability and n41 measurements were performed on this device. The other test results of n71 were obtained from the test report of No.119Z61344-WMD06.

For detail differences between two models please refer the Declaration of Changes document.

7. Test Equipment Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	UXM 5G Wireless Test Platform	E7515B	MY59020623	Keysight	2021-03-31	2 year
2	Signal Analyzer	FSV	101576	R&S	2020-05-03	1 year
3	Spectrum Analyzer	FSU26	200030	R&S	2020-06-03	1 year
4	Spectrum Analyzer	FSV30	101576	R&S	2020-05-03	1 year
5	Climate chamber	SH-242	93008556	ESPEC	2020-12-21	3 year
6	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-11-20	1 year
7	EMI Antenna	VULB9163	9163-301	Schwarzbeck	2020-02-29	1 year
8	EMI Antenna	3117	00058889	ETS-Lindgren	2020-01-02	1 year
9	EMI Antenna	3117	00119024	ETS-Lindgren	2020-02-25	1 year
10	EMI Antenna	9117	167	Schwarzbeck	2020-05-27	1 year
11	Signal Generator	N5183A	MY49060052	Agilent	2020-06-24	1 year
12	Test Receiver	E4440A	MY48250642	Agilent	2020-03-18	1 year
13	Power Amplifier	5S1G4	0341863	AR	/	/

Note: The VULB9163 EMI Antenna which series number is 9163-235 was in Cal Due Date when tested.

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was set up for the max output power with proper modulation.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Measurement result

n41

Test Freq Description	5G-n41						Power Results (dBm)
	SCS (kHz)	NR BW (MHz)	Modulation	RB allocation	NR Test Freq. (MHz)	NR Test CH.	n41
High	30	20	DFT-s-OFDM QPSK	Edge_1RB_Right	2679.99	535998	19.34
Middle-1	30	20	DFT-s-OFDM QPSK	Inner_Full	2636.49	527298	19.61
Middle-2	30	20	DFT-s-OFDM QPSK	Inner_Full	2592.99	518598	19.89
Middle-3	30	20	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.88
Low	30	20	DFT-s-OFDM QPSK	Edge_1RB_Left	2506.02	501204	19.76
High	30	100	DFT-s-OFDM QPSK	Edge_1RB_Right	2640	528000	19.75
Middle-1	30	100	DFT-s-OFDM QPSK	Inner_Full	2616.495	523299	19.68
Middle-2	30	100	DFT-s-OFDM QPSK	Inner_Full	2592.99	518598	19.57
Middle-3	30	100	DFT-s-OFDM QPSK	Inner_Full	2569.5	513900	19.34
Low	30	100	DFT-s-OFDM QPSK	Edge_1RB_Left	2546.01	509202	19.38
default	30	20	DFT-s-OFDM 16QAM	Inner_Full	2549.505	509400	19.82
default	30	20	DFT-s-OFDM 64QAM	Inner_Full	2549.505	509400	19.76
default	30	20	DFT-s-OFDM 256QAM	Inner_Full	2549.505	509400	19.00
default	30	20	CP-OFDM QPSK	Inner_Full	2549.505	509400	19.80
default	30	20	CP-OFDM 16QAM	Inner_Full	2549.505	509400	19.81
default	30	20	CP-OFDM 64QAM	Inner_Full	2549.505	509400	19.48
default	30	20	CP-OFDM 256QAM	Inner_Full	2549.505	509400	17.26
default	30	20	DFT-s-OFDM QPSK	Edge_Full_Right	2549.505	509400	19.65
default	30	20	DFT-s-OFDM QPSK	Edge_Full_Left	2549.505	509400	19.27
default	30	20	DFT-s-OFDM QPSK	Inner_1RB_Right	2549.505	509400	19.05
default	30	20	DFT-s-OFDM QPSK	Inner_1RB_Left	2549.505	509400	19.36
default	30	20	DFT-s-OFDM QPSK	Outer_Full	2549.505	509400	19.00
default	30	40	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.85
default	30	50	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.48
default	30	60	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.56
default	30	80	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.19
default	30	90	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.25

n71

Test Freq Description	5G-n71						Power Results (dBm)
	SCS (kHz)	NR BW (MHz)	Modulation	RB allocation	NR Test Freq. (MHz)	NR Test CH.	n71
High	15	5	DFT-s-OFDM QPSK	Edge_1RB_Right	695.5	139100	19.27
Middle-1	15	5	DFT-s-OFDM QPSK	Inner_Full	688	137600	19.98
Middle-2	15	5	DFT-s-OFDM QPSK	Inner_Full	680.5	136100	19.44
Middle-3	15	5	DFT-s-OFDM QPSK	Inner_Full	673	134600	19.94
Low	15	5	DFT-s-OFDM QPSK	Edge_1RB_Left	665.5	133100	18.07
High	15	20	DFT-s-OFDM QPSK	Edge_1RB_Right	688	137600	19.00
Middle-1	15	20	DFT-s-OFDM QPSK	Inner_Full	684.25	136850	19.63
Middle-2	15	20	DFT-s-OFDM QPSK	Inner_Full	680.5	136100	19.77
Middle-3	15	20	DFT-s-OFDM QPSK	Inner_Full	676.75	135350	19.63
Low	15	20	DFT-s-OFDM QPSK	Edge_1RB_Left	673	134600	18.08
default	15	5	DFT-s-OFDM 16QAM	Inner_Full	688	137600	19.03
default	15	5	DFT-s-OFDM 64QAM	Inner_Full	688	137600	18.70
default	15	5	CP-OFDM QPSK	Inner_Full	688	137600	19.96
default	15	5	CP-OFDM 16QAM	Inner_Full	688	137600	19.02
default	15	5	CP-OFDM 64QAM	Inner_Full	688	137600	18.70
default	15	5	DFT-s-OFDM QPSK	Edge_Full_Right	688	137600	19.23
default	15	5	DFT-s-OFDM QPSK	Edge_Full_Left	688	137600	18.39
default	15	5	DFT-s-OFDM QPSK	Inner_1RB_Right	688	137600	19.39
default	15	5	DFT-s-OFDM QPSK	Inner_1RB_Left	688	137600	19.75
default	15	5	DFT-s-OFDM QPSK	Outer_Full	688	137600	18.68
default	15	10	DFT-s-OFDM QPSK	Inner_Full	688	137600	18.32
default	15	15	DFT-s-OFDM QPSK	Inner_Full	688	137600	18.62

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP."

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP."

A.1.3.2 Method of Measurement

ANSI C63.26-2015 Subclause 5.2.5.5, For personal/portable radios utilizing an integral antenna, the factor LC is typically negligible. However, in a fixed station transmit system that utilizes a long cable run between the transmitter and the transmitting antenna, this factor can be significant. The minimum cable loss should be used in this equation.

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

A.1.3.3 Measurement result

n41

Limits: ≤ 33.00 dBm (2W)

Test Freq Description	5G-n41						Power Results (dBm)		
	SCS (kHz)	NR BW (MHz)	Modulation	RB allocation	NR Test Freq. (MHz)	NR Test CH.	n41	G _T	Radiated n41
High	30	20	DFT-s-OFDM QPSK	Edge_1RB_Right	2679.99	535998	19.34	-3.00	16.34
Middle-1	30	20	DFT-s-OFDM QPSK	Inner_Full	2636.49	527298	19.61	-3.00	16.61
Middle-2	30	20	DFT-s-OFDM QPSK	Inner_Full	2592.99	518598	19.89	-3.00	16.89
Middle-3	30	20	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.88	-3.00	16.88
Low	30	20	DFT-s-OFDM QPSK	Edge_1RB_Left	2506.02	501204	19.76	-3.00	16.76
High	30	100	DFT-s-OFDM QPSK	Edge_1RB_Right	2640	528000	19.75	-3.00	16.75
Middle-1	30	100	DFT-s-OFDM QPSK	Inner_Full	2616.495	523299	19.68	-3.00	16.68
Middle-2	30	100	DFT-s-OFDM QPSK	Inner_Full	2592.99	518598	19.57	-3.00	16.57
Middle-3	30	100	DFT-s-OFDM QPSK	Inner_Full	2569.5	513900	19.34	-3.00	16.34
Low	30	100	DFT-s-OFDM QPSK	Edge_1RB_Left	2546.01	509202	19.38	-3.00	16.38
default	30	20	DFT-s-OFDM 16QAM	Inner_Full	2549.505	509400	19.82	-3.00	16.82
default	30	20	DFT-s-OFDM 64QAM	Inner_Full	2549.505	509400	19.76	-3.00	16.76
default	30	20	DFT-s-OFDM 256QAM	Inner_Full	2549.505	509400	19.00	-3.00	16
default	30	20	CP-OFDM QPSK	Inner_Full	2549.505	509400	19.80	-3.00	16.8
default	30	20	CP-OFDM 16QAM	Inner_Full	2549.505	509400	19.81	-3.00	16.81
default	30	20	CP-OFDM 64QAM	Inner_Full	2549.505	509400	19.48	-3.00	16.48
default	30	20	CP-OFDM 256QAM	Inner_Full	2549.505	509400	17.26	-3.00	14.26
default	30	20	DFT-s-OFDM QPSK	Edge_Full_Right	2549.505	509400	19.65	-3.00	16.65
default	30	20	DFT-s-OFDM QPSK	Edge_Full_Left	2549.505	509400	19.27	-3.00	16.27
default	30	20	DFT-s-OFDM QPSK	Inner_1RB_Right	2549.505	509400	19.05	-3.00	16.05
default	30	20	DFT-s-OFDM QPSK	Inner_1RB_Left	2549.505	509400	19.36	-3.00	16.36
default	30	20	DFT-s-OFDM QPSK	Outer_Full	2549.505	509400	19.00	-3.00	16
default	30	40	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.85	-3.00	16.85
default	30	50	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.48	-3.00	16.48
default	30	60	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.56	-3.00	16.56
default	30	80	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.19	-3.00	16.19
default	30	90	DFT-s-OFDM QPSK	Inner_Full	2549.505	509400	19.25	-3.00	16.25

n71- ERP

Limits: ≤34.77 dBm (3W)

Test Freq Description	5G-n71						Power Results (dBm)		
	SCS (kHz)	NR BW (MHz)	Modulation	RB allocation	NR Test Freq. (MHz)	NR Test CH.	Conducted n71	GT	Radiated n71
High	15	5	DFT-s-OFDM QPSK	Edge_1RB_Right	695.5	139100	19.27	-3.00	16.27
Middle-1	15	5	DFT-s-OFDM QPSK	Inner_Full	688	137600	19.98	-3.00	16.98
Middle-2	15	5	DFT-s-OFDM QPSK	Inner_Full	680.5	136100	19.44	-3.00	16.44
Middle-3	15	5	DFT-s-OFDM QPSK	Inner_Full	673	134600	19.94	-3.00	16.94
Low	15	5	DFT-s-OFDM QPSK	Edge_1RB_Left	665.5	133100	18.07	-3.00	15.07
High	15	20	DFT-s-OFDM QPSK	Edge_1RB_Right	688	137600	19.00	-3.00	16.00
Middle-1	15	20	DFT-s-OFDM QPSK	Inner_Full	684.25	136850	19.63	-3.00	16.63
Middle-2	15	20	DFT-s-OFDM QPSK	Inner_Full	680.5	136100	19.77	-3.00	16.77
Middle-3	15	20	DFT-s-OFDM QPSK	Inner_Full	676.75	135350	19.63	-3.00	16.63
Low	15	20	DFT-s-OFDM QPSK	Edge_1RB_Left	673	134600	18.08	-3.00	15.08
default	15	5	DFT-s-OFDM 16QAM	Inner_Full	688	137600	19.03	-3.00	16.03
default	15	5	DFT-s-OFDM 64QAM	Inner_Full	688	137600	18.70	-3.00	15.70
default	15	5	CP-OFDM QPSK	Inner_Full	688	137600	19.96	-3.00	16.96
default	15	5	CP-OFDM 16QAM	Inner_Full	688	137600	19.02	-3.00	16.02
default	15	5	CP-OFDM 64QAM	Inner_Full	688	137600	18.70	-3.00	15.70
default	15	5	DFT-s-OFDM QPSK	Edge_Full_Right	688	137600	19.23	-3.00	16.23
default	15	5	DFT-s-OFDM QPSK	Edge_Full_Left	688	137600	18.39	-3.00	15.39
default	15	5	DFT-s-OFDM QPSK	Inner_1RB_Right	688	137600	19.39	-3.00	16.39
default	15	5	DFT-s-OFDM QPSK	Inner_1RB_Left	688	137600	19.75	-3.00	16.75
default	15	5	DFT-s-OFDM QPSK	Outer_Full	688	137600	18.68	-3.00	15.68
default	15	10	DFT-s-OFDM QPSK	Inner_Full	688	137600	18.32	-3.00	15.32
default	15	15	DFT-s-OFDM QPSK	Inner_Full	688	137600	18.62	-3.00	15.62

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in C63.26-2015 are used. This measurement is carried out in fully anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the NR n41 and n71.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360 and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

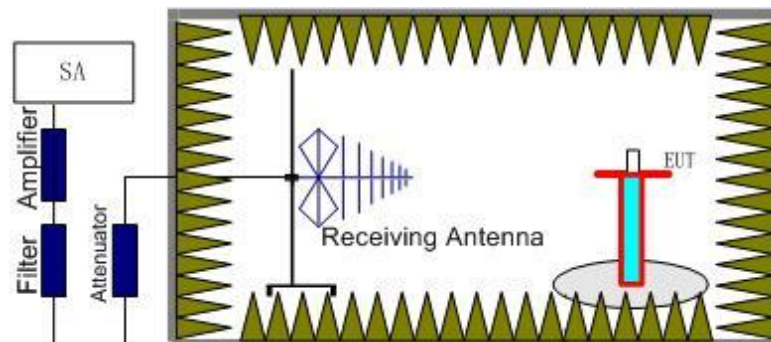

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

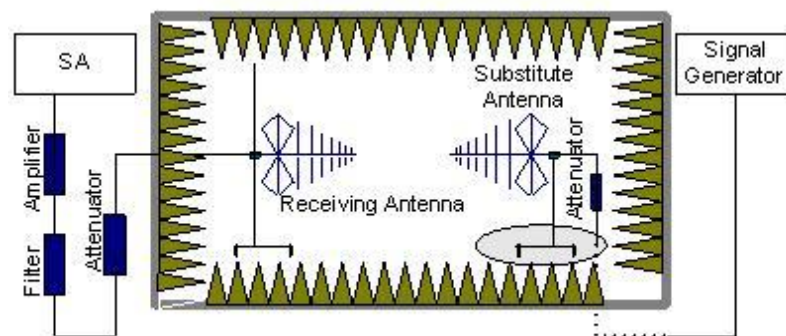

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 27.53(g) specifies that for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the NR n41 and n71. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the NR n41 and n71 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The range of evaluated frequency is from 30MHz to 26GHz.

(EUT 75a)

LTE band 2- NR n41, 20MHz, QPSK, Channel 501204

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5023.02	-57.31	6.56	9.93	-53.94	-25.00	28.94	H
7531.01	-55.02	8.26	12.22	-51.06	-25.00	26.06	V
10001.01	-52.69	9.18	12.90	-48.97	-25.00	23.97	H
12536.01	-50.00	10.28	13.22	-47.06	-25.00	22.06	V
15030.00	-45.13	11.26	13.98	-42.41	-25.00	17.41	H
17572.00	-42.82	13.00	15.00	-40.82	-25.00	15.82	V

LTE band 2- NR n41, 20MHz, QPSK, Channel 518598

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5166.02	-57.04	6.91	10.13	-53.82	-25.00	28.82	V
7758.01	-54.68	8.35	12.41	-50.62	-25.00	25.62	V
10356.01	-51.31	9.73	13.04	-48.00	-25.00	23.00	H
12994.01	-48.69	10.47	13.50	-45.66	-25.00	20.66	V
15569.00	-44.94	11.50	13.70	-42.74	-25.00	17.74	H
16867.00	-41.66	12.04	13.75	-39.95	-25.00	14.95	H

LTE band 2- NR n41, 20MHz, QPSK, Channel 535998

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5357.02	-56.50	6.92	10.40	-53.02	-25.00	28.02	V
8064.01	-54.68	8.32	12.65	-50.35	-25.00	25.35	H
10715.01	-51.44	9.34	13.14	-47.64	-25.00	22.64	V
13422.01	-47.35	10.58	14.09	-43.84	-25.00	18.84	V
16103.00	-45.70	11.85	13.68	-43.87	-25.00	18.87	V
17400.00	-42.17	12.50	14.68	-39.99	-25.00	14.99	H

Sample calculation: 5357.02 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_a$$

$$\begin{aligned} \text{Peak EIRP (dBm)} &= P_{\text{Mea}}(-56.50 \text{ dBm}) - P_{\text{pl}}(6.92 \text{ dB}) + G_a(10.40 \text{ dBi}) \\ &= -53.02 \text{ dBm} \end{aligned}$$

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16 \text{ dB}$, $k = 2$.

LTE band 25- NR n41, 20MHz, QPSK, Channel 501204

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5036.02	-57.81	6.59	9.95	-54.45	-25.00	29.45	H
7530.01	-54.44	8.27	12.22	-50.49	-25.00	25.49	H
10015.01	-52.96	9.22	12.91	-49.27	-25.00	24.27	V
12544.01	-49.07	10.30	13.23	-46.14	-25.00	21.14	V
15038.00	-45.36	11.27	13.98	-42.65	-25.00	17.65	V
17563.00	-42.46	12.97	14.99	-40.44	-25.00	15.44	H

LTE band 25- NR n41, 20MHz, QPSK, Channel 518598

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5167.02	-56.77	6.91	10.13	-53.55	-25.00	28.55	V
7757.01	-55.11	8.35	12.41	-51.05	-25.00	26.05	H
10351.01	-51.34	9.72	13.04	-48.02	-25.00	23.02	H
12975.01	-49.70	10.48	13.49	-46.69	-25.00	21.69	H
15555.00	-45.61	11.51	13.70	-43.42	-25.00	18.42	V
16859.00	-41.76	12.04	13.74	-40.06	-25.00	15.06	V

LTE band 25- NR n41, 20MHz, QPSK, Channel 535998

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5349.02	-56.49	6.94	10.39	-53.04	-25.00	28.04	H
8051.01	-54.88	8.32	12.64	-50.56	-25.00	25.56	H
10704.01	-52.07	9.31	13.14	-48.24	-25.00	23.24	V
13395.01	-48.07	10.57	14.05	-44.59	-25.00	19.59	V
16082.00	-45.93	11.85	13.68	-44.10	-25.00	19.10	H
17406.00	-43.02	12.51	14.69	-40.84	-25.00	15.84	H

Sample calculation: 5349.02 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_a$$

$$\begin{aligned} \text{Peak EIRP (dBm)} &= P_{\text{Mea}}(-56.49 \text{ dBm}) - P_{\text{pl}}(6.94 \text{ dB}) + G_a(10.39 \text{ dBi}) \\ &= -53.04 \text{ dBm} \end{aligned}$$

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16 \text{ dB}$, $k = 2$.

LTE band 26- NR n41, 20MHz, QPSK, Channel 501204

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5000.02	-51.54	6.60	9.90	-48.24	-25.00	23.24	H
7498.01	-54.68	8.39	12.20	-50.87	-25.00	25.87	V
10026.01	-52.59	9.25	12.91	-48.93	-25.00	23.93	H
12507.01	-49.01	10.19	13.20	-46.00	-25.00	21.00	H
15035.00	-45.14	11.26	13.98	-42.42	-25.00	17.42	V
17531.00	-43.49	12.84	14.94	-41.39	-25.00	16.39	H

LTE band 26- NR n41, 20MHz, QPSK, Channel 518598

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5172.02	-49.94	6.92	10.14	-46.72	-25.00	21.72	V
7755.01	-54.87	8.35	12.40	-50.82	-25.00	25.82	V
10390.01	-51.09	9.79	13.06	-47.82	-25.00	22.82	V
12943.01	-49.27	10.49	13.47	-46.29	-25.00	21.29	V
15558.00	-45.09	11.50	13.70	-42.89	-25.00	17.89	V
16828.00	-41.70	12.08	13.73	-40.05	-25.00	15.05	V

LTE band 26- NR n41, 20MHz, QPSK, Channel 535998

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5347.02	-49.09	6.94	10.39	-45.64	-25.00	20.64	H
8044.01	-54.67	8.32	12.64	-50.35	-25.00	25.35	H
10731.01	-50.62	9.38	13.15	-46.85	-25.00	21.85	H
13412.01	-47.16	10.58	14.08	-43.66	-25.00	18.66	V
16078.00	-45.59	11.85	13.68	-43.76	-25.00	18.76	H
17421.00	-42.28	12.55	14.73	-40.10	-25.00	15.10	V

Sample calculation: 5347.02 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_{\text{a}}$$

$$\begin{aligned} \text{Peak EIRP (dBm)} &= P_{\text{Mea}}(-49.09 \text{ dBm}) - P_{\text{pl}}(6.94 \text{ dB}) + G_{\text{a}}(10.39 \text{ dBi}) \\ &= -45.64 \text{ dBm} \end{aligned}$$

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16 \text{ dB}$, $k = 2$.

LTE band 66- NR n41, 20MHz, QPSK, Channel 501204

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5027.02	-57.54	6.57	9.94	-54.17	-25.00	29.17	V
7495.01	-55.03	8.38	12.19	-51.22	-25.00	26.22	V
10004.01	-53.17	9.19	12.90	-49.46	-25.00	24.46	H
12550.01	-48.87	10.32	13.23	-45.96	-25.00	20.96	H
15023.00	-44.85	11.25	13.99	-42.11	-25.00	17.11	H
17558.00	-43.27	12.95	14.98	-41.24	-25.00	16.24	H

LTE band 66- NR n41, 20MHz, QPSK, Channel 518598

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5197.02	-56.85	6.96	10.18	-53.63	-25.00	28.63	V
7776.01	-55.13	8.32	12.42	-51.03	-25.00	26.03	V
10342.01	-51.35	9.71	13.04	-48.02	-25.00	23.02	V
12946.01	-49.26	10.49	13.47	-46.28	-25.00	21.28	V
15551.00	-45.08	11.51	13.70	-42.89	-25.00	17.89	V
16850.00	-41.86	12.06	13.74	-40.18	-25.00	15.18	V

LTE band 66- NR n41, 20MHz, QPSK, Channel 535998

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5346.02	-57.18	6.94	10.38	-53.74	-25.00	28.74	V
8061.01	-55.14	8.32	12.65	-50.81	-25.00	25.81	H
10724.01	-51.91	9.36	13.14	-48.13	-25.00	23.13	H
13421.01	-47.88	10.58	14.09	-44.37	-25.00	19.37	V
16055.00	-44.68	11.84	13.69	-42.83	-25.00	17.83	V
17397.00	-42.74	12.50	14.67	-40.57	-25.00	15.57	H

Sample calculation: 5346.02 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_a$$

$$\begin{aligned} \text{Peak EIRP (dBm)} &= P_{\text{Mea}}(-57.18 \text{ dBm}) - P_{\text{pl}}(6.94 \text{ dB}) + G_a(10.38 \text{ dBi}) \\ &= -53.74 \text{ dBm} \end{aligned}$$

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16 \text{ dB}$, $k = 2$.

(EUT 66a)

LTE band 2- NR n71, 5MHz, QPSK, Channel 133100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1306.01	-60.43	3.12	4.49	2.15	-61.21	-13.00	48.21	V
1968.01	-49.12	3.96	4.66	2.15	-50.57	-13.00	37.57	H
2632.00	-51.88	4.73	6.34	2.15	-52.42	-13.00	39.42	H
3329.02	-54.33	5.30	7.79	2.15	-53.99	-13.00	40.99	H
3963.02	-55.08	6.10	8.85	2.15	-54.48	-13.00	41.48	H
4643.02	-54.22	6.46	9.54	2.15	-53.29	-13.00	40.29	H

LTE band 2- NR n71, 5MHz, QPSK, Channel 136100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1348.01	-60.63	3.17	4.71	2.15	-61.24	-13.00	48.24	V
2027.00	-56.82	4.13	4.68	2.15	-58.42	-13.00	45.42	V
2715.00	-52.70	4.80	6.49	2.15	-53.16	-13.00	40.16	V
3401.02	-55.71	5.36	7.96	2.15	-55.26	-13.00	42.26	V
4088.02	-55.66	6.04	8.99	2.15	-54.86	-13.00	41.86	H
4755.01	-55.25	6.58	9.66	2.15	-54.32	-13.00	41.32	H

LTE band 2- NR n71, 5MHz, QPSK, Channel 139100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1393.01	-61.12	3.23	4.94	2.15	-61.56	-13.00	48.56	H
2114.00	-56.75	4.20	4.94	2.15	-58.16	-13.00	45.16	V
2800.00	-53.29	4.91	6.64	2.15	-53.71	-13.00	40.71	H
3450.02	-55.20	5.43	8.08	2.15	-54.70	-13.00	41.70	H
4183.02	-55.09	6.17	9.08	2.15	-54.33	-13.00	41.33	V
4859.01	-55.14	6.72	9.76	2.15	-54.25	-13.00	41.25	H

Sample calculation: 1393.01 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_a$$

$$\begin{aligned} \text{Peak ERP (dBm)} &= P_{\text{Mea}}(-61.12 \text{ dBm}) - P_{\text{pl}}(3.23 \text{ dB}) + G_a(4.94 \text{ dBi}) - 2.15 \text{ dBm} \\ &= -61.56 \text{ dBm} \end{aligned}$$

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16 \text{ dB}$, $k = 2$.

LTE band 66- NR n71, 5MHz, QPSK, Channel 133100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1349.01	-54.27	3.17	4.71	2.15	-54.88	-13.00	41.88	H
2002.00	-56.77	4.06	4.61	2.15	-58.37	-13.00	45.37	V
2632.00	-52.53	4.73	6.34	2.15	-53.07	-13.00	40.07	V
3351.02	-54.27	5.32	7.84	2.15	-53.90	-13.00	40.90	H
3991.02	-55.37	6.07	8.89	2.15	-54.70	-13.00	41.70	H
4646.02	-54.13	6.46	9.55	2.15	-53.19	-13.00	40.19	V

LTE band 66- NR n71, 5MHz, QPSK, Channel 136100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1347.01	-55.18	3.17	4.70	2.15	-55.80	-13.00	42.80	H
2037.00	-57.09	4.13	4.71	2.15	-58.66	-13.00	45.66	V
2728.00	-52.68	4.81	6.51	2.15	-53.13	-13.00	40.13	V
3392.02	-55.25	5.35	7.94	2.15	-54.81	-13.00	41.81	V
4081.02	-55.21	6.04	8.98	2.15	-54.42	-13.00	41.42	H
4752.01	-55.75	6.58	9.65	2.15	-54.83	-13.00	41.83	V

LTE band 66- NR n71, 5MHz, QPSK, Channel 139100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1399.01	-61.26	3.23	4.97	2.15	-61.67	-13.00	48.67	H
2108.00	-56.77	4.20	4.92	2.15	-58.20	-13.00	45.20	V
2771.00	-52.71	4.87	6.59	2.15	-53.14	-13.00	40.14	V
3450.02	-55.73	5.43	8.08	2.15	-55.23	-13.00	42.23	H
4182.02	-54.68	6.17	9.08	2.15	-53.92	-13.00	40.92	V
4883.01	-54.59	6.72	9.78	2.15	-53.68	-13.00	40.68	H

Sample calculation: 1399.01 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_a$$

$$\begin{aligned} \text{Peak ERP (dBm)} &= P_{\text{Mea}}(-61.26 \text{ dBm}) - P_{\text{cl}}(3.23 \text{ dB}) + G_a(4.97 \text{ dBi}) - 2.15 \text{ dBm} \\ &= -61.67 \text{ dBm} \end{aligned}$$

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16 \text{ dB}$, $k = 2$.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of UXM.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the UXM, and in a simulated call on middle channel for n41 and n71, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the UXM and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.3VDC, with a nominal voltage of 4VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

n41, 100MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)							
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
3.6	20	-20.64	-42.74	-85.35	-92.35	3.71	-21.38	-30.24	-88.71
4		-13.20	-67.25	-82.71	-97.45	4.56	-23.30	-38.66	-90.26
4.3		-4.74	-40.38	-69.22	-50.29	-5.35	-44.41	-79.94	-72.67

Voltage (V)	Temperature (°C)	Frequency error (ppm)							
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
3.6	20	0.008	0.017	0.033	0.036	0.001	0.008	0.012	0.034
4		0.005	0.026	0.032	0.038	0.002	0.009	0.015	0.035
4.3		0.002	0.016	0.027	0.019	0.002	0.017	0.031	0.028

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)							
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
-30	4	-23.10	-36.34	-32.44	-74.41	7.89	-16.87	-29.55	-67.94
-20		-19.21	-68.68	-89.89	-65.78	3.61	-27.79	-56.70	-23.59
-10		-16.49	-66.82	-77.32	-91.22	-9.96	-17.51	-59.93	-75.96
0		-8.79	-63.10	-82.72	-35.06	-12.04	-6.85	-40.12	-77.10
10		-14.59	-51.81	-77.60	-63.04	6.65	-29.95	-54.15	-51.57
20		-6.36	-52.09	-78.41	-79.33	-9.28	-26.36	-50.28	-62.07
30		-20.25	-36.08	-73.97	-62.77	-2.76	-16.38	-64.77	-81.53
40		-19.23	-57.32	-80.65	-88.12	1.89	-43.55	-41.29	-75.23
50		-17.95	-67.31	-81.25	-73.52	-1.47	-30.63	-68.82	-76.30

Temperature (°C)	Voltage (V)	Frequency error (ppm)							
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
-30	4	0.009	0.014	0.013	0.029	0.003	0.007	0.011	0.026
-20		0.007	0.027	0.035	0.025	0.001	0.011	0.022	0.009
-10		0.006	0.026	0.030	0.035	0.004	0.007	0.023	0.029
0		0.003	0.024	0.032	0.014	0.005	0.003	0.016	0.030
10		0.006	0.020	0.030	0.024	0.003	0.012	0.021	0.020
20		0.003	0.020	0.030	0.031	0.004	0.010	0.019	0.024
30		0.008	0.014	0.029	0.024	0.001	0.006	0.025	0.031
40		0.007	0.022	0.031	0.034	0.001	0.017	0.016	0.029
50		0.007	0.026	0.031	0.028	0.001	0.012	0.027	0.029

n71, 20MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)						
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
3.6	20	-8.11	-10.70	-25.39	-14.74	4.21	3.48	3.61
4		-17.42	-6.03	-14.46	-16.57	3.38	6.43	2.04
4.3		-6.71	-8.56	6.00	-13.90	9.01	5.62	1.38

Voltage (V)	Temperature (°C)	Frequency error (ppm)						
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
3.6	20	0.012	0.016	0.037	0.022	0.006	0.005	0.005
4		0.026	0.009	0.021	0.024	0.005	0.009	0.003
4.3		0.010	0.013	0.009	0.020	0.013	0.008	0.002

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)						
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
-30	4	-9.38	-10.03	-6.45	-11.02	1.46	-2.09	2.20
-20		-8.23	-4.24	-7.29	-10.29	2.55	3.26	1.35
-10		-9.26	-9.76	-5.27	-13.27	1.26	1.29	1.90
0		-5.62	-9.60	-17.41	-9.92	5.06	-3.09	-1.62
10		-3.74	-11.62	-8.80	-12.87	1.97	3.83	-3.28
20		-17.09	-7.33	-6.41	-14.61	2.00	4.00	4.22
30		5.27	-6.11	-3.37	-21.17	3.14	1.97	4.05
40		-13.10	-3.35	-4.46	-9.86	2.58	5.69	-6.06
50		-4.49	-8.25	-9.20	-15.28	1.63	3.56	3.21

Temperature (°C)	Voltage (V)	Frequency error (ppm)						
		CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
-30	4	0.014	0.015	0.009	0.016	0.002	0.003	0.003
-20		0.012	0.006	0.011	0.015	0.004	0.005	0.002
-10		0.014	0.014	0.008	0.020	0.002	0.002	0.003
0		0.008	0.014	0.026	0.015	0.007	0.005	0.002
10		0.005	0.017	0.013	0.019	0.003	0.006	0.005
20		0.025	0.011	0.009	0.021	0.003	0.006	0.006
30		0.008	0.009	0.005	0.031	0.005	0.003	0.006
40		0.019	0.005	0.007	0.014	0.004	0.008	0.009
50		0.007	0.012	0.014	0.022	0.002	0.005	0.005

A.4 OCCUPIED BANDWIDTH

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

n41, 20MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)							
	CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
2592.99	18523.88	18639.65	18755.43	18581.77	18292.33	18350.22	18176.56	18176.56

n41, 20MHz Bandwidth, CP-QPSK (99% BW)

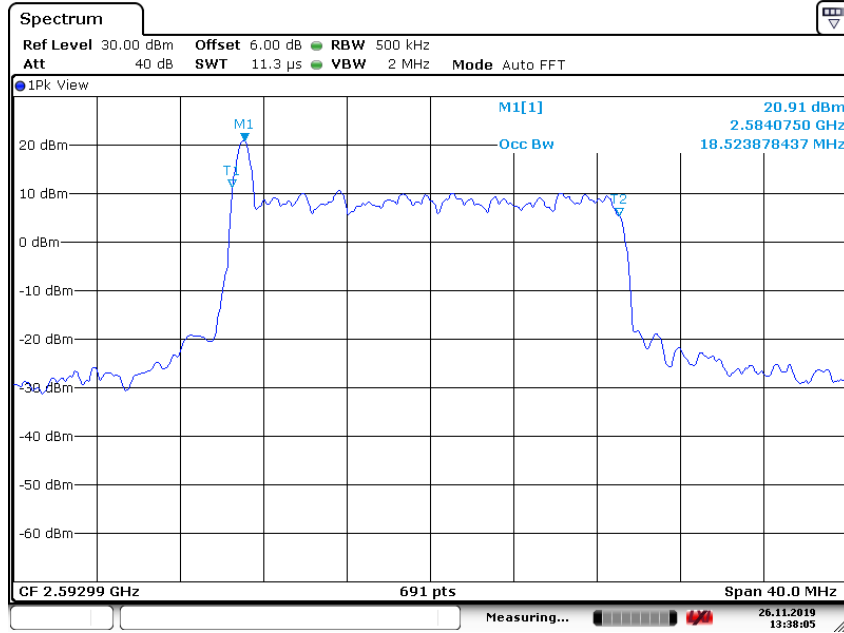


Date: 26.NOV.2019 13:38:05

n41, 20MHz Bandwidth, CP-16QAM (99% BW)

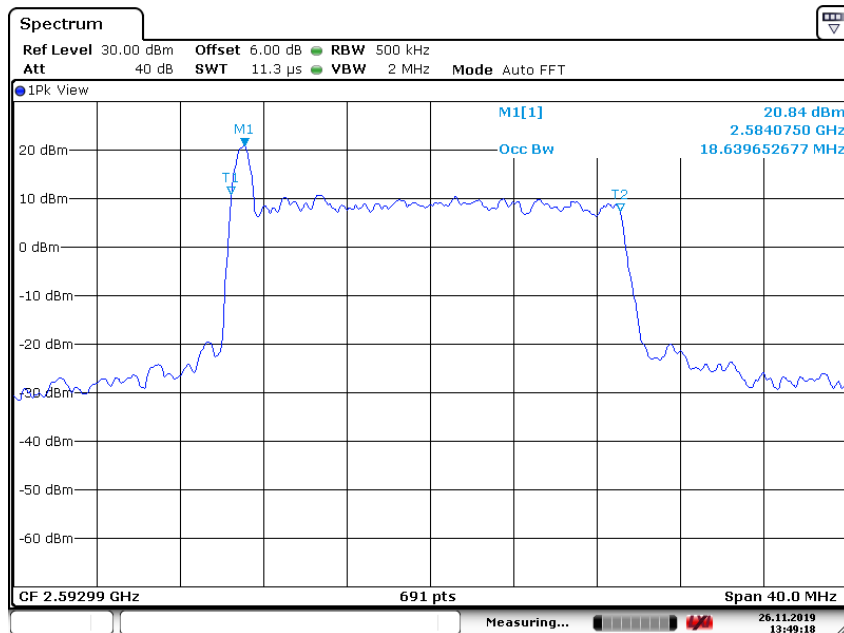


Date: 26.NOV.2019 13:49:18

n41, 20MHz Bandwidth,CP-64QAM (99% BW)

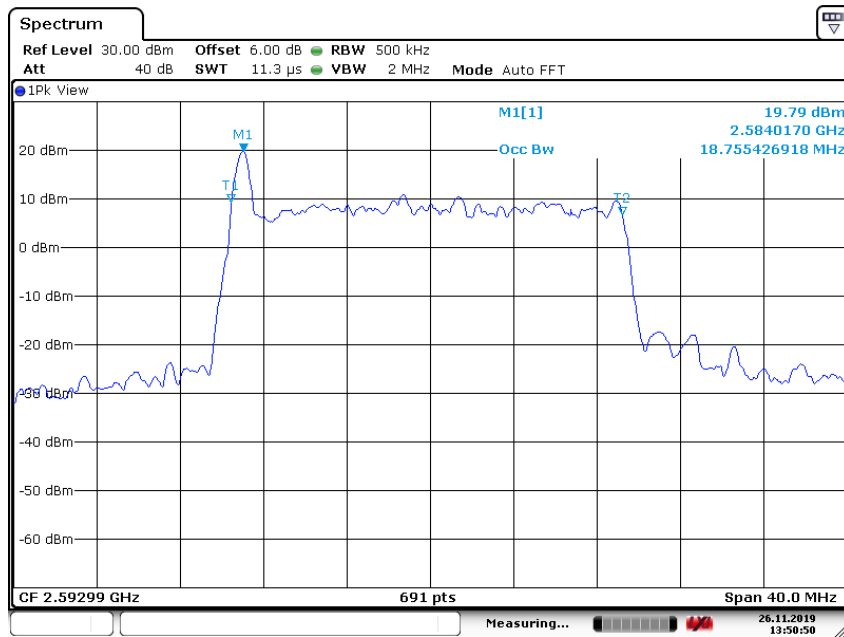


Date: 26.NOV.2019 13:50:49

n41, 20MHz Bandwidth,CP-256QAM (99% BW)

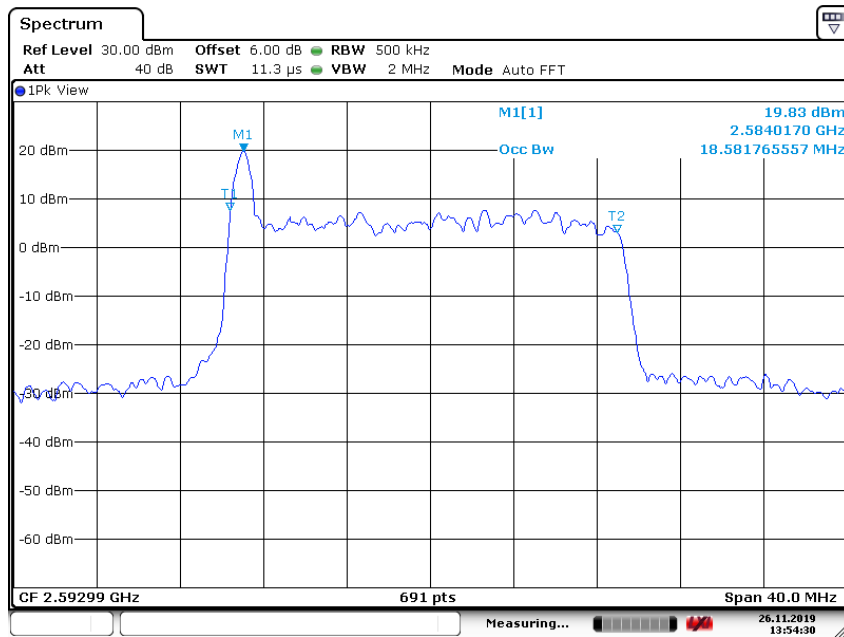


Date: 26.NOV.2019 13:54:30

n41, 20MHz Bandwidth,DFT-s-QPSK (99% BW)

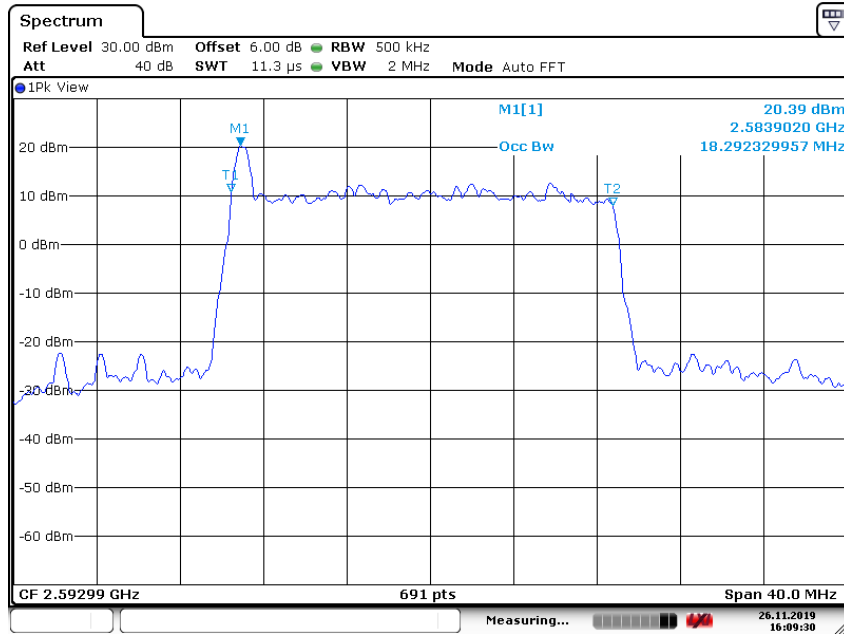


Date: 26.NOV.2019 16:09:30

n41, 20MHz Bandwidth,DFT-s-16QAM (99% BW)

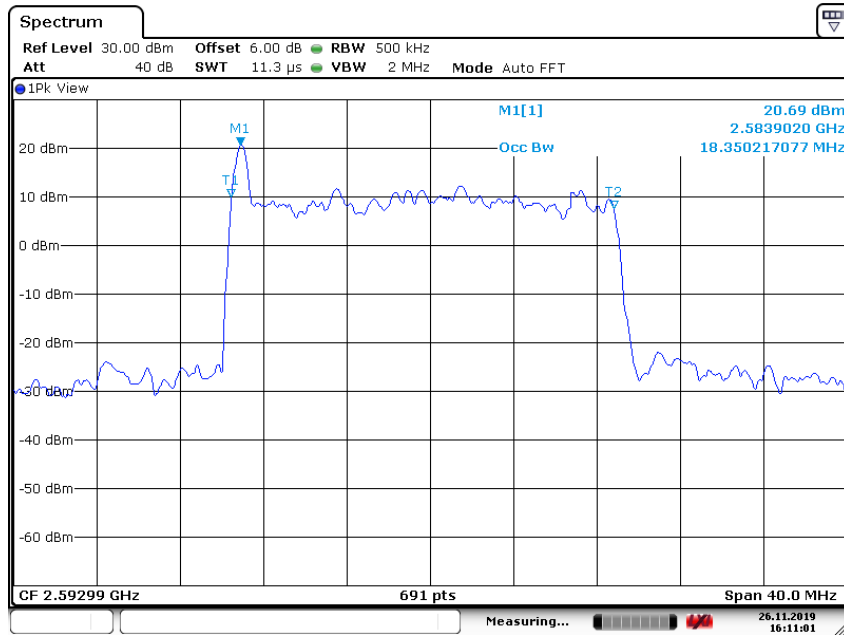


Date: 26.NOV.2019 16:11:01

n41, 20MHz Bandwidth,DFT-s-64QAM (99% BW)

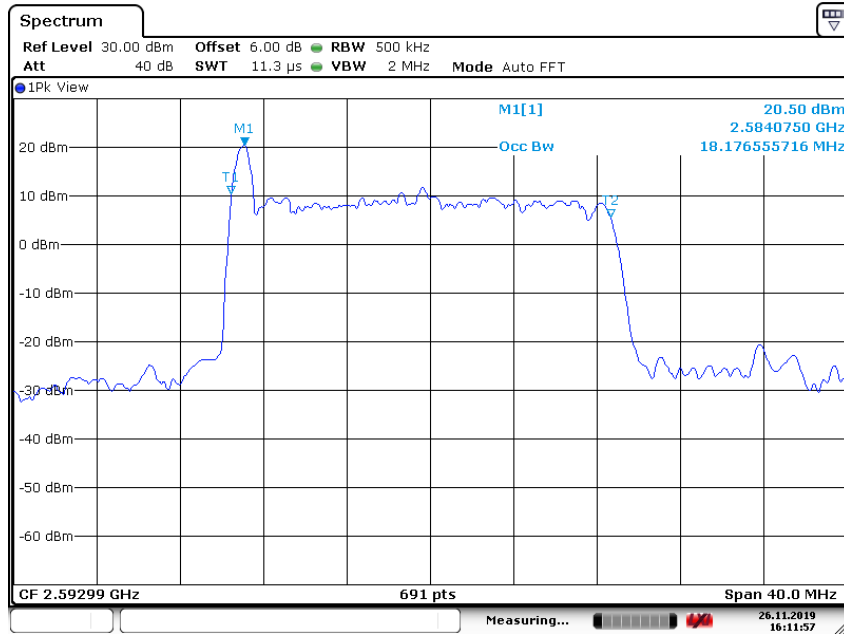

Date: 26.NOV.2019 16:11:57

n41, 20MHz Bandwidth,DFT-s-256QAM (99% BW)

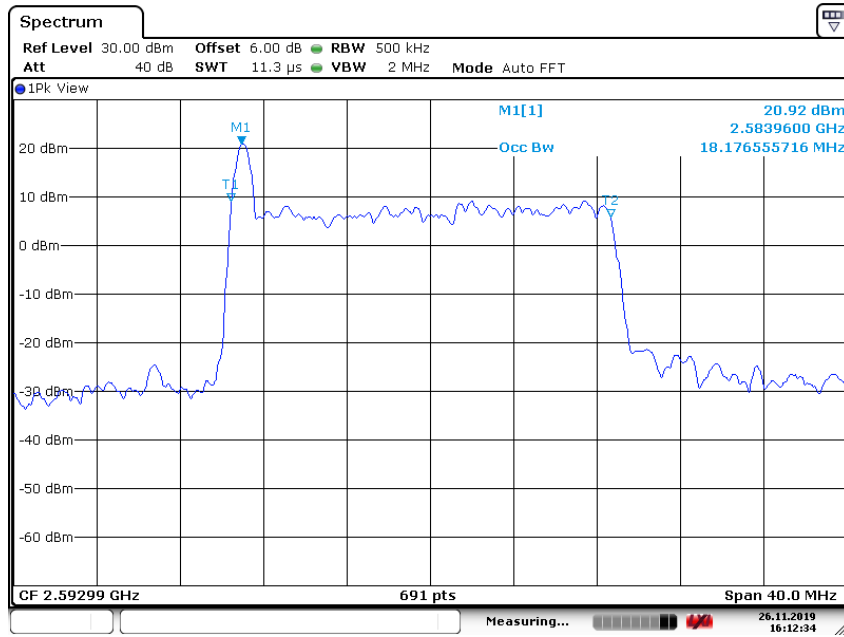


Date: 26.NOV.2019 16:12:34

n41, 40MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	38552.82	36584.66

n41, 40MHz Bandwidth, CP-QPSK (99% BW)

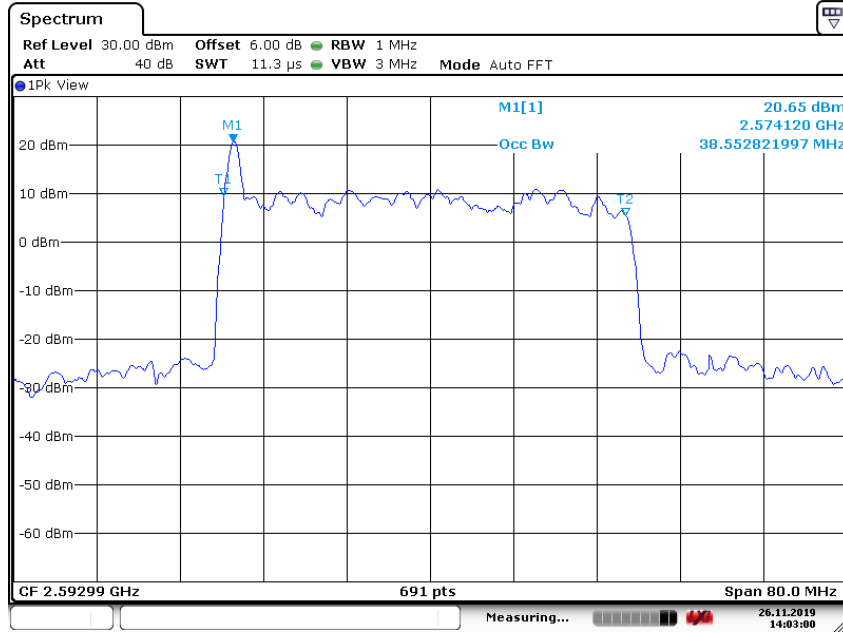

Date: 26.NOV.2019 14:03:00

n41, 40MHz Bandwidth, DFT-s-QPSK (99% BW)

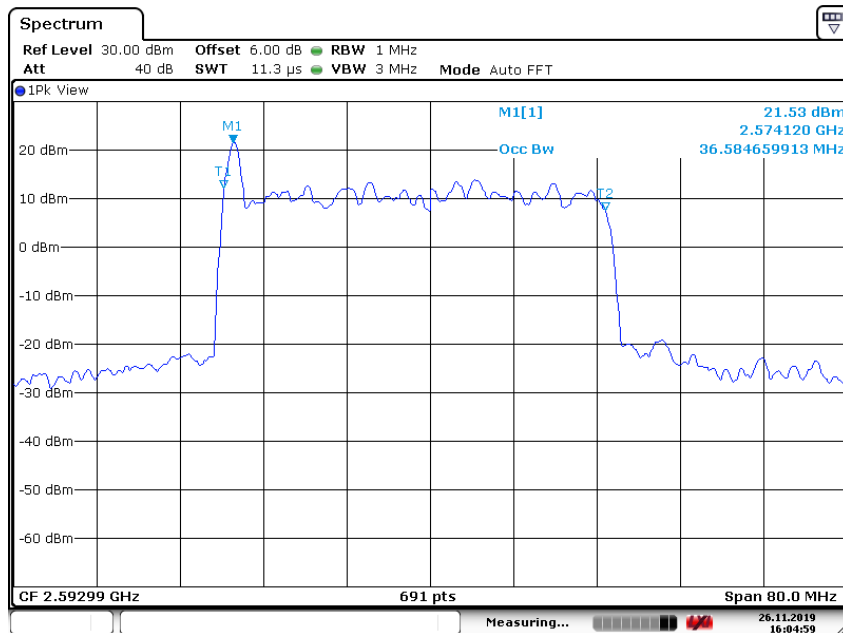


Date: 26.NOV.2019 16:04:59


n41, 50MHz (99%)

Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	48335.75	46454.42

n41, 50MHz Bandwidth, CP-QPSK (99% BW)

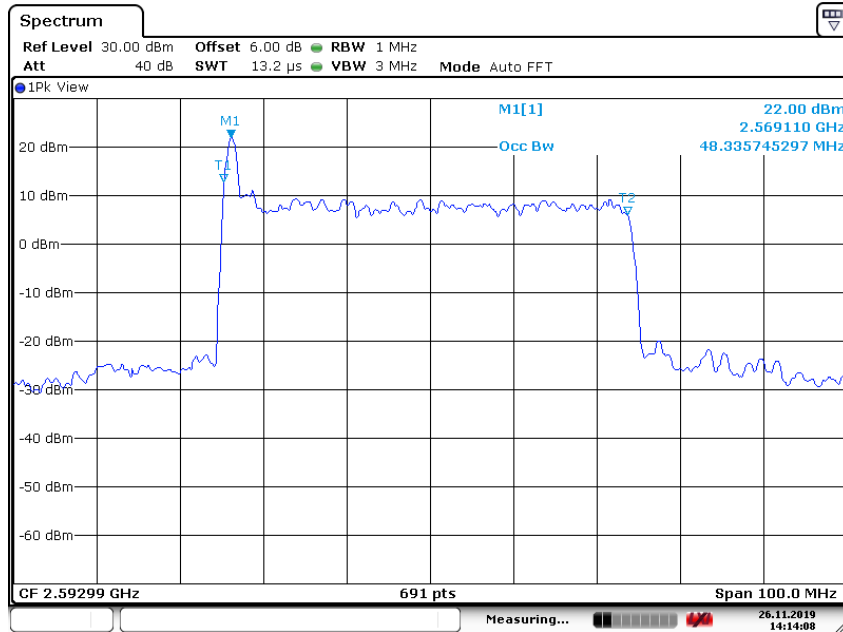


n41, 50MHz Bandwidth, DFT-s-QPSK (99% BW)

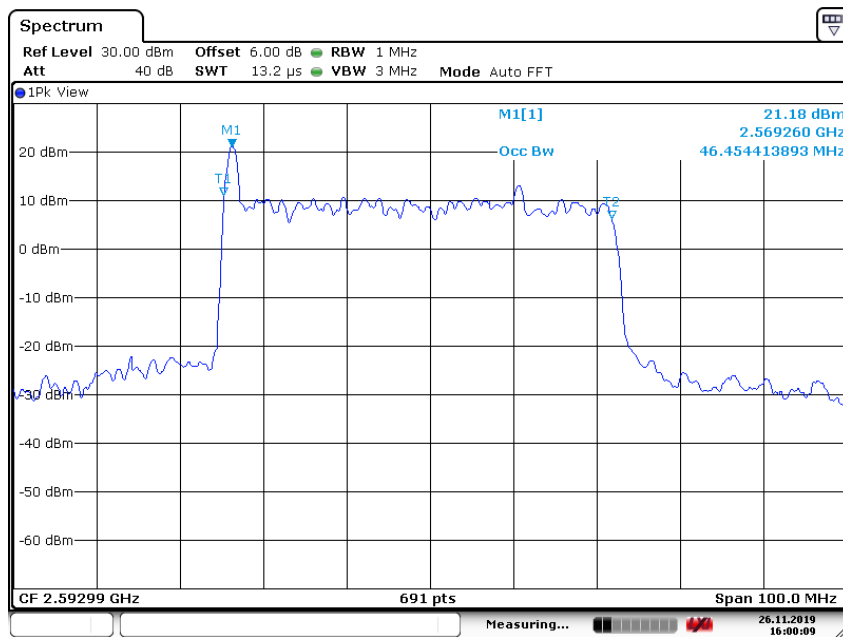

n41, 60MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	58523.88	58871.20

n41, 60MHz Bandwidth, CP-QPSK (99% BW)

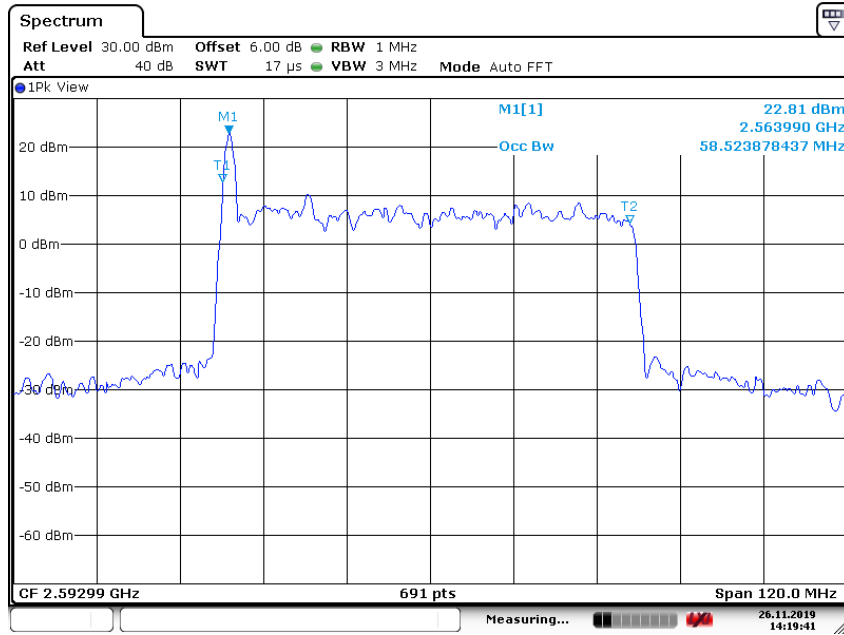

Date: 26.NOV.2019 14:19:41

n41, 60MHz Bandwidth, DFT-s-QPSK (99% BW)

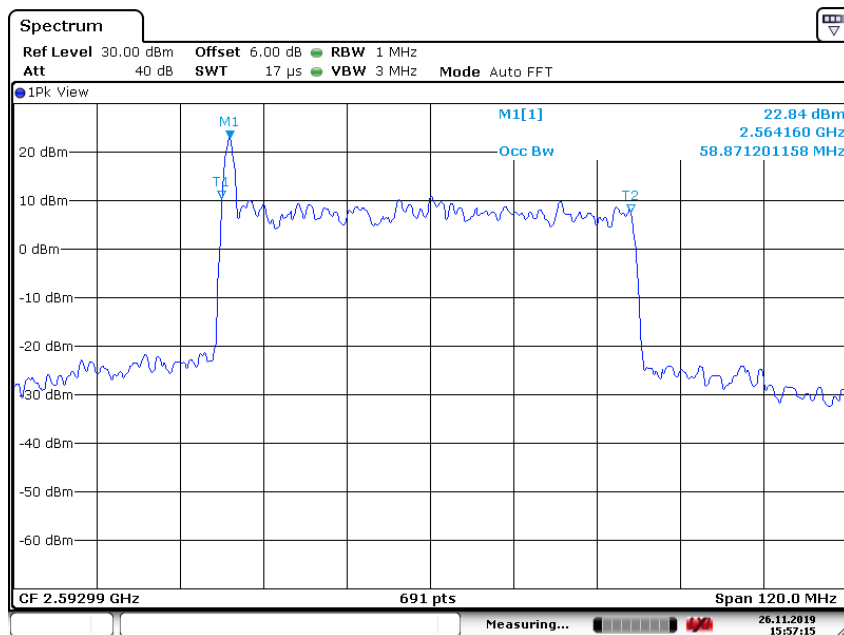


Date: 26.NOV.2019 15:57:15

n41, 80MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	79652.68	79450.07

n41, 80MHz Bandwidth, CP-QPSK (99% BW)

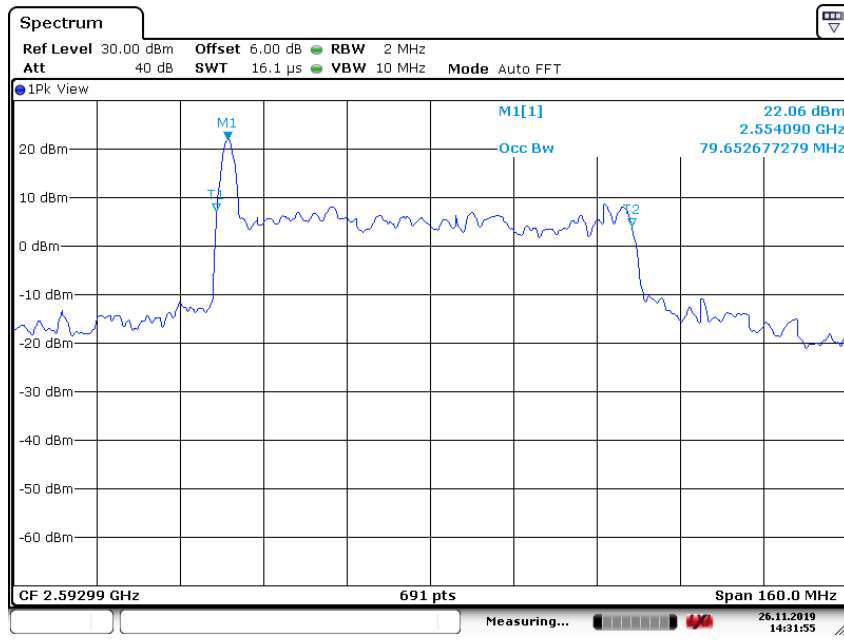

Date: 26.NOV.2019 14:31:55

n41, 80MHz Bandwidth, DFT-s-QPSK (99% BW)

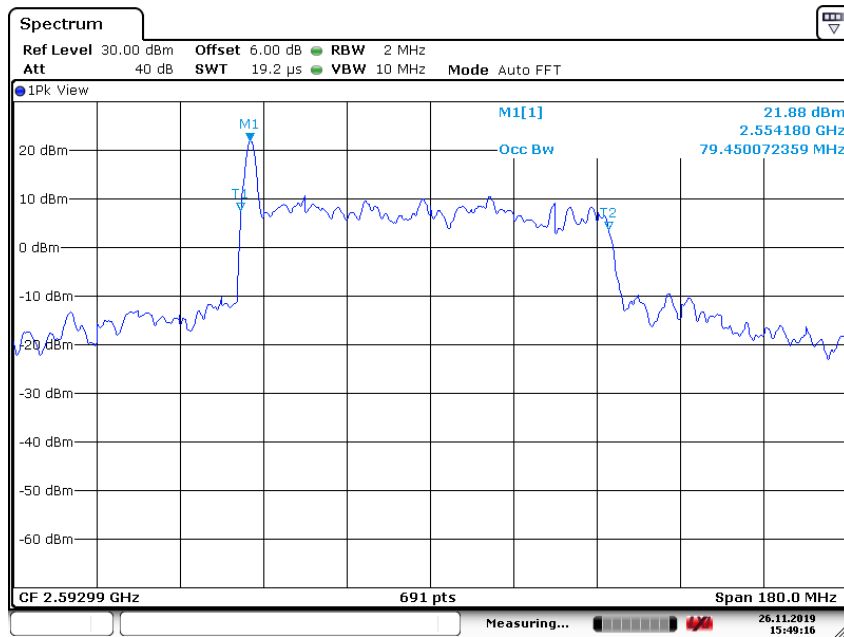


Date: 26.NOV.2019 15:49:16

n41, 90MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	89869.75	87525.33

n41, 90MHz Bandwidth, CP-QPSK (99% BW)

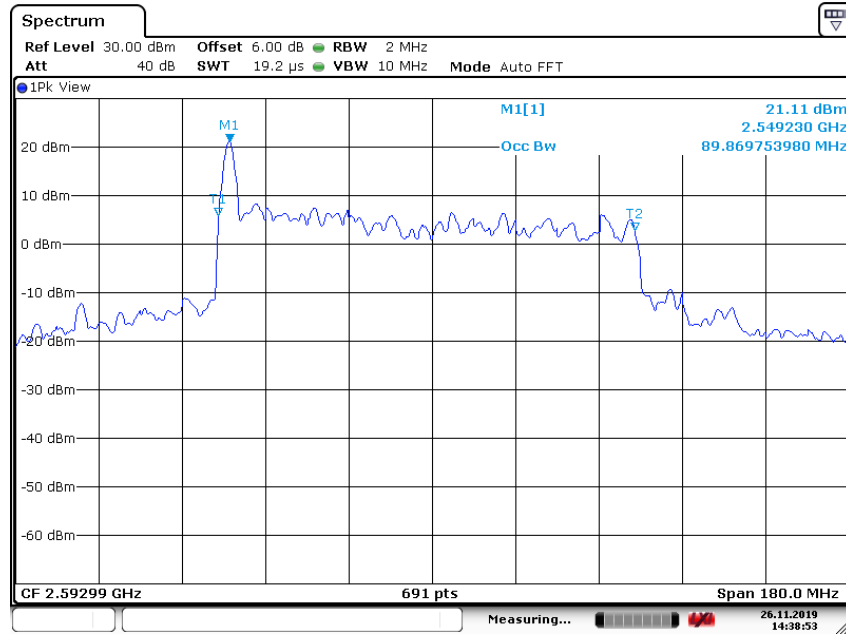

Date: 26.NOV.2019 14:38:53

n41, 90MHz Bandwidth, DFT-s-QPSK (99% BW)

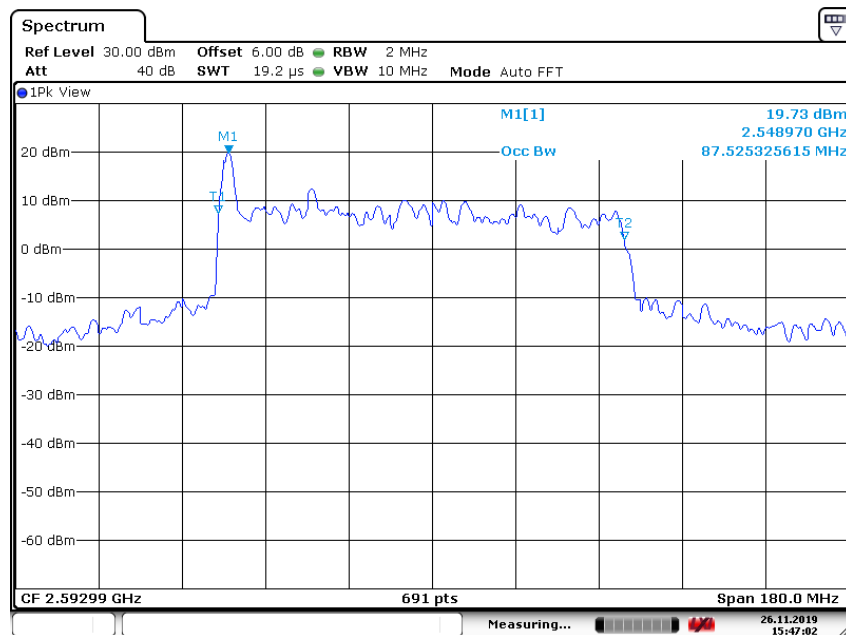


Date: 26.NOV.2019 15:47:02

n41, 100MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	99855.28	98118.67

n41, 100MHz Bandwidth, CP-QPSK (99% BW)

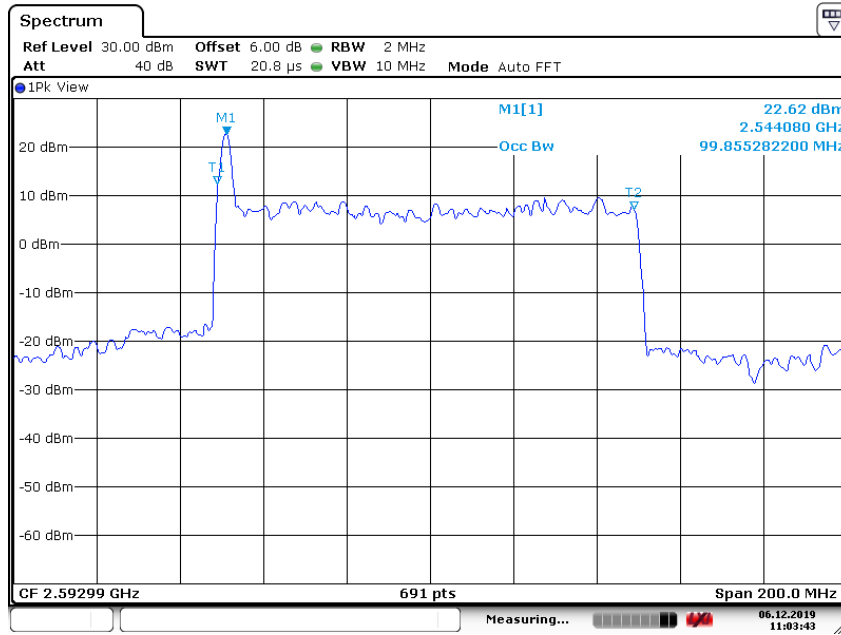

Date: 6.DEC.2019 11:03:43

n41, 100MHz Bandwidth, DFT-s-QPSK (99% BW)

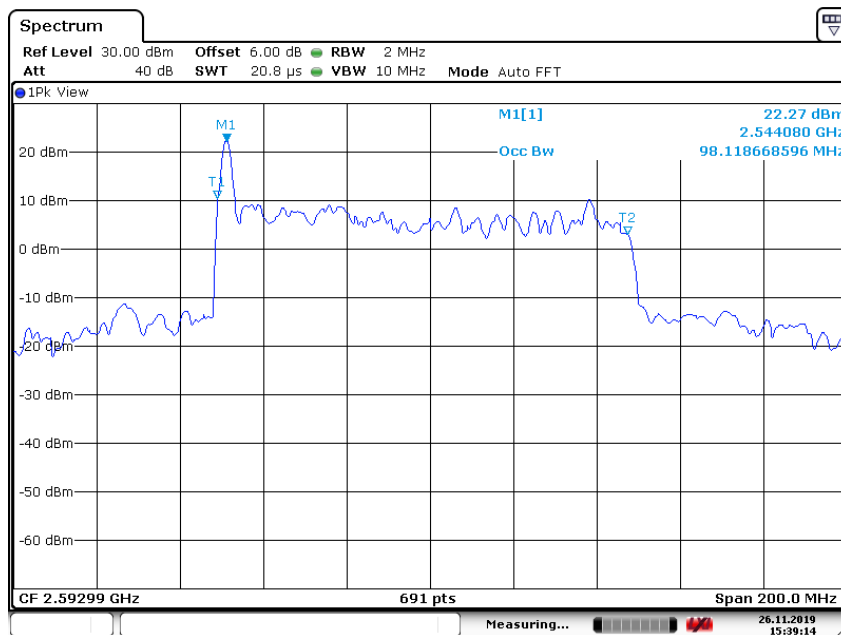


Date: 26.NOV.2019 15:39:14

n71, 5MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)						
	CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
680.5	4695.51	4599.35	4615.38	4535.26	4515.20	4529.67	4529.67

n71, 5MHz Bandwidth, CP-QPSK (99% BW)

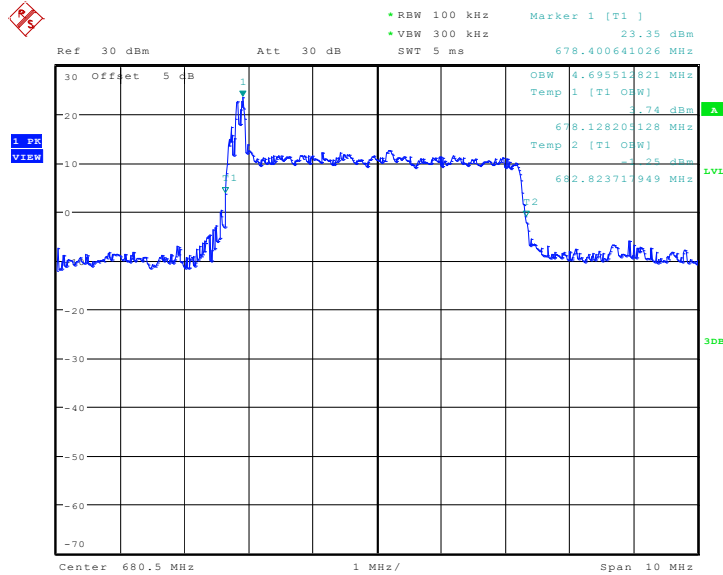


Date: 11.OCT.2019 15:06:16

n71, 5MHz Bandwidth, CP-16QAM (99% BW)

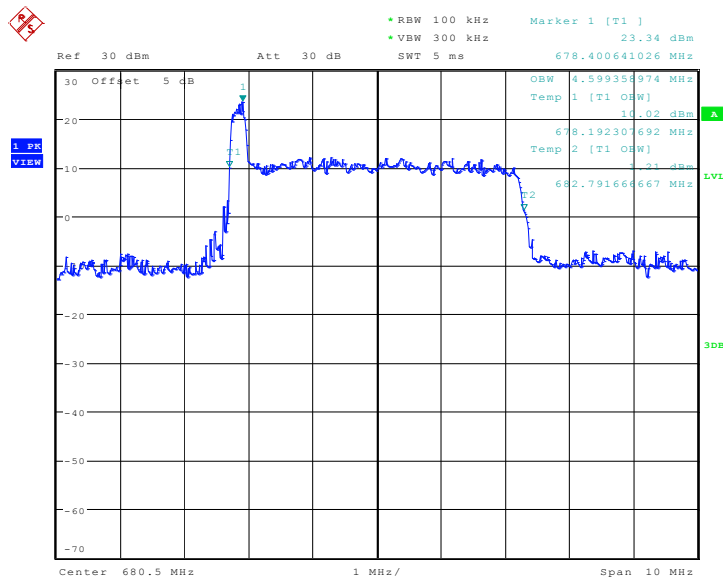


Date: 11.OCT.2019 15:26:37

n71, 5MHz Bandwidth, CP-64QAM (99% BW)

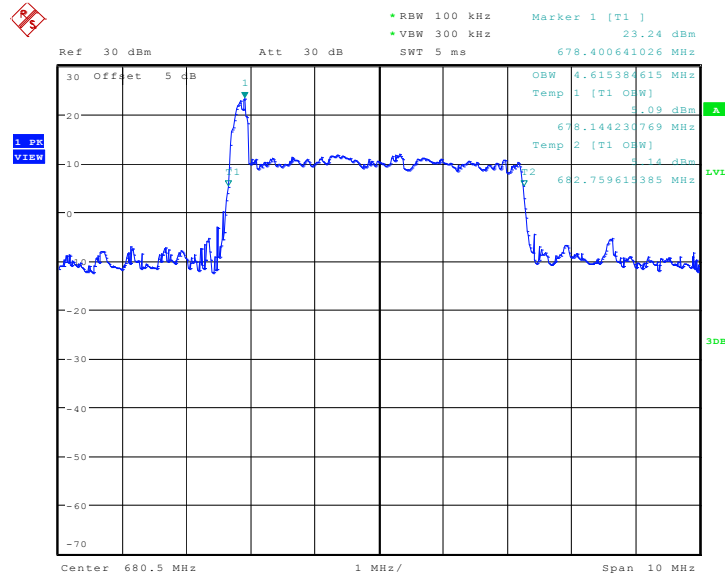


Date: 11.OCT.2019 15:30:02

n71, 5MHz Bandwidth, CP-256QAM (99% BW)

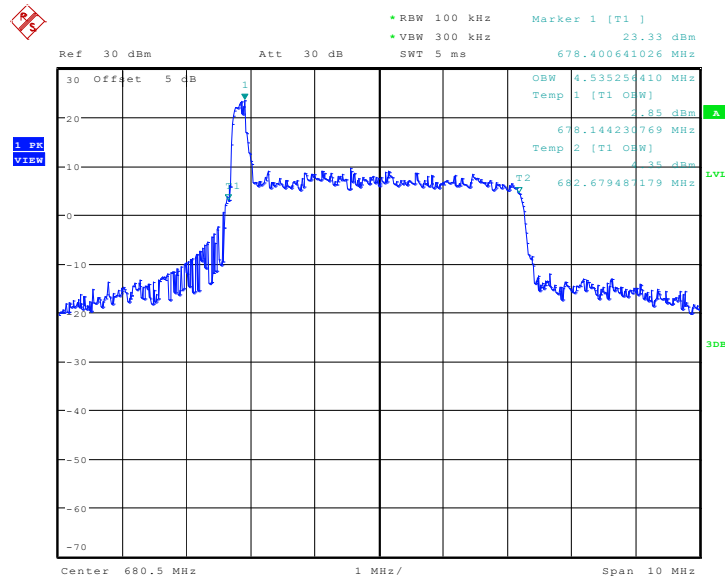


Date: 11.OCT.2019 16:02:47


n71, 5MHz Bandwidth,DFT-s-QPSK (99% BW)

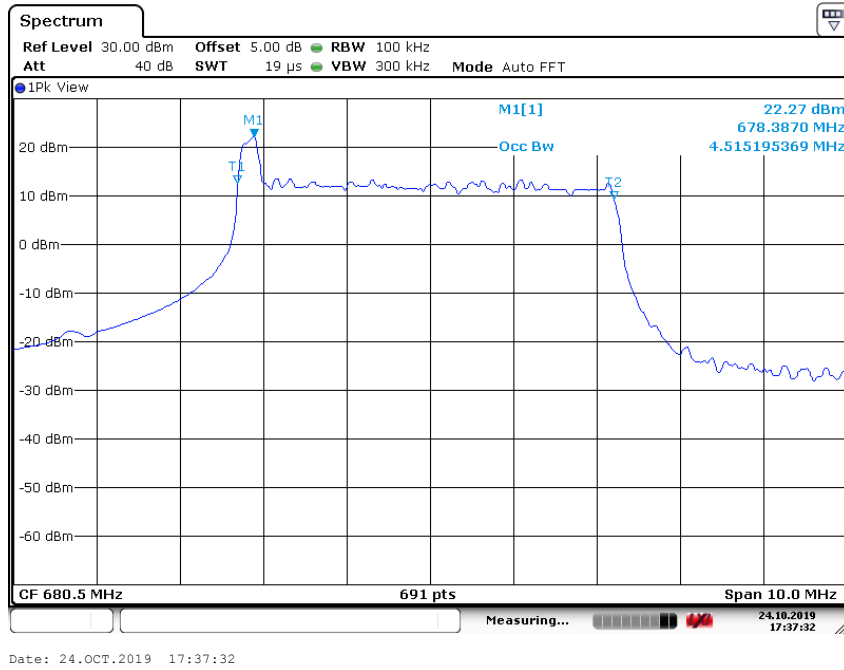

n71, 5MHz Bandwidth,DFT-s-16QAM (99% BW)

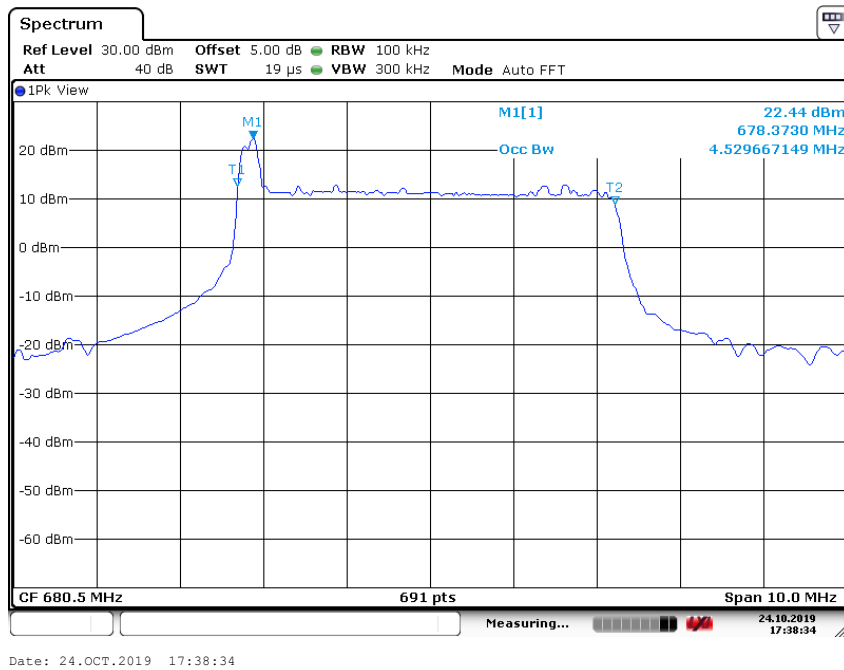

n71, 5MHz Bandwidth, DFT-s-64QAM (99% BW)

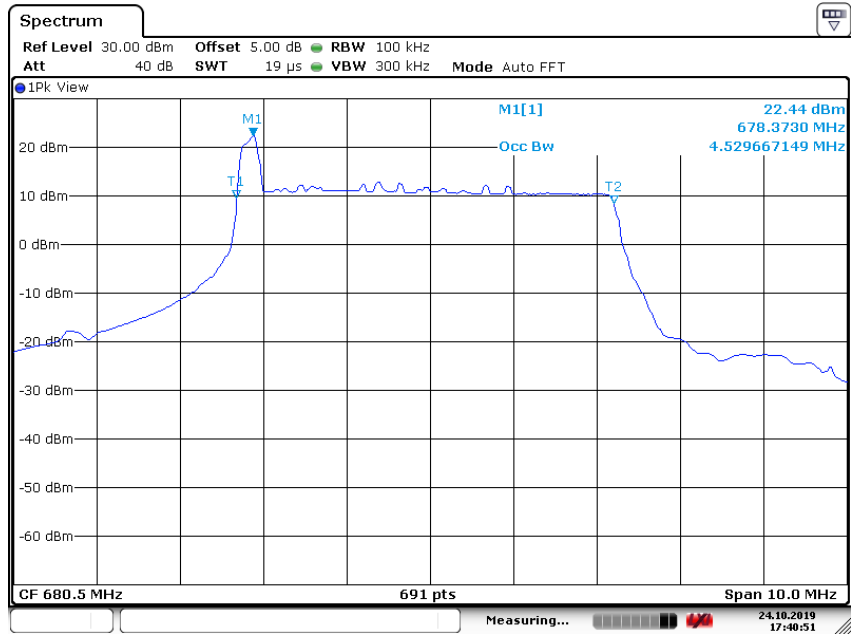


Date: 24.OCT.2019 17:40:51

n71, 10MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
680.5	9679.49	9073.81

n71, 10MHz Bandwidth, CP-QPSK (99% BW)

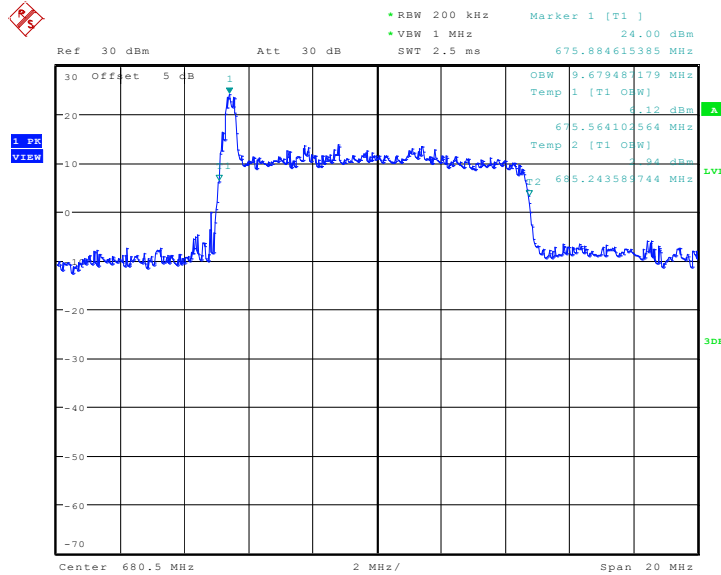

Date: 12.OCT.2019 11:09:01

n71, 10MHz Bandwidth, DFT-s-QPSK (99% BW)

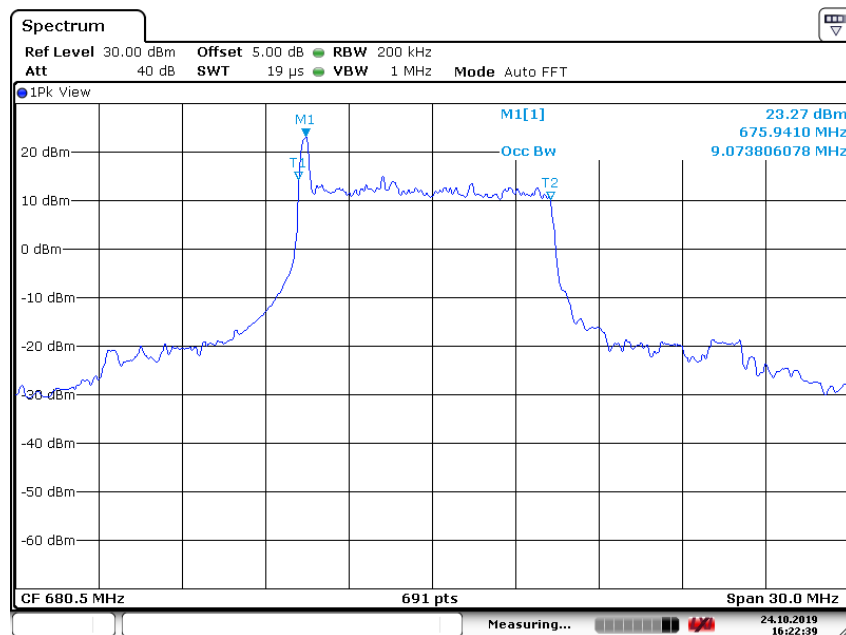


Date: 24.OCT.2019 16:22:39

n71, 15MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
680.5	14807.69	13632.41

n71, 15MHz Bandwidth, CP-QPSK (99% BW)

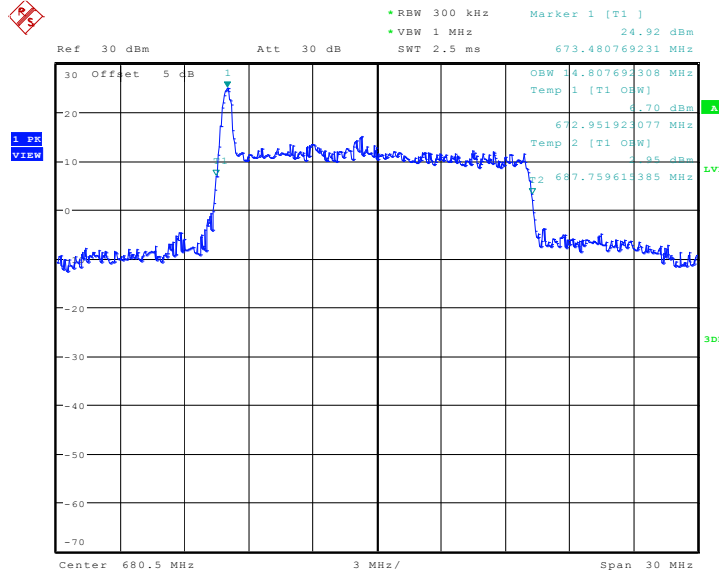

Date: 12.OCT.2019 09:30:13

n71, 15MHz Bandwidth, DFT-s-QPSK (99% BW)

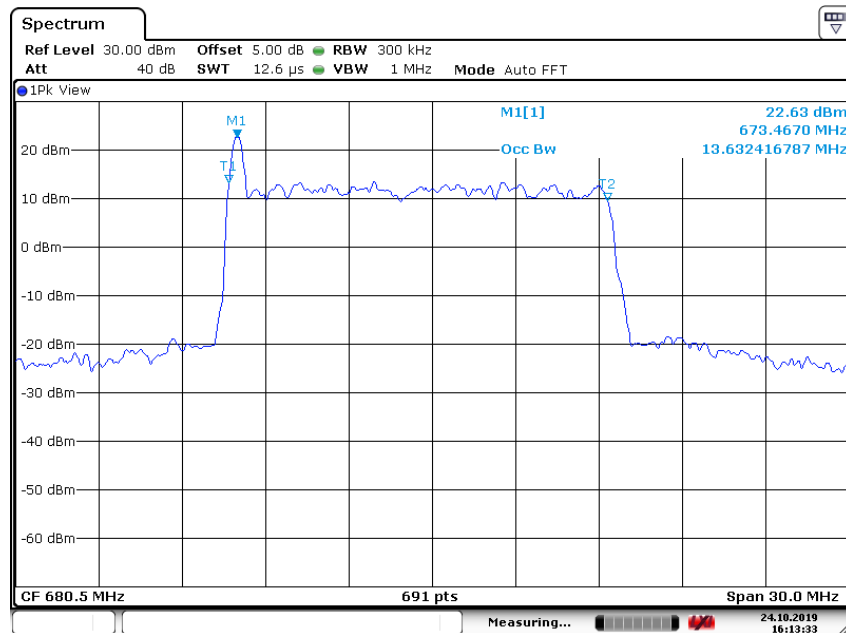


Date: 24.OCT.2019 16:13:33

n71, 20MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
	CP-QPSK	DFT-s-QPSK
680.5	19935.90	18350.22

n71, 20MHz Bandwidth, CP-QPSK (99% BW)

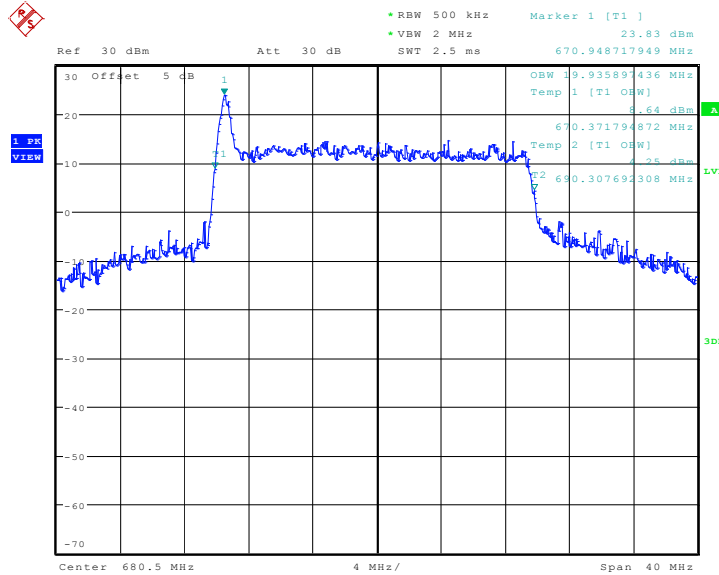

Date: 12.OCT.2019 09:41:15

n71, 20MHz Bandwidth, DFT-s-QPSK (99% BW)

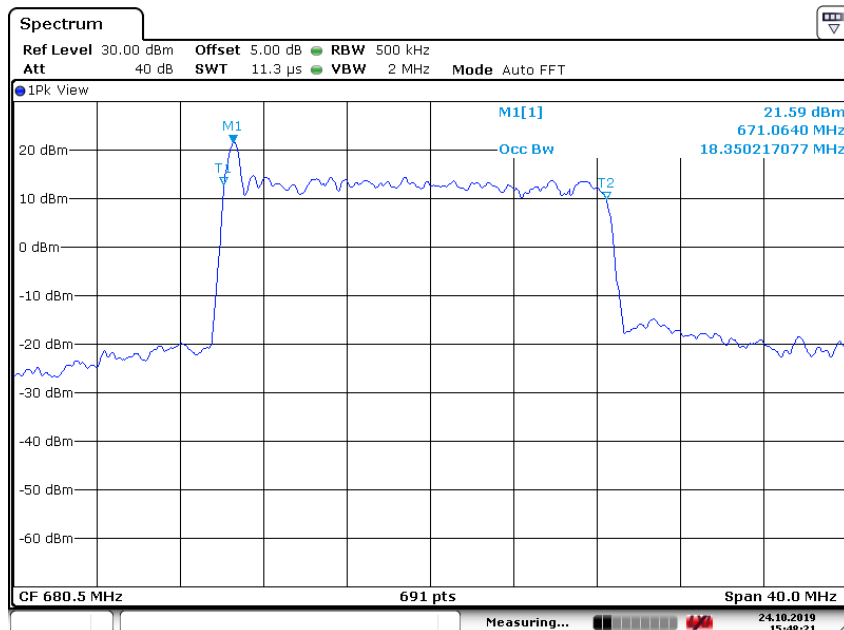

Date: 24.OCT.2019 15:48:21

A.5 EMISSION BANDWIDTH

A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

n41, 20MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)							
	CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
2592.99	19392.00	19508.00	19392.00	19219.00	18929.00	19045.00	18987.00	18813.00

n41, 20MHz Bandwidth, CP-QPSK (-26dBc BW)

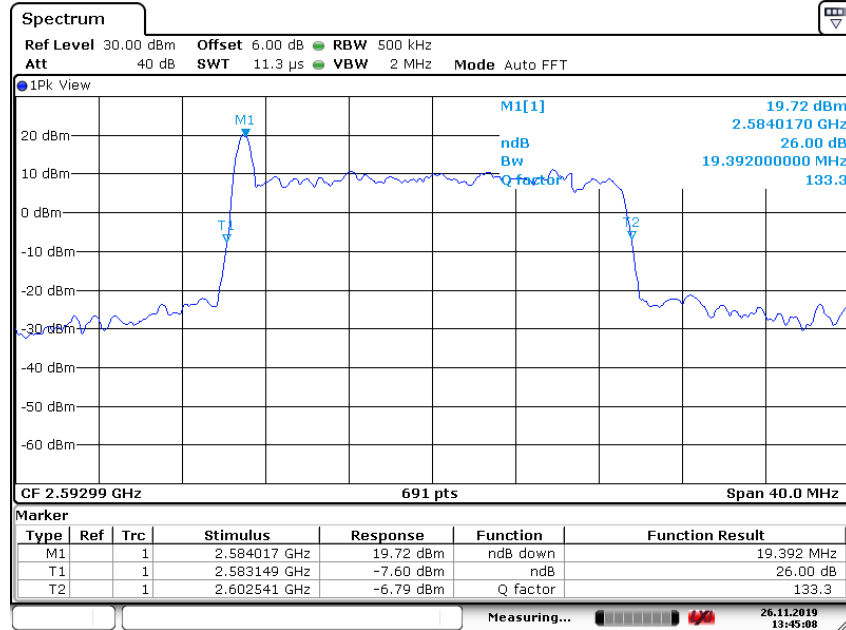


Date: 26.NOV.2019 13:45:08

n41, 20MHz Bandwidth, CP-16QAM (-26dBc BW)

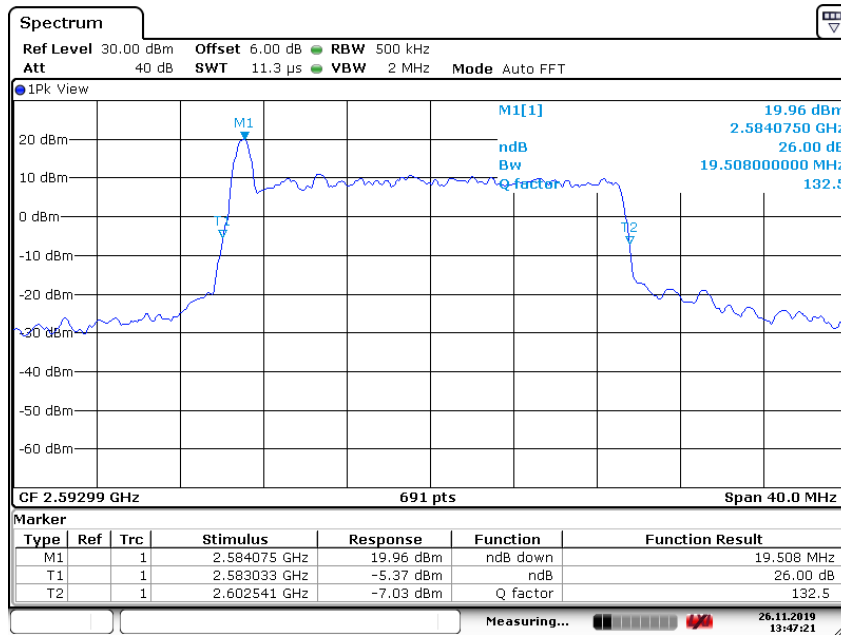


Date: 26.NOV.2019 13:47:21

n41, 20MHz Bandwidth, CP-64QAM (-26dBc BW)

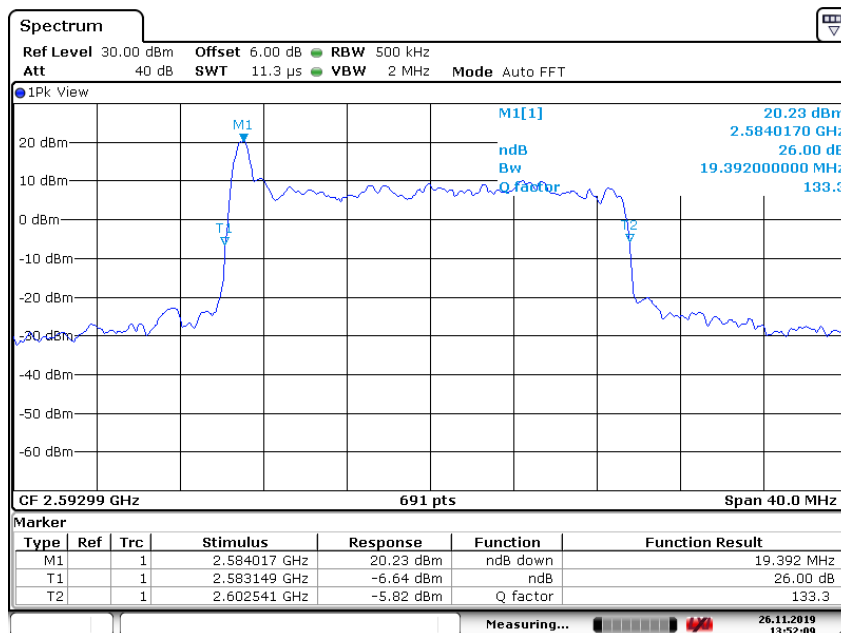


Date: 26.NOV.2019 13:52:09

n41, 20MHz Bandwidth,CP-256QAM (-26dBc BW)

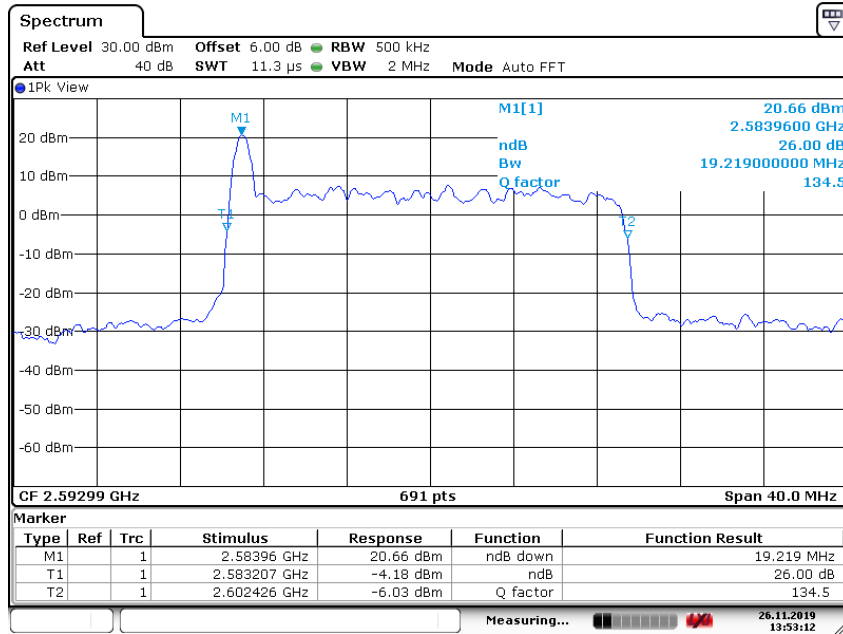


Date: 26.NOV.2019 13:53:12

n41, 20MHz Bandwidth,DFT-s-QPSK (-26dBc BW)

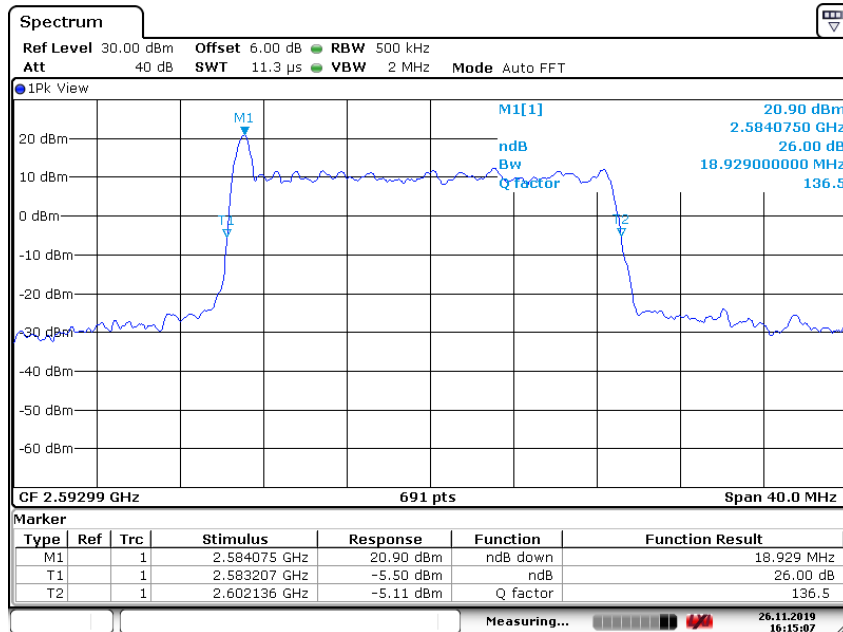


Date: 26.NOV.2019 16:15:07

n41, 20MHz Bandwidth,DFT-s-16QAM (-26dBc BW)

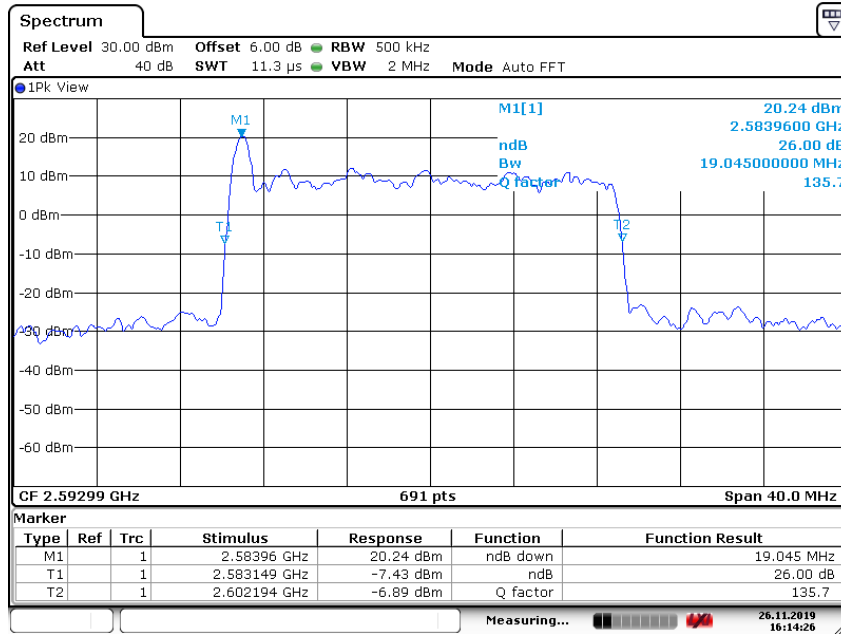


Date: 26.NOV.2019 16:14:26

n41, 20MHz Bandwidth,DFT-s-64QAM (-26dBc BW)

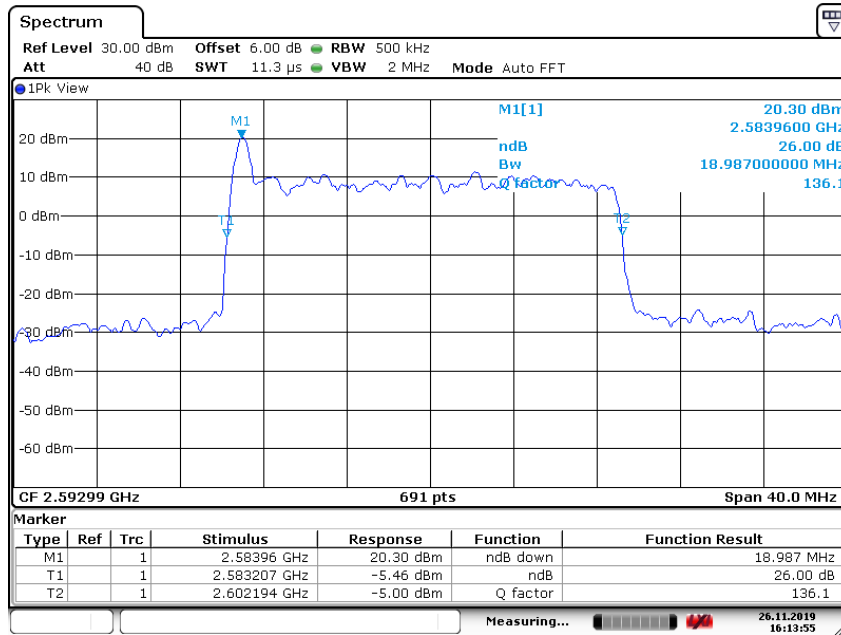

Date: 26.NOV.2019 16:13:55

n41, 20MHz Bandwidth,DFT-s-256QAM (-26dBc BW)

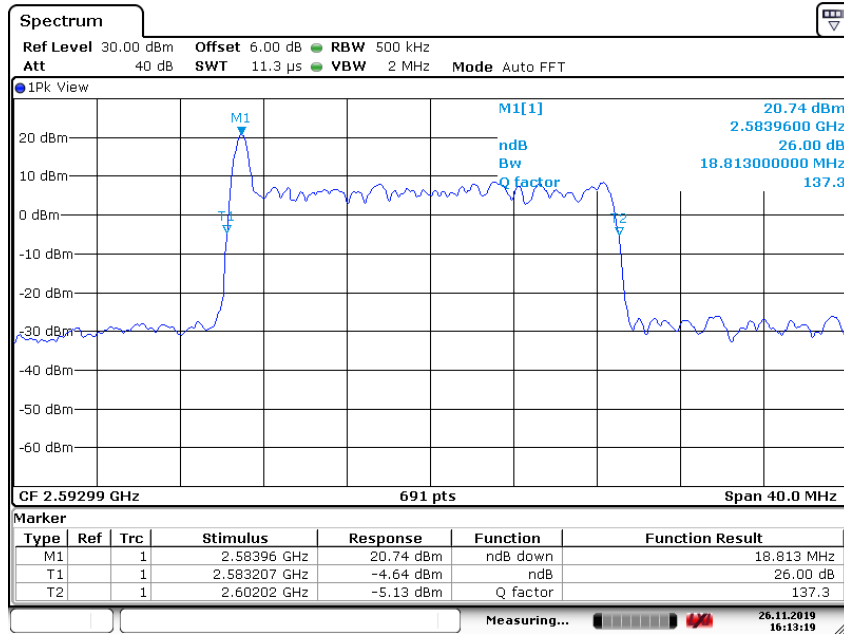


Date: 26.NOV.2019 16:13:19


n41, 40MHz (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	40060.00	38090.00

n41, 40MHz Bandwidth, CP-QPSK (-26dBc BW)

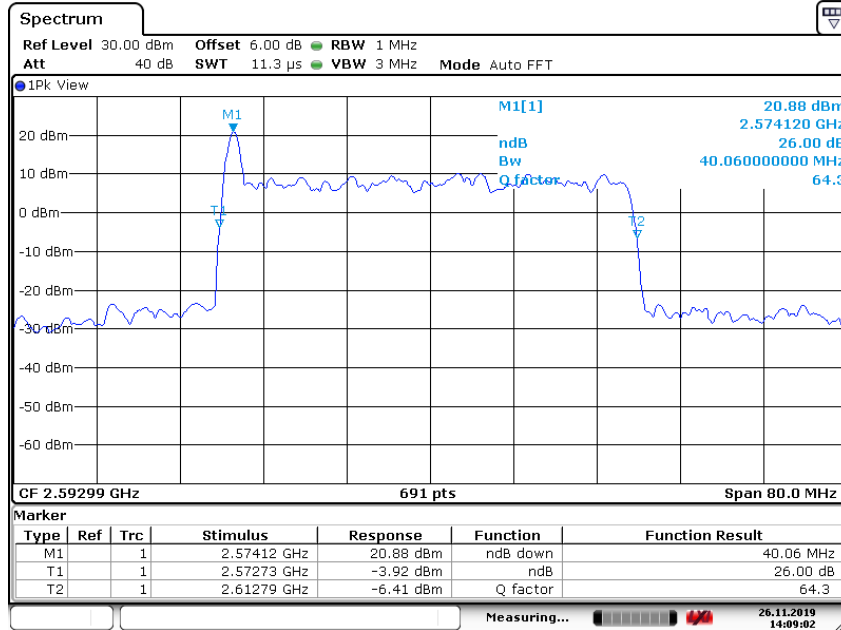


n41, 40MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

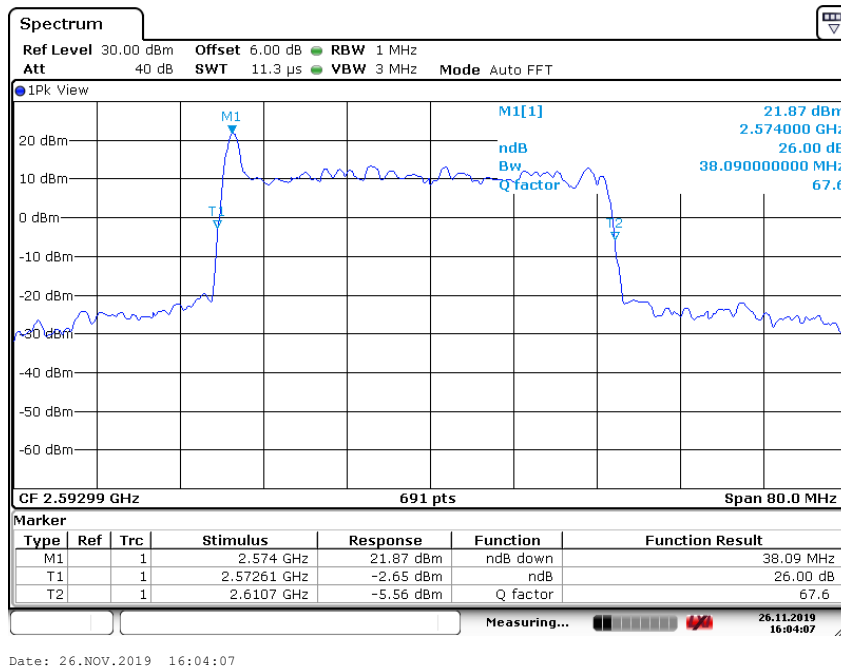

n41, 50MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	49930.00	48050.00

n41, 50MHz Bandwidth, CP-QPSK (-26dBc BW)

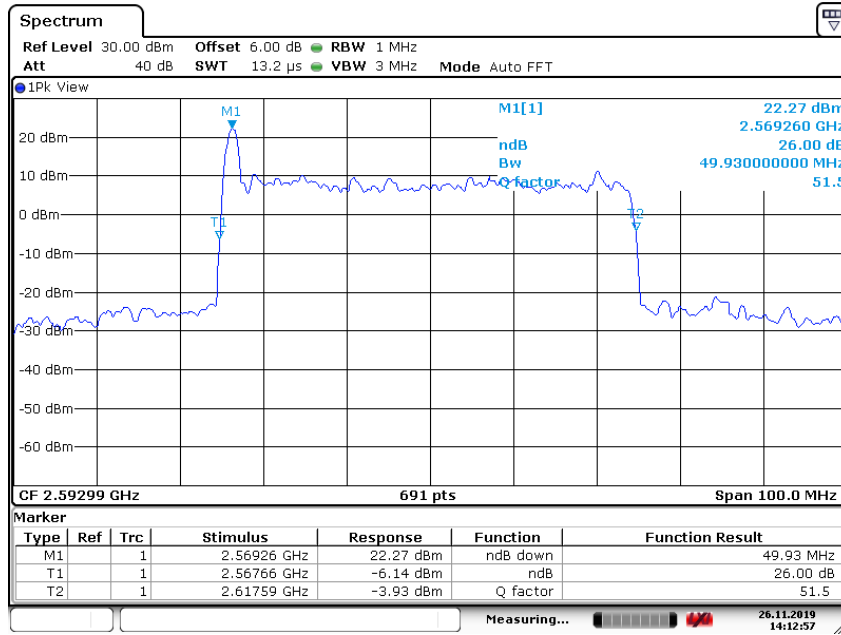

Date: 26.NOV.2019 14:12:56

n41, 50MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

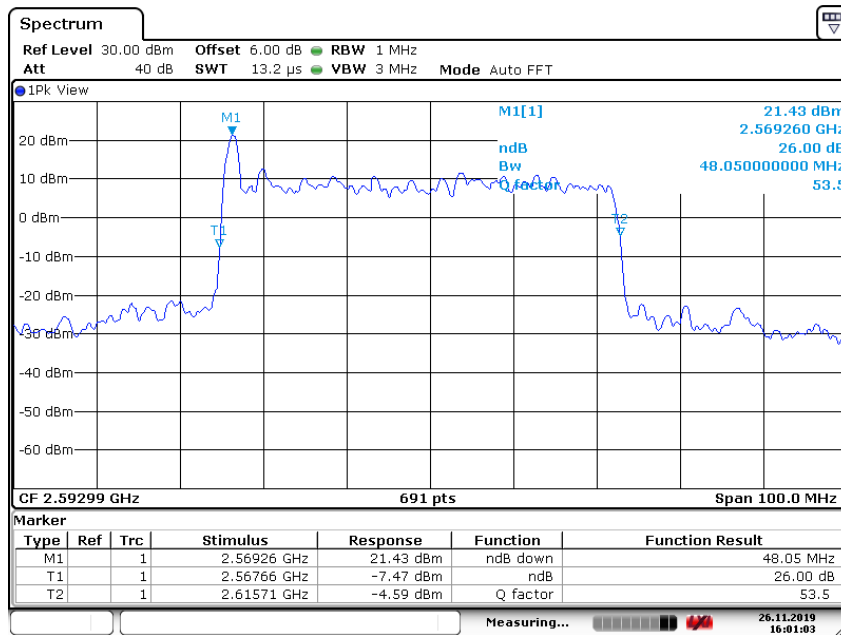


Date: 26.NOV.2019 16:01:03

n41, 60MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	60430.00	60430.00

n41, 60MHz Bandwidth, CP-QPSK (-26dBc BW)

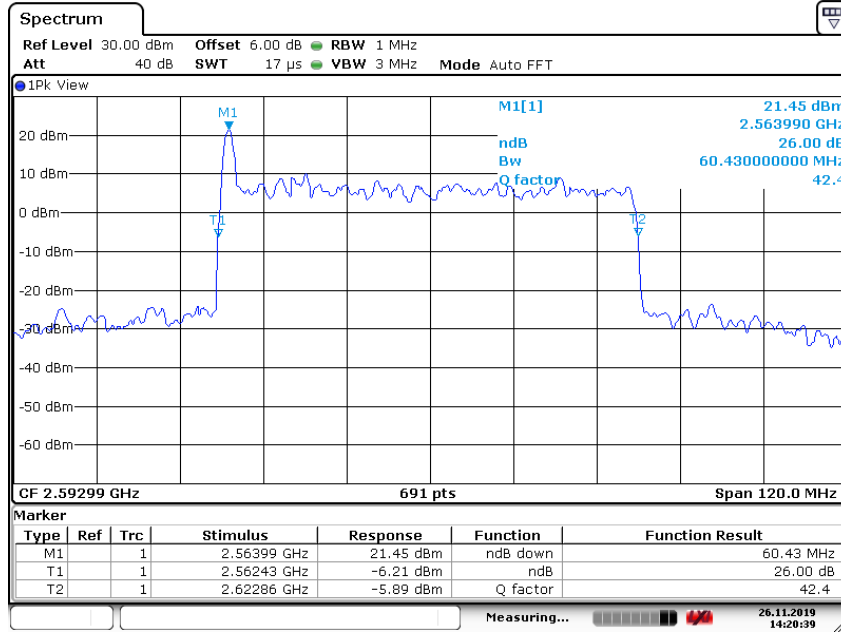

Date: 26.NOV.2019 14:20:38

n41, 60MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

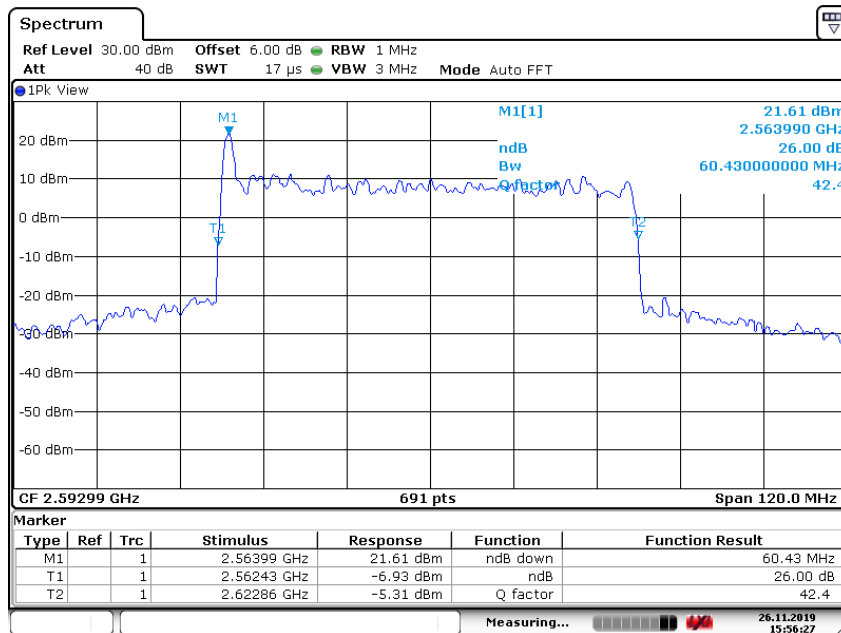


Date: 26.NOV.2019 15:56:27

n41, 80MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	81040.00	81530.00

n41, 80MHz Bandwidth, CP-QPSK (-26dBc BW)

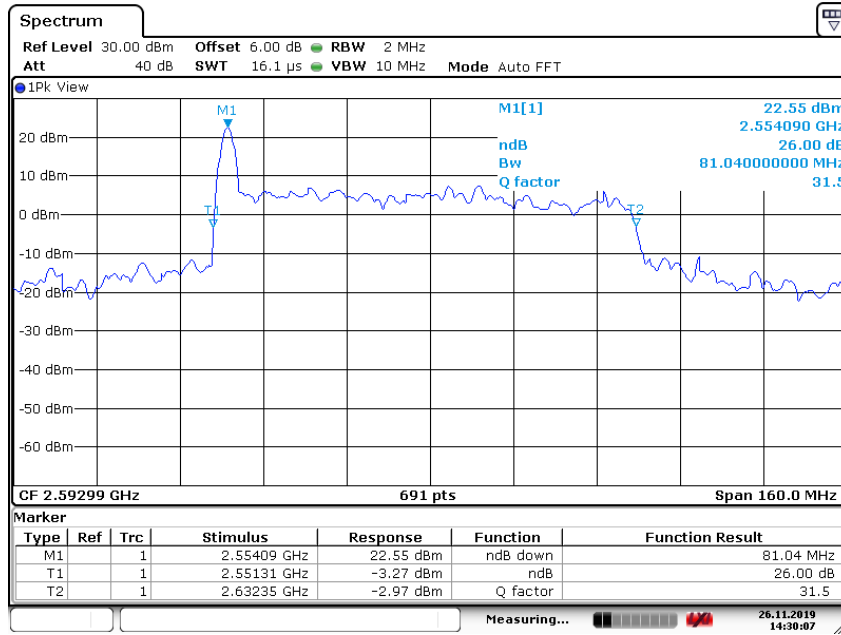

Date: 26.NOV.2019 14:30:07

n41, 80MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

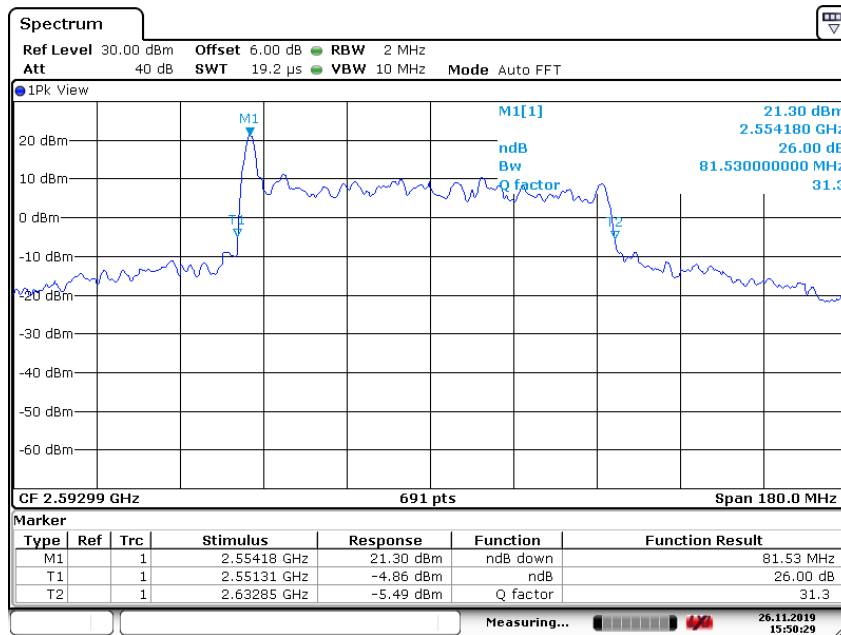


Date: 26.NOV.2019 15:50:29


n41, 90MHz (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	91690.00	90390.00

n41, 90MHz Bandwidth, CP-QPSK (-26dBc BW)

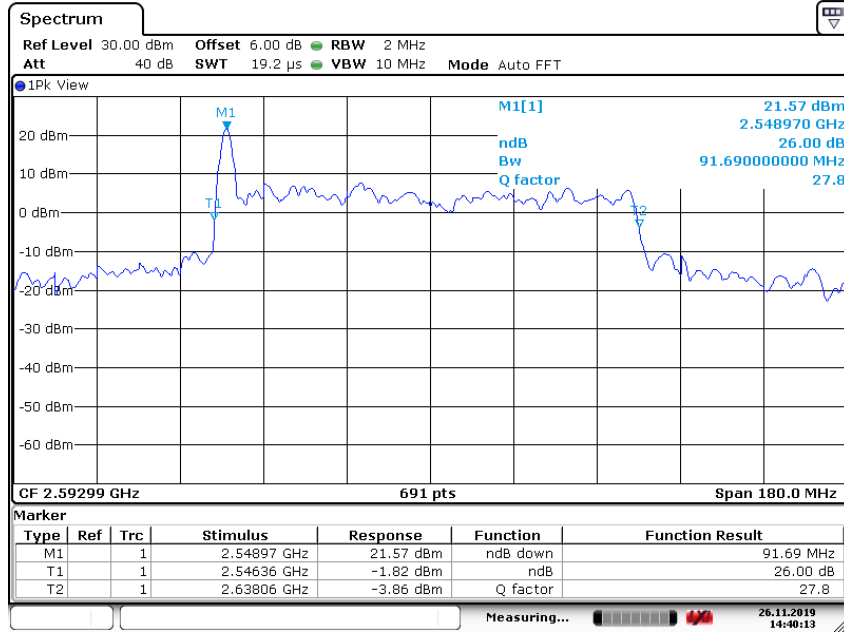


n41, 90MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

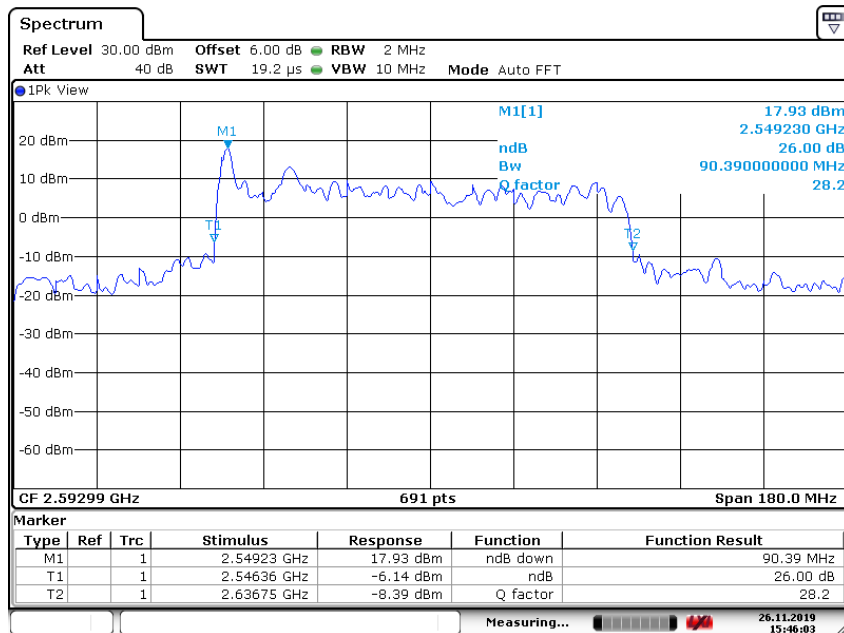


n41, 100MHz (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
2592.99	102170.00	100720.00

n41, 100MHz Bandwidth, CP-QPSK (-26dBc BW)

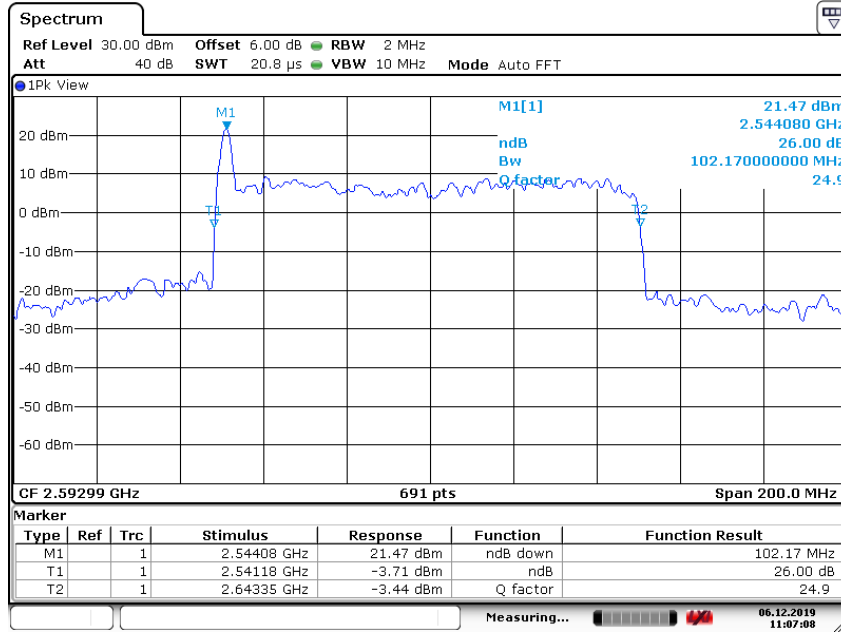


n41, 100MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

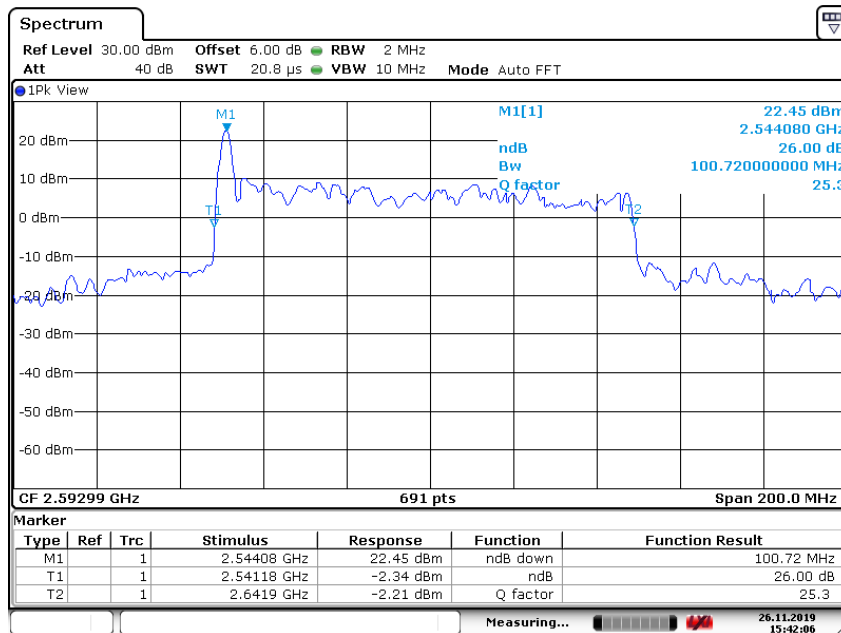

n71, 5MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)						
	CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
680.5	4743.59	4791.67	4759.62	4727.56	4877.00	4805.00	4863.00

n71, 5MHz Bandwidth, CP-QPSK (-26dBc BW)

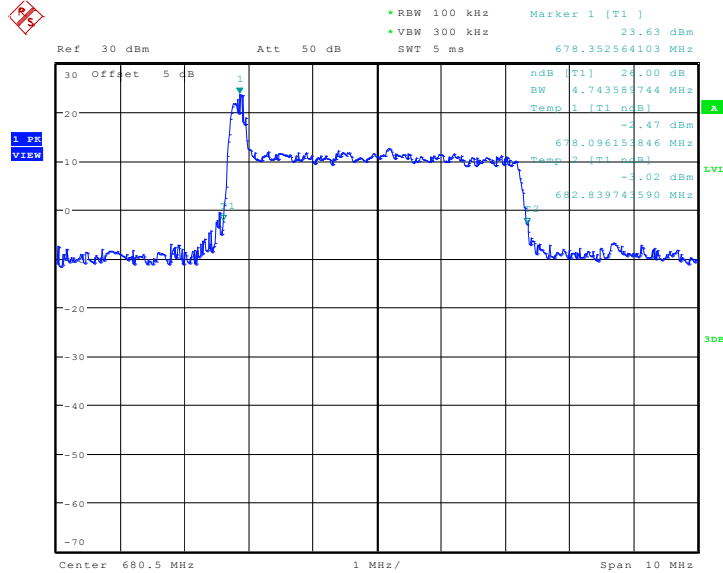


Date: 11.OCT.2019 15:07:42

n71, 5MHz Bandwidth, CP-16QAM (-26dBc BW)

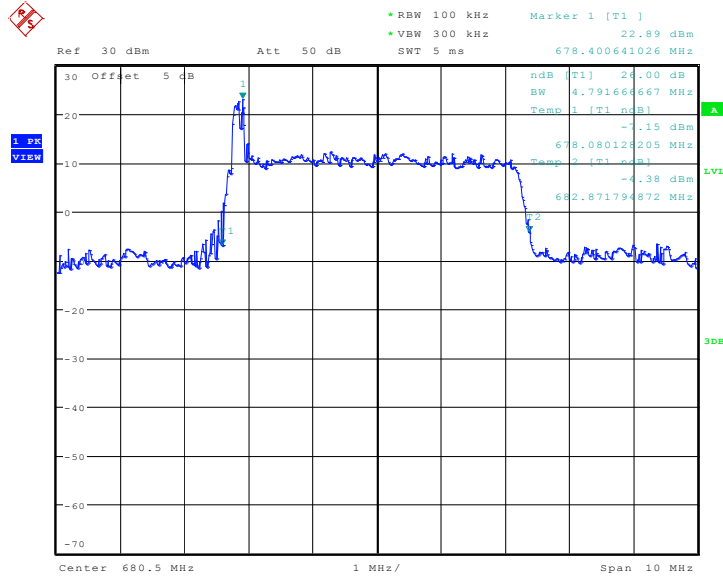


Date: 11.OCT.2019 15:25:47

n71, 5MHz Bandwidth, CP-64QAM (-26dBc BW)

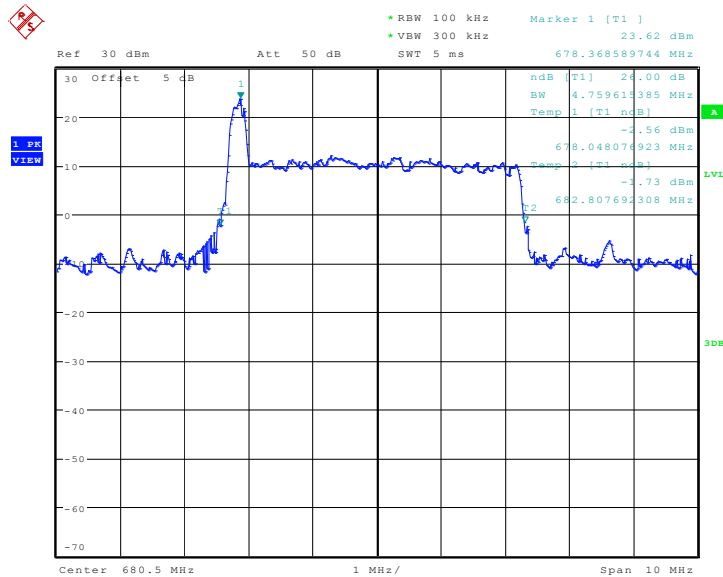


Date: 11.OCT.2019 15:32:42

n71, 5MHz Bandwidth, CP-256QAM (-26dBc BW)

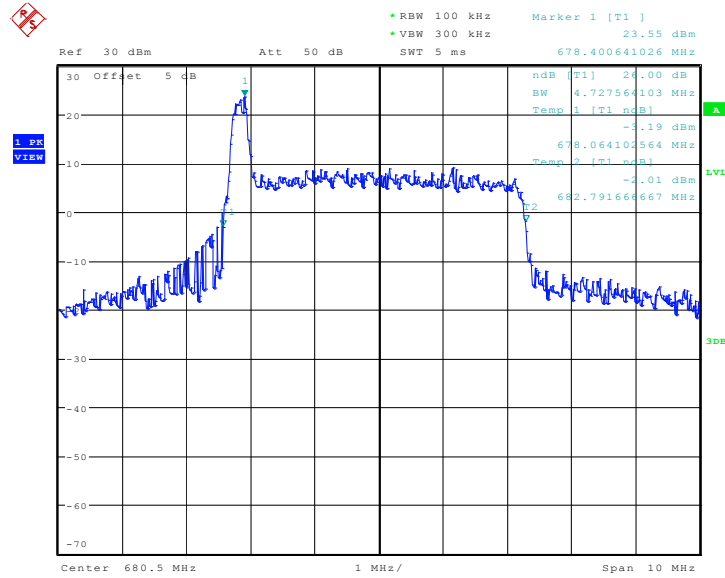


Date: 11.OCT.2019 16:00:52

n71, 5MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

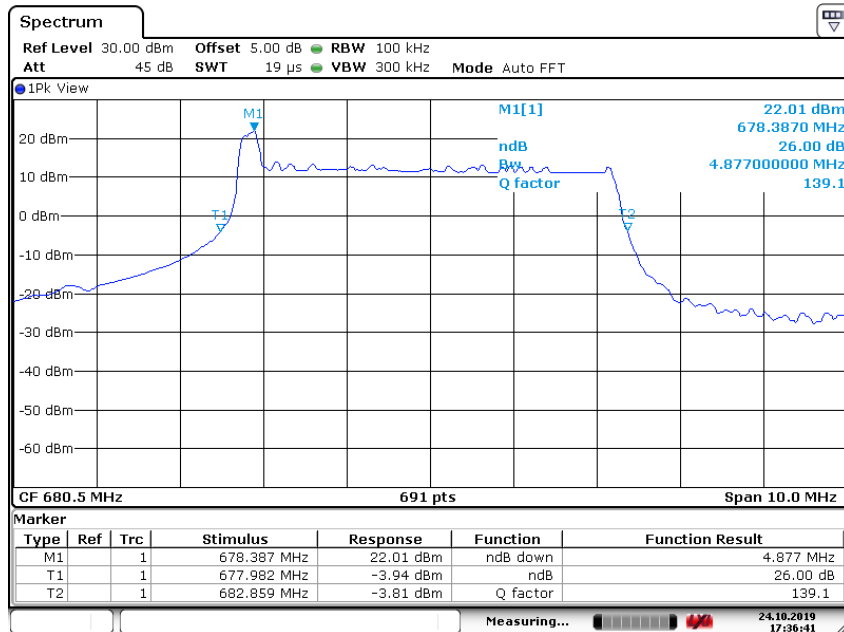


Date: 24.OCT.2019 17:36:41

n71, 5MHz Bandwidth,DFT-s-16QAM (-26dBc BW)

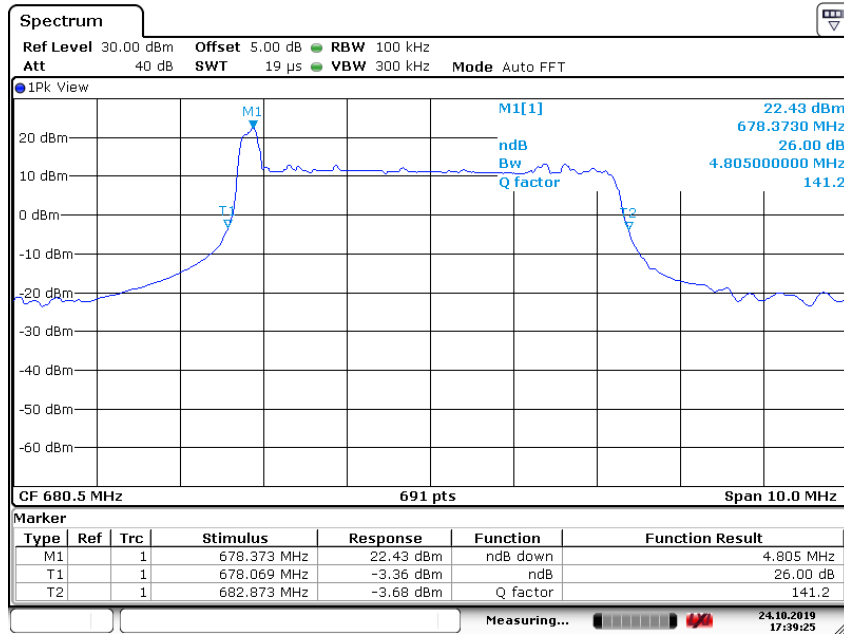

Date: 24.OCT.2019 17:39:25

n71, 5MHz Bandwidth,DFT-s-64QAM (-26dBc BW)

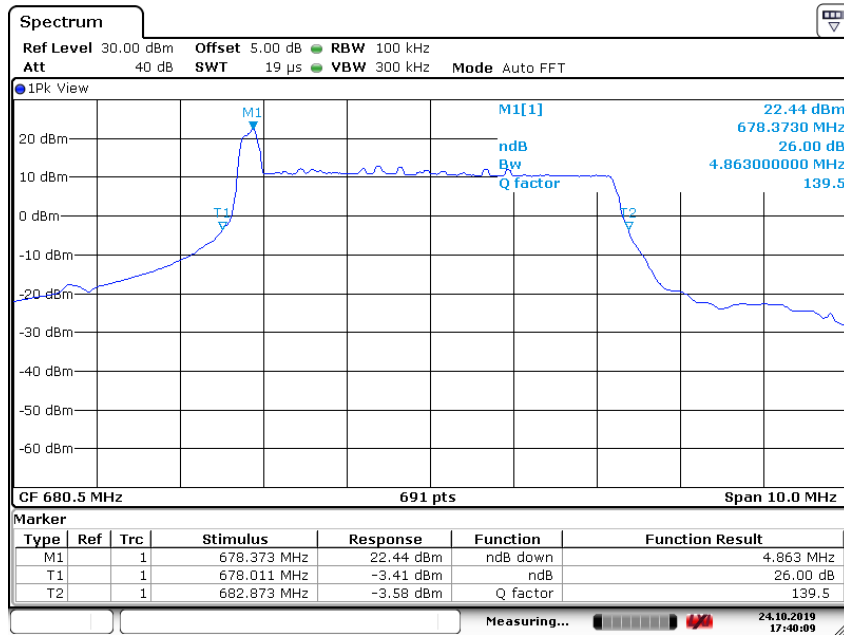


Date: 24.OCT.2019 17:40:10

n71, 10MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
680.5	9935.90	9508.00

n71, 10MHz Bandwidth, CP-QPSK (-26dBc BW)

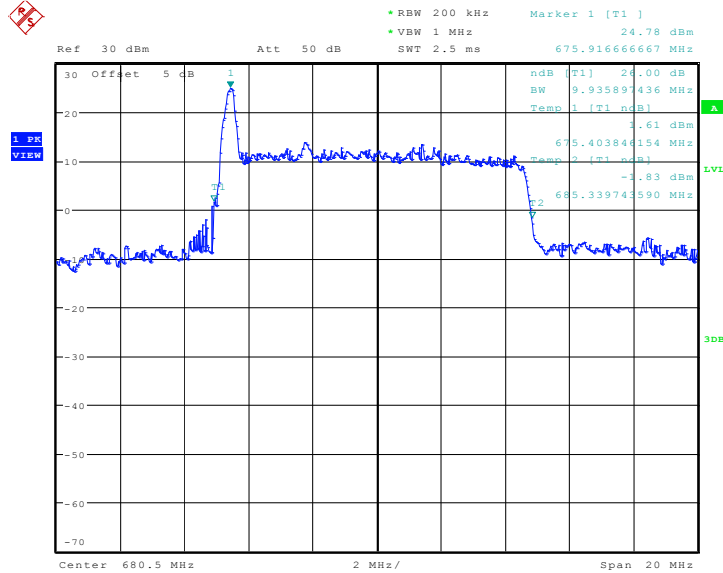

Date: 12.OCT.2019 11:10:26

n71, 10MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

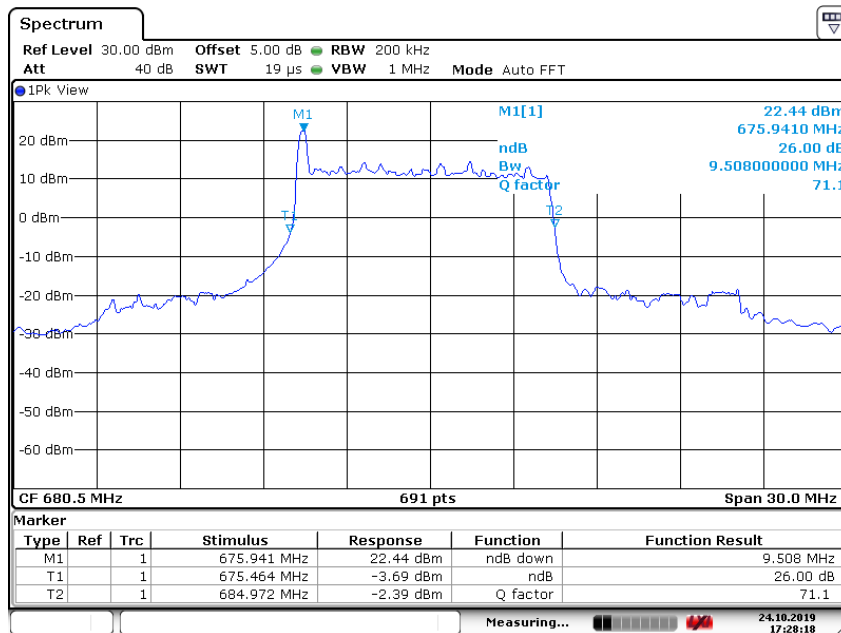


Date: 24.OCT.2019 17:28:18

n71, 15MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
680.5	15000.00	14153.00

n71, 15MHz Bandwidth, CP-QPSK (-26dBc BW)

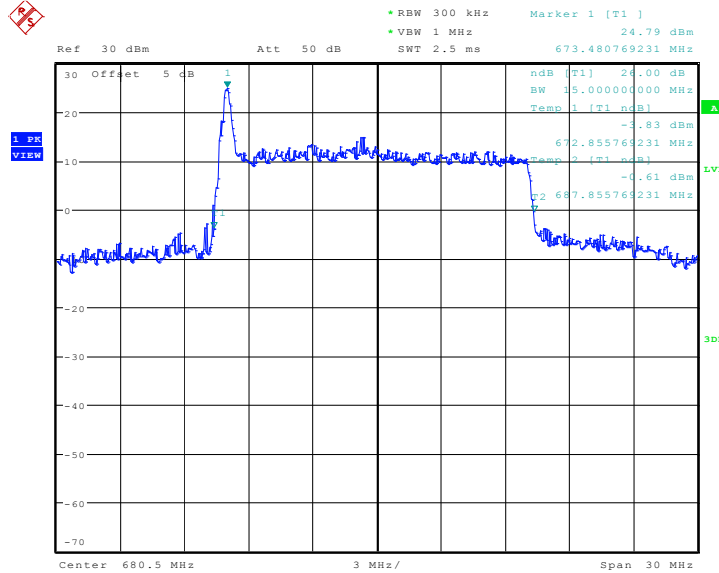

Date: 12.OCT.2019 09:31:15

n71, 15MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

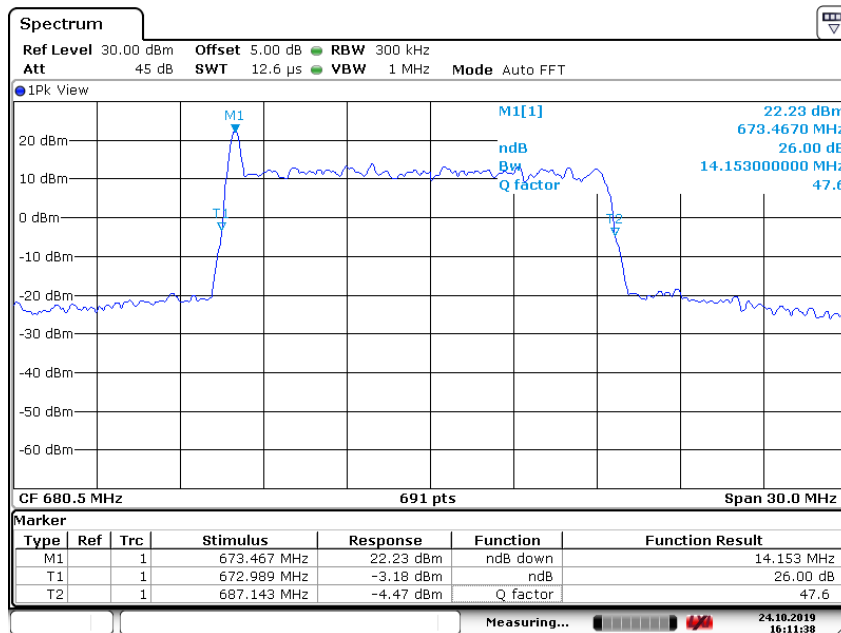


Date: 24.OCT.2019 16:11:38

n71, 20MHz (-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	
	CP-QPSK	DFT-s-QPSK
680.5	20513.82	19682.00

n71, 20MHz Bandwidth, CP-QPSK (-26dBc BW)

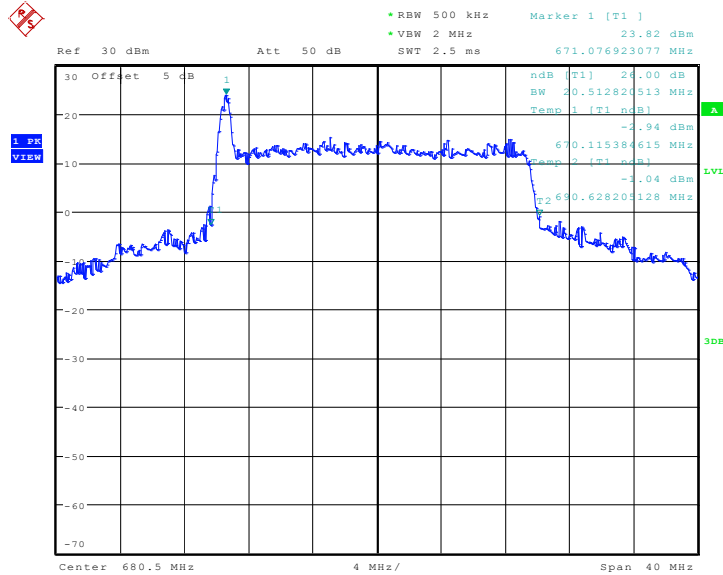

Date: 12.OCT.2019 09:42:31

n71, 20MHz Bandwidth, DFT-s-QPSK (-26dBc BW)

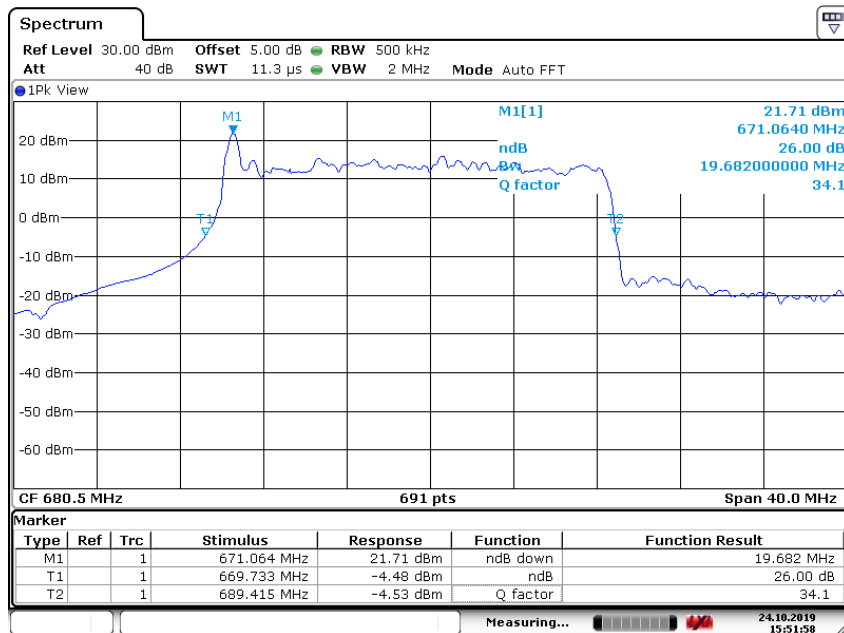

Date: 24.OCT.2019 15:51:58

A.6 BAND EDGE COMPLIANCE

A.6.1 Measurement limit

Part 27.53(g) specifies that for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.


Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A.6.2 Measurement result


Only the worst case result is given below

n41


LOW BAND EDGE BLOCK-1RB-low_offset

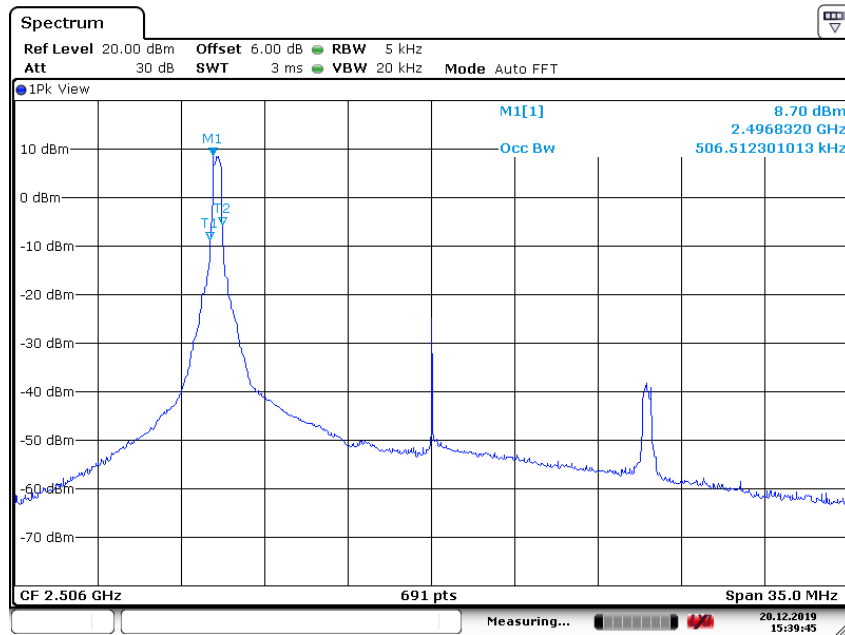


Date: 20.DEC.2019 15:39:45

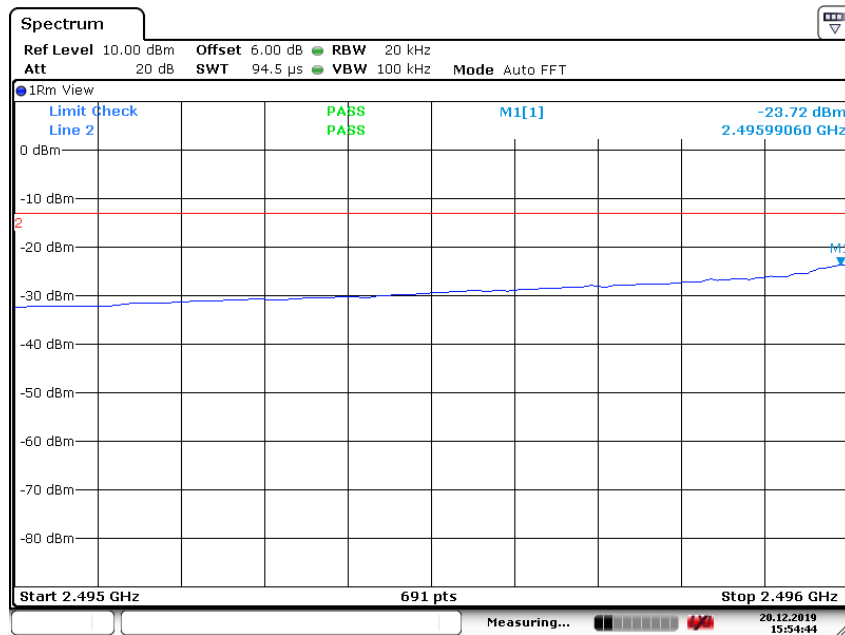


Date: 20.DEC.2019 15:54:45

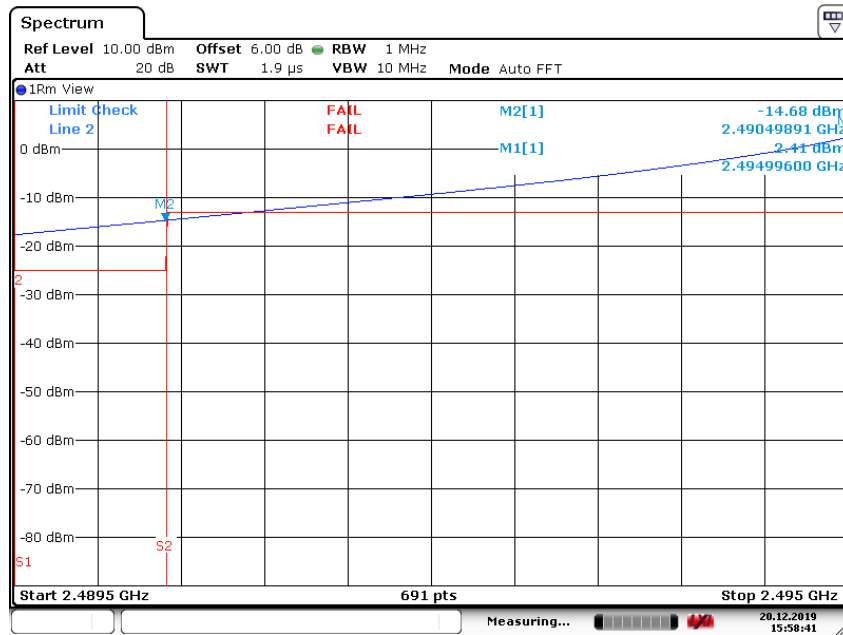

Date: 20.DEC.2019 15:58:41

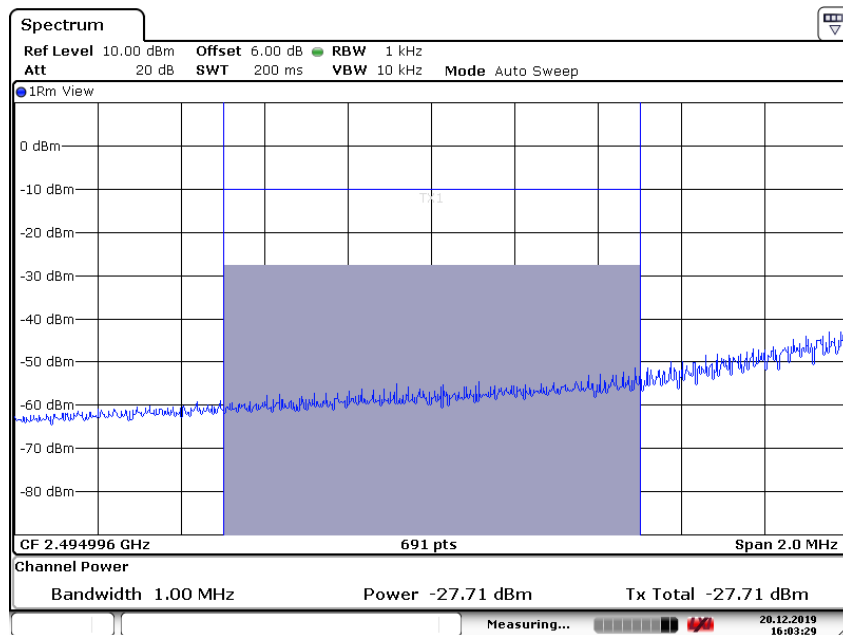


Date: 20.DEC.2019 16:03:29

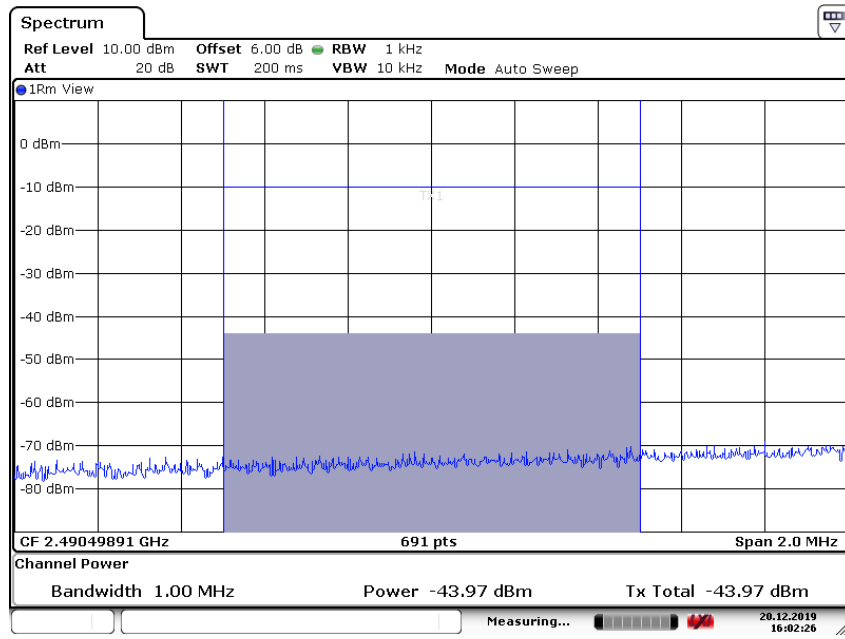


Date: 20.DEC.2019 16:02:26


HIGH BAND EDGE BLOCK-1RB-high_offset

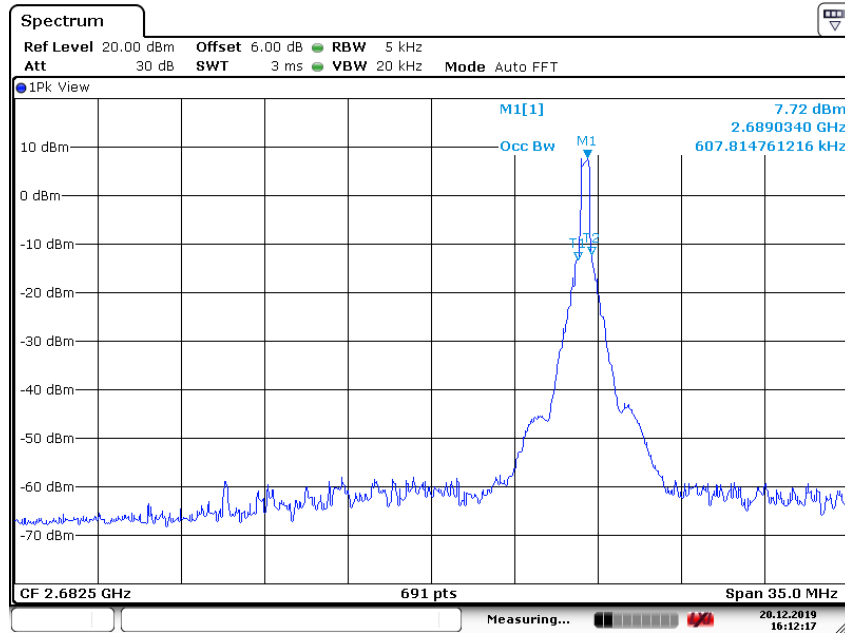


Date: 20.DEC.2019 16:12:17

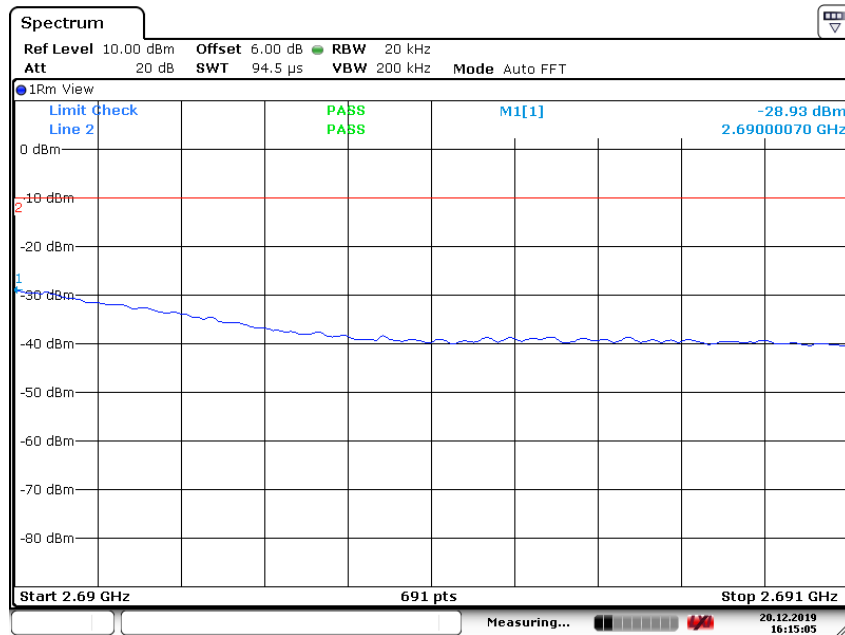


Date: 20.DEC.2019 16:15:05

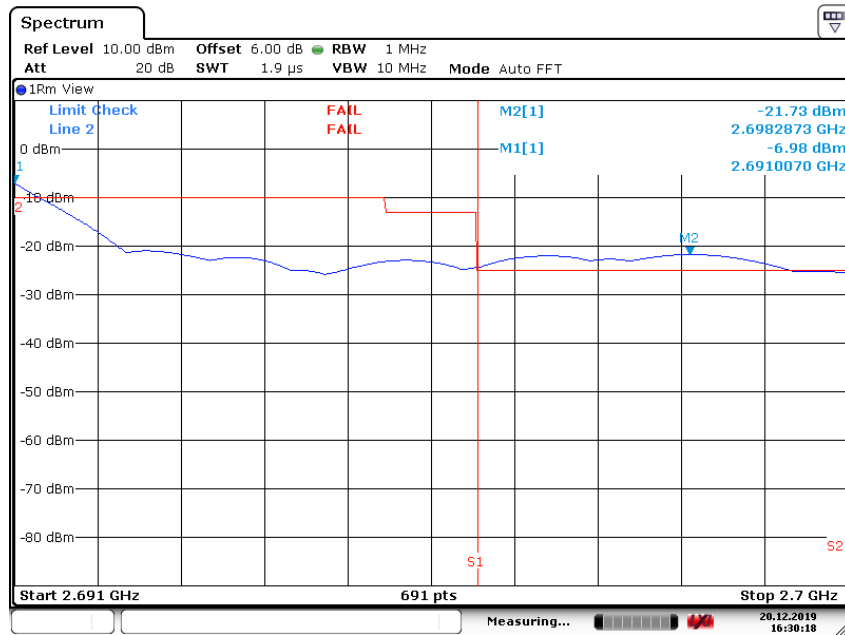

Date: 20.DEC.2019 16:30:18


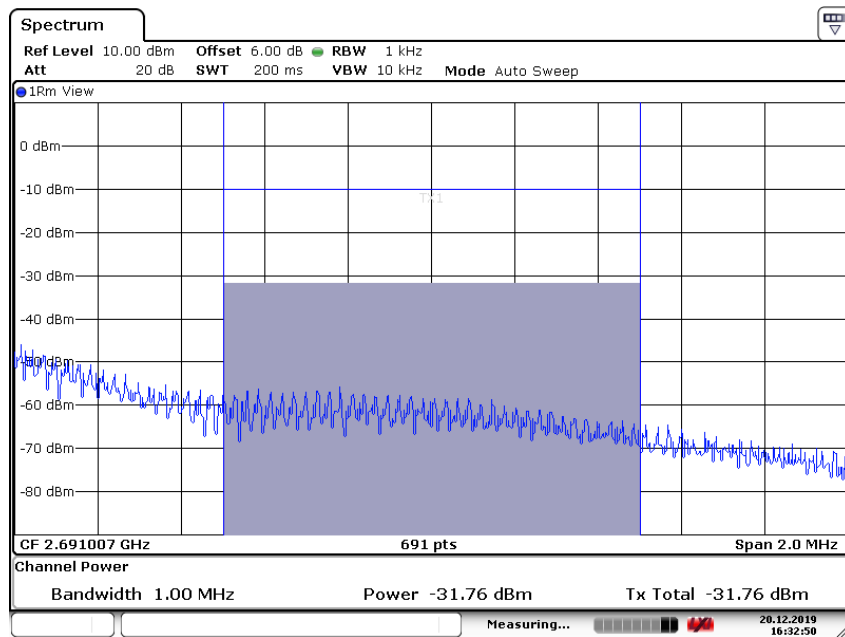



Date: 20.DEC.2019 16:32:50

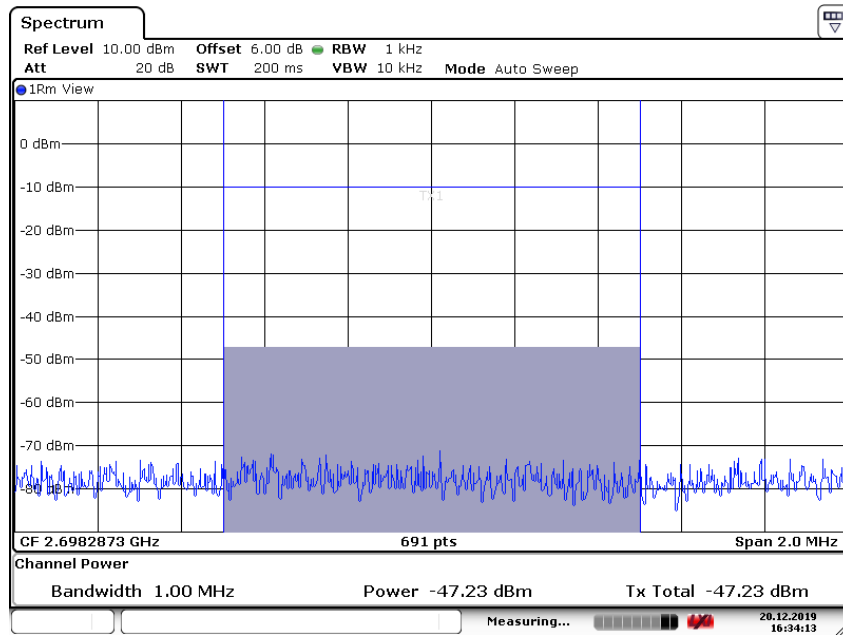

Date: 20.DEC.2019 16:34:13


LOW BAND EDGE BLOCK-20MHz-100%RB

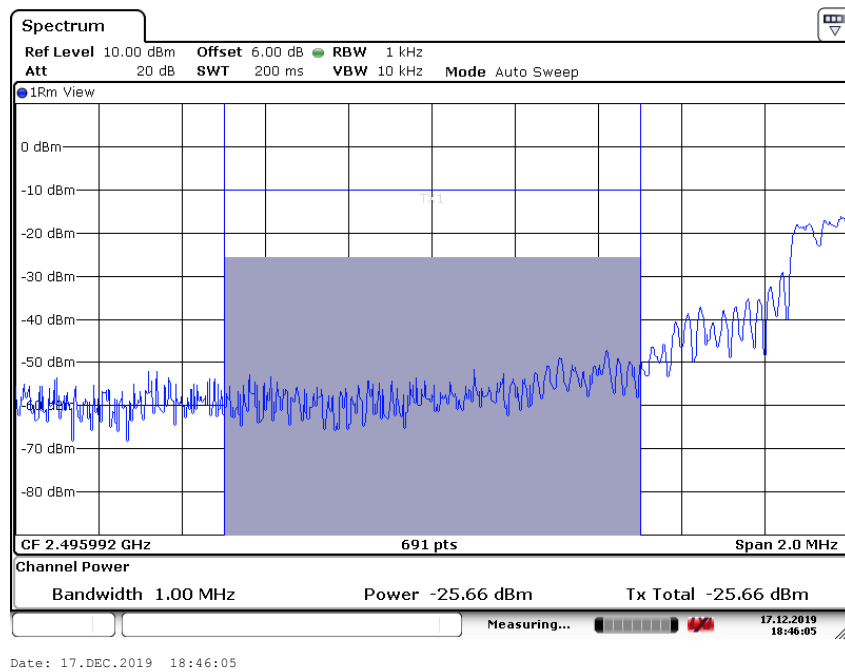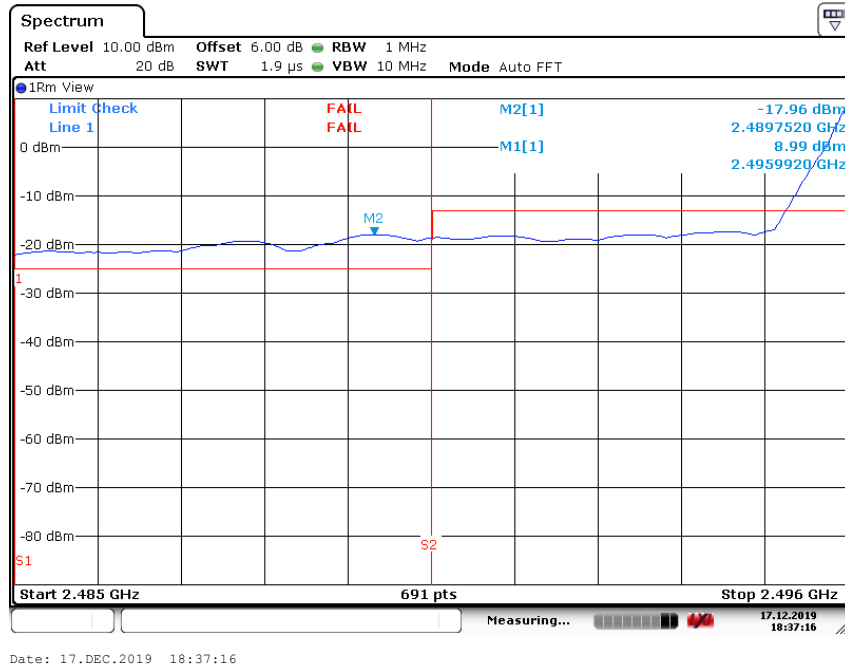

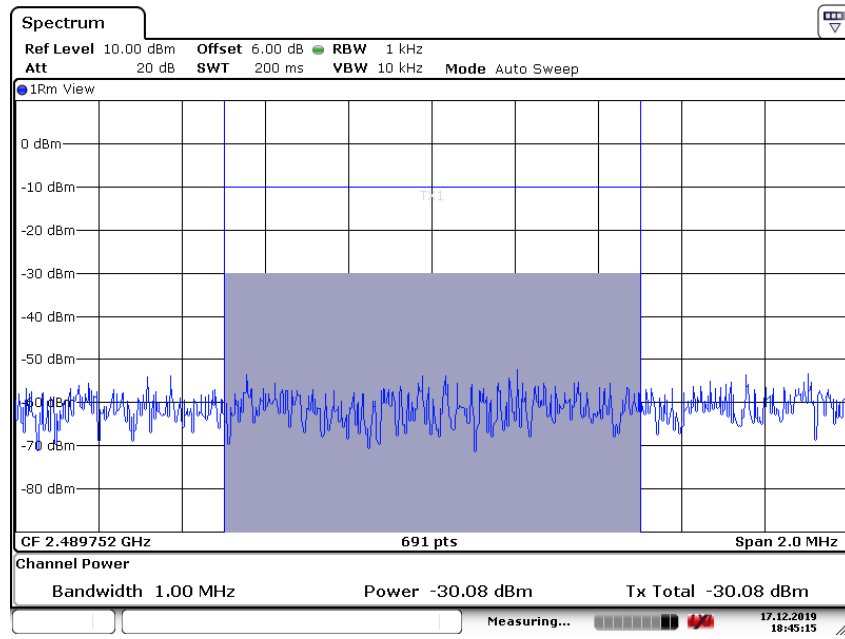

Date: 17.DEC.2019 18:45:15


HIGH BAND EDGE BLOCK-20MHz-100%RB

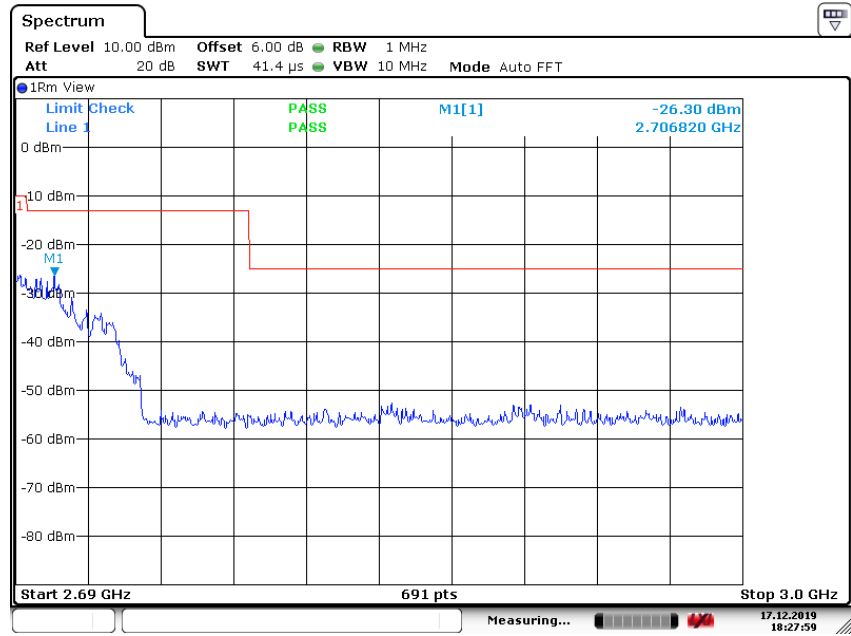

Date: 17.DEC.2019 18:27:59


n71

LOW BAND EDGE BLOCK-1RB-low_offset

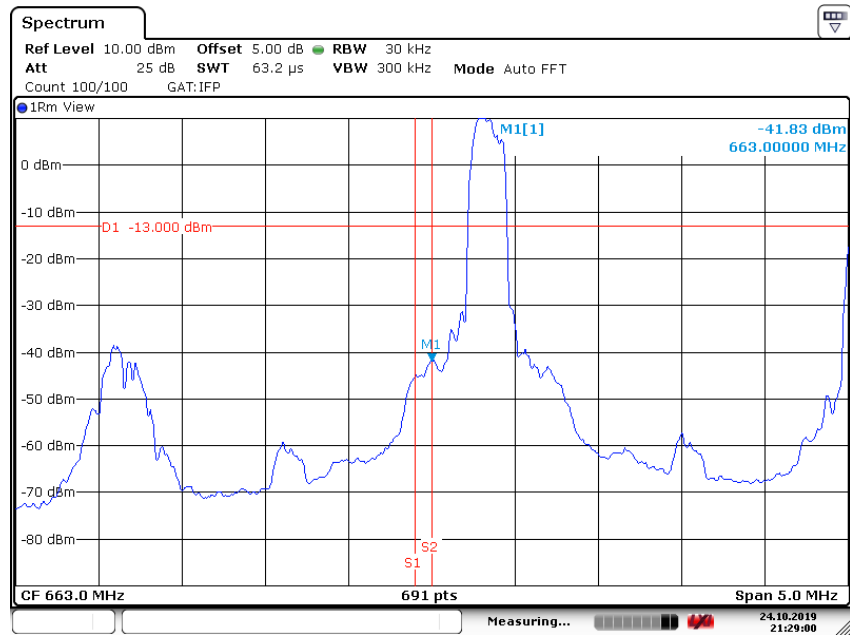


Date: 24.OCT.2019 21:29:00

HIGH BAND EDGE BLOCK-1RB-high_offset

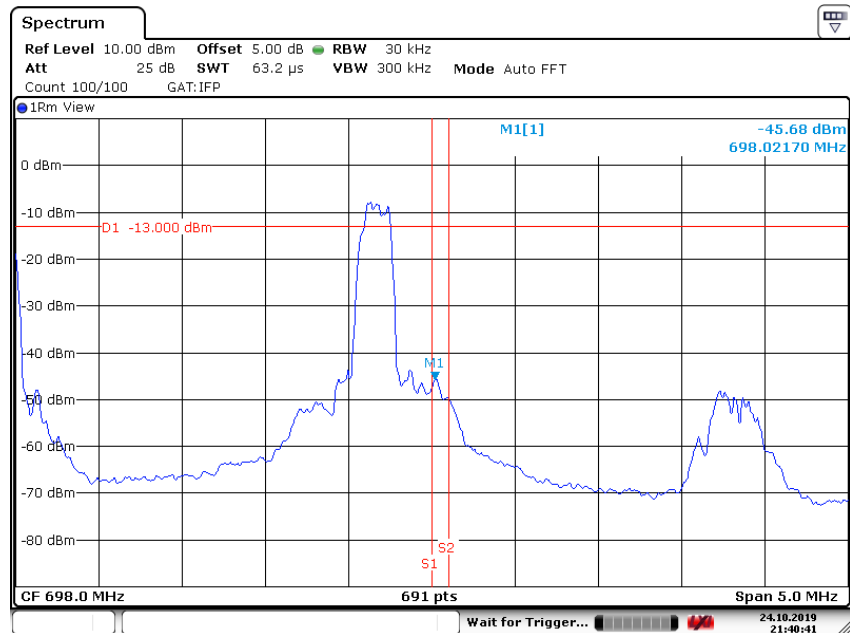


Date: 24.OCT.2019 21:40:42

LOW BAND EDGE BLOCK-20MHz-100%RB

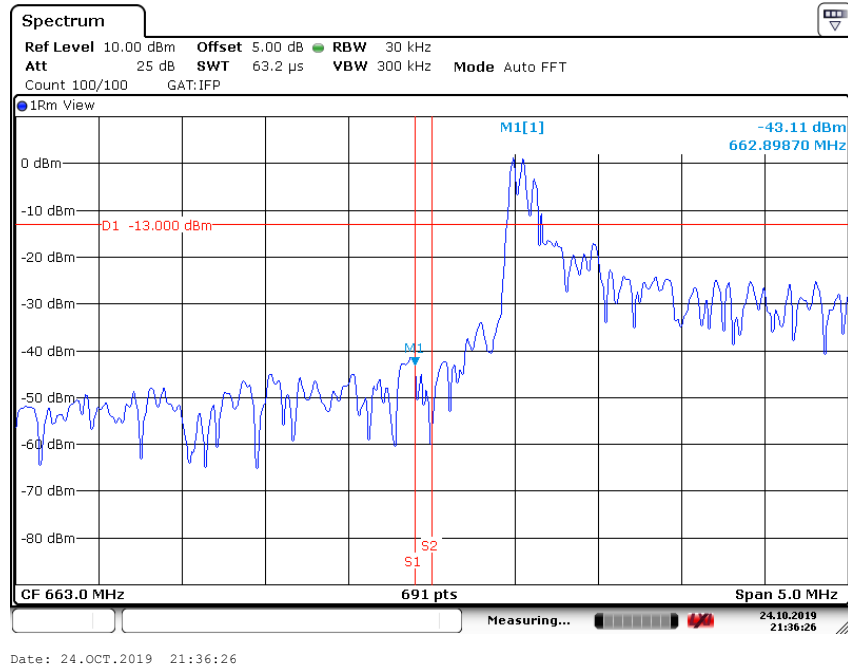

HIGH BAND EDGE BLOCK-20MHz-100%RB

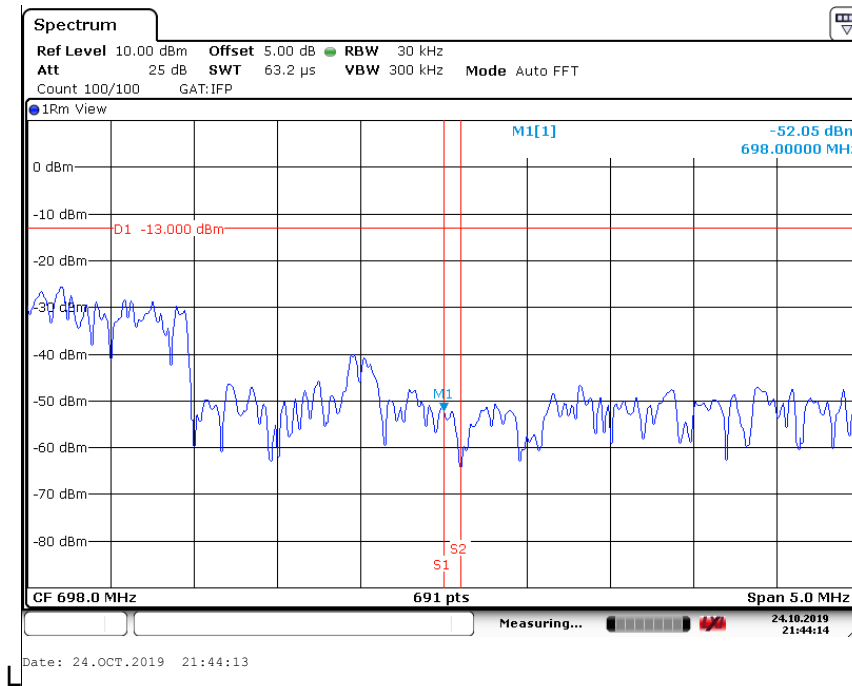

A.7 CONDUCTED SPURIOUS EMISSION

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit


Part 27.53(g) specifies that for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A. 7.3 Measurement result


Only the worst case result is given below

n41: 30MHz – 30GHz

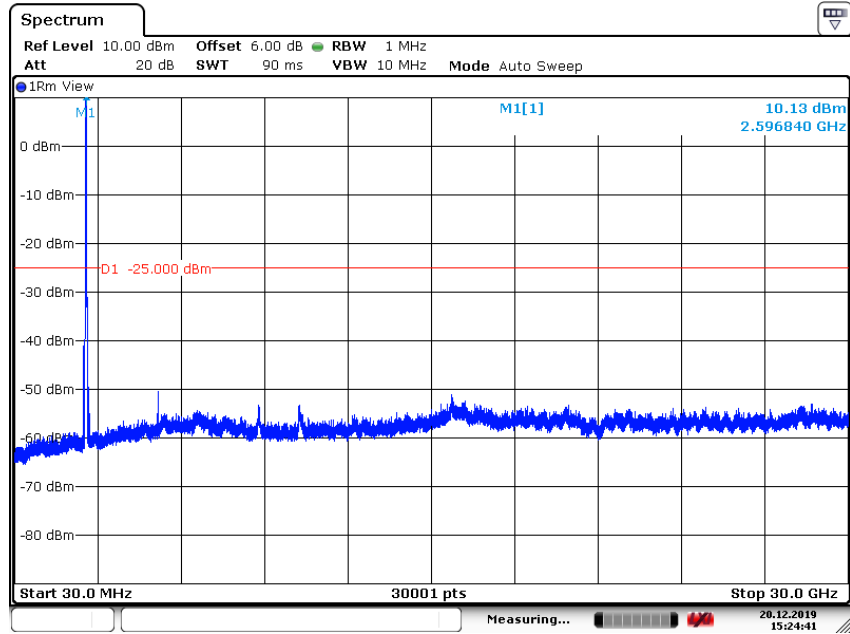

Date: 20.DEC.2019 15:24:41

n71: 30MHz – 6.98GHz

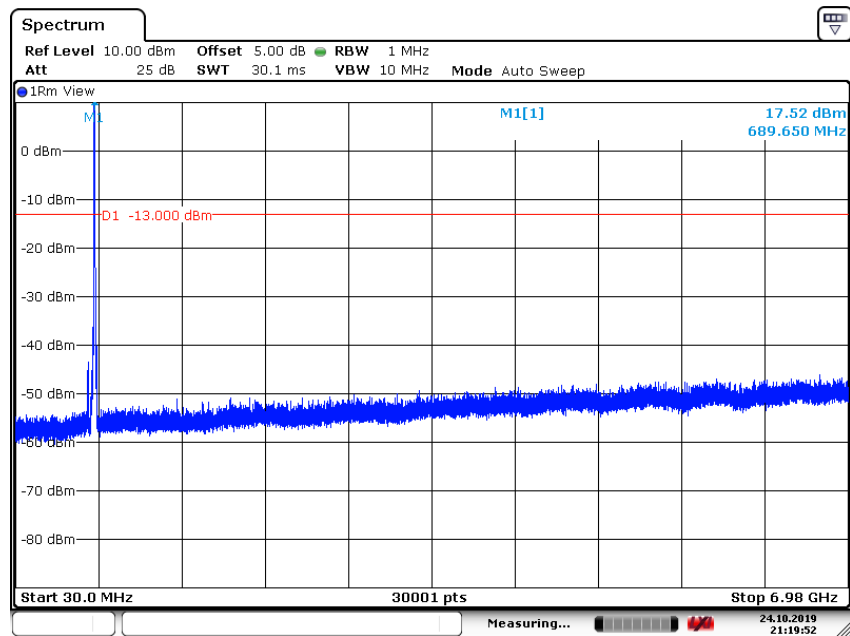

Date: 24.OCT.2019 21:19:53

A.8 PEAK-TO-AVERAGE POWER RATIO

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1ms;
- e) Record the maximum PAPR level associated with a probability of 0.1%.

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

n41, 100MHz

Frequency (MHz)	PAPR (dB)							
	CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM	DFT-s-256QAM
2592.99	8.70	9.56	9.62	9.87	7.06	8.17	8.41	8.48

n71, 20MHz

Frequency (MHz)	PAPR (dB)						
	CP-QPSK	CP-16QAM	CP-64QAM	CP-256QAM	DFT-s-QPSK	DFT-s-16QAM	DFT-s-64QAM
680.5	7.05	7.17	7.46	8.00	4.72	6.05	5.61

ANNEX B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> 	
<hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

END OF REPORT