FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd.

EQUIPMENT : Smart Phone BRAND NAME : ONEPLUS

MODEL NAME : DE2118, DE2117 FCC ID : 2ABZ2-EF000

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 05, 2021 and completely tested on Jan. 29, 2021. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Frie Shih

Dogue Cher

Approved by: Eric Shih / Manager

Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 1 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMA	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	6
	1.5	Modification of EUT	
	1.6	Maximum Conducted Power, Frequency Tolerance and Emission Designator	6
	1.7	Testing Site	
	1.8	Test Software	
	1.9	Applied Standards	8
2	TES	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	TES	「RESULT	12
	3.1	Conducted Output Power Measurement	12
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13
	3.3	Emissions Mask Measurement	14
	3.4	Emissions Mask – Out Of Band Emissions Measurement	16
	3.5	Field Strength of Spurious Radiation Measurement	17
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT	21
5	UNC	ERTAINTY OF EVALUATION	22
ΔP	DENI	DIX A. TEST RESULTS OF CONDUCTED TEST	
AP	PEND	IX B. TEST RESULTS OF RADIATED TEST	

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 2 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW110513-01	Rev. 01	Initial issue of report	Mar. 18, 2021

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 3 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule Description		Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 29.60 dB at 3258.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 4 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd.

18C02,18C03,18C04,18C05, Shum Yip Terra Building,Binhe Avenue North, Futian District, Shenzhen,Guangdong, China.

Report No.: FW110513-01

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd.

18C02,18C03,18C04,18C05, Shum Yip Terra Building,Binhe Avenue North, Futian District, Shenzhen,Guangdong, China.

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	DE2118, DE2117
FCC ID	2ABZ2-EF000
	GSM/WCDMA/LTE/5G NR
	WLAN 2.4GHz 802.11b/g/n/ac HT20/HT40/VHT20/VHT40
FUT assuments Badisa application	WLAN 5GHz 802.11a/n HT20/HT40
EUT supports Radios application	WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
	Bluetooth BR / EDR / LE
	GNSS/NFC / ANT+
IMELO - d-	Conducted: 990017690032400
IMEI Code	Radiation: 990017690038134
HW Version	10
SW Version	11.0.1.1.DE18CB
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

 Sporton International (Shenzhen) Inc.
 Page Number
 : 5 of 21

 TEL: 86-755-8637-9589
 Report Issued Date
 : Mar. 18, 2021

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID : 2ABZ2-EF000 Report Template No.: BU5-FWLTE Version 2.0

1.4 Product Specification of Equipment Under Test

Product Specif	ication subjective to this standard				
Tx Frequency	814 ~ 824 MHz				
Rx Frequency	859 ~ 869 MHz				
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz				
Maximum Output Power to Antenna	Top Antenna:23.91 dBm				
maximum output I ower to Antenna	Bottom Antenna:23.71 dBm				
Type of Modulation	QPSK / 16QAM / 64QAM/ 256QAM(Downlink Only)				

Note: For Top/Bottom Antenna, the higher Conducted power is showed in this report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power, Frequency Tolerance and Emission Designator

	TE Daniel OC		ODOK			400 414		
L	TE Band 26		QPSK	ı	16QAM			
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power (W)	
1.4	814.7 ~ 823.3	1M10G7D	-	0.2382	1M09W7D	-	0.2061	
3	815.5 ~ 822.5	2M72G7D	-	0.2415	2M72W7D	-	0.2193	
5	816.5 ~ 821.5	4M51G7D	-	0.2421	4M50W7D	-	0.2133	
10	819.0	8M99G7D	0.0015	0.2460	9M05W7D	-	0.2037	
15	821.5	13M4G7D	-	0.2355	13M4W7D	-	0.1995	
L	TE Band 26			64Q	QAM			
BW (MHz)	Frequency Range (MHz)	Emission I (99%)	Designator OBW)			Conduct	mum ed power V)	
1.4	814.7 ~ 823.3	1M10)W7D		-	0.1	596	
3	815.5 ~ 822.5	2M73	BW7D		-	0.1	622	
5	816.5 ~ 821.5	4M50)W7D		-	0.1	611	
10	819.0	9M01	W7D		-	0.1570		
15	821.5	13M4	W7D		-	0.1500		

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 6 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.7 Testing Site

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Sh	nenzhen) Inc.							
Test Site Location	Shenzhen, 518055 Peop								
	Sporton Sito No	Sporton Site No. ECC Designation No.							
Test Site No.	Sporton Site No. FCC Designation No. Registrat								
	TH01-SZ	CN1256	421272						

Test Firm	Sporton International (Sh	nenzhen) Inc.					
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398						
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.				
	03CH02-SZ	CN1256	421272				

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 7 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 8 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

			Ва	ndwi	dth (M	Hz)			Modulation	1		RB#		Tes	t Cha	nnel
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	н
Max. Output Power	26	>	>	٧	٧	٧	-	٧	v	v	v	v	v	v	٧	v
26dB and 99% Bandwidth	26	٧	٧	>	v	v	-	v	v	v			v	v	٧	v
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v	v	v	v			v	v	v
Frequency Stability	26				٧		-	٧					v		٧	
Radiated Spurious Emission	26							Worst	case					v	>	
Note	2. The 3. LTE 15N	mark " Band2	'-" me 26 tra ndwid	eans t nsmit Ith co	that thi frequences mplies	s band ency fo the E	lwidth i or part2	s not suppo 22 rule is 82	24MHz-849M	lHz, for part9 refore ERP o						

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 9 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

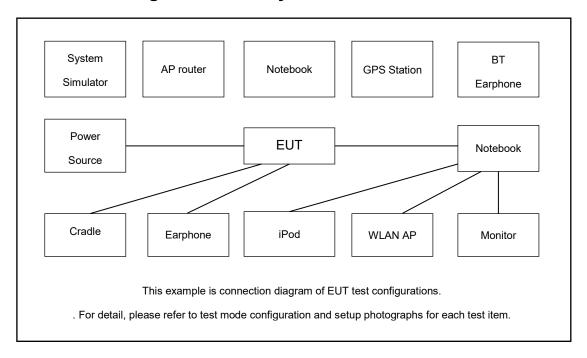

2.3 Support Unit used in test configuration and system

Ite	m Equipment	Trade Name	Name Model No.		Data Cable	Power Cord	
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m	
2.	Earphone	Apple	MC690ZP/A	N/A	Shielded,1.0m	N/A	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

= 4.0 + 10 = 14.0 (dB)

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 10 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest				
15	Channel	26765	-	-				
15	Frequency	821.5	-	-				
10	Channel	-	26740	-				
10	Frequency	-	819	-				
5	Channel	26715	26740	26765				
o O	Frequency	816.5	819	821.5				
3	Channel	26705	26740	26775				
3	Frequency	815.5	819	822.5				
1.4	Channel	26697	26740	26783				
1.4	Frequency	814.7	819	823.3				

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000

Page Number : 11 of 21 Report Issued Date: Mar. 18, 2021 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 12 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

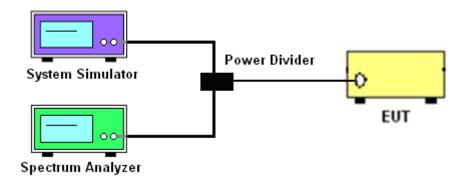

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 13 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 14 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

3.3.4 Test Setup

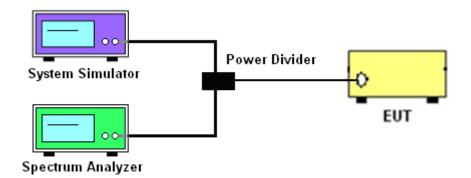

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 15 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

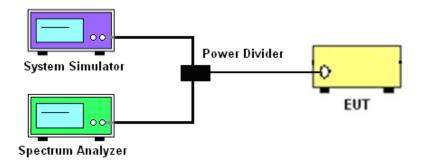

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 16 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 17 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 2.0

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

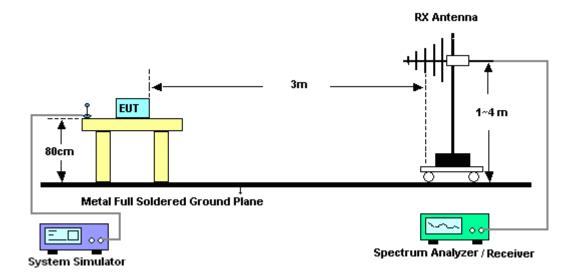

For radiated test above 1GHz

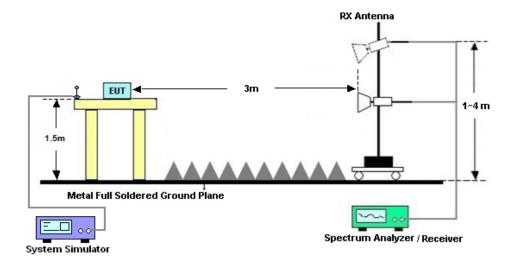

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 18 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.


3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 19 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

3.6.5 Test Setup

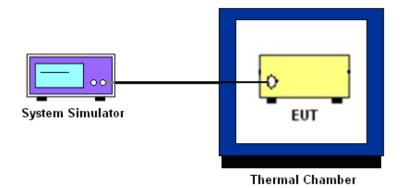

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 20 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 17, 2020	Jan. 29, 2021	Apr. 16, 2021	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangrou p	LP-150U	H201408180 3	-40~+150°C	Jul. 22, 2020	Jan. 29, 2021	Jul. 21, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz	Apr. 17, 2020	Jan. 27, 2021	Apr. 16, 2021	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 15, 2020	Jan. 27, 2021	Jul. 14, 2021	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120 D	9120D-1355	1GHz~18GHz	Apr. 30, 2020	Jan. 27, 2021	Apr. 29, 2021	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 16, 2020	Jan. 27, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY5327010 5	0.5GHz~26.5Gh z	Oct. 16, 2020	Jan. 27, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	6160100024 70	N/A	NCR	Jan. 27, 2021	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jan. 27, 2021	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jan. 27, 2021	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 21 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of	
	2.47dB
Confidence of 95% (U = 2Uc(y))	

<u>Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)</u>

Measuring Uncertainty for a Level of	3.31dB
Confidence of 95% (U = 2Uc(y))	3.3 IUB

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : 22 of 21
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Report No.: FW110513-01

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

				Power	Power	Power
BW			RB	Low	Middle	High
[MHz]	Modulation	RB Size	Offset	Ch. /	Ch. /	Ch. /
				Freq.	Freq.	Freq.
	Chan	inel	26765			
	Frequenc	y (MHz)		821.5		
15	QPSK	1	0	23.70		
15	QPSK	1	37	23.72		
15	QPSK	1	74	23.62		
15	QPSK	36	0	22.45		
15	QPSK	36	20	22.61		
15	QPSK	36	39	22.64		
15	QPSK	75	0	22.51		
15	16QAM	1	0	22.88		
15	16QAM	1	37	23.00		
15	16QAM	1	74	22.71		
15	16QAM	36	0	21.59		
15	16QAM	36	20	21.65		
15	16QAM	36	39	21.73		
15	16QAM	75	0	21.66		
15	64QAM	1	0	21.24		
15	64QAM	1	37	21.64		
15	64QAM	1	74	21.76		
15	64QAM	36	0	20.37		
15	64QAM	36	20	20.63		
15	64QAM	36	39	20.65		
15	64QAM	75	0	20.49		
	Chan	inel		26740		
	Frequenc	y (MHz)			819	
10	QPSK	1	0		23.91	

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A1 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01



10	QPSK	1	25		23.65	
10	QPSK	1	49		23.88	
10	QPSK	25	0		22.83	
10	QPSK	25	12		22.78	
10	QPSK	25	25		22.76	
10	QPSK	50	0		22.70	
10	16QAM	1	0		22.84	
10	16QAM	1	25		23.09	
10	16QAM	1	49		22.76	
10	16QAM	25	0		21.74	
10	16QAM	25	12		21.86	
10	16QAM	25	25		21.90	
10	16QAM	50	0		21.78	
10	64QAM	1	0		21.96	
10	64QAM	1	25		21.92	
10	64QAM	1	49		21.95	
10	64QAM	25	0		20.88	
10	64QAM	25	12		20.86	
10	64QAM	25	25		20.92	
10	64QAM	50	0		20.85	
	Char	nel		26715	26740	26765
	Frequenc	y (MHz)		816.5	819	821.5
5	QPSK	1	0	23.60	23.63	23.68
5	QPSK	1	12	23.64	23.84	23.73
5	QPSK	1	24	23.70	23.73	23.56
5	QPSK	12	0	22.84	22.71	22.77
5	QPSK	12	7	22.78	22.78	22.77
5	QPSK	12	13	22.74	22.76	22.76
5	QPSK	25	0	22.76	22.75	22.70
5	16QAM	1	0	23.08	22.74	23.00
5	16QAM	1	12	23.07	22.91	23.04
5	16QAM	1	24	23.29	22.96	23.04
5	16QAM	12	0	21.86	21.78	21.73
5	16QAM	12	7	21.81	21.88	21.75
5	16QAM	12	13	21.90	21.85	21.77
5	16QAM	25	0	21.99	21.72	21.73

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A2 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01



5	64QAM	1	0	21.22	21.98	22.07
5	64QAM	1	12	21.16	22.02	21.72
	<u> </u>					
5	64QAM	1	24	21.38	22.05	21.44
5	64QAM	12	0	20.16	20.90	20.90
5	64QAM	12	7	20.19	20.87	20.82
5	64QAM	12	13	20.23	20.89	20.73
5	64QAM	25	0	20.13	20.83	20.72
	Char			26705	26740	26775
	Frequenc	y (MHz)	ı	815.5	819	822.5
3	QPSK	1	0	23.77	23.67	23.64
3	QPSK	1	8	23.83	23.82	23.75
3	QPSK	1	14	23.76	23.72	23.61
3	QPSK	8	0	22.83	22.72	22.69
3	QPSK	8	4	22.85	22.85	22.76
3	QPSK	8	7	22.78	22.82	22.71
3	QPSK	15	0	22.82	22.73	22.81
3	16QAM	1	0	23.24	23.06	22.91
3	16QAM	1	8	23.36	23.35	22.95
3	16QAM	1	14	23.41	23.27	23.02
3	16QAM	8	0	21.88	21.82	21.83
3	16QAM	8	4	21.83	21.96	21.63
3	16QAM	8	7	21.78	21.92	21.66
3	16QAM	15	0	21.83	21.85	21.73
3	64QAM	1	0	21.27	22.04	21.94
3	64QAM	1	8	21.38	22.10	21.92
3	64QAM	1	14	21.37	22.03	21.52
3	64QAM	8	0	20.19	20.84	20.83
3	64QAM	8	4	20.18	20.93	20.82
3	64QAM	8	7	20.17	20.87	20.82
3	64QAM	15	0	20.14	20.80	20.85
	Char	nel	26697	26740	26783	
	Frequenc	y (MHz)	814.7	819	823.3	
1.4	QPSK	1	0	23.62	23.68	23.62
1.4	QPSK	1	3	23.67	23.72	23.66
		1	E	23.57	22.66	22.52
1.4	QPSK	1	5	23.31	23.66	23.52

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A3 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01



QPSK 23.74 23.67 23.62 QPSK 23.76 23.69 23.60 22.79 22.71 **QPSK** 22.67 16QAM 22.86 23.02 22.97 22.94 1.4 16QAM 22.90 22.87 16QAM 23.14 22.93 22.65 1.4 16QAM 22.81 22.74 22.75 16QAM 22.88 22.79 22.74 16QAM 22.64 22.73 22.64 16QAM 21.82 21.64 21.85 64QAM 21.19 21.89 21.94 64QAM 21.19 22.03 21.97 64QAM 21.15 21.93 21.73 1.4 64QAM 21.12 21.86 21.90 64QAM 21.16 21.91 21.94 64QAM 21.13 21.91 21.78 6 20.70 1.4 64QAM 20.02 20.78

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A4 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01


LTE Band 26

26dB Bandwidth


Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz 3MHz 5MHz						101	10MHz 15M			/IHz 20MI	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.22	3.02	3.01	4.89	4.89	-	-	14.27	14.36	-	-
Middle CH	1.24	1.22	2.96	3.02	4.98	4.78	9.73	9.83	-	-	-	-
Highest CH	1.23	1.23	3.03	2.97	4.85	4.87	-	-	-	-	-	-
Mode					LTE Ba	and 26 : :	26dB BV	V(MHz)				
BW	1.4	ИНz	3M	lHz	5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.22	-	3.04	-	4.88	-	-	-	14.42	-	-	-
Middle CH	1.23	-	3.00	-	4.87	-	9.81	-	-	-	-	-
Highest CH	1.24	-	2.97	-	4.84	-	ı	-	-	-	-	-

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A5 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

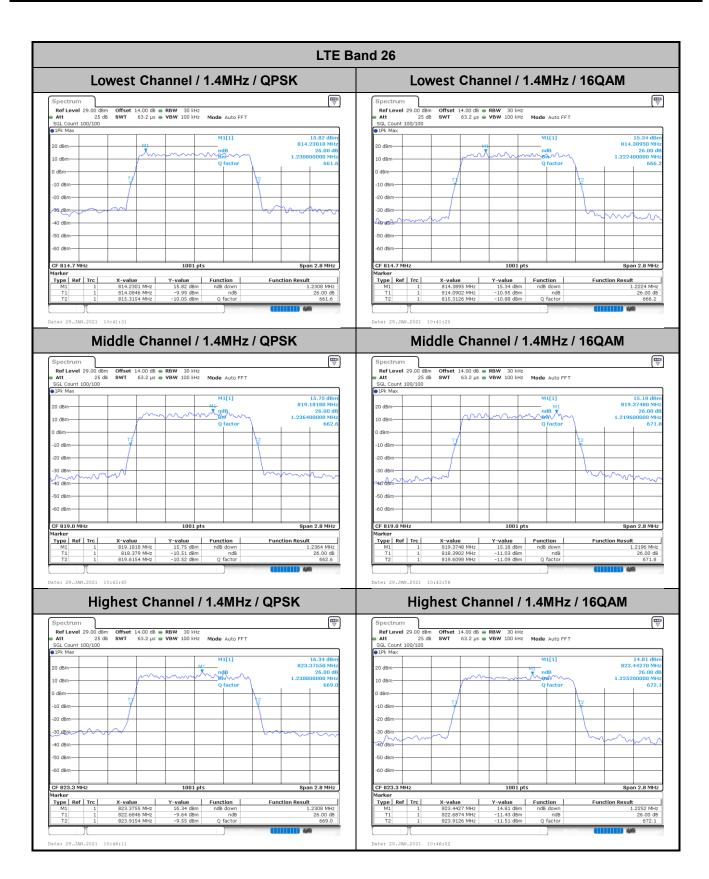


Page Number : A6 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

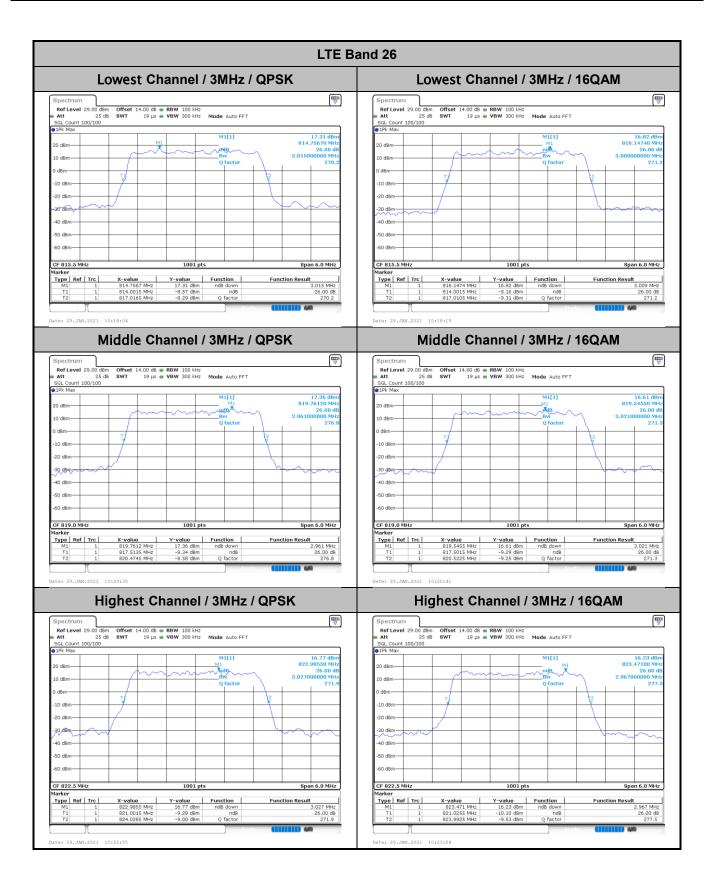


Page Number : A7 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

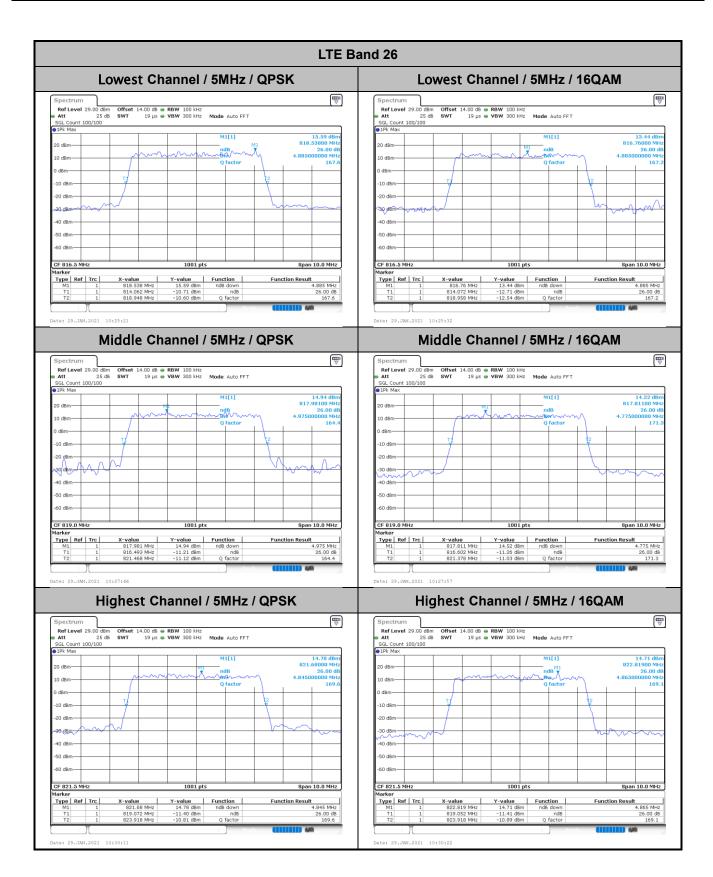


Page Number : A8 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

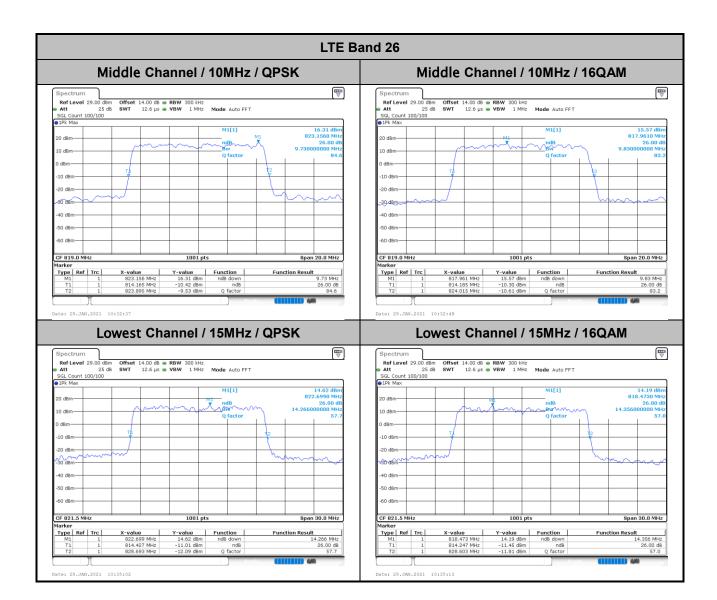

Page Number : A9 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

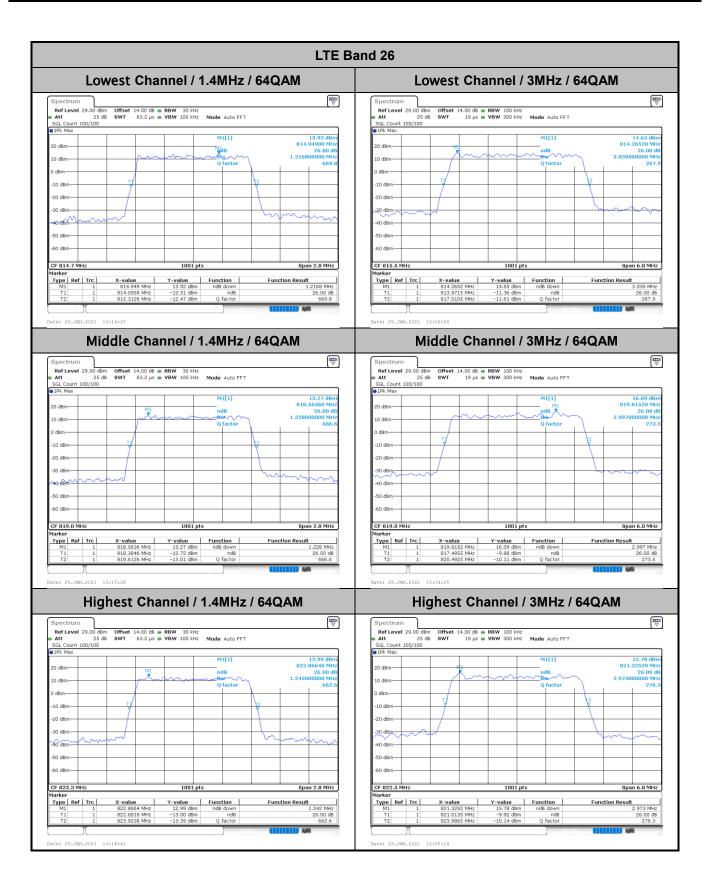


Page Number : A10 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

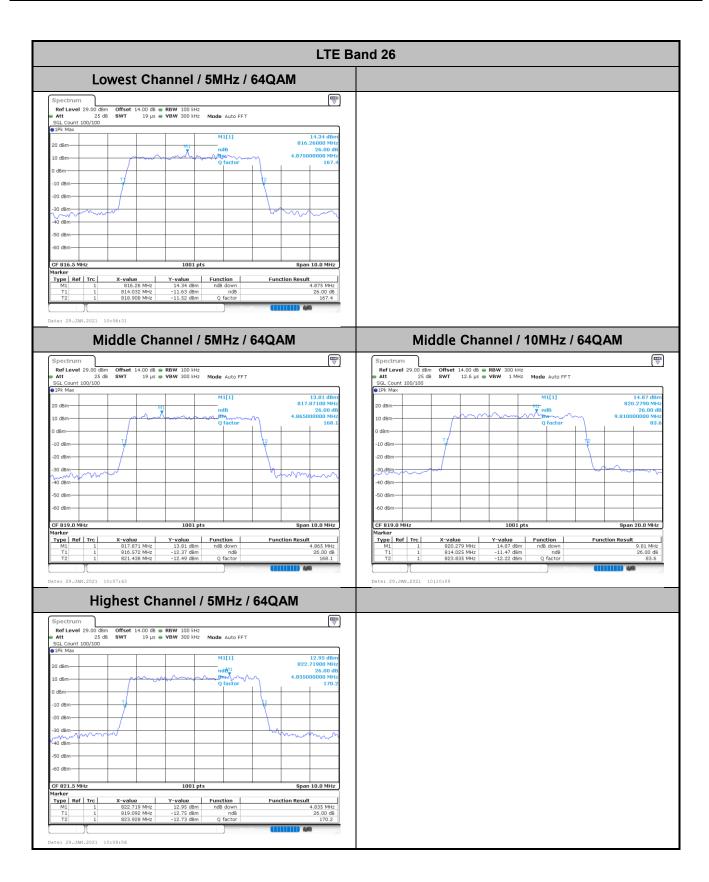

Sporton International (Shenzhen) Inc.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A11 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

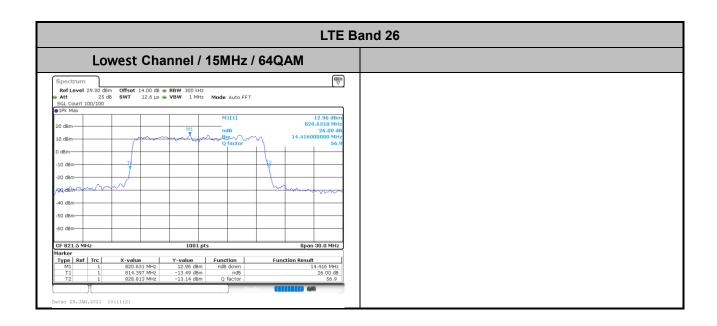

Page Number : A12 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

Occupied Bandwidth


Mode	LTE Band 26 : 99%OBW(MHz)												
BW	1.4	ИНz	3M	lHz	5M	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.09	1.09	2.71	2.71	4.51	4.50	-	-	13.40	13.40	-	-	
Middle CH	1.09	1.09	2.72	2.70	4.50	4.48	8.99	9.05	-	-	-	-	
Highest CH	1.10	1.09	2.72	2.72	4.50	4.49	-	-	-	-	-	-	
Mode					LTE Ba	and 26 :	99%OBV	V(MHz)					
BW	1.4	ИНz	3M	lHz	5M	Hz	10MHz		15MHz		20MHz		
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM		
Lowest CH	1.09	-	2.72	-	4.50	-	-	-	13.40	-	-	-	
Middle CH	1.10	-	2.73	-	4.50	-	9.01	-	-	-	-	-	
Highest CH	1.09	-	2.73	-	4.48	-	-	-	-	-	-	-	

Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A13 of A46 Report Issued Date : Mar. 18, 2021

Report No. : FW110513-01


Report Version : Rev. 01

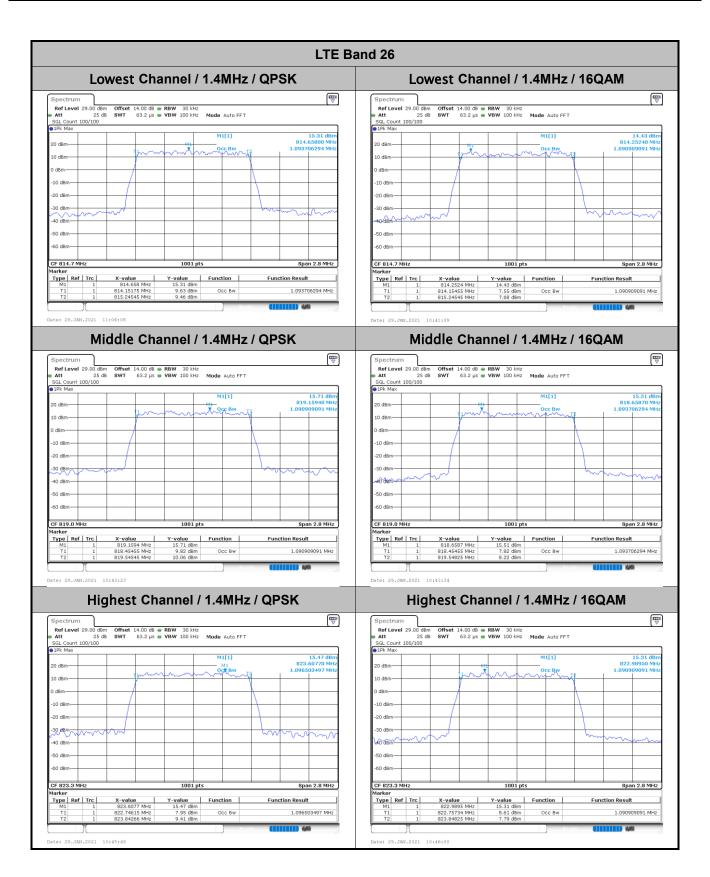


Page Number : A14 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

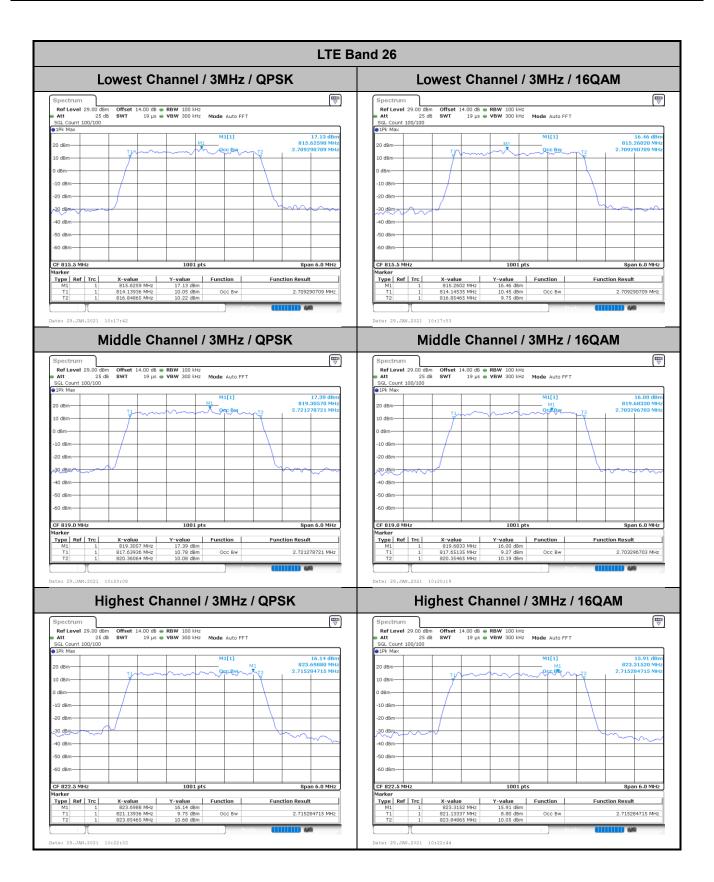


Page Number : A15 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

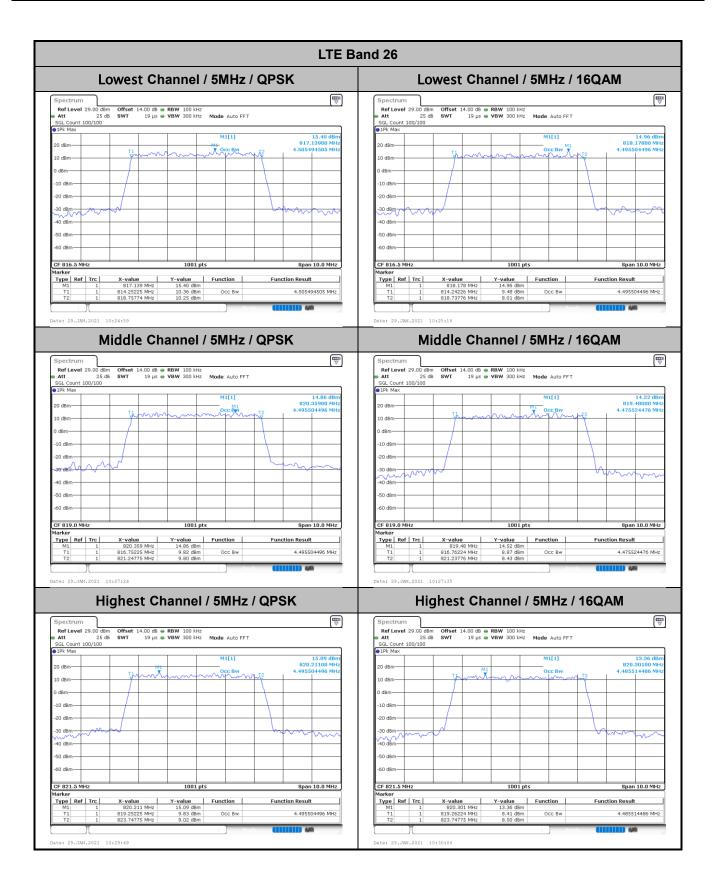


Page Number : A16 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

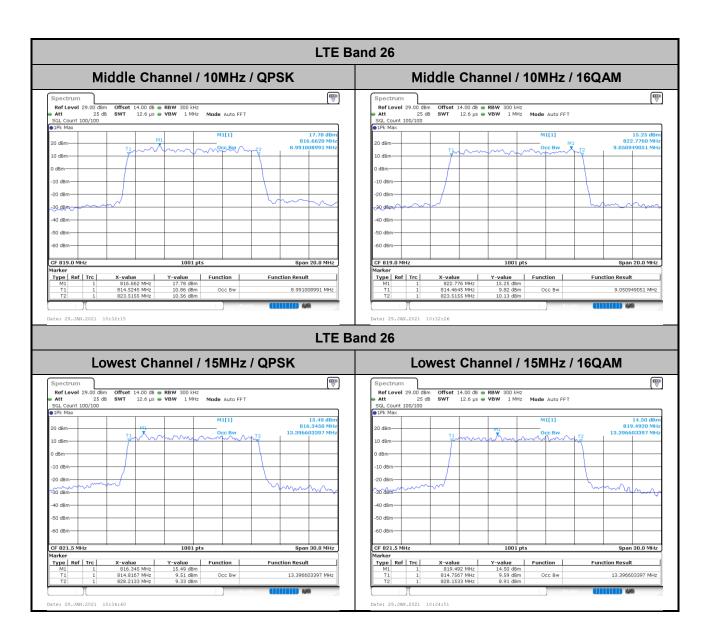


Page Number : A17 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

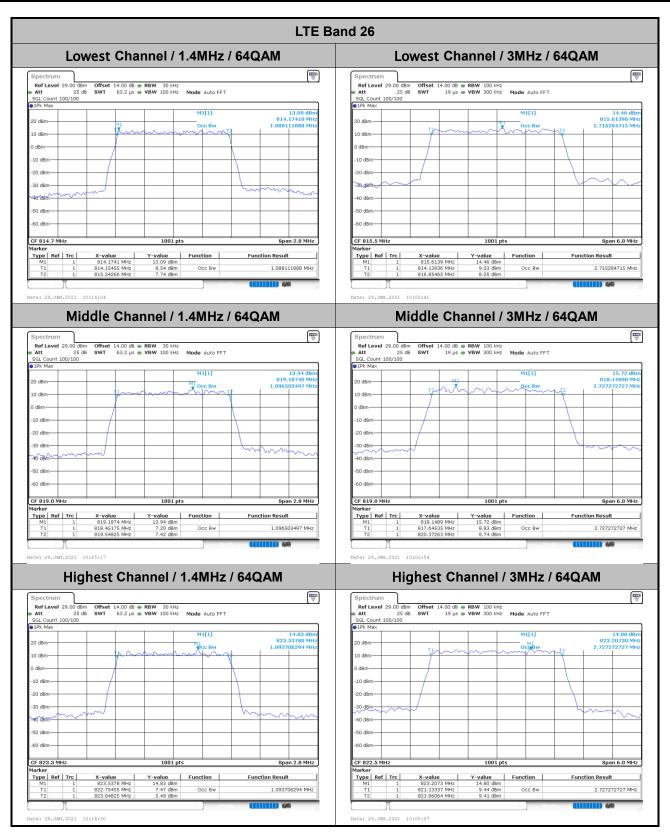

Page Number : A18 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

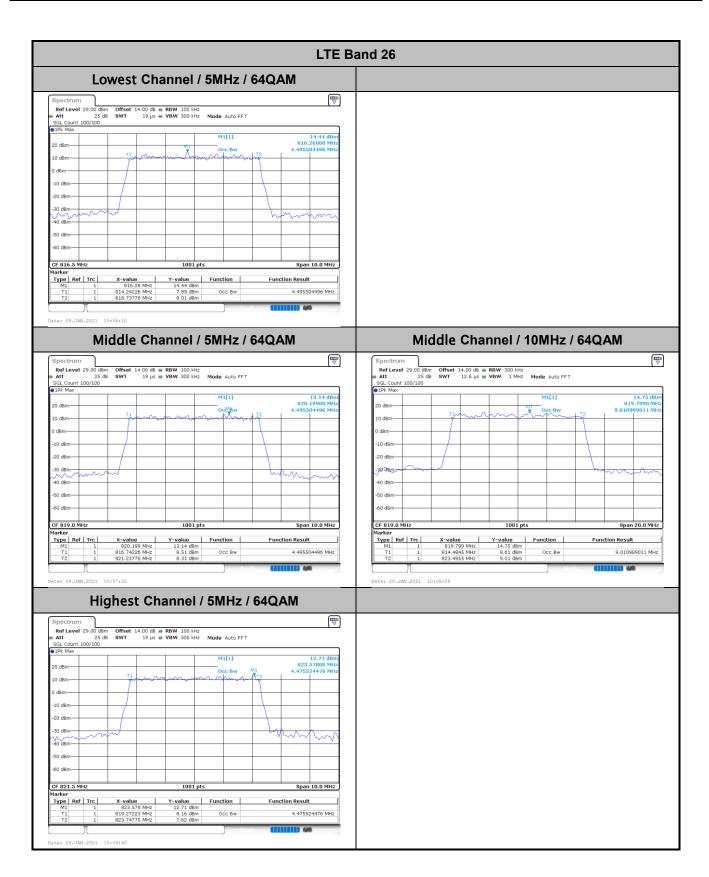

Page Number : A19 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

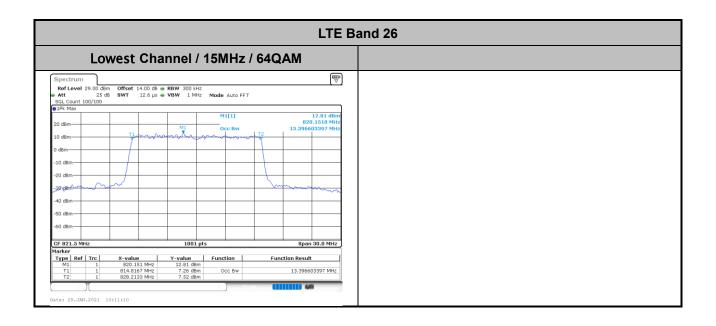


Page Number : A20 of A46 Report Issued Date: Mar. 18, 2021 Report Version

Report No. : FW110513-01


: Rev. 01

Conducted Band Edge

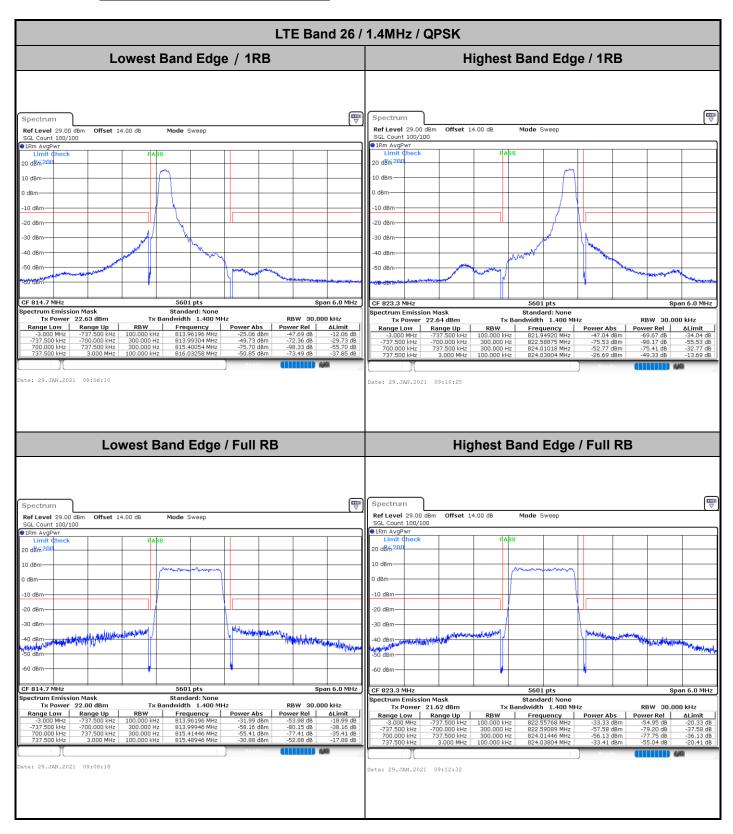


Sporton International (Shenzhen) Inc.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A21 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

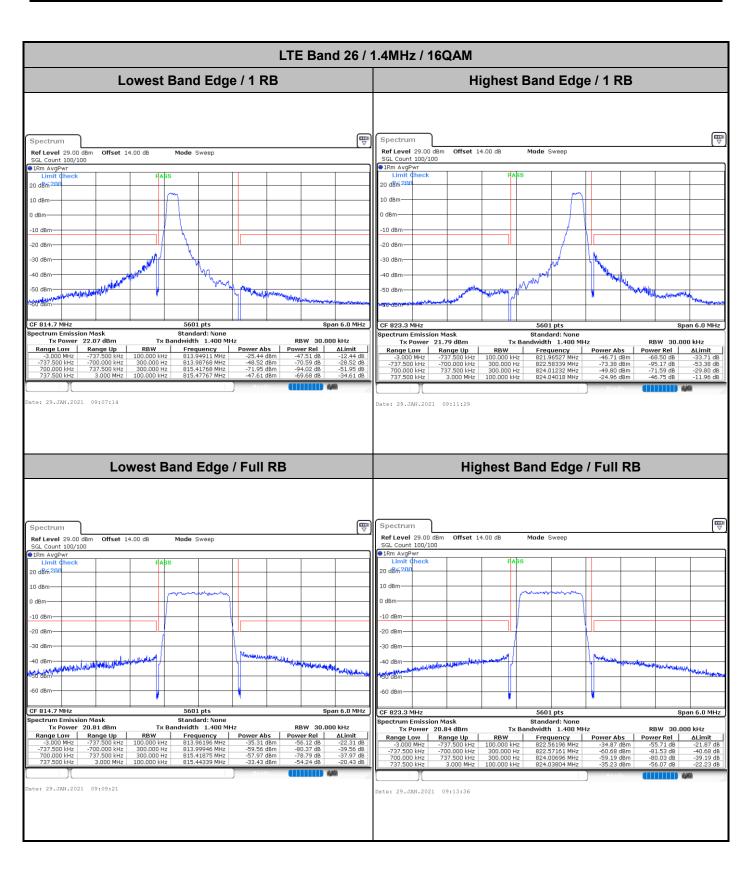


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A22 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

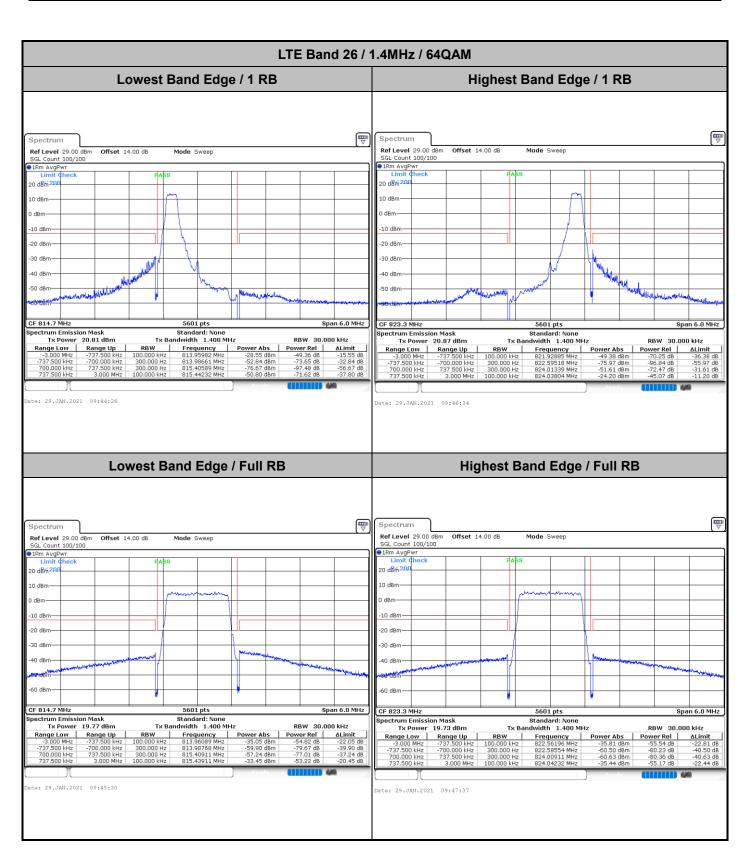


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A23 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

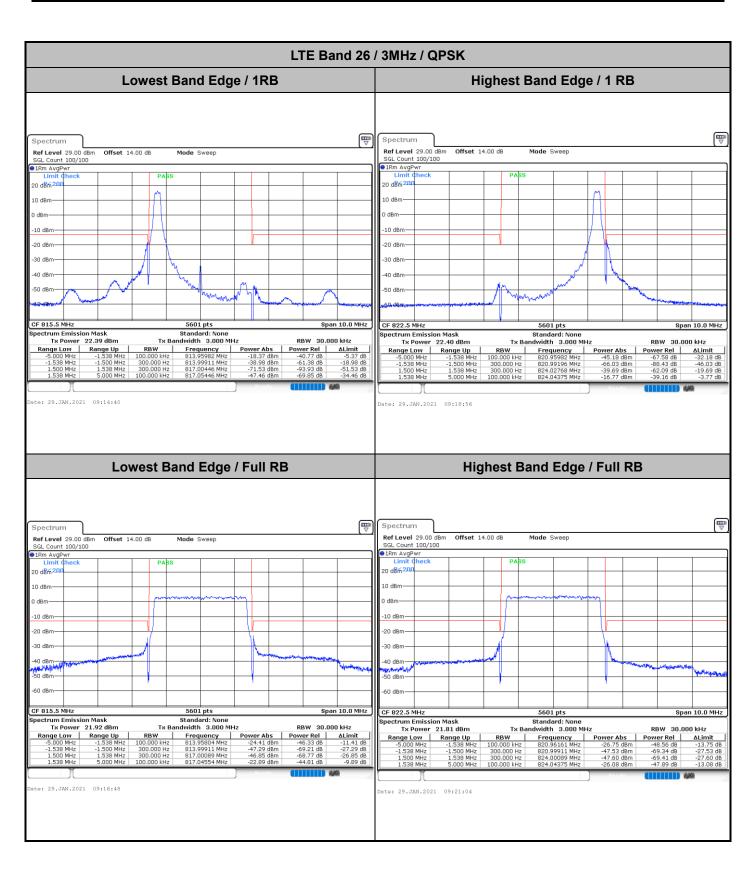


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A24 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

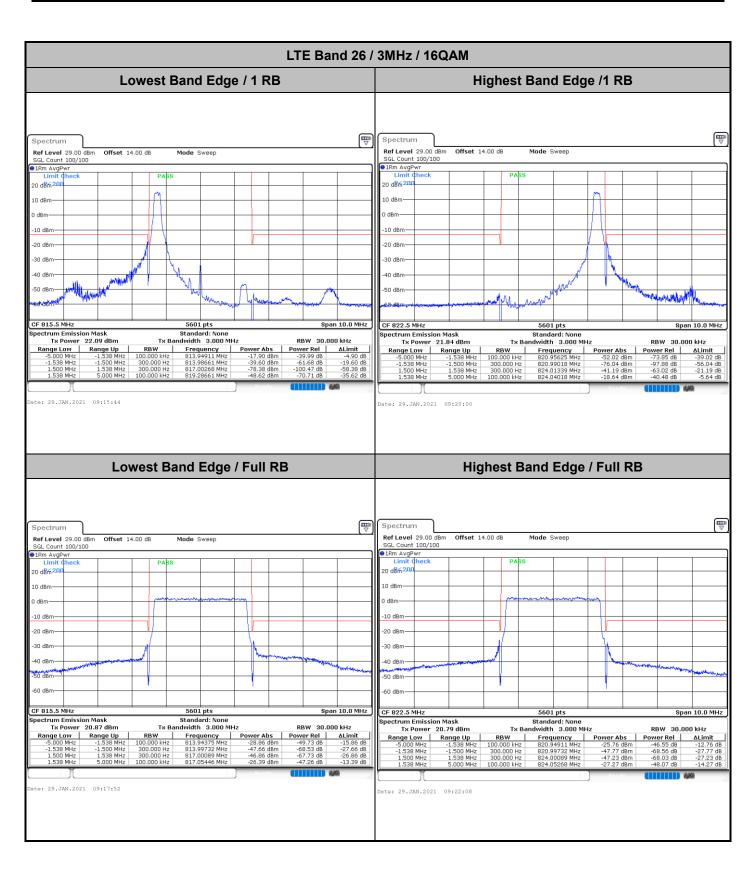


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A25 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

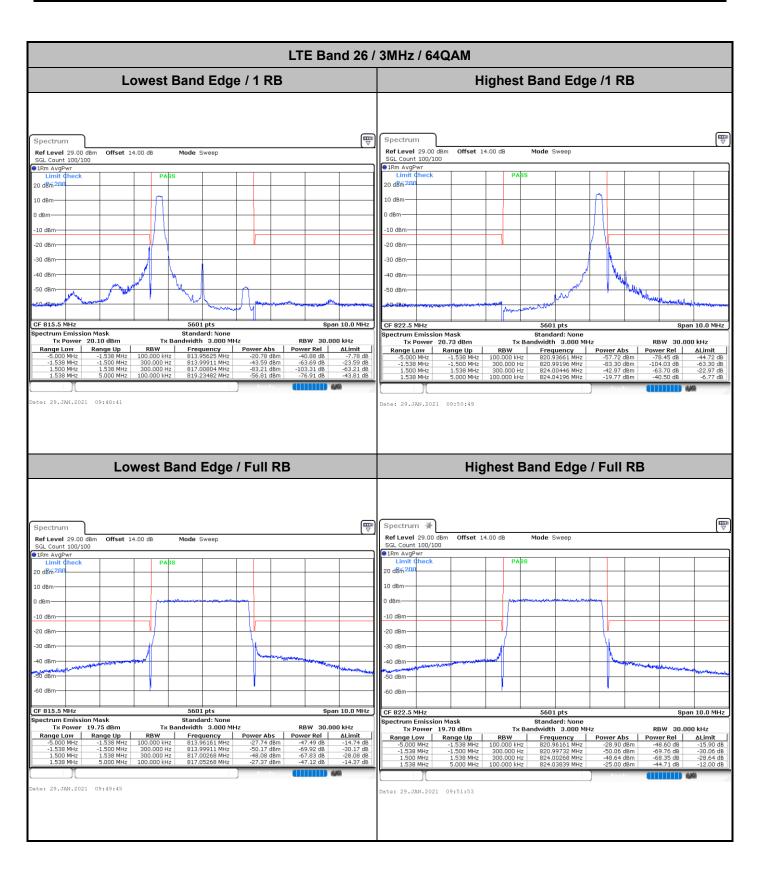

Page Number : A26 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

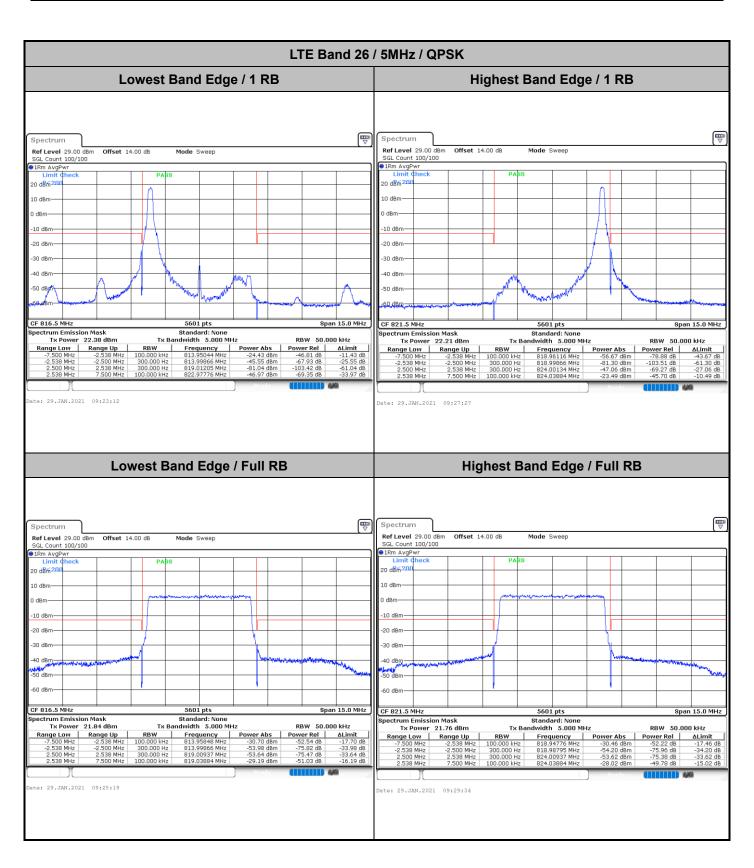

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: 2ABZ2-EF000 Page Number : A27 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01

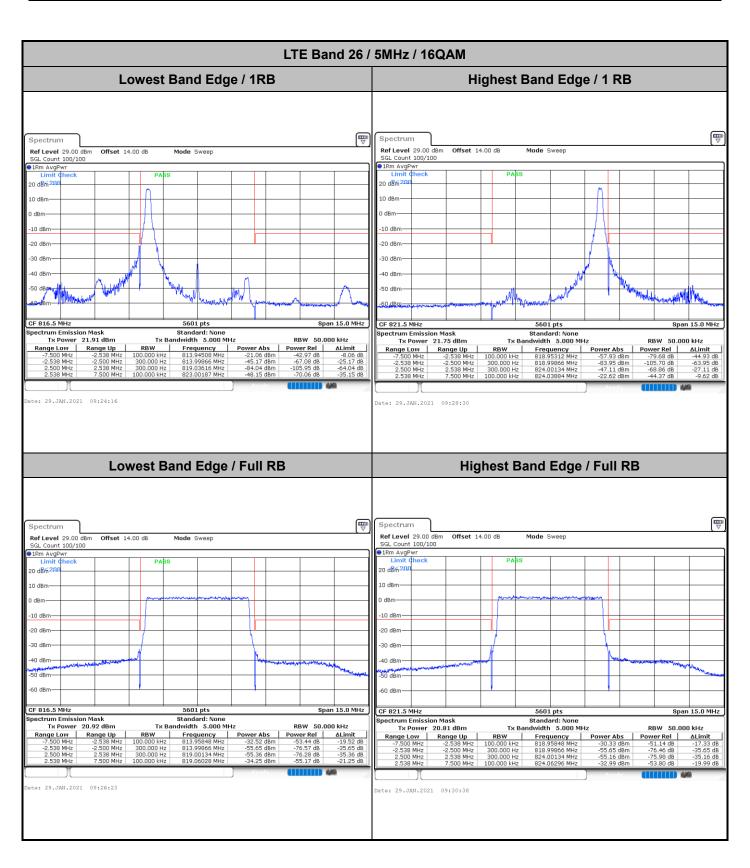

Page Number : A28 of A46
Report Issued Date : Mar. 18, 2021
Report Version : Rev. 01