

# The Photos of SAR test

# No. I20Z60959-SEM07

#### For

### OnePlus Technology (Shenzhen) Co., Ltd.

#### **Smart Phone**

#### Model Name: BE2028, BE2025, BE2026

with

#### Hardware Version: 16

## Software Version: 10.5.5.BE88CB

#### FCC ID: 2ABZ2-EF170



#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.


#### Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191. Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504 Email: <u>cttl\_terminals@caict.ac.cn</u>, website: <u>www.caict.ac.cn</u>


©Copyright. All rights reserved by CTTL.




Picture 1: Constituents of the sample

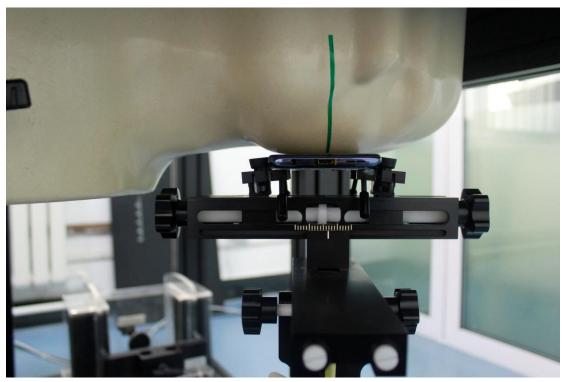


Picture 2: Left Head Touch Cheek Position

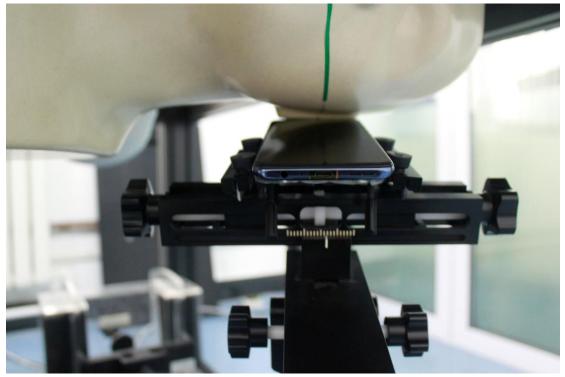

Picture 3: Left Head Tilt 15° Position

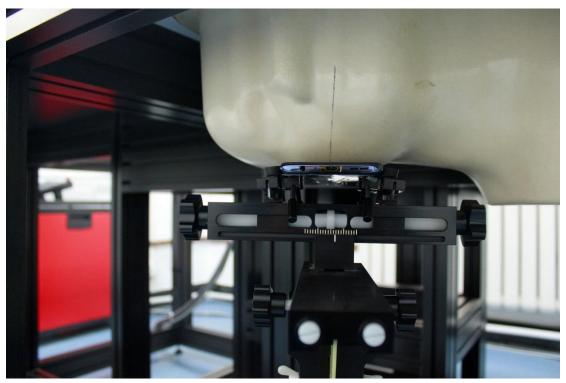


Picture 4: Right Head Touch Cheek Position

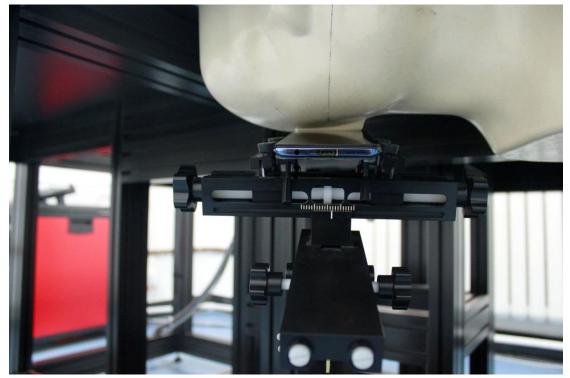


Picture 5: Right Head Tilt 15° Position

#### Test positions for body:


The Body SAR is tested at the following 12 test positions all with the distance =10mm, 15mm or 4mm between the EUT and the phantom bottom:

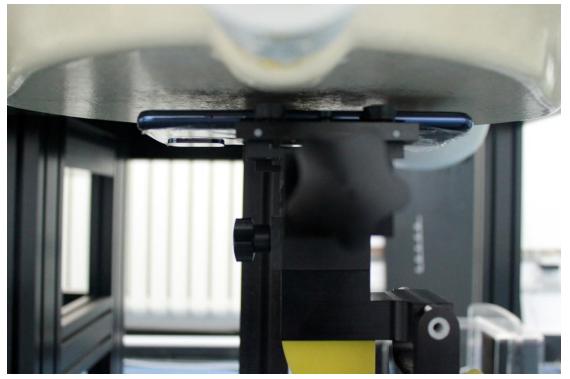

Picture 6: Front with 10mm

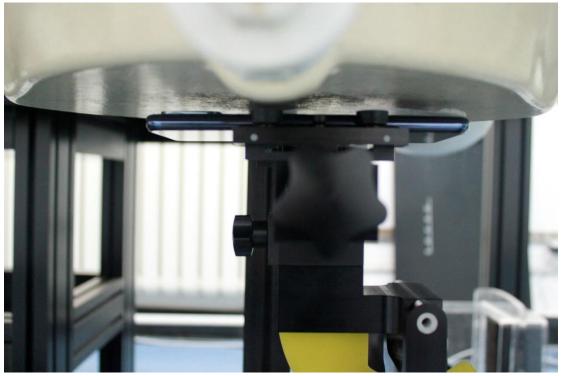


Picture 7: Rear with 10mm

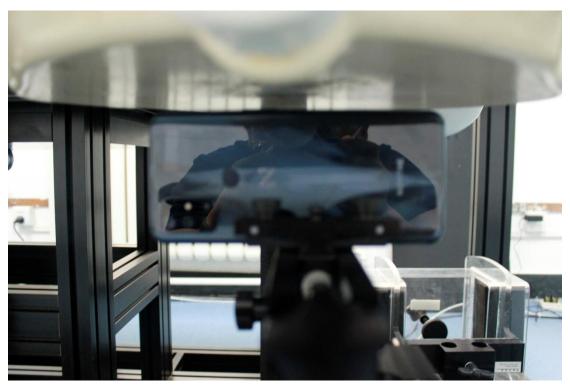


Picture 8: Left with 10mm




Picture 9: Right with 10mm

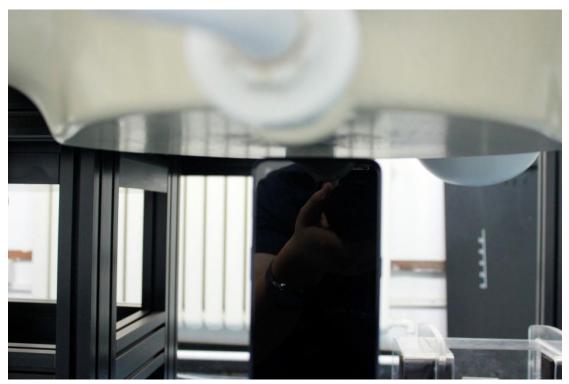


Picture 10: Top with 10mm

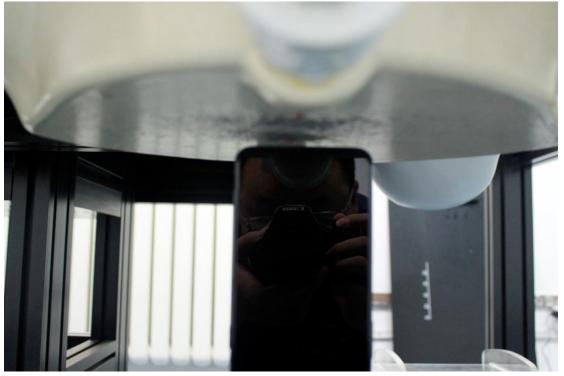


Picture 11: Bottom with 10mm

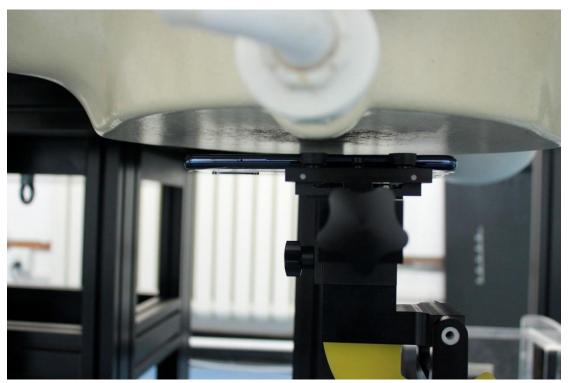


Picture 12: Front with 15mm

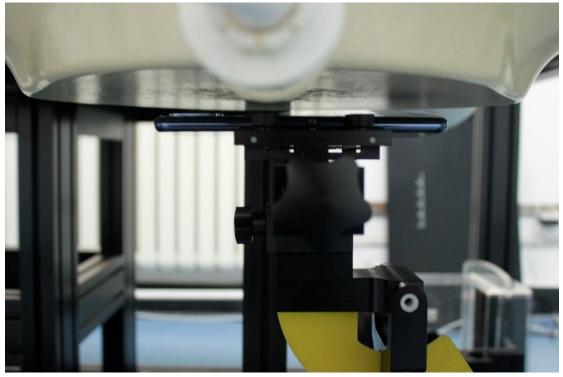


Picture 13: Rear with 15mm

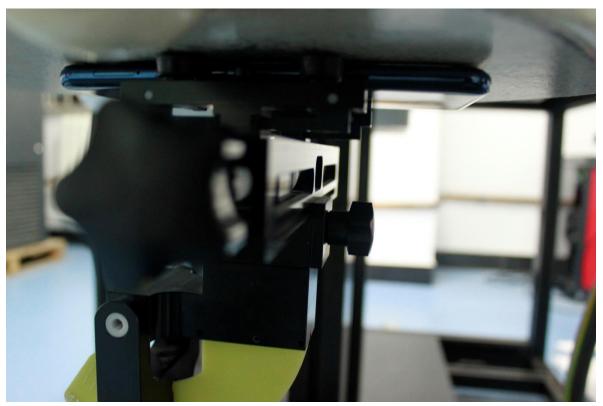

Picture 14 Rear 0mm

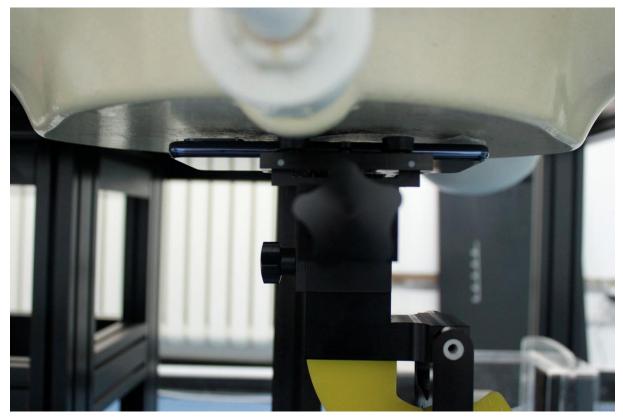

Picture 15 Rear 4mm

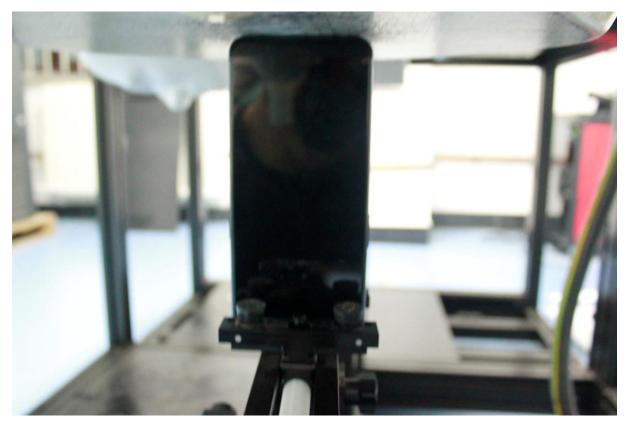

Picture 16 Bottom 0mm



Picture 17 Top 0mm