



# FCC Test Report

**APPLICANT** : OnePlus Technology (shenzhen) Co., Ltd  
**EQUIPMENT** : Smart Phone  
**BRAND NAME** : ONEPLUS  
**MODEL NAME** : GM1915  
**FCC ID** : 2ABZ2-GM1915  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Dec. 25, 2018 and testing was completed on Apr. 01, 2019. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

**Sporton International (Shenzhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 8

    1.7. Applicable Standards ..... 9

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 12

    2.4. EUT Operation Test Setup ..... 13

**3. TEST RESULT ..... 14**

    3.1. Test of AC Conducted Emission Measurement ..... 14

    3.2. Test of Radiated Emission Measurement ..... 18

**4. LIST OF MEASURING EQUIPMENT ..... 23**

**5. UNCERTAINTY OF EVALUATION ..... 24**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.41 dB at 0.160 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 8.15 dB at 30.000 MHz



# 1. General Description

## 1.1. Applicant

**OnePlus Technology (shenzhen) Co., Ltd**

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

## 1.2. Manufacturer

**OnePlus Technology (shenzhen) Co., Ltd**

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

## 1.3. Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Smart Phone
<b>Brand Name</b>	ONEPLUS
<b>Model Name</b>	GM1915
<b>FCC ID</b>	2ABZ2-GM1915
<b>EUT supports Radios application</b>	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/NFC
<b>IMEI Code</b>	Conduction: 864737040223374 Radiation: 864737040223150
<b>HW Version</b>	13
<b>SW Version</b>	9.5.1.GM31CB
<b>EUT Stage</b>	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71 : 665.5 MHz ~ 695.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 48 : 3552.5 MHz ~ 3697.5 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz 802.11b/g/n/ac: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 29 : 718.5 MHz ~ 726.5 MHz LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz LTE Band 66 : 2110.7 MHz~ 2199.3 MHz LTE Band 71 : 619.5 MHz~ 649.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 46 : 5160 MHz ~ 5915 MHz LTE Band 48 : 3552.5 MHz ~ 3697.5 MHz



	CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz 802.11b/g/n/ac: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz 1164 MHz ~ 1215 MHz NFC : 13.56 MHz
<b>Antenna Type</b>	WWAN/WLAN/Bluetooth/GNSS : PIFA Antenna NFC : Loop Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM CDMA2000 1xRTT: QPSK CDMA2000 1xEV-DO: QPSK/8PSK 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK

GNSS (1559 MHz ~ 1610 MHz) = BDS + Galileo + GLONASS + GPS + SBAS

GNSS (1164 MHz ~ 1215 MHz) = Galileo + GPS

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

<b>Test Site</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	CN5018	337463
<b>Test Site</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-SZ	CN5019	577730





## **1.7. Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle (Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable(Charging from Adapter)
	Mode 2: PCS1900 Idle (Middle CH) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable(Charging from Adapter)
	Mode 3: LTE Band 12 Idle (Low CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Color bar) + USB Cable(Charging from Adapter)
	Mode 4: LTE Band 13 Idle (High CH) + Bluetooth Idle + WLAN (5G) Idle + NFC on + USB Cable(Charging from Adapter)
	Mode 5: LTE Band 17 Idle (Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS RX + USB Cable(Charging from Adapter)
	Mode 6: LTE Band 26 Idle (High CH) + Bluetooth Idle + WLAN (5G) Idle + H-Pattern + USB Cable(Charging from Adapter)
	Mode 7: LTE Band 71 Idle (Low CH) + Bluetooth Idle + WLAN (2.4G) Idle + USB Cable (Data Link with Notebook)
	Mode 8: LTE Band 29 Idle (Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable(Charging from Adapter)

Radiated Emissions	<p>Mode 1: GSM850 Idle (Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable(Charging from Adapter)</p> <p>Mode 2: PCS1900 Idle (Middle CH) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + USB Cable(Charging from Adapter)</p> <p>Mode 3: LTE Band 12 Idle (Low CH) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Color bar) + USB Cable(Charging from Adapter)</p> <p>Mode 4: LTE Band 13 Idle (High CH) + Bluetooth Idle + WLAN (5G) Idle + NFC on + USB Cable(Charging from Adapter)</p> <p>Mode 5: LTE Band 17 Idle (Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS RX + USB Cable(Charging from Adapter)</p> <p>Mode 6: LTE Band 26 Idle (High CH) + Bluetooth Idle + WLAN (5G) Idle + H-Pattern + USB Cable(Charging from Adapter)</p> <p>Mode 7: LTE Band 71 Idle (Low CH) + Bluetooth Idle + WLAN (2.4G) Idle + USB Cable (Data Link with Notebook)</p> <p>Mode 8: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Type C Earphone</p> <p>Mode 9: LTE Band 29 Idle (Middle CH) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable(Charging from Adapter)</p>
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 3; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 1; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook means data application transferred mode between EUT and Notebook.</li> <li>4. Pre-scanned Low/Middle/High channel for GSM850/ LTE Band12/13/17/26/29/71 Band Rx mode, the worst channel was recorded in this report.</li> </ol>	

## 2.2. Connection Diagram of Test System

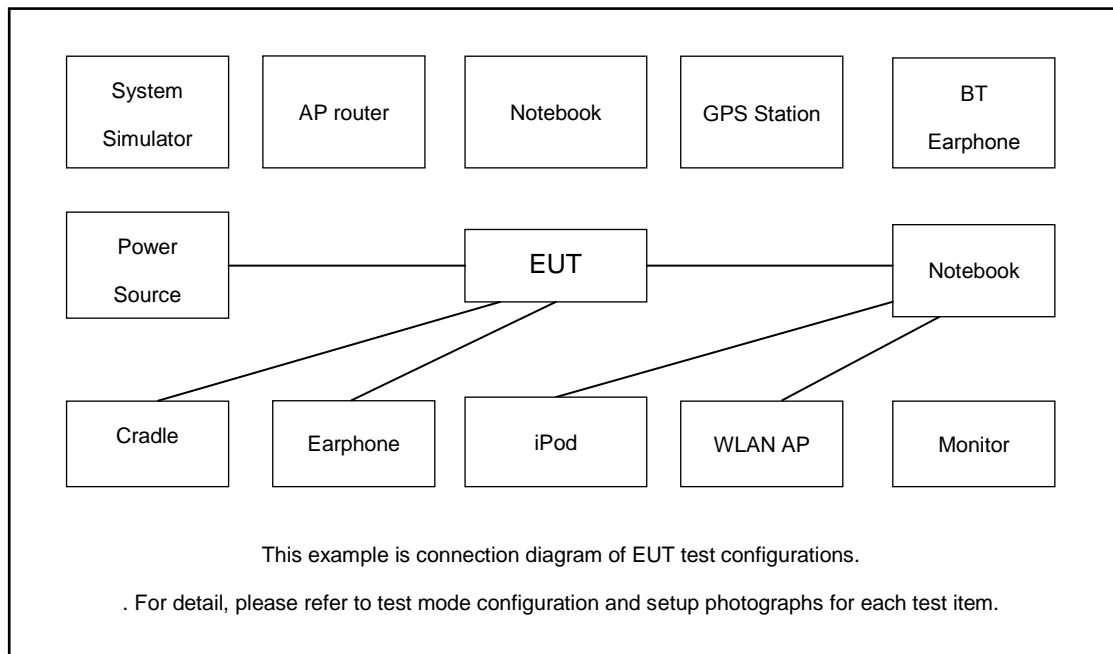

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	GNSS Simulator	RACELOGIC	RLLS03-2P	FCC DoC	N/A	Unshielded, 1.8 m
3.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 2.7m with core
4.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8 m
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
6.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
7.	Earphone	Apple	N/A	N/A	Unshielded, 1.2 m	N/A
8.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
9.	GNSS Simulator	RACELOGIC	18645	N/A	N/A	Unshielded, 1.8m
10.	iPod	Apple	MC525 ZP/A	FCC DoC	Shielded, 1.0m	N/A
11.	iPod	Apple	MC69029/A	FCC DoC	Unshielded, 1.2 m	N/A
12.	Type C to audio cable	N/A	N/A	N/A	Unshielded, 0.8 m	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on camera to capture images.
4. Turn on MPEG4 function.
5. Turn on NFC Function.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

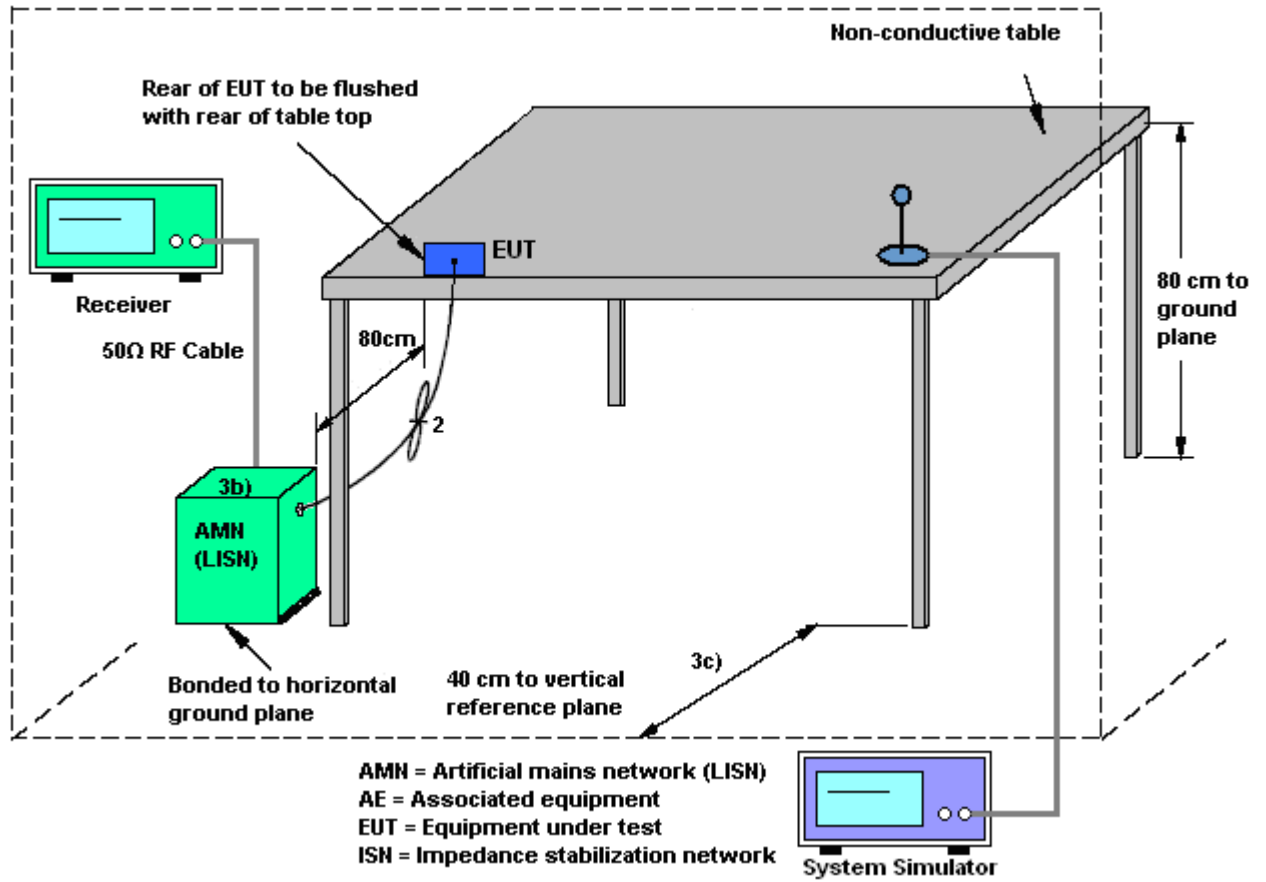




3.1.5 Test Result of AC Conducted Emission

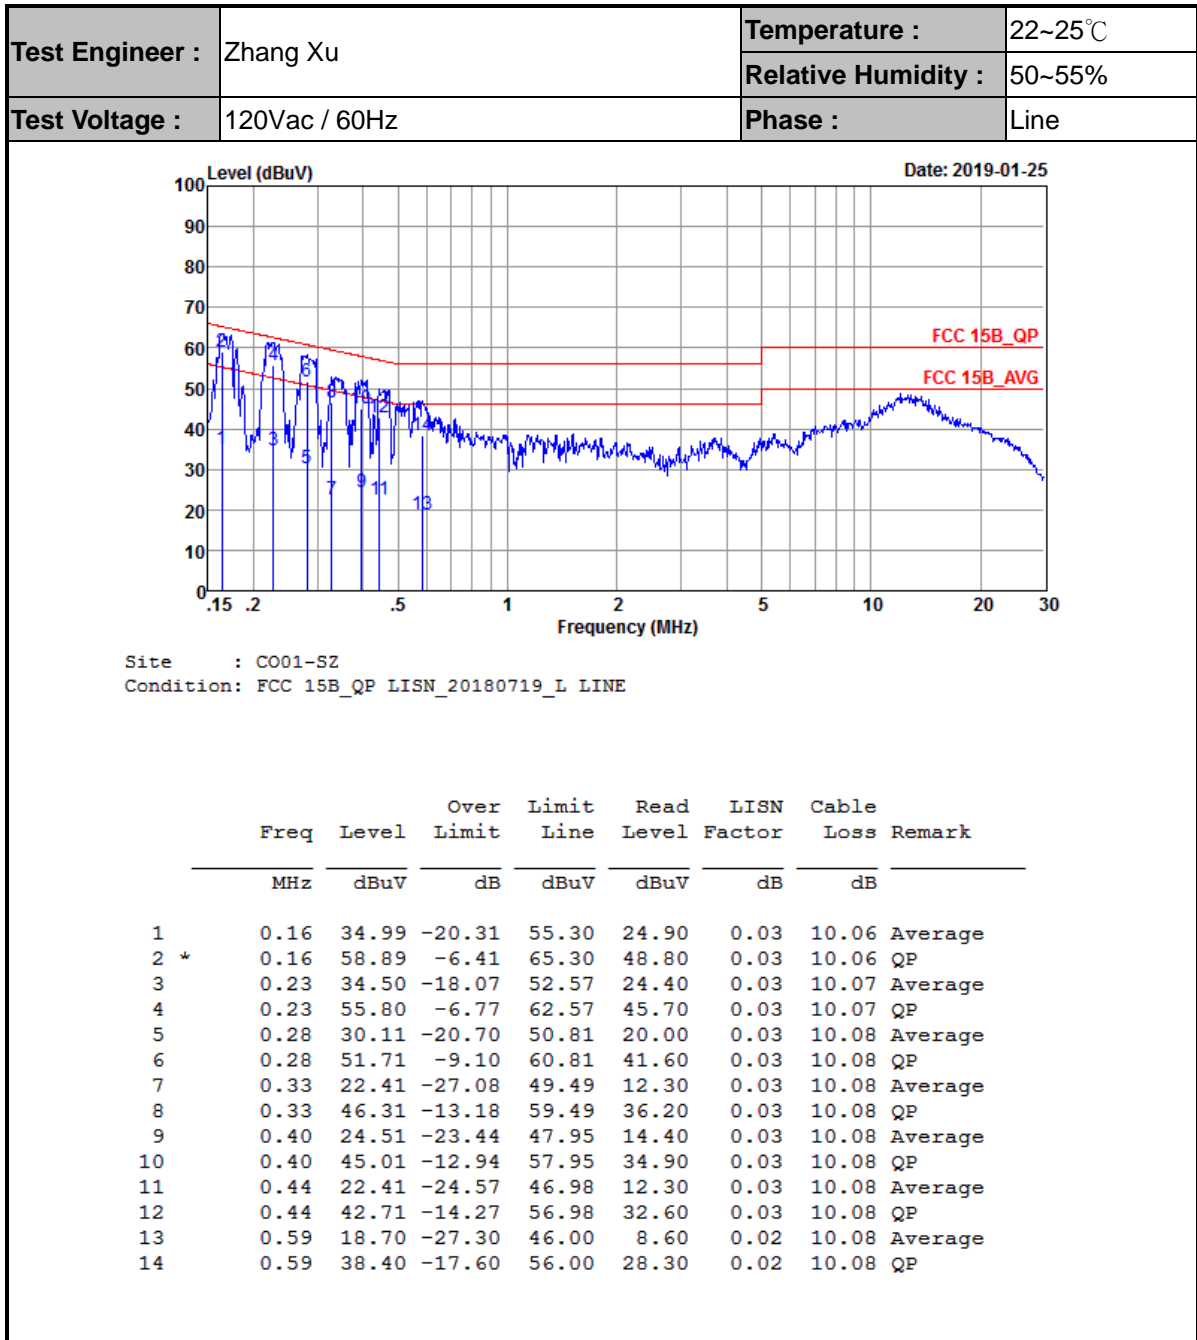





Test Engineer :	Zhang Xu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

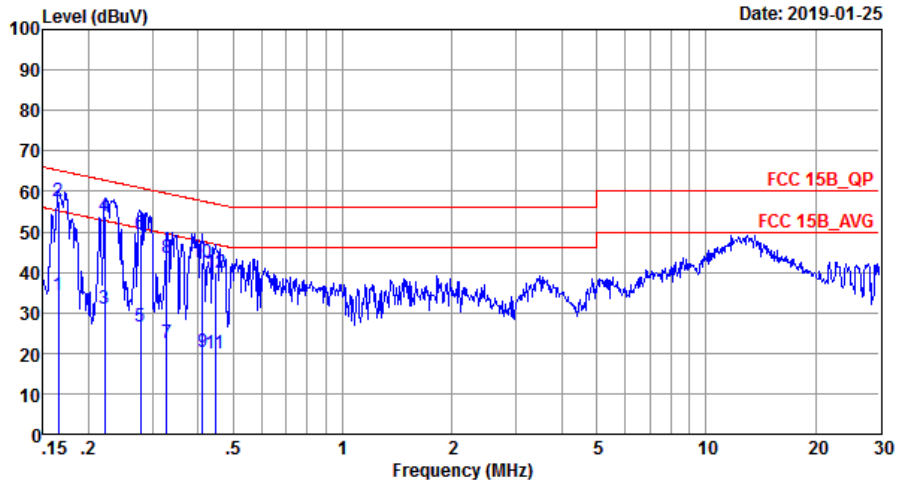

Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_20180719\_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	34.19	-21.02	55.21	24.09	0.03	10.07	Average
2 *	0.17	57.49	-7.72	65.21	47.39	0.03	10.07	QP
3	0.22	31.10	-21.64	52.74	21.00	0.03	10.07	Average
4	0.22	53.90	-8.84	62.74	43.80	0.03	10.07	QP
5	0.28	26.71	-24.19	50.90	16.60	0.03	10.08	Average
6	0.28	49.51	-11.39	60.90	39.40	0.03	10.08	QP
7	0.33	22.41	-27.08	49.49	12.30	0.03	10.08	Average
8	0.33	43.71	-15.78	59.49	33.60	0.03	10.08	QP
9	0.41	20.40	-27.19	47.59	10.30	0.02	10.08	Average
10	0.41	42.60	-14.99	57.59	32.50	0.02	10.08	QP
11	0.45	19.90	-27.03	46.93	9.80	0.02	10.08	Average
12	0.45	39.70	-17.23	56.93	29.60	0.02	10.08	QP



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

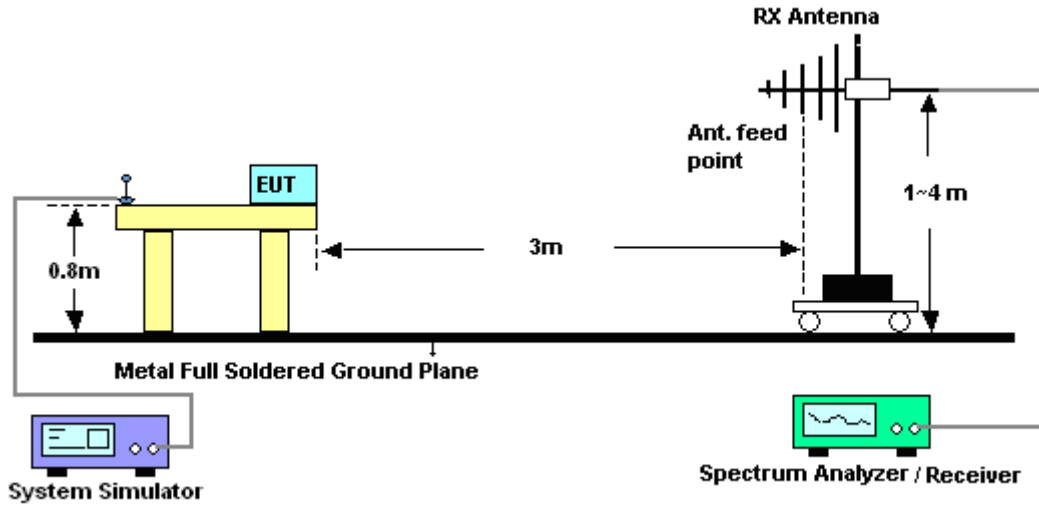


For radiated emissions above 1GHz

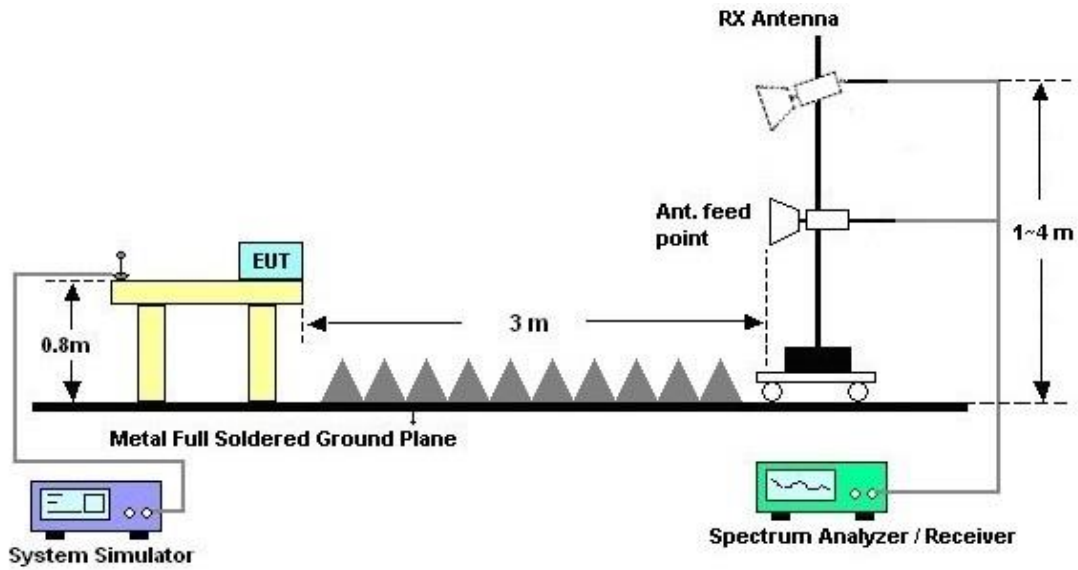



3.2.5. Test Result of Radiated Emission

Test Engineer :	Barry Chang	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

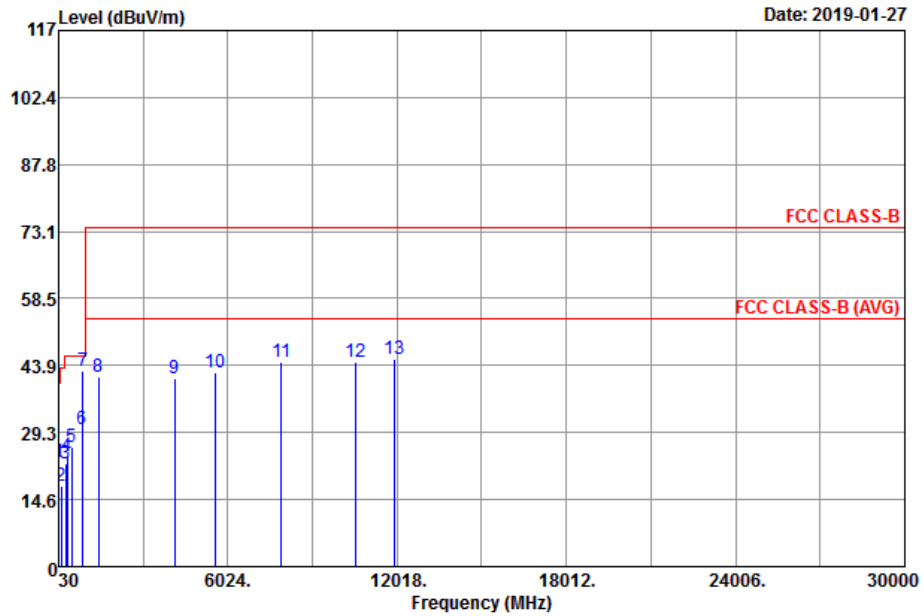


Site : 03CH04-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT41909\_18 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.97	22.97	-17.03	40.00	30.47	24.33	0.27	32.10	---	---	Peak
2	125.06	17.52	-25.98	43.50	31.04	17.42	1.16	32.10	---	---	Peak
3	283.17	22.43	-23.57	46.00	33.53	19.06	1.80	31.96	---	---	Peak
4	323.91	24.05	-21.95	46.00	34.15	19.98	1.97	32.05	---	---	Peak
5	484.93	26.16	-19.84	46.00	32.35	23.58	2.39	32.16	---	---	Peak
6	860.32	29.93	-16.07	46.00	28.93	28.80	3.28	31.08	100	---	61 Peak
7	881.40	42.66			41.45	28.91	3.34	31.04	---	---	Peak
8	1436.00	41.42	-32.58	74.00	70.38	26.19	3.60	58.75	---	---	Peak
9	4136.00	41.07	-32.93	74.00	65.25	30.22	4.97	59.37	---	---	Peak
10	5578.00	42.21	-31.79	74.00	61.11	32.38	6.22	57.50	---	---	Peak
11	7922.00	44.74	-29.26	74.00	56.01	37.27	7.43	55.97	---	---	Peak
12	10554.00	44.79	-29.21	74.00	53.01	38.42	9.28	55.92	---	---	Peak
13	11936.00	45.33	-28.67	74.00	51.13	39.30	9.60	54.70	100	134	Peak



Test Engineer :	Barry Chang	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

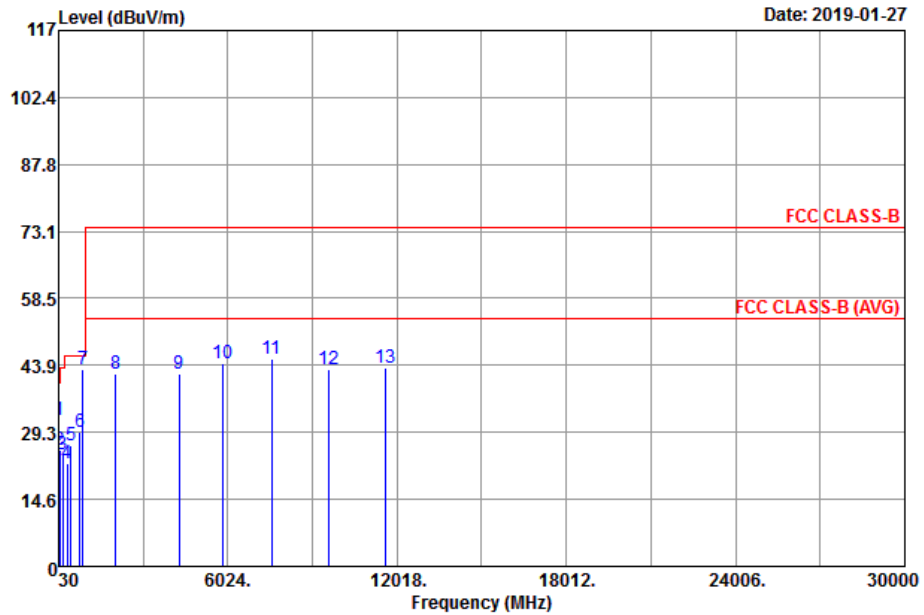

Site : 03CH04-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT41909\_18 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.00	31.85	-8.15	40.00	38.90	24.80	0.25	32.10	100	225 Peak
2	64.92	25.48	-14.52	40.00	43.88	12.20	0.80	31.40	---	---
3	181.32	24.55	-18.95	43.50	39.98	15.01	1.42	31.86	---	---
4	325.85	22.44	-23.56	46.00	32.48	20.03	1.98	32.05	---	---
5	453.89	26.34	-19.66	46.00	32.79	22.93	2.31	31.69	---	---
6	794.36	29.20	-16.80	46.00	28.84	28.40	3.14	31.18	---	---
7	881.40	42.88			41.67	28.91	3.34	31.04	---	---
8	2046.00	42.09	-31.91	74.00	69.40	26.55	4.39	58.25	---	---
9	4294.00	42.08	-31.92	74.00	65.47	30.56	5.13	59.08	---	---
10	5830.00	44.23	-29.77	74.00	62.69	32.57	6.29	57.32	---	---
11	7588.00	45.43	-28.57	74.00	57.87	37.52	7.04	57.00	100	118 Peak
12	9572.00	42.89	-31.11	74.00	50.88	38.76	8.56	55.31	---	---
13	11604.00	43.39	-30.61	74.00	49.74	39.30	9.53	55.18	---	---



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Jan. 25, 2019~ Apr. 01, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	Jan. 25, 2019~ Apr. 01, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Jan. 25, 2019~ Apr. 01, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000089 1	100Vac~250Vac	Jul. 18, 2018	Jan. 25, 2019~ Apr. 01, 2019	Jul. 17, 2019	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Apr. 19, 2018	Jan. 27, 2019~ Apr. 01, 2019	Apr. 18, 2019	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2018	Jan. 27, 2019~ Apr. 01, 2019	Apr. 18, 2019	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Aug. 28, 2018	Jan. 27, 2019~ Apr. 01, 2019	Aug. 27, 2019	Radiation (03CH04-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2018	Jan. 27, 2019~ Apr. 01, 2019	Oct. 17, 2019	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-1474	1GHz~18GHz	Feb. 07, 2018	Jan. 27, 2019~ Apr. 01, 2019	Feb. 06, 2019	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-1474	1GHz~18GHz	Feb. 05, 2018		Feb. 04, 2019	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P- R	1989346	1GHz~18GHz	Jul. 30, 2018	Jan. 27, 2019~ Apr. 01, 2019	Jul. 29, 2019	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 17, 2018	Jan. 27, 2019~ Apr. 01, 2019	Jul. 16, 2019	Radiation (03CH04-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30, 2018	Jan. 27, 2019~ Apr. 01, 2019	Mar. 29, 2019	Radiation (03CH04-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 29, 2018		Mar. 28, 2019	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Jan. 27, 2019~ Apr. 01, 2019	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 27, 2019~ Apr. 01, 2019	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 27, 2019~ Apr. 01, 2019	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.6 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------