

FCC TEST REPORT

APPLICANT : Life Alert Emergency Response, Inc.

PRODUCT NAME : Mobile/Feature Phone

MODEL NAME : Life Alert HELP PENDANT (913)

TRADE NAME : Life Alert HELP PENDANT (913)

BRAND NAME : Life Alert HELP PENDANT

FCC ID : 2ABZ7-913

STANDARD(S) : 47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E

ISSUE DATE : 2014-10-16



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, Shenzhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.com](http://www.morlab.com) E-mail: service@morlab.cn

DIRECTORY

TEST REPORT DECLARATION.....**3**

1. GENERAL INFORMATION.....**4**

1.1. EUT DESCRIPTION**4**
1.2. TEST STANDARDS AND RESULTS.....**6**
1.3. FACILITIES AND ACCREDITATIONS.....**7**

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS.....**8**

2.1. CONDUCTED RF OUTPUT POWER**8**
2.2. PEAK TO AVERAGE RADIO.....**20**
2.3. 99% OCCUPIED BANDWIDTH**26**
2.4. FREQUENCY STABILITY.....**40**
2.5. CONDUCTED OUT OF BAND EMISSIONS.....**45**
2.6. BAND EDGE.....**65**
2.7. TRANSMITTER RADIATED POWER (EIRP/ERP)**72**
2.8. RADIATED OUT OF BAND EMISSIONS.....**81**

Change History		
Issue	Date	Reason for change
1.0	2014-10-16	First edition

Test Report Declaration

Applicant	Life Alert Emergency Response, Inc.
Applicant Address	16027 Ventura Blvd. Suite 400, Encino, CA 91436 USA
Manufacturer	Life Alert Emergency Response, Inc.
Manufacturer Address	16027 Ventura Blvd. Suite 400 Encino, CA 91436 USA
Product Name	Mobile/Feature Phone
Model Name	Life Alert HELP PENDANT (913)
Brand Name	Life Alert HELP PENDANT
HW Version	V. 913
SW Version	913: V1.00
Test Standards	47 CFR Part 22 Subpart H 47 CFR Part 24 Subpart E
Test Date	2014-07-28to 2014-08-08
Test Result	PASS

Tested by : Liu Zhisen

Liu Zhisen

Reviewed by : Peng Huarui

Peng Huarui

Approved by : Zeng Dexin

Zeng Dexin

1. GENERAL INFORMATION

1.1. EUT Description

EUT Type : Mobile/Feature Phone
Serial No. : (n.a, marked #1 by test site)
Hardware Version : V. 913
Software Version : 913: V1.00
Applicant : Life Alert Emergency Response, Inc.
16027 Ventura Blvd. Suite 400, Encino, CA 91436 USA
Manufacturer : Life Alert Emergency Response, Inc.
16027 Ventura Blvd. Suite 400 Encino, CA 91436 USA
Frequency Range : GSM 850MHz:
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
GSM 1900MHz:
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
WCDMA 850MHz
Tx: 826.4 - 846.6MHz (at intervals of 200kHz);
Rx: 871.4 - 891.6MHz (at intervals of 200kHz)
WCDMA 1900MHz
Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);
Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)
Modulation Type : GSM,GPRS Mode with GMSK Modulation
EDGE Mode with 8PSK Modulation
WCDMA Mode with QPSK Modulation
HSDPA Mode with QPSK Modulation
HSUPA Mode with QPSK Modulation
HSPA+ Mode with QPSK Modulation
Multislot Class : GPRS: Multislot Class 12,EGPRS: Multislot Class 12
Antenna Type : PIFA Antenna
Emission Designators : GSM 850:254KGXW,GSM 1900:251KGXW
EGPRS850:254KG7W, EGPRS1900:246KG7W,
WCDMA 850:4M18F9W, WCDMA1900:4M21F9W

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCNs) used and tested in this report are

separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4175(835MHz) and 4233 (846.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-13 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-13 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-13 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2.	24.232(d)	Peak to average radio	PASS
2	2.1049,22.917 24.238	99% Occupied Bandwidth	PASS
3	2.1055,22.355 24.235	Frequency Stability	PASS
4	2.1051,2.1057 22.917,24.238,	Conducted Out of Band Emissions	PASS
5	2.1051,2.1057 22.917,24.238	Band Edge	PASS
6	22.913,24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053,2.1057 22.917,24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010

1.3. Facilities and Accreditations

1.3.1. Facilities

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China 518101. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 2, Part 22H & 24E Requirements


2.1. Conducted RF Output Power

2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2. Test Description

1. Test Setup:

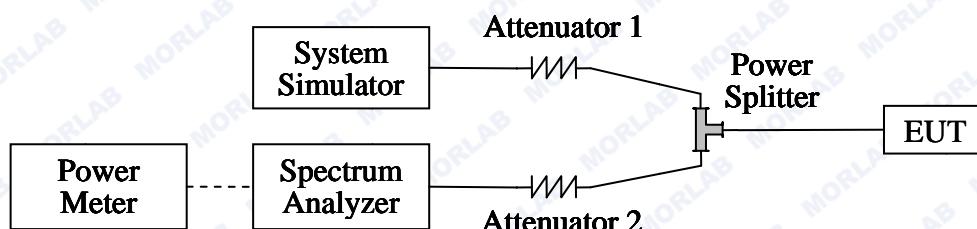

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Meter	Agilent	E4418B	GB43318055	2014.02.26	2015.02.25
Power Sensor	Agilent	8482A	MY41091706	2014.02.26	2015.02.25
Power Splitter	Weinschel	1506A	NW521	2014.02.26	2015.02.25
Attenuator 1	Resnet	20dB	(n.a.)	2014.02.26	2015.02.25
Attenuator 2	Resnet	3dB	(n.a.)	2014.02.26	2015.02.25

2.1.3. Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:


Band	Channel	Frequency (MHz)	Measured Output Power		Limit dBm	Verdict
			dBm	Refer to Plot		
GSM 850MHz	128	824.2	32.26	Plot A1 to A3	35	PASS
	190	836.6	32.81			PASS
	251	848.8	33.29			PASS
GSM 1900MHz	512	1850.2	29.39	Plot B1 to B3	32	PASS
	661	1880.0	30.27			PASS
	810	1909.8	30.76			PASS
GPRS 850MHz	128	824.2	28.73	Plot C1 to C3 ^{Note 1}	35	PASS
	190	836.6	29.32			PASS
	251	848.8	29.98			PASS
GPRS 1900MHz	512	1850.2	27.96	Plot D1 to D3 ^{Note 1}	32	PASS
	661	1880.0	28.83			PASS
	810	1909.8	29.34			PASS
EGPRS 850MHz	128	824.2	28.65	Plot E1 to E3 ^{Note 1}	35	PASS
	190	836.6	29.31			PASS
	251	848.8	29.97			PASS
EGPRS 1900MHz	512	1850.2	28.23	Plot F1 to F3 ^{Note 1}	32	PASS
	661	1880.0	28.94			PASS
	810	1909.8	29.62			PASS

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.


WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
		ARFCN	4132	4175	4233	9262	9400
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.47	23.67	24.36	23.44	23.65	23.11
Note:	The Conducted RF Output Power test of WCDMA was tested by power meter.						

2. GSM Model Test Plots:

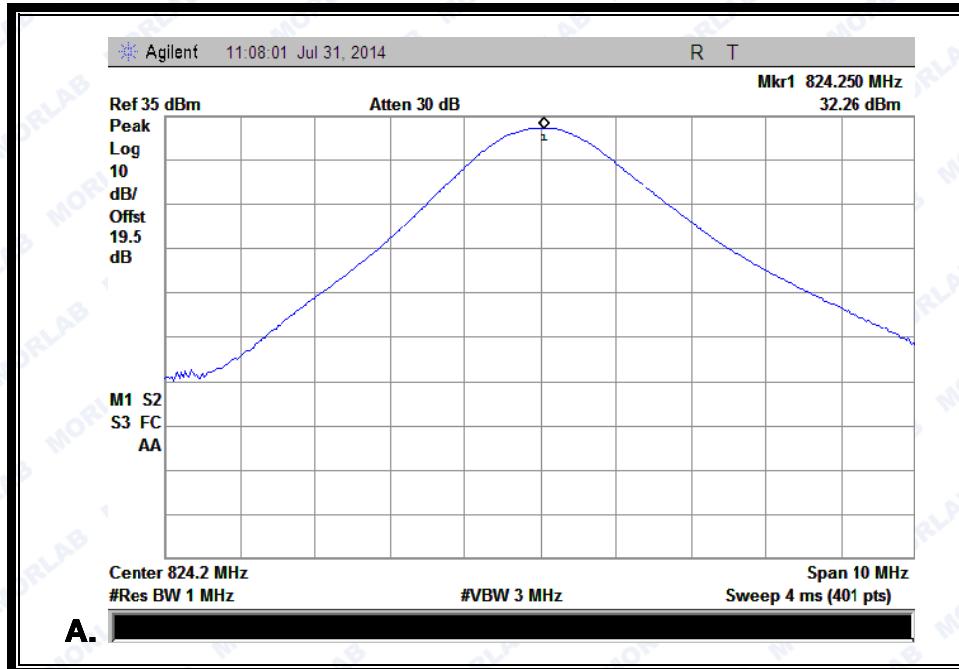


(Plot A1: GSM 850MHz Channel = 128)

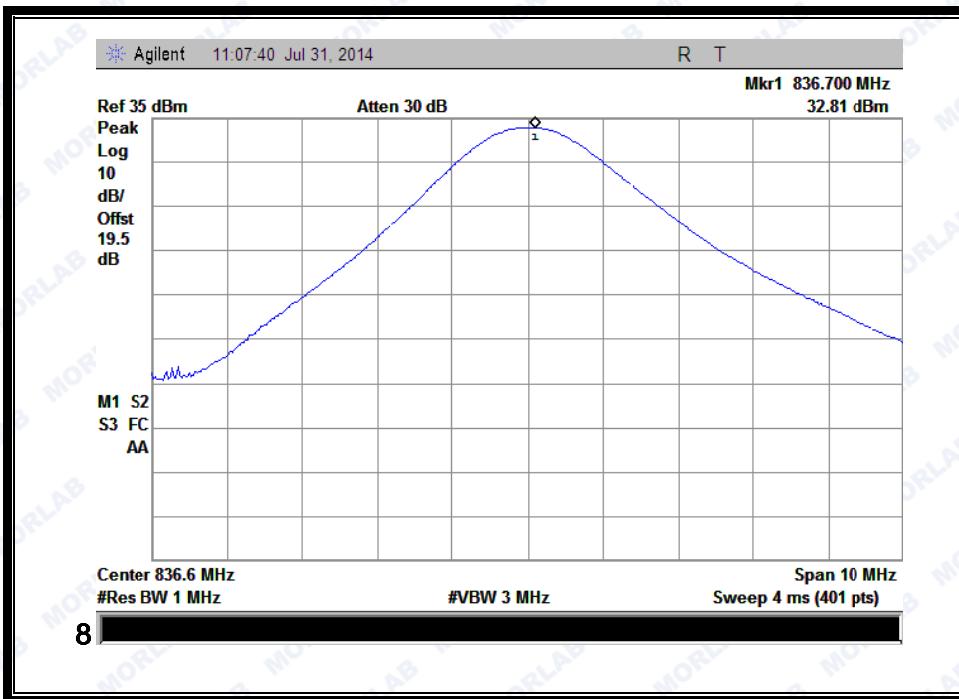


(Plot A2: GSM 850MHz Channel = 190)

SZ14070043W01

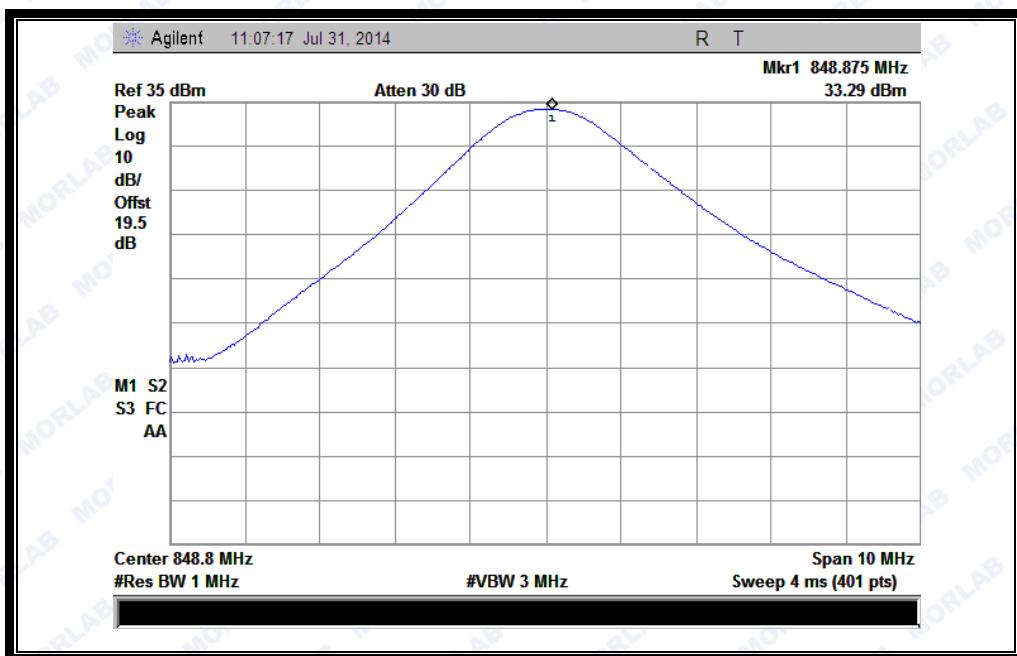


(Plot A3: GSM 850MHz Channel = 251)

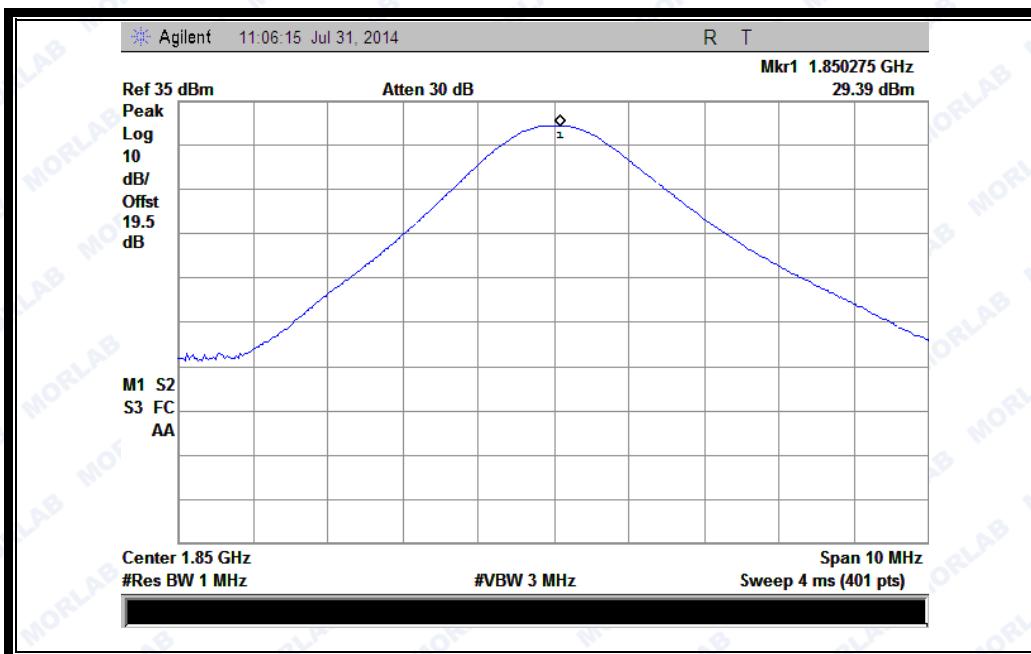


(Plot B1: GSM 1900MHz Channel = 512)


SZ14070043W01

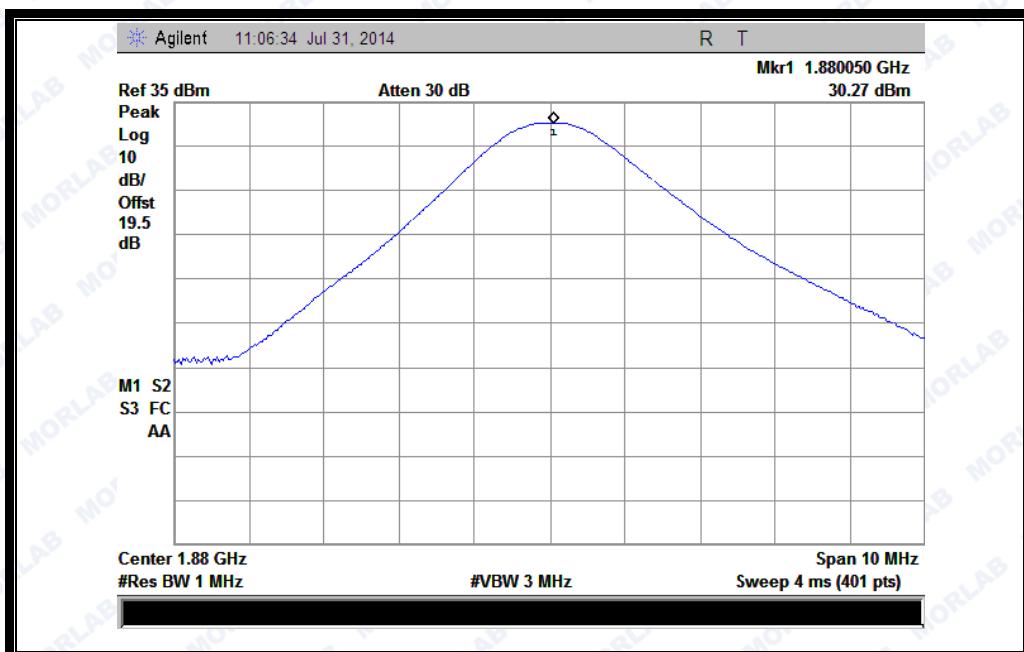


(Plot B2: GSM 1900MHz Channel = 661)

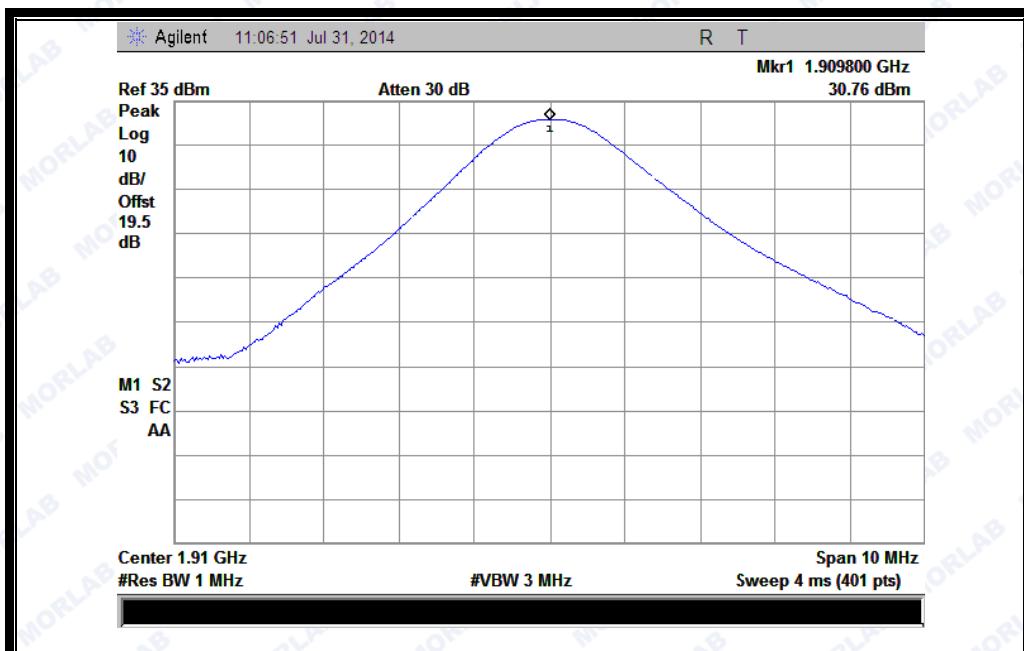

(Plot B3: GSM 1900Hz Channel = 810)

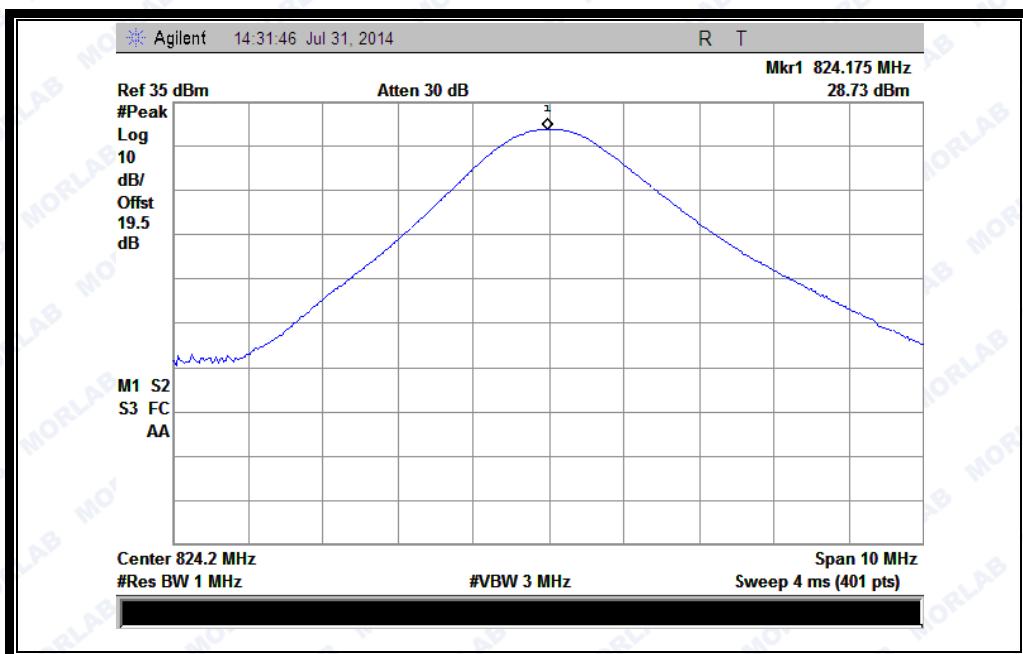


(Plot C 1: GPRS 850MHz Channel = 128)

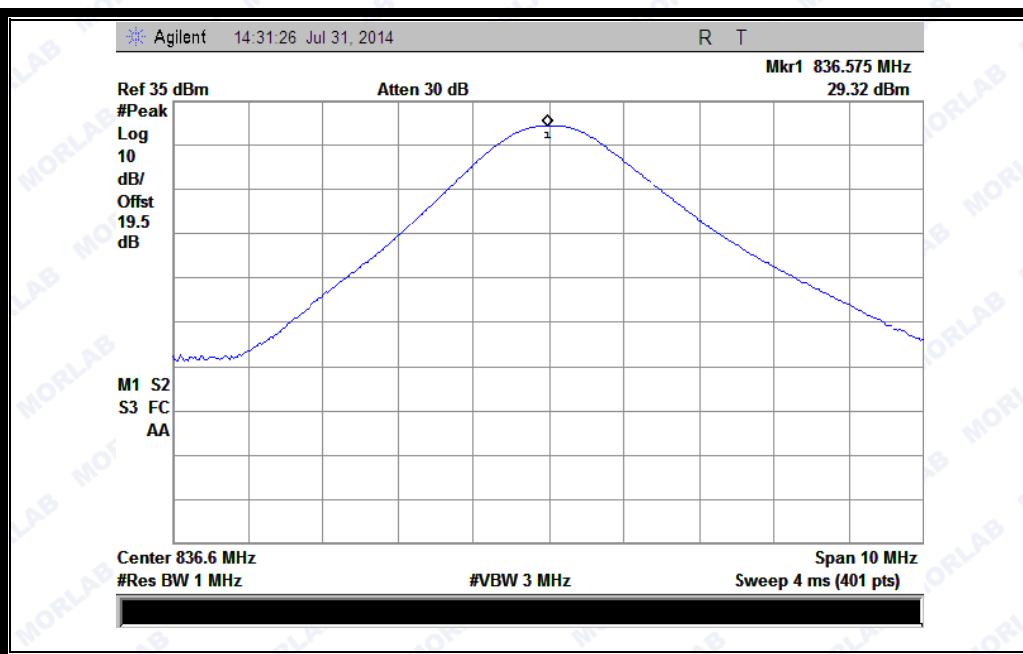


(Plot C 2: GPRS 850MHz Channel = 190)

SZ14070043W01

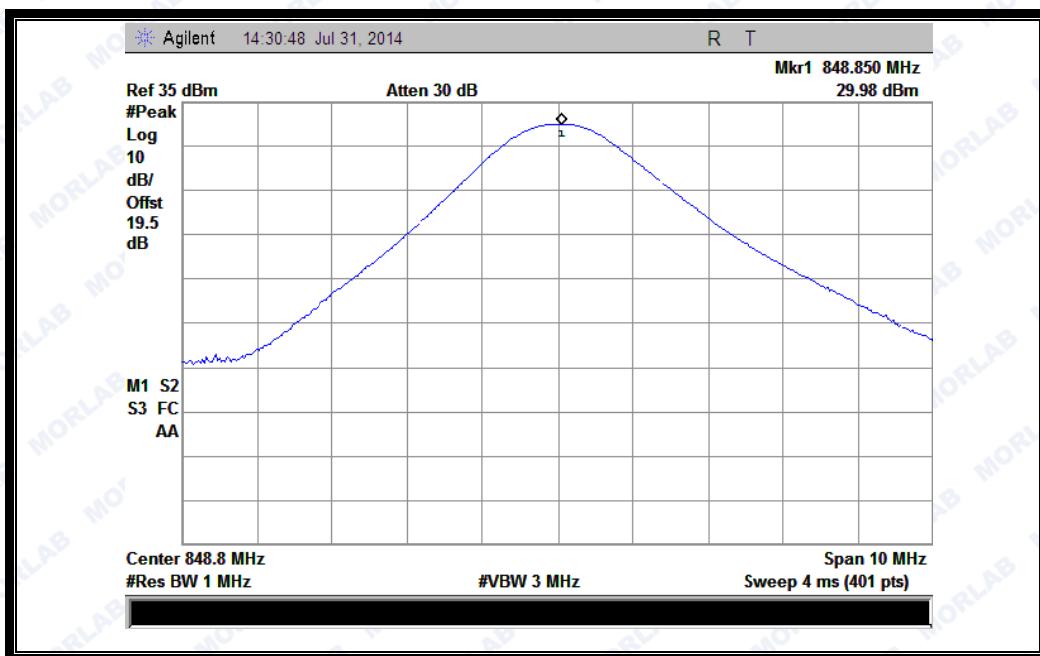


(Plot C 3: GPRS 850MHz Channel = 251)

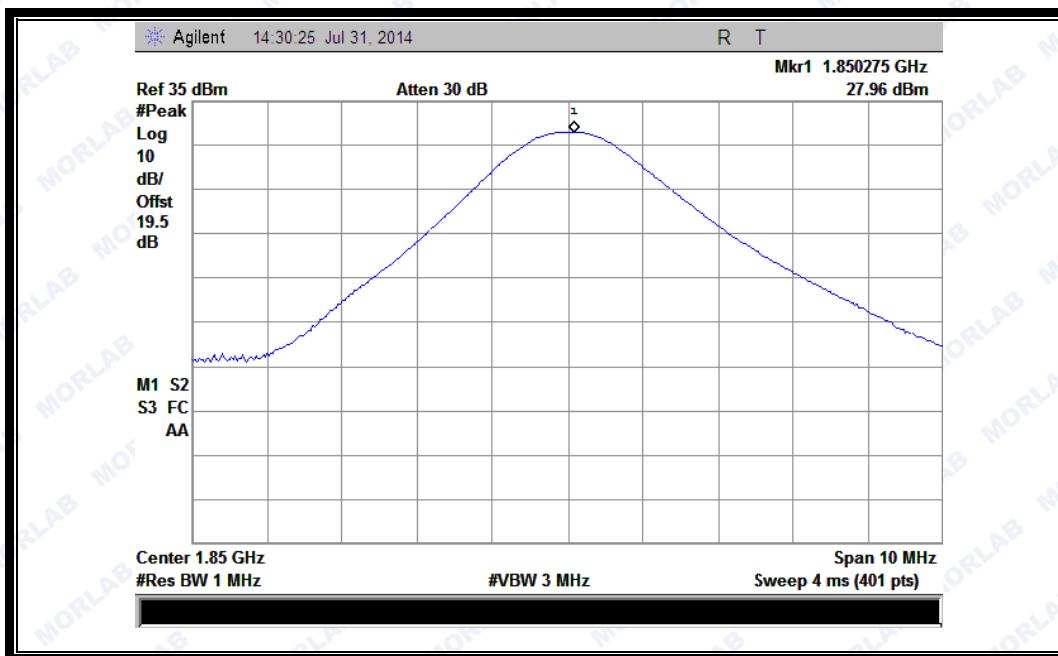


(Plot D 1: GPRS 1900MHz Channel = 512)


SZ14070043W01

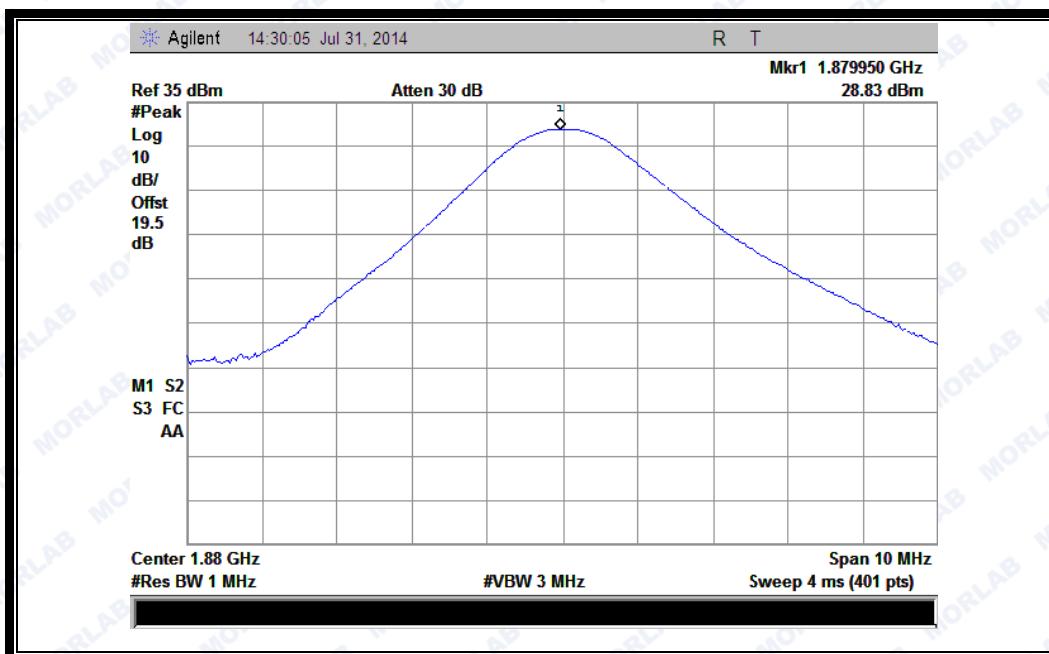


(Plot D 2: GPRS 1900MHz Channel = 661)

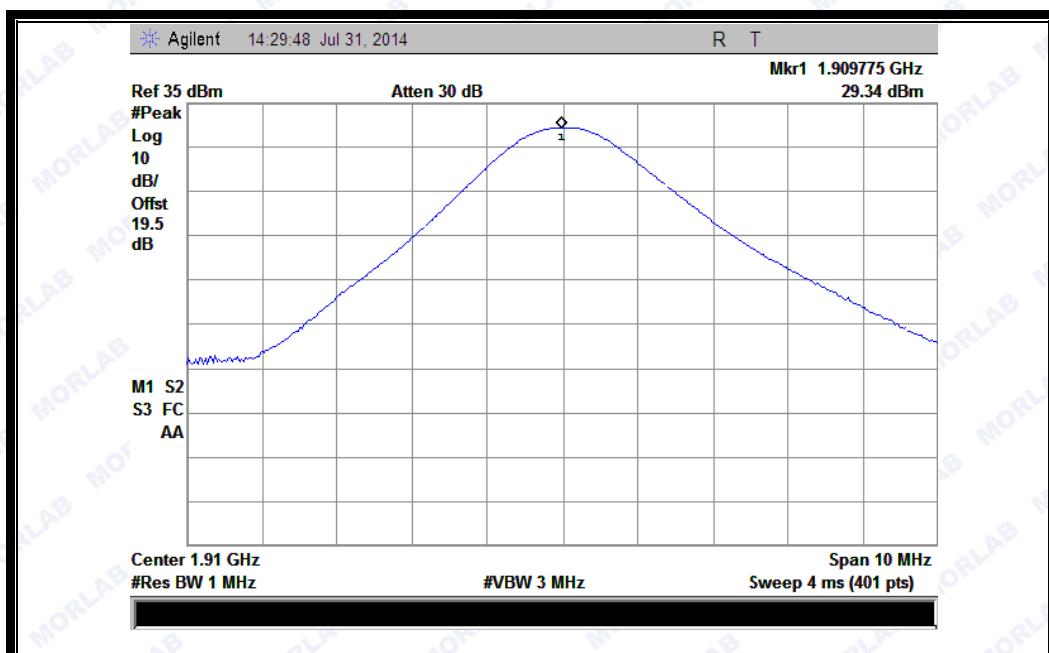

(Plot D 3: GPRS 1900MHz Channel = 810)

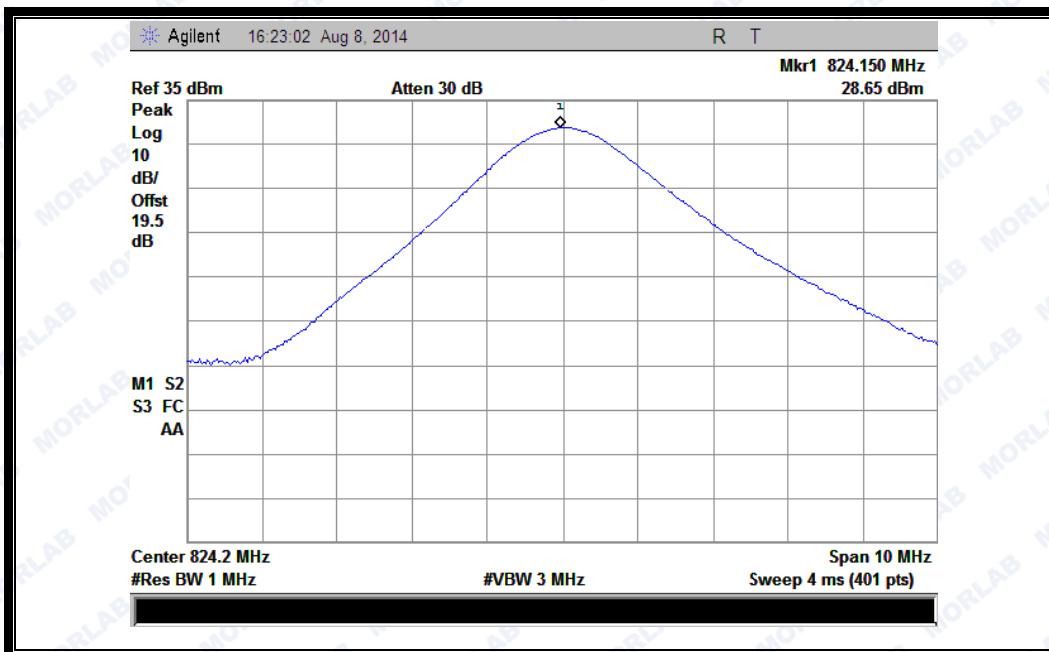


(Plot E1: EGPRS 850MHz Channel = 128)

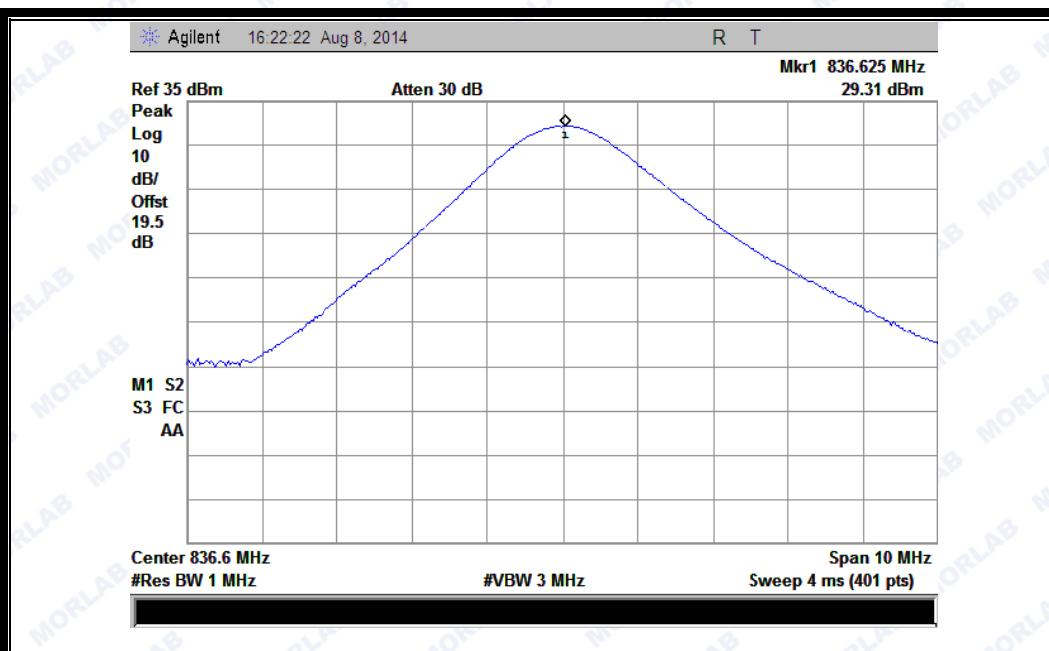


(Plot E2: EGPRS 850MHz Channel = 190)

SZ14070043W01

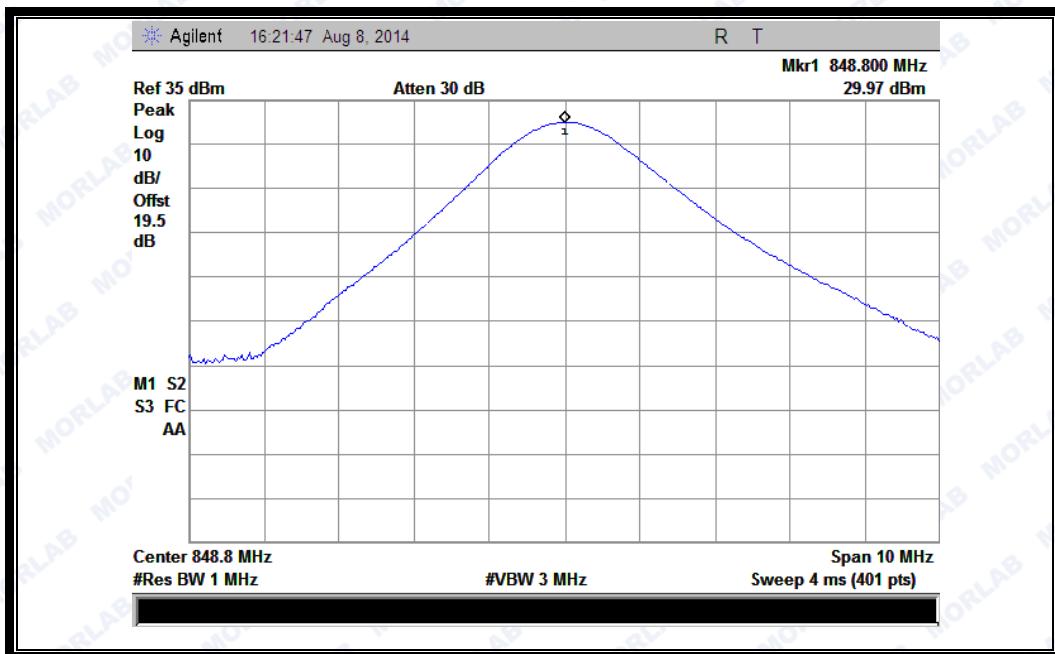


(Plot E3: EGPRS 850MHz Channel = 251)

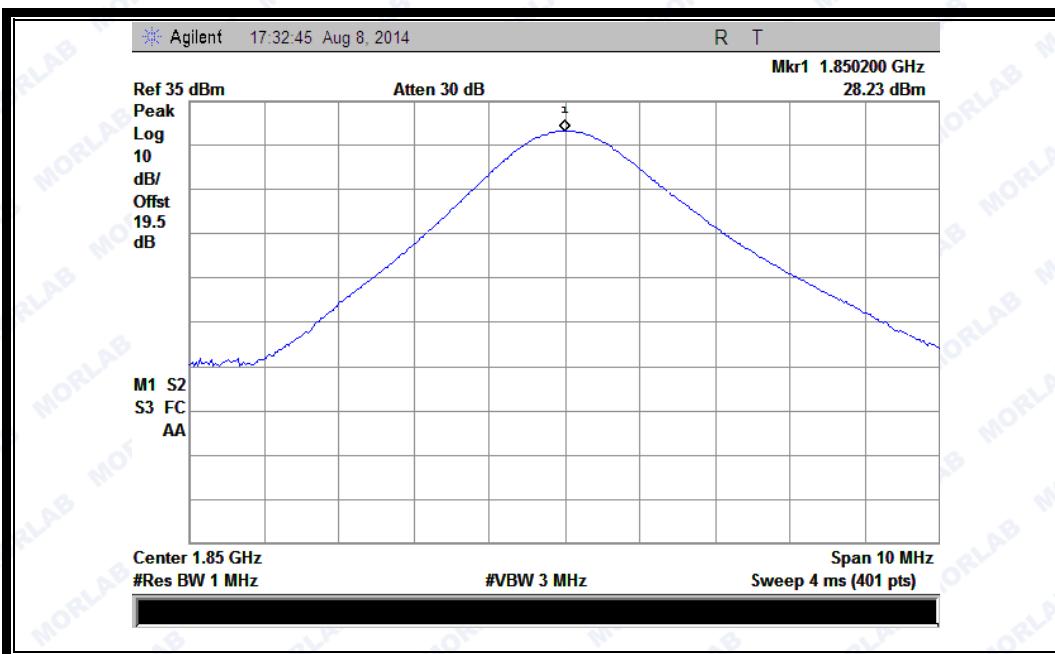


(Plot F1:EGPRS 1900MHz Channel = 512)

SZ14070043W01

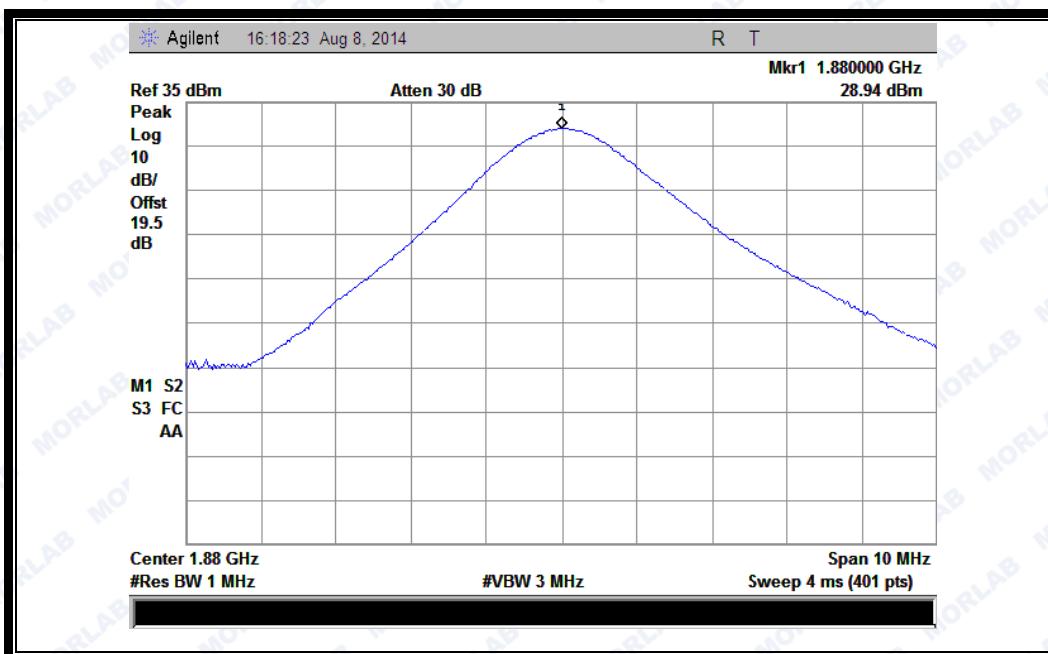

(Plot F2:EGPRS 1900MHz Channel = 661)

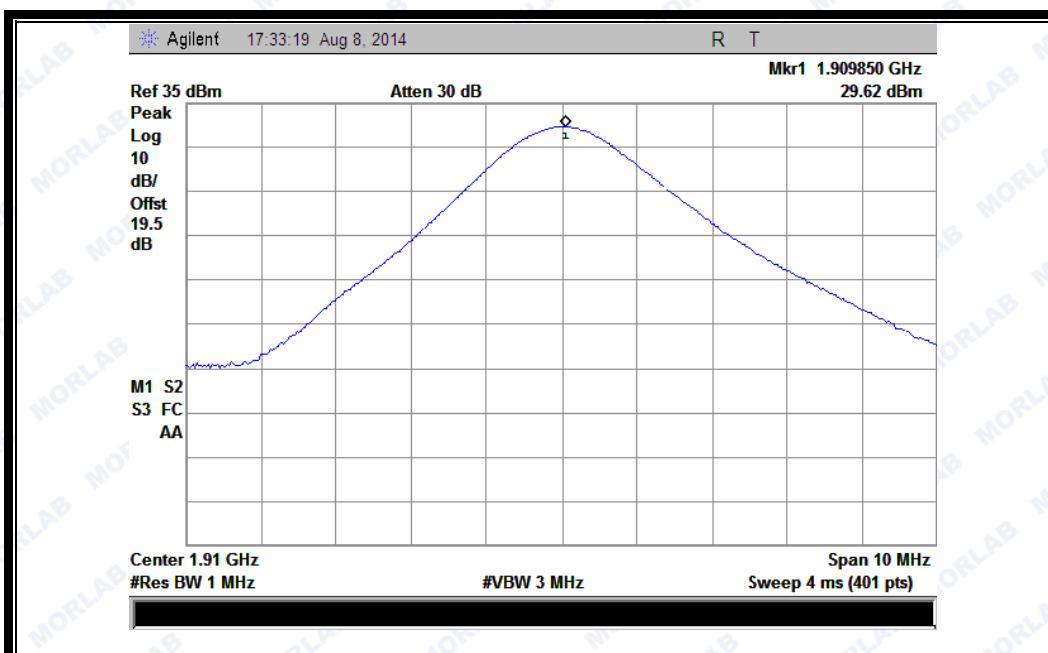

(Plot F3:EGPRS 1900Hz Channel = 810)

2.2. Peak to Average Radio

2.2.1. Definition

According to FCC section 2.1049 and FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2. Test Description

See section 2.1.2 of this report.

2.2.3. Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A .For GSM/EGPRS operating mode:

- Set RBW=1MHz, VBW=1MHz, peak detector in spectrum analyzer.
- Set EUT in maximum output power, and triggered the burst signal.
- Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average radio.


B. For UMTS operating mode:

- Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Peak to Average radio		Limit	Verdict
			dBm	Refer to Plot		
GSM 1900MHz	512	1850.2	0.08	Plot A1 to A3	13	PASS
	661	1880.0	0.17			PASS
	810	1909.8	0.05			PASS
EGPRS 1900MHz	512	1850.2	0.13	Plot B1 to B3	13	PASS
	661	1880.0	0.06			PASS
	810	1909.8	0.17			PASS


Band	Channel	Frequency (MHz)	Peak to Average radio		Limit dBm	Verdict
			dBm	Refer to Plot		
WCDMA 1900MHz	9262	1852.4	2.39	Plot C1 toC3	13	PASS
	9400	1880	2.75			PASS
	9538	1907.6	2.56			PASS

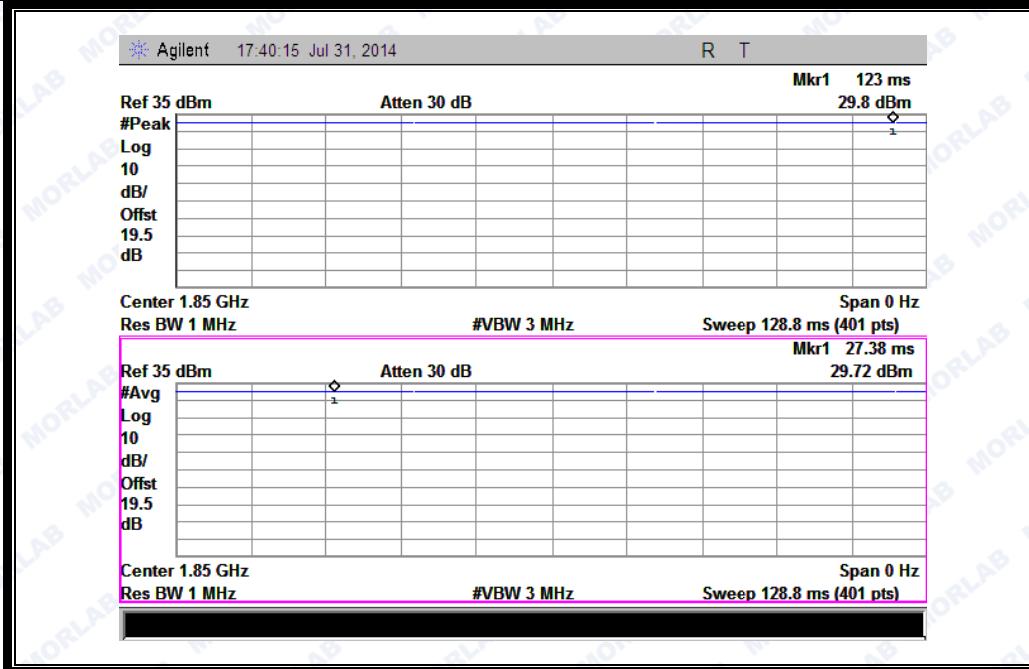

(Plot A1:GSM 1900 MHz Channel = 512)

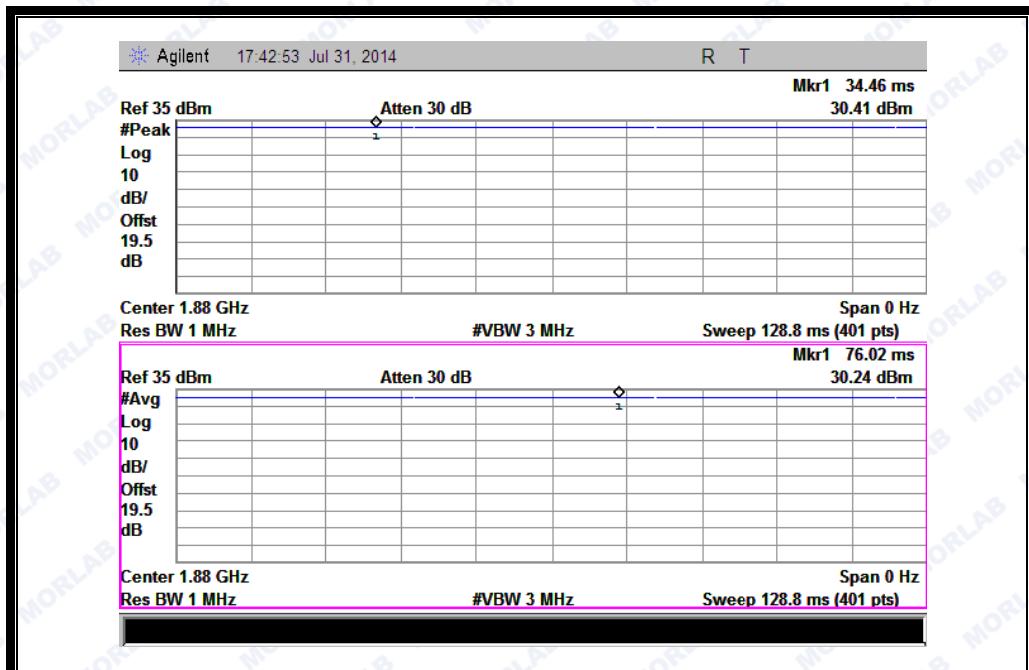


(Plot A2:GSM 1900 MHz Channel = 661)

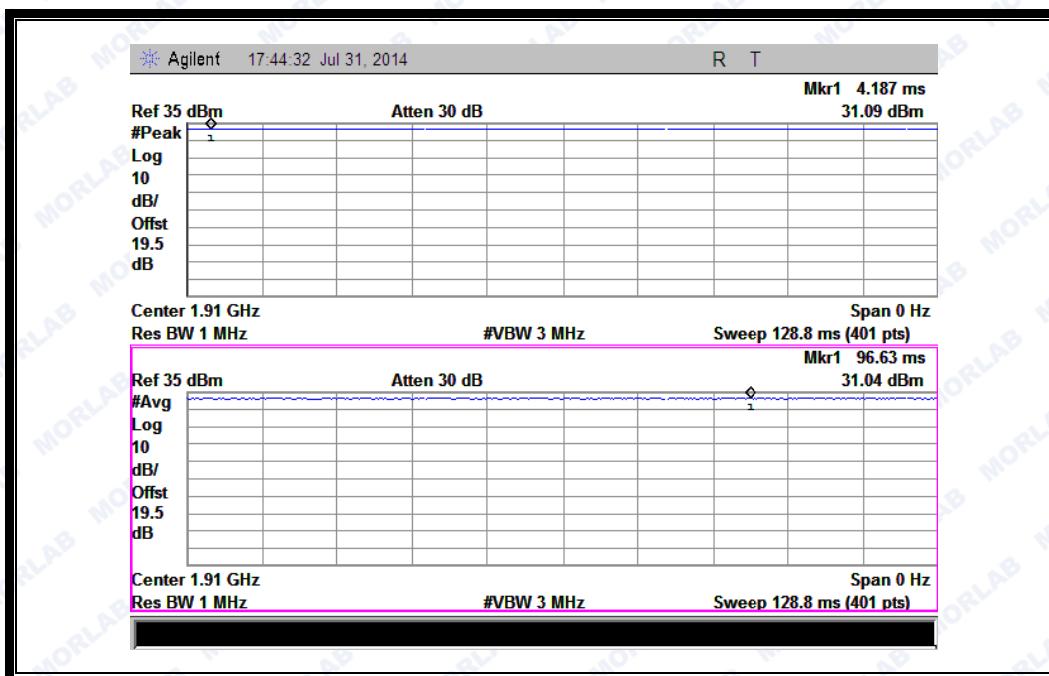


(Plot A3:GSM 1900MHz Channel = 810)




(Plot B1: EGPRS 1900MHz Channel = 512)

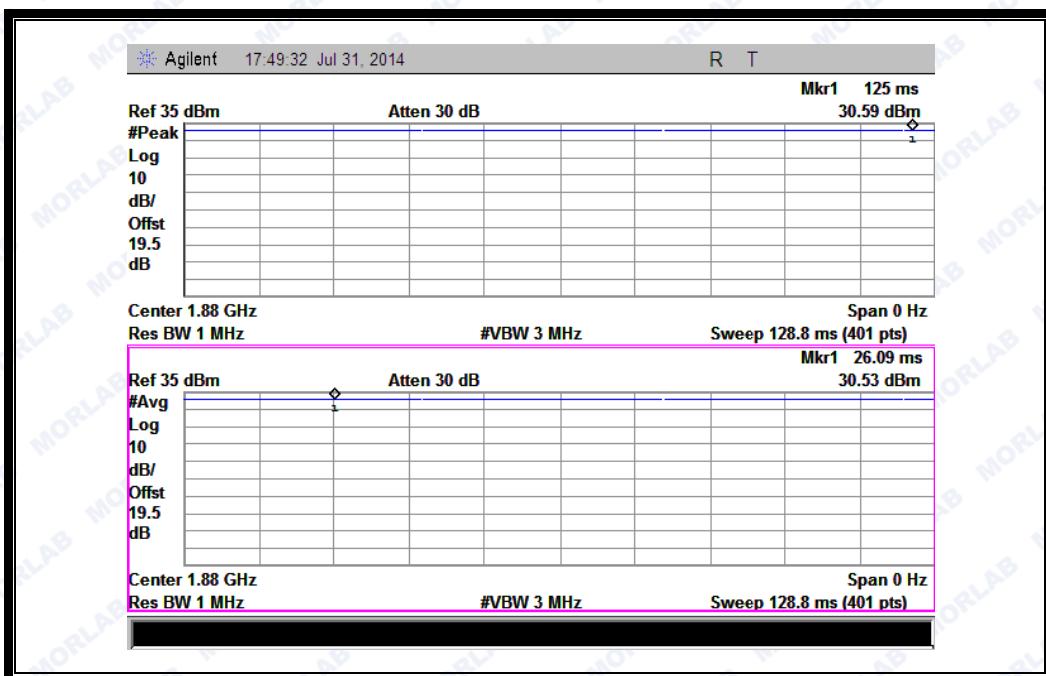


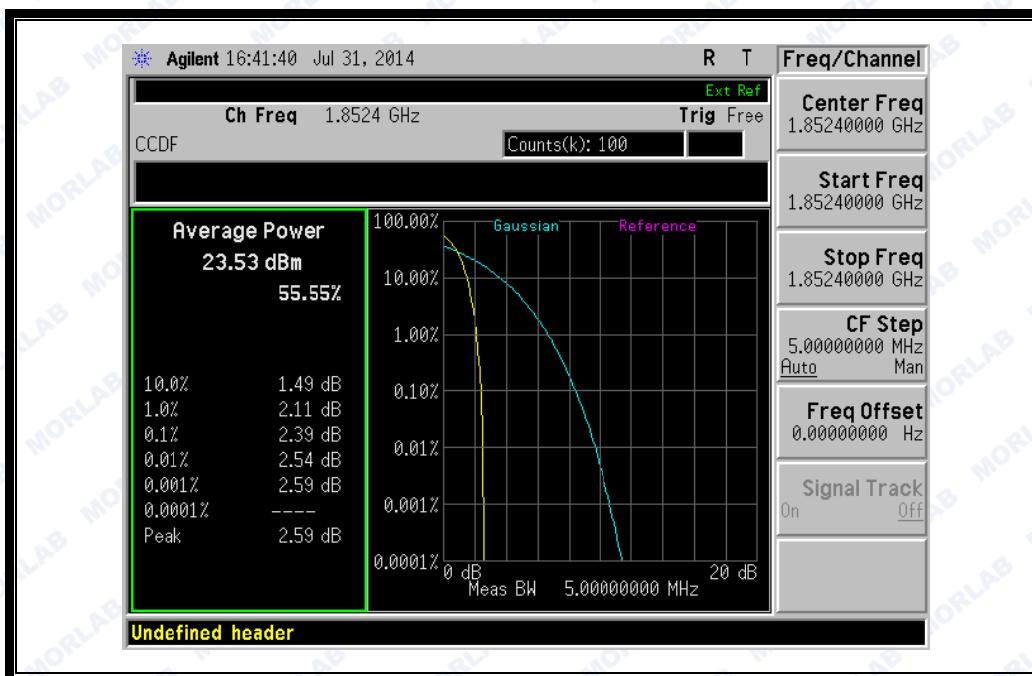

(Plot C1: WCDMA 1900MHz Channel = 9262)

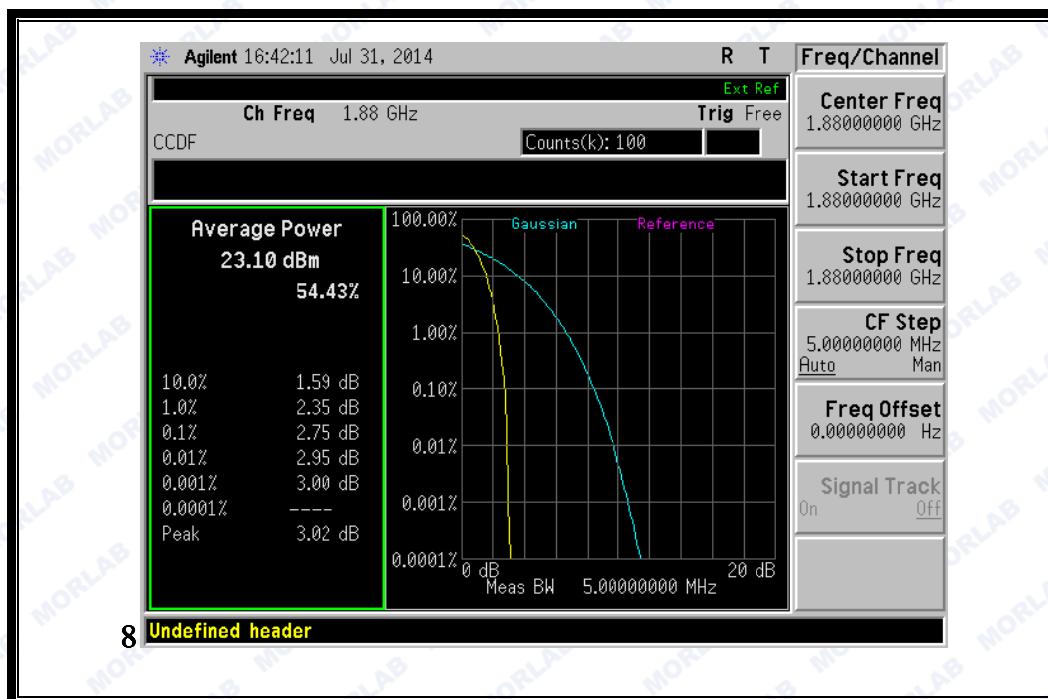

(Plot C2: WCDMA 1900MHz Channel = 9400)

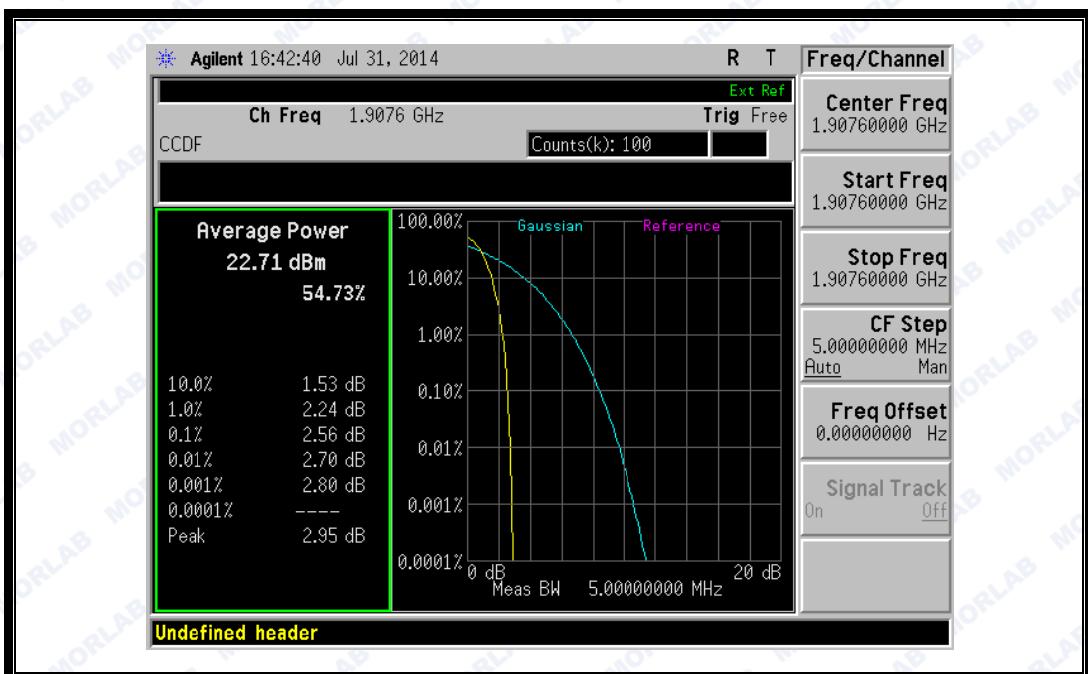

(Plot C3: WCDMA 1900MHz Channel = 9538)

2.3. 99% Occupied Bandwidth

2.3.1. Definition

According to FCC section 2.1049 and FCC § 22.917 &24.238 the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2. Test Description

See section 2.1.2 of this report.

2.3.3. Test Verdict


Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.

1. Test Verdict:


Band	Chann el	Frequen cy (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
EDGE 850MHz	128	824.2	312.127 KHz	242.5134 KHz	Plot A
	190	836.6	319.434 KHz	253.6833 KHz	Plot B
	251	848.8	311.998 KHz	246.3135 KHz	Plot C
EDGE 1900MHz	512	1850.2	318.934 KHz	246.4323 KHz	Plot D
	661	1880.0	313.045 KHz	243.0728 KHz	Plot E
	810	1909.8	310.718 KHz	246.3991 KHz	Plot F
WCDMA 850MHz	4132	826.4	4.628 MHz	4.1684 MHz	Plot G
	4175	835	4.678 MHz	4.1831 MHz	Plot H
	4233	846.6	4.633 MHz	4.1478 MHz	Plot I
WCDMA 1900MHz	9262	1852.4	4.694 MHz	4.2075 MHz	Plot J
	9400	1880	4.661 MHz	4.1867 MHz	Plot K
	9538	1907.6	4.671 MHz	4.1743 MHz	Plot L
GSM 850MHz	128	824.2	318.509 KHz	244.8923 KHz	Plot M
	190	836.6	318.994 KHz	251.3326 KHz	Plot N

Band	Chann el	Frequen cy (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
GSM 1900MHz	251	848.8	325.044 KHz	246.8593 KHz	Plot O
	512	1850.2	322.955 KHz	248.5285 KHz	Plot P
	661	1880.0	325.142 KHz	244.6306 KHz	Plot Q
	810	1909.8	315.005 KHz	251.0542 KHz	Plot R
GPRS 850MHz	128	824.2	313.087 KHz	246.4825 KHz	Plot S
	190	836.6	325.847 KHz	254.2778 KHz	Plot T
	251	848.8	320.115 KHz	244.5027 KHz	Plot U
GPRS 1900MHz	512	1850.2	318.934 KHz	246.4323 KHz	Plot V
	661	1880.0	328.578 KHz	249.0102 KHz	Plot W
	810	1909.8	324.116 KHz	248.9776 KHz	Plot X


2. Test Plots:

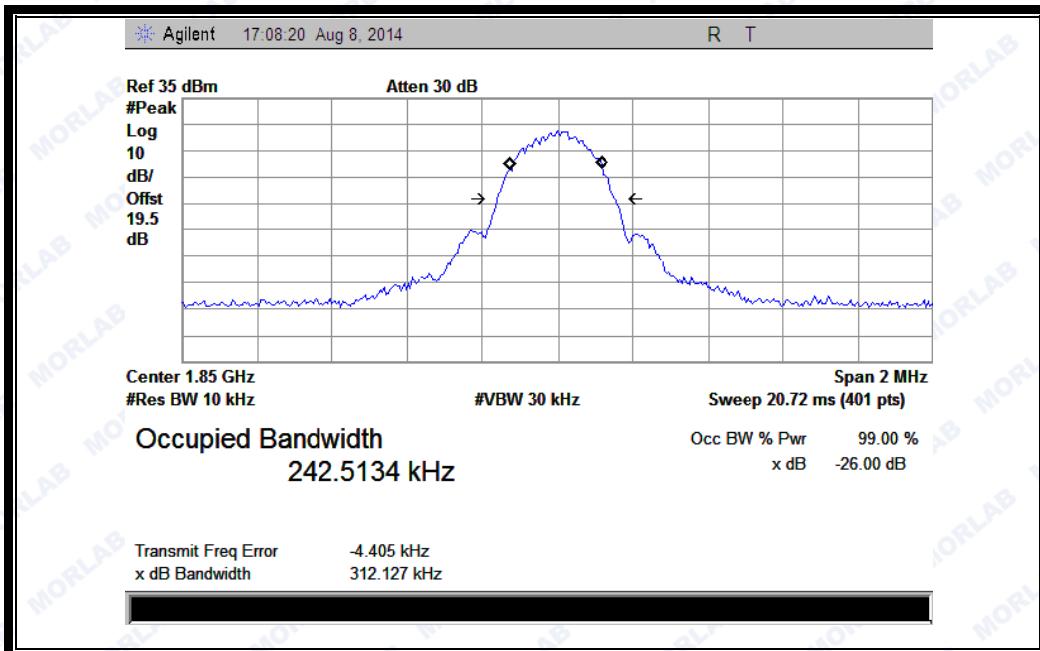


(Plot A: EGPRS 850MHz Channel = 128)

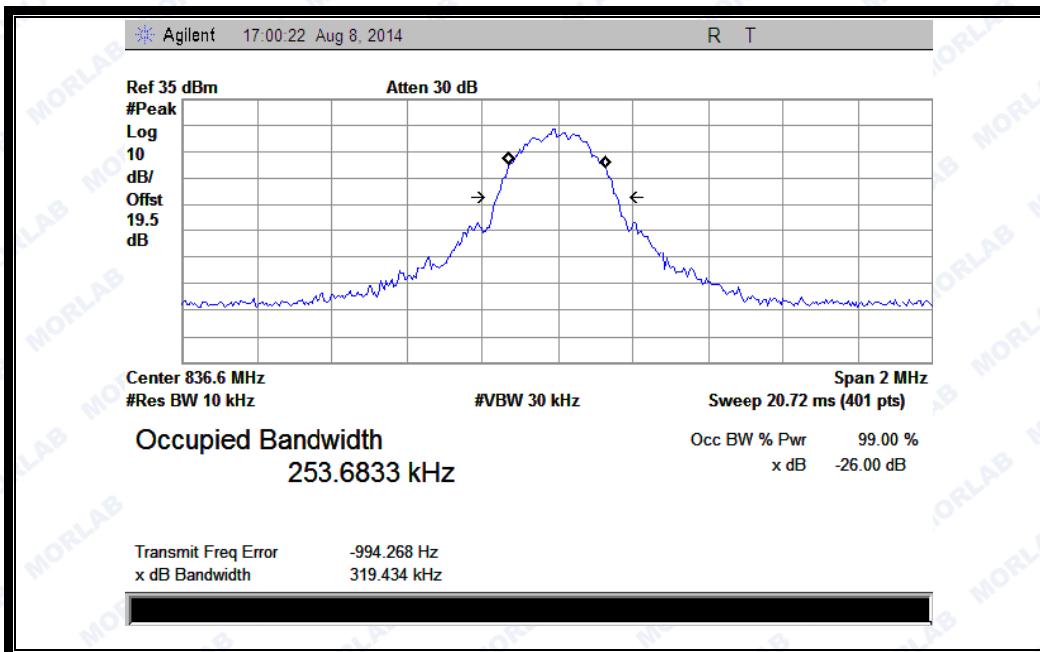

(Plot B: EGPRS 850MHz Channel = 190)

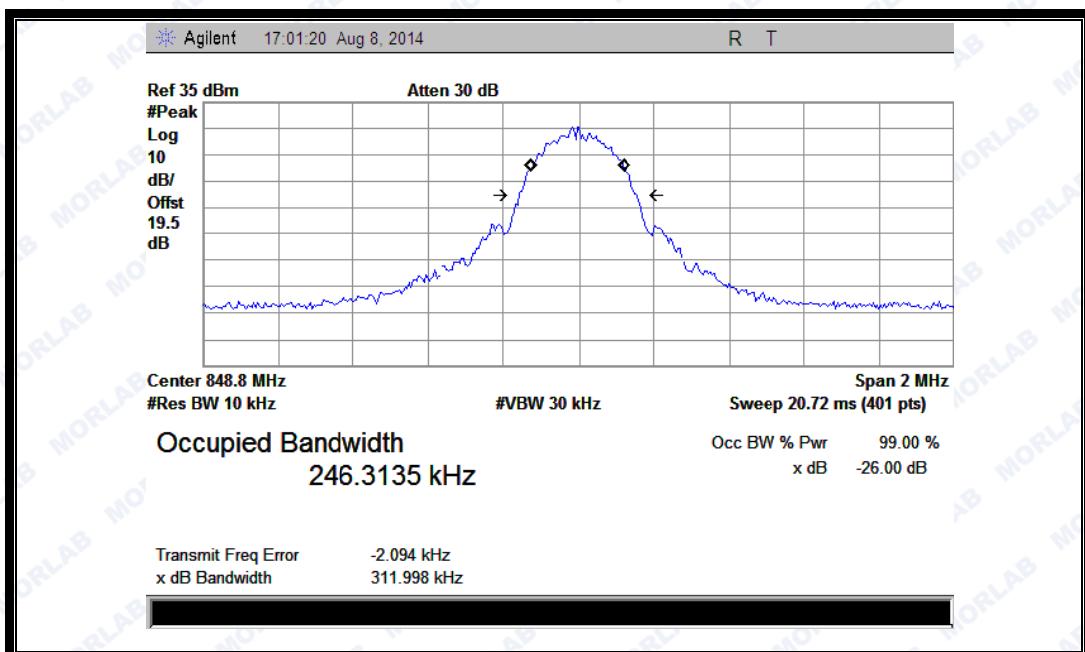


(Plot C: EGPRS 850MHz Channel = 251)

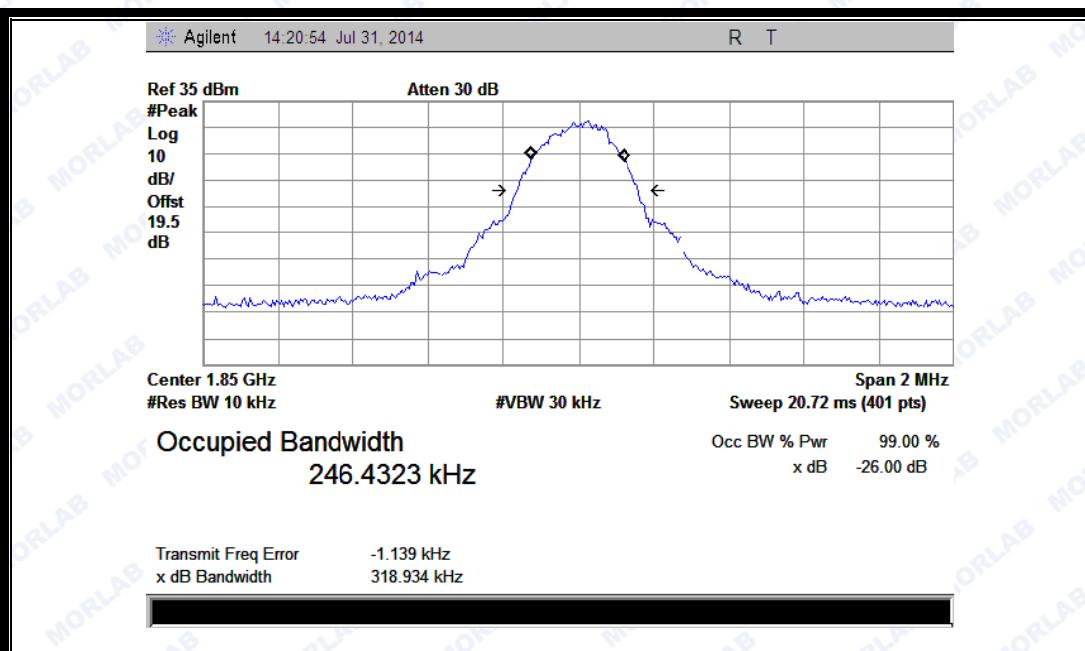


(Plot D: EGPRS1900MHz Channel = 512)

SZ14070043W01

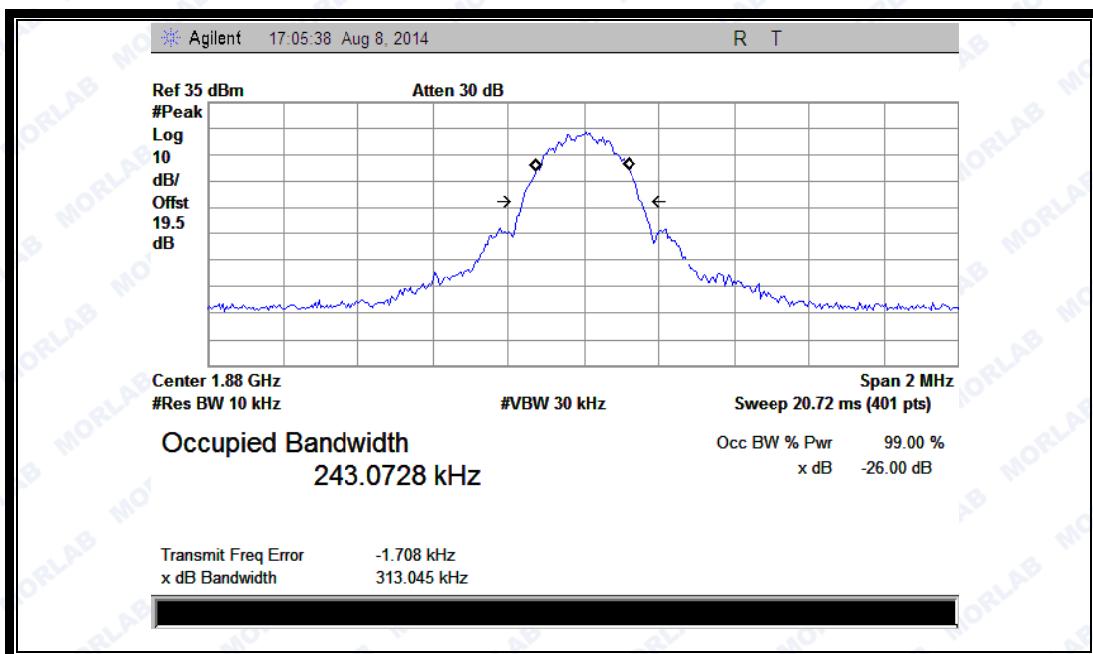


(Plot E:EGPRS1900MHz Channel = 661)

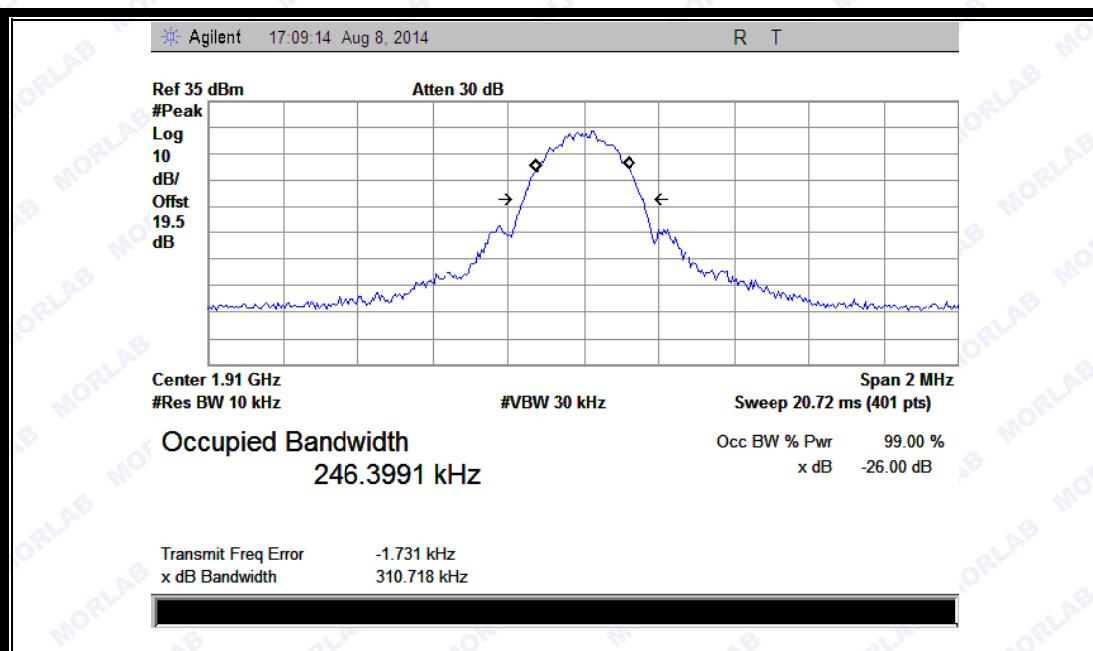


(Plot F:EGPRS 1900MHz Channel = 810)


SZ14070043W01

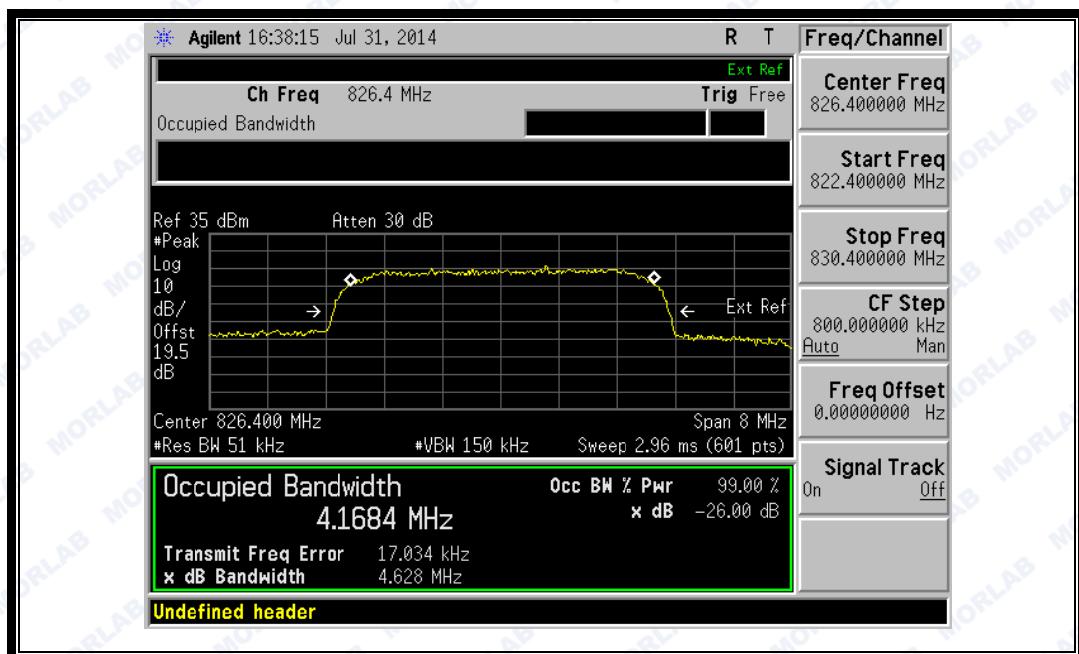


(Plot G: WCDMA 850MHz Channel = 4132)

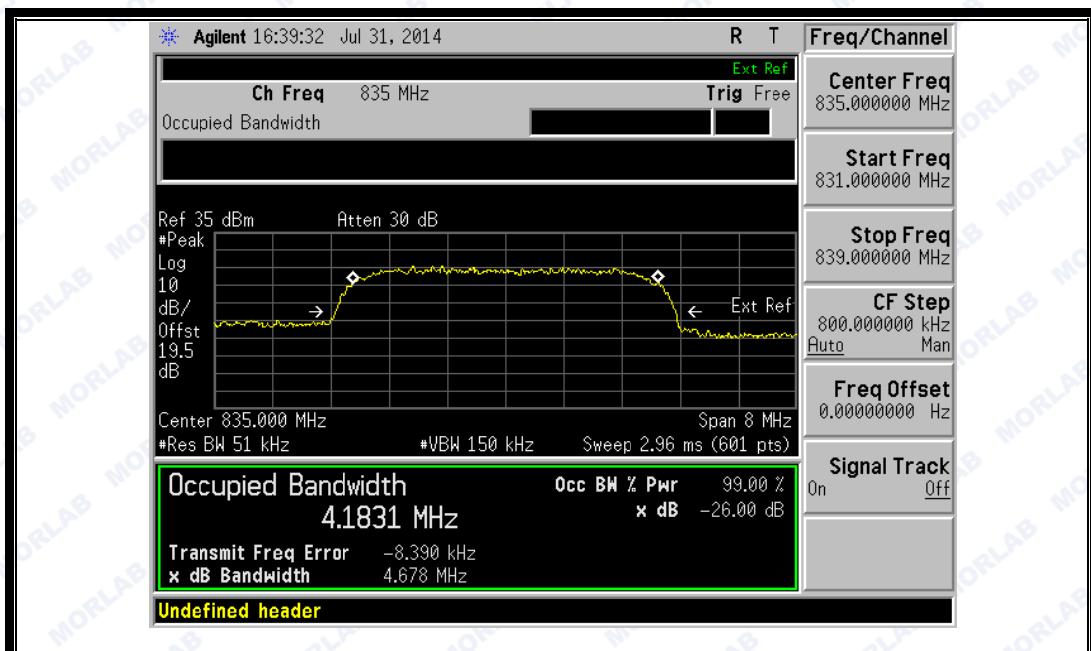


(Plot H: WCDMA 850 MHz Channel = 4175)

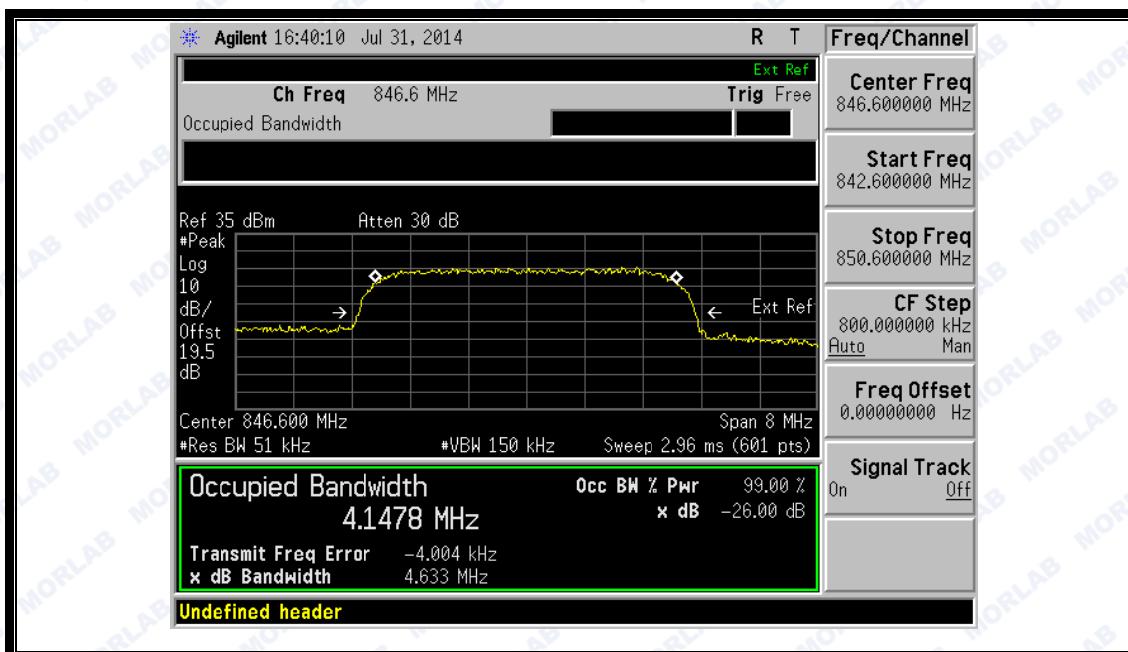


(Plot I: WCDMA 850MHz Channel = 4233)

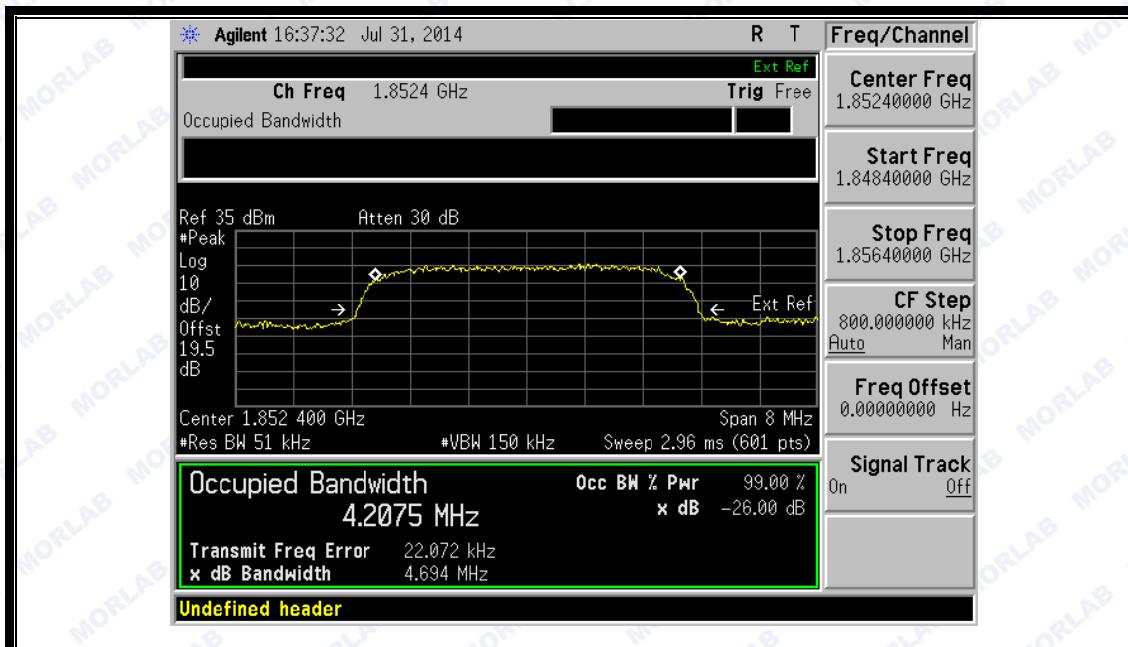

(Plot J: WCDMA 1900MHz Channel = 9262)

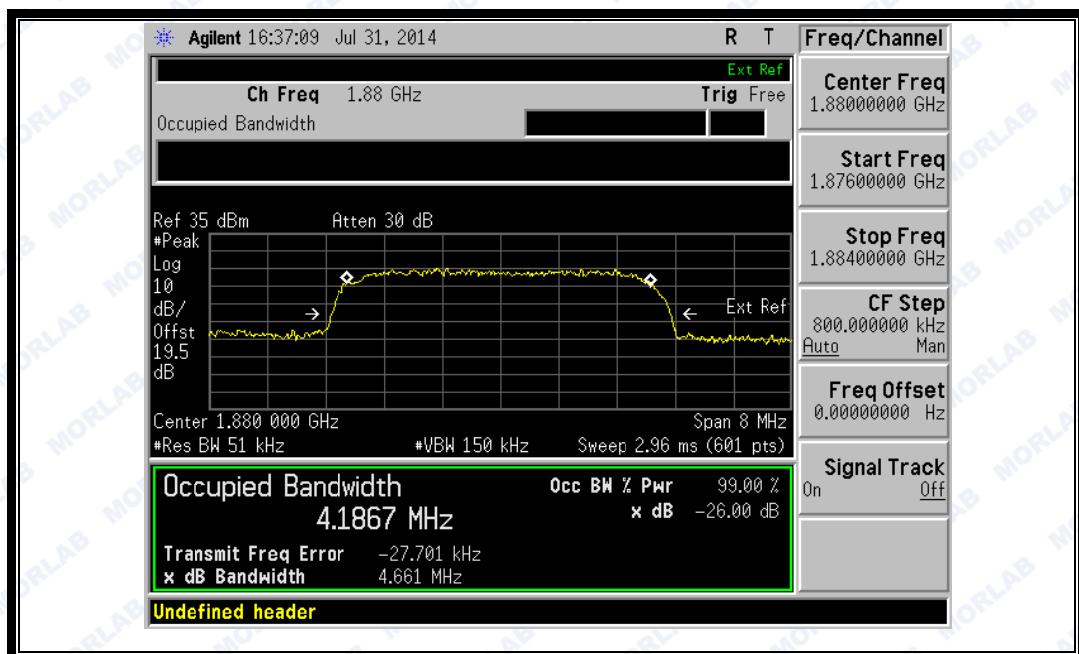


(Plot K: WCDMA 1900 MHz Channel = 9400)

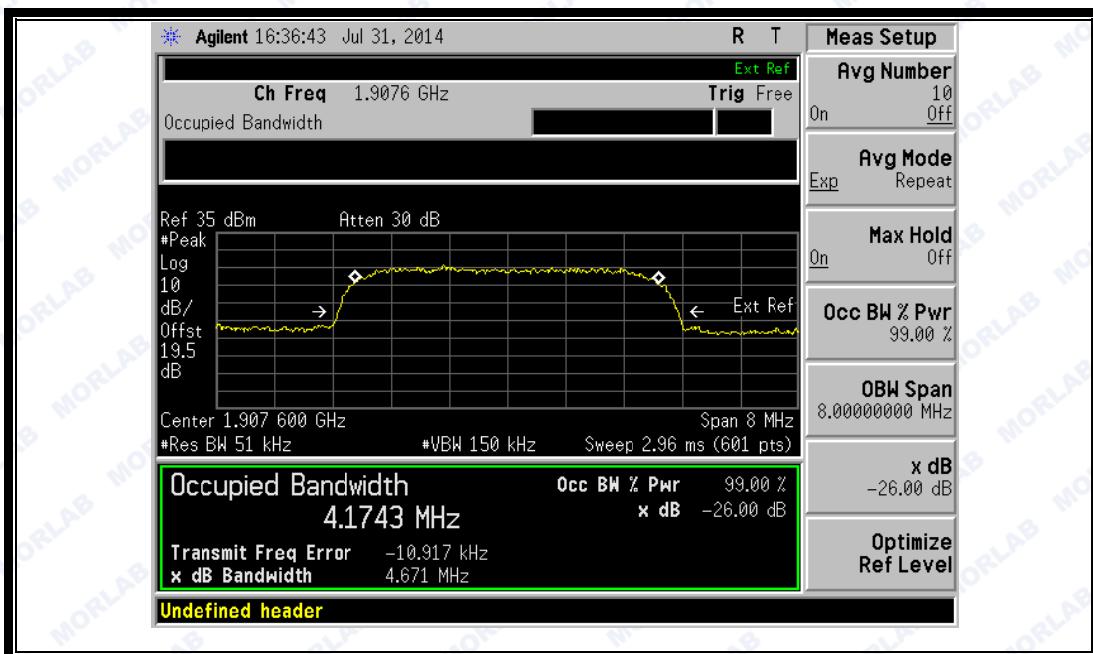


(Plot L: WCDMA1900MHz Channel = 9538)

SZ14070043W01


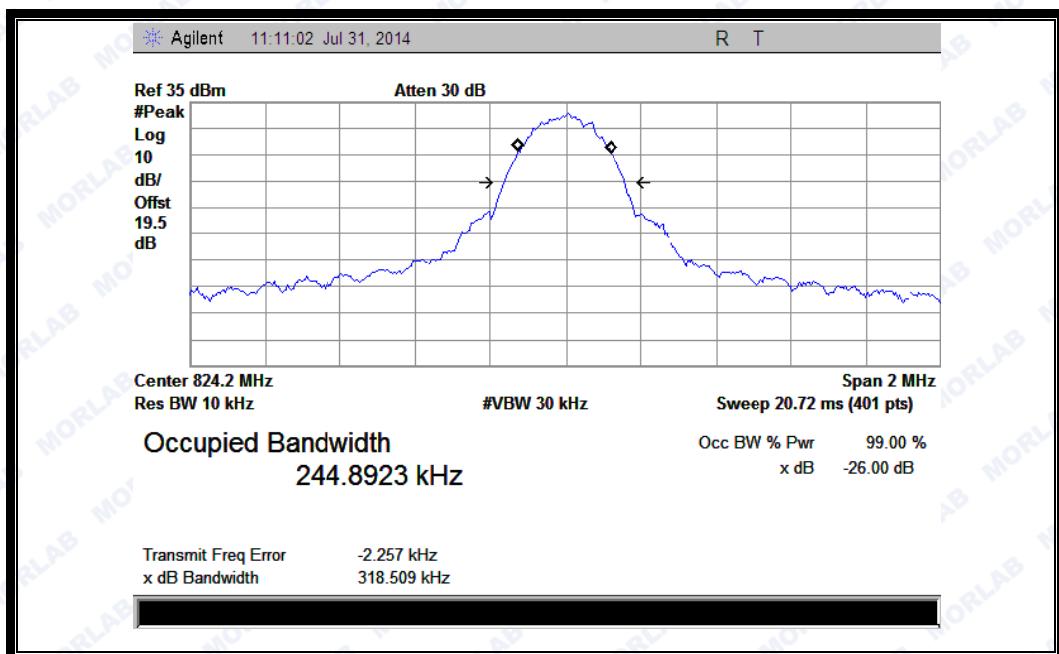




(Plot M: GSM 850MHz Channel = 128)

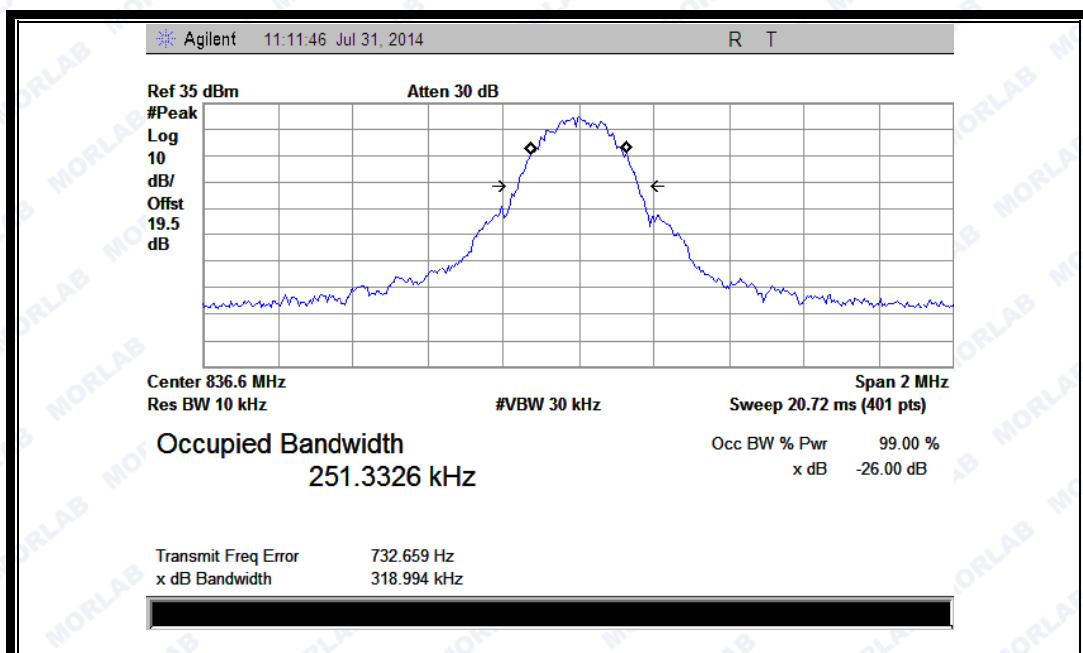



(Plot N: GSM 850MHz Channel = 190)


SZ14070043W01

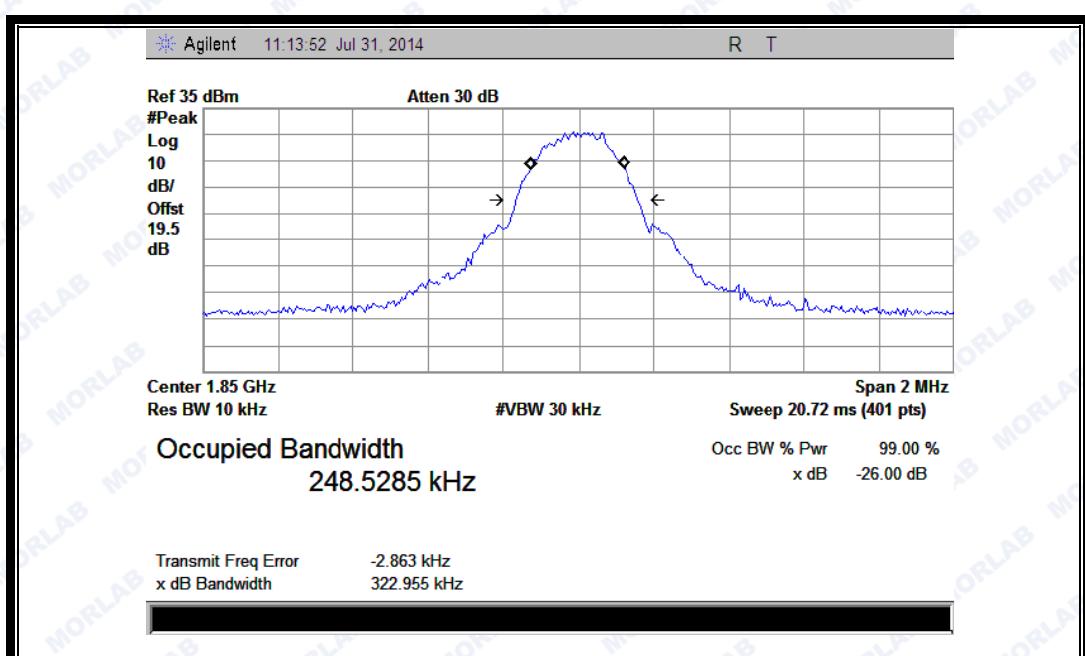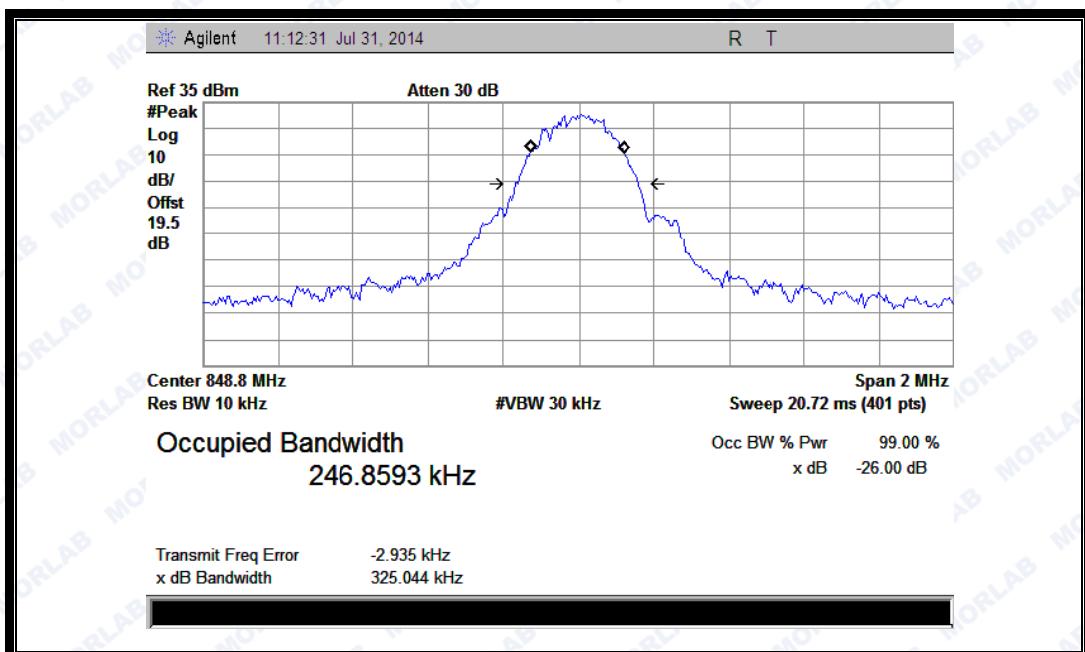

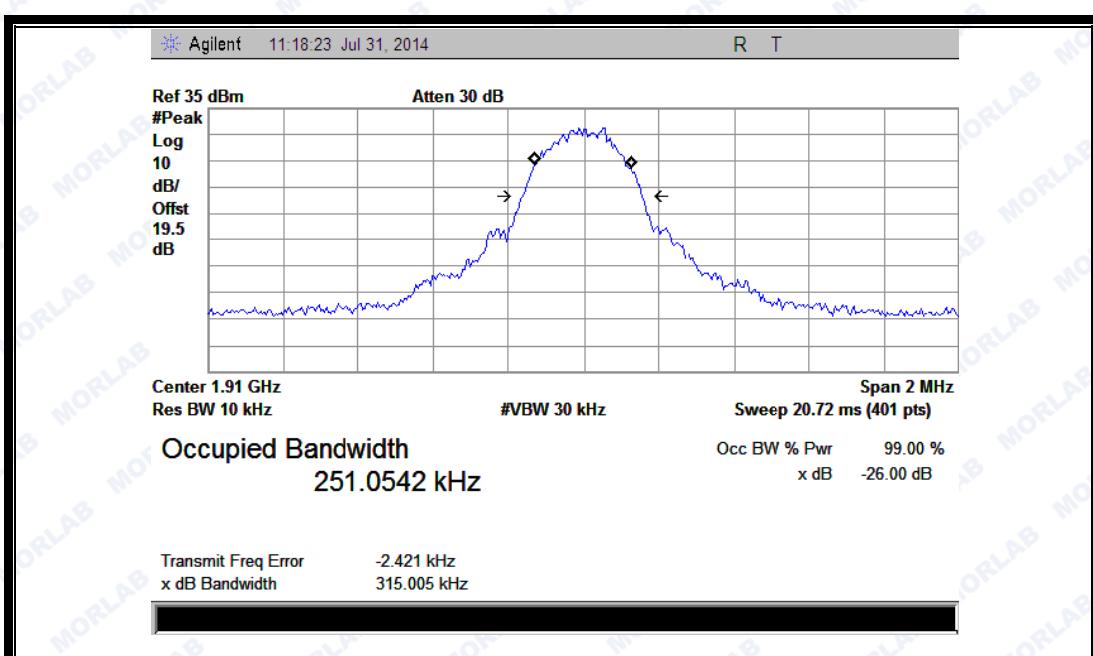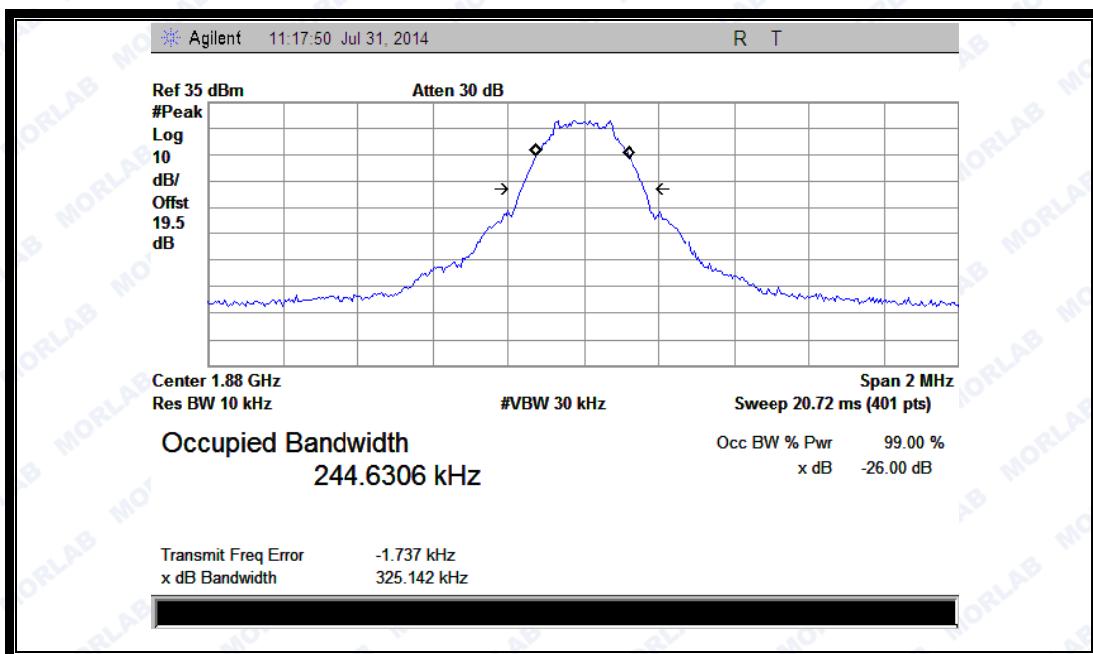


SZ14070043W01

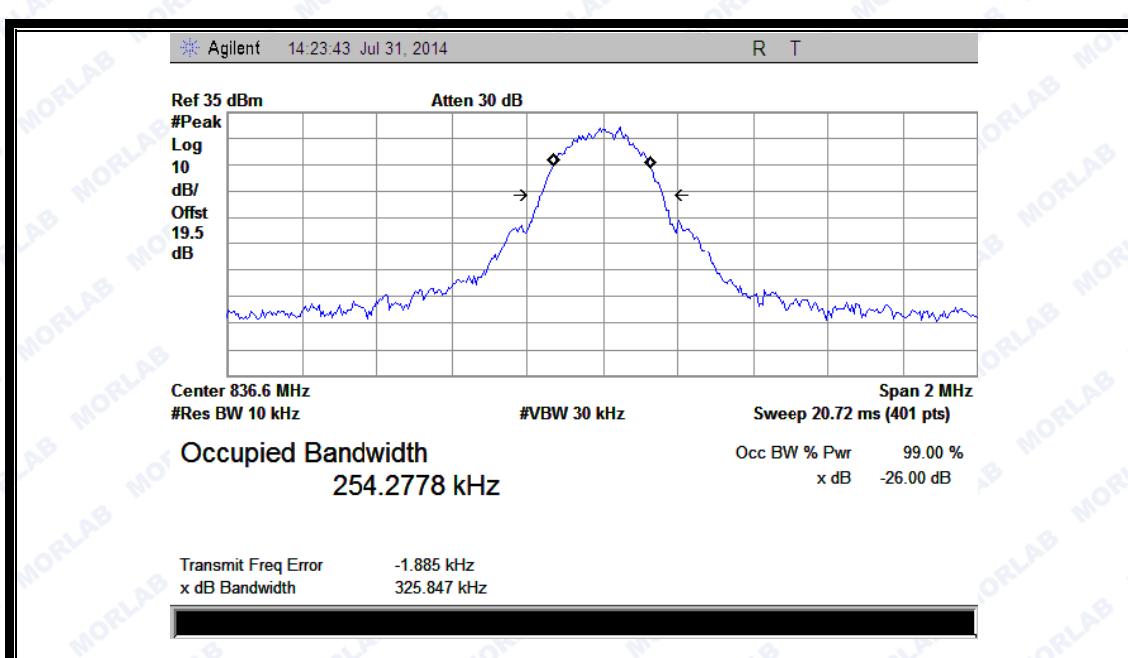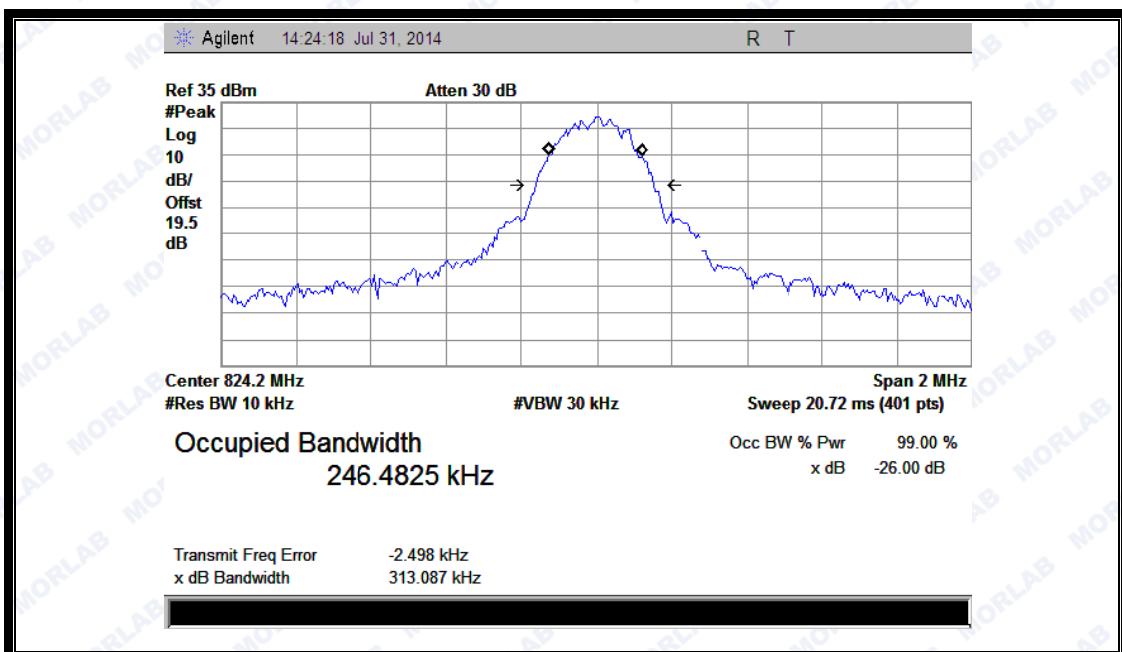


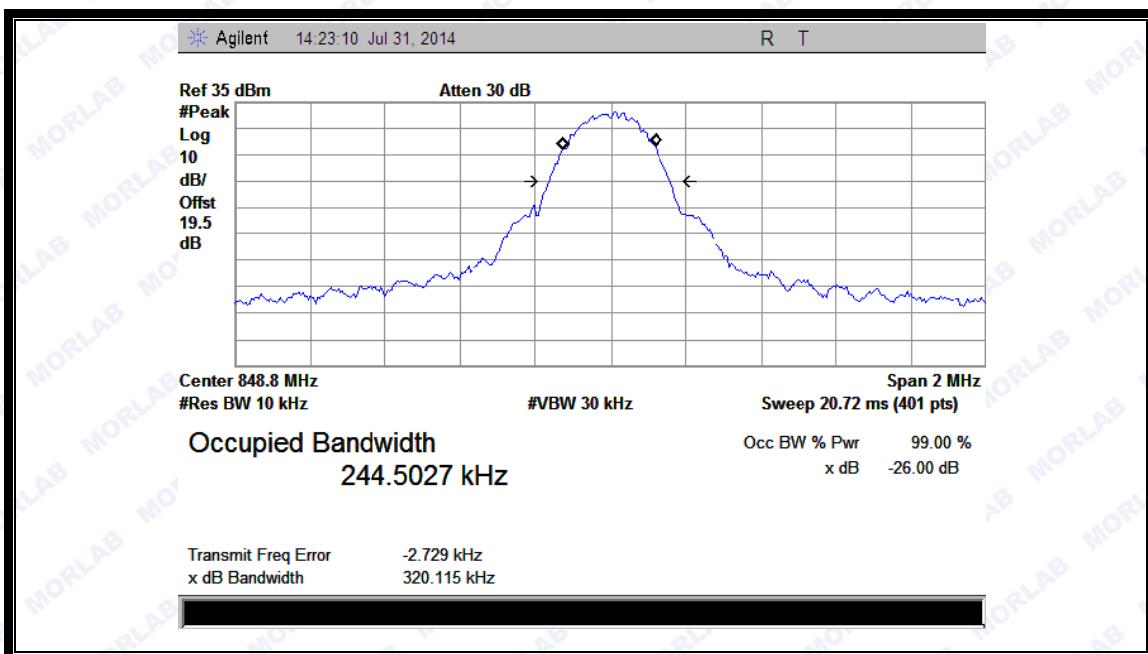


(Plot U: GPRS850MHz Channel = 251)

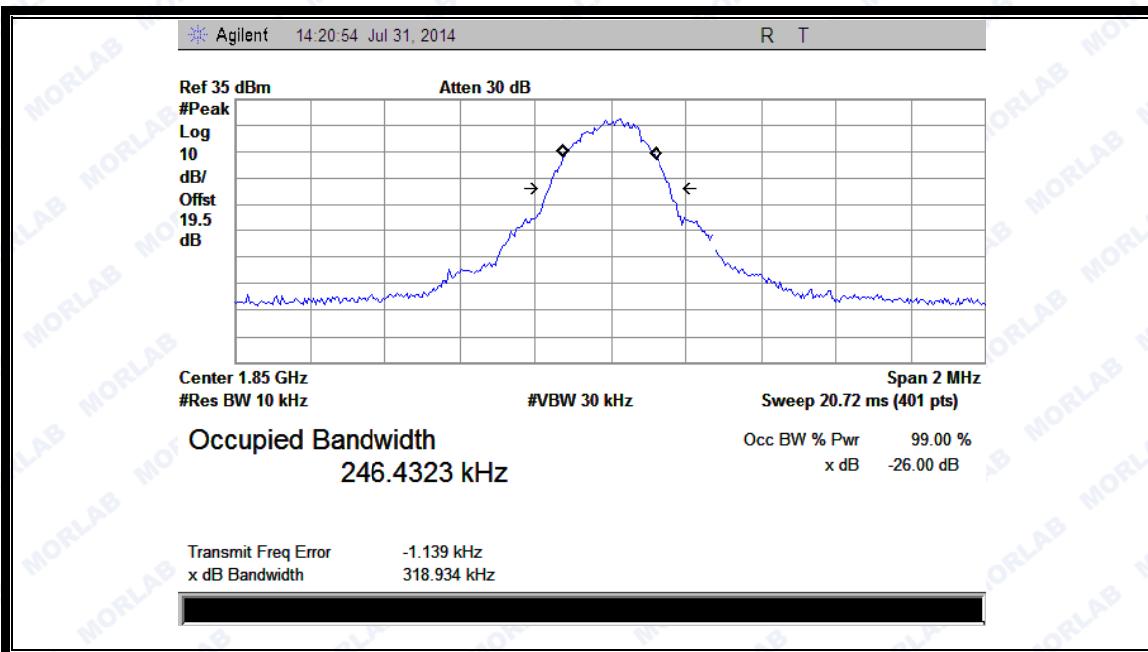

(Plot V:GPRS 1900MHz Channel = 512)

SZ14070043W01

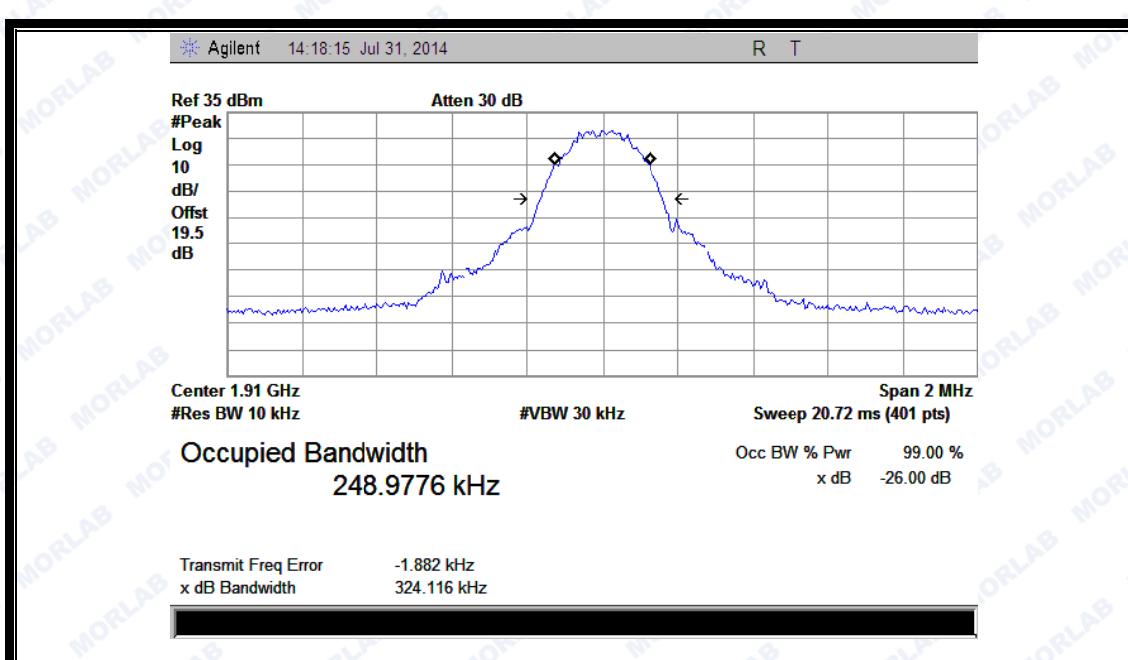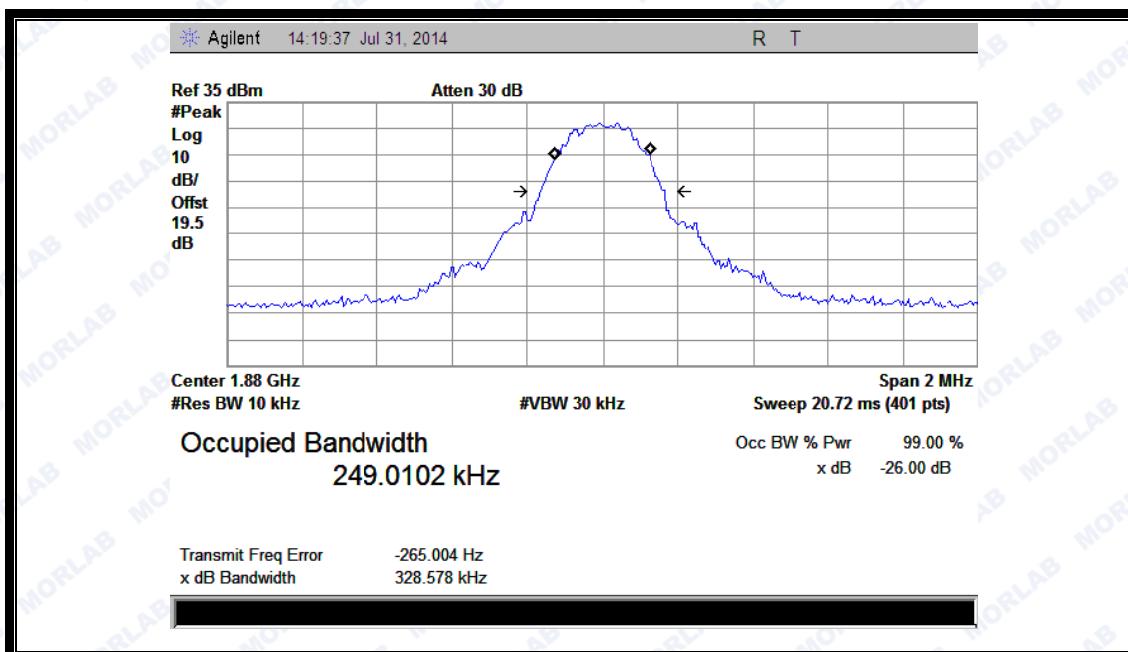

2.4. Frequency Stability

2.4.1. Requirement


According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2. Test Description

1. Test Setup:

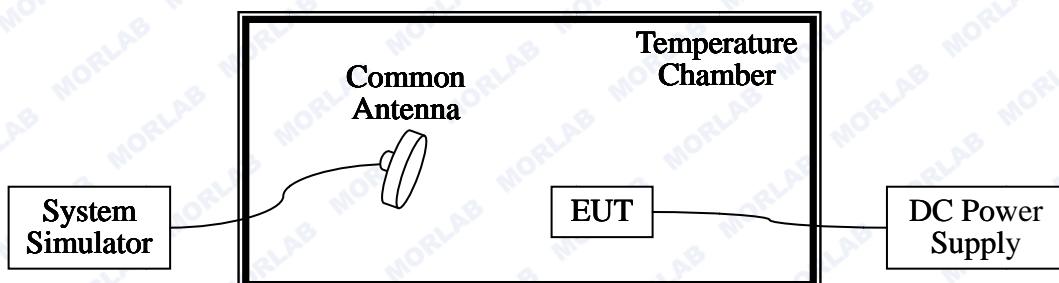

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.02.26	2015.02.25
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.02.26	2015.02.25

2.4.3. Test Verdict

The nominal, highest and lowest extreme voltages are separately 6VDC, 7VDC and 4.35VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of 850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm.

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdic t	
Power (VDC)	Temperatur e (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
6	-30	-22.45	± 2060.5	22.12	± 2091.5	18.19	± 2122	<u>PASS</u>	
	-20	27.11		12.43		-15.02			
	-10	-2.25		-17.46		15.11			
	0	30.26		32.14		5.05			
	+10	21.79		-24.93		3.02			
	+20	-19.56		-17.19		10.76			
	+30	34.36		19.36		-16.53			
	+40	41.63		19.64		-2.13			
	+55	36.28		23.27		-12.89			
	7	+25		29.05		-7.55			
4.35	+25	-17.65		37.33		7.78			

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdic t	
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
6	-30	18.11	$\pm 1850.$ 2	21.18	± 1880.0	34.15	± 1909.8	<u>PASS</u>	
	-20	37.18		-21.48		-18.88			
	-10	-2.05		-13.76		-16.88			
	0	40.06		-18.38		19.32			
	+10	1.98		-21.61		25.31			
	+20	-19.76		15.52		30.26			
	+30	39.76		-0.78		-29.21			
	+40	46.56		35.37		19.33			

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
	+55	39.88		24.02		-19.37			
7	+25	37.88		23.72		27.09			
4.35	+25	-5.69		15.22		19.89			

3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
6	-30	-31.22	±2060.5	26.29	±2091.5	6.12	±2122	<u>PASS</u>	
	-20	36.98		13.73		-13.80			
	-10	-3.25		-18.35		13.16			
	0	41.06		38.10		5.05			
	+10	1.99		-22.06		3.02			
	+20	-19.86		-16.11		10.76			
	+30	39.56		17.76		-16.51			
	+40	47.62		15.54		-2.11			
	+55	40.98		3.57		-12.89			
	7	+25		14.05		-7.83			
4.35	+25	-15.01		7.93		6.88			

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperatur e (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
6	-30	-11.87	±1850.2	25.12	±1880. 0	1.57	±1909.8	<u>PASS</u>	
	-20	2.72		7.63		-13.76			
	-10	1.25		-25.78		-13.21			
	0	2.57		-1.36		13.23			
	+10	-10.78		-17.98		5.23			
	+20	-2.11		-21.61		37.77			
	+30	14.03		14.58		-26.88			
	+40	5.43		-0.78		19.34			
	+55	-2.46		39.87		-16.77			
	7	+25		4.08		26.59			
4.35	+25	-7.19		14.13		19.03			

5. WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)			
		Hz	Limit	Hz	Limit	Hz	Limit		
6	-30	17.11	± 2066	12.21	± 2087.5	-1.10	± 2116.5	<u>PASS</u>	
	-20	-7.51		-0.62		-18.48			
	-10	-3.43		22.45		7.67			
	0	16.47		13.25		4.32			
	+10	30.18		1.31		-17.33			
	+20	32.27		-12.22		11.90			
	+30	-7.98		31.62		6.63			
	+40	26.31		13.45		28.93			
	+55	12.10		-12.42		19.76			
	7	+25		31.12		23.89			
4.35	+25	18.56		-17.80		-18.12			

6. WCDMA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict	
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)			
		Hz	Limits	Hz	Limits	Hz	Limits		
6	-30	-4.22	± 1852.4	-11.17	± 1880.0	-3.29	± 1907.6	<u>PASS</u>	
	-20	19.15		12.28		25.60			
	-10	5.35		-14.36		15.11			
	0	18.92		18.59		-3.17			
	+10	32.40		21.39		18.12			
	+20	13.55		39.17		-10.39			
	+30	2.31		2.37		17.47			
	+40	-12.52		-13.47		29.89			
	+55	-13.65		-5.81		-2.53			
	7	+25		14.68		21.05			
4.35	+25	23.12		25.37		-25.11			

2.5. Conducted Out of Band Emissions

2.5.1. Requirement

According to FCC section 22.917(a) and FCC section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

2.5.2. Test Description

See section 2.1.2 of this report.

2.5.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-18.65	Plot A1toA1.1	-13	PASS
	190	836.6	-18.96	Plot A2toA2.1		PASS
	251	848.8	-18.14	Plot A3toA3.1		PASS
GSM 1900MHz	512	1850.2	-18.19	Plot B1toB1.1	-13	PASS
	661	1880.0	-19.96	Plot B2toB2.1		PASS
	810	1909.8	-18.15	Plot B3toB3.1		PASS
EDGE 850MHz	128	824.2	-18.6	Plot C1toC1.1	-13	PASS
	190	836.6	-19.17	Plot C2toC2.1		PASS
	251	848.8	-19.09	Plot C3toC3.1		PASS
EDGE 1900MHz	512	1850.2	-19.59	Plot D1toD1.1	-13	PASS
	661	1880.0	-18.97	Plot D2toD2.1		PASS
	810	1909.8	-18.53	Plot D3toD3.1		PASS


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
WCDMA 850MHz	4132	826.4	<-25	Plot E1toE1.1	-13	PASS
	4175	835	<-25	Plot E2toE2.1		PASS
	4233	846.6	<-25	Plot E3toE3.1		PASS
WCDMA 1900MHz	9262	1852.4	<-25	Plot F1toF1.1	-13	PASS
	9400	1880	<-25	Plot F2toF2.1		PASS
	9538	1907.6	<-25	Plot F3toF3.1		PASS

2. Test Plots for the Whole Measurement Frequency Range:

Note: the power of the EUT transmitting frequency should be ignored.

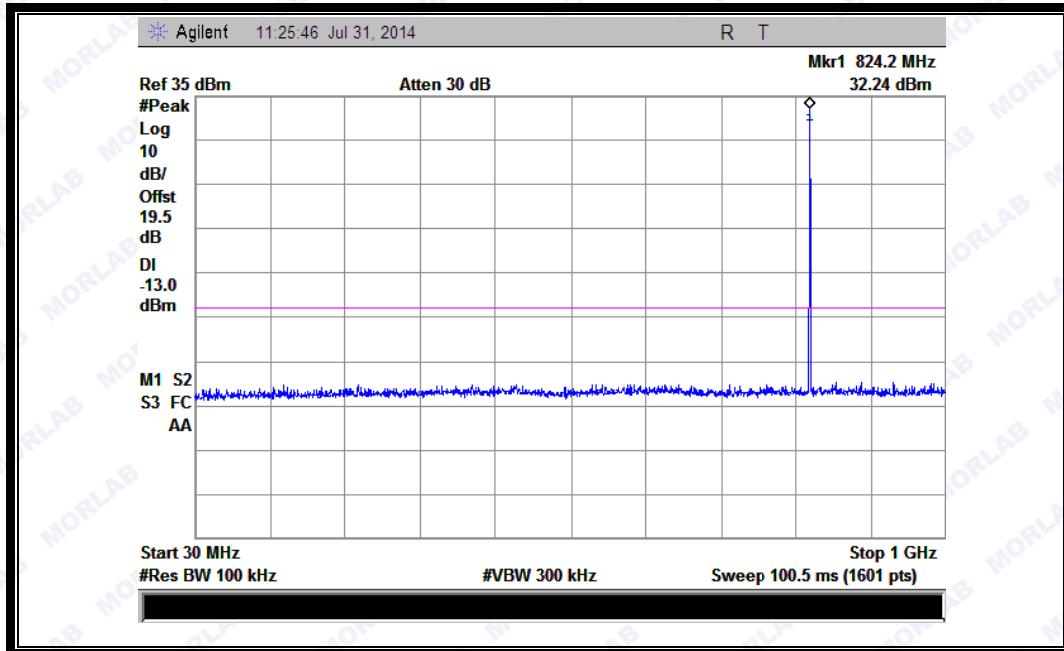


(Plot A1:GSM 850MHz Channel = 128, 30MHz to 1GHz)

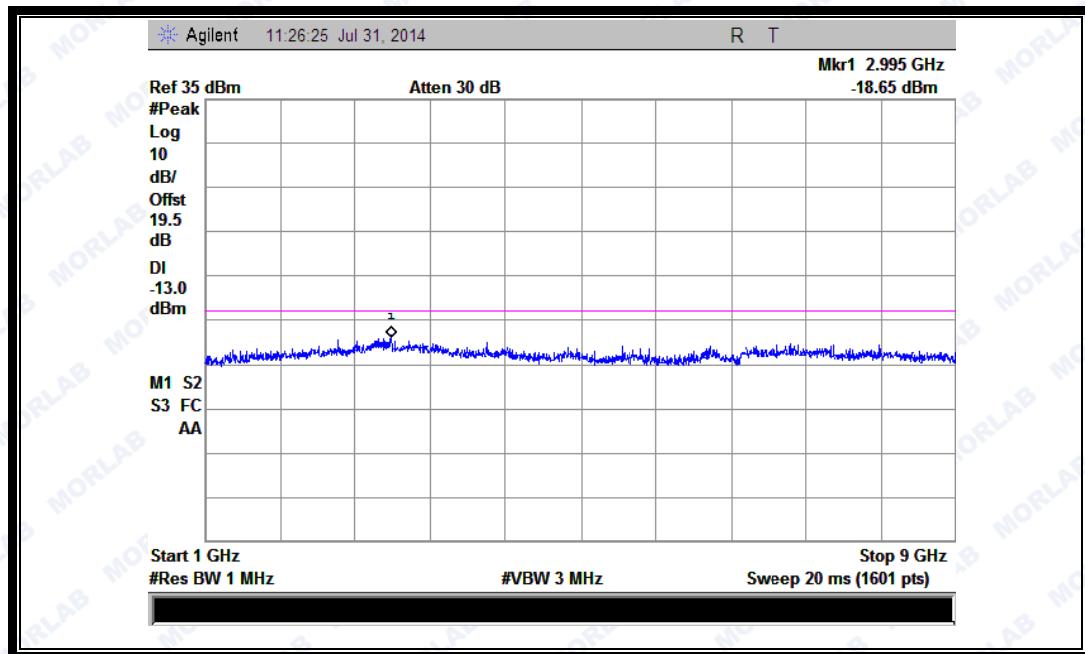


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

SZ14070043W01

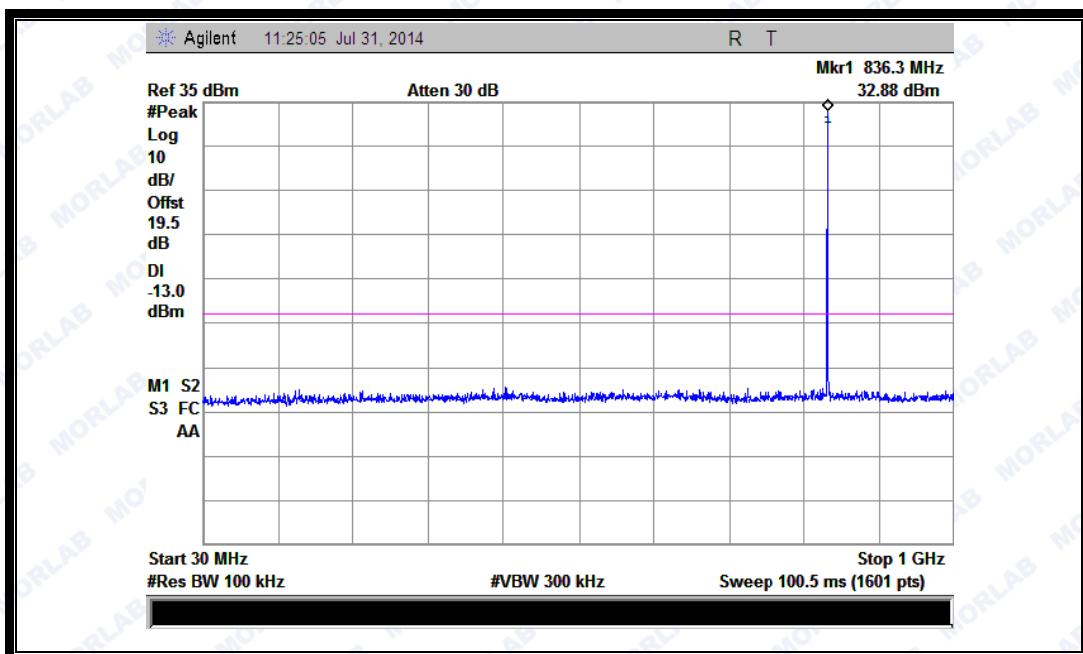


(Plot A2:GSM 850MHz Channel = 190, 30MHz to 1GHz)

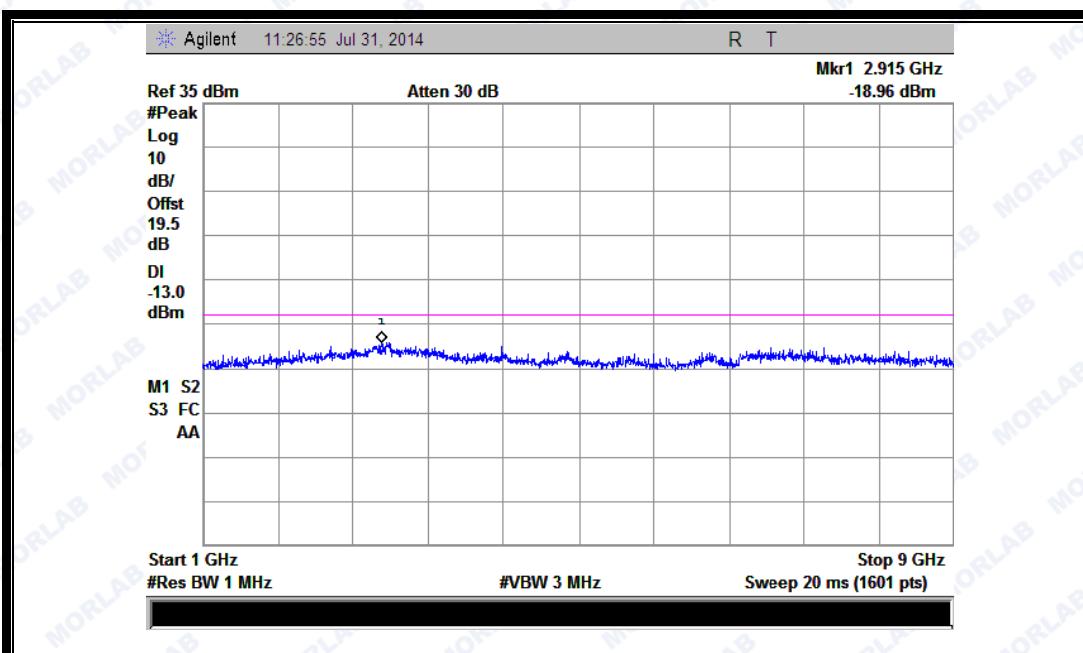


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)


SZ14070043W01

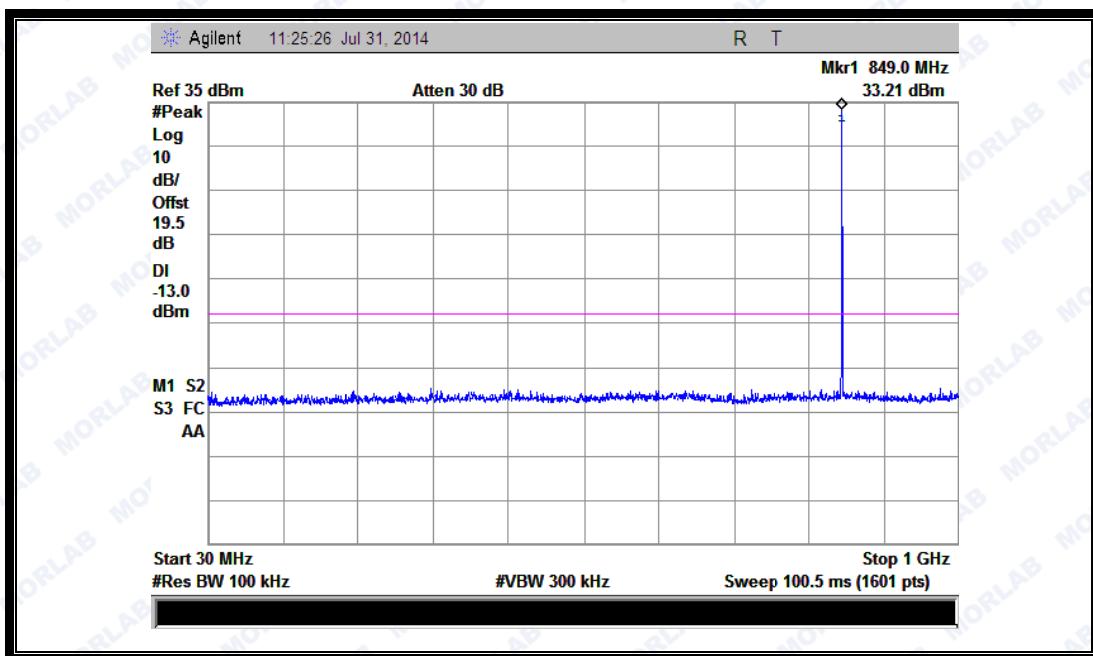


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)

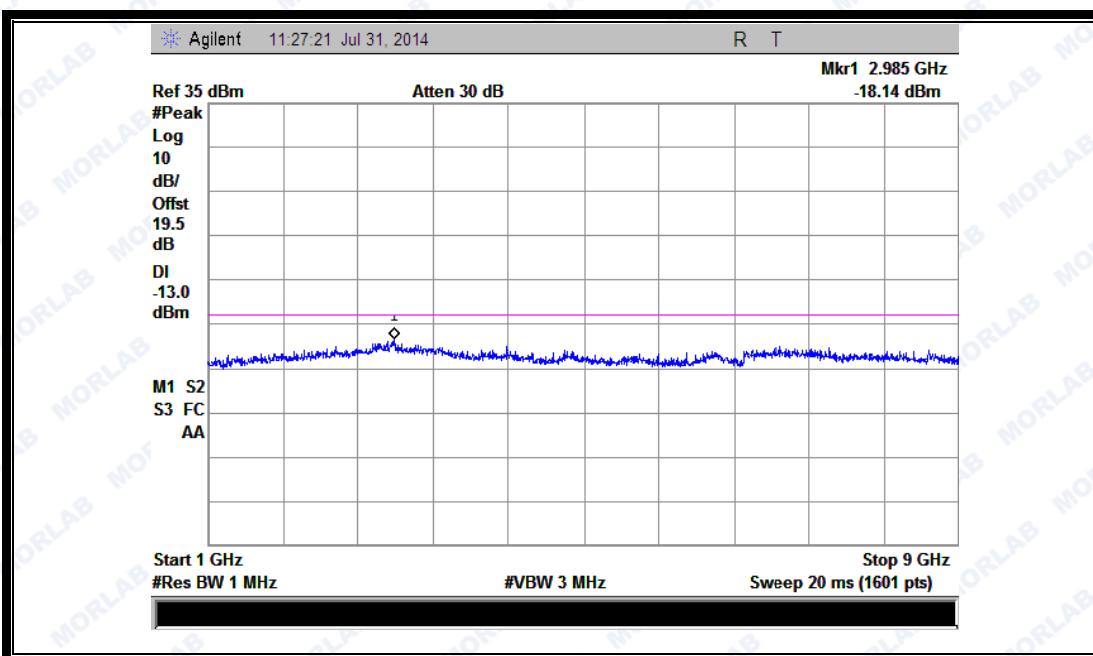


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

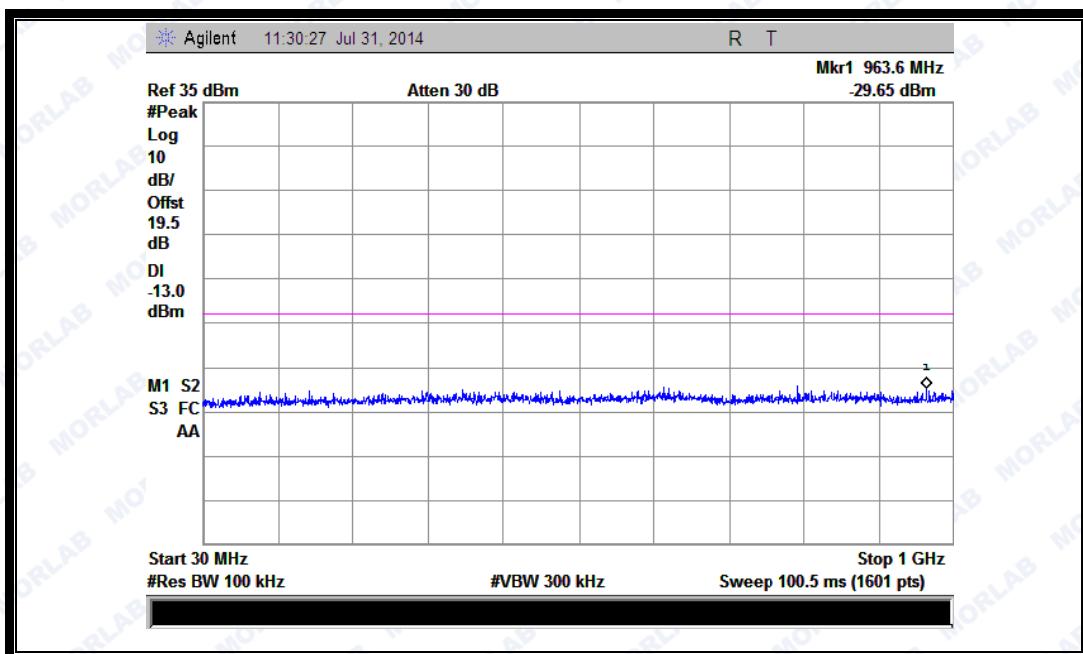


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

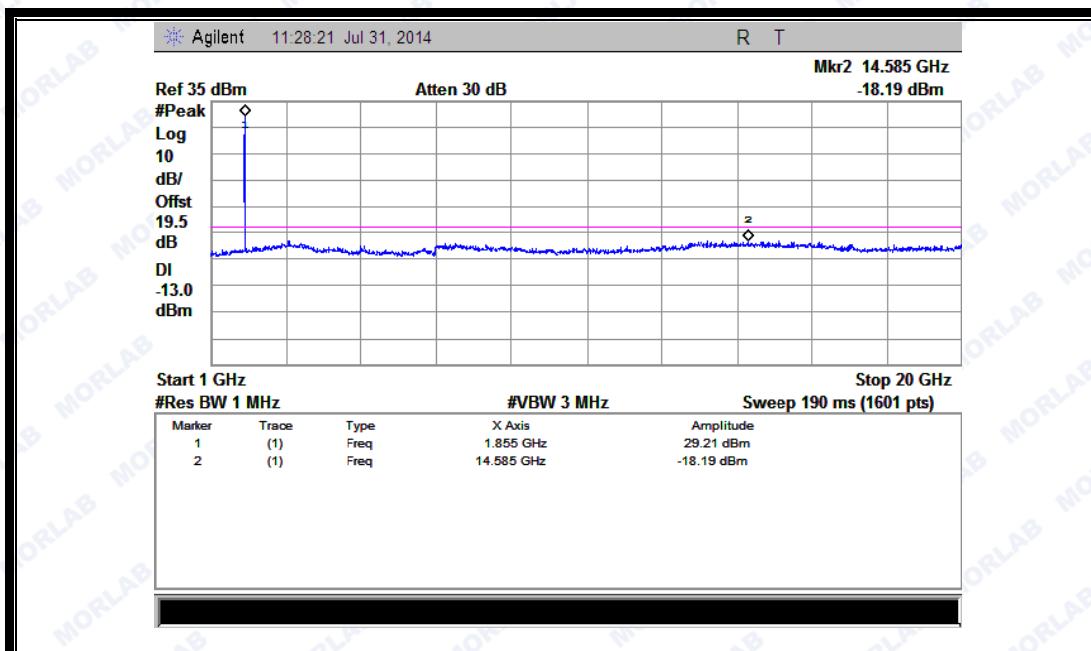


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

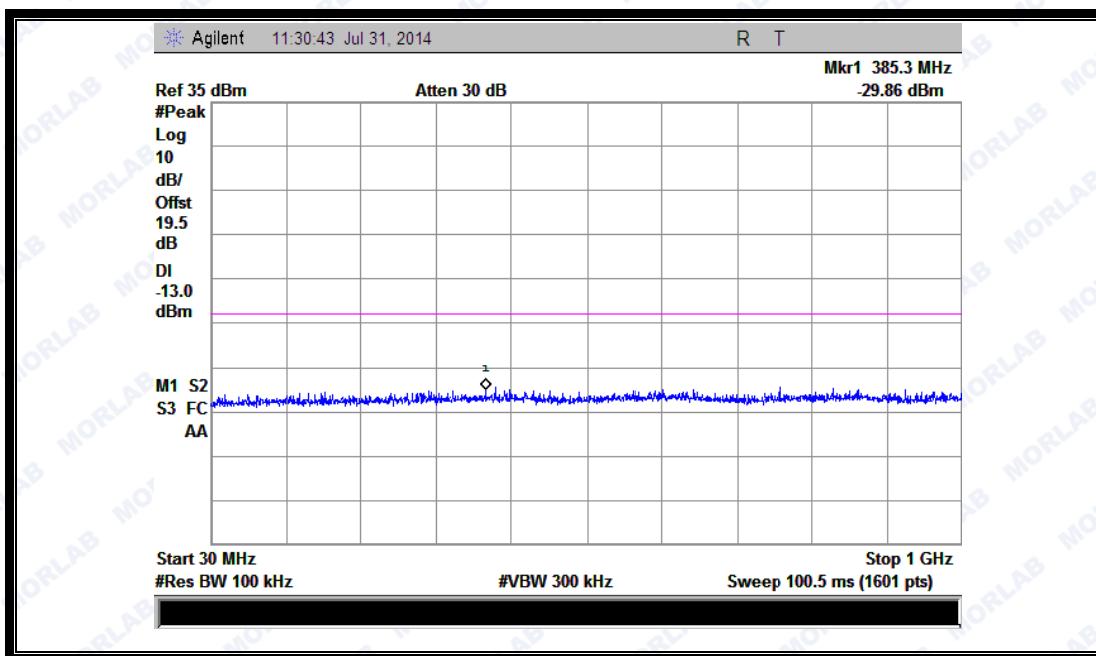


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

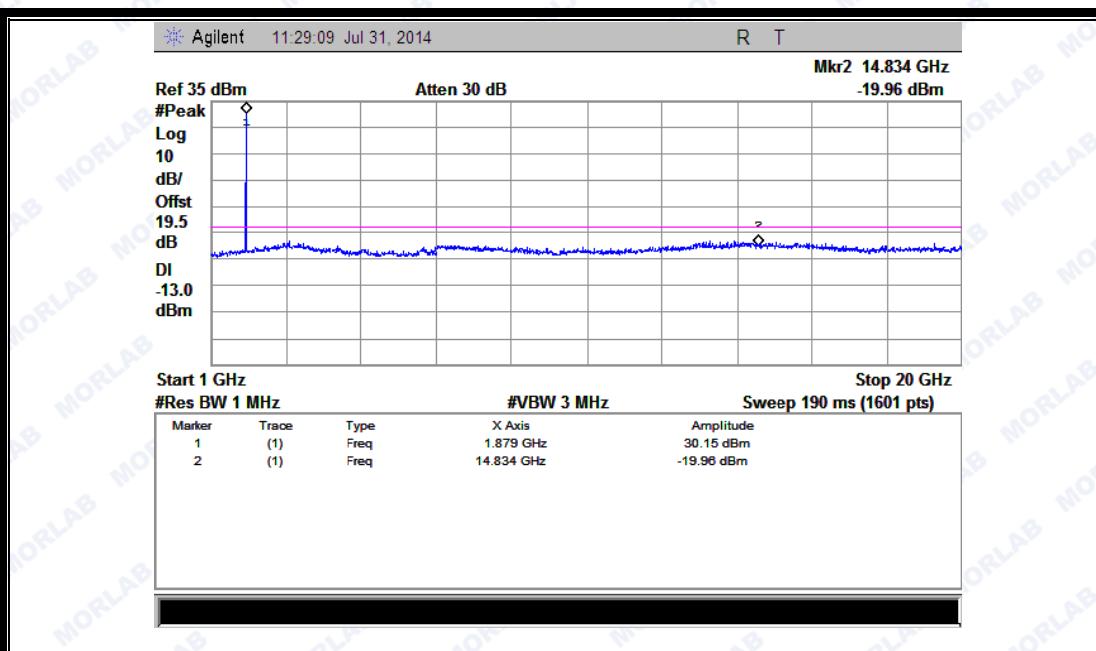

(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

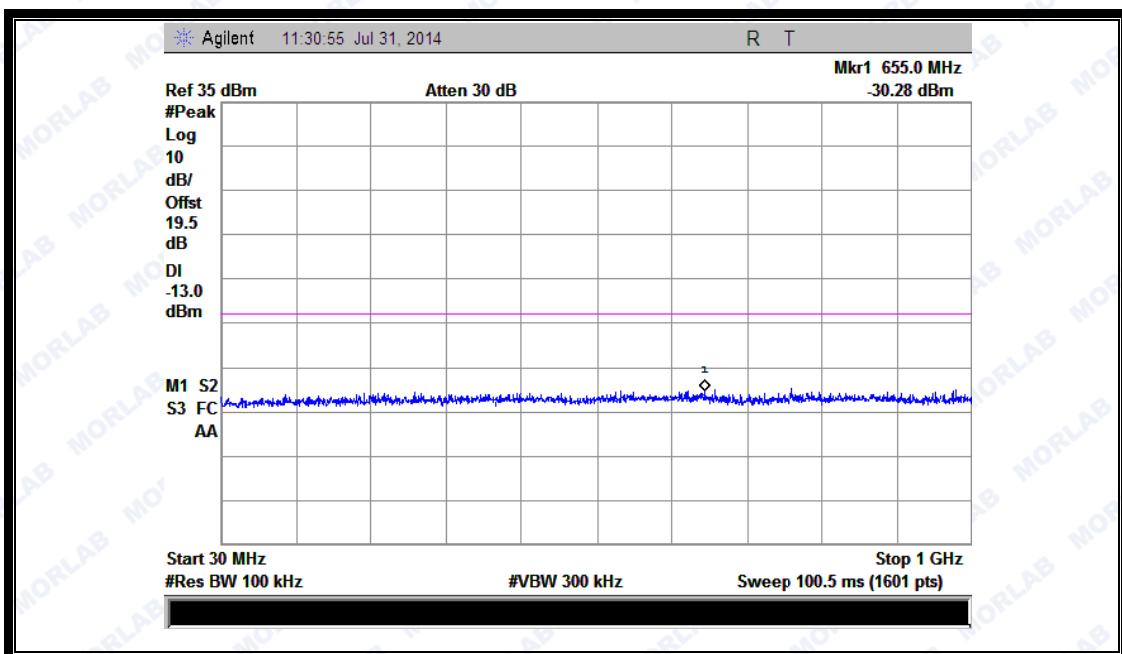


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

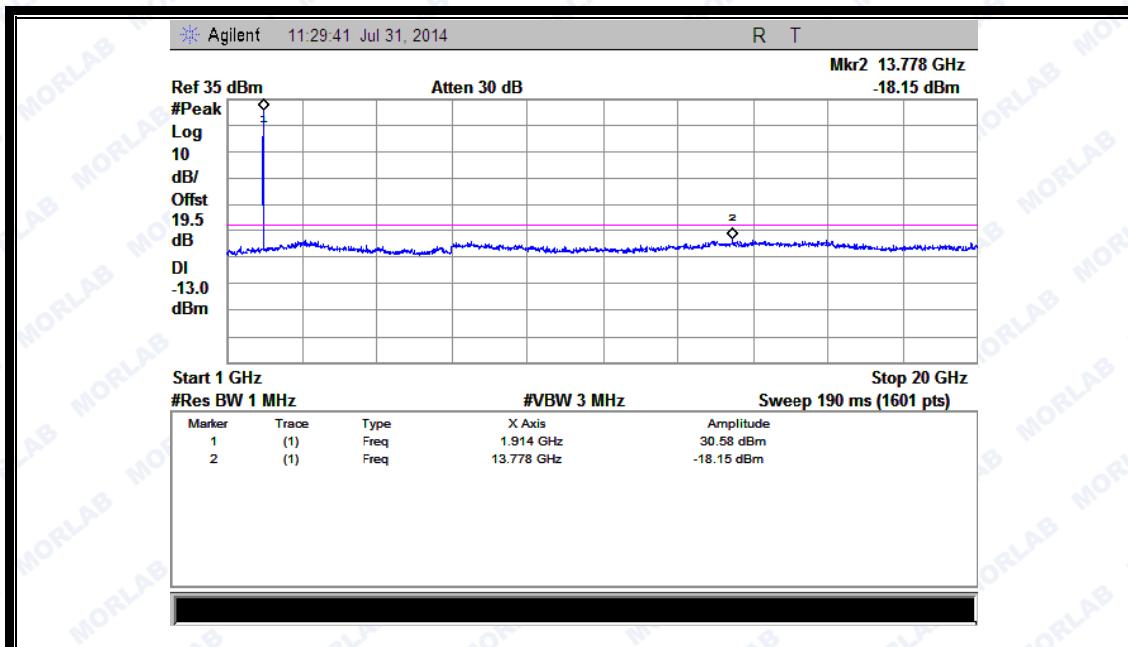


(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)

SZ14070043W01

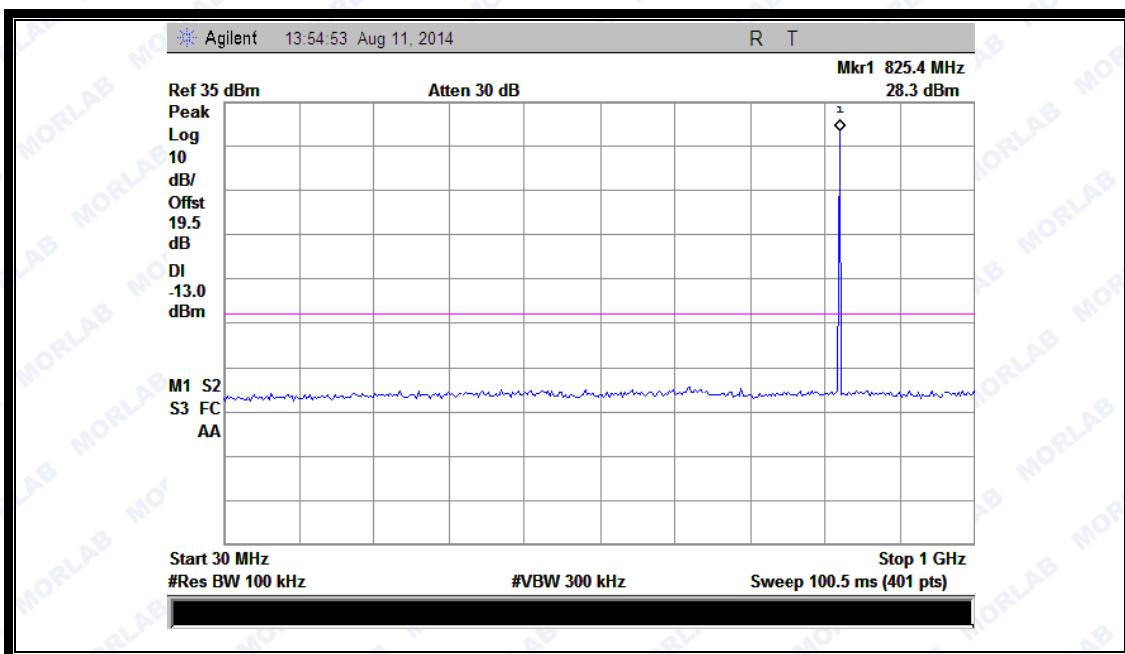


(Plot C1: EDGE 850MHz Channel = 128, 30MHz to 1GHz)

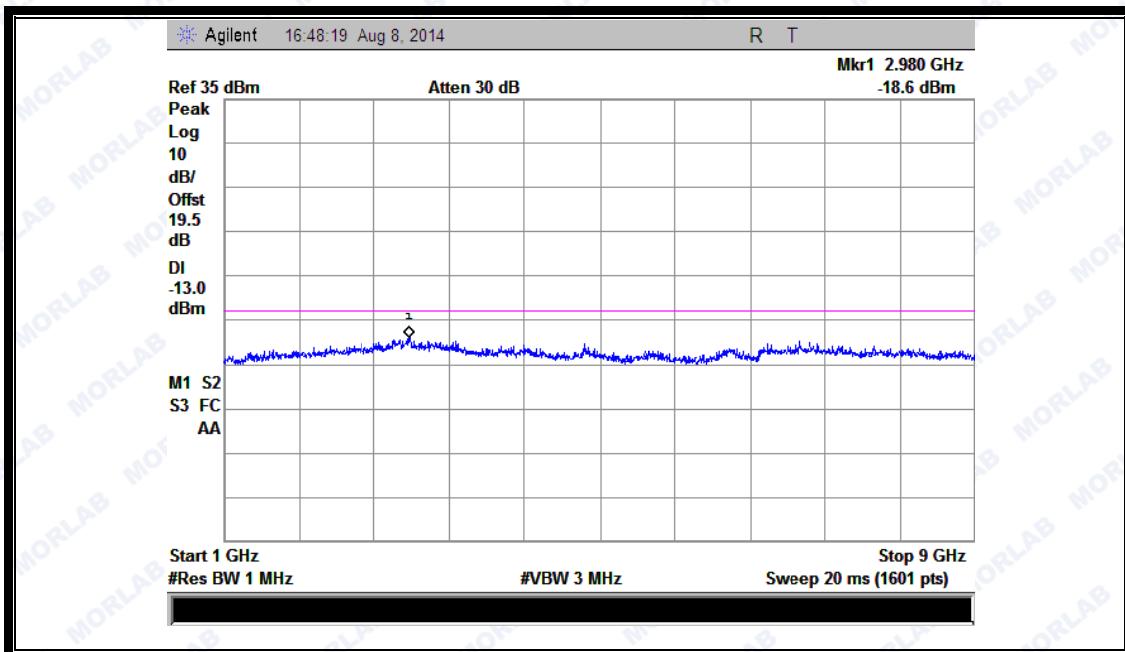


(Plot C1.1: EDGE 850MHz Channel = 128, 1GHz to 9GHz)

SZ14070043W01

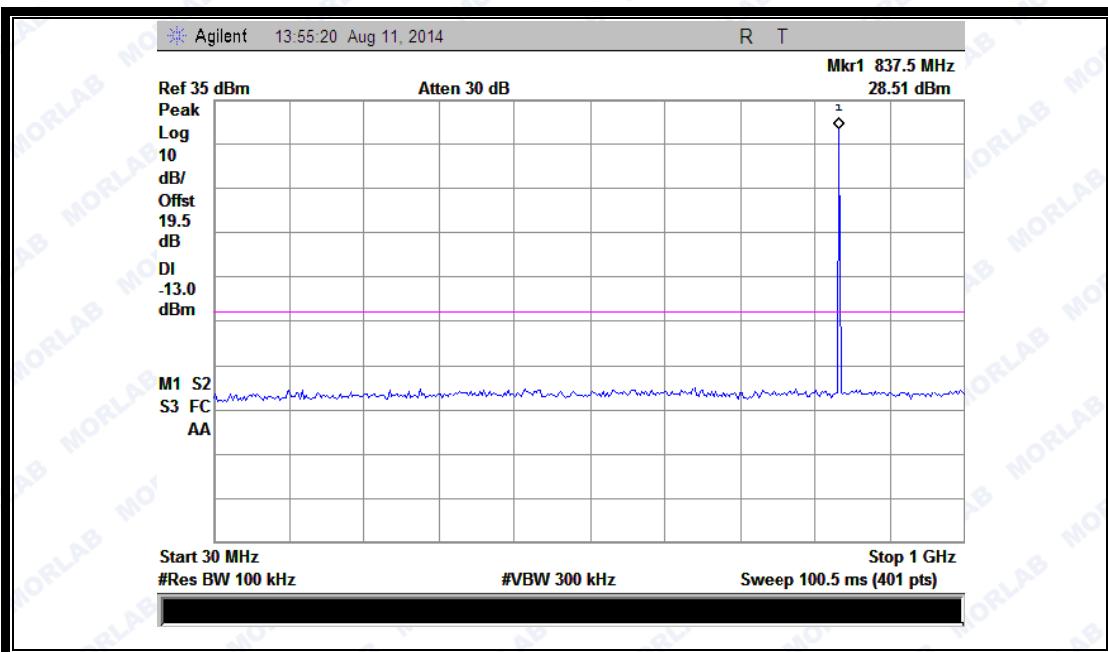


(Plot C2: EDGE 850MHz Channel = 190, 30MHz to 1GHz)

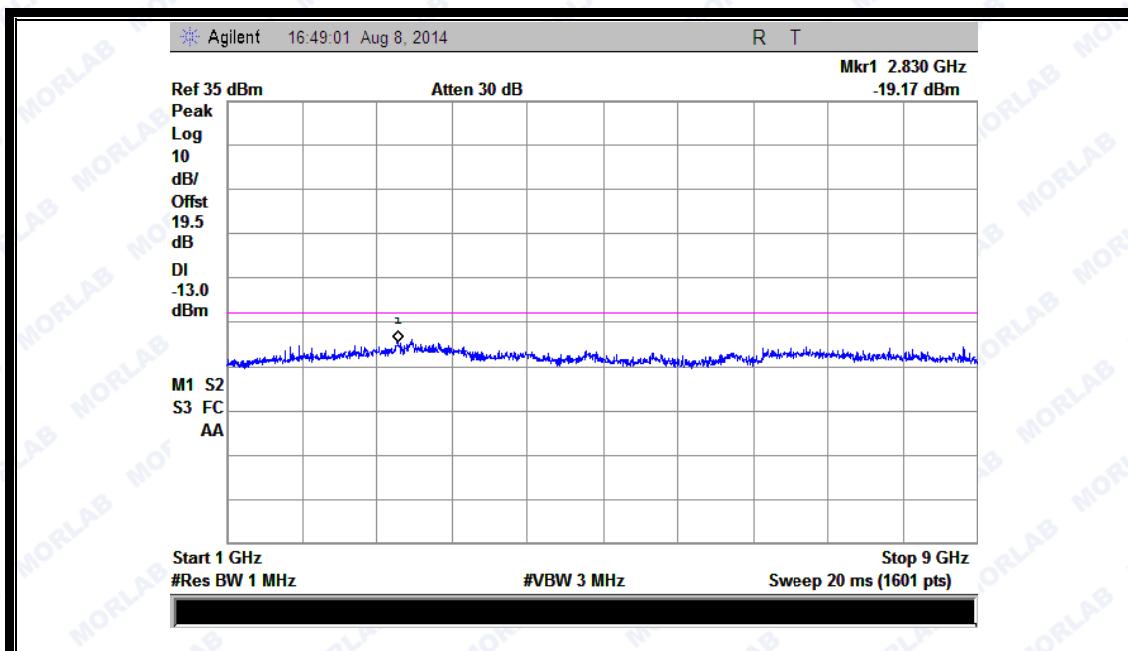


(Plot C2.1: EDGE 850MHz Channel = 190, 1GHz to 9GHz)


SZ14070043W01

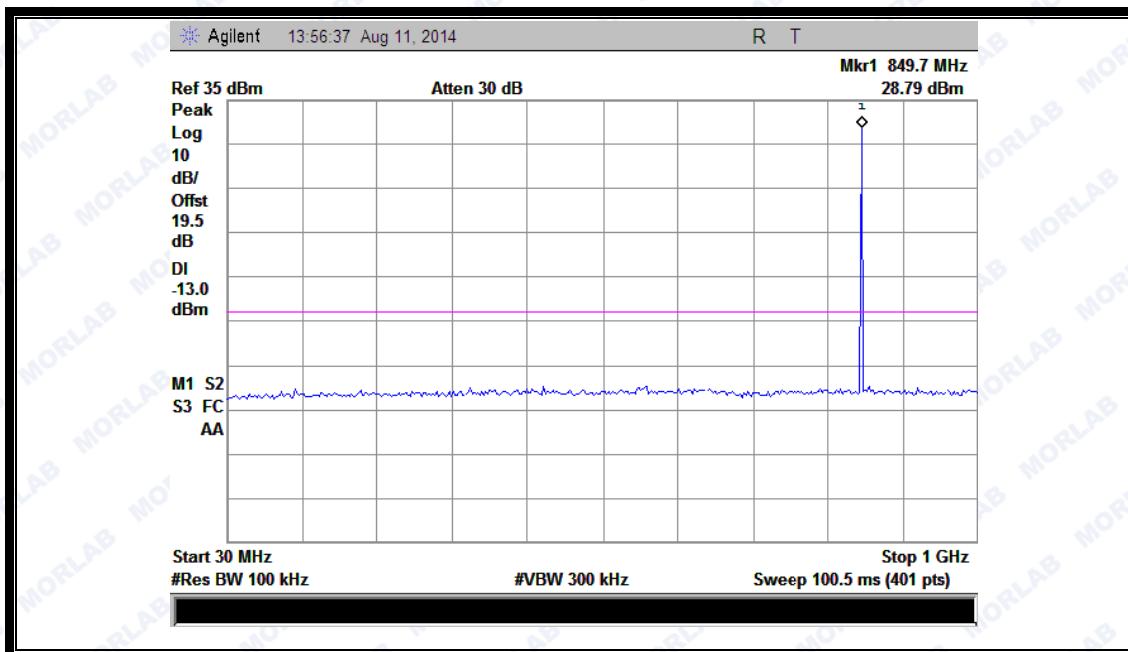


(Plot C3: EDGE 850MHz Channel = 251, 30MHz to 1GHz)

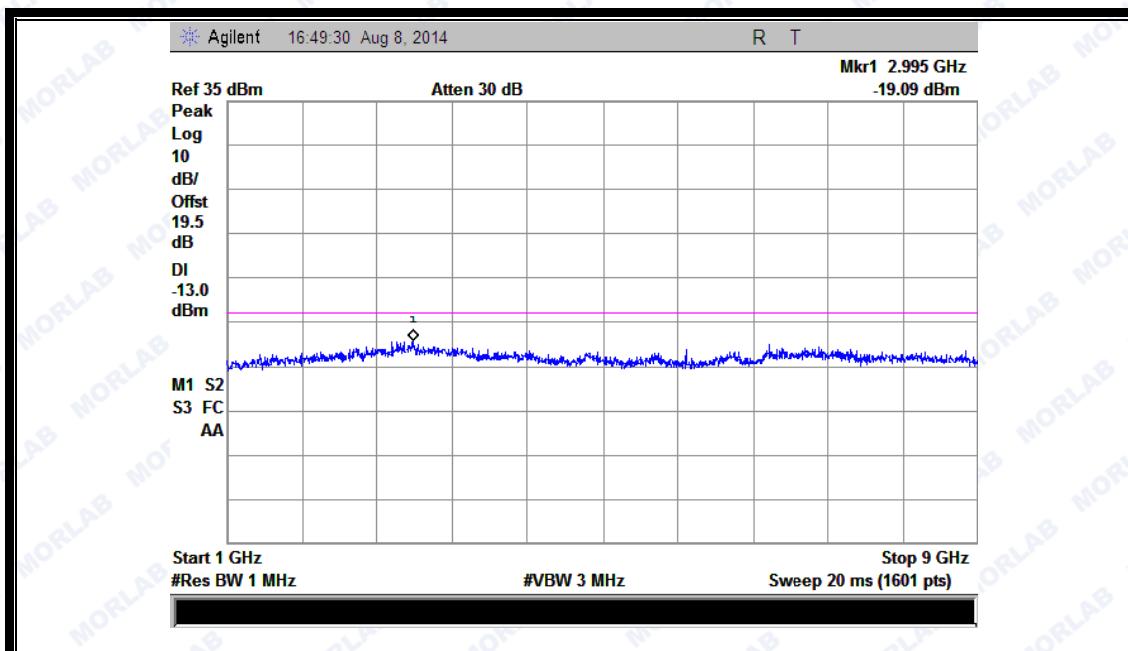

(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)

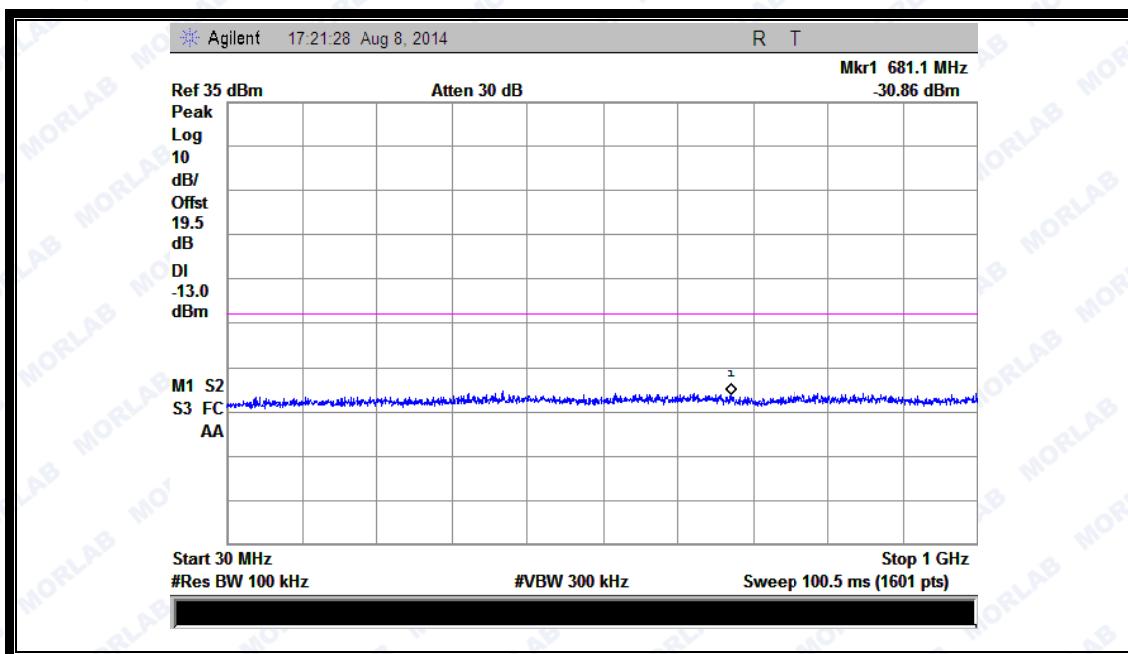


(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)

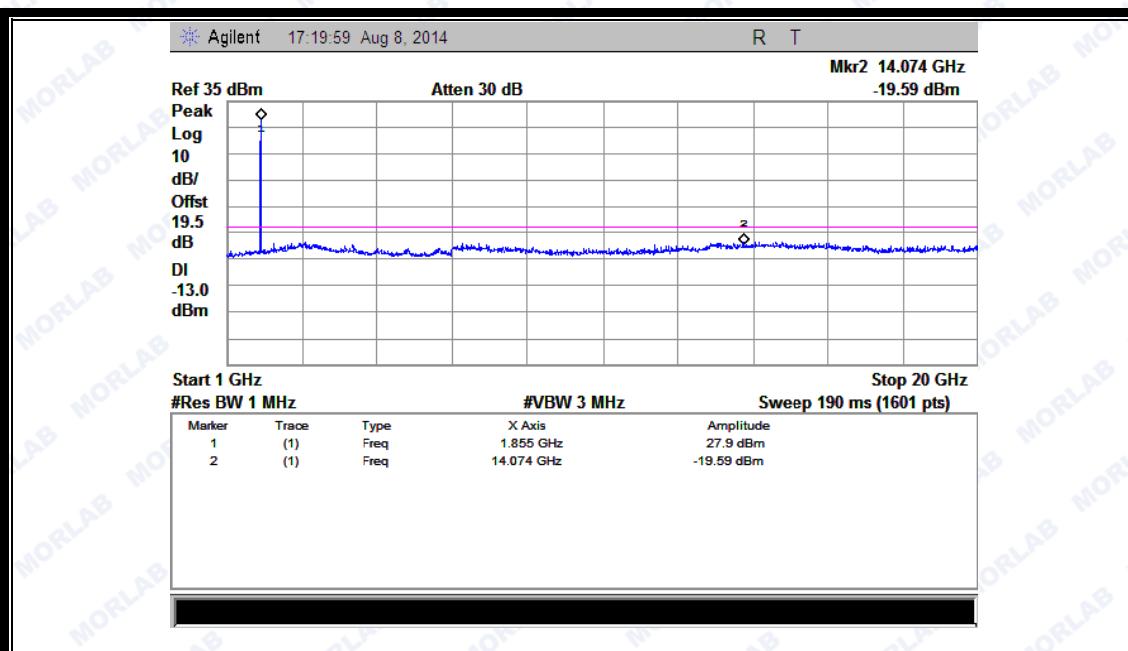


(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)

SZ14070043W01

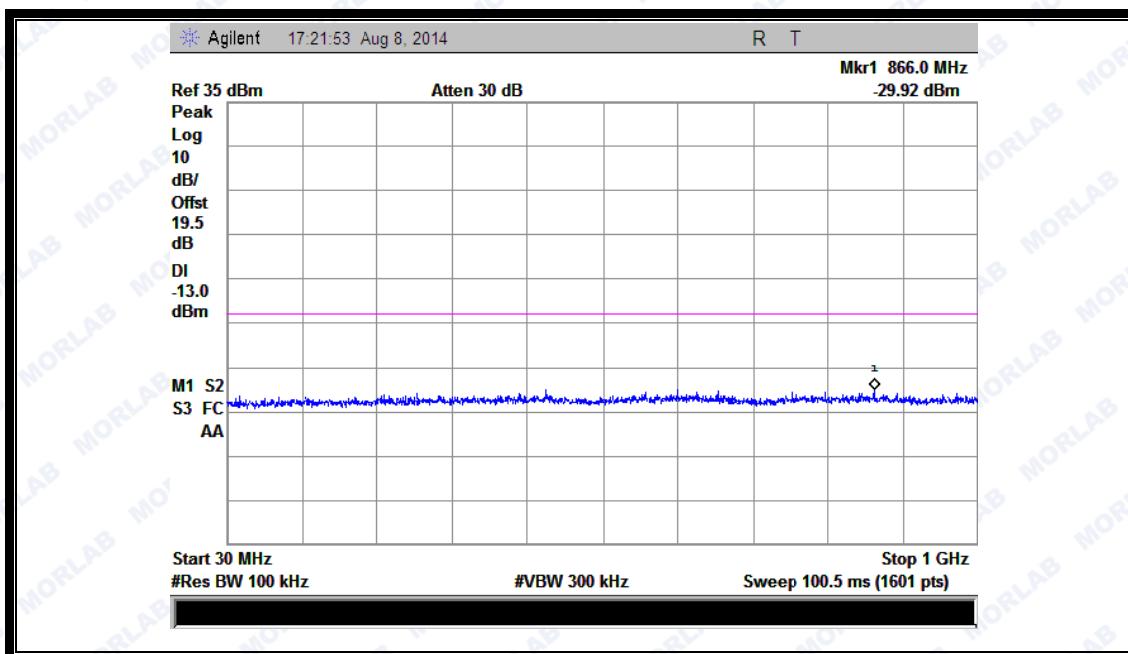


(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

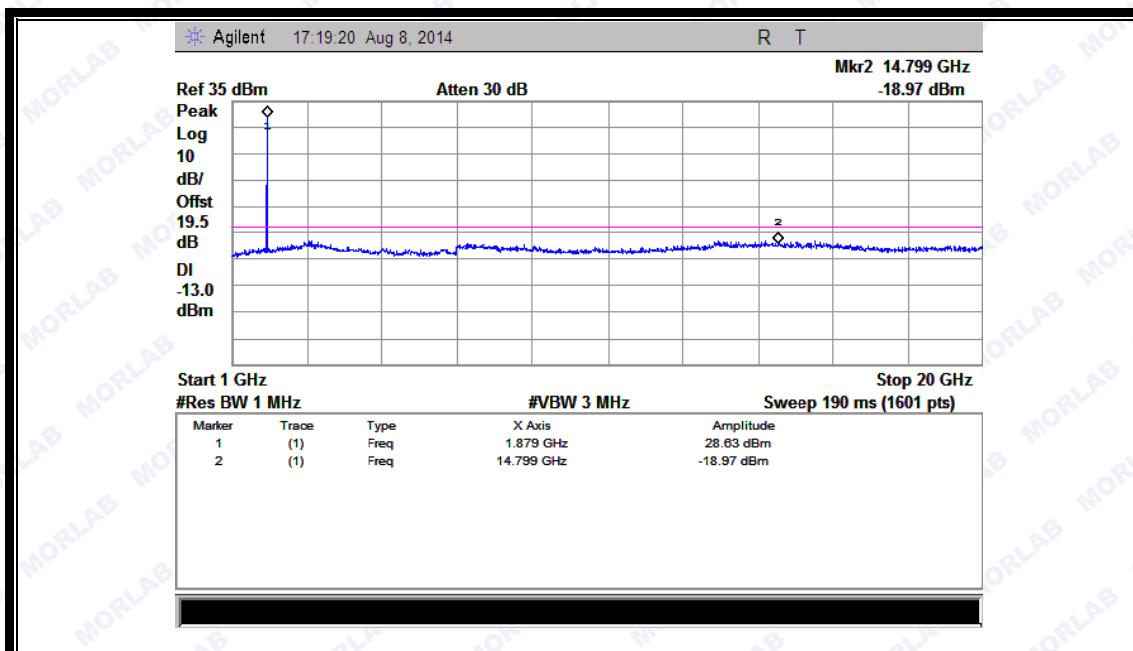


(Plot D2.1: EDGE 1900MHz Channel = 661, 1GHz to 20GHz)


SZ14070043W01

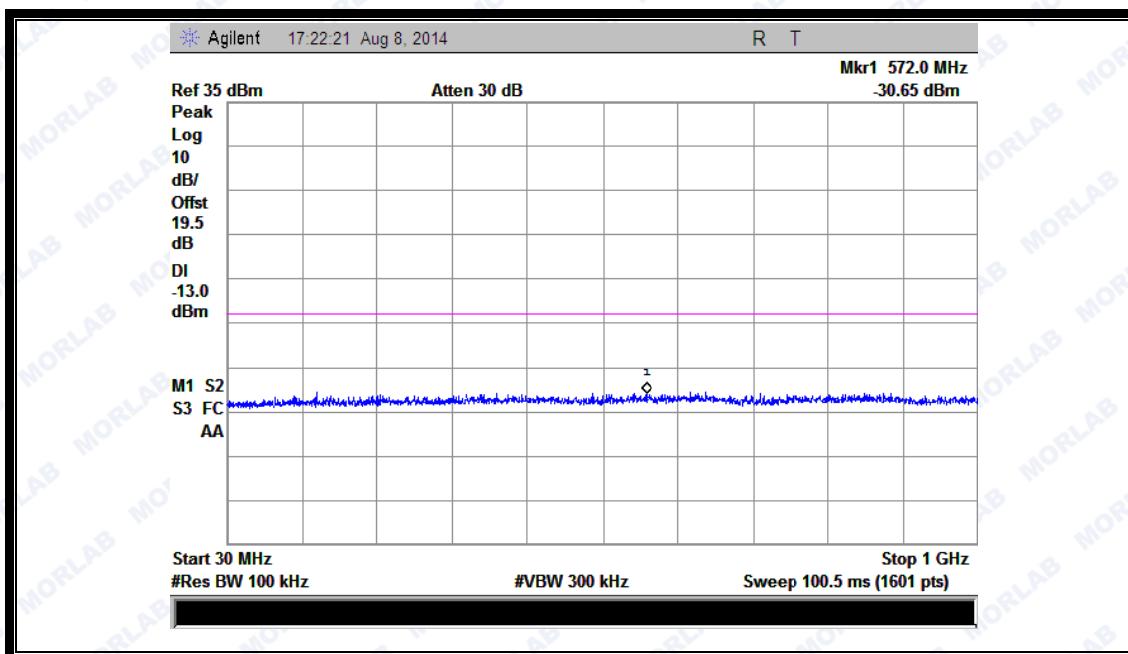


(Plot D3: EDGE 1900MHz Channel = 810, 30MHz to 1GHz)

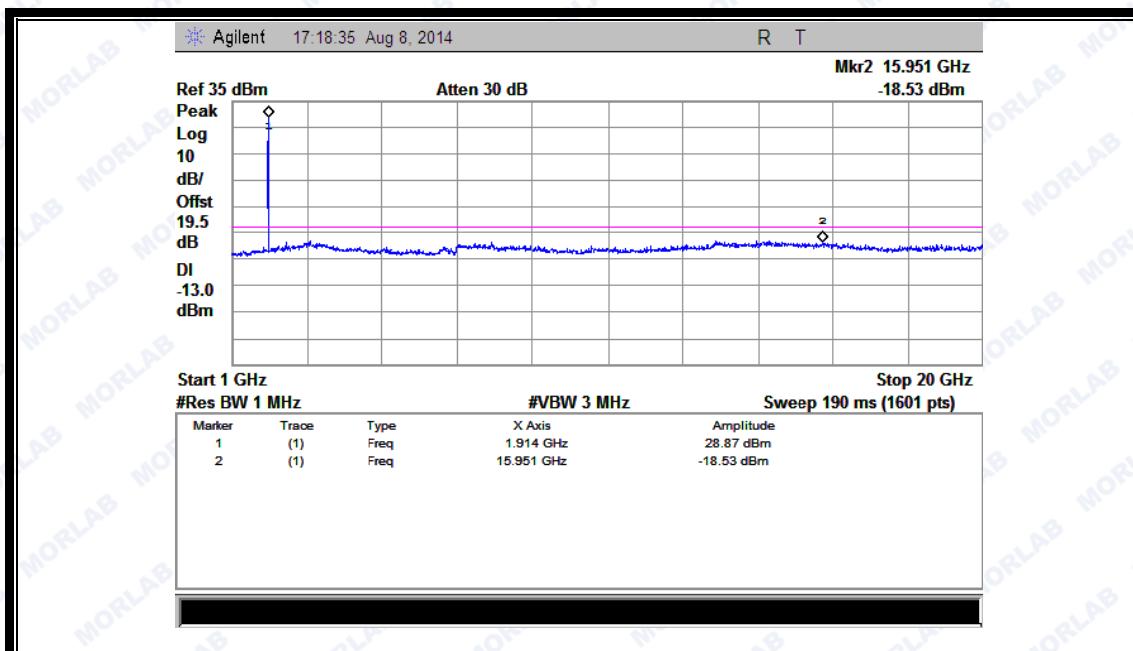


(Plot D3.1: EDGE 1900MHz Channel = 810, 1GHz to 20GHz)

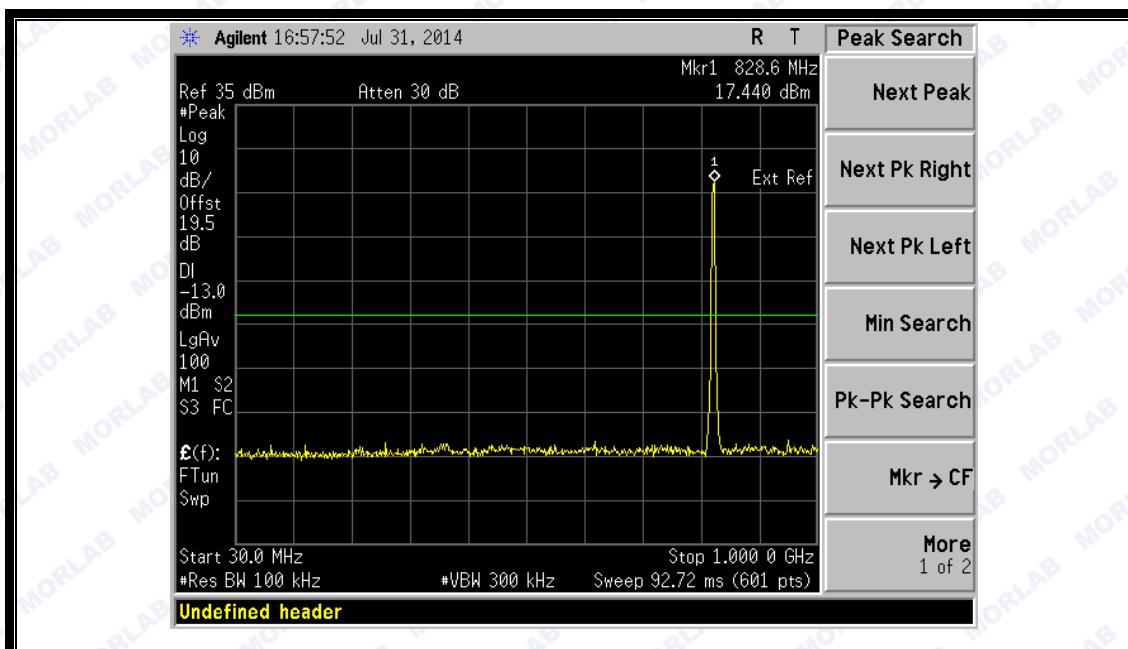


(Plot E1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

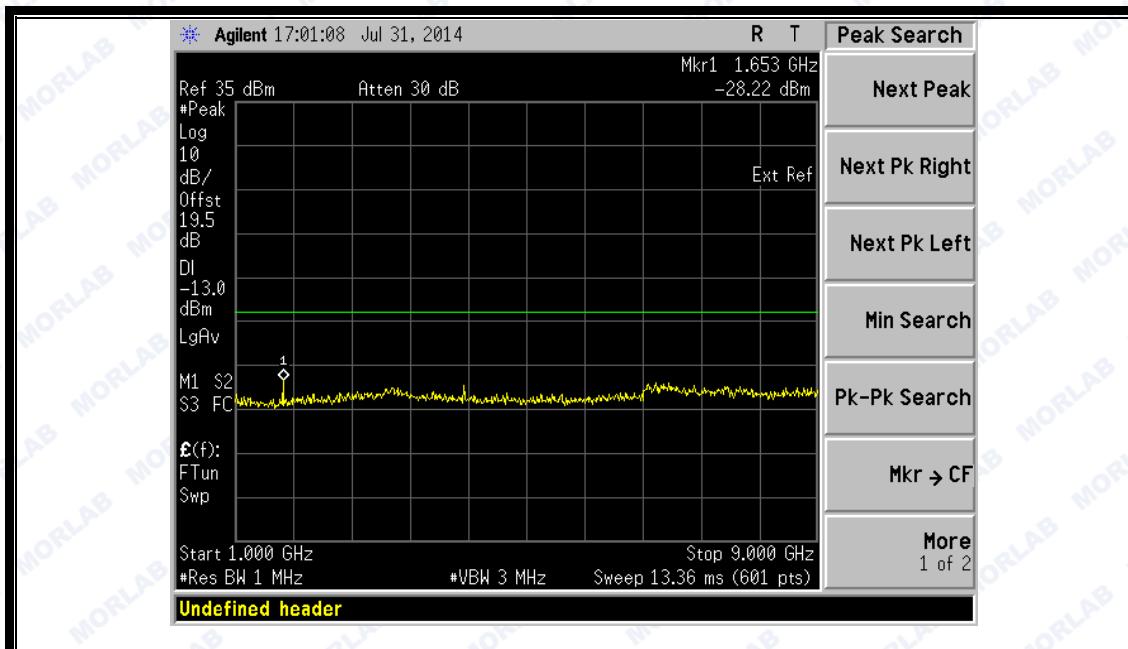


(Plot E1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)

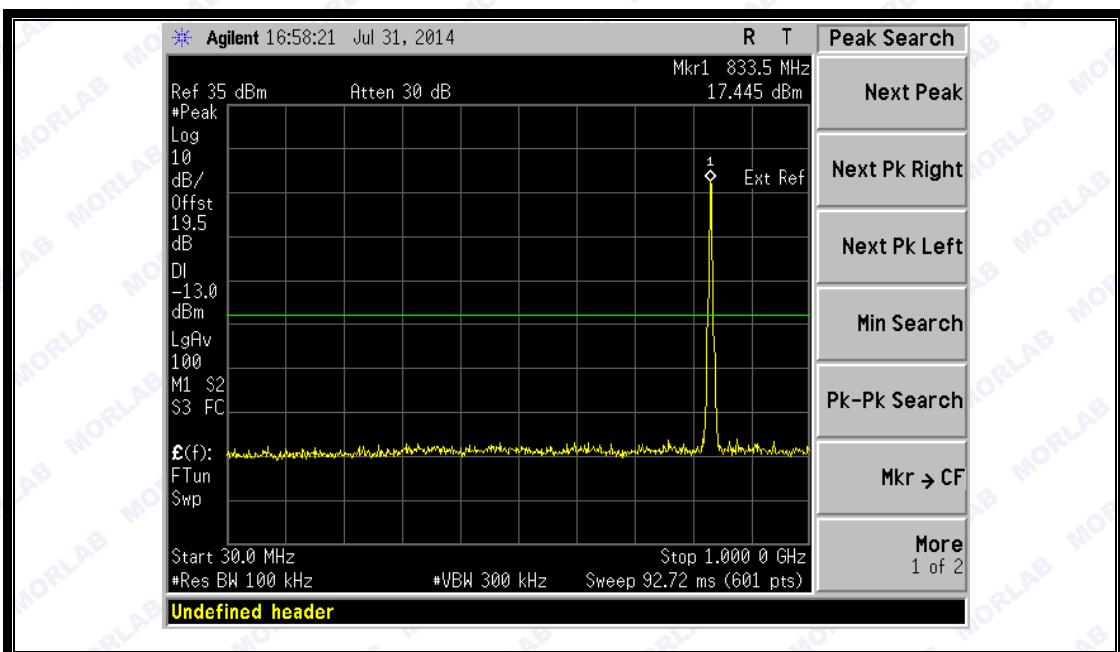


(Plot E2: WCDMA850MHz Channel = 4175, 30MHz to 1GHz)

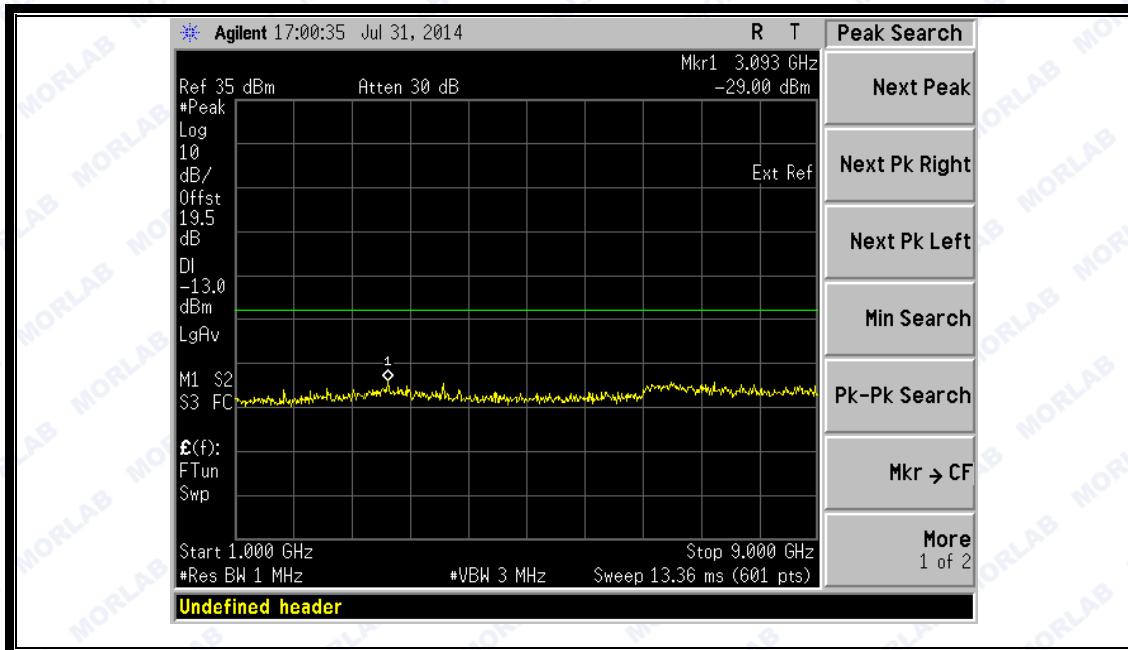

(Plot E2.1: WCDMA850MHz Channel = 4175, 1GHz to 9GHz)

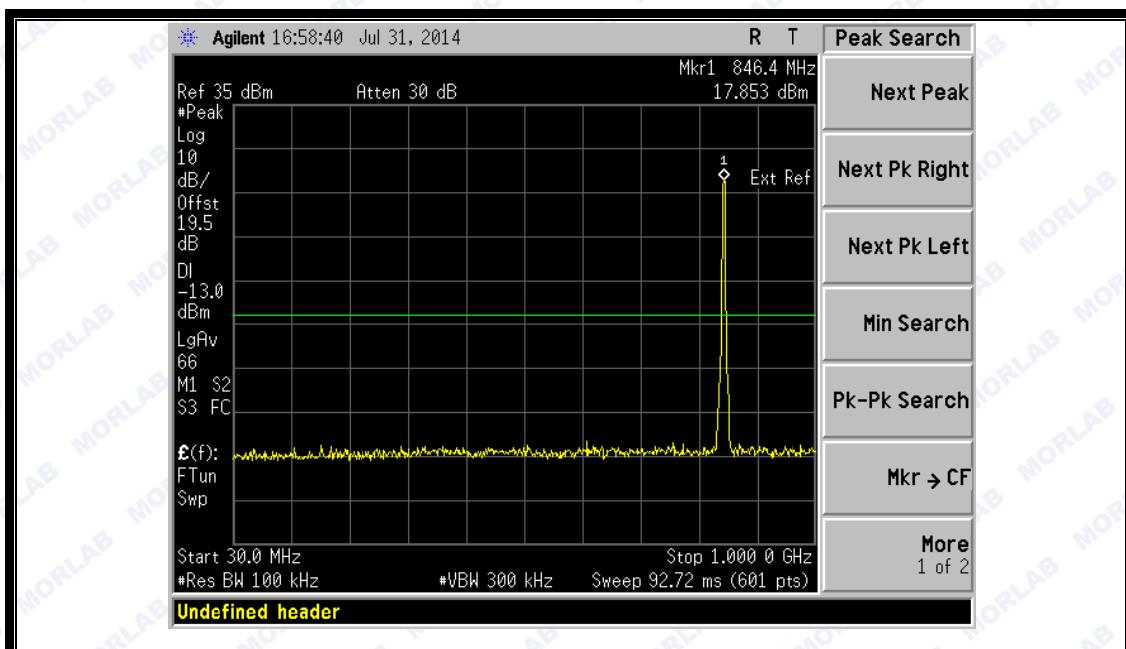



(Plot E3: WCDMA850MHz Channel = 4233, 30MHz to 1GHz)

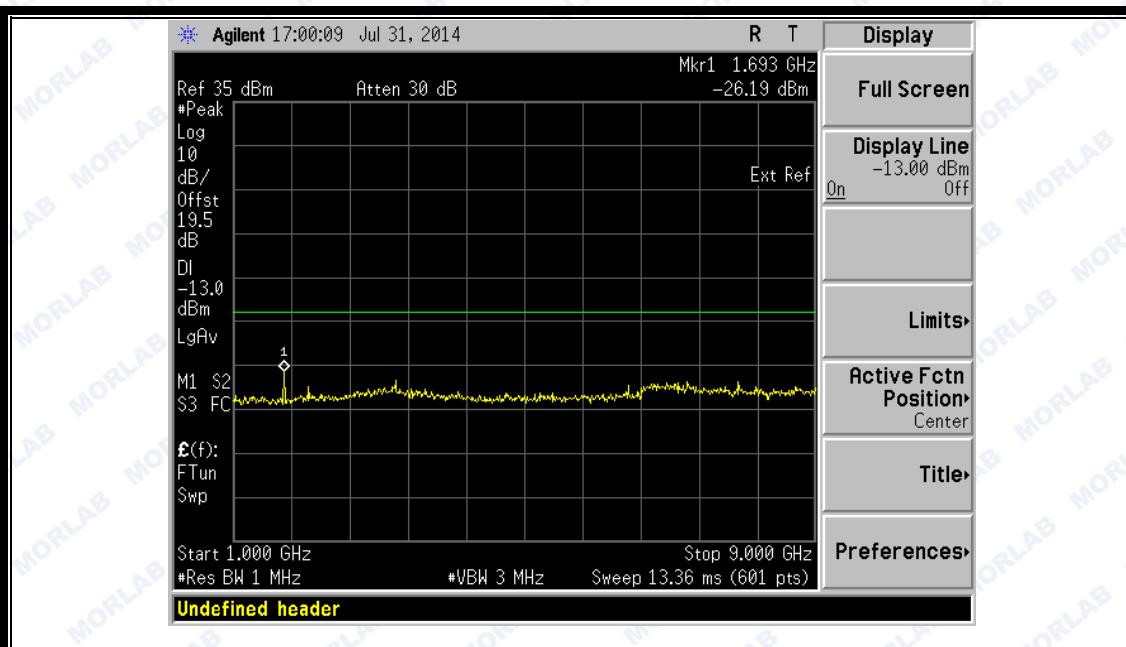


(Plot E3.1: WCDMA850MHz Channel = 4233, 1GHz to 9GHz)

SZ14070043W01

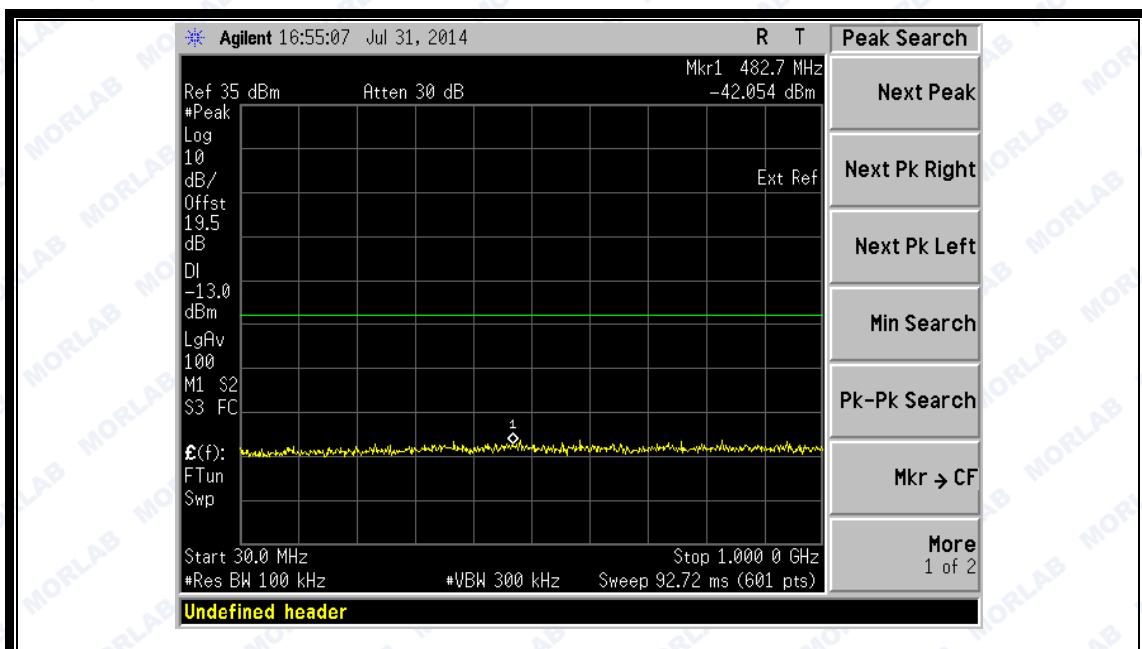

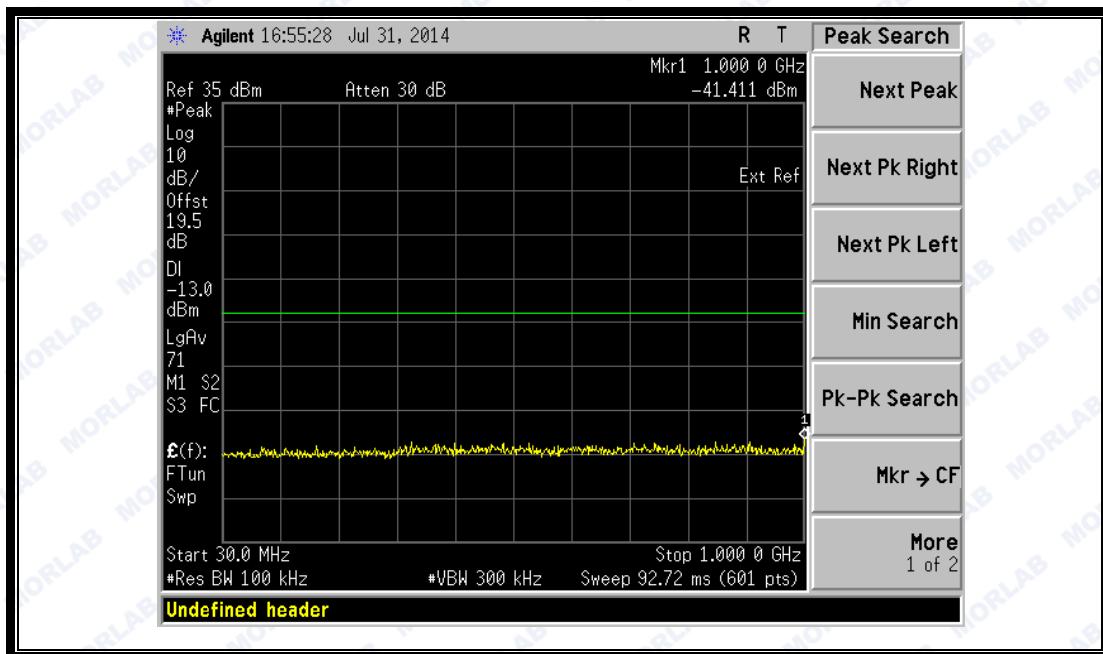


(Plot F2: WCDMA1900MHz Channel = 9400, 30MHz to 1GHz)

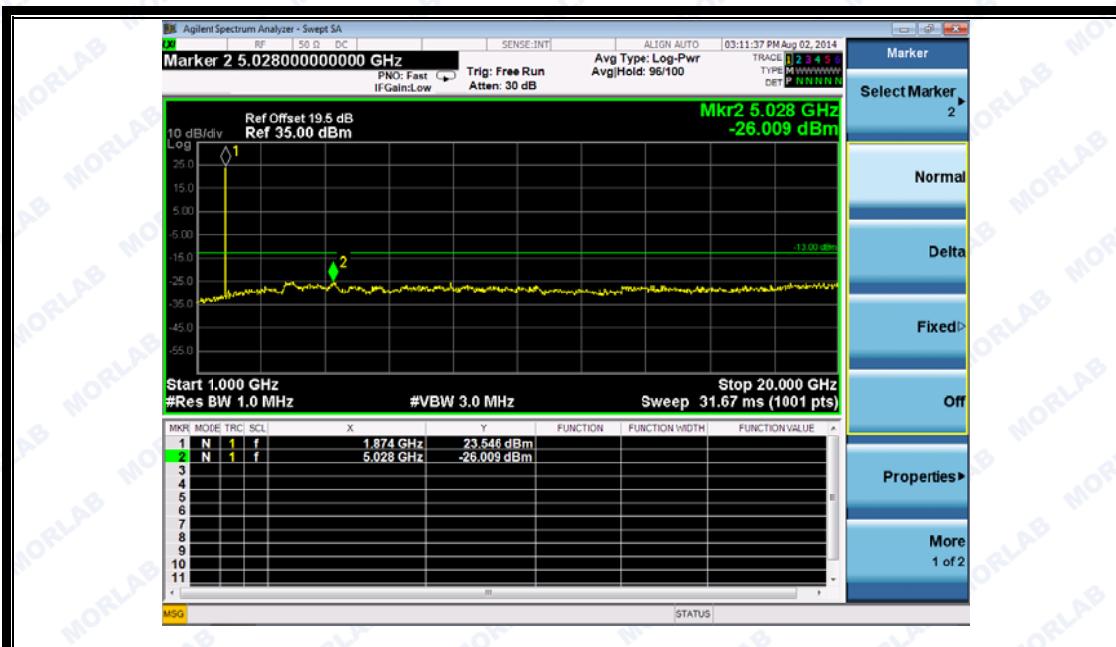


(Plot F2.1: WCDMA1900MHz Channel = 9400, 1GHz to 20GHz)

SZ14070043W01

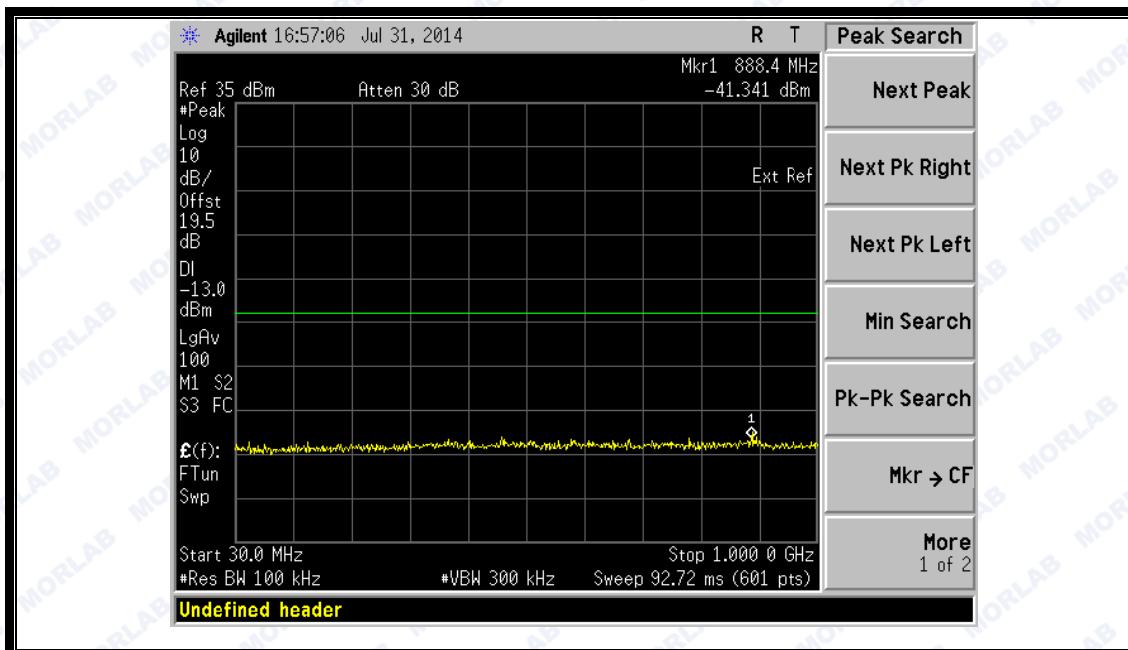

(Plot F3:WCDMA1900MHz Channel = 9538, 30MHz to 1GHz)

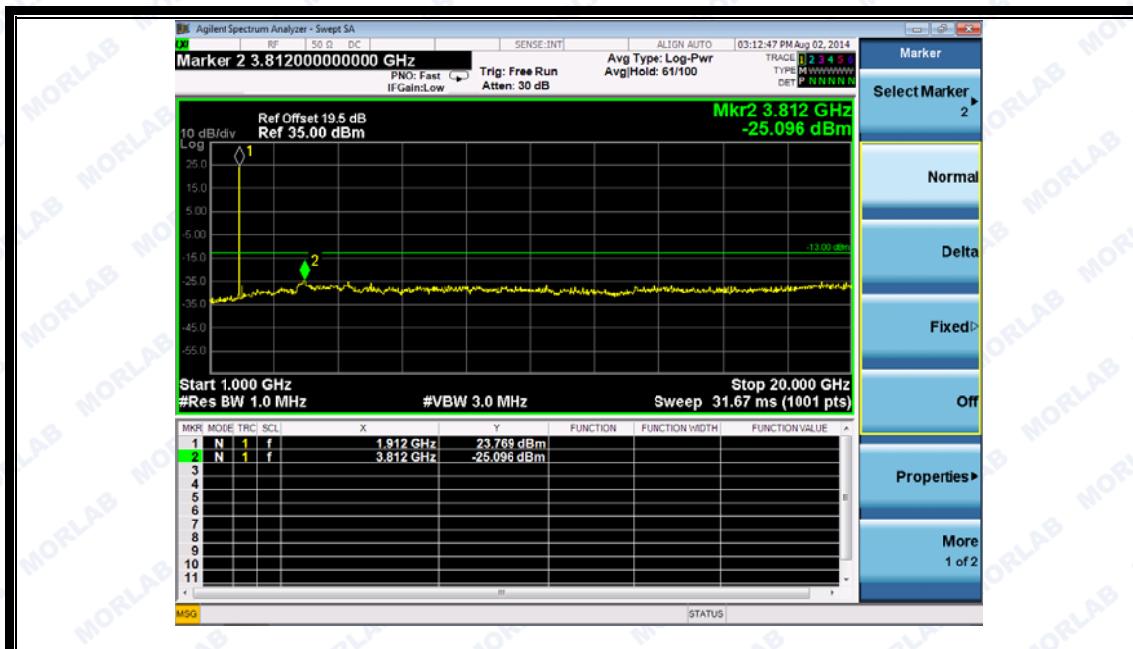

(Plot F3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)

2.6. Band Edge

2.6.1. Requirement

According to FCC section 22.917(b) and FCC section 24.238(b) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.6.2. Test Description

See section 2.1.2 of this report.



2.6.3. Test Result


The lowest and highest channels are tested to verify the band edge emissions.

1. Test Verdict:


Band	Channe l	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM	128	824.2	-18.03	Plat A	-13	PASS
850MHz	251	848.8	-16.9	Plot B		PASS
GSM	512	1850.2	-20.7	Plat C	-13	PASS
1900MHz	810	1909.8	-18.59	Plot D		PASS
EDGE	128	824.2	-20.5	Plat E	-13	PASS
850MHz	251	848.8	-18.99	Plot F		PASS
EDGE	512	1850.2	-20.36	Plat G	-13	PASS
1900MHz	810	1909.8	-18.28	Plot H		PASS
WCDMA	4132	826.4	-21.891	Plat I	-13	PASS
850MHz	4233	846.6	-21.103	Plot J		PASS
WCDMA	9262	1852.4	-15.253	Plat K	-13	PASS
1900MHz	9538	1907.6	-18.515	Plot L		PASS

2. Test Plots:

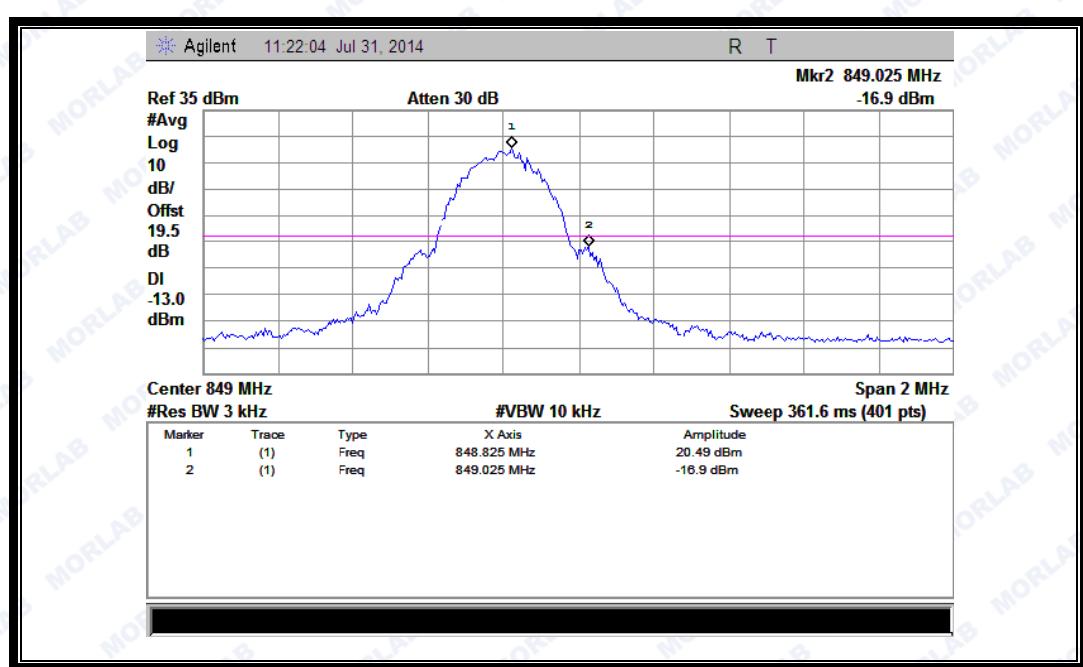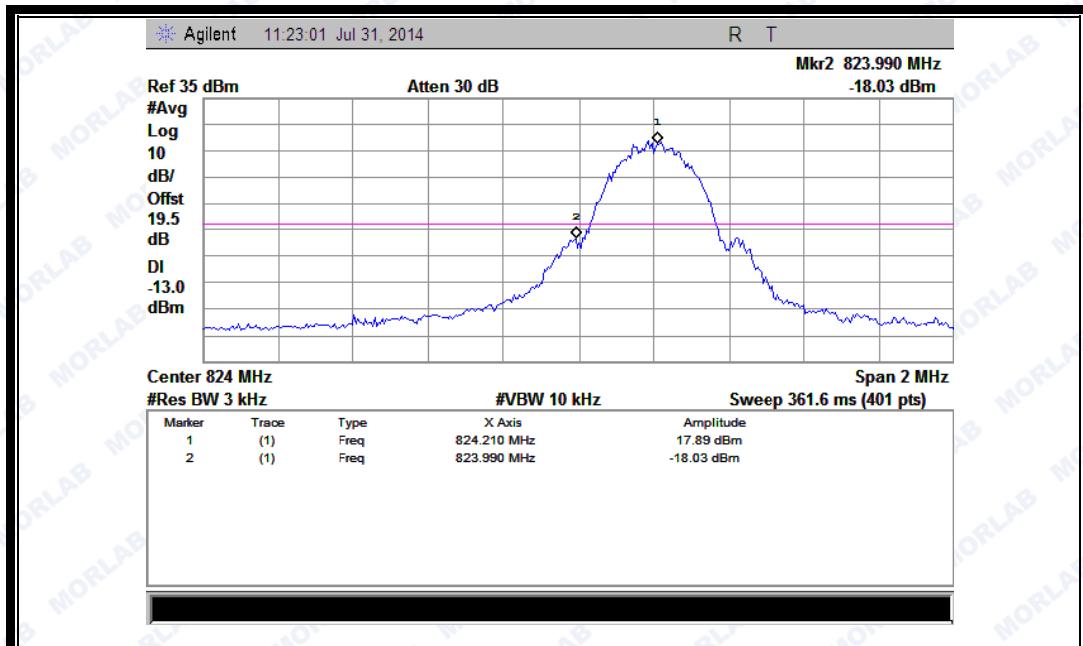

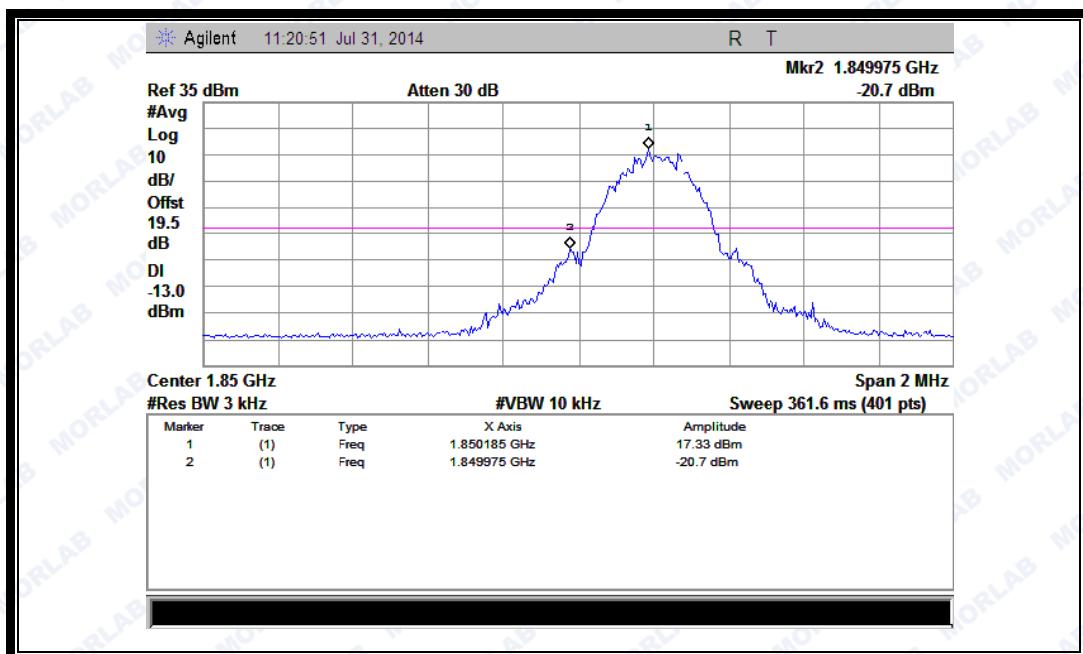


(Plot C: GSM 1900 Channel = 512)

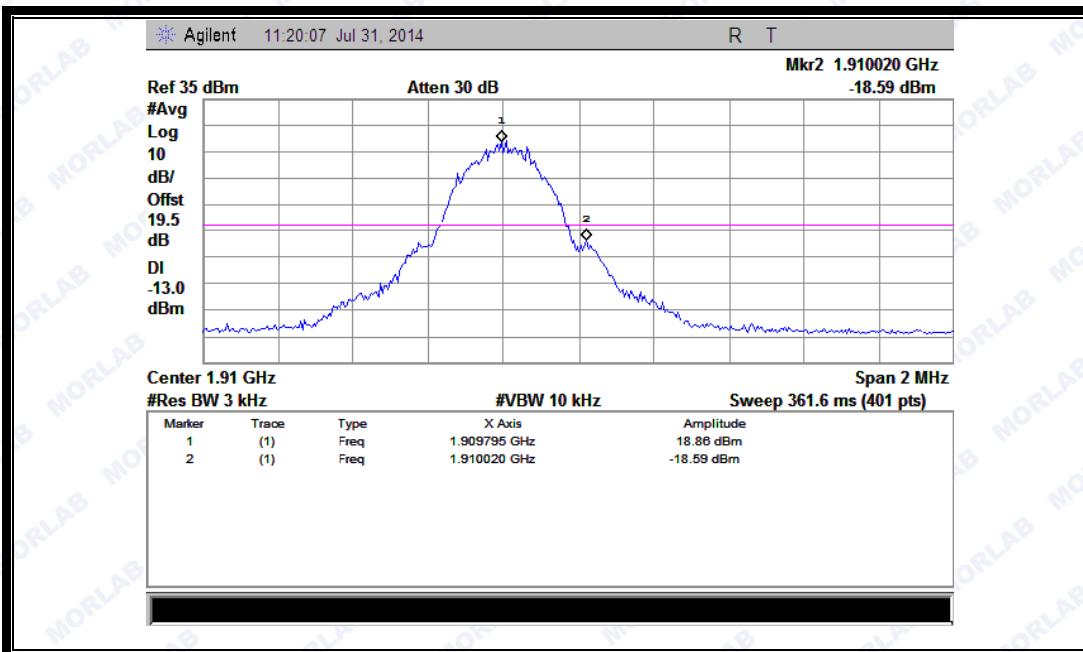


(Plot D: GSM 1900 Channel = 810)

SZ14070043W01

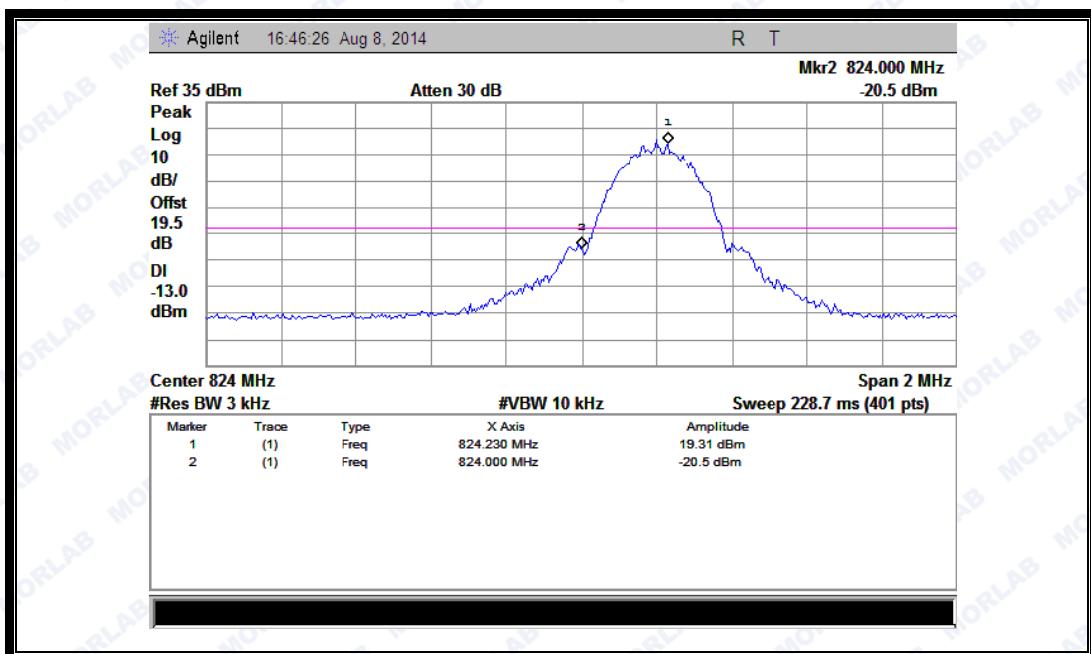


(Plot E:EGPRS 850 Channel = 128)

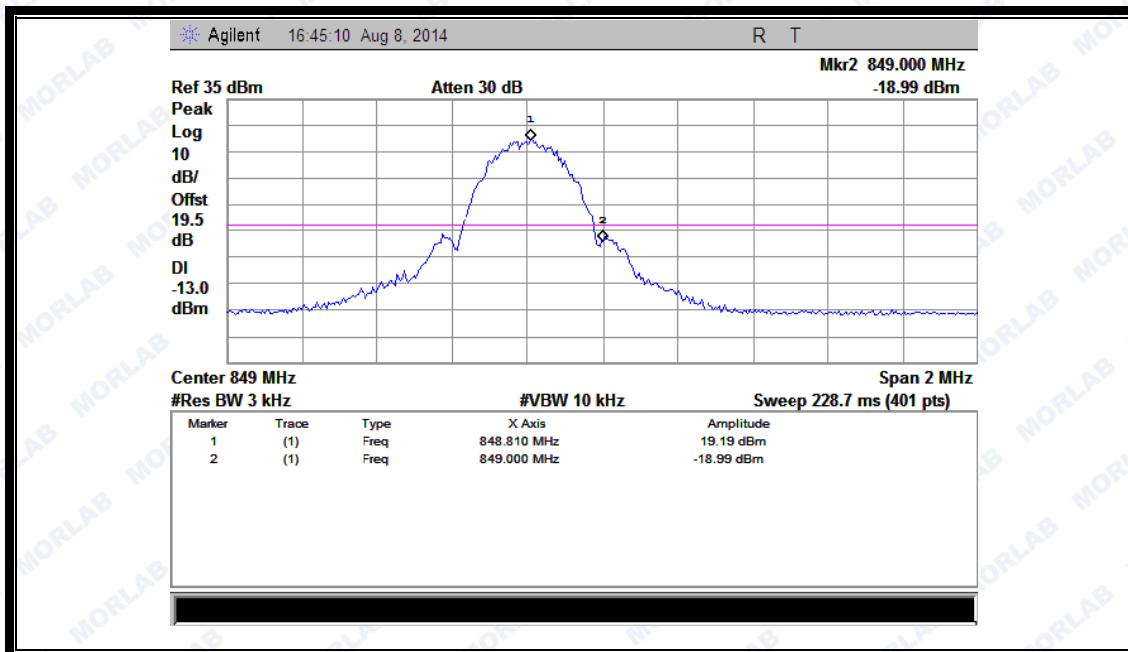


(Plot F:EGPRS 850 Channel = 251)

SZ14070043W01

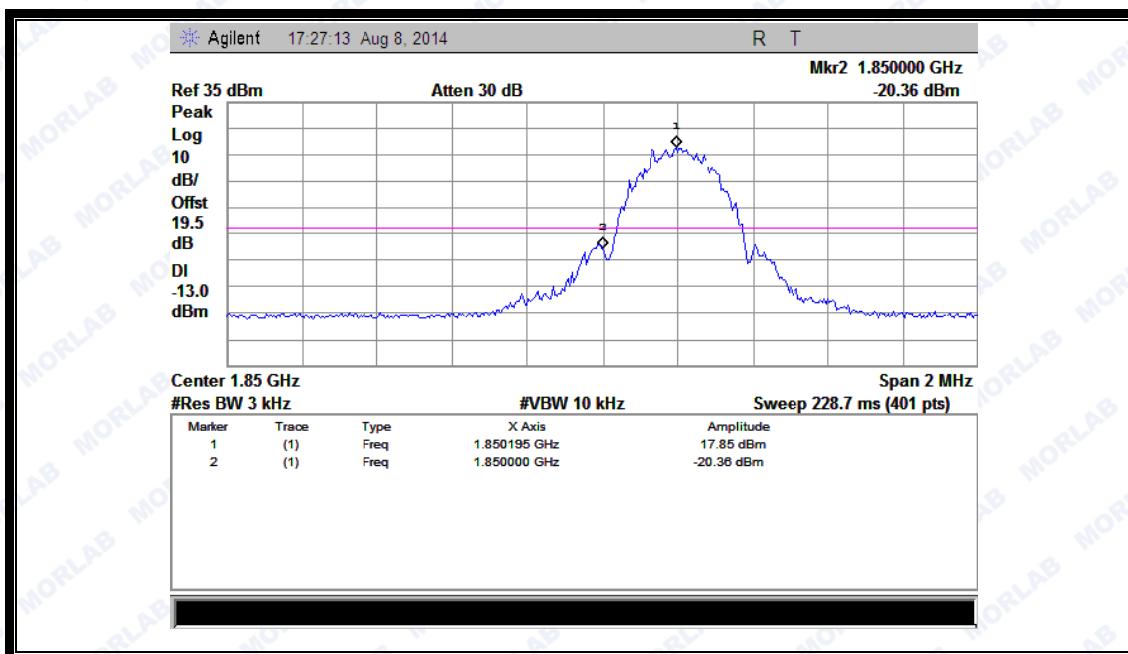


(Plot G: EGPRS 1900 Channel = 512)

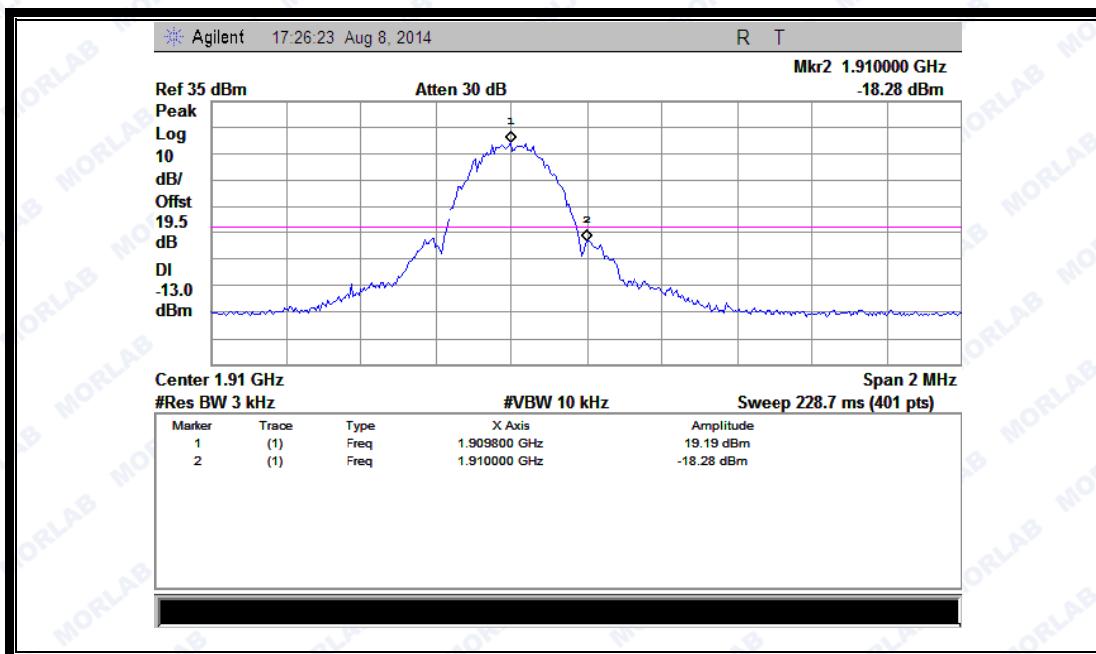


(Plot H: EGPRS 1900 Channel = 810)


SZ14070043W01

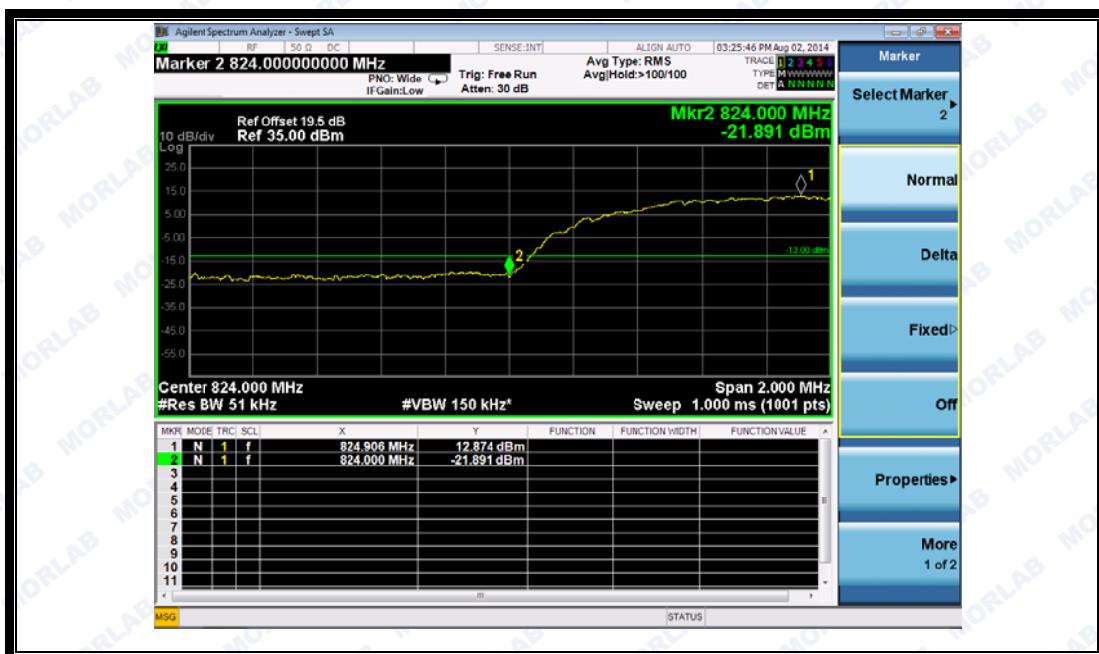


(Plot I: WCDMA 850 Channel = 4132)

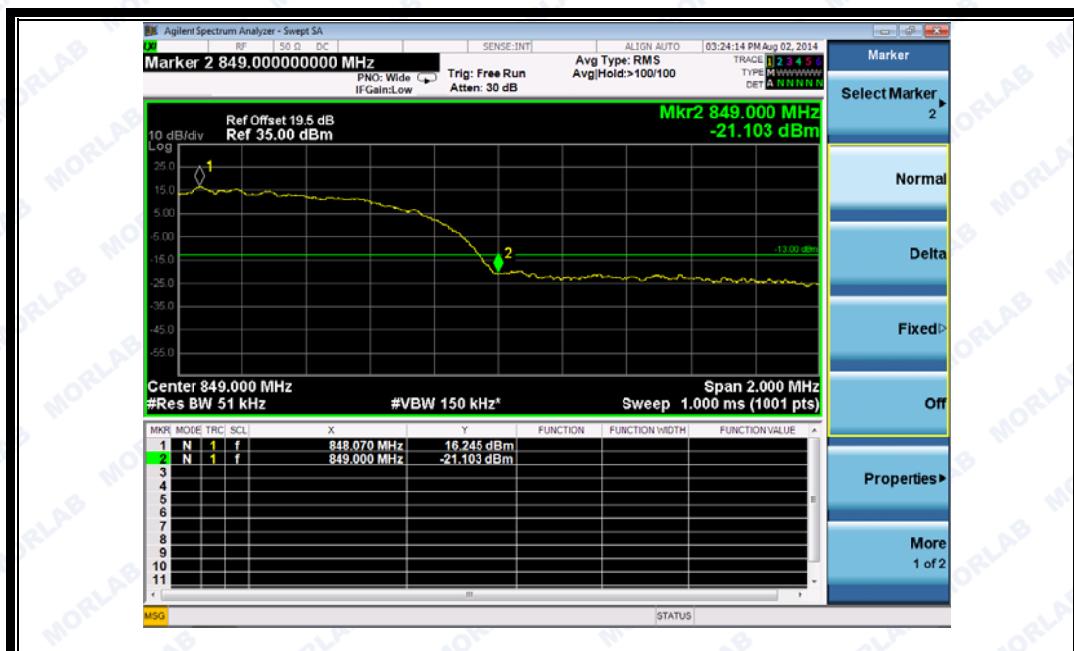

(Plot J: WCDMA 850 Channel = 4233)

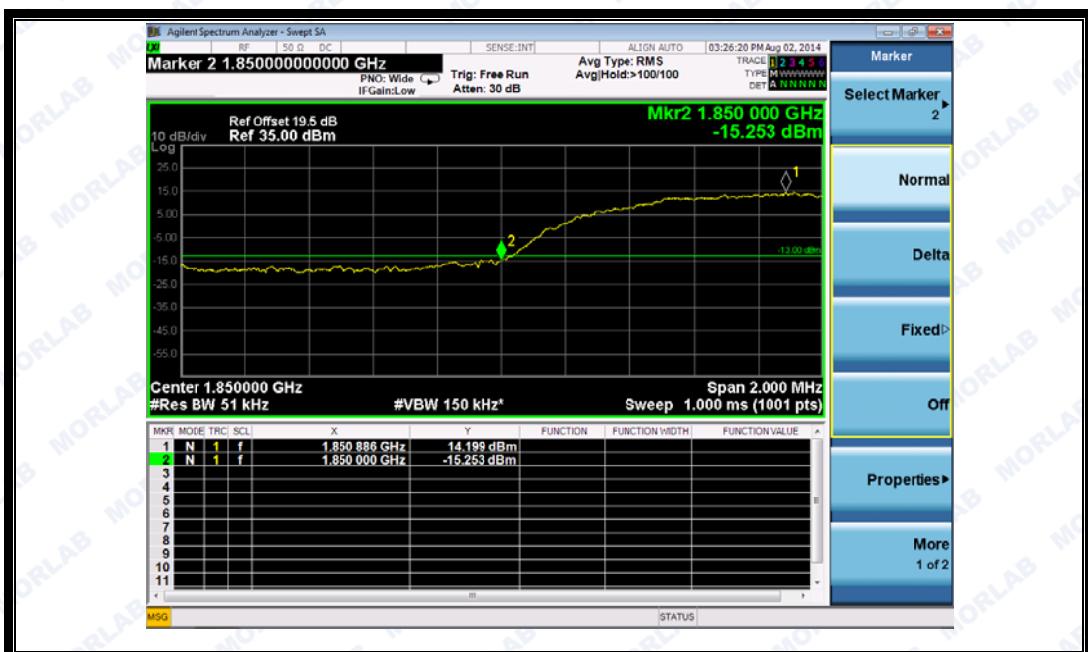

(Plot K: WCDMA 1900 Channel = 9262)

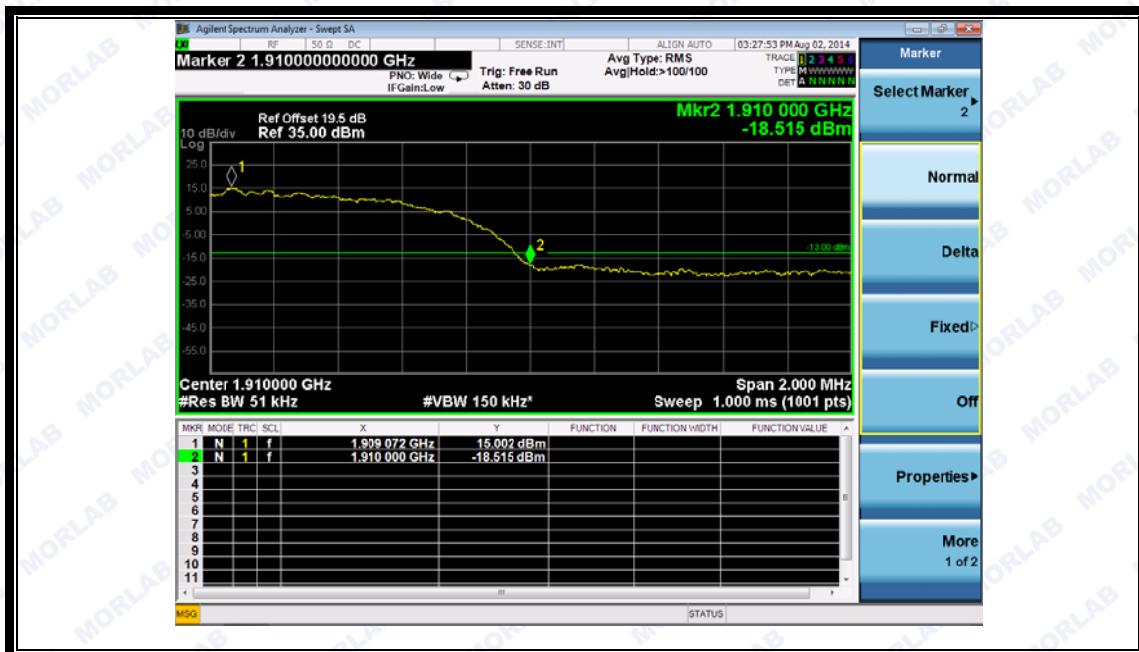

(Plot L: WCDMA 1900 Channel = 9538)


2.7. Transmitter Radiated Power (EIRP/ERP)

2.7.1. Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power

2.7.2. Test Description

1. Test Setup:

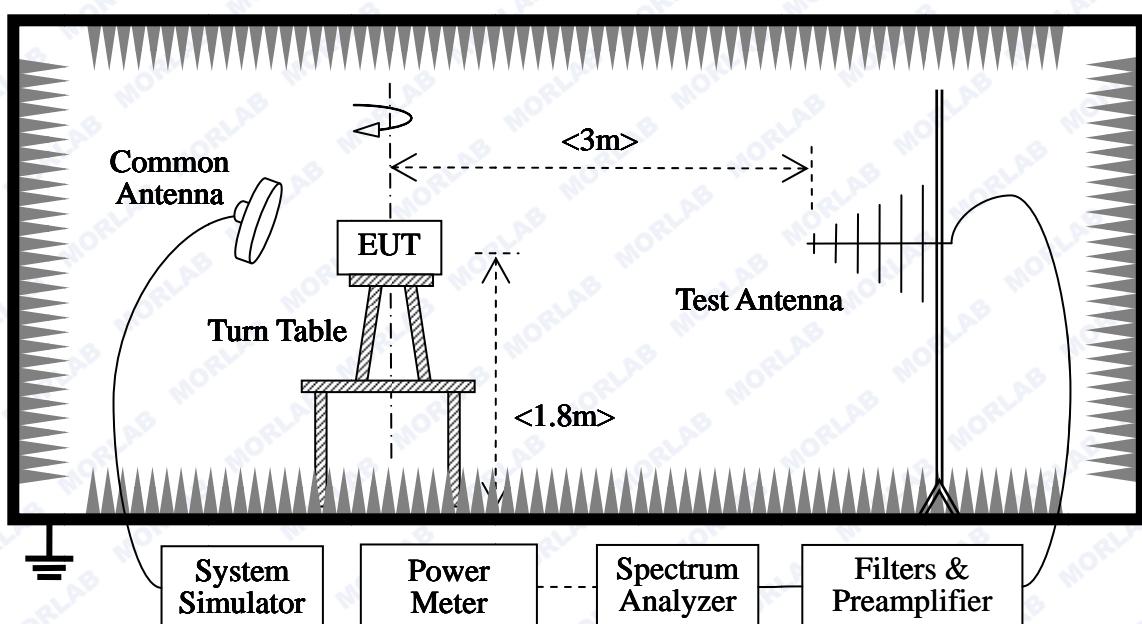

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded.

- GSM Maximum RF output power: GSM 850 33.29dBm, GSM 1900 30.76dBm, EGPRS 850 29.97dBm, EGPRS 1900 29.62dBm, WCDMA 850 24.36dBm, WCDMA 1900 23.65dBm, Please refer to section 2.1.3 of this report.
- Step size (dB): 3dB
- Minimum RF power: GSM 850 3.1dBm, GSM 1900 0.3dBm, EGPRS 850 3.1dBm, EGPRS 1900 0.21dBm, WCDMA 850 0.39dBm, WCDMA 1900 0.5dBm.

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.02.26	2015.02.25
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.02.26	2015.02.25
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Substitution Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Pre-AMPS	lucix	S10M100L3802	S020180L320 3	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C836.5-25-X	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1747.5-75-X2	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1880-60-X2	NA	2014.02.26	2015.02.25

2.7.3. Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

$$A_{TOT} = L_{CABLES} + A_{SUBST}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

P_{SUBST_TX} is signal generator level,

P_{SUBST_RX} is receiver level,

L_{SUBST_CABLES} is cable losses including TX cable,

$G_{SUBST_TX_ANT}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT} .

1. GSM Model Test Verdict:



Band	Channel	Frequency (MHz)	PCL	Measured ERP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 850MHz	128	824.20	5	31.9	1.549	Plot A	38.5	7	PASS
	190	836.60	5	31.49	1.409				PASS
	251	848.80	5	31.06	1.276				PASS
GPRS 850MHz	128	824.20	5	27.97	0.627	Plot B ^{Note 1}	38.5	7	PASS
	190	836.60	5	26.46	0.443				PASS
	251	848.80	5	25.87	0.386				PASS
EGPRS 850MHz	128	824.20	5	31.31	1.352	Plot C ^{Note 1}	38.5	7	PASS
	190	836.60	5	29.82	0.959				PASS
	251	848.80	5	29.99	0.998				PASS
Band	Channel	Frequency (MHz)	PCL	Measured EIRP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 1900MHz	512	1850.2	0	30.02	1.005	Plot D	33	2	PASS
	661	1880.0	0	30.65	1.161				PASS
	810	1909.8	0	30.99	1.256				PASS
GPRS 1900MHz	512	1850.2	0	27.17	0.521	Plot E ^{Note 1}	33	2	PASS
	661	1880.0	0	27.93	0.621				PASS
	810	1909.8	0	28.3	0.676				PASS
EGPRS 1900MHz	512	1850.2	0	28.75	0.750	Plot F ^{Note 1}	33	2	PASS
	661	1880.0	0	29.5	0.891				PASS
	810	1909.8	0	29.92	0.982				PASS
Note 1:	For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.								

2. WCDMA Model Test Verdict:


Band	Chann el	Frequen cy (MHz)	Measured ERP			Limit		Verdict
			dBm	W	Refer to Plot	dBm	W	
WCDMA 850MHz	4132	826.4	21.5	0.141	Plot G	38.5	7	PASS
	4175	835	20.98	0.125				PASS
	4233	846.6	21.78	0.151				PASS

Band	Chann el	Frequen cy (MHz)	Measured EIRP			Limit		Verdict
			dBm	W		dB m	W	
WCDMA 1900MHz	9262	1852.4	24.11	0.258	Plot H	33	2	PASS
	9400	1880	23.91	0.246				PASS
	9538	1907.6	24.03	0.253				PASS


3. Test Plots:

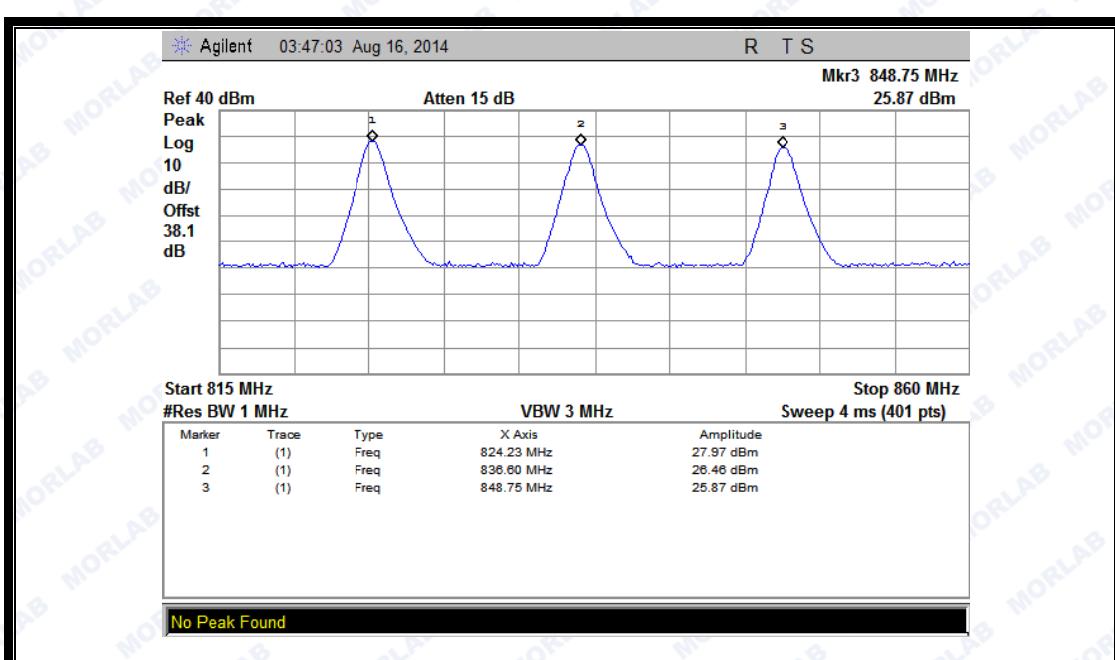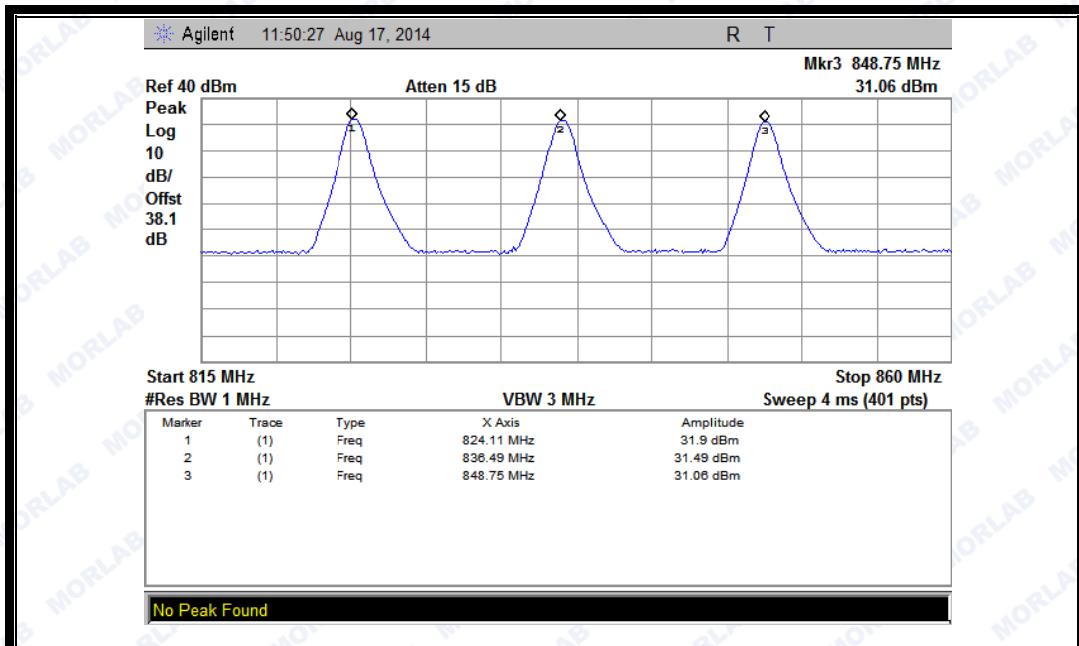

SZ14070043W01

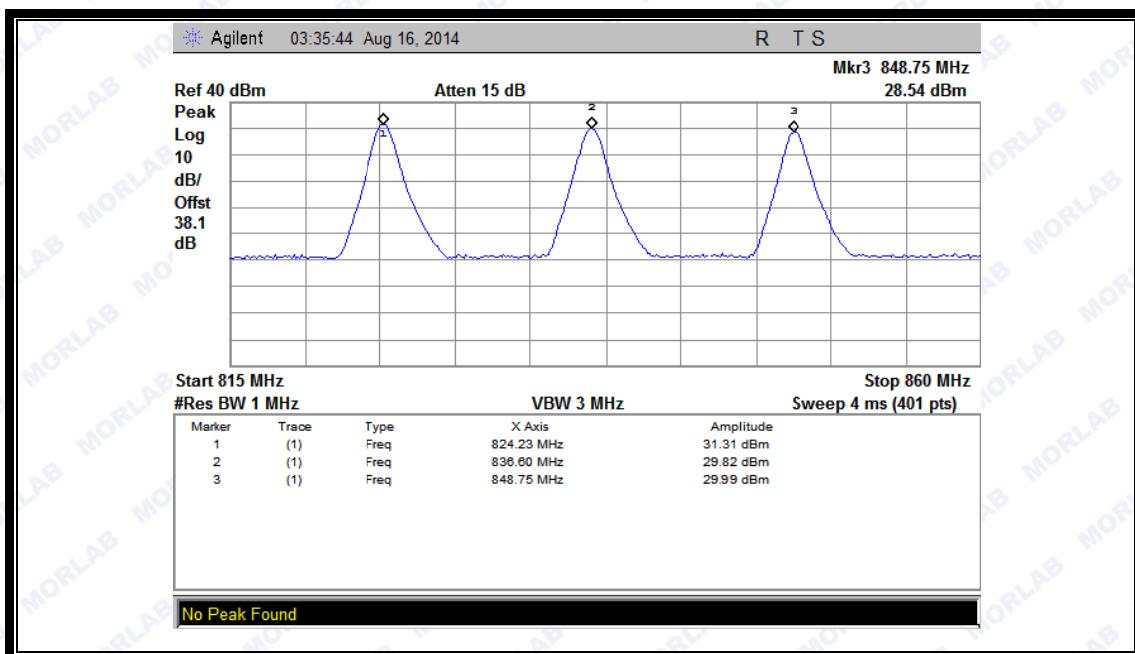


(Plot C: EGPRS 850MHz Channel = 128, 190, 251)

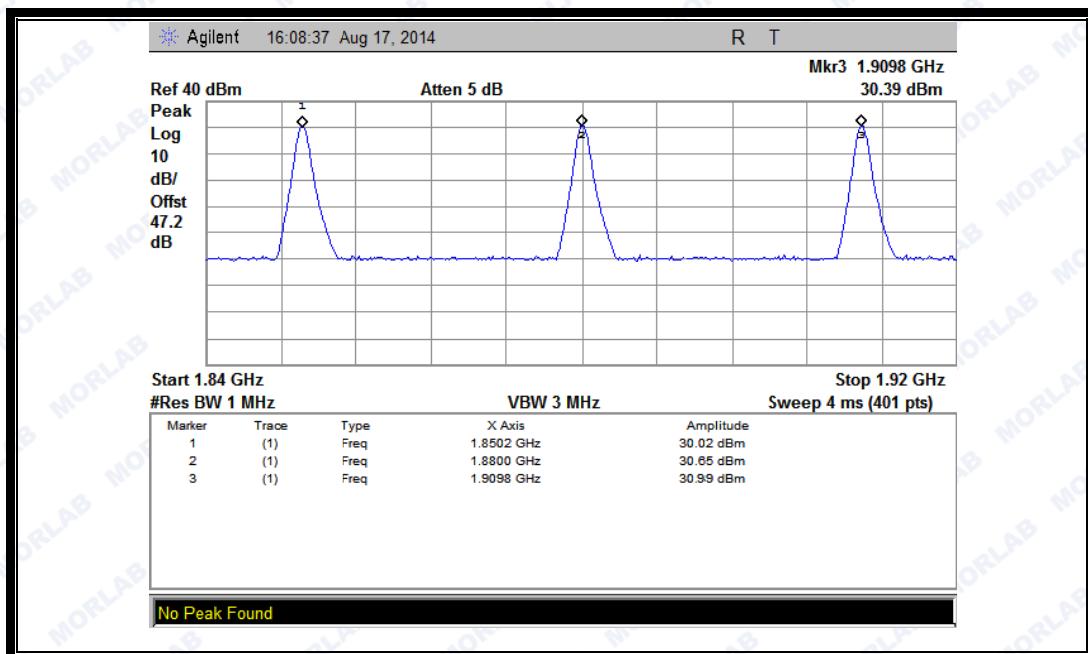


(Plot D: GSM 1900MHz Channel = 512, 661, 810)


SZ14070043W01

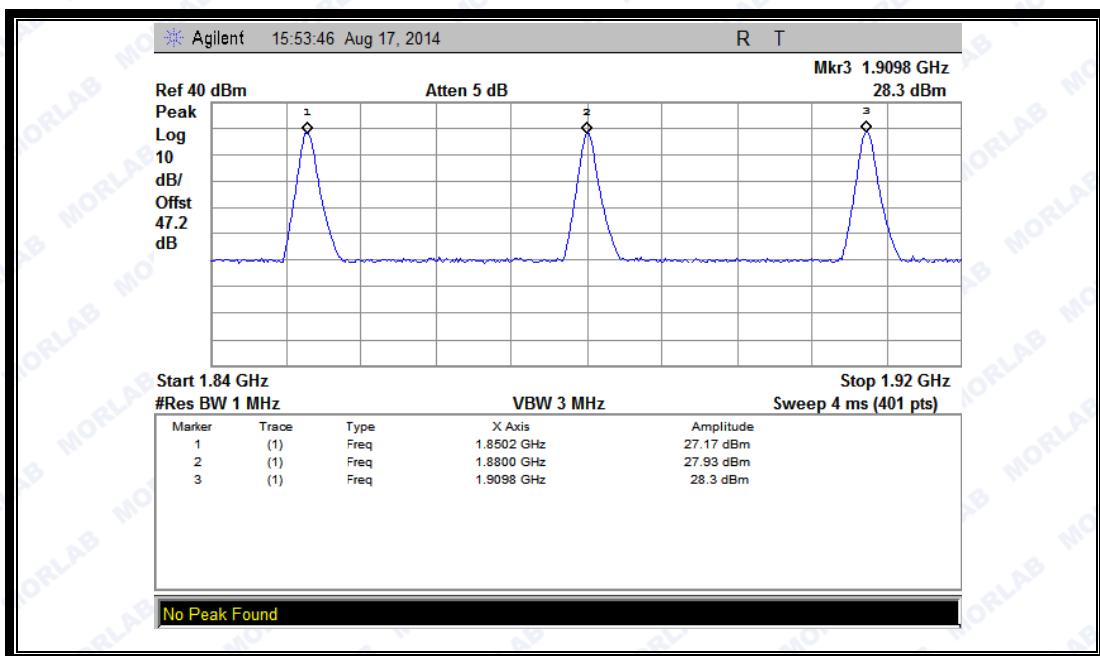


(Plot E:GPRS 1900MHz Channel = 512, 661, 810)

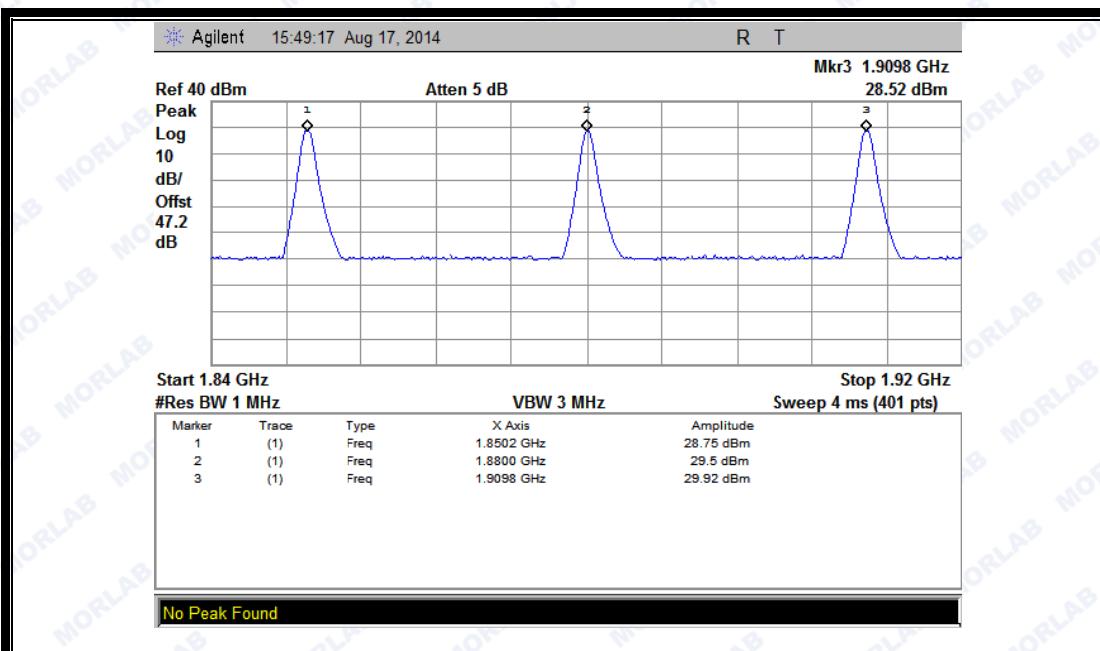

(Plot F:EGPRS 1900MHz Channel = 512, 661, 810)

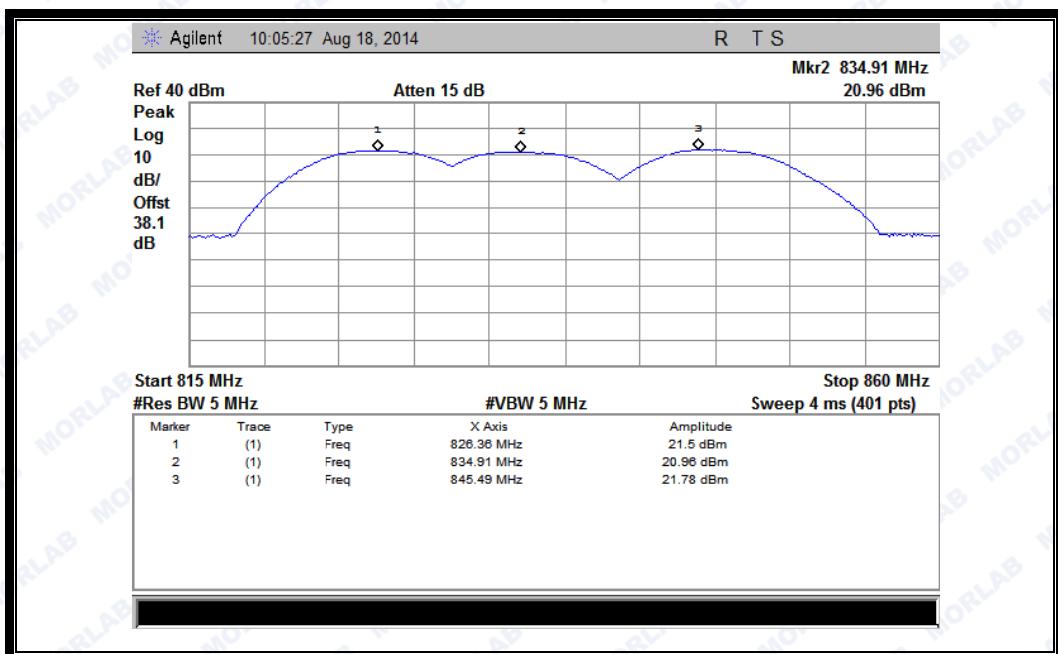

(Plot G: WCDMA 850 MHz Channel = 4132, 4175, 4233)

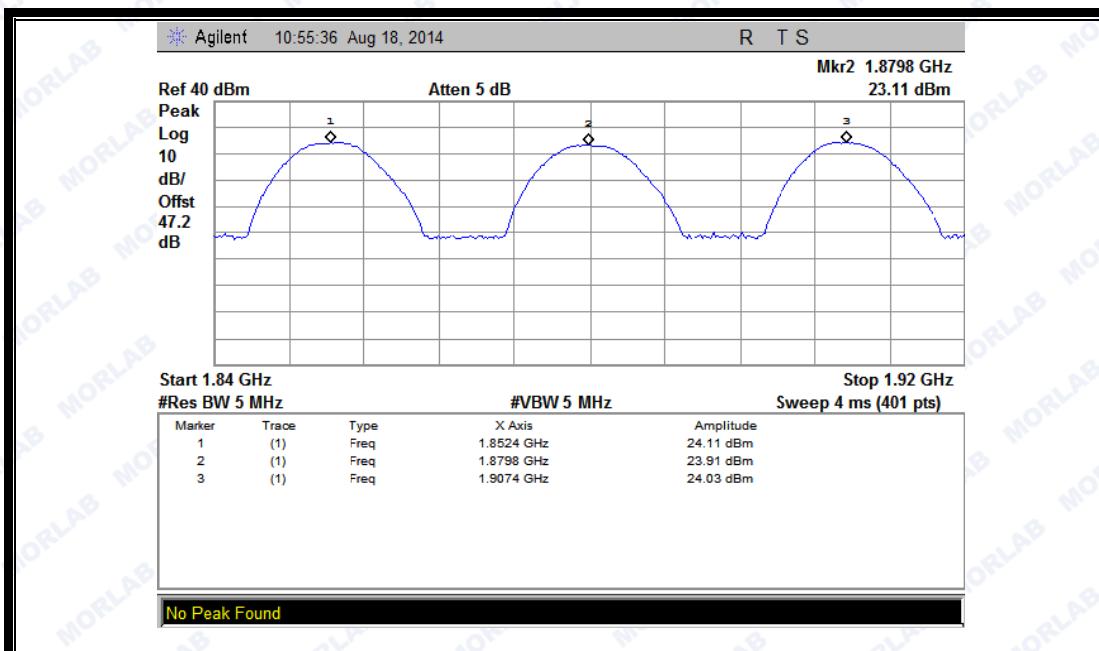

(Plot H: WCDMA 1900 MHz Channel = 9262, 9400, 9538)

2.8. Radiated Out of Band Emissions

2.8.1. Requirement

According to FCC section 22.917(a) and section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

The spurious emission with frequency band 1900 according to FCC section 2.1057.

2.8.2. Test Description

See section 2.7.2 of this report.

1. Equipment List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.02.26	2015.02.25
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.02.26	2015.02.25
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Substitution Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Pre-AMPS	lucix	S10M100L3802	S020180L3203	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C836.5-25-X	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1747.5-75-X2	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1880-60-X2	NA	2014.02.26	2015.02.25

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.


1. Test Verdict:

Band	Chann el	Freque nacy (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
GSM 850MHz	128	824.2	< -25	< -25	Plot A.1/A.2	-13	PASS
	190	836.6	< -25	< -25	Plot A.3/A.4		PASS
	251	848.8	< -25	< -25	Plot A.5/A.6		PASS
GSM 1900MHz	512	1850.2	< -25	< -25	Plot B.1/B.2	-13	PASS
	661	1880.0	< -25	< -25	Plot B.3/B.4		PASS
	810	1909.8	< -25	< -25	Plot B.5/B.6		PASS
EDGE 850MHz	128	824.2	< -25	< -25	Plot C.1/C.2	-13	PASS
	190	836.6	< -25	< -25	Plot C.3/C.4		PASS
	251	848.8	< -25	< -25	Plot C.5/C.6		PASS
EDGE 1900MHz	512	1850.2	< -25	< -25	Plot D.1/D.2	-13	PASS
	661	1880.0	< -25	< -25	Plot D.3/D.4		PASS
	810	1909.8	< -25	< -25	Plot D.5/D.6		PASS
WCDMA 850MHz	4132	826.4	< -25	< -25	Plot E.1/E.2	-13	PASS
	4175	835	< -25	< -25	Plot E.3/E.4		PASS
	4233	846.6	< -25	< -25	Plot E.5/E.6		PASS
WCDMA 1900MHz	9262	1852.4	< -25	< -25	Plot F.1/F.2	-13	PASS
	9400	1880	< -25	< -25	Plot F.3/F.4		PASS
	9538	1907.6	< -25	< -25	Plot F.5/F.6		PASS


2. Test Plots for the Whole Measurement Frequency Range:

Note1: the power of the EUT transmitting frequency should be ignored.

Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

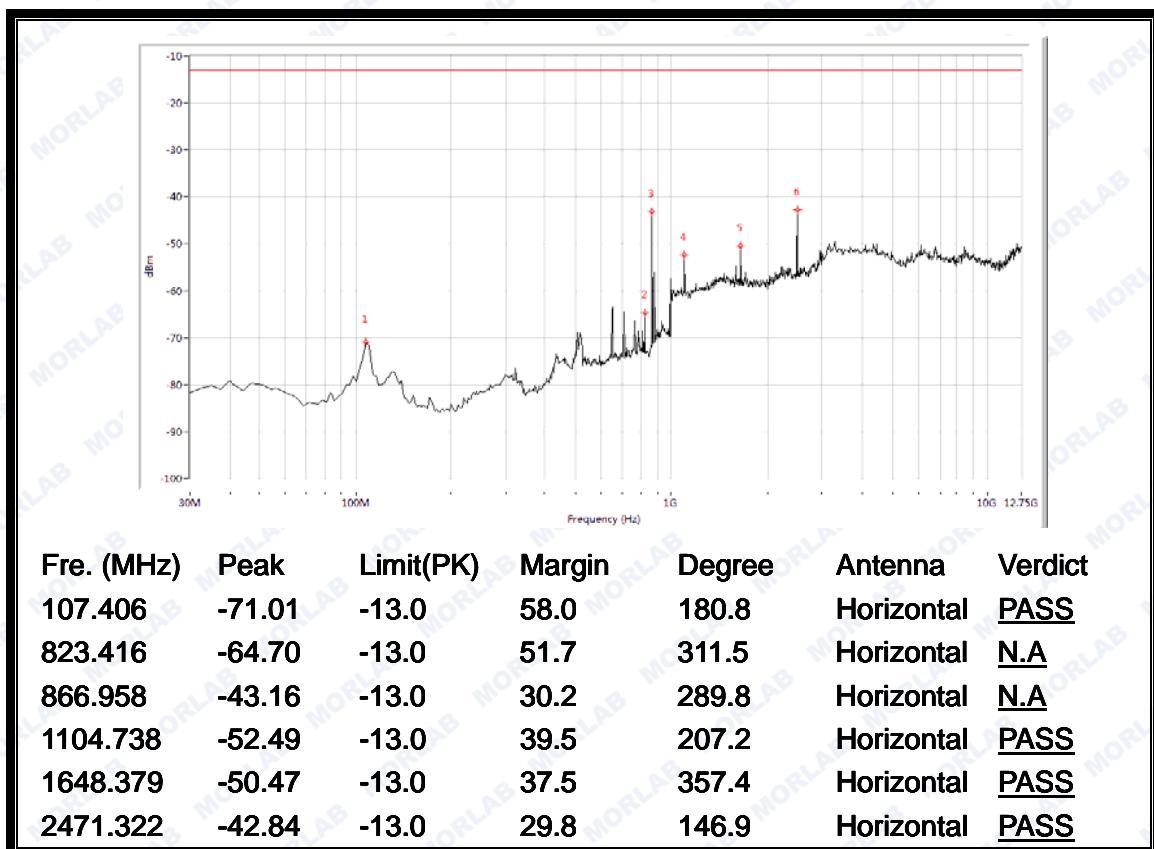


(Plot A.1: GSM 850MHz Channel = 128, Test Antenna Horizontal)

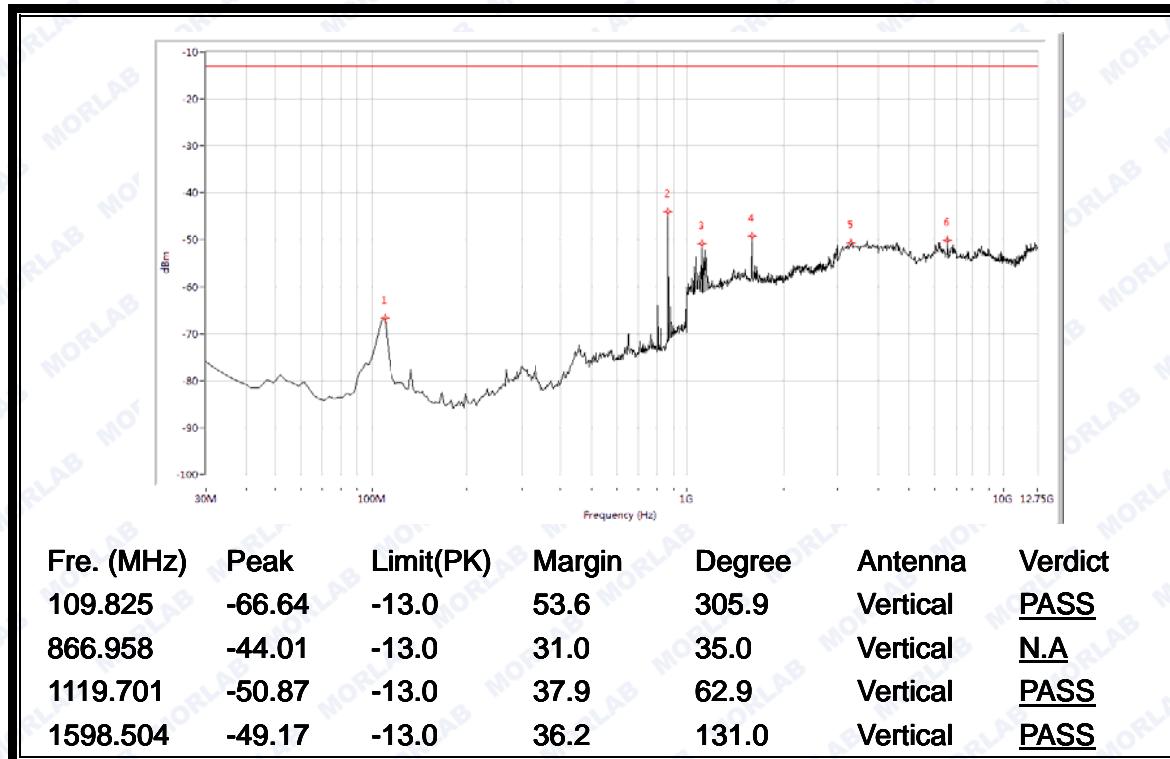


3291.771	-50.61	-13.0	37.6	216.3	Vertical	<u>PASS</u>
6574.190	-50.13	-13.0	37.1	122.5	Vertical	<u>PASS</u>

(Plot A.2: GSM 850MHz Channel = 128, Test Antenna Vertical)

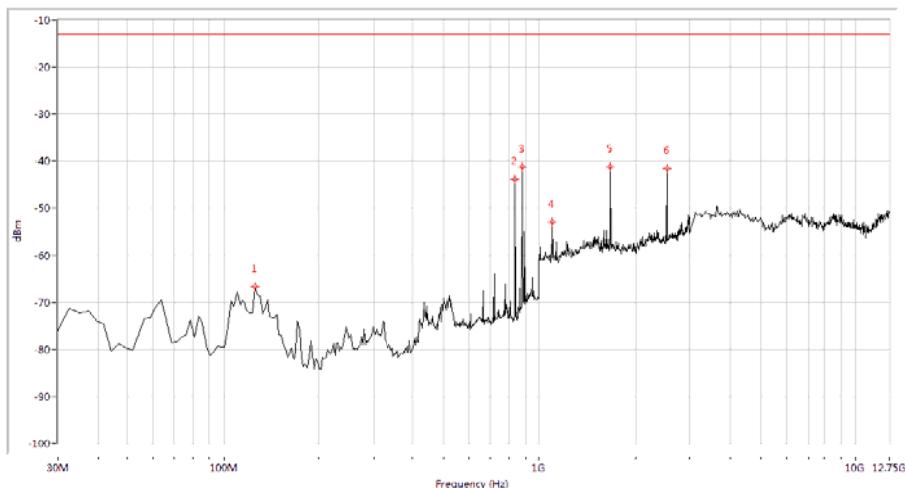


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
126.758	-66.76	-13.0	53.8	86.1	Horizontal	<u>PASS</u>
835.511	-43.86	-13.0	30.9	341.3	Horizontal	<u>N.A</u>
879.052	-41.19	-13.0	28.2	332.9	Horizontal	<u>N.A</u>
1104.738	-53.04	-13.0	40.0	56.7	Horizontal	<u>PASS</u>
1673.317	-41.14	-13.0	28.1	230.9	Horizontal	<u>PASS</u>
2506.234	-41.60	-13.0	28.6	153.9	Horizontal	<u>PASS</u>

(Plot A.3: GSM 850MHz Channel = 190, Test Antenna Horizontal)

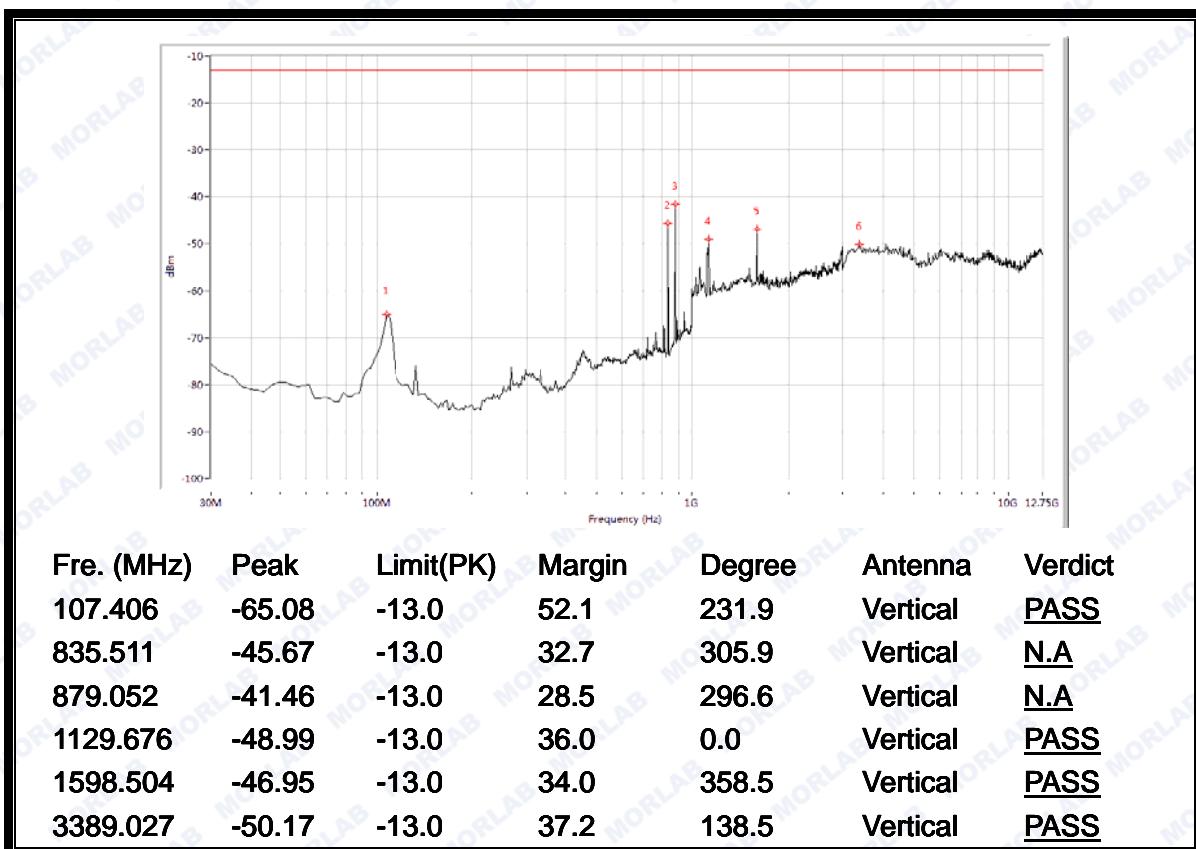


(Plot A.4: GSM 850MHz Channel = 190, Test Antenna Vertical)

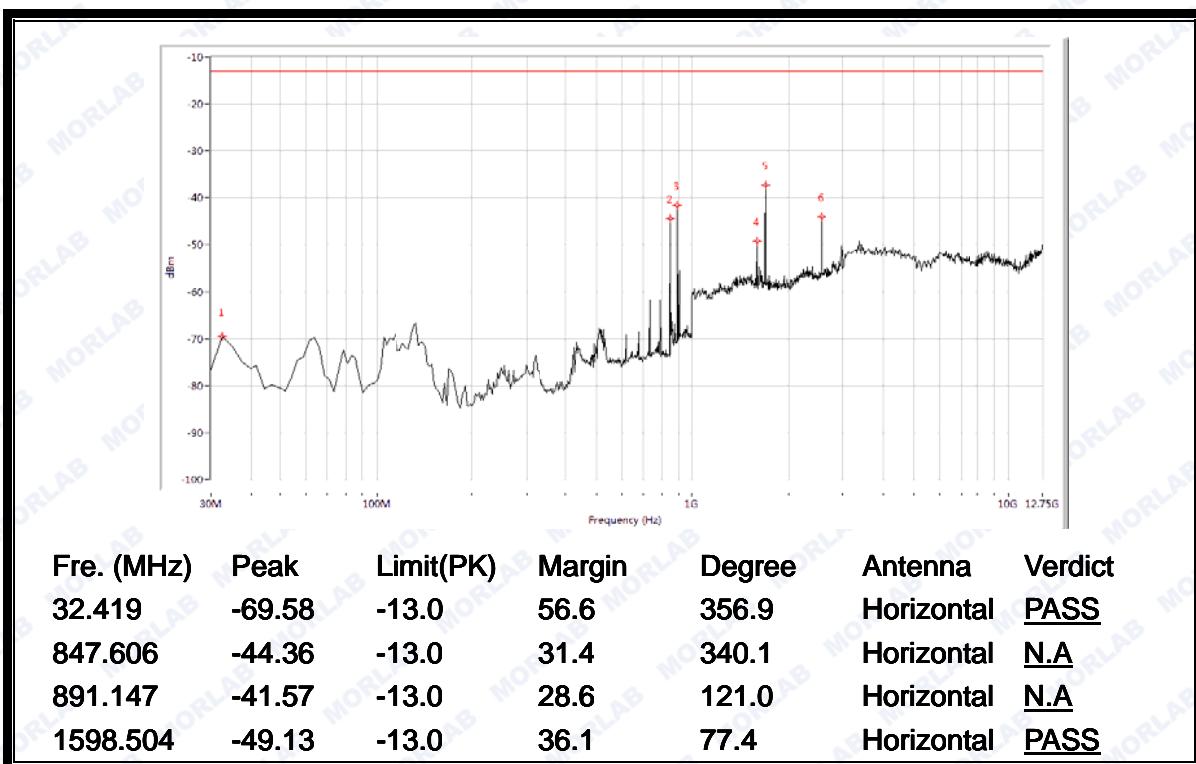


1698.254	-37.35	-13.0	24.3	214.4	Horizontal	PASS
2541.147	-44.00	-13.0	31.0	222.2	Horizontal	PASS


(Plot A.5: GSM 850MHz Channel = 251, Test Antenna Horizontal)

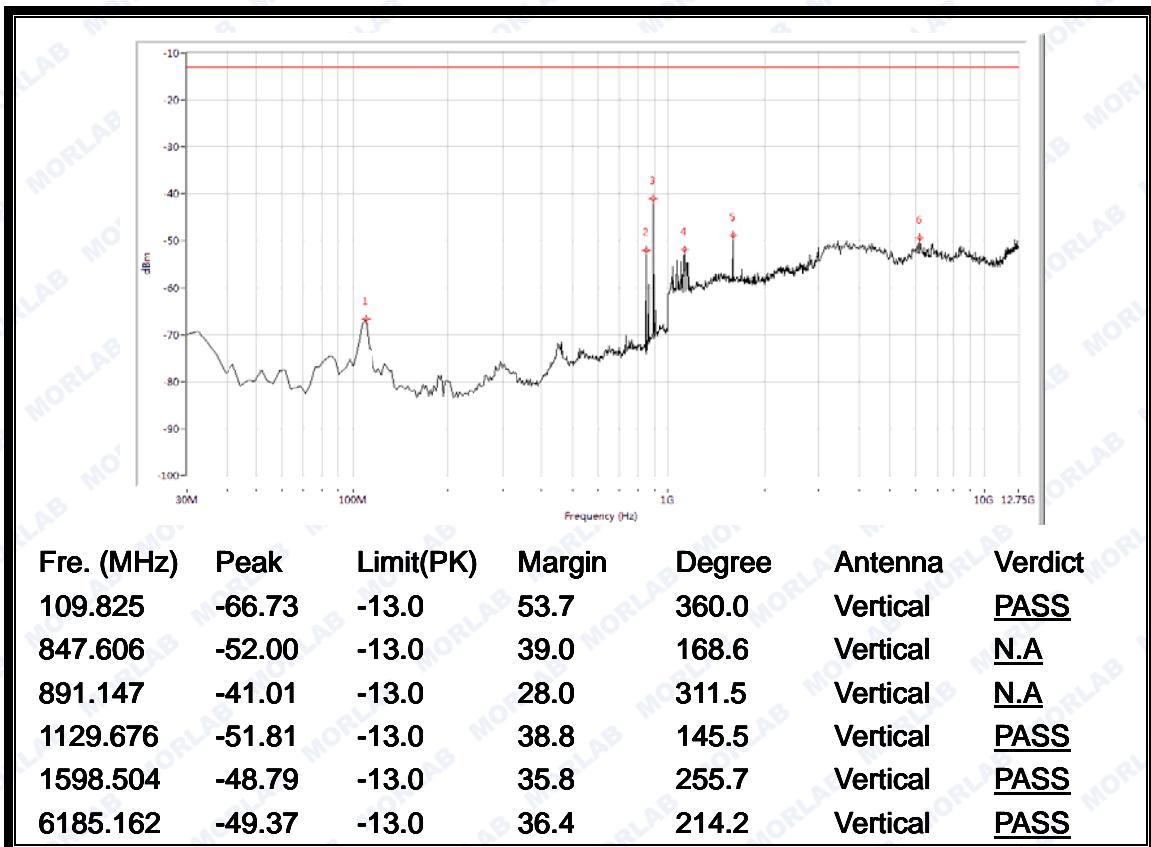

(Plot A.6: GSM 850MHz Channel = 251, Test Antenna Vertical)

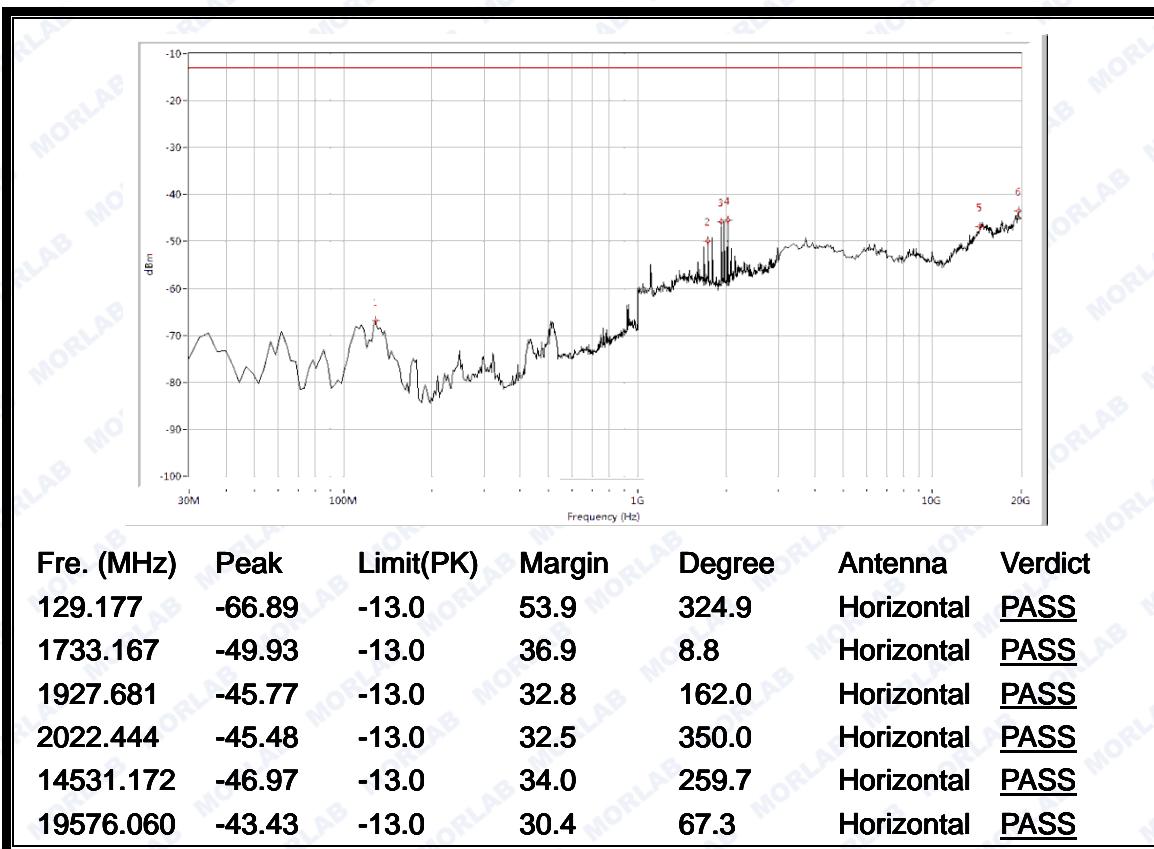


(Plot B.1: GSM 1900MHz Channel = 512, Test Antenna Horizontal)

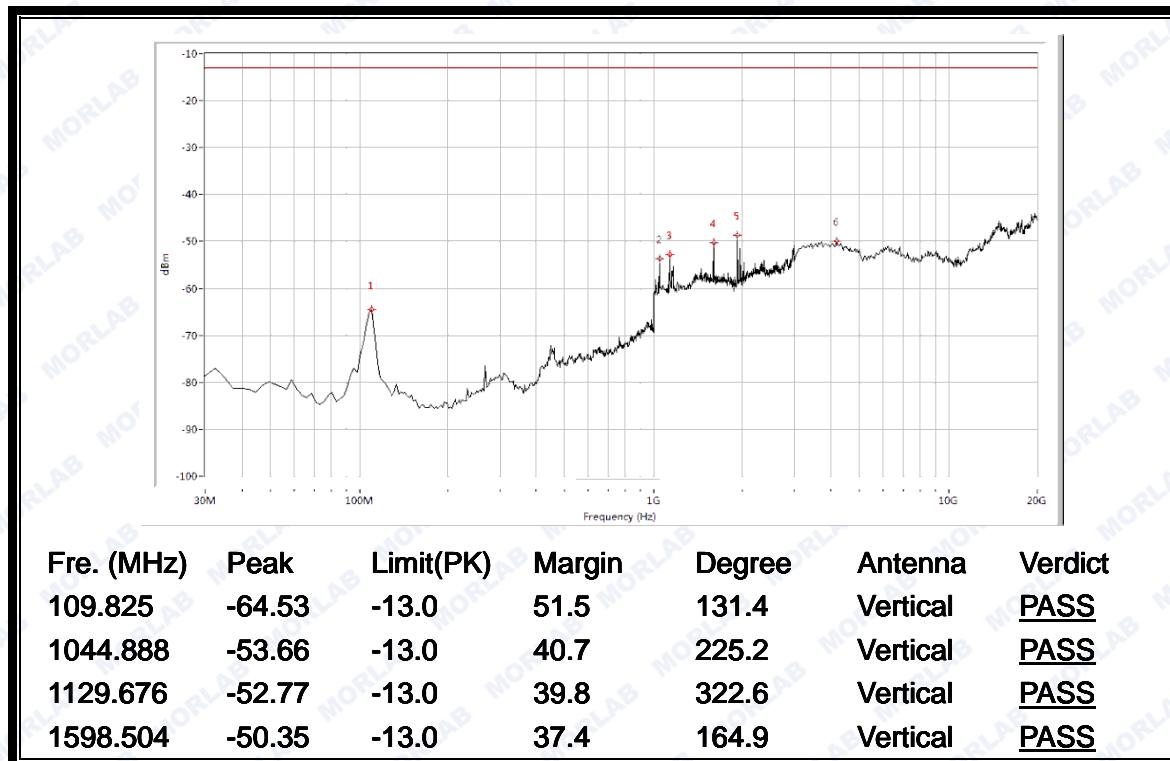


1927.681	-48.62	-13.0	35.6	65.6	Vertical	PASS
4187.032	-49.90	-13.0	36.9	88.2	Vertical	PASS

(Plot B.2: GSM 1900MHz Channel = 512, Test Antenna Vertical)

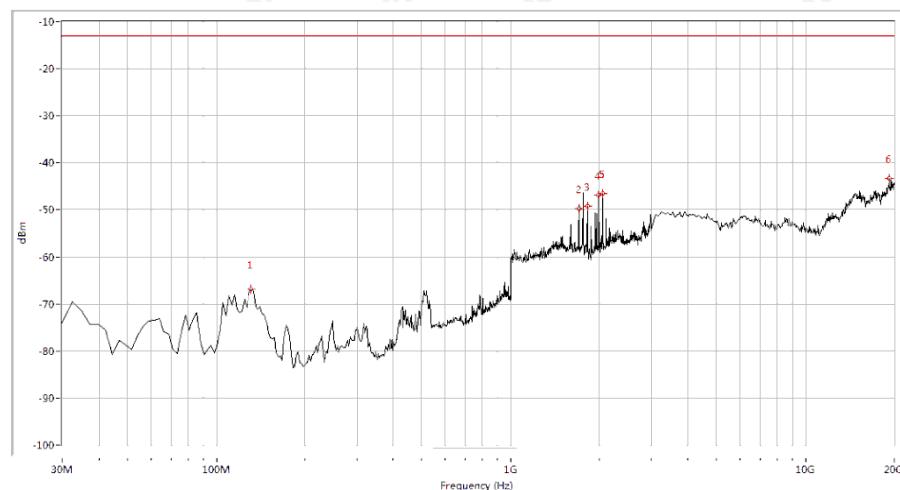

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
131.596	-66.90	-13.0	53.9	44.6	Horizontal	PASS
1708.229	-49.71	-13.0	36.7	26.7	Horizontal	PASS
1822.943	-49.22	-13.0	36.2	31.7	Horizontal	PASS
1992.519	-46.98	-13.0	34.0	358.9	Horizontal	PASS
2052.369	-46.52	-13.0	33.5	31.7	Horizontal	PASS
19236.908	-43.30	-13.0	30.3	360.0	Horizontal	PASS


(Plot B.3: GSM 1900MHz Channel = 661, Test Antenna Horizontal)

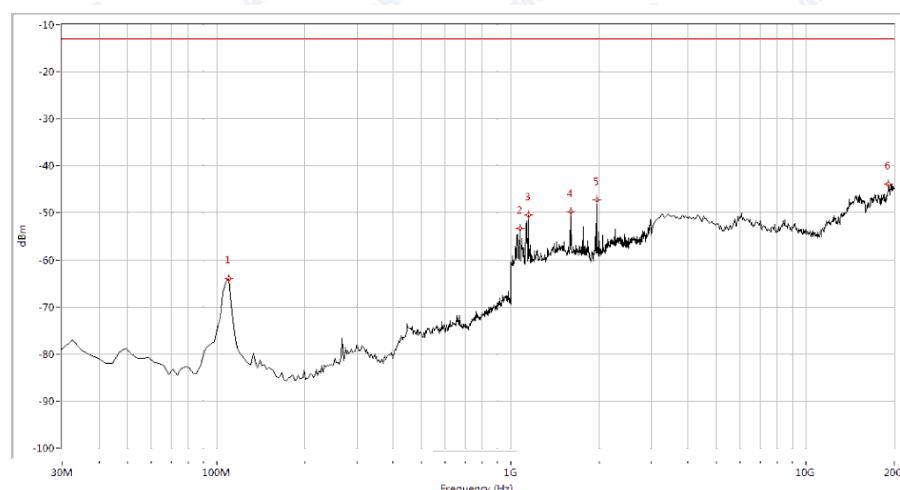


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict

109.825	-63.92	-13.0	50.9	172.0	Vertical	PASS
1074.813	-53.30	-13.0	40.3	356.9	Vertical	PASS
1144.638	-50.50	-13.0	37.5	360.0	Vertical	PASS
1598.504	-49.71	-13.0	36.7	352.3	Vertical	PASS
1957.606	-47.33	-13.0	34.3	68.5	Vertical	PASS
19109.726	-43.78	-13.0	30.8	360.0	Vertical	PASS


(Plot B.4: GSM 1900MHz Channel = 661, Test Antenna Vertical)

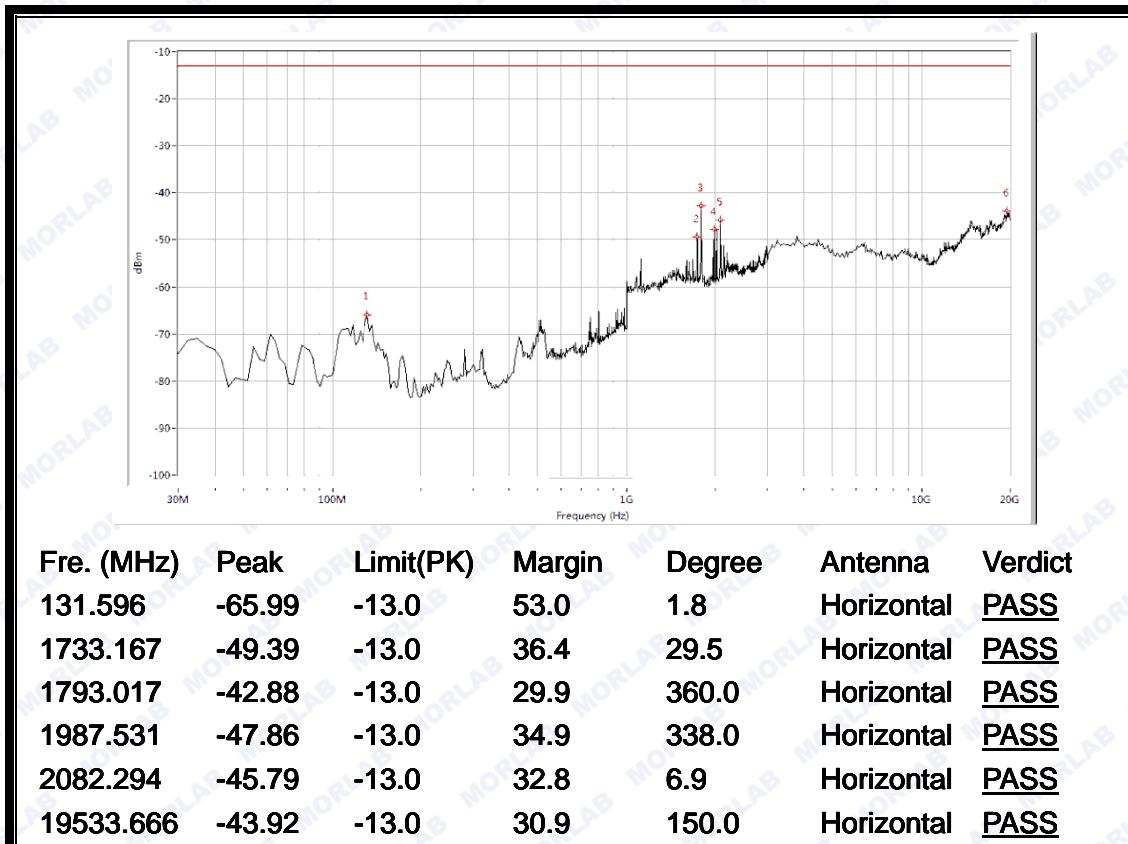

(Plot B.5: GSM 1900MHz Channel = 810, Test Antenna Horizontal)

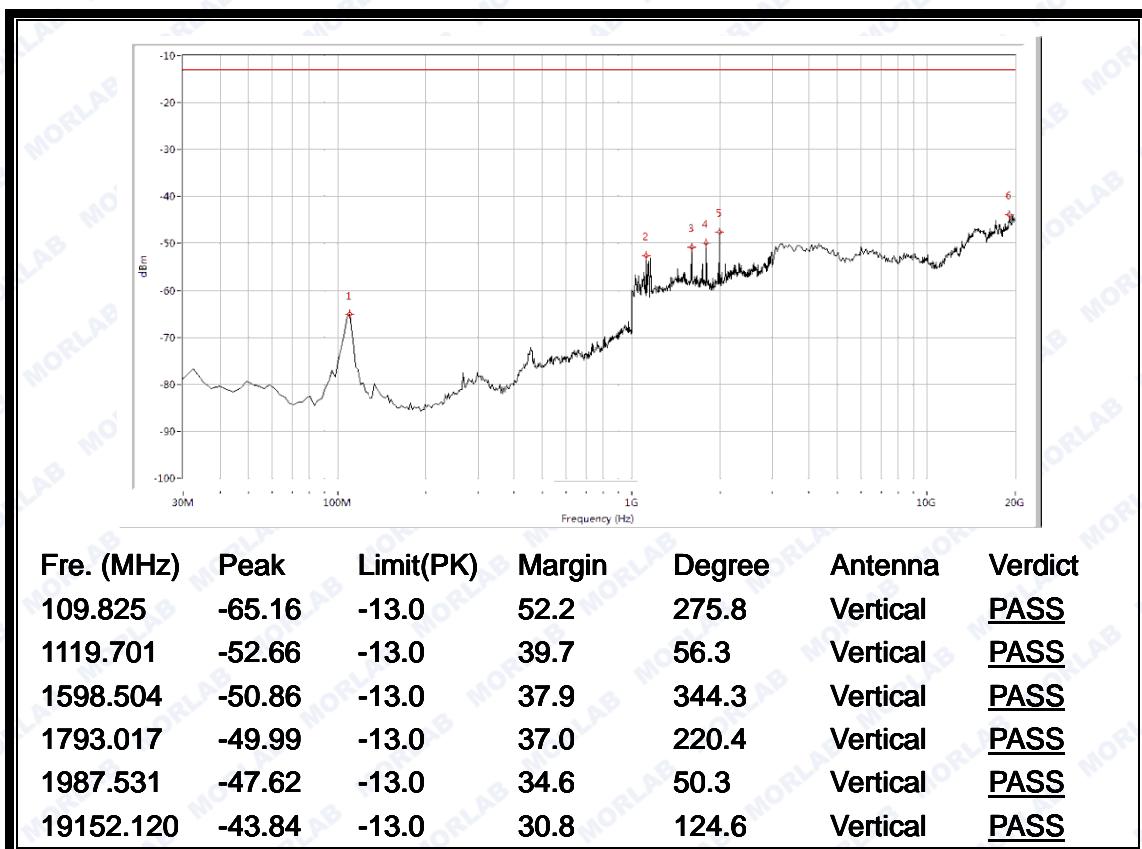


(PlotB.6: GSM 1900MHz Channel = 810, Test Antenna Vertical)

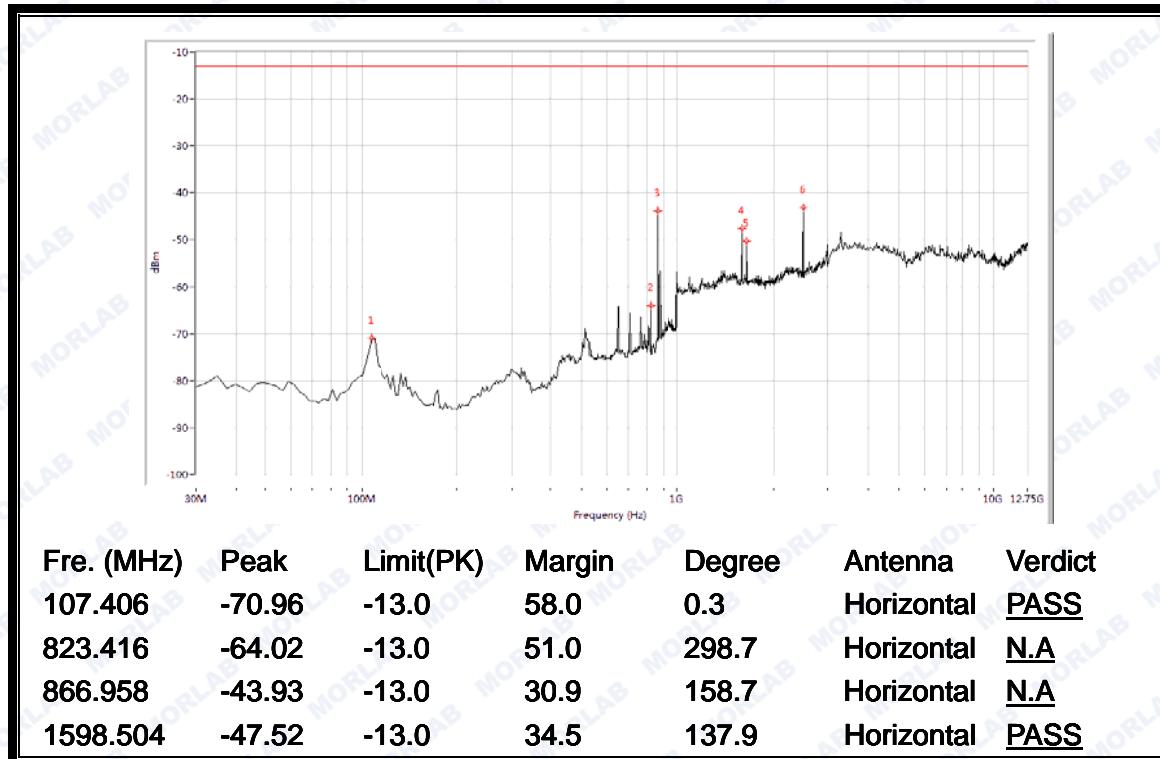


1648.379	-50.24	-13.0	37.2	29.5	Horizontal	<u>PASS</u>
2471.322	-43.10	-13.0	30.1	148.4	Horizontal	<u>PASS</u>


(Plot C.1: EGPRS 850MHz Channel = 128, Test Antenna Horizontal)

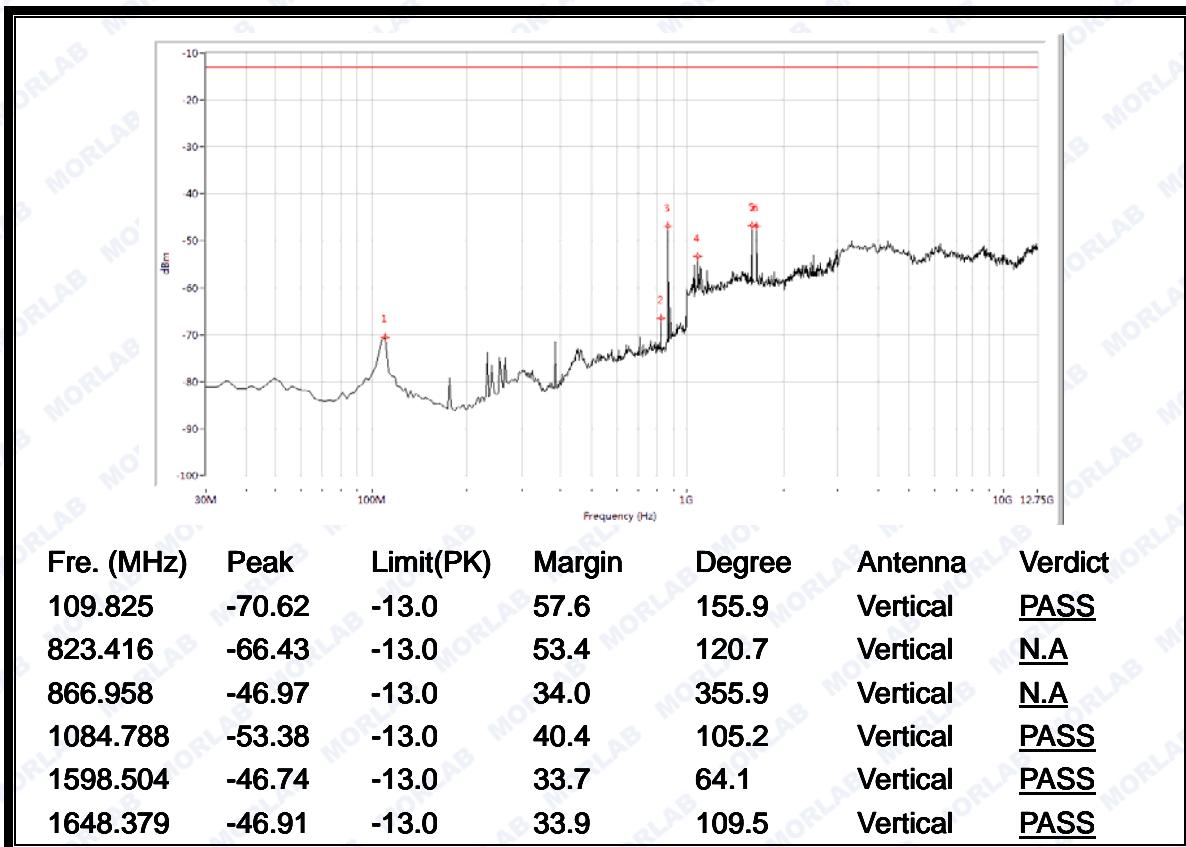

(Plot C.2: EGPRS 850MHz Channel = 128, Test Antenna Vertical)

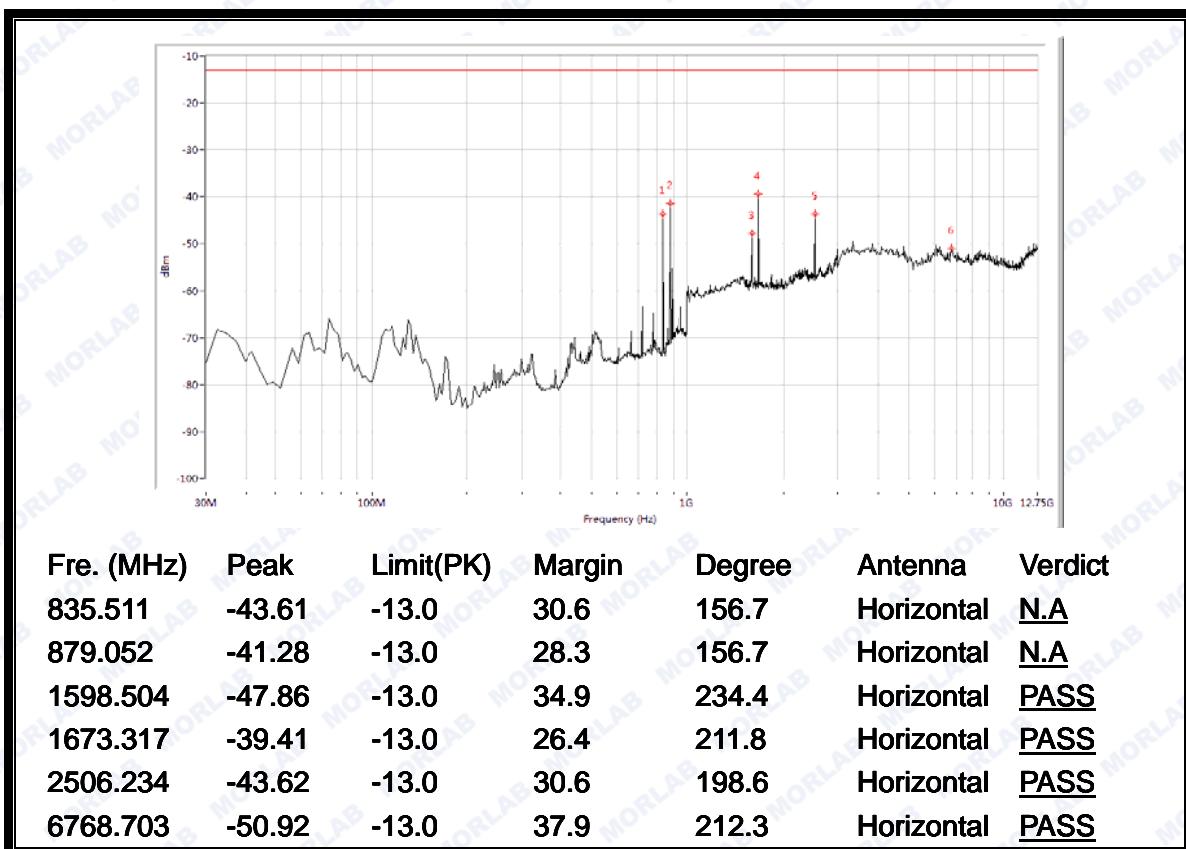


(Plot C.3: EGPRS 850MHz Channel = 190, Test Antenna Horizontal)

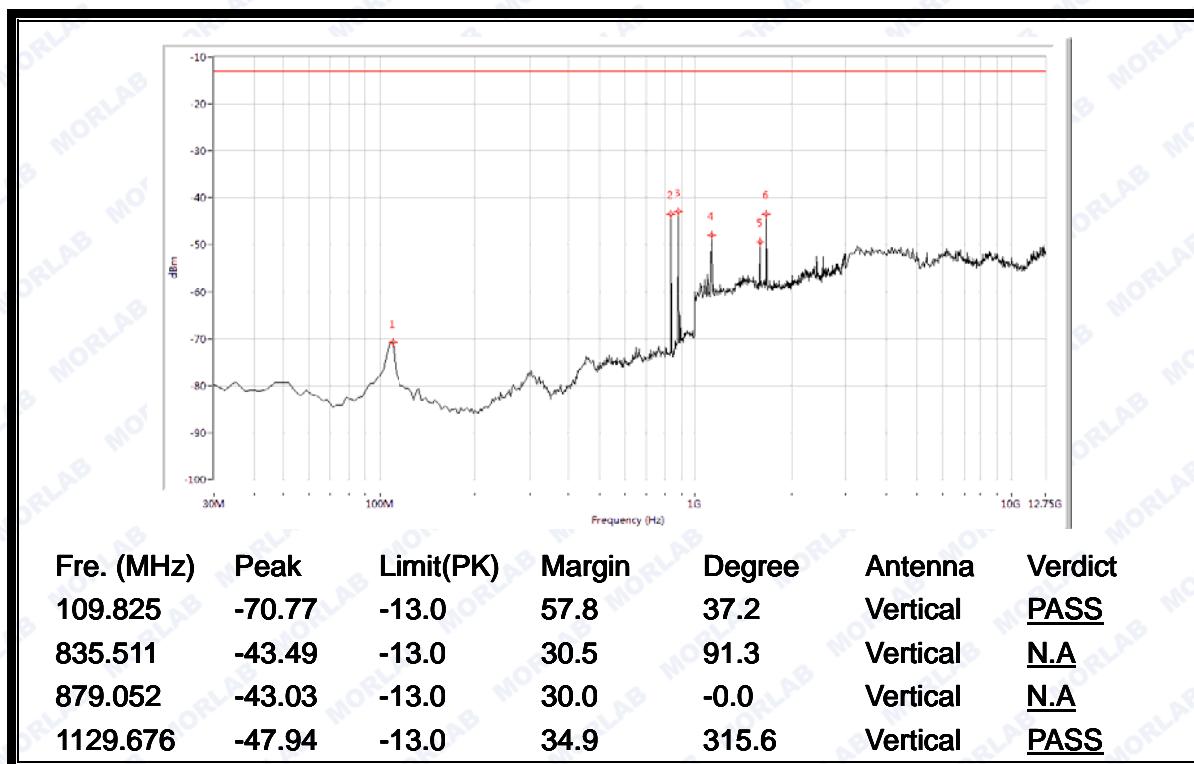


1598.504	-49.36	-13.0	36.4	53.3	Vertical	<u>PASS</u>
1673.317	-43.56	-13.0	30.6	88.0	Vertical	<u>PASS</u>

(Plot C.4: EGPRS 850MHz Channel = 190, Test Antenna Vertical)

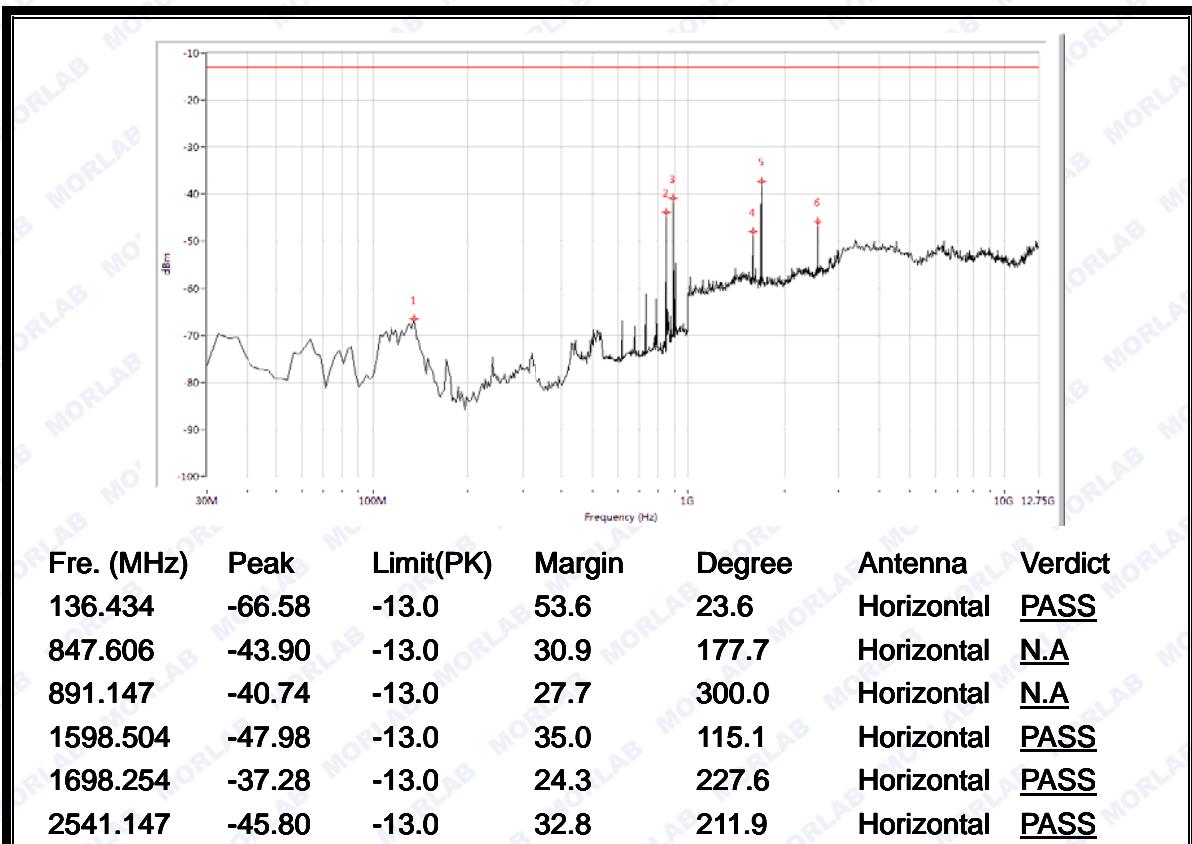


(Plot C.5: EGPRS 850MHz Channel = 251, Test Antenna Horizontal)

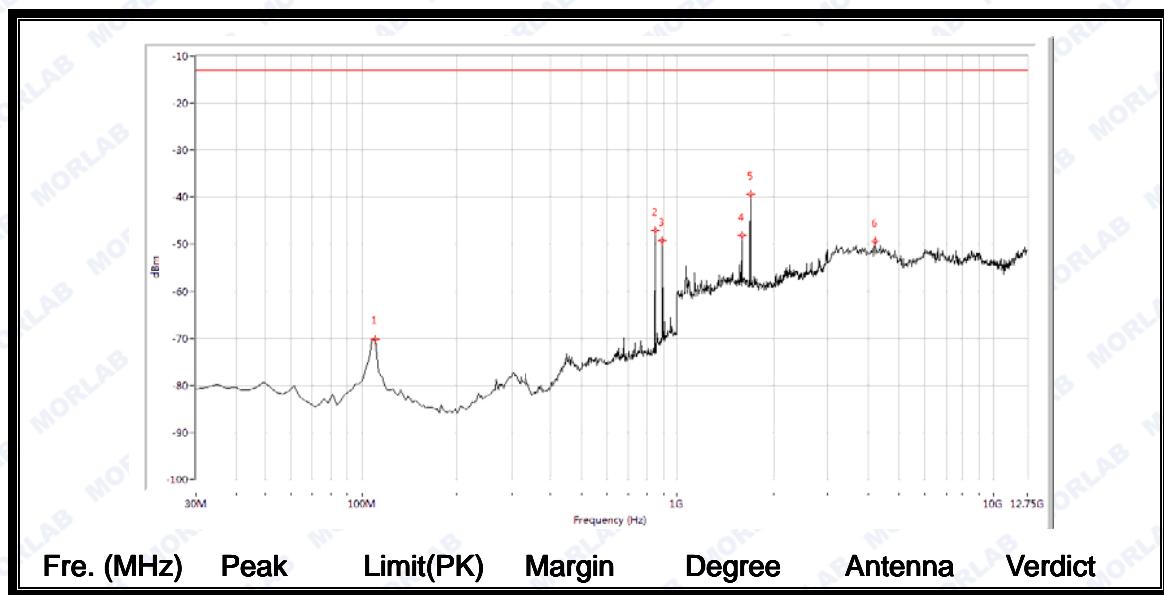


109.825	-70.29	-13.0	57.3	97.6	Vertical	<u>PASS</u>
847.606	-47.13	-13.0	34.1	249.6	Vertical	<u>N.A</u>
891.147	-49.30	-13.0	36.3	284.2	Vertical	<u>N.A</u>
1598.504	-48.11	-13.0	35.1	57.9	Vertical	<u>PASS</u>
1698.254	-39.48	-13.0	26.5	97.2	Vertical	<u>PASS</u>
4215.711	-49.40	-13.0	36.4	105.6	Vertical	<u>PASS</u>


(Plot C.6: EGPRS 850MHz Channel = 251, Test Antenna Vertical)

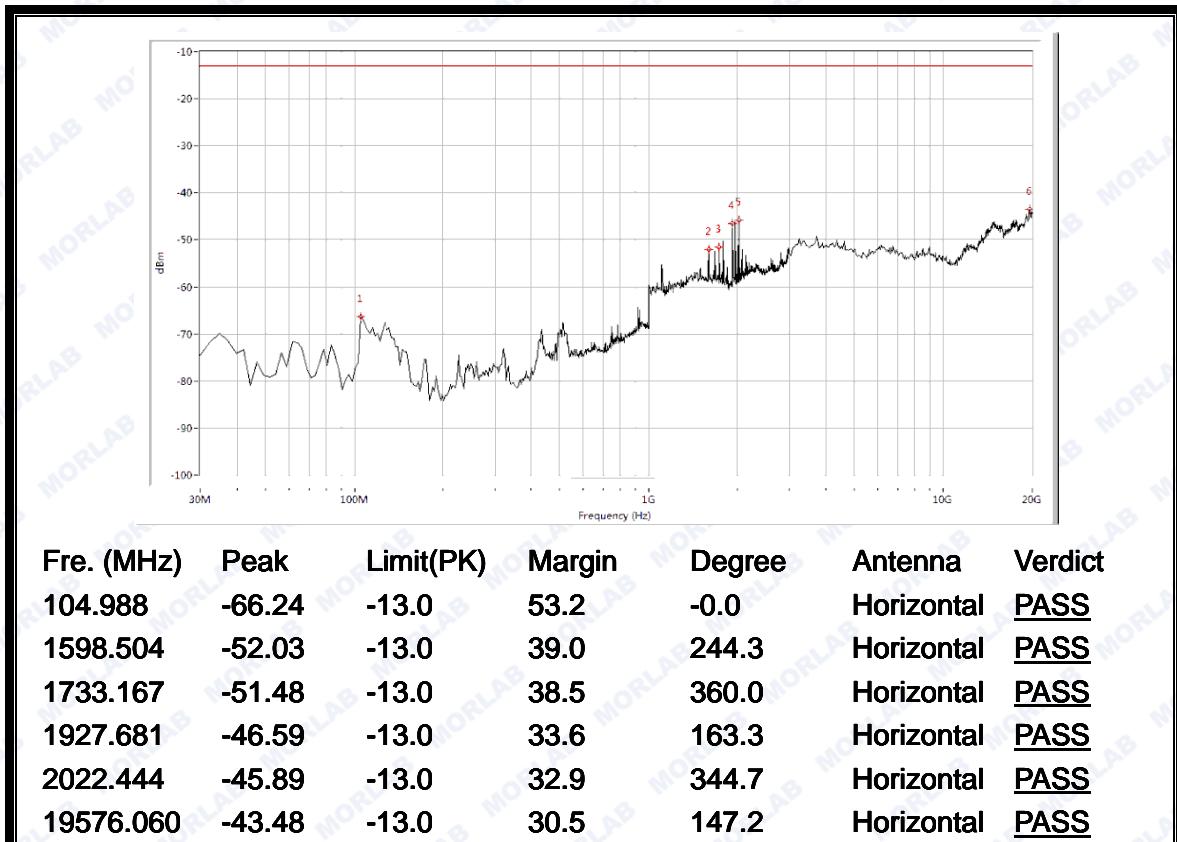

(Plot D.1: EGPRS 1900MHz Channel = 512, Test Antenna Horizontal)

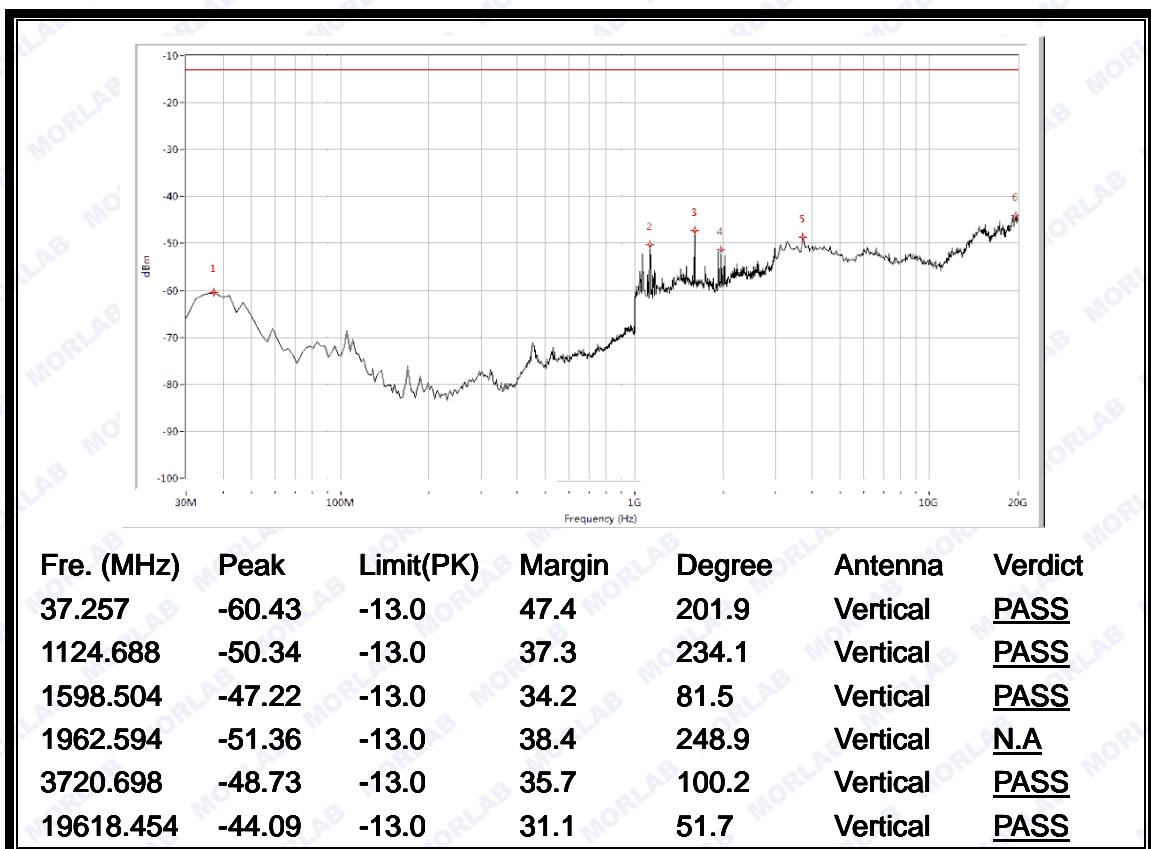


(Plot D.2: EGPRS 1900MHz Channel = 512, Test Antenna Vertical)

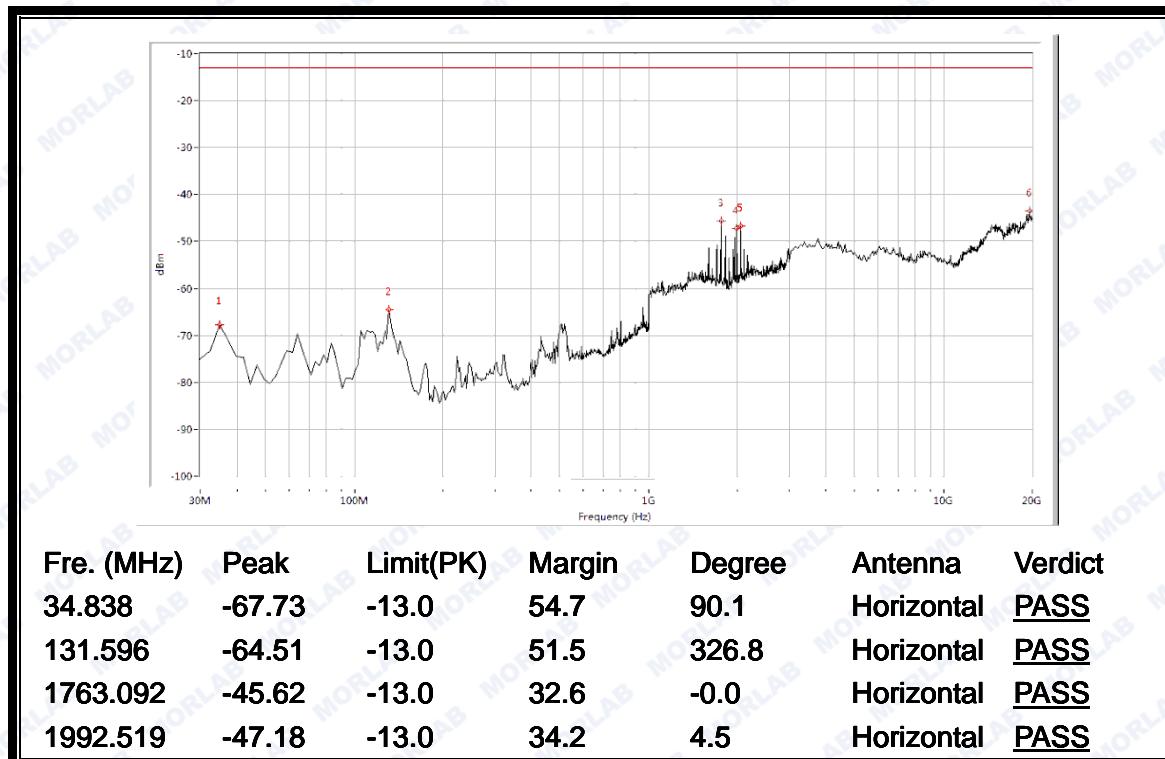


2052.369	-46.79	-13.0	33.8	359.7	Horizontal	PASS
19618.454	-43.48	-13.0	30.5	110.8	Horizontal	PASS

(Plot D.3: EGPRS 1900MHz Channel = 661, Test Antenna Horizontal)

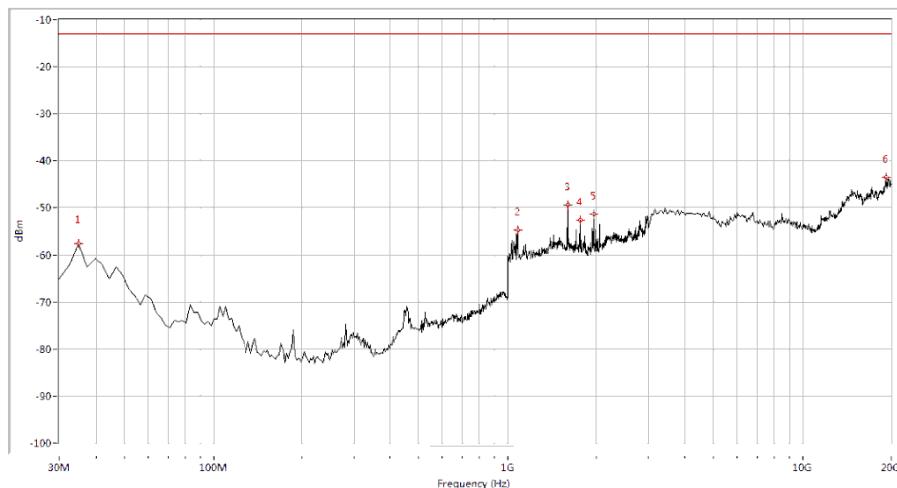


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-57.57	-13.0	44.6	325.8	Vertical	PASS
1079.800	-54.80	-13.0	41.8	360.0	Vertical	PASS
1598.504	-49.34	-13.0	36.3	132.0	Vertical	PASS
1763.092	-52.54	-13.0	39.5	244.1	Vertical	PASS
1957.606	-51.29	-13.0	38.3	163.2	Vertical	N.A
19194.514	-43.46	-13.0	30.5	34.5	Vertical	PASS

(Plot D.4: EGPRS 1900MHz Channel = 661, Test Antenna Vertical)

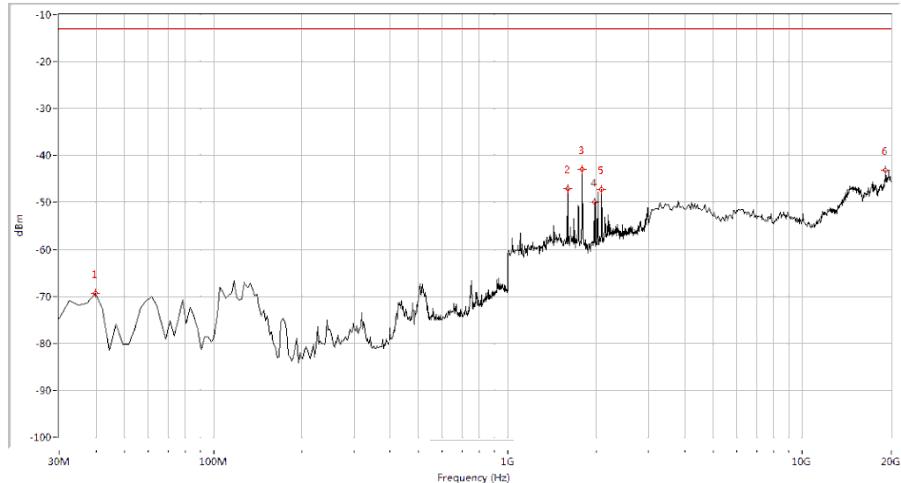

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
39.676	-69.39	-13.0	56.4	130.8	Horizontal	<u>PASS</u>
1598.504	-47.09	-13.0	34.1	297.1	Horizontal	<u>PASS</u>
1793.017	-42.92	-13.0	29.9	26.4	Horizontal	<u>PASS</u>
1967.581	-49.91	-13.0	36.9	345.6	Horizontal	N.A.
2082.294	-47.19	-13.0	34.2	359.6	Horizontal	<u>PASS</u>
19109.726	-43.20	-13.0	30.2	23.9	Horizontal	<u>PASS</u>


(Plot D.5: EGPRS 1900MHz Channel = 810, Test Antenna Horizontal)

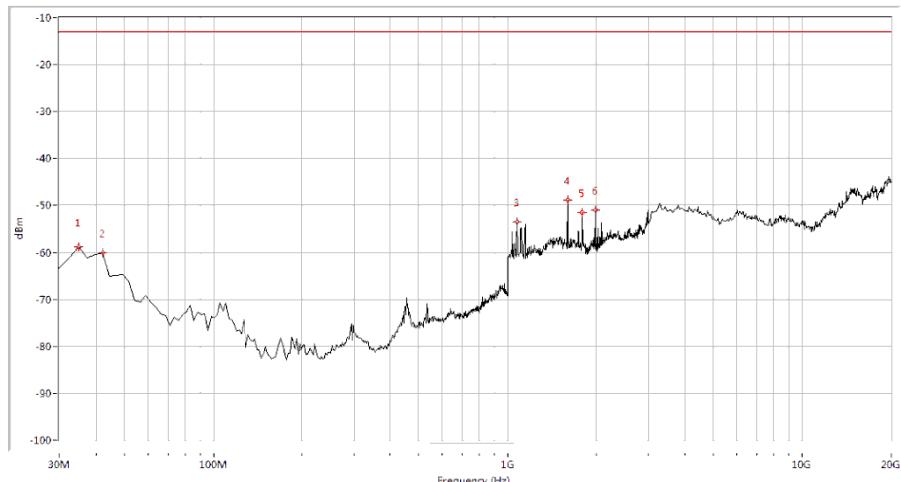


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-58.81	-13.0	45.8	121.6	Vertical	<u>PASS</u>
42.095	-60.14	-13.0	47.1	262.8	Vertical	<u>PASS</u>
1074.813	-53.46	-13.0	40.5	225.9	Vertical	<u>PASS</u>
1598.504	-48.81	-13.0	35.8	165.4	Vertical	<u>PASS</u>

1793.017	-51.50	-13.0	38.5	220.1	Vertical	<u>PASS</u>
1987.531	-50.96	-13.0	38.0	299.4	Vertical	<u>N.A</u>

(Plot D.6: EGPRS 1900MHz Channel = 810, Test Antenna Vertical)

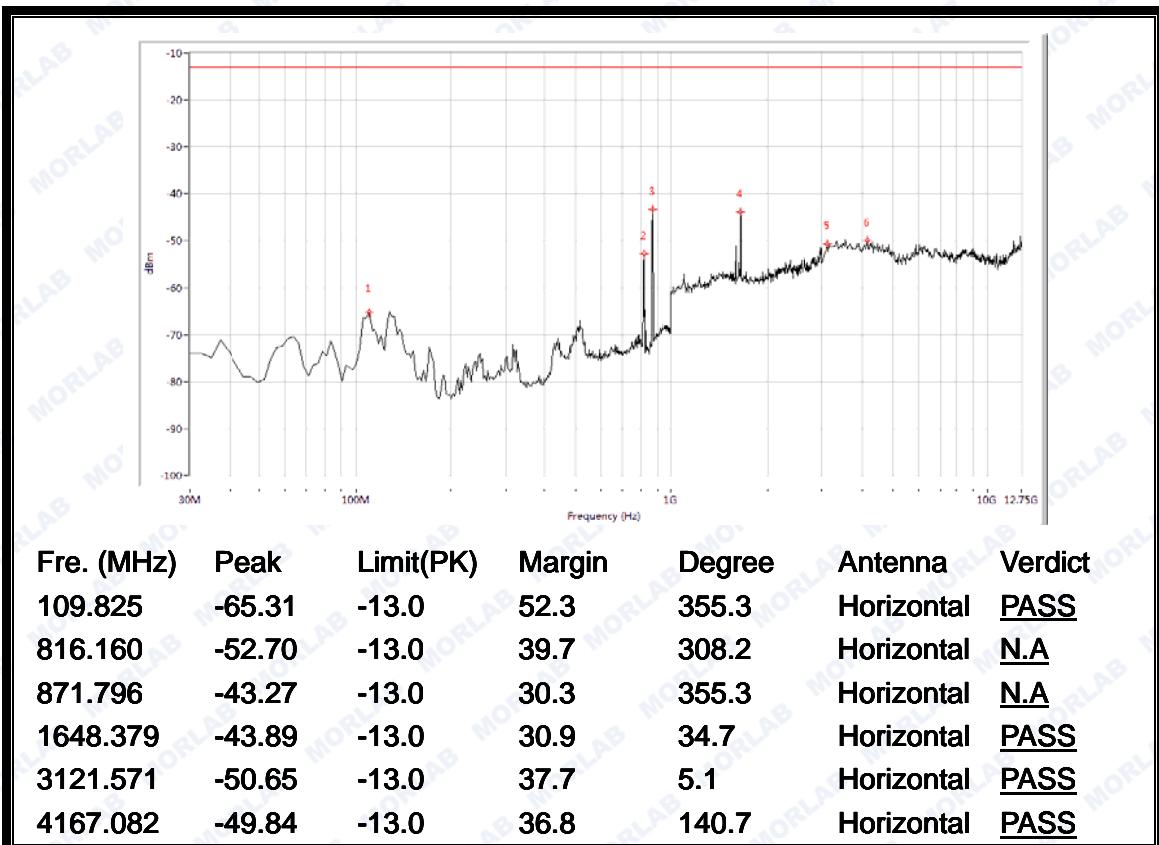


(Plot E.1: WCDMA 850MHz Channel = 4132, Test Antenna Horizontal)

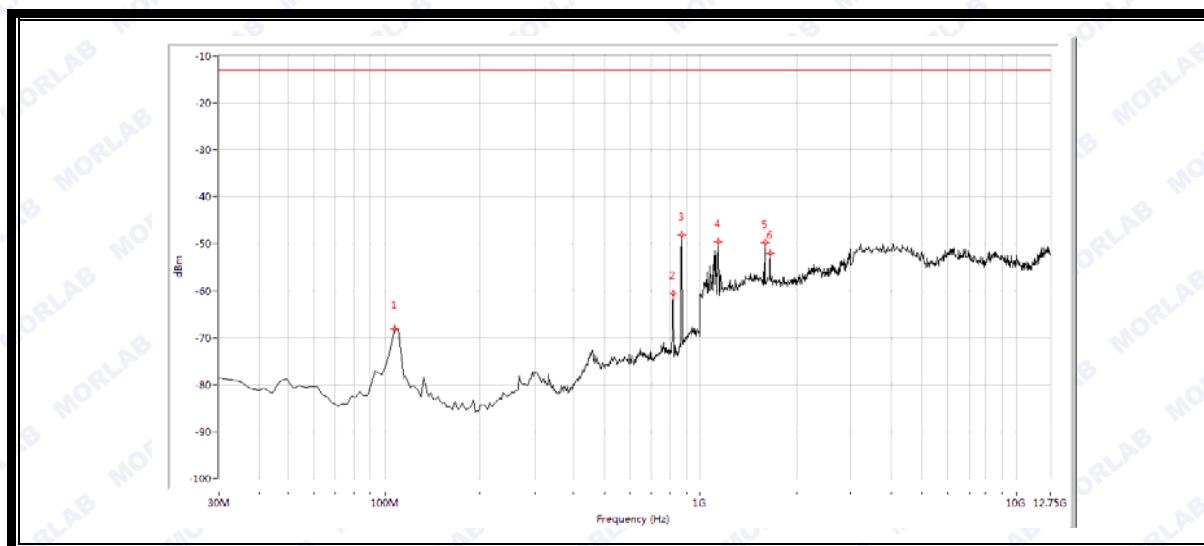


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
107.406	-68.10	-13.0	55.1	109.4	Vertical	<u>PASS</u>
816.160	-60.65	-13.0	47.7	100.1	Vertical	<u>N.A</u>
871.796	-48.21	-13.0	35.2	241.2	Vertical	<u>N.A</u>
1144.638	-49.58	-13.0	36.6	254.9	Vertical	<u>PASS</u>
1598.504	-49.66	-13.0	36.7	43.3	Vertical	<u>PASS</u>
1653.367	-52.12	-13.0	39.1	113.1	Vertical	<u>PASS</u>


(Plot E.2: WCDMA 850MHz Channel = 4132, Test Antenna Vertical)

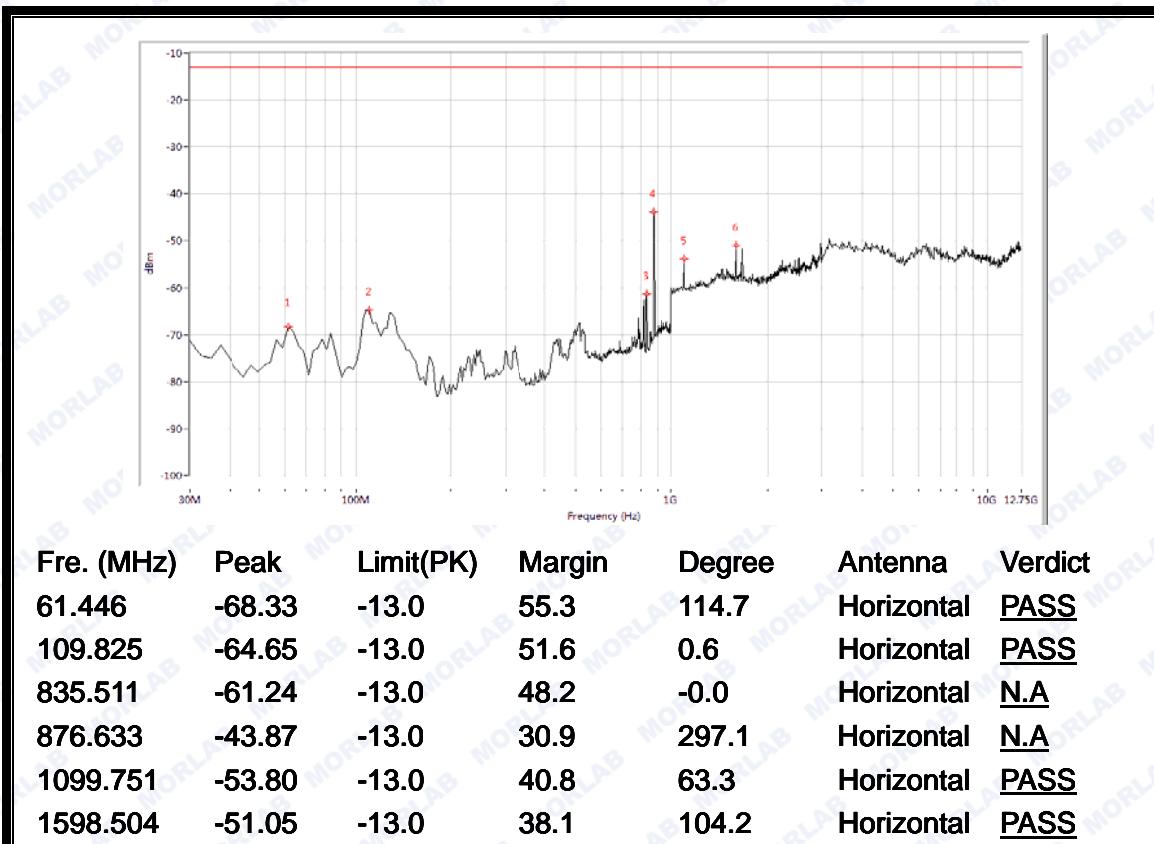

(Plot E.3: WCDMA 850MHz Channel = 4175, Test Antenna Horizontal)

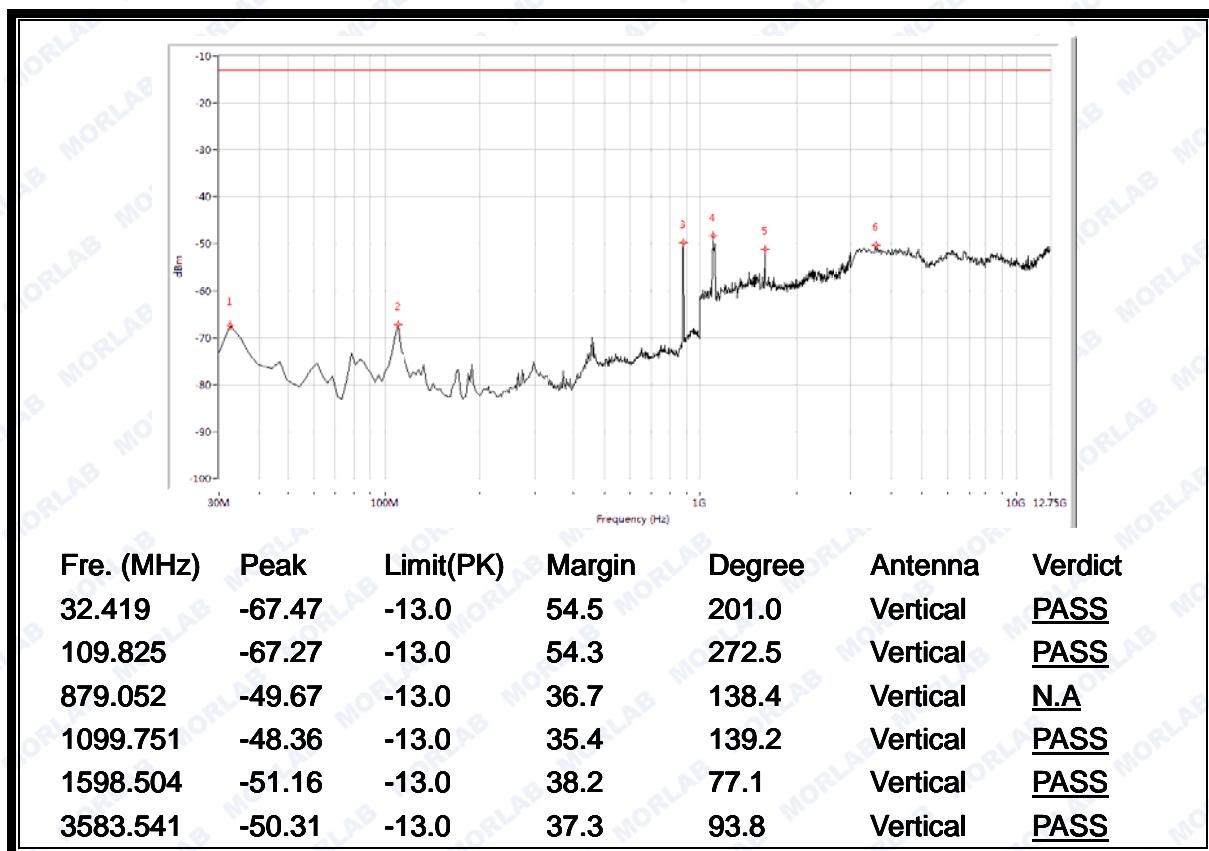


(Plot E.4: WCDMA 850MHz Channel = 4175, Test Antenna Vertical)

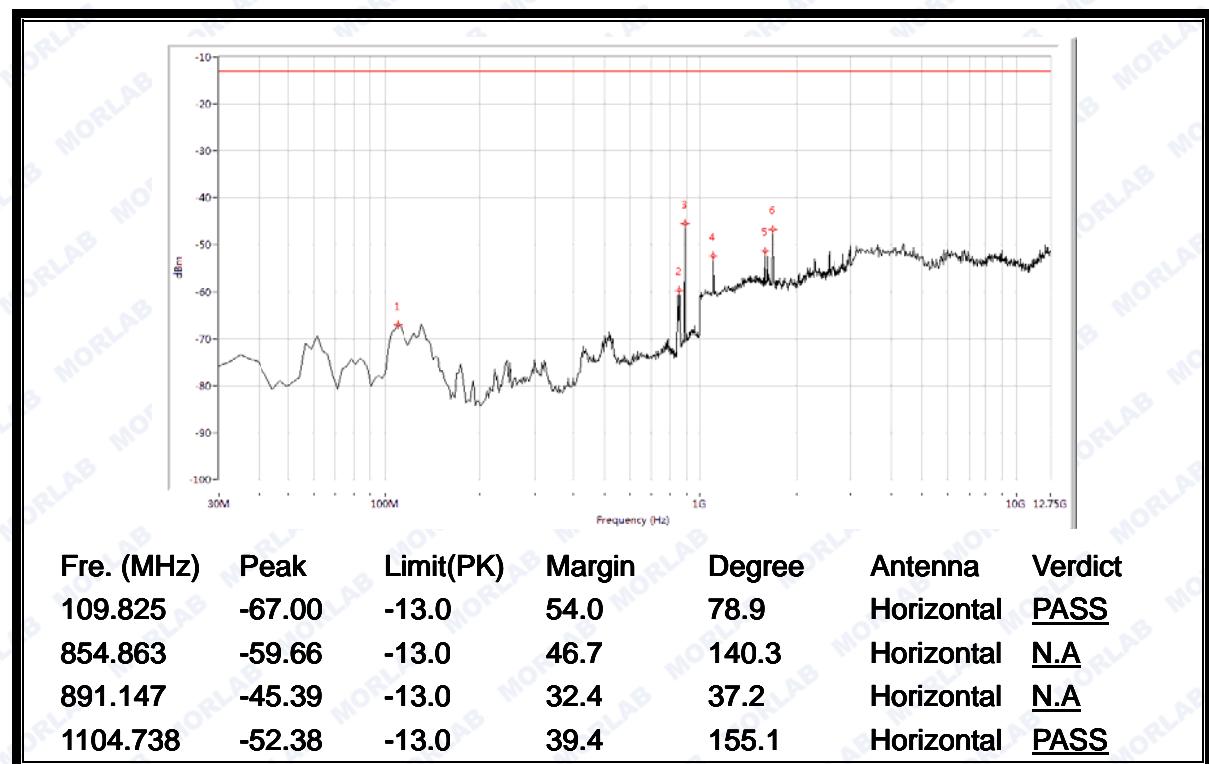


1598.504	-51.29	-13.0	38.3	158.1	Horizontal	PASS
1688.279	-46.79	-13.0	33.8	14.2	Horizontal	PASS

(Plot E.5: WCDMA 850MHz Channel = 4233, Test Antenna Horizontal)

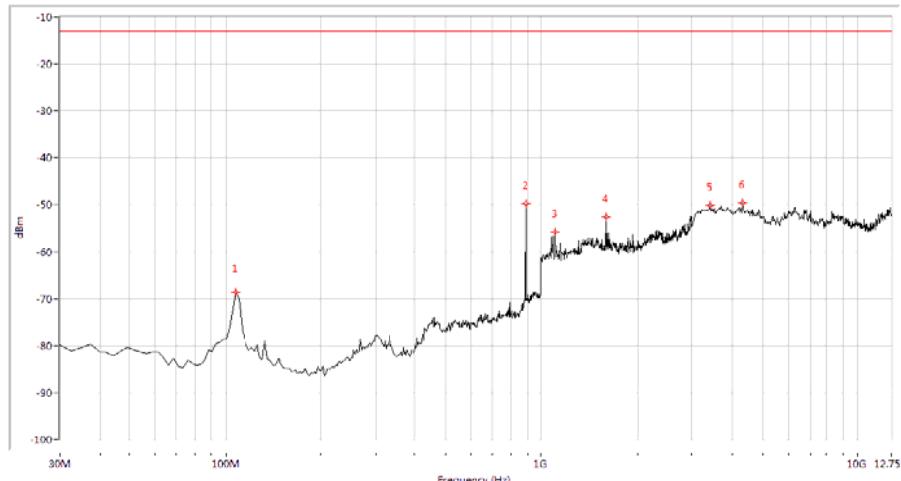


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
107.406	-68.58	-13.0	55.6	126.9	Vertical	PASS
888.728	-49.78	-13.0	36.8	259.0	Vertical	PASS
1109.726	-55.78	-13.0	42.8	152.2	Vertical	PASS
1598.504	-52.59	-13.0	39.6	10.5	Vertical	PASS
3413.342	-50.01	-13.0	37.0	233.4	Vertical	PASS
4312.968	-49.53	-13.0	36.5	208.4	Vertical	PASS

(Plot E.6: WCDMA 850MHz Channel = 4233, Test Antenna Vertical)

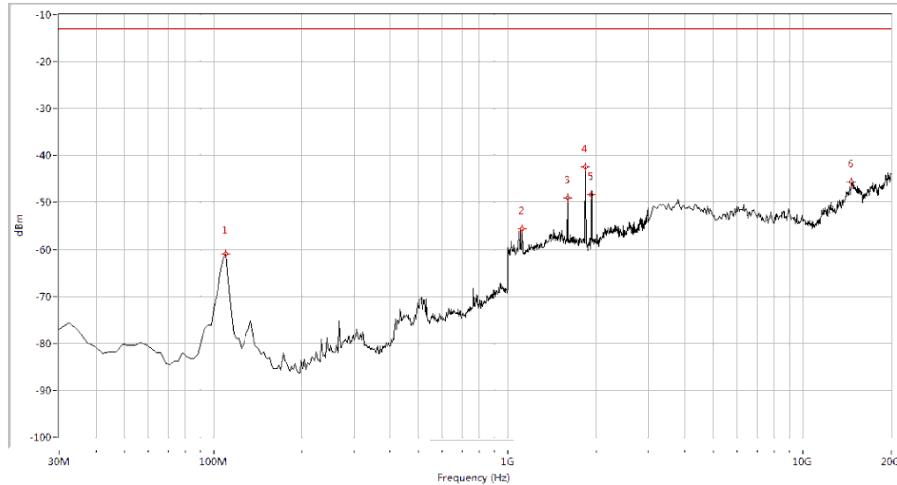


Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
109.825	-60.98	-13.0	48.0	257.6	Horizontal	<u>PASS</u>
1119.701	-55.66	-13.0	42.7	241.9	Horizontal	<u>PASS</u>
1598.504	-49.08	-13.0	36.1	327.9	Horizontal	<u>PASS</u>
1837.905	-42.48	-13.0	29.5	62.1	Horizontal	N.A
1927.681	-48.29	-13.0	35.3	236.3	Horizontal	N.A
14743.142	-45.63	-13.0	32.6	157.0	Horizontal	<u>PASS</u>


(Plot F.1: WCDMA 1900MHz Channel = 9262, Test Antenna Horizontal)

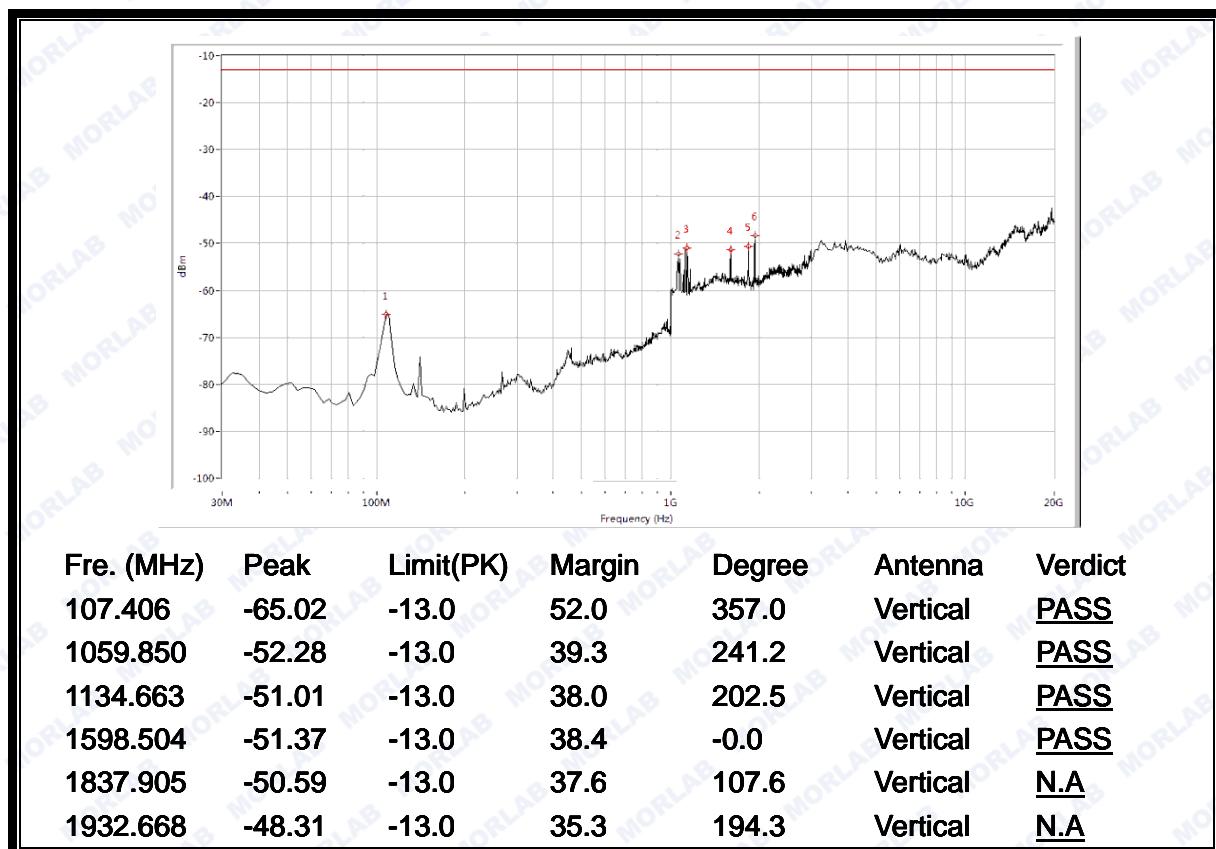


(Plot F.2: WCDMA 1900MHz Channel = 9262, Test Antenna Vertical)

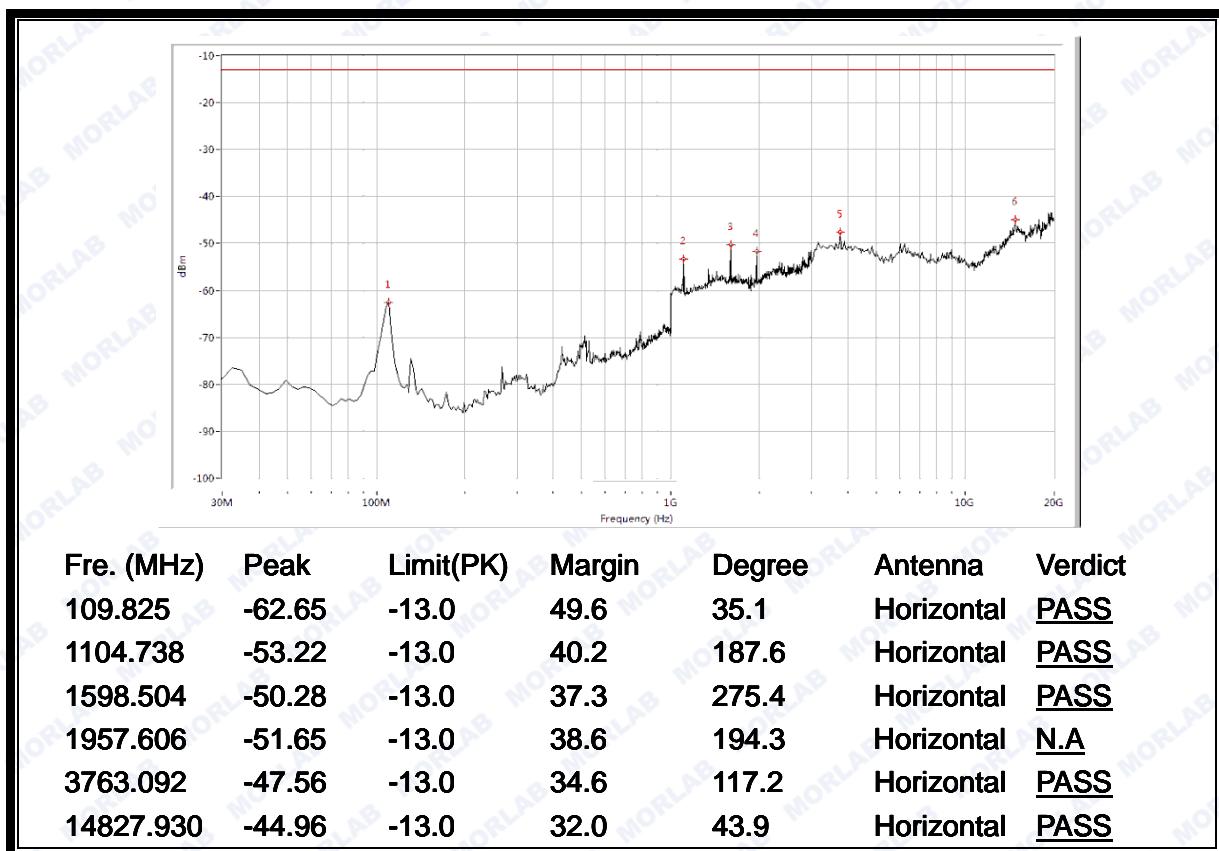

(Plot F.3: WCDMA 1900MHz Channel = 9400, Test Antenna Horizontal)

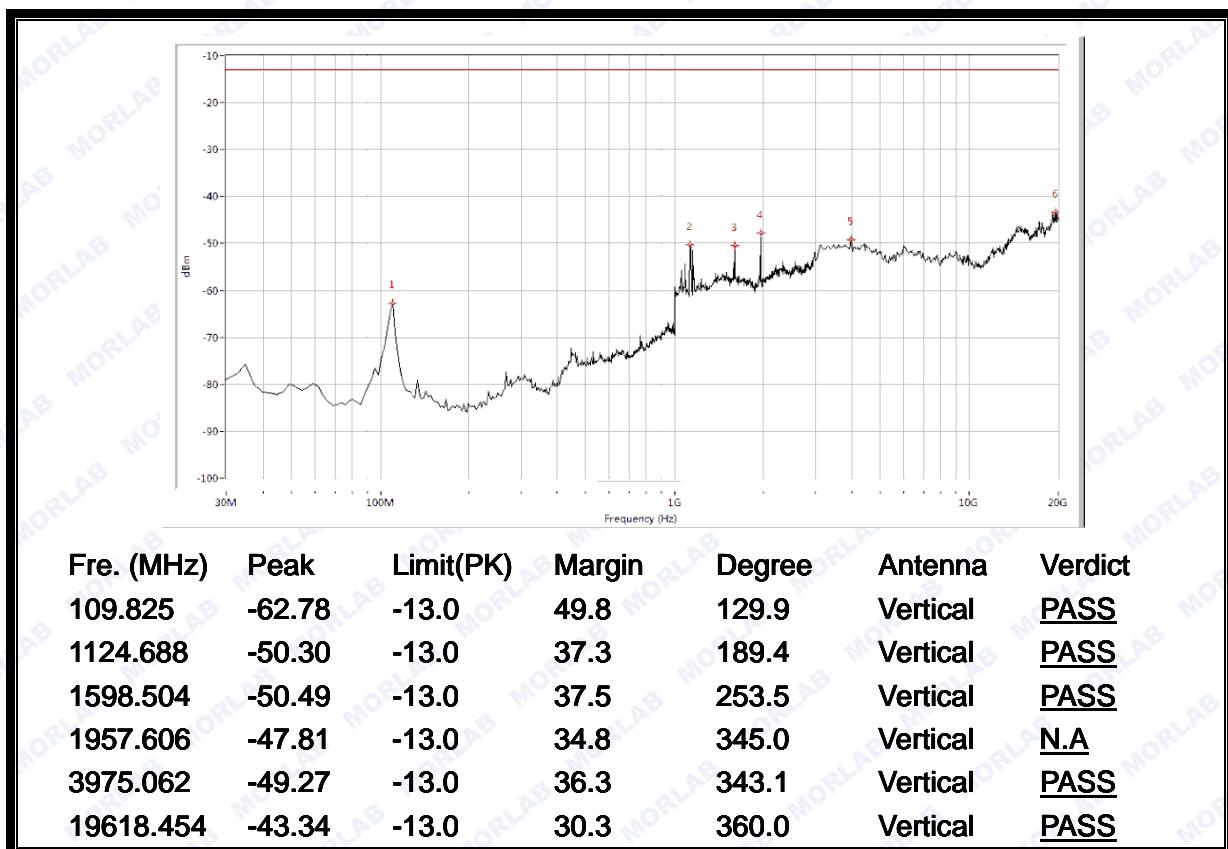


(Plot F.4: WCDMA 1900MHz Channel = 9400, Test Antenna Vertical)

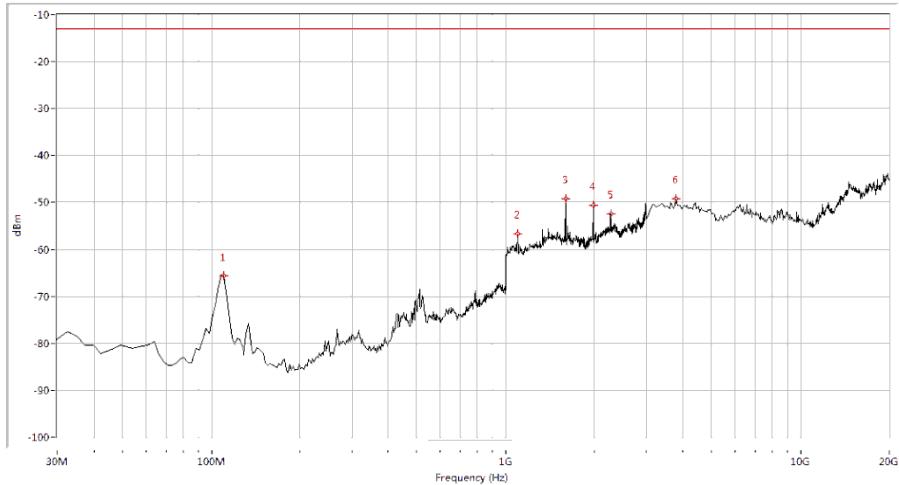

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
109.825	-65.63	-13.0	52.6	22.0	Horizontal	<u>PASS</u>
1094.763	-56.69	-13.0	43.7	224.8	Horizontal	<u>PASS</u>
1598.504	-49.29	-13.0	36.3	88.2	Horizontal	<u>PASS</u>
1987.531	-50.71	-13.0	37.7	339.8	Horizontal	N.A
2276.808	-52.49	-13.0	39.5	166.0	Horizontal	<u>PASS</u>
3805.486	-49.26	-13.0	36.3	107.6	Horizontal	<u>PASS</u>

(Plot F.5: WCDMA 1900MHz Channel = 9538, Test Antenna Horizontal)

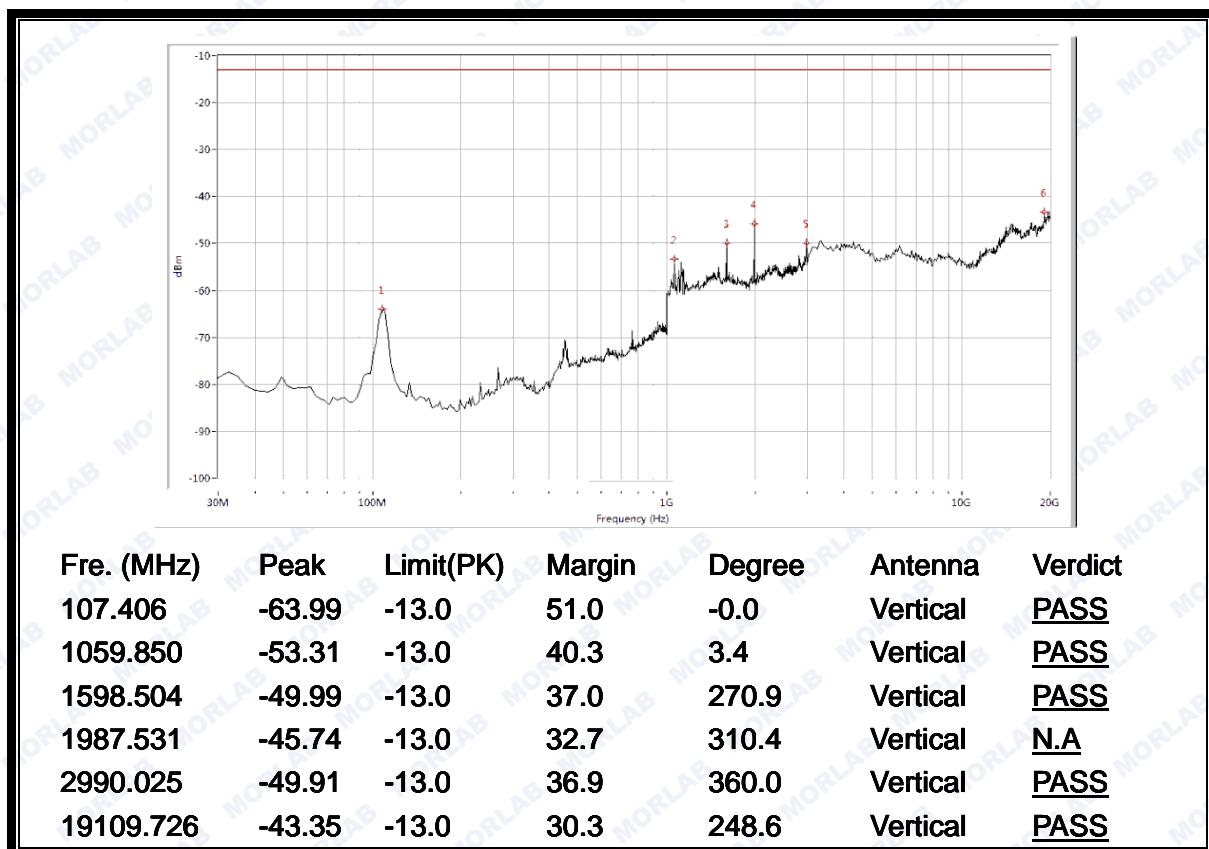

(Plot F.6: WCDMA 1900MHz Channel = 9538, Test Antenna Vertical)

***** END OF REPORT *****