

# Super Flexible, Super Fast, Super Value

## Gigabit PTMP Client and PTP With Modular Antennas

Building on the popular X-series family of modular directional antenna options for flexible distance deployments, the new rugged C6x sets a new bar for affordable speed and interference reduction. With the latest in Wi-Fi 6E OFDMA technologies, and access to new 6 GHz bands<sup>1</sup>, the C6x achieves extremely low latency speeds of up to 1.75 Gbps and high reliability with new noise fighting features. Supporting the Wi-Fi 5/6/6E standards, the C6x can be deployed as a standard Wi-Fi interoperable client, and provide smooth transitioning in the field for legacy Mimosa and standard Wi-Fi deployments. The C6x can be used as a PTMP (point-to-multipoint) client radio, or PTP<sup>2</sup> (point-to-point) backhaul.

### Integrated Radio with Modular Antenna Options

The C6x radio's native 8 dBi gain can be increased to 12, 16, 20 or 25 dBi using modular, X-series, twist-on antennas, offering the ease and simplicity of integrated radios, but with so much more flexibility.

### Noise Just Met Its Match


The link reliability of the C6x starts with the high isolation design of the X-series antennas—but there's so much more that's new. Based on Wi-Fi 6E OFDMA technologies, the C6x reduces in-band noise impact across the operating channel with dramatically smaller 2 MHz resource units (RU) sizes instead of legacy OFDM solutions, where any noise impacted the full channel.

### Incredible Speed and PTMP Scale

Previous OFDM technologies limited the scale of client deployments and the ability to deploy in dense, noisy areas. In PTMP client deployments, the C6x pairs together with new multi-user OFDMA scheduling and beamforming technologies on the A6 access point to enable massive subscriber scaling, advanced noise management, and access to the new low-noise 6 GHz band<sup>1</sup>.

### Carrier Grade

While the C6x rugged IP67 design is built to withstand the elements, carrier-grade management capabilities with Airspan ACP and MMP enable operators to deploy and monitor with ease. Together with next-gen RF noise fighting features and new low-noise 6 GHz band support, C6x leads the way in dependable connectivity.

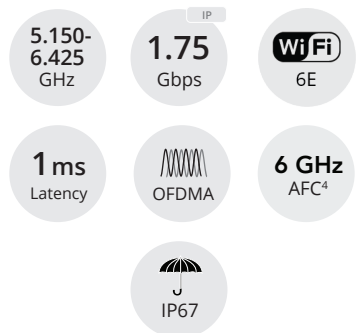

Need more information?  
Contact the Mimosa sales team by visiting [mimosa.co/contact-us](https://mimosa.co/contact-us).

# Specifications

## Performance

- **Max Throughput:**  
1.75 Gbps IP aggregate UL/DL (2402 Mbps PHY)
- **Wireless Protocols:**  
WiFi Interop; Auto-TDD (future release);  
PTMP TDMA (future release)
- **Modes:**  
Default mode:  
PTMP client, 1.75 Gbps  
  
License key purchase modes:  
PTP Backhaul<sup>2</sup>

## Radio

- **MIMO & Modulation:**  
2x2, PTMP MU-MIMO client support, OFDMA,  
BPSK-1024QAM
- **Bandwidth:**  
20/40/80/160 MHz channels, tunable to 5 MHz increments
- **Frequency Range:** PTP/PTMP: 5150–6425 MHz<sup>1 3</sup>  
(restricted by country of operation)
- **Max Output Power:** 27 dBm
- **Sensitivity (MCS 0):**  
-87 dBm @ 80 MHz  
-90 dBm @ 40 MHz  
-93 dBm @ 20 MHz

## Power

- **Max Power Consumption:** 20 W
- **System Power Method:**  
Passive PoE
- **PoE Power Supply:**  
Passive POE compliant, 48–56 V  
(PoE injector not included)

## Physical

- **Dimensions:**  
Height: 178mm (5")  
Width: 113mm (4.5")  
Depth: 67mm (2.6")
- **Weight:** 0.7 kg (1.54 lbs)
- **RF Connector Type:** X-series twist-on
- **Enclosure Characteristics:**  
Die-cast aluminum, UV stabilized paint, with outdoor UV  
stable plastic radome lens
- **Mounting:**  
Dual attached pole mount straps
- **Grounding:** Ground lug

## Environmental

- **Outdoor Ingress Protection Rating:** IP67
- **Operating Temperature:** -40°C to +55°C (-40°F to 131°F)
- **Operating Humidity:** 5 to 100% condensing
- **Operating Altitude:** 4,420 m (14,500') maximum
- **Shock and Vibration:** ETS 300-019-2-4 class 4M5

## Regulatory and Compliance

- **Approvals:**  
FCC Part 15.407; IC RSS210; CE (RED, EMCD, LVD, RoHS);  
ETSI 301 893/302 502
- **RoHS Compliance:** Yes
- **Safety:** EN 62638-1

## Features





- **Gigabit Ethernet:** 10/100/1000-BASE-T
- **Management Services:**  
MMP support; Netconf (future support); SNMPv2c/v3; Syslog;  
HTTPS; HTML 5 based Web GUI; IPv4 and IPv6
- **Smart Spectrum Management:**  
Active scan monitors/logs ongoing RF interference across all  
channels (no service impact); Dynamic auto-optimization of  
channel and bandwidth use
- **Security:** AES; RADIUS; 802.1x authorization
- **QoS:** WiFi Interop Mode WMM;  
SRS mode supports 4 user configurable QoS levels  
supporting both CBWFQ and PQ
- **VLAN:** Q-in-Q, double tagging, management VLAN, PTMP  
per client VLAN

<sup>1</sup> Outdoor 6 GHz availability varies by country regulations. USA/FCC may only allow PTMP client mode.

<sup>2</sup> Additional purchase of a PTP license key required for PTP operation.

<sup>3</sup> Automatic Frequency Coordination database support via firmware update, once formally approved by the FCC



### N5-X Modular Antenna Options

					
<b>Product</b>	C6x (no antenna)	N5-X12 (horn)	N5-X16 (horn)	N5-X20 (dish)	N5-X25 (dish)
<b>Gain</b>	8 dBi	12 dBi	16 dBi	20 dBi	25 dBi
<b>Polarization</b>	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°	Dual-slant 45°
<b>Beamwidth, Symmetric (3 dB)</b>	58°	38°	22°	12°	8°
<b>Front-to-Back Ratio (min)</b>	21 dB	29 dB	50 dB	35 dB	40 dB
<b>Front-to-Side Ratio (min)</b>	21 dB	27 dB	43 dB	37 dB	> 45 dB
<b>Weight</b>	0.7 kg (1.54 lbs)	0.16 kg (0.35 lbs)	0.61 kg (1.35 lbs)	0.77 kg (1.70 lbs)	0.98 kg (2.15 lbs)
<b>Dimensions</b>	Height: 178 mm (5") Width: 113 mm (4.5") Depth: 67 mm (2.6")	Diameter: 76 mm (2.99") Depth: 67 mm (2.63")	Diameter: 160 mm (6.29") Depth: 116 mm (4.57")	Diameter: 270 mm (10.63") Depth: 83 mm (3.27")	Diameter: 429 mm (16.89") Depth: 116 mm (4.57")
<b>Mount</b>	Dual-pole clamps	Mimosa N5-X twist-on	Mimosa N5-X twist-on	Mimosa N5-X twist-on	Mimosa N5-X twist-on
<b>Wind Survivability</b>	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)	200 km/h (125 mph)
<b>Wind Loading</b>	2.79 kg @ 160 km/h (6.14 lbs @ 100 mph)	3.27 kg @ 160 km/h (7.20 lbs @ 100 mph)	5.13 kg @ 160 km/h (11.30 lbs @ 100 mph)	14.55 @ 160 km/h (32.07 lbs @ 100 mph)	36.26 kg @ 160 km/h (79.95 lbs @ 100 mph)



### Polar Plots and Gain Across Frequencies





Native, Built-In (8 dBi)

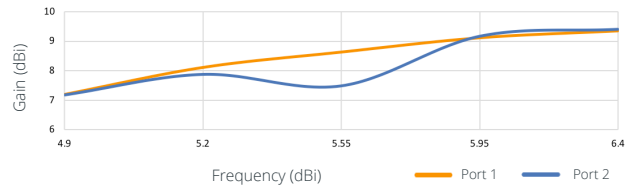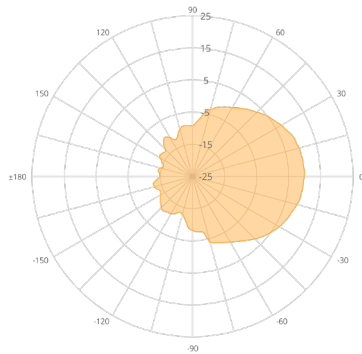



N5-X12 (12 dBi)

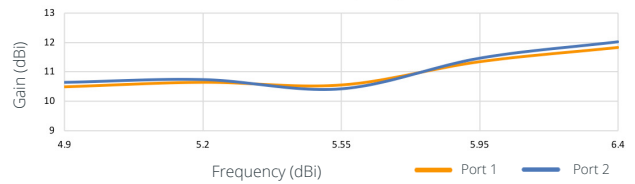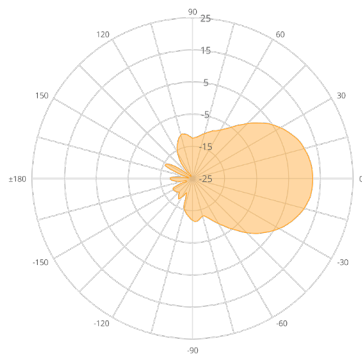



N5-X16 (16 dBi)

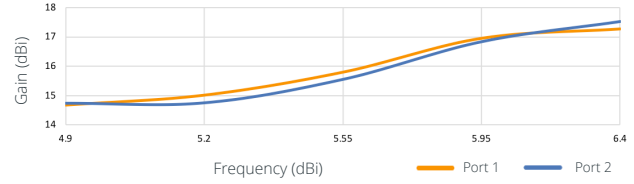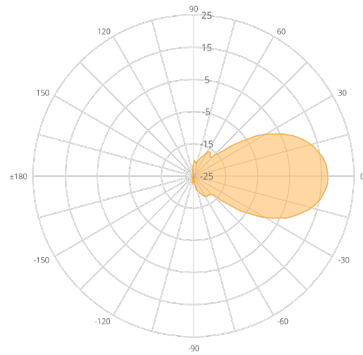

N5-X20 (20 dBi)

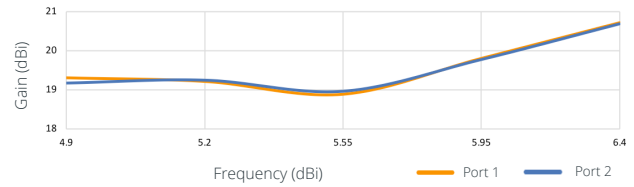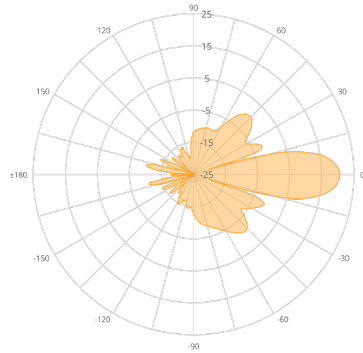

N5-X25 (25 dBi)

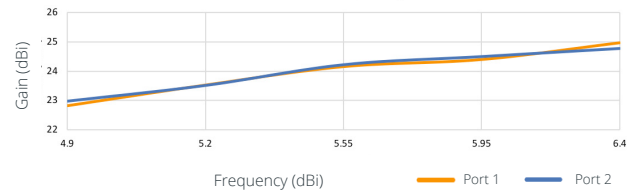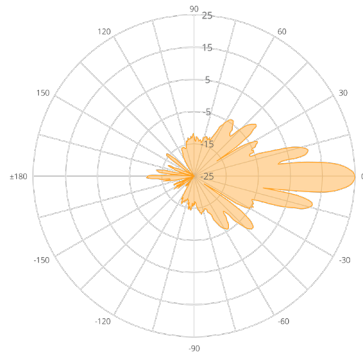

Mimosa, a product division of Airspan, is the global technology leader in wireless broadband solutions, enabling service providers to connect dense urban and hard-to-reach rural homes at a fraction of the cost of fiber. Mimosa was acquired in 2018 by Airspan Networks Holdings Inc. (NYSE American: MIMO), the award-winning, leading vendor of 5G software and hardware.