

FCC Radio Test Report

FCC ID: 2ABZMW185AP

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1502C010
Equipment : 1750M 11AC High Power Ceiling Access Point
Model Name : W185AP
Applicant : SHENZHEN IP-COM NETWORKS CO.,LTD.
Address : Room 101, Unit A, First Floor, Tower E3, No. 1001,
Zhongshanyuan Road, Nanshan District, Shenzhen,
China. 518052


Date of Receipt : Feb.02, 2015
Date of Test : Feb.02, 2015~Mar. 20, 2015
Issued Date : Mar. 23, 2015
Tested by : BTL Inc.

Testing Engineer :




(David Mao)

Technical Manager :

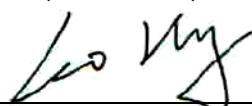

(Leo Hung)

Authorized Signatory :

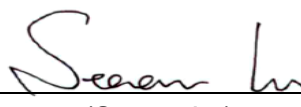

(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
3.5 DESCRIPTION OF SUPPORT UNITS	16
4 . EMC EMISSION TEST	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 POWER LINE CONDUCTED EMISSION	17
4.1.2 TEST PROCEDURE	17
4.1.3 DEVIATION FROM TEST STANDARD	17
4.1.4 TEST SETUP	18
4.1.5 EUT OPERATING CONDITIONS	18
4.1.6 EUT TEST CONDITIONS	18
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	20
4.2.5 EUT OPERATING CONDITIONS	21
4.2.6 EUT TEST CONDITIONS	21
4.2.7 TEST RESULTS (9K TO 30MHz)	22
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	22
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	22
5 . 26dB SPECTRUM BANDWIDTH	23
5.1 APPLIED PROCEDURES / LIMIT	23
5.1.1 TEST PROCEDURE	23
5.1.2 DEVIATION FROM STANDARD	23
5.1.3 TEST SETUP	23
5.1.4 EUT OPERATION CONDITIONS	23
5.1.5 EUT TEST CONDITIONS	24
5.1.6 TEST RESULTS	24
6 . MAXIMUM CONDUCTED OUTPUT POWER	25

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	25
6.1.1 TEST PROCEDURE	25
6.1.2 DEVIATION FROM STANDARD	26
6.1.3 TEST SETUP	26
6.1.4 EUT OPERATION CONDITIONS	26
6.1.5 EUT TEST CONDITIONS	26
6.1.6 TEST RESULTS	26
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	27
7.1 APPLIED PROCEDURES / LIMIT	27
7.1.1 TEST PROCEDURE	27
7.1.2 DEVIATION FROM STANDARD	27
7.1.3 TEST SETUP	27
7.1.4 EUT OPERATION CONDITIONS	27
7.1.5 EUT TEST CONDITIONS	27
7.1.6 TEST RESULTS	27
8 . POWER SPECTRAL DENSITY TEST	28
8.1 APPLIED PROCEDURES / LIMIT	28
8.1.1 TEST PROCEDURE	28
8.1.1 DEVIATION FROM STANDARD	29
8.1.2 TEST SETUP	29
8.1.3 EUT OPERATION CONDITIONS	29
8.1.4 EUT TEST CONDITIONS	29
8.1.5 TEST RESULTS	29
9 . FREQUENCY STABILITY MEASUREMENT	30
9.1 APPLIED PROCEDURES / LIMIT	30
9.1.1 TEST PROCEDURE	30
9.1.2 DEVIATION FROM STANDARD	30
9.1.3 TEST SETUP	31
9.1.4 EUT OPERATION CONDITIONS	31
9.1.5 EUT TEST CONDITIONS	31
9.1.6 TEST RESULTS	31
10 . MEASUREMENT INSTRUMENTS LIST	32
11 . EUT TEST PHOTOS	34
ATTACHMENT A - CONDUCTED EMISSION	42
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	45
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	47
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	60
ATTACHMENT E - BANDWIDTH	179

Table of Contents

Page

ATTACHMENT F - MAXIMUM OUTPUT POWER	202
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	215
ATTACHMENT H - POWER SPECTRAL DENSITY	248
ATTACHMENT I - FREQUENCY STABILITY	317

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1502C010	Original Issue.	Mar. 23, 2015

1. CERTIFICATION

Equipment : 1750M 11AC High Power Ceiling Access Point
Brand Name : IP-COM
Model Name : W185AP
Applicant : SHENZHEN IP-COM NETWORKS CO.,LTD.
Manufacturer: SHENZHEN IP-COM NETWORKS CO.,LTD.
Address : Room 101, Unit A, First Floor, Tower E3, No. 1001, Zhongshanyuan Road,
Nanshan District, Shenzhen, China. 518052
Date of Test : Feb. 02, 2015~Mar. 20, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407)
FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1502C010) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China. 523792
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%** ◦

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
DG-CB03	CISPR	9kHz~30MHz	V	3.79	
		9kHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	1750M 11AC High Power Ceiling Access Point	
Brand Name	IP-COM	
Model Name	W185AP	
Mode Different	N/A	
Product Description	For the information of EUT's HW version/SW version/ Serial number, please refer to the operation description file.	
	Operation Frequency	UNII-1: 5150-5250MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	1300Mbps
Output Power	Output Power (Max.)for UNII-1	802.11a: 16.05dBm 802.11n (20M): 20.76dBm 802.11n (40M): 17.98dBm 802.11ac (20M): 20.20dBm 802.11ac (40M): 19.14dBm 802.11ac (80M): 17.29dBm
	Output Power (Max.)for UNII-3	802.11a: 15.52dBm 802.11n (20M): 20.95dBm 802.11n (40M): 17.50dBm 802.11ac (20M): 20.17dBm 802.11ac (40M): 17.93dBm 802.11ac (80M): 17.38dBm
Power Source	DC Voltage Supplied from AC/DC adapter Brand/Model: GOSPELL DIGITAL TECHNOLOGY CO.,LTD/GP306A-510-125	
Power Rating	I/P: 100-240V ~1.5A MAX 50/60Hz O/P: 51V /1.25A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. The product will be sold with 2 kinds of base plates, the test results would not be affected by the appearance difference.

3. Channel List:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

4. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Internal	IpeX	3.00	5G
2	N/A	N/A	Internal	IpeX	3.00	5G
3	N/A	N/A	Internal	IpeX	3.00	5G

. Note:

- (1) The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and receivers (3T3R).
- (2) ANT 1 is the worst case for 1TX

5.

Operating Mode TX Mode	1TX	3TX
	802.11a	V (ANT 1)
802.11n (20MHz)	-	V (ANT 1+ ANT 2+ANT 3)
802.11n (40MHz)	-	V (ANT 1+ ANT 2+ANT 3)
802.11ac (20MHz)	-	V (ANT 1+ ANT 2+ANT 3)
802.11ac (40MHz)	-	V (ANT 1+ ANT 2+ANT 3)
802.11ac (80MHz)	-	V (ANT 1+ ANT 2+ANT 3)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149, CH157, CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149, CH157, CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151, CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149, CH157, CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151, CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)
Mode 13	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 13	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

UNII-1 - 1TX			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
A Mode	72	73	73

UNII-3 - 1TX			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
A Mode	72	72	66


UNII-1 - 3TX			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
N20 Mode	68	74	72
Frequency (MHz)	5190	5230	
N40 Mode	65	72	

UNII-3 - 3TX			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
N20 Mode	72	74	67
Frequency (MHz)	5755	5795	
N40 Mode	66	68	

UNII-1 - 3TX			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5180	5200	5240
AC20 Mode	68	74	72
Frequency (MHz)	5190	5230	
AC40 Mode	65	72	
Frequency (MHz)	5210		
AC80 Mode	66		

UNII-3 - 3TX			
Test Software Version	MTool_2.0.1.1		
Frequency (MHz)	5745	5785	5825
AC20 Mode	72	74	68
Frequency (MHz)	5755	5795	
AC40 Mode	66	68	
Frequency (MHz)	5775		
AC80 Mode	66		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

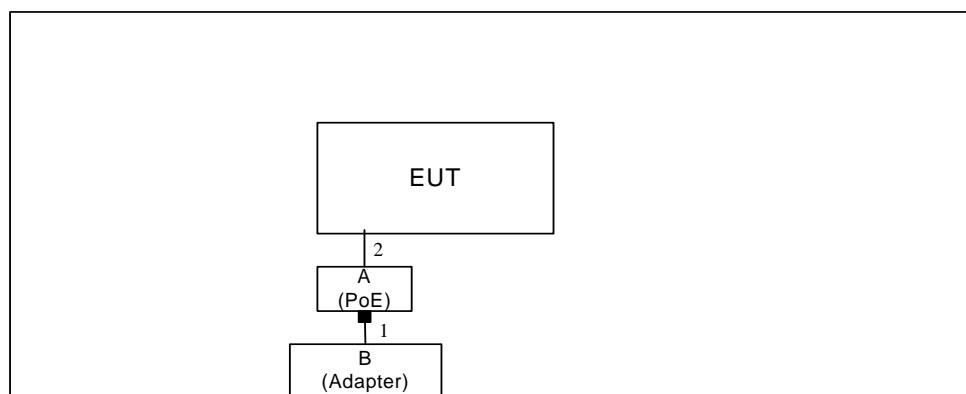

■ ferrite core

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	PoE	IP-COM	G10P	N/A	N/A	
B	Adapter	GOSPELL	GP306A-510-125	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	YES	1m	DC cable
2	NO	NO	1m	RJ45 cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

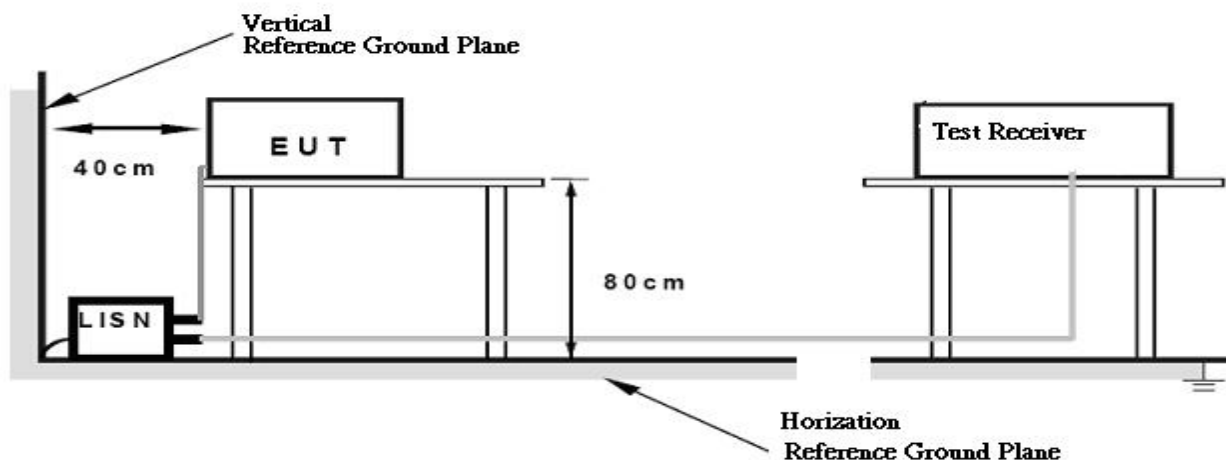

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 26°C Relative Humidity: 65% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note 』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (beyond 10MHz of the band edge)	68.3
	-17 (within 10 MHz of band edge)	78.3

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)

4.2.2 TEST PROCEDURE


- a. The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1GHz

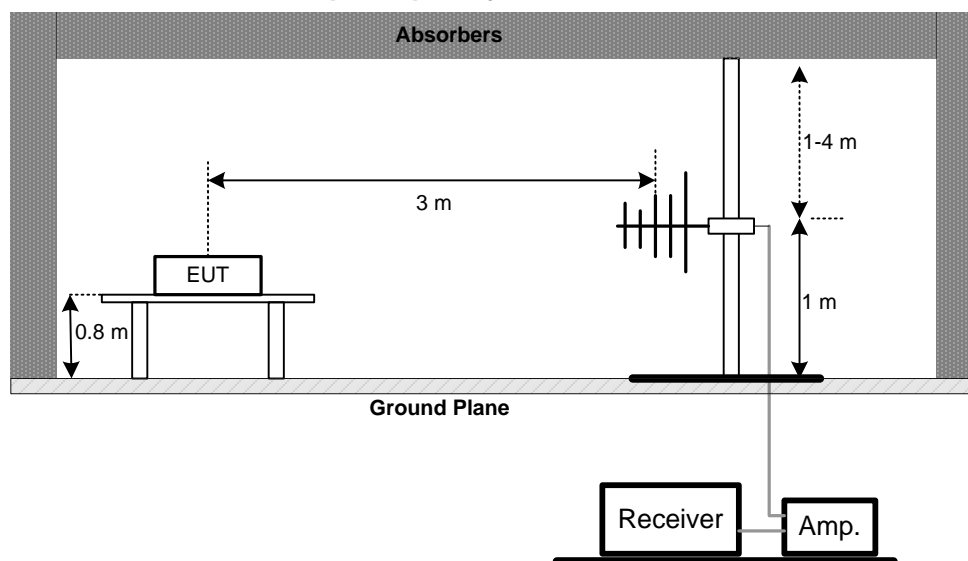

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

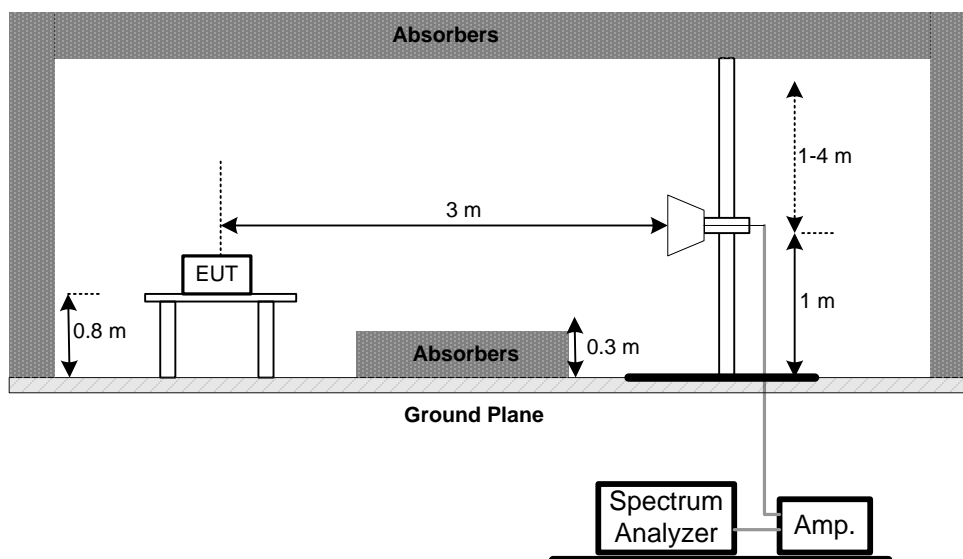

(C) Radiated emissions below 30MHz

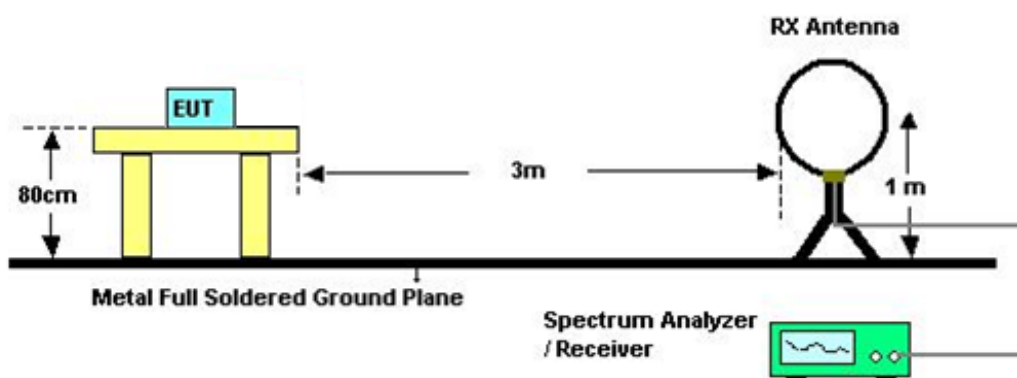

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 27°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log$ (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120kHz ; SPA setting in RBW=120kHz, VBW =120kHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Spectrum Setting: 30MHz – 1000MHz , RBW= 100kHz, VBW=100kHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (7) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (8) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 27°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)	5150-5250	PASS
	1 Watt (30dBm)	5725-5850	PASS
Note: The maximum e.i.r.p at anyelevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)			

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	\geq 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

- c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

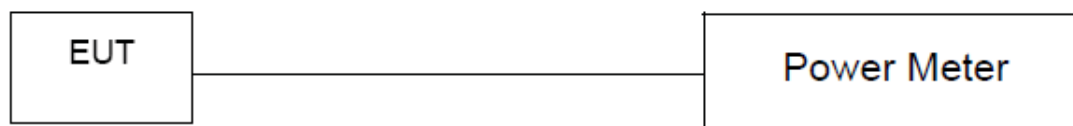

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 27°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27dBm/MHz	5150-5250	PASS
	Below -17dBm/MHz within 10MHz of band edge, below -27dBm/MHz beyond 10MHz of the band edge	5725-5850	PASS

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
RBW	1000kHz
VBW	1000kHz
Trace	Max Hold
Sweep Time	Auto

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 27°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

8.1.1 DEVIATION FROM STANDARD

No deviation.

8.1.2 TEST SETUP



8.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.4 EUT TEST CONDITIONS

Temperature: 27°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

8.1.5 TEST RESULTS

Please refer to the Attachment H.

9. FREQUENCY STABILITY MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
FSpecified in the user's manual Specified in the user's manual frequency Stability	Specified in the user's manual	5150-5250	PASS
		5725-5850	PASS

9.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is 0°C~40°C.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

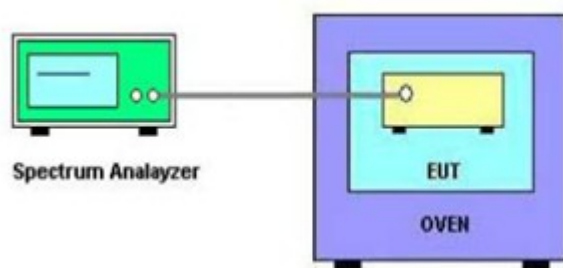

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Attachment I.

10. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	100087	Mar. 28, 2016
3	Test Cable	N/A	C_17	N/A	Mar. 13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Mar. 28, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 01, 2015
5	Controller	CT	SC100	N/A	N/A
6	Antenna	ETS	3115	00075789	Mar. 28, 2016
7	Amplifier	Agilent	8449B	3008A02274	Mar. 28, 2016
8	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015
9	Test Cable	HUBER+SUHNER	C-48	N/A	Apr. 30, 2015
10	Controller	CT	SC100	N/A	N/A
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Feb. 21, 2016
12	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 21, 2016
13	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 28, 2016
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 28, 2016
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 28, 2016
3	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015


Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May. 24, 2015

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

11. EUT TEST PHOTOS


Conducted Measurement Photos

High base plate

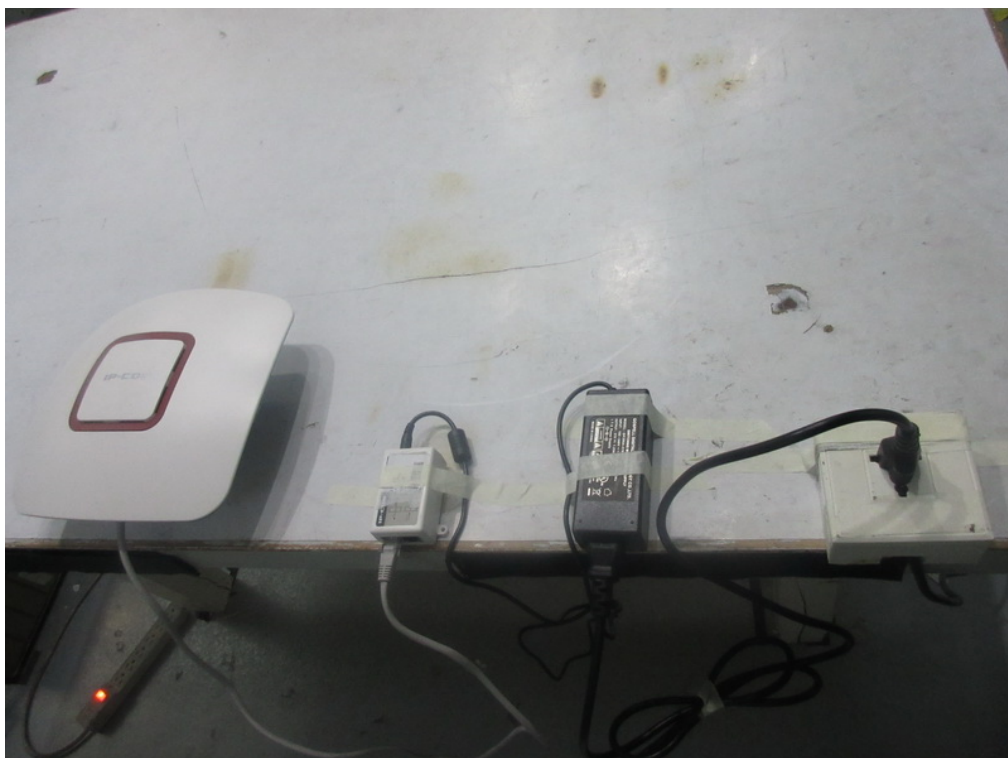

Conducted Measurement Photos

Low base plate

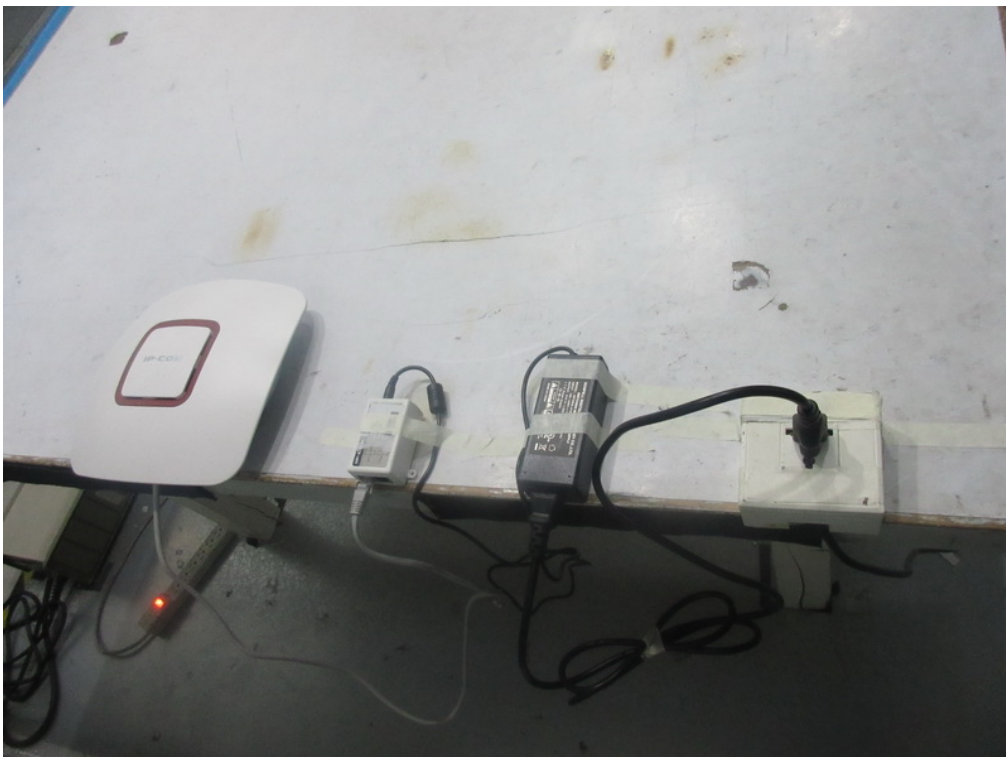


Radiated Measurement Photos

High base plate
9KHz to 30MHz



Radiated Measurement Photos

High base plate
30MHz to 1000MHz

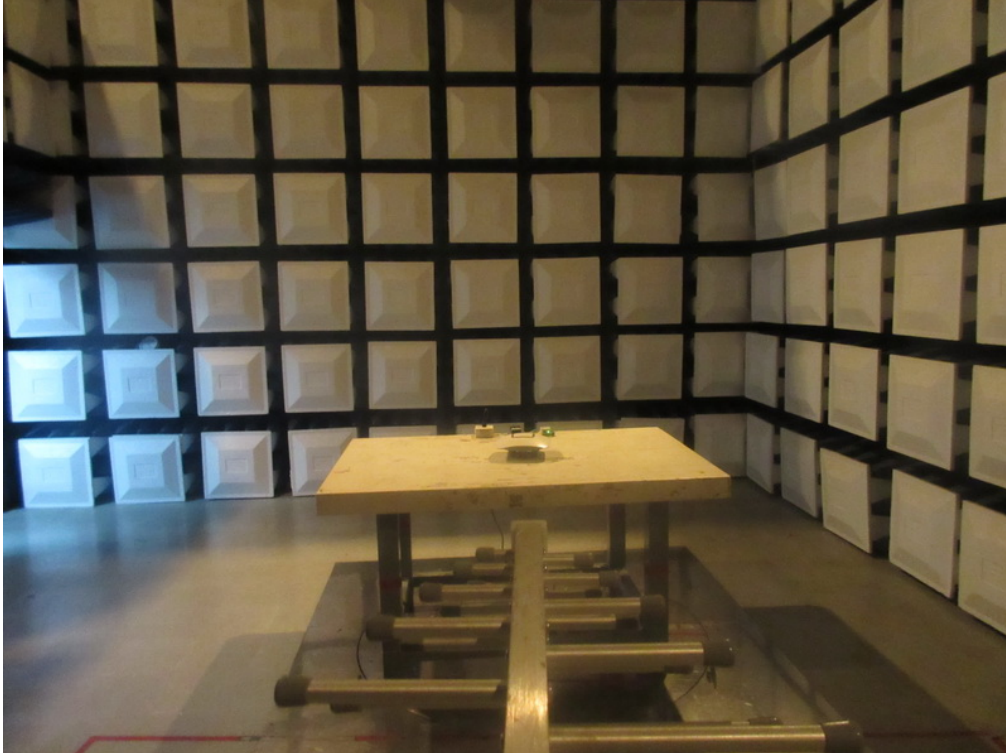


Radiated Measurement Photos

High base plate
Above 1000MHz




Radiated Measurement Photos

Low base plate
9KHz to 30MHz

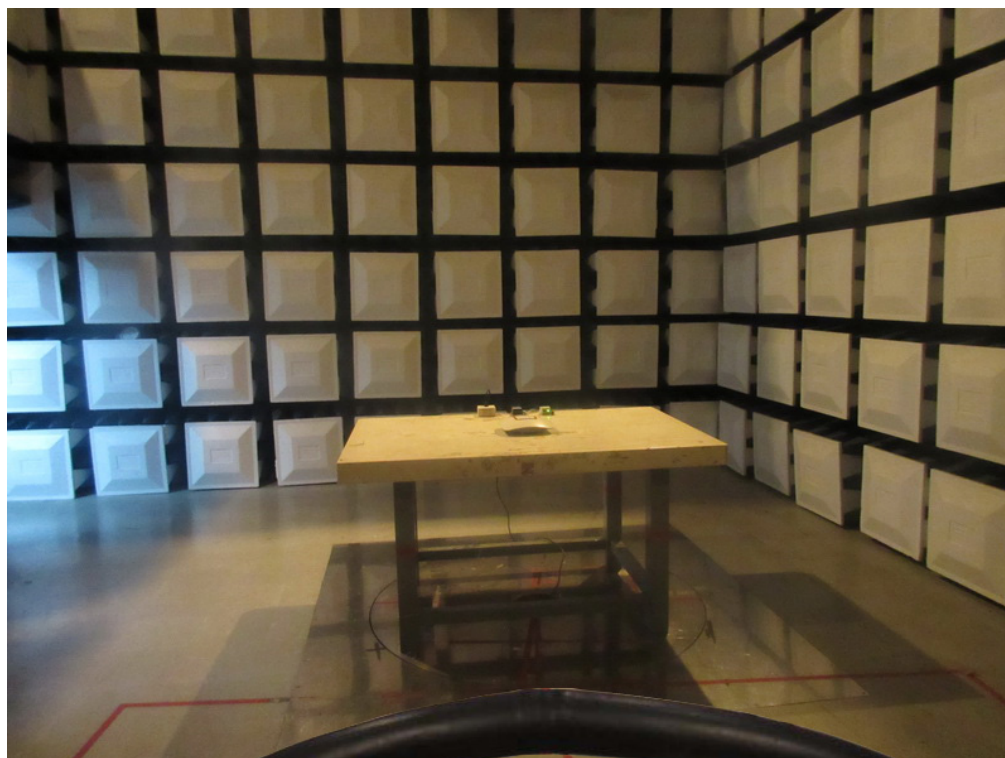

Radiated Measurement Photos

Low base plate
30MHz to 1000MHz

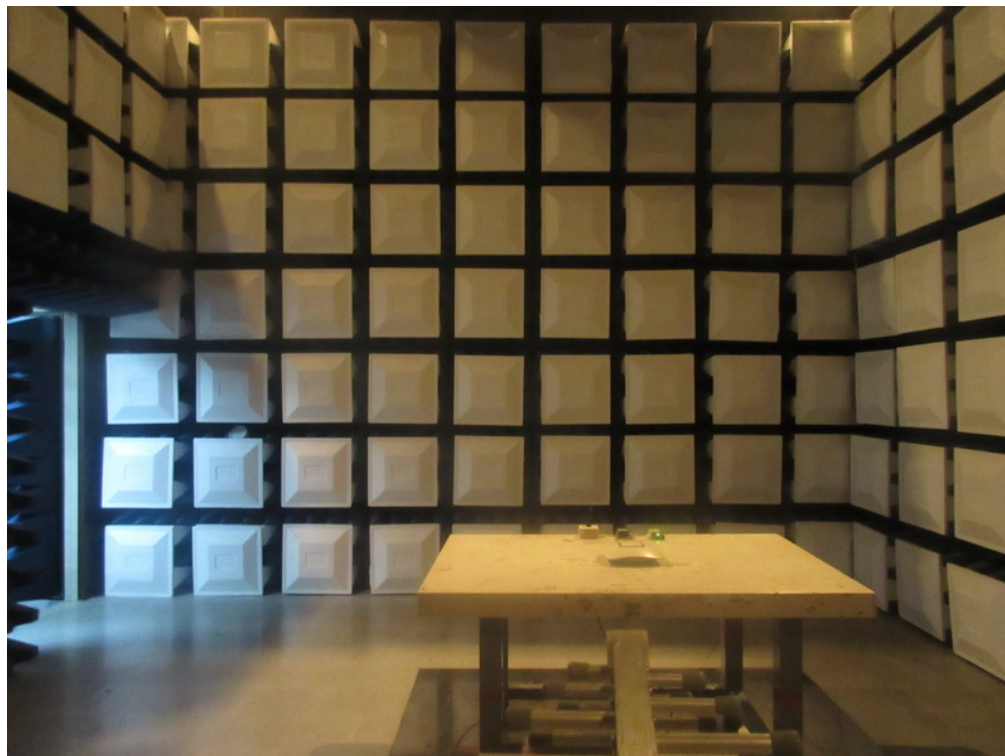

Radiated Measurement Photos


Low base plate
Above 1000MHz



ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX MODE

Line

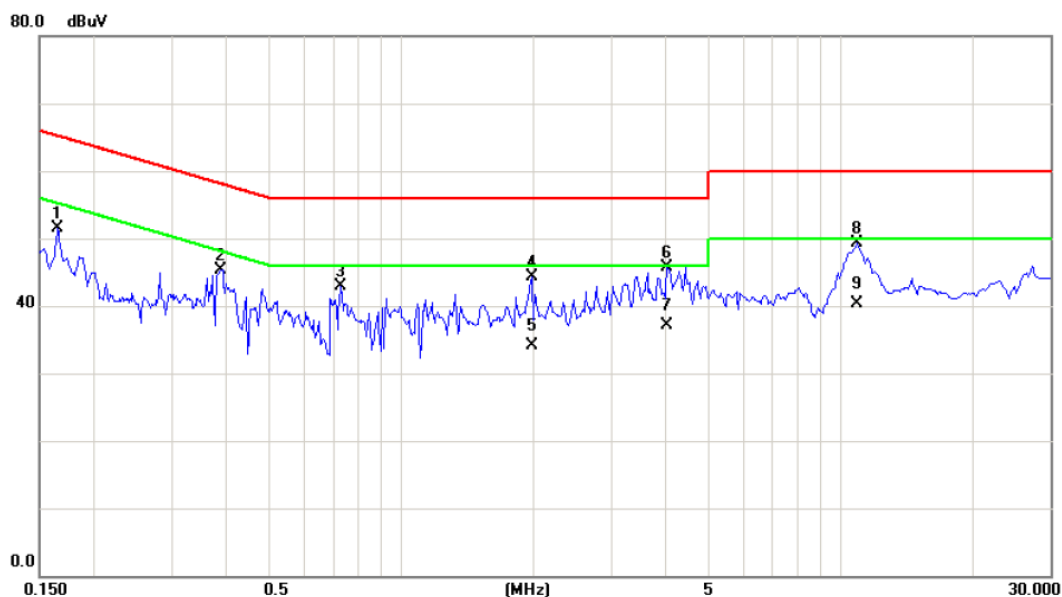


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1655	41.93	9.49	51.42	65.18	-13.76	peak	
2		0.3881	35.73	9.59	45.32	58.10	-12.78	peak	
3		0.7280	33.40	9.56	42.96	56.00	-13.04	peak	
4		1.9780	34.65	9.60	44.25	56.00	-11.75	peak	
5		1.9780	24.59	9.60	34.19	46.00	-11.81	AVG	
6		4.0312	36.04	9.64	45.68	56.00	-10.32	peak	
7	*	4.0312	27.54	9.64	37.18	46.00	-8.82	AVG	
8		10.8750	39.50	9.81	49.31	60.00	-10.69	peak	
9		10.8750	30.54	9.81	40.35	50.00	-9.65	AVG	

Note : The test result has included the cable loss.

Test Mode : TX MODE

Neutral

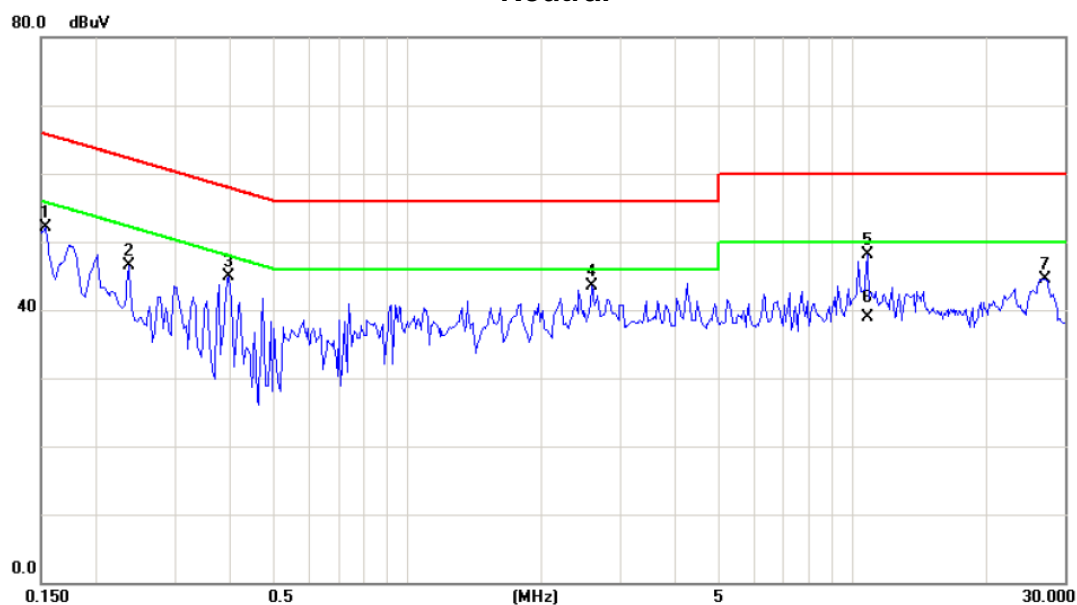

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	42.47	9.59	52.06	65.78	-13.72	peak	
2		0.2360	36.86	9.57	46.43	62.24	-15.81	peak	
3		0.3960	35.35	9.58	44.93	57.94	-13.01	peak	
4		2.5992	33.78	9.64	43.42	56.00	-12.58	peak	
5		10.7850	38.33	9.81	48.14	60.00	-11.86	peak	
6	*	10.7850	29.15	9.81	38.96	50.00	-11.04	AVG	
7		27.0350	34.13	10.41	44.54	60.00	-15.46	peak	

Note : The test result has included the cable loss.

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX MODE
------------	---------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0087	0°	12.87	25.01	37.88	108.79	-70.91	AVG
0.0087	0°	14.28	25.01	39.29	128.79	-89.50	PEAK
0.0349	0°	5.85	23.36	29.21	96.75	-67.54	AVG
0.0349	0°	8.05	23.36	31.41	116.75	-85.34	PEAK
0.0521	0°	4.04	22.36	26.40	93.27	-66.87	AVG
0.0521	0°	5.87	22.36	28.23	113.27	-85.04	PEAK
0.0687	0°	1.05	22.03	23.08	90.87	-67.79	AVG
0.0687	0°	3.17	22.03	25.20	110.87	-85.67	PEAK
0.9520	0°	31.58	19.79	51.37	68.03	-16.66	QP
8.6970	0°	22.97	17.90	40.87	69.54	-28.67	QP


Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0057	90°	12.52	24.30	36.82	132.49	-95.67	AVG
0.0057	90°	14.52	24.30	38.82	152.49	-113.67	PEAK
0.0128	90°	7.15	24.30	31.45	125.46	-94.01	AVG
0.0128	90°	9.04	24.30	33.34	145.46	-112.12	PEAK
0.0443	90°	4.27	22.76	27.03	114.68	-87.65	AVG
0.0443	90°	6.28	22.76	29.04	134.68	-105.64	PEAK
0.0752	90°	1.17	21.90	23.07	110.08	-87.01	AVG
0.0752	90°	3.21	21.90	25.11	130.08	-104.97	PEAK
2.5870	90°	31.74	19.15	50.89	69.54	-18.65	QP
8.2590	90°	22.54	17.94	40.48	69.54	-29.06	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz

Vertical


80 dBuV/m

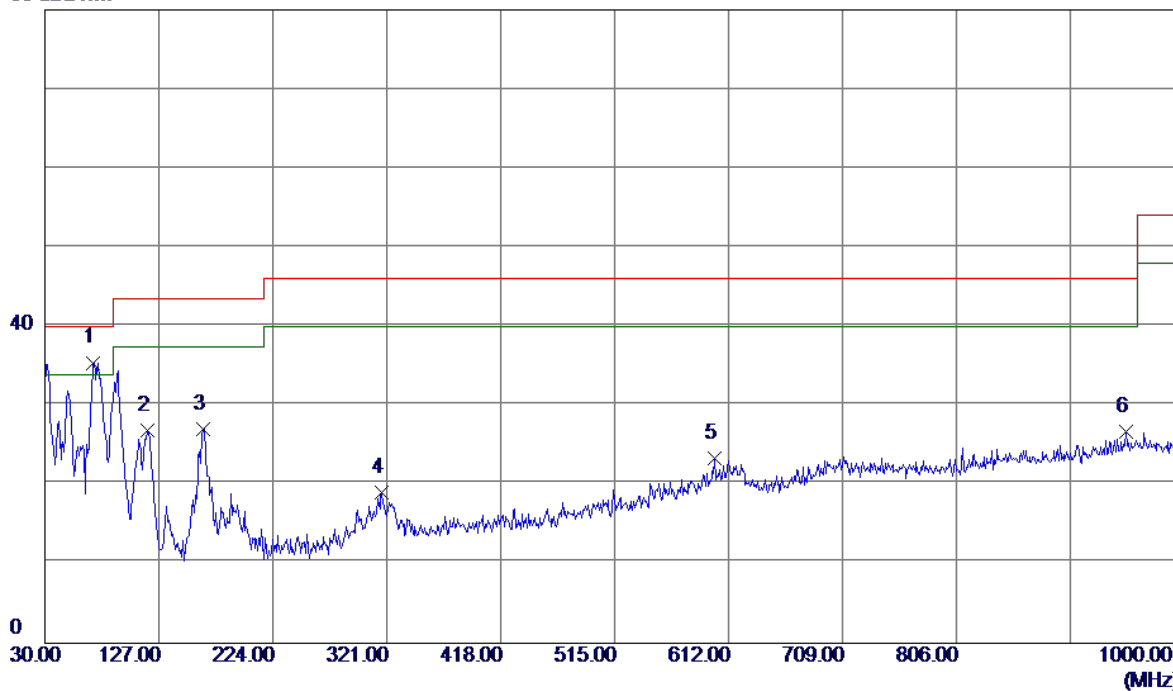

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	70.7400	58.88	-23.44	35.44	40.00	-4.56	Peak	
2	117.3000	49.04	-22.23	26.81	43.50	-16.69	Peak	
3	164.8300	48.86	-21.76	27.10	43.50	-16.40	Peak	
4	317.1200	34.53	-15.45	19.08	46.00	-26.92	Peak	
5	600.3600	31.84	-8.51	23.33	46.00	-22.67	Peak	
6	950.5300	29.92	-3.22	26.70	46.00	-19.30	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz


Horizontal

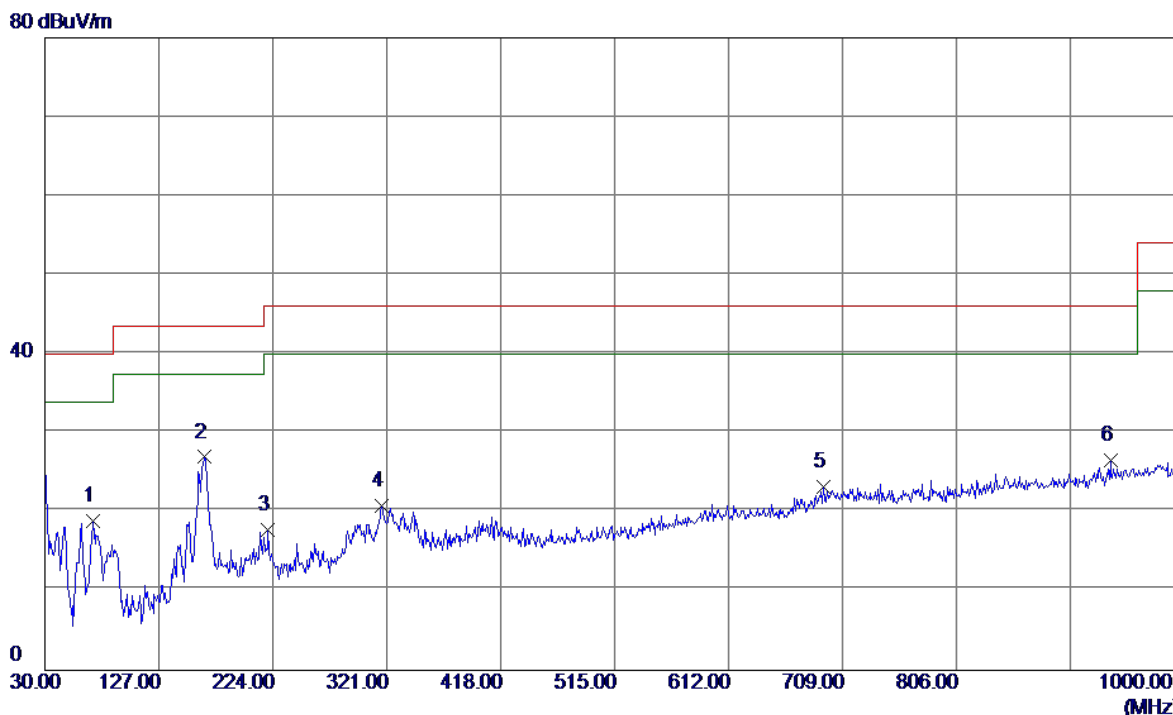

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	70.7400	42.32	-23.44	18.88	40.00	-21.12	Peak	
2	165.8000	48.67	-21.71	26.96	43.50	-16.54	Peak	
3	220.1200	36.40	-18.66	17.74	46.00	-28.26	Peak	
4	317.1200	36.18	-15.45	20.73	46.00	-25.27	Peak	
5	692.5100	29.85	-6.60	23.25	46.00	-22.75	Peak	
6	936.9500	30.24	-3.61	26.63	46.00	-19.37	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz


Vertical

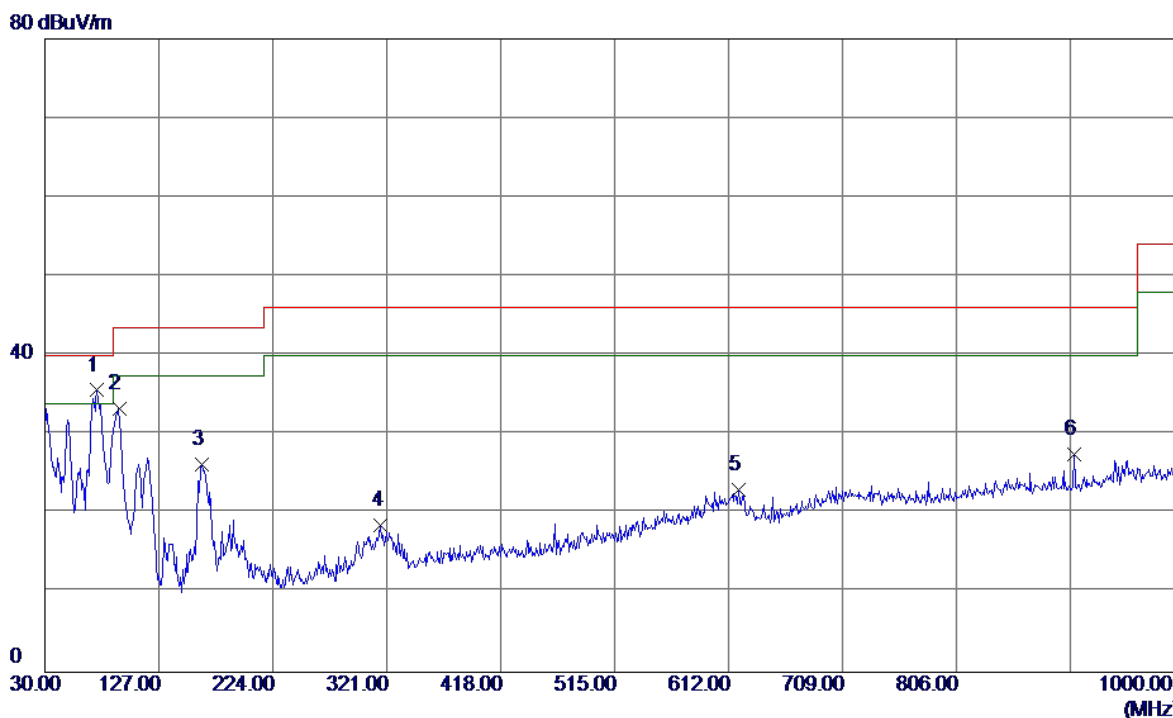

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	74.6200	58.81	-23.21	35.60	40.00	-4.40	Peak	
2	93.0500	55.13	-21.85	33.28	43.50	-10.22	Peak	
3	163.8600	48.06	-21.80	26.26	43.50	-17.24	Peak	
4	316.1500	34.13	-15.51	18.62	46.00	-27.38	Peak	
5	620.7300	31.48	-8.46	23.02	46.00	-22.98	Peak	
6	905.9100	32.10	-4.54	27.56	46.00	-18.44	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz


Horizontal

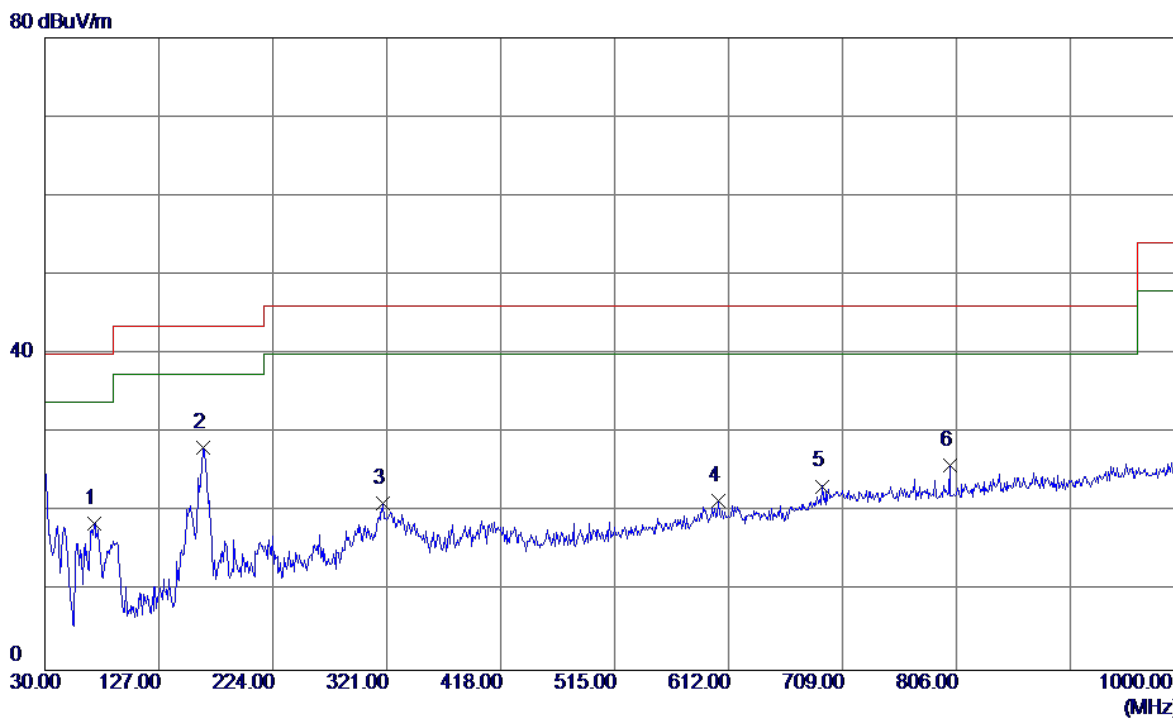

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	41.90	-23.38	18.52	40.00	-21.48	Peak	
2	164.8300	49.92	-21.76	28.16	43.50	-15.34	Peak	
3	318.0900	36.46	-15.39	21.07	46.00	-24.93	Peak	
4	603.2700	29.92	-8.50	21.42	46.00	-24.58	Peak	
5	691.5400	29.92	-6.64	23.28	46.00	-22.72	Peak	
6	800.1800	31.98	-6.12	25.86	46.00	-20.14	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz


Vertical

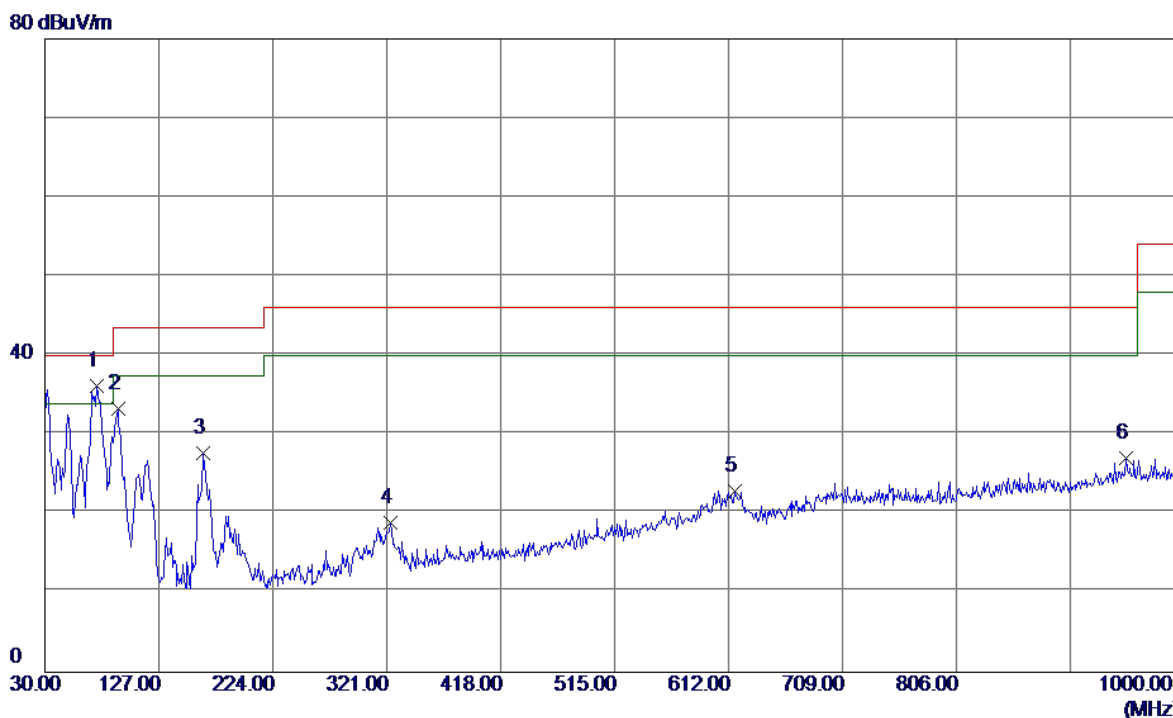

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	74.6200	59.35	-23.21	36.14	40.00	-3.86	Peak	
2	92.0800	55.16	-21.91	33.25	43.50	-10.25	Peak	
3	164.8300	49.40	-21.76	27.64	43.50	-15.86	Peak	
4	323.9100	34.00	-15.17	18.83	46.00	-27.17	Peak	
5	617.8200	31.29	-8.47	22.82	46.00	-23.18	Peak	
6	950.5300	30.24	-3.22	27.02	46.00	-18.98	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz

Horizontal

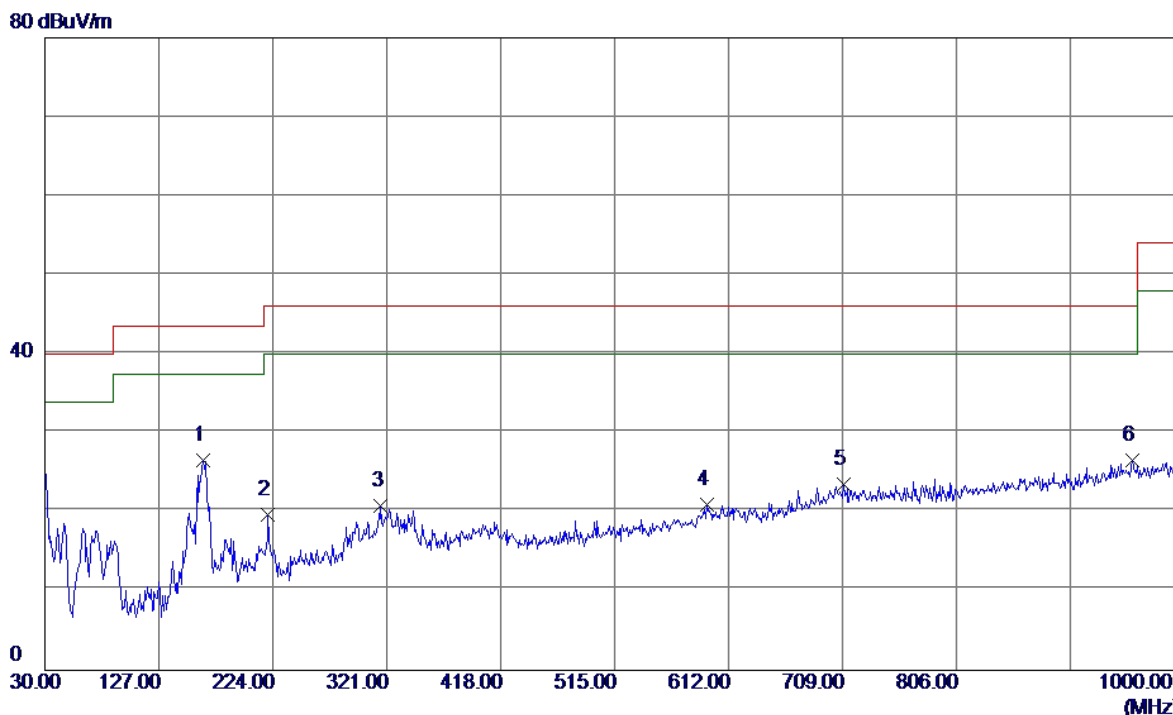


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	164.8300	48.34	-21.76	26.58	43.50	-16.92	Peak	
2	220.1200	38.32	-18.66	19.66	46.00	-26.34	Peak	
3	316.1500	36.37	-15.51	20.86	46.00	-25.14	Peak	
4	593.5700	29.72	-8.75	20.97	46.00	-25.03	Peak	
5	709.9699	29.84	-6.29	23.55	46.00	-22.45	Peak	
6	955.3800	29.74	-3.20	26.54	46.00	-19.46	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz

Vertical


80 dBuV/m

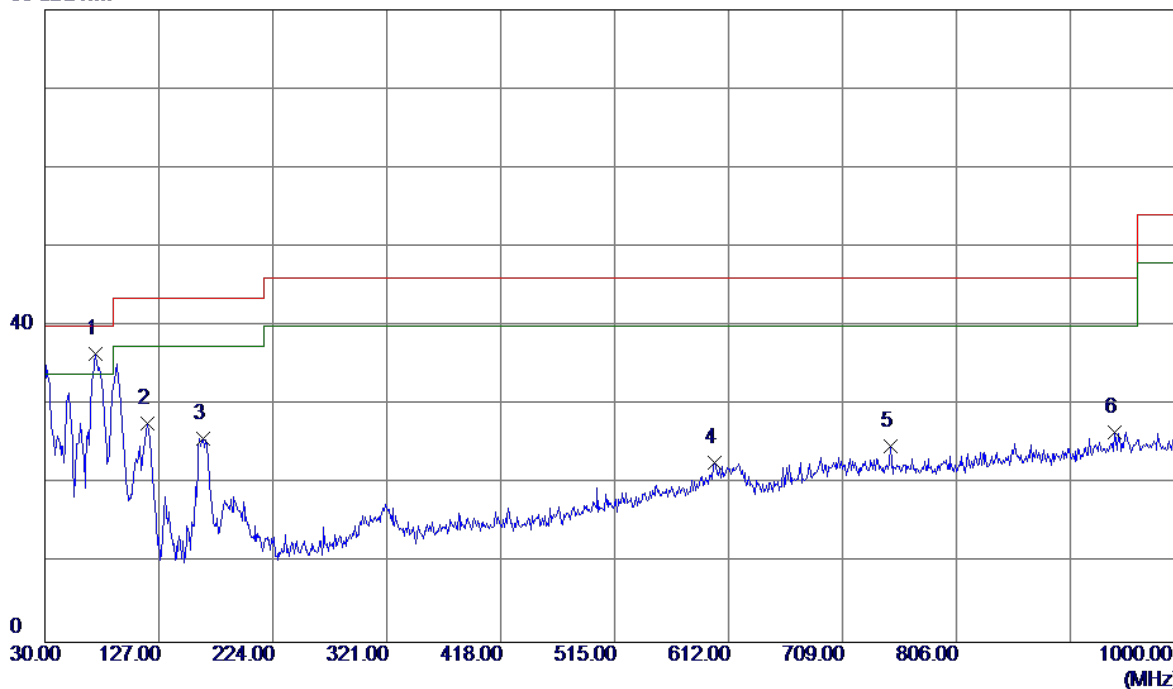

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	72.6800	59.86	-23.32	36.54	40.00	-3.46	Peak	
2	117.3000	49.89	-22.23	27.66	43.50	-15.84	Peak	
3	164.8300	47.55	-21.76	25.79	43.50	-17.71	Peak	
4	600.3600	31.17	-8.51	22.66	46.00	-23.34	Peak	
5	749.7400	31.09	-6.34	24.75	46.00	-21.25	Peak	
6	940.8300	30.10	-3.50	26.60	46.00	-19.40	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz

Horizontal

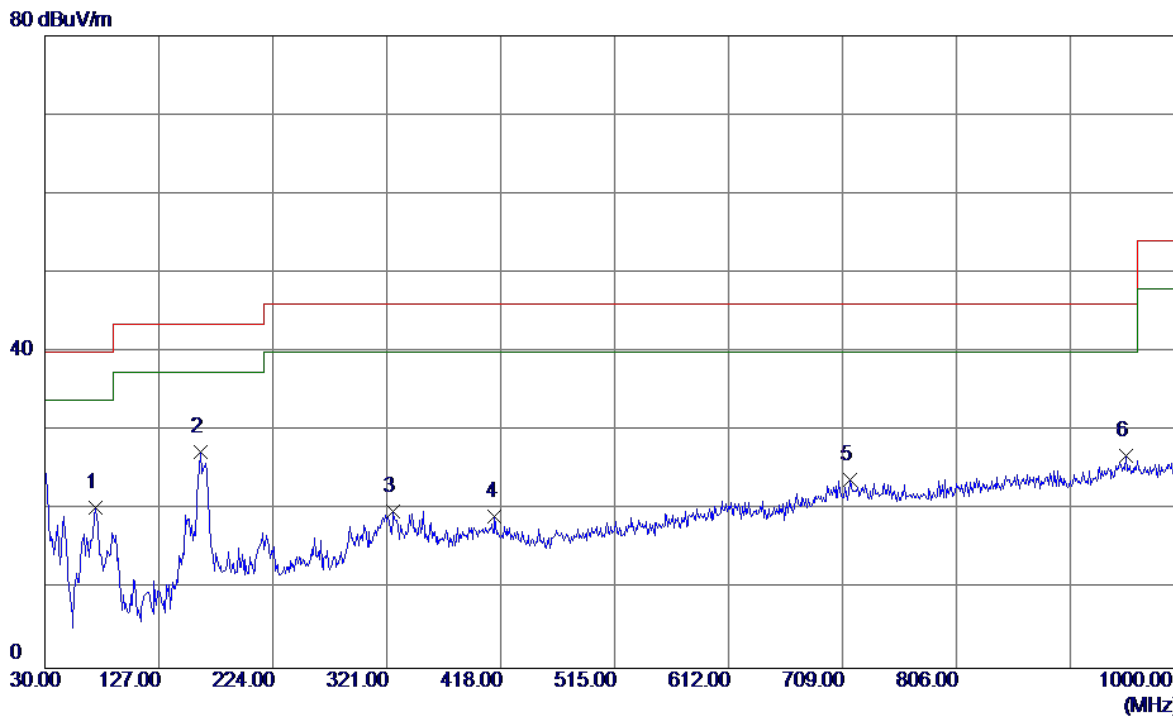


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	72.6800	43.70	-23.32	20.38	40.00	-19.62	Peak	
2	162.8900	49.18	-21.85	27.33	43.50	-16.17	Peak	
3	326.8200	34.91	-15.09	19.82	46.00	-26.18	Peak	
4	413.1500	32.42	-13.23	19.19	46.00	-26.81	Peak	
5	715.7900	30.10	-6.30	23.80	46.00	-22.20	Peak	
6	950.5300	30.03	-3.22	26.81	46.00	-19.19	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz

Vertical


80 dBuV/m

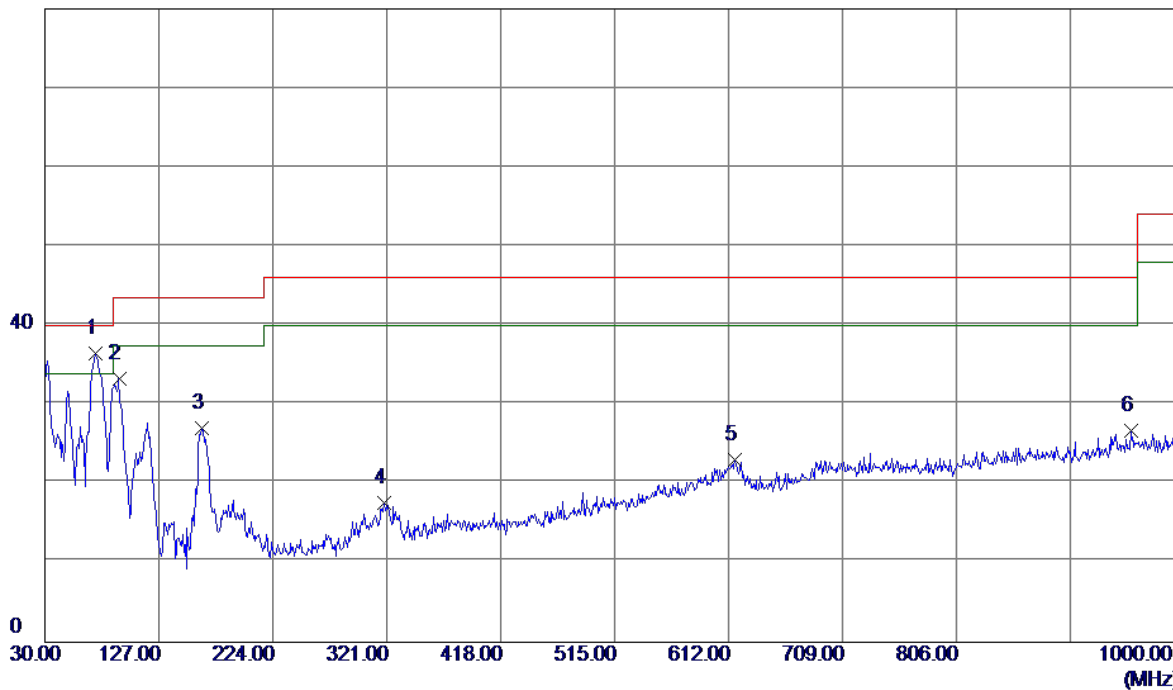

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	72.6800	59.73	-23.32	36.41	40.00	-3.59	Peak	
2	93.0500	55.18	-21.85	33.33	43.50	-10.17	Peak	
3	163.8600	48.88	-21.80	27.08	43.50	-16.42	Peak	
4	319.0600	33.01	-15.34	17.67	46.00	-28.33	Peak	
5	617.8200	31.52	-8.47	23.05	46.00	-22.95	Peak	
6	954.4100	29.95	-3.20	26.75	46.00	-19.25	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz


Horizontal

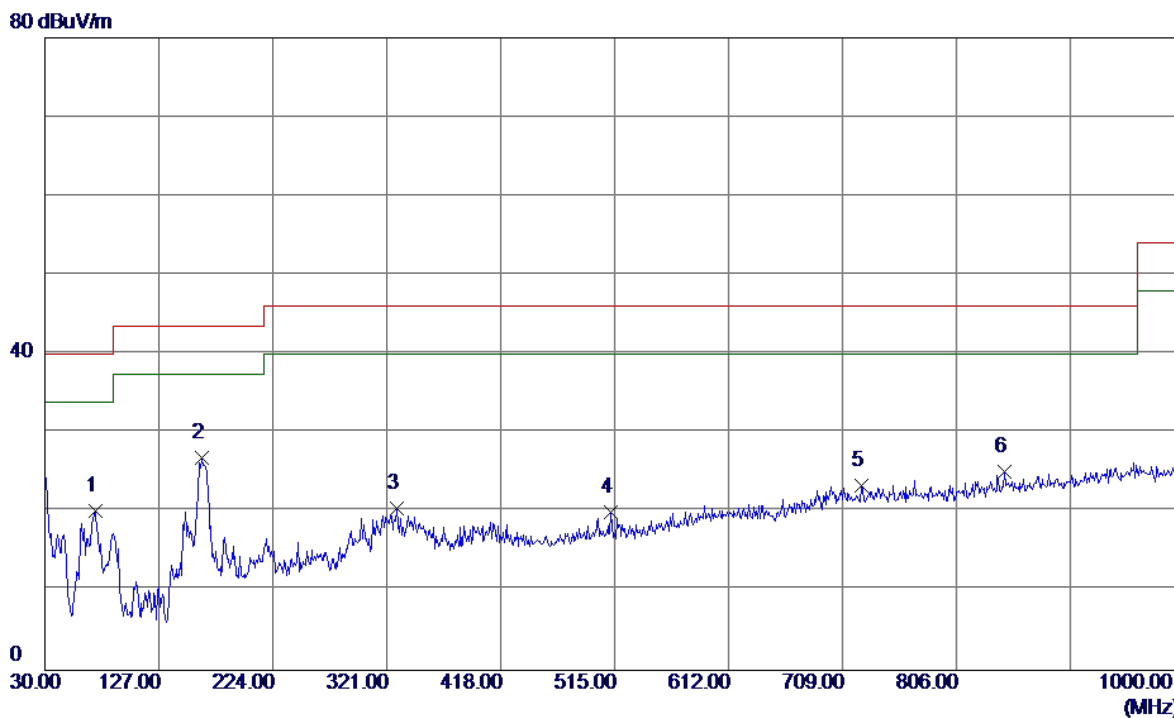

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	72.6800	43.50	-23.32	20.18	40.00	-19.82	Peak	
2	163.8600	48.70	-21.80	26.90	43.50	-16.60	Peak	
3	329.7300	35.43	-15.01	20.42	46.00	-25.58	Peak	
4	512.0900	30.92	-10.98	19.94	46.00	-26.06	Peak	
5	725.4900	29.63	-6.31	23.32	46.00	-22.68	Peak	
6	846.7400	30.09	-4.95	25.14	46.00	-20.86	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz

Vertical

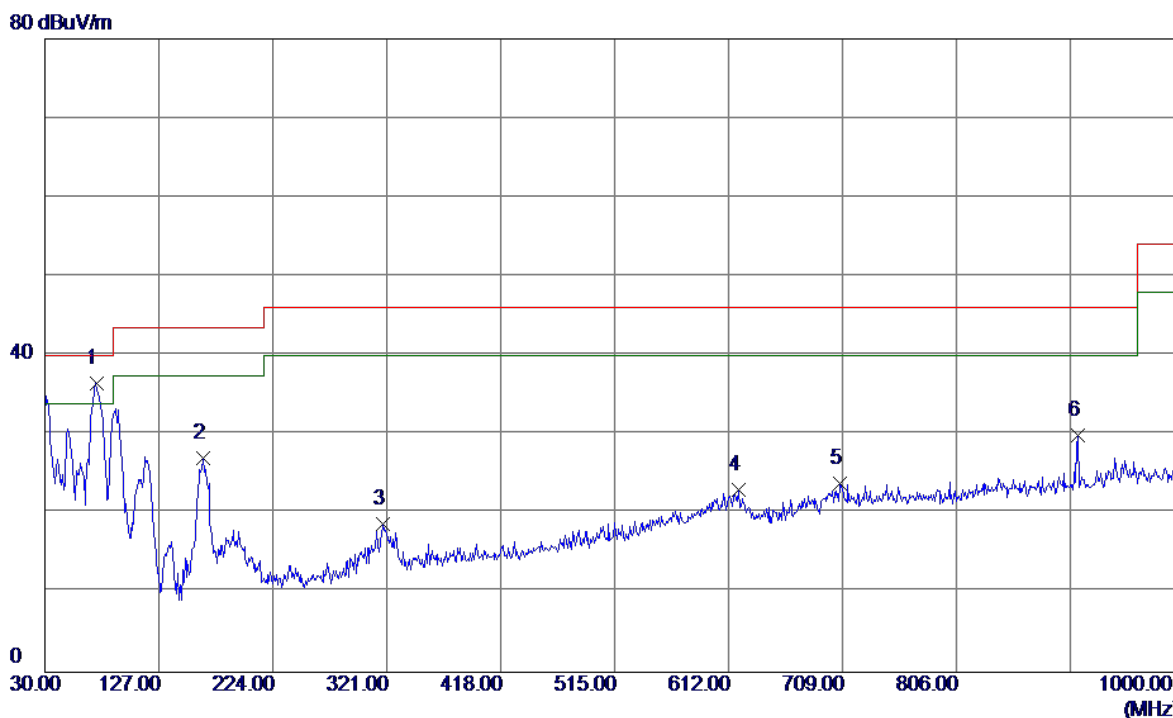


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	73.6500	59.76	-23.27	36.49	40.00	-3.51	Peak	
2	164.8300	48.86	-21.76	27.10	43.50	-16.40	Peak	
3	318.0900	34.10	-15.39	18.71	46.00	-27.29	Peak	
4	620.7300	31.46	-8.46	23.00	46.00	-23.00	Peak	
5	707.0600	30.17	-6.29	23.88	46.00	-22.12	Peak	
6	909.7900	34.38	-4.43	29.95	46.00	-16.05	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz

Horizontal

80 dBuV/m

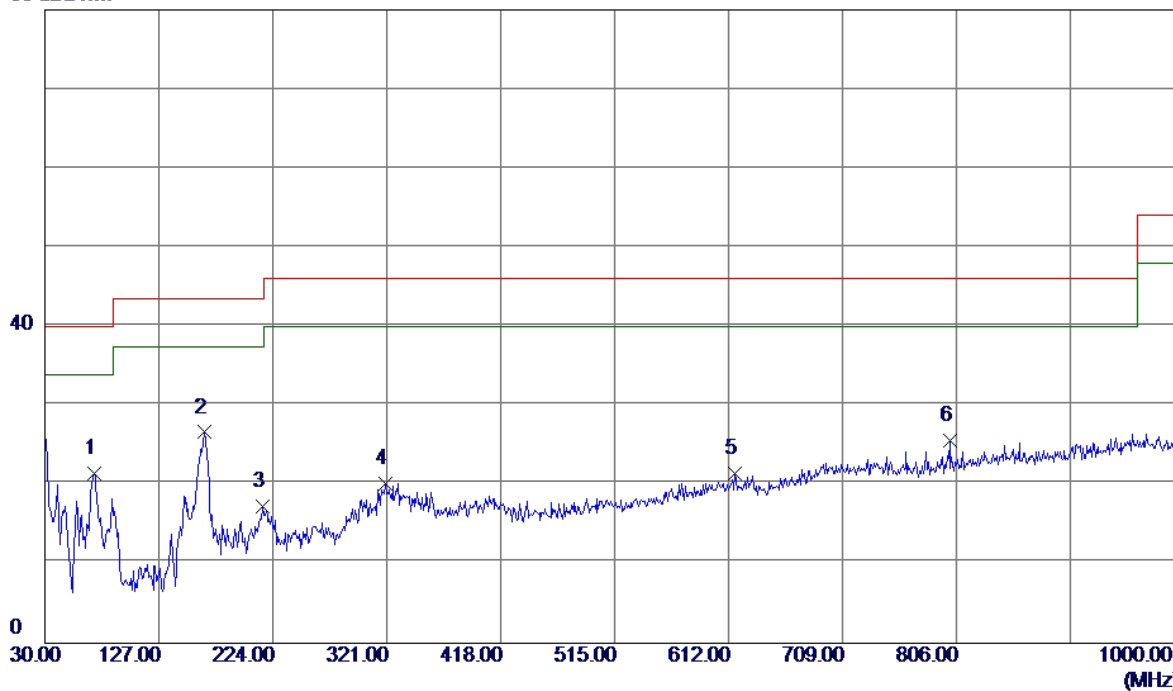


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	44.82	-23.38	21.44	40.00	-18.56	Peak	
2	165.8000	48.35	-21.71	26.64	43.50	-16.86	Peak	
3	215.2700	36.27	-19.01	17.26	43.50	-26.24	Peak	
4	320.0300	35.50	-15.28	20.22	46.00	-25.78	Peak	
5	617.8200	29.97	-8.47	21.50	46.00	-24.50	Peak	
6	800.1800	31.71	-6.12	25.59	46.00	-20.41	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

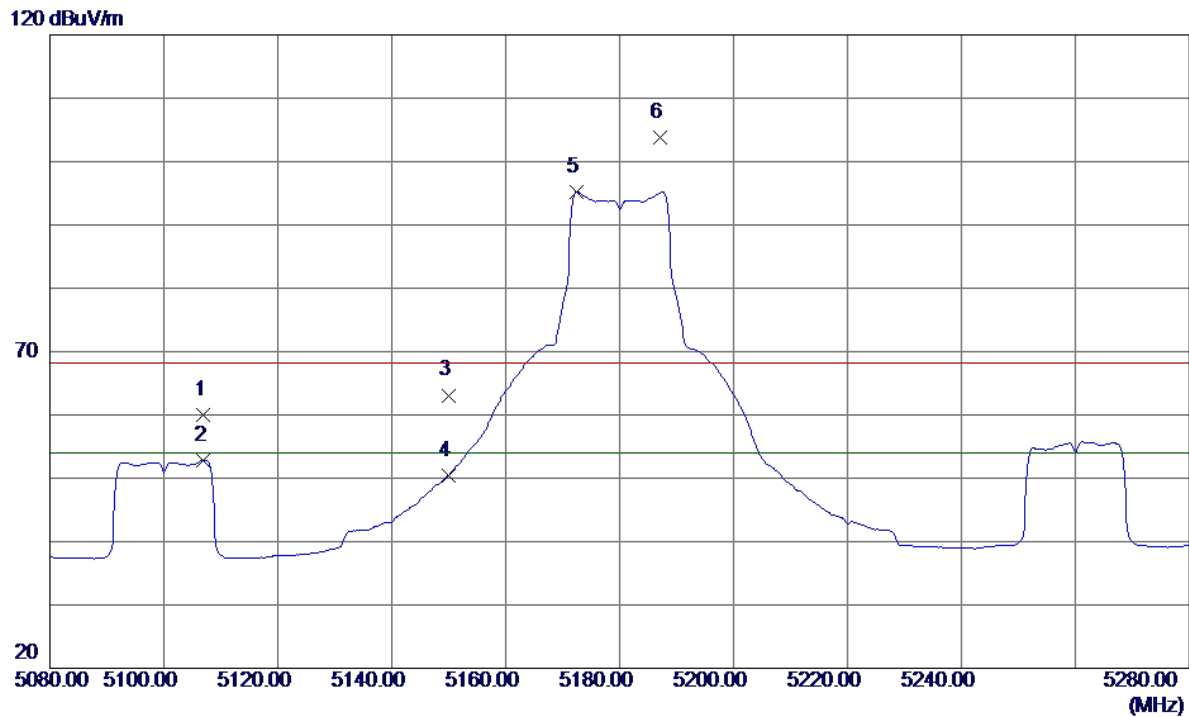


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5107.0000	21.06	38.86	59.92	68.30	-8.38	Peak	
2	5107.0000	13.90	38.86	52.76	54.00	-1.24	AVG	
3	5150.0000	24.10	39.00	63.10	68.30	-5.20	Peak	
4	5150.0000	11.49	39.00	50.49	54.00	-3.51	AVG	
5	5172.4000	56.13	39.07	95.20	54.00	41.20	AVG	no limit
6	5187.2000	64.69	39.12	103.81	68.30	35.51	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical


100 dBuV/m

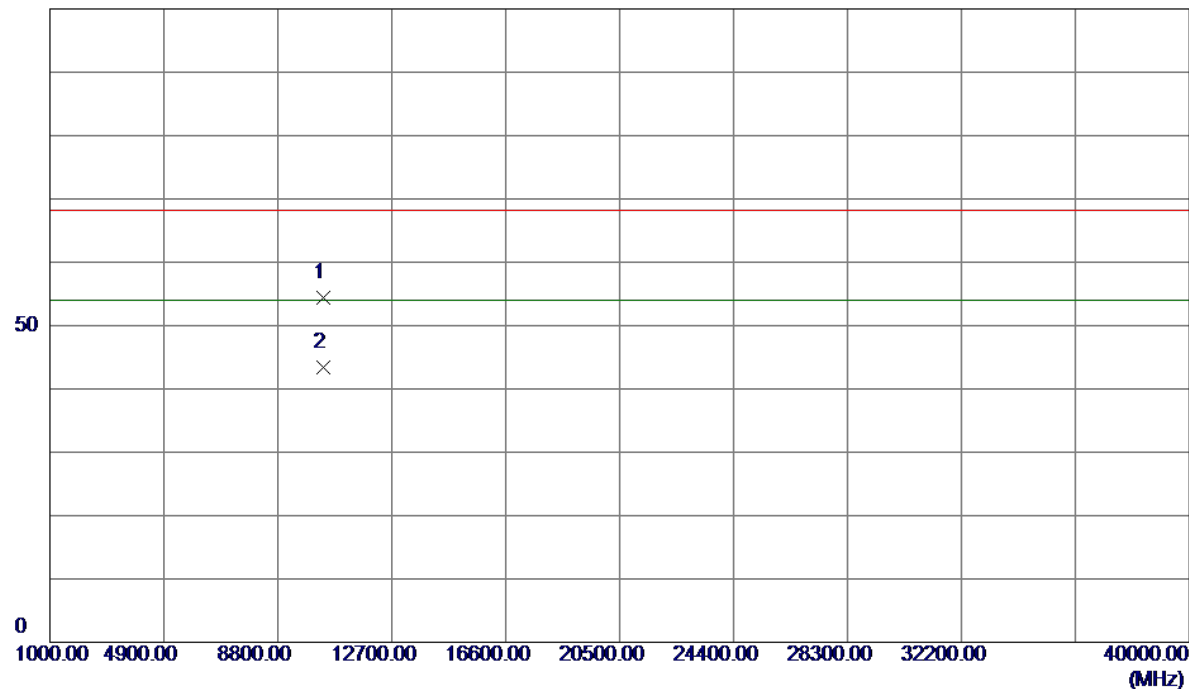

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10358.8000	43.38	11.11	54.49	68.30	-13.81	Peak	
2	10359.9500	32.29	11.11	43.40	54.00	-10.60	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

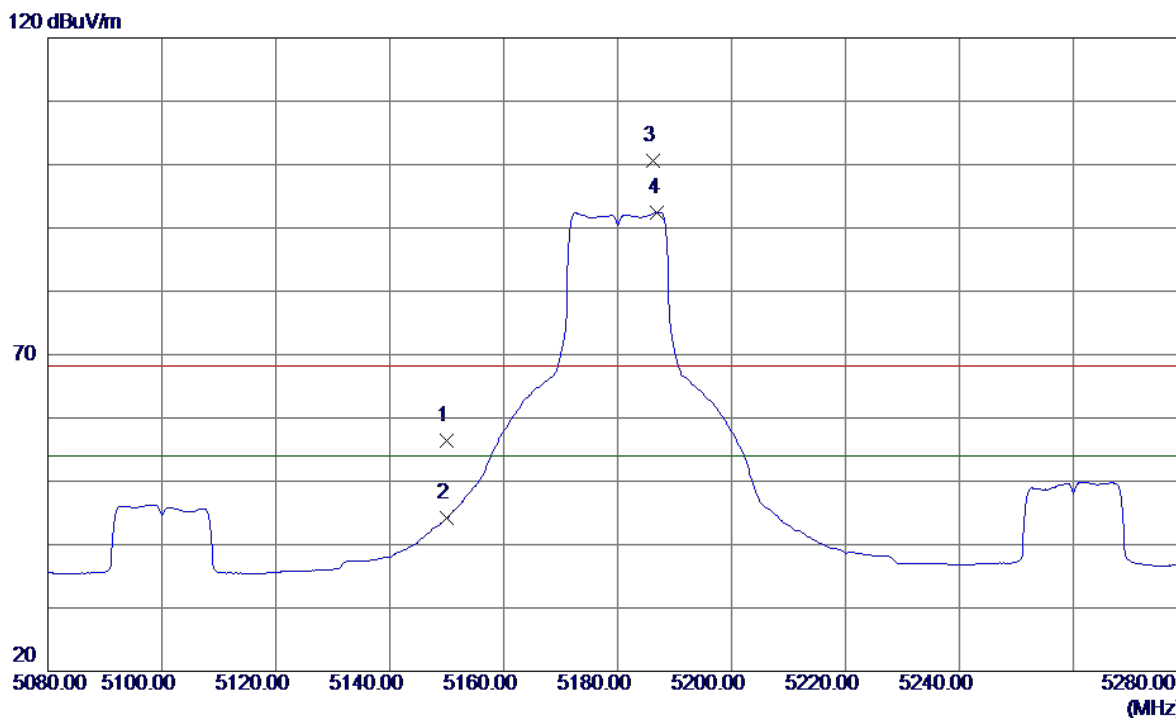


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	17.49	39.00	56.49	68.30	-11.81	Peak	
2	5150.0000	5.15	39.00	44.15	54.00	-9.85	AVG	
3	5186.2000	61.47	39.12	100.59	68.30	32.29	Peak	no limit
4	5187.0000	53.33	39.12	92.45	54.00	38.45	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


100 dBuV/m

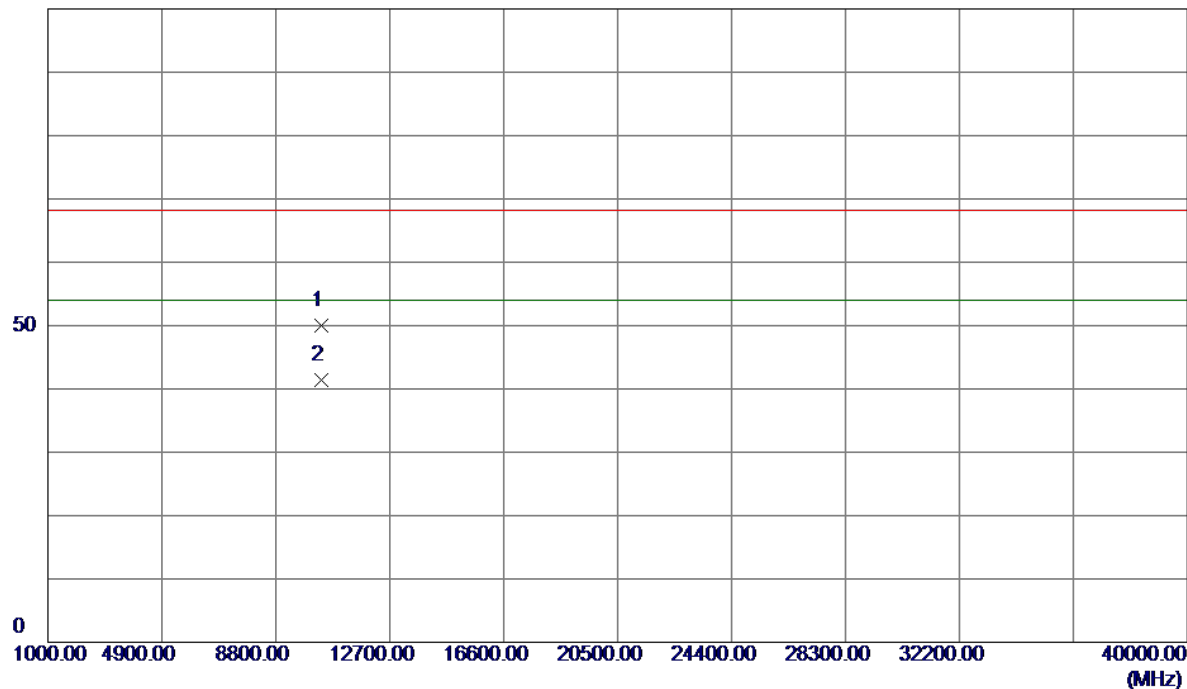

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.1500	38.88	11.11	49.99	68.30	-18.31	Peak	
2	10360.1500	30.28	11.11	41.39	54.00	-12.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Vertical

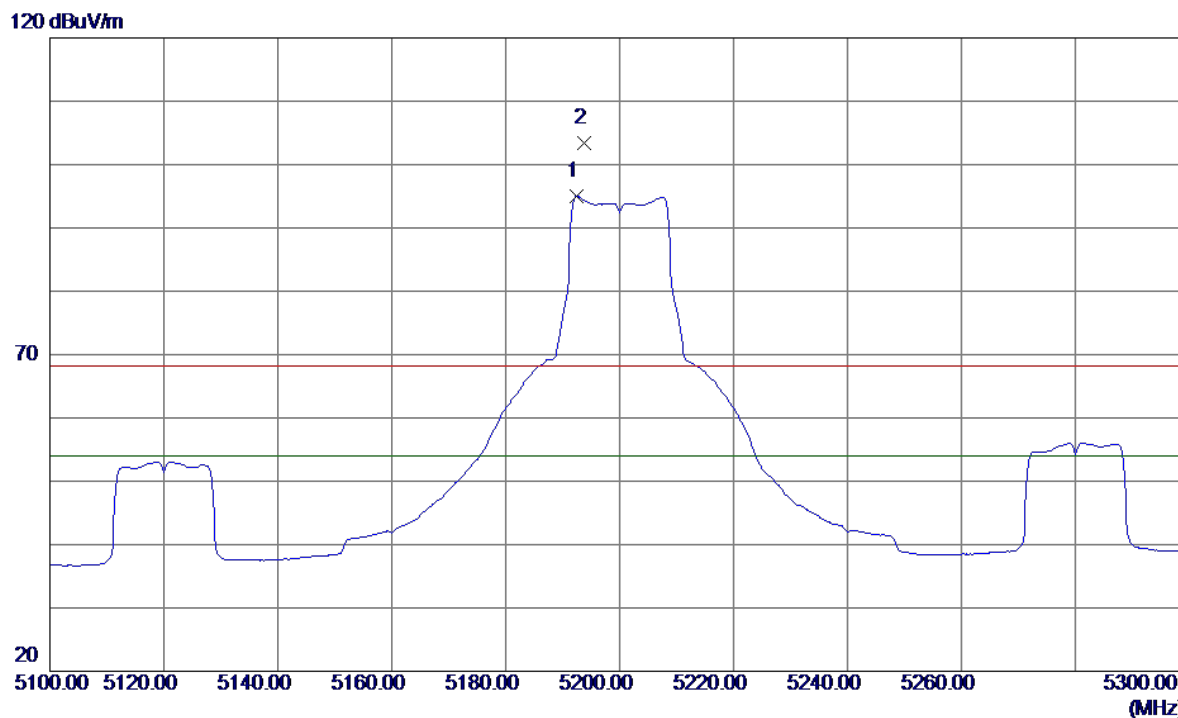


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5192.4000	55.86	39.14	95.00	54.00	41.00	AVG	no limit
2	5193.8000	64.22	39.14	103.36	68.30	35.06	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Vertical


100 dBuV/m

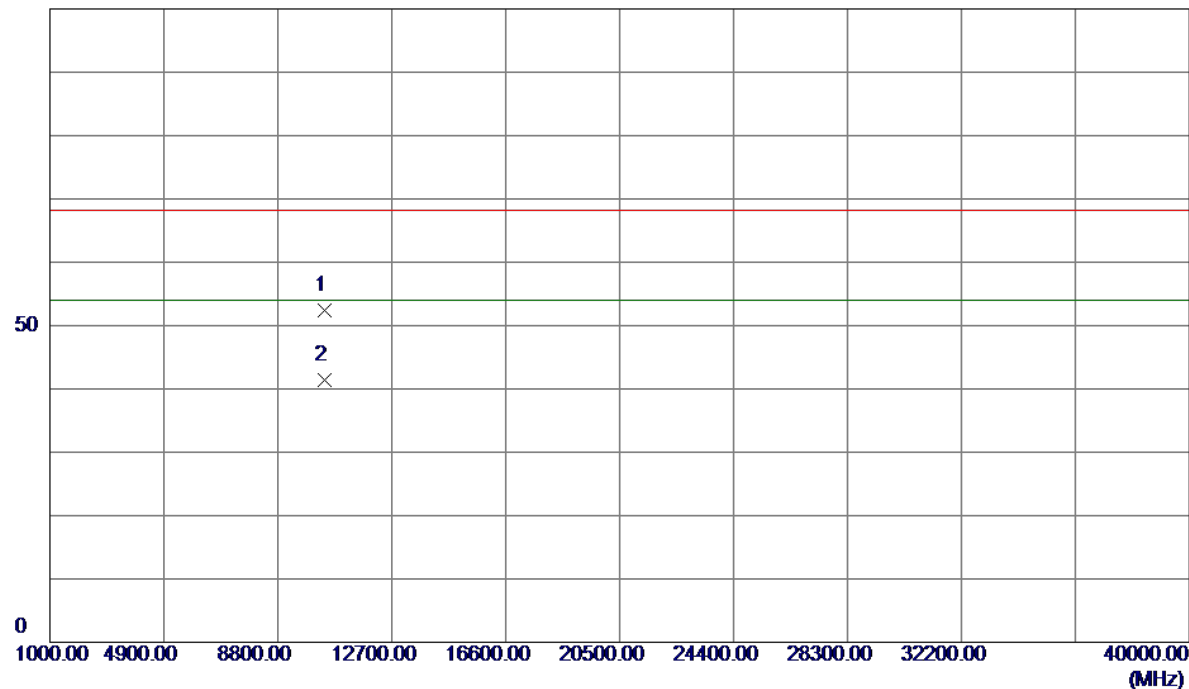

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.0500	41.40	11.05	52.45	68.30	-15.85	Peak	
2	10400.0500	30.33	11.05	41.38	54.00	-12.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Horizontal

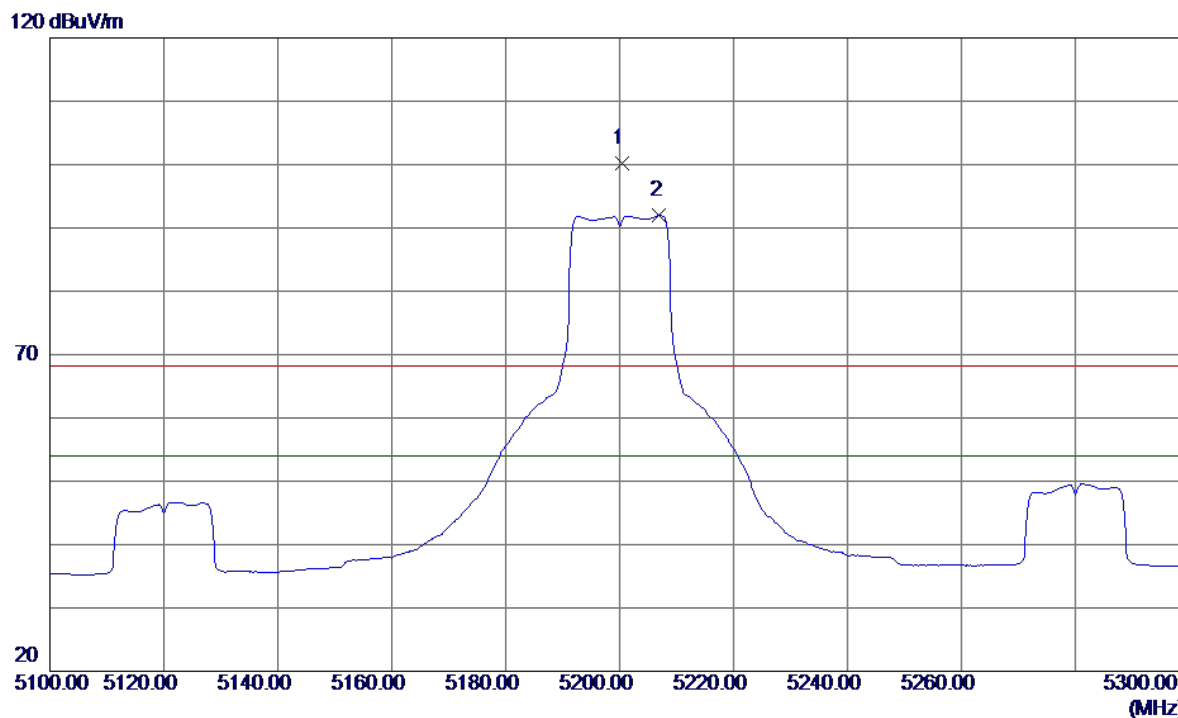


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5200.4000	60.95	39.17	100.12	68.30	31.82	Peak	no limit
2	5207.0000	52.75	39.19	91.94	54.00	37.94	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Horizontal


100 dBuV/m

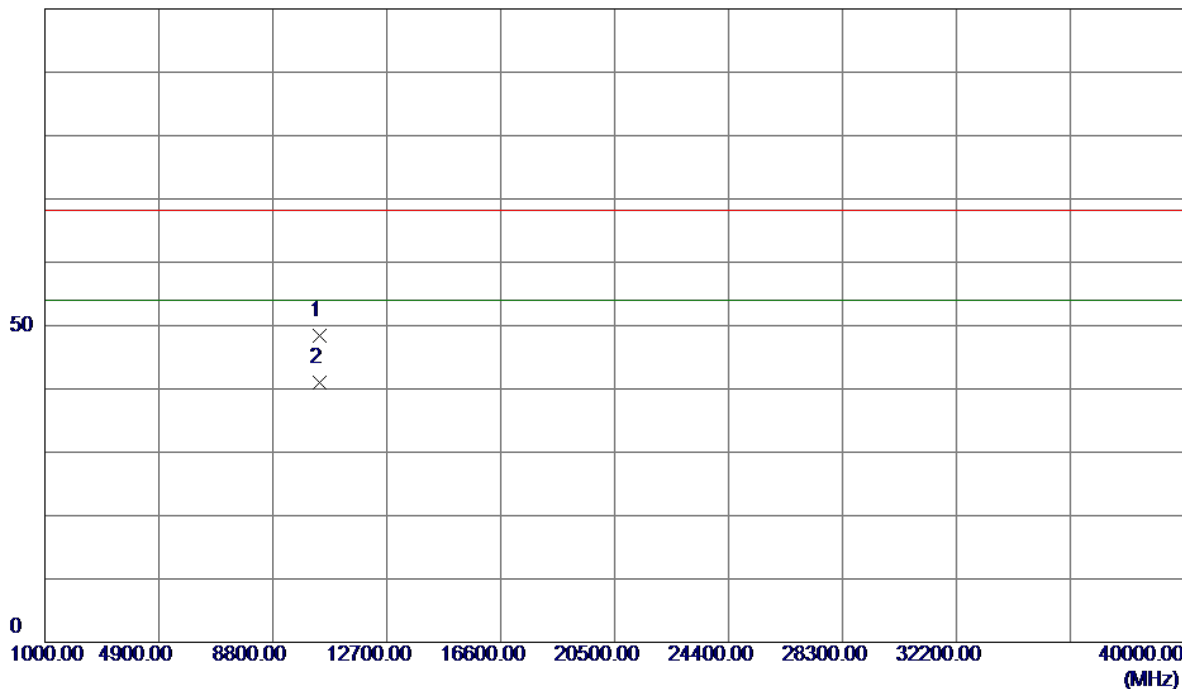

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.1000	37.35	11.05	48.40	68.30	-19.90	Peak	
2	10400.1000	29.96	11.05	41.01	54.00	-12.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

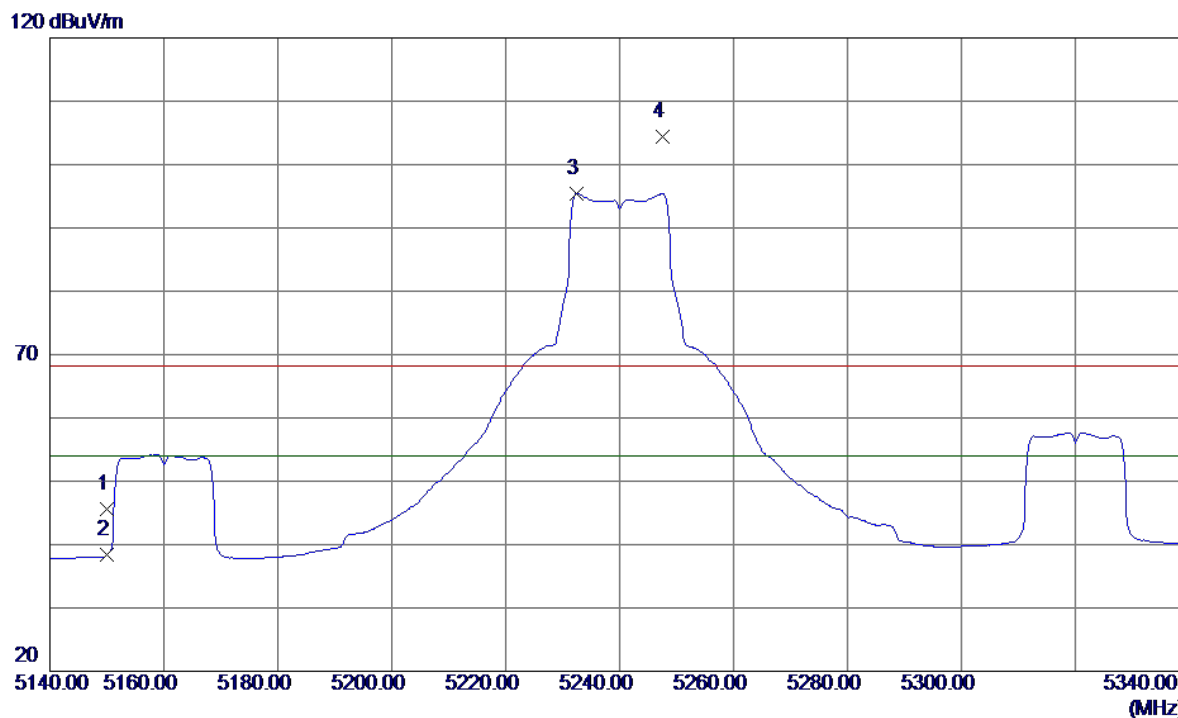

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	6.60	39.00	45.60	68.30	-22.70	Peak	
2	5150.0000	-0.64	39.00	38.36	54.00	-15.64	AVG	
3	5232.4000	56.19	39.27	95.46	54.00	41.46	AVG	no limit
4	5247.6000	65.07	39.32	104.39	68.30	36.09	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

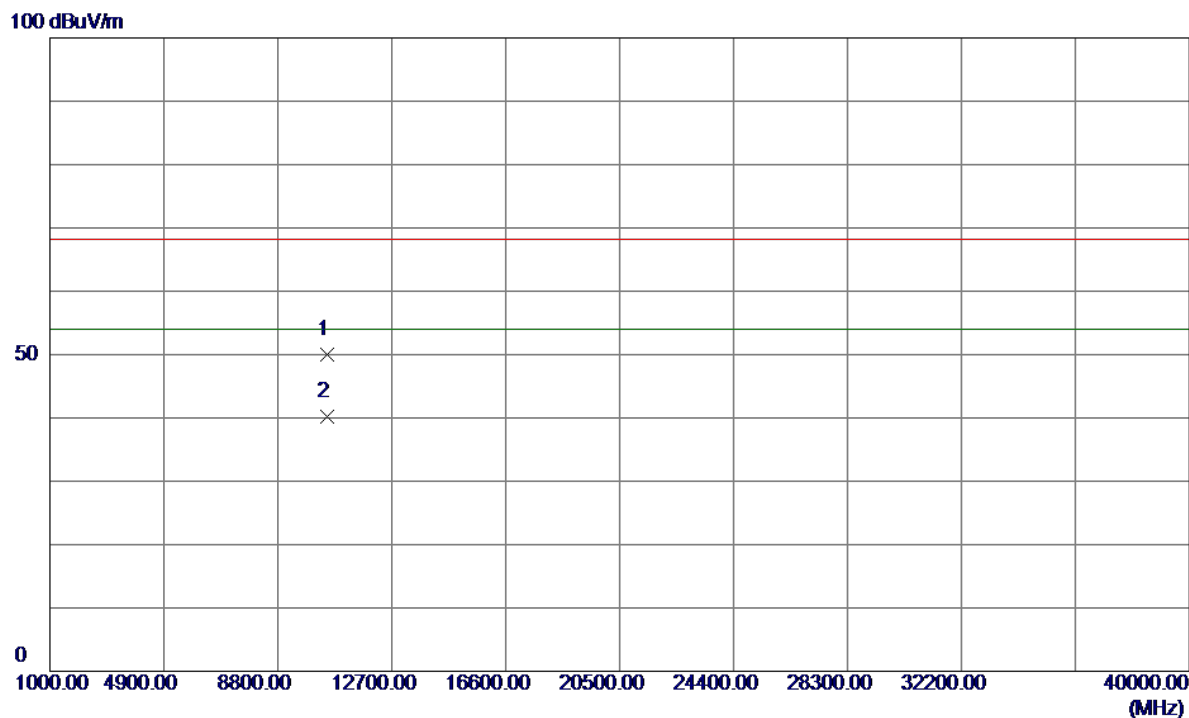

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.0500	39.05	10.94	49.99	68.30	-18.31	Peak	
2	10480.0500	29.26	10.94	40.20	54.00	-13.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

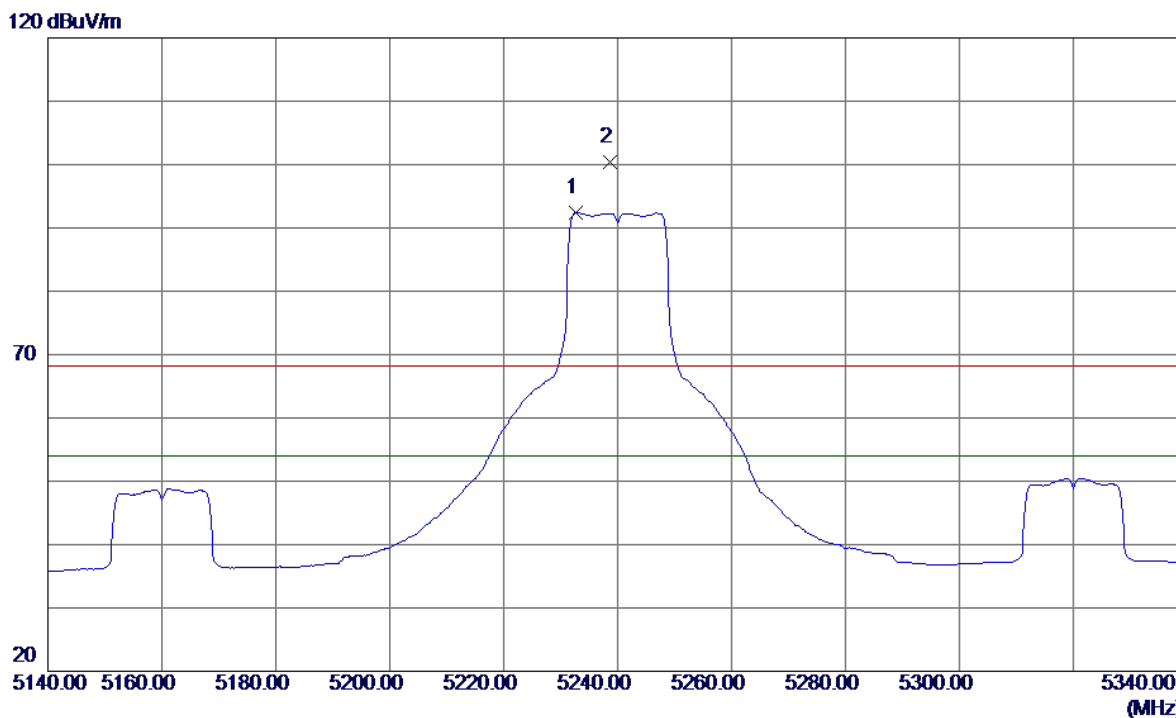


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5232.6000	53.18	39.27	92.45	54.00	38.45	AVG	no limit
2	5238.6000	61.12	39.29	100.41	68.30	32.11	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal


100 dBuV/m

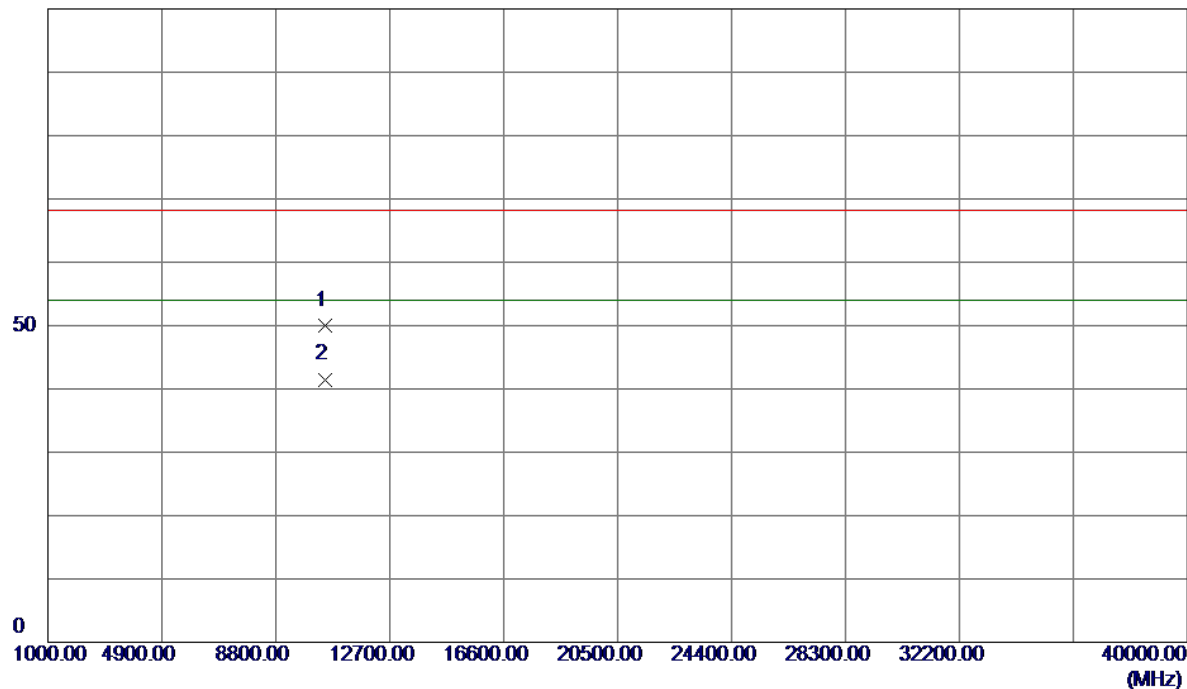

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.1000	38.98	10.94	49.92	68.30	-18.38	Peak	
2	10480.1000	30.56	10.94	41.50	54.00	-12.50	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

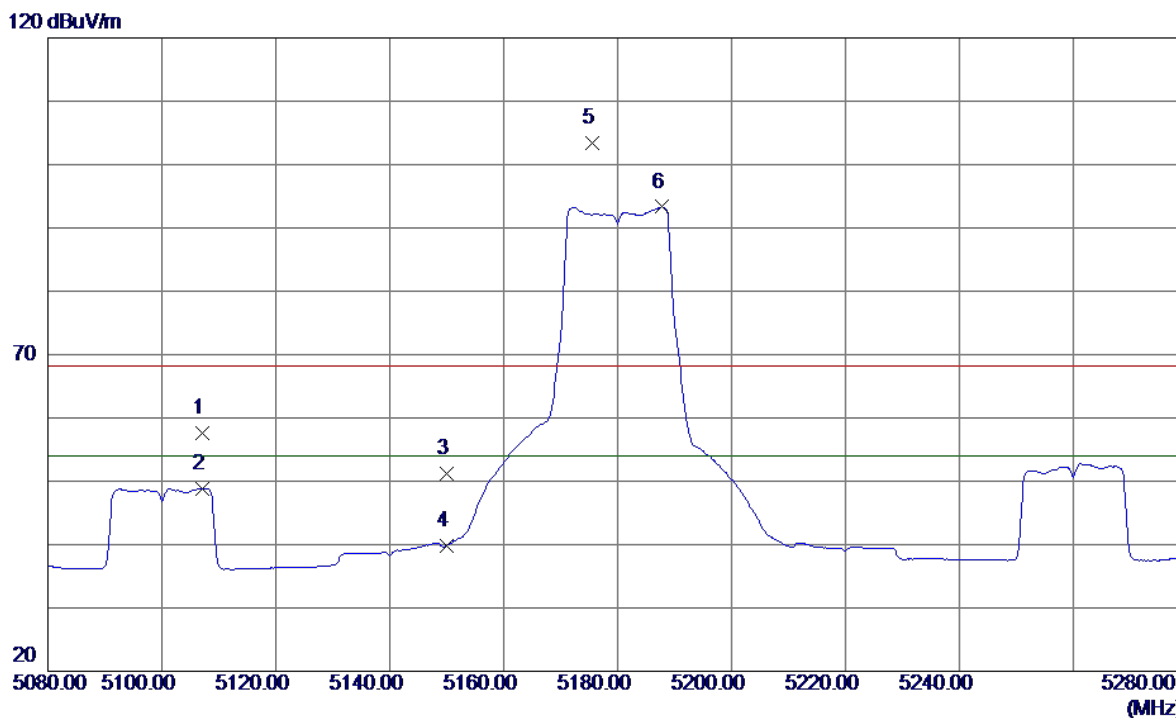


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5107.2000	18.79	38.86	57.65	68.30	-10.65	Peak	
2	5107.2000	10.00	38.86	48.86	54.00	-5.14	AVG	
3	5150.0000	12.21	39.00	51.21	68.30	-17.09	Peak	
4	5150.0000	0.88	39.00	39.88	54.00	-14.12	AVG	
5	5175.6000	64.37	39.08	103.45	68.30	35.15	Peak	no limit
6	5187.8000	54.18	39.12	93.30	54.00	39.30	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


100 dBuV/m

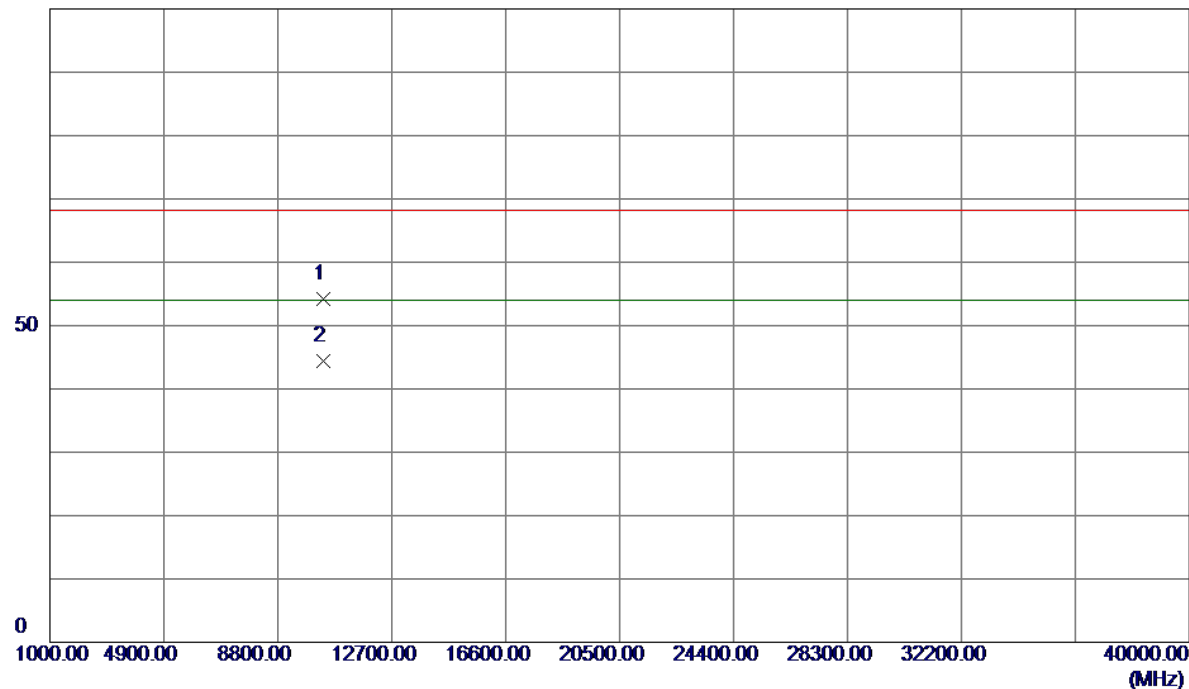

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.0500	43.03	11.11	54.14	68.30	-14.16	Peak	
2	10360.0500	33.36	11.11	44.47	54.00	-9.53	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

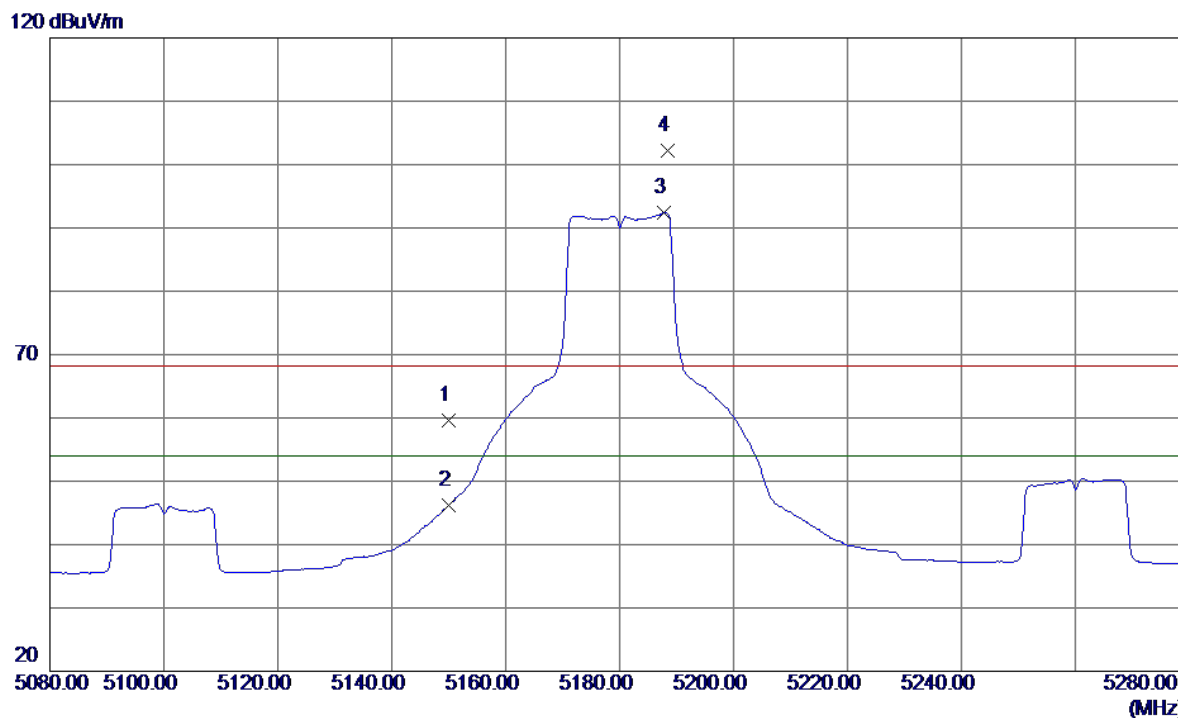


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	20.61	39.00	59.61	68.30	-8.69	Peak	
2	5150.0000	7.20	39.00	46.20	54.00	-7.80	AVG	
3	5187.8000	53.27	39.12	92.39	54.00	38.39	AVG	no limit
4	5188.4000	63.06	39.13	102.19	68.30	33.89	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


100 dBuV/m

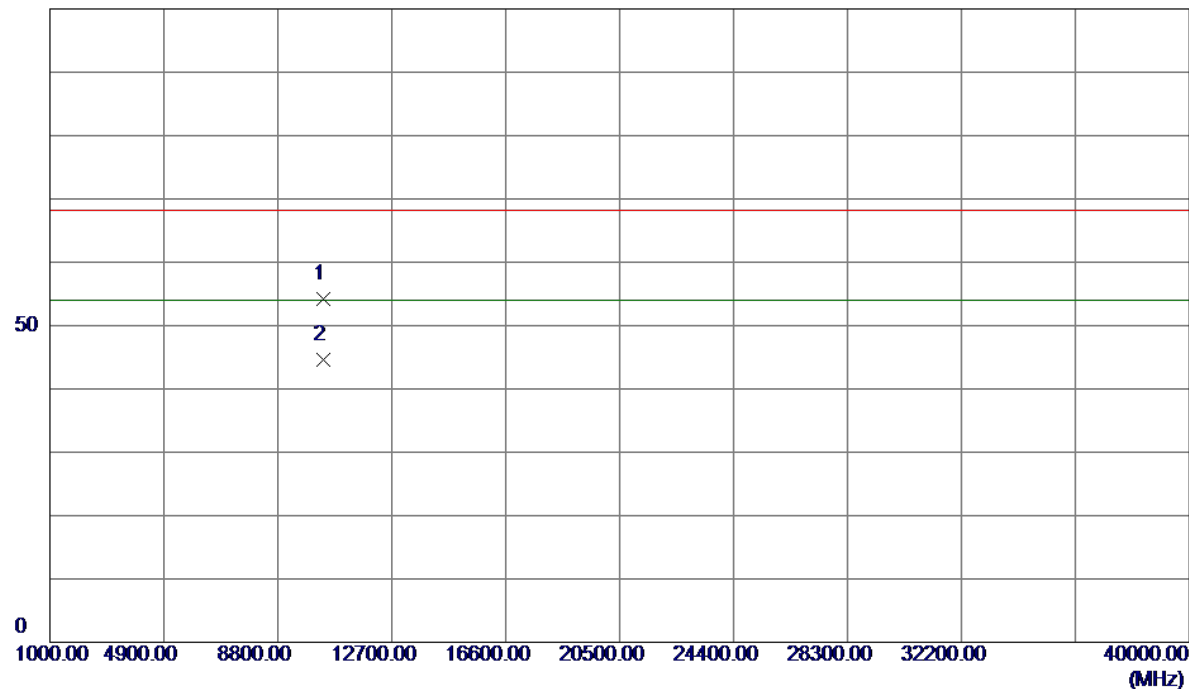

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10359.9500	43.11	11.11	54.22	68.30	-14.08	Peak	
2	10359.9500	33.40	11.11	44.51	54.00	-9.49	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Vertical

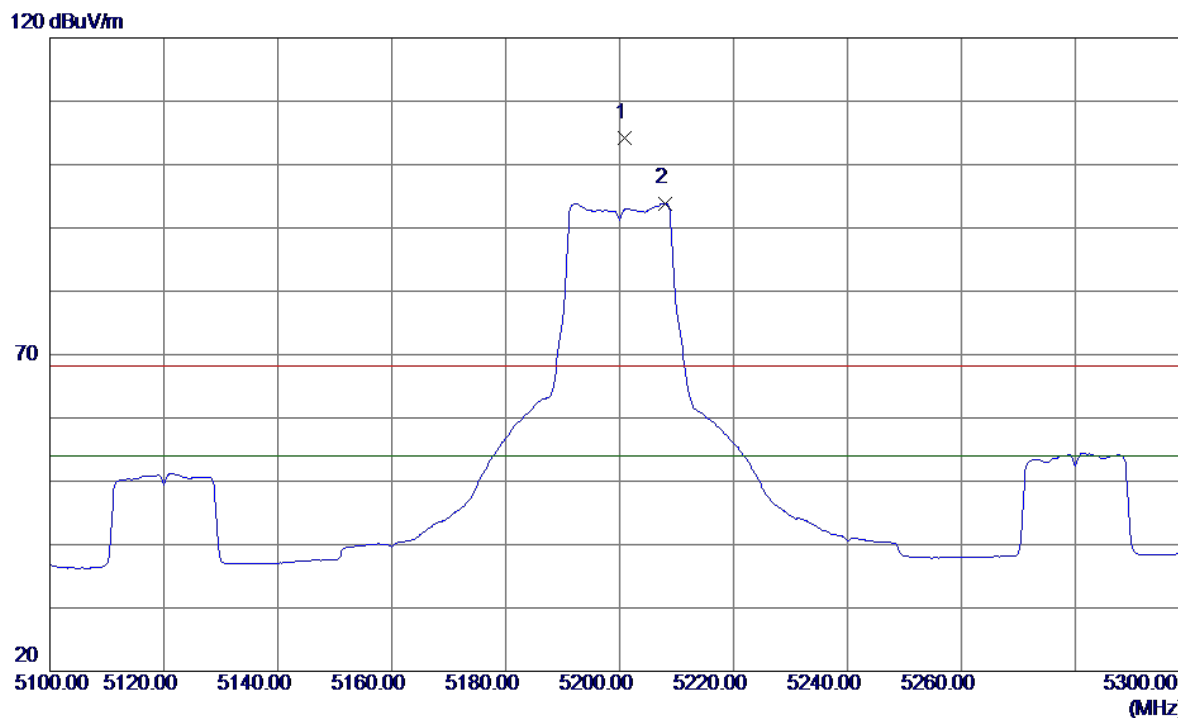


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5200.8000	65.01	39.17	104.18	68.30	35.88	Peak	no limit
2	5208.0000	54.71	39.19	93.90	54.00	39.90	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Vertical


100 dBuV/m

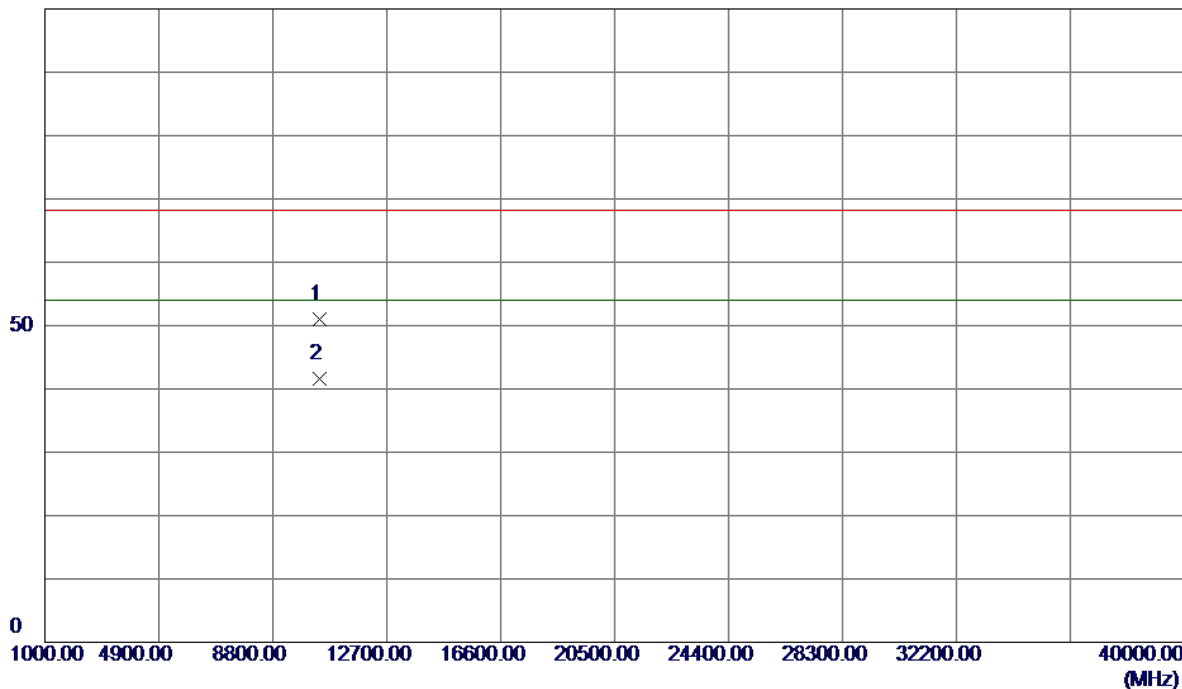

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.1500	39.89	11.05	50.94	68.30	-17.36	Peak	
2	10400.1500	30.50	11.05	41.55	54.00	-12.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Horizontal

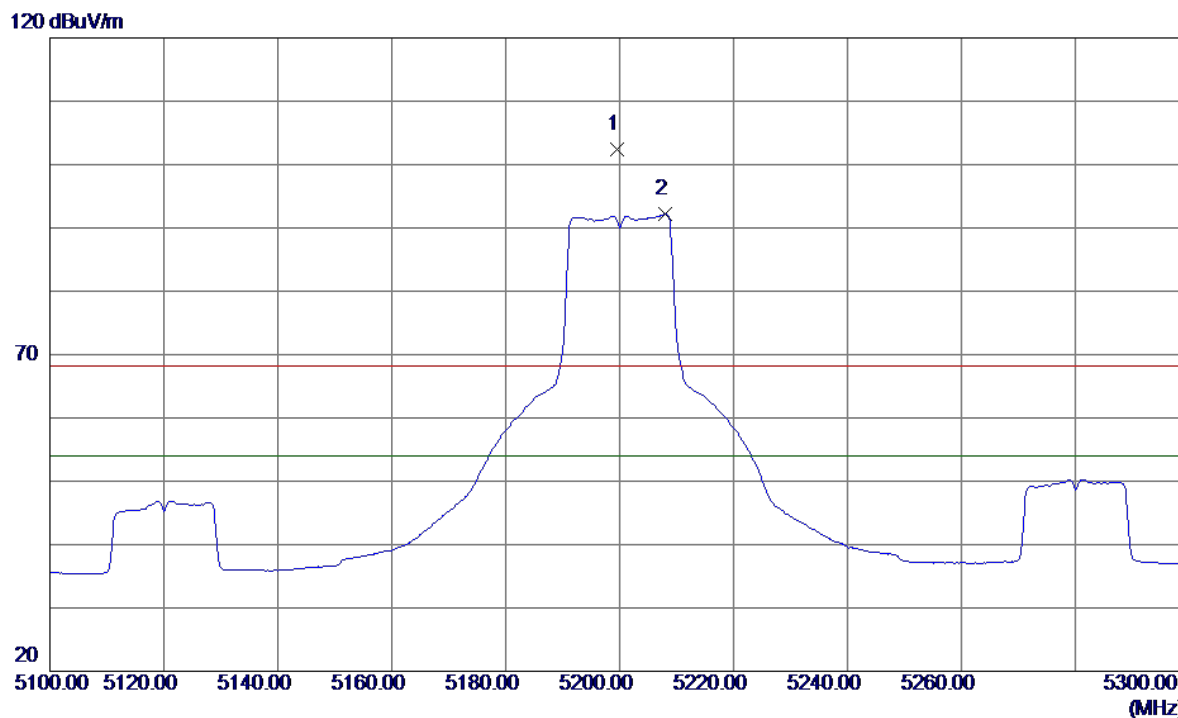


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5199.6000	63.22	39.16	102.38	68.30	34.08	Peak	no limit
2	5208.0000	52.96	39.19	92.15	54.00	38.15	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Horizontal


100 dBuV/m

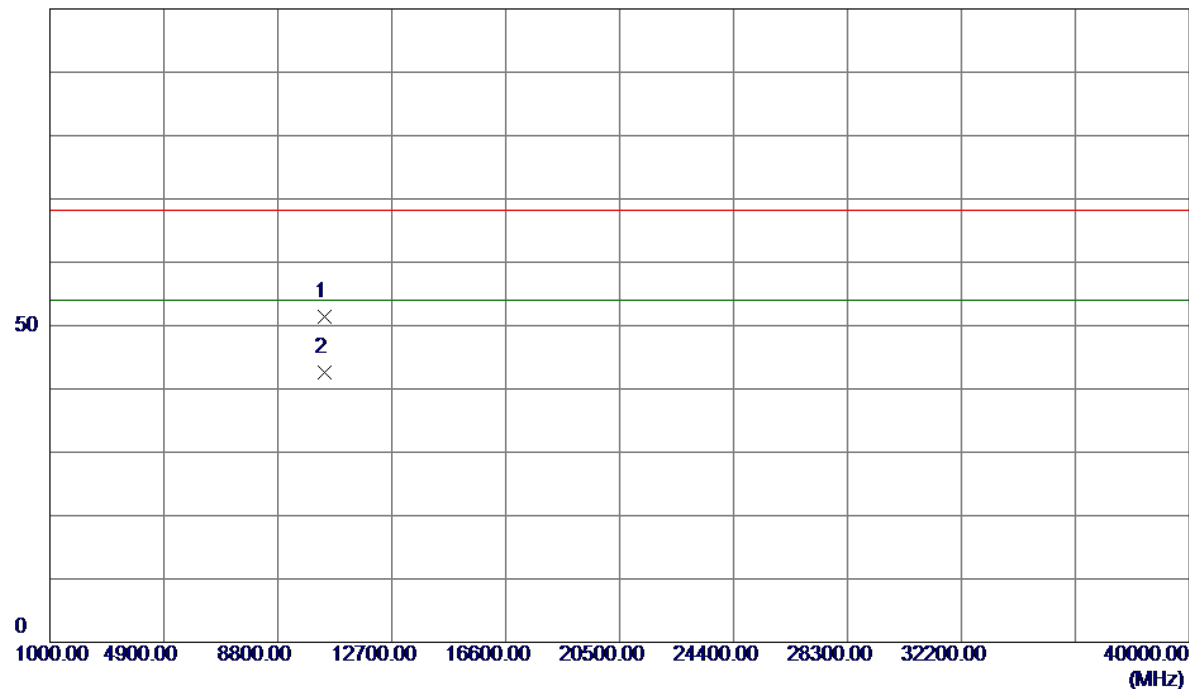

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.1000	40.28	11.05	51.33	68.30	-16.97	Peak	
2	10400.1000	31.52	11.05	42.57	54.00	-11.43	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

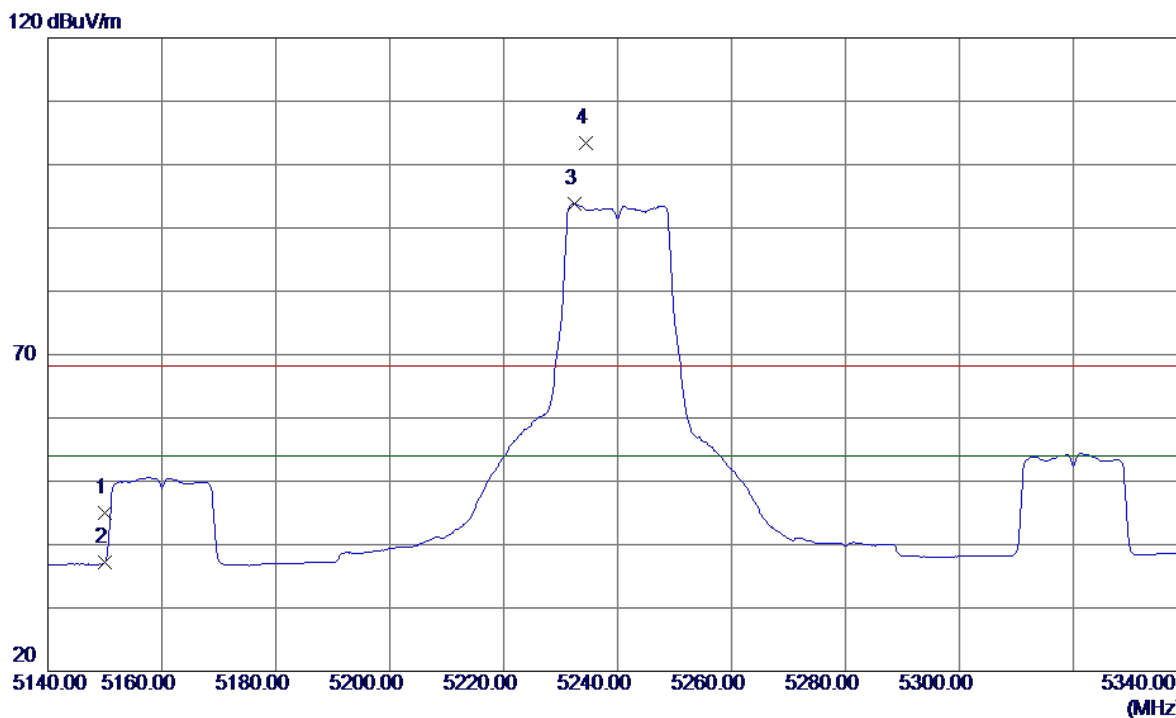


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	6.07	39.00	45.07	68.30	-23.23	Peak	
2	5150.0000	-1.85	39.00	37.15	54.00	-16.85	AVG	
3	5232.4000	54.48	39.27	93.75	54.00	39.75	AVG	no limit
4	5234.4000	64.09	39.28	103.37	68.30	35.07	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


100 dBuV/m

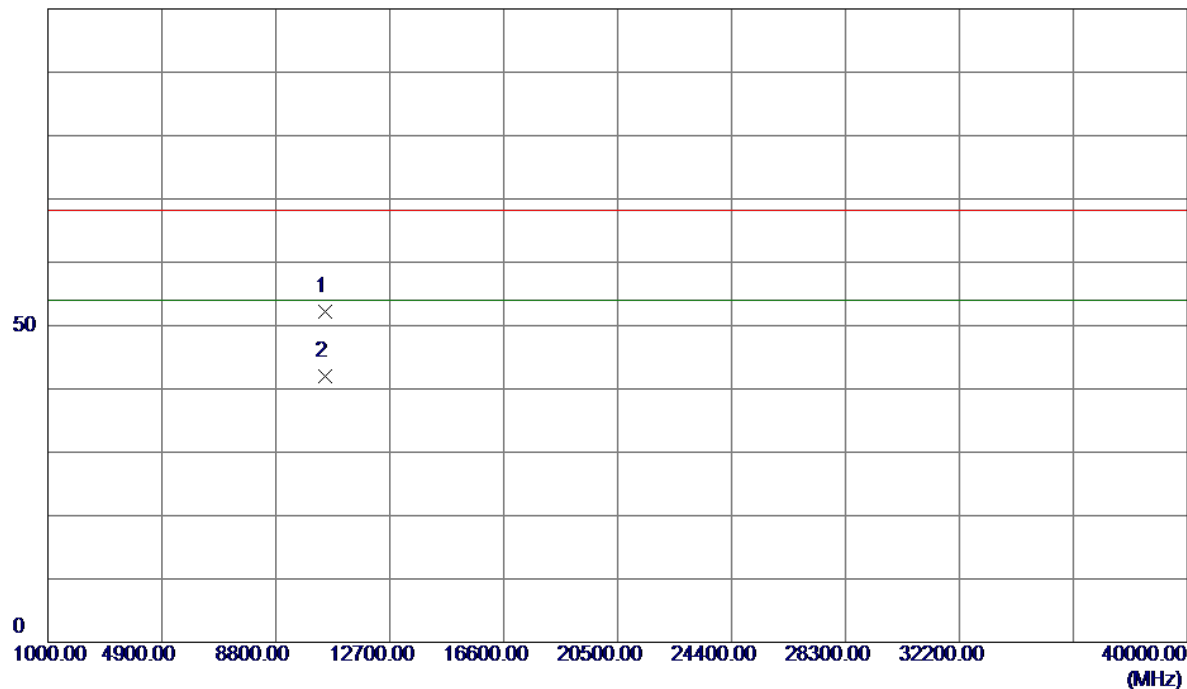

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.0500	41.19	10.94	52.13	68.30	-16.17	Peak	
2	10480.0500	30.97	10.94	41.91	54.00	-12.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

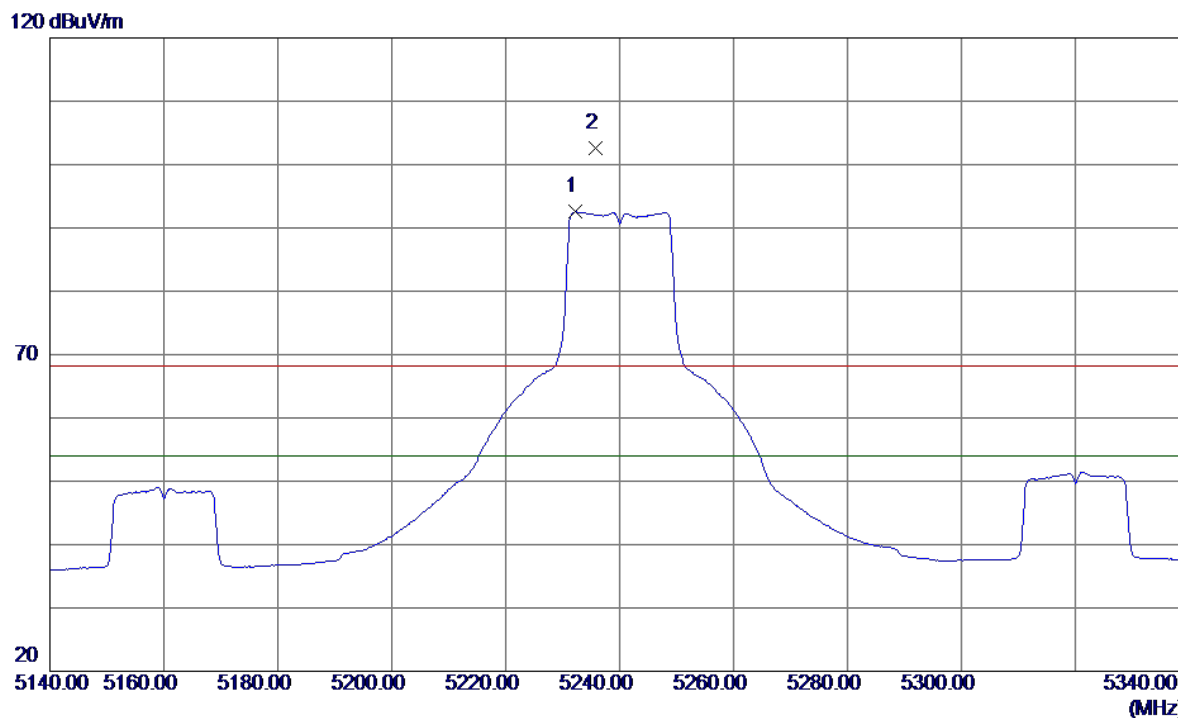

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5232.2000	53.26	39.27	92.53	54.00	38.53	AVG	no limit
2	5235.8000	63.37	39.28	102.65	68.30	34.35	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

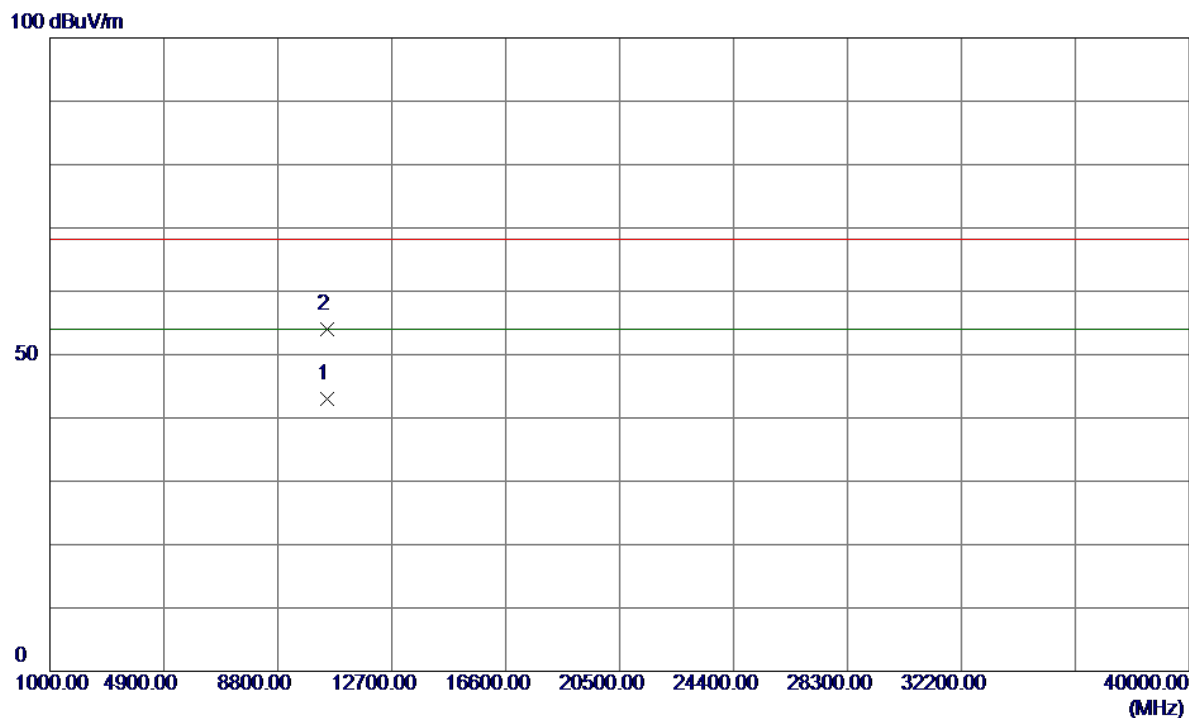


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.1000	32.11	10.94	43.05	54.00	-10.95	AVG	
2	10483.4500	43.12	10.93	54.05	68.30	-14.25	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

120 dBuV/m

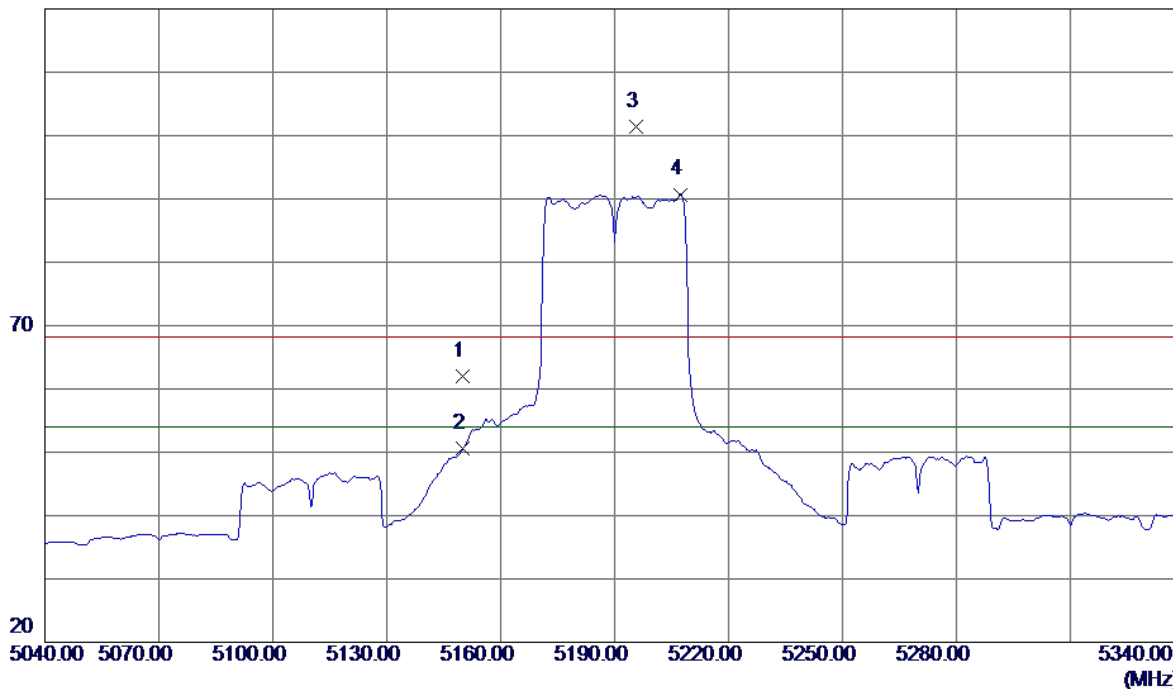


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	23.08	39.00	62.08	68.30	-6.22	Peak	
2	5150.0000	11.51	39.00	50.51	54.00	-3.49	AVG	
3	5195.7000	62.29	39.15	101.44	68.30	33.14	Peak	no limit
4	5207.4000	51.51	39.19	90.70	54.00	36.70	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


100 dBuV/m

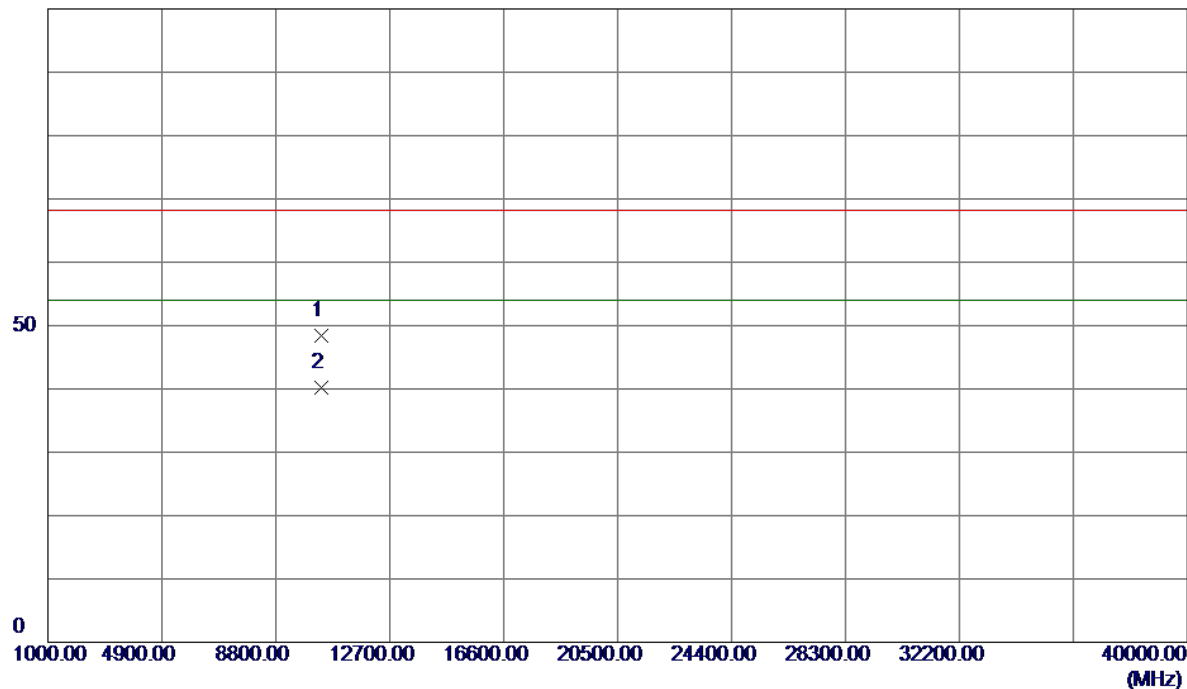

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10380.0500	37.28	11.08	48.36	68.30	-19.94	Peak	
2	10380.0500	29.19	11.08	40.27	54.00	-13.73	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

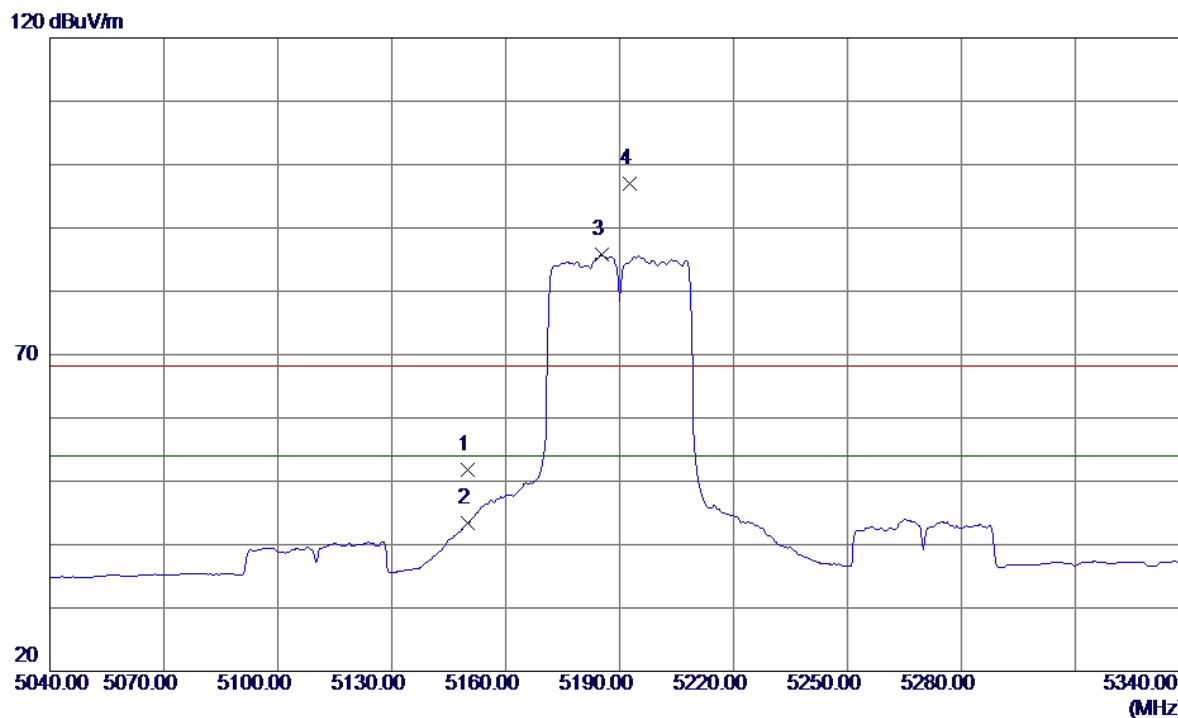


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	12.86	39.00	51.86	68.30	-16.44	Peak	
2	5150.0000	4.42	39.00	43.42	54.00	-10.58	AVG	
3	5185.2000	46.64	39.11	85.75	54.00	31.75	AVG	no limit
4	5192.7000	57.82	39.14	96.96	68.30	28.66	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal


100 dBuV/m

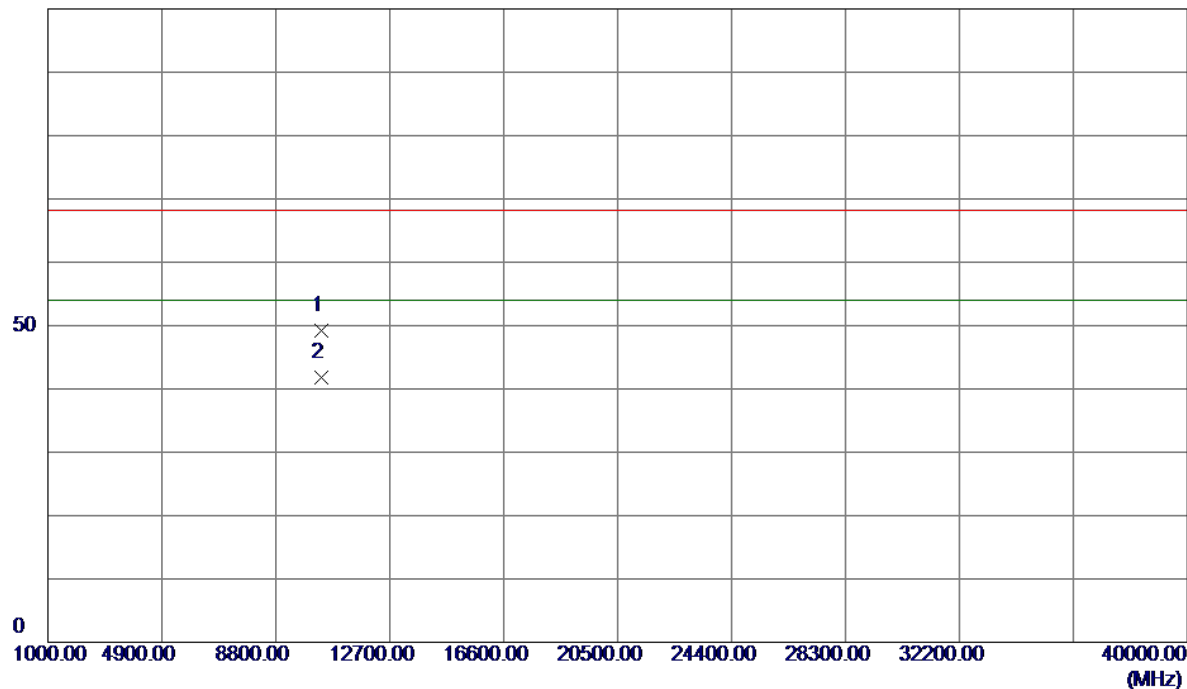

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10380.1000	38.04	11.08	49.12	68.30	-19.18	Peak	
2	10380.1000	30.63	11.08	41.71	54.00	-12.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

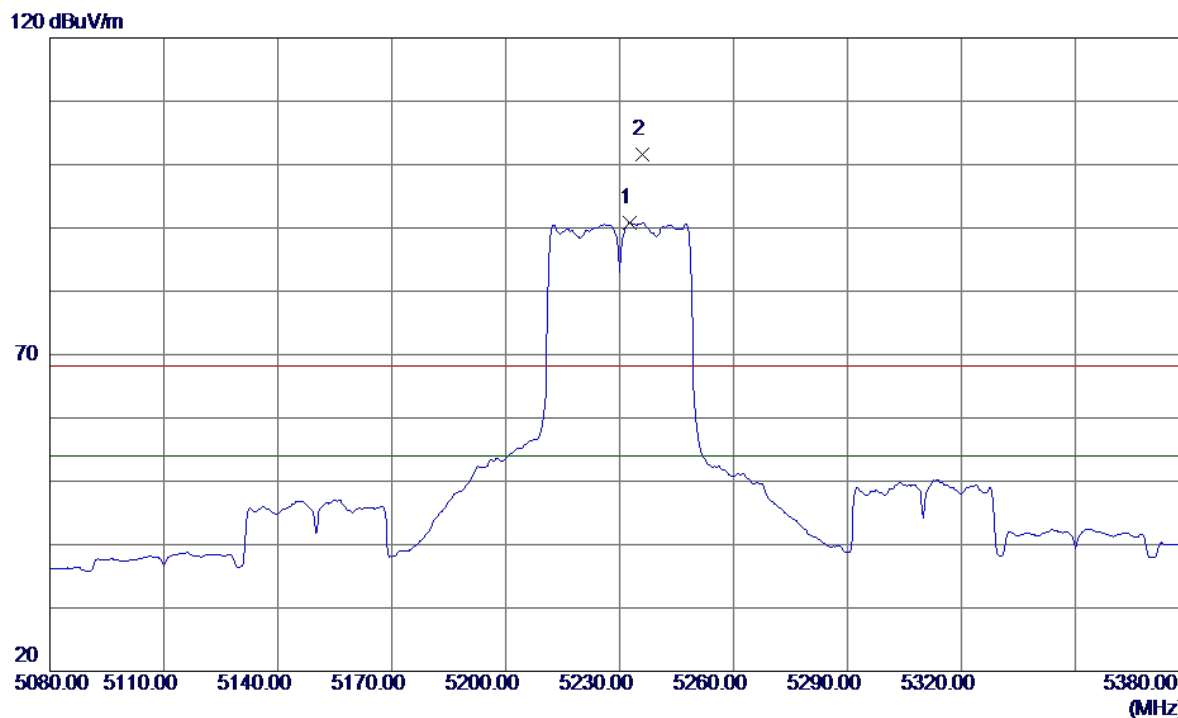


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5232.7000	51.52	39.27	90.79	54.00	36.79	AVG	no limit
2	5236.0000	62.32	39.28	101.60	68.30	33.30	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


100 dBuV/m

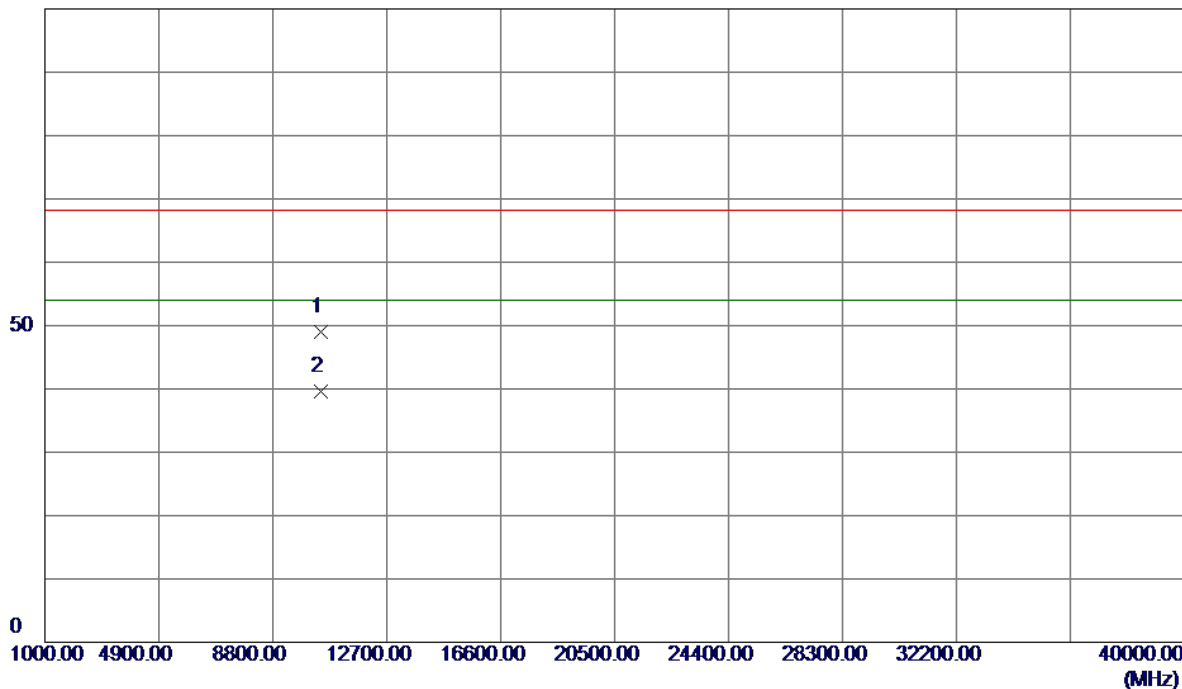

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10460.1000	38.09	10.97	49.06	68.30	-19.24	Peak	
2	10460.1000	28.60	10.97	39.57	54.00	-14.43	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

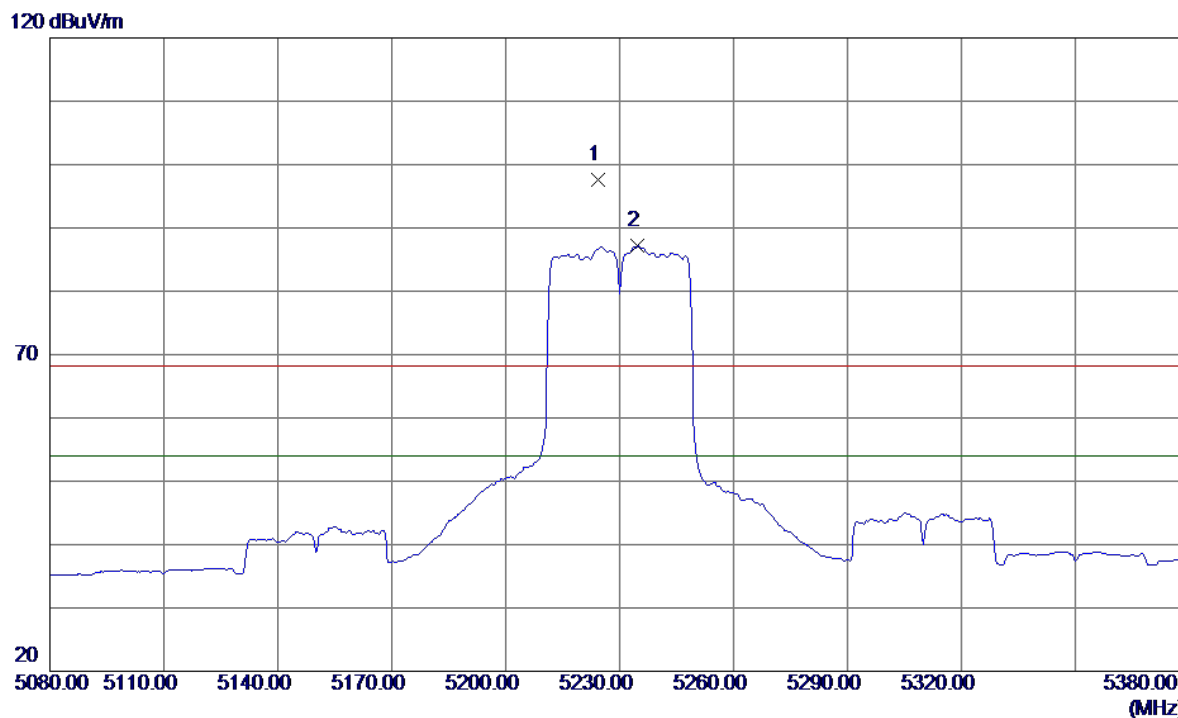


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5224.3000	58.33	39.24	97.57	68.30	29.27	Peak	no limit
2	5234.8000	47.95	39.28	87.23	54.00	33.23	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

100 dBuV/m

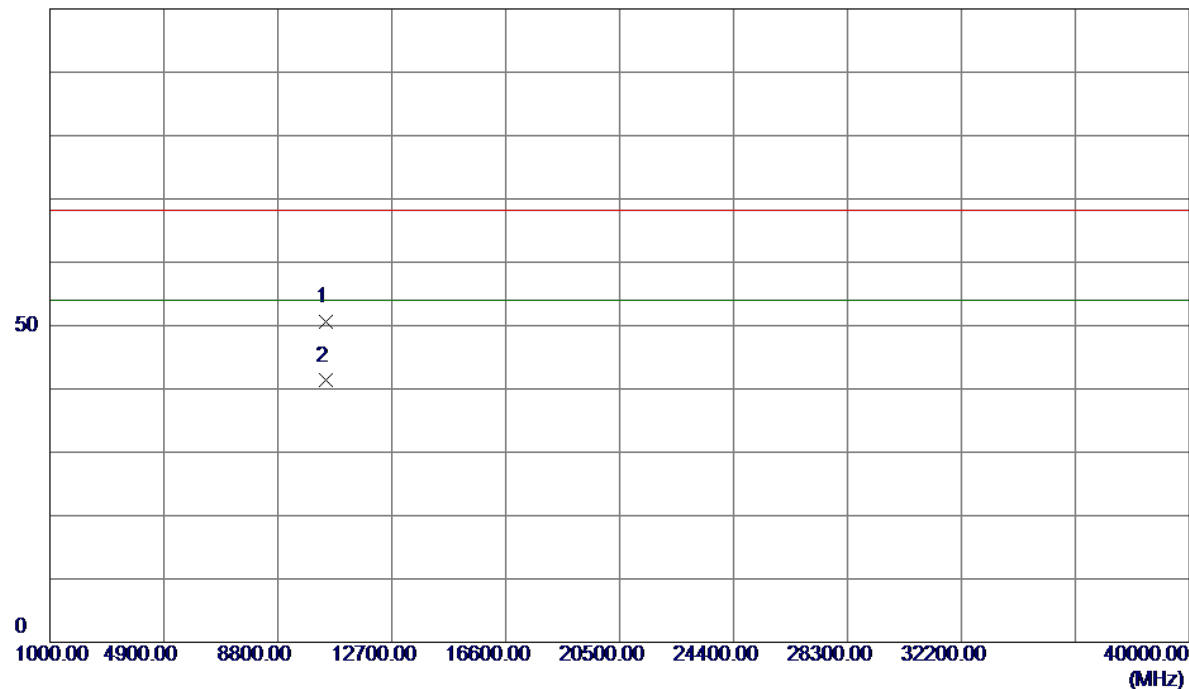


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10460.0800	39.70	10.97	50.67	68.30	-17.63	Peak	
2	10460.0800	30.33	10.97	41.30	54.00	-12.70	AVG	

Hi

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

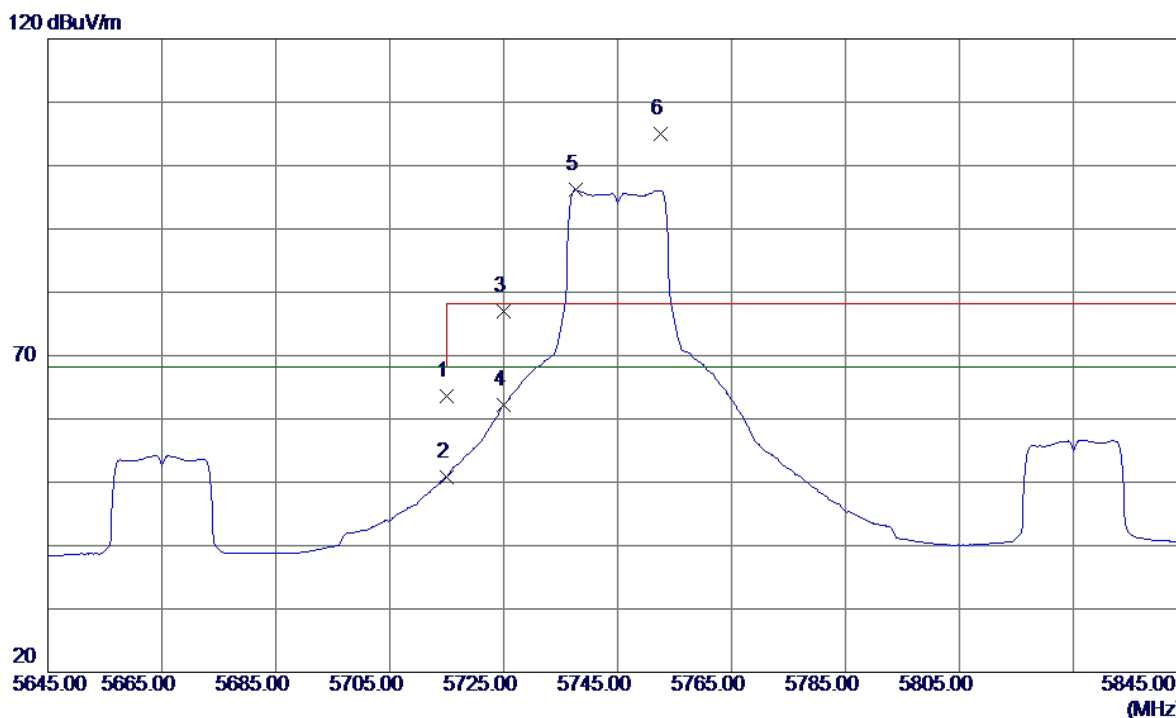


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	22.59	41.05	63.64	68.30	-4.66	Peak	
2	5715.0000	9.83	41.05	50.88	68.30	-17.42	AVG	
3	5725.0000	35.83	41.10	76.93	78.30	-1.37	Peak	
4	5725.0000	21.12	41.10	62.22	68.30	-6.08	AVG	
5	5737.6000	54.97	41.15	96.12	68.30	27.82	AVG	no limit
6	5752.6000	63.73	41.21	104.94	78.30	26.64	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical


100 dBuV/m

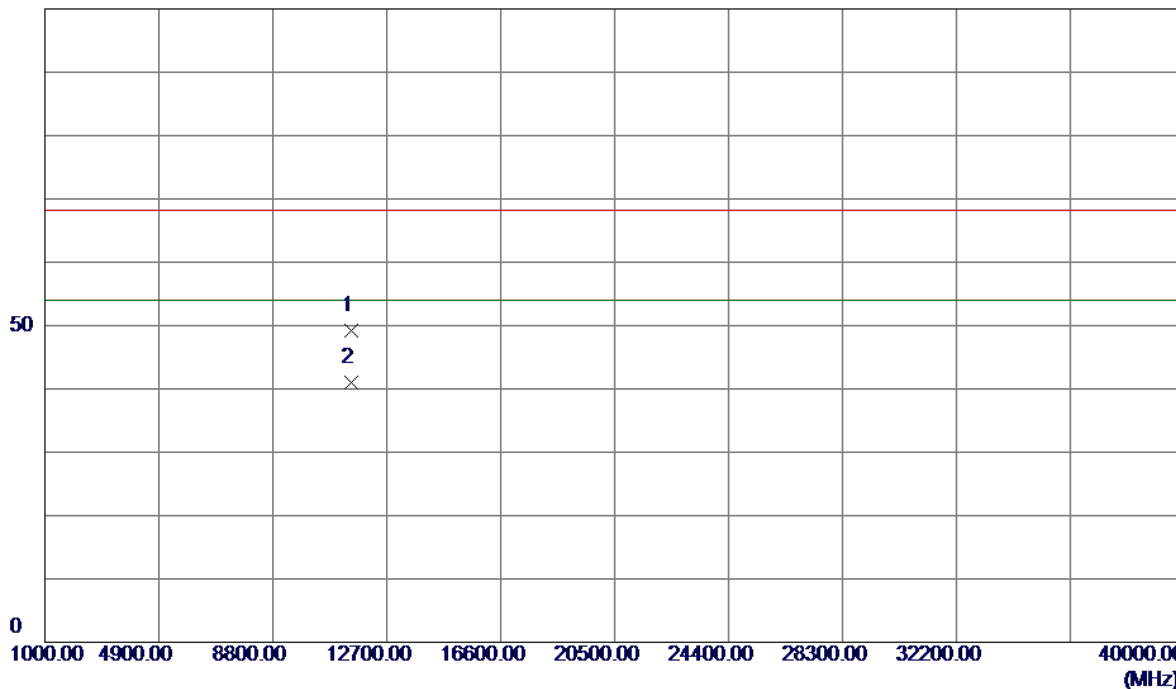

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.0500	36.38	12.91	49.29	68.30	-19.01	Peak	
2	11490.0500	28.06	12.91	40.97	54.00	-13.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

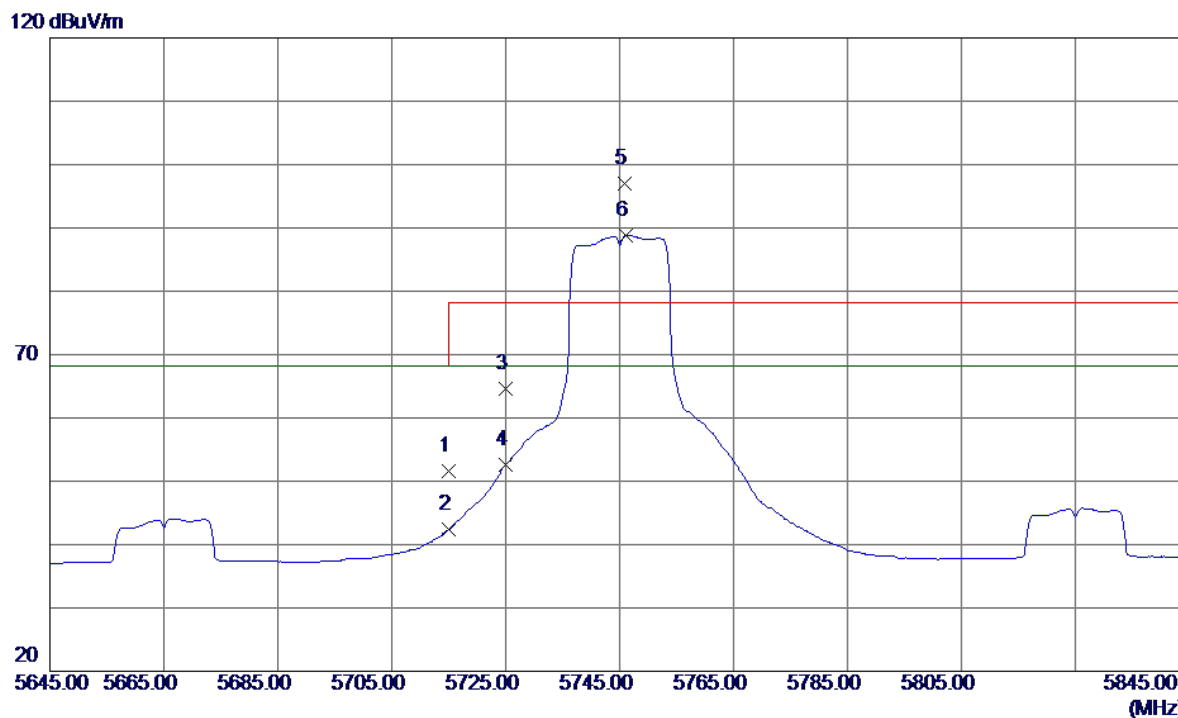


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	10.54	41.05	51.59	68.30	-16.71	Peak	
2	5715.0000	1.29	41.05	42.34	68.30	-25.96	AVG	
3	5725.0000	23.51	41.10	64.61	78.30	-13.69	Peak	
4	5725.0000	11.51	41.10	52.61	68.30	-15.69	AVG	
5	5745.8000	55.75	41.18	96.93	78.30	18.63	Peak	no limit
6	5746.2000	47.66	41.18	88.84	68.30	20.54	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal


100 dBuV/m

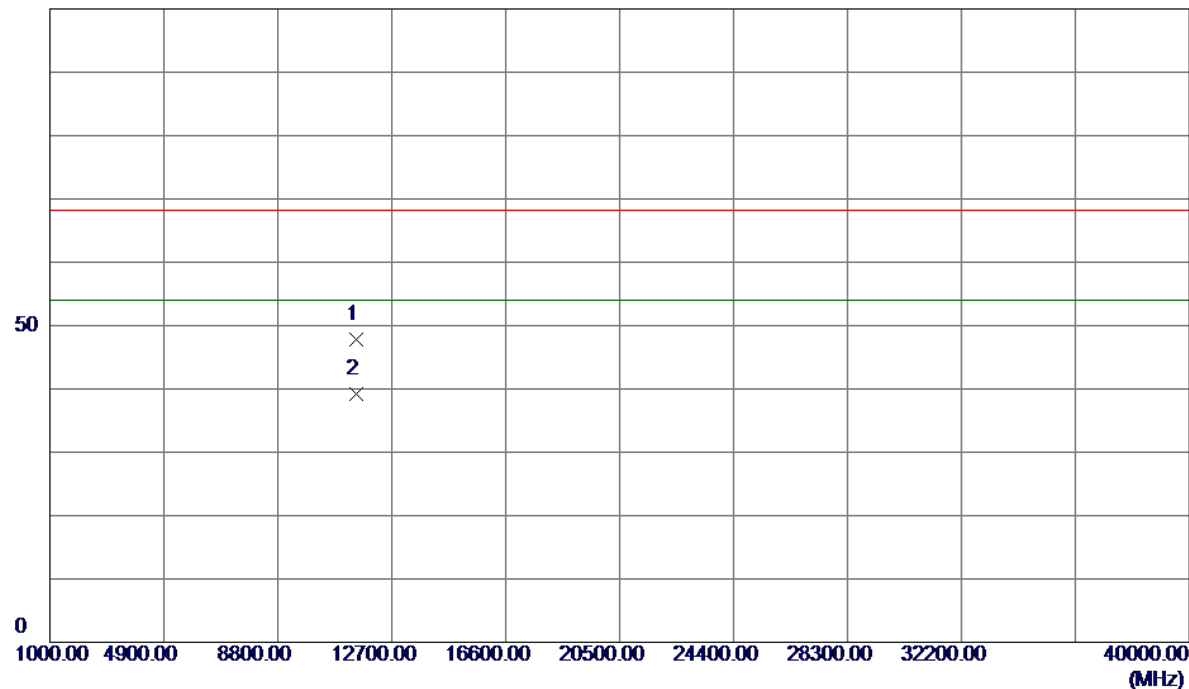

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11489.5000	34.95	12.91	47.86	68.30	-20.44	Peak	
2	11489.5000	26.25	12.91	39.16	54.00	-14.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Vertical

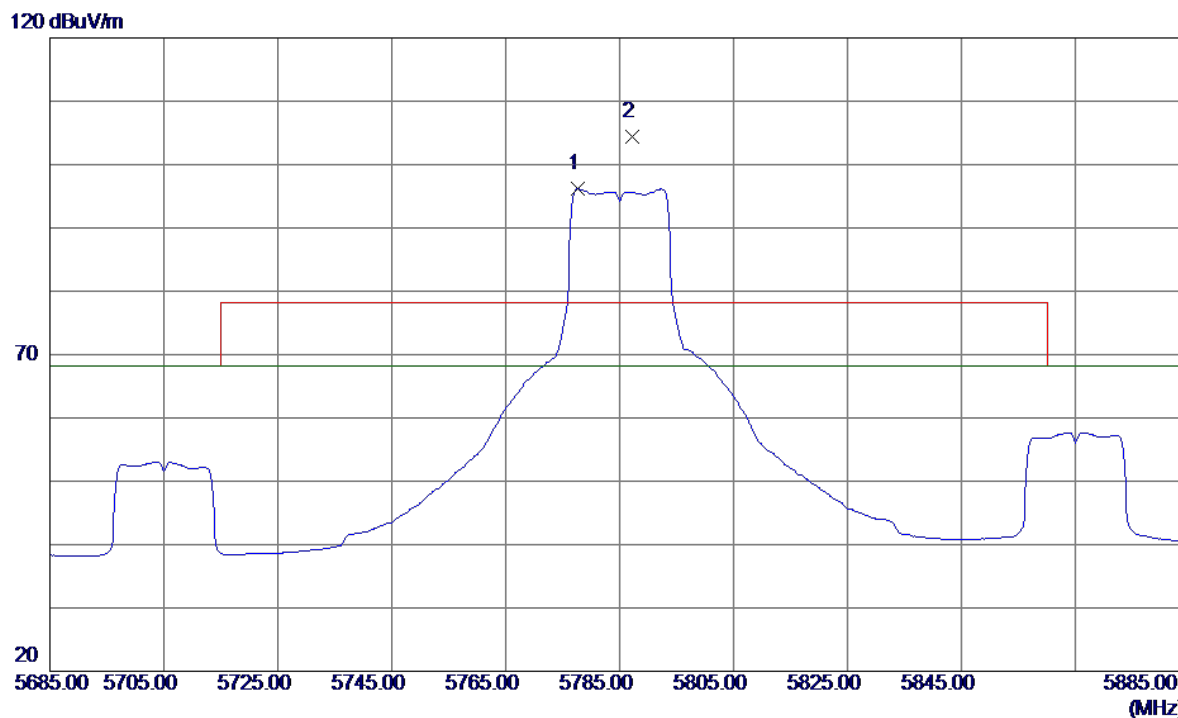


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5777.6000	54.92	41.31	96.23	68.30	27.93	AVG	no limit
2	5787.2000	63.13	41.35	104.48	78.30	26.18	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Vertical


100 dBuV/m

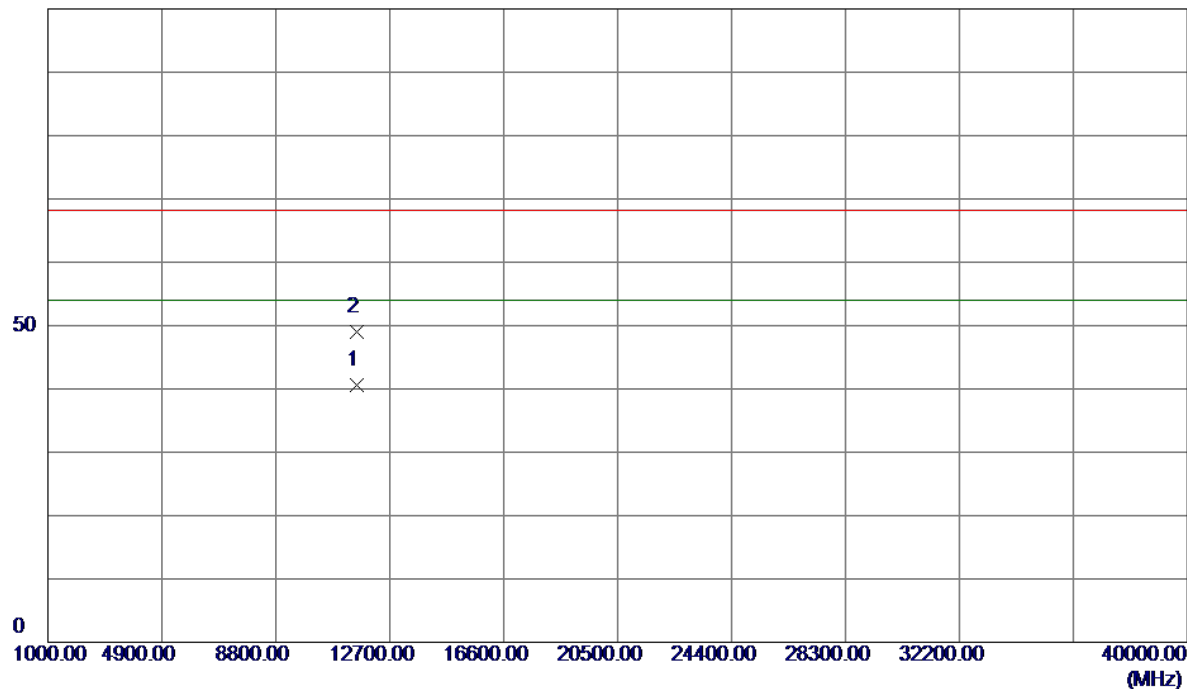

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11569.9500	27.64	12.89	40.53	54.00	-13.47	AVG	
2	11570.0000	36.12	12.89	49.01	68.30	-19.29	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal

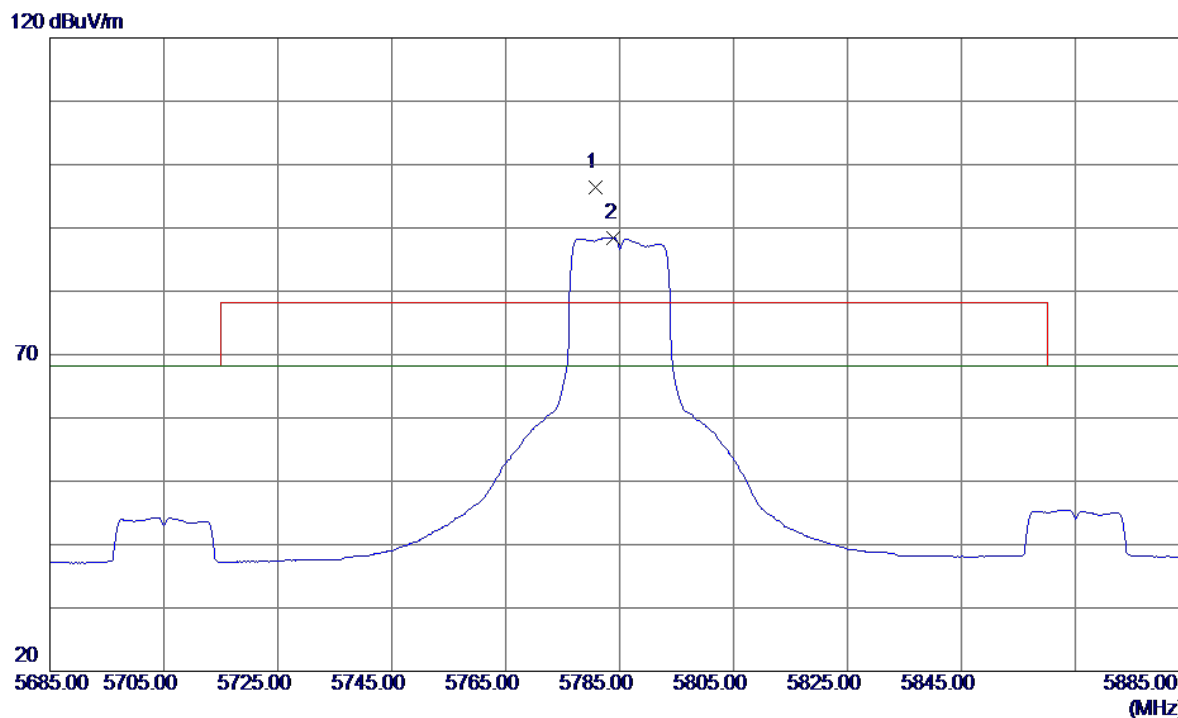


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5780.8000	55.14	41.33	96.47	78.30	18.17	Peak	no limit
2	5784.0000	47.13	41.34	88.47	68.30	20.17	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal


100 dBuV/m

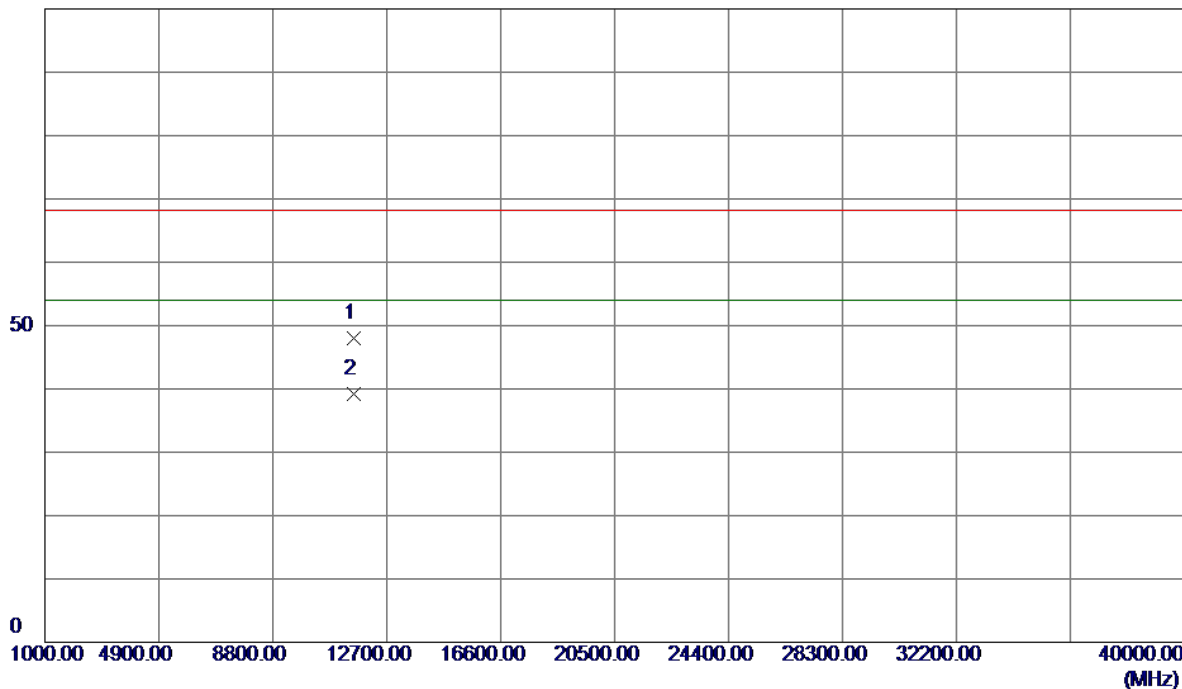

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11569.7500	35.17	12.89	48.06	68.30	-20.24	Peak	
2	11569.7500	26.32	12.89	39.21	54.00	-14.79	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

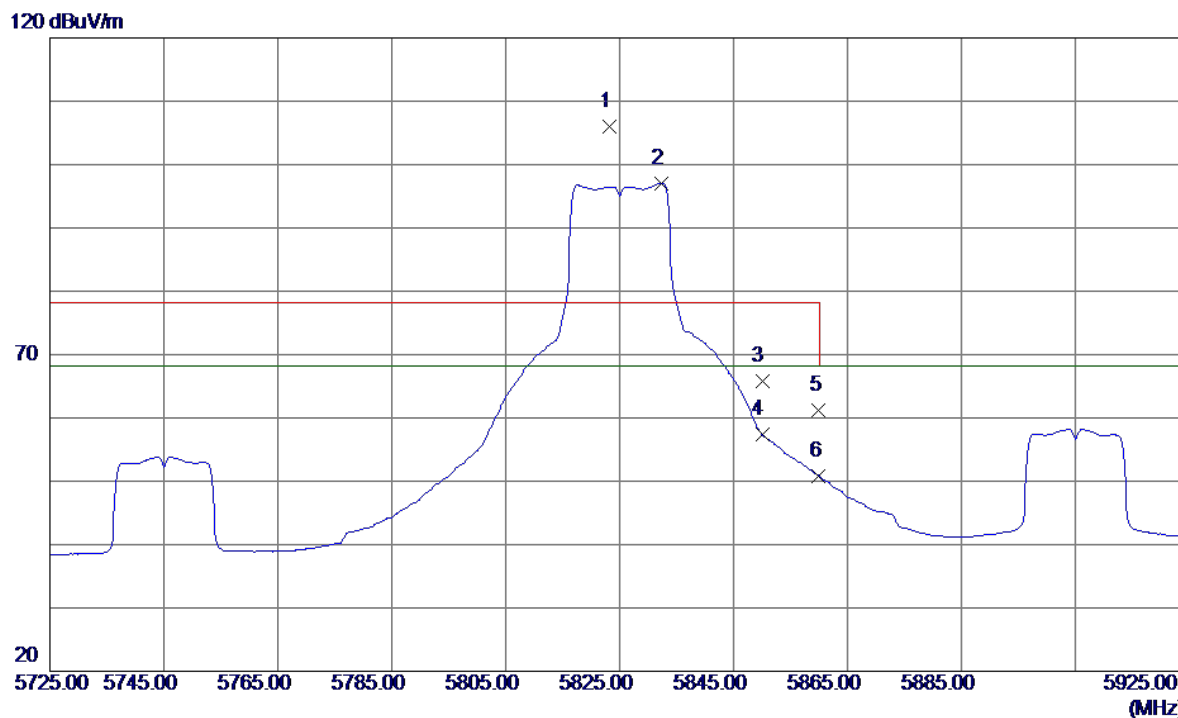


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5823.2000	64.47	41.50	105.97	78.30	27.67	Peak	no limit
2	5832.4000	55.47	41.54	97.01	68.30	28.71	AVG	no limit
3	5850.0000	24.19	41.62	65.81	78.30	-12.49	Peak	
4	5850.0000	15.84	41.62	57.46	68.30	-10.84	AVG	
5	5860.0000	19.61	41.66	61.27	78.30	-17.03	Peak	
6	5860.0000	9.12	41.66	50.78	68.30	-17.52	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical


100 dBuV/m

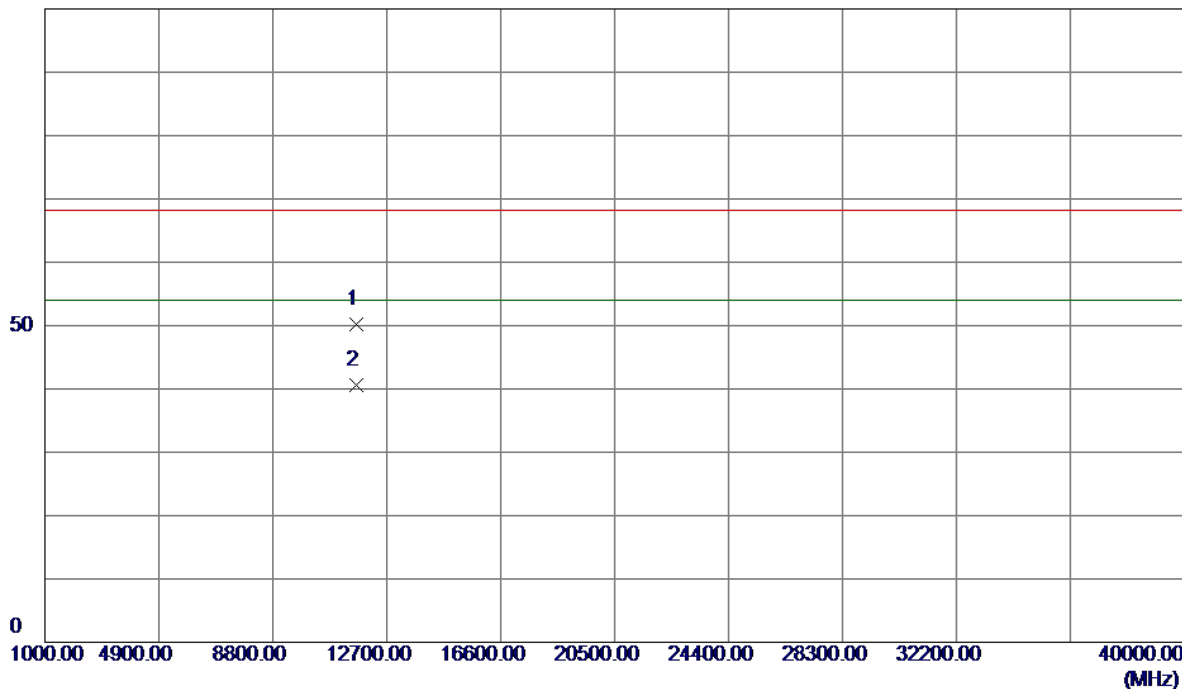

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.1000	37.39	12.84	50.23	68.30	-18.07	Peak	
2	11650.1000	27.73	12.84	40.57	54.00	-13.43	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

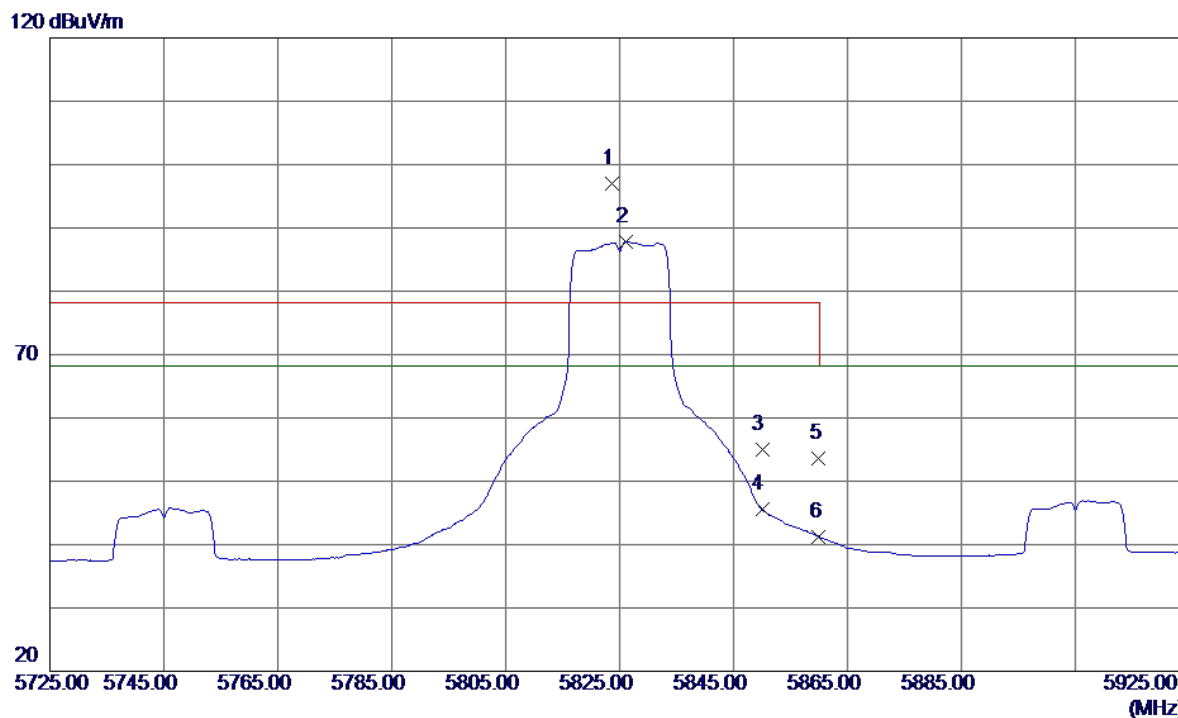

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5823.6000	55.48	41.51	96.99	78.30	18.69	Peak	no limit
2	5826.2000	46.30	41.52	87.82	68.30	19.52	AVG	no limit
3	5850.0000	13.44	41.62	55.06	78.30	-23.24	Peak	
4	5850.0000	3.93	41.62	45.55	68.30	-22.75	AVG	
5	5860.0000	11.87	41.66	53.53	78.30	-24.77	Peak	
6	5860.0000	-0.38	41.66	41.28	68.30	-27.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

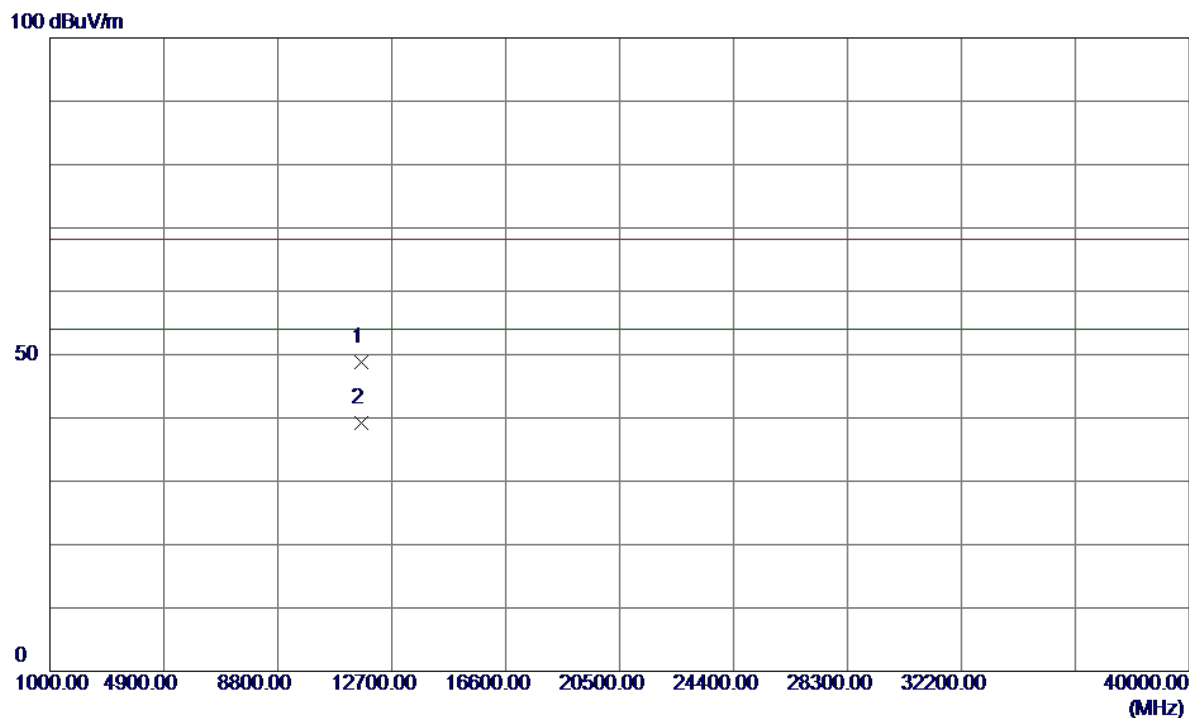

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11648.5000	36.03	12.84	48.87	68.30	-19.43	Peak	
2	11648.5000	26.42	12.84	39.26	54.00	-14.74	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

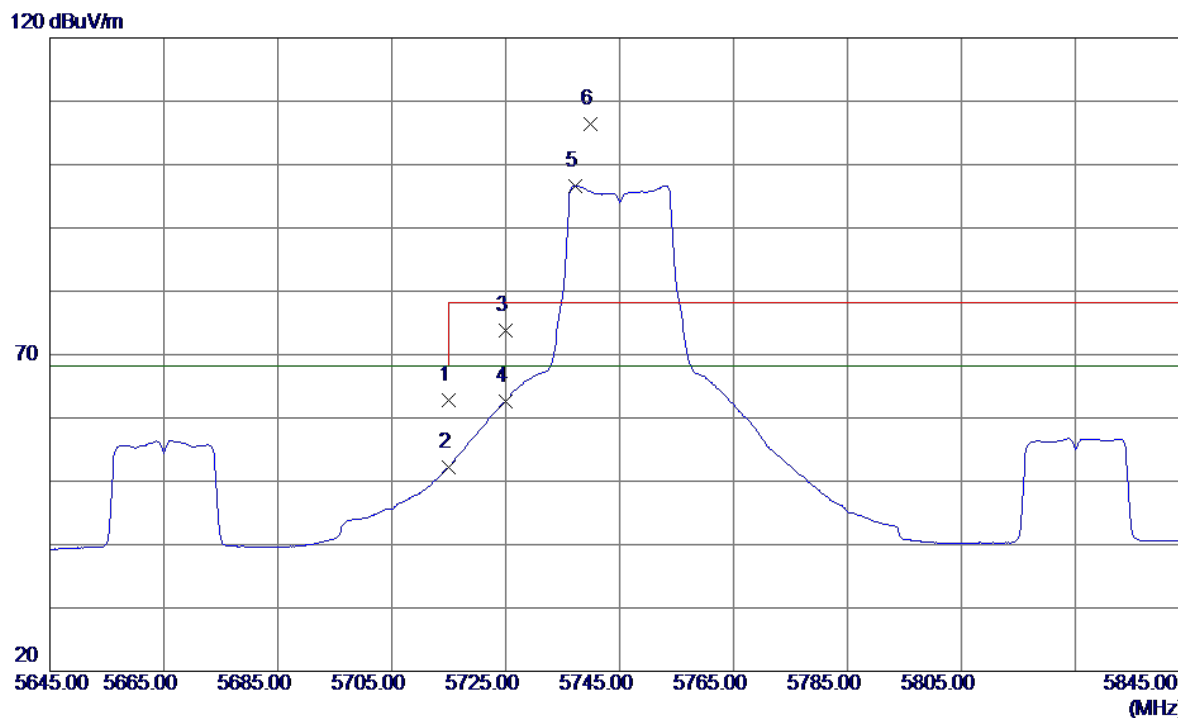


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	21.70	41.05	62.75	68.30	-5.55	Peak	
2	5715.0000	11.20	41.05	52.25	68.30	-16.05	AVG	
3	5725.0000	32.66	41.10	73.76	78.30	-4.54	Peak	
4	5725.0000	21.58	41.10	62.68	68.30	-5.62	AVG	
5	5737.2000	55.53	41.15	96.68	68.30	28.38	AVG	no limit
6	5739.8000	65.33	41.16	106.49	78.30	28.19	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical


100 dBuV/m

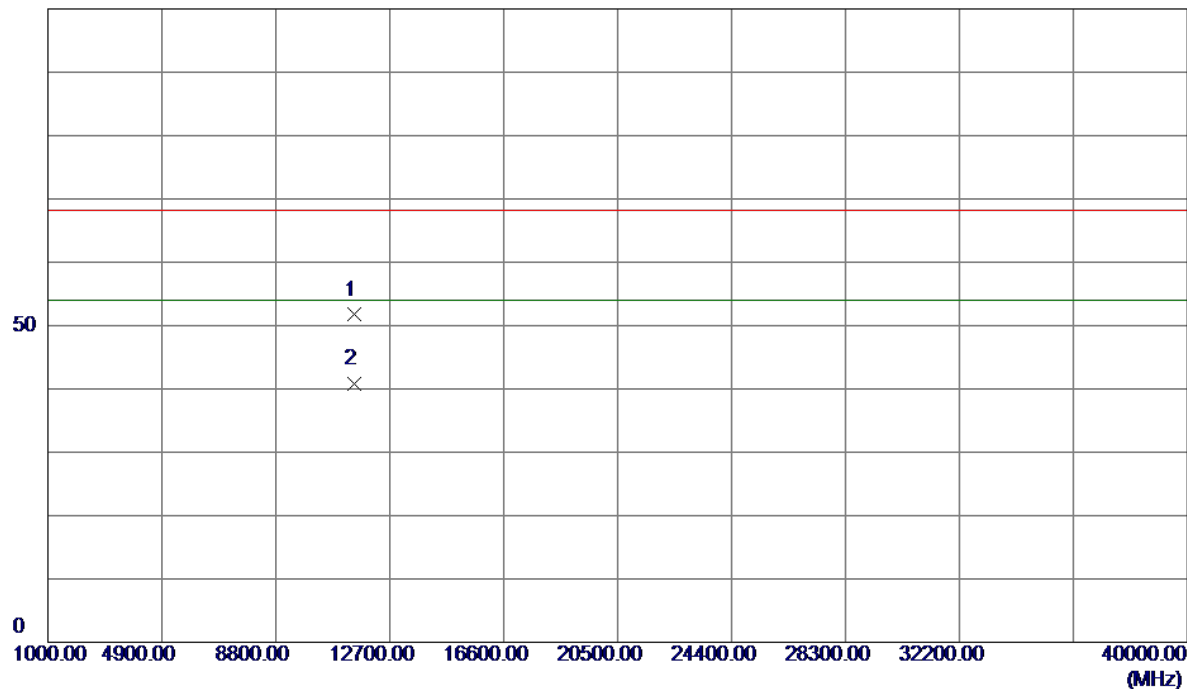

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.0500	38.79	12.91	51.70	68.30	-16.60	Peak	
2	11490.0500	27.90	12.91	40.81	54.00	-13.19	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

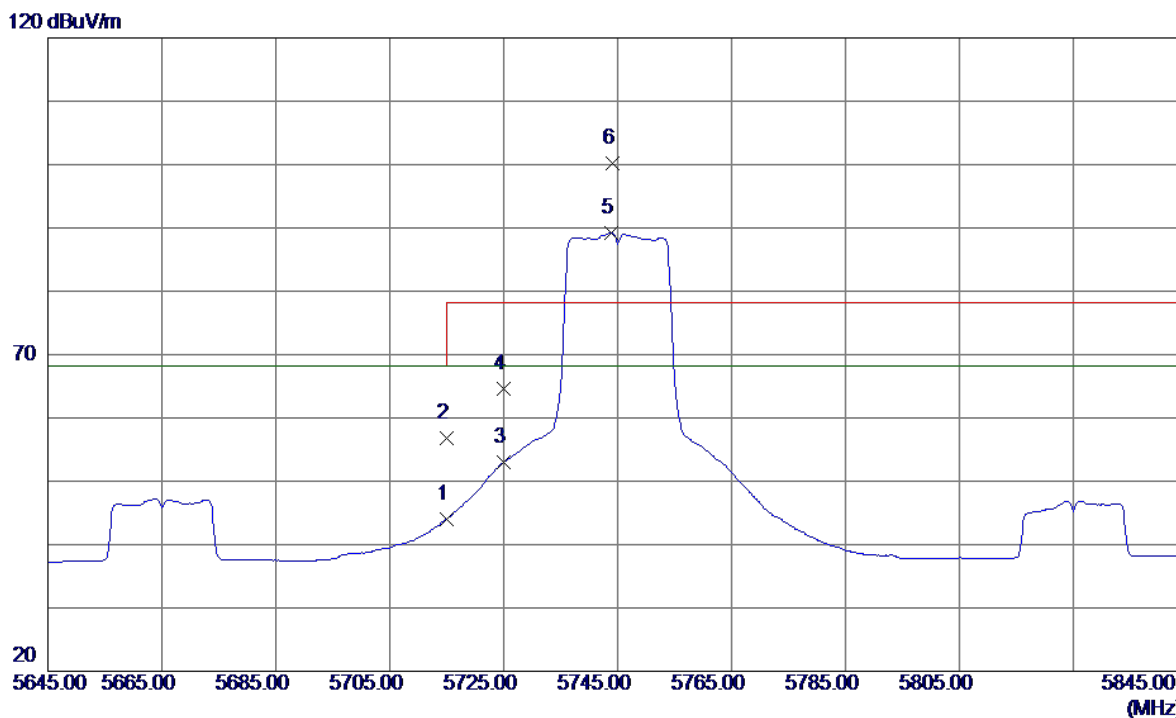


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	2.98	41.05	44.03	68.30	-24.27	Peak	
2	5715.0000	15.68	41.05	56.73	68.30	-11.57	AVG	
3	5725.0000	11.88	41.10	52.98	78.30	-25.32	Peak	
4	5725.0000	23.56	41.10	64.66	68.30	-3.64	AVG	
5	5743.8000	48.12	41.17	89.29	68.30	20.99	AVG	no limit
6	5744.2000	58.98	41.18	100.16	78.30	21.86	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal


100 dBuV/m

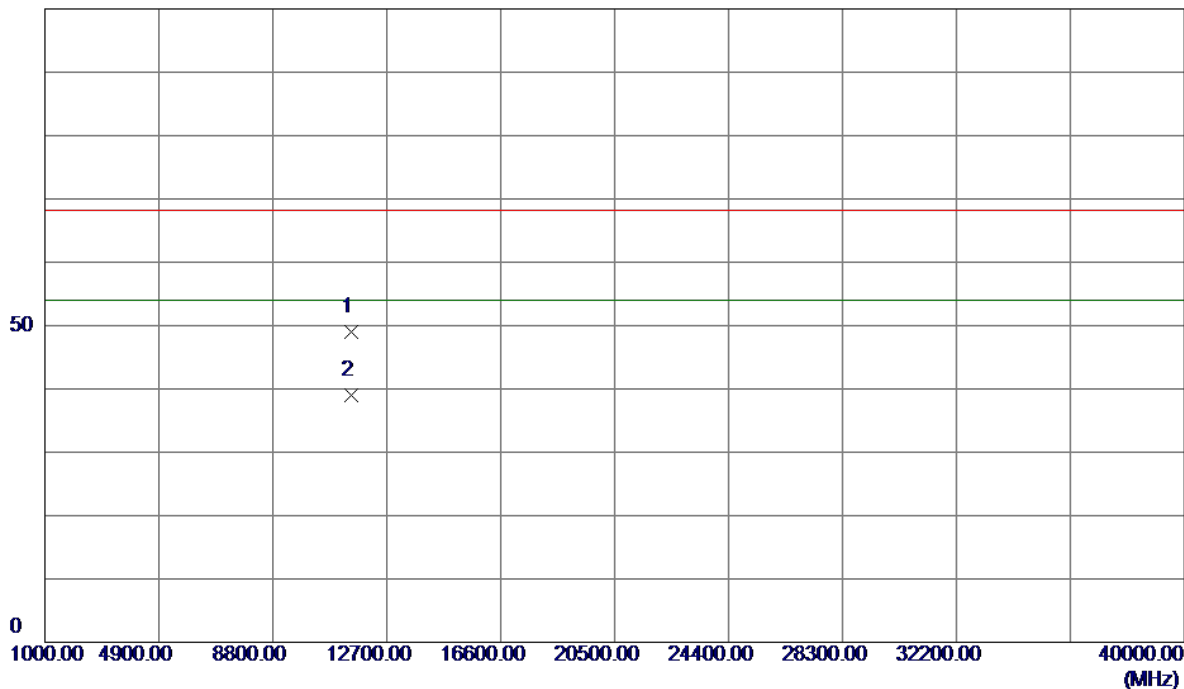

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.2000	36.04	12.91	48.95	68.30	-19.35	Peak	
2	11490.2000	26.16	12.91	39.07	54.00	-14.93	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Vertical

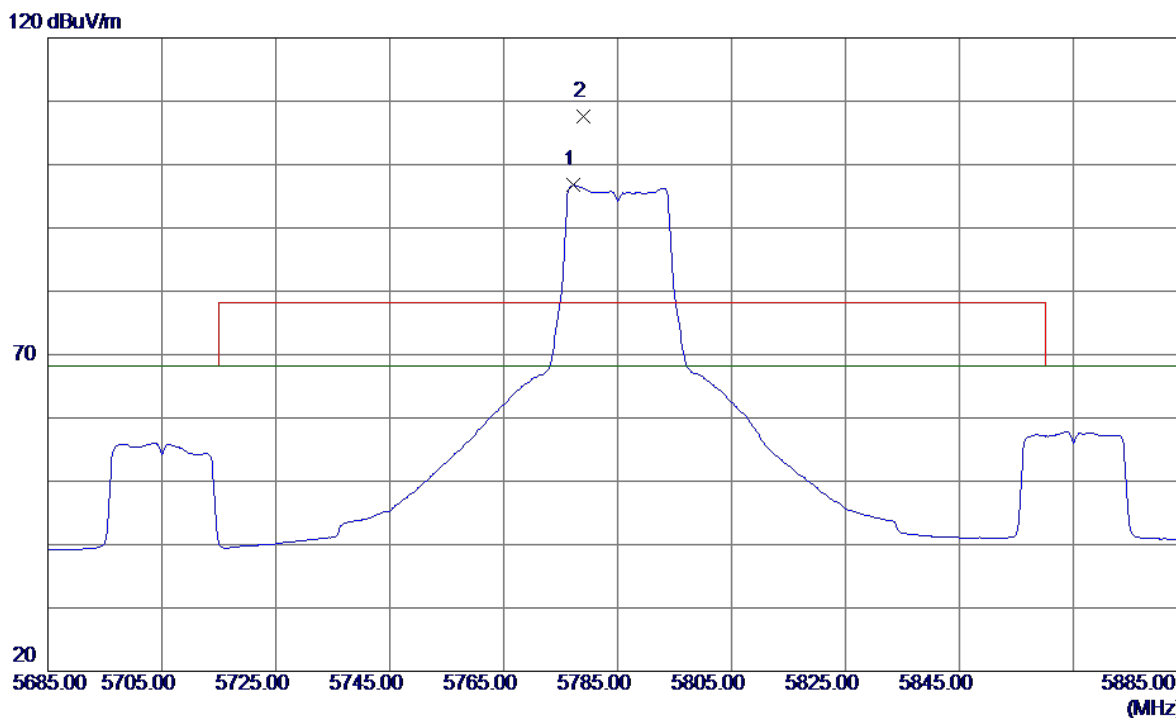


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5777.2000	55.42	41.31	96.73	68.30	28.43	AVG	no limit
2	5779.0000	66.29	41.32	107.61	78.30	29.31	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Vertical


100 dBuV/m

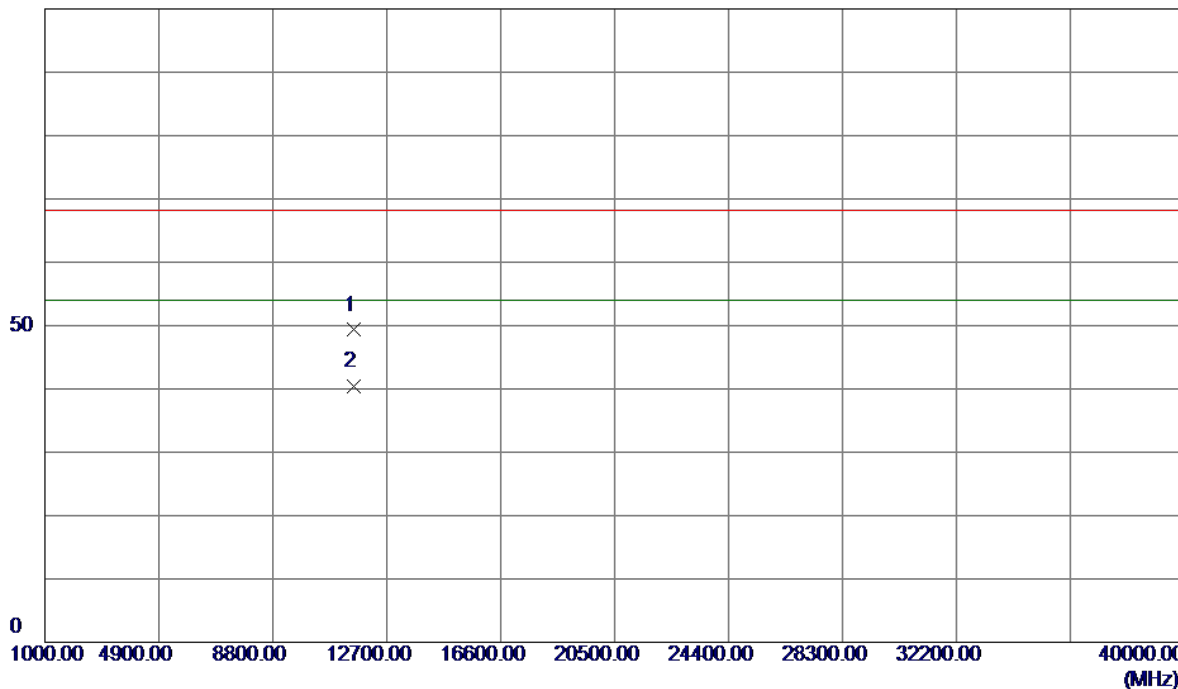

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.3000	36.41	12.89	49.30	68.30	-19.00	Peak	
2	11570.3000	27.42	12.89	40.31	54.00	-13.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Horizontal

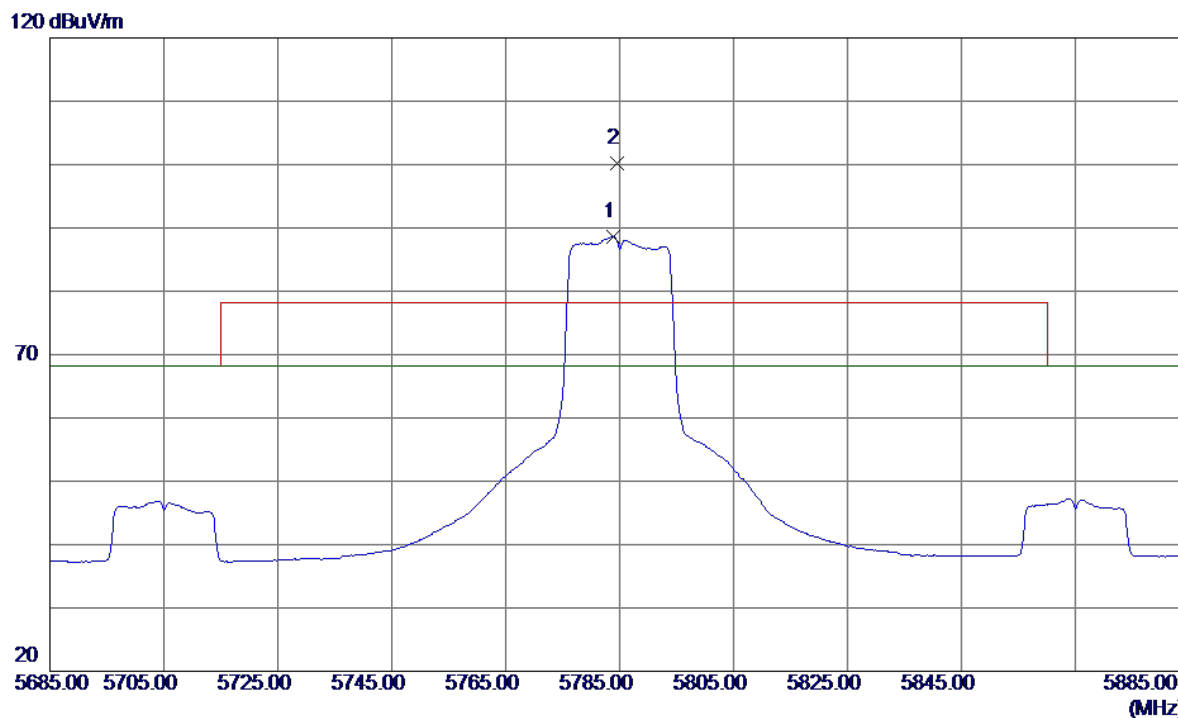


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5783.8000	47.32	41.34	88.66	68.30	20.36	AVG	no limit
2	5784.6000	58.86	41.34	100.20	78.30	21.90	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Horizontal


100 dBuV/m

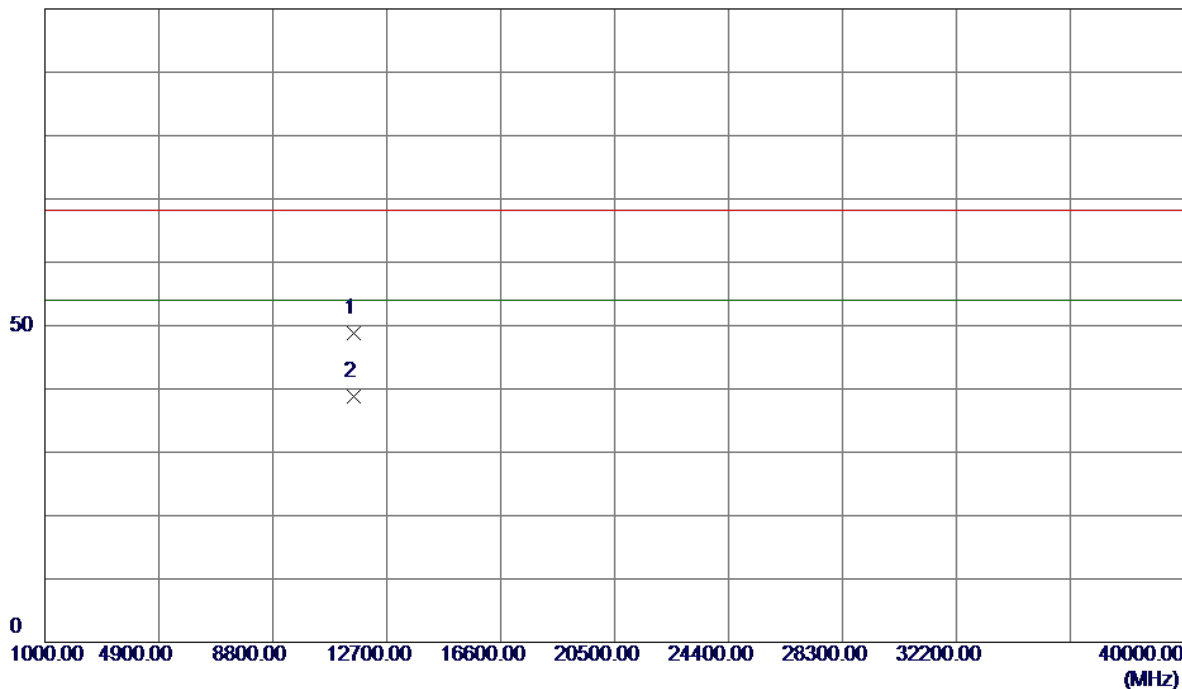

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.1000	35.82	12.89	48.71	68.30	-19.59	Peak	
2	11570.1000	25.94	12.89	38.83	54.00	-15.17	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

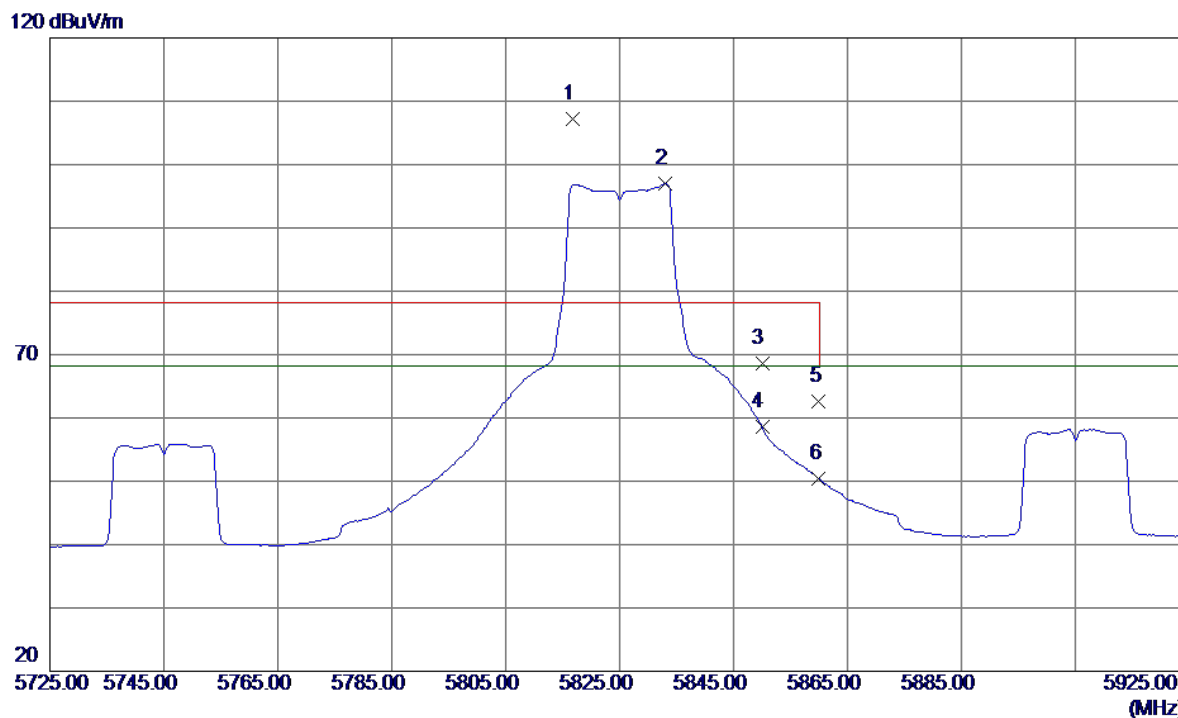


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5816.8000	65.65	41.48	107.13	78.30	28.83	Peak	no limit
2	5833.0000	55.39	41.55	96.94	68.30	28.64	AVG	no limit
3	5850.0000	26.90	41.62	68.52	78.30	-9.78	Peak	
4	5850.0000	17.00	41.62	58.62	68.30	-9.68	AVG	
5	5860.0000	20.95	41.66	62.61	78.30	-15.69	Peak	
6	5860.0000	8.76	41.66	50.42	68.30	-17.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical


100 dBuV/m

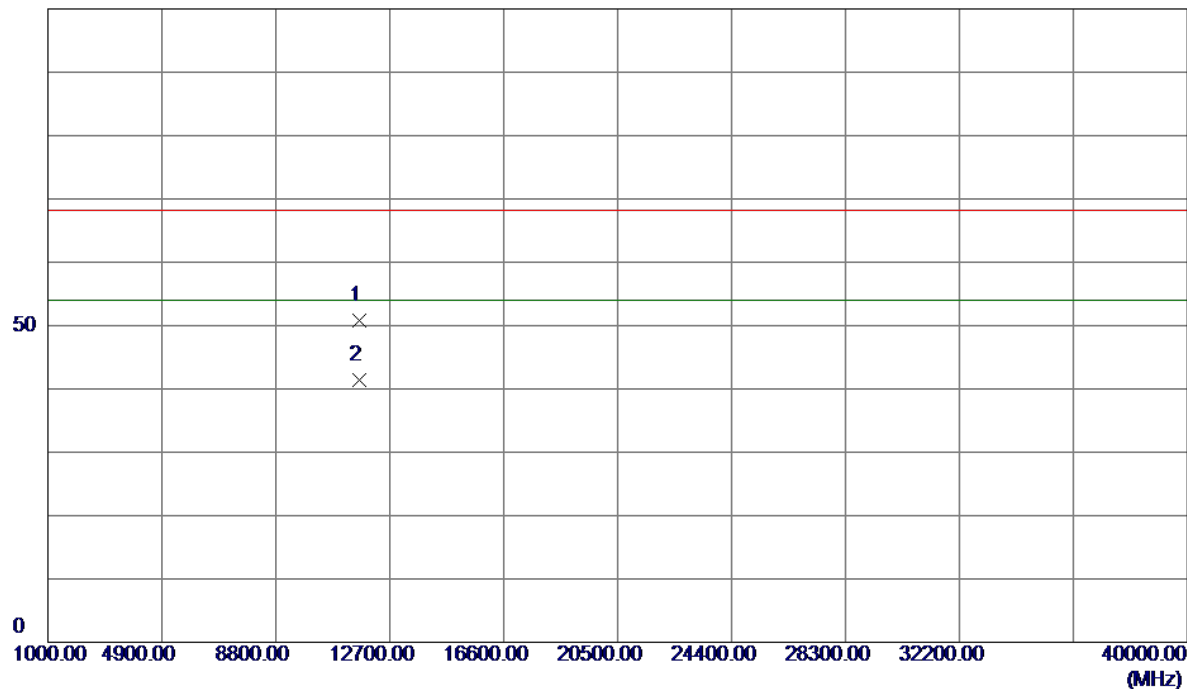

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.1000	37.96	12.84	50.80	68.30	-17.50	Peak	
2	11650.1000	28.60	12.84	41.44	54.00	-12.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal

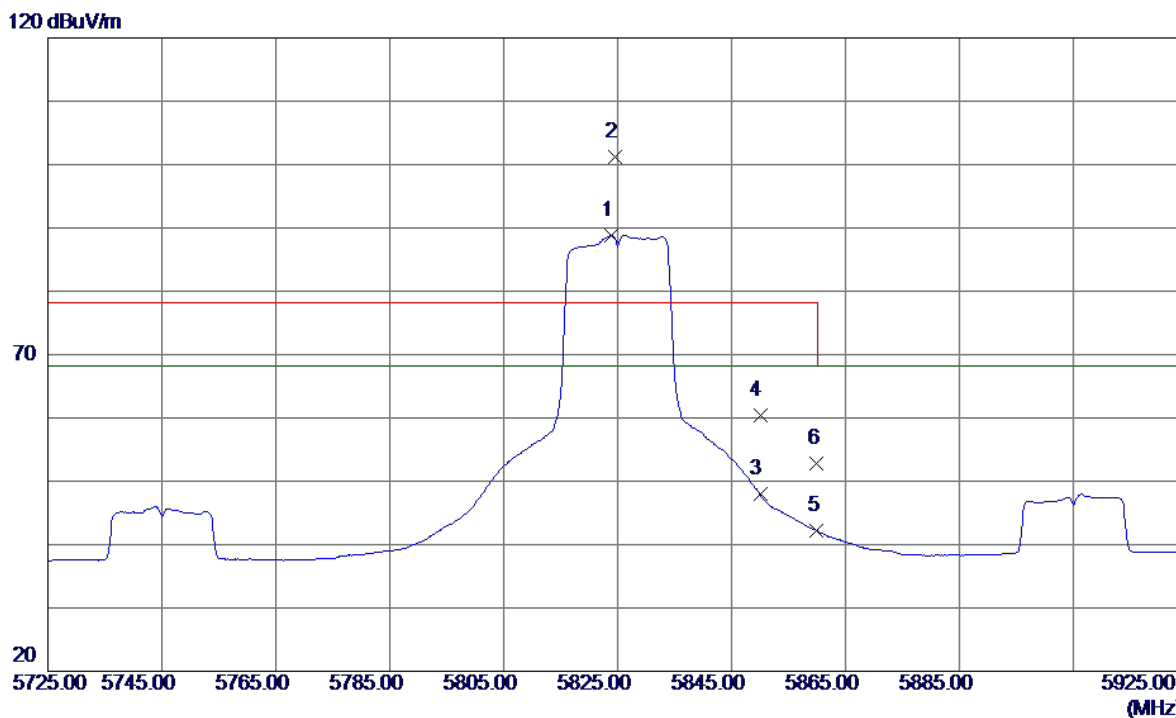


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5823.8000	47.37	41.51	88.88	68.30	20.58	AVG	no limit
2	5824.6000	59.66	41.51	101.17	78.30	22.87	Peak	no limit
3	5850.0000	6.38	41.62	48.00	78.30	-30.30	Peak	
4	5850.0000	18.79	41.62	60.41	68.30	-7.89	AVG	
5	5860.0000	0.51	41.66	42.17	78.30	-36.13	Peak	
6	5860.0000	11.17	41.66	52.83	68.30	-15.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal


100 dBuV/m

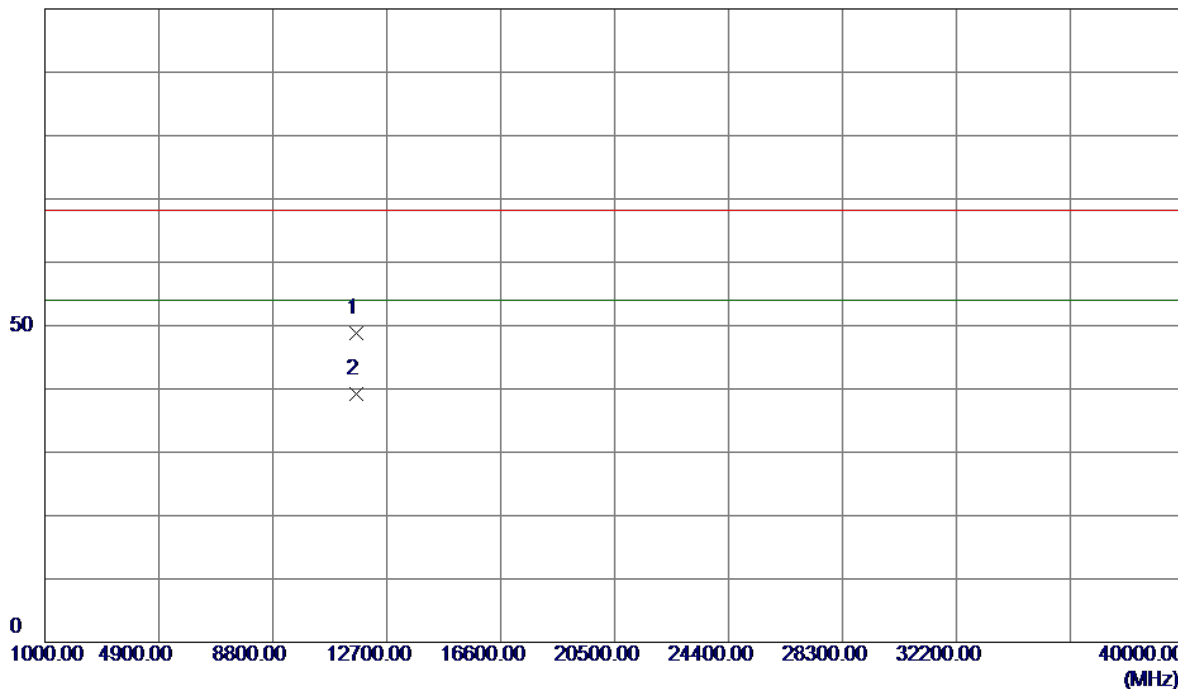

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11652.2000	35.93	12.84	48.77	68.30	-19.53	Peak	
2	11652.2000	26.40	12.84	39.24	54.00	-14.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

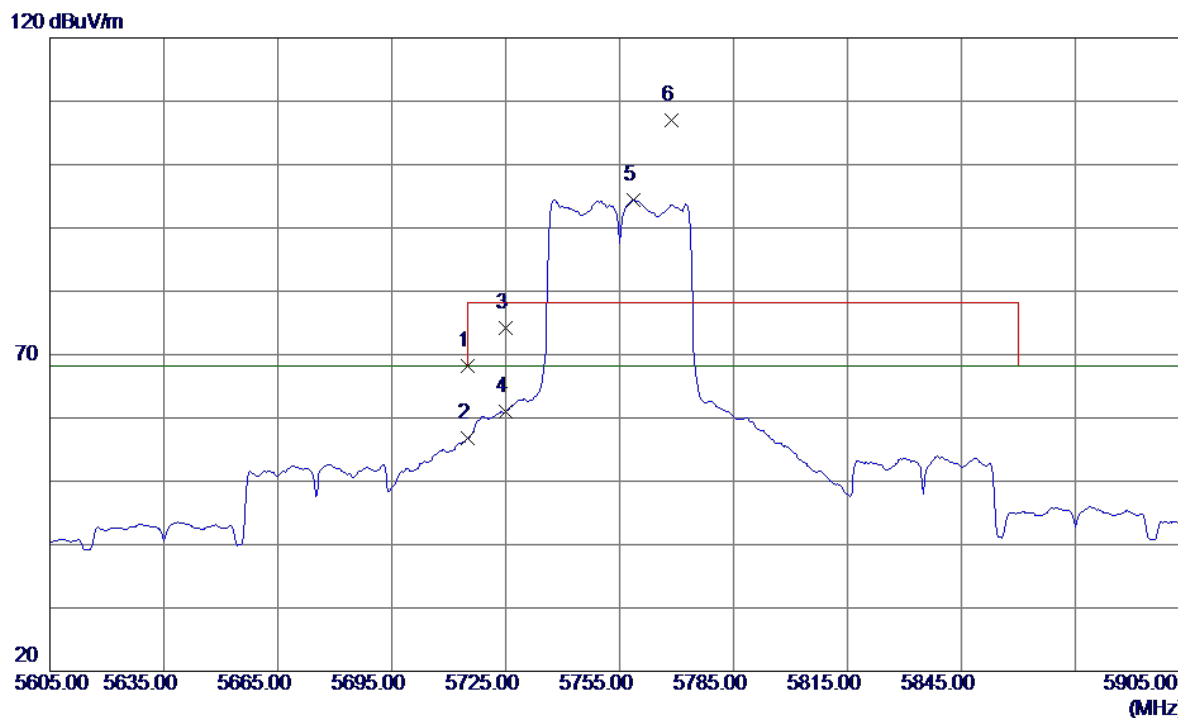


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	27.18	41.05	68.23	68.30	-0.07	Peak	
2	5715.0000	15.73	41.05	56.78	68.30	-11.52	AVG	
3	5725.0000	33.19	41.10	74.29	78.30	-4.01	Peak	
4	5725.0000	19.83	41.10	60.93	68.30	-7.37	AVG	
5	5758.6000	53.25	41.24	94.49	68.30	26.19	AVG	no limit
6	5768.8000	65.71	41.28	106.99	78.30	28.69	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical


100 dBuV/m

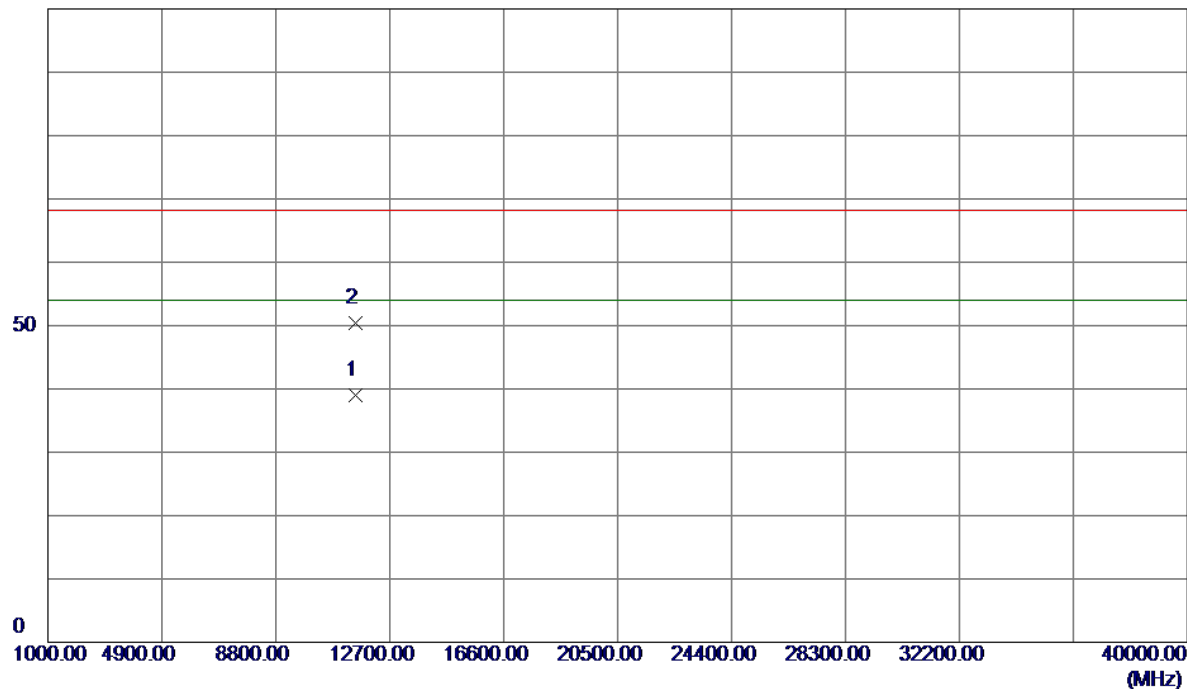

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11509.9000	26.05	12.93	38.98	54.00	-15.02	AVG	
2	11510.0500	37.47	12.93	50.40	68.30	-17.90	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal

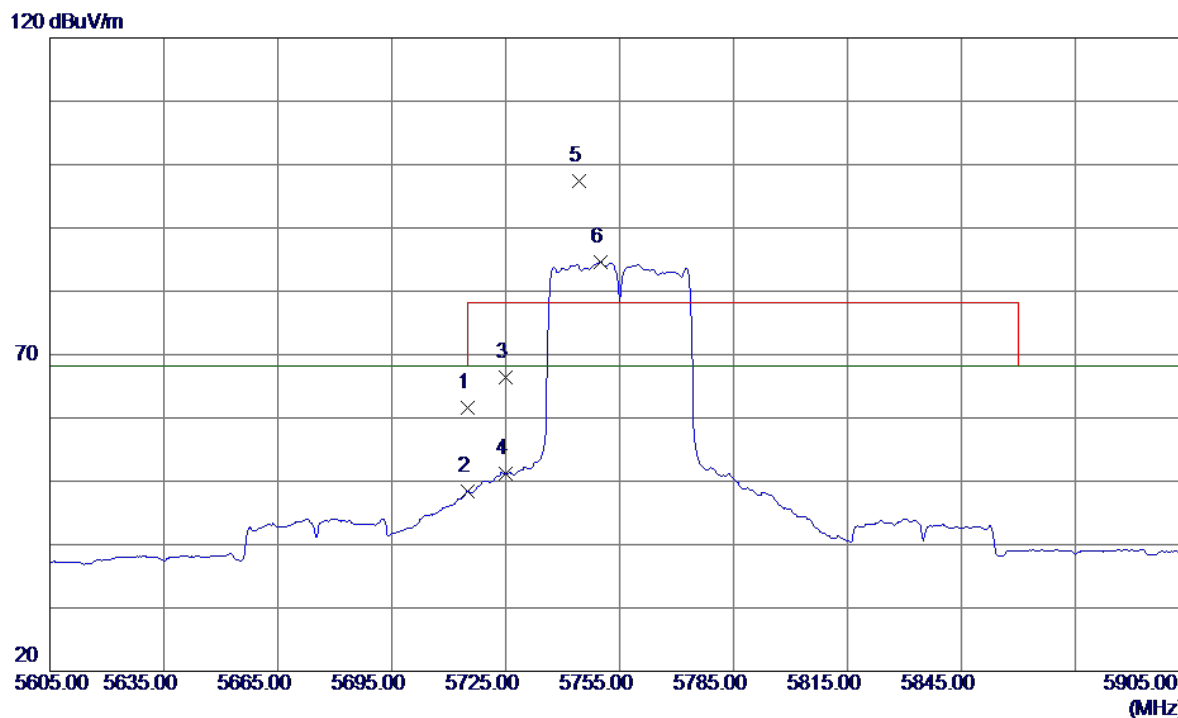


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	20.62	41.05	61.67	68.30	-6.63	Peak	
2	5715.0000	7.32	41.05	48.37	68.30	-19.93	AVG	
3	5725.0000	25.31	41.10	66.41	78.30	-11.89	Peak	
4	5725.0000	10.13	41.10	51.23	68.30	-17.07	AVG	
5	5744.2000	56.18	41.18	97.36	78.30	19.06	Peak	no limit
6	5749.9000	43.41	41.20	84.61	68.30	16.31	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal


100 dBuV/m

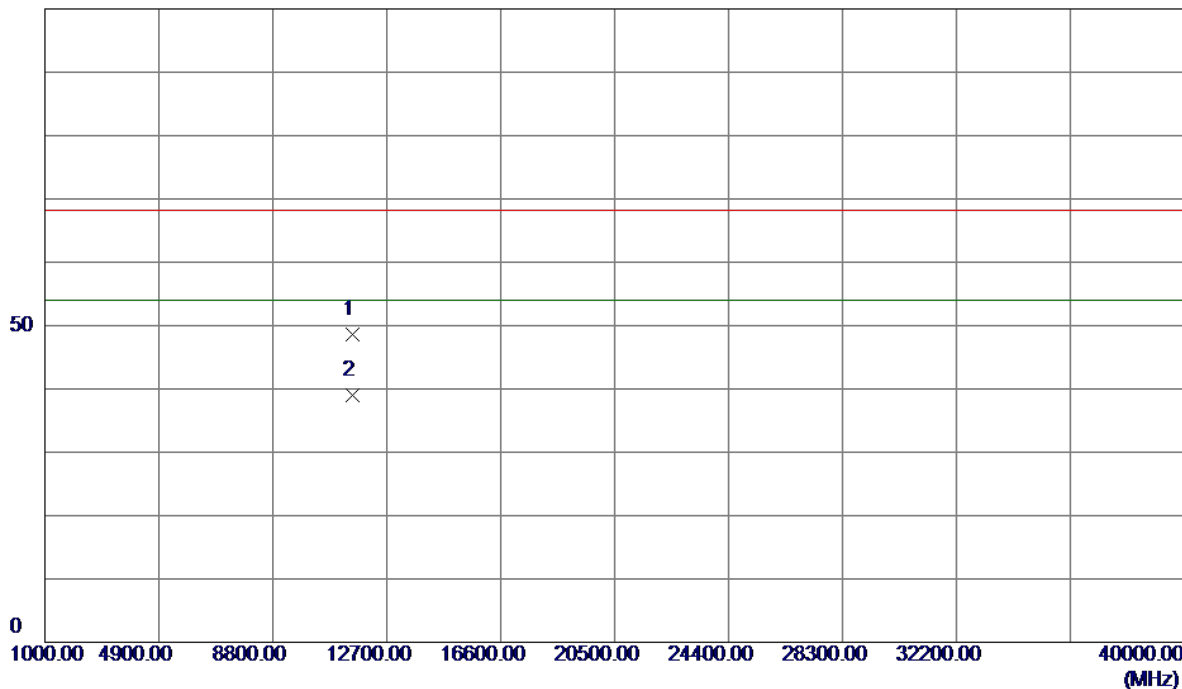

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11509.8500	35.73	12.93	48.66	68.30	-19.64	Peak	
2	11509.8500	25.98	12.93	38.91	54.00	-15.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical

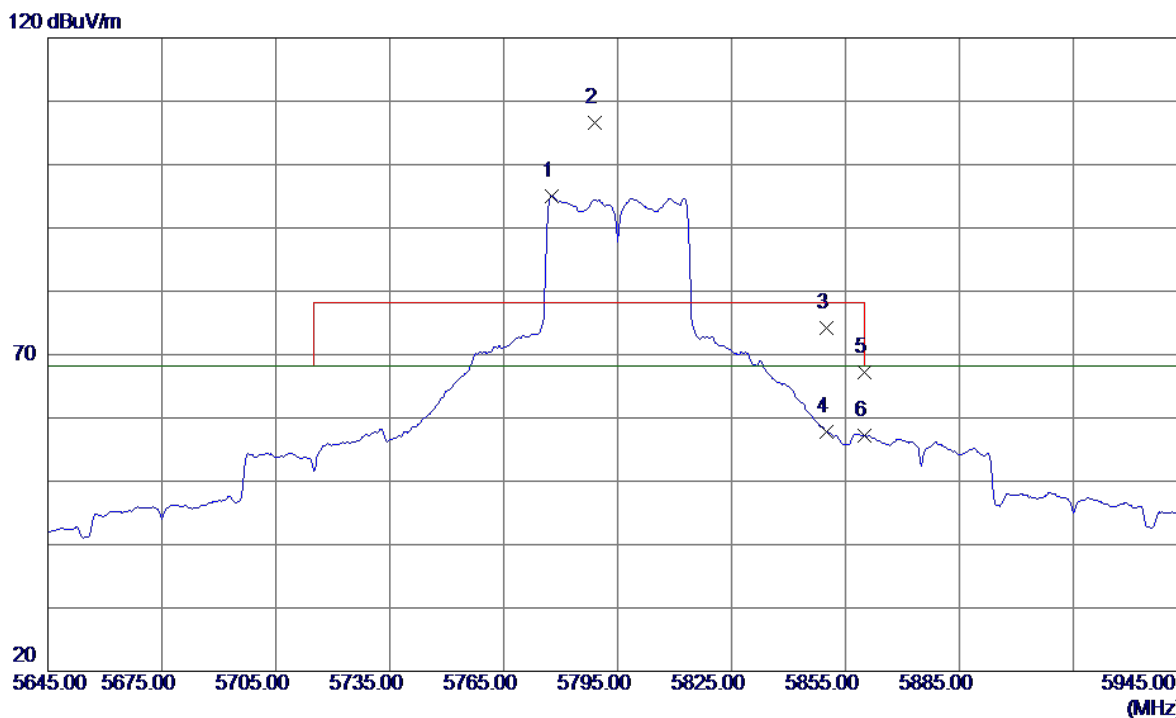


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5777.6000	53.65	41.31	94.96	68.30	26.66	AVG	no limit
2	5789.0000	65.16	41.36	106.52	78.30	28.22	Peak	no limit
3	5850.0000	32.54	41.62	74.16	78.30	-4.14	Peak	
4	5850.0000	16.18	41.62	57.80	68.30	-10.50	AVG	
5	5860.0000	25.47	41.66	67.13	78.30	-11.17	Peak	
6	5860.0000	15.57	41.66	57.23	68.30	-11.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical


100 dBuV/m

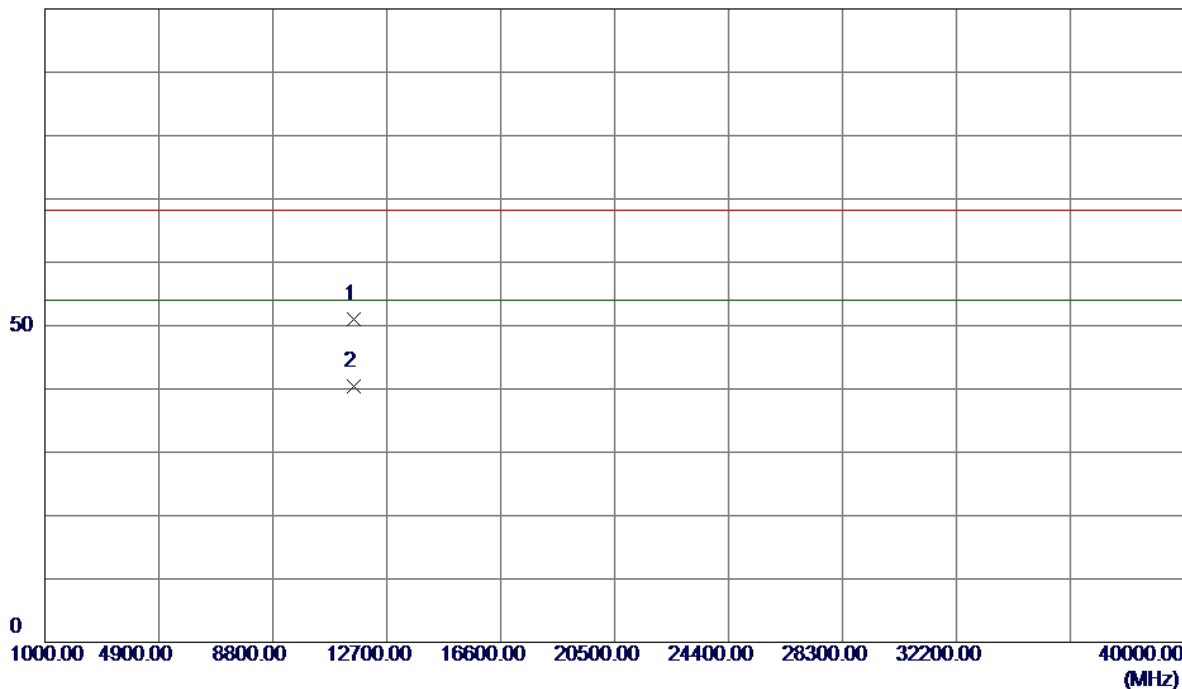

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.0599	38.06	12.88	50.94	68.30	-17.36	Peak	
2	11590.0599	27.54	12.88	40.42	54.00	-13.58	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

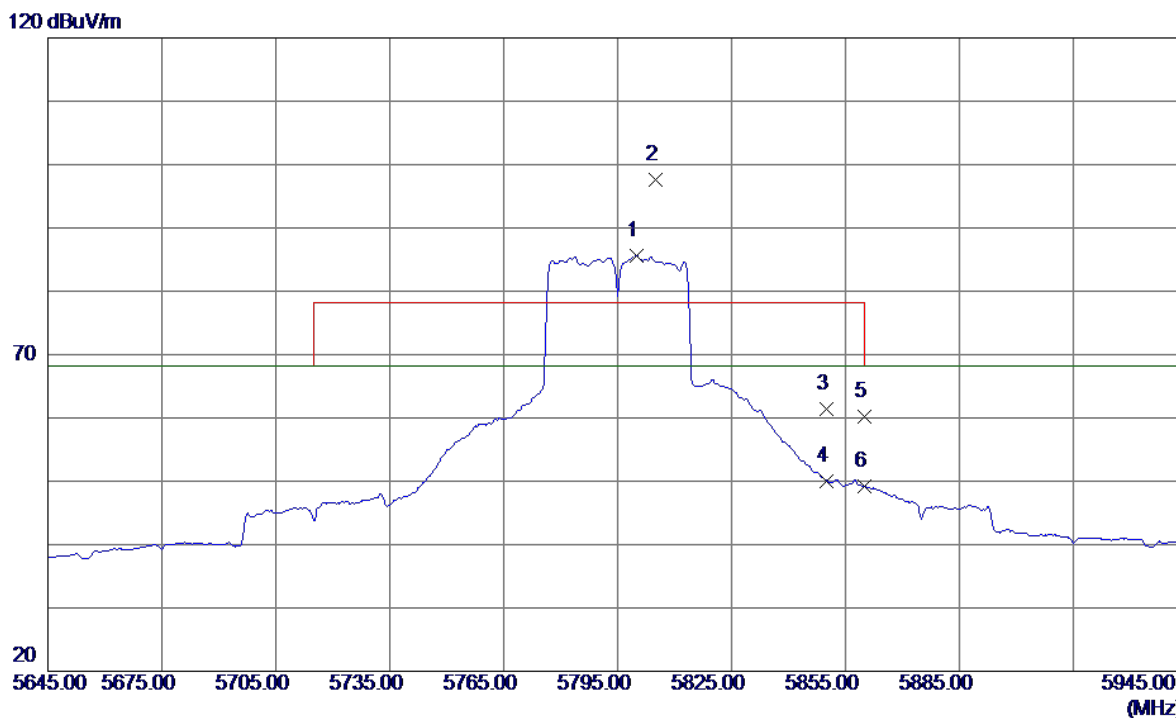


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5800.1000	44.25	41.41	85.66	68.30	17.36	AVG	no limit
2	5804.9000	56.22	41.43	97.65	78.30	19.35	Peak	no limit
3	5850.0000	19.80	41.62	61.42	78.30	-16.88	Peak	
4	5850.0000	8.42	41.62	50.04	68.30	-18.26	AVG	
5	5860.0000	18.52	41.66	60.18	78.30	-18.12	Peak	
6	5860.0000	7.57	41.66	49.23	68.30	-19.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

100 dBuV/m

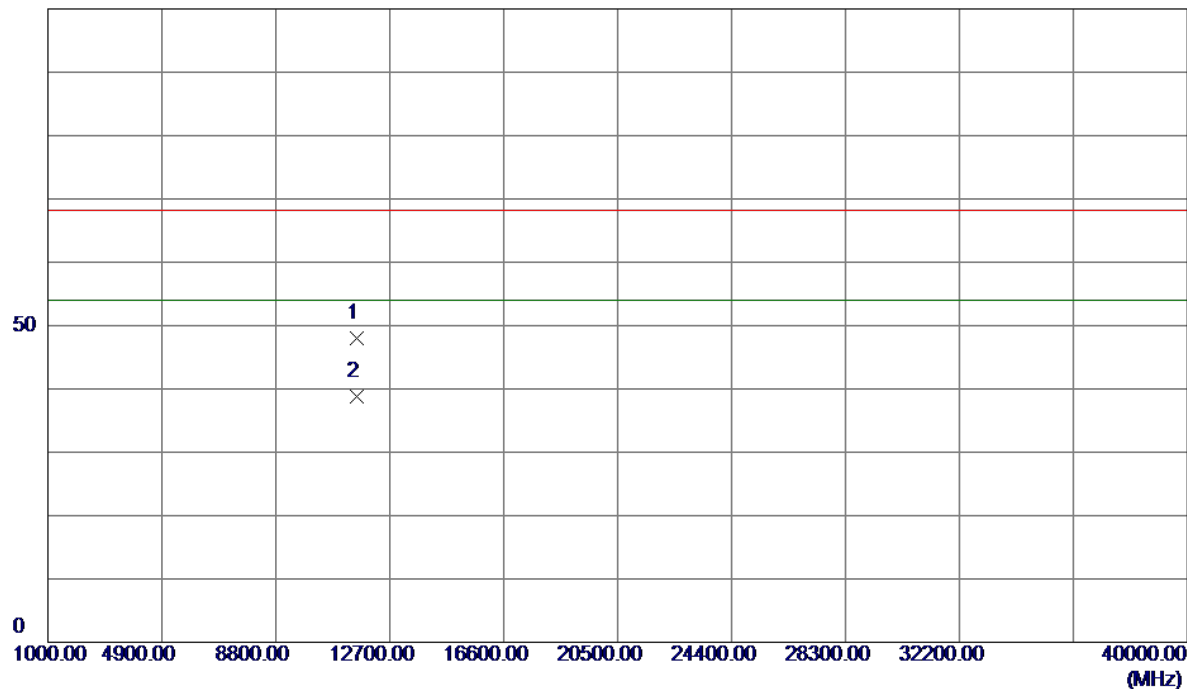


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.1500	35.09	12.88	47.97	68.30	-20.33	Peak	
2	11590.1500	25.85	12.88	38.73	54.00	-15.27	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

120 dBuV/m

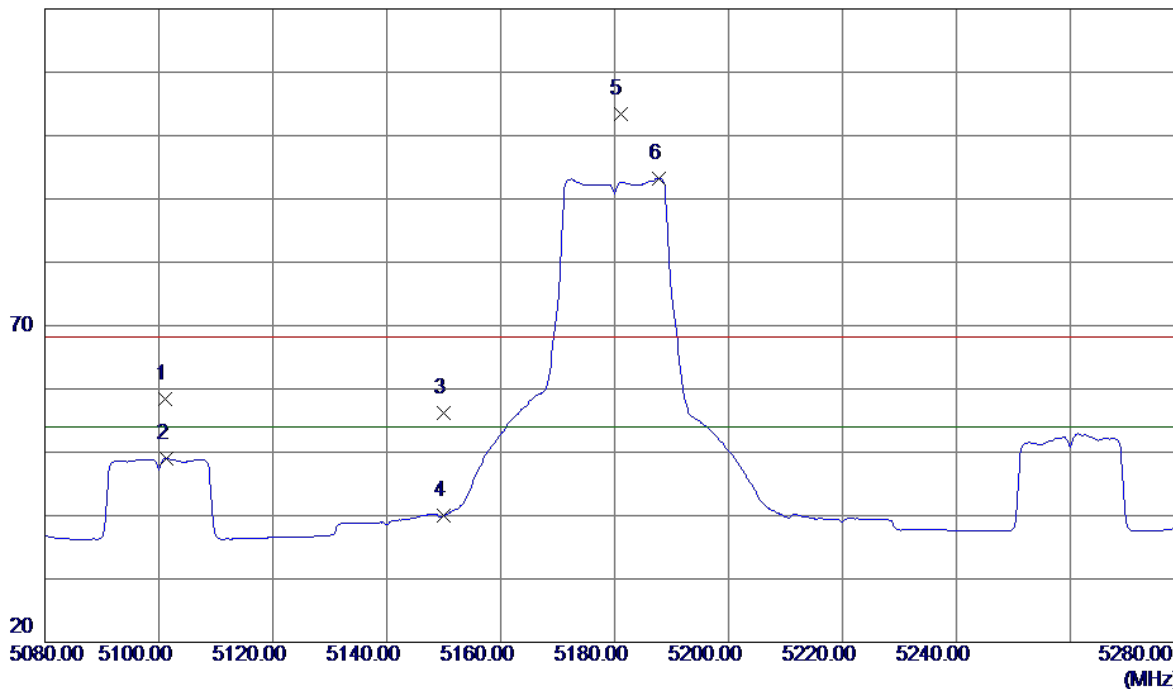


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5101.2000	19.57	38.84	58.41	68.30	-9.89	Peak	
2	5101.4000	10.23	38.84	49.07	54.00	-4.93	AVG	
3	5150.0000	17.19	39.00	56.19	68.30	-12.11	Peak	
4	5150.0000	0.91	39.00	39.91	54.00	-14.09	AVG	
5	5181.0000	64.24	39.10	103.34	68.30	35.04	Peak	no limit
6	5187.8000	54.10	39.12	93.22	54.00	39.22	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical


100 dBuV/m

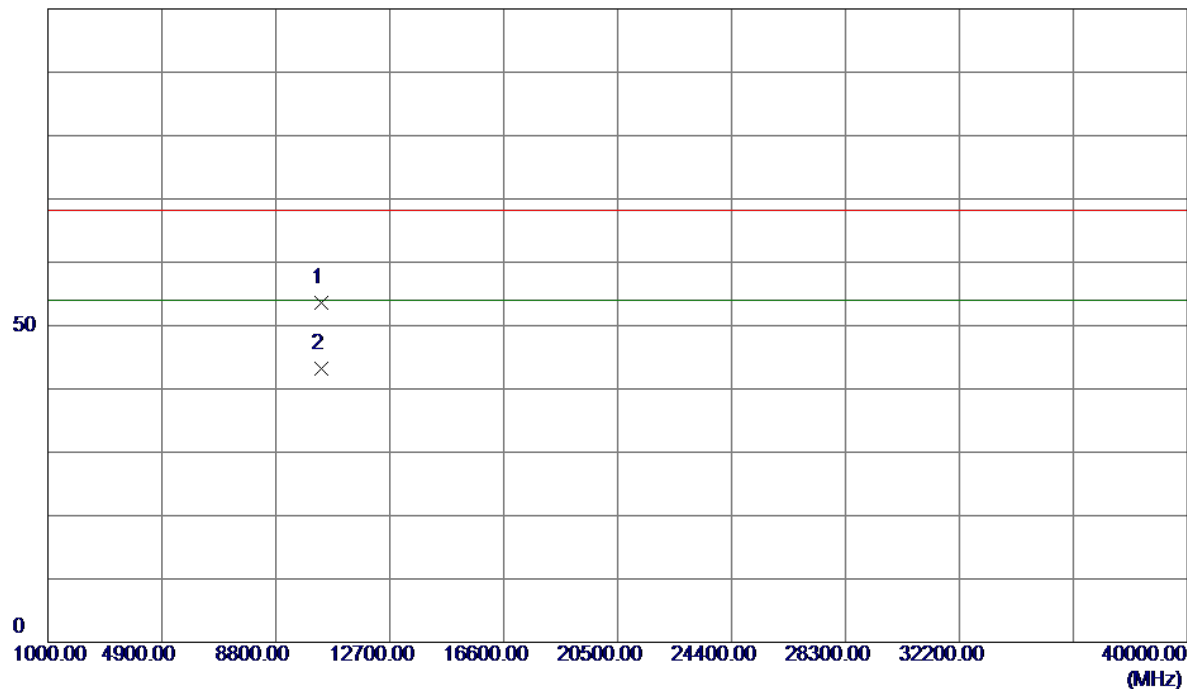

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.1000	42.47	11.11	53.58	68.30	-14.72	Peak	
2	10360.1000	32.13	11.11	43.24	54.00	-10.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

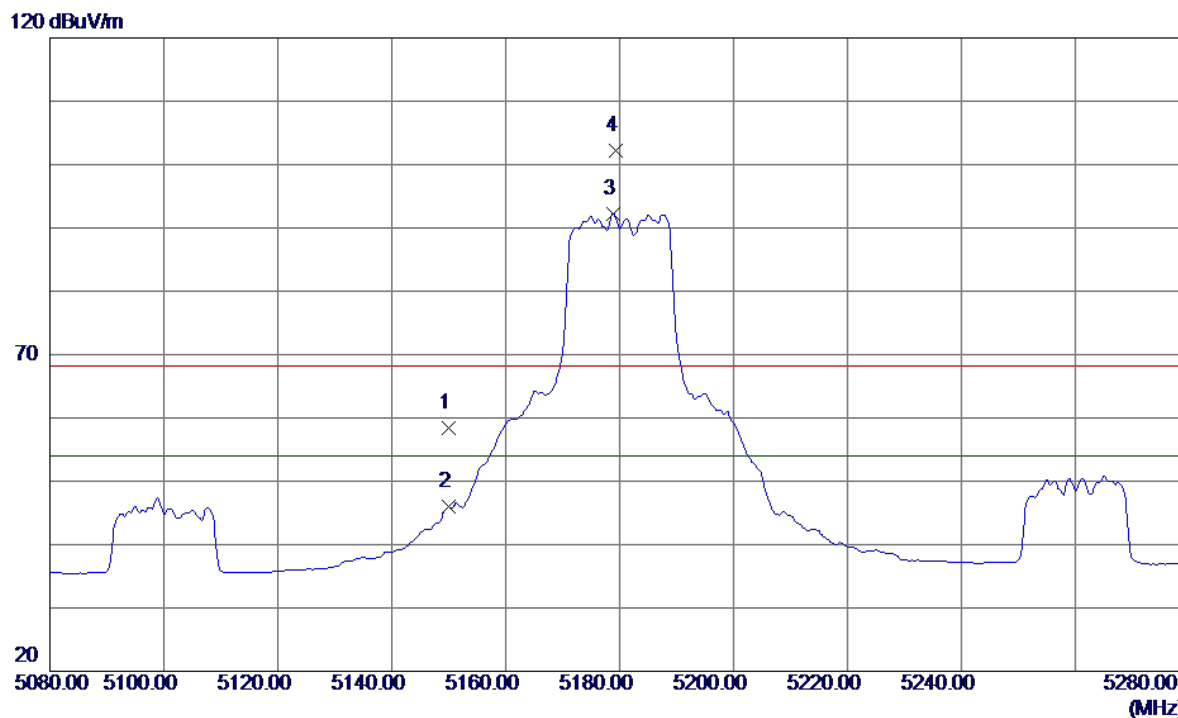

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	19.45	39.00	58.45	68.30	-9.85	Peak	
2	5150.0000	6.94	39.00	45.94	54.00	-8.06	AVG	
3	5178.8000	53.15	39.09	92.24	54.00	38.24	AVG	no limit
4	5179.4000	63.17	39.10	102.27	68.30	33.97	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

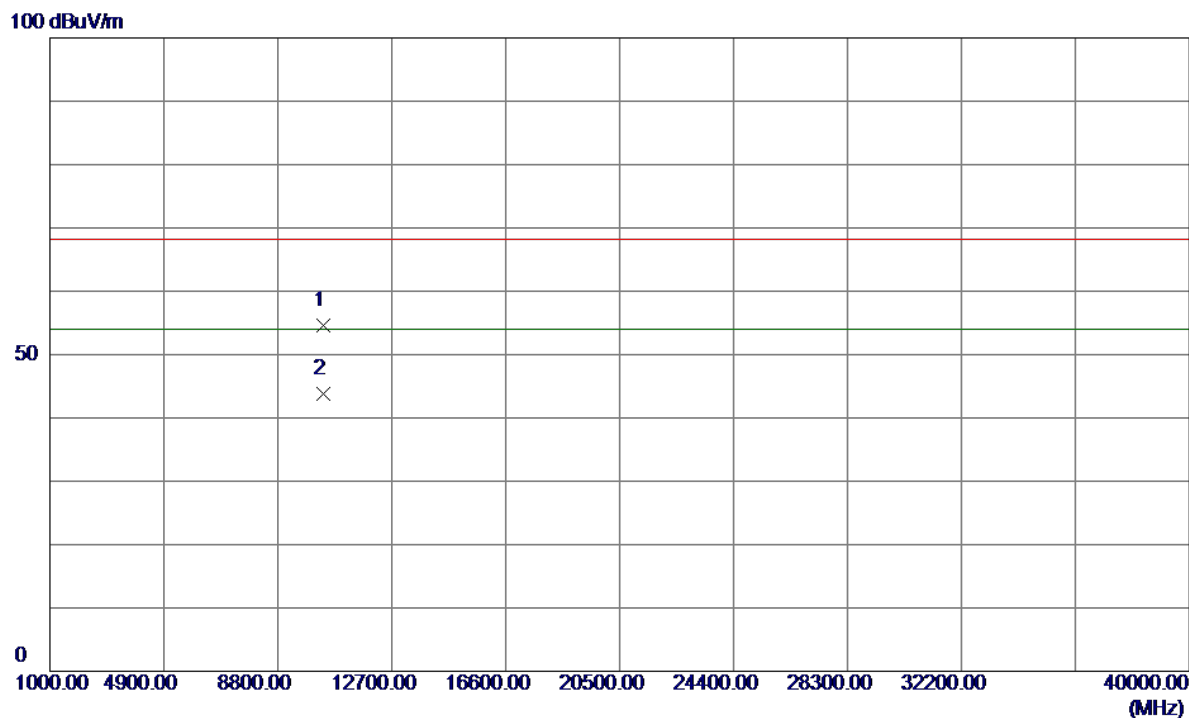

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.1200	43.56	11.11	54.67	68.30	-13.63	Peak	
2	10360.1200	32.66	11.11	43.77	54.00	-10.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical

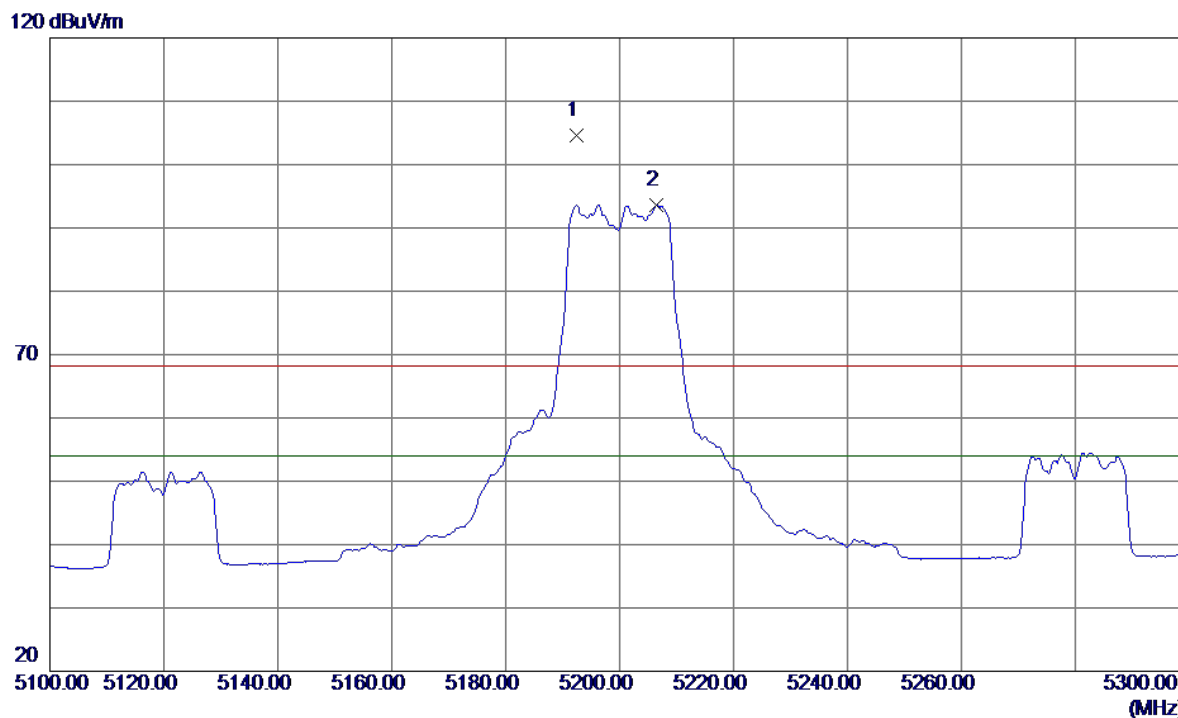


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5192.4000	65.37	39.14	104.51	68.30	36.21	Peak	no limit
2	5206.4000	54.43	39.19	93.62	54.00	39.62	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical


100 dBuV/m

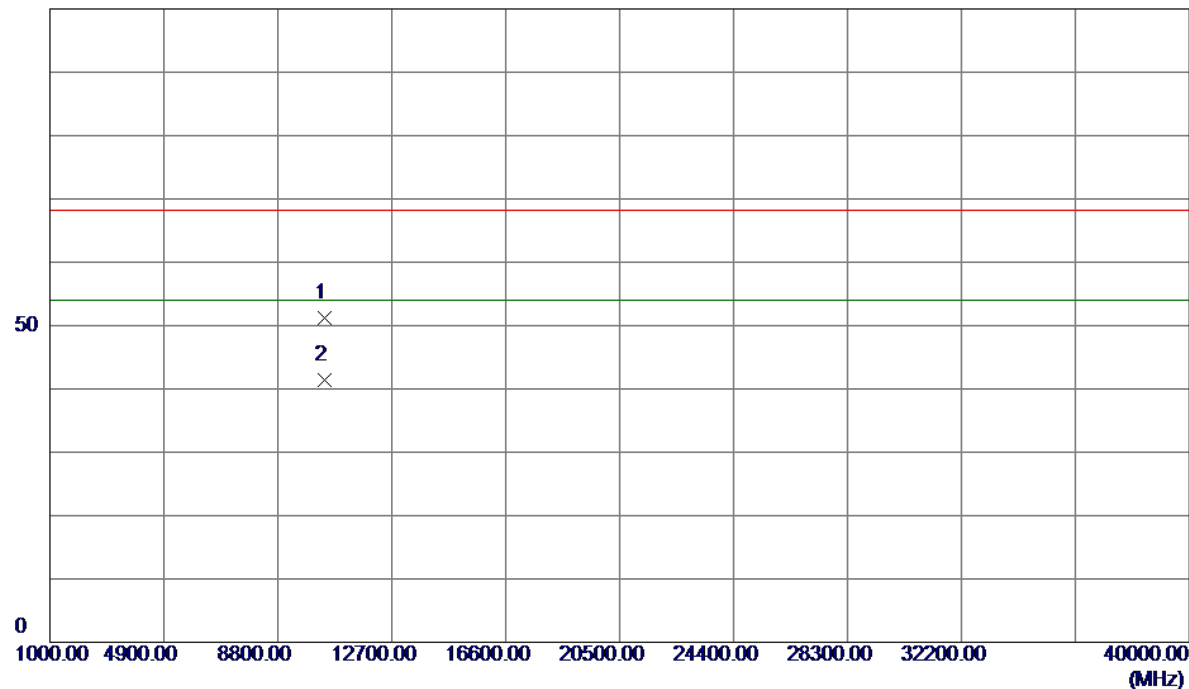

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.0000	40.12	11.05	51.17	68.30	-17.13	Peak	
2	10400.0000	30.27	11.05	41.32	54.00	-12.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

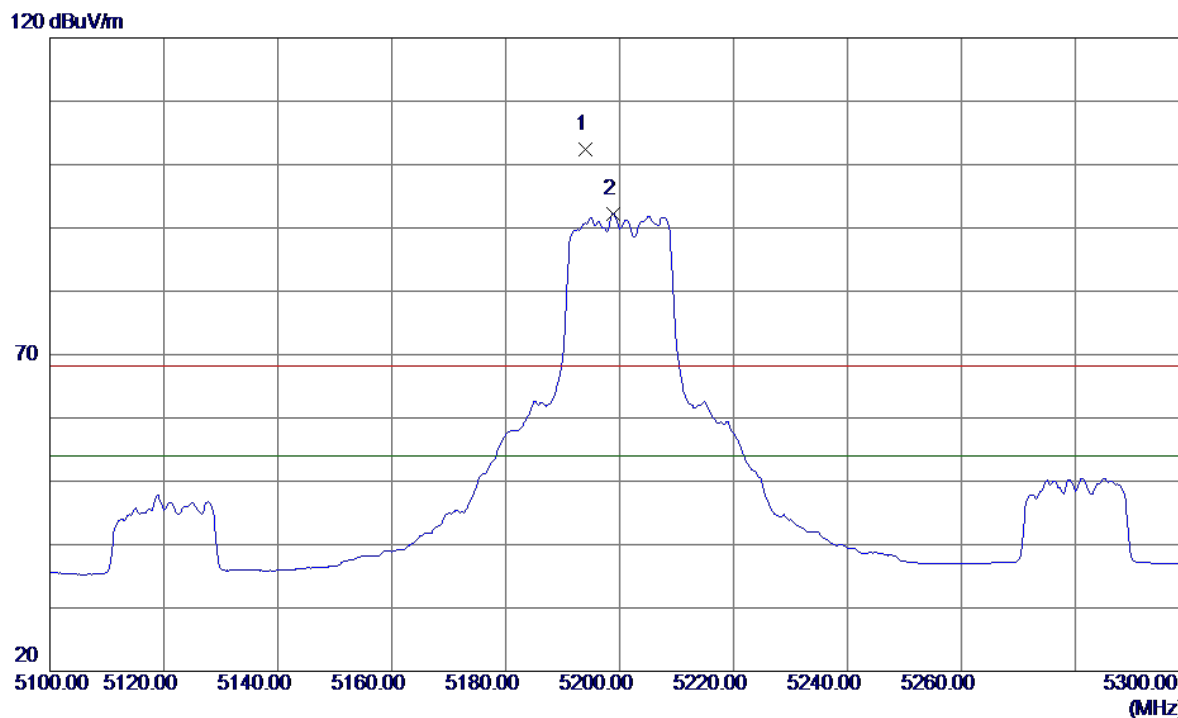

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5194.0000	63.32	39.14	102.46	68.30	34.16	Peak	no limit
2	5198.8000	53.05	39.16	92.21	54.00	38.21	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

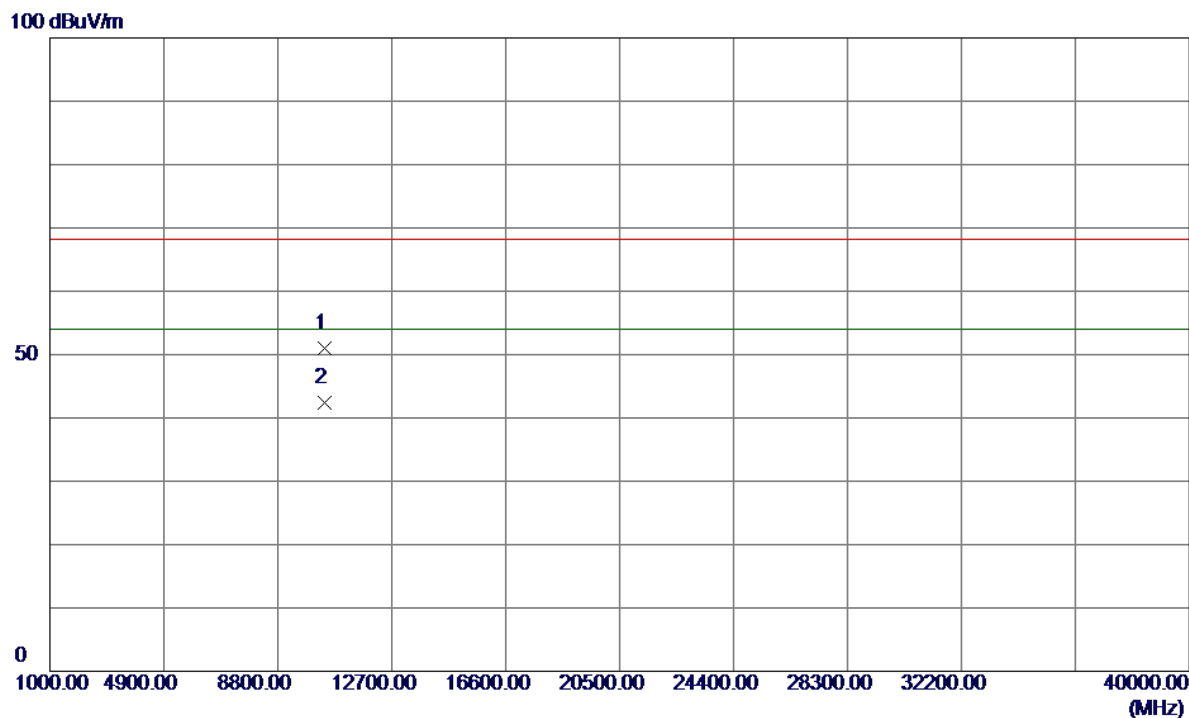

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10399.9500	39.88	11.05	50.93	68.30	-17.37	Peak	
2	10399.9500	31.35	11.05	42.40	54.00	-11.60	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

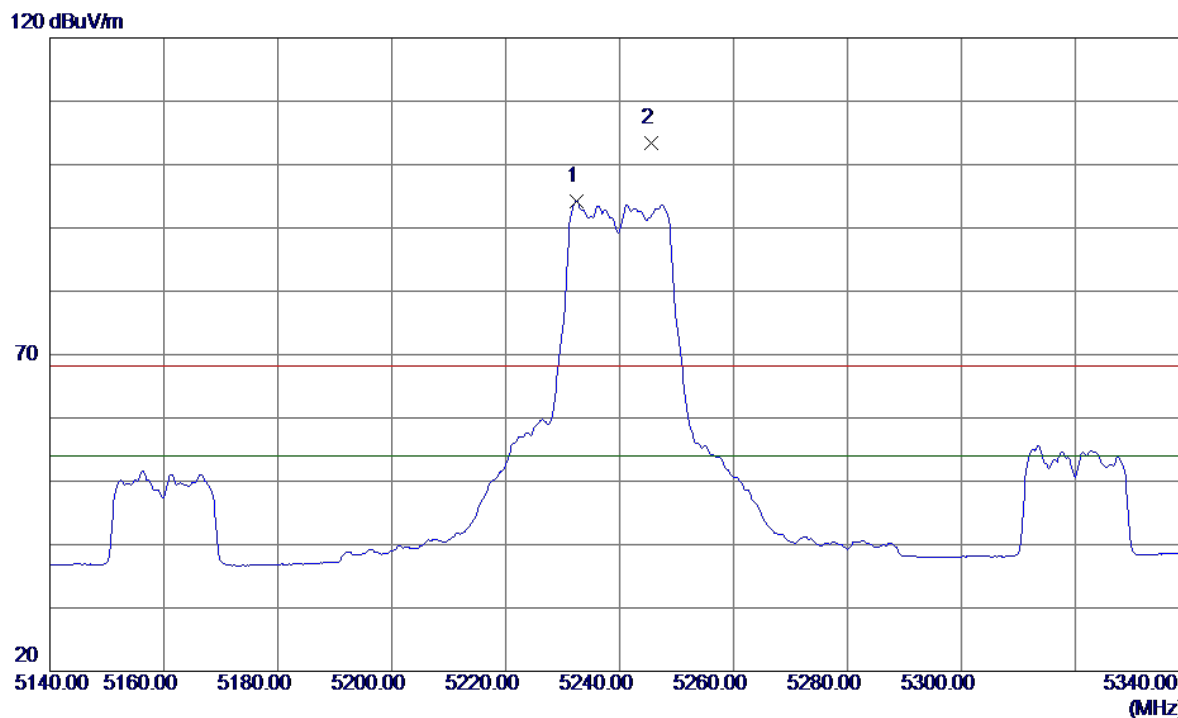


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5232.4000	54.95	39.27	94.22	54.00	40.22	AVG	no limit
2	5245.6000	64.07	39.32	103.39	68.30	35.09	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical


100 dBuV/m

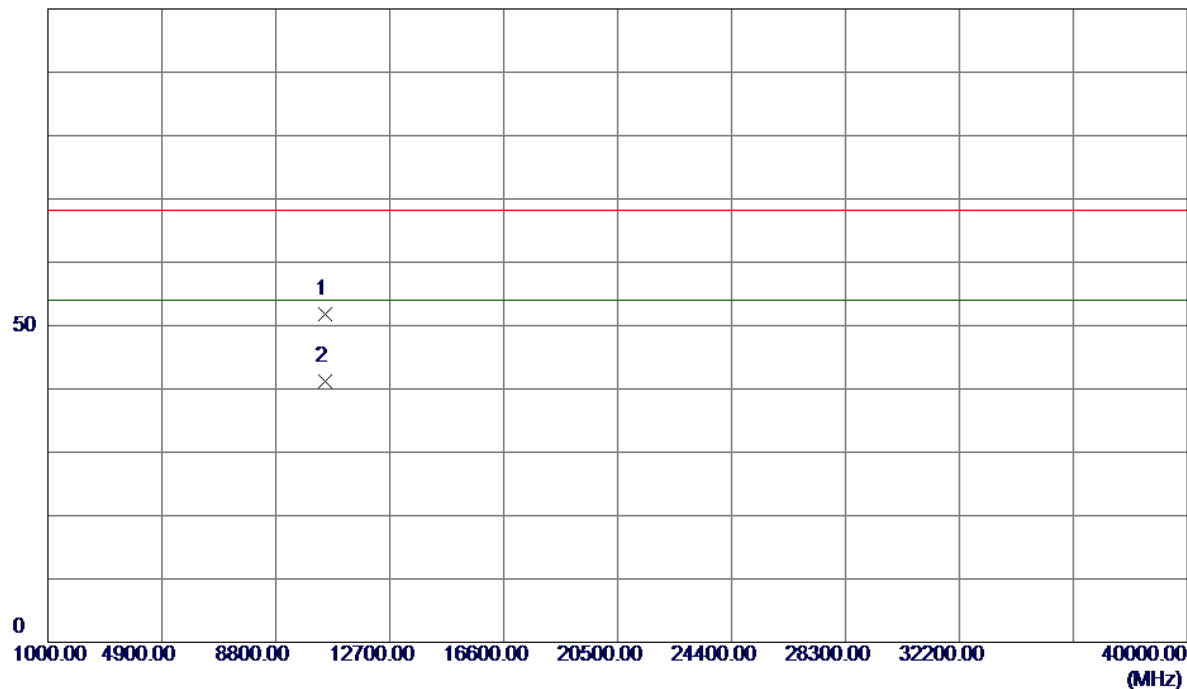

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10479.9000	40.93	10.94	51.87	68.30	-16.43	Peak	
2	10479.9000	30.19	10.94	41.13	54.00	-12.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

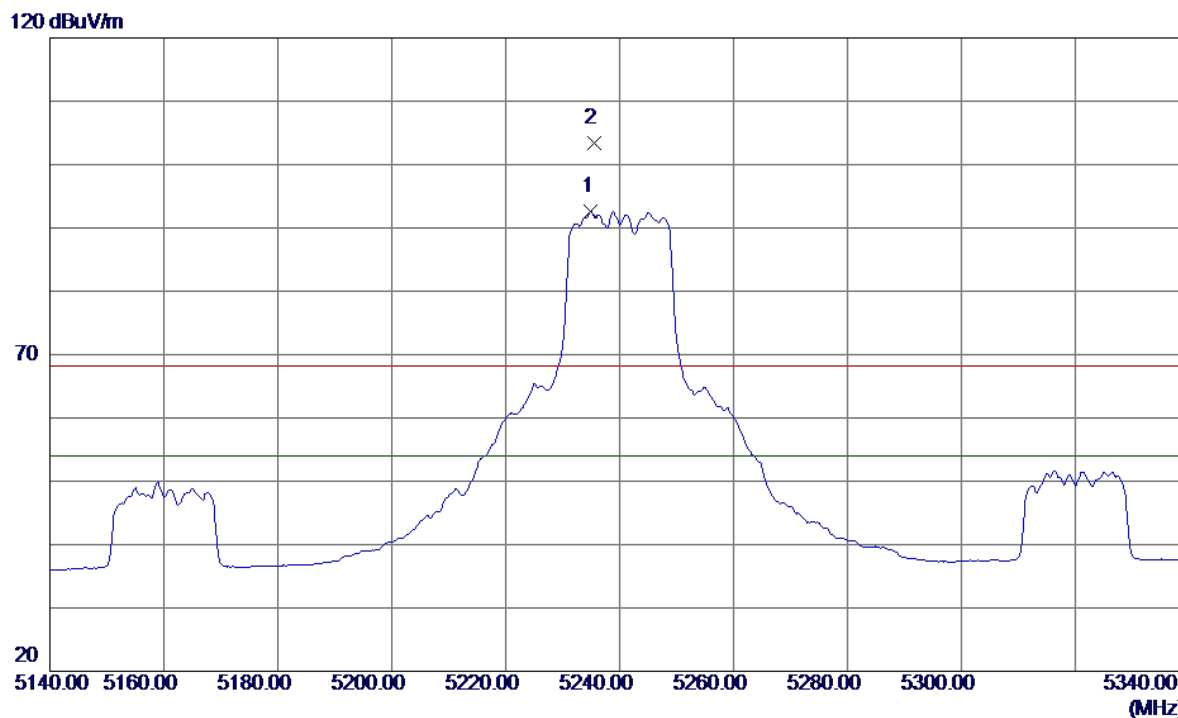


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5235.0000	53.41	39.28	92.69	54.00	38.69	AVG	no limit
2	5235.6000	64.19	39.28	103.47	68.30	35.17	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal


100 dBuV/m

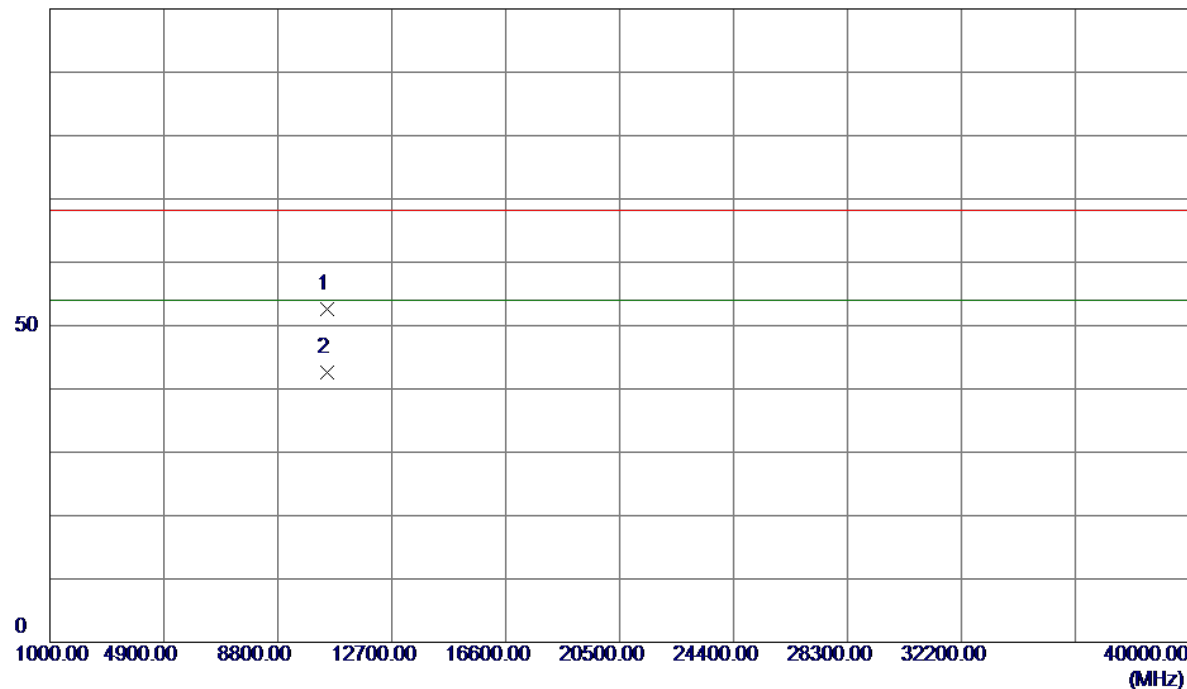

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.0500	41.58	10.94	52.52	68.30	-15.78	Peak	
2	10480.0500	31.75	10.94	42.69	54.00	-11.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

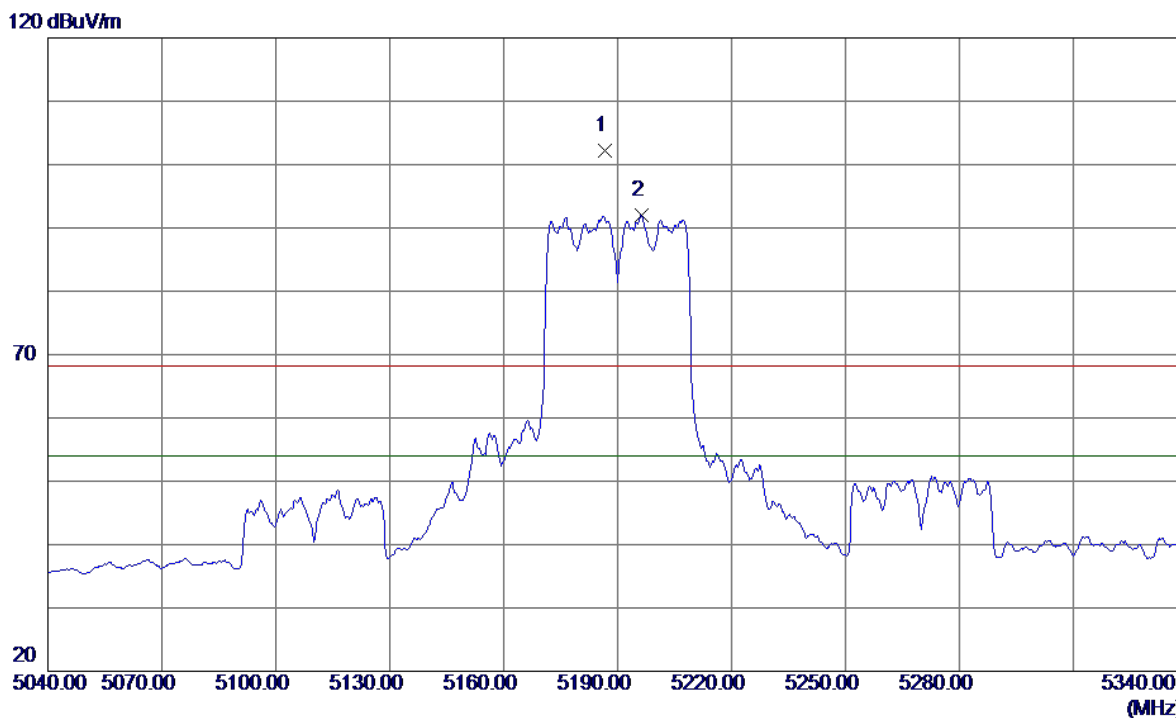


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5186.7000	63.04	39.12	102.16	68.30	33.86	Peak	no limit
2	5196.3000	52.77	39.15	91.92	54.00	37.92	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


100 dBuV/m

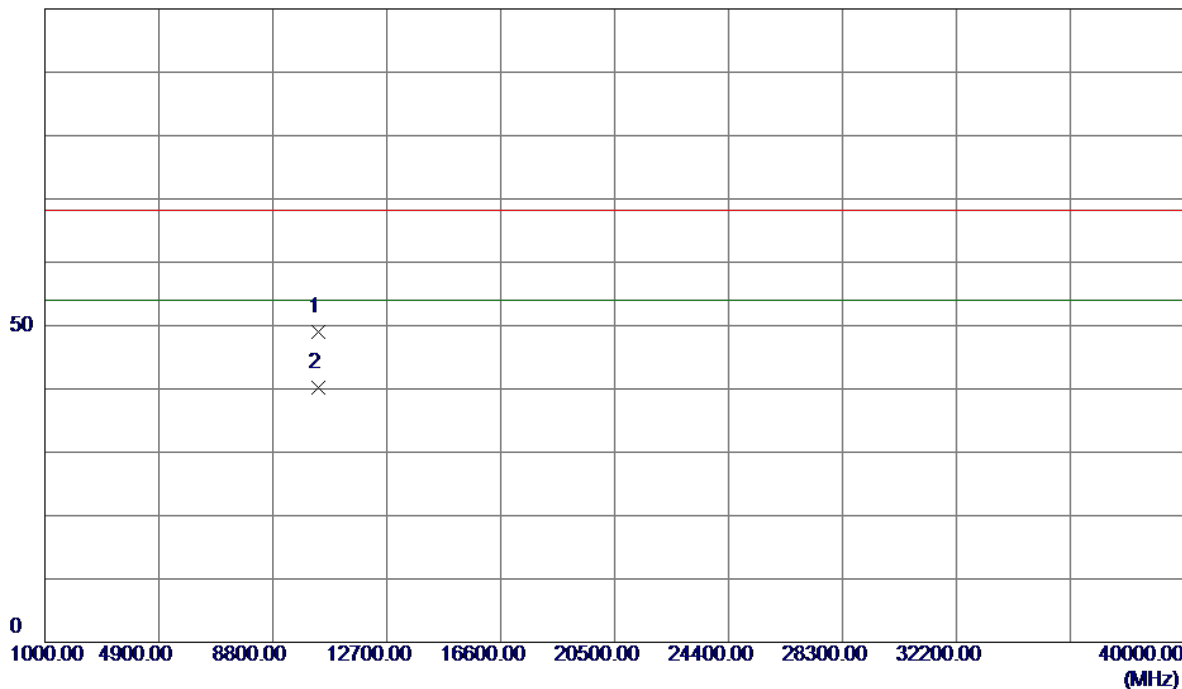

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10380.0500	37.96	11.08	49.04	68.30	-19.26	Peak	
2	10380.0500	29.04	11.08	40.12	54.00	-13.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

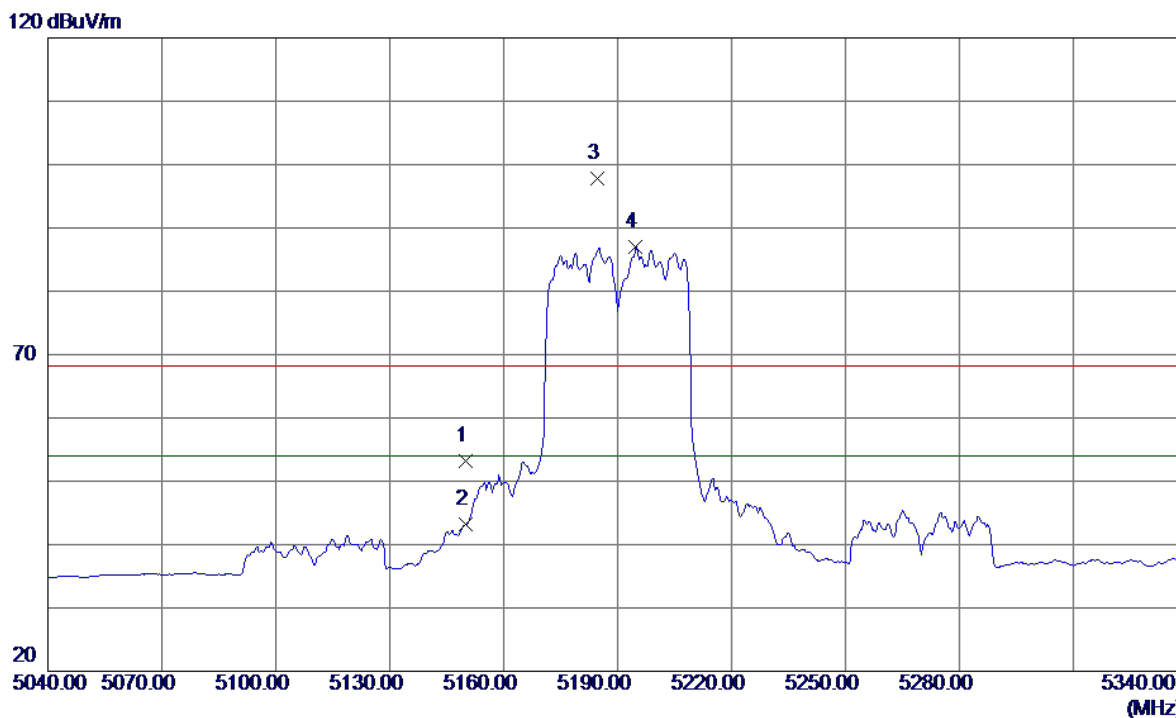


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	14.28	39.00	53.28	68.30	-15.02	Peak	
2	5150.0000	4.20	39.00	43.20	54.00	-10.80	AVG	
3	5184.6000	58.78	39.11	97.89	68.30	29.59	Peak	no limit
4	5194.8000	47.78	39.15	86.93	54.00	32.93	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


100 dBuV/m

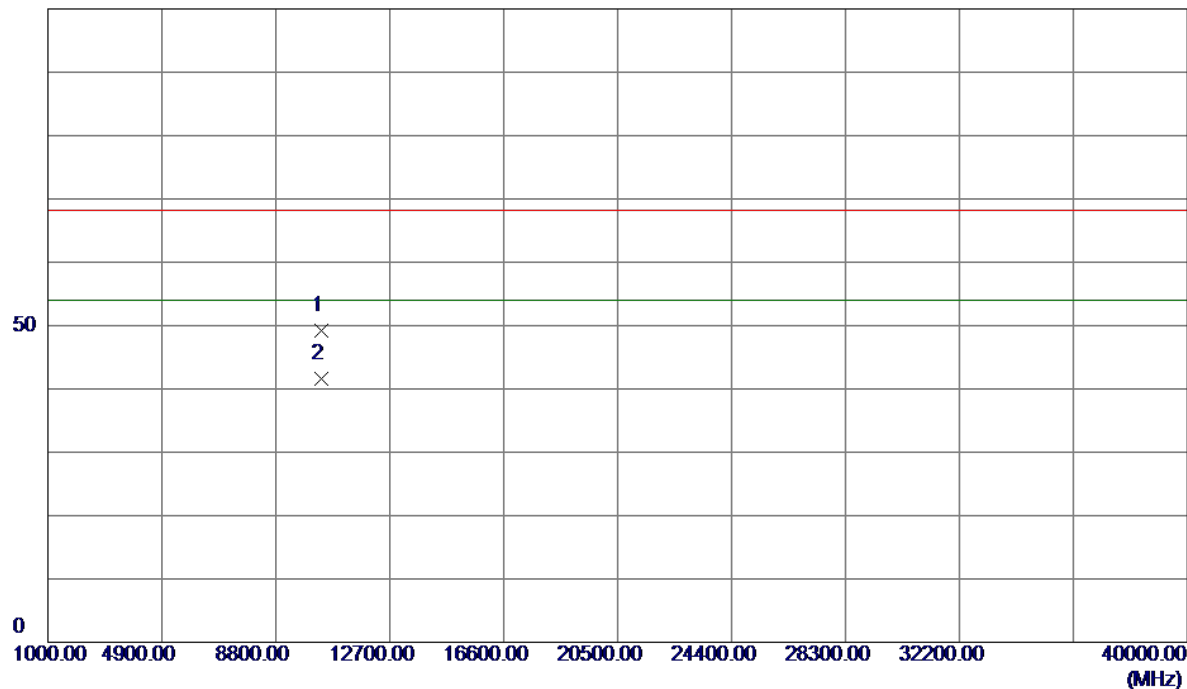

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10380.0500	38.19	11.08	49.27	68.30	-19.03	Peak	
2	10380.0500	30.54	11.08	41.62	54.00	-12.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

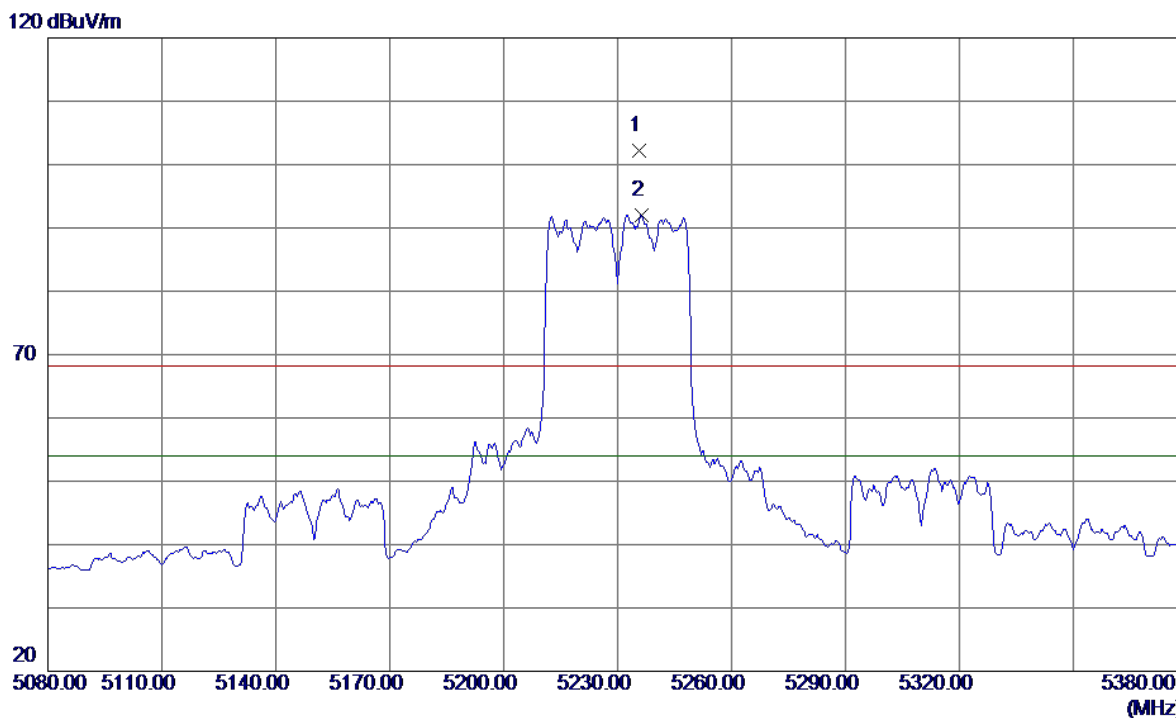


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5235.7000	63.01	39.28	102.29	68.30	33.99	Peak	no limit
2	5236.3000	52.67	39.28	91.95	54.00	37.95	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


100 dBuV/m

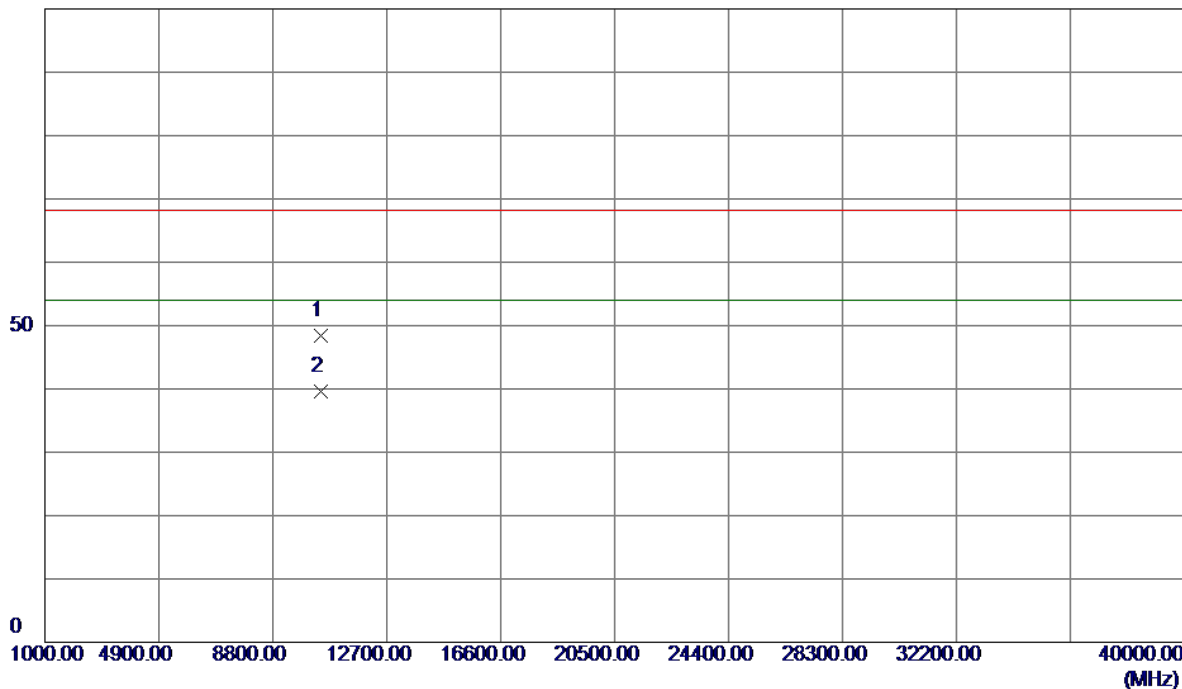

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10460.0000	37.34	10.97	48.31	68.30	-19.99	Peak	
2	10460.0000	28.57	10.97	39.54	54.00	-14.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

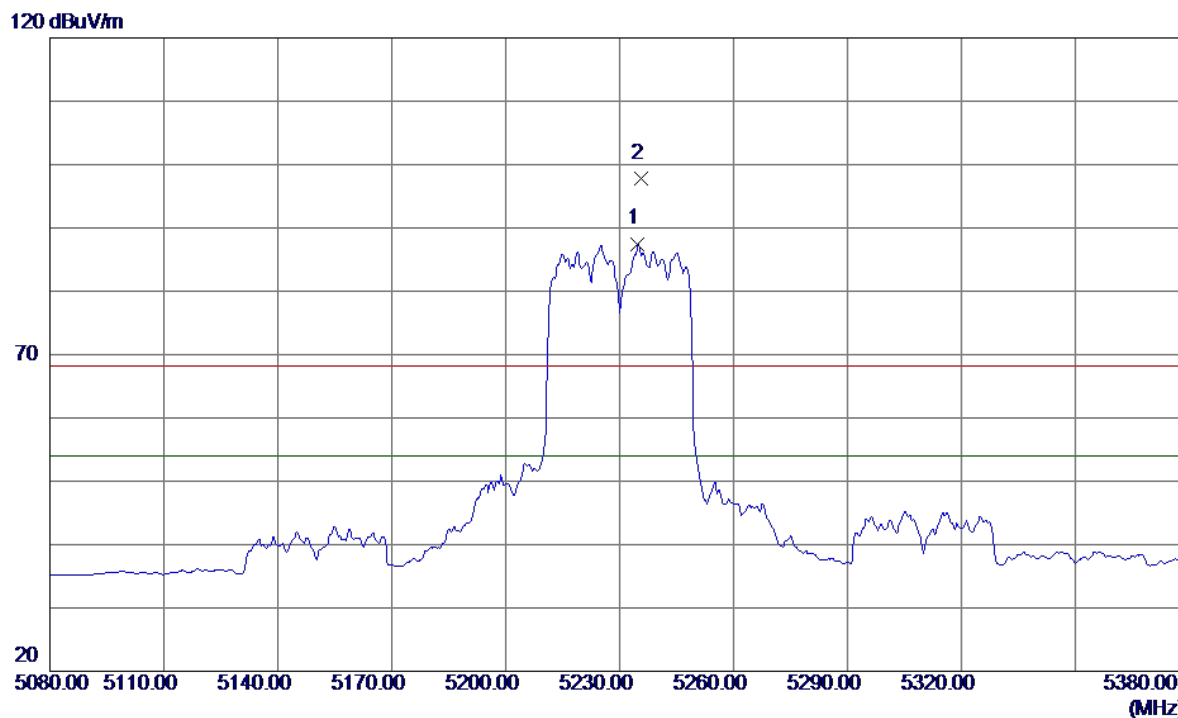


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5234.8000	48.22	39.28	87.50	54.00	33.50	AVG	no limit
2	5235.7000	58.55	39.28	97.83	68.30	29.53	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


100 dBuV/m

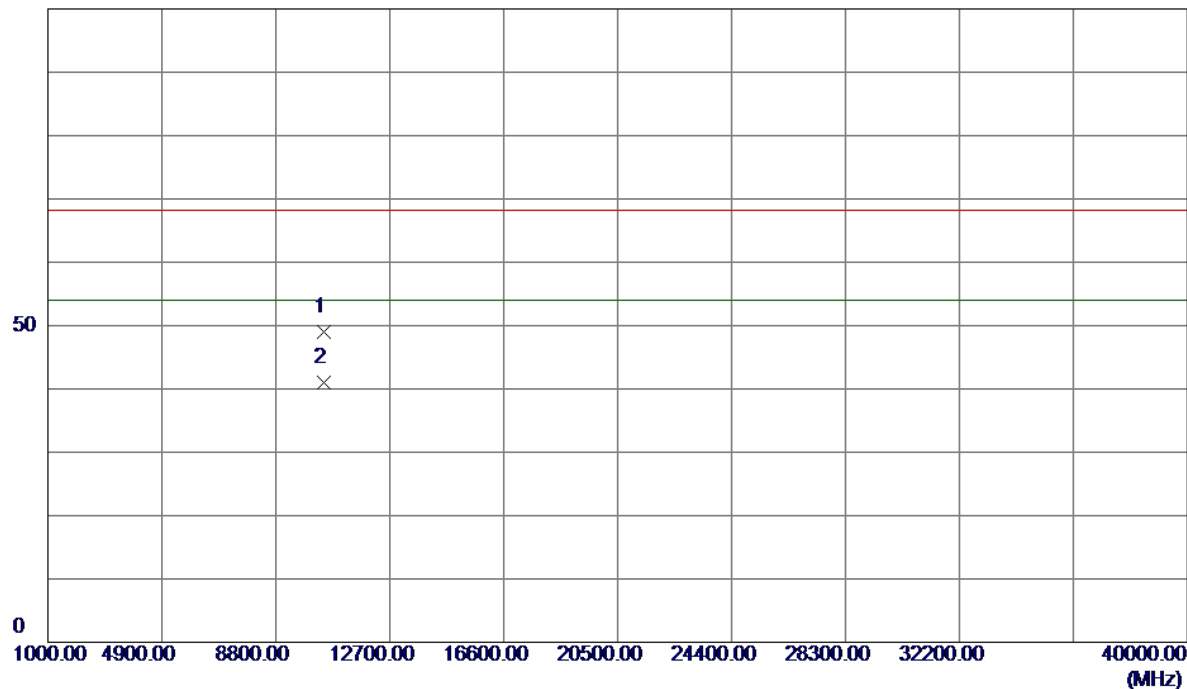

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10460.1000	38.00	10.97	48.97	68.30	-19.33	Peak	
2	10460.1000	29.99	10.97	40.96	54.00	-13.04	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

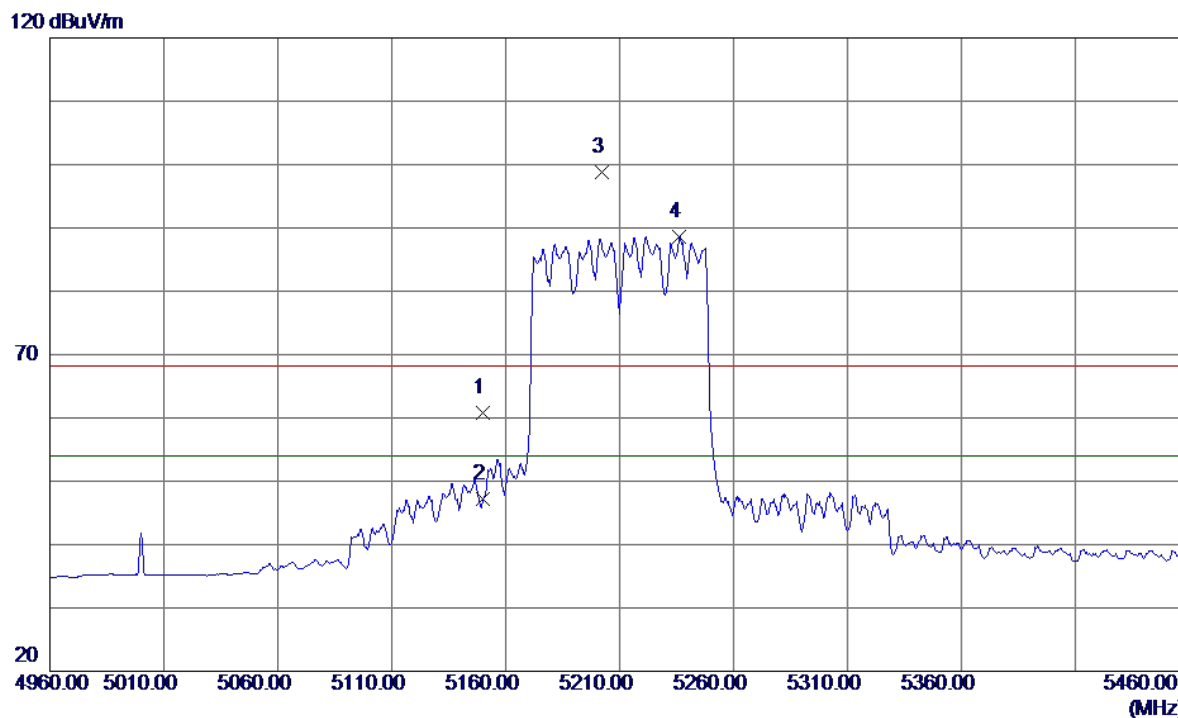


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	21.72	39.00	60.72	68.30	-7.58	Peak	
2	5150.0000	8.12	39.00	47.12	54.00	-6.88	AVG	
3	5202.0000	59.67	39.17	98.84	68.30	30.54	Peak	no limit
4	5236.0000	49.34	39.28	88.62	54.00	34.62	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


100 dBuV/m

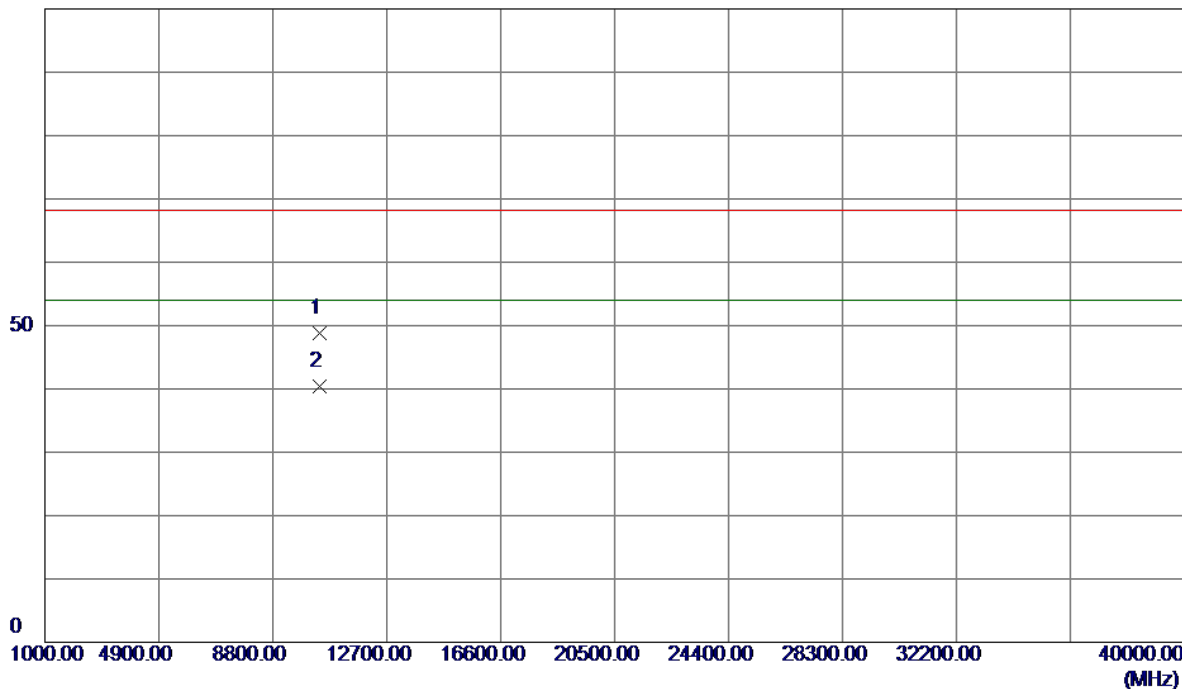

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10420.0500	37.87	11.02	48.89	68.30	-19.41	Peak	
2	10420.0500	29.37	11.02	40.39	54.00	-13.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

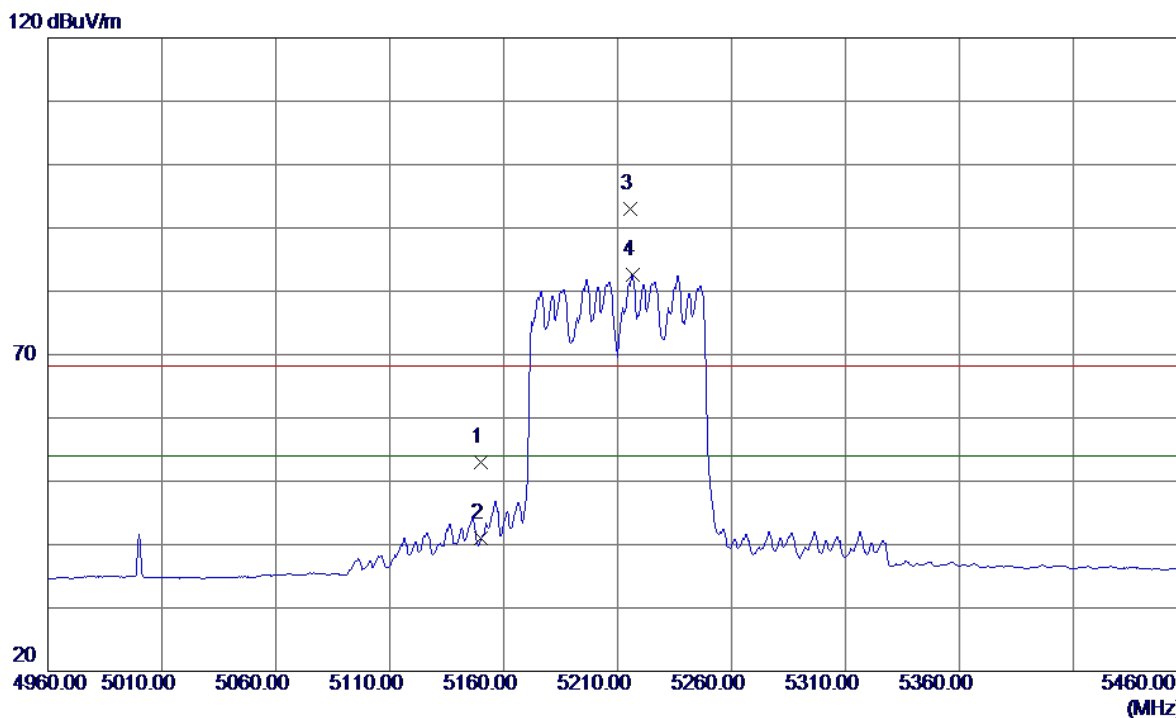

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	14.01	39.00	53.01	68.30	-15.29	Peak	
2	5150.0000	2.07	39.00	41.07	54.00	-12.93	AVG	
3	5215.5000	53.81	39.22	93.03	68.30	24.73	Peak	no limit
4	5216.5000	43.41	39.22	82.63	54.00	28.63	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

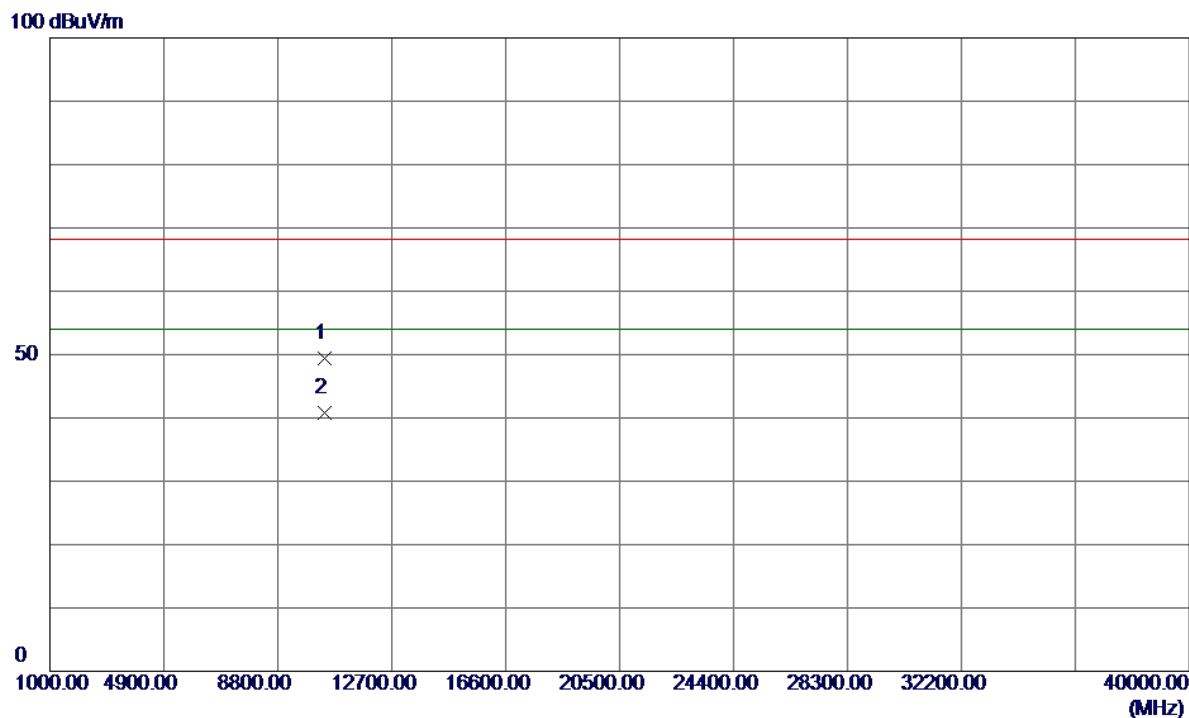

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10420.1000	38.34	11.02	49.36	68.30	-18.94	Peak	
2	10420.1000	29.87	11.02	40.89	54.00	-13.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

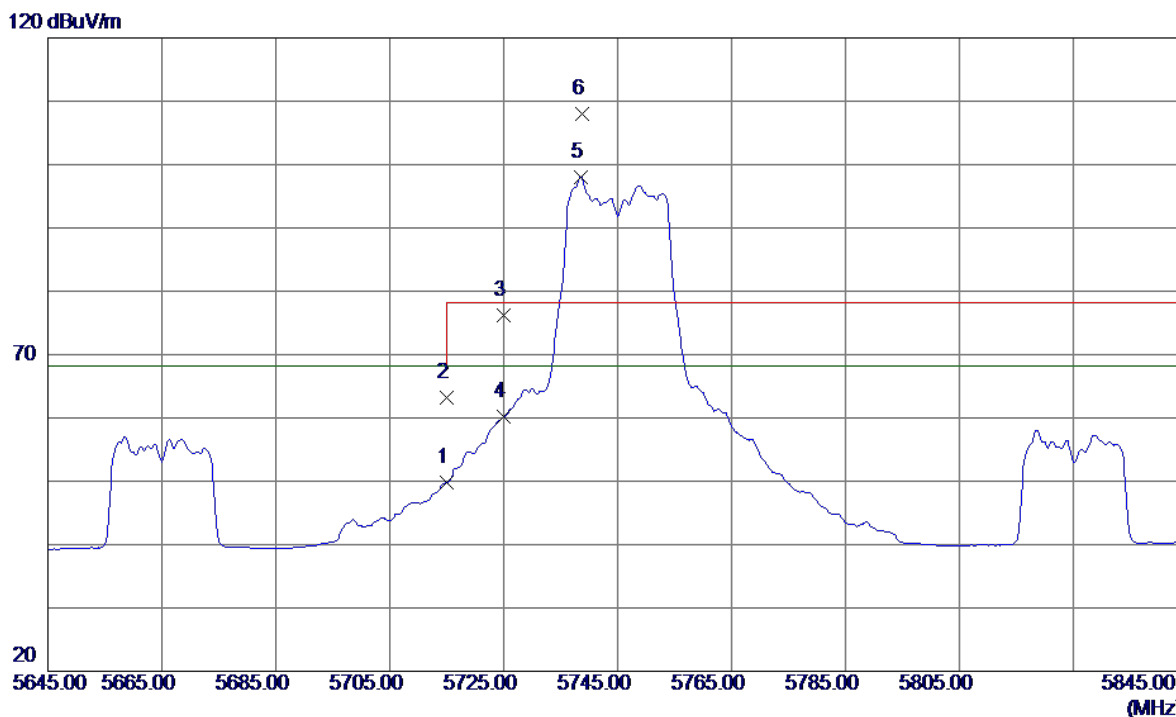


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	8.72	41.05	49.77	68.30	-18.53	Peak	
2	5715.0000	22.06	41.05	63.11	68.30	-5.19	AVG	
3	5725.0000	35.03	41.10	76.13	78.30	-2.17	Peak	
4	5725.0000	19.01	41.10	60.11	68.30	-8.19	AVG	
5	5738.6000	56.89	41.15	98.04	68.30	29.74	AVG	no limit
6	5738.8000	66.85	41.15	108.00	78.30	29.70	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


100 dBuV/m

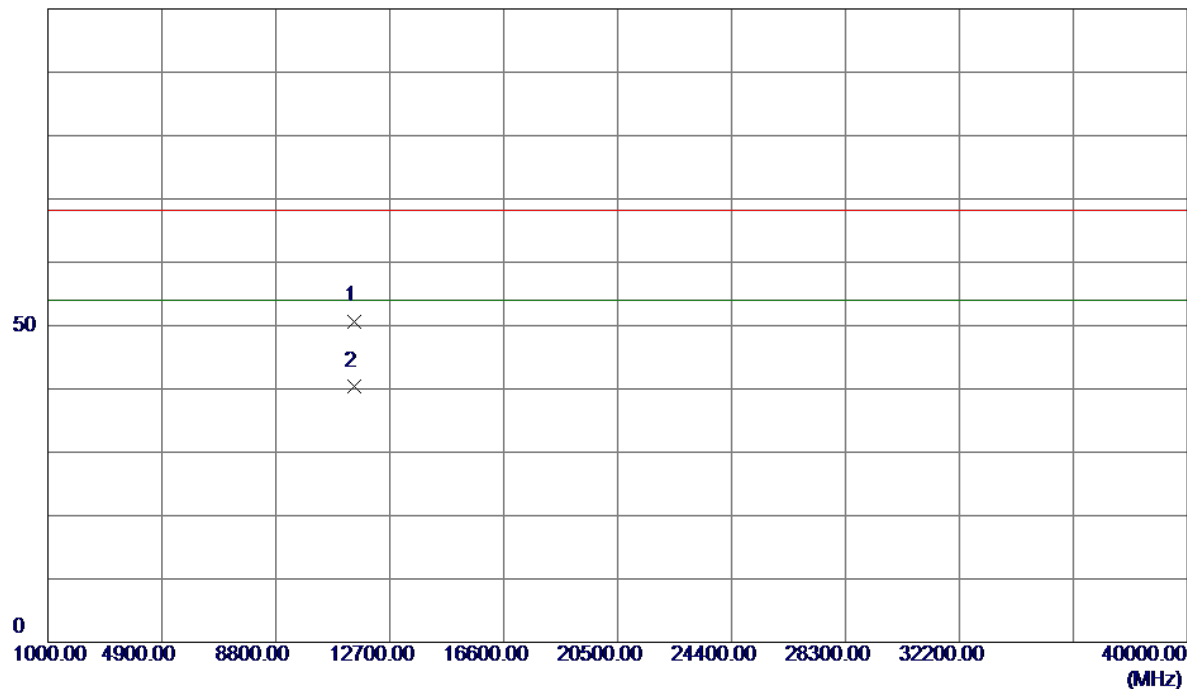

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.1000	37.79	12.91	50.70	68.30	-17.60	Peak	
2	11490.1000	27.57	12.91	40.48	54.00	-13.52	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

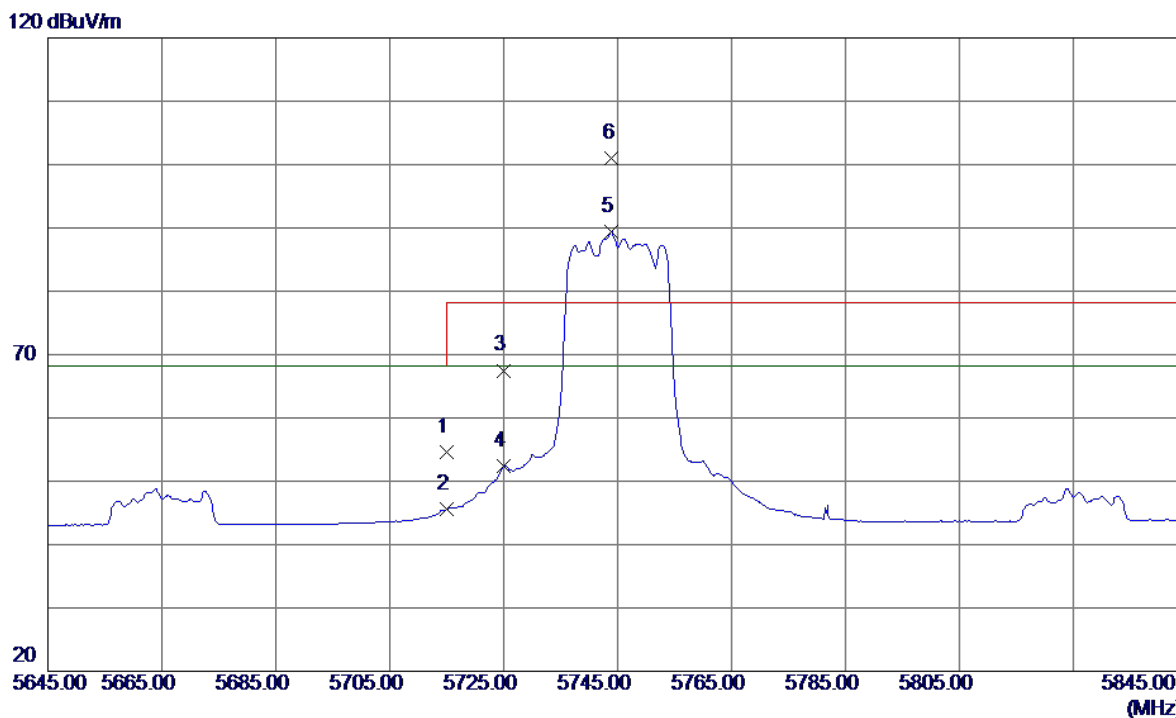

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	13.56	41.05	54.61	68.30	-13.69	Peak	
2	5715.0000	4.46	41.05	45.51	68.30	-22.79	AVG	
3	5725.0000	26.40	41.10	67.50	78.30	-10.80	Peak	
4	5725.0000	11.24	41.10	52.34	68.30	-15.96	AVG	
5	5743.8000	48.21	41.17	89.38	68.30	21.08	AVG	no limit
6	5744.0000	59.82	41.17	100.99	78.30	22.69	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

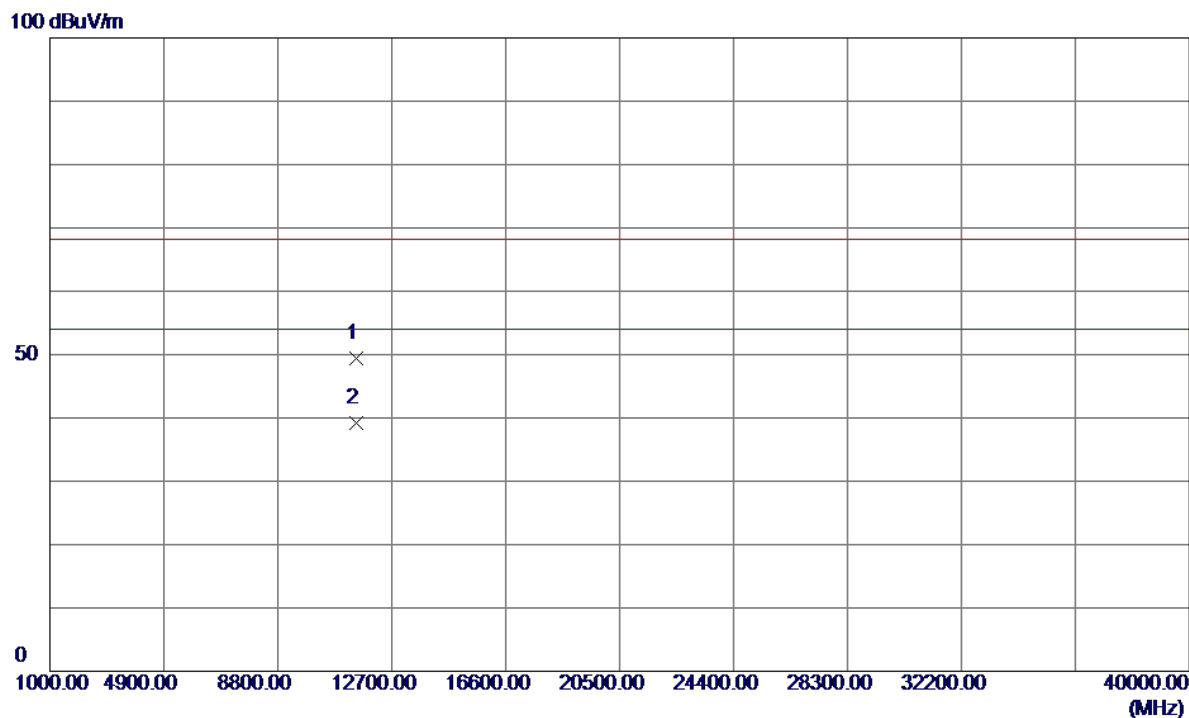


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.9500	36.51	12.91	49.42	68.30	-18.88	Peak	
2	11490.9500	26.21	12.91	39.12	54.00	-14.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical

120 dBuV/m

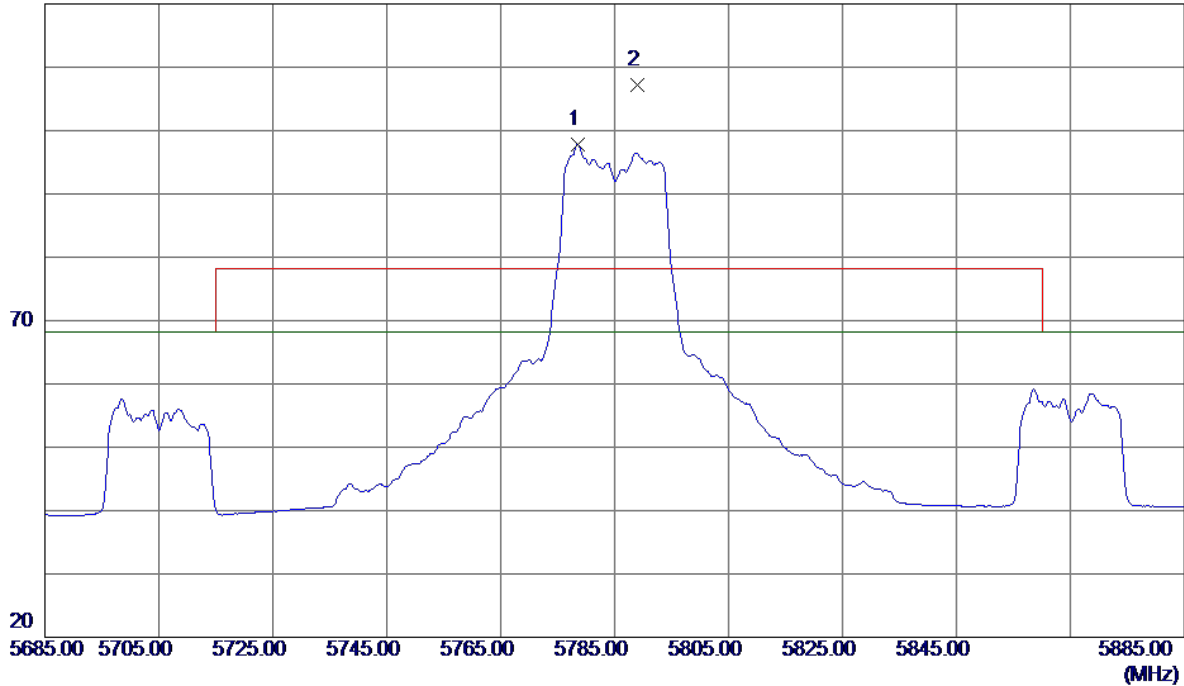


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5778.6000	56.51	41.32	97.83	68.30	29.53	AVG	no limit
2	5789.0000	65.81	41.36	107.17	78.30	28.87	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical


100 dBuV/m

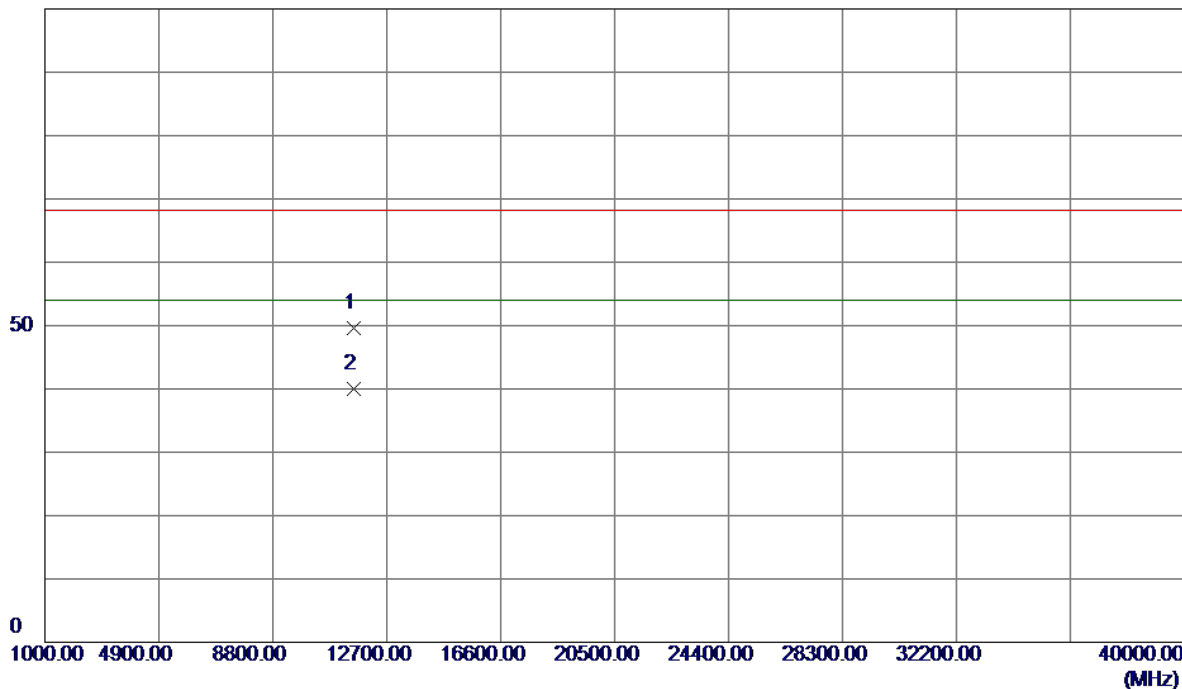

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11569.9000	36.74	12.89	49.63	68.30	-18.67	Peak	
2	11569.9000	27.14	12.89	40.03	54.00	-13.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

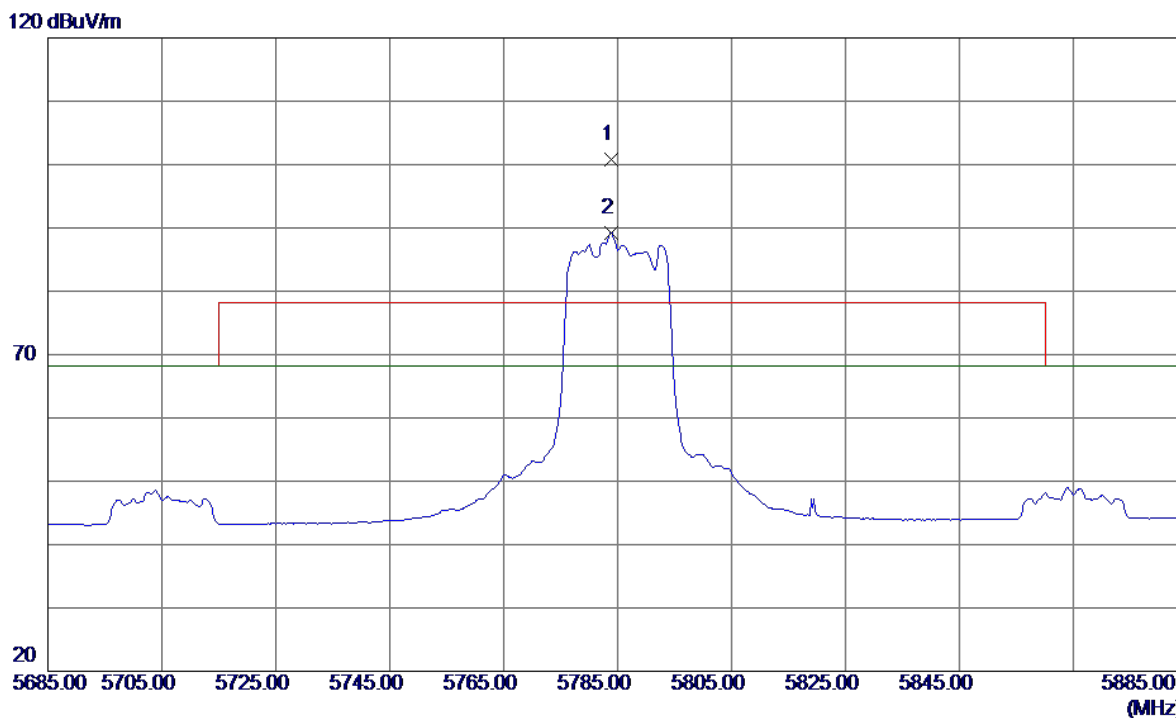

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5783.8000	59.43	41.34	100.77	78.30	22.47	Peak	no limit
2	5783.8000	47.91	41.34	89.25	68.30	20.95	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

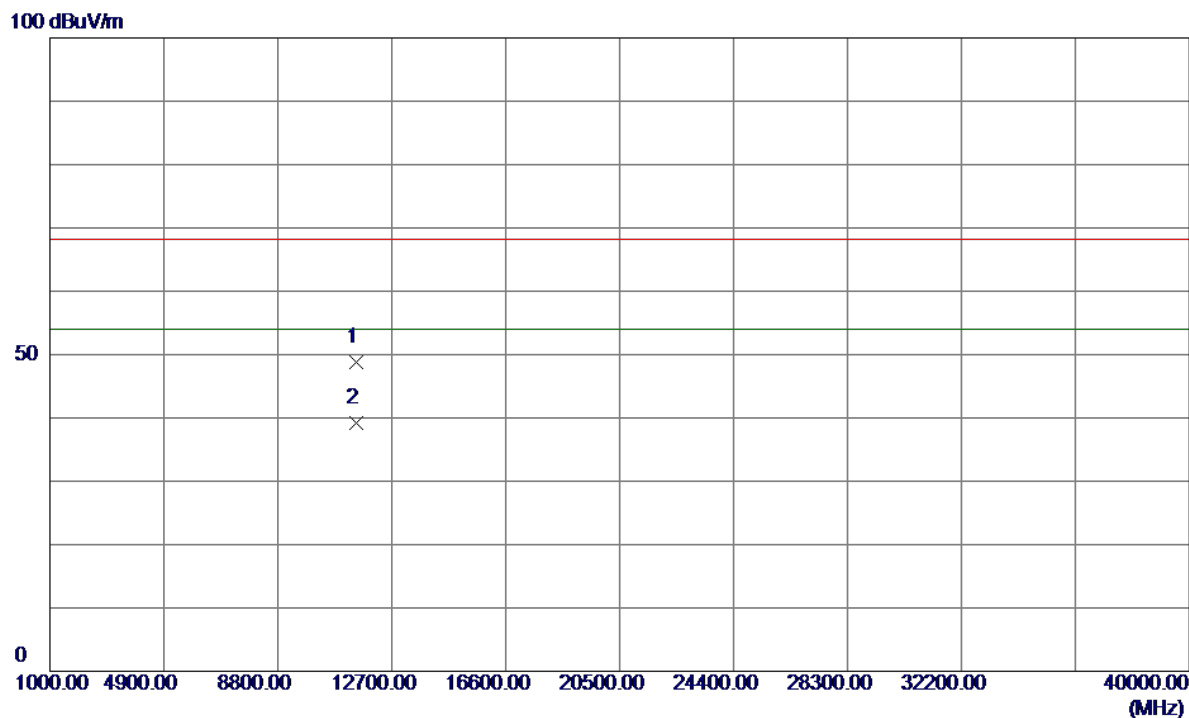


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11489.9000	35.95	12.91	48.86	68.30	-19.44	Peak	
2	11489.9000	26.29	12.91	39.20	54.00	-14.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

120 dBuV/m

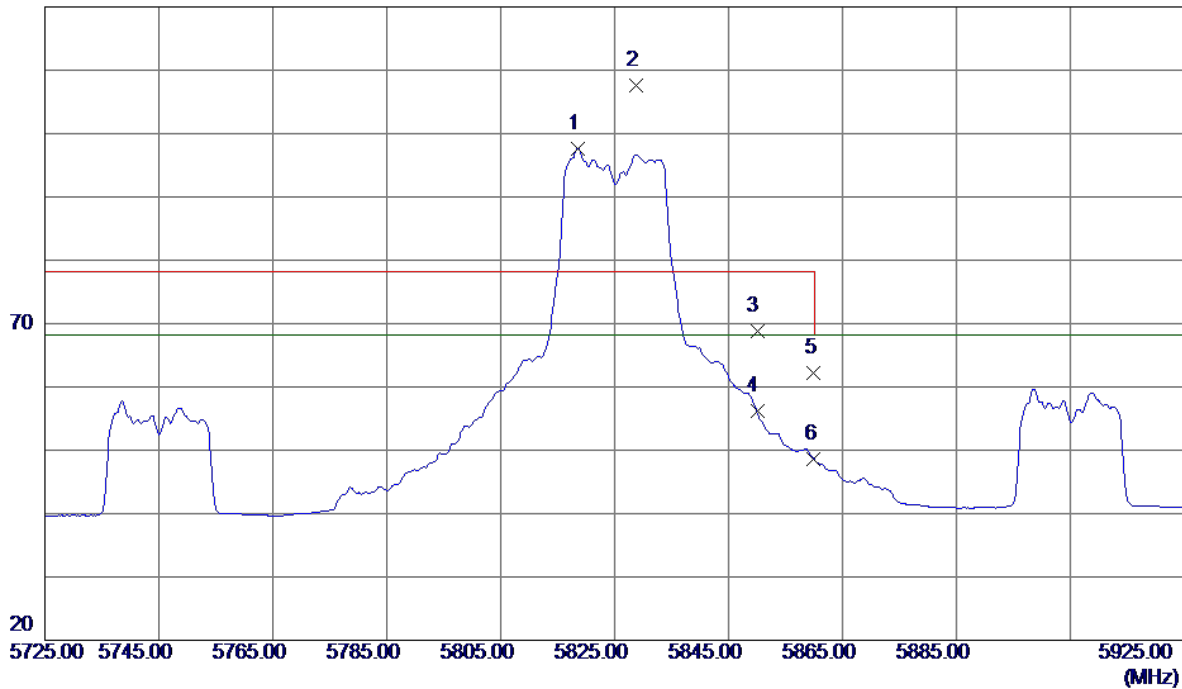


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5818.6000	56.20	41.49	97.69	68.30	29.39	AVG	no limit
2	5828.8000	66.12	41.53	107.65	78.30	29.35	Peak	no limit
3	5850.0000	27.14	41.62	68.76	78.30	-9.54	Peak	
4	5850.0000	14.61	41.62	56.23	68.30	-12.07	AVG	
5	5860.0000	20.56	41.66	62.22	78.30	-16.08	Peak	
6	5860.0000	6.97	41.66	48.63	68.30	-19.67	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


100 dBuV/m

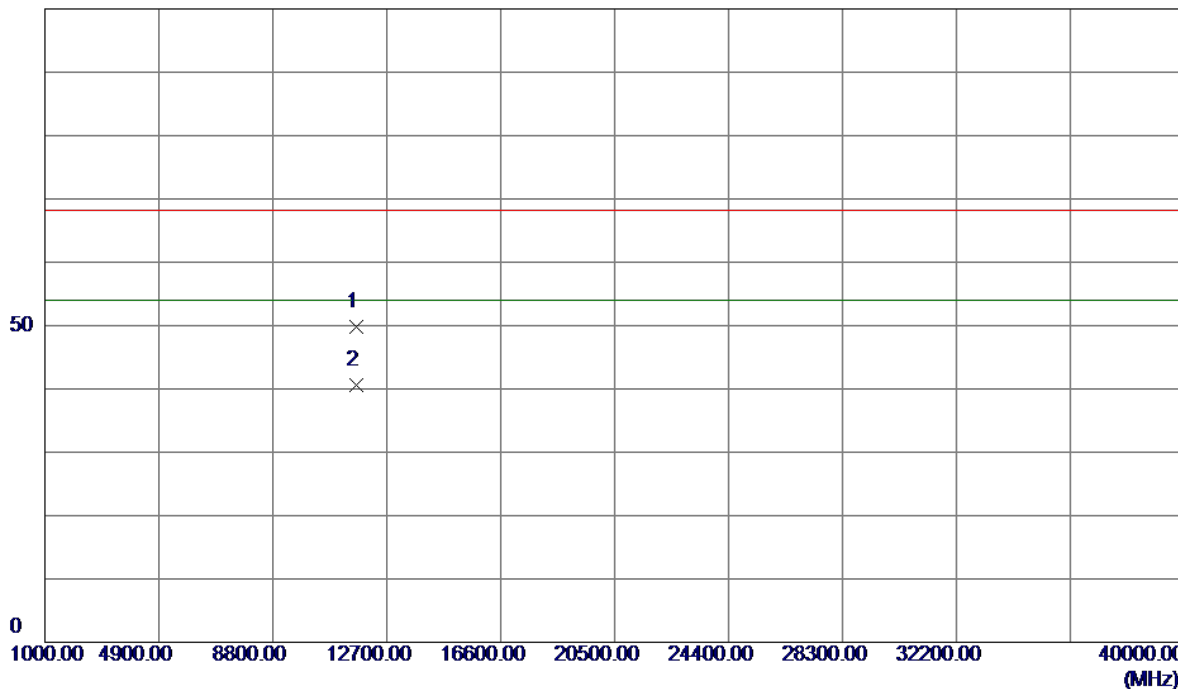

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11649.9000	36.92	12.84	49.76	68.30	-18.54	Peak	
2	11649.9000	27.84	12.84	40.68	54.00	-13.32	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

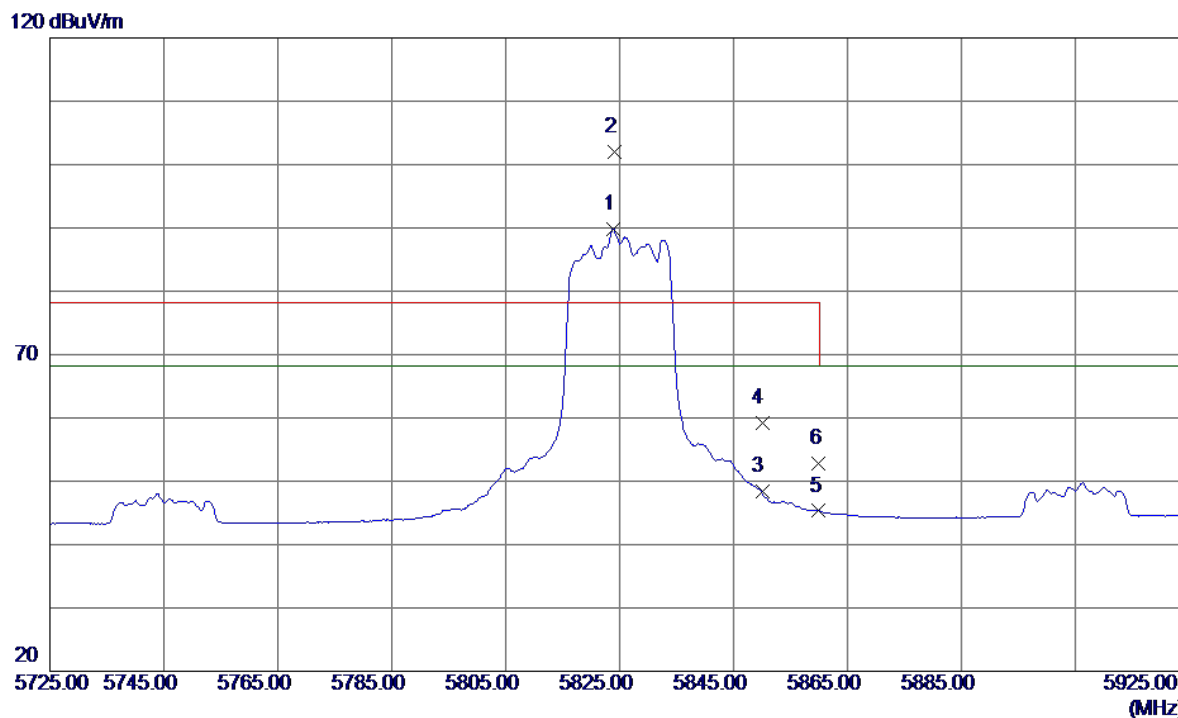


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5823.8000	48.34	41.51	89.85	68.30	21.55	AVG	no limit
2	5824.2000	60.46	41.51	101.97	78.30	23.67	Peak	no limit
3	5850.0000	6.70	41.62	48.32	78.30	-29.98	Peak	
4	5850.0000	17.49	41.62	59.11	68.30	-9.19	AVG	
5	5860.0000	3.64	41.66	45.30	78.30	-33.00	Peak	
6	5860.0000	11.07	41.66	52.73	68.30	-15.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal


100 dBuV/m

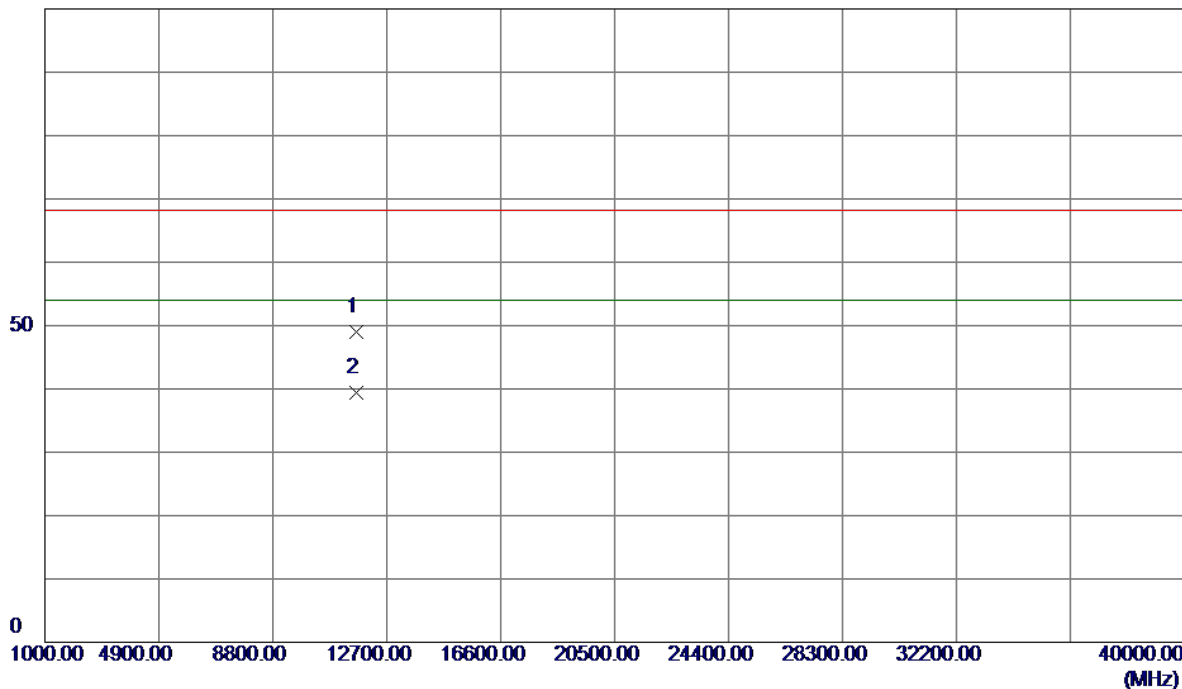

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.1000	36.11	12.84	48.95	68.30	-19.35	Peak	
2	11650.1000	26.48	12.84	39.32	54.00	-14.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

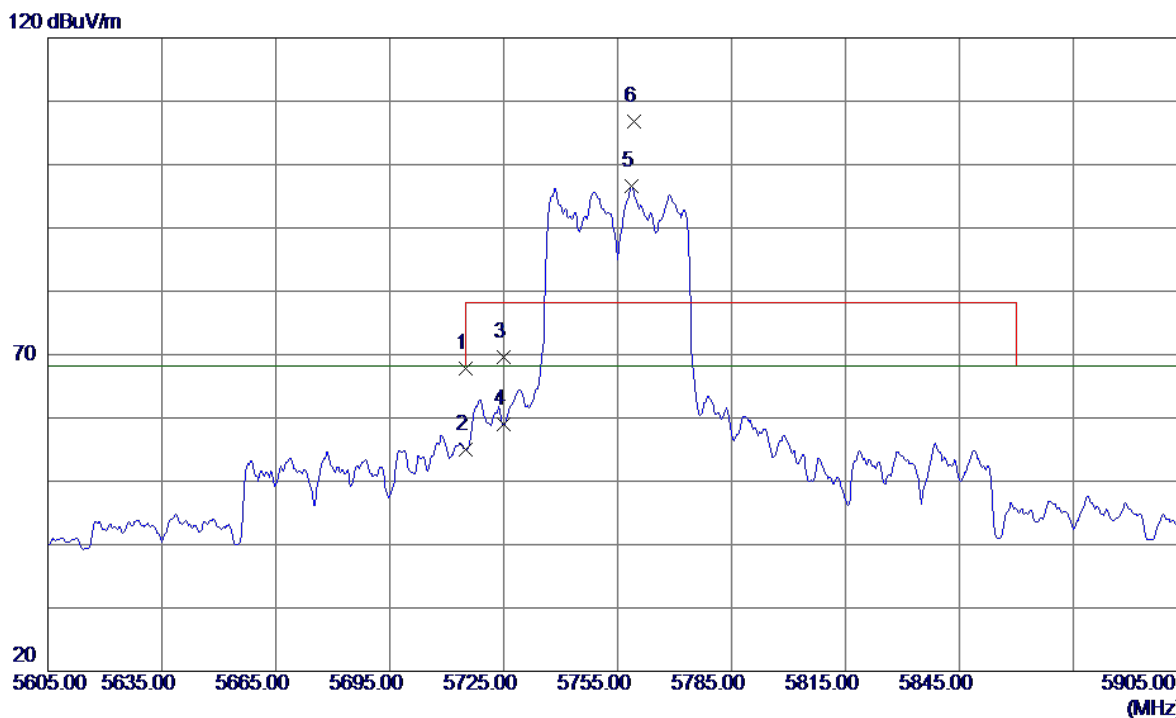

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	26.73	41.05	67.78	68.30	-0.52	Peak	
2	5715.0000	14.03	41.05	55.08	68.30	-13.22	AVG	
3	5725.0000	28.58	41.10	69.68	78.30	-8.62	Peak	
4	5725.0000	17.83	41.10	58.93	68.30	-9.37	AVG	
5	5758.6000	55.31	41.24	96.55	68.30	28.25	AVG	no limit
6	5759.2000	65.64	41.24	106.88	78.30	28.58	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

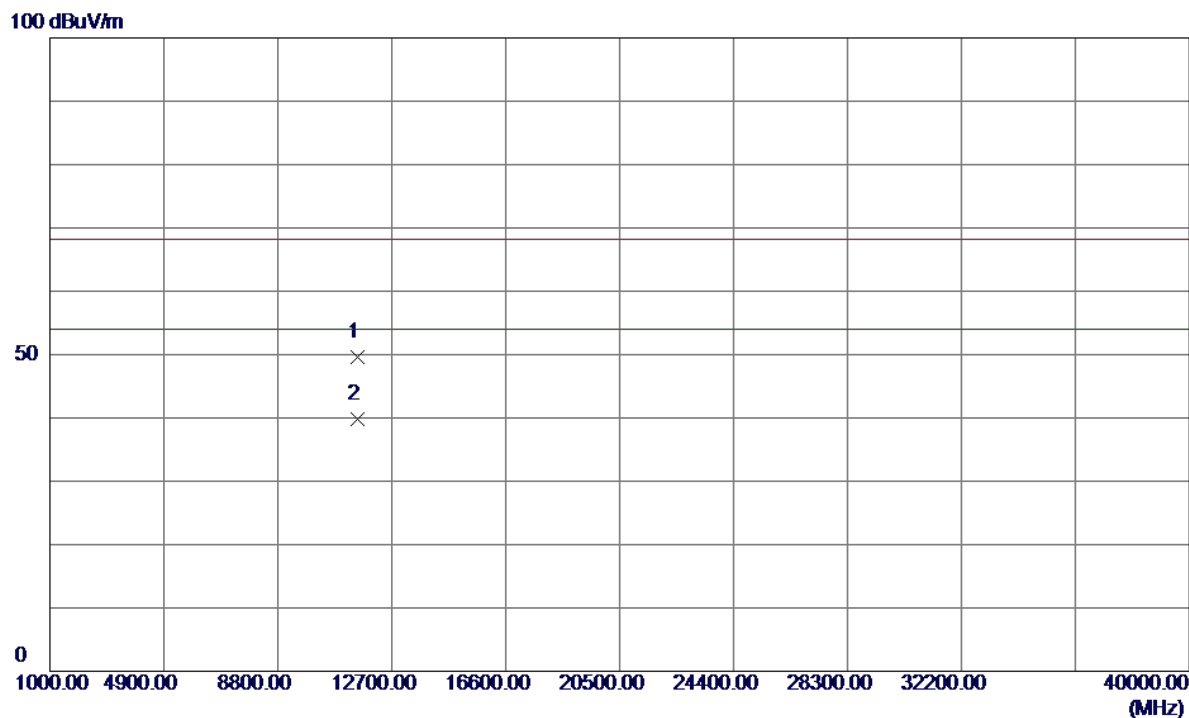


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.1000	36.75	12.93	49.68	68.30	-18.62	Peak	
2	11510.1000	26.86	12.93	39.79	54.00	-14.21	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

120 dBuV/m

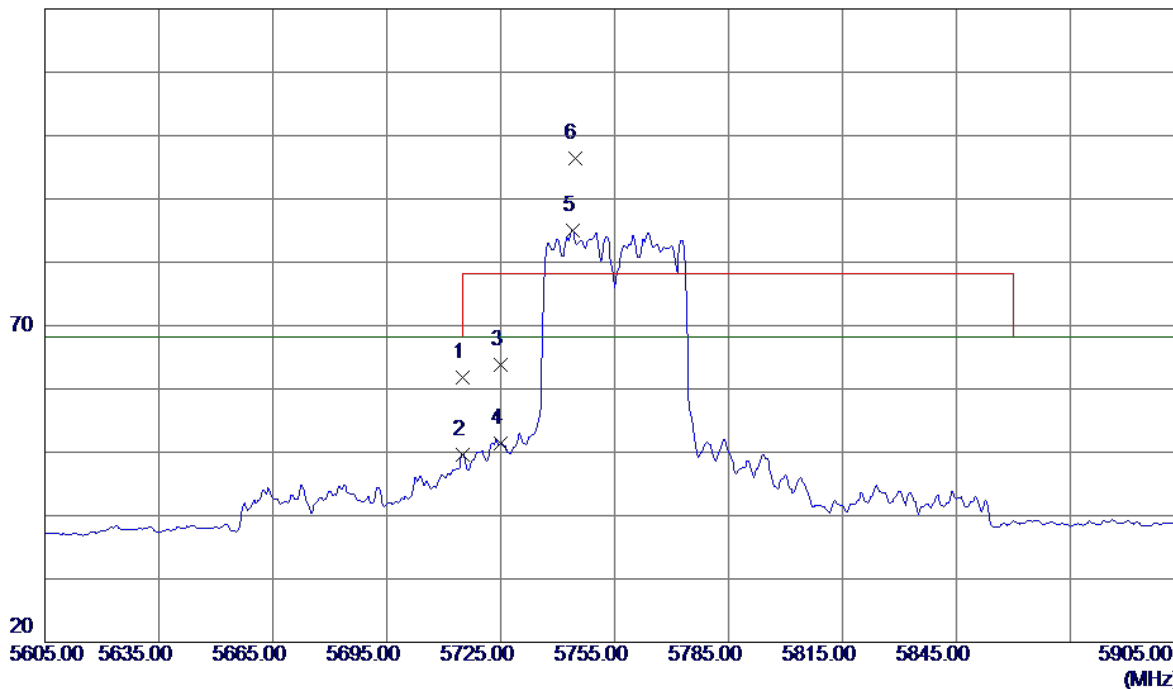


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	20.74	41.05	61.79	68.30	-6.51	Peak	
2	5715.0000	8.63	41.05	49.68	68.30	-18.62	AVG	
3	5725.0000	22.67	41.10	63.77	78.30	-14.53	Peak	
4	5725.0000	10.35	41.10	51.45	68.30	-16.85	AVG	
5	5743.9000	43.92	41.17	85.09	68.30	16.79	AVG	no limit
6	5744.5000	55.20	41.18	96.38	78.30	18.08	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal


100 dBuV/m

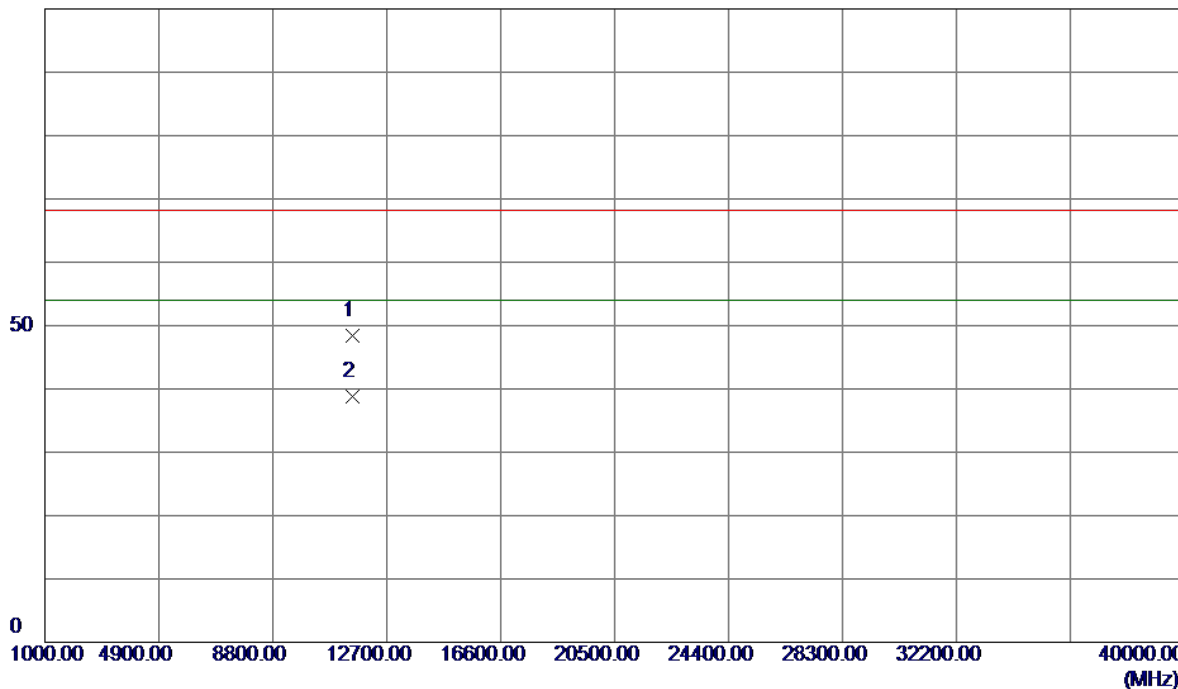

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.5000	35.47	12.93	48.40	68.30	-19.90	Peak	
2	11510.5000	25.91	12.93	38.84	54.00	-15.16	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

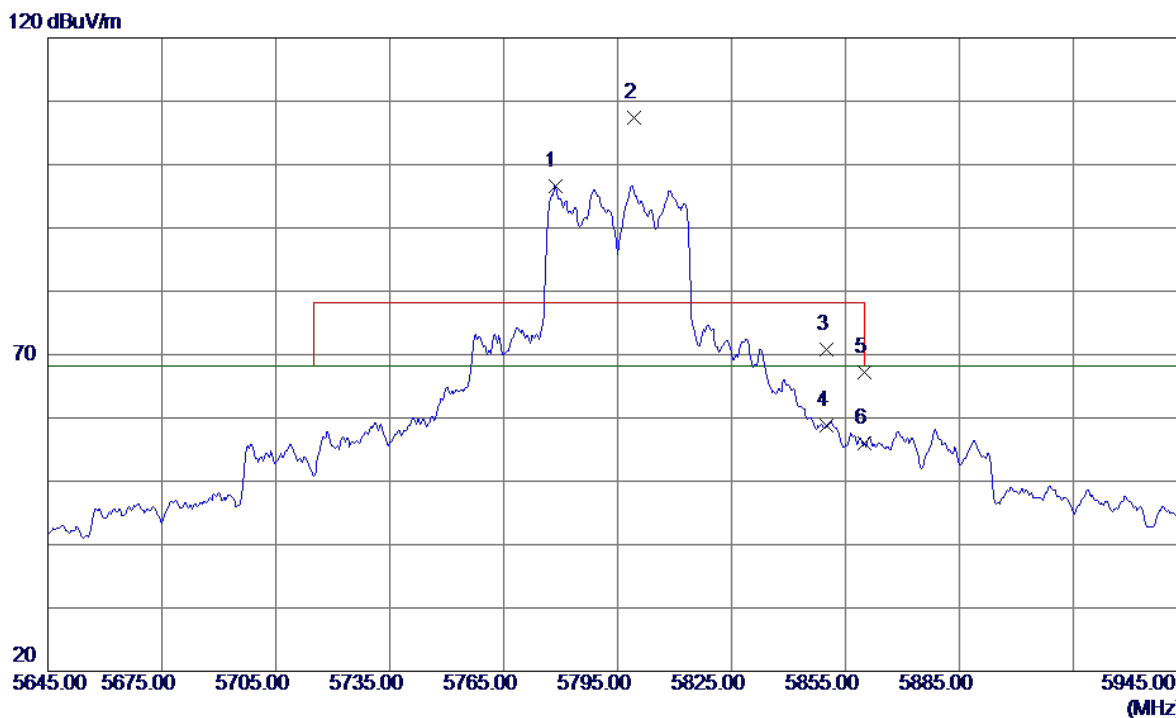


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5778.5000	55.37	41.32	96.69	68.30	28.39	AVG	no limit
2	5799.2000	65.94	41.40	107.34	78.30	29.04	Peak	no limit
3	5850.0000	29.12	41.62	70.74	78.30	-7.56	Peak	
4	5850.0000	17.14	41.62	58.76	68.30	-9.54	AVG	
5	5860.0000	25.46	41.66	67.12	78.30	-11.18	Peak	
6	5860.0000	14.39	41.66	56.05	68.30	-12.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical


100 dBuV/m

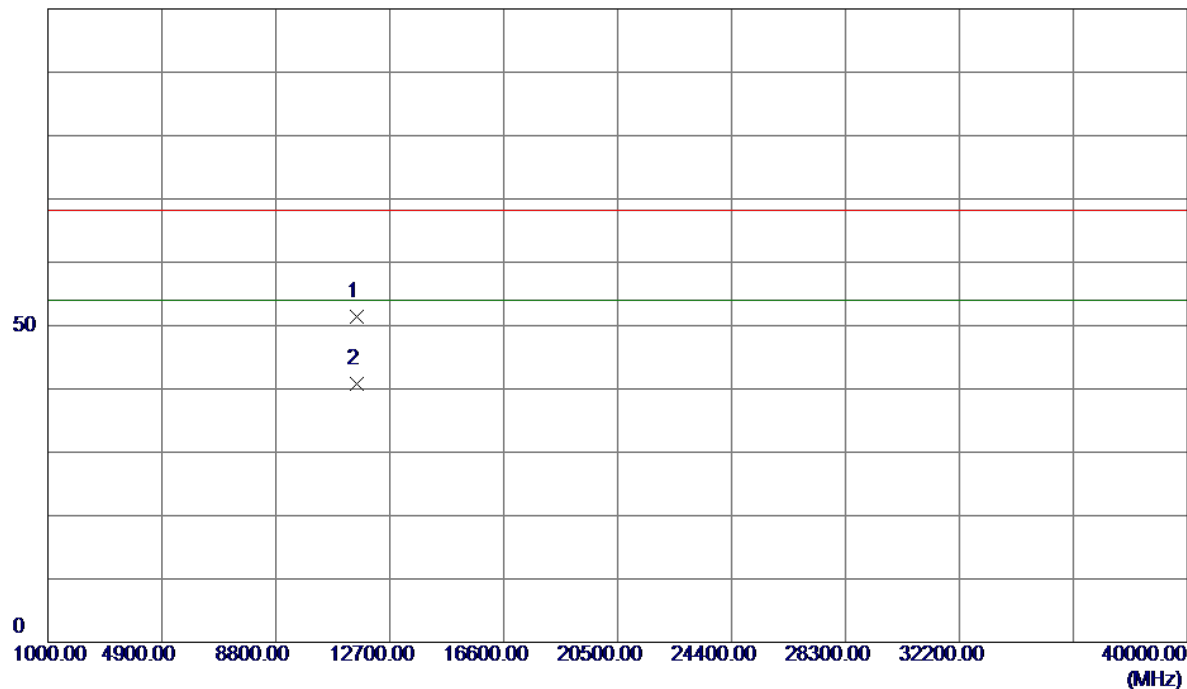

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11589.6500	38.61	12.88	51.49	68.30	-16.81	Peak	
2	11589.6500	27.87	12.88	40.75	54.00	-13.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

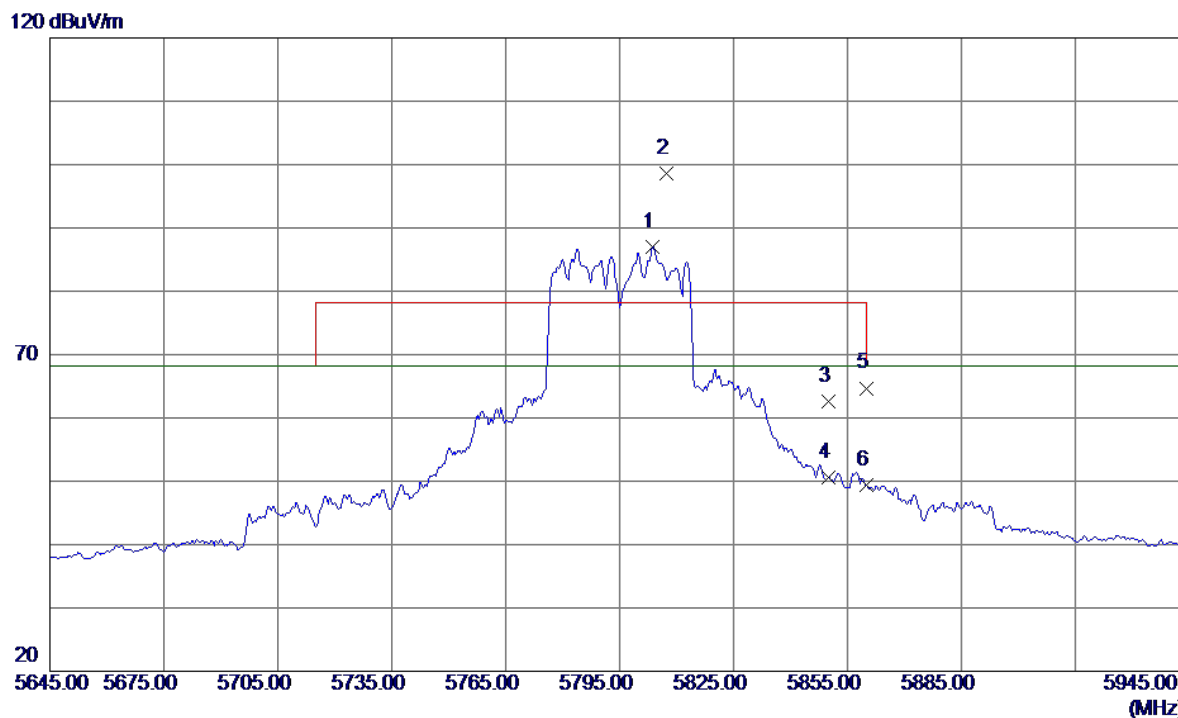


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5803.7000	45.53	41.42	86.95	68.30	18.65	AVG	no limit
2	5807.3000	57.09	41.44	98.53	78.30	20.23	Peak	no limit
3	5850.0000	20.95	41.62	62.57	78.30	-15.73	Peak	
4	5850.0000	8.90	41.62	50.52	68.30	-17.78	AVG	
5	5860.0000	23.04	41.66	64.70	78.30	-13.60	Peak	
6	5860.0000	7.76	41.66	49.42	68.30	-18.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

100 dBuV/m

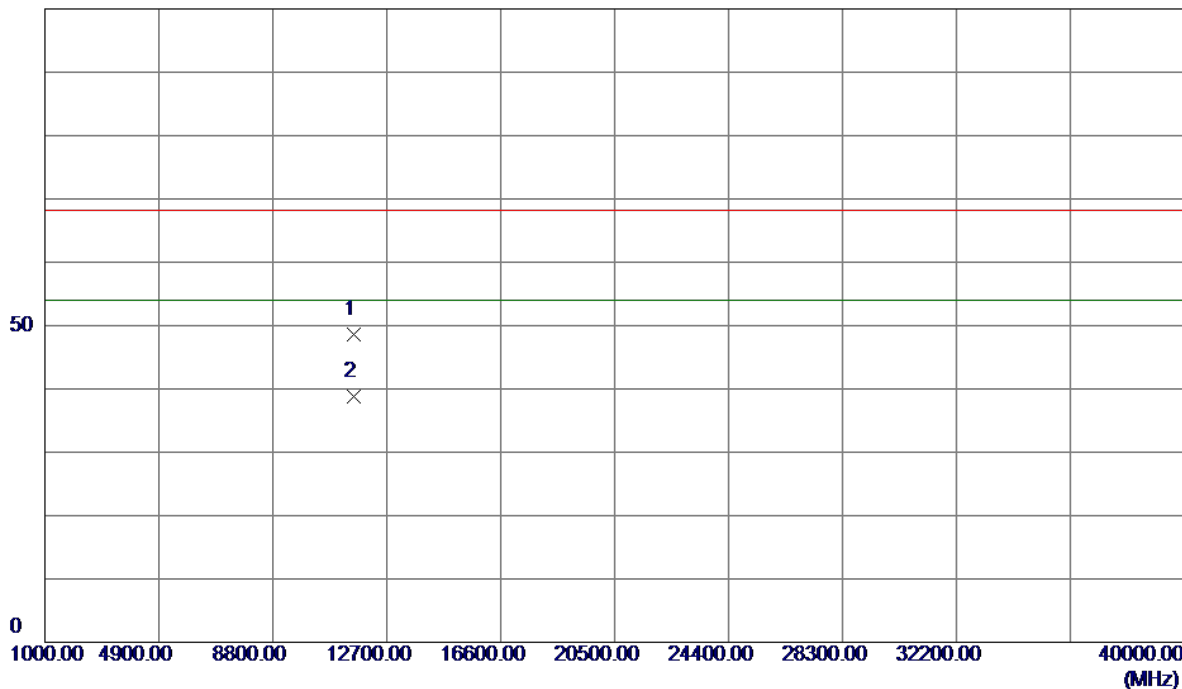


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.2500	35.71	12.88	48.59	68.30	-19.71	Peak	
2	11590.2500	25.83	12.88	38.71	54.00	-15.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

120 dBuV/m

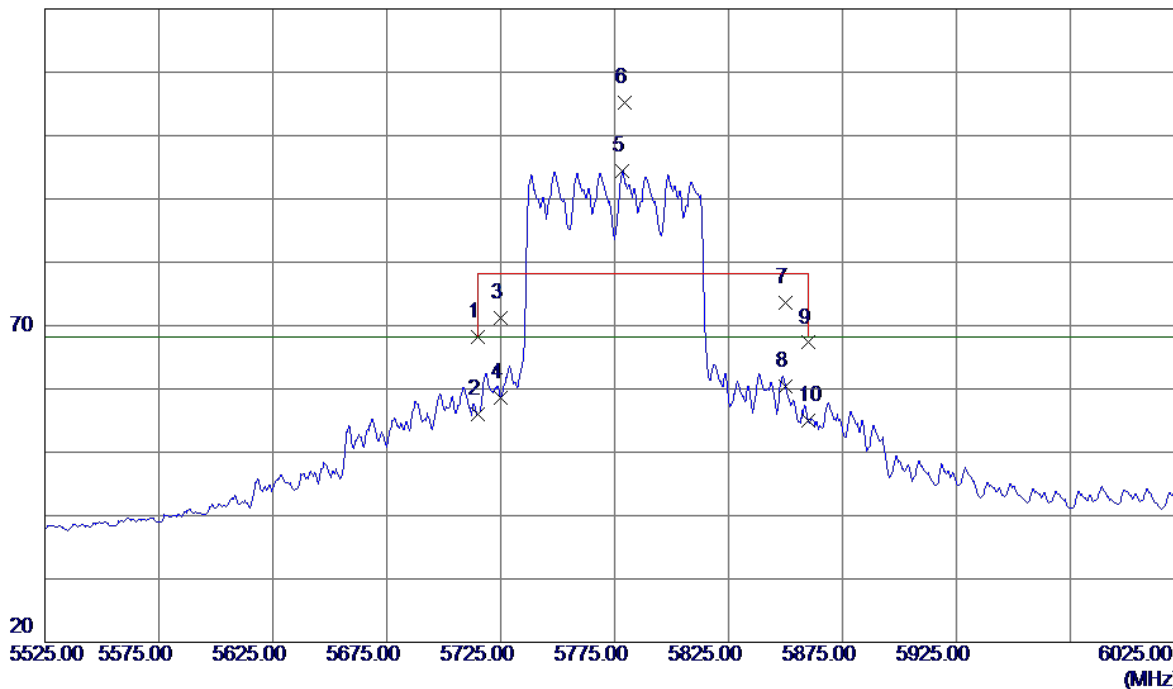


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	27.23	41.05	68.28	68.30	-0.02	Peak	
2	5715.0000	15.03	41.05	56.08	68.30	-12.22	AVG	
3	5725.0000	30.17	41.10	71.27	78.30	-7.03	Peak	
4	5725.0000	17.46	41.10	58.56	68.30	-9.74	AVG	
5	5778.5000	53.15	41.32	94.47	68.30	26.17	AVG	no limit
6	5779.5000	63.97	41.32	105.29	78.30	26.99	Peak	no limit
7	5850.0000	32.00	41.62	73.62	78.30	-4.68	Peak	
8	5850.0000	18.72	41.62	60.34	68.30	-7.96	AVG	
9	5860.0000	25.64	41.66	67.30	78.30	-11.00	Peak	
10	5860.0000	13.25	41.66	54.91	68.30	-13.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

100 dBuV/m

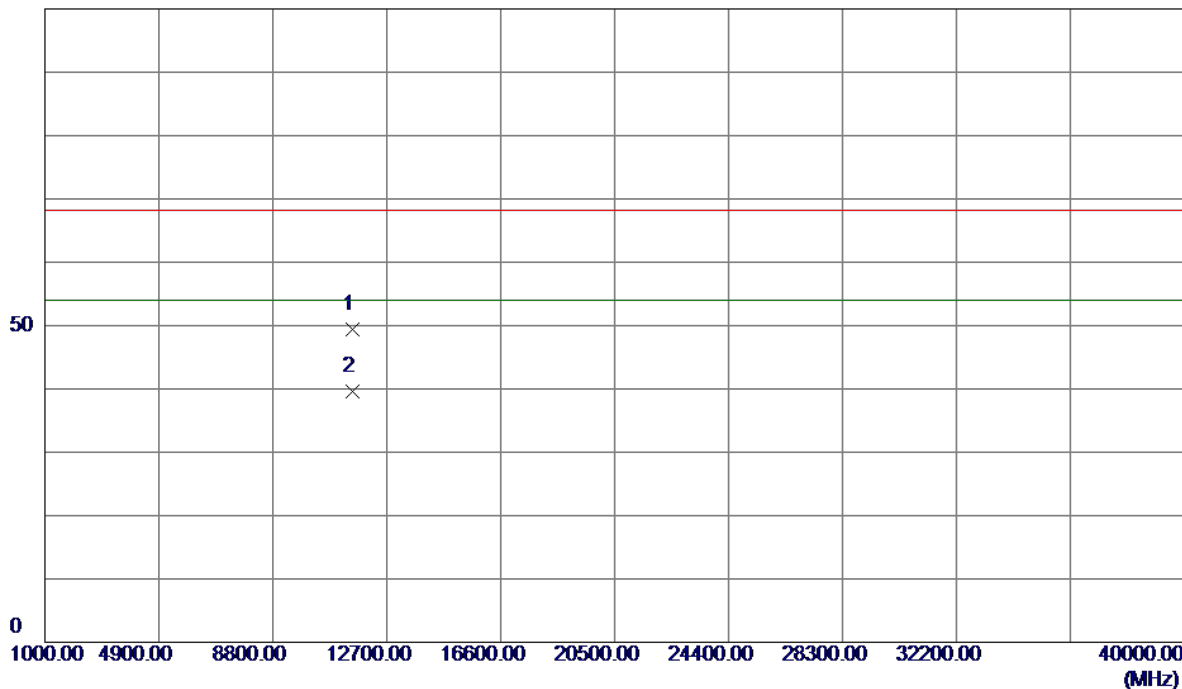


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11550.3000	36.50	12.91	49.41	68.30	-18.89	Peak	
2	11550.3000	26.70	12.91	39.61	54.00	-14.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal


120 dBuV/m

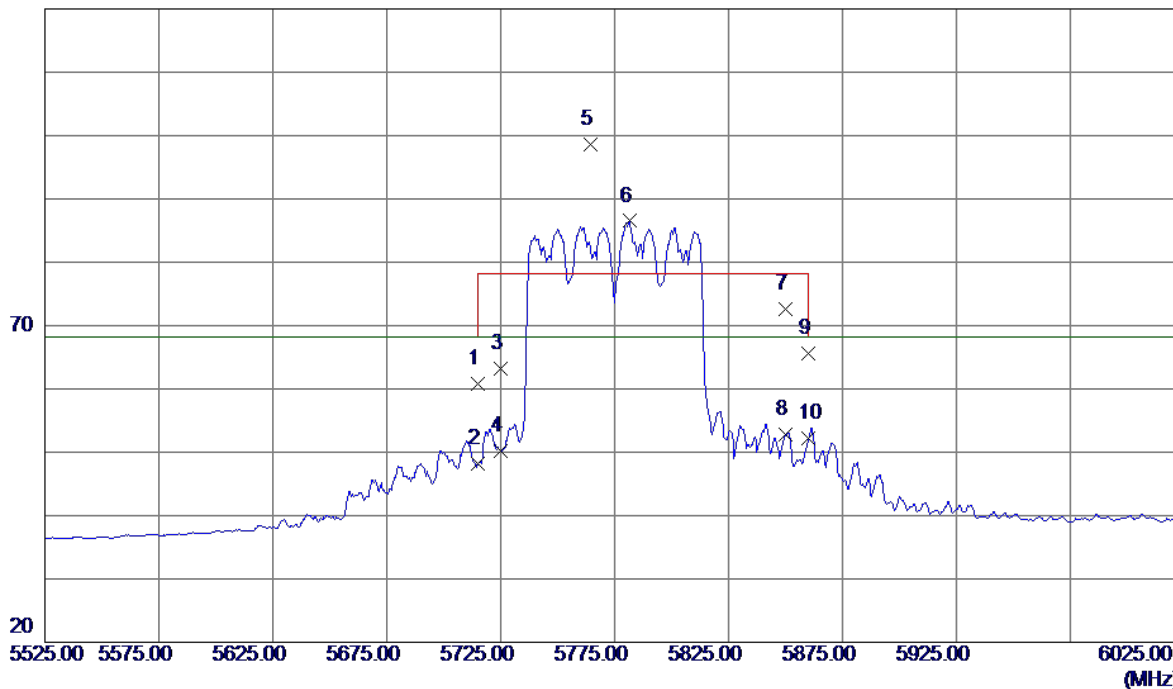

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	19.82	41.05	60.87	68.30	-7.43	Peak	
2	5715.0000	7.08	41.05	48.13	68.30	-20.17	AVG	
3	5725.0000	22.19	41.10	63.29	78.30	-15.01	Peak	
4	5725.0000	9.17	41.10	50.27	68.30	-18.03	AVG	
5	5764.5000	57.34	41.26	98.60	78.30	20.30	Peak	no limit
6	5781.5000	45.17	41.33	86.50	68.30	18.20	AVG	no limit
7	5850.0000	30.90	41.62	72.52	78.30	-5.78	Peak	
8	5850.0000	11.26	41.62	52.88	68.30	-15.42	AVG	
9	5860.0000	23.92	41.66	65.58	78.30	-12.72	Peak	
10	5860.0000	10.49	41.66	52.15	68.30	-16.15	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

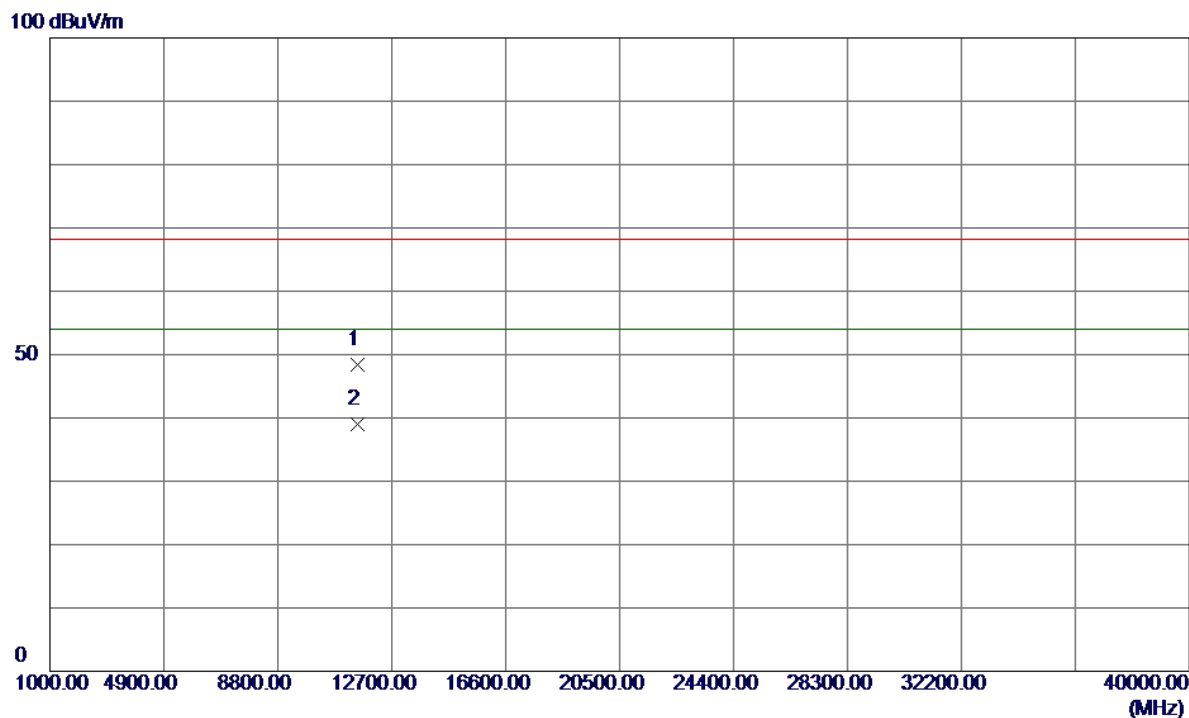

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11550.0500	35.47	12.91	48.38	68.30	-19.92	Peak	
2	11550.0500	26.11	12.91	39.02	54.00	-14.98	AVG	

TX N20 Mode_DUTY CYCLE

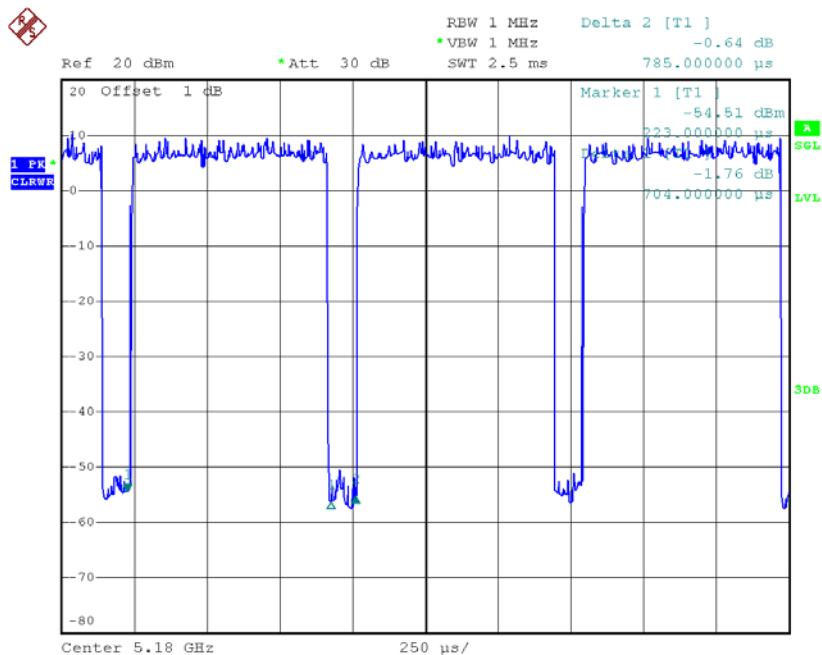

Date: 9.FEB.2015 13:36:32

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.70 msec

T_{Total} : 0.78 msec

Duty cycle: 89.74%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.47

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N40 Mode_DUTY CYCLE

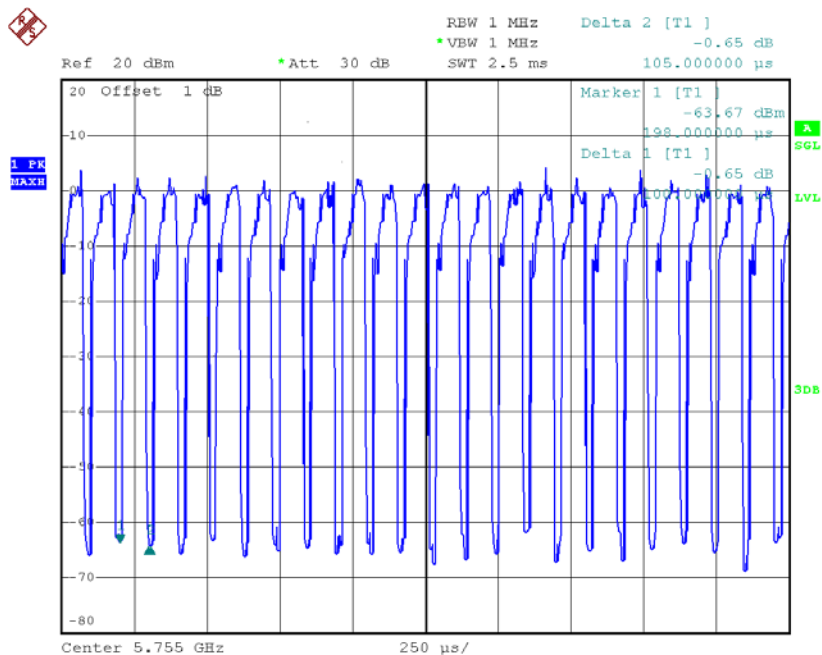

Date: 9.FEB.2015 13:15:00

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.11 msec

T_{Total} : 0.11 msec

Duty cycle: 100.00%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.00

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be

cacluated as Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

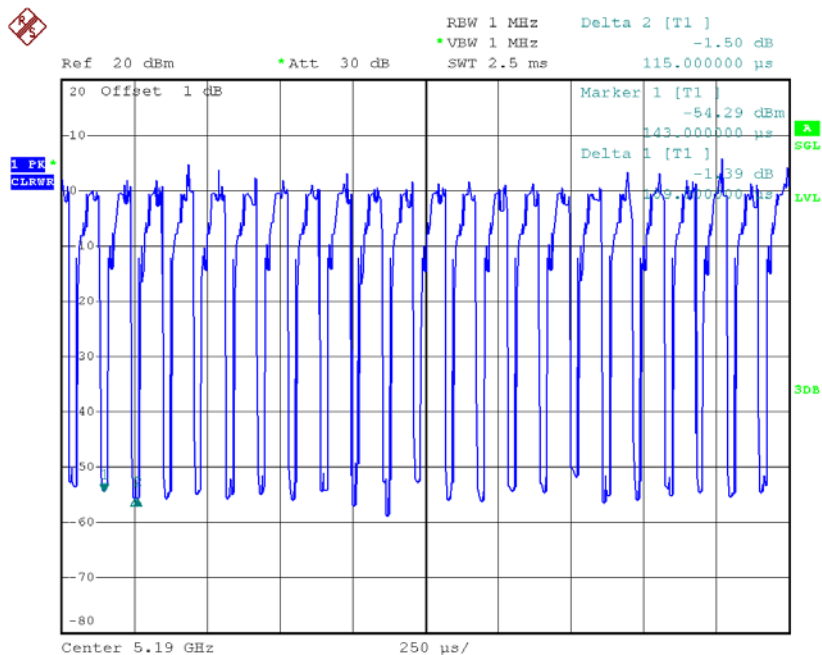

Date: 9.FEB.2015 13:51:34

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.11 msec

T_{Total} : 0.12 msec

Duty cycle: 91.67%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.38

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$


$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.75	17.10
CH40	5200	20.75	17.10
CH48	5240	20.64	17.10

TX CH36

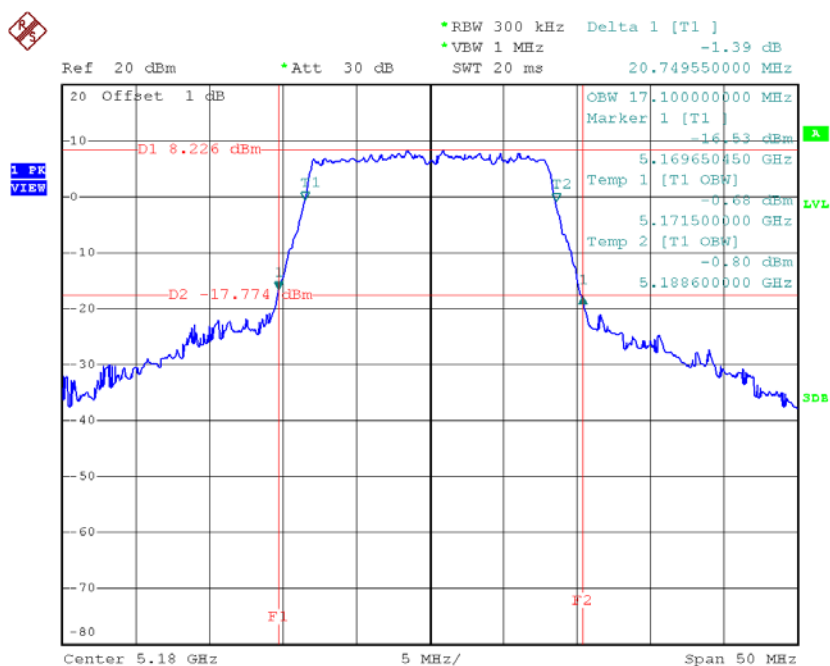


Date: 9.FEB.2015 10:49:02

TX CH40

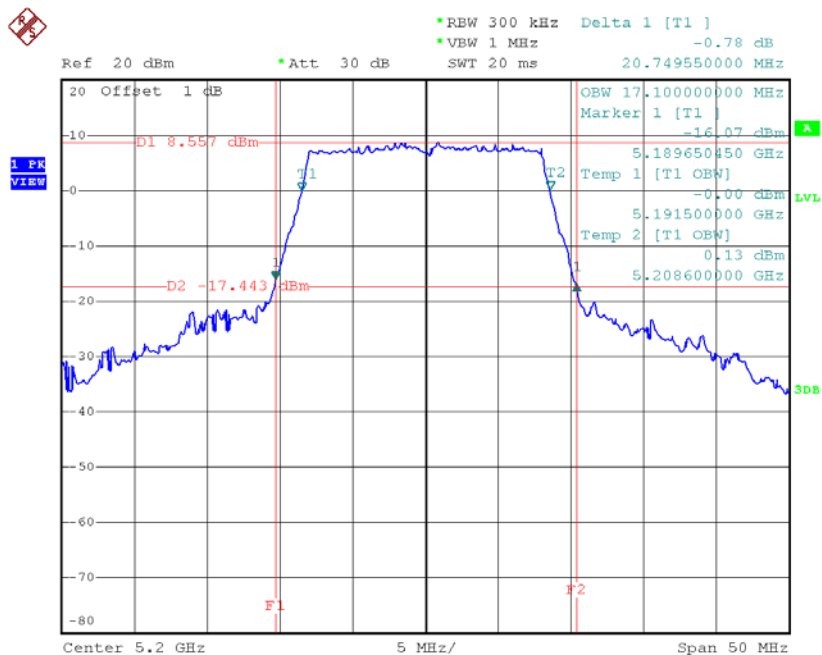

Date: 9.FEB.2015 10:52:10

TX CH48

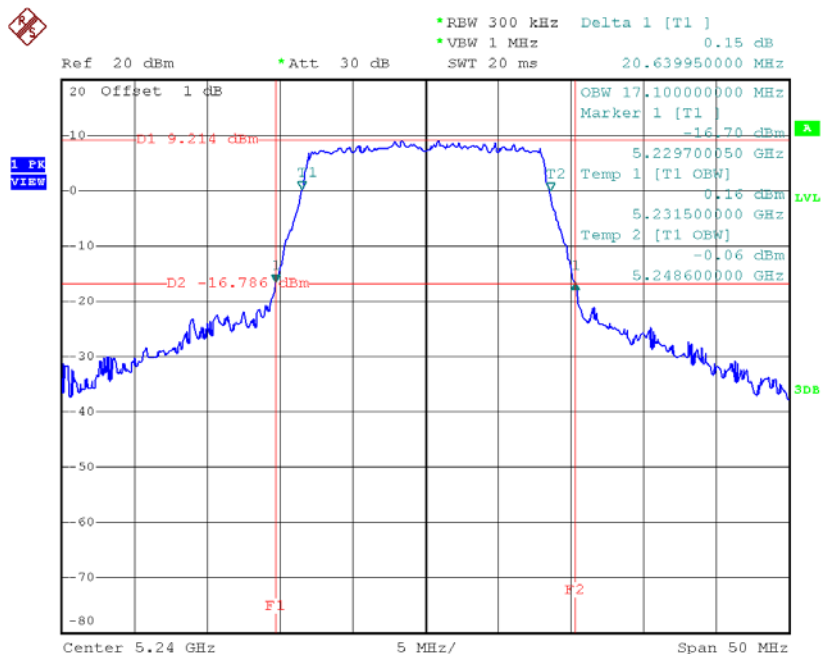


Date: 9.FEB.2015 10:53:34

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.65	17.90
CH40	5200	20.55	17.90
CH48	5240	20.45	17.90

TX CH36

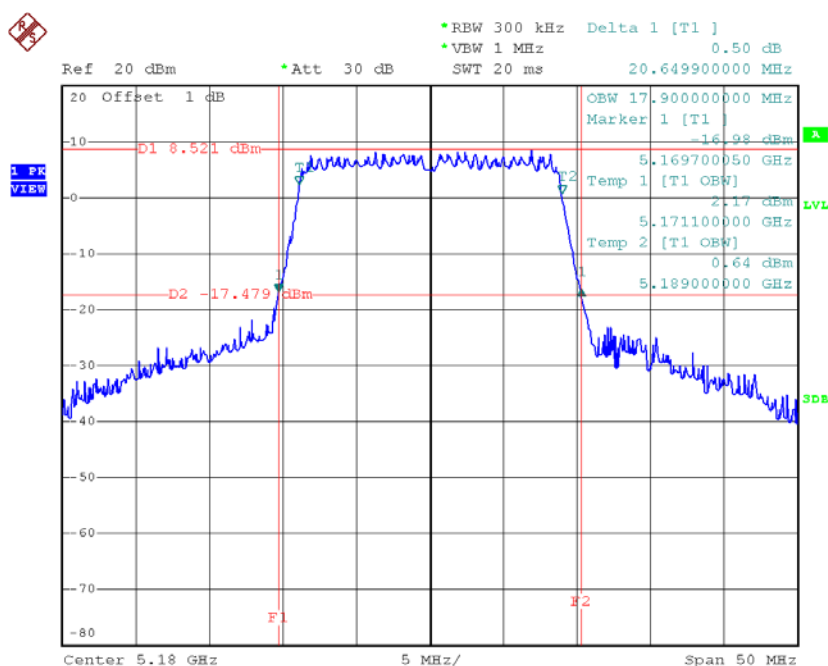


Date: 9.FEB.2015 13:53:42

TX CH40

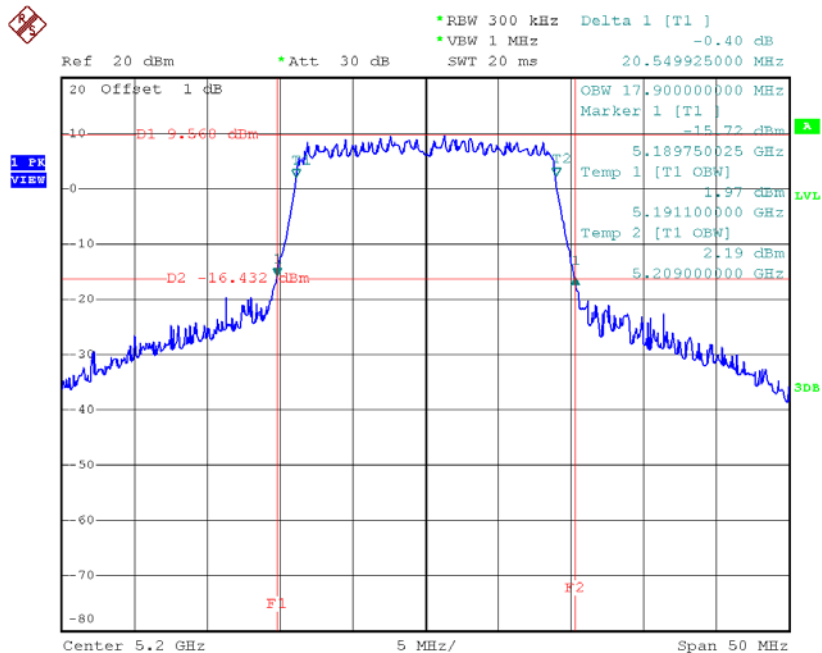

Date: 9.FEB.2015 13:55:04

TX CH48

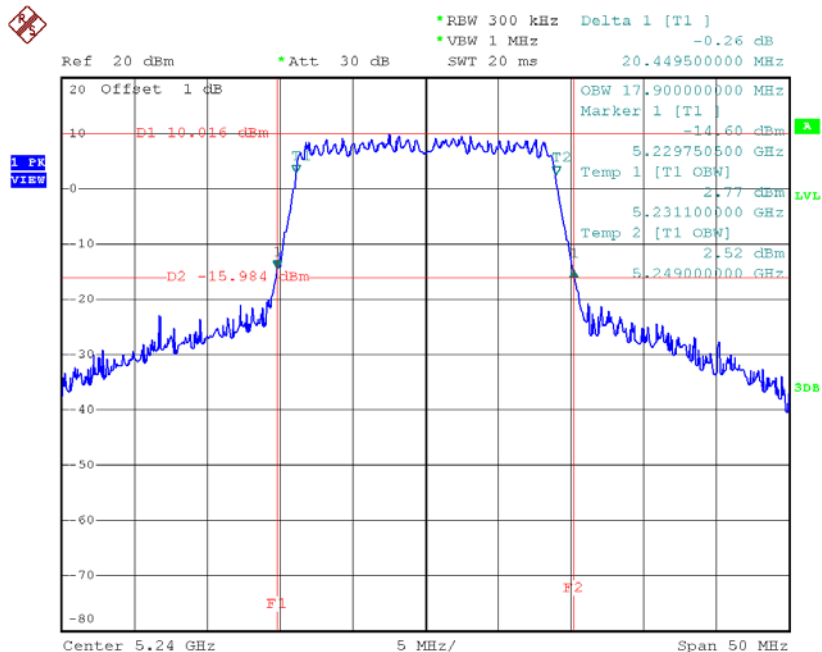

Date: 9.FEB.2015 13:55:48

Test Mode: UNII-1/TX N40 Mode_CH38/CH46

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.50	36.40
CH46	5230	39.19	36.40