Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

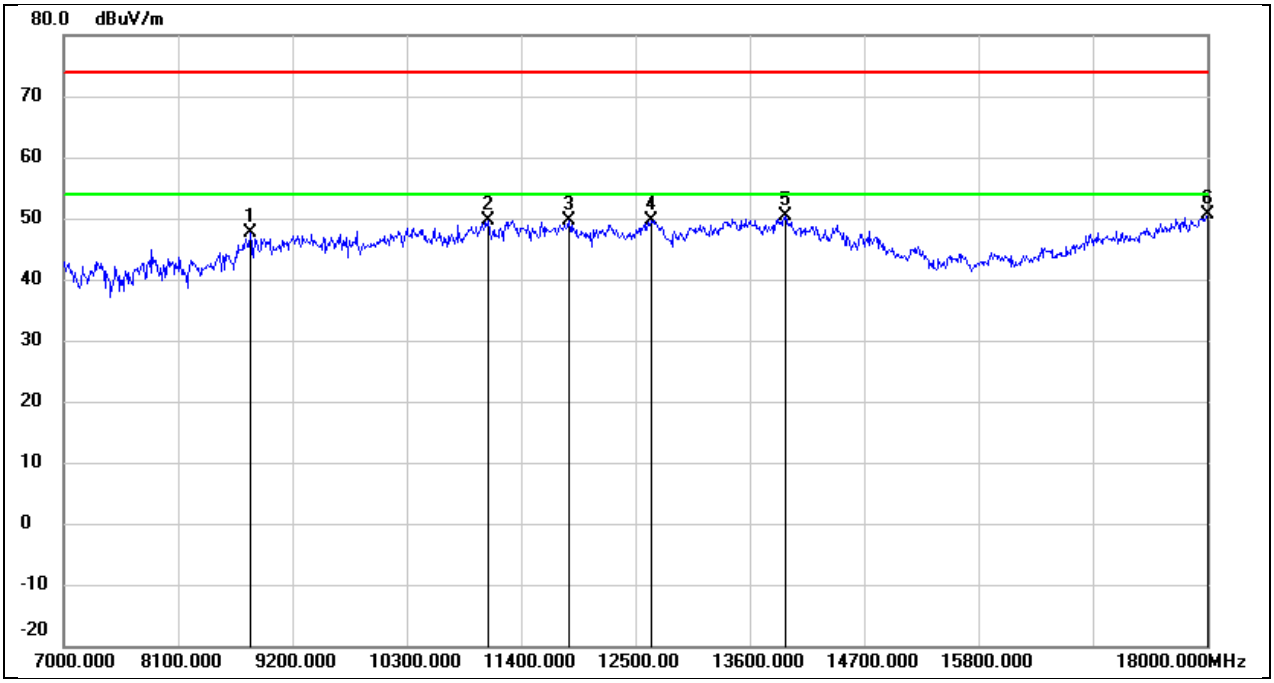

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8793.000	38.60	8.91	47.51	74.00	-26.49	peak
2	11081.000	34.67	15.05	49.72	74.00	-24.28	peak
3	11862.000	32.26	17.45	49.71	74.00	-24.29	peak
4	12654.000	31.65	18.01	49.66	74.00	-24.34	peak
5	13941.000	28.75	21.73	50.48	74.00	-23.52	peak
6	18000.000	24.49	26.12	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3 V

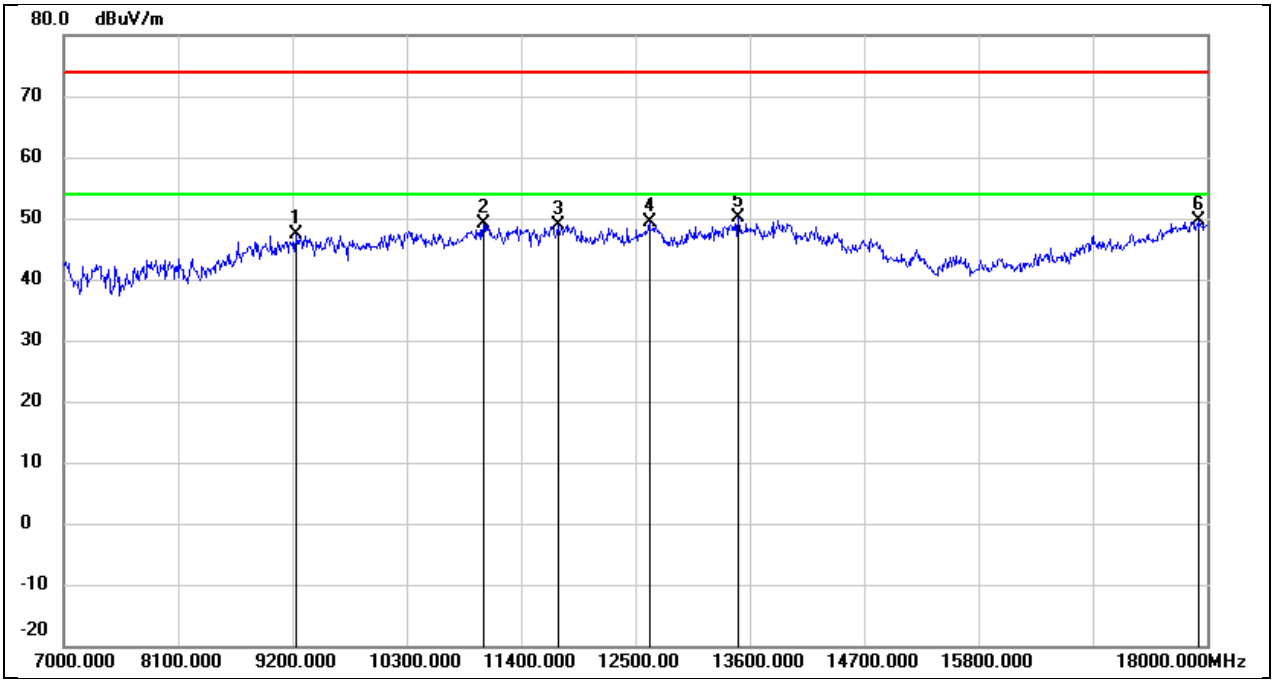

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.89	10.48	47.37	74.00	-26.63	peak
2	11037.000	34.35	14.87	49.22	74.00	-24.78	peak
3	11752.000	31.71	17.24	48.95	74.00	-25.05	peak
4	12632.000	31.28	17.99	49.27	74.00	-24.73	peak
5	13490.000	29.44	20.60	50.04	74.00	-23.96	peak
6	17923.000	24.06	25.60	49.66	74.00	-24.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

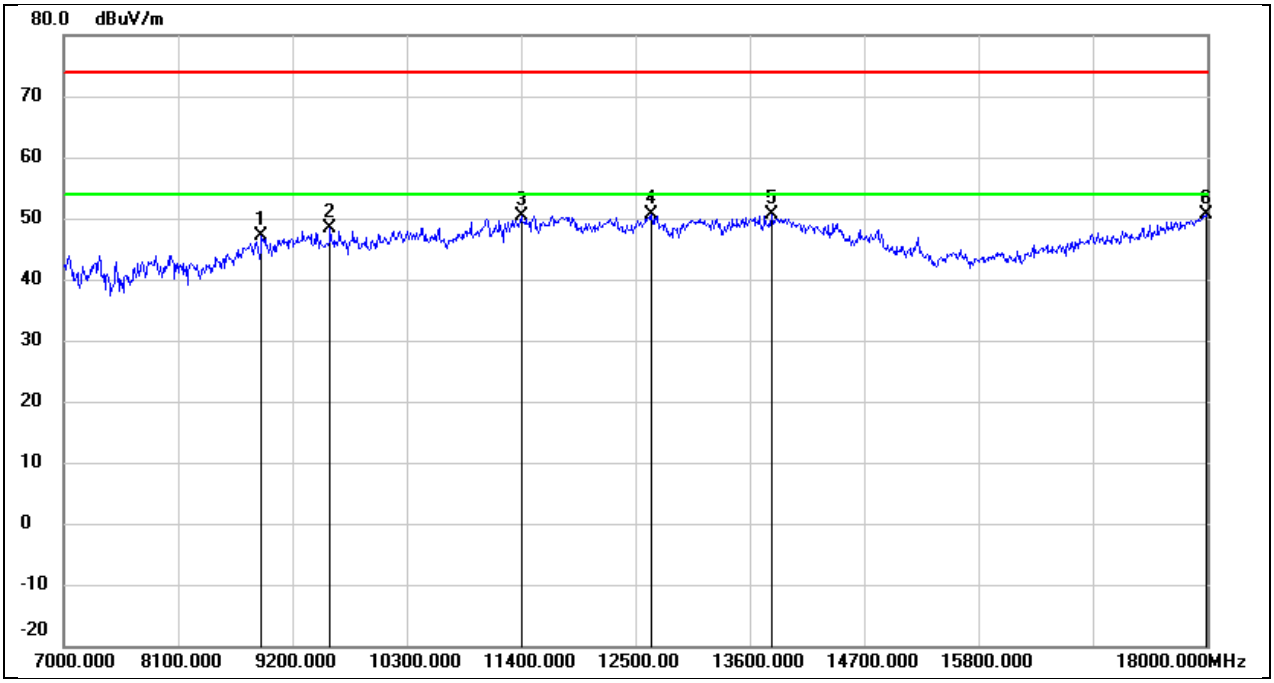

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	37.48	9.66	47.14	74.00	-26.86	peak
2	9563.000	37.66	10.79	48.45	74.00	-25.55	peak
3	11400.000	34.06	16.36	50.42	74.00	-23.58	peak
4	12654.000	32.52	18.01	50.53	74.00	-23.47	peak
5	13809.000	29.24	21.41	50.65	74.00	-23.35	peak
6	17989.000	24.69	26.04	50.73	74.00	-23.27	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3 V

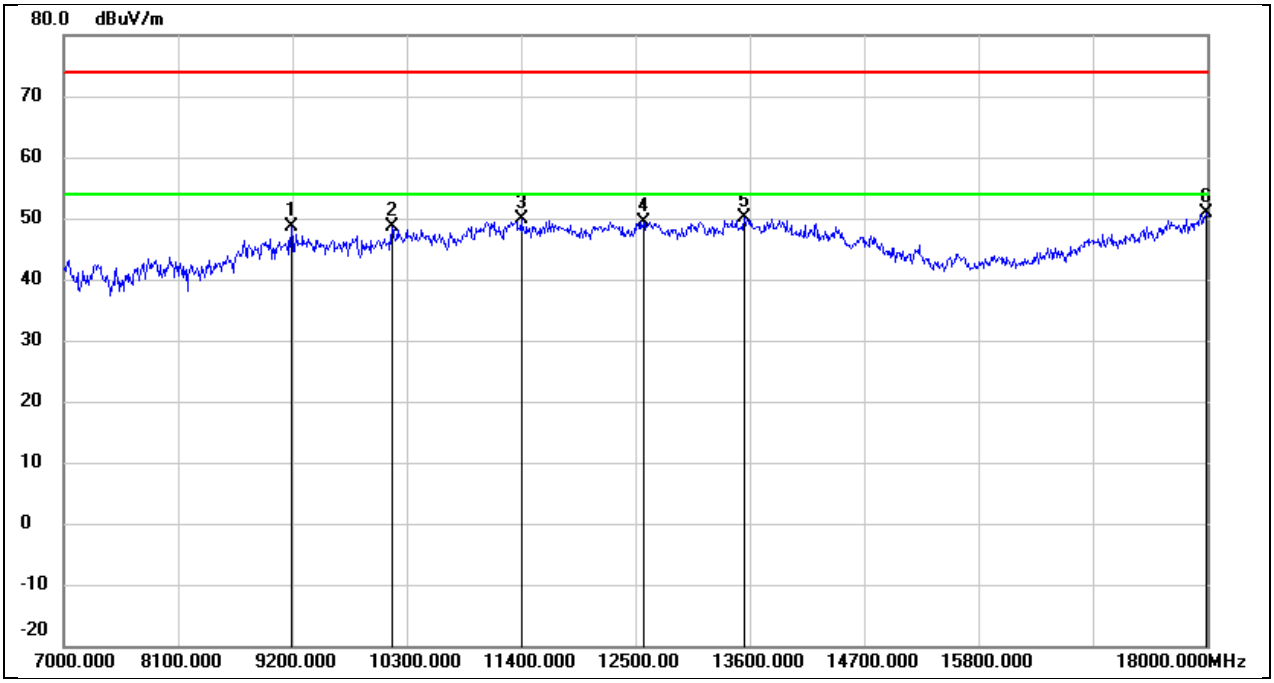

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	38.07	10.46	48.53	74.00	-25.47	peak
2	10157.000	36.64	12.10	48.74	74.00	-25.26	peak
3	11400.000	33.44	16.36	49.80	74.00	-24.20	peak
4	12577.000	31.56	17.93	49.49	74.00	-24.51	peak
5	13545.000	29.34	20.75	50.09	74.00	-23.91	peak
6	17989.000	24.76	26.04	50.80	74.00	-23.20	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

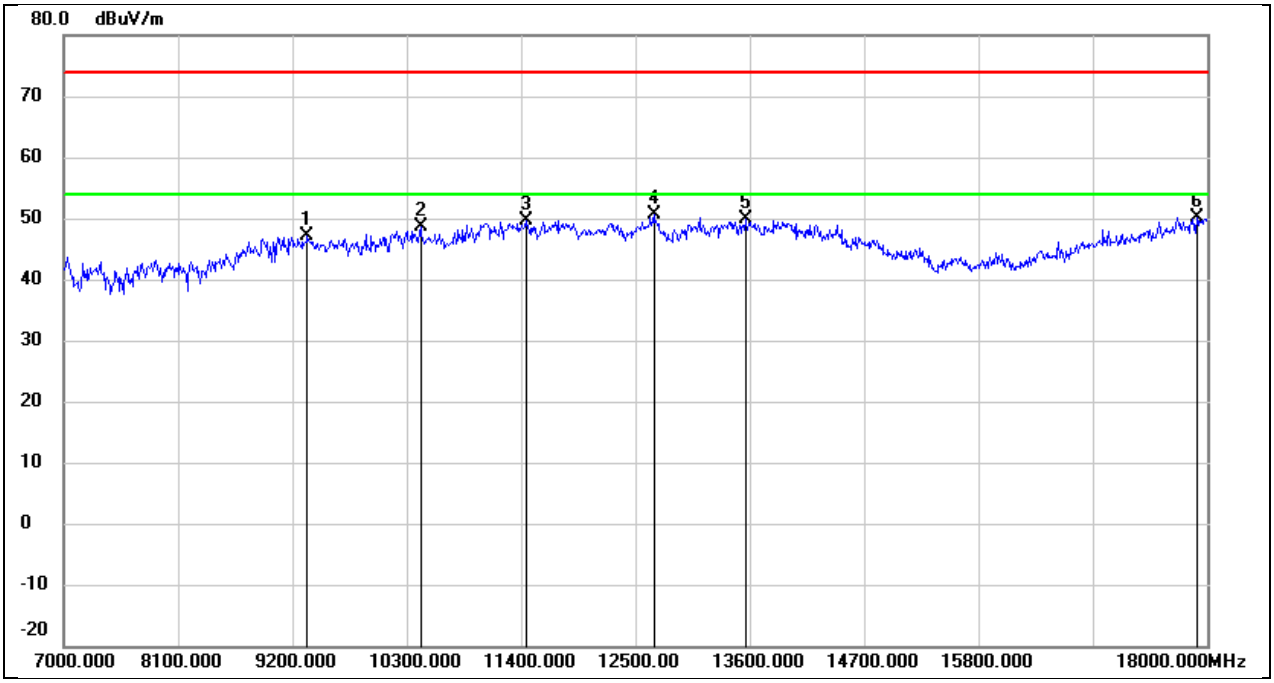

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.52	10.55	47.07	74.00	-26.93	peak
2	10432.000	35.97	12.67	48.64	74.00	-25.36	peak
3	11444.000	33.00	16.53	49.53	74.00	-24.47	peak
4	12676.000	32.62	18.05	50.67	74.00	-23.33	peak
5	13556.000	29.18	20.78	49.96	74.00	-24.04	peak
6	17901.000	24.64	25.45	50.09	74.00	-23.91	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

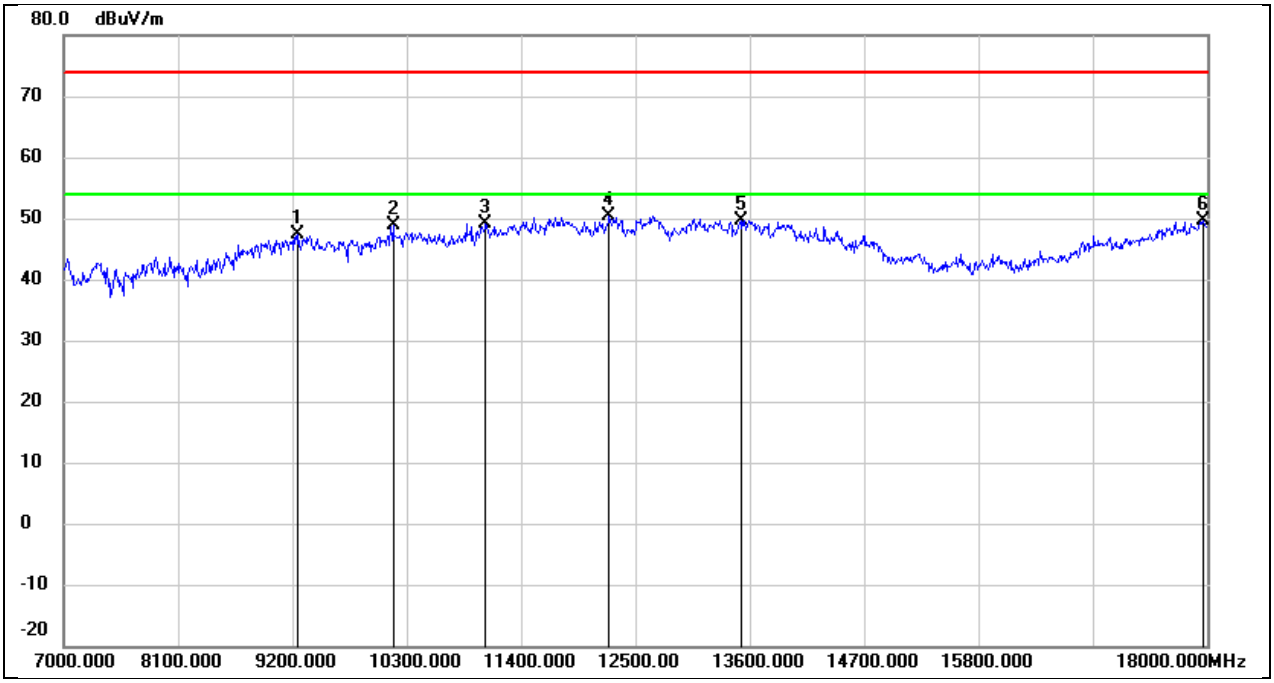

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.98	10.51	47.49	74.00	-26.51	peak
2	10168.000	36.63	12.13	48.76	74.00	-25.24	peak
3	11059.000	34.25	14.96	49.21	74.00	-24.79	peak
4	12247.000	32.60	17.77	50.37	74.00	-23.63	peak
5	13512.000	29.04	20.68	49.72	74.00	-24.28	peak
6	17956.000	23.90	25.82	49.72	74.00	-24.28	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

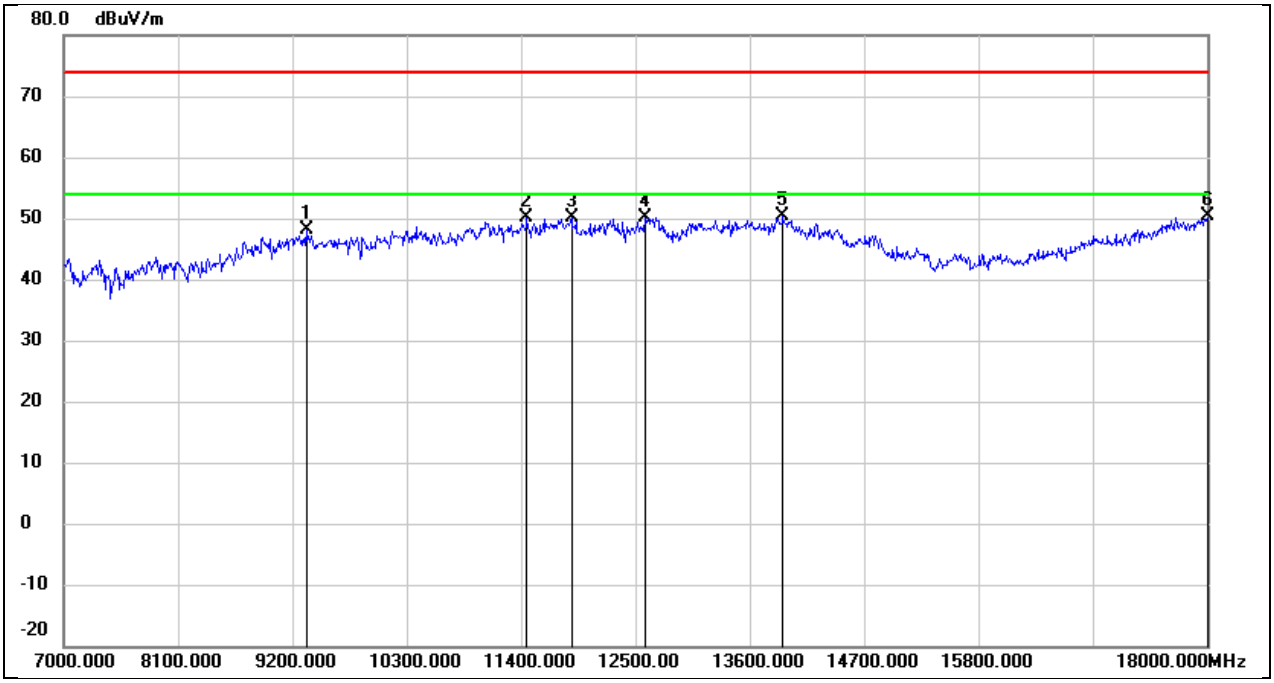

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.51	10.54	48.05	74.00	-25.95	peak
2	11455.000	33.44	16.58	50.02	74.00	-23.98	peak
3	11884.000	32.59	17.48	50.07	74.00	-23.93	peak
4	12588.000	32.25	17.94	50.19	74.00	-23.81	peak
5	13919.000	28.61	21.68	50.29	74.00	-23.71	peak
6	18000.000	24.26	26.12	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3 V

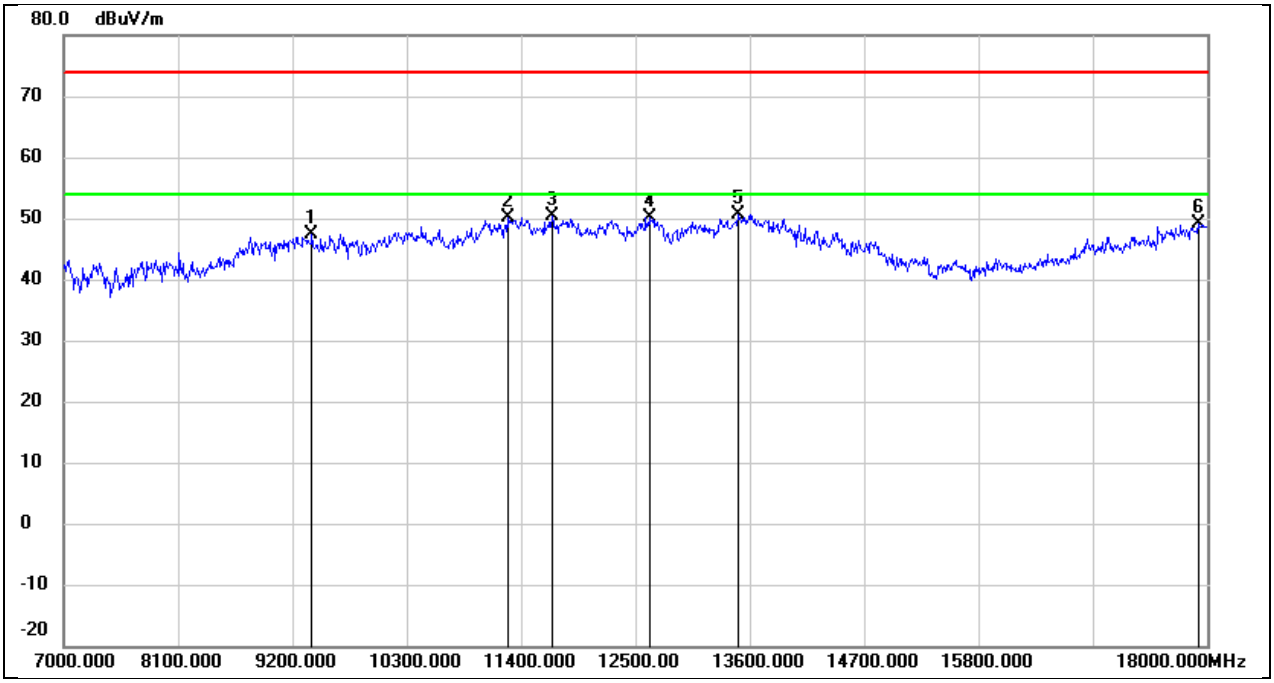

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	36.83	10.58	47.41	74.00	-26.59	peak
2	11268.000	34.39	15.83	50.22	74.00	-23.78	peak
3	11697.000	33.14	17.13	50.27	74.00	-23.73	peak
4	12632.000	32.21	17.99	50.20	74.00	-23.80	peak
5	13490.000	30.00	20.60	50.60	74.00	-23.40	peak
6	17912.000	23.59	25.52	49.11	74.00	-24.89	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

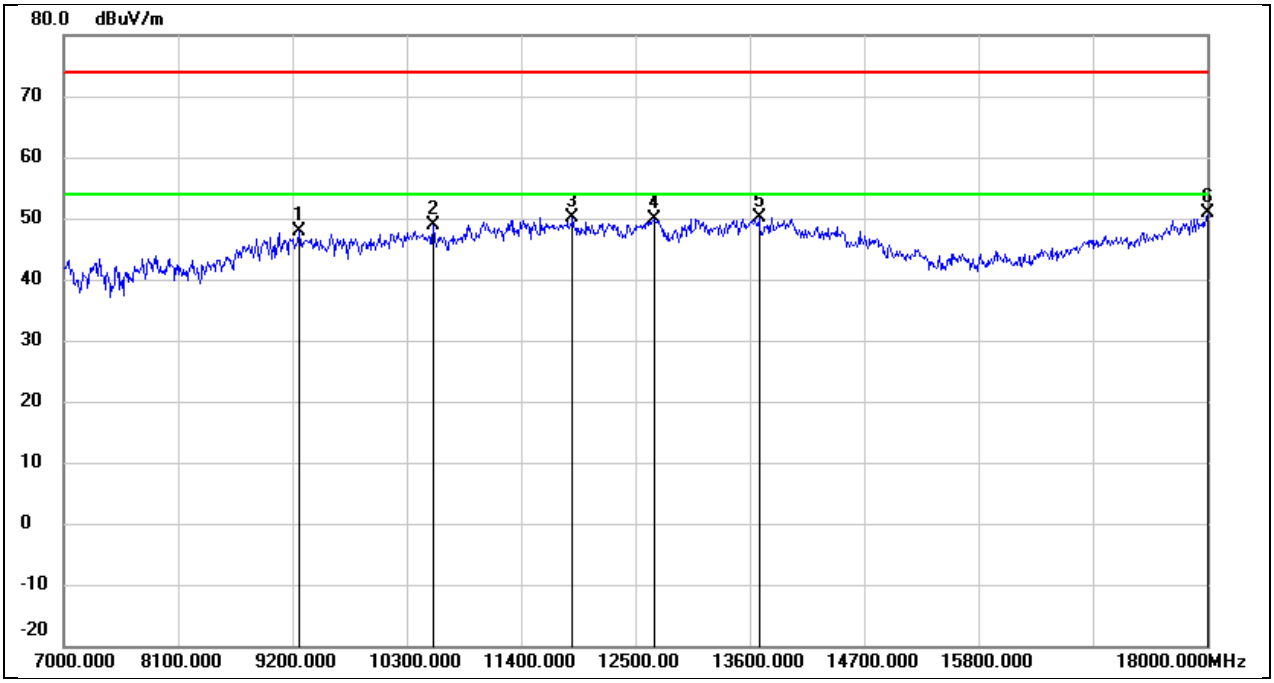

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.35	10.51	47.86	74.00	-26.14	peak
2	10553.000	35.91	13.02	48.93	74.00	-25.07	peak
3	11895.000	32.57	17.51	50.08	74.00	-23.92	peak
4	12676.000	31.86	18.05	49.91	74.00	-24.09	peak
5	13688.000	28.94	21.10	50.04	74.00	-23.96	peak
6	18000.000	24.65	26.12	50.77	74.00	-23.23	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3 V

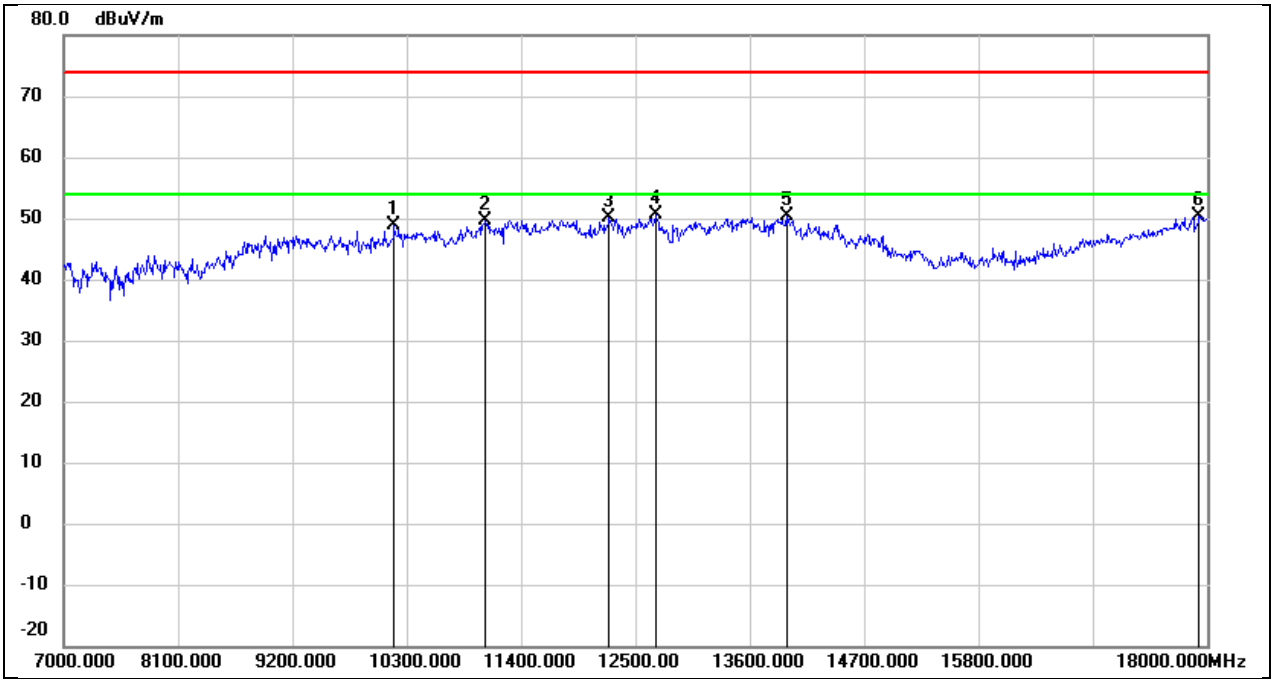

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10179.000	36.75	12.14	48.89	74.00	-25.11	peak
2	11059.000	34.66	14.96	49.62	74.00	-24.38	peak
3	12247.000	32.25	17.77	50.02	74.00	-23.98	peak
4	12698.000	32.46	18.08	50.54	74.00	-23.46	peak
5	13952.000	28.70	21.76	50.46	74.00	-23.54	peak
6	17923.000	24.77	25.60	50.37	74.00	-23.63	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

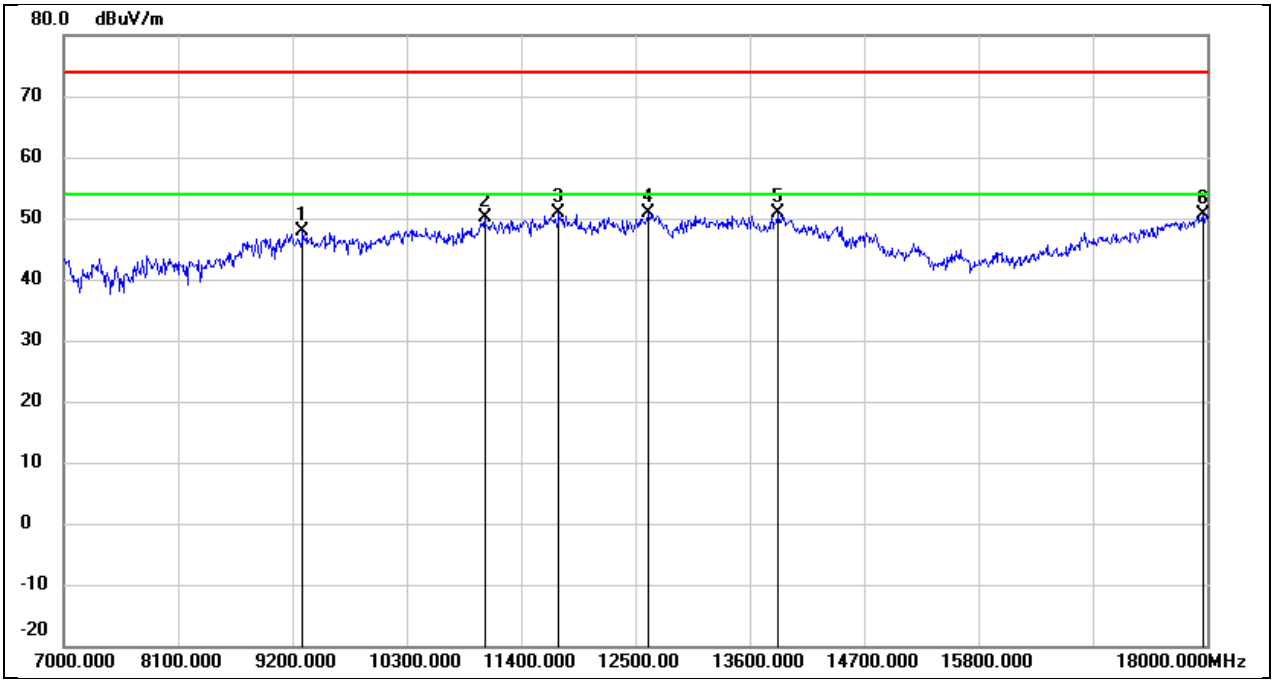

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.47	10.53	48.00	74.00	-26.00	peak
2	11048.000	35.31	14.91	50.22	74.00	-23.78	peak
3	11763.000	33.61	17.26	50.87	74.00	-23.13	peak
4	12621.000	32.79	17.98	50.77	74.00	-23.23	peak
5	13875.000	29.36	21.57	50.93	74.00	-23.07	peak
6	17956.000	24.87	25.82	50.69	74.00	-23.31	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3 V

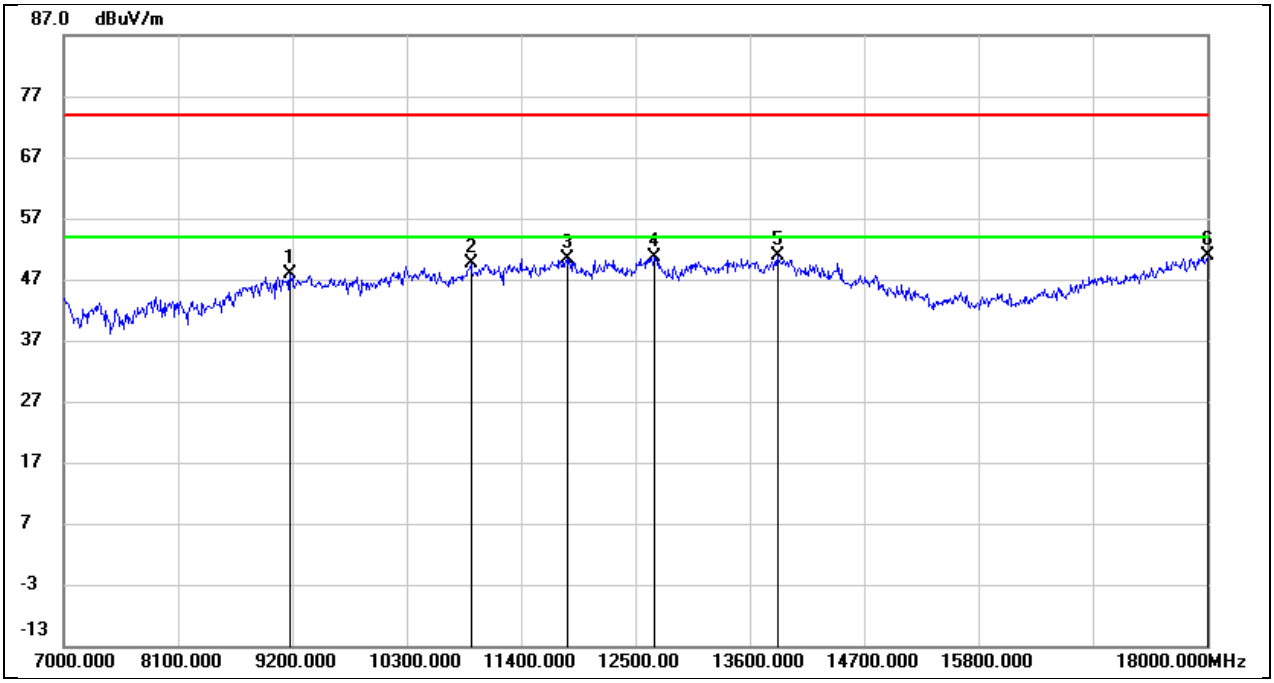

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.31	10.45	47.76	74.00	-26.24	peak
2	10916.000	35.17	14.39	49.56	74.00	-24.44	peak
3	11851.000	32.87	17.43	50.30	74.00	-23.70	peak
4	12676.000	32.57	18.05	50.62	74.00	-23.38	peak
5	13864.000	29.24	21.53	50.77	74.00	-23.23	peak
6	18000.000	24.74	26.12	50.86	74.00	-23.14	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

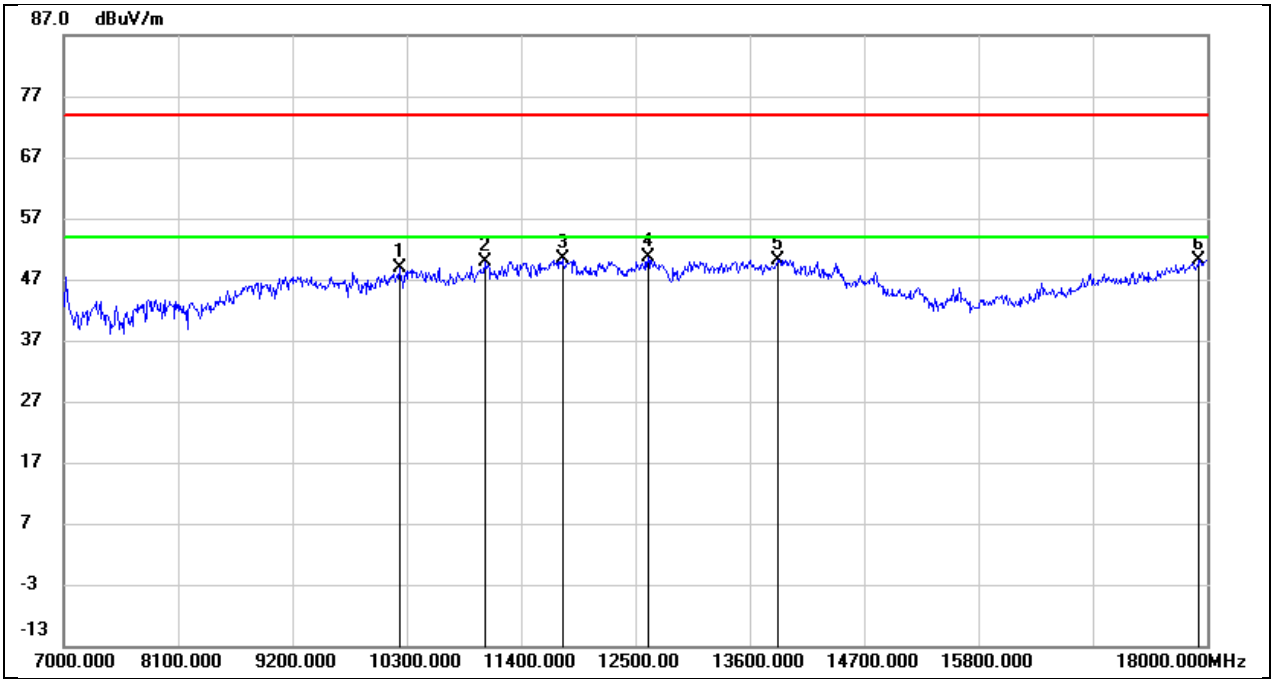

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10234.000	36.50	12.26	48.76	74.00	-25.24	peak
2	11048.000	34.93	14.91	49.84	74.00	-24.16	peak
3	11796.000	33.16	17.32	50.48	74.00	-23.52	peak
4	12621.000	32.54	17.98	50.52	74.00	-23.48	peak
5	13875.000	28.64	21.57	50.21	74.00	-23.79	peak
6	17923.000	24.62	25.60	50.22	74.00	-23.78	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3 V

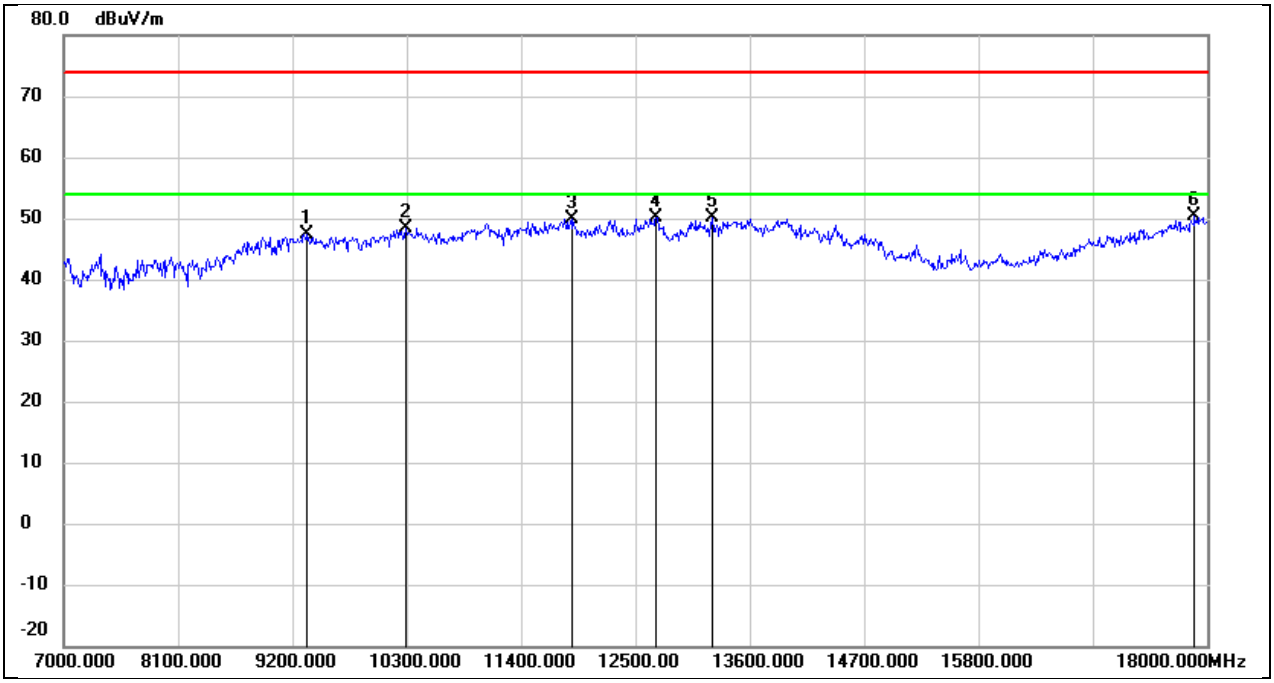

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.82	10.54	47.36	74.00	-26.64	peak
2	10289.000	36.05	12.38	48.43	74.00	-25.57	peak
3	11895.000	32.39	17.51	49.90	74.00	-24.10	peak
4	12698.000	32.04	18.08	50.12	74.00	-23.88	peak
5	13237.000	30.65	19.49	50.14	74.00	-23.86	peak
6	17879.000	25.09	25.29	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

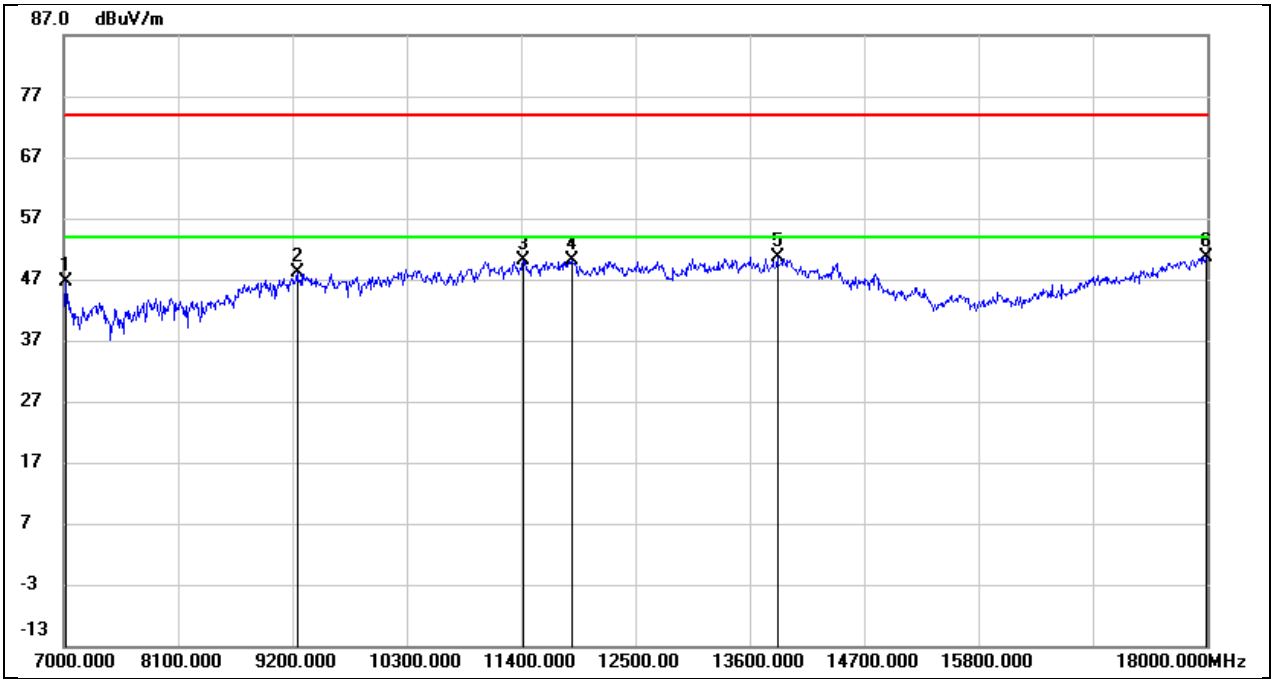

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7022.000	39.47	7.05	46.52	74.00	-27.48	peak
2	9244.000	37.55	10.49	48.04	74.00	-25.96	peak
3	11422.000	33.71	16.46	50.17	74.00	-23.83	peak
4	11895.000	32.51	17.51	50.02	74.00	-23.98	peak
5	13864.000	29.17	21.53	50.70	74.00	-23.30	peak
6	17989.000	24.57	26.04	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3 V

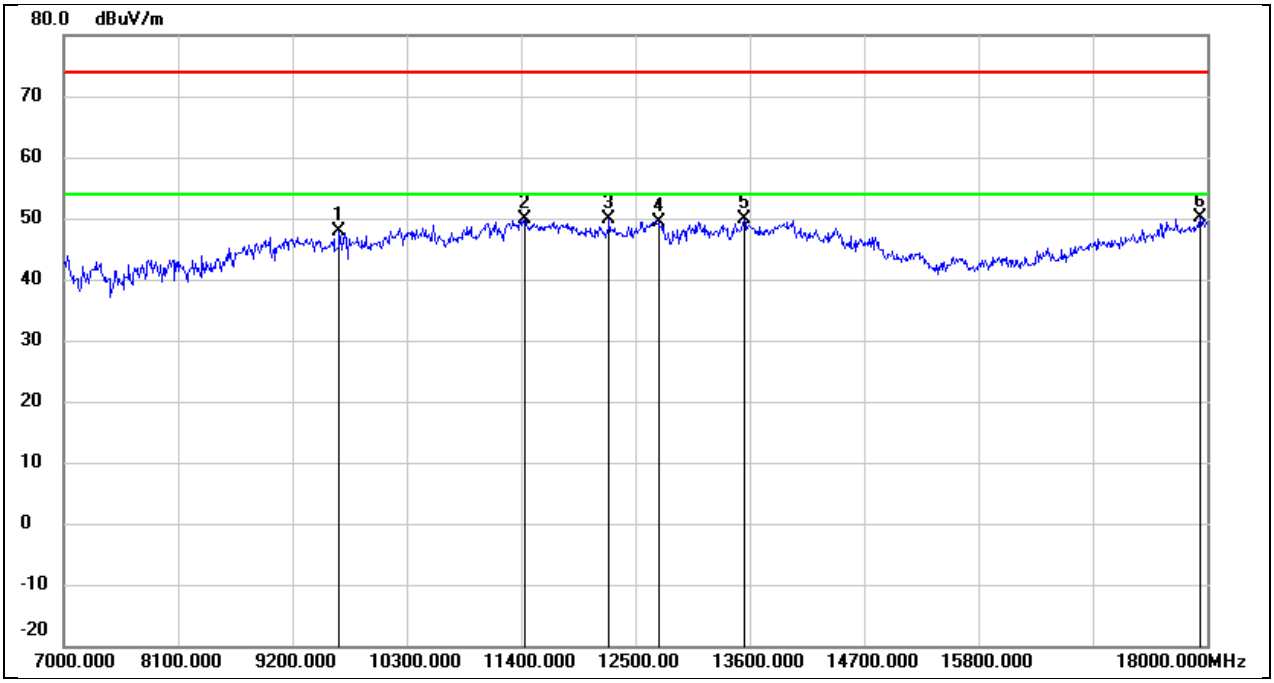

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9651.000	36.92	10.99	47.91	74.00	-26.09	peak
2	11433.000	33.35	16.50	49.85	74.00	-24.15	peak
3	12247.000	32.08	17.77	49.85	74.00	-24.15	peak
4	12720.000	31.30	18.09	49.39	74.00	-24.61	peak
5	13545.000	29.04	20.75	49.79	74.00	-24.21	peak
6	17934.000	24.49	25.67	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

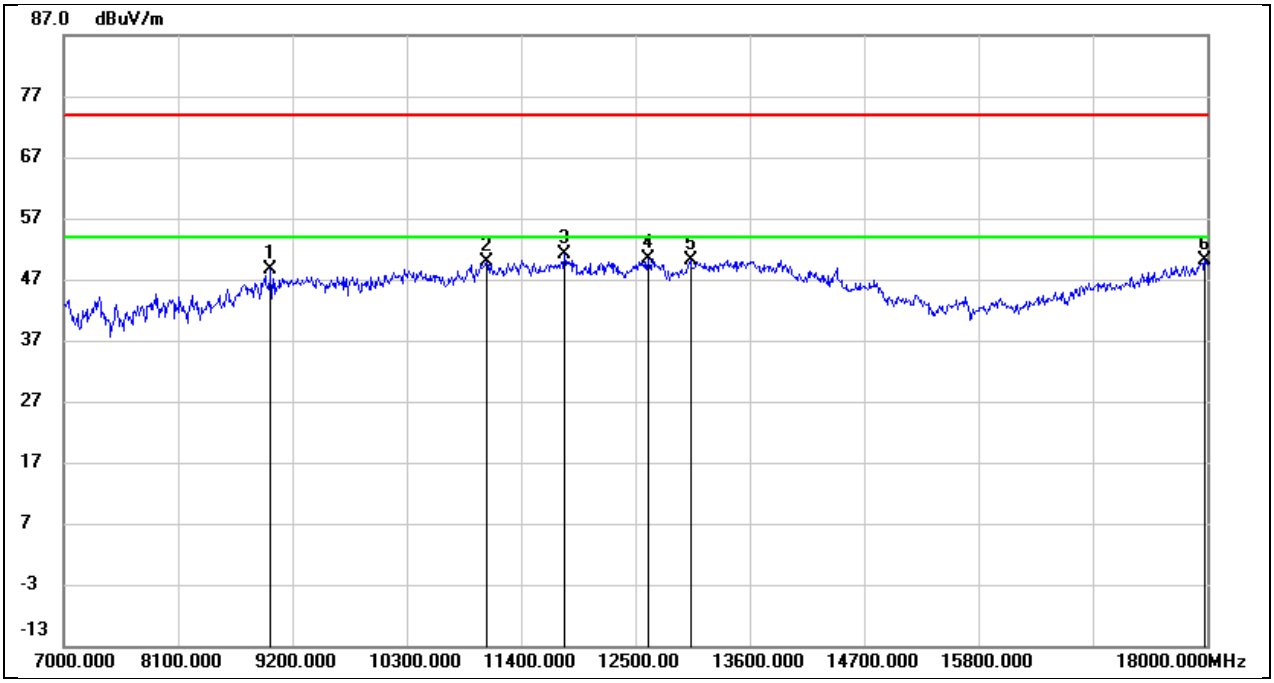

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	38.24	10.28	48.52	74.00	-25.48	peak
2	11070.000	34.86	15.01	49.87	74.00	-24.13	peak
3	11818.000	33.78	17.36	51.14	74.00	-22.86	peak
4	12621.000	32.29	17.98	50.27	74.00	-23.73	peak
5	13028.000	31.54	18.57	50.11	74.00	-23.89	peak
6	17978.000	24.09	25.97	50.06	74.00	-23.94	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3 V

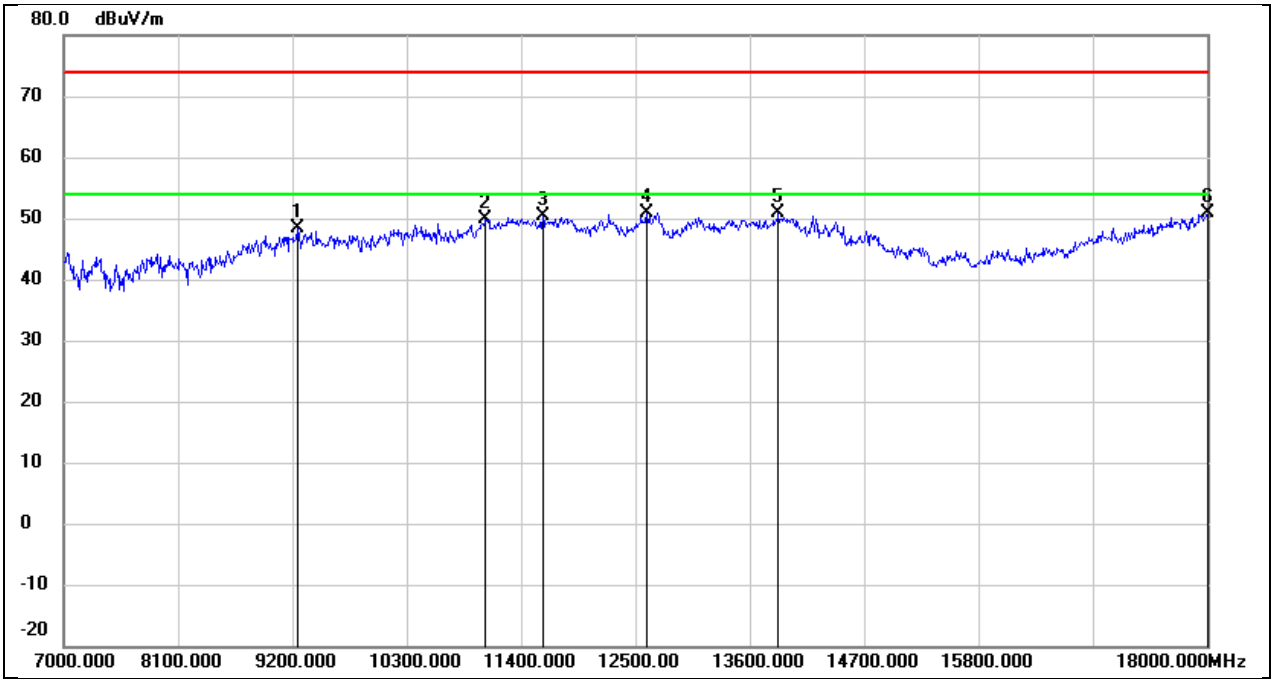

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.84	10.49	48.33	74.00	-25.67	peak
2	11059.000	35.02	14.96	49.98	74.00	-24.02	peak
3	11609.000	33.50	16.98	50.48	74.00	-23.52	peak
4	12610.000	32.95	17.97	50.92	74.00	-23.08	peak
5	13875.000	29.40	21.57	50.97	74.00	-23.03	peak
6	18000.000	24.84	26.12	50.96	74.00	-23.04	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

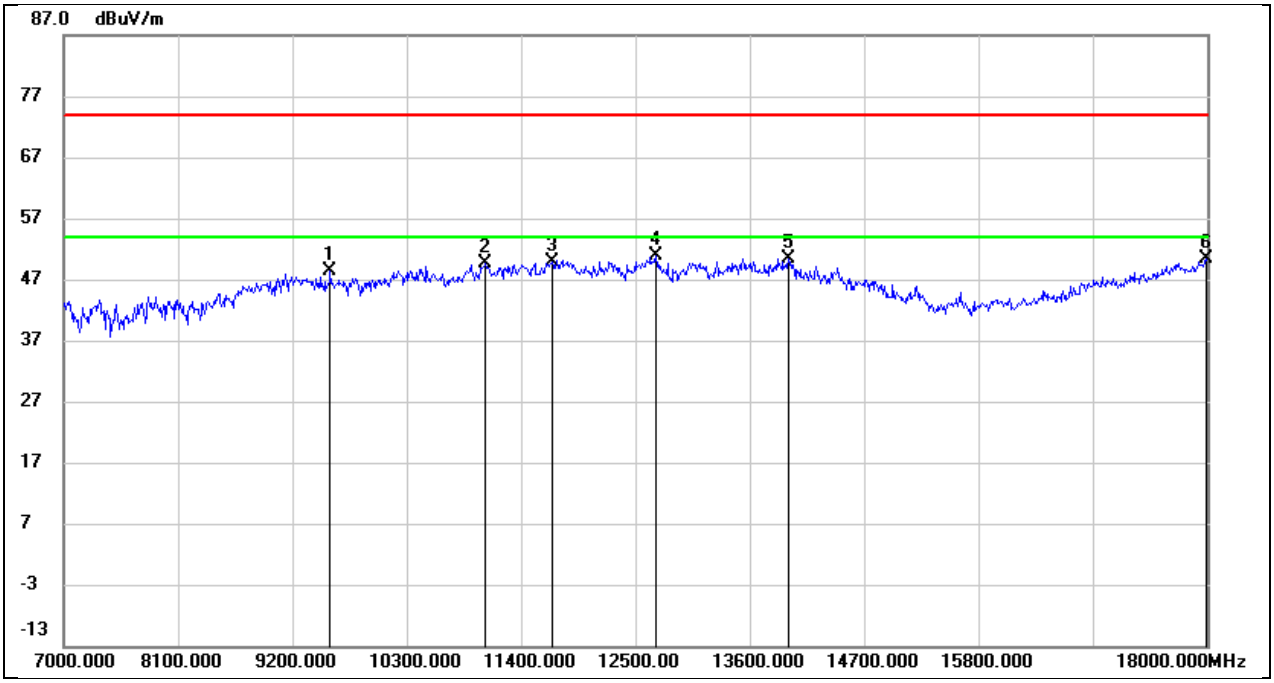

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.57	10.79	48.36	74.00	-25.64	peak
2	11059.000	34.61	14.96	49.57	74.00	-24.43	peak
3	11697.000	32.86	17.13	49.99	74.00	-24.01	peak
4	12698.000	32.79	18.08	50.87	74.00	-23.13	peak
5	13974.000	28.46	21.82	50.28	74.00	-23.72	peak
6	17989.000	24.39	26.04	50.43	74.00	-23.57	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3 V

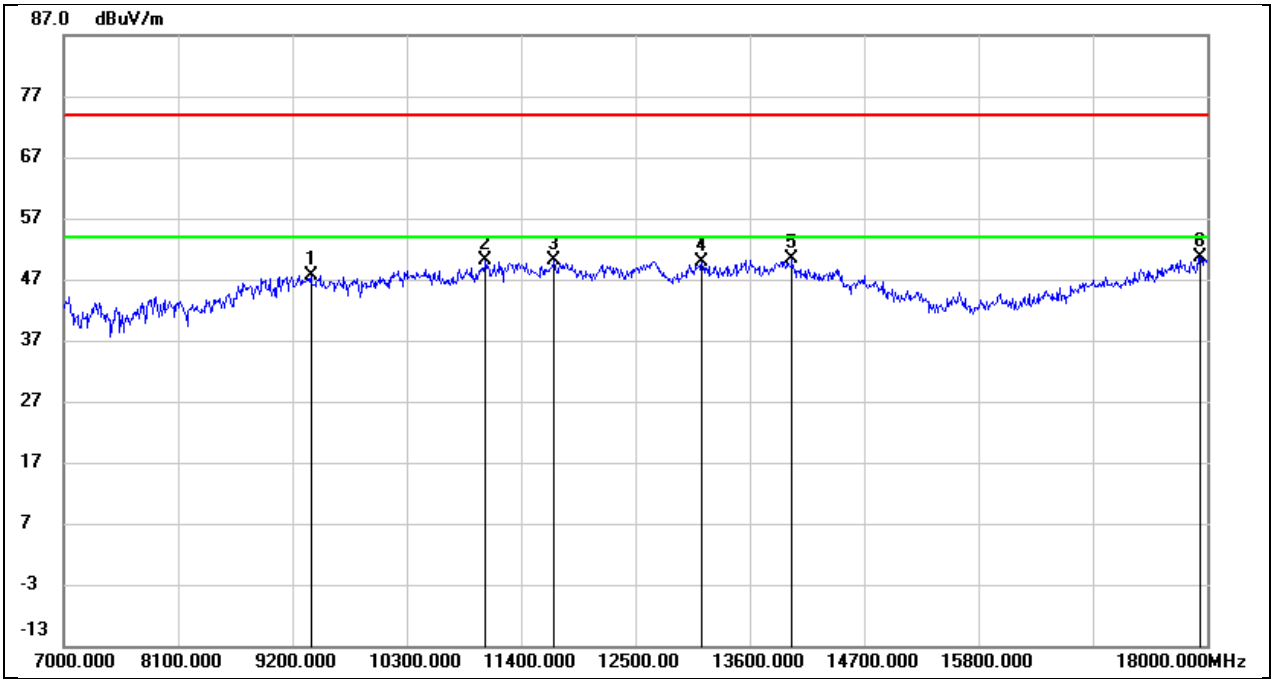

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	37.10	10.58	47.68	74.00	-26.32	peak
2	11059.000	35.16	14.96	50.12	74.00	-23.88	peak
3	11719.000	32.98	17.18	50.16	74.00	-23.84	peak
4	13138.000	30.94	19.05	49.99	74.00	-24.01	peak
5	14007.000	28.41	21.85	50.26	74.00	-23.74	peak
6	17934.000	24.88	25.67	50.55	74.00	-23.45	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

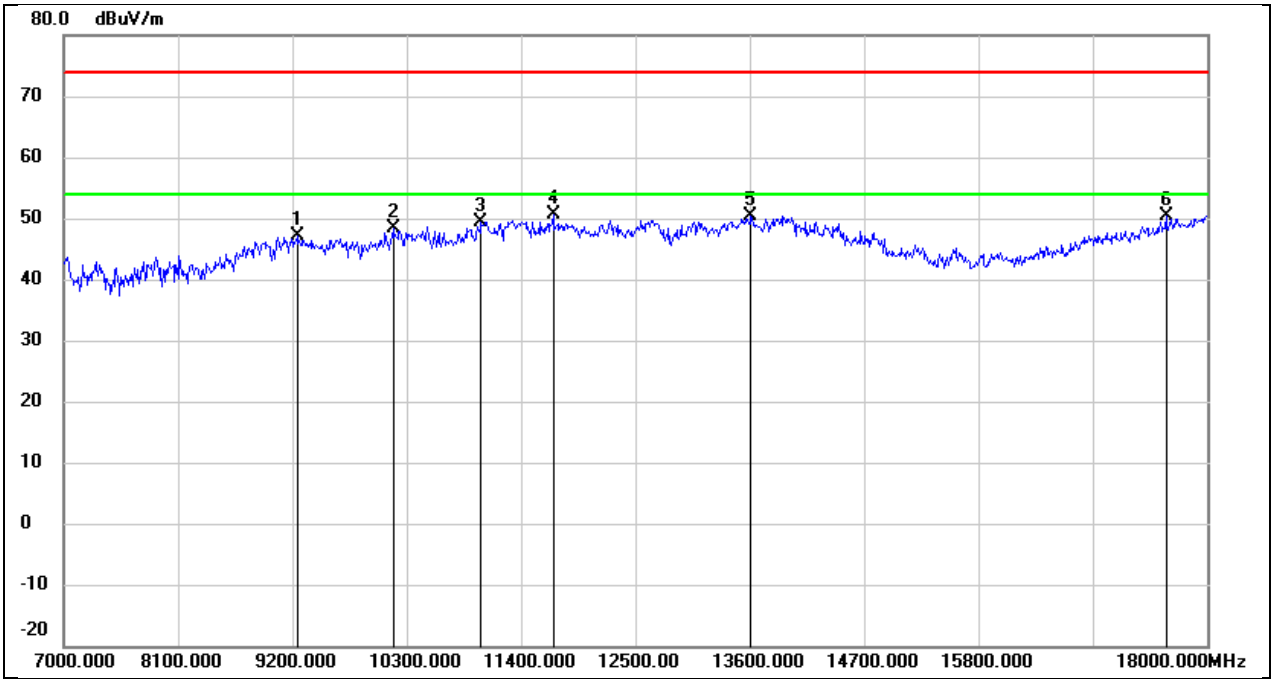

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.57	10.49	47.06	74.00	-26.94	peak
2	10168.000	36.25	12.13	48.38	74.00	-25.62	peak
3	11015.000	34.71	14.79	49.50	74.00	-24.50	peak
4	11708.000	33.57	17.16	50.73	74.00	-23.27	peak
5	13611.000	29.52	20.92	50.44	74.00	-23.56	peak
6	17604.000	27.07	23.41	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3 V

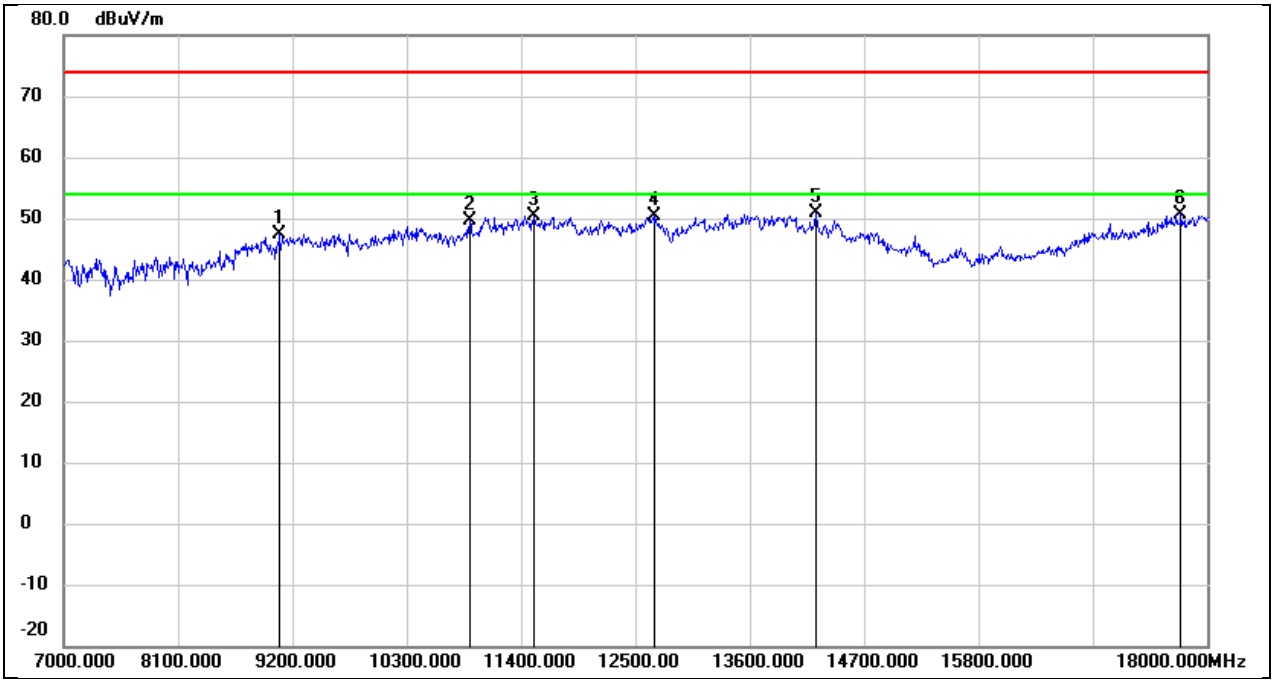

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	36.92	10.39	47.31	74.00	-26.69	peak
2	10905.000	35.29	14.36	49.65	74.00	-24.35	peak
3	11521.000	33.61	16.82	50.43	74.00	-23.57	peak
4	12687.000	32.33	18.05	50.38	74.00	-23.62	peak
5	14238.000	30.03	20.88	50.91	74.00	-23.09	peak
6	17747.000	26.36	24.39	50.75	74.00	-23.25	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

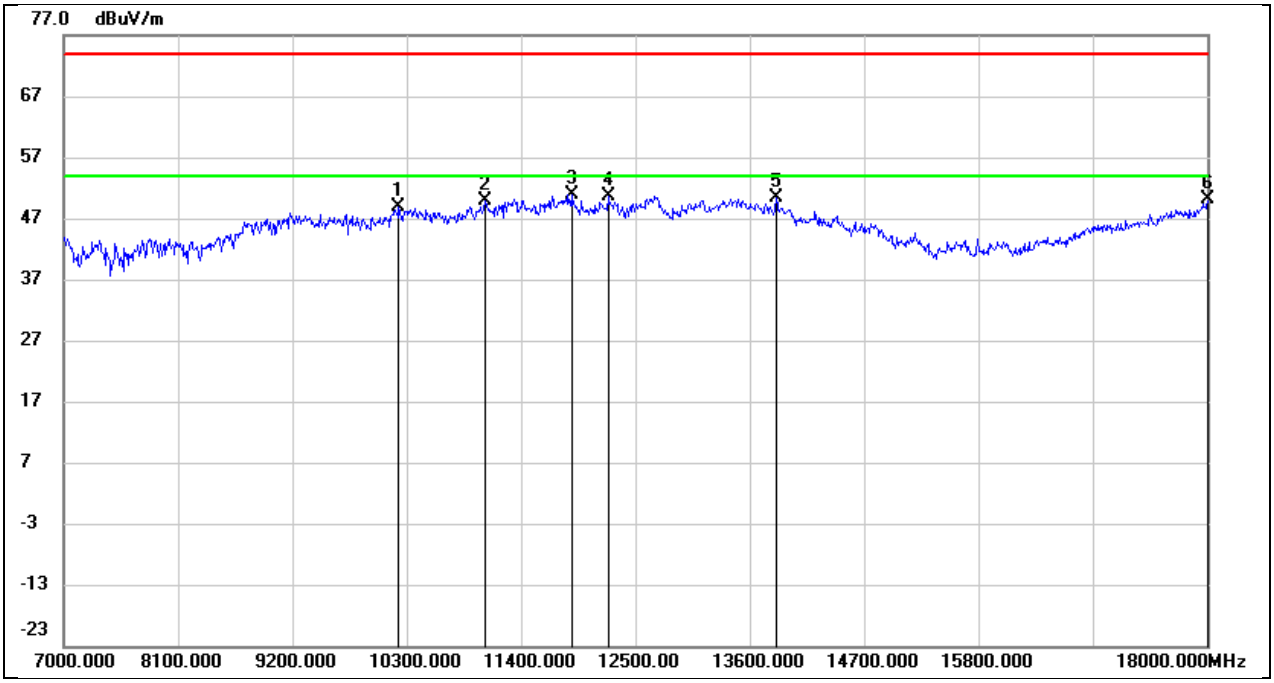

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10223.000	36.57	12.24	48.81	74.00	-25.19	peak
2	11059.000	34.99	14.96	49.95	74.00	-24.05	peak
3	11884.000	33.37	17.48	50.85	74.00	-23.15	peak
4	12236.000	32.94	17.76	50.70	74.00	-23.30	peak
5	13853.000	28.95	21.52	50.47	74.00	-23.53	peak
6	18000.000	23.90	26.12	50.02	74.00	-23.98	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3 V

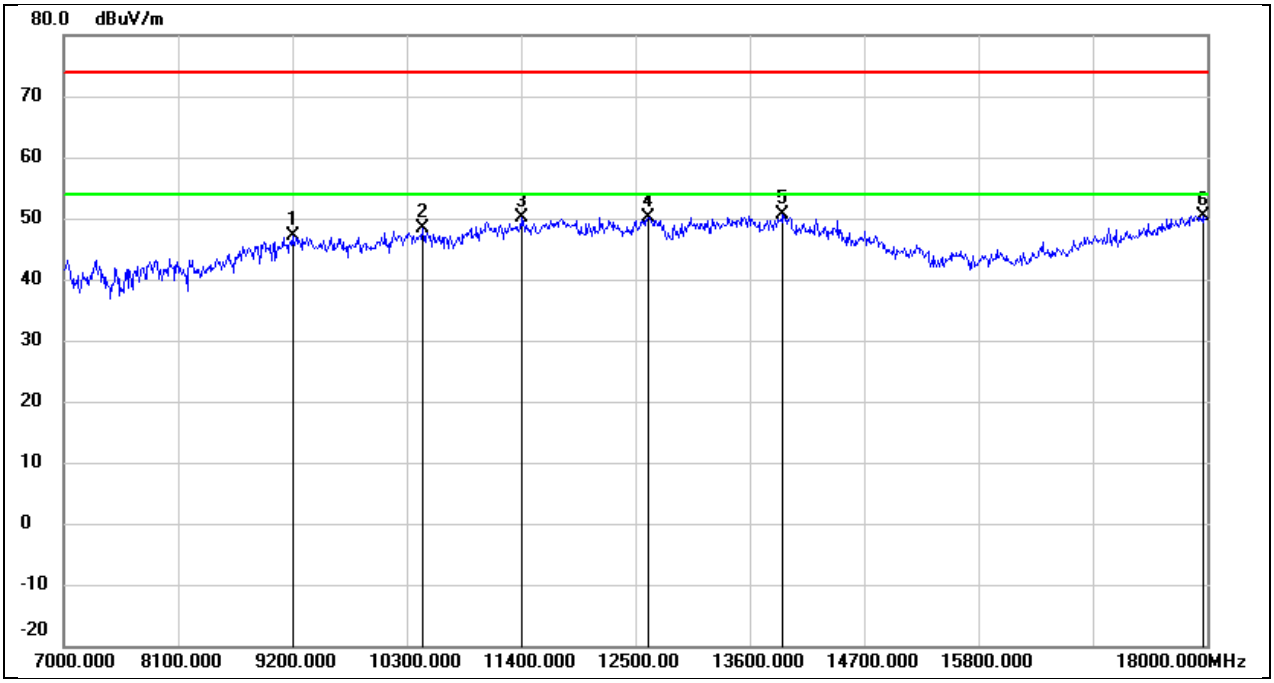

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	36.58	10.46	47.04	74.00	-26.96	peak
2	10454.000	35.58	12.73	48.31	74.00	-25.69	peak
3	11400.000	33.79	16.36	50.15	74.00	-23.85	peak
4	12621.000	32.22	17.98	50.20	74.00	-23.80	peak
5	13919.000	28.99	21.68	50.67	74.00	-23.33	peak
6	17956.000	24.66	25.82	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

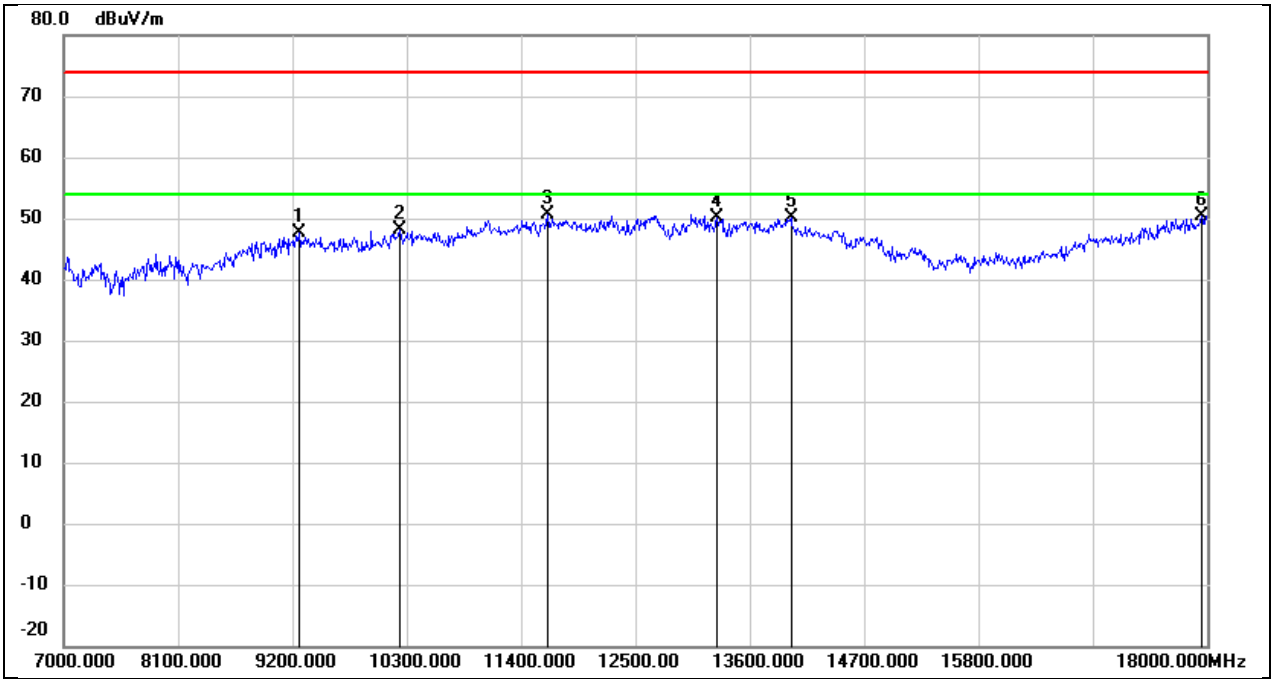

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.01	10.51	47.52	74.00	-26.48	peak
2	10234.000	35.91	12.26	48.17	74.00	-25.83	peak
3	11653.000	33.68	17.05	50.73	74.00	-23.27	peak
4	13281.000	30.51	19.68	50.19	74.00	-23.81	peak
5	13996.000	28.23	21.87	50.10	74.00	-23.90	peak
6	17945.000	24.65	25.75	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3 V

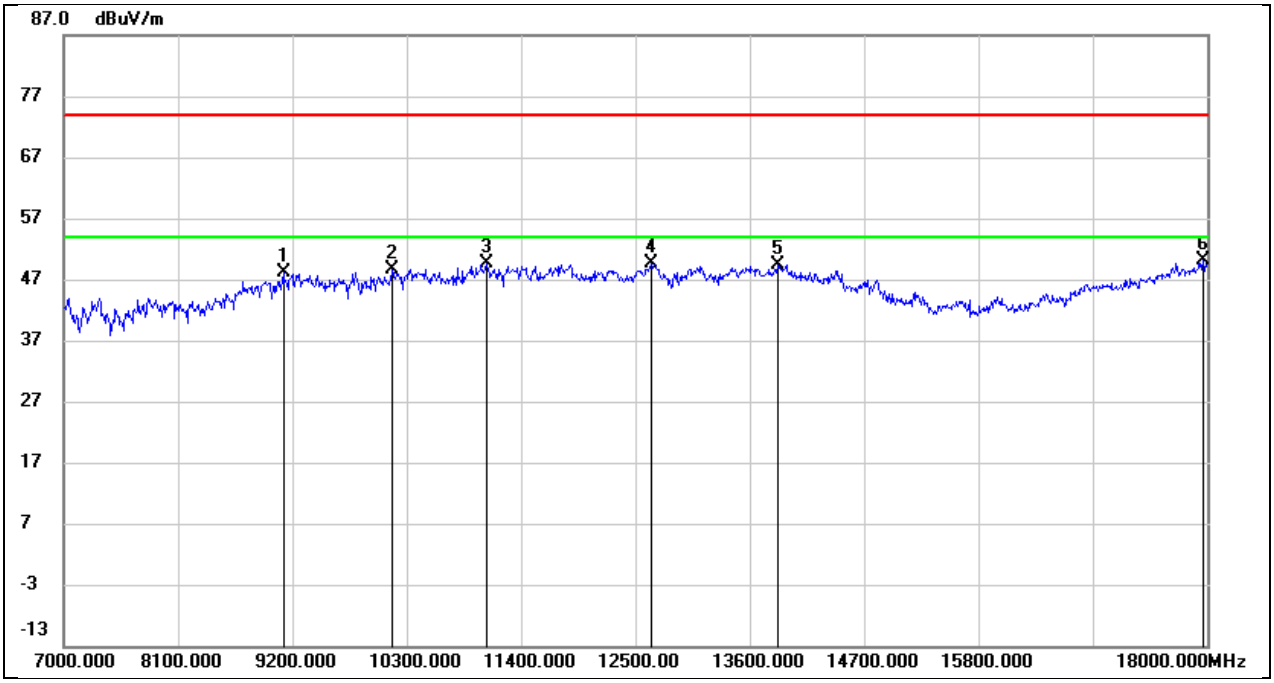

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.60	10.41	48.01	74.00	-25.99	peak
2	10157.000	36.41	12.10	48.51	74.00	-25.49	peak
3	11070.000	34.56	15.01	49.57	74.00	-24.43	peak
4	12654.000	31.57	18.01	49.58	74.00	-24.42	peak
5	13864.000	27.89	21.53	49.42	74.00	-24.58	peak
6	17967.000	24.30	25.89	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

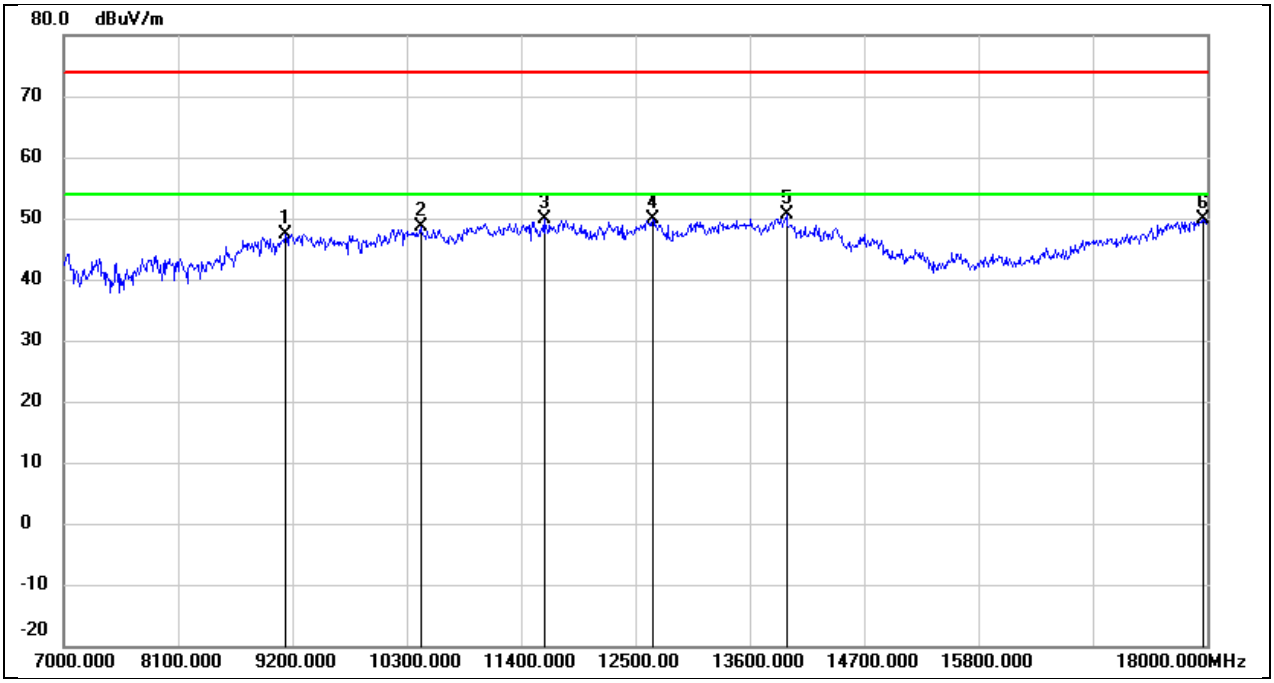

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.01	10.41	47.42	74.00	-26.58	peak
2	10432.000	35.89	12.67	48.56	74.00	-25.44	peak
3	11620.000	32.98	16.99	49.97	74.00	-24.03	peak
4	12665.000	31.85	18.04	49.89	74.00	-24.11	peak
5	13952.000	28.98	21.76	50.74	74.00	-23.26	peak
6	17956.000	23.96	25.82	49.78	74.00	-24.22	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3 V

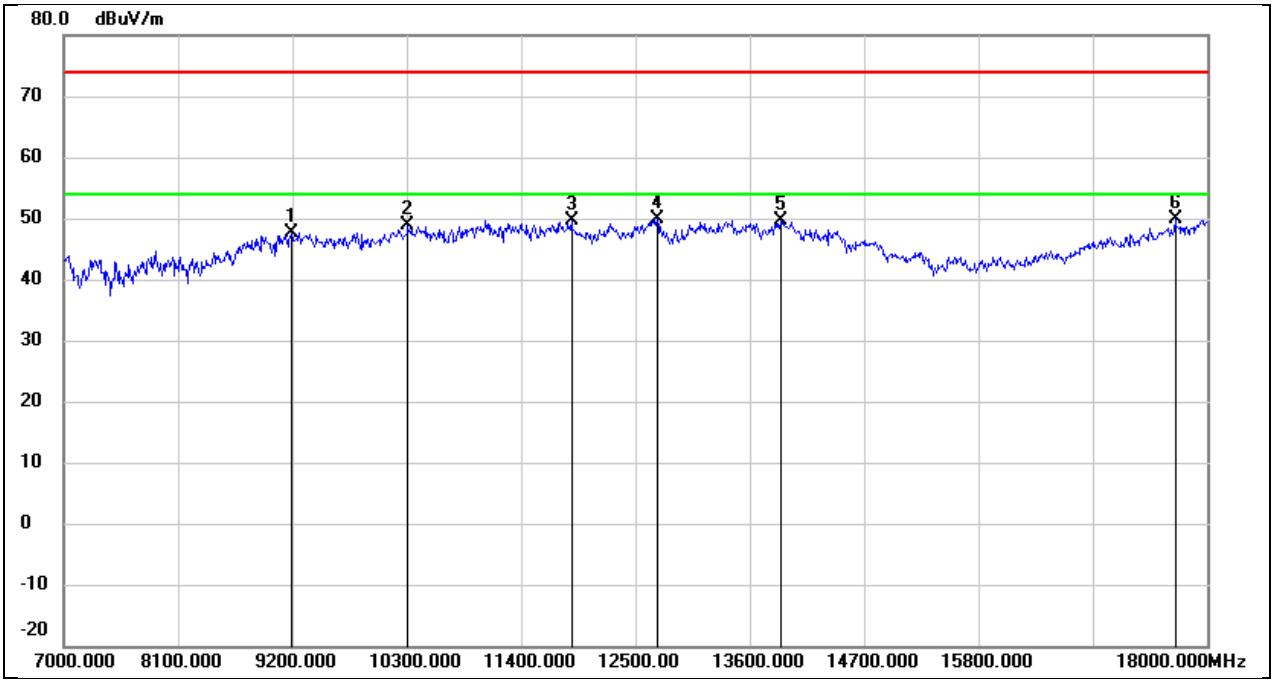

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.12	10.46	47.58	74.00	-26.42	peak
2	10311.000	36.41	12.42	48.83	74.00	-25.17	peak
3	11884.000	32.07	17.48	49.55	74.00	-24.45	peak
4	12709.000	31.70	18.09	49.79	74.00	-24.21	peak
5	13897.000	28.12	21.62	49.74	74.00	-24.26	peak
6	17692.000	25.91	24.01	49.92	74.00	-24.08	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

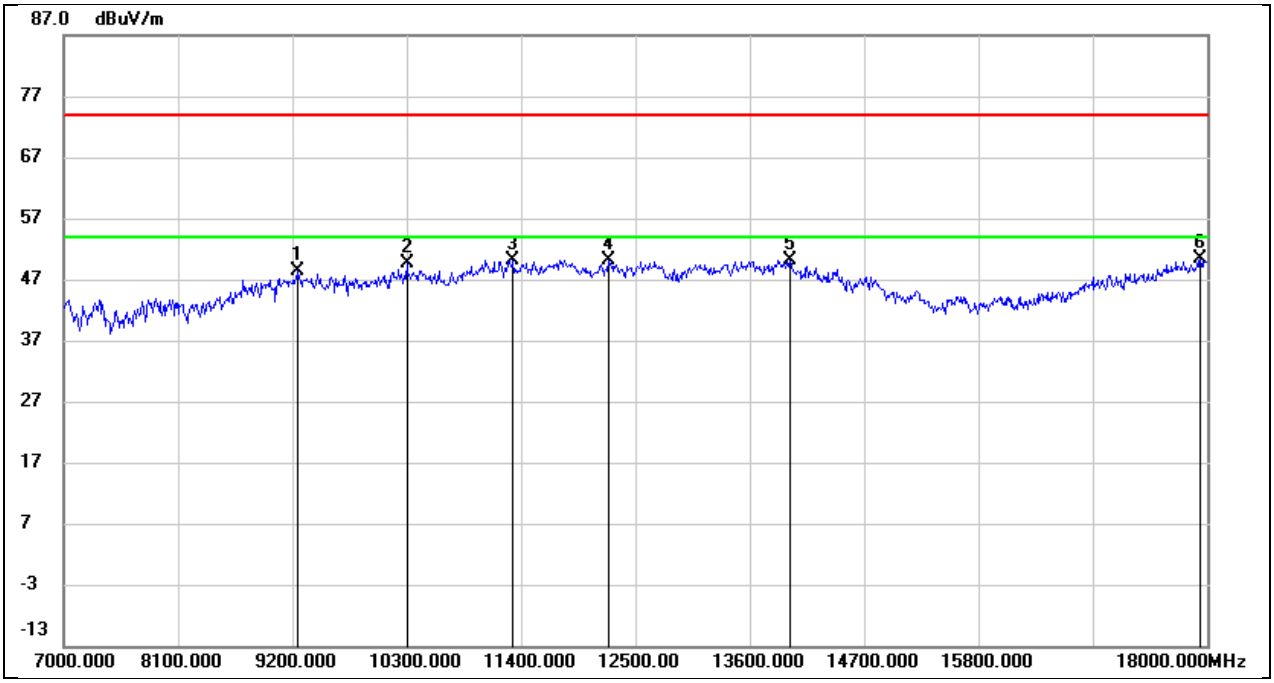

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.81	10.51	48.32	74.00	-25.68	peak
2	10300.000	37.12	12.40	49.52	74.00	-24.48	peak
3	11323.000	34.07	16.05	50.12	74.00	-23.88	peak
4	12236.000	32.33	17.76	50.09	74.00	-23.91	peak
5	13985.000	28.36	21.85	50.21	74.00	-23.79	peak
6	17934.000	24.63	25.67	50.30	74.00	-23.70	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3 V

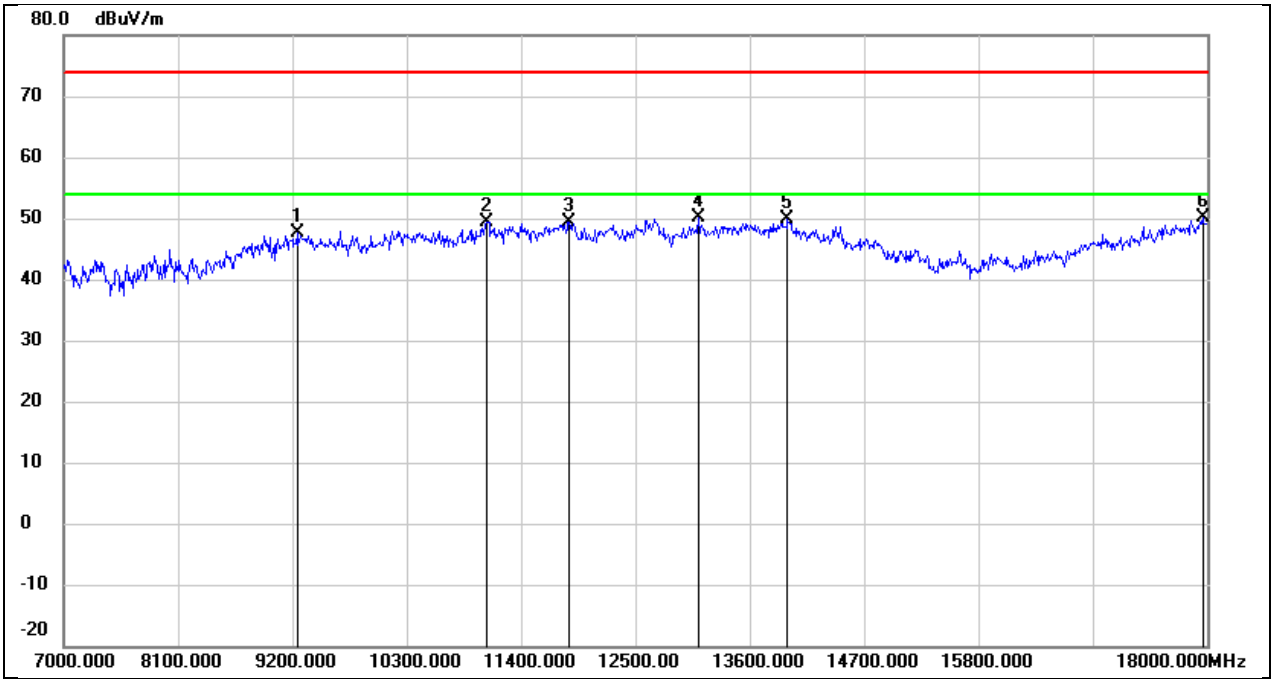

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.26	10.49	47.75	74.00	-26.25	peak
2	11070.000	34.46	15.01	49.47	74.00	-24.53	peak
3	11862.000	31.82	17.45	49.27	74.00	-24.73	peak
4	13105.000	31.32	18.91	50.23	74.00	-23.77	peak
5	13963.000	28.01	21.78	49.79	74.00	-24.21	peak
6	17956.000	24.22	25.82	50.04	74.00	-23.96	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

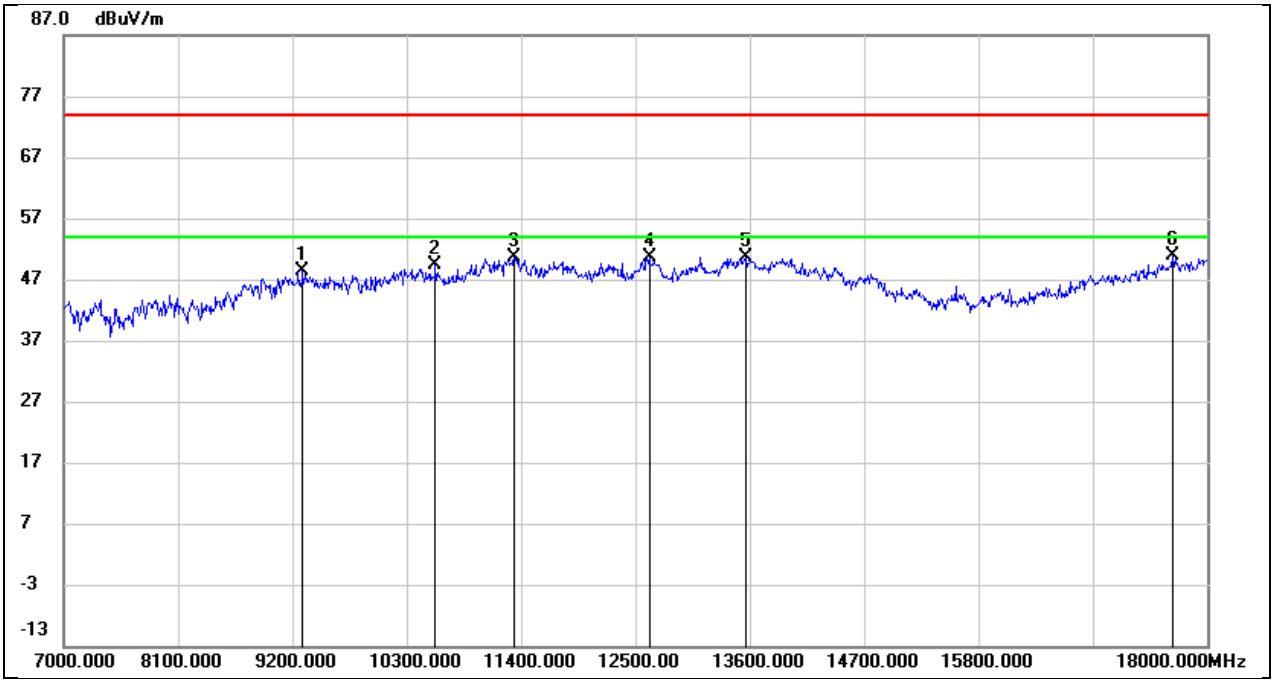

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.96	10.53	48.49	74.00	-25.51	peak
2	10575.000	36.27	13.10	49.37	74.00	-24.63	peak
3	11334.000	34.60	16.09	50.69	74.00	-23.31	peak
4	12632.000	32.71	17.99	50.70	74.00	-23.30	peak
5	13556.000	29.76	20.78	50.54	74.00	-23.46	peak
6	17670.000	27.02	23.86	50.88	74.00	-23.12	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3 V

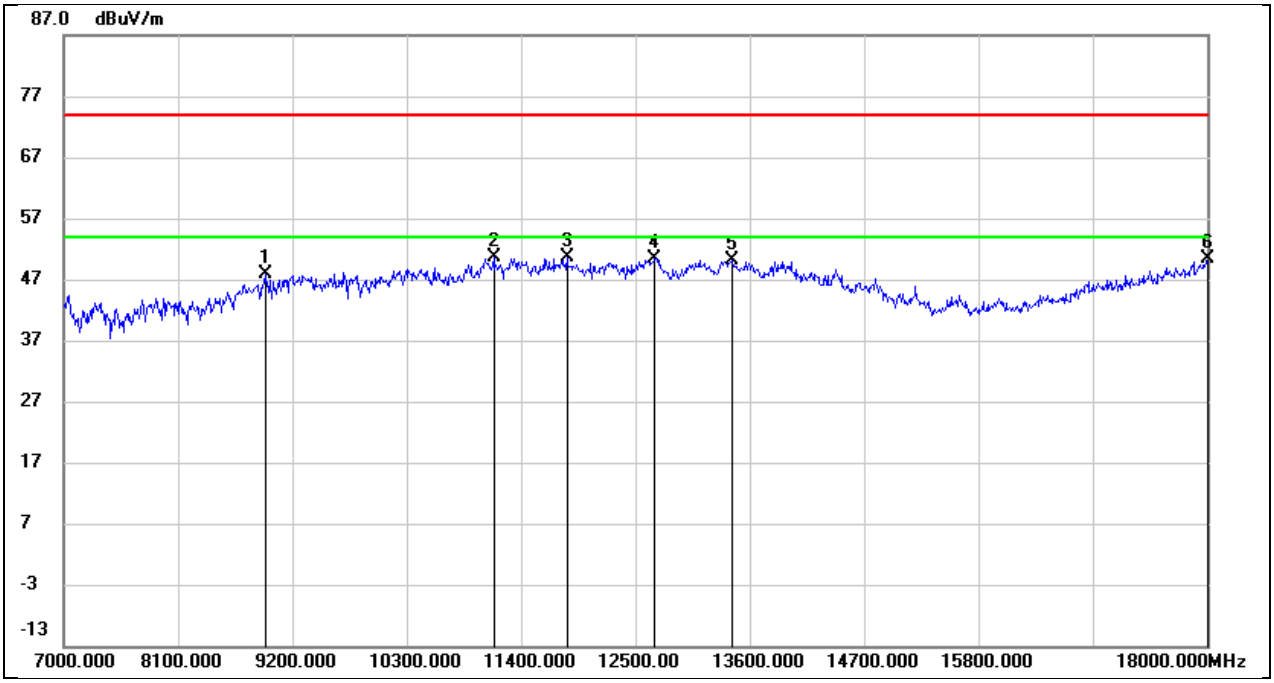

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	38.00	9.90	47.90	74.00	-26.10	peak
2	11136.000	35.48	15.27	50.75	74.00	-23.25	peak
3	11840.000	33.14	17.40	50.54	74.00	-23.46	peak
4	12687.000	32.35	18.05	50.40	74.00	-23.60	peak
5	13424.000	29.79	20.30	50.09	74.00	-23.91	peak
6	18000.000	24.32	26.12	50.44	74.00	-23.56	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

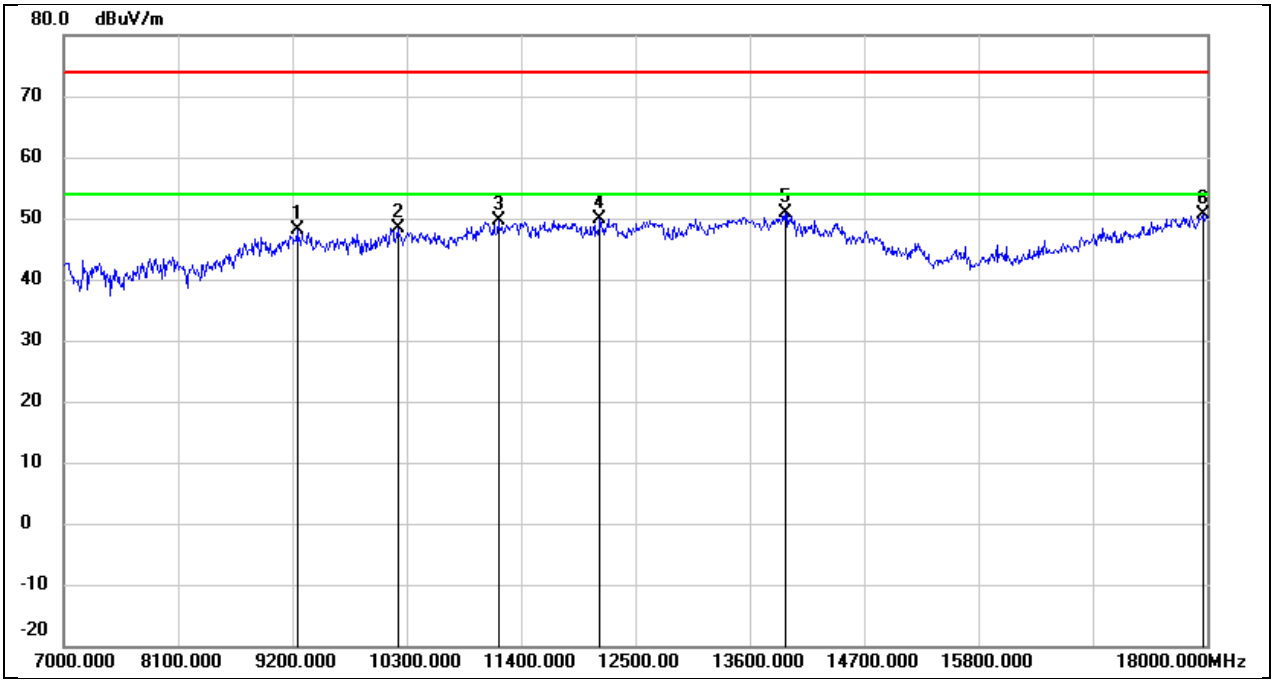

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.62	10.49	48.11	74.00	-25.89	peak
2	10212.000	36.24	12.21	48.45	74.00	-25.55	peak
3	11180.000	34.19	15.46	49.65	74.00	-24.35	peak
4	12159.000	32.24	17.73	49.97	74.00	-24.03	peak
5	13941.000	29.10	21.73	50.83	74.00	-23.17	peak
6	17956.000	24.76	25.82	50.58	74.00	-23.42	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3 V

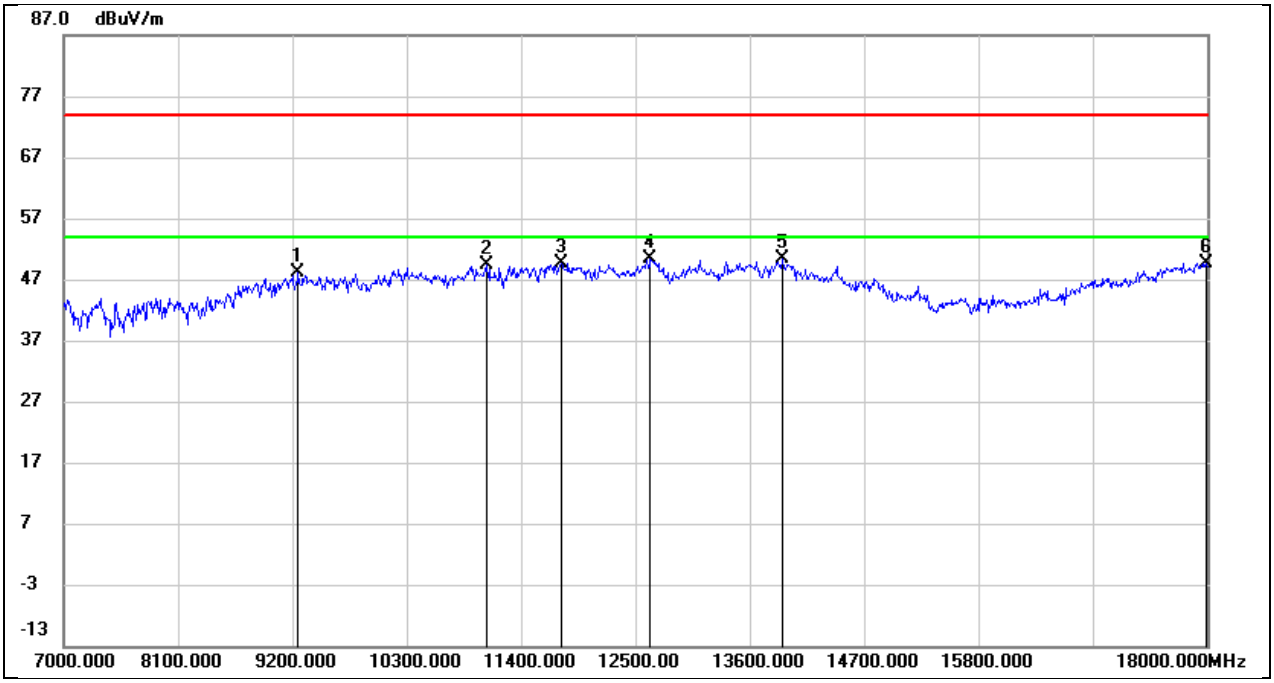

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.54	10.51	48.05	74.00	-25.95	peak
2	11070.000	34.38	15.01	49.39	74.00	-24.61	peak
3	11785.000	32.35	17.30	49.65	74.00	-24.35	peak
4	12643.000	32.28	18.01	50.29	74.00	-23.71	peak
5	13919.000	28.71	21.68	50.39	74.00	-23.61	peak
6	17989.000	23.70	26.04	49.74	74.00	-24.26	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

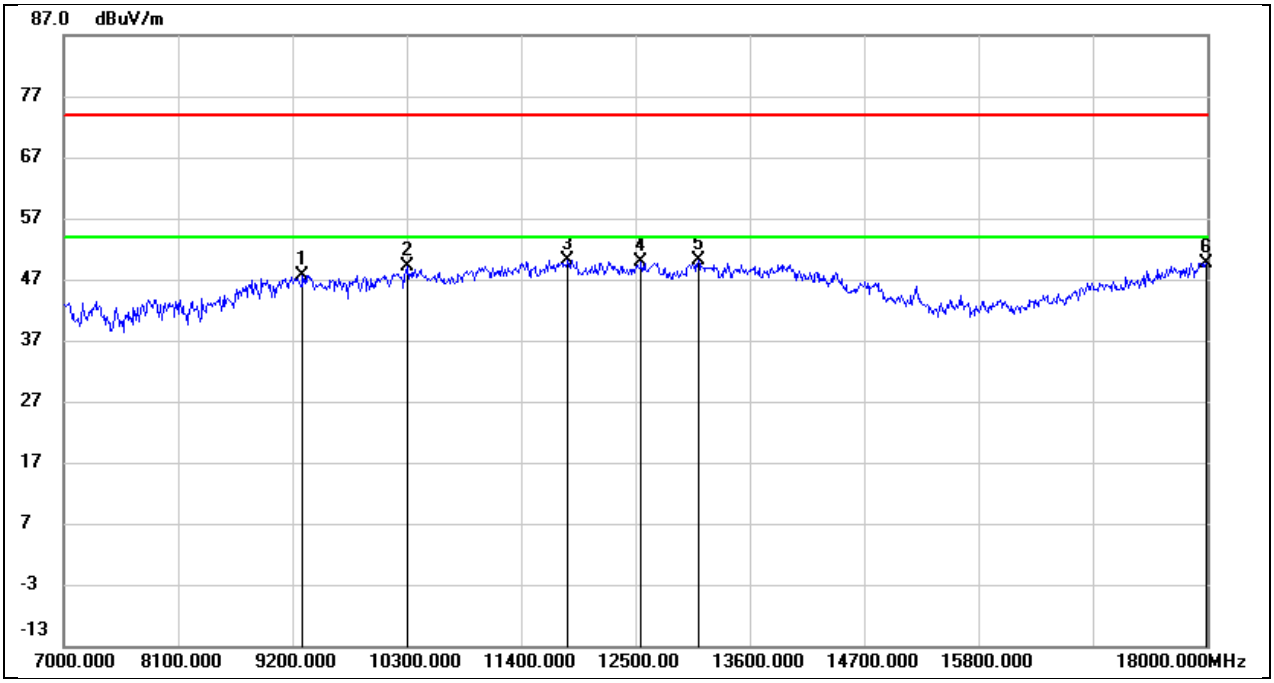

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.14	10.53	47.67	74.00	-26.33	peak
2	10311.000	36.64	12.42	49.06	74.00	-24.94	peak
3	11851.000	32.77	17.43	50.20	74.00	-23.80	peak
4	12555.000	31.90	17.90	49.80	74.00	-24.20	peak
5	13105.000	31.25	18.91	50.16	74.00	-23.84	peak
6	17989.000	23.69	26.04	49.73	74.00	-24.27	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3 V

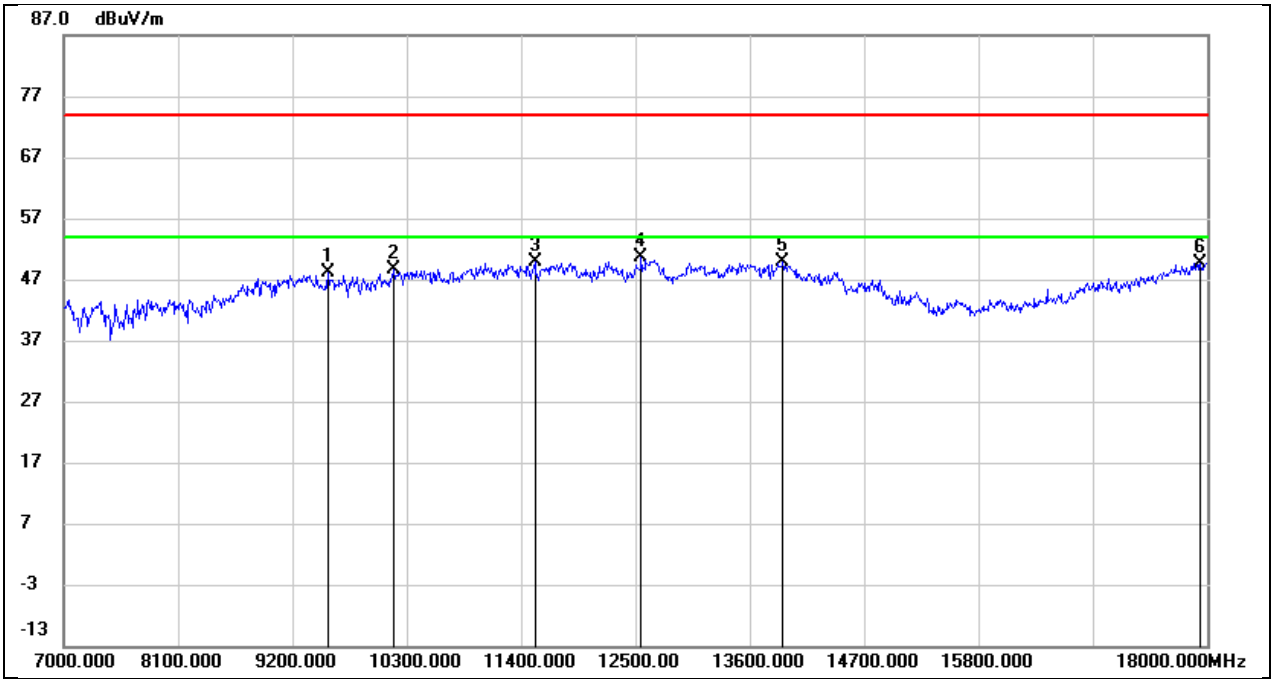

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9541.000	37.27	10.74	48.01	74.00	-25.99	peak
2	10179.000	36.44	12.14	48.58	74.00	-25.42	peak
3	11532.000	32.96	16.83	49.79	74.00	-24.21	peak
4	12555.000	32.72	17.90	50.62	74.00	-23.38	peak
5	13919.000	28.18	21.68	49.86	74.00	-24.14	peak
6	17934.000	24.04	25.67	49.71	74.00	-24.29	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

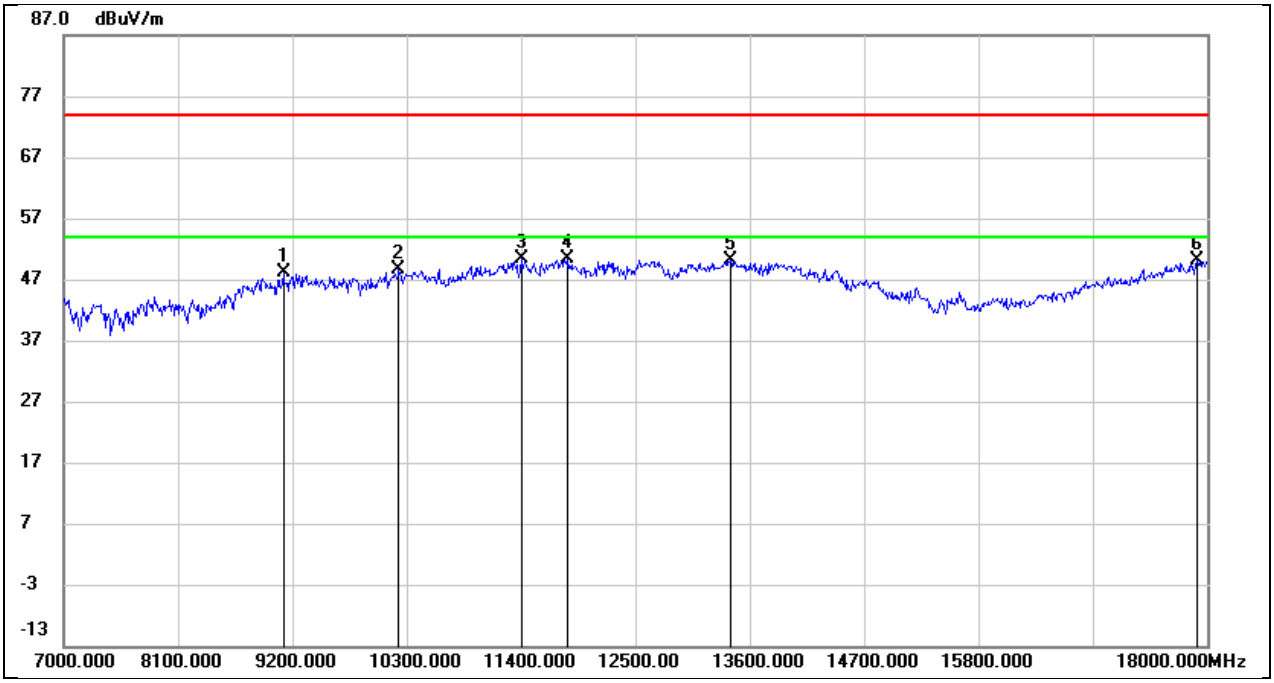

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.67	10.41	48.08	74.00	-25.92	peak
2	10223.000	36.29	12.24	48.53	74.00	-25.47	peak
3	11400.000	33.94	16.36	50.30	74.00	-23.70	peak
4	11851.000	32.89	17.43	50.32	74.00	-23.68	peak
5	13413.000	29.85	20.26	50.11	74.00	-23.89	peak
6	17901.000	24.65	25.45	50.10	74.00	-23.90	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3 V

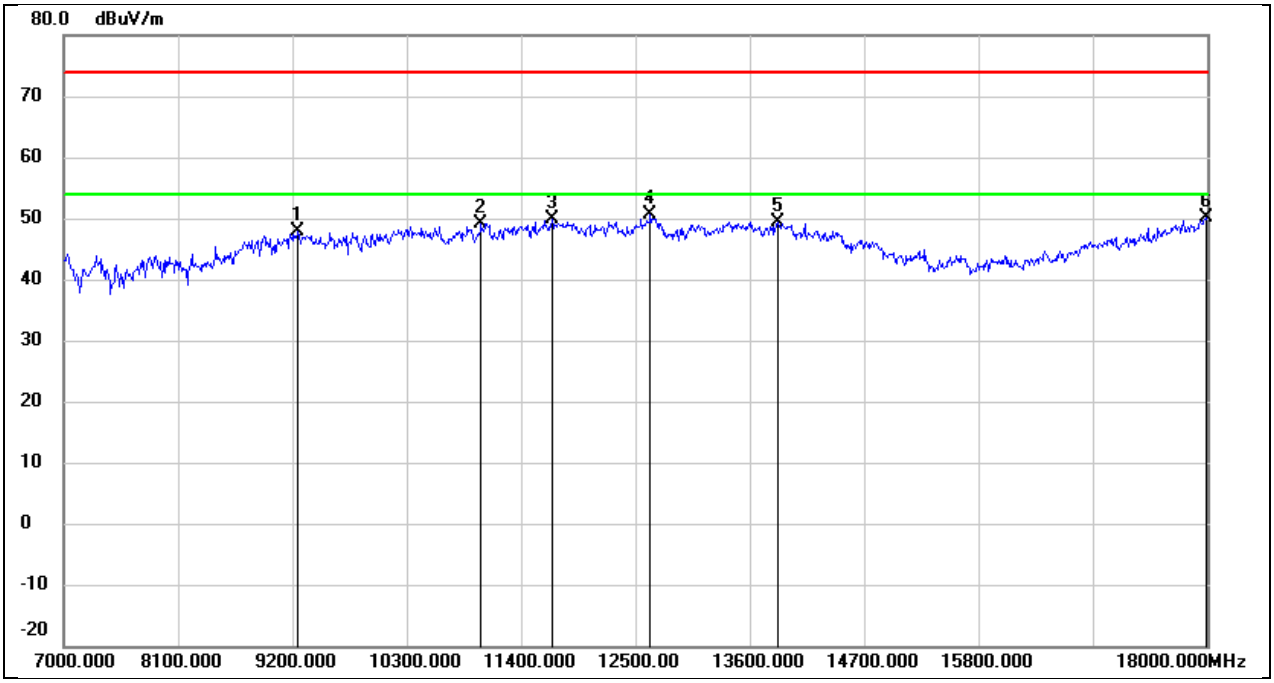

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.32	10.51	47.83	74.00	-26.17	peak
2	11015.000	34.39	14.79	49.18	74.00	-24.82	peak
3	11697.000	32.63	17.13	49.76	74.00	-24.24	peak
4	12643.000	32.59	18.01	50.60	74.00	-23.40	peak
5	13875.000	27.92	21.57	49.49	74.00	-24.51	peak
6	17989.000	24.09	26.04	50.13	74.00	-23.87	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

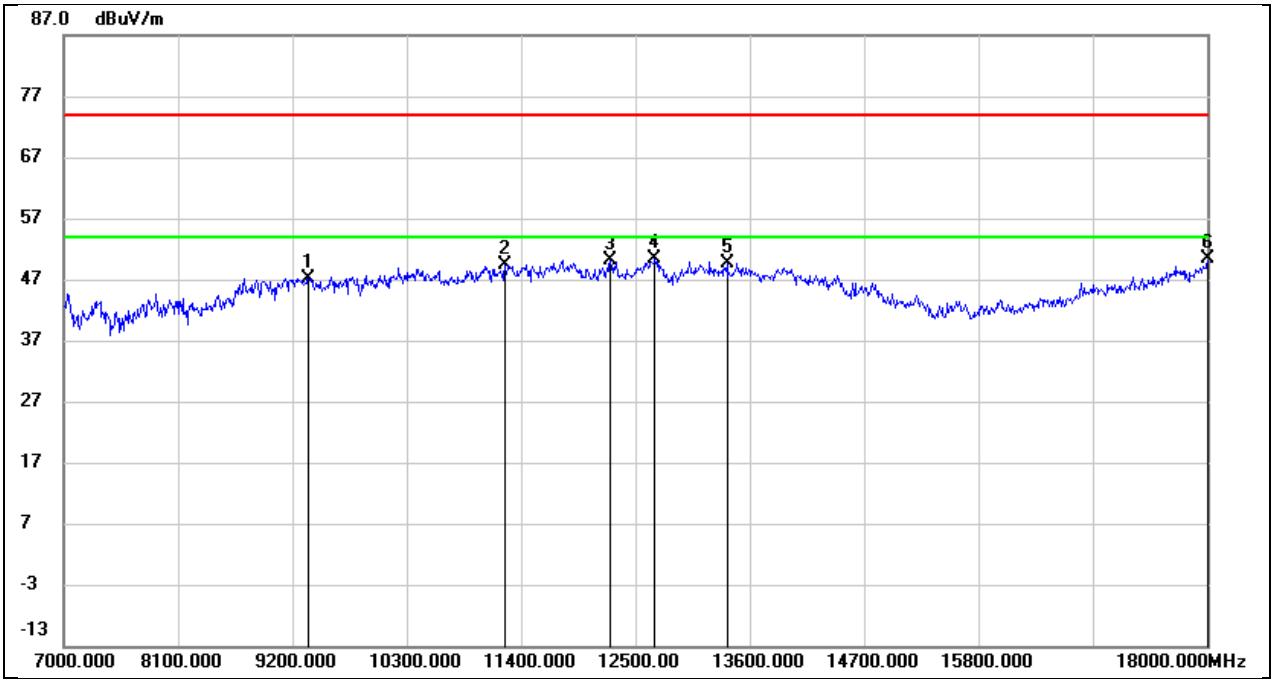

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.63	10.56	47.19	74.00	-26.81	peak
2	11246.000	33.60	15.73	49.33	74.00	-24.67	peak
3	12258.000	32.40	17.77	50.17	74.00	-23.83	peak
4	12687.000	32.41	18.05	50.46	74.00	-23.54	peak
5	13380.000	29.63	20.12	49.75	74.00	-24.25	peak
6	18000.000	24.30	26.12	50.42	74.00	-23.58	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3 V

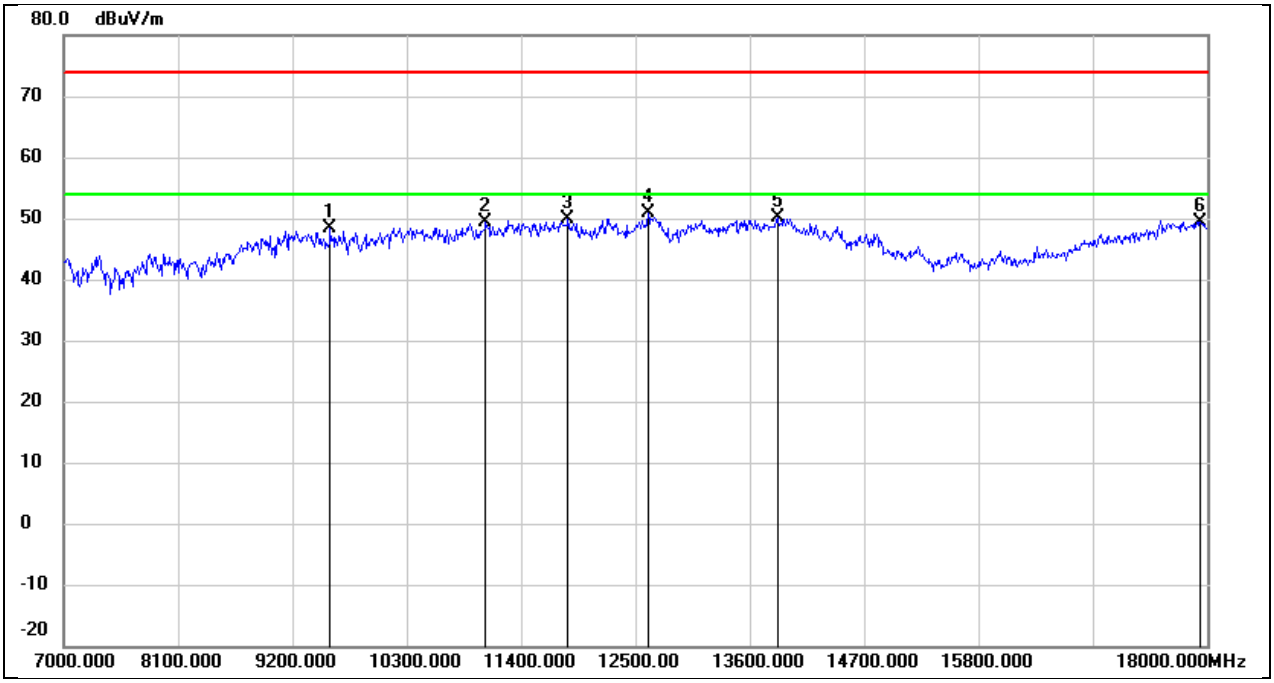

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.58	10.79	48.37	74.00	-25.63	peak
2	11059.000	34.42	14.96	49.38	74.00	-24.62	peak
3	11851.000	32.38	17.43	49.81	74.00	-24.19	peak
4	12621.000	32.83	17.98	50.81	74.00	-23.19	peak
5	13864.000	28.61	21.53	50.14	74.00	-23.86	peak
6	17934.000	23.66	25.67	49.33	74.00	-24.67	peak

8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

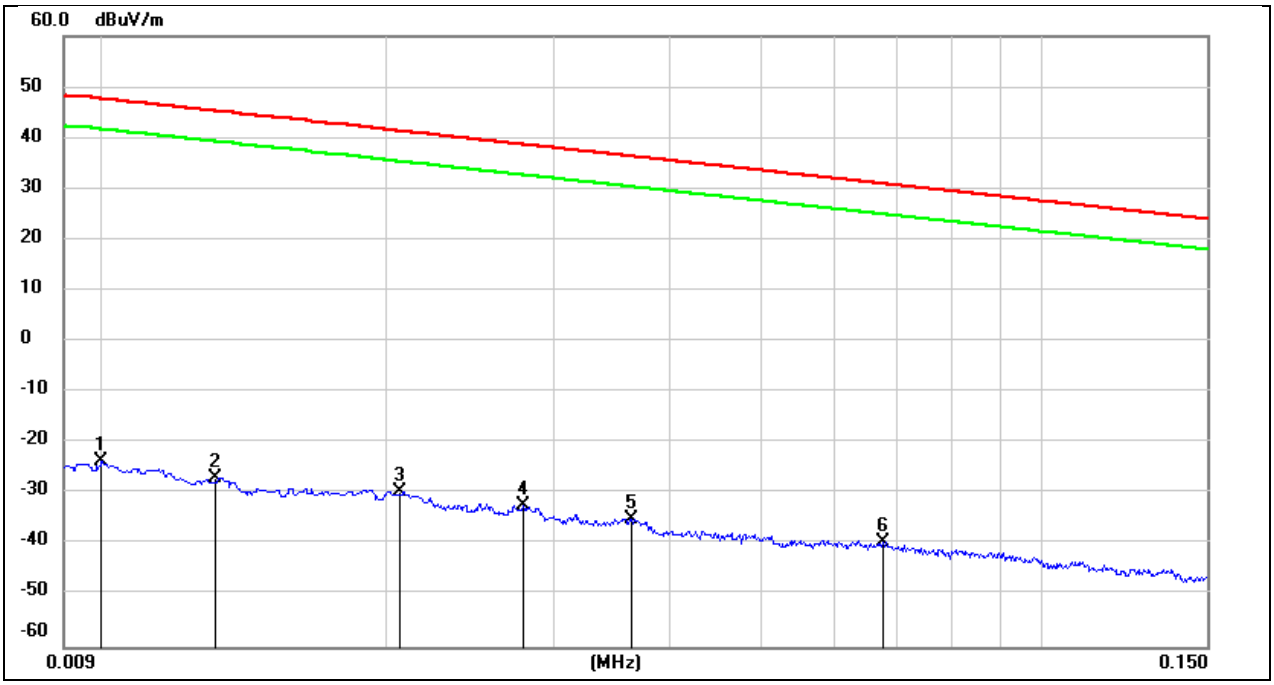

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	77.72	-101.40	-23.68	47.60	-71.28	peak
2	0.0131	74.47	-101.38	-26.91	45.25	-72.16	peak
3	0.0206	71.92	-101.35	-29.43	41.32	-70.75	peak
4	0.0279	69.17	-101.38	-32.21	38.69	-70.90	peak
5	0.0364	66.38	-101.42	-35.04	36.38	-71.42	peak
6	0.0675	62.14	-101.56	-39.42	31.02	-70.44	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

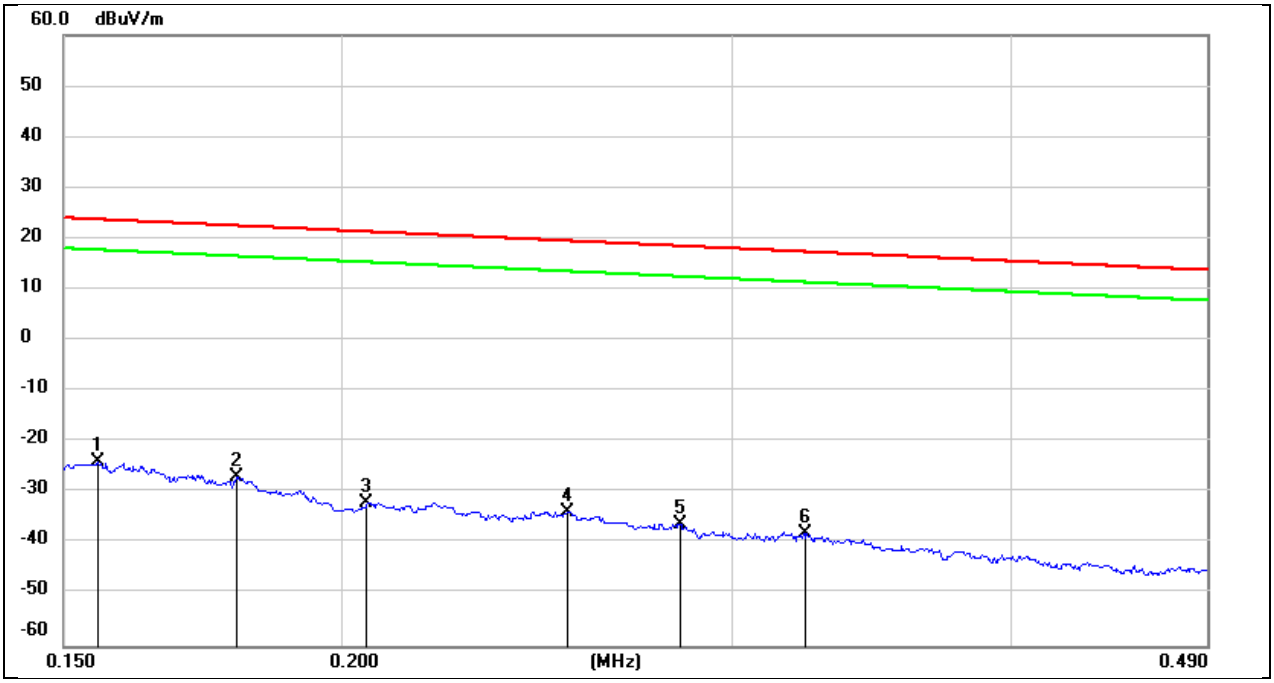

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	77.77	-101.65	-23.88	23.77	-47.65	peak
2	0.1794	74.77	-101.68	-26.91	22.53	-49.44	peak
3	0.2053	69.79	-101.73	-31.94	21.35	-53.29	peak
4	0.2530	68.14	-101.80	-33.66	19.54	-53.20	peak
5	0.2837	65.72	-101.83	-36.11	18.54	-54.65	peak
6	0.3234	63.98	-101.88	-37.90	17.41	-55.31	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

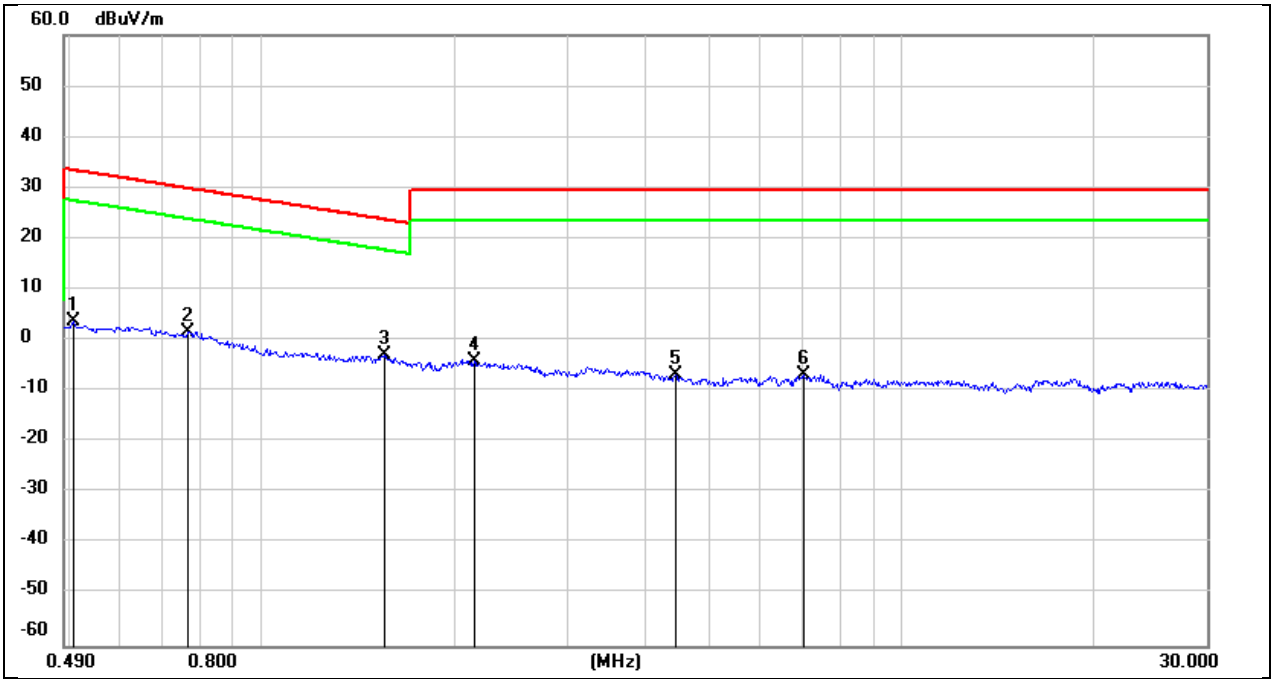

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5080	65.85	-62.07	3.78	33.49	-29.71	peak
2	0.7641	63.92	-62.12	1.80	29.94	-28.14	peak
3	1.5564	59.18	-62.02	-2.84	23.76	-26.60	peak
4	2.1463	57.77	-61.79	-4.02	29.54	-33.56	peak
5	4.4443	54.79	-61.40	-6.61	29.54	-36.15	peak
6	7.0411	54.56	-61.21	-6.65	29.54	-36.19	peak

8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

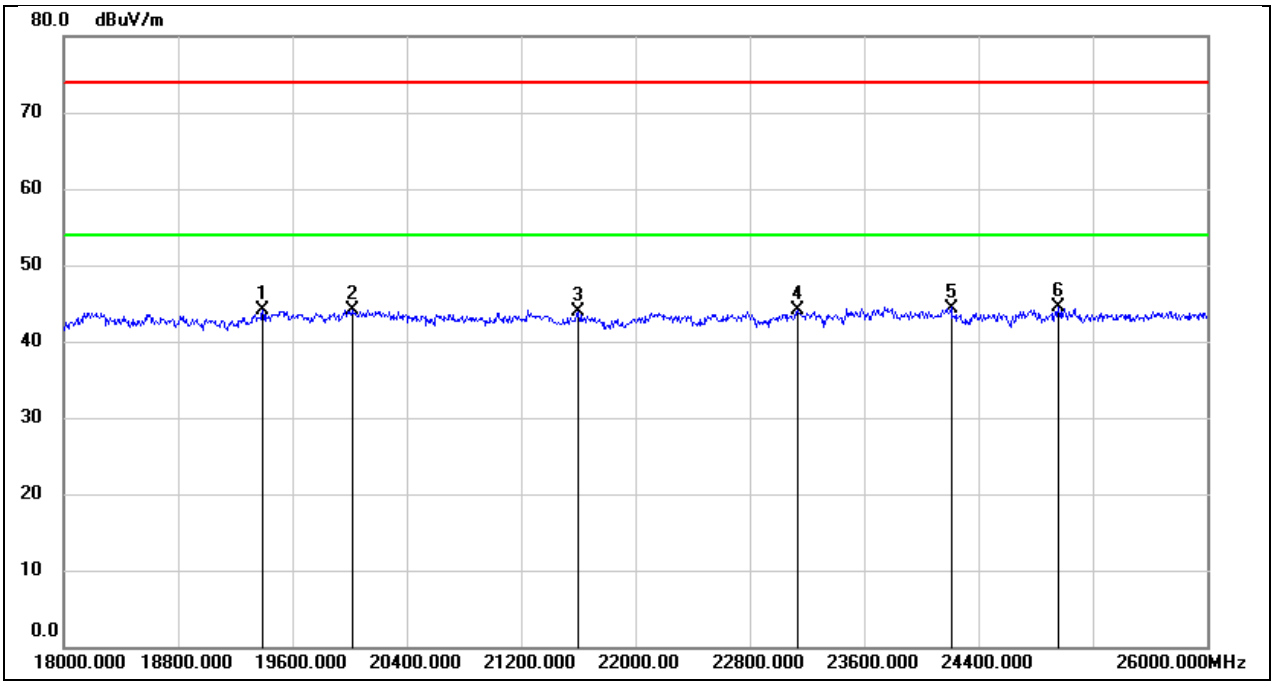

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
2	20016.000	49.56	-5.47	44.09	74.00	-29.91	peak
3	21600.000	48.52	-4.54	43.98	74.00	-30.02	peak
4	23136.000	47.43	-3.40	44.03	74.00	-29.97	peak
5	24208.000	47.21	-2.81	44.40	74.00	-29.60	peak
6	24960.000	46.64	-2.14	44.50	74.00	-29.50	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

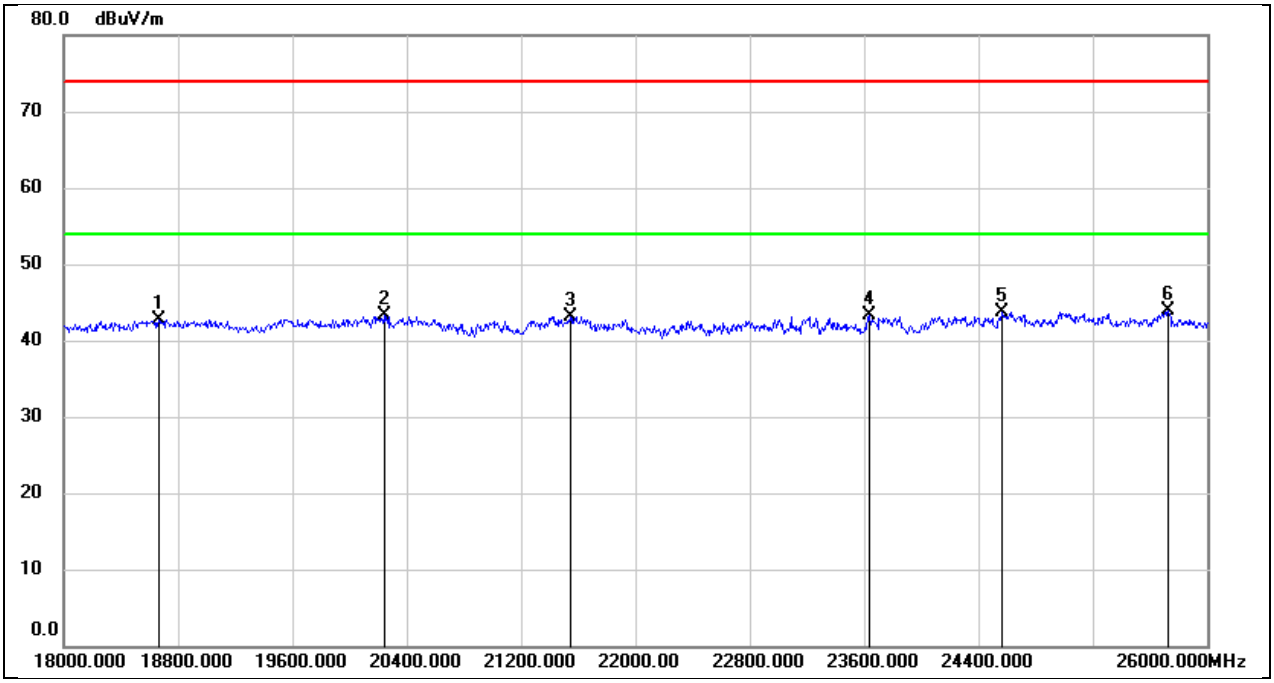

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18664.000	48.05	-5.37	42.68	74.00	-31.32	peak
2	20240.000	48.82	-5.61	43.21	74.00	-30.79	peak
3	21544.000	47.76	-4.63	43.13	74.00	-30.87	peak
4	23640.000	46.47	-3.17	43.30	74.00	-30.70	peak
5	24568.000	46.10	-2.33	43.77	74.00	-30.23	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak

8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

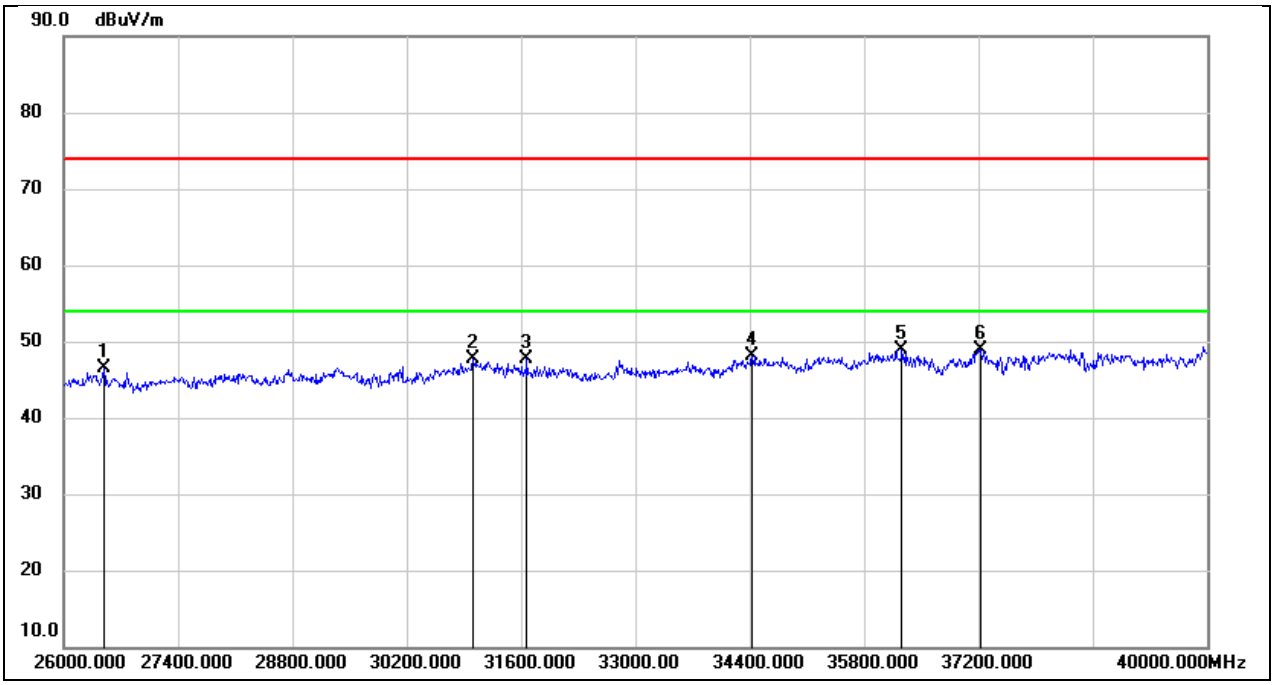

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	51.29	-4.74	46.55	74.00	-27.45	peak
2	31012.000	48.33	-0.71	47.62	74.00	-26.38	peak
3	31670.000	48.86	-1.21	47.65	74.00	-26.35	peak
4	34428.000	47.20	0.99	48.19	74.00	-25.81	peak
5	36262.000	45.60	3.28	48.88	74.00	-25.12	peak
6	37228.000	45.73	3.14	48.87	74.00	-25.13	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

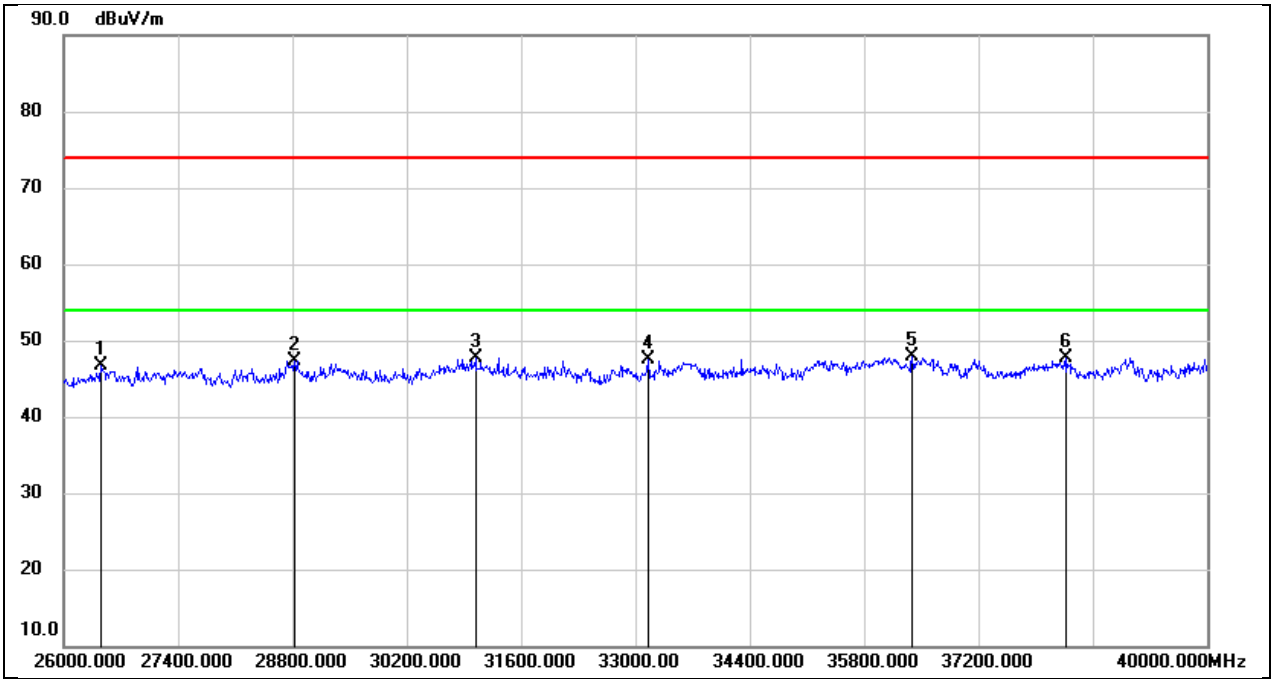

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26448.000	51.55	-4.85	46.70	74.00	-27.30	peak
2	28828.000	48.13	-0.79	47.34	74.00	-26.66	peak
3	31040.000	48.45	-0.72	47.73	74.00	-26.27	peak
4	33154.000	48.05	-0.54	47.51	74.00	-26.49	peak
5	36388.000	44.32	3.52	47.84	74.00	-26.16	peak
6	38278.000	43.82	3.82	47.64	74.00	-26.36	peak

8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

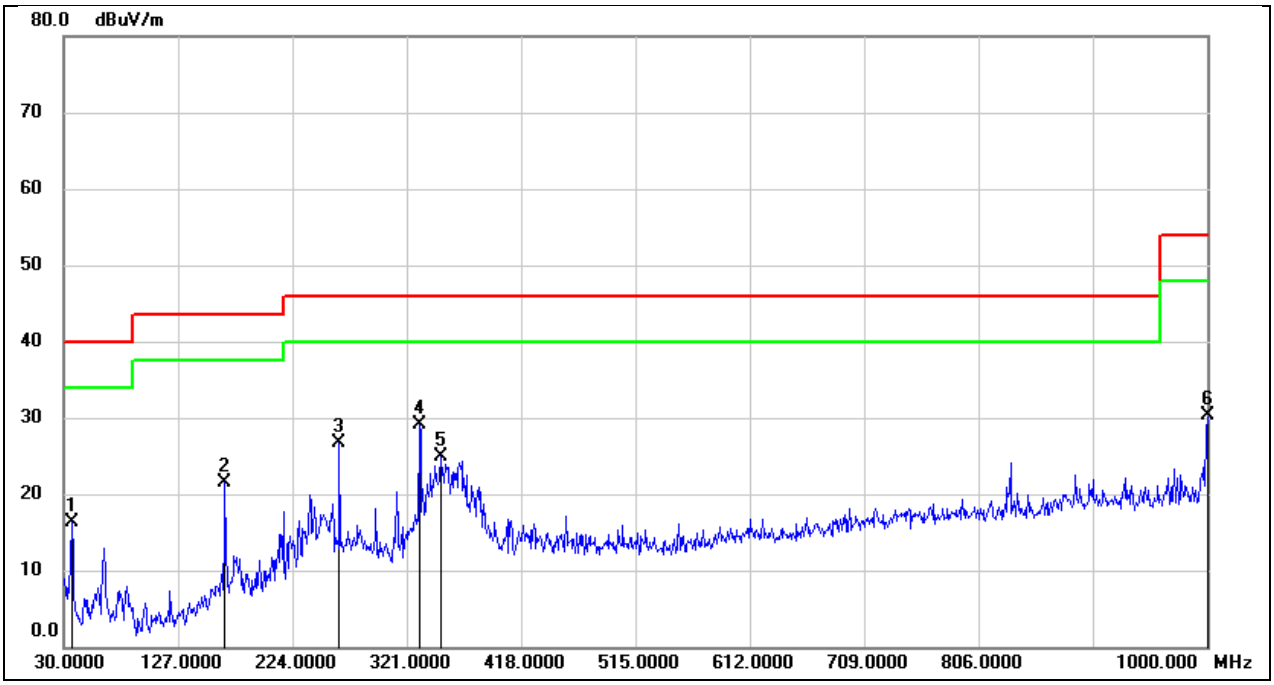

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.7900	35.09	-18.83	16.26	40.00	-23.74	QP
2	166.7700	38.12	-16.55	21.57	43.50	-21.93	QP
3	263.7700	44.09	-17.39	26.70	46.00	-19.30	QP
4	331.6700	42.51	-13.34	29.17	46.00	-16.83	QP
5	350.1000	37.38	-12.49	24.89	46.00	-21.11	QP
6	1000.0000	33.93	-3.66	30.27	54.00	-23.73	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

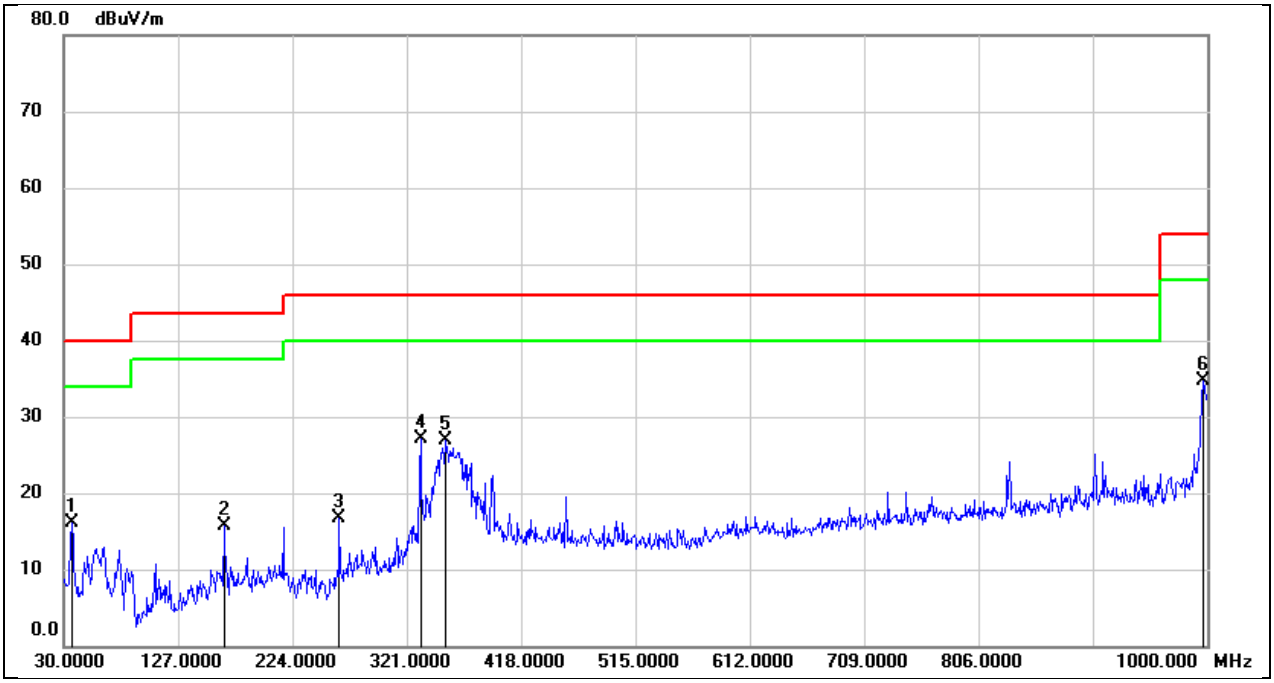

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.7900	34.85	-18.83	16.02	40.00	-23.98	QP
2	165.8000	32.22	-16.61	15.61	43.50	-27.89	QP
3	263.7700	34.13	-17.39	16.74	46.00	-29.26	QP
4	332.6400	40.39	-13.30	27.09	46.00	-18.91	QP
5	353.9800	39.44	-12.46	26.98	46.00	-19.02	QP
6	997.0900	38.40	-3.70	34.70	54.00	-19.30	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

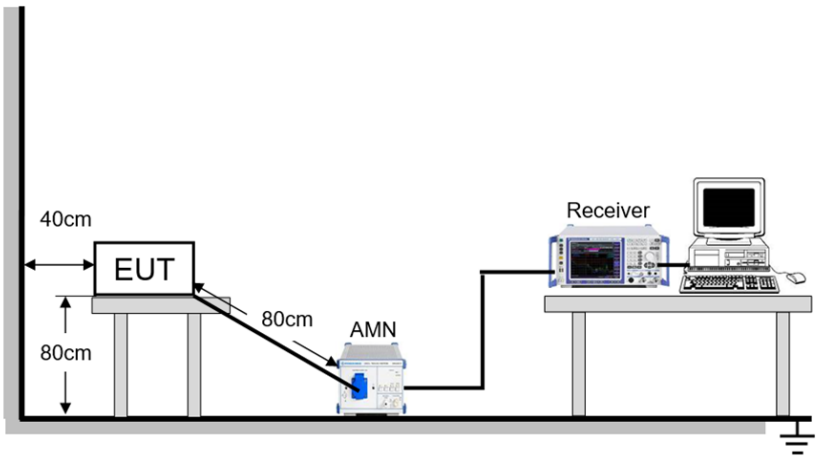

TEST ENVIRONMENT

Temperature	22.9℃	Relative Humidity	58.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	February 6, 2024	Test By	Wite Chen

TEST RESULTS

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Line		

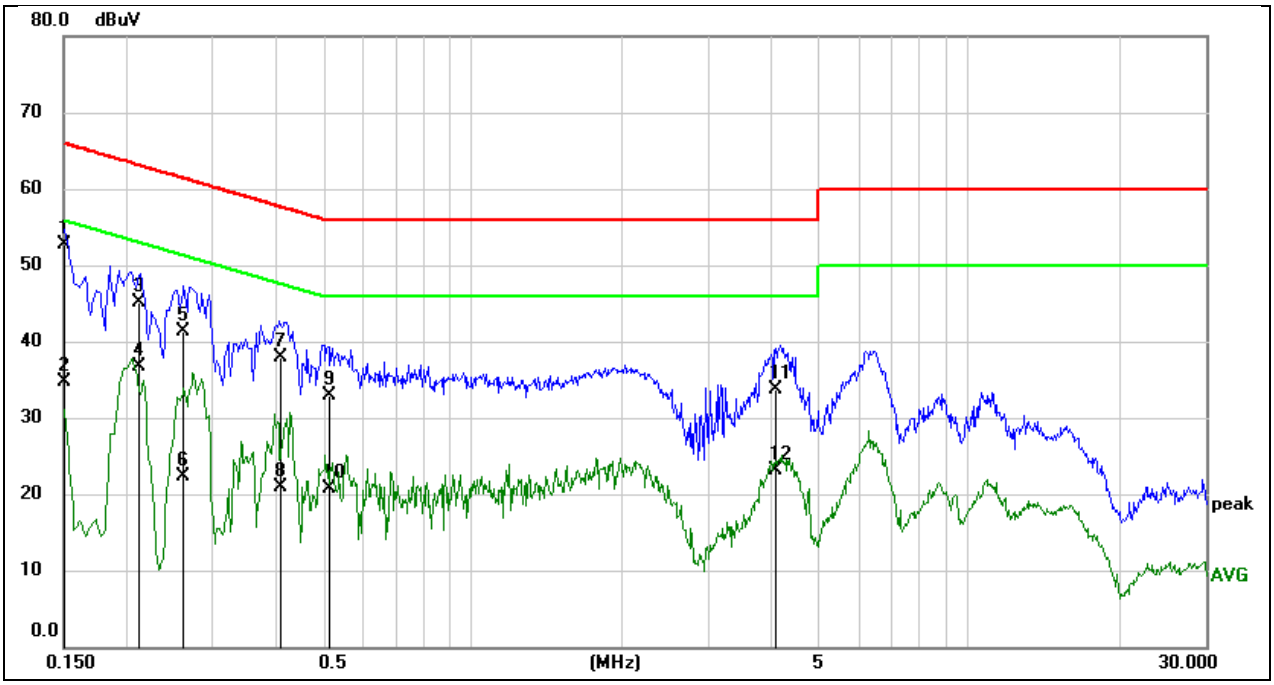

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1501	43.25	9.49	52.74	65.99	-13.25	QP
2	0.1501	25.16	9.49	34.65	55.99	-21.34	AVG
3	0.2127	35.59	9.59	45.18	63.10	-17.92	QP
4	0.2127	27.16	9.59	36.75	53.10	-16.35	AVG
5	0.2620	31.73	9.57	41.30	61.37	-20.07	QP
6	0.2620	12.76	9.57	22.33	51.37	-29.04	AVG
7	0.4108	28.40	9.53	37.93	57.63	-19.70	QP
8	0.4108	11.46	9.53	20.99	47.63	-26.64	AVG
9	0.5107	23.45	9.50	32.95	56.00	-23.05	QP
10	0.5107	11.14	9.50	20.64	46.00	-25.36	AVG
11	4.0934	24.08	9.60	33.68	56.00	-22.32	QP
12	4.0934	13.56	9.60	23.16	46.00	-22.84	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Neutral		

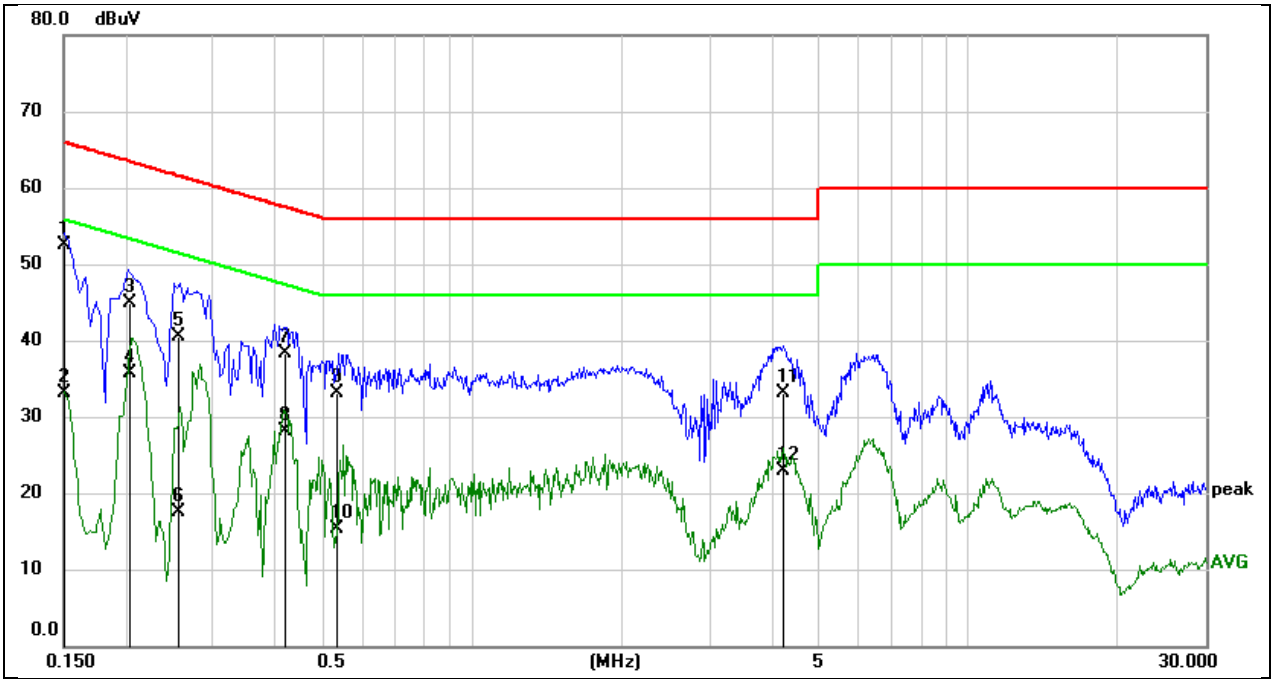

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1502	43.06	9.49	52.55	65.99	-13.44	QP
2	0.1502	23.65	9.49	33.14	55.99	-22.85	AVG
3	0.2050	35.23	9.59	44.82	63.41	-18.59	QP
4	0.2050	26.08	9.59	35.67	53.41	-17.74	AVG
5	0.2542	30.96	9.57	40.53	61.62	-21.09	QP
6	0.2542	7.91	9.57	17.48	51.62	-34.14	AVG
7	0.4185	28.80	9.53	38.33	57.48	-19.15	QP
8	0.4185	18.52	9.53	28.05	47.48	-19.43	AVG
9	0.5333	23.54	9.50	33.04	56.00	-22.96	QP
10	0.5333	5.74	9.50	15.24	46.00	-30.76	AVG
11	4.2328	23.49	9.60	33.09	56.00	-22.91	QP
12	4.2328	13.38	9.60	22.98	46.00	-23.02	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)
For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	18.80	5170.68	5189.48	PASS
	Ant2	5180	18.88	5170.64	5189.52	PASS
	Ant1	5200	18.76	5190.68	5209.44	PASS
	Ant2	5200	18.92	5190.60	5209.52	PASS
	Ant1	5240	18.76	5230.72	5249.48	PASS
	Ant2	5240	18.88	5230.68	5249.56	PASS
	Ant1	5260	18.96	5250.56	5269.52	PASS
	Ant2	5260	19.00	5250.52	5269.52	PASS
	Ant1	5280	18.76	5270.72	5289.48	PASS
	Ant2	5280	19.04	5270.56	5289.60	PASS
	Ant1	5320	18.96	5310.64	5329.60	PASS
	Ant2	5320	18.76	5310.72	5329.48	PASS
	Ant1	5500	18.76	5490.72	5509.48	PASS
	Ant2	5500	18.84	5490.68	5509.52	PASS
	Ant1	5580	18.76	5570.72	5589.48	PASS
	Ant2	5580	18.80	5570.64	5589.44	PASS
	Ant1	5700	18.96	5690.56	5709.52	PASS
	Ant2	5700	18.84	5690.60	5709.44	PASS
	Ant1	5720	18.72	5710.76	5729.48	PASS
	Ant2	5720	18.68	5710.68	5729.36	PASS
	Ant1	5720_UNII-2C	14.24	5710.76	5725	PASS
	Ant2	5720_UNII-2C	14.32	5710.68	5725	PASS
	Ant1	5720_UNII-3	4.48	5725	5729.48	PASS
	Ant2	5720_UNII-3	4.36	5725	5729.36	PASS
	Ant1	5745	18.80	5735.72	5754.52	PASS
	Ant2	5745	19.00	5735.64	5754.64	PASS
	Ant1	5785	18.88	5775.60	5794.48	PASS
	Ant2	5785	18.84	5775.68	5794.52	PASS
	Ant1	5825	18.84	5815.64	5834.48	PASS
	Ant2	5825	19.00	5815.64	5834.64	PASS
11N20MIMO	Ant1	5180	20.08	5169.96	5190.04	PASS
	Ant2	5180	19.92	5170.08	5190.00	PASS
	Ant1	5200	19.88	5190.16	5210.04	PASS
	Ant2	5200	19.72	5190.20	5209.92	PASS
	Ant1	5240	19.56	5230.20	5249.76	PASS
	Ant2	5240	19.68	5230.20	5249.88	PASS
	Ant1	5260	19.76	5250.12	5269.88	PASS
	Ant2	5260	19.76	5250.16	5269.92	PASS
	Ant1	5280	20.12	5270.00	5290.12	PASS
	Ant2	5280	19.80	5270.08	5289.88	PASS
	Ant1	5320	20.00	5310.12	5330.12	PASS
	Ant2	5320	19.84	5310.08	5329.92	PASS
	Ant1	5500	19.68	5490.16	5509.84	PASS
	Ant2	5500	19.72	5490.16	5509.88	PASS
	Ant1	5580	19.84	5570.16	5590.00	PASS
	Ant2	5580	19.88	5570.20	5590.08	PASS
	Ant1	5700	19.80	5690.20	5710.00	PASS
	Ant2	5700	19.88	5690.20	5710.08	PASS
	Ant1	5720	19.80	5710.20	5730.00	PASS
	Ant2	5720	19.72	5710.16	5729.88	PASS
	Ant1	5720_UNII-2C	14.8	5710.20	5725	PASS
	Ant2	5720_UNII-2C	14.84	5710.16	5725	PASS
	Ant1	5720_UNII-3	5	5725	5730.00	PASS
	Ant2	5720_UNII-3	4.88	5725	5729.88	PASS
	Ant1	5745	19.72	5735.20	5754.92	PASS
	Ant2	5745	19.92	5735.20	5755.12	PASS

	Ant1	5785	19.68	5775.24	5794.92	PASS
	Ant2	5785	20.00	5775.04	5795.04	PASS
	Ant1	5825	20.00	5815.08	5835.08	PASS
	Ant2	5825	19.84	5815.08	5834.92	PASS
11N40MIMO	Ant1	5190	42.24	5169.12	5211.36	PASS
	Ant2	5190	41.76	5169.28	5211.04	PASS
	Ant1	5230	42.08	5209.12	5251.20	PASS
	Ant2	5230	41.68	5209.28	5250.96	PASS
	Ant1	5270	39.28	5250.40	5289.68	PASS
	Ant2	5270	41.76	5249.36	5291.12	PASS
	Ant1	5310	41.92	5289.28	5331.20	PASS
	Ant2	5310	41.60	5289.20	5330.80	PASS
	Ant1	5510	41.84	5489.20	5531.04	PASS
	Ant2	5510	41.76	5489.36	5531.12	PASS
	Ant1	5550	44.56	5526.48	5571.04	PASS
	Ant2	5550	41.92	5529.12	5571.04	PASS
	Ant1	5670	42.00	5649.04	5691.04	PASS
	Ant2	5670	49.92	5641.28	5691.20	PASS
	Ant1	5710	41.92	5689.20	5731.12	PASS
	Ant2	5710	42.08	5689.04	5731.12	PASS
	Ant1	5710_UNII-2C	35.8	5689.20	5725	PASS
	Ant2	5710_UNII-2C	35.96	5689.04	5725	PASS
	Ant1	5710_UNII-3	6.12	5725	5731.12	PASS
	Ant2	5710_UNII-3	6.12	5725	5731.12	PASS
	Ant1	5755	42.08	5734.20	5776.28	PASS
	Ant2	5755	41.84	5734.20	5776.04	PASS
	Ant1	5795	42.24	5774.04	5816.28	PASS
	Ant2	5795	51.92	5764.20	5816.12	PASS
11AC80MIMO	Ant1	5210	82.40	5169.20	5251.60	PASS
	Ant2	5210	82.08	5169.36	5251.44	PASS
	Ant1	5290	82.40	5249.20	5331.60	PASS
	Ant2	5290	82.72	5249.04	5331.76	PASS
	Ant1	5530	82.24	5489.36	5571.60	PASS
	Ant2	5530	82.56	5489.04	5571.60	PASS
	Ant1	5610	83.04	5568.88	5651.92	PASS
	Ant2	5610	82.56	5569.04	5651.60	PASS
	Ant1	5690	82.72	5649.04	5731.76	PASS
	Ant2	5690	82.72	5648.88	5731.60	PASS
	Ant1	5690_UNII-2C	75.96	5649.04	5725	PASS
	Ant2	5690_UNII-2C	76.12	5648.88	5725	PASS
	Ant1	5690_UNII-3	6.76	5725	5731.76	PASS
	Ant2	5690_UNII-3	6.6	5725	5731.60	PASS
	Ant1	5775	82.72	5734.04	5816.76	PASS
	Ant2	5775	82.40	5734.04	5816.44	PASS

11.1.2. Test Graphs

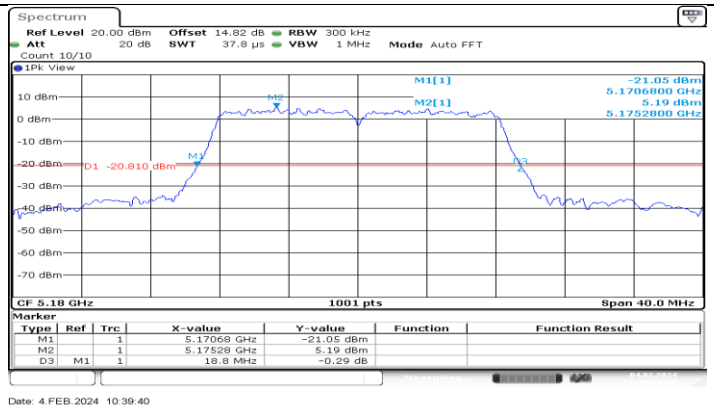

11A_Ant1_5180

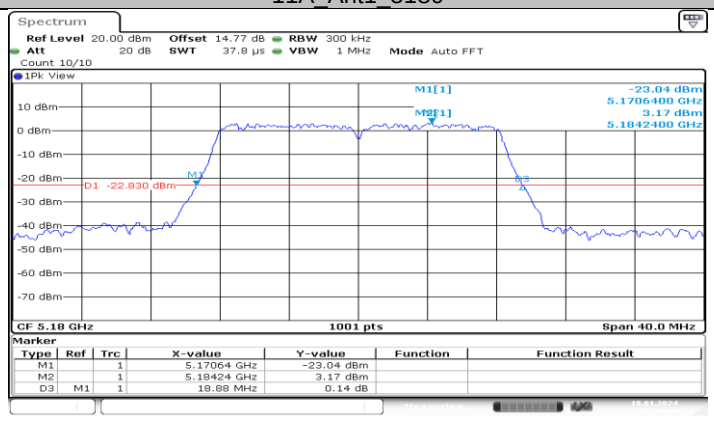

11A_Ant2_5180

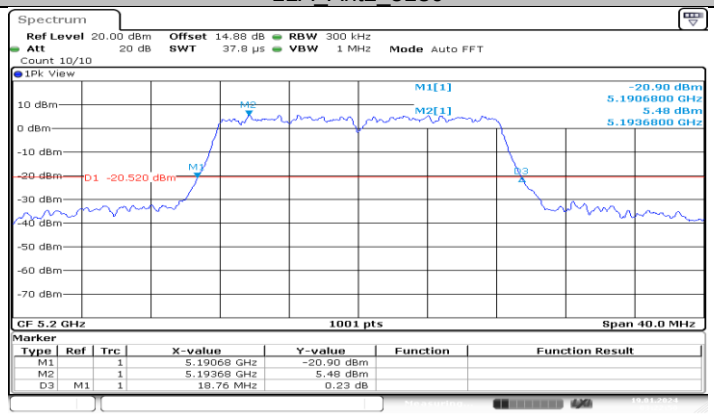

11A_Ant1_5200

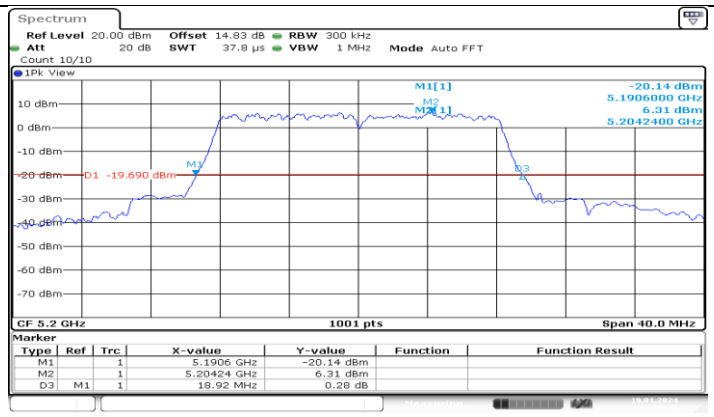

11A_Ant2_5200

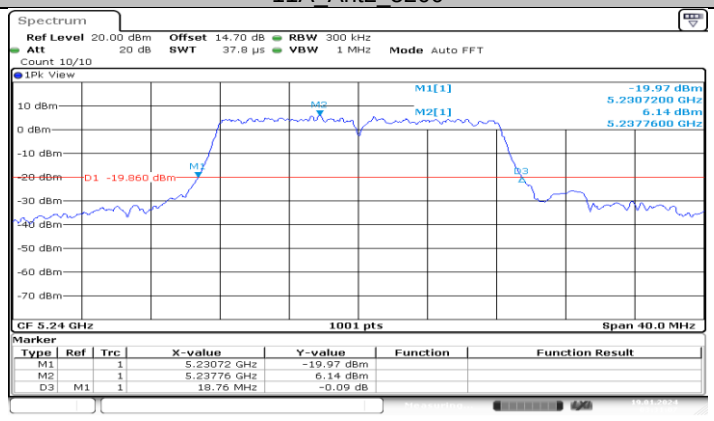

11A_Ant1_5240

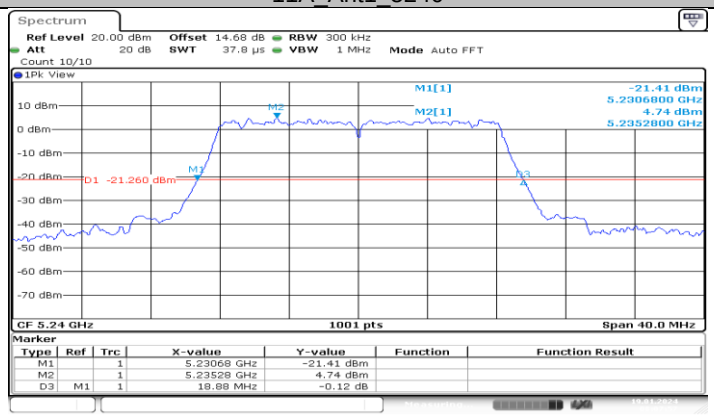

11A_Ant2_5240

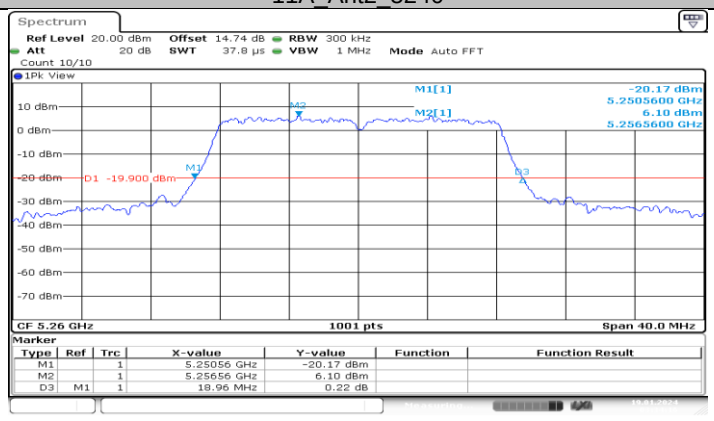

11A_Ant1_5260

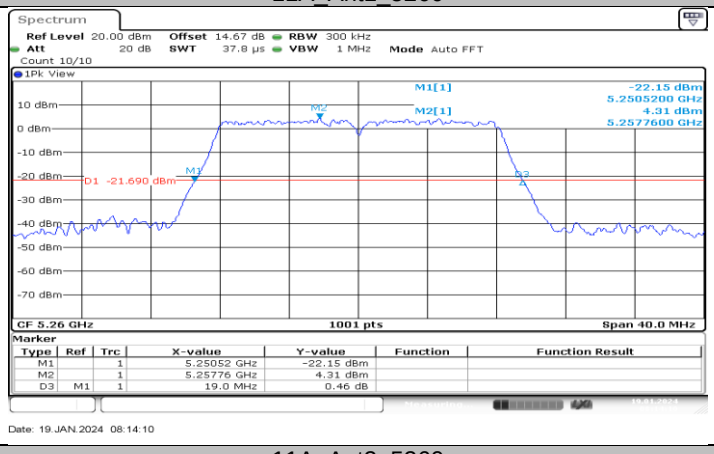

11A_Ant2_5260

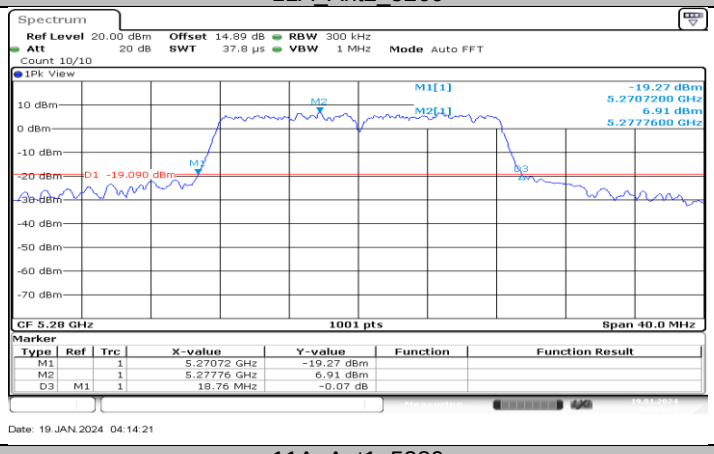

11A_Ant1_5280

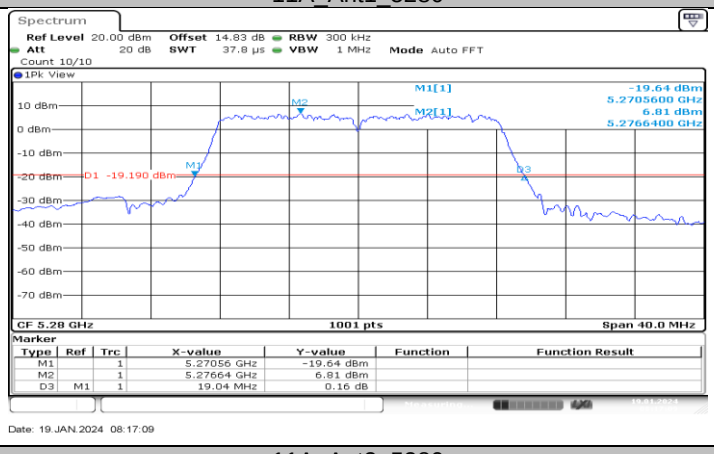

11A_Ant2_5280

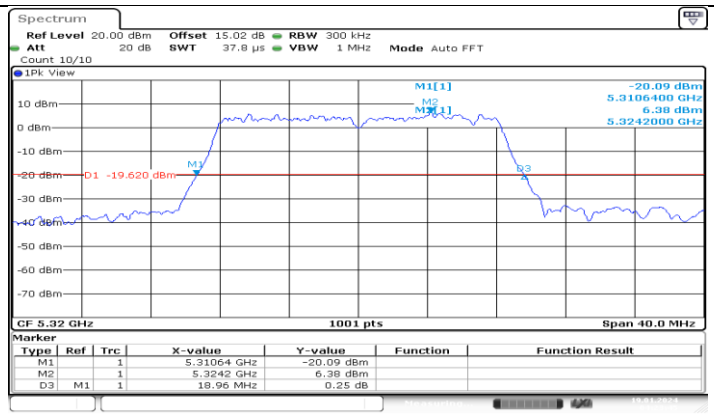

11A_Ant1_5320

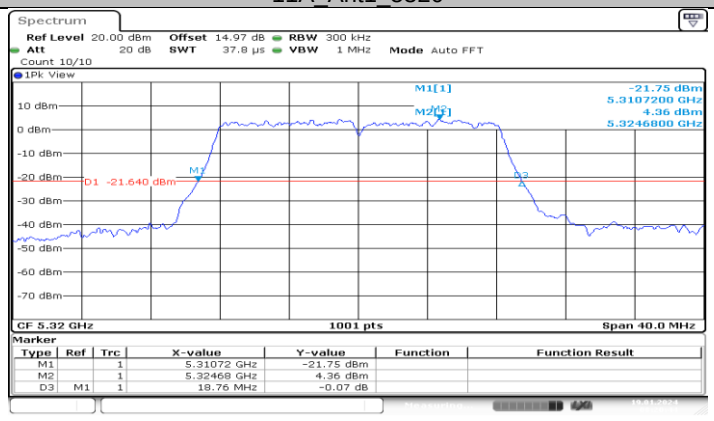

11A_Ant2_5320

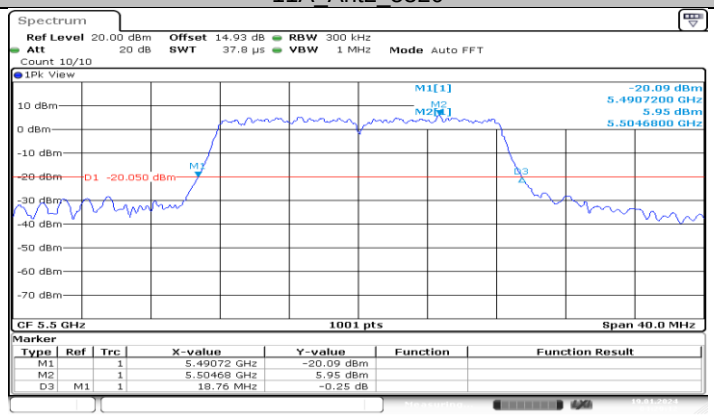

11A_Ant1_5500

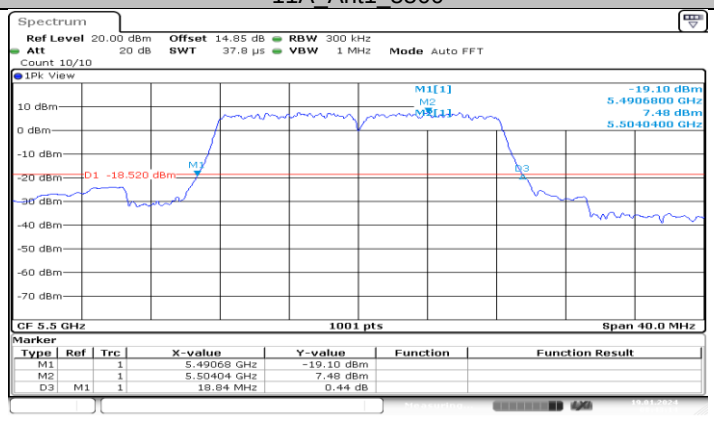

11A_Ant2_5500
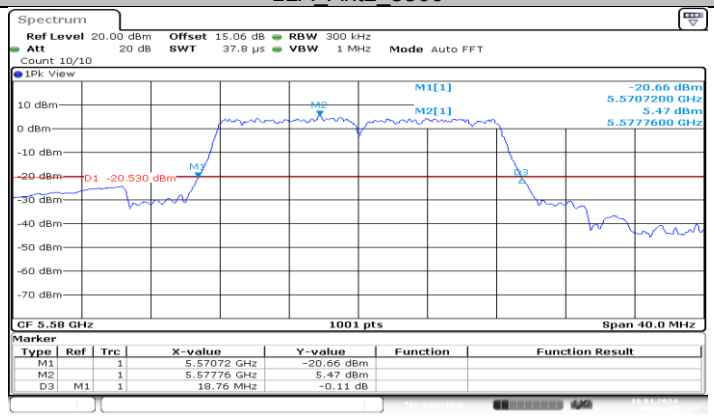

11A_Ant1_5580
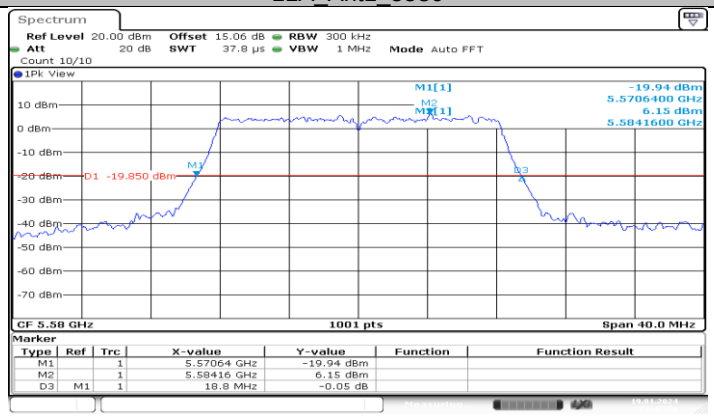

11A_Ant2_5580
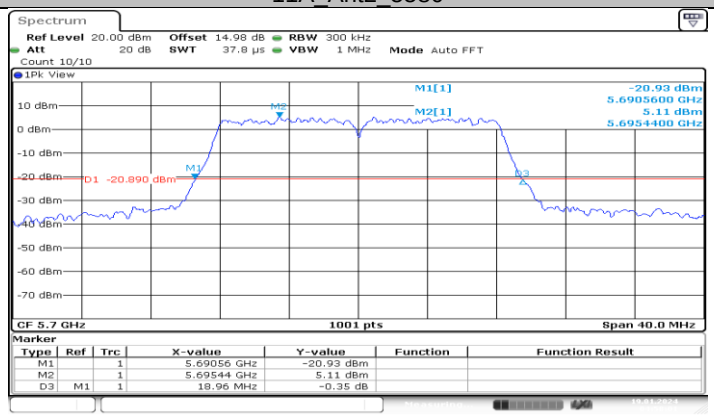

11A_Ant1_5700

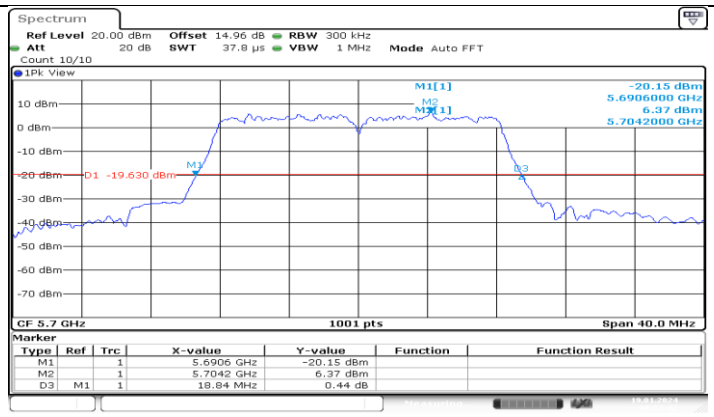

11A_Ant2_5700

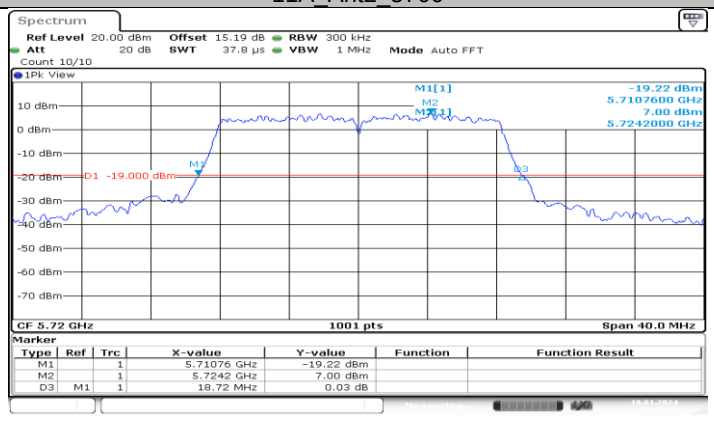

11A_Ant1_5720

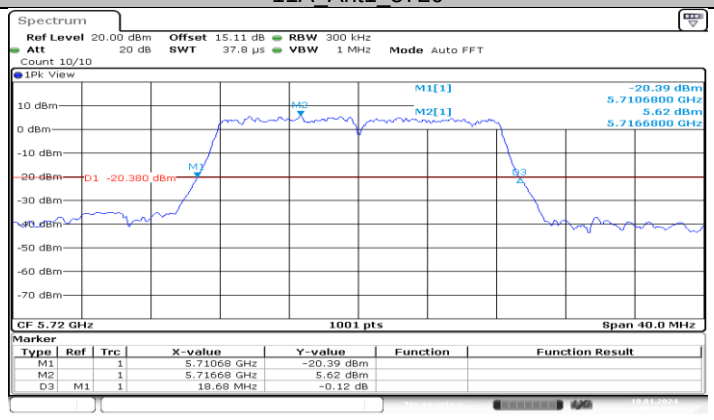

11A_Ant2_5720

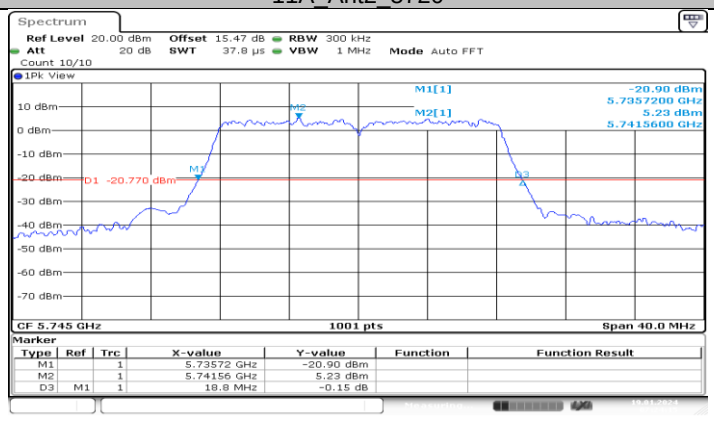

11A_Ant1_5745

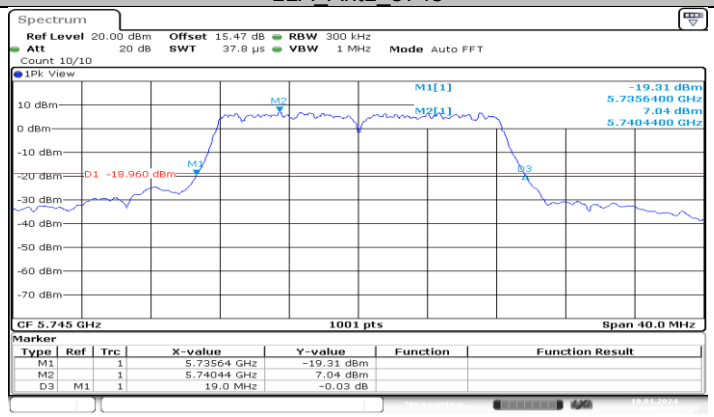

11A_Ant2_5745

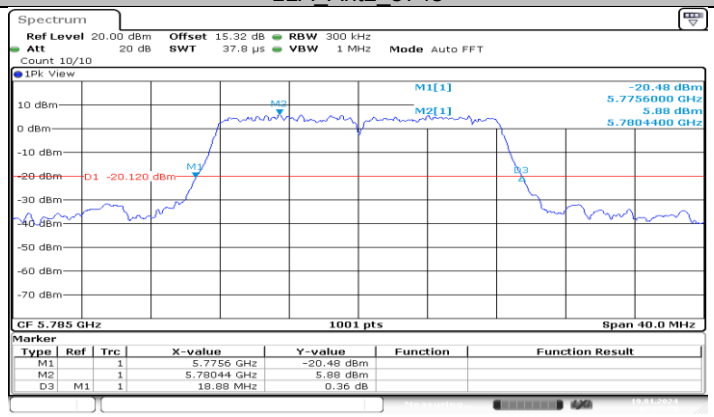

11A_Ant1_5785

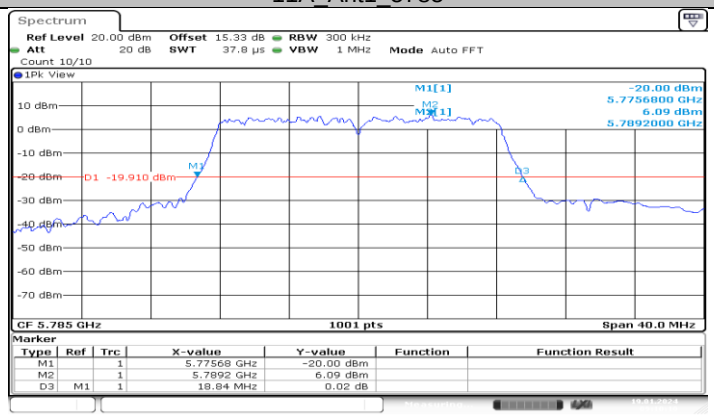

11A_Ant2_5785

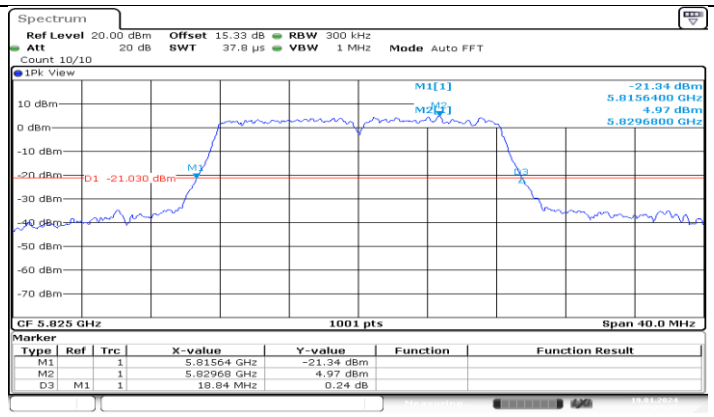

11A_Ant1_5825

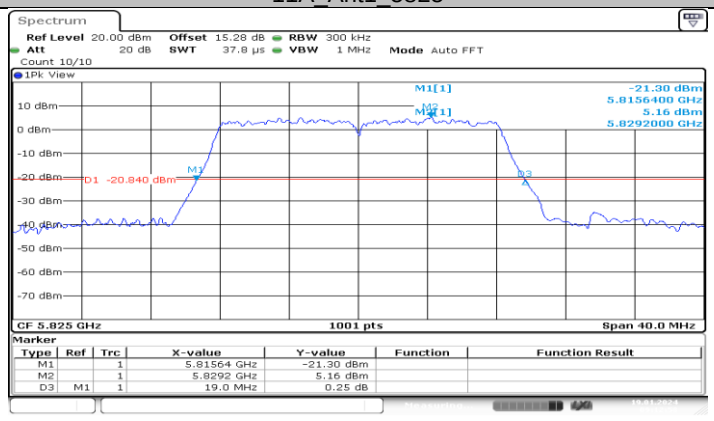

11A_Ant2_5825

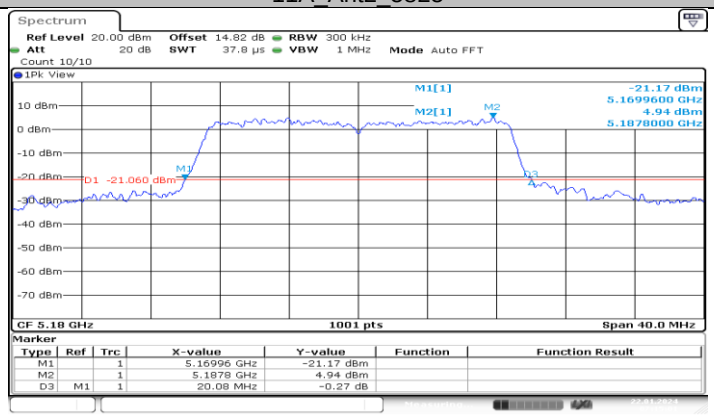

11N20MIMO_Ant1_5180

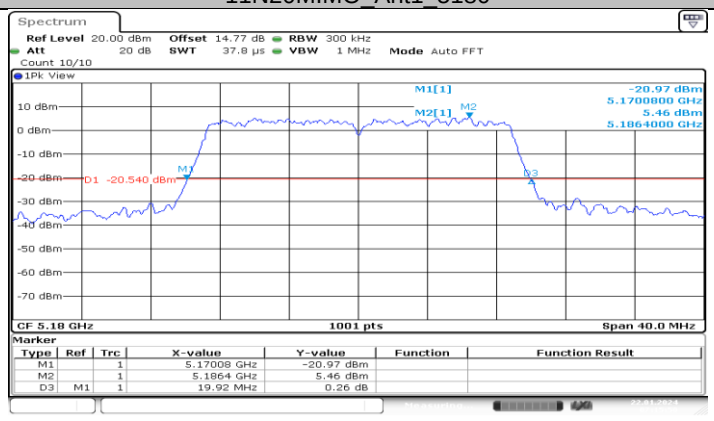

11N20MIMO_Ant2_5180

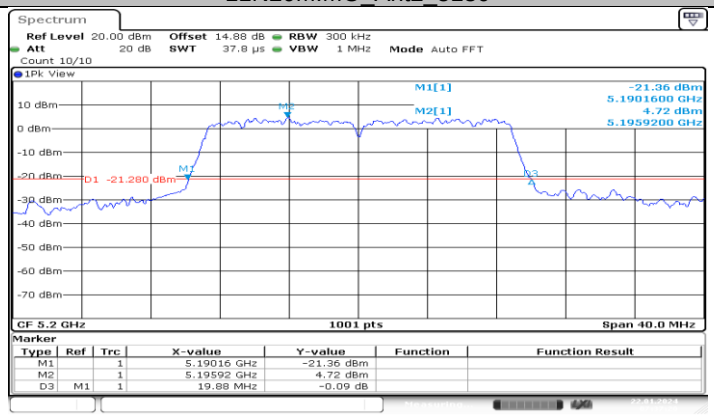

11N20MIMO_Ant1_5200

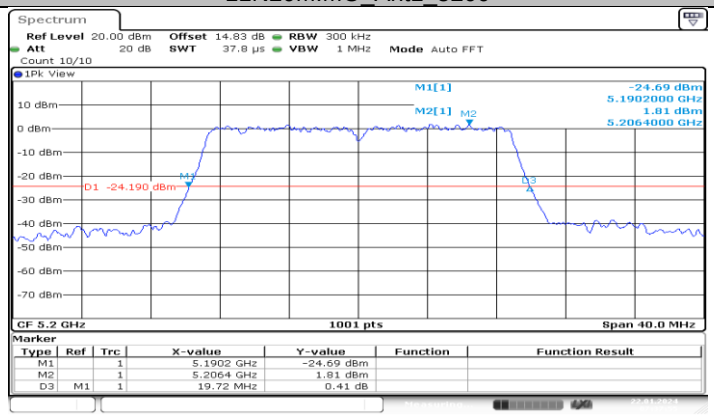

11N20MIMO_Ant2_5200

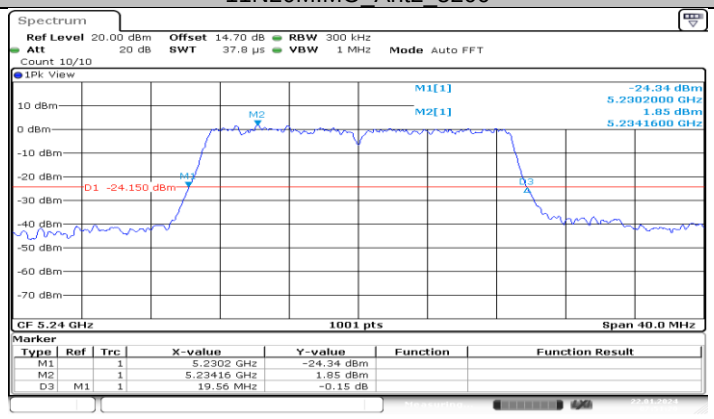

11N20MIMO_Ant1_5240

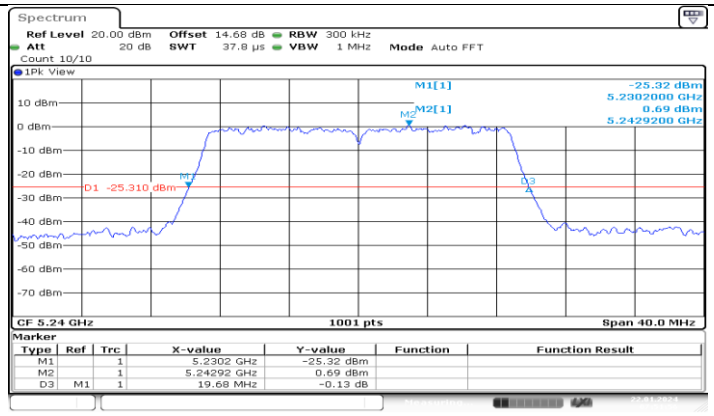

11N20MIMO_Ant2_5240

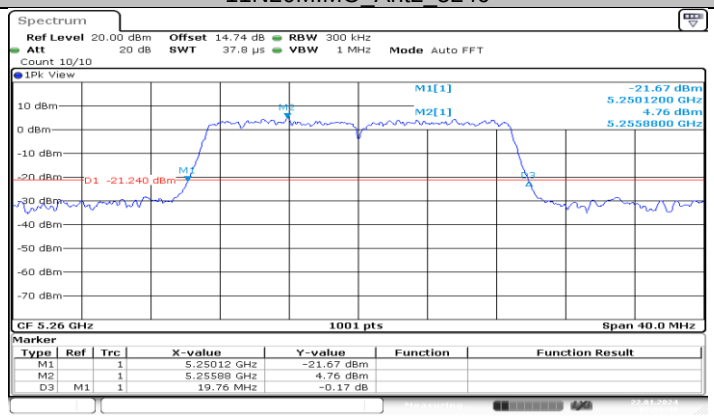

11N20MIMO_Ant1_5260

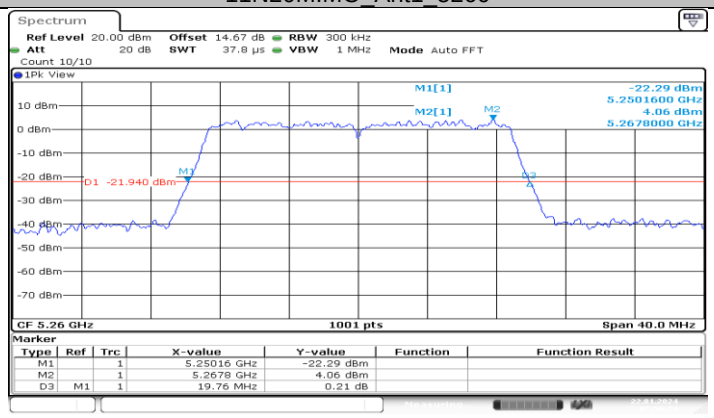

11N20MIMO_Ant2_5260

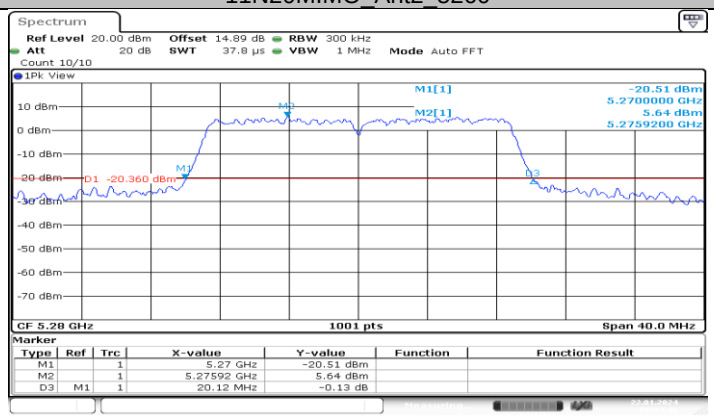

11N20MIMO_Ant1_5280
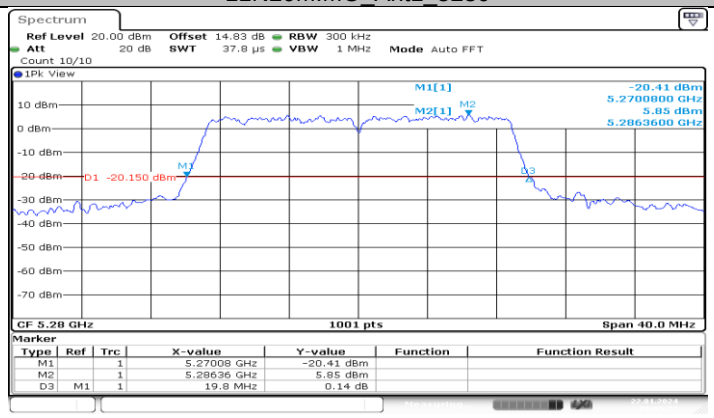
11N20MIMO_Ant2_5280
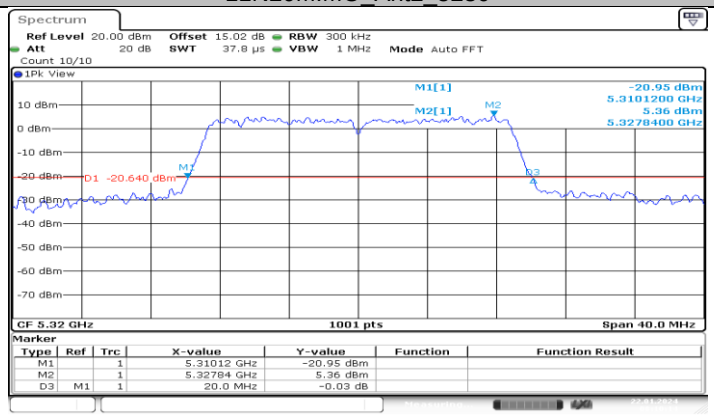
11N20MIMO_Ant1_5320
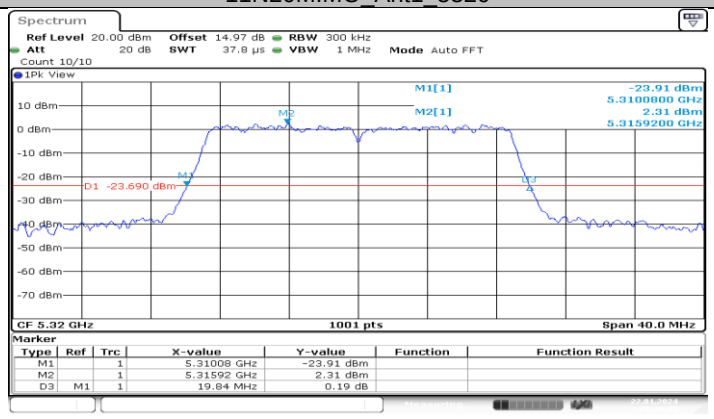
11N20MIMO_Ant2_5320

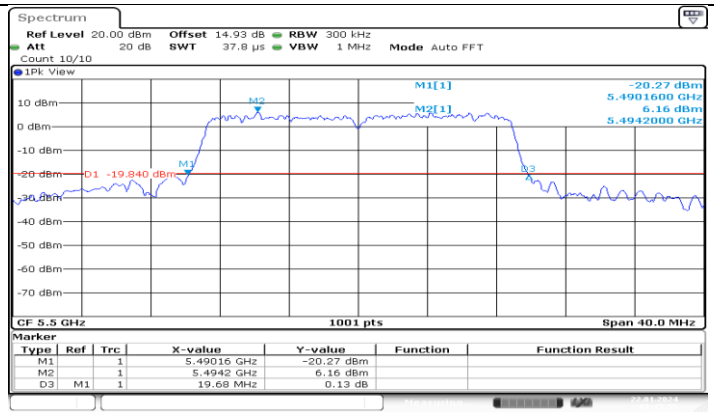

11N20MIMO_Ant1_5500

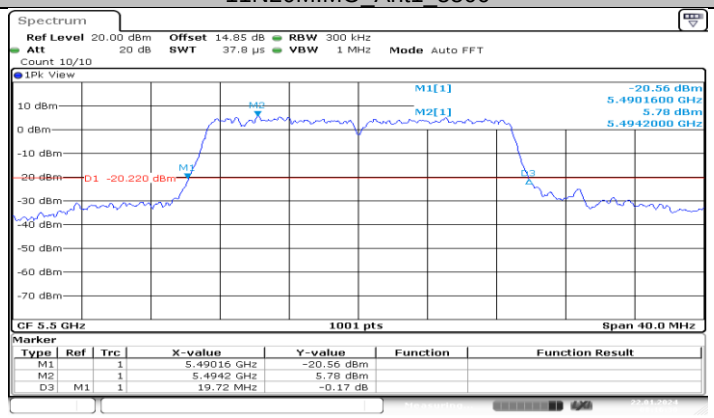

11N20MIMO_Ant2_5500

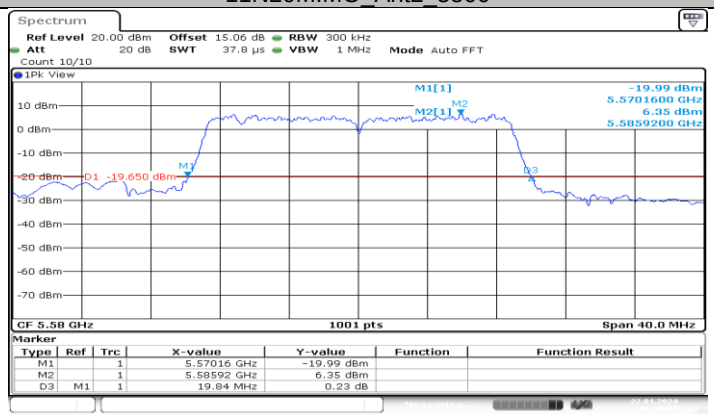

11N20MIMO_Ant1_5580

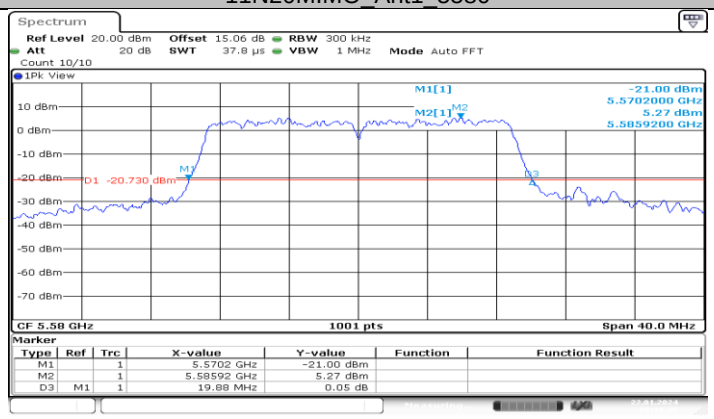

11N20MIMO_Ant2_5580

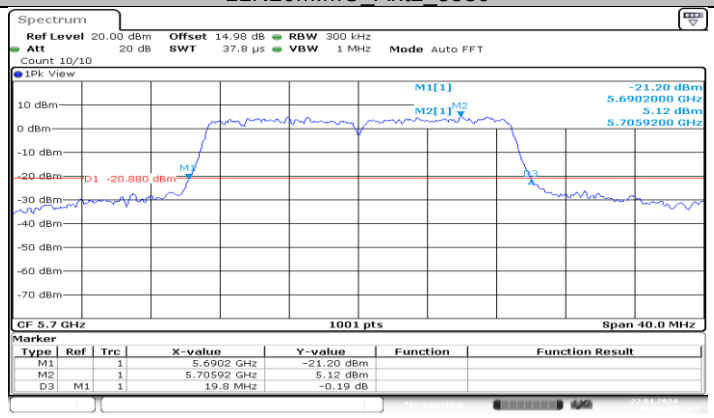

11N20MIMO_Ant1_5700

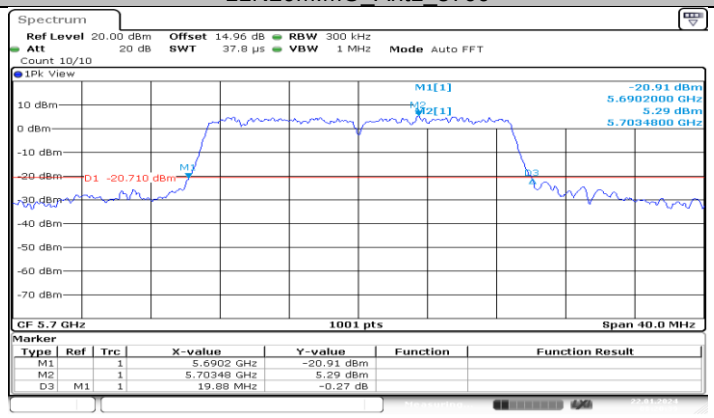

11N20MIMO_Ant2_5700

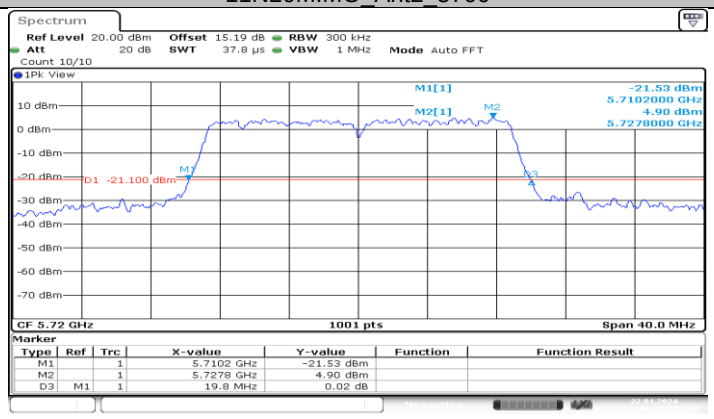

11N20MIMO_Ant1_5720

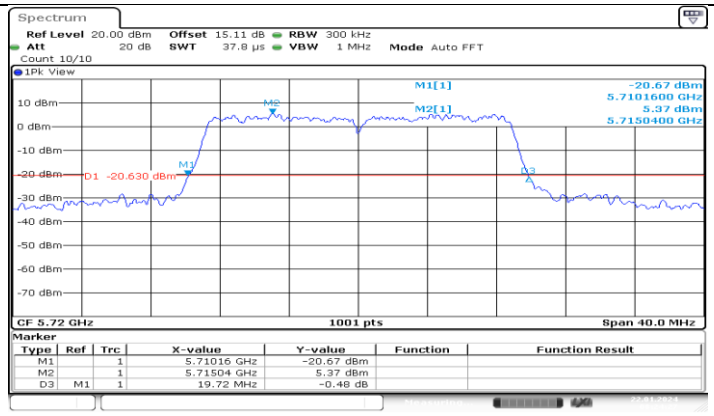

11N20MIMO_Ant2_5720

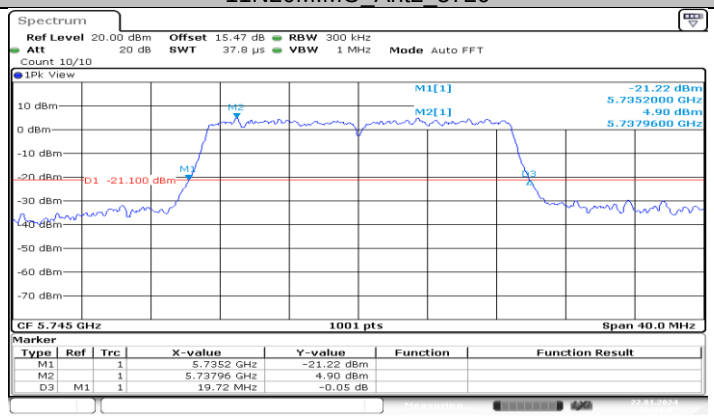

11N20MIMO_Ant1_5745

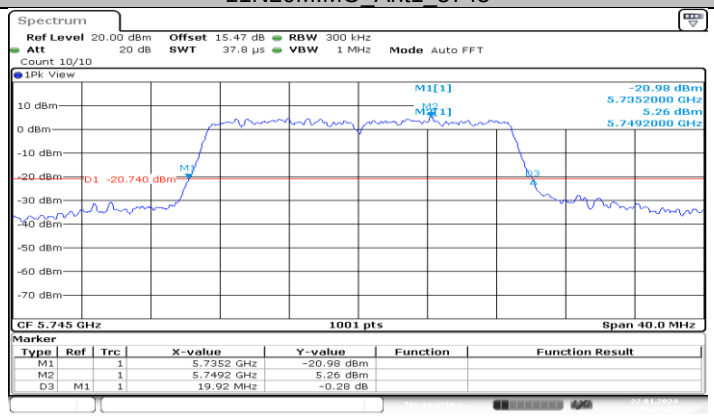

11N20MIMO_Ant2_5745

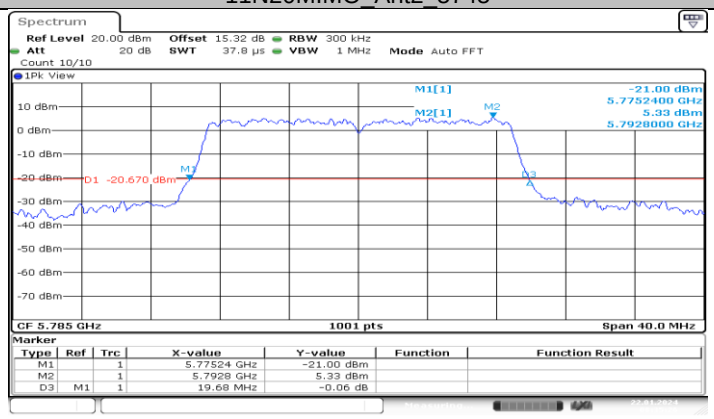

11N20MIMO_Ant1_5785
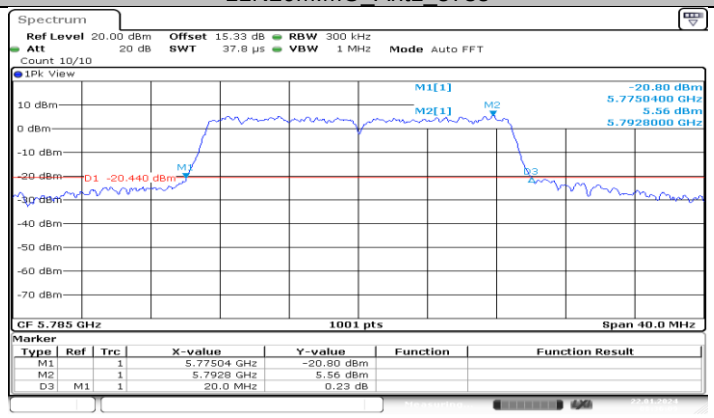
11N20MIMO_Ant2_5785
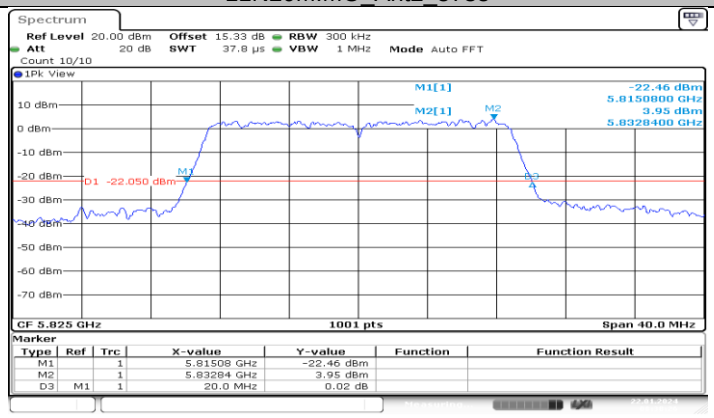
11N20MIMO_Ant1_5825
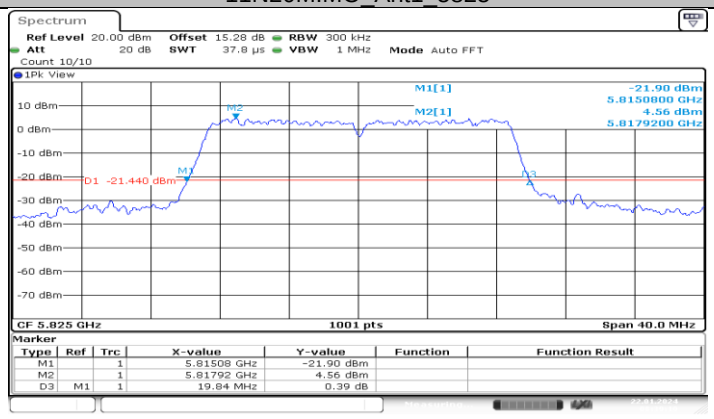
11N20MIMO_Ant2_5825

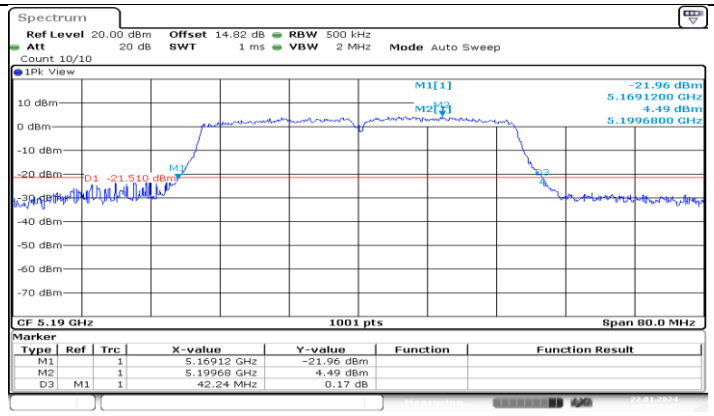

11N40MIMO_Ant1_5190

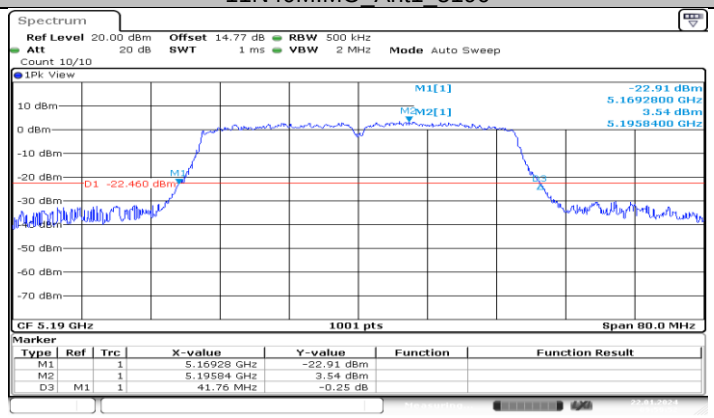

11N40MIMO_Ant2_5190

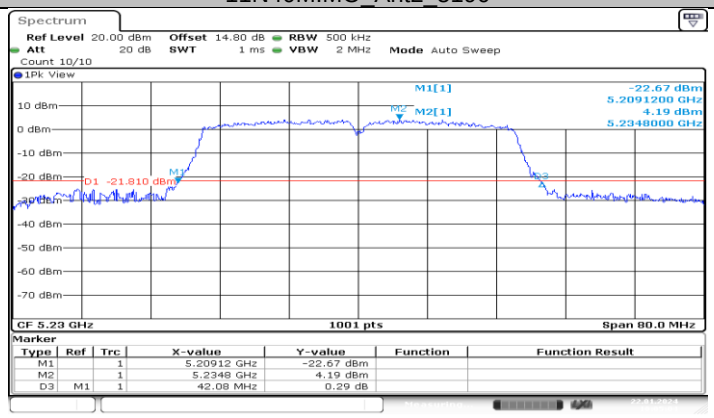

11N40MIMO_Ant1_5230

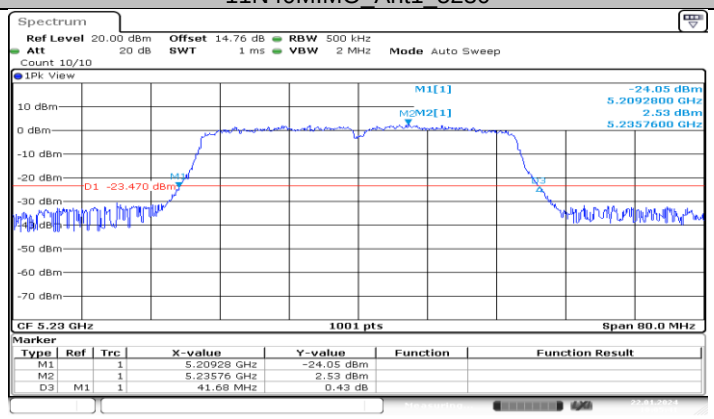

11N40MIMO_Ant2_5230
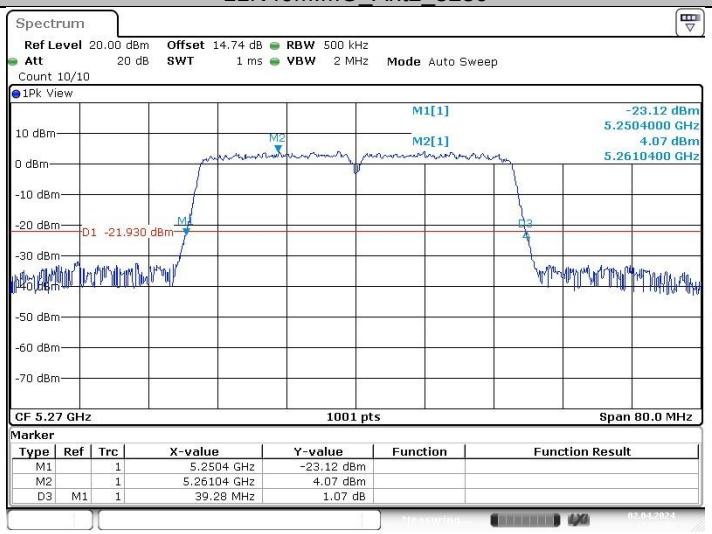

Date: 22.JAN.2024 10:28:01

11N40MIMO_Ant1_5270
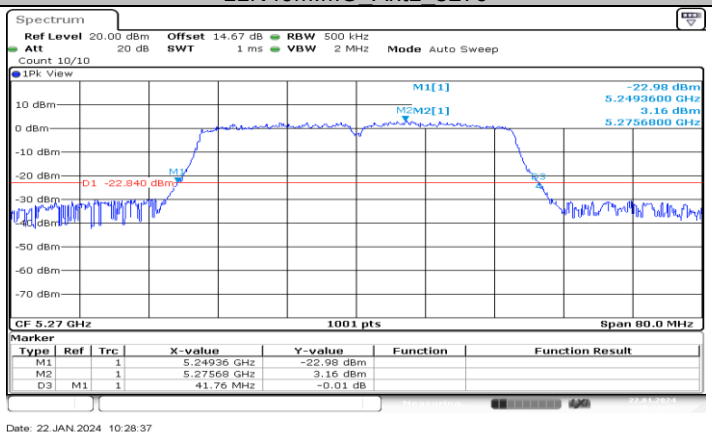

Date: 22.JAN.2024 10:28:37

11N40MIMO_Ant2_5270
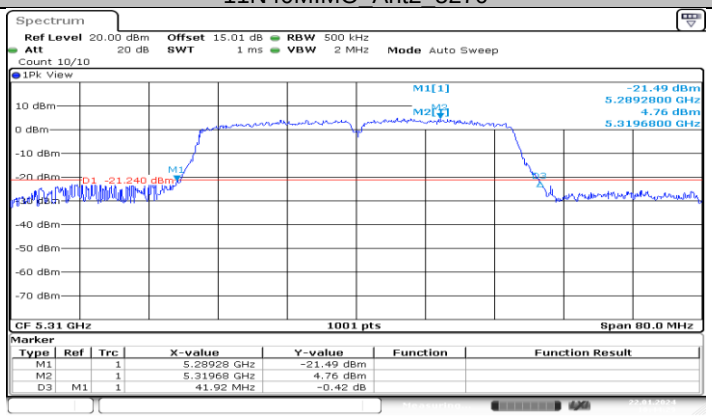

Date: 22.JAN.2024 10:44:29

11N40MIMO_Ant1_5310