

FCC &ISED Radio Test Report**FCC ID: 2AC23-DCT2C
IC:12290A-DCT2C****The report concerns: Original Grant**

Report Reference No. : 21EFSS08055 07761
Date Sample(s) Received : 2021-08-12
Date of Tested : 2021-08-12 to 2021-09-14
Date of issue : 2021-09-15
Testing Laboratory : DongGuanShuoXin Electronic Technology Co., Ltd.
Address : Zone A, 1F, No. 6, XinGang Road YuanGang Street,
XinAn District, ChangAn Town, DongGuan City,
GuangDong, China

Applicant's name : Hui Zhou Gaoshengda Technology Co., LTD
Address : NO.75 Zhongkai Development Area, Huizhou,
Guangdong,China
Manufacturer : Hui Zhou Gaoshengda Technology Co., LTD

Equipment : WIFI+BT Module
Trade Mark : GSD
Model : DCT2CM2101
Ratings : I/P: DC 3.3V

Test Engineer:


Blue Qiu

Responsible Engineer :


Smile Wang

Authorized Signatory:



King Wang

Table of Contents	Page
1 . TEST REPORT DECLARE	4
2 . SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 TEST MODES	10
3.3PARAMETERS OF TEST SOFTWARE	13
3.4BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	15
3.5SUPPORT UNITS	15
3.6 TEST ENVIRONMENT CONDITIONS	15
3.7DUTY CYCLE	16
4 .AC POWER LINE CONDUCTED EMISSIONS TEST	17
4.1LIMIT	17
4.2 TEST PROCEDURE	17
4.3MEASUREMENT INSTRUMENTS LIST	17
4.4TESTSETUP	18
4.5EUT OPERATION CONDITIONS	18
4.6 TEST RESULTS	19
5 . RADIATED EMISSIONSTEST	21
5.1LIMIT	21
5.2TEST PROCEDURE	22
5.3MEASUREMENT INSTRUMENTS LIST	22
5.4TESTSETUP	23
5.5EUT OPERATION CONDITIONS	23
5.6TEST RESULTS - 9 KHZ to 30MHZ	24
5.7TEST RESULTS - 30 MHz TO 1000 MHz	25
5.8TEST RESULTS - ABOVE1000 MHz(BAND EDGE)	27
5.9TEST RESULTS - ABOVE1000 MHz (HARMONIC)	103
6 .BANDWIDTH TEST	199
6.1LIMIT	199
6.2TEST PROCEDURE AND SETTING	199
6.3MEASUREMENT INSTRUMENTS LIST	199
6.4TEST SETUP	200

Table of Contents	Page
6.5EUT OPERATION CONDITIONS	200
6.6 TEST RESULTS	201
7 .MAXIMUM OUTPUT POWER TEST	217
7.1LIMIT	217
7.2TEST PROCEDURE AND SETTING	217
7.3MEASUREMENT INSTRUMENTS LIST	217
7.4TEST SETUP	217
7.5EUT OPERATION CONDITIONS	217
7.6 TEST RESULTS	218
8 .POWER SPECTRAL DENSITY TEST	241
8.1LIMIT	241
8.2TEST PROCEDURE ANS SETTING	241
8.3MEASUREMENT INSTRUMENTS LIST	241
8.4TEST SETUP	241
8.5EUT OPERATION CONDITIONS	242
8.6 TEST RESULTS	242
9 .FREQUENCY STABILITY MEASUREMENT	267
9.1LIMIT	267
9.2TEST PROCEDURE AND SETTING	267
9.3MEASUREMENT INSTRUMENTS LIST	267
9.4TEST SETUP	267
9.5EUT OPERATION CONDITIONS	267
9.6 TEST RESULTS	268

1TEST REPORT DECLARE

Applicant	Hui Zhou Gaoshengda Technology Co., LTD
Address	NO.75 Zhongkai Development Area, Huizhou, Guangdong,China
Manufacturer	Hui Zhou Gaoshengda Technology Co., LTD
Address	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China
Factory	Hui Zhou Gaoshengda Technology Co., LTD
Address	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China
Equipment	WIFI+BT Module
Model No.	DCT2CM2101
Trade Mark	GSD
Standard	FCC Part15, Subpart E(15.407) RSS-247 Issue 2, Feb. 2017 RSS-Gen Issue 5, Apr. 2018 ANSI C63.10-2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

We Declare:

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

2SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207 15.407(b)	RSS-GEN 8.8	AC Power Line Conducted Emissions	PASS	-----
15.407(b) 15.205(a) 15.209(a)	RSS-247 6.2.1.2 RSS-247 6.2.4.2 RSS-GEN 8.9 RSS-GEN 8.10	Radiated Emissions	PASS	-----
15.407(a) 15.407(e)	RSS-247 6.2.1.1 RSS-247 6.2.2.1 RSS-247 6.2.3.1 RSS-247 6.2.4.1 RSS-GEN 6.7	Spectrum Bandwidth	PASS	-----
15.407(a)	RSS-247 6.2.1.1 RSS-247 6.2.2.1 RSS-247 6.2.3.1 RSS-247 6.2.4.1	Maximum Output Power	PASS	-----
15.407(a)	RSS-247 6.2.1.1 RSS-247 6.2.2.1 RSS-247 6.2.3.1 RSS-247 6.2.4.1	Power Spectral Density	PASS	-----
15.407(g)	RSS-GEN 6.11	Frequency Stability	PASS	-----
15.203	RSS-247 6.4(a)	Antenna Requirements	PASS	Note(4)
15.407(c)	RSS-GEN 8.8	Automatically Discontinue Transmission	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (3) For UNII-1 this device was functioned as a
 Access point device Client device
- (4) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	±0.048kHz
Uncertainty for conducted RF Power	±0.32dB

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test Facility:

The Test site used by DongGuan ShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2024-08-27
A2LA	4893.01	2022-06-30
Innovation, Science and Economic Development Canada (ISED)	11033A CAB identifier:CN0083	2022-06-30
Federal Communications Commission (FCC)	171688 Designation No.:CN1235	2022-06-30

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIFI+BT Module	
Brand Name	GSD	
Test Model	DCT2CM2101	
Series Model	N/A	
Model Difference(s)	N/A	
Hardware Version	V1.0	
Software Version	V1.0	
Power Source	Supplied from USB.	
Power Rating	DC 3.3V	
Operation Frequency Bands	UNII-1: 5150 MHz~5250 MHz UNII-2A: 5250MHz~5350 MHz UNII-2C:5470 MHz~5725 MHz UNII-3: 5725 MHz~5850 MHz	
Modulation Type	OFDM	
Bit Rate of Transmitter	Up to 866.6Mbps	
Operating Mode	IEEE 802.11a: 1TX(Ant 1 or Ant 2) IEEE 802.11n (HT20): 2TX(Ant 1+Ant 2) IEEE 802.11n (HT40): 2TX(Ant 1+Ant 2) IEEE 802.11ac (VHT20): 2TX(Ant 1+Ant 2) IEEE 802.11ac (VHT40): 2TX(Ant 1+Ant 2) IEEE 802.11ac (VHT80): 2TX(Ant 1+Ant 2)	
Antenna Information	Antenna Type: PIFA	Maximum Peak Gain:3dBi
Maximum Output Power for UNII-1 For FCC	IEEE 802.11a: 14.82dBm (0.0303W) IEEE 802.11n (HT20): 16.82dBm (0.0481 W) IEEE 802.11n (HT40): 16.70dBm (0.0468 W) IEEE 802.11ac (VHT20): 16.91dBm (0.0491 W) IEEE 802.11ac (VHT40): 16.51dBm (0.0448 W) IEEE 802.11ac (VHT80): 16.63dBm (0.0460 W)	
Maximum EIRP Output Power for UNII-1 For IC	IEEE 802.11a: 17.82dBm (0.0605W) IEEE 802.11n (HT20): 22.83dBm (0.1919 W) IEEE 802.11n (HT40): 22.71dBm (0.1866 W) IEEE 802.11ac (VHT20): 22.92dBm (0.1959 W) IEEE 802.11ac (VHT40): 22.52dBm (0.1786 W) IEEE 802.11ac (VHT80): 22.64dBm (0.1837 W)	
Maximum Output Power for UNII-2A UNII-2C	IEEE 802.11a: 14.91dBm (0.0310W) IEEE 802.11n (HT20): 16.88dBm (0.0488 W) IEEE 802.11n (HT40): 16.75dBm (0.0473) IEEE 802.11ac (VHT20): 16.92dBm (0.0492 W) IEEE 802.11ac (VHT40): 16.79dBm (0.0478 W) IEEE 802.11ac (VHT80): 16.75dBm (0.0473 W)	
Maximum Output Power for UNII-3	IEEE 802.11a: 14.95dBm (0.0313 W) IEEE 802.11n (HT20): 16.79dBm (0.0478 W) IEEE 802.11n (HT40): 16.78dBm (0.0476 W) IEEE 802.11ac (VHT20): 16.75dBm (0.0473 W) IEEE 802.11ac (VHT40): 16.85dBm (0.0484 W) IEEE 802.11ac (VHT80): 16.78dBm (0.0476 W)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. It is not open 5600MHz-5650MHz for Canada. And all test data in the 5600MHz-5650MHz range is FCC only

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N (HT40) Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC (VHT80) Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH120, CH140 (UNII-2C)
Mode 14	TX N (HT20) Mode / CH100, CH120, CH140 (UNII-2C)
Mode 15	TX N (HT40) Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC (VHT20) Mode / CH100, CH120, CH140 (UNII-2C)
Mode 17	TX AC (VHT40) Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 25	TX N(HT40) Mode / CH159 (UNII-3)

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 13	TX N(HT40) Mode / CH159 (UNII-3)

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 13	TX N(HT40) Mode / CH159 (UNII-3)

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N (HT40) Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC (VHT80) Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH120, CH140 (UNII-2C)
Mode 14	TX N (HT20) Mode / CH100, CH120, CH140 (UNII-2C)
Mode 15	TX N (HT40) Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC (VHT20) Mode / CH100, CH120, CH140 (UNII-2C)
Mode 17	TX AC (VHT40) Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT80) Mode / CH155 (UNII-3)

Conducted test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N (HT40) Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC (VHT80) Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH120, CH140 (UNII-2C)
Mode 14	TX N (HT20) Mode / CH100, CH120, CH140 (UNII-2C)
Mode 15	TX N (HT40) Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC (VHT20) Mode / CH100, CH120, CH140 (UNII-2C)
Mode 17	TX AC (VHT40) Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC (VHT80) Mode / CH155 (UNII-3)

Note:

- (1) For radiated emission below 1 GHz and AC power line conducted emissions test, the IEEE 802.11n40channel 38is found to be the worst case and recorded.

3.3PARAMETERS OF TEST SOFTWARE


UNII-1			
Test Software	MT7663QA		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	20	21	20
IEEE 802.11n (HT20)	1D	1E	1D
IEEE 802.11ac (VHT20)	24	24	23
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	21	21	
IEEE 802.11ac (VHT40)	22	22	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	22		

UNII-2A			
Test Software	MT7663QA		
Test Frequency (MHz)	5260	5300	5320
IEEE 802.11a	20	20	20
IEEE 802.11n (HT20)	1D	1D	1D
IEEE 802.11ac (VHT20)	23	23	24
Test Frequency (MHz)	5270	5310	
IEEE 802.11n (HT40)	21	21	
IEEE 802.11ac (VHT40)	22	22	
Test Frequency (MHz)	5290		
IEEE 802.11ac (VHT80)	22		

UNII-2C			
Test Software	MT7663QA		
Test Frequency (MHz)	5500	5600	5700
IEEE 802.11a	20	20	1F
IEEE 802.11n (HT20)	1D	1D	1D
IEEE 802.11ac (VHT20)	23	23	22
Test Frequency (MHz)	5510	5550	5670
IEEE 802.11n (HT40)	20	20	20
IEEE 802.11ac (VHT40)	21	21	21
Test Frequency (MHz)	5530	5610	
IEEE 802.11ac (VHT80)	22	21	

UNII-3			
Test Software	MT7663QA		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	1F	20	20
IEEE 802.11n (HT20)	1C	1D	1D
IEEE 802.11ac (VHT20)	22	23	23
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	20	20	
IEEE 802.11ac (VHT40)	20	21	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	2A		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

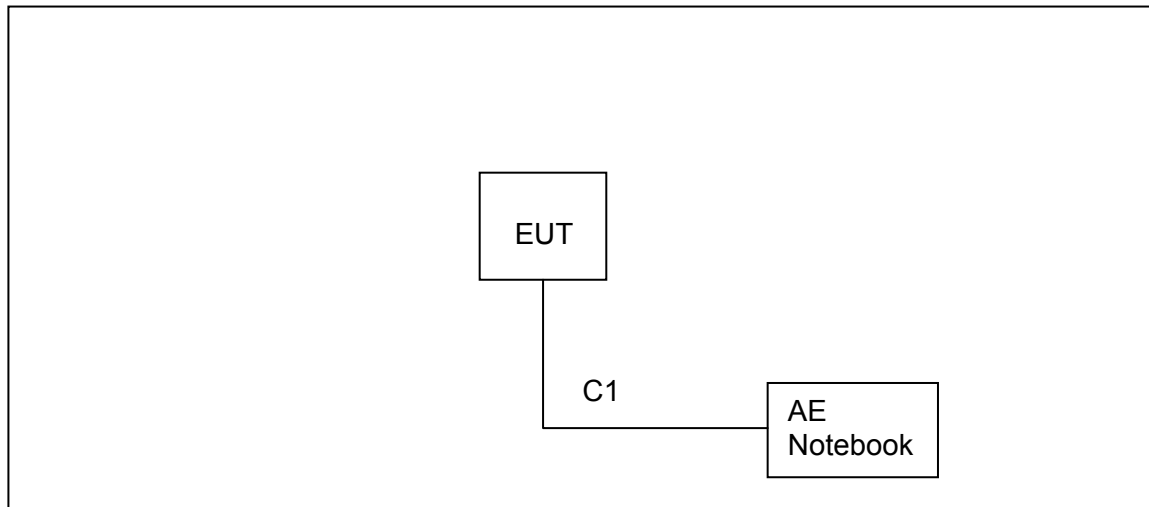

3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Notebook	ACER	MS2367	32807810766

Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	DC Cable	NO	NO	1m

3.6 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	DC 3.3V
Radiated Emissions-9K-30MHz	25°C	60%	DC 3.3V
Radiated Emissions-30 MHz to 1GHz	24°C	68%	DC 3.3V
Radiated Emissions-Above 1000 MHz	24°C	68%	DC 3.3V
Spectrum Bandwidth	25.3°C	44.8%	DC 3.3V
Maximum Output Power	25.3°C	44.8%	DC 3.3V
Power Spectral Density	25.3°C	44.8%	DC 3.3V
Frequency Stability	Normal, Extreme	44.8%	Normal, Extreme

3.7 DUTY CYCLE

All tests were performed under the condition of 100% Duty Cycle

NOTE:

For IEEE 802.11a, IEEE 802.11n (HT20) and IEEE 802.11ac (VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40) and IEEE 802.11ac (VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

4.AC POWER LINE CONDUCTED EMISSIONS TEST

4.1LIMIT

Frequency (MHz)	Limit (dBµV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

4.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/11/2021
2	EMI Test Receiver	R&S	ESCI	101308	12/12/2021
3	LISN	AFJ	LS16	16011103219	06/09/2022
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/11/2021
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

4.4 TEST SETUP

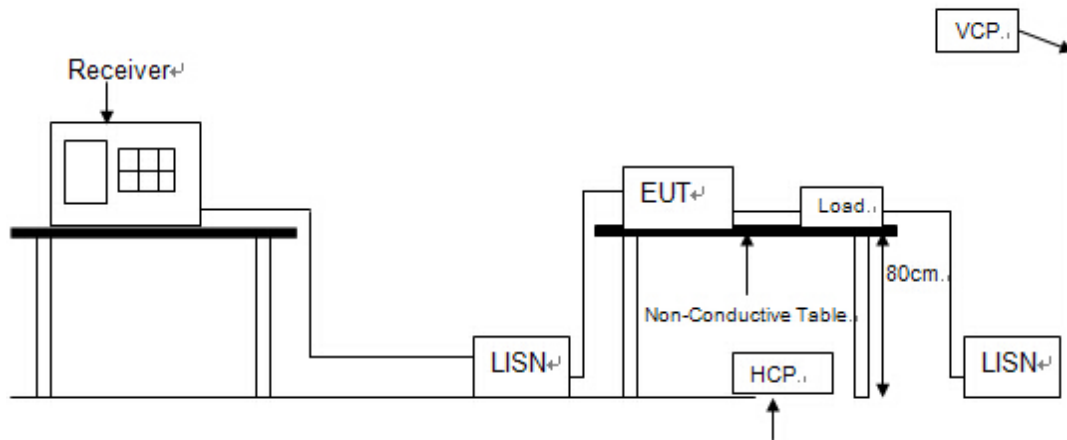


4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Test Mode: TX N(HT40) Mode / CH159 (UNII-3)

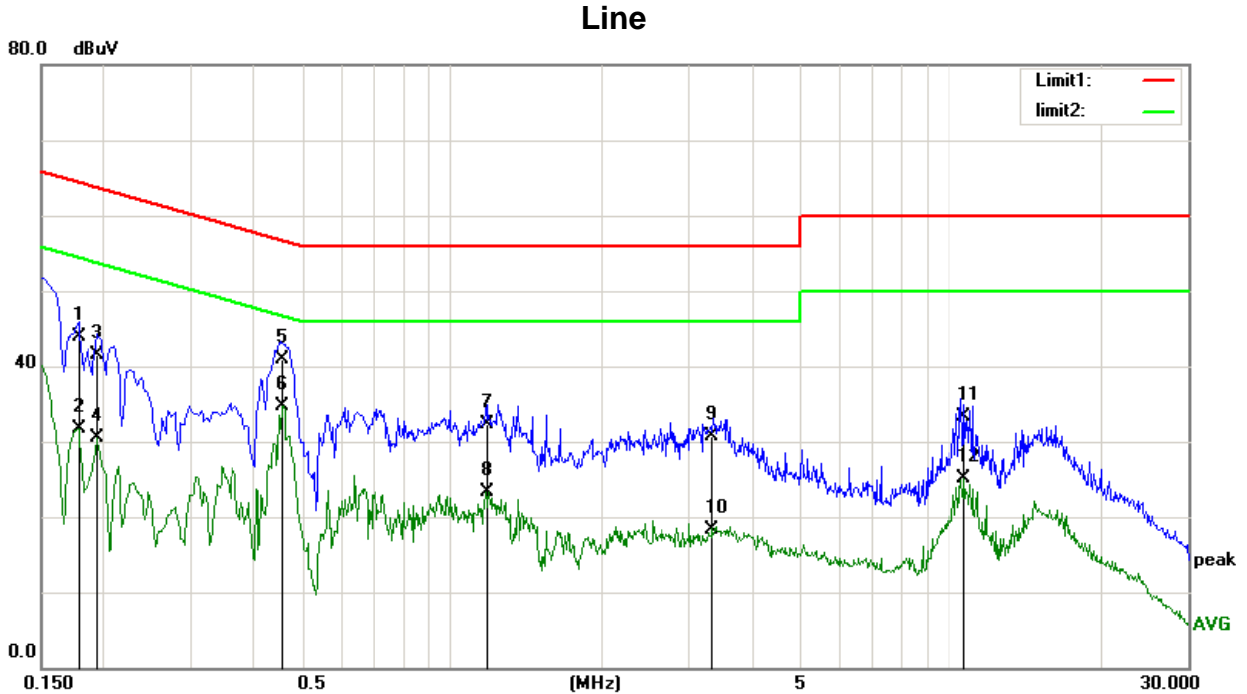


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1780	32.63	11.34	43.97	64.57	-20.60	QP
2	0.1780	20.37	11.34	31.71	54.57	-22.86	AVG
3	0.1940	30.19	11.23	41.42	63.86	-22.44	QP
4	0.1940	19.23	11.23	30.46	53.86	-23.40	AVG
5	0.4580	30.49	10.33	40.82	56.73	-15.91	QP
6	0.4580	24.46	10.33	34.79	46.73	-11.94	AVG
7	1.1700	22.08	10.21	32.29	56.00	-23.71	QP
8	1.1700	13.11	10.21	23.32	46.00	-22.68	AVG
9	3.3420	20.56	10.23	30.79	56.00	-25.21	QP
10	3.3420	8.17	10.23	18.40	46.00	-27.60	AVG
11	10.6979	23.15	10.20	33.35	60.00	-26.65	QP
12	10.6979	14.81	10.20	25.01	50.00	-24.99	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N(HT40) Mode / CH159 (UNII-3)

Neutral

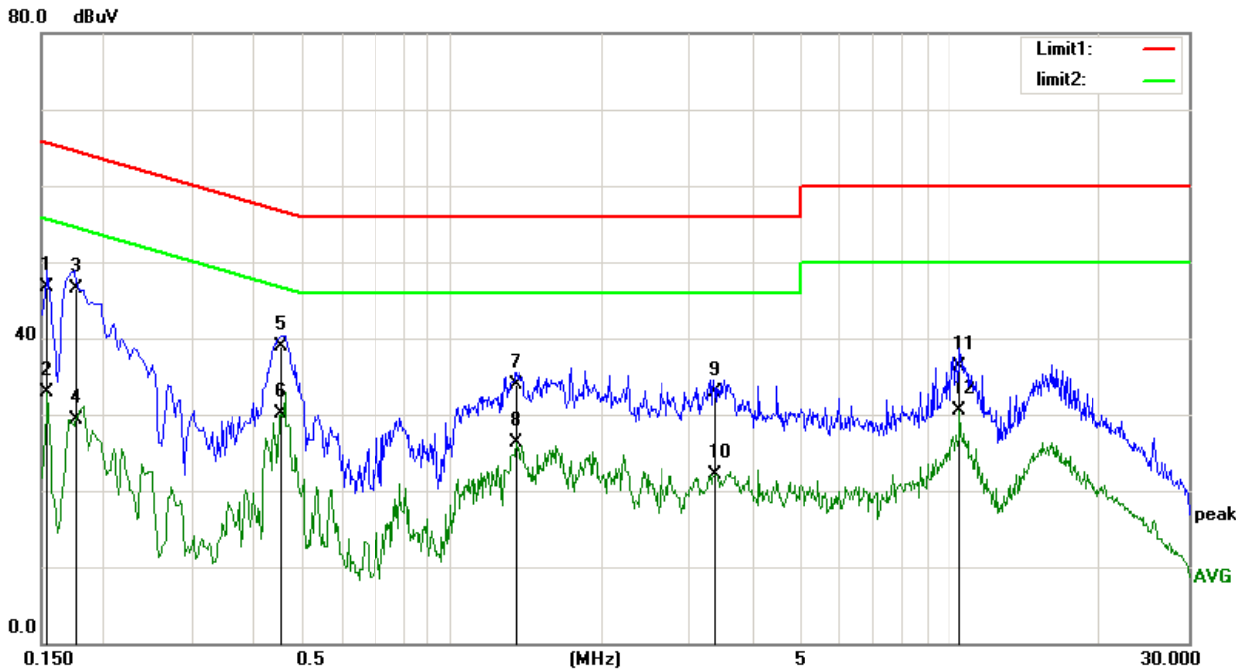

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	35.20	11.50	46.70	65.78	-19.08	QP
2	0.1539	21.50	11.50	33.00	55.78	-22.78	AVG
3	0.1758	35.19	11.35	46.54	64.68	-18.14	QP
4	0.1758	17.97	11.35	29.32	54.68	-25.36	AVG
5	0.4540	28.66	10.34	39.00	56.80	-17.80	QP
6	0.4540	19.82	10.34	30.16	46.80	-16.64	AVG
7	1.3500	23.61	10.21	33.82	56.00	-22.18	QP
8	1.3500	16.03	10.21	26.24	46.00	-19.76	AVG
9	3.3780	22.72	10.23	32.95	56.00	-23.05	QP
10	3.3780	11.93	10.23	22.16	46.00	-23.84	AVG
11	10.4938	26.08	10.20	36.28	60.00	-23.72	QP
12	10.4938	20.21	10.20	30.41	50.00	-19.59	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

5. RADIATED EMISSIONSTEST

5.1LIMIT

In case the emission fall within the restricted band specified on 15.205(a)&RSS-Gen 8.10, then the 15.209(a)&RSS-Gen 8.9 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 Note(2)	68.3
	10 Note(2)	105.3
	15.6 Note(2)	110.9
	27 Note(2)	122.3

Note:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

(3) Radiation larger than 26.5GHz is background, so the following data only measures the maximum 26.5GHz

(4) Duty Cycle compensation less than 98% has been compensated in the test software prior to the implementation of the test

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
 - (1) Result = Reading + Correct Factor
 - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
 - (3) Margin = Result - Limit

5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	12/12/2021
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/17/2021
3	Spectrum Analyzer	R&S	FSP	1164.4391.38	06/01/2022
4	Loop antenna	SCHWARZBECK	FMZB1519	1519-062	12/14/2021
5	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	08/06/2021
6	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/21/2022
7	DRG Horn Antenna	A.H. Systems	SAS-574	588	06/01/2022
8	Preamplifier Amplifier	HP	8447F	3113A05680	12/11/2021
9	Preamplifier Amplifier	Aeroflex	33711-392-77150-11	97	06/01/2022
10	PRE-AMPLIFIER	CY	EMC011830	980136	12/11/2021
11	RF Cable	R&S	Test Cable 4	4	12/11/2021
12	RF Cable	R&S	Test Cable 5	5	12/11/2021
13	RF Cable	R&S	Test Cable 9	9	04/21/2022
14	RF Cable	R&S	Test Cable 10	10	12/11/2021
15	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

5.4 TEST SETUP


9 kHz to 30 MHz

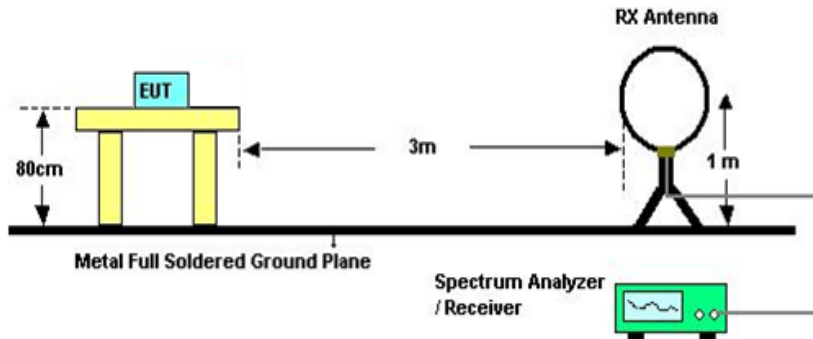

30 MHz to 1 GHz

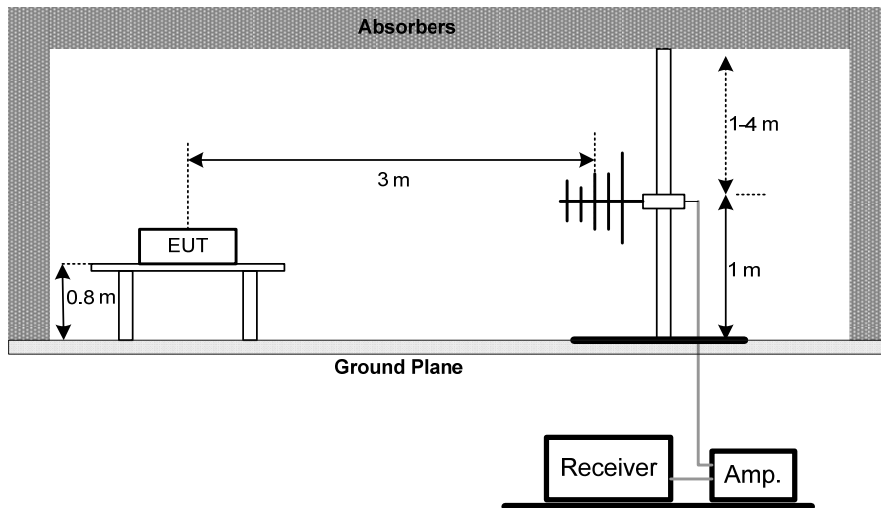

Above 1 GHz

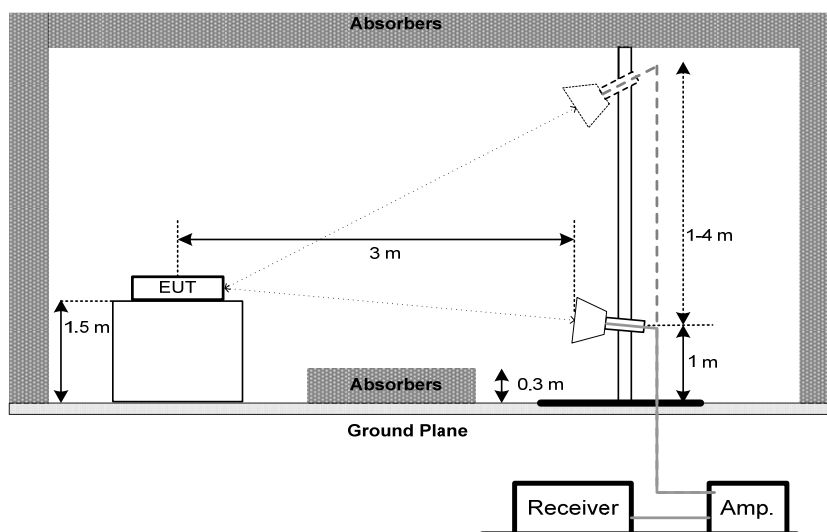

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ to 30MHZ

Test Mode:	TX N(HT40) Mode / CH159 (UNII-3)
------------	----------------------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $20 \log(\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

5.7 TEST RESULTS - 30 MHz TO 1000 MHz

Test Mode: TX N(HT40) Mode / CH159 (UNII-3)


Vertical

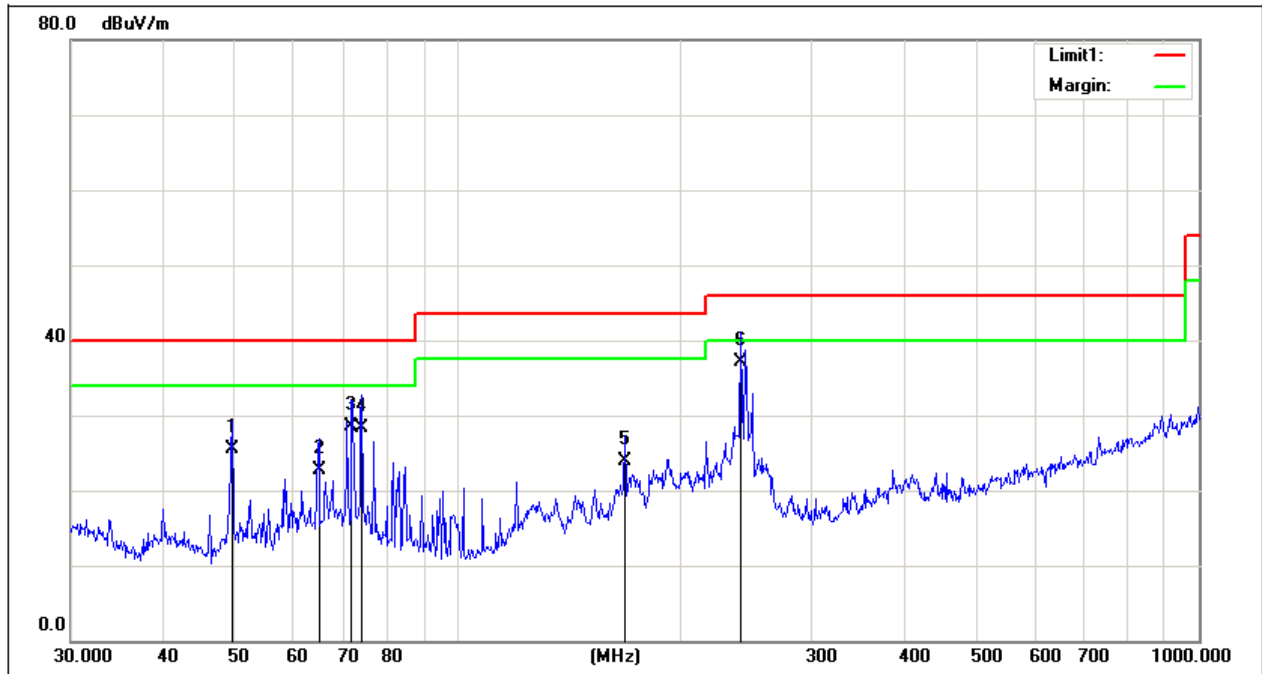

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.5328	38.65	-13.20	25.45	40.00	-14.55	QP
2	64.8863	35.07	-12.42	22.65	40.00	-17.35	QP
3	71.8319	43.23	-14.78	28.45	40.00	-11.55	QP
4	74.1351	43.06	-14.71	28.35	40.00	-11.65	QP
5	167.8240	34.44	-10.48	23.96	43.50	-19.54	QP
6	240.8301	45.34	-8.18	37.16	46.00	-8.84	QP

Test Mode: TX N(HT40) Mode / CH159 (UNII-3)

Horizontal

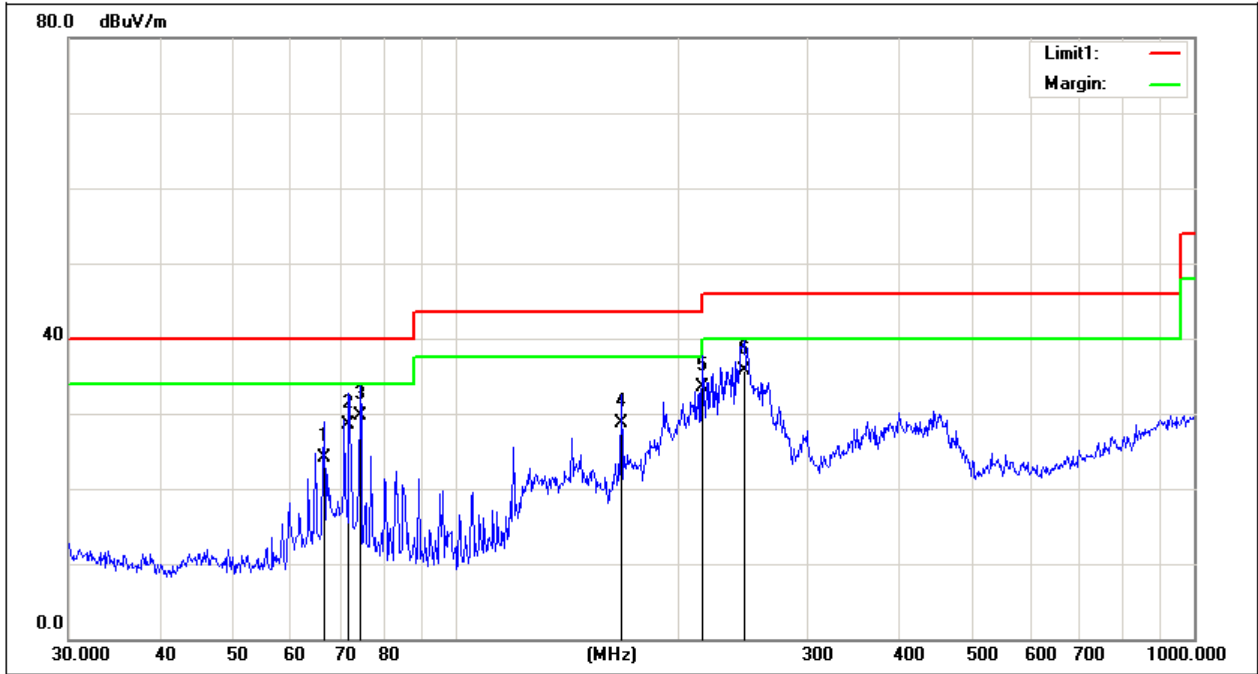


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.4989	39.69	-15.54	24.15	40.00	-15.85	QP
2	71.8320	44.71	-16.15	28.56	40.00	-11.44	QP
3	74.3955	46.34	-16.59	29.75	40.00	-10.25	QP
4	167.8240	39.56	-10.91	28.65	43.50	-14.85	QP
5	216.0240	42.89	-9.38	33.51	46.00	-12.49	QP
6	246.8149	41.85	-6.11	35.74	46.00	-10.26	QP

5.8TEST RESULTS - ABOVE1000 MHz(BAND EDGE)

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz


Vertical

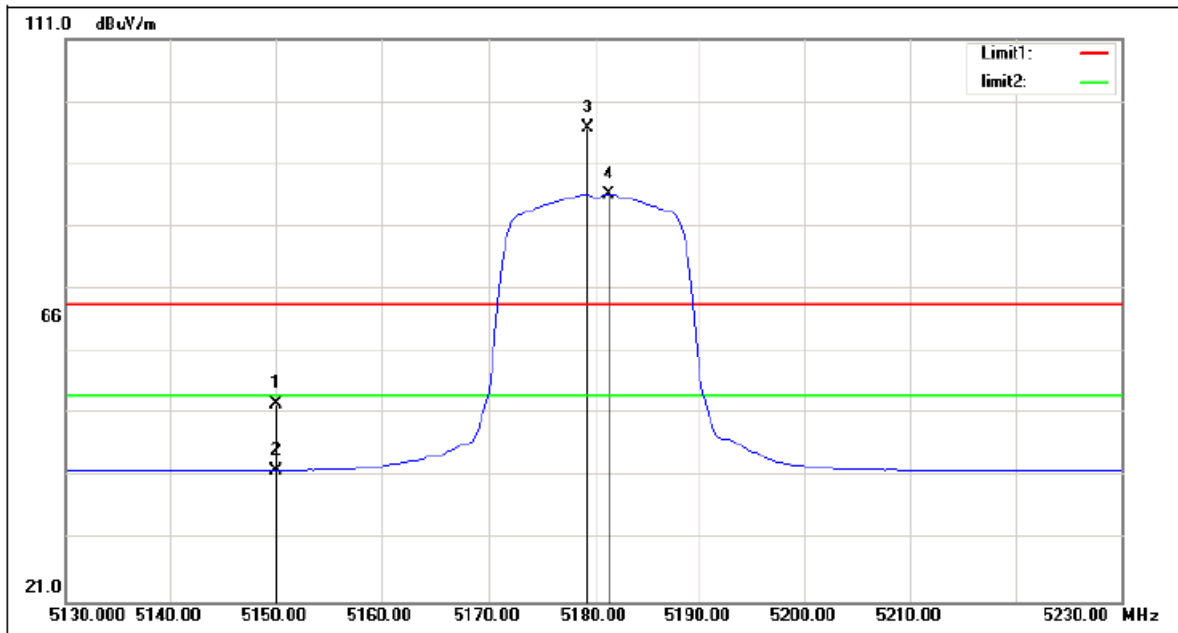

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	19.45	33.20	52.65	68.30	-15.65	peak
2	5150.000	8.89	33.20	42.09	54.00	-11.91	AVG
3	5179.250	63.41	33.27	96.68	/	/	peak
4	5181.250	52.94	33.27	86.21	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz


Horizontal

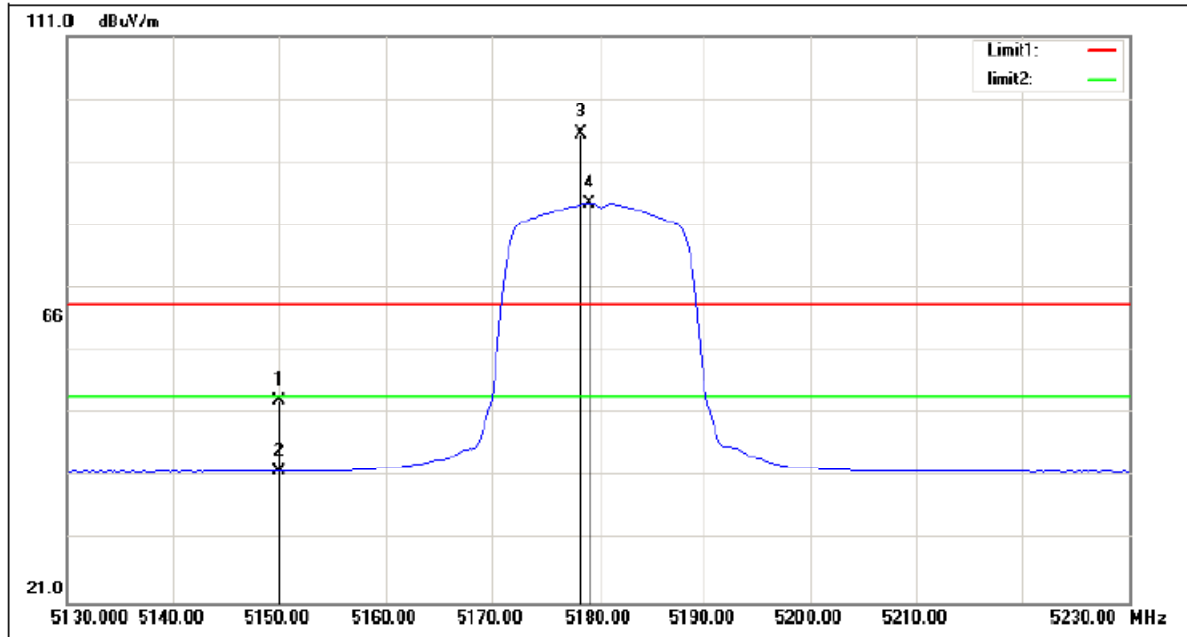

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	19.98	33.20	53.18	68.30	-15.12	peak
2	5150.000	8.81	33.20	42.01	54.00	-11.99	AVG
3	5178.250	62.32	33.27	95.59	/	/	peak
4	5179.000	51.34	33.27	84.61	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz


Vertical

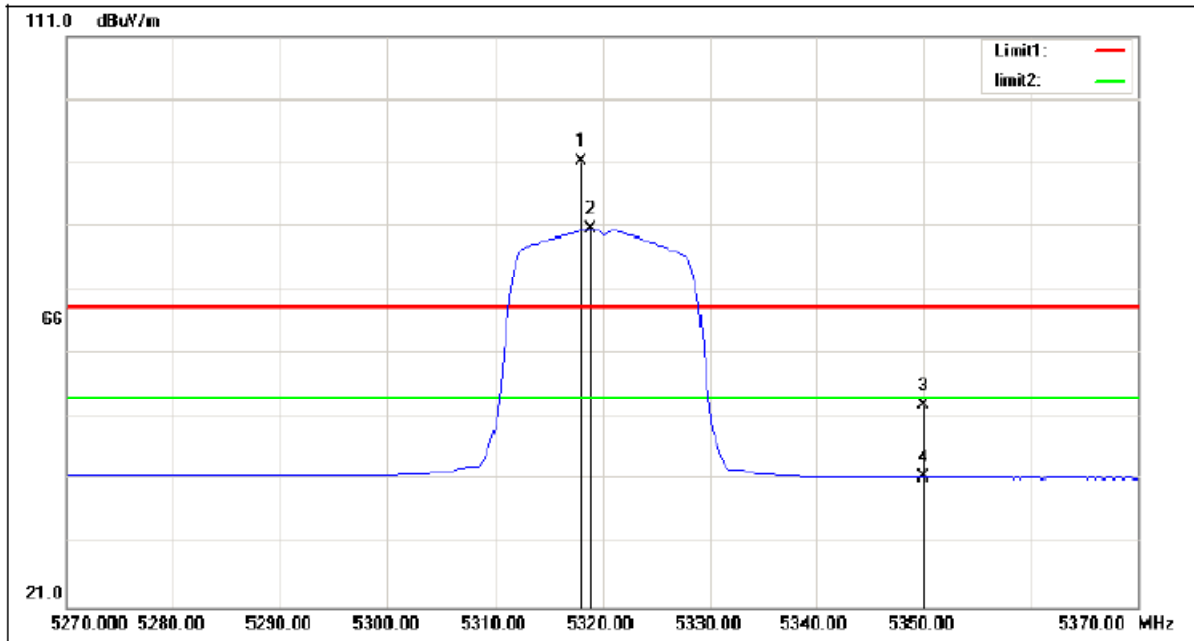

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.000	57.56	33.60	91.16	/	/	peak
2	5319.000	46.80	33.61	80.41	/	/	AVG
3	5350.000	19.12	33.68	52.80	68.30	-15.50	peak
4	5350.000	7.87	33.68	41.55	54.00	-12.45	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz


Horizontal

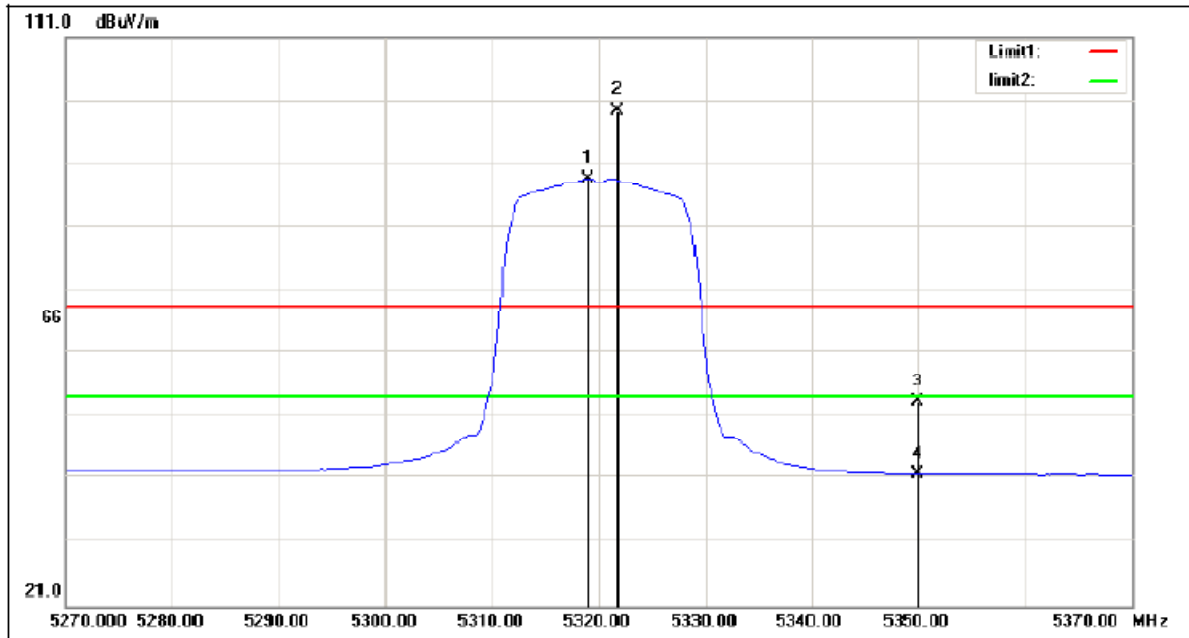

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.000	54.98	33.61	88.59	/	/	AVG
2	5321.750	65.87	33.61	99.48	/	/	peak
3	5350.000	19.52	33.68	53.20	68.30	-15.10	peak
4	5350.000	8.17	33.68	41.85	54.00	-12.15	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz


Vertical

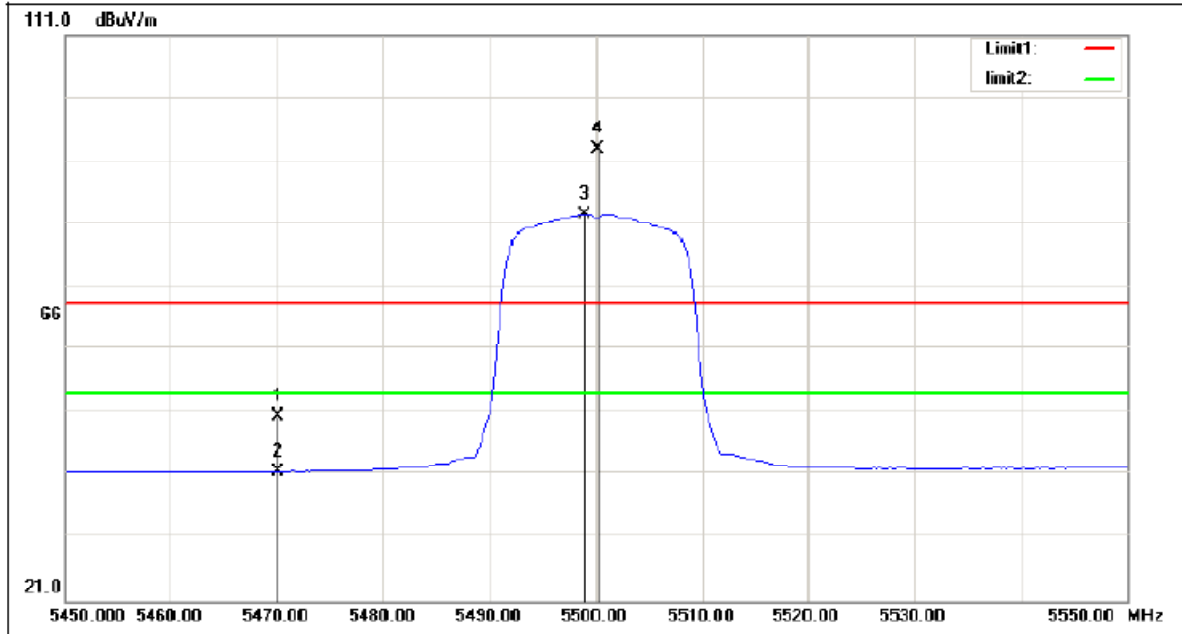

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	16.41	33.98	50.39	68.30	-17.91	peak
2	5470.000	7.69	33.98	41.67	54.00	-12.33	AVG
3	5499.000	48.59	34.05	82.64	/	/	AVG
4	5500.250	58.84	34.05	92.89	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5500 MHz


Horizontal

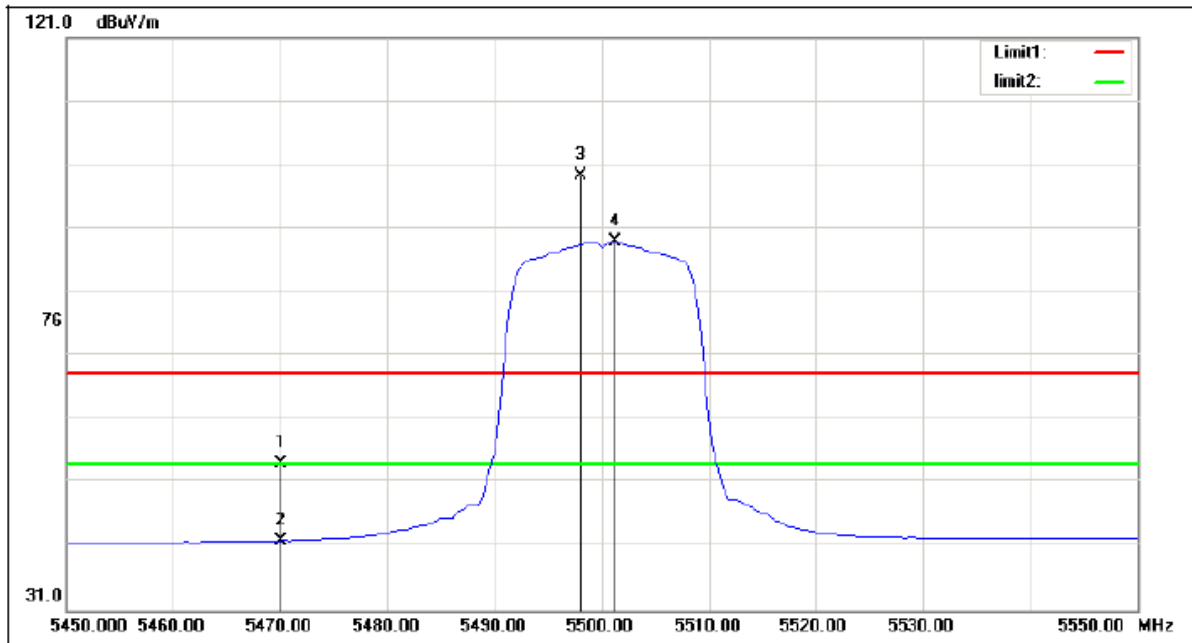

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	20.18	33.98	54.16	68.30	-14.14	peak
2	5470.000	8.03	33.98	42.01	54.00	-11.99	AVG
3	5498.000	65.23	34.05	99.28	/	/	peak
4	5501.250	54.79	34.05	88.84	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz


Vertical

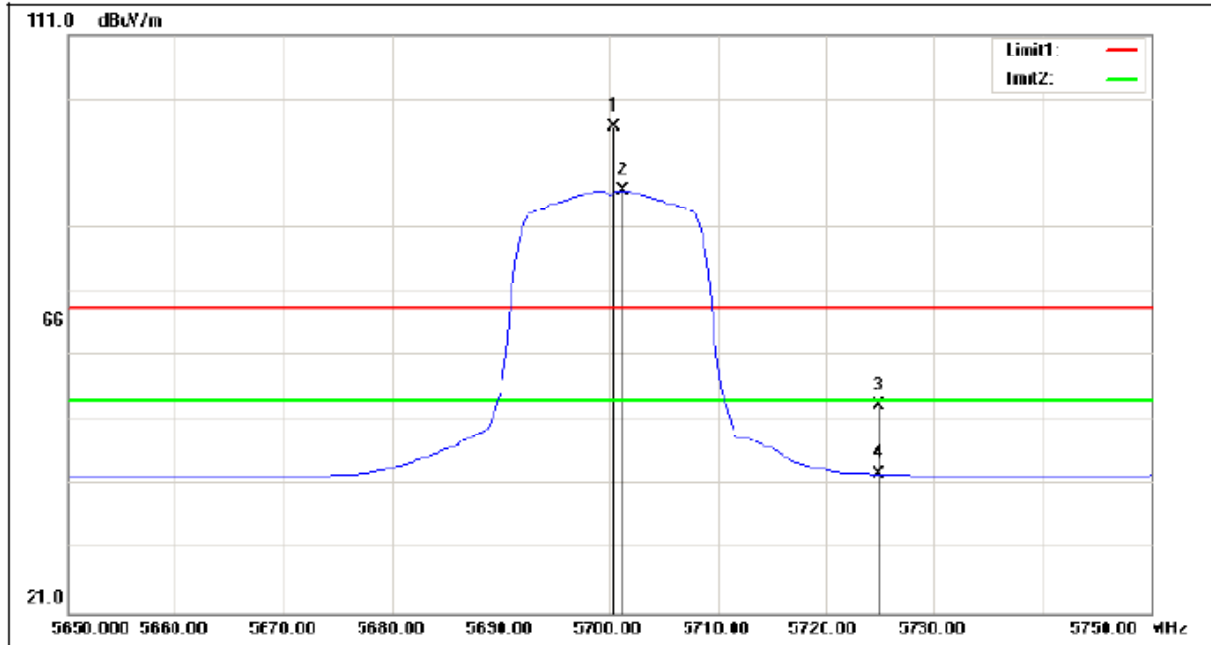

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.500	62.76	33.90	96.66	/	/	peak
2	5701.250	52.98	33.90	86.88	/	/	AVG
3	5725.000	19.43	33.88	53.31	68.30	-14.99	peak
4	5725.000	8.83	33.88	42.71	54.00	-11.29	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5700 MHz


Horizontal

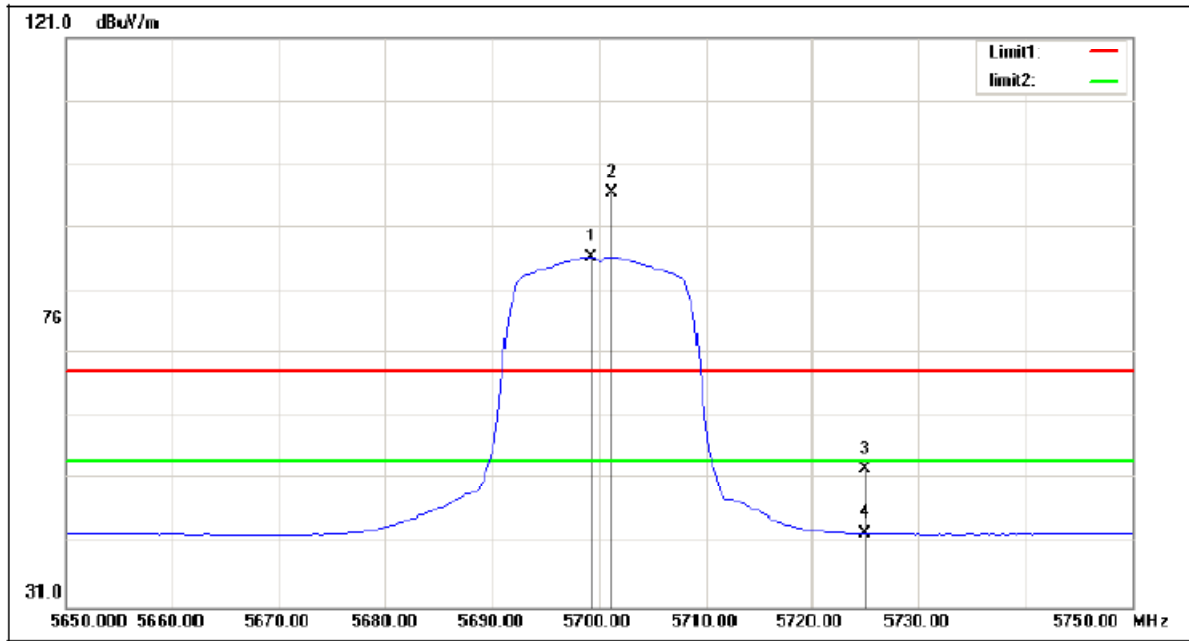

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5699.250	52.43	33.90	86.33	/	/	AVG
2	5701.250	62.50	33.90	96.40	/	/	peak
3	5725.000	18.89	33.88	52.77	68.30	-15.53	peak
4	5725.000	8.69	33.88	42.57	54.00	-11.43	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz


Vertical

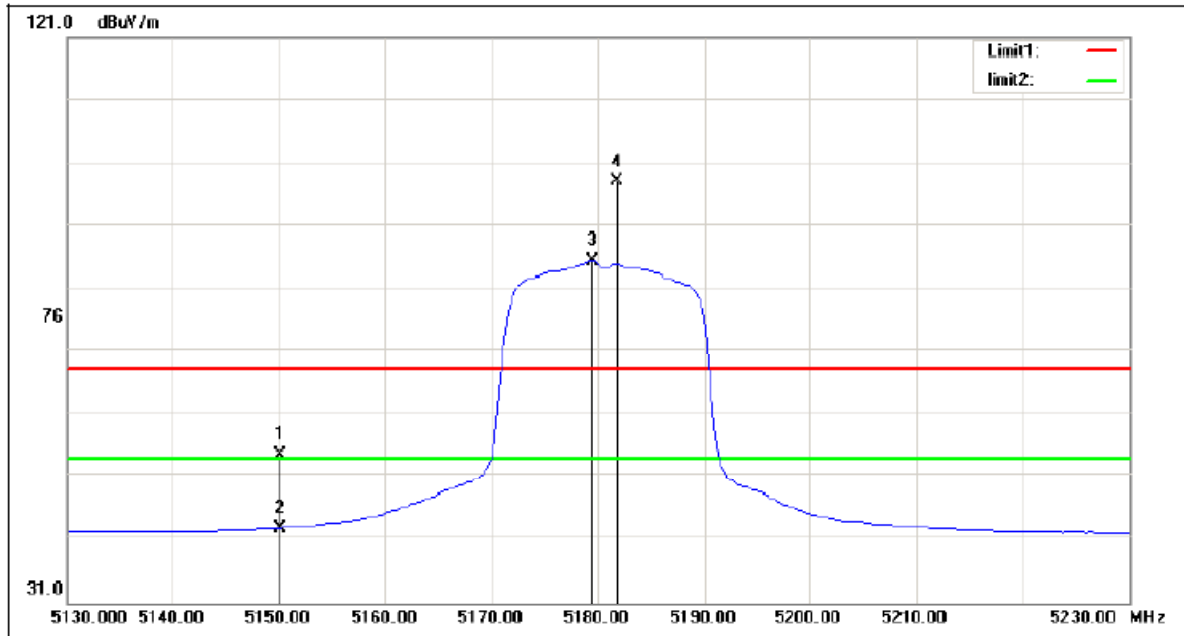

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	21.33	33.20	54.53	68.30	-13.77	peak
2	5150.000	9.69	33.20	42.89	54.00	-11.11	AVG
3	5179.500	52.04	33.27	85.31	/	/	AVG
4	5181.750	64.71	33.28	97.99	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz


Horizontal

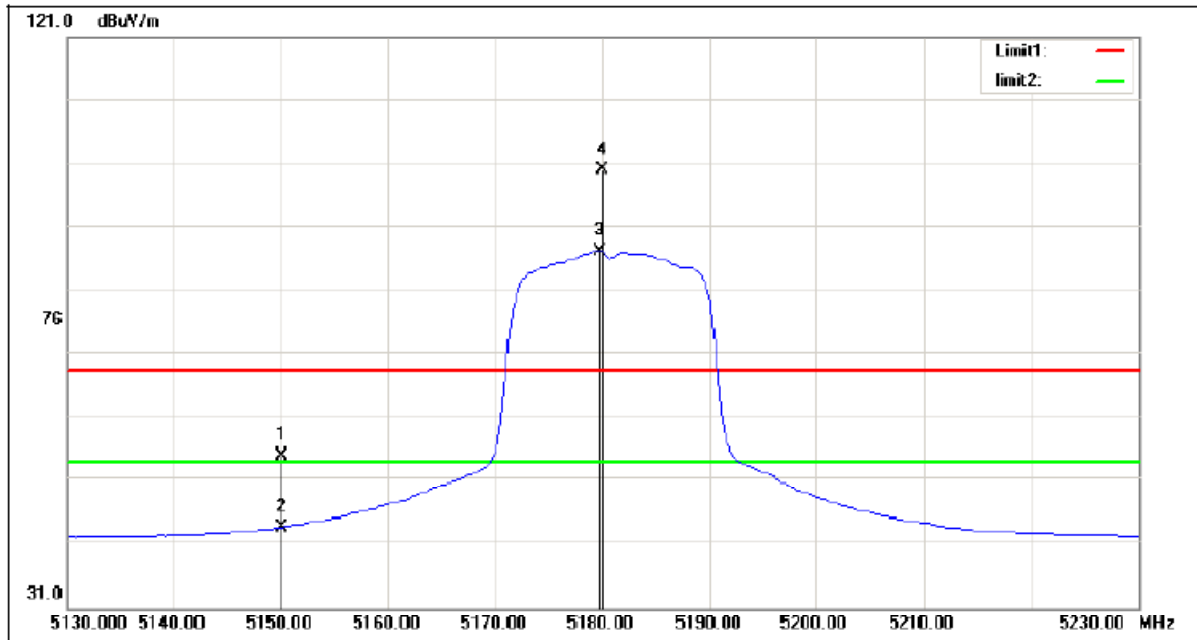

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	21.85	33.20	55.05	68.30	-13.25	peak
2	5150.000	10.53	33.20	43.73	54.00	-10.27	AVG
3	5179.750	53.94	33.27	87.21	/	/	AVG
4	5180.000	66.72	33.27	99.99	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz


Vertical

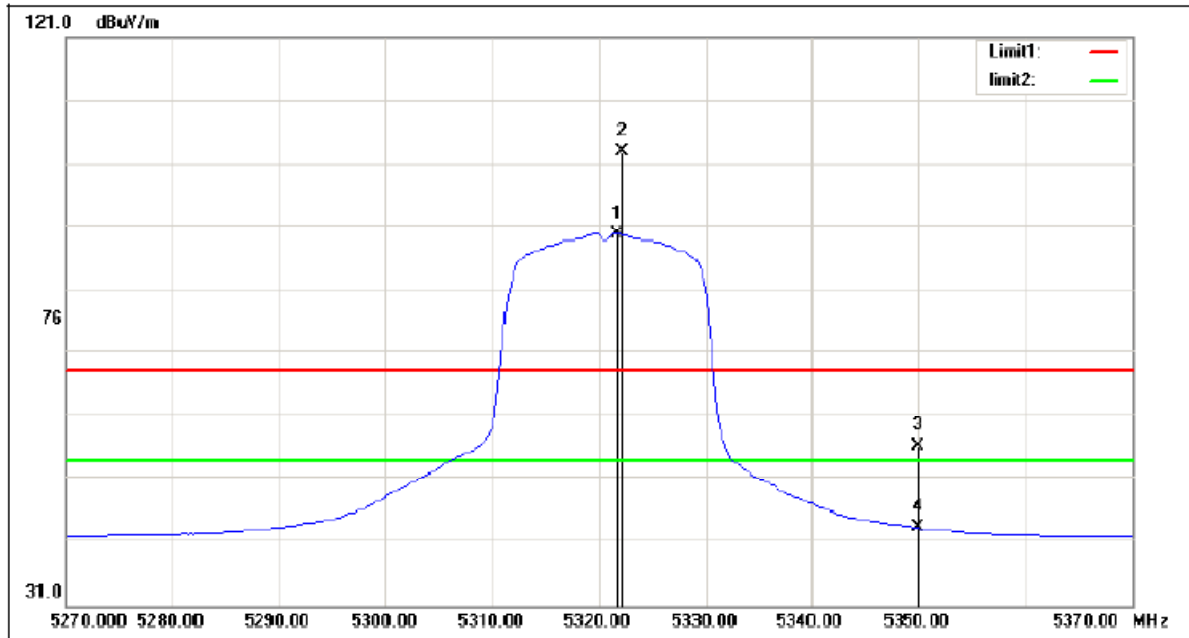

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.750	56.21	33.61	89.82	/	/	AVG
2	5322.250	69.28	33.61	102.89	/	/	peak
3	5350.000	22.60	33.68	56.28	68.30	-12.02	peak
4	5350.000	9.72	33.68	43.40	54.00	-10.60	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz


Horizontal

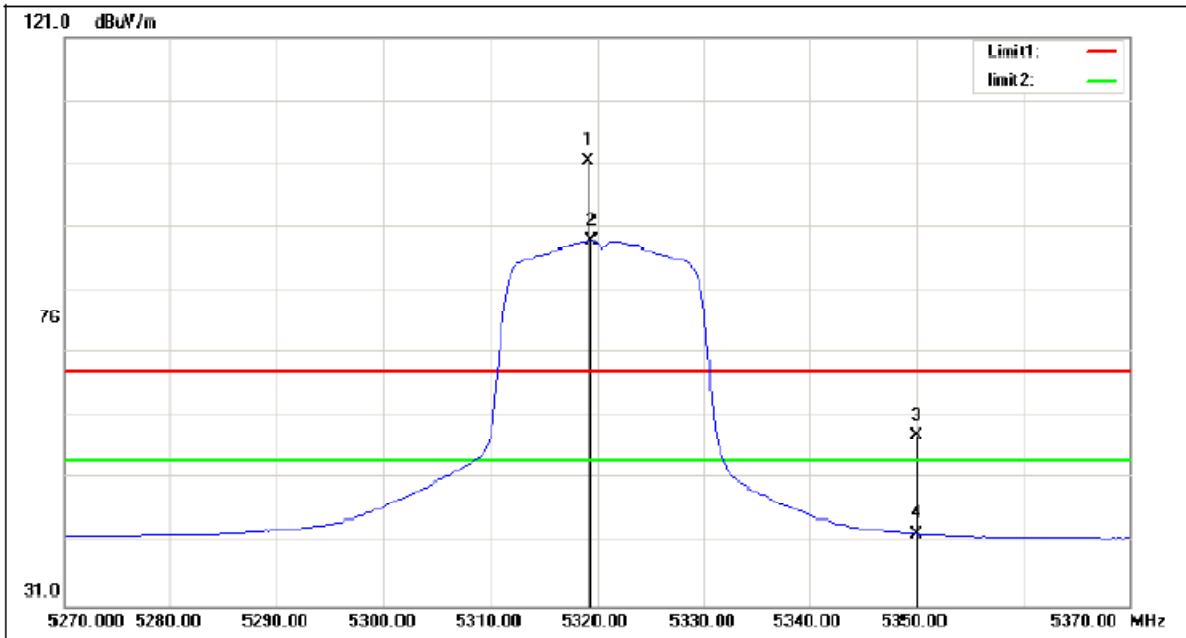

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.250	67.63	33.61	101.24	/	/	peak
2	5319.500	55.03	33.61	88.64	/	/	AVG
3	5350.000	24.28	33.68	57.96	68.30	-10.34	peak
4	5350.000	8.77	33.68	42.45	54.00	-11.55	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz


Vertical

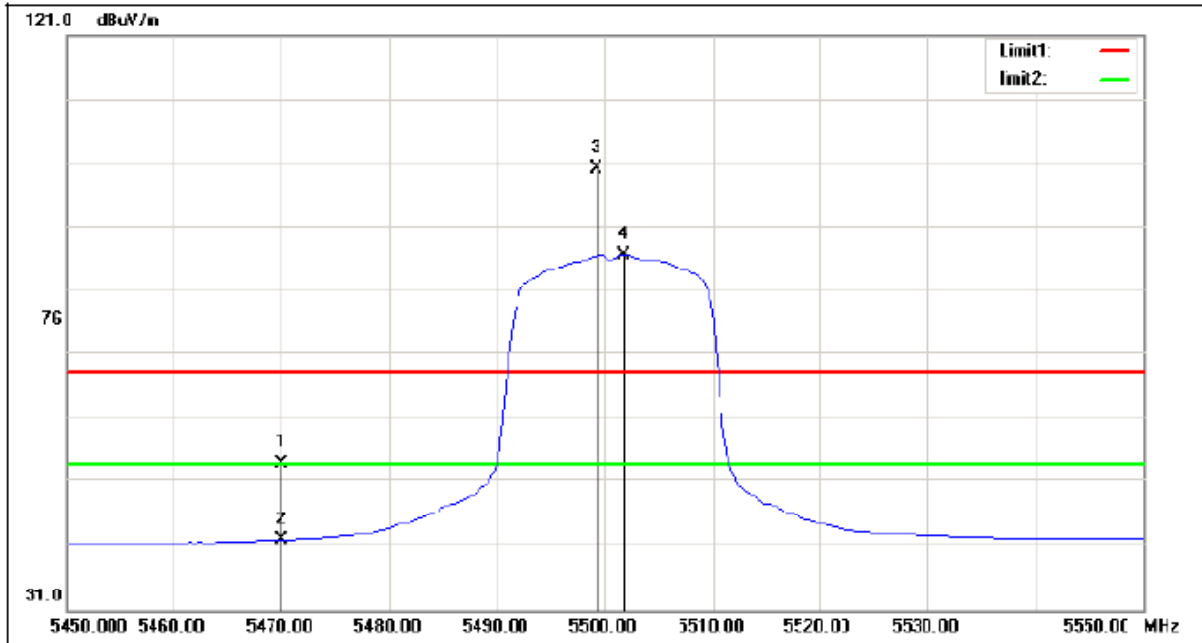

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	20.06	33.98	54.04	68.30	-14.26	peak
2	5470.000	8.16	33.98	42.14	54.00	-11.86	AVG
3	5499.250	66.22	34.05	100.27	/	/	peak
4	5501.750	52.61	34.05	86.66	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz


Horizontal

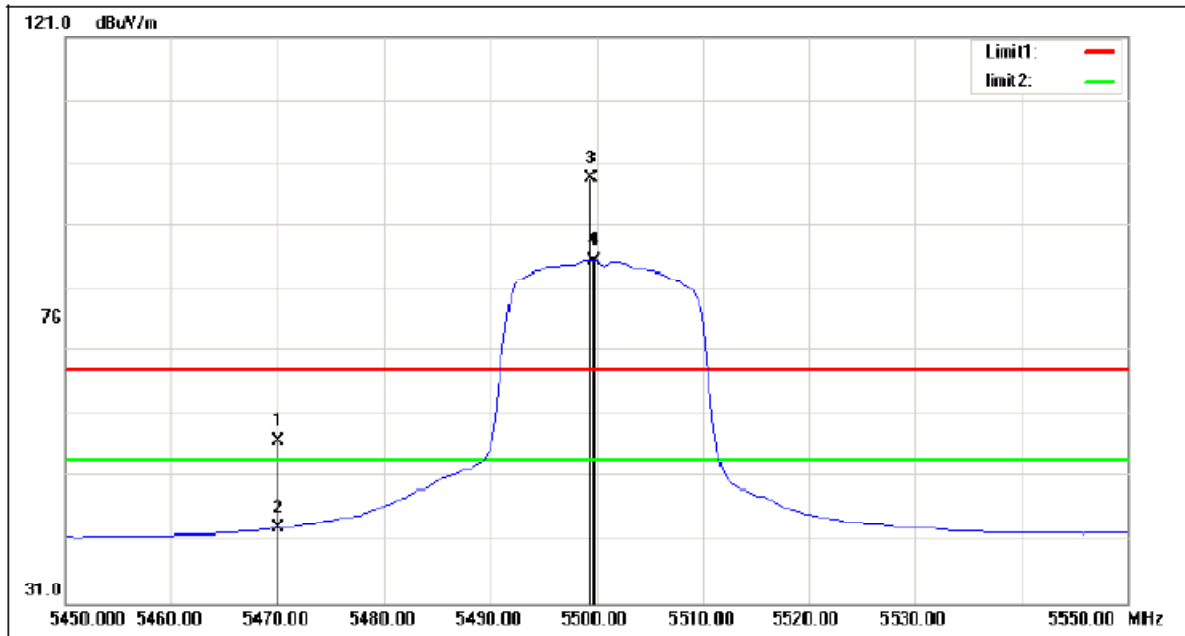

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	22.68	33.98	56.66	68.30	-11.64	peak
2	5470.000	9.08	33.98	43.06	54.00	-10.94	AVG
3	5499.500	64.55	34.05	98.60	/	/	peak
4	5499.750	51.59	34.05	85.64	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz


Vertical

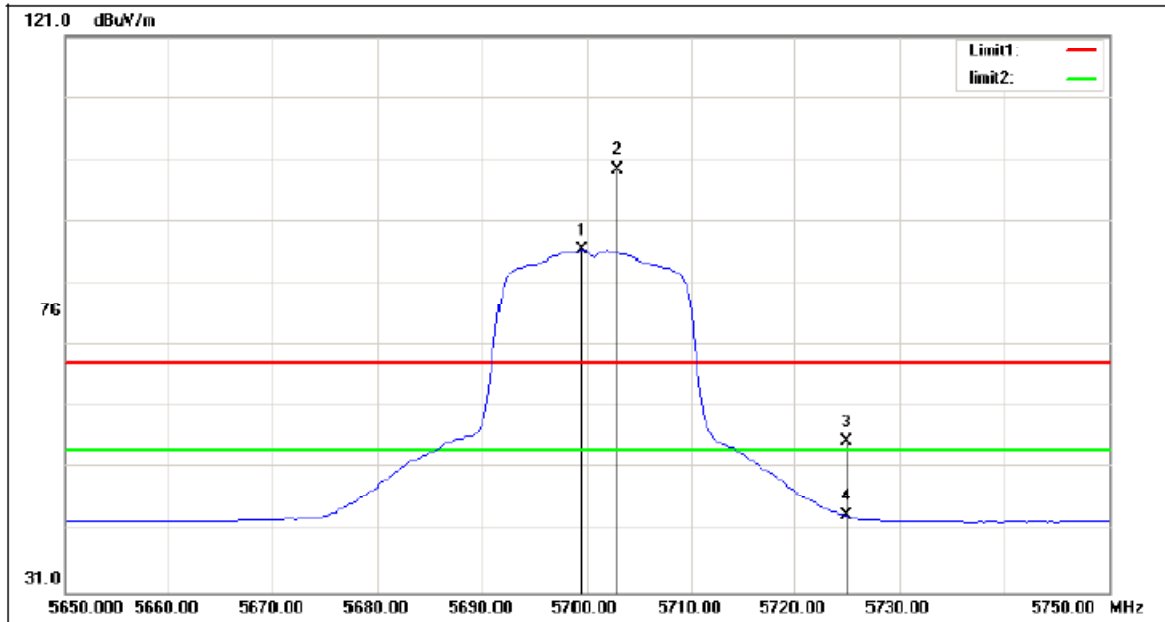

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5699.500	52.27	33.90	86.17	/	/	AVG
2	5703.000	65.49	33.90	99.39	/	/	peak
3	5725.000	21.60	33.88	55.48	68.30	-12.82	peak
4	5725.000	9.50	33.88	43.38	54.00	-10.62	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz


Horizontal

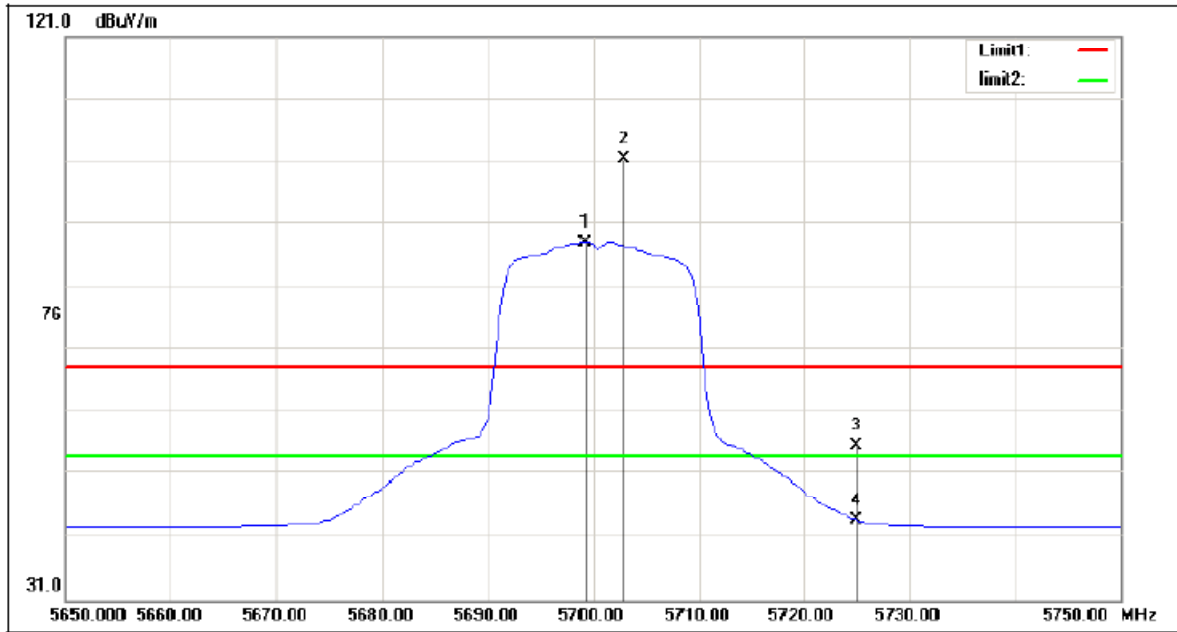

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5699.250	54.12	33.90	88.02	/	/	AVG
2	5703.000	67.46	33.90	101.36	/	/	peak
3	5725.000	21.74	33.88	55.62	68.30	-12.68	peak
4	5725.000	9.85	33.88	43.73	54.00	-10.27	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz


Vertical

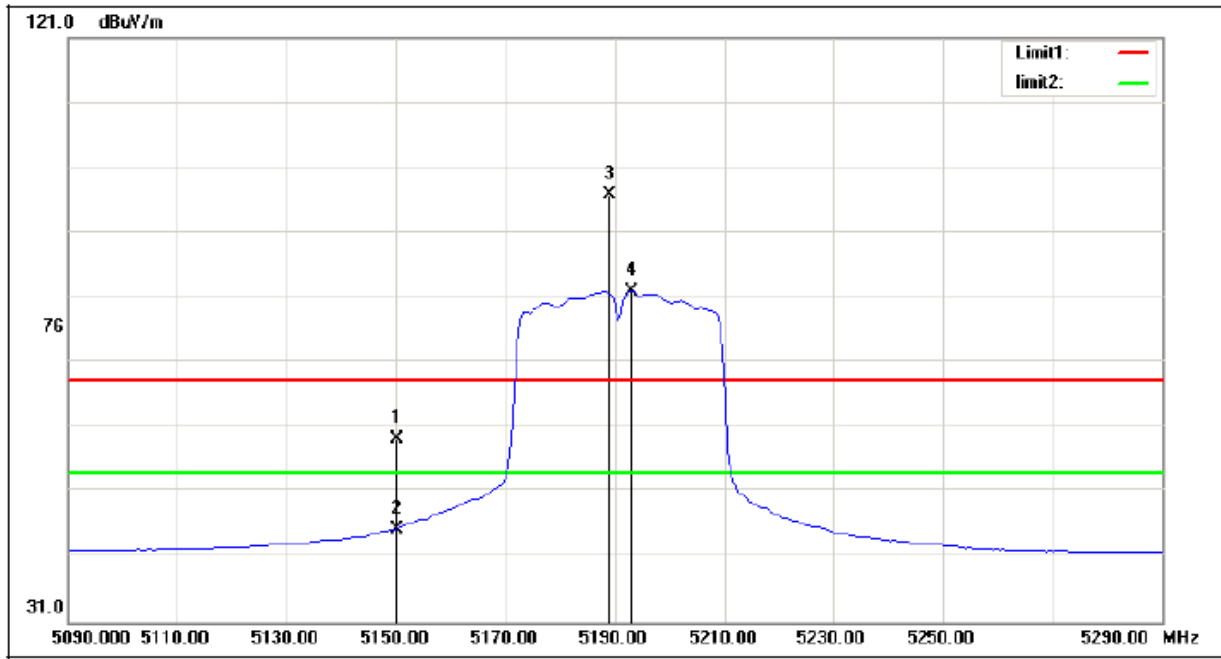

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	25.94	33.20	59.14	68.30	-9.16	peak
2	5150.000	12.18	33.20	45.38	54.00	-8.62	AVG
3	5189.000	63.58	33.29	96.87	/	/	peak
4	5193.000	48.65	33.30	81.95	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz


Horizontal

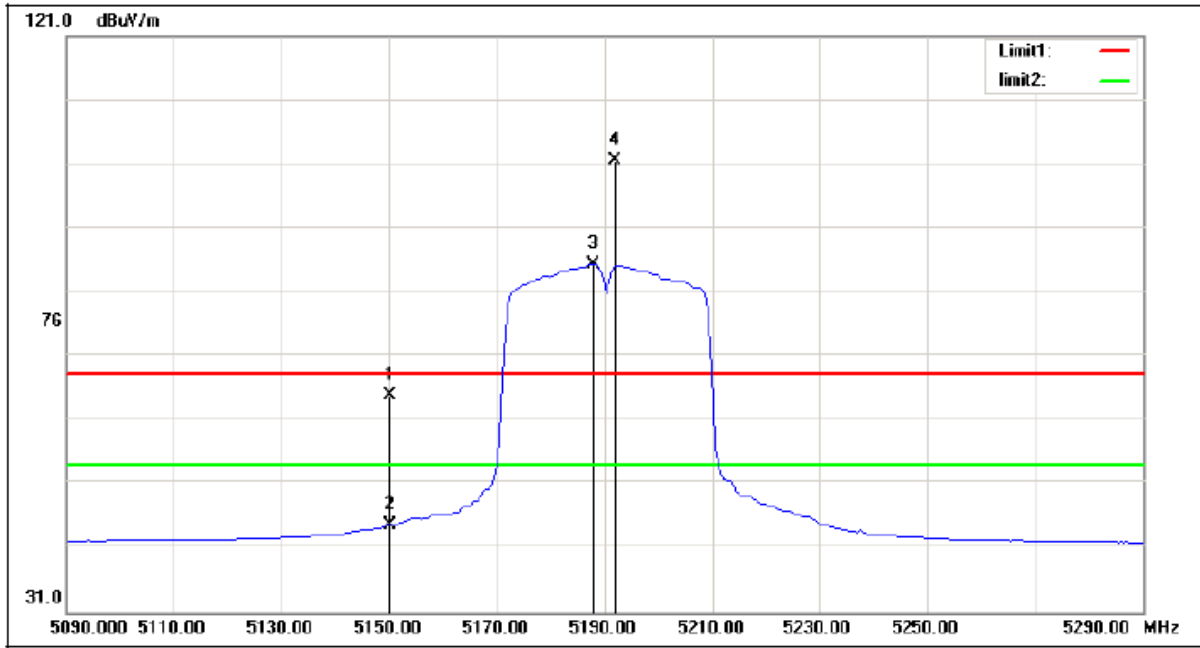

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.66	33.20	64.86	68.30	-3.44	peak
2	5150.000	11.46	33.20	44.66	54.00	-9.34	AVG
3	5188.000	52.12	33.29	85.41	/	/	AVG
4	5192.000	68.16	33.30	101.46	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz


Vertical

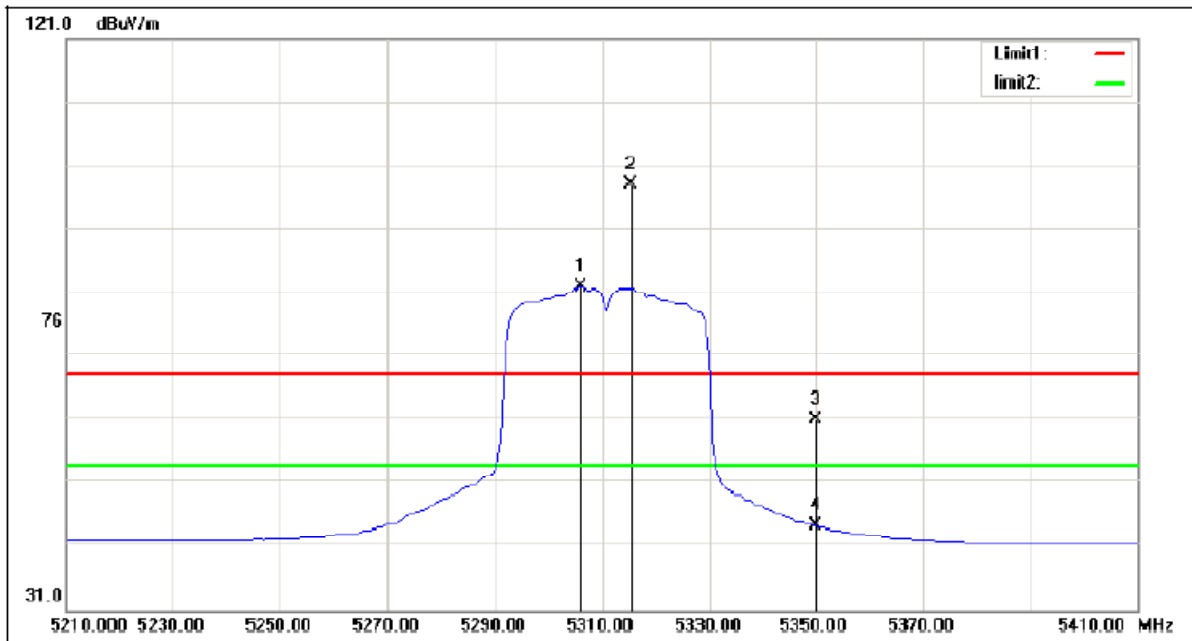

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5306.000	48.31	33.57	81.88	/	/	AVG
2	5315.500	64.30	33.60	97.90	/	/	peak
3	5350.000	27.27	33.68	60.95	68.30	-7.35	peak
4	5350.000	10.65	33.68	44.33	54.00	-9.67	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz


Horizontal

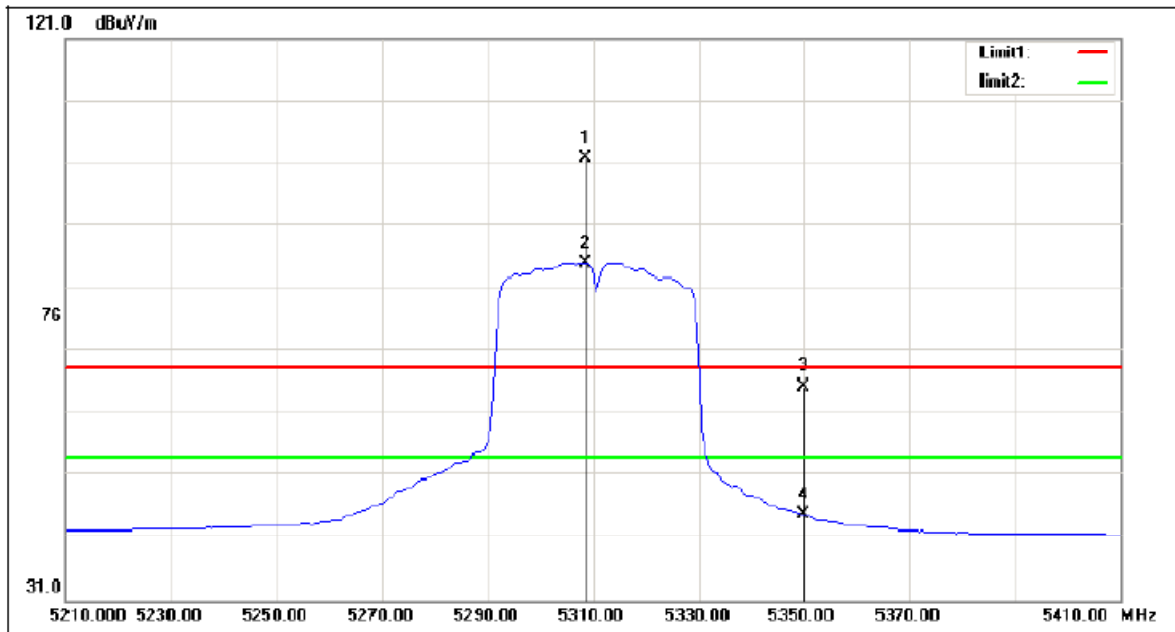

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5308.500	68.21	33.58	101.79	/	/	peak
2	5308.500	51.41	33.58	84.99	/	/	AVG
3	5350.000	31.56	33.68	65.24	68.30	-3.06	peak
4	5350.000	11.06	33.68	44.74	54.00	-9.26	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz


Vertical

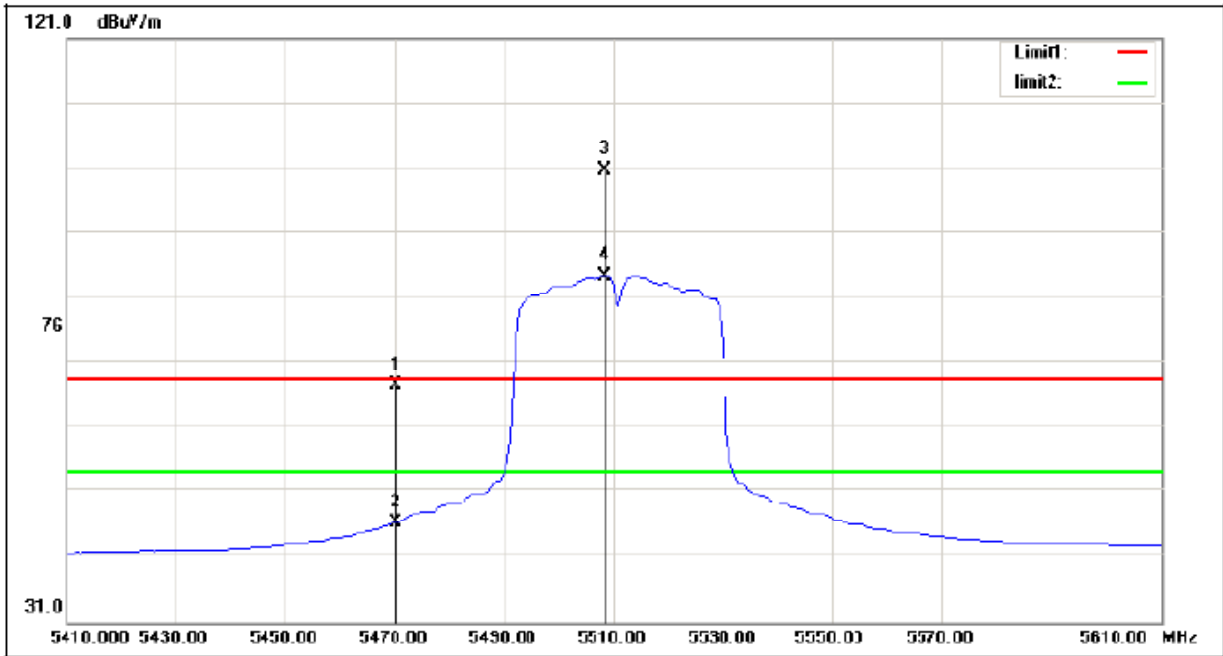

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	33.29	33.98	67.27	68.30	-1.03	peak
2	5470.000	12.26	33.98	46.24	54.00	-7.76	AVG
3	5508.500	66.55	34.04	100.59	/	/	peak
4	5508.500	50.21	34.04	84.25	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz


Horizontal

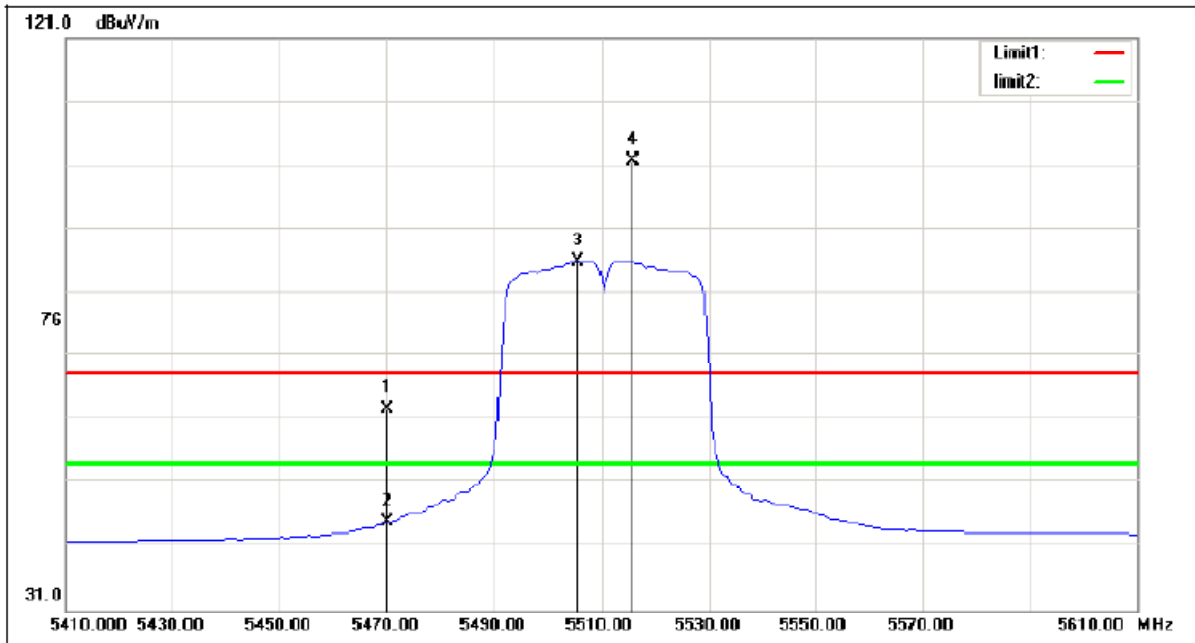

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	28.58	33.98	62.56	68.30	-5.74	peak
2	5470.000	10.79	33.98	44.77	54.00	-9.23	AVG
3	5505.500	51.83	34.05	85.88	/	/	AVG
4	5516.000	67.77	34.04	101.81	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz


Vertical

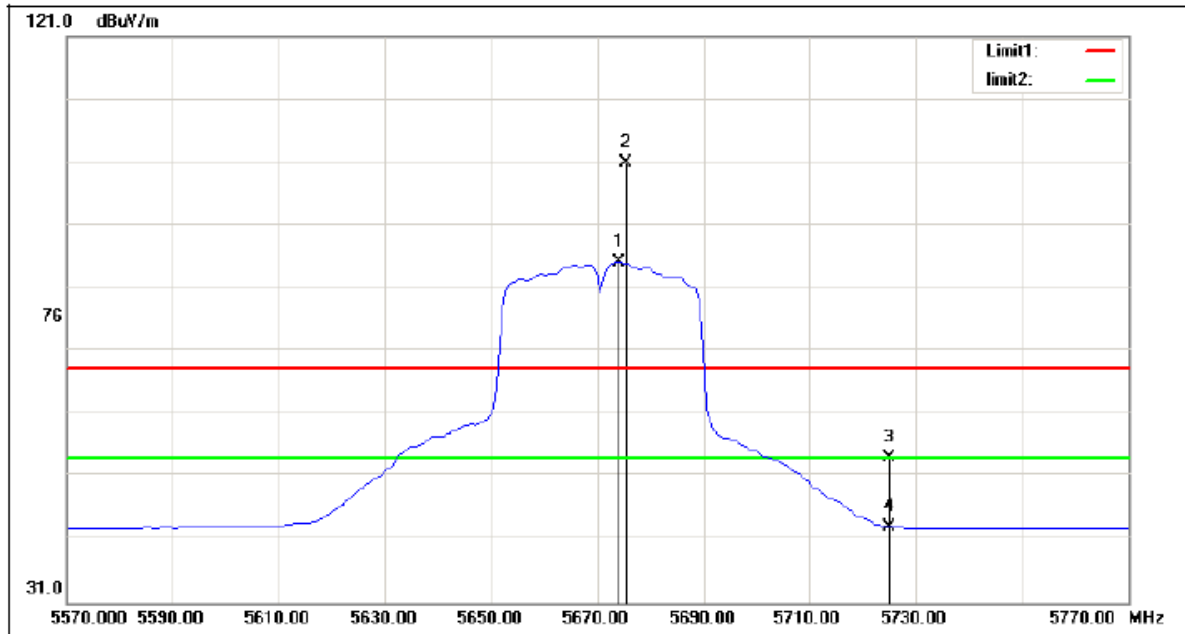

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5674.000	51.13	33.92	85.05	/	/	AVG
2	5675.500	67.00	33.92	100.92	/	/	peak
3	5725.000	20.14	33.88	54.02	68.30	-14.28	peak
4	5725.000	9.20	33.88	43.08	54.00	-10.92	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz


Horizontal

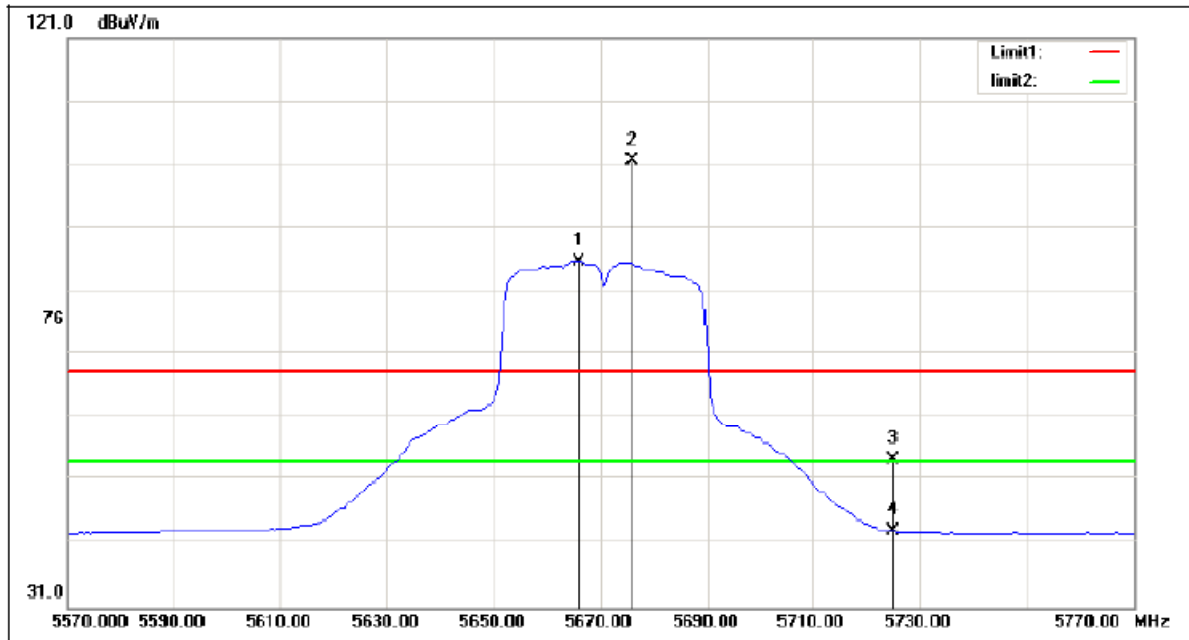

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5666.000	51.70	33.93	85.63	/	/	AVG
2	5676.000	67.60	33.92	101.52	/	/	peak
3	5725.000	20.32	33.88	54.20	68.30	-14.10	peak
4	5725.000	9.05	33.88	42.93	54.00	-11.07	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz


Vertical

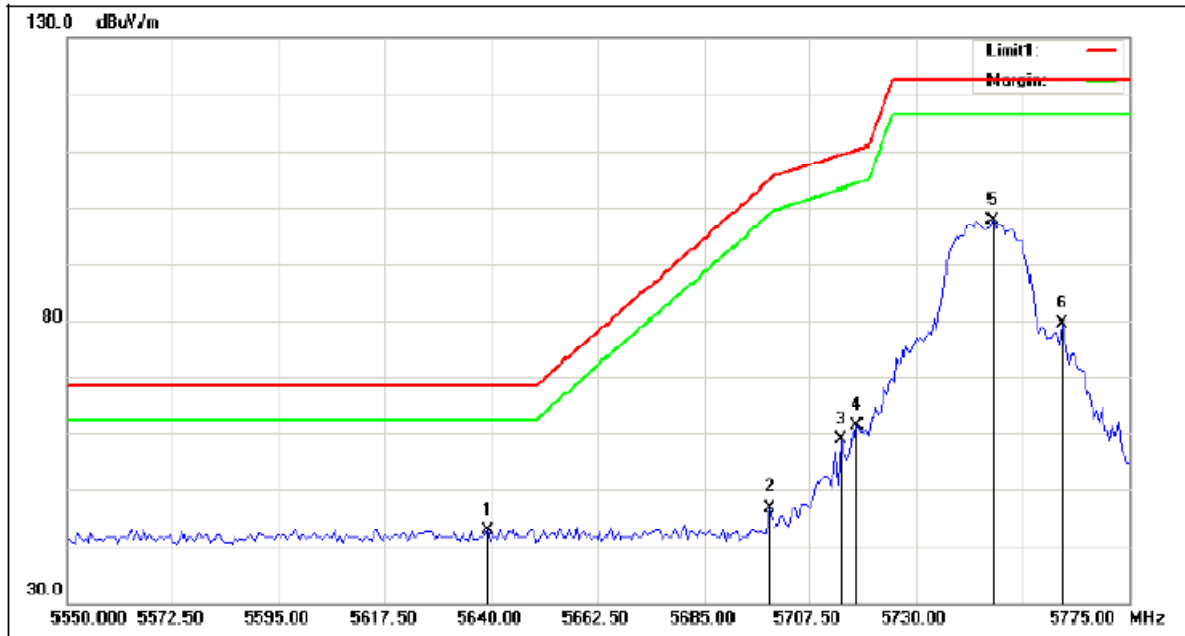

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5638.875	49.15	-6.27	42.88	68.30	-25.42	peak
2	5699.063	52.97	-6.20	46.77	104.61	-57.84	peak
3	5714.250	64.97	-6.18	58.79	109.29	-50.50	peak
4	5717.625	67.54	-6.17	61.37	110.23	-48.86	peak
5	5746.313	103.67	-6.15	97.52	122.30	-24.78	peak
6	5760.938	85.41	-6.13	79.28	122.30	-43.02	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz


Horizontal

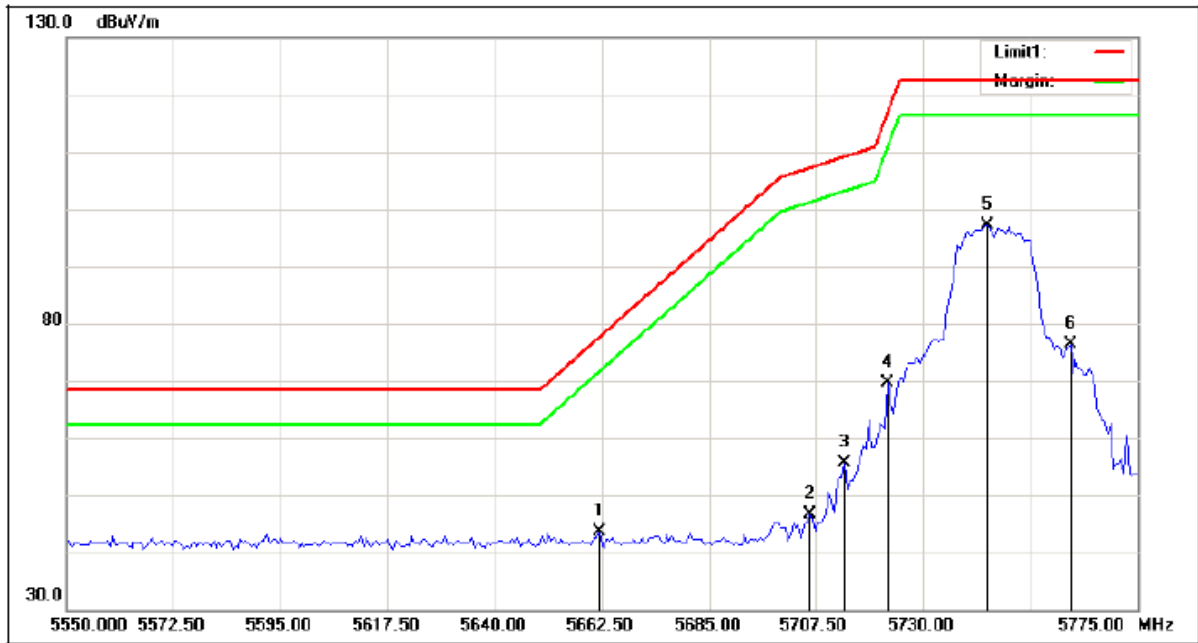

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5661.938	49.94	-6.25	43.69	77.13	-33.44	peak
2	5706.375	52.89	-6.20	46.69	107.08	-60.39	peak
3	5713.688	61.92	-6.18	55.74	109.13	-53.39	peak
4	5722.688	75.68	-6.17	69.51	117.03	-47.52	peak
5	5743.500	103.19	-6.14	97.05	122.30	-25.25	peak
6	5760.938	82.58	-6.13	76.45	122.30	-45.85	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz


Vertical

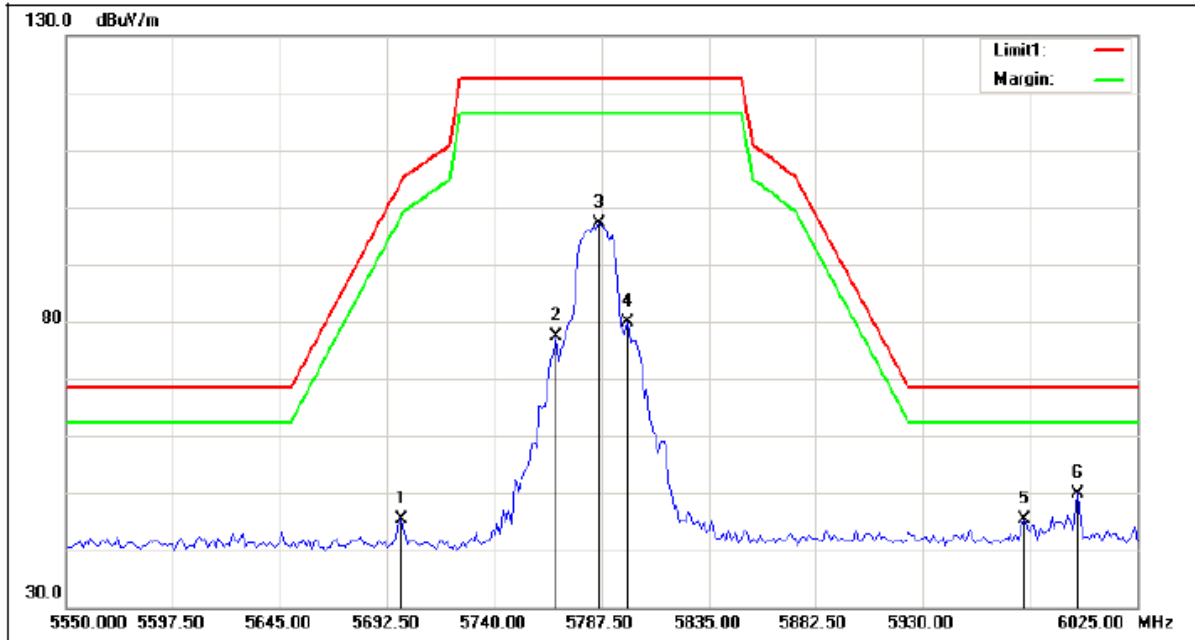

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5698.438	51.59	-6.20	45.39	104.14	-58.75	peak
2	5767.313	83.54	-6.12	77.42	122.30	-44.88	peak
3	5786.313	103.31	-6.10	97.21	122.30	-25.09	peak
4	5799.375	86.03	-6.08	79.95	122.30	-42.35	peak
5	5975.125	51.35	-5.86	45.49	68.30	-22.81	peak
6	5998.875	55.83	-5.83	50.00	68.30	-18.30	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz


Horizontal

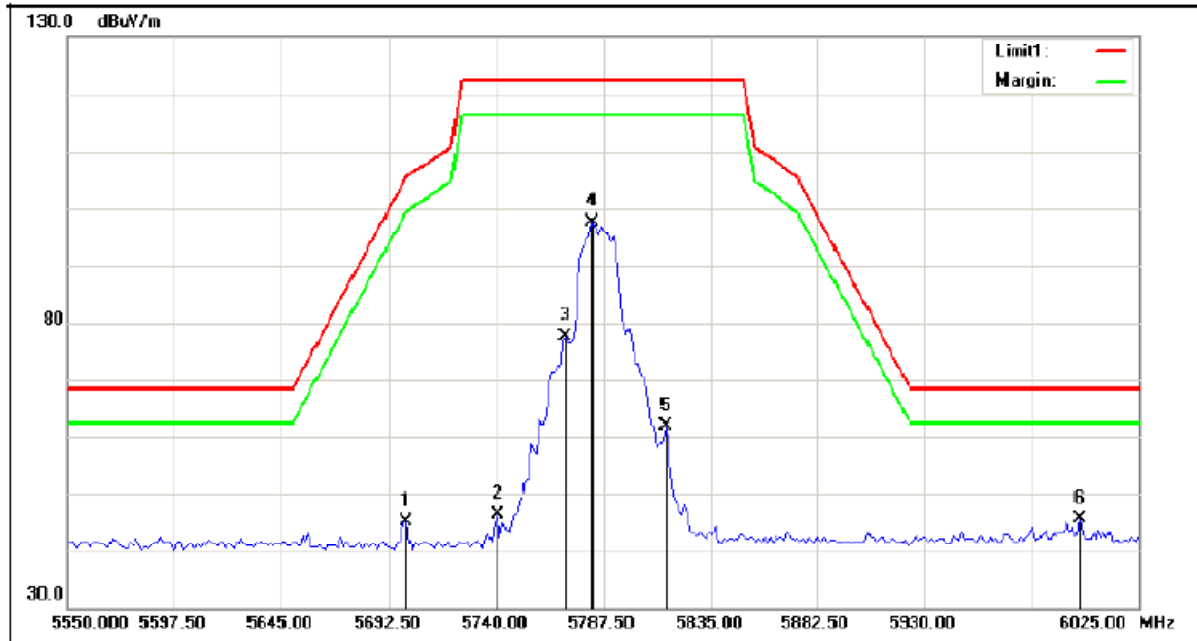

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5699.625	51.24	-6.20	45.04	105.02	-59.98	peak
2	5740.000	52.58	-6.15	46.43	122.30	-75.87	peak
3	5770.875	83.75	-6.12	77.63	122.30	-44.67	peak
4	5782.750	103.62	-6.10	97.52	122.30	-24.78	peak
5	5814.813	67.88	-6.06	61.82	122.30	-60.48	peak
6	5998.875	51.50	-5.83	45.67	68.30	-22.63	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Vertical

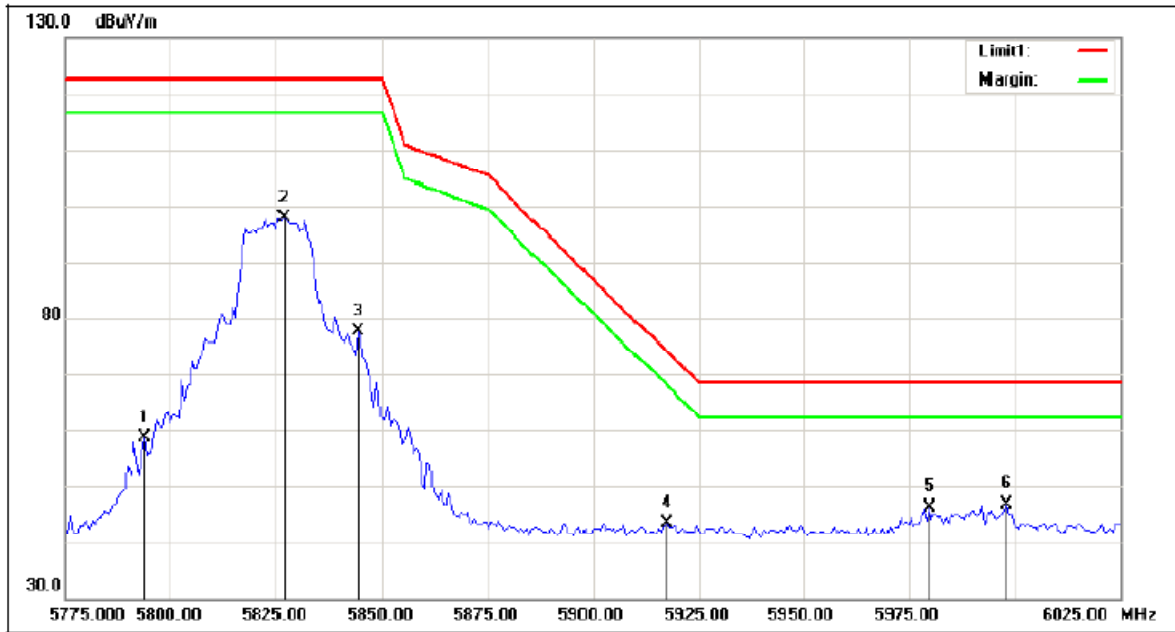

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5793.750	64.82	-6.09	58.73	122.30	-63.57	peak
2	5826.875	103.84	-6.05	97.79	122.30	-24.51	peak
3	5844.375	83.70	-6.03	77.67	122.30	-44.63	peak
4	5917.500	49.55	-5.92	43.63	73.85	-30.22	peak
5	5980.000	52.11	-5.85	46.26	68.30	-22.04	peak
6	5998.125	52.62	-5.83	46.79	68.30	-21.51	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Horizontal

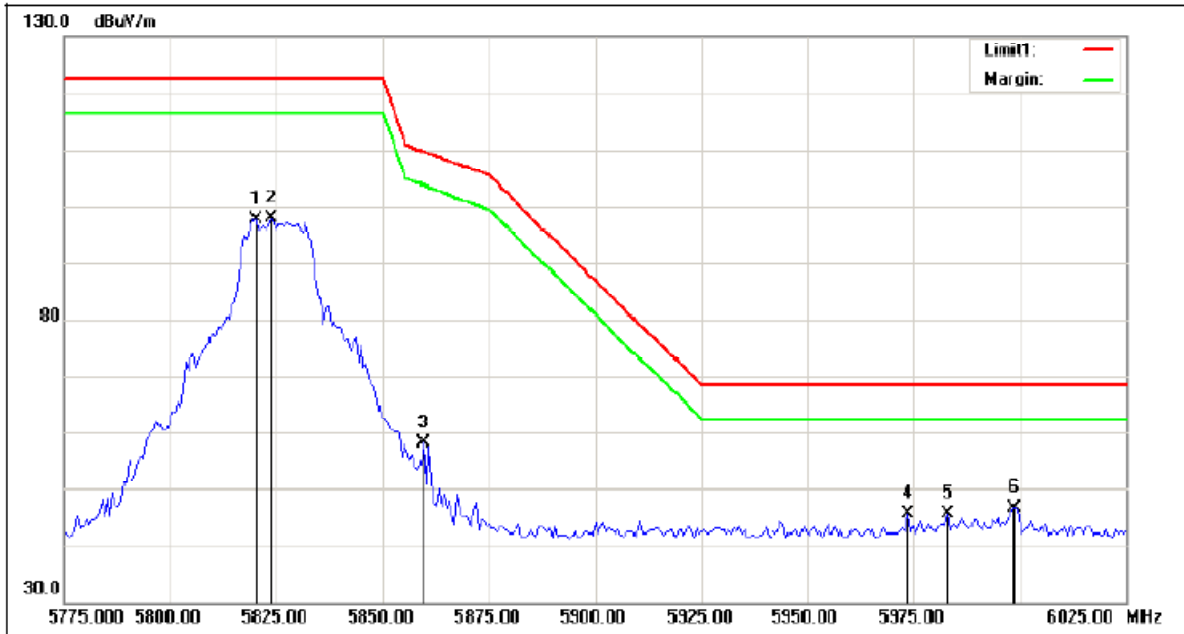

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5820.000	103.64	-6.06	97.58	122.30	-24.72	peak
2	5823.750	103.93	-6.05	97.88	122.30	-24.42	peak
3	5859.375	64.07	-6.01	58.06	109.67	-51.61	peak
4	5973.750	51.49	-5.86	45.63	68.30	-22.67	peak
5	5983.125	51.52	-5.85	45.67	68.30	-22.63	peak
6	5998.750	52.51	-5.83	46.68	68.30	-21.62	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz


Vertical

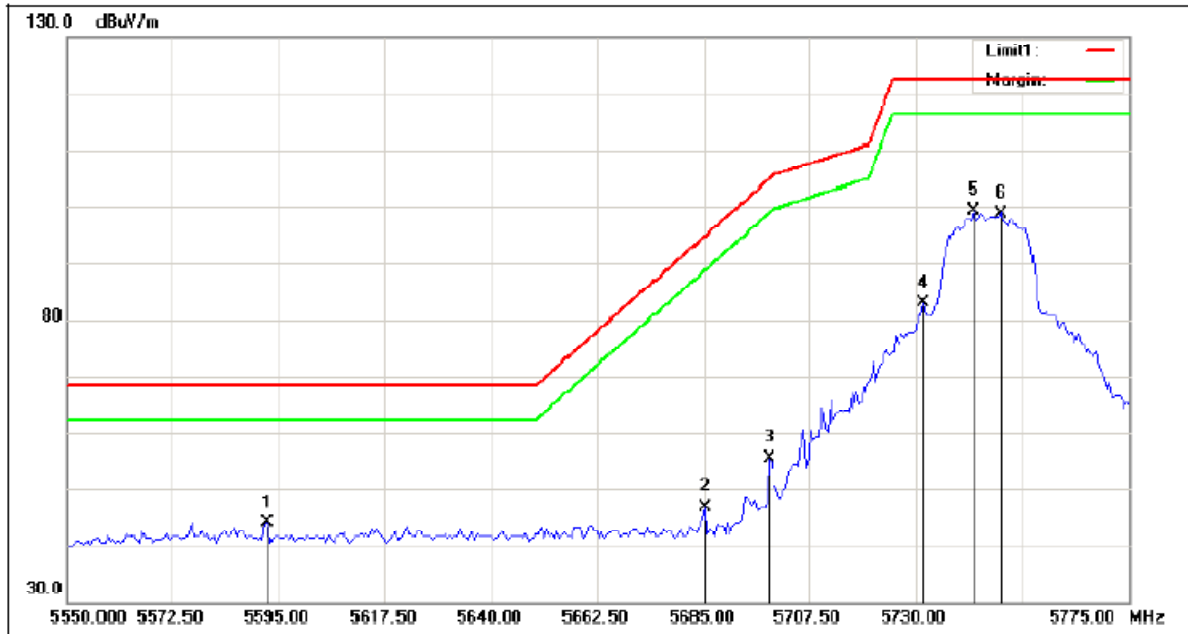

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5592.750	50.45	-6.33	44.12	68.30	-24.18	peak
2	5685.000	52.99	-6.22	46.77	94.20	-47.43	peak
3	5699.063	61.90	-6.20	55.70	104.61	-48.91	peak
4	5731.688	89.13	-6.17	82.96	122.30	-39.34	peak
5	5742.375	105.40	-6.15	99.25	122.30	-23.05	peak
6	5748.000	104.89	-6.14	98.75	122.30	-23.55	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz


Horizontal

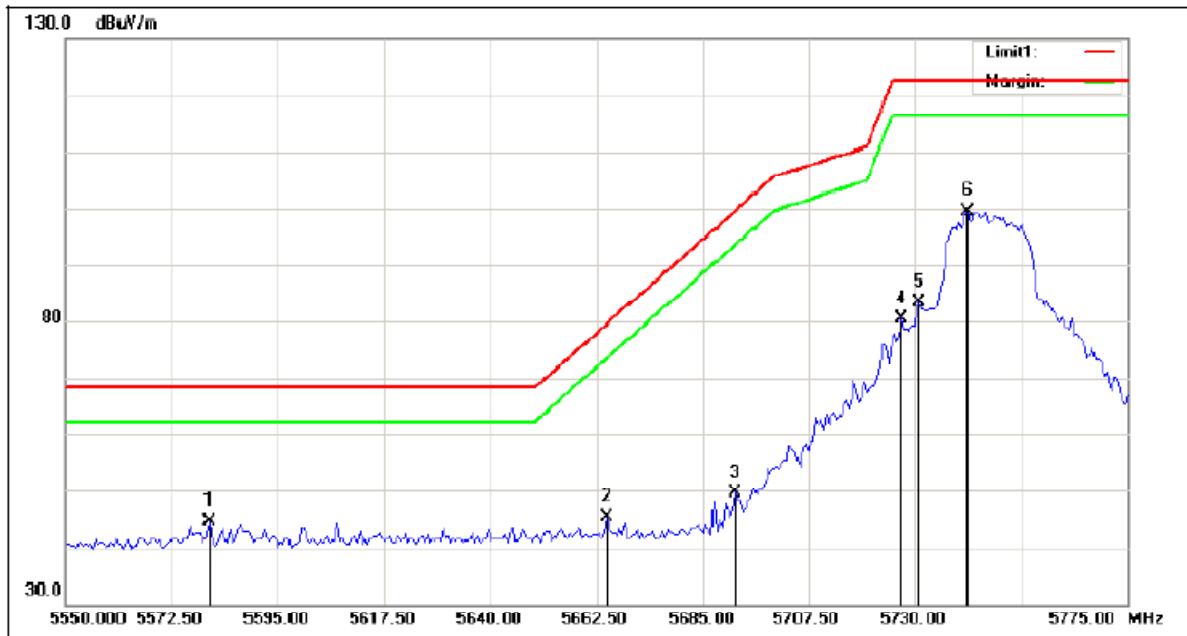

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5580.375	50.95	-6.35	44.60	68.30	-23.70	peak
2	5664.750	51.63	-6.24	45.39	79.21	-33.82	peak
3	5691.750	55.78	-6.21	49.57	99.19	-49.62	peak
4	5727.188	86.61	-6.17	80.44	122.30	-41.86	peak
5	5731.125	89.50	-6.16	83.34	122.30	-38.96	peak
6	5741.250	105.48	-6.15	99.33	122.30	-22.97	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz


Vertical

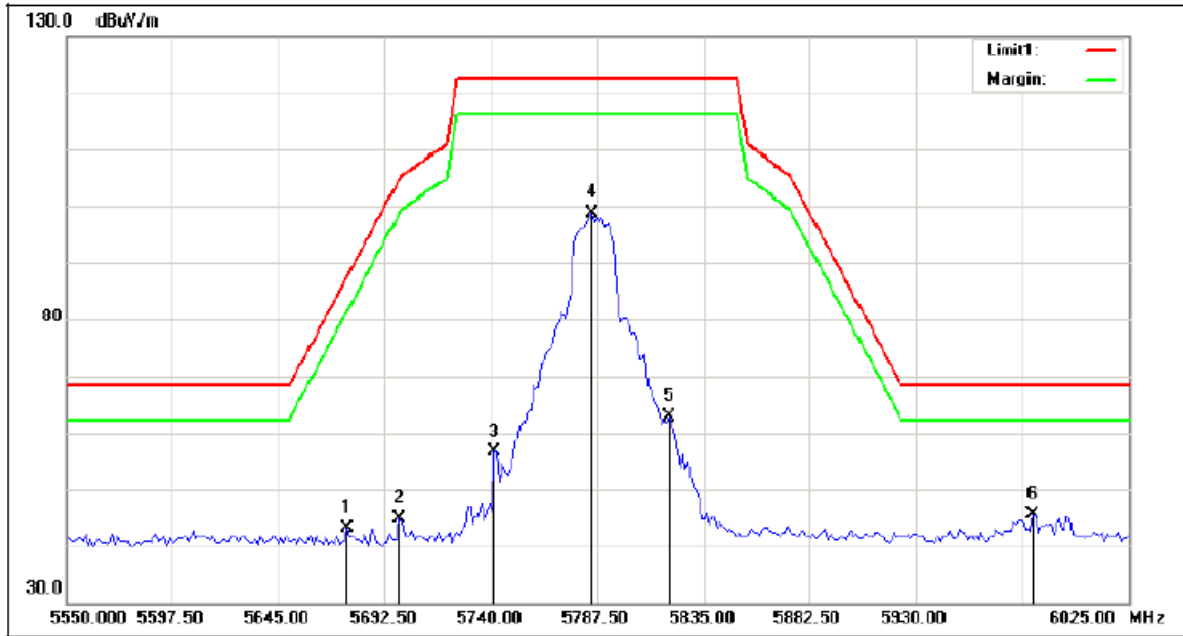

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5675.875	49.36	-6.23	43.13	87.45	-44.32	peak
2	5698.438	51.15	-6.20	44.95	104.14	-59.19	peak
3	5741.188	62.72	-6.15	56.57	122.30	-65.73	peak
4	5785.125	104.77	-6.10	98.67	122.30	-23.63	peak
5	5819.563	68.88	-6.06	62.82	122.30	-59.48	peak
6	5982.250	51.61	-5.86	45.75	68.30	-22.55	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz


Horizontal

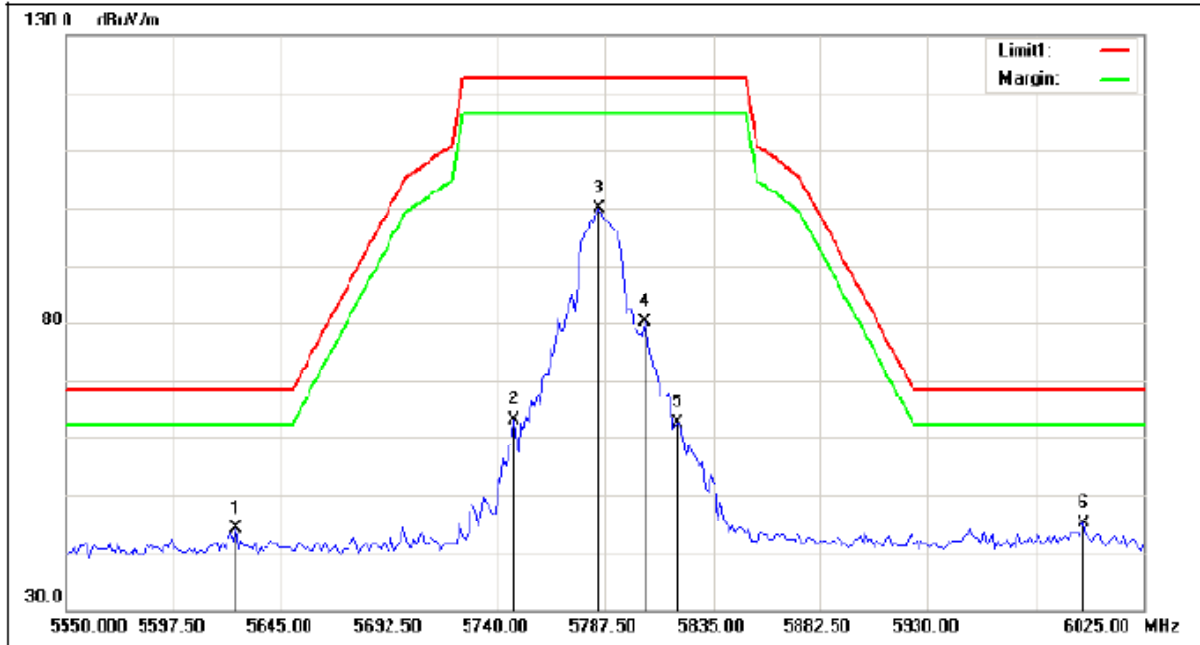

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.813	50.51	-6.30	44.21	68.30	-24.09	peak
2	5747.125	69.19	-6.15	63.04	122.30	-59.25	peak
3	5785.125	105.90	-6.10	99.80	122.30	-22.50	peak
4	5805.313	86.26	-6.07	80.19	122.30	-42.11	peak
5	5819.563	68.69	-6.06	62.63	122.30	-59.67	peak
6	5998.875	50.85	-5.83	45.02	68.30	-23.28	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz


Vertical

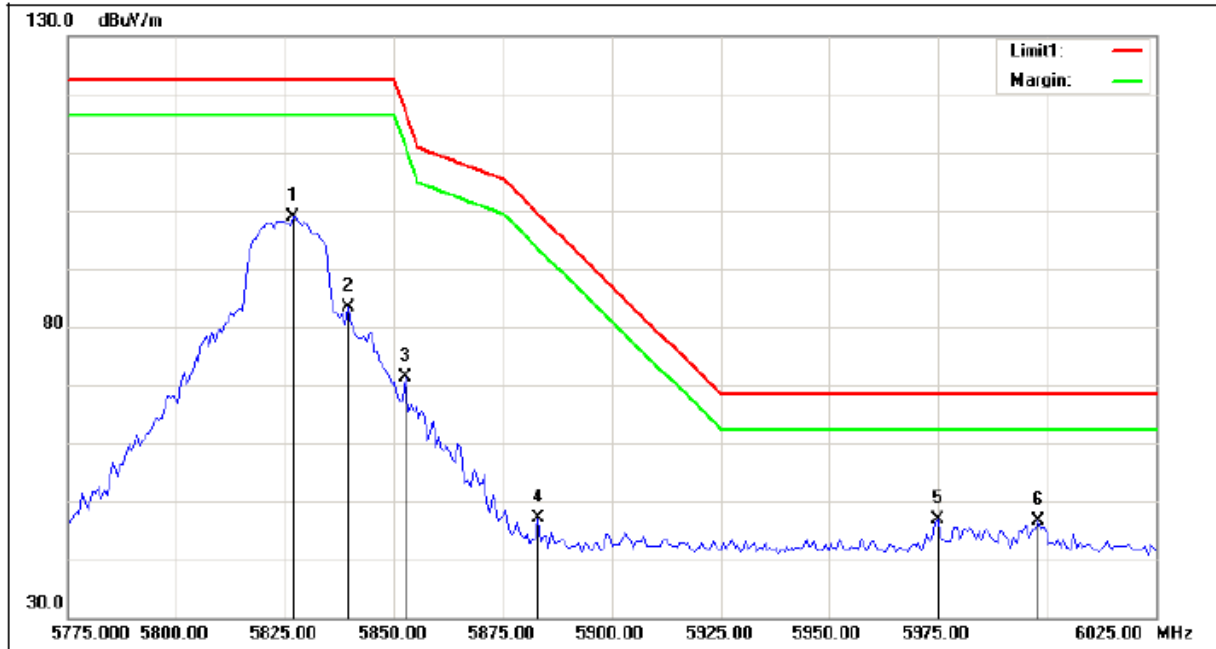

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.875	105.03	-6.05	98.98	122.30	-23.32	peak
2	5839.375	89.40	-6.03	83.37	122.30	-38.93	peak
3	5852.500	77.37	-6.02	71.35	116.60	-45.25	peak
4	5883.125	53.12	-5.97	47.15	99.29	-52.14	peak
5	5975.000	52.81	-5.86	46.95	68.30	-21.35	peak
6	5998.125	52.48	-5.83	46.65	68.30	-21.65	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz


Horizontal

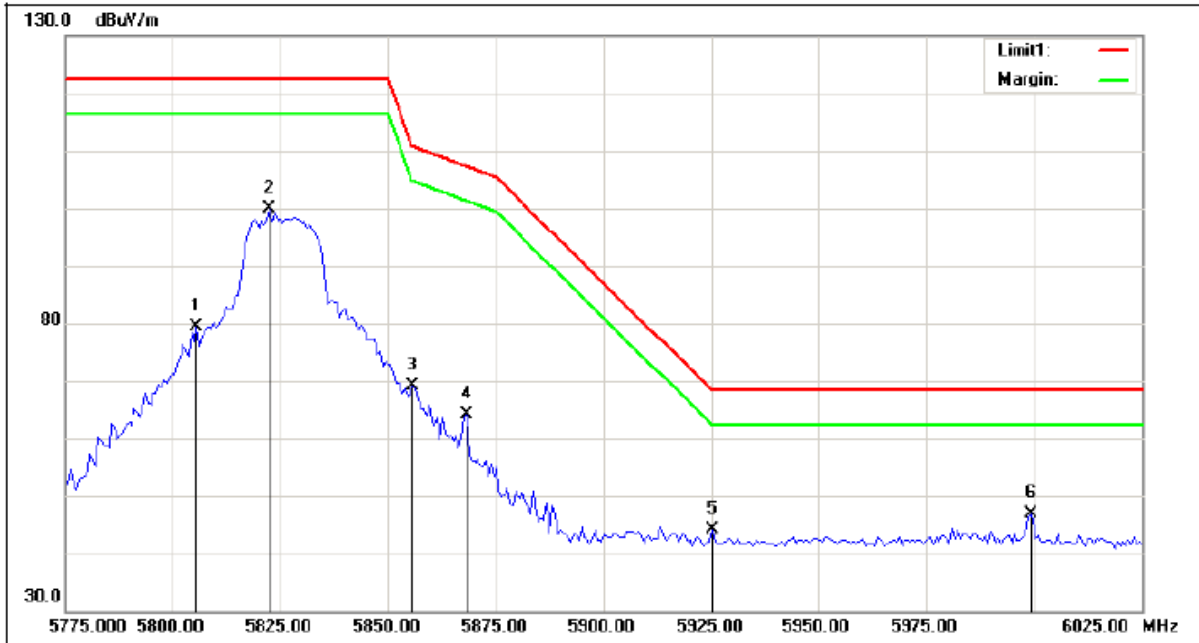

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5805.625	85.53	-6.07	79.46	122.30	-42.84	peak
2	5822.500	106.04	-6.05	99.99	122.30	-22.31	peak
3	5855.625	75.26	-6.01	69.25	110.72	-41.47	peak
4	5868.125	70.21	-5.99	64.22	107.22	-43.00	peak
5	5925.000	50.12	-5.92	44.20	68.30	-24.10	peak
6	5999.375	52.78	-5.83	46.95	68.30	-21.35	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz


Vertical

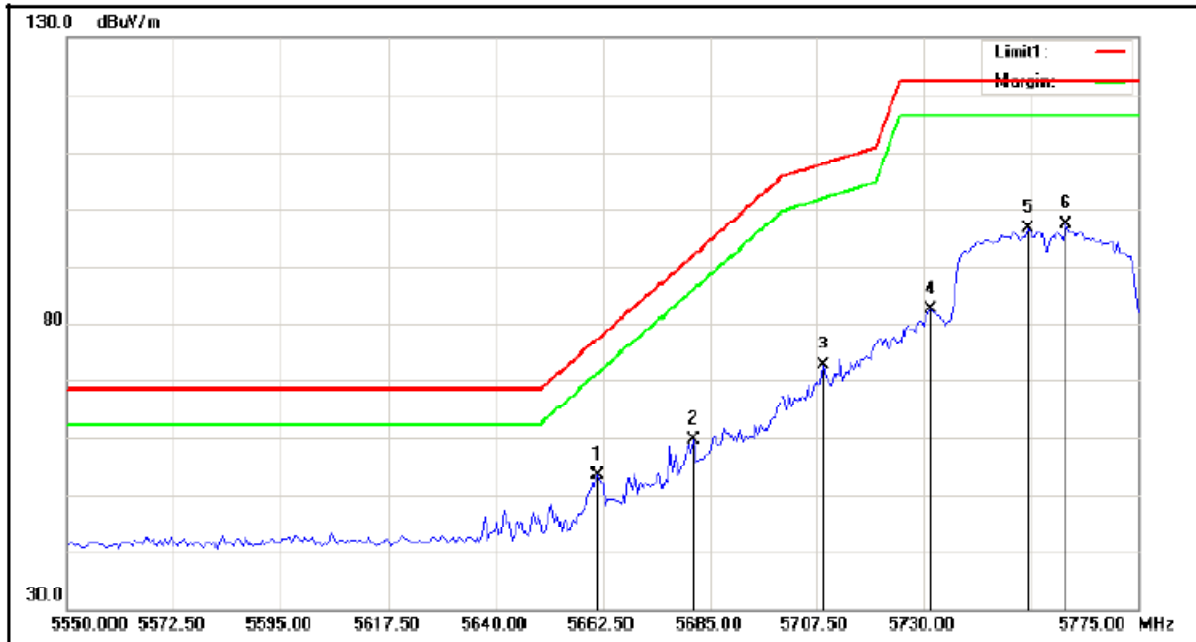

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5661.375	59.68	-6.25	53.43	76.72	-23.29	peak
2	5681.625	65.98	-6.23	59.75	91.70	-31.95	peak
3	5709.188	78.74	-6.19	72.55	107.87	-35.32	peak
4	5731.688	88.45	-6.17	82.28	122.30	-40.02	peak
5	5751.938	102.69	-6.14	96.55	122.30	-25.75	peak
6	5759.813	103.47	-6.13	97.34	122.30	-24.96	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz


Horizontal

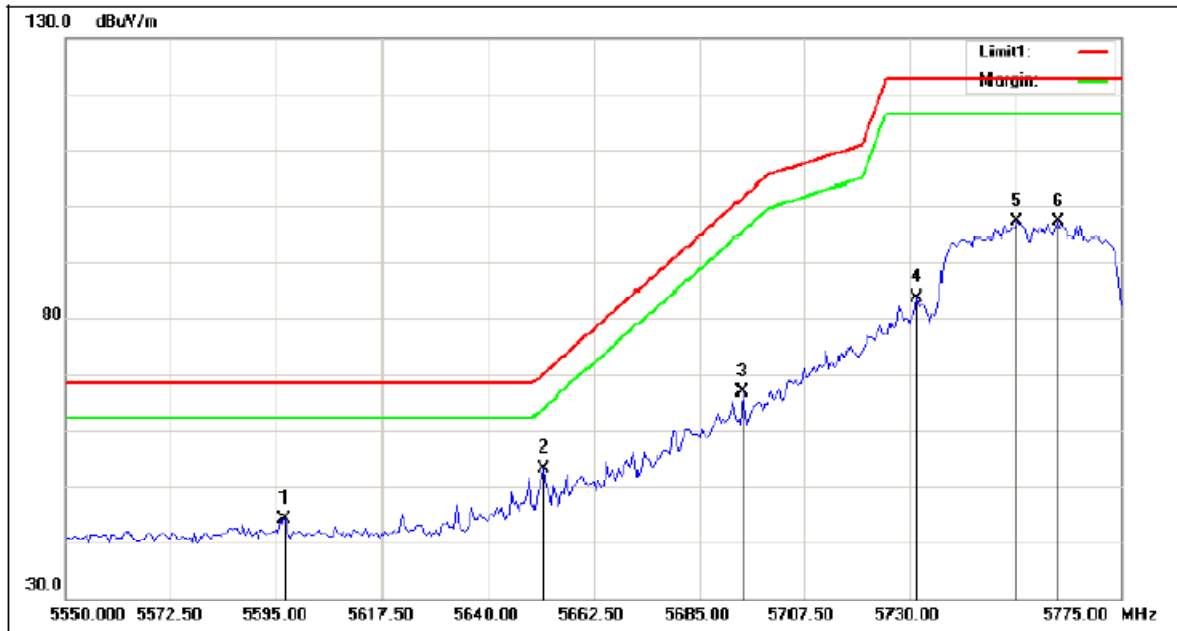

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5596.688	50.62	-6.34	44.28	68.30	-24.02	peak
2	5651.813	59.59	-6.26	53.33	69.64	-16.31	peak
3	5694.000	73.13	-6.21	66.92	100.86	-33.94	peak
4	5731.688	89.86	-6.17	83.69	122.30	-38.61	peak
5	5753.063	103.27	-6.13	97.14	122.30	-25.16	peak
6	5761.500	103.38	-6.13	97.25	122.30	-25.05	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz


Vertical

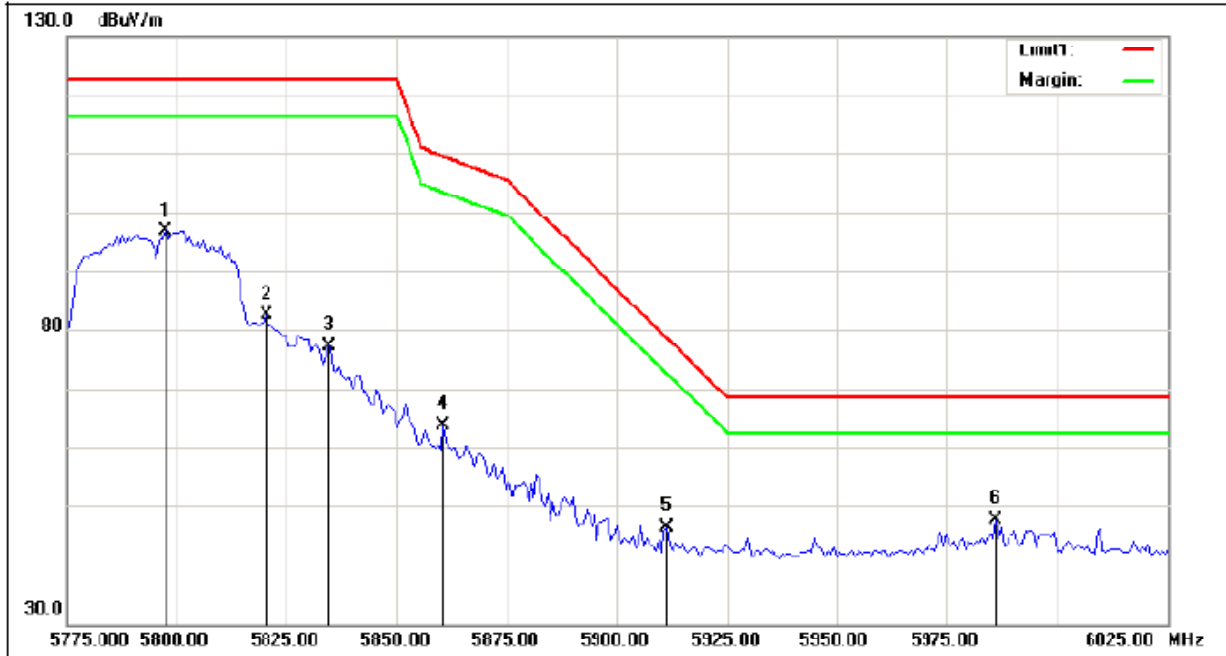

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5797.500	102.84	-6.09	96.75	122.30	-25.55	peak
2	5820.625	88.45	-6.06	82.39	122.30	-39.91	peak
3	5834.375	83.29	-6.04	77.25	122.30	-45.05	peak
4	5850.625	69.60	-6.01	63.59	109.32	-45.73	peak
5	5911.250	52.40	-5.94	46.46	78.47	-32.01	peak
6	5986.250	53.37	-5.85	47.52	68.30	-20.78	pcak

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz


Horizontal

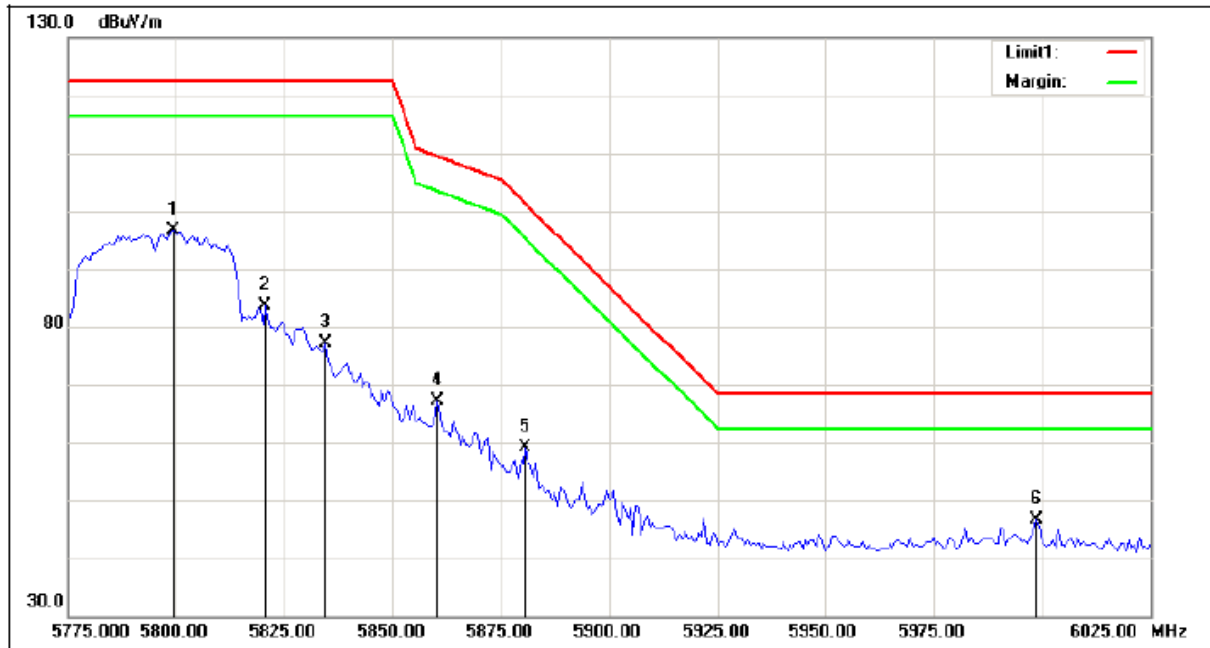

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5799.375	102.59	-6.08	96.51	122.30	-25.79	peak
2	5820.625	89.64	-6.06	83.58	122.30	-38.72	peak
3	5834.375	83.13	-6.04	77.09	122.30	-45.21	peak
4	5860.000	73.11	-6.01	67.10	109.50	-42.40	peak
5	5880.625	65.06	-5.97	59.09	101.14	-42.05	peak
6	5998.750	52.44	-5.83	46.61	68.30	-21.69	peak

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz


Vertical

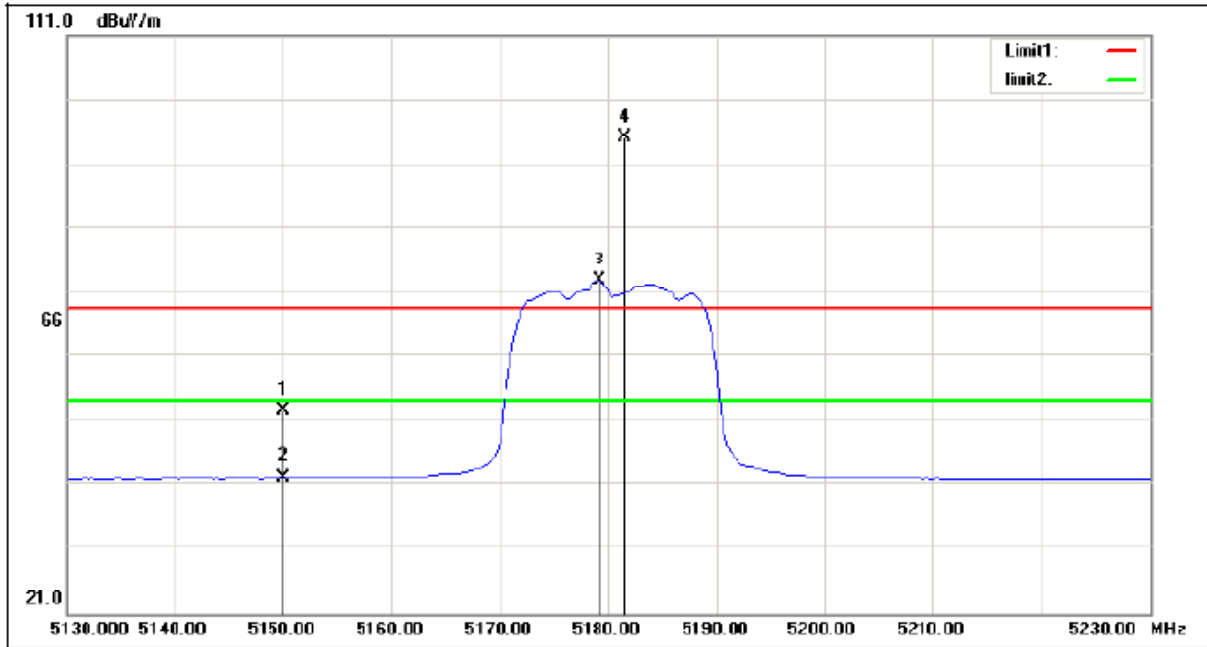

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	19.43	33.20	52.63	68.30	-15.67	peak
2	5150.000	8.98	33.20	42.18	54.00	-11.82	AVG
3	5179.250	39.56	33.27	72.83	/	/	AVG
4	5181.500	61.83	33.28	95.11	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz


Horizontal

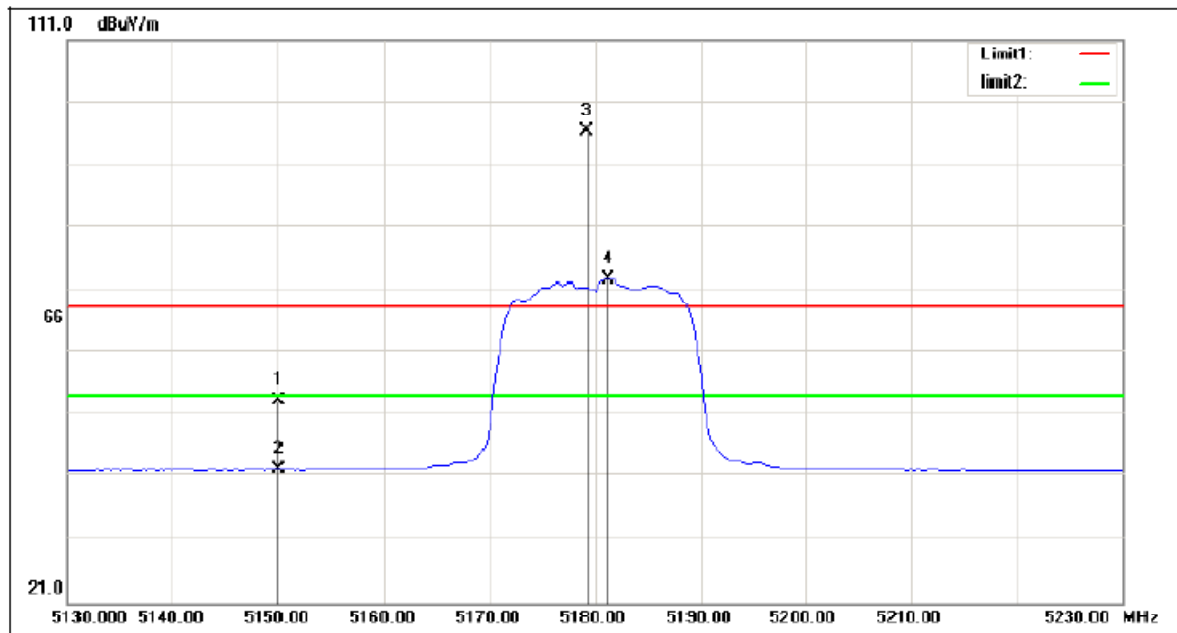

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.10	33.20	53.30	68.30	-15.00	peak
2	5150.000	8.99	33.20	42.19	54.00	-11.81	AVG
3	5179.250	62.98	33.27	96.25	/	/	peak
4	5181.250	39.43	33.27	72.70	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz


Vertical

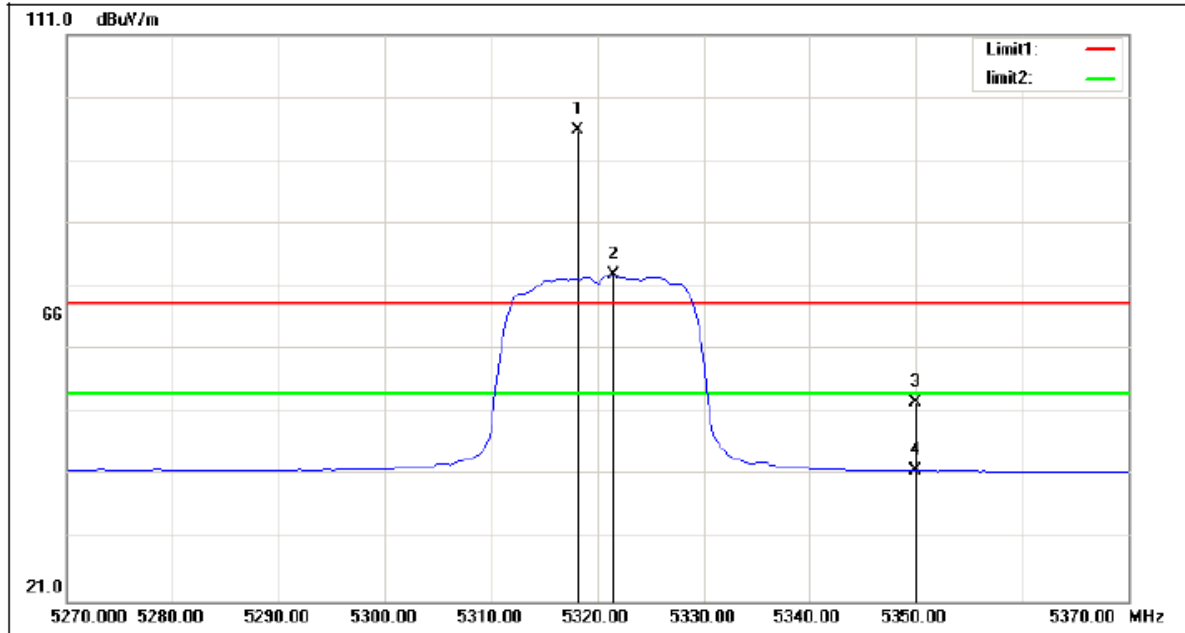

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.250	62.26	33.60	95.86	/	/	peak
2	5321.500	39.23	33.61	72.84	/	/	AVG
3	5350.000	19.02	33.68	52.70	68.30	-15.60	peak
4	5350.000	8.10	33.68	41.78	54.00	-12.22	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz


Horizontal

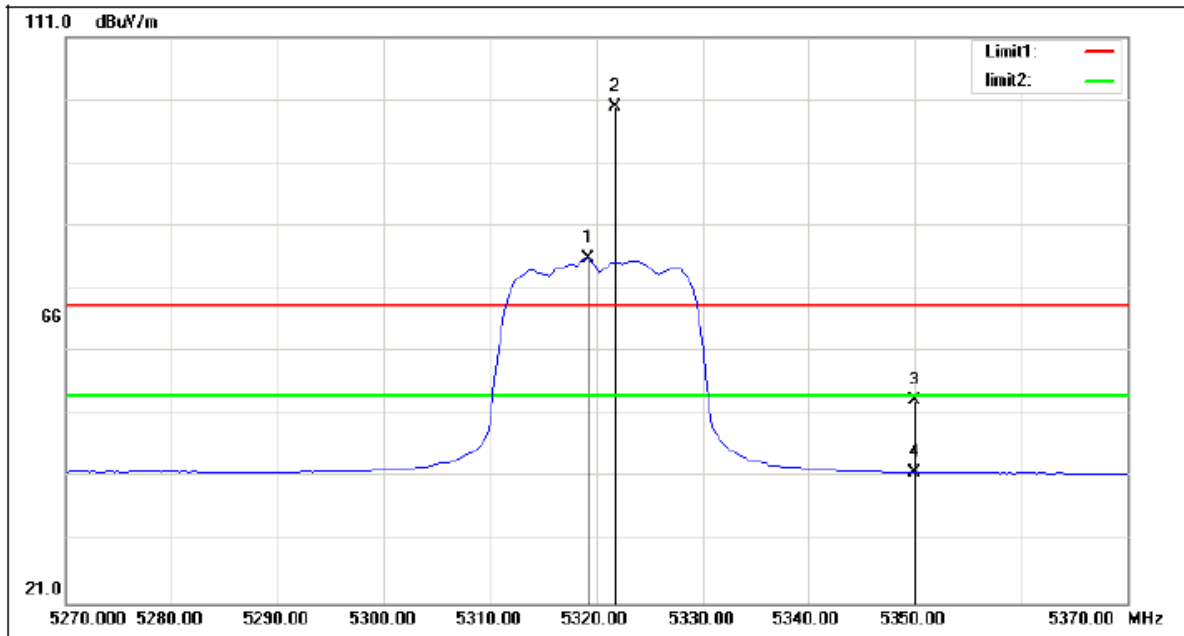

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.250	42.07	33.61	75.68	/	/	AVG
2	5321.750	66.18	33.61	99.79	/	/	peak
3	5350.000	19.72	33.68	53.40	68.30	-14.90	peak
4	5350.000	8.13	33.68	41.81	54.00	-12.19	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz


Vertical

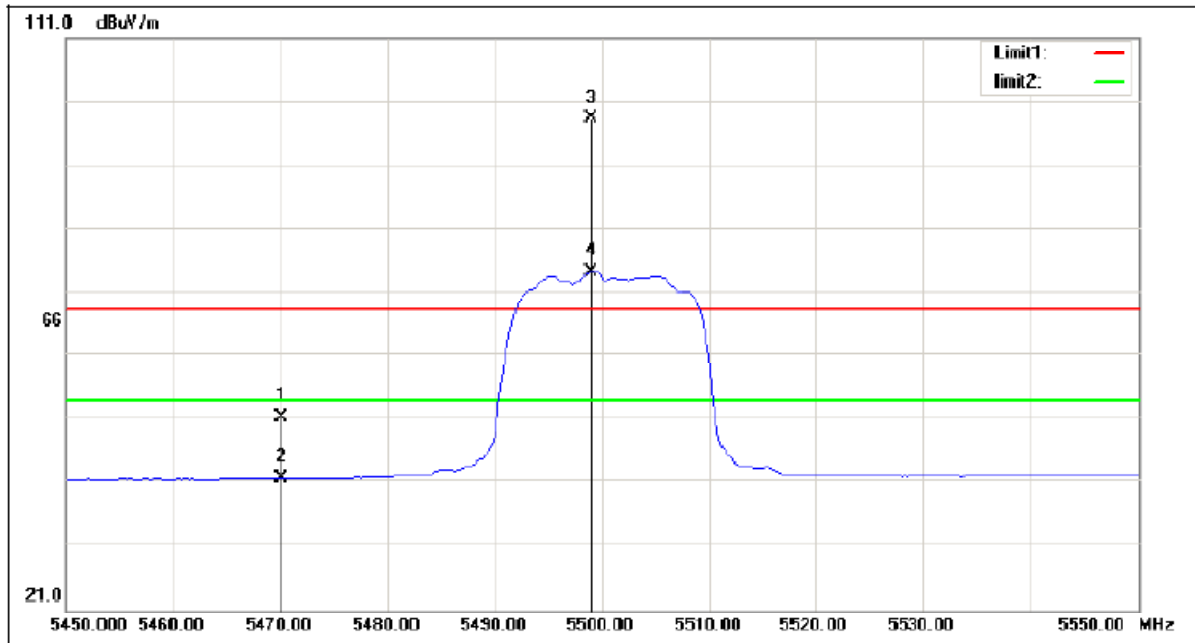

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	17.38	33.98	51.36	68.30	-16.94	peak
2	5470.000	7.83	33.98	41.81	54.00	-12.19	AVG
3	5499.000	64.27	34.05	98.32	/	/	peak
4	5499.000	40.22	34.05	74.27	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz


Horizontal

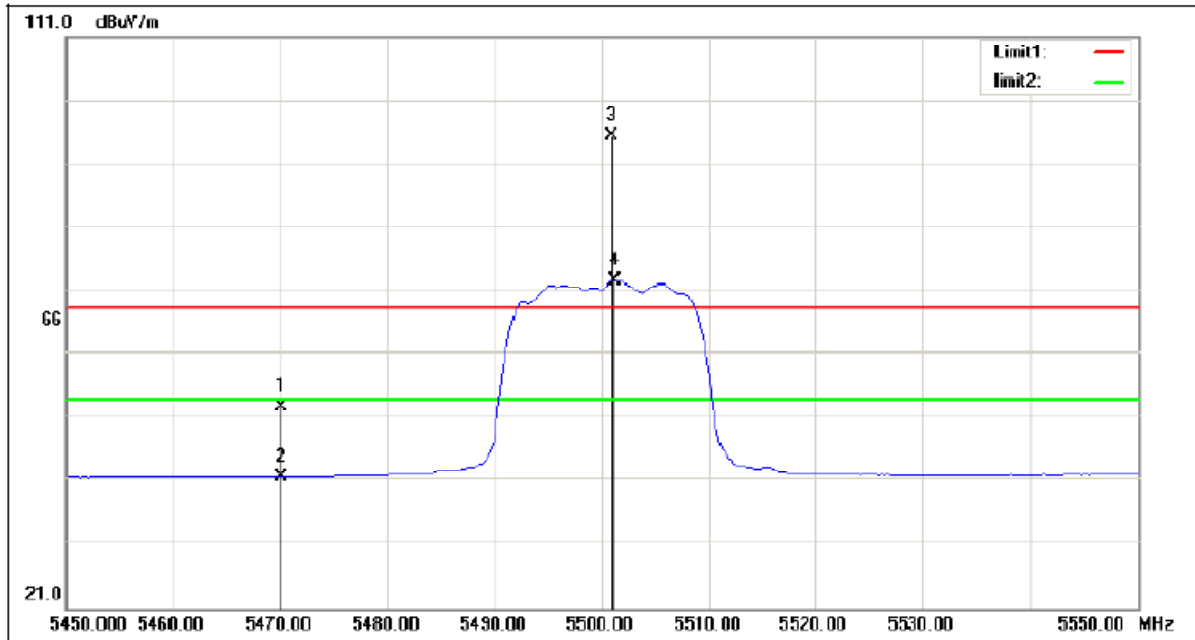

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	18.95	33.98	52.93	68.30	-15.37	peak
2	5470.000	7.83	33.98	41.81	54.00	-12.19	AVG
3	5501.000	61.40	34.05	95.45	/	/	peak
4	5501.250	38.64	34.05	72.69	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz


Vertical

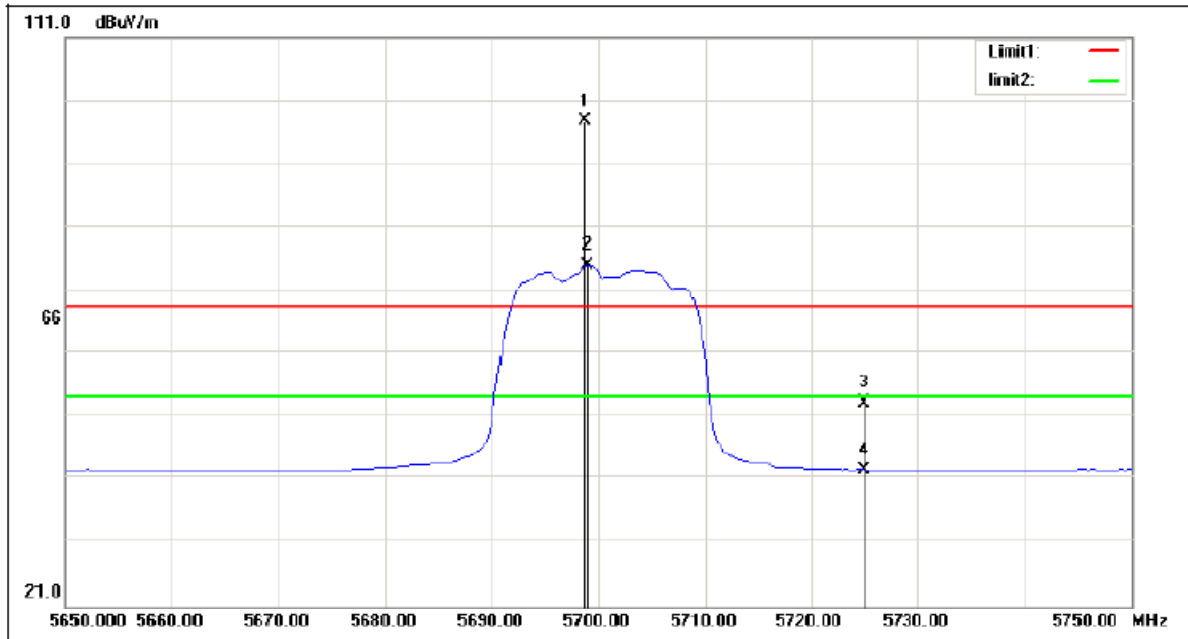

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5698.750	63.77	33.90	97.67	/	/	peak
2	5699.000	41.10	33.90	75.00	/	/	AVG
3	5725.000	19.20	33.88	53.08	68.30	-15.22	peak
4	5725.000	8.70	33.88	42.58	54.00	-11.42	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz


Horizontal

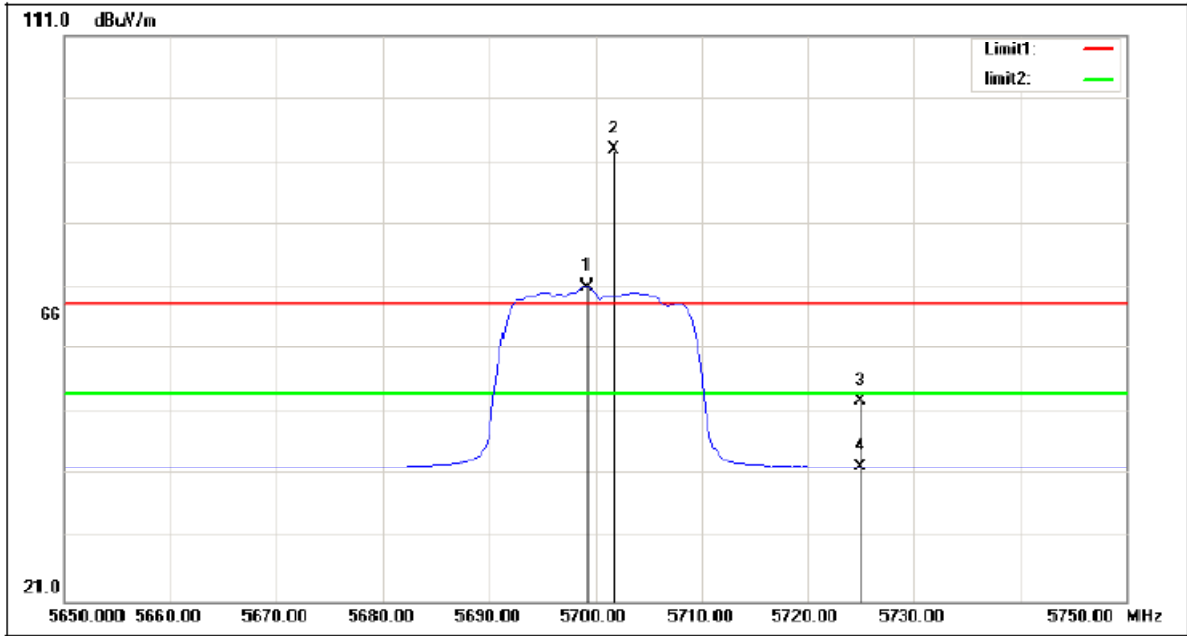

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5699.250	37.21	33.90	71.11	/	/	AVG
2	5701.750	58.97	33.90	92.87	/	/	peak
3	5725.000	19.01	33.88	52.89	68.30	-15.41	peak
4	5725.000	8.59	33.88	42.47	54.00	-11.53	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz


Vertical

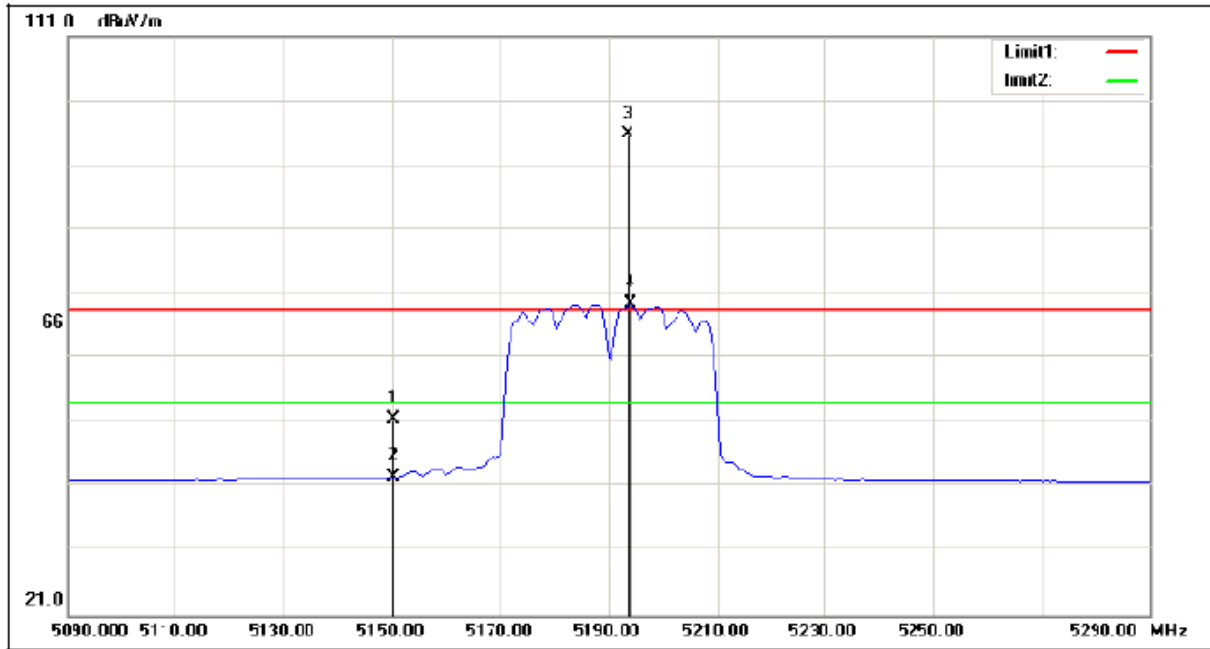

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	18.35	33.20	51.55	68.30	-16.75	peak
2	5150.000	9.32	33.20	42.52	54.00	-11.48	AVG
3	5193.500	62.49	33.30	95.79	/	/	peak
4	5194.000	36.29	33.31	69.60	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz


Horizontal

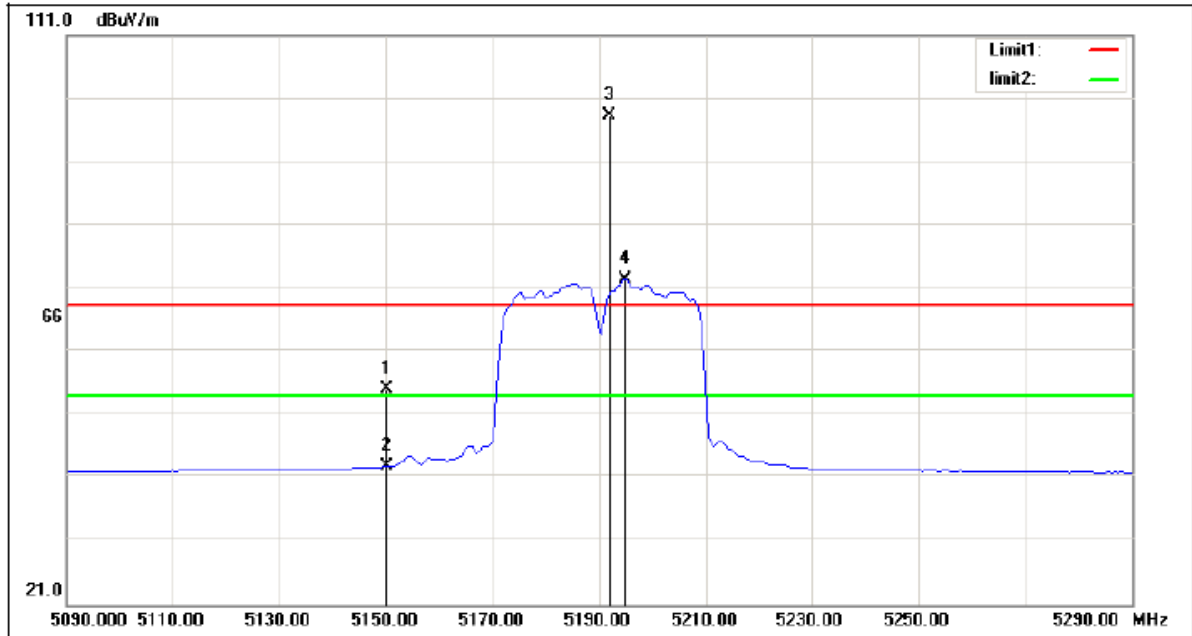

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	21.82	33.20	55.02	68.30	-13.28	peak
2	5150.000	9.79	33.20	42.99	54.00	-11.01	AVG
3	5192.000	64.90	33.30	98.20	/	/	peak
4	5195.000	39.08	33.31	72.39	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz


Vertical

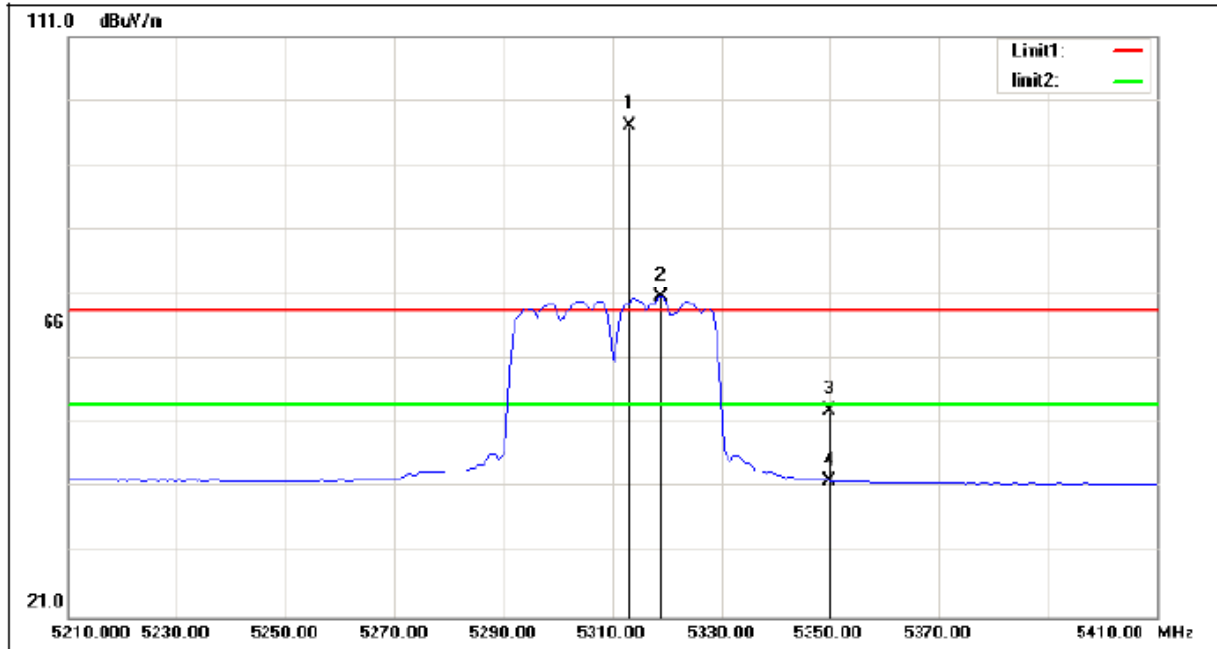

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5313.000	63.49	33.59	97.08	/	/	peak
2	5319.000	36.90	33.61	70.51	/	/	AVG
3	5350.000	19.27	33.68	52.95	68.30	-15.35	peak
4	5350.000	8.47	33.68	42.15	54.00	-11.85	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz


Horizontal

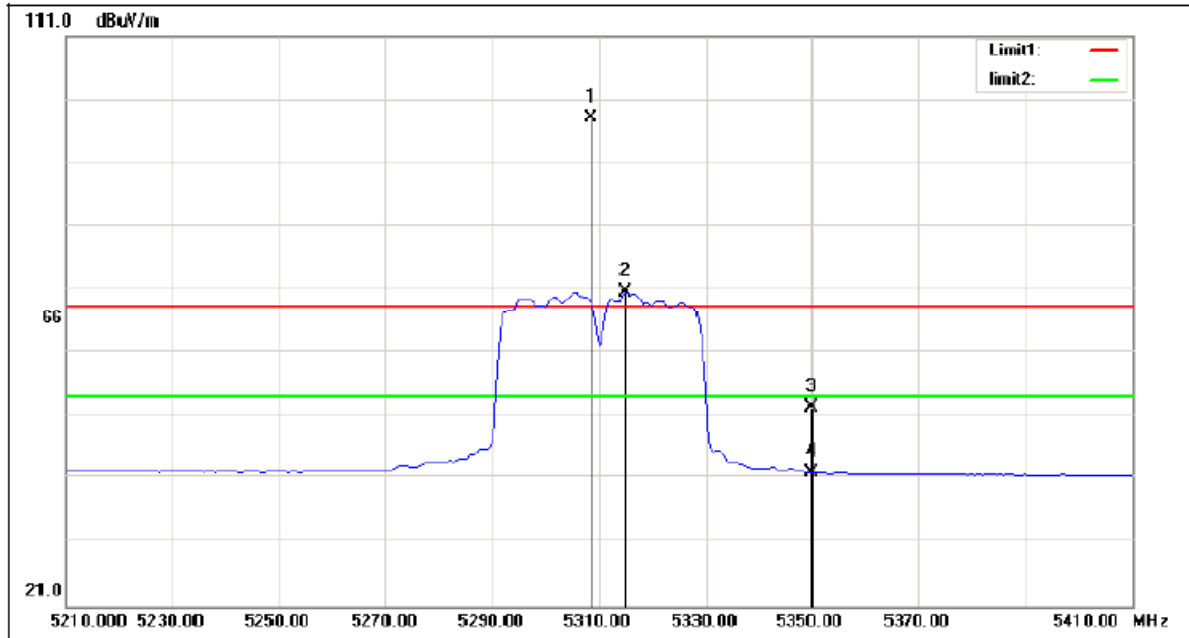

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5308.500	64.44	33.58	98.02	/	/	peak
2	5315.000	37.07	33.60	70.67	/	/	AVG
3	5350.000	18.61	33.68	52.29	68.30	-16.01	peak
4	5350.000	8.37	33.68	42.05	54.00	-11.95	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz


Vertical

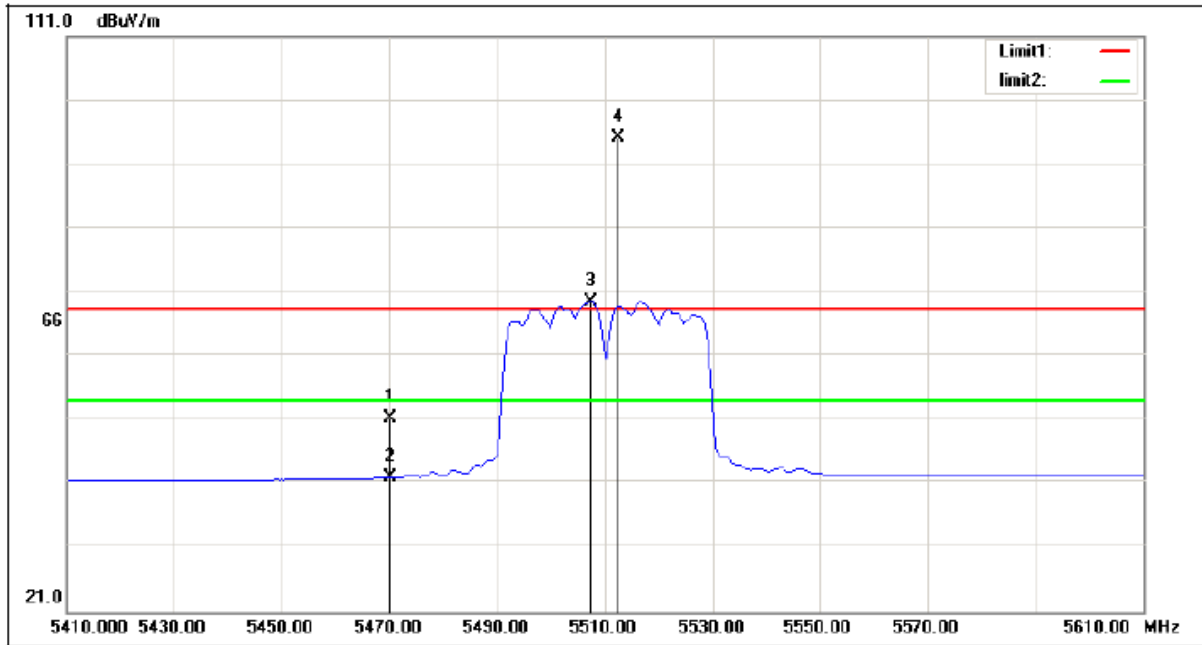

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	17.37	33.98	51.35	68.30	-16.95	peak
2	5470.000	7.99	33.98	41.97	54.00	-12.03	AVG
3	5507.500	35.39	34.04	69.43	/	/	AVG
4	5512.500	61.03	34.04	95.07	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz


Horizontal

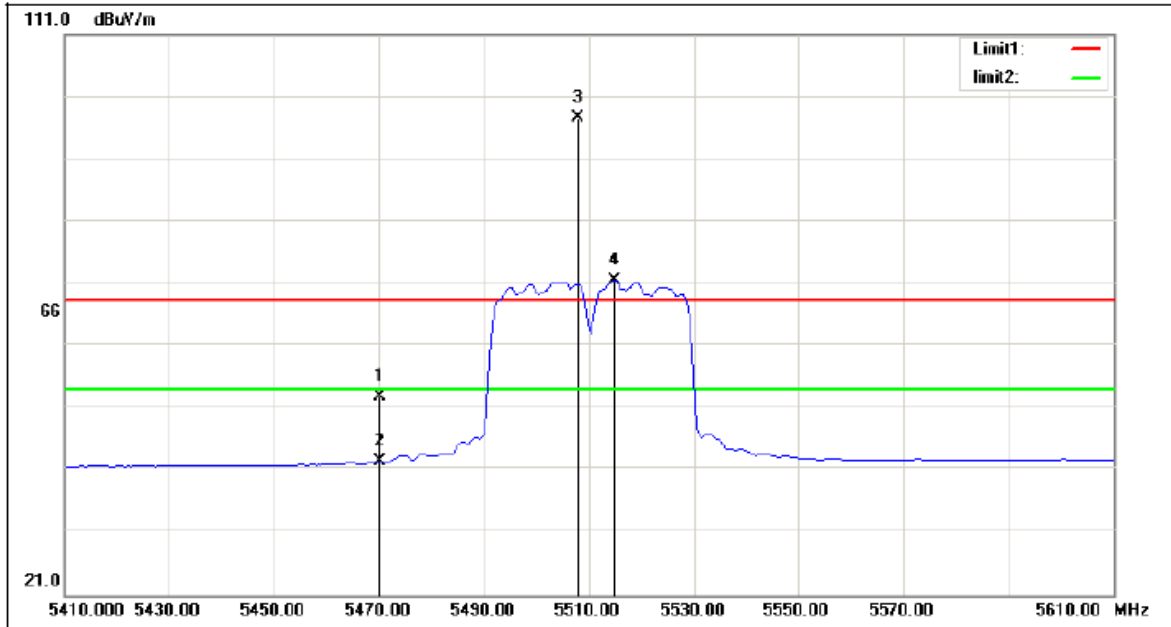

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	18.87	33.98	52.85	68.30	-15.45	peak
2	5470.000	8.46	33.98	42.44	54.00	-11.56	AVG
3	5508.000	63.55	34.04	97.59	/	/	peak
4	5515.000	37.52	34.04	71.56	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz


Vertical

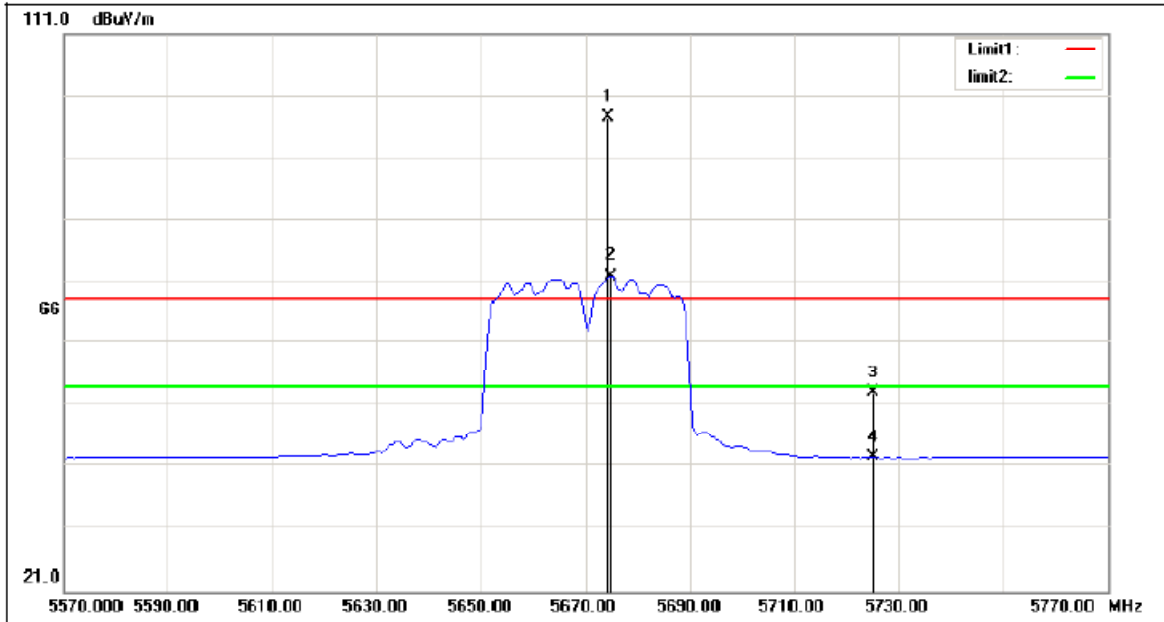

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5674.500	63.67	33.92	97.59	/	/	peak
2	5675.000	38.10	33.92	72.02	/	/	AVG
3	5725.000	19.24	33.88	53.12	68.30	-15.18	peak
4	5725.000	8.78	33.88	42.66	54.00	-11.34	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz


Horizontal

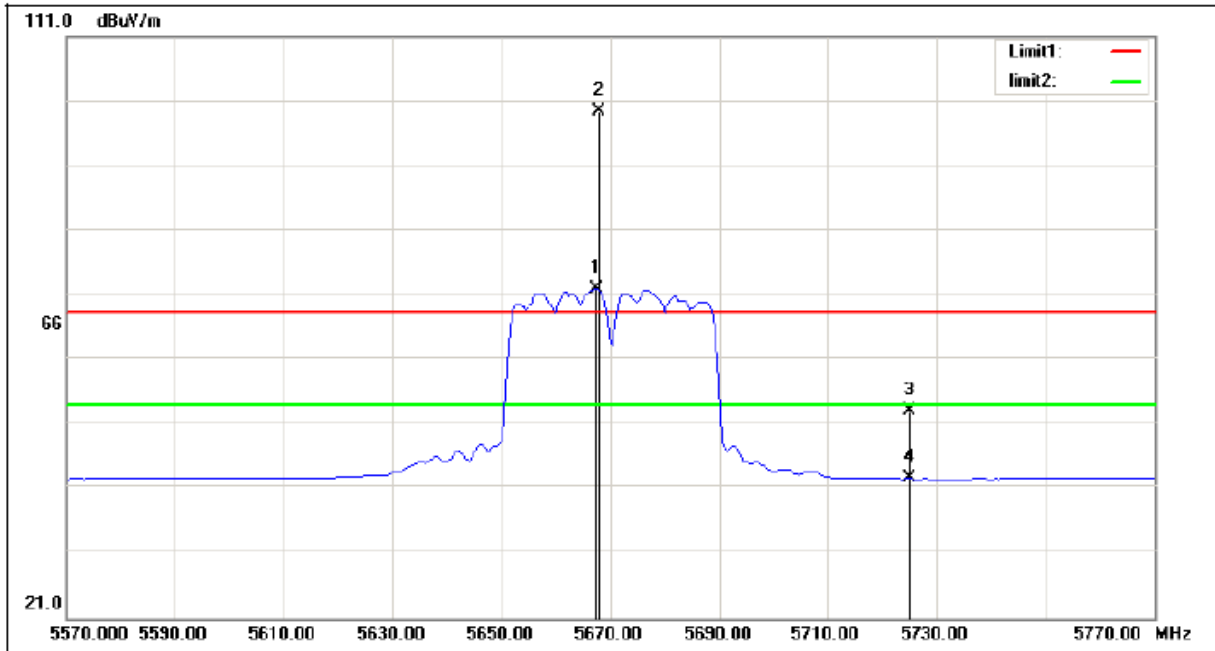

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5667.500	37.95	33.93	71.88	/	/	AVG
2	5668.000	65.46	33.93	99.39	/	/	peak
3	5725.000	19.09	33.88	52.97	68.30	-15.33	peak
4	5725.000	8.73	33.88	42.61	54.00	-11.39	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz


Vertical

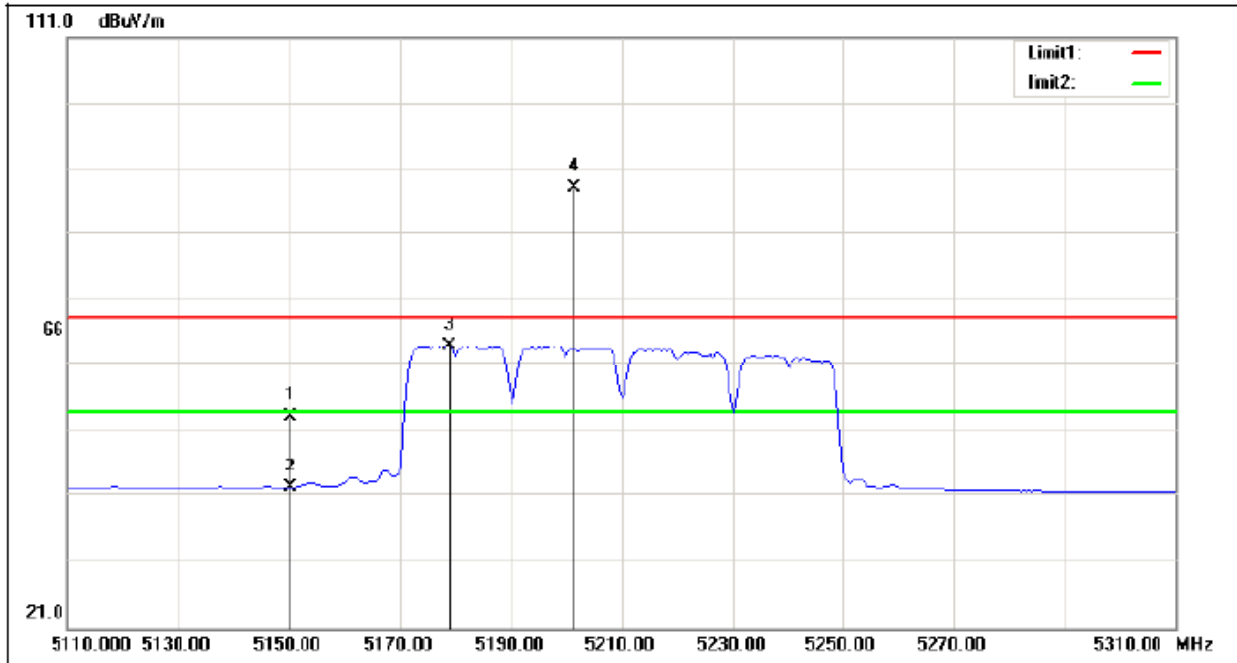

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.17	33.20	53.37	68.30	-14.93	peak
2	5150.000	9.36	33.20	42.56	54.00	-11.44	AVG
3	5179.000	30.89	33.27	64.16	/	/	AVG
4	5201.500	54.83	33.32	88.15	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz


Horizontal

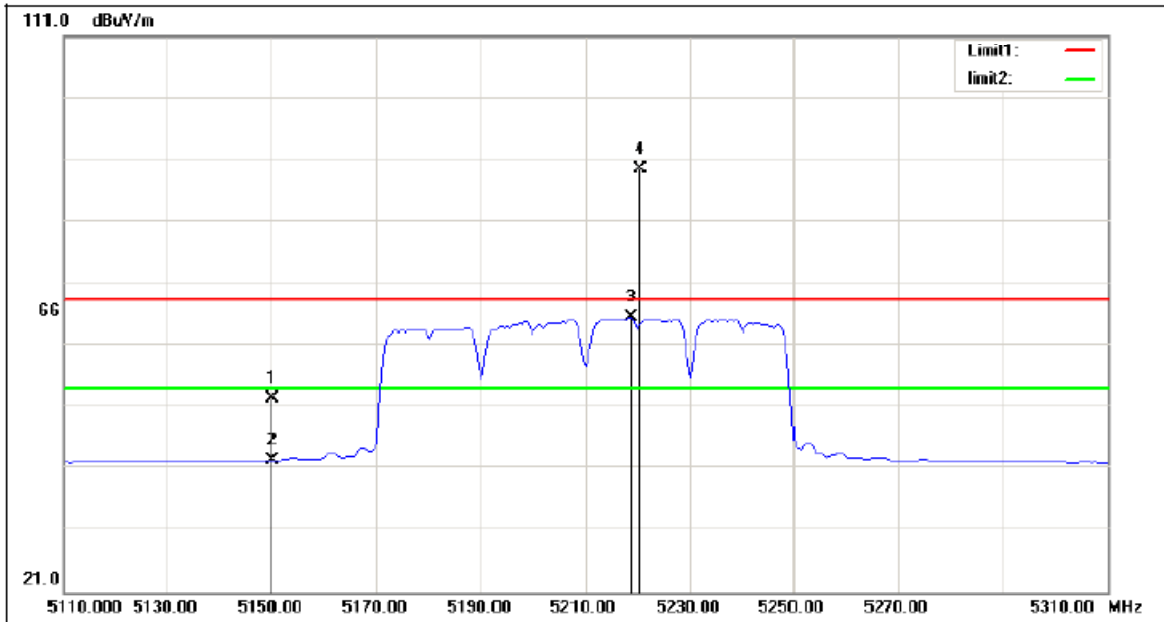

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	19.30	33.20	52.50	68.30	-15.80	peak
2	5150.000	9.26	33.20	42.46	54.00	-11.54	AVG
3	5219.000	32.03	33.37	65.40	/	/	AVG
4	5220.500	55.98	33.37	89.35	/	/	peak

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz


Vertical

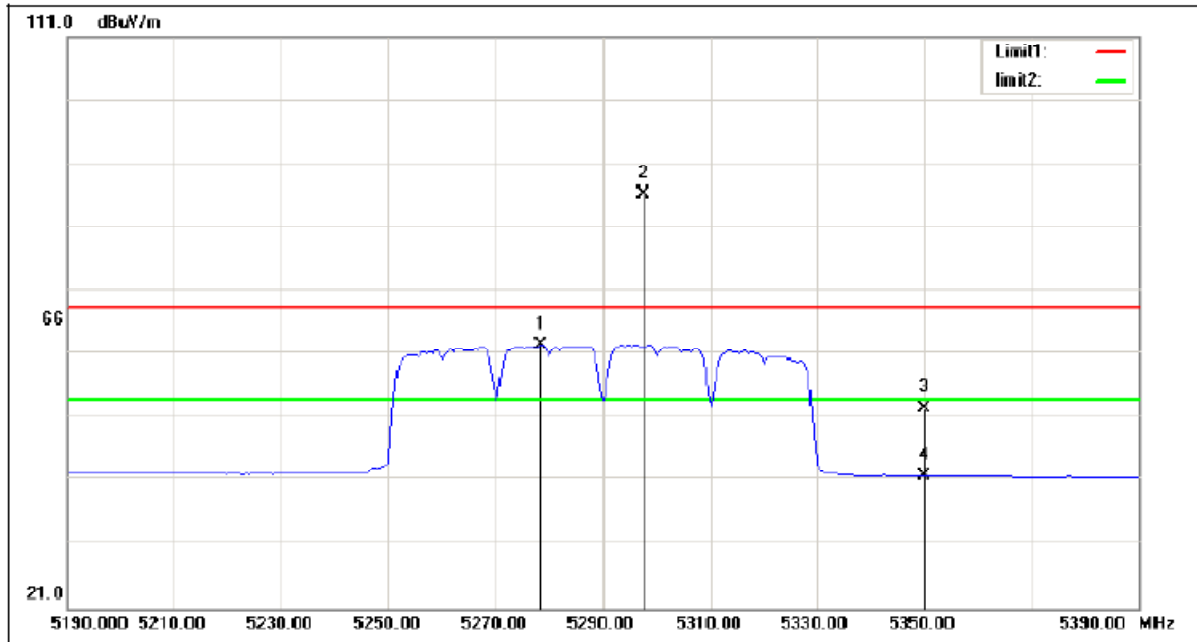

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5278.500	29.04	33.51	62.55	/	/	AVG
2	5297.500	52.63	33.55	86.18	/	/	peak
3	5350.000	18.94	33.68	52.62	68.30	-15.68	peak
4	5350.000	8.06	33.68	41.74	54.00	-12.26	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz


Horizontal

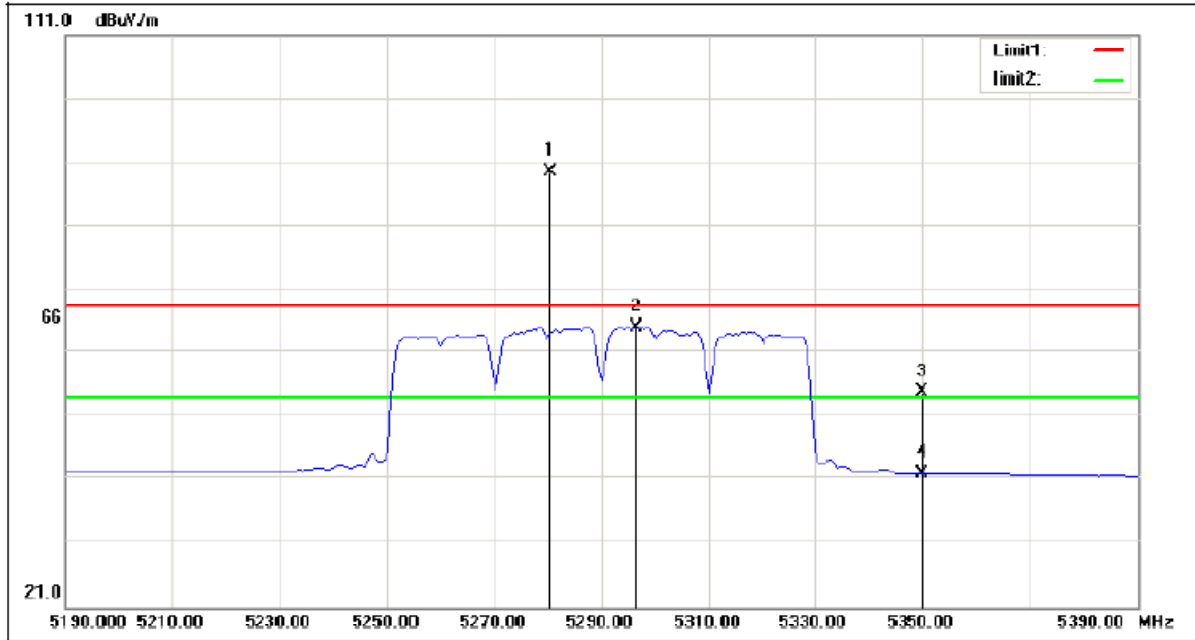

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5280.500	55.91	33.51	89.42	/	/	peak
2	5296.500	31.50	33.55	65.05	/	/	AVG
3	5350.000	21.17	33.68	54.85	68.30	-13.45	peak
4	5350.000	8.31	33.68	41.99	54.00	-12.01	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz


Vertical

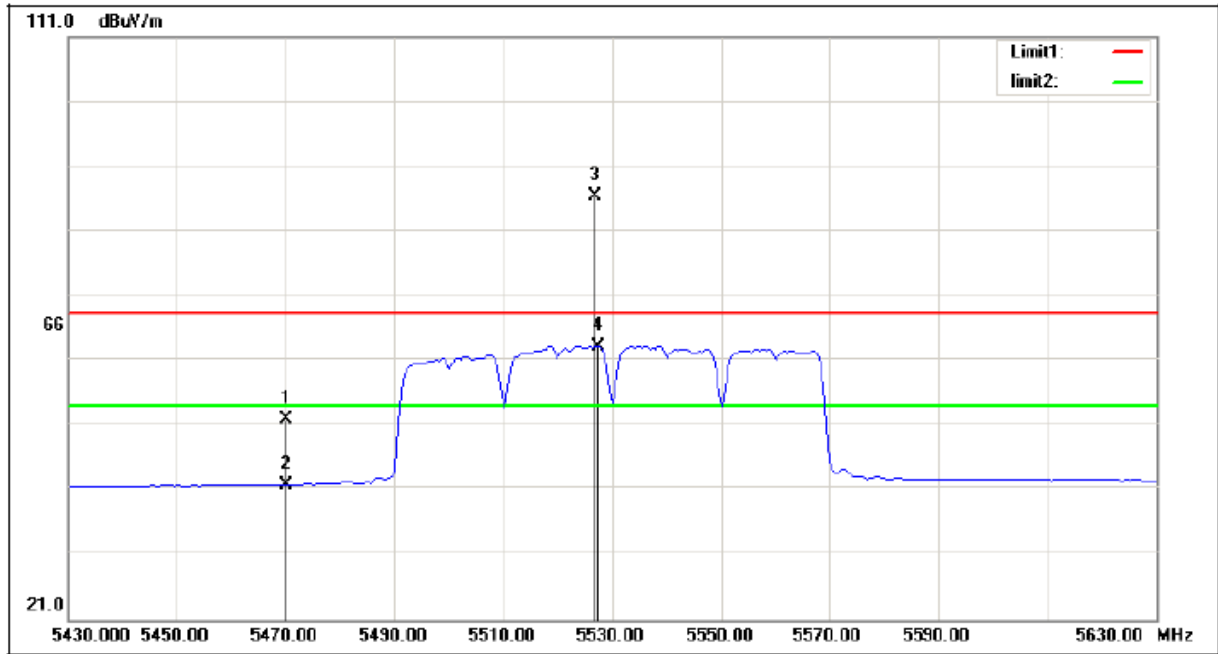

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	17.90	33.98	51.88	68.30	-16.42	peak
2	5470.000	7.87	33.98	41.85	54.00	-12.15	AVG
3	5527.000	52.27	34.03	86.30	/	/	peak
4	5527.500	29.19	34.03	63.22	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz


Horizontal

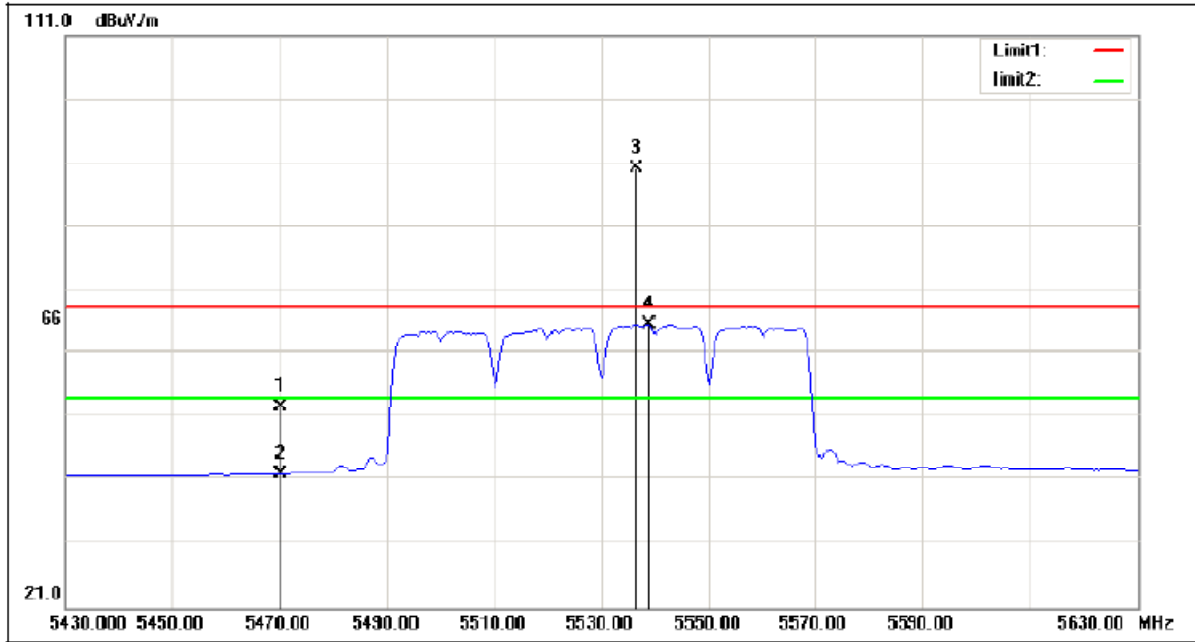

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	18.60	33.98	52.58	68.30	-15.72	peak
2	5470.000	8.17	33.98	42.15	54.00	-11.85	AVG
3	5536.500	56.07	34.02	90.09	/	/	peak
4	5539.000	31.69	34.02	65.71	/	/	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz


Vertical

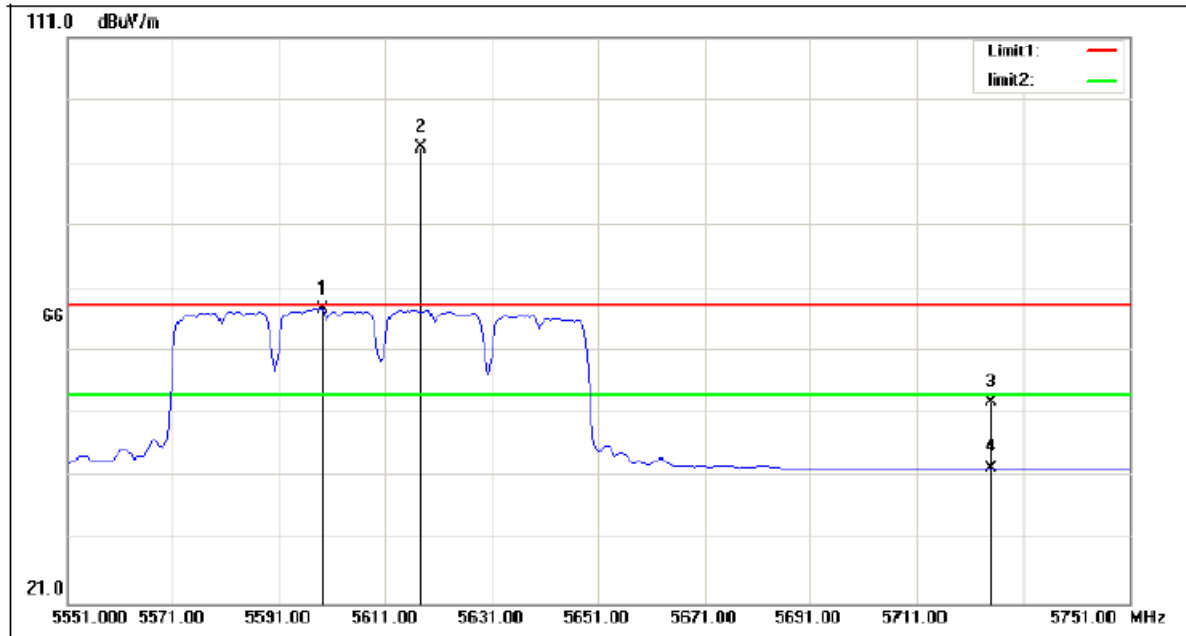

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5599.000	33.82	33.97	67.79	/	/	AVG
2	5617.500	59.36	33.96	93.32	/	/	peak
3	5725.000	18.86	33.88	52.74	68.30	-15.56	peak
4	5725.000	8.57	33.88	42.45	54.00	-11.55	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz


Horizontal

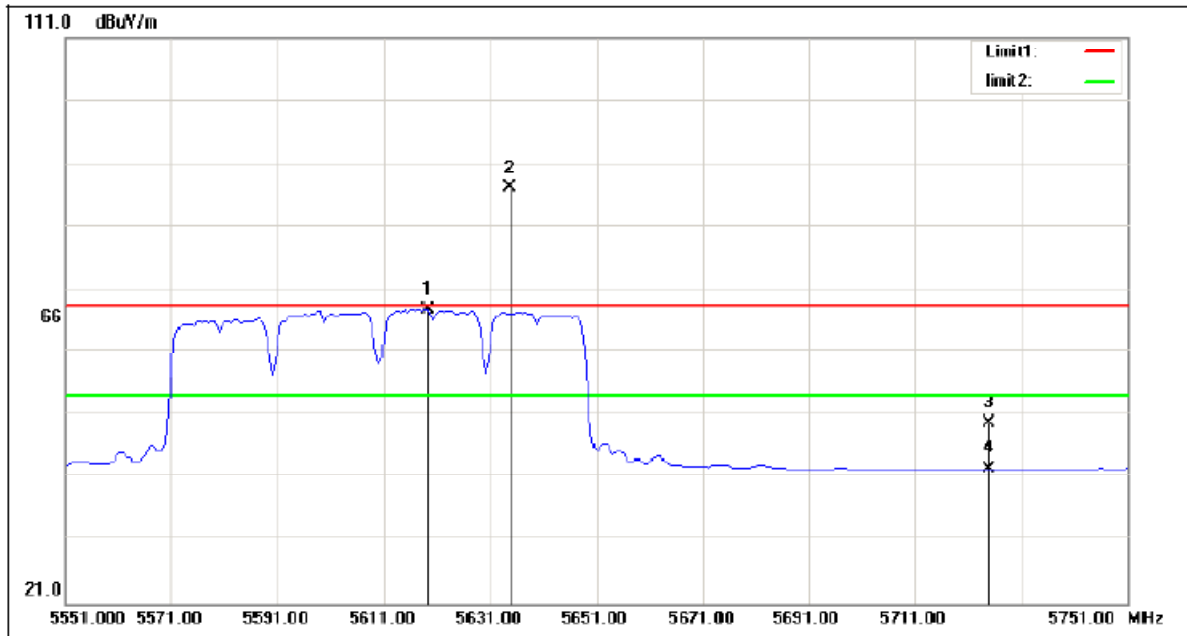

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5619.000	33.84	33.95	67.79	/	/	AVG
2	5634.500	53.12	33.95	87.07	/	/	peak
3	5725.000	15.71	33.88	49.59	68.30	-18.71	peak
4	5725.000	8.60	33.88	42.48	54.00	-11.52	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz


Vertical

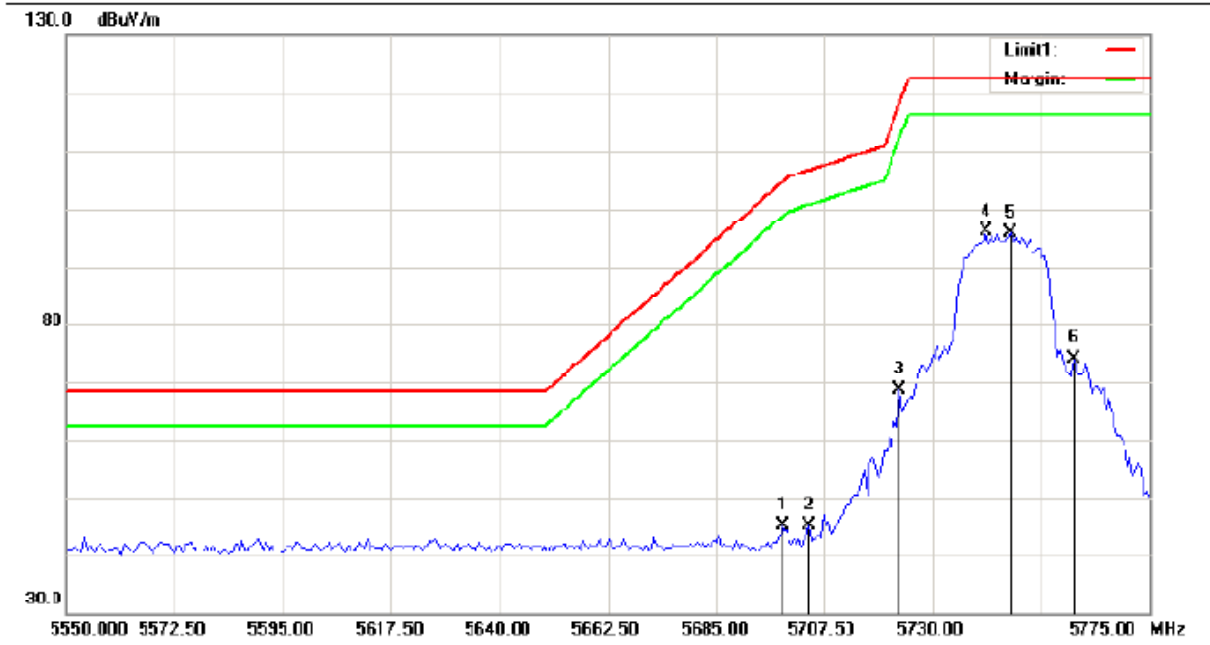

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5698.500	51.25	-6.20	45.05	104.19	-59.14	peak
2	5704.688	51.35	-6.19	45.16	106.61	-61.45	peak
3	5723.250	74.90	-6.17	68.73	118.31	-49.58	peak
4	5741.250	102.03	-6.15	95.88	122.30	-26.42	peak
5	5746.313	101.79	-6.15	95.64	122.30	-26.66	peak
6	5759.250	80.17	-6.13	74.04	122.30	-48.26	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz


Horizontal

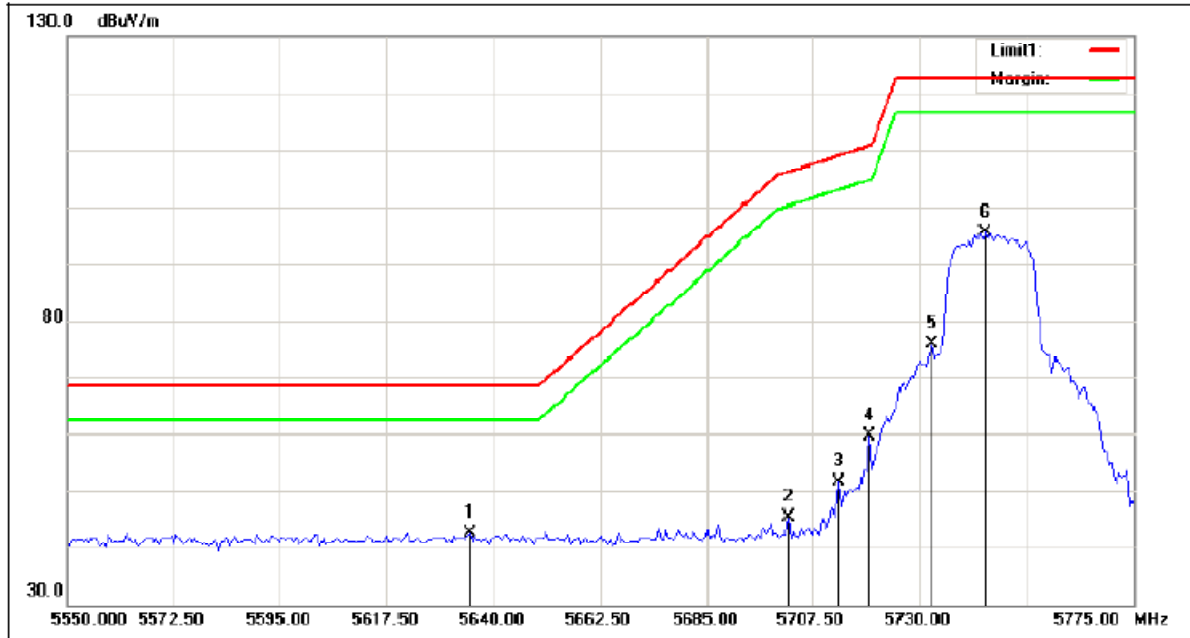

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.938	48.98	-6.28	42.70	68.30	-25.60	peak
2	5702.438	51.58	-6.20	45.38	105.98	-60.60	peak
3	5713.125	57.75	-6.18	51.57	108.97	-57.40	peak
4	5719.313	65.83	-6.18	59.65	110.71	-51.06	peak
5	5732.813	82.08	-6.16	75.92	122.30	-46.38	peak
6	5744.063	101.52	-6.15	95.37	122.30	-26.93	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz


Vertical

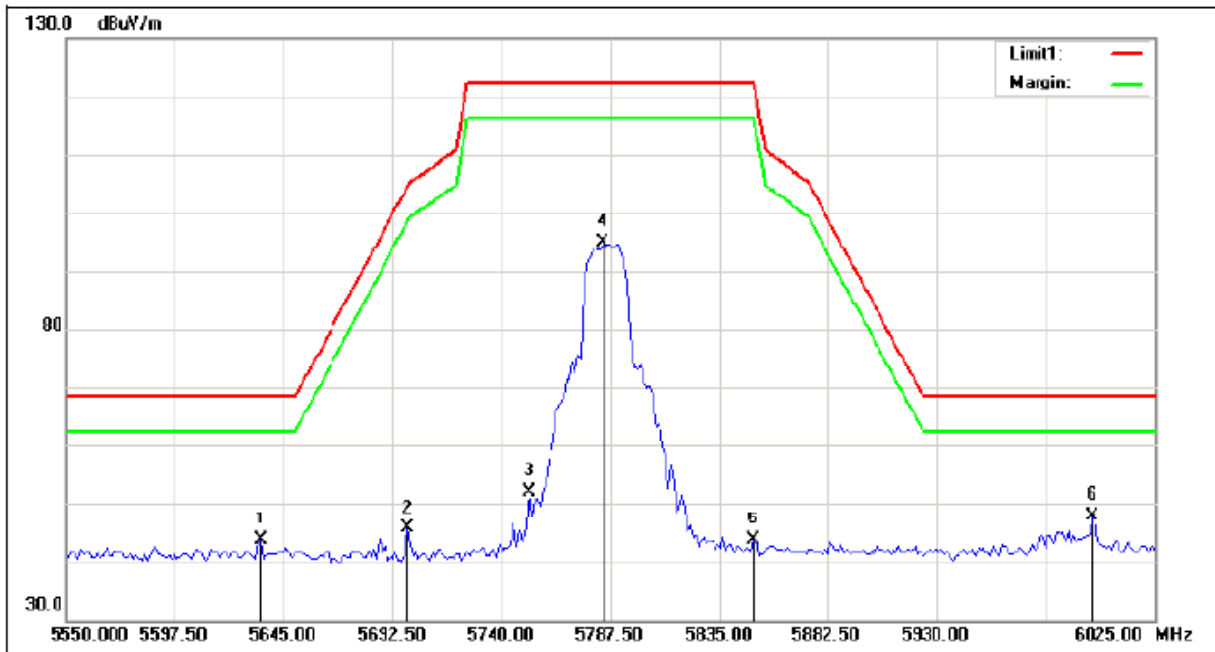

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.313	49.87	-6.28	43.59	68.30	-24.71	peak
2	5698.438	51.77	-6.20	45.57	104.14	-58.57	peak
3	5751.875	58.14	-6.14	52.00	122.30	-70.30	peak
4	5783.938	100.93	-6.10	94.83	122.30	-27.47	peak
5	5849.250	49.75	6.02	43.73	122.30	78.57	peak
6	5997.688	53.62	-5.83	47.79	68.30	-20.51	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz


Horizontal

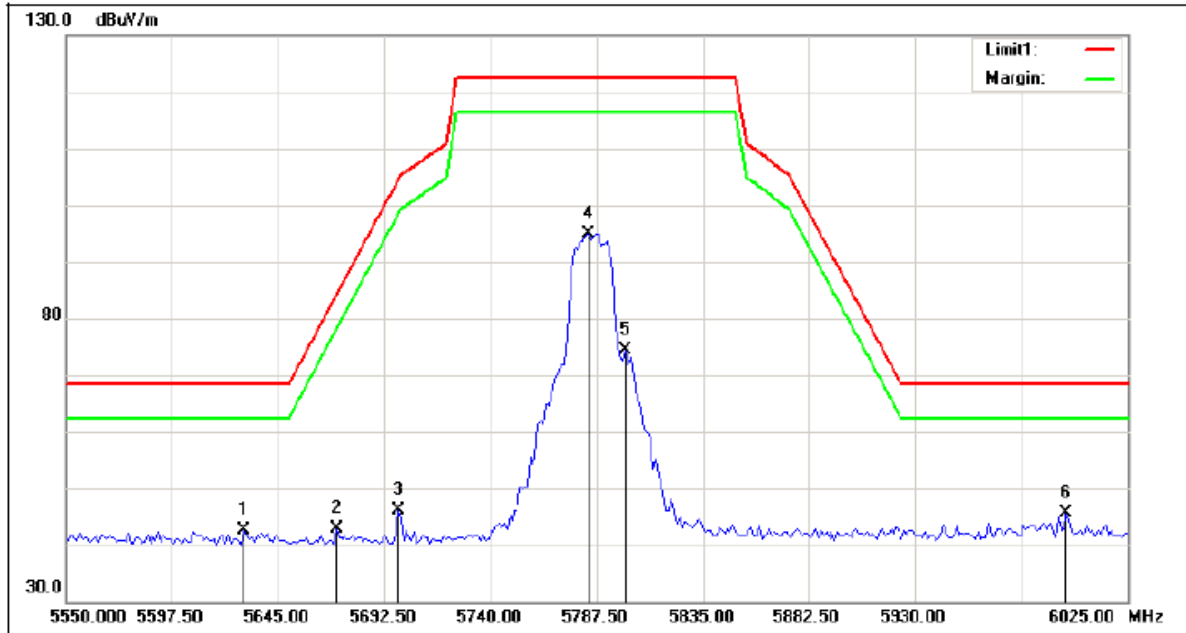

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5629.563	48.79	-6.28	42.51	68.30	-25.79	peak
2	5671.125	49.02	-6.24	42.78	83.93	-41.15	peak
3	5698.438	52.38	-6.20	46.18	104.14	-57.96	peak
4	5783.938	101.08	-6.10	94.98	122.30	-27.32	peak
5	5800.563	80.56	-6.08	74.48	122.30	-47.82	peak
6	5997.688	51.48	-5.83	45.65	68.30	-22.65	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz


Vertical

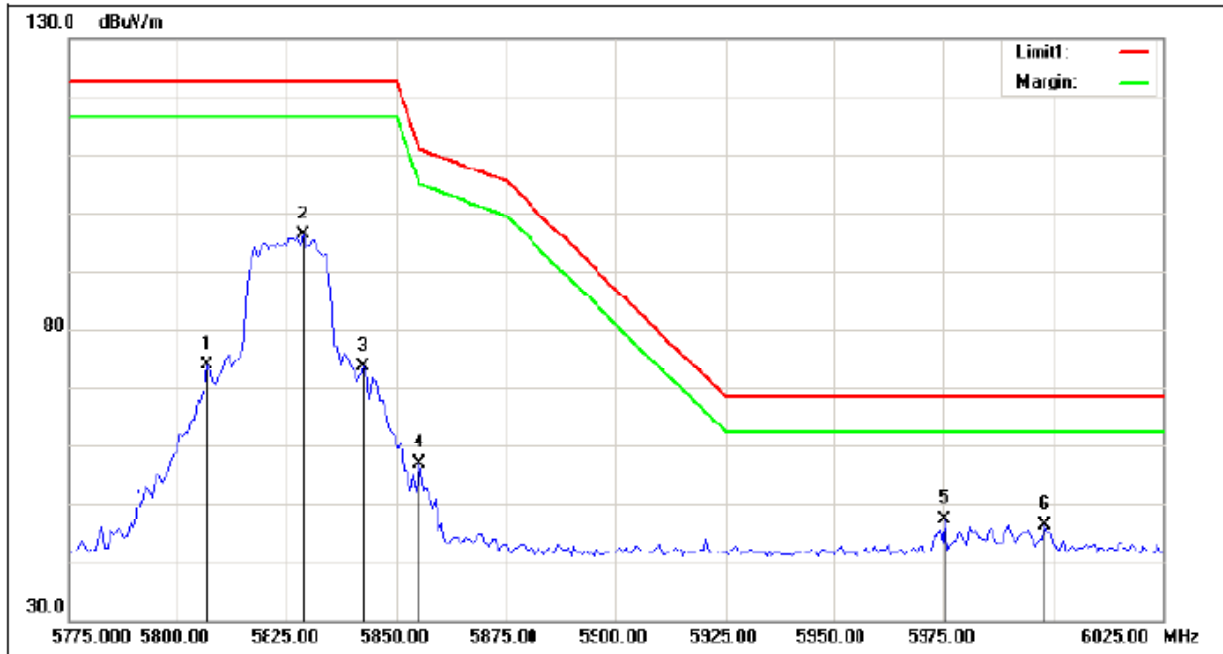

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5806.875	79.86	-6.08	73.78	122.30	-48.52	peak
2	5828.750	102.14	-6.04	96.10	122.30	-26.20	peak
3	5842.500	79.77	-6.02	73.75	122.30	-48.55	peak
4	5855.000	62.96	-6.01	56.95	110.90	-53.95	peak
5	5975.625	53.33	-5.86	47.47	68.30	-20.83	peak
6	5998.125	52.11	-5.83	46.28	68.30	-22.02	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz


Horizontal

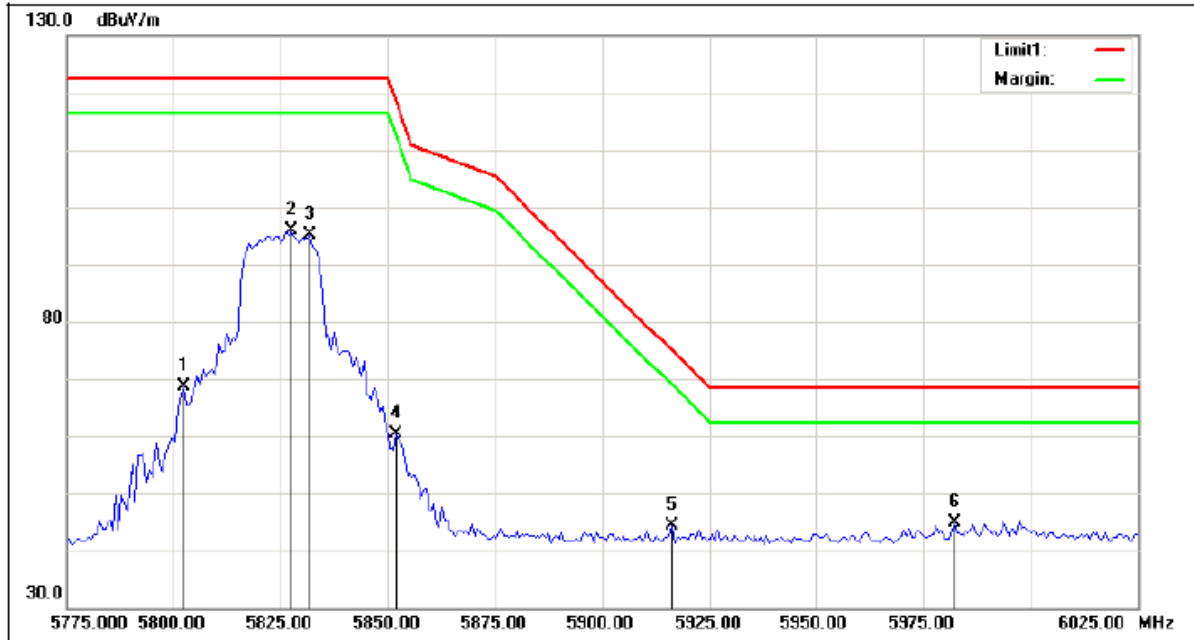

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5802.500	74.75	-6.08	68.67	122.30	-53.63	peak
2	5827.500	101.89	-6.04	95.85	122.30	-26.45	peak
3	5831.875	101.17	-6.05	95.12	122.30	-27.18	peak
4	5851.875	66.30	-6.02	60.28	118.02	-57.74	peak
5	5916.250	50.21	-5.93	44.28	74.77	-30.49	peak
6	5982.500	50.77	-5.85	44.92	68.30	-23.38	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz


Vertical

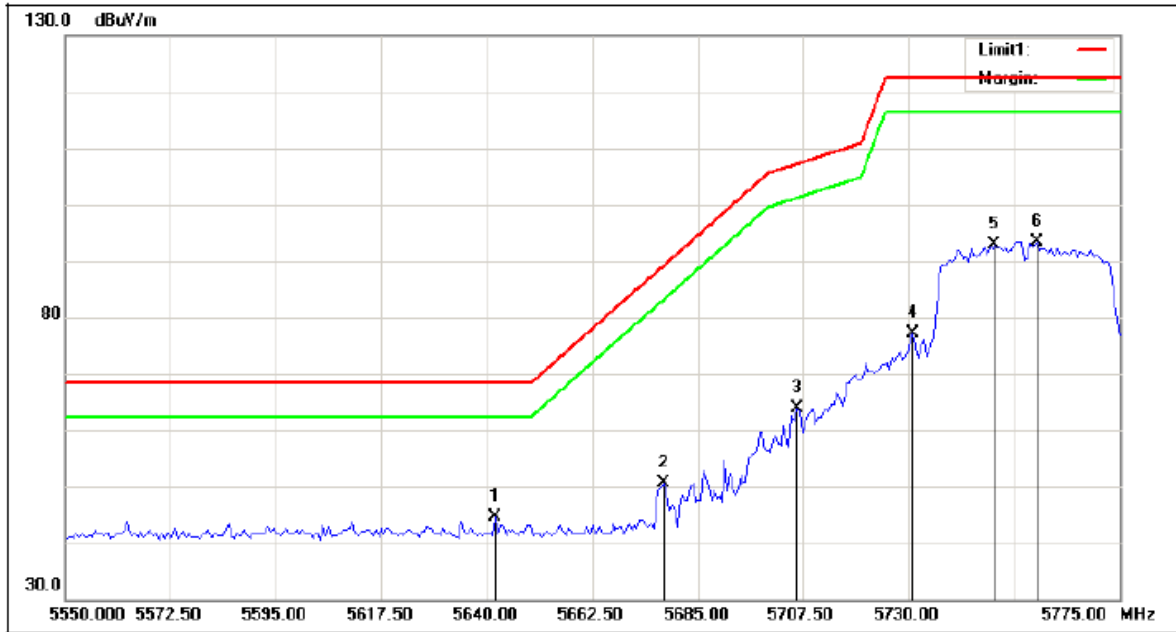

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5641.688	50.80	-6.27	44.53	68.30	-23.77	peak
2	5677.688	56.89	-6.22	50.67	88.79	-38.12	peak
3	5706.375	70.14	-6.20	63.94	107.08	-43.14	peak
4	5731.125	83.17	-6.16	77.01	122.30	-45.29	peak
5	5748.563	98.99	-6.14	92.85	122.30	-29.45	peak
6	5757.563	99.62	-6.13	93.49	122.30	-28.81	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz


Horizontal

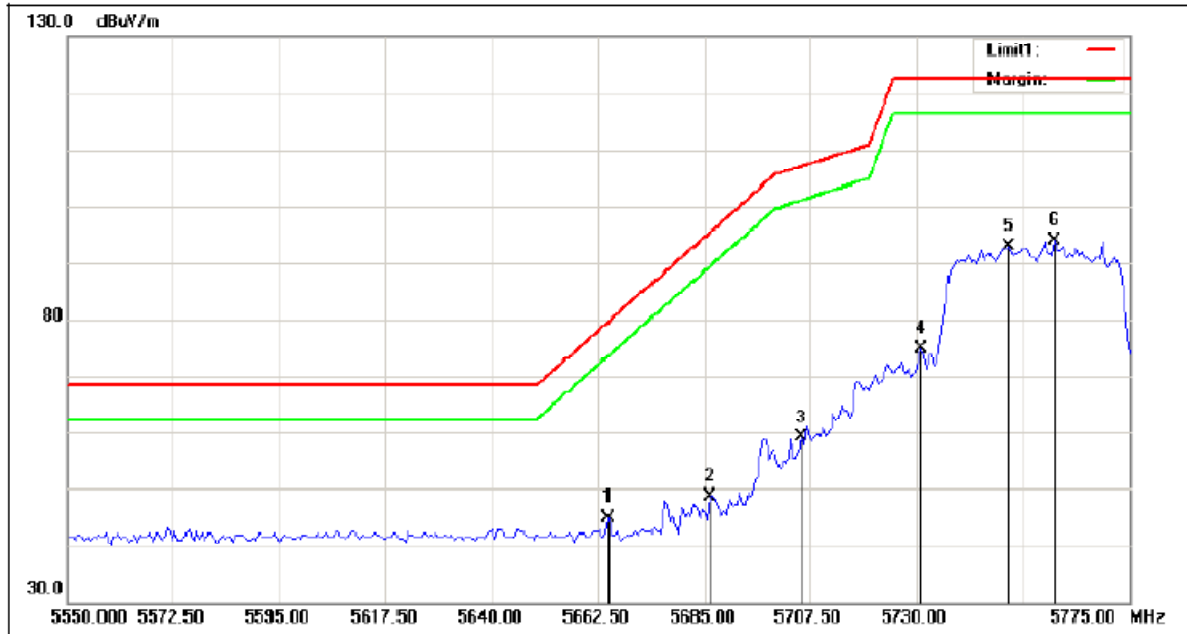

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5664.750	51.01	-6.24	44.77	79.21	-34.44	peak
2	5686.125	54.94	-6.22	48.72	95.03	-46.31	peak
3	5705.813	65.44	-6.19	59.25	106.93	-47.68	peak
4	5731.125	81.11	-6.16	74.95	122.30	-47.35	peak
5	5749.688	99.10	-6.14	92.96	122.30	-29.34	peak
6	5759.250	99.89	-6.13	93.76	122.30	-28.54	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz


Vertical

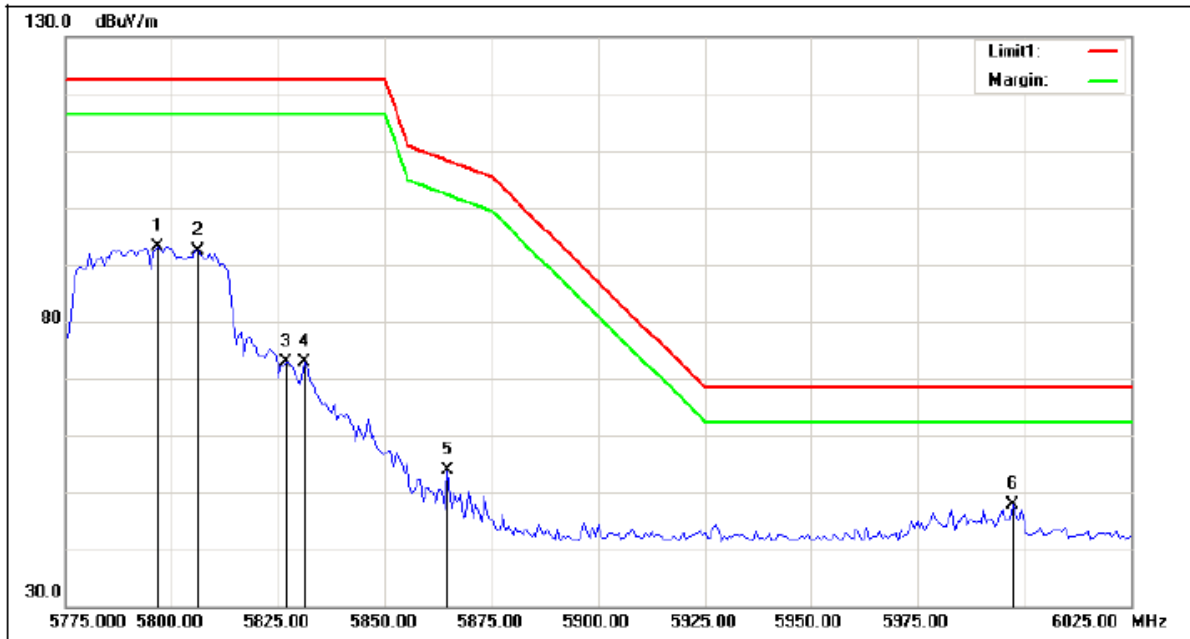

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5796.875	99.18	-6.09	93.09	122.30	-29.21	peak
2	5806.250	98.58	-6.08	92.50	122.30	-29.80	peak
3	5826.875	79.02	-6.05	72.97	122.30	-49.33	peak
4	5831.250	78.87	-6.05	72.82	122.30	-49.48	peak
5	5864.375	59.76	-6.00	53.76	108.27	-54.51	peak
6	5997.500	53.69	-5.84	47.85	68.30	-20.45	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz


Horizontal

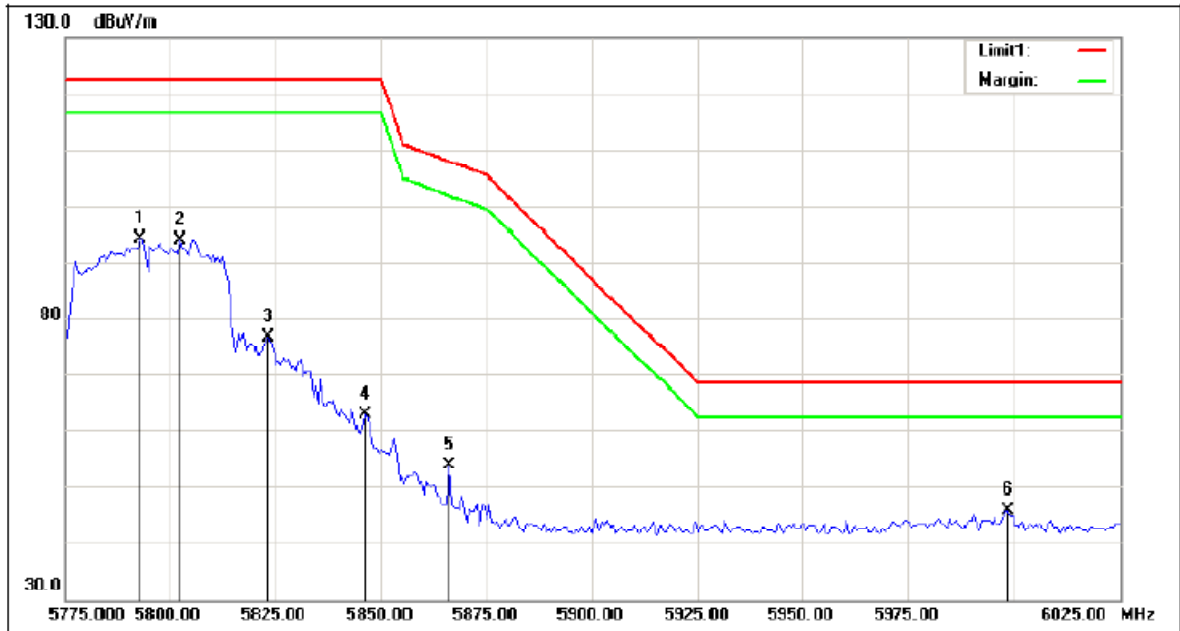

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5793.125	100.24	-6.08	94.16	122.30	-28.14	peak
2	5802.500	99.91	-6.08	93.83	122.30	-28.47	peak
3	5823.125	82.62	-6.05	76.57	122.30	-45.73	peak
4	5846.250	68.96	-6.03	62.93	122.30	-59.37	peak
5	5866.250	59.86	-6.00	53.86	107.75	-53.89	peak
6	5998.750	51.81	-5.83	45.98	68.30	-22.32	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz


Vertical

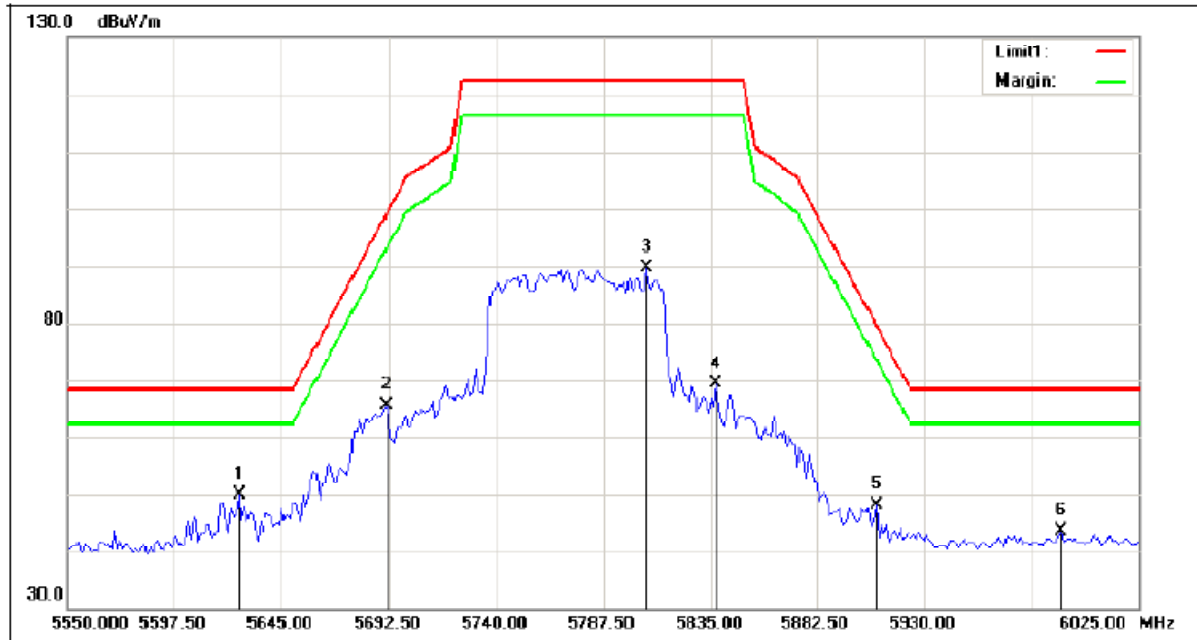

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5626.000	56.28	-6.30	49.98	68.30	-18.32	peak
2	5691.313	71.96	-6.21	65.75	98.87	-33.12	peak
3	5806.500	95.63	-6.08	89.55	122.30	-32.75	peak
4	5837.375	75.35	-6.04	69.31	122.30	-52.99	peak
5	5908.625	54.11	-5.94	48.17	80.42	-32.25	peak
6	5990.563	49.54	-5.84	43.70	68.30	-24.60	peak

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

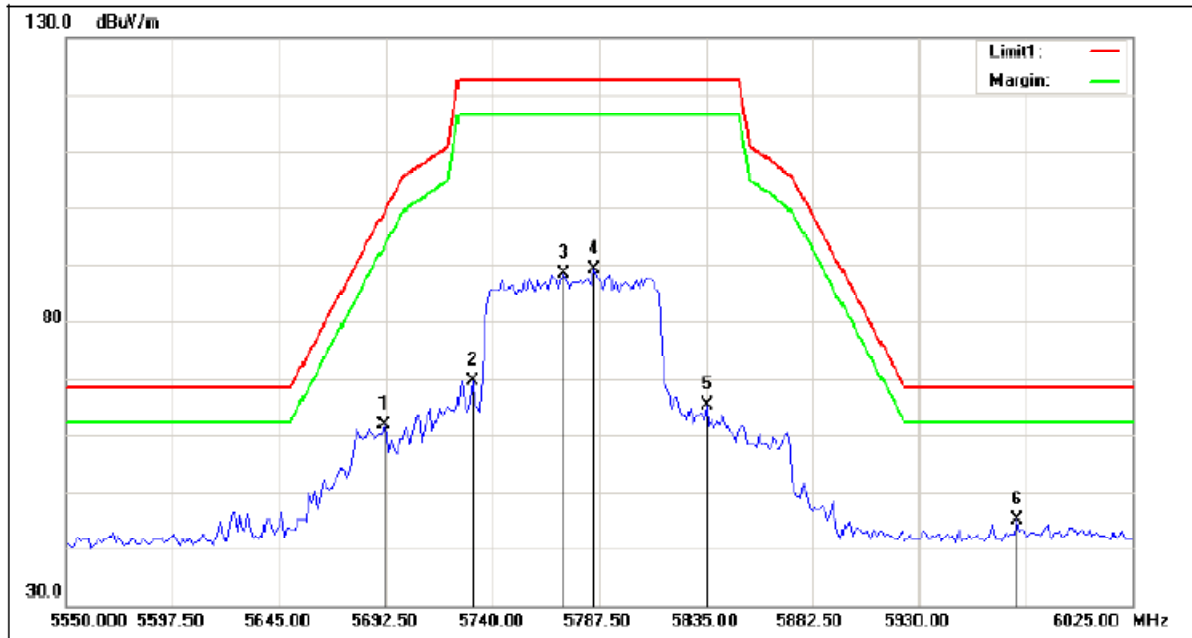


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5691.313	68.03	-6.21	61.82	98.87	-37.05	peak
2	5730.500	75.83	-6.16	69.67	122.30	-52.63	peak
3	5772.063	94.56	-6.12	88.44	122.30	-33.86	peak
4	5785.125	95.12	-6.10	89.02	122.30	-33.28	peak
5	5835.000	71.41	-6.04	65.37	122.30	-56.93	peak
6	5973.938	50.93	-5.86	45.07	68.30	-23.23	peak

5.9 TEST RESULTS - ABOVE 1000 MHz (HARMONIC)

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz


Vertical

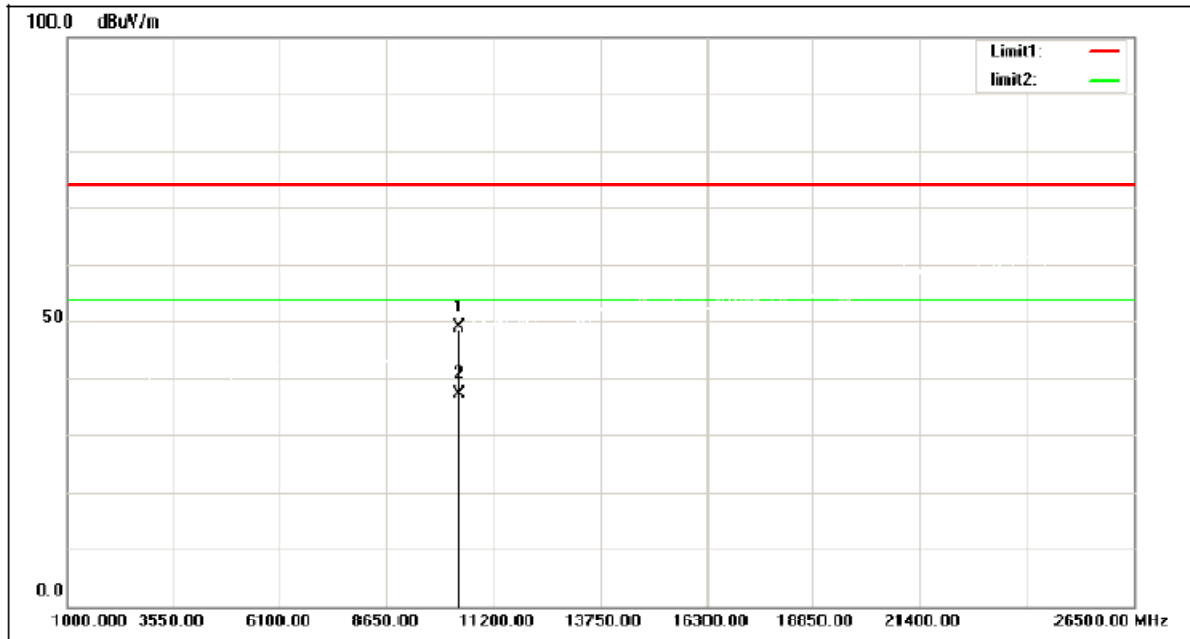

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	44.24	4.53	48.77	74.00	-25.23	peak
2	10360.000	32.62	4.53	37.15	54.00	-16.85	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz


Horizontal

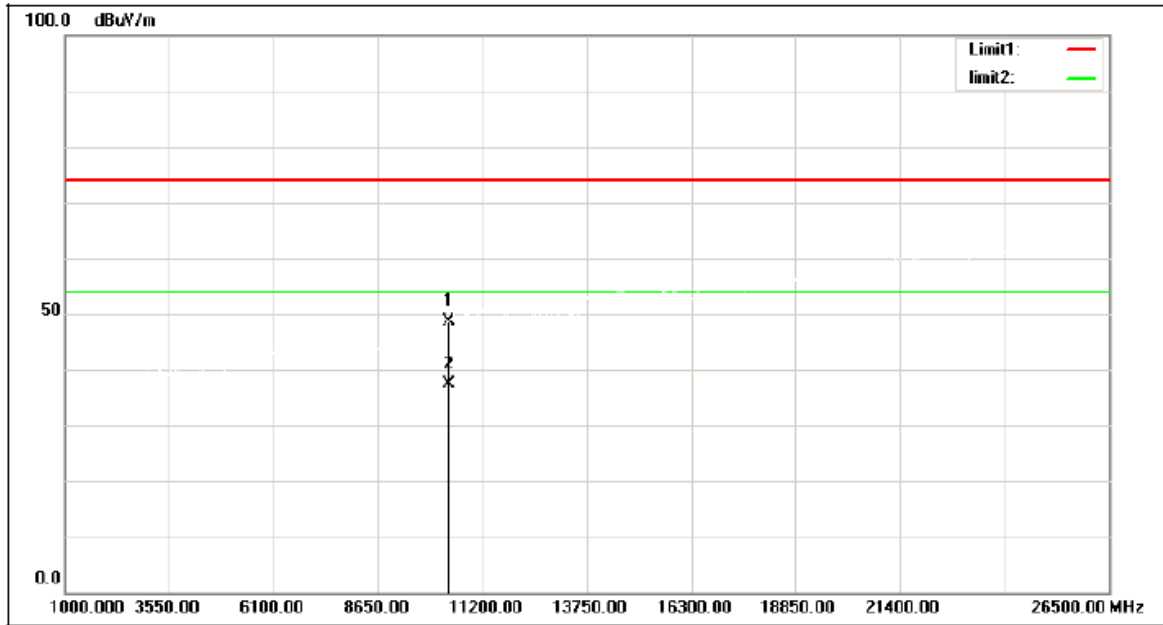

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	44.00	4.53	48.53	74.00	-25.47	peak
2	10360.000	32.73	4.53	37.26	54.00	-16.74	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5260 MHz


Vertical

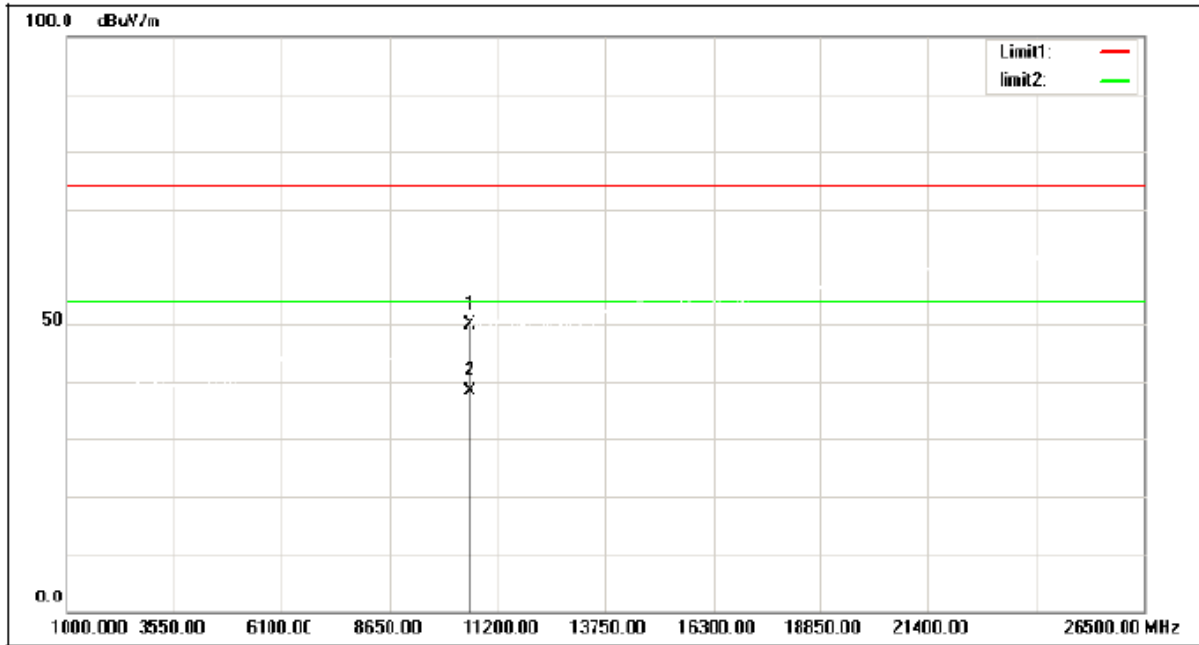

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	44.85	5.01	49.86	74.00	-24.14	peak
2	10520.000	33.25	5.01	38.26	54.00	-15.74	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5260 MHz


Horizontal

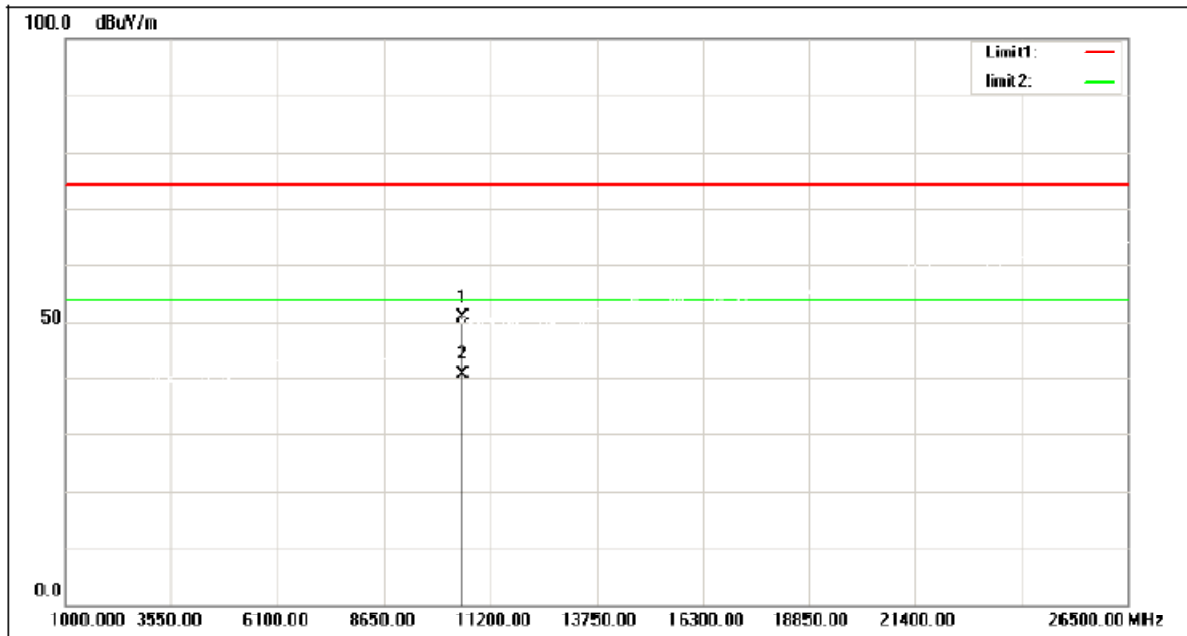

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	45.73	5.01	50.74	74.00	-23.26	peak
2	10520.000	35.61	5.01	40.62	54.00	-13.38	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz


Vertical

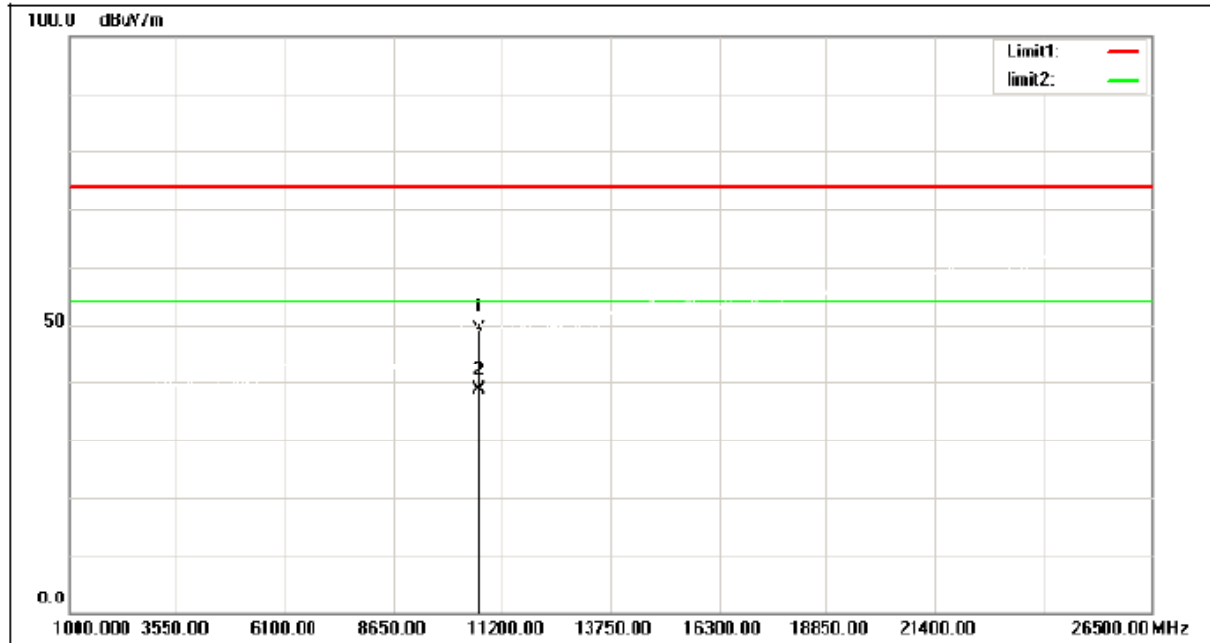

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	43.97	5.38	49.35	74.00	-24.65	peak
2	10640.000	33.30	5.38	38.68	54.00	-15.32	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX A Mode 5320 MHz


Horizontal

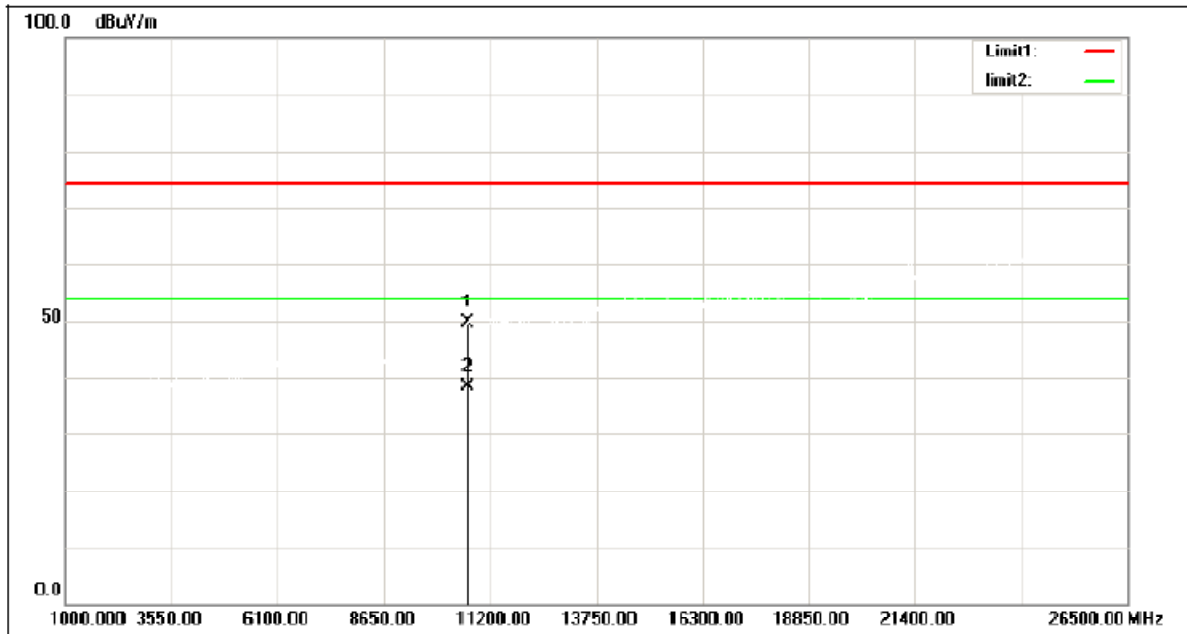

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	44.23	5.38	49.61	74.00	-24.39	peak
2	10640.000	32.90	5.38	38.28	54.00	-15.72	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz


Vertical

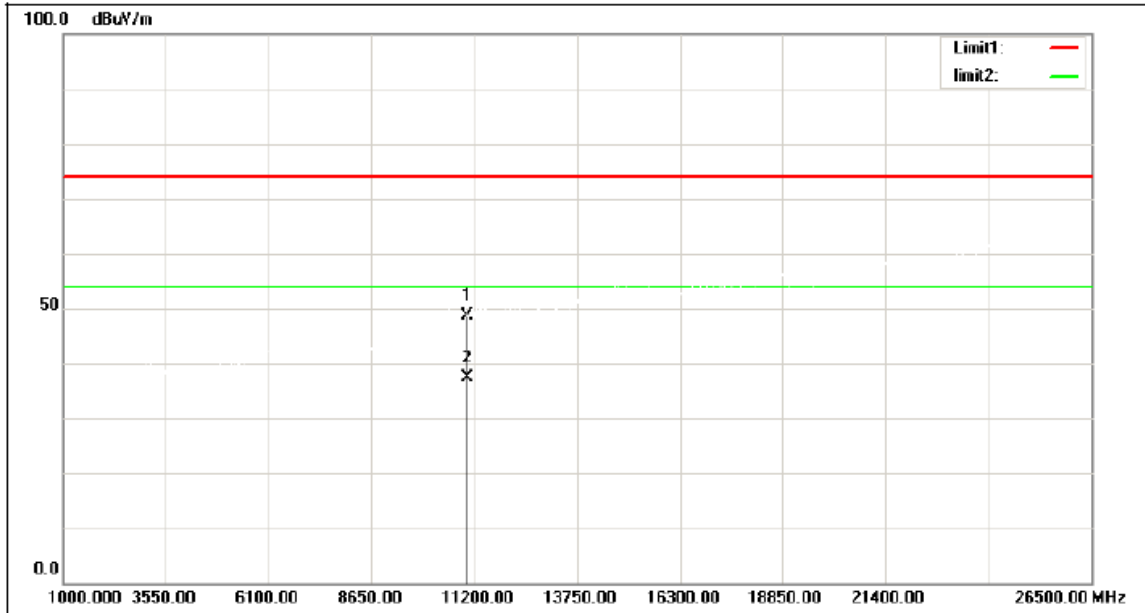

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	42.12	6.50	48.62	74.00	-25.38	peak
2	11000.000	30.82	6.50	37.32	54.00	-16.68	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5500 MHz


Horizontal

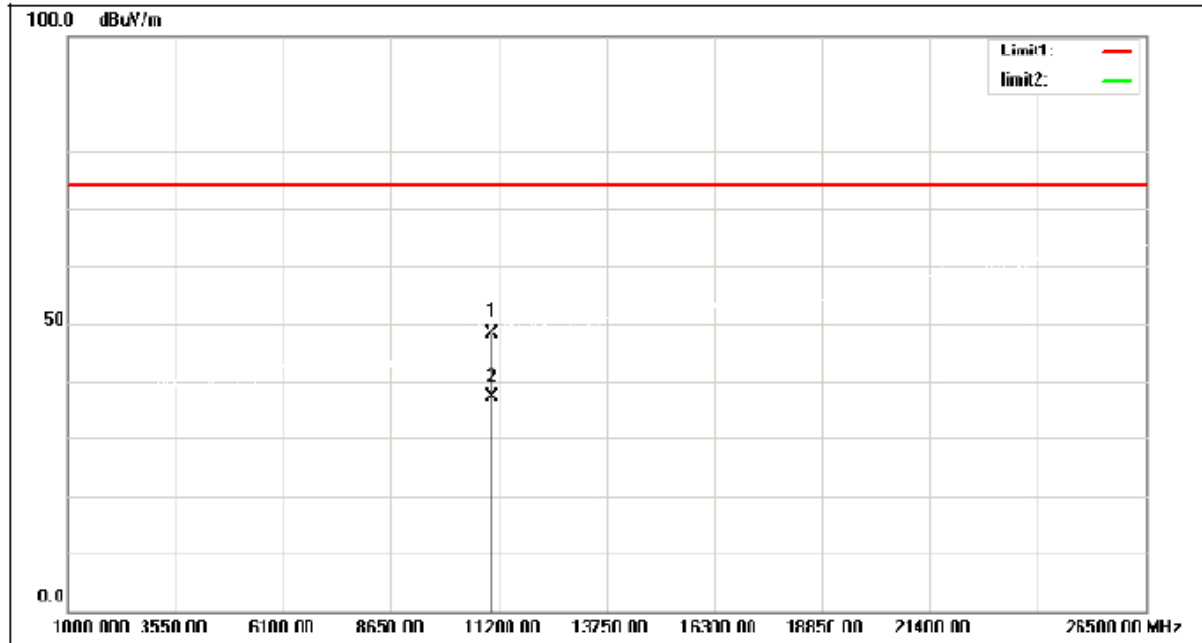

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	41.95	6.50	48.45	74.00	-25.55	peak
2	11000.000	30.62	6.50	37.12	54.00	-16.88	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5600 MHz


Vertical

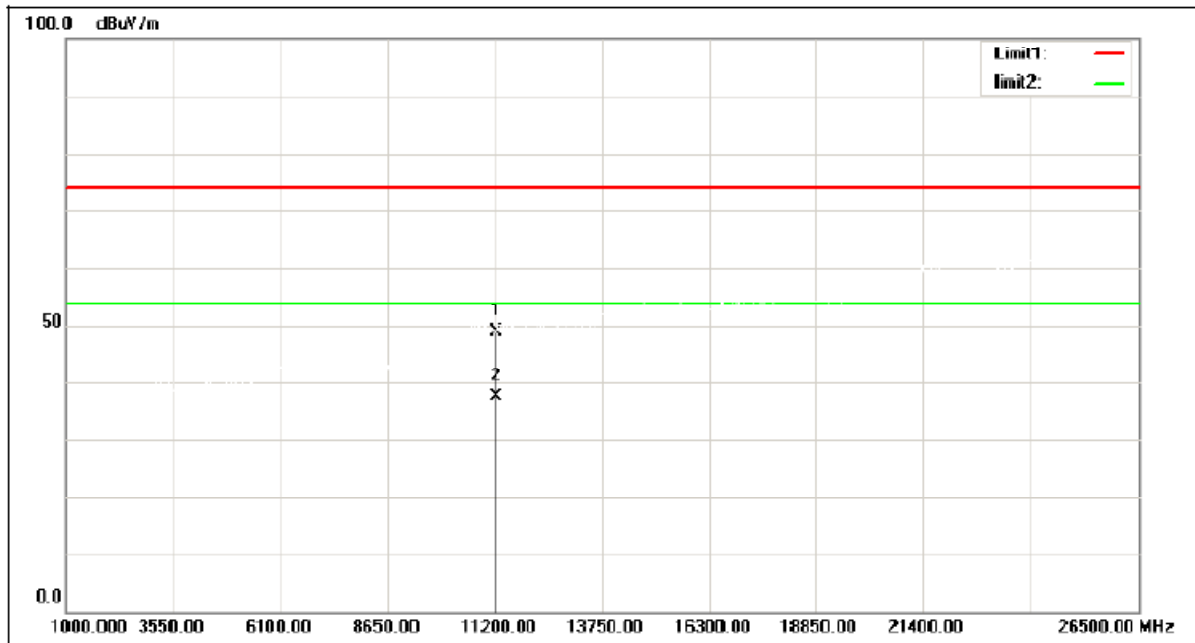

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	42.55	6.41	48.96	74.00	-25.04	peak
2	11200.000	31.17	6.41	37.58	54.00	-16.42	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5600 MHz


Horizontal

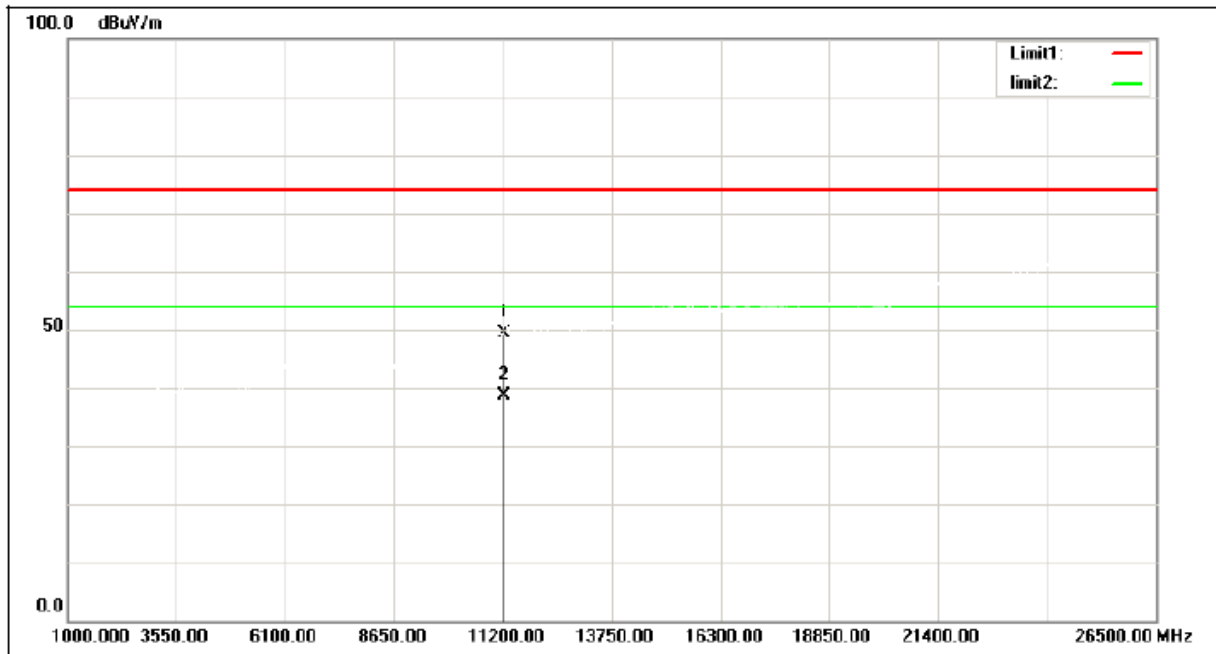

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	42.89	6.41	49.30	74.00	-24.70	peak
2	11200.000	32.15	6.41	38.56	54.00	-15.44	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz


Vertical

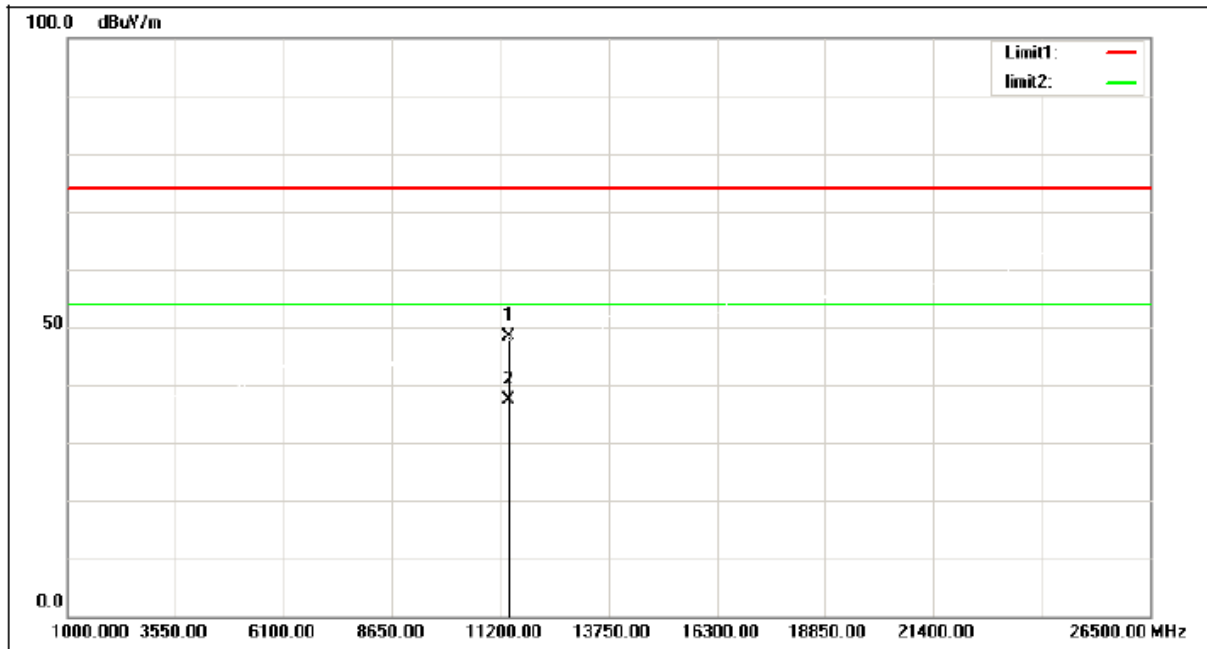

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	42.01	6.31	48.32	74.00	-25.68	peak
2	11400.000	30.95	6.31	37.26	54.00	-16.74	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5700 MHz


Horizontal

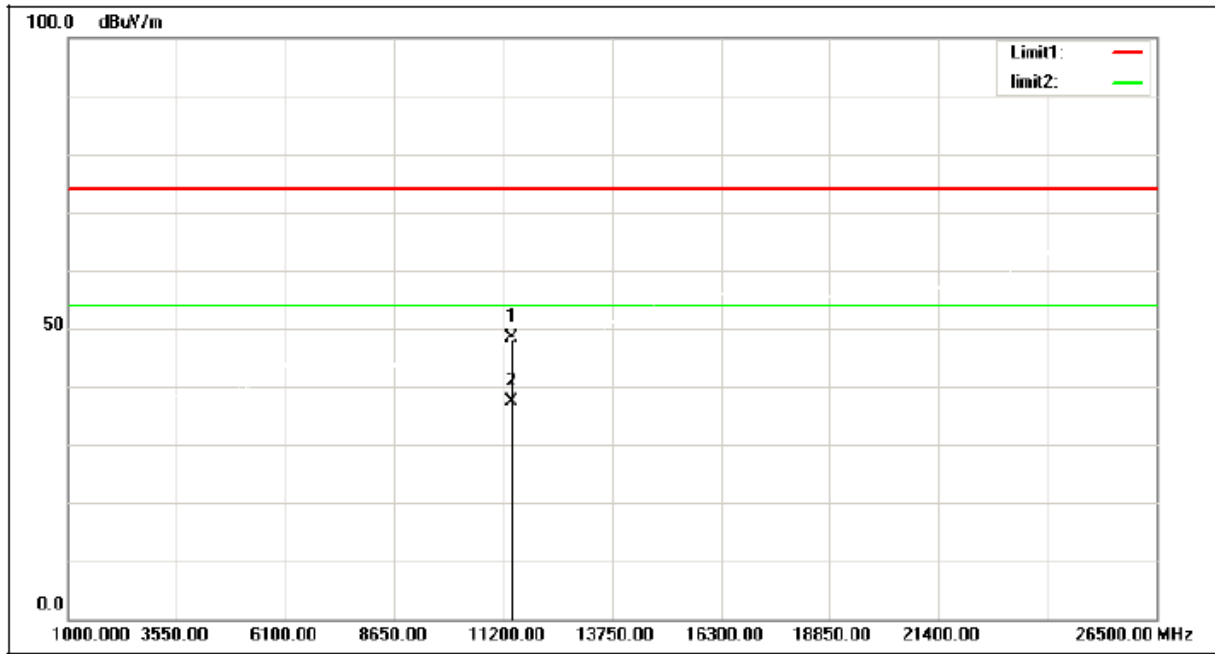

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	41.95	6.31	48.26	74.00	-25.74	peak
2	11400.000	31.17	6.31	37.48	54.00	-16.52	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz


Vertical

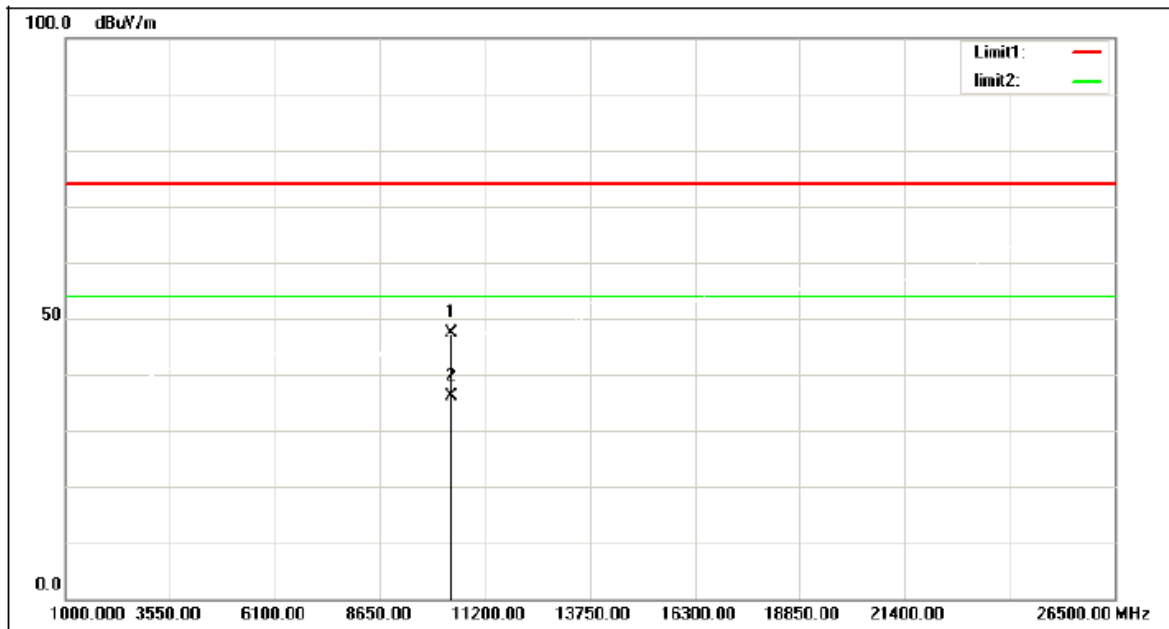

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	42.80	4.53	47.33	74.00	-26.67	peak
2	10360.000	31.65	4.53	36.18	54.00	-17.82	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT20) Mode 5180 MHz


Horizontal

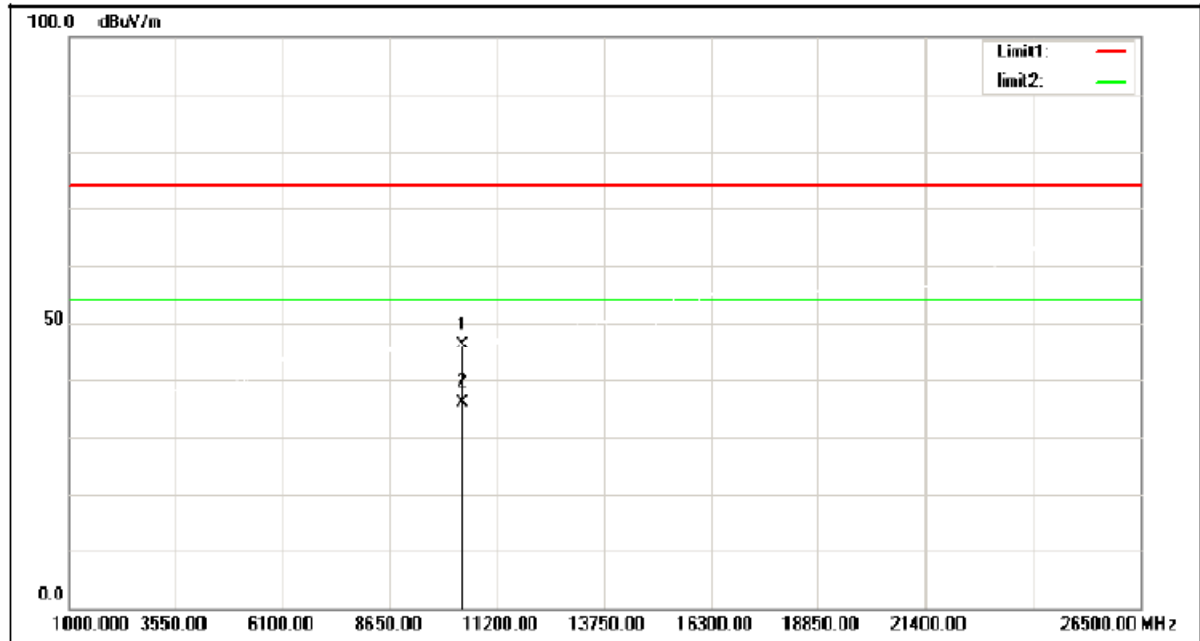

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	41.58	4.53	46.11	74.00	-27.89	peak
2	10360.000	31.52	4.53	36.05	54.00	-17.95	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5260 MHz


Vertical

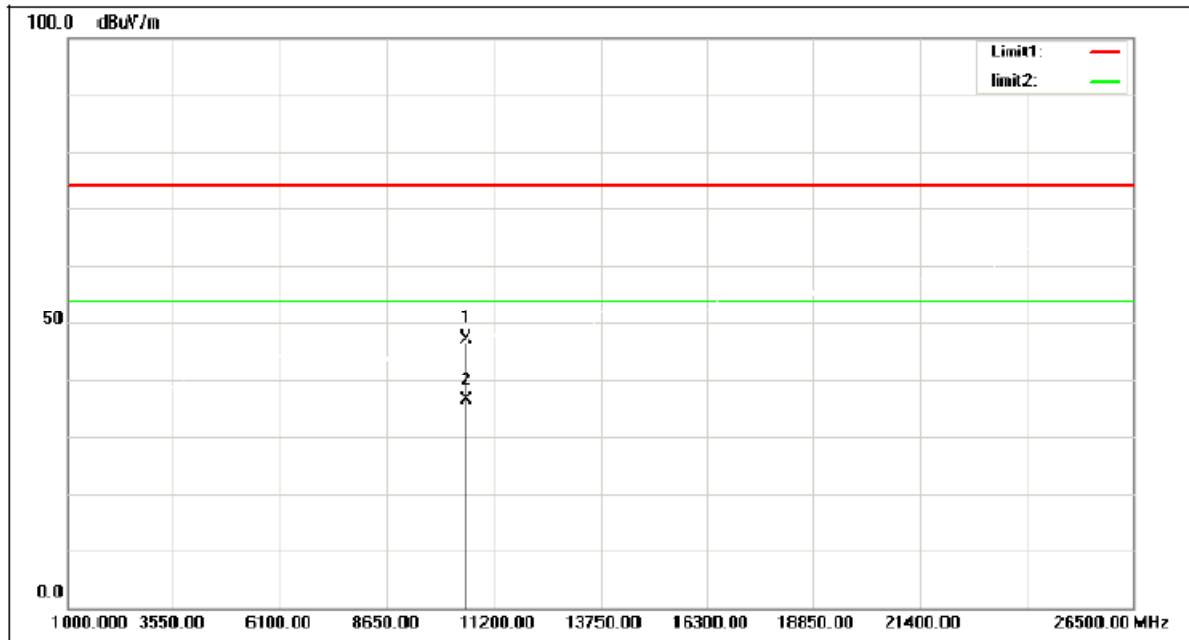

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	42.18	5.01	47.19	74.00	-26.81	peak
2	10520.000	31.28	5.01	36.29	54.00	-17.71	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5260 MHz


Horizontal

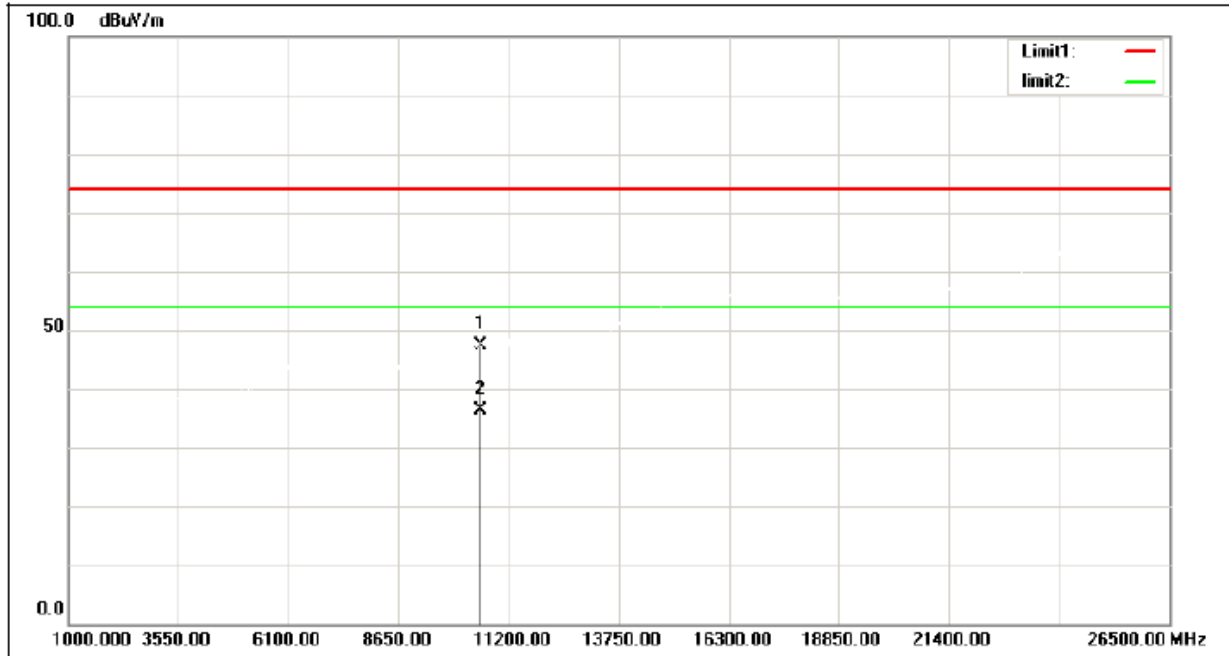

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	42.41	5.01	47.42	74.00	-26.58	peak
2	10520.000	31.47	5.01	36.48	54.00	-17.52	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz


Vertical

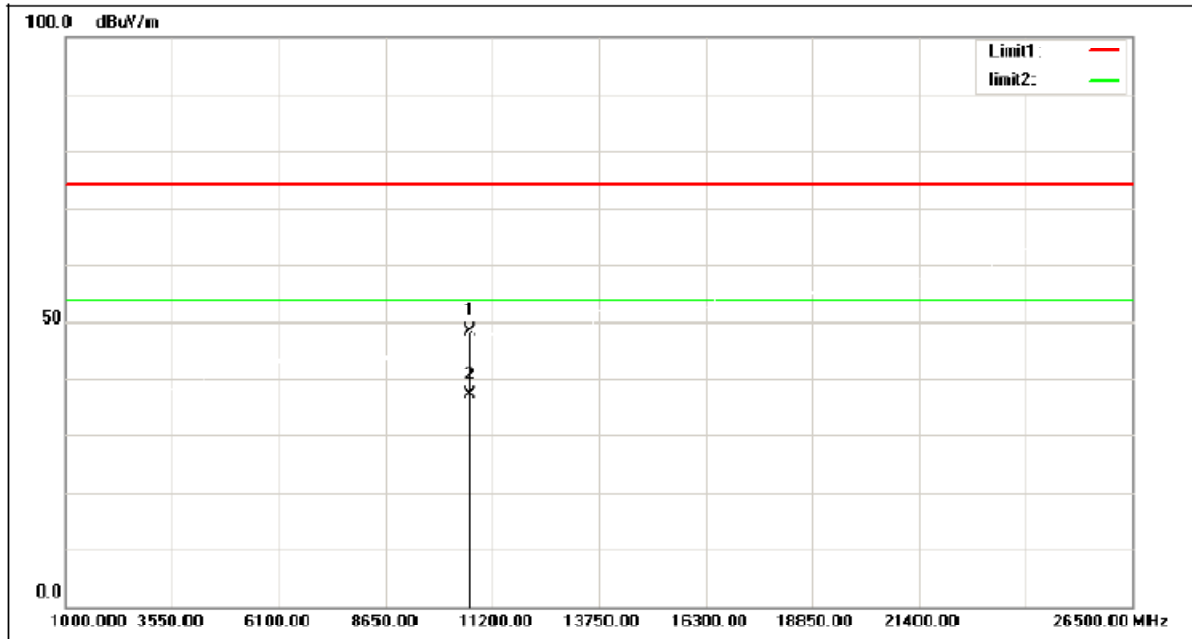

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	42.97	5.38	48.35	74.00	-25.65	peak
2	10640.000	31.80	5.38	37.18	54.00	-16.82	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT20) Mode 5320 MHz


Horizontal

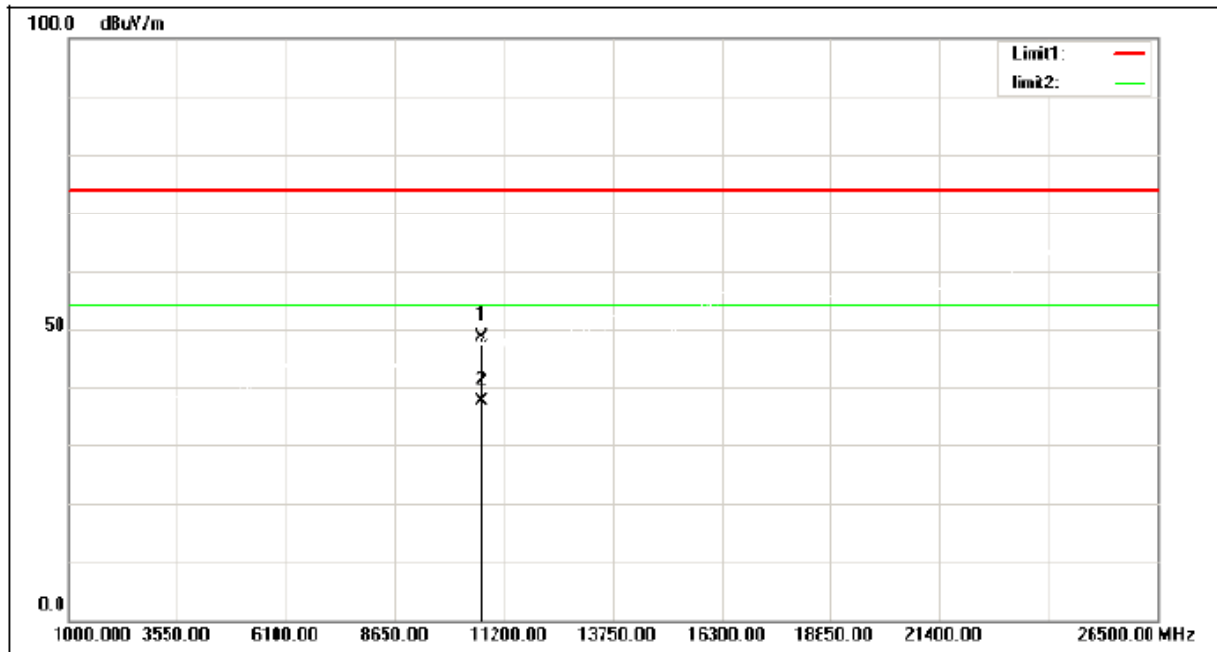

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	43.28	5.38	48.66	74.00	-25.34	peak
2	10640.000	32.31	5.38	37.69	54.00	-16.31	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz


Vertical

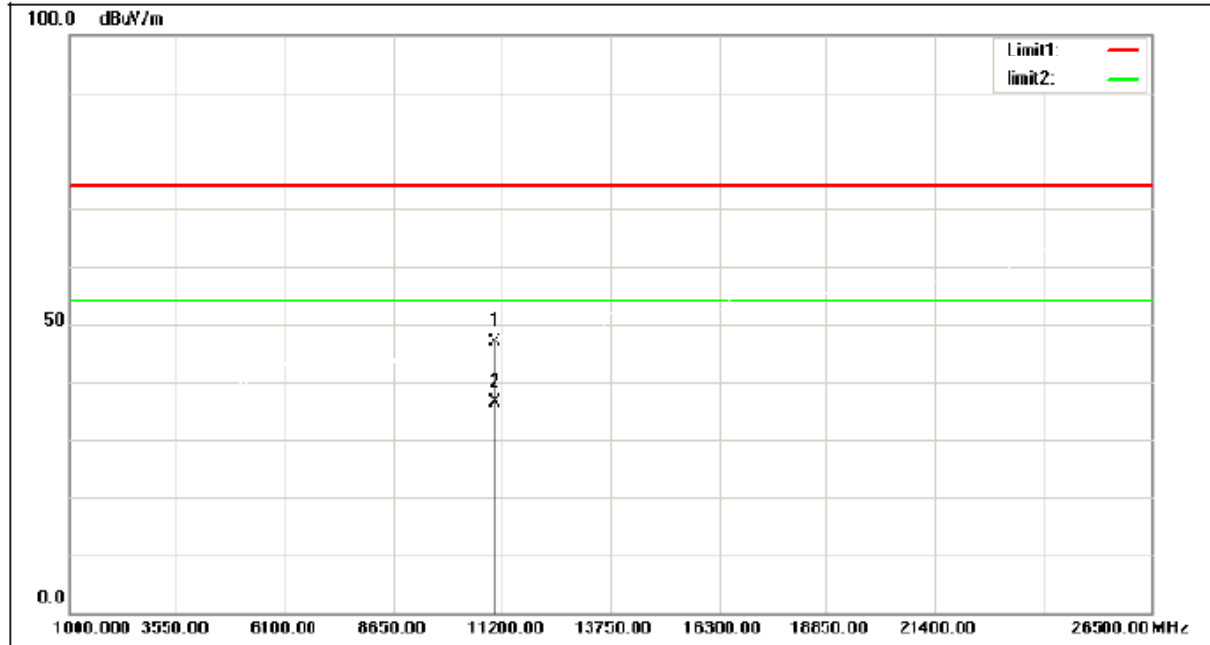

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	40.47	6.50	46.97	74.00	-27.03	peak
2	11000.000	29.76	6.50	36.26	54.00	-17.74	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5500 MHz


Horizontal

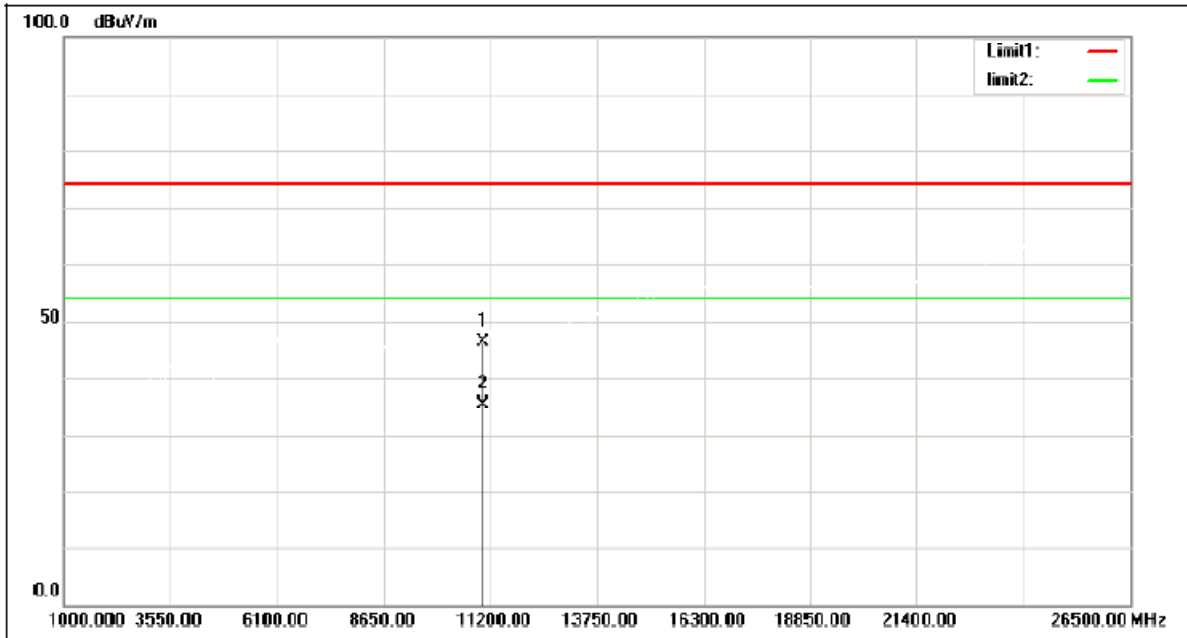

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	39.90	6.50	46.40	74.00	-27.60	peak
2	11000.000	28.87	6.50	35.37	54.00	-18.63	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5600 MHz


Vertical

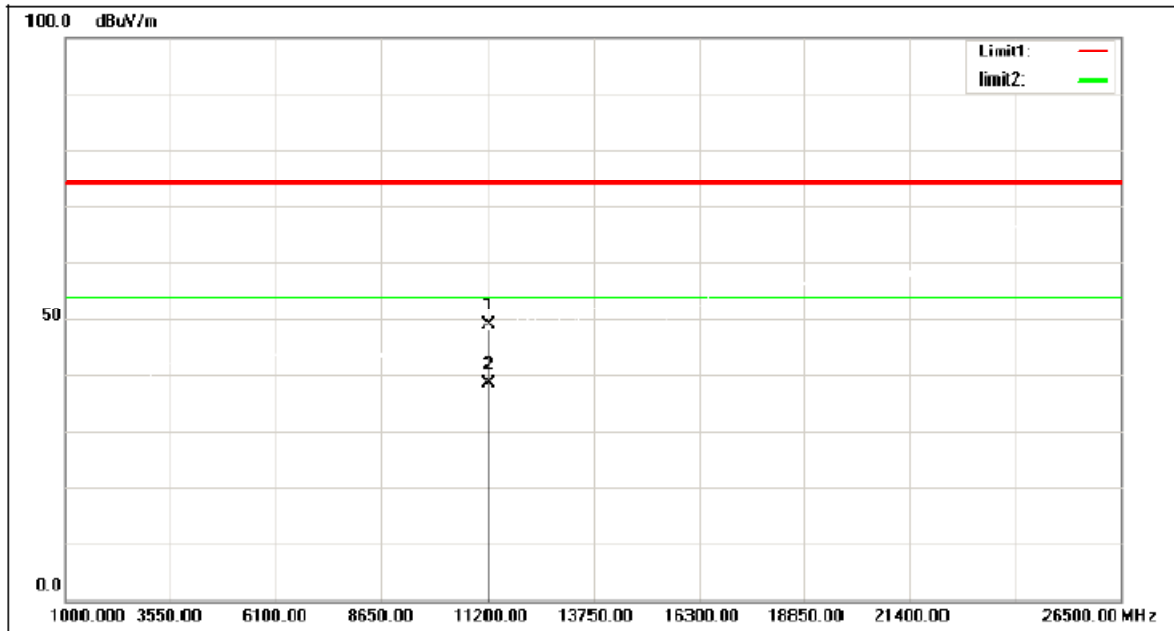

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	42.55	6.41	48.96	74.00	-25.04	peak
2	11200.000	31.86	6.41	38.27	54.00	-15.73	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5600 MHz


Horizontal

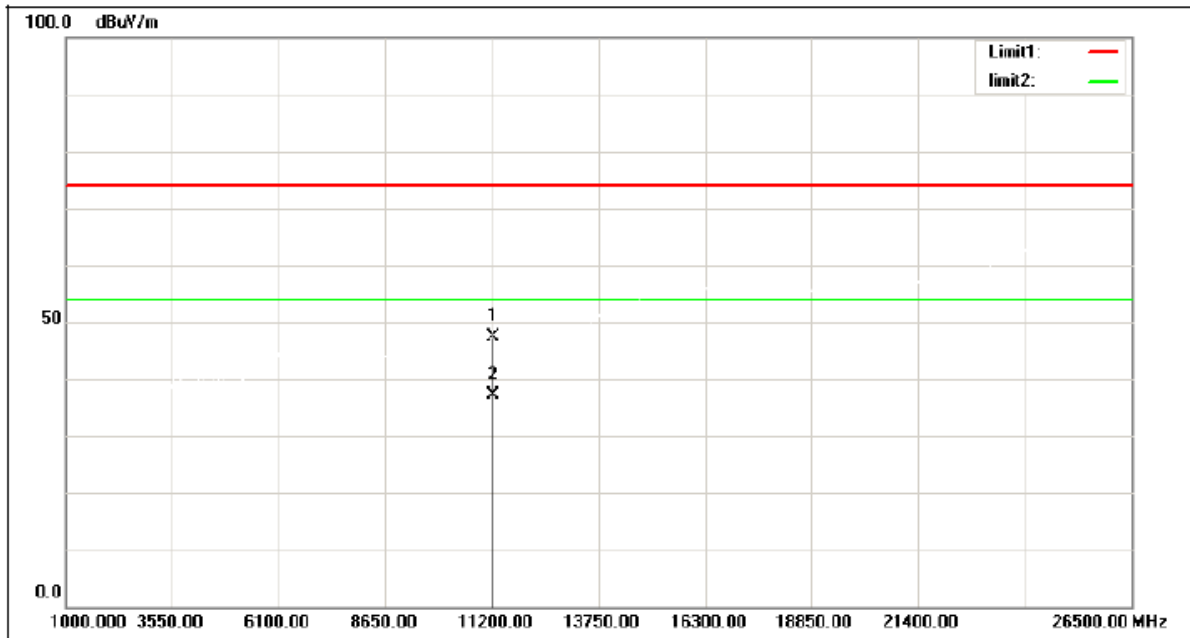

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	40.89	6.41	47.30	74.00	-26.70	peak
2	11200.000	30.80	6.41	37.21	54.00	-16.79	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz


Vertical

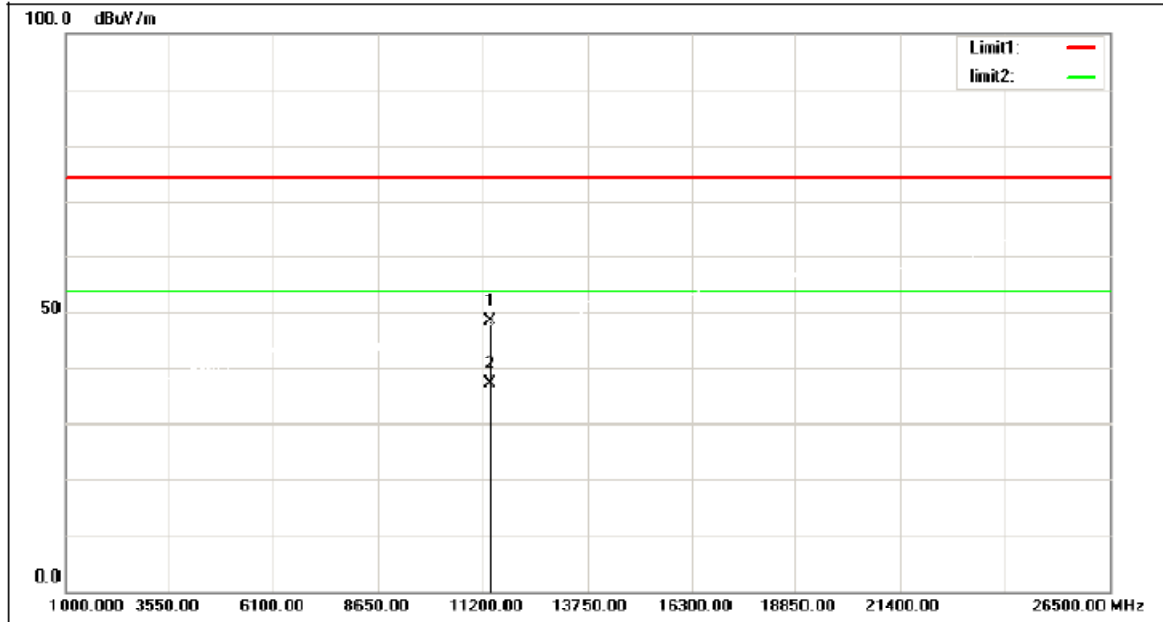

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	42.01	6.31	48.32	74.00	-25.68	peak
2	11400.000	30.93	6.31	37.24	54.00	-16.76	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5700 MHz


Horizontal

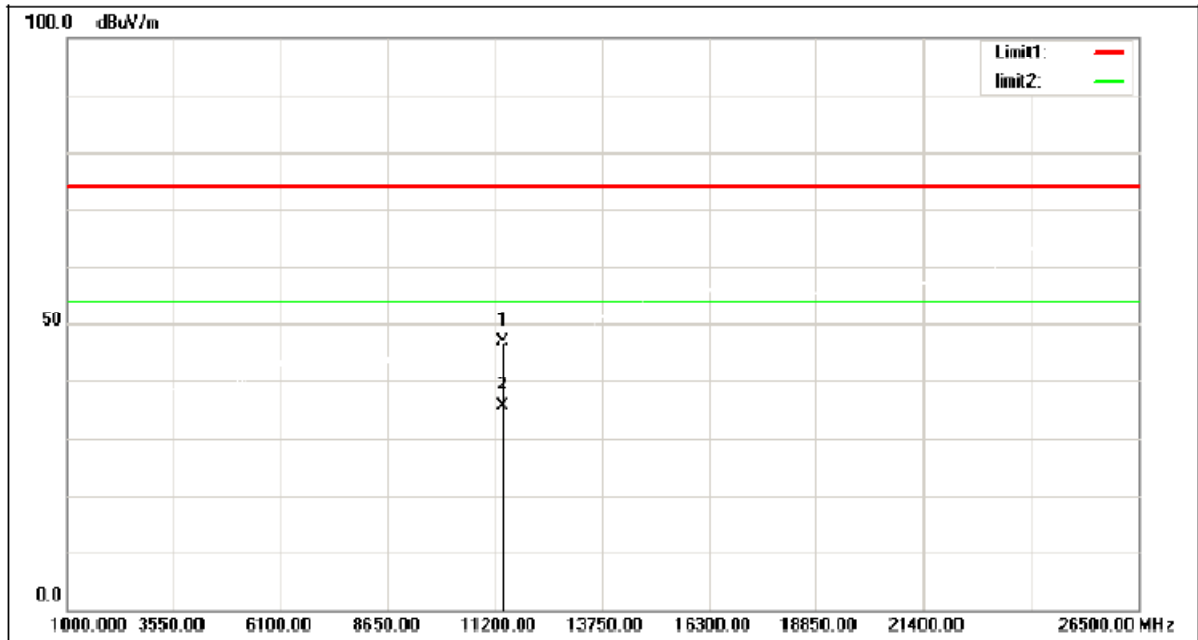

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	40.45	6.31	46.76	74.00	-27.24	peak
2	11400.000	29.43	6.31	35.74	54.00	-18.26	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz


Vertical

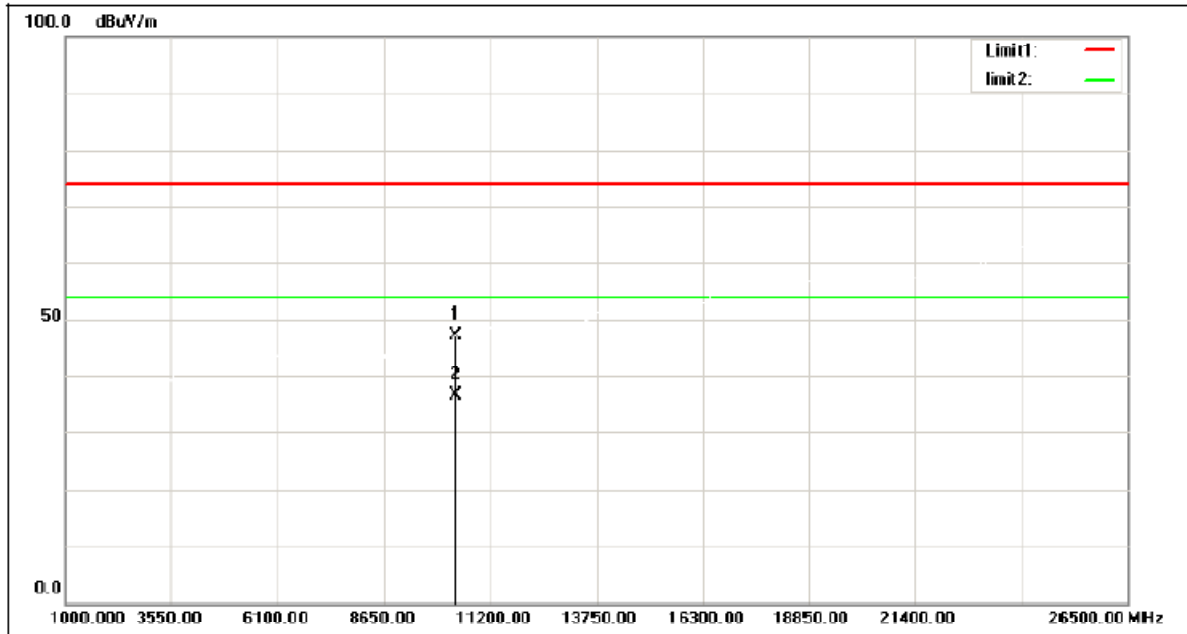

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	42.57	4.59	47.16	74.00	-26.84	peak
2	10380.000	32.16	4.59	36.75	54.00	-17.25	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX N (HT40) Mode 5190 MHz


Horizontal

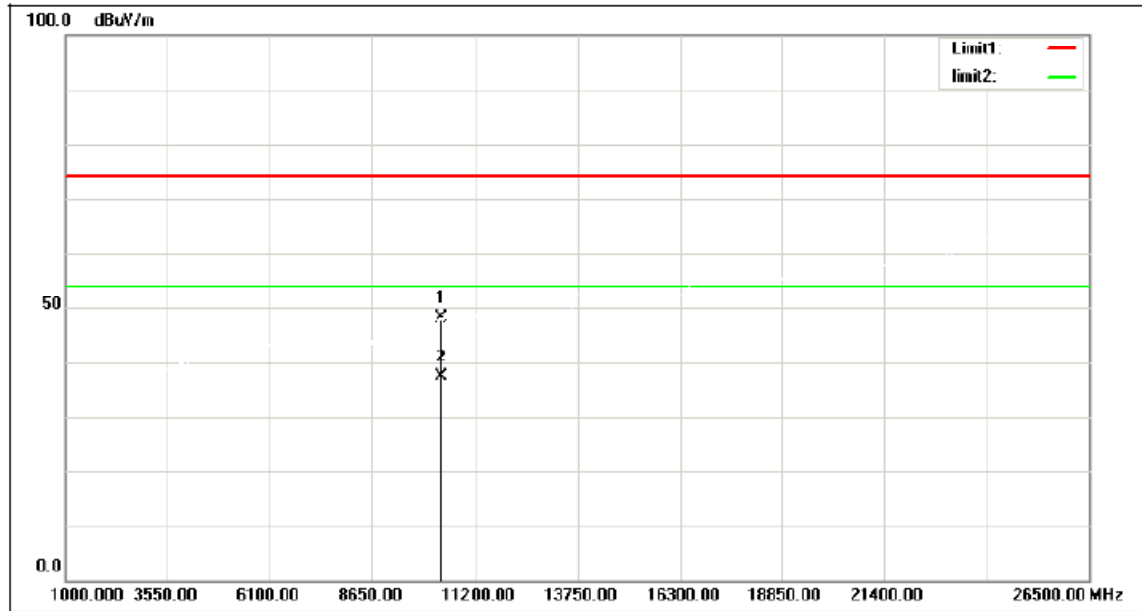

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	43.57	4.59	48.16	74.00	-25.84	peak
2	10380.000	32.87	4.59	37.46	54.00	-16.54	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5270 MHz


Vertical

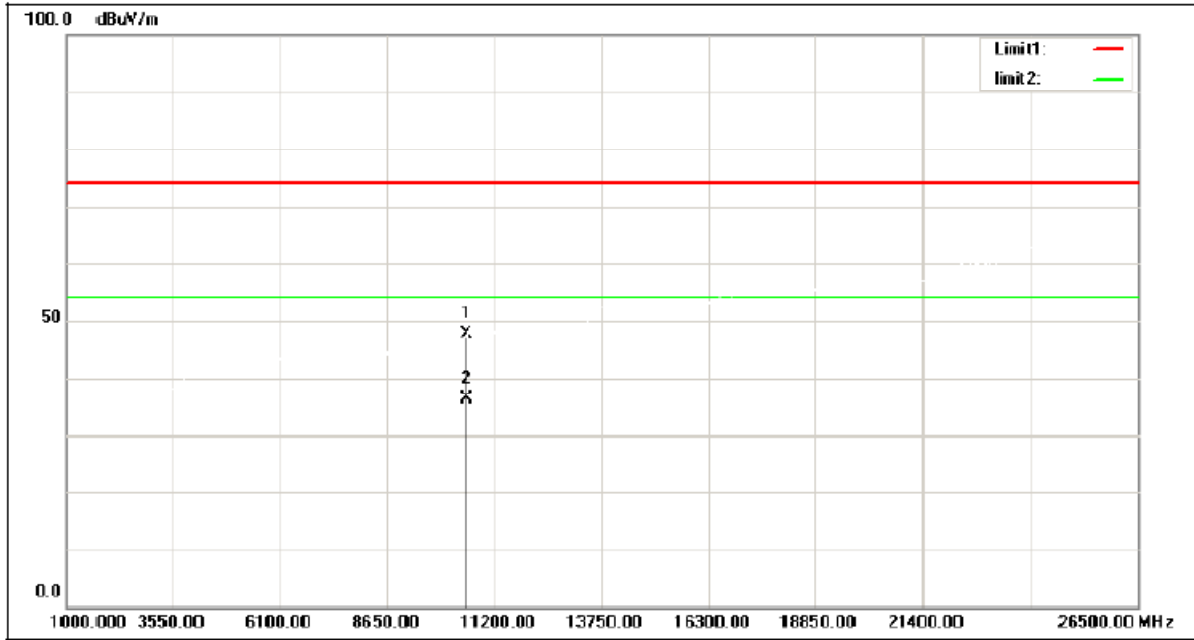

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	42.62	5.07	47.69	74.00	-26.31	peak
2	10540.000	31.28	5.07	36.35	54.00	-17.65	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5270 MHz


Horizontal

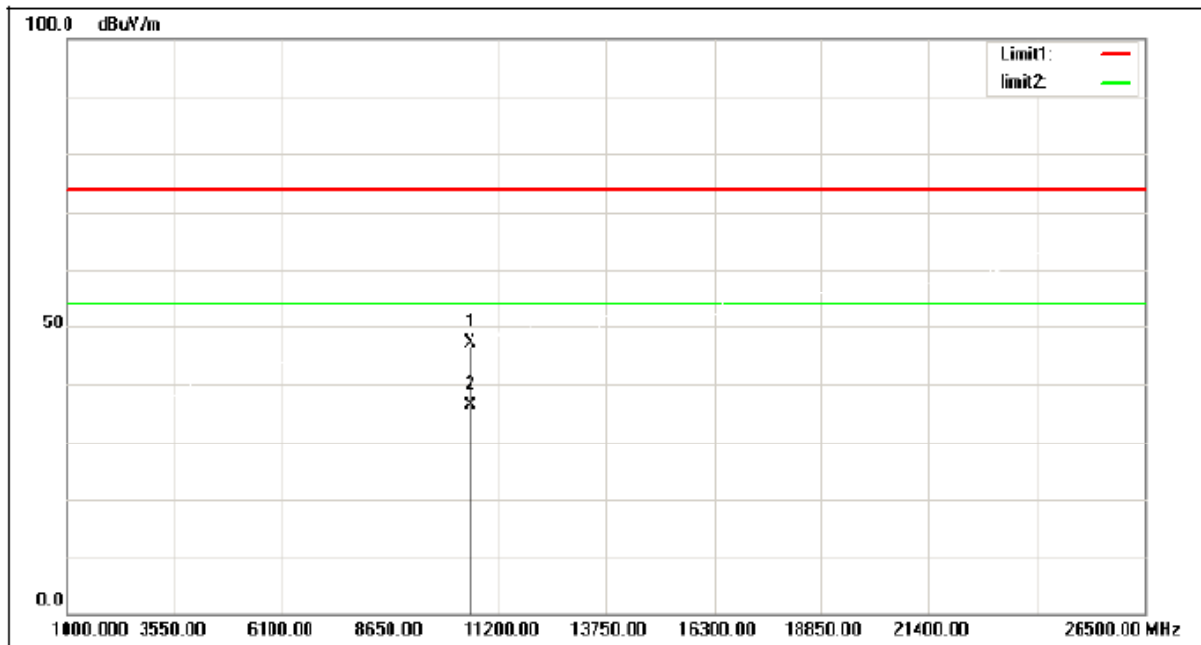

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	42.12	5.07	47.19	74.00	-26.81	peak
2	10540.000	31.35	5.07	36.42	54.00	-17.58	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz


Vertical

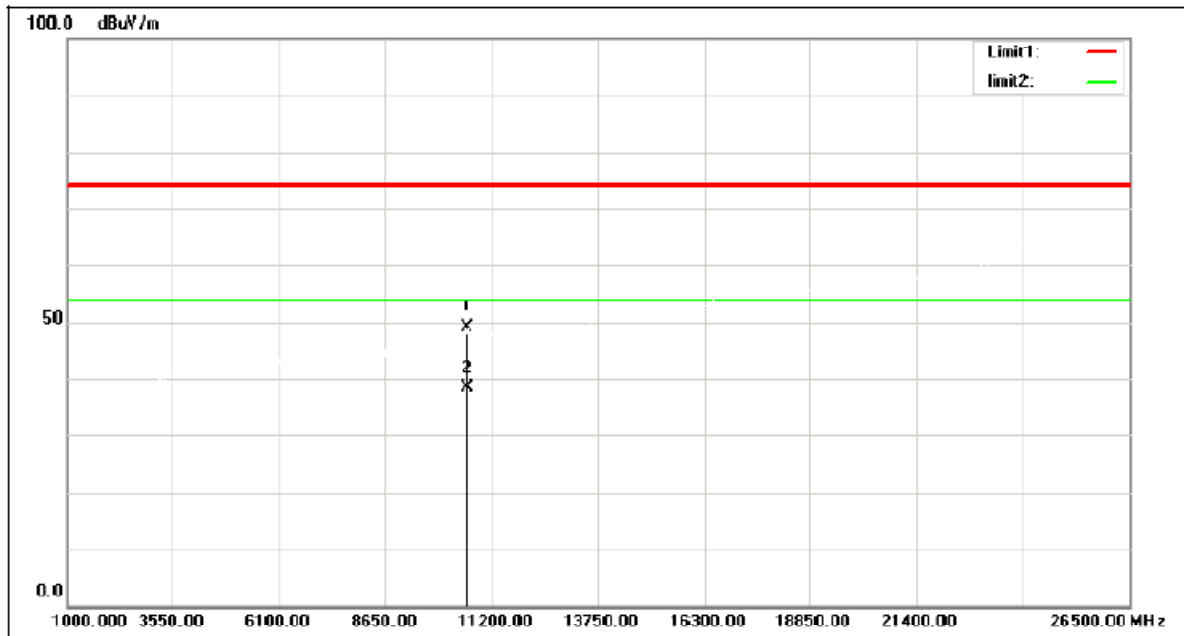

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	43.69	5.32	49.01	74.00	-24.99	peak
2	10620.000	32.94	5.32	38.26	54.00	-15.74	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX N (HT40) Mode 5310 MHz


Horizontal

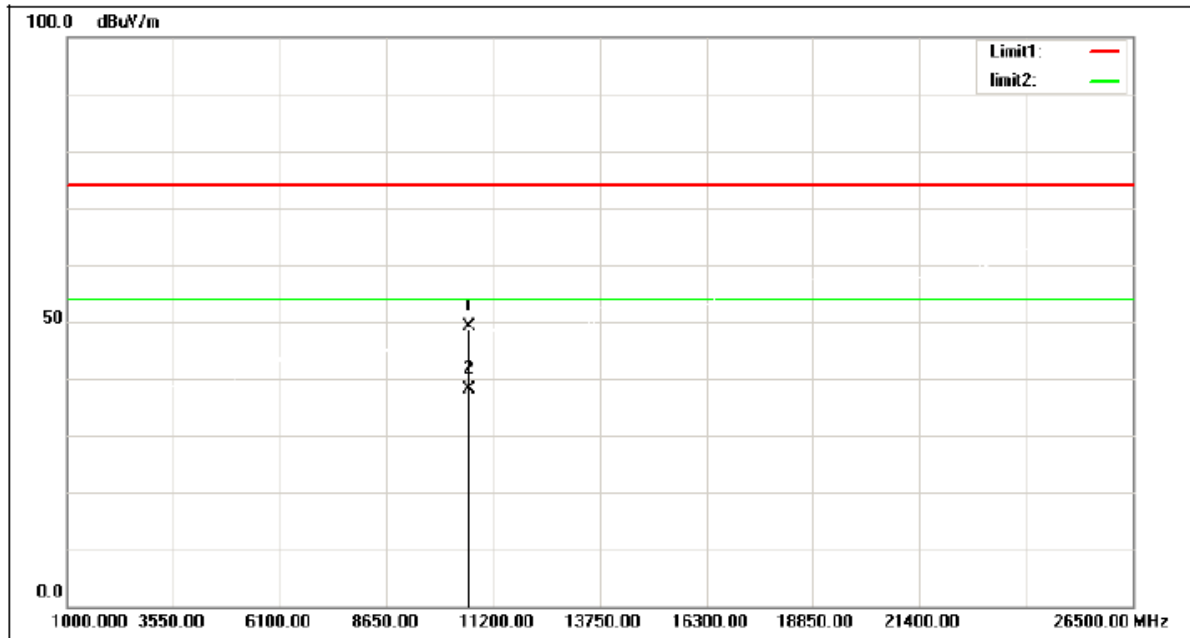

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	43.69	5.32	49.01	74.00	-24.99	peak
2	10620.000	32.80	5.32	38.12	54.00	-15.88	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz


Vertical

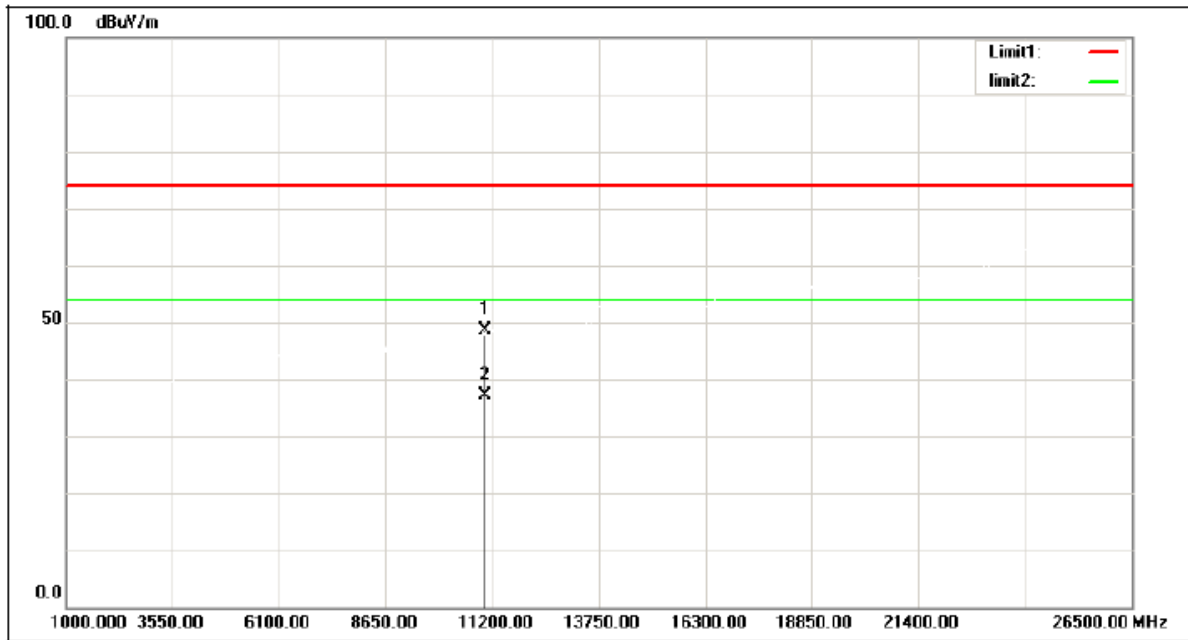

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	42.23	6.48	48.71	74.00	-25.29	peak
2	11020.000	30.71	6.48	37.19	54.00	-16.81	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5510 MHz


Horizontal

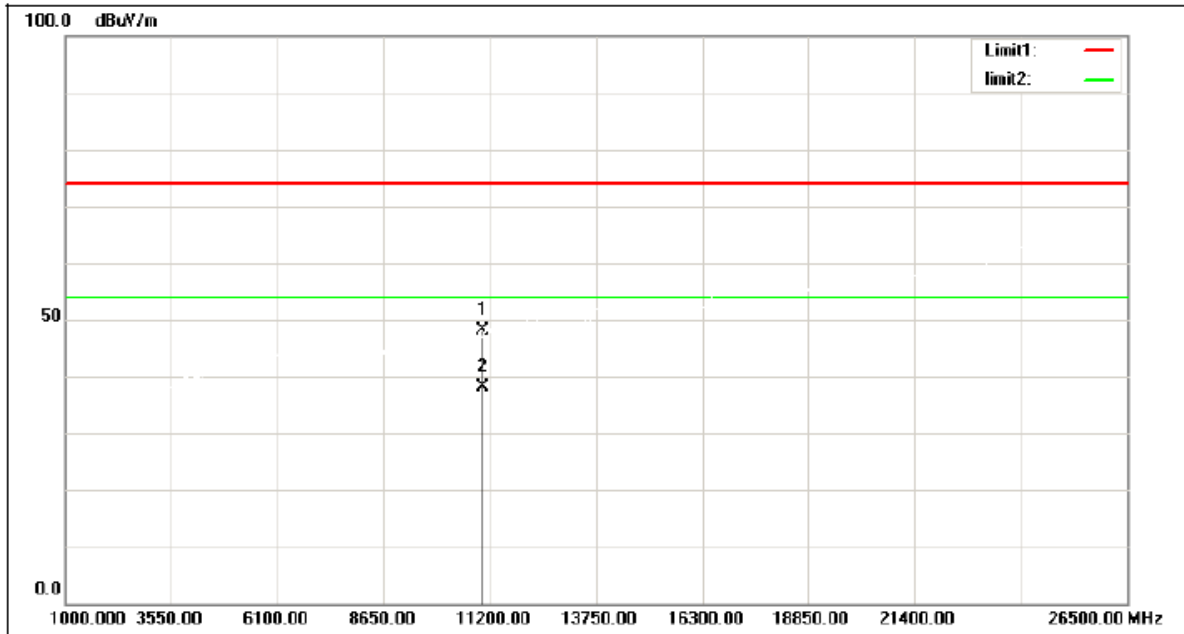

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	41.73	6.48	48.21	74.00	-25.79	peak
2	11020.000	31.54	6.48	38.02	54.00	-15.98	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5590 MHz


Vertical

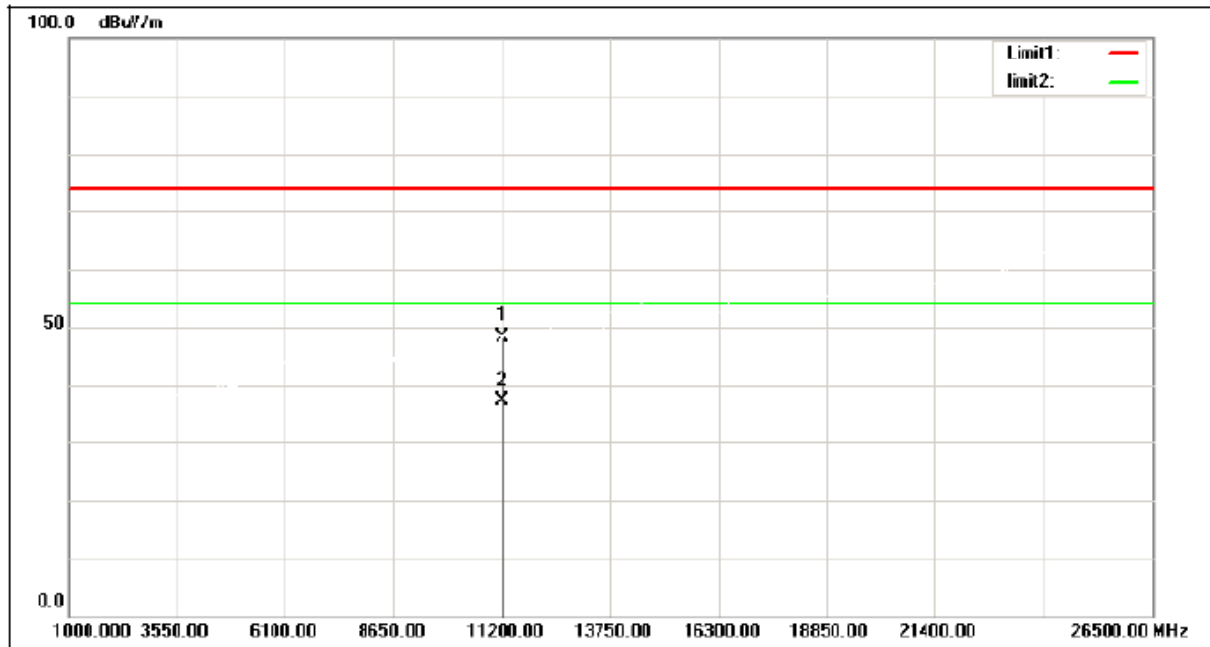

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	42.04	6.42	48.46	74.00	-25.54	peak
2	11180.000	30.82	6.42	37.24	54.00	-16.76	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5590 MHz


Horizontal

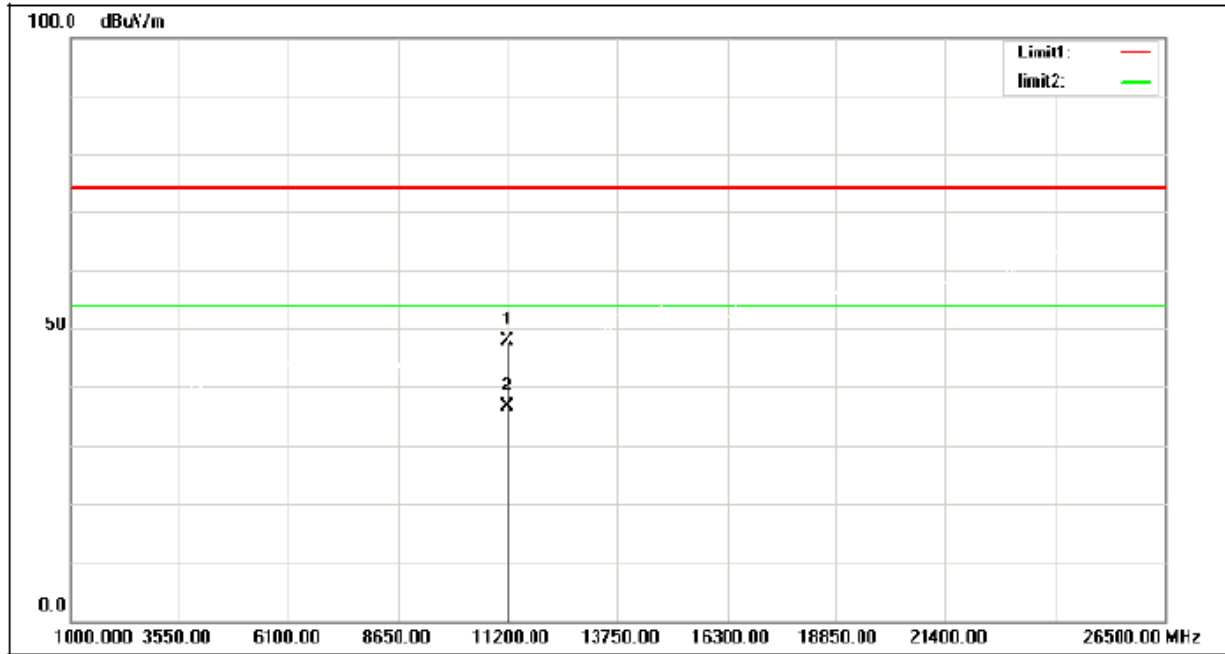

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	41.54	6.42	47.96	74.00	-26.04	peak
2	11180.000	30.16	6.42	36.58	54.00	-17.42	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz


Vertical

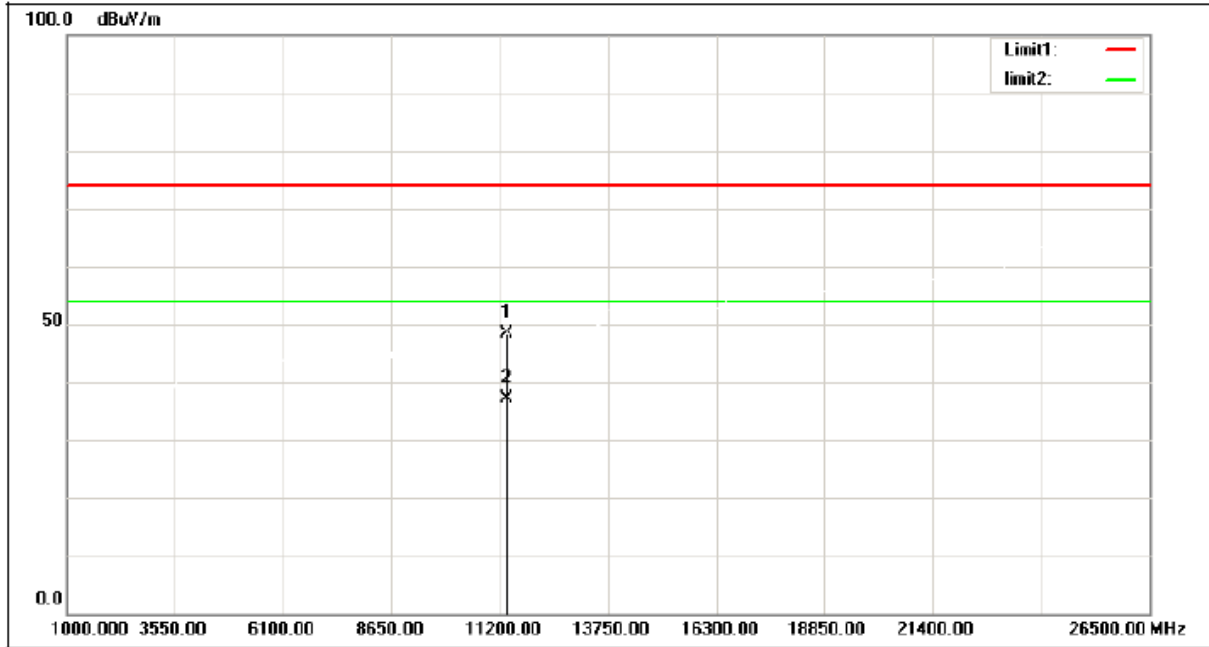

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	42.09	6.34	48.43	74.00	-25.57	peak
2	11340.000	30.90	6.34	37.24	54.00	-16.76	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5670 MHz


Horizontal

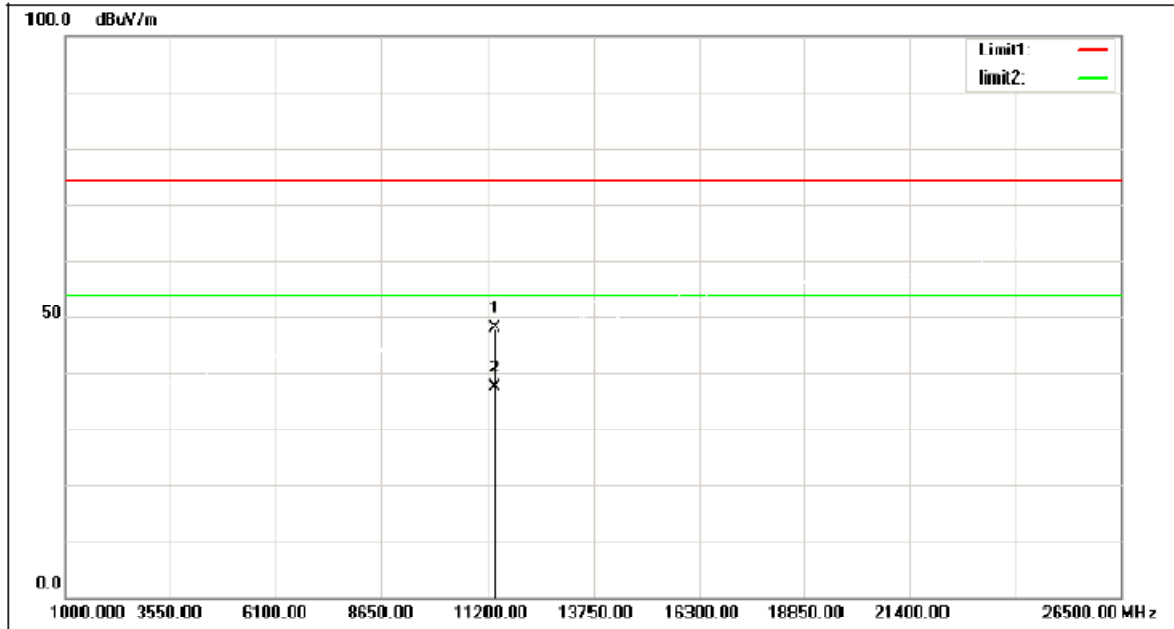

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	41.59	6.34	47.93	74.00	-26.07	peak
2	11340.000	31.14	6.34	37.48	54.00	-16.52	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz


Vertical

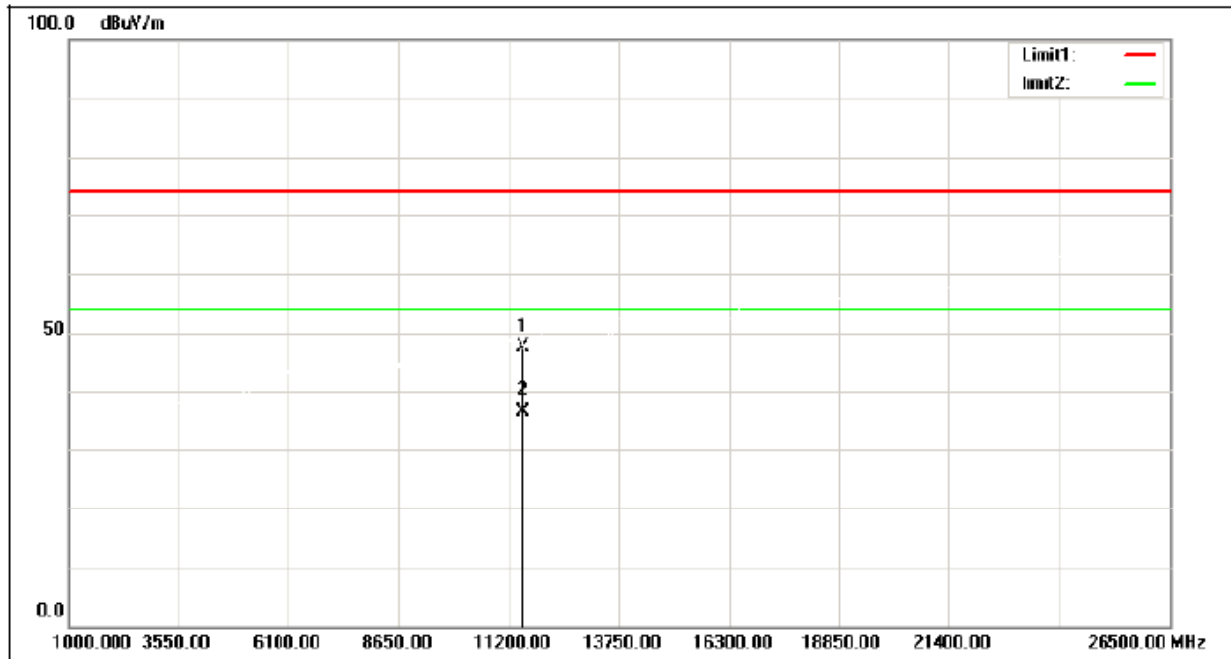

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	41.22	6.27	47.49	74.00	-26.51	peak
2	11490.000	30.29	6.27	36.56	54.00	-17.44	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz


Horizontal

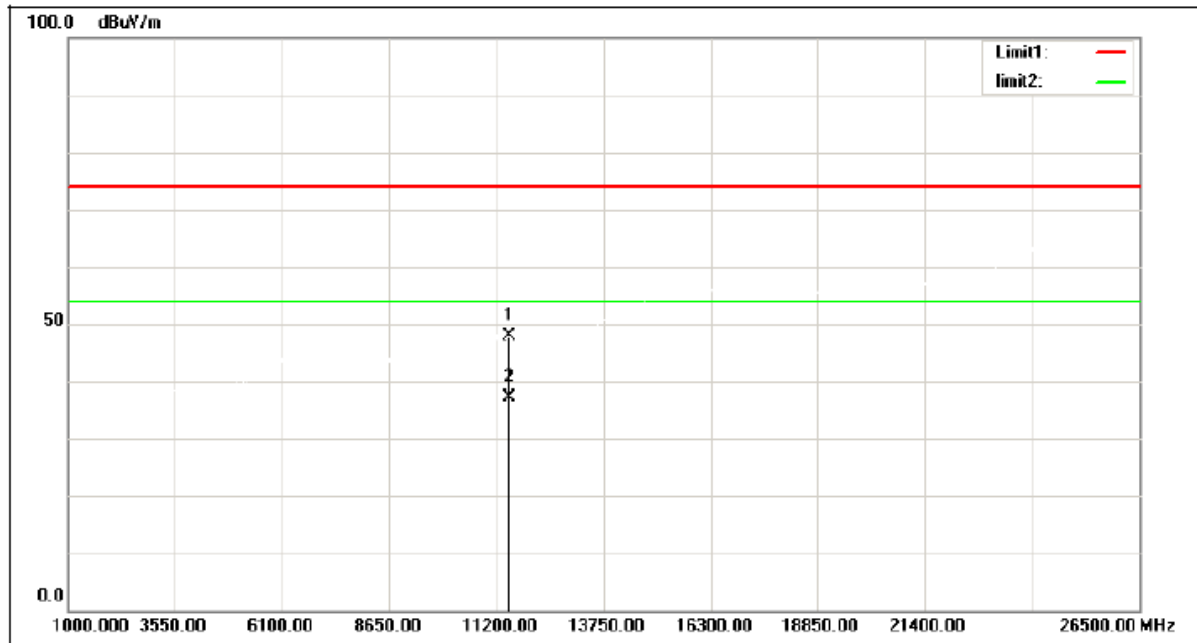

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	41.62	6.27	47.89	74.00	-26.11	peak
2	11490.000	30.94	6.27	37.21	54.00	-16.79	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz


Vertical

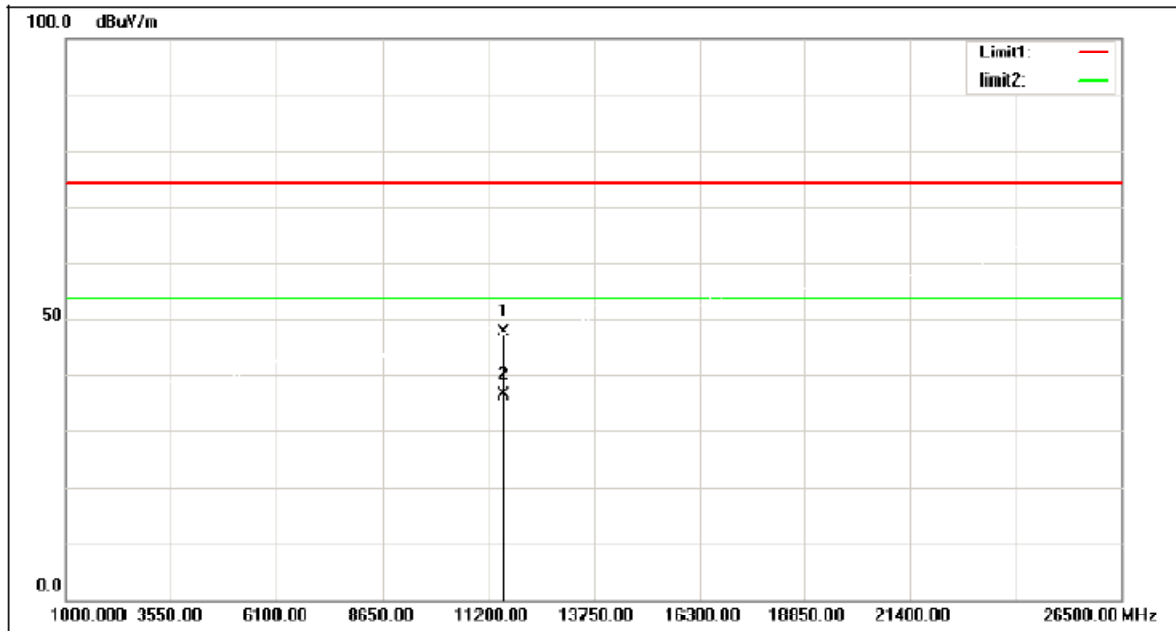

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	41.30	6.22	47.52	74.00	-26.48	peak
2	11570.000	30.04	6.22	36.26	54.00	-17.74	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz


Horizontal

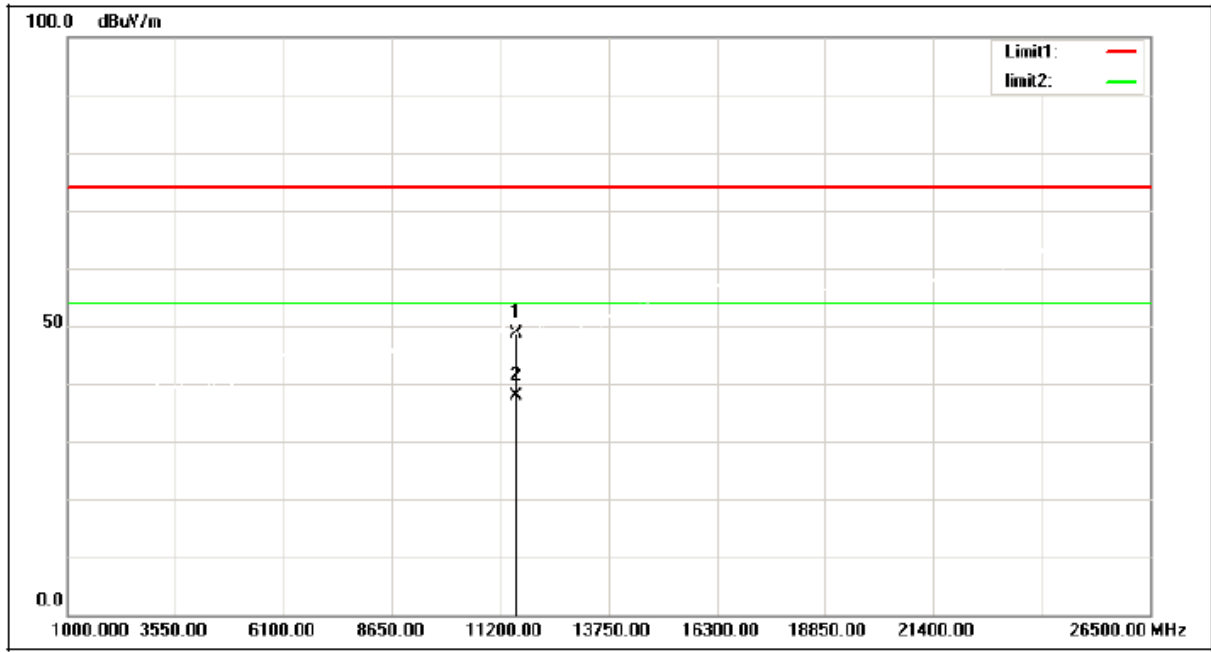

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	42.43	6.22	48.65	74.00	-25.35	peak
2	11570.000	31.62	6.22	37.84	54.00	-16.16	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Vertical

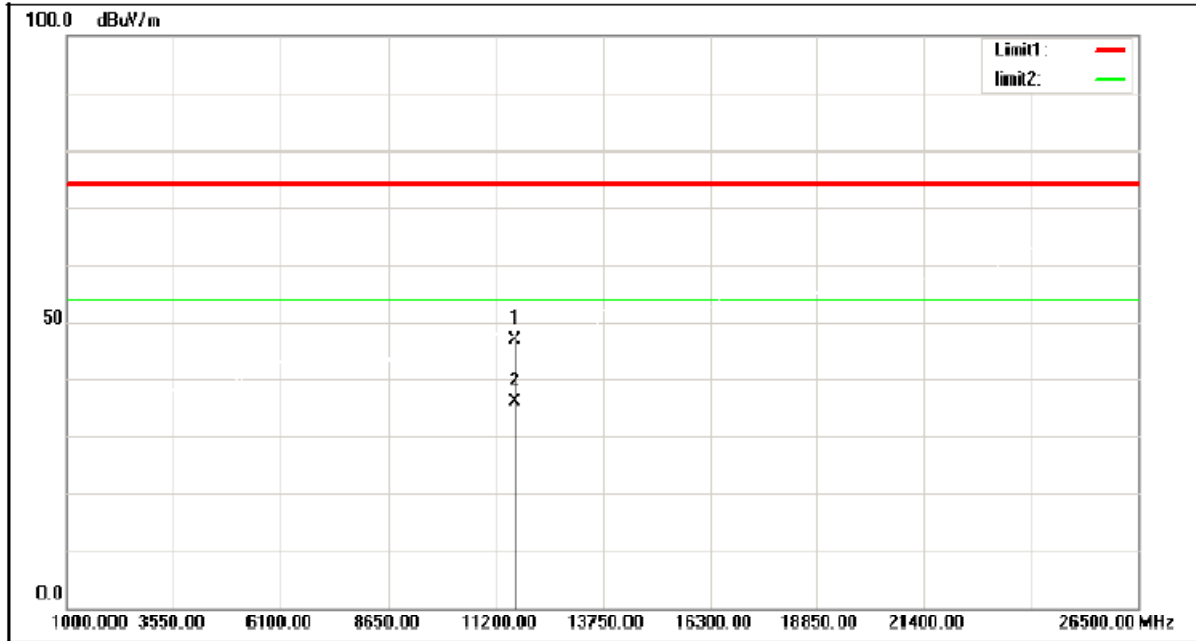

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	40.63	6.19	46.82	74.00	-27.18	peak
2	11650.000	30.06	6.19	36.25	54.00	-17.75	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz


Horizontal

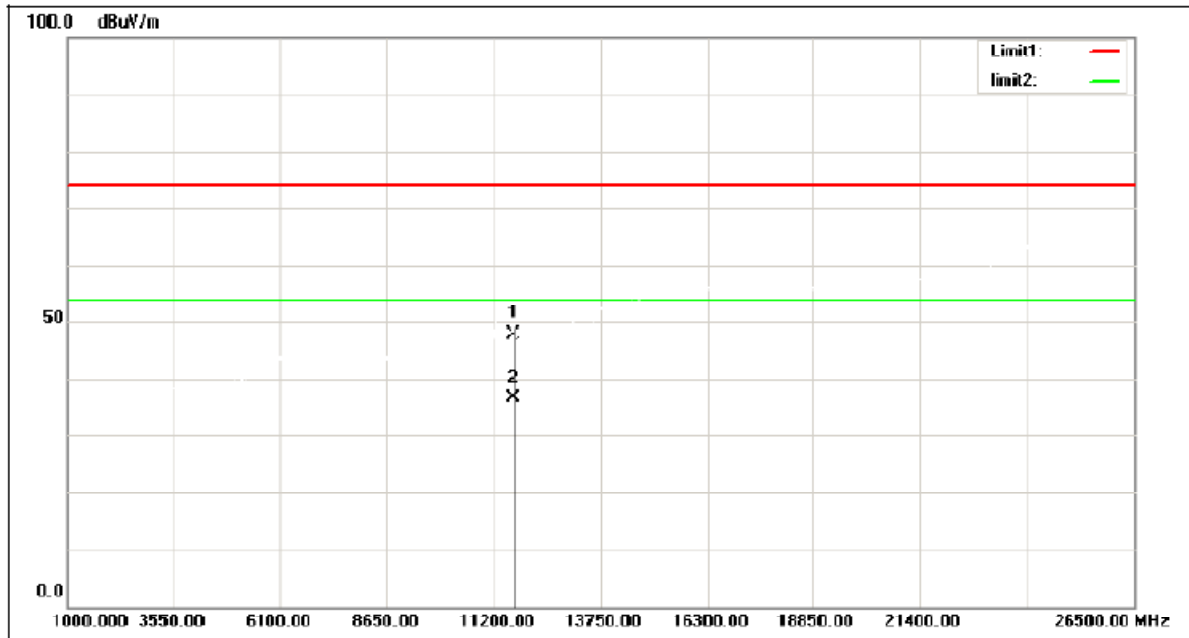

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	41.66	6.19	47.85	74.00	-26.15	peak
2	11650.000	30.40	6.19	36.59	54.00	-17.41	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz


Vertical

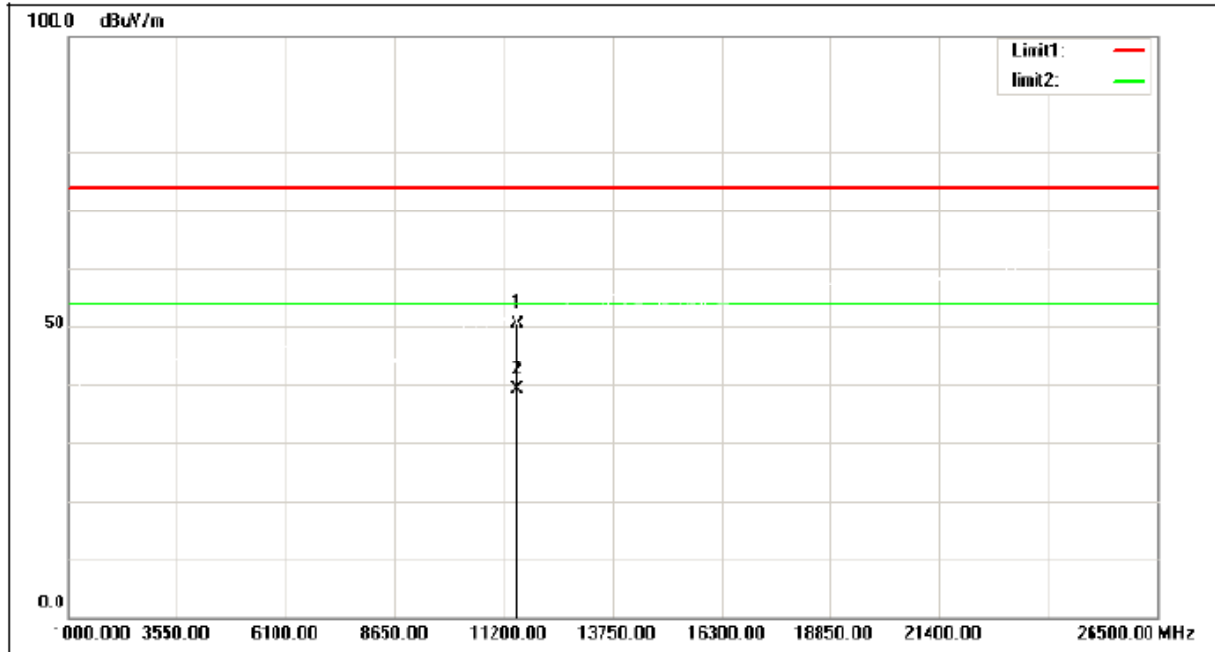

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	44.22	6.27	50.49	74.00	-23.51	peak
2	11490.000	32.91	6.27	39.18	54.00	14.82	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz


Horizontal

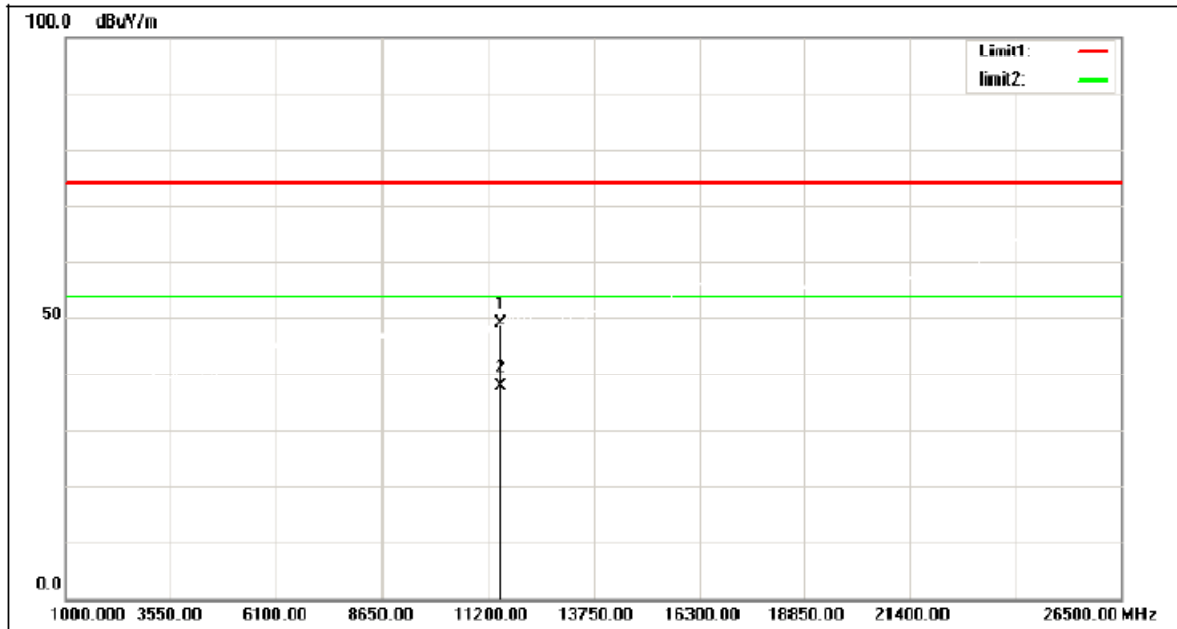

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	42.62	6.27	48.89	74.00	-25.11	peak
2	11490.000	31.32	6.27	37.59	54.00	-16.41	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz


Vertical

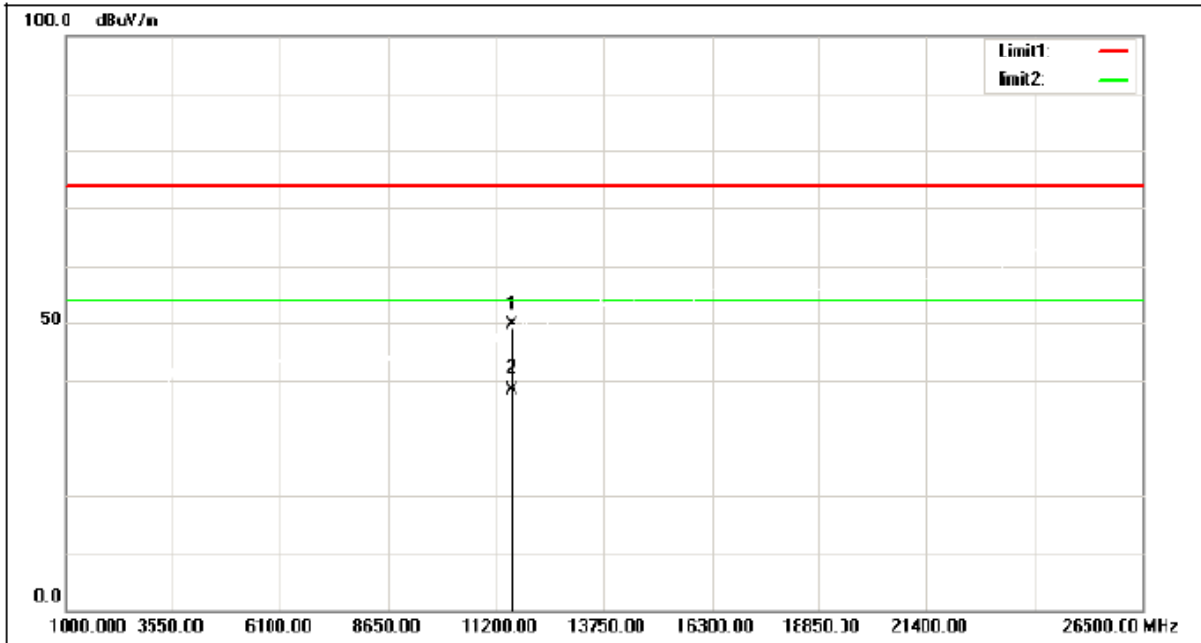

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	43.30	6.22	49.52	74.00	-24.48	peak
2	11570.000	32.07	6.22	38.29	54.00	-15.71	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz


Horizontal

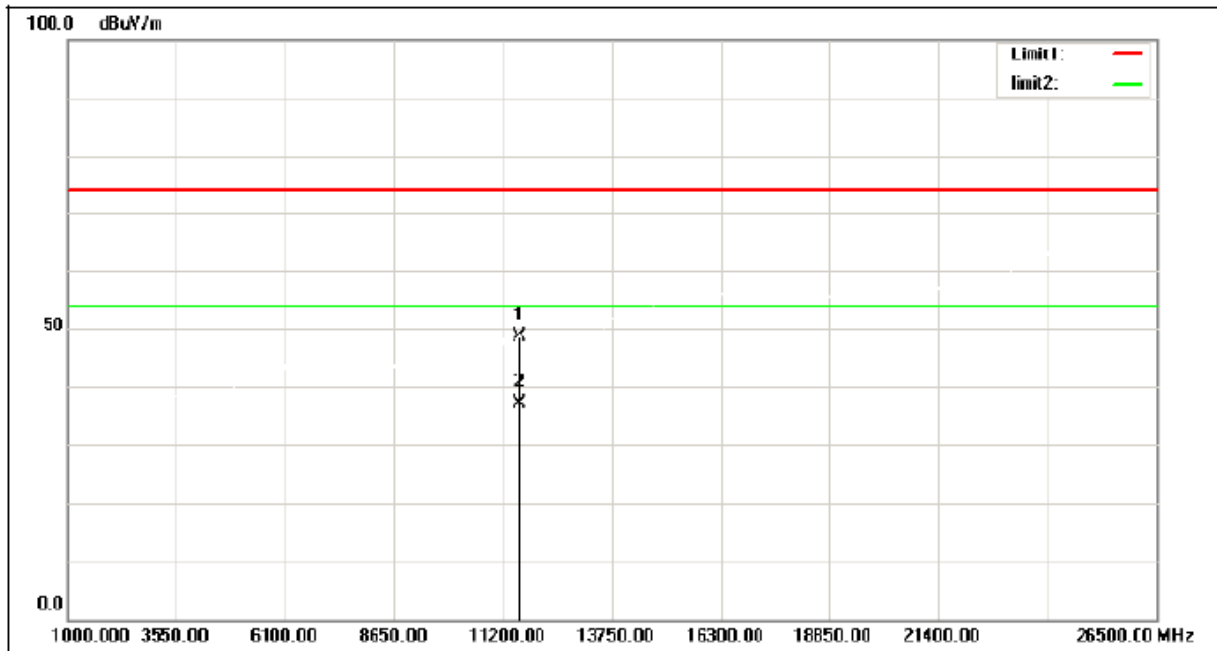

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	42.43	6.22	48.65	74.00	-25.35	peak
2	11570.000	30.93	6.22	37.15	54.00	-16.85	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz


Vertical

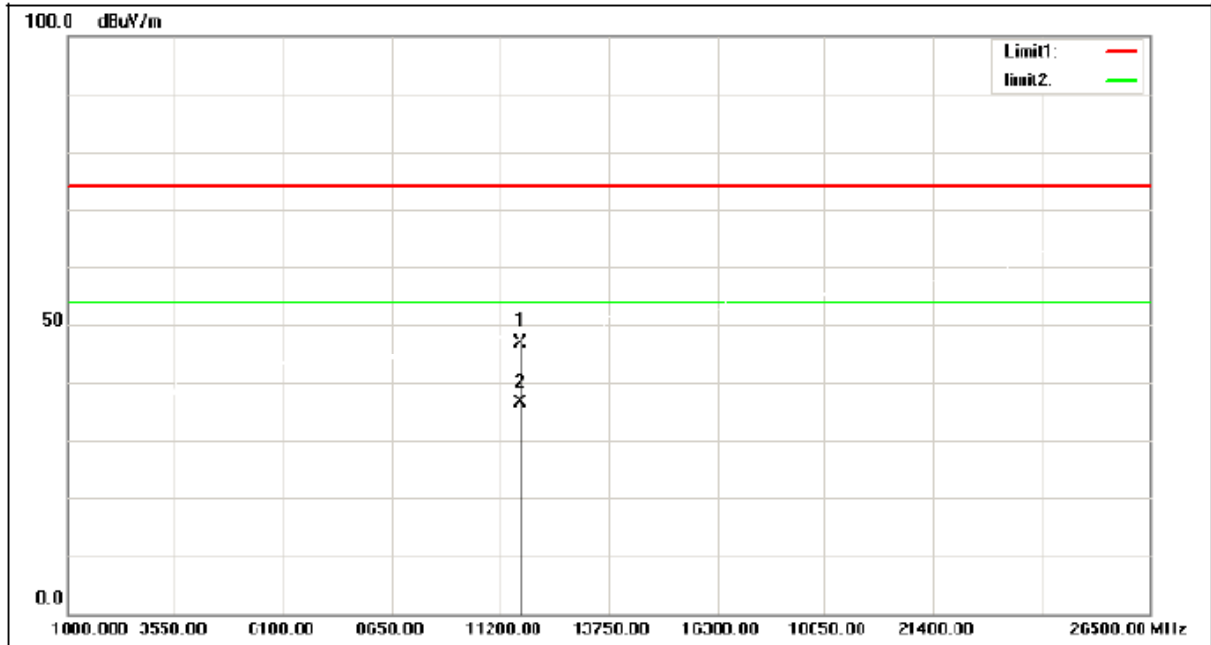

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	40.63	6.19	46.82	74.00	-27.18	peak
2	11650.000	30.29	6.19	36.48	54.00	-17.52	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz


Horizontal

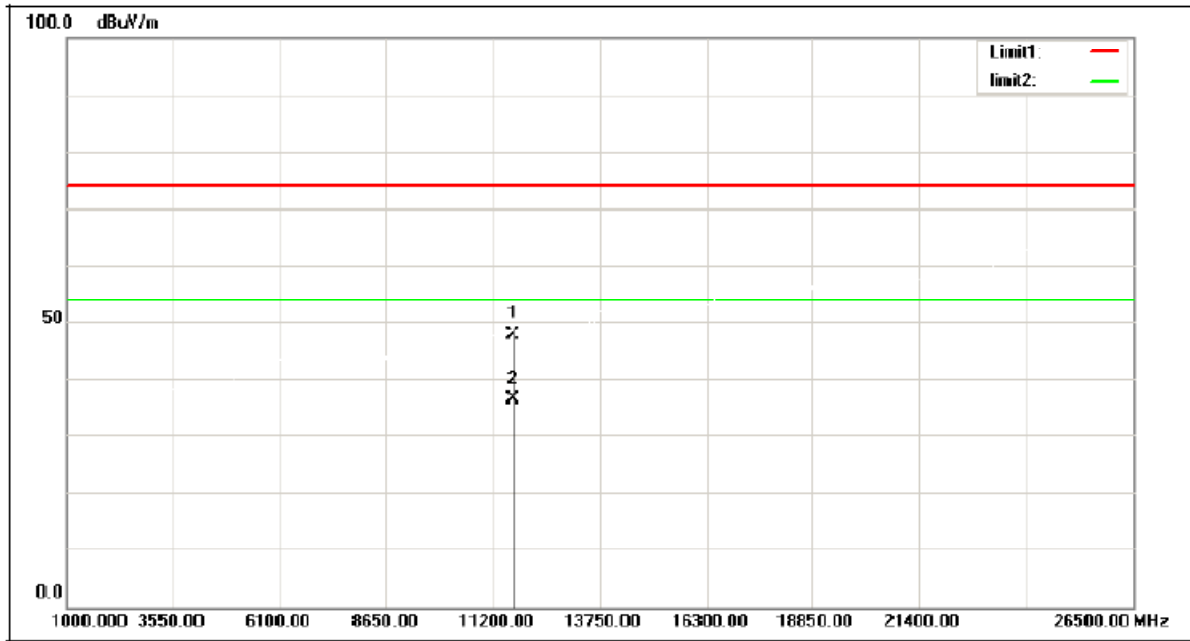

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	41.63	6.19	47.82	74.00	-26.18	peak
2	11650.000	30.08	6.19	36.27	54.00	-17.73	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz


Vertical

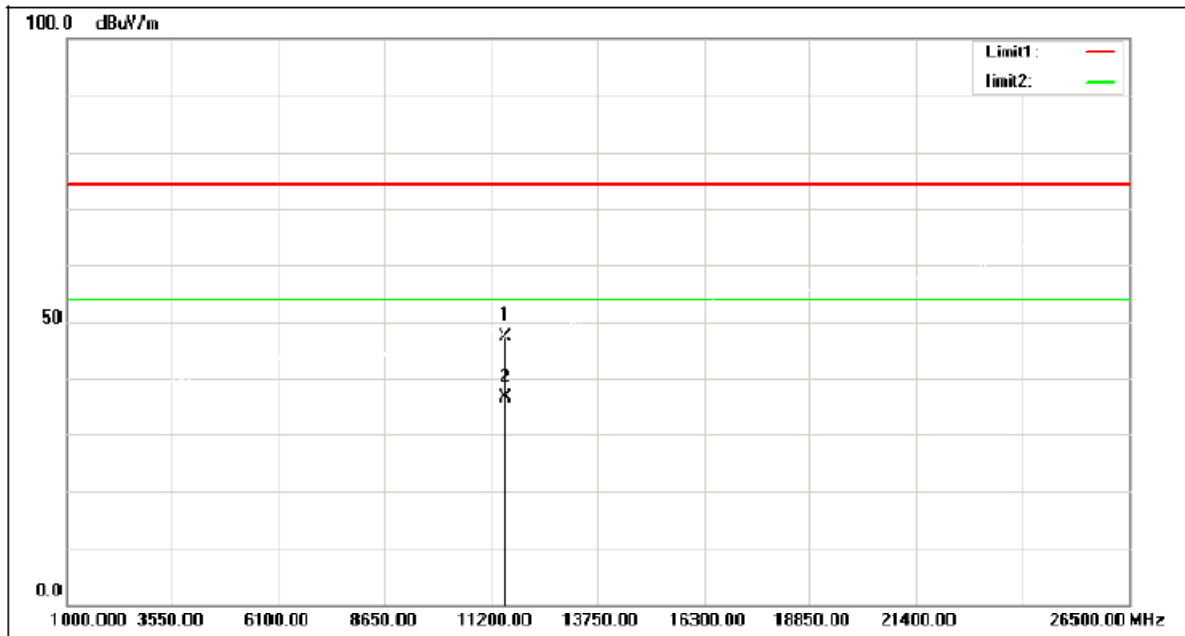

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	41.23	6.26	47.49	74.00	-26.51	peak
2	11510.000	30.31	6.26	36.57	54.00	-17.43	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz


Horizontal

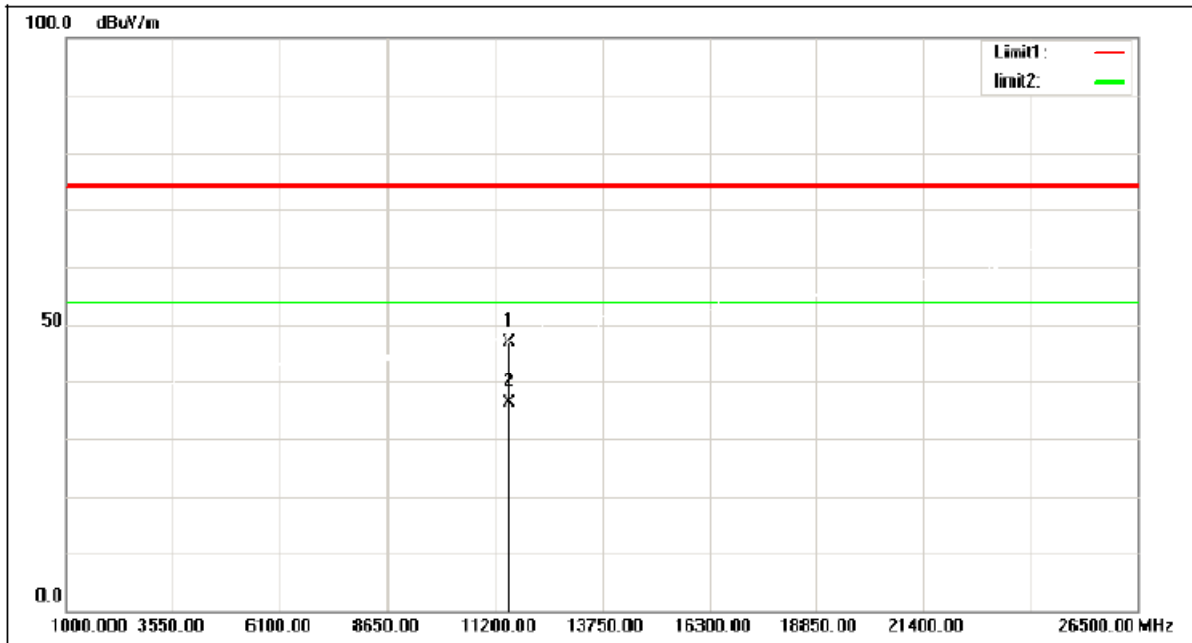

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	40.73	6.26	46.99	74.00	-27.01	peak
2	11510.000	30.03	6.26	36.29	54.00	-17.71	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz


Vertical

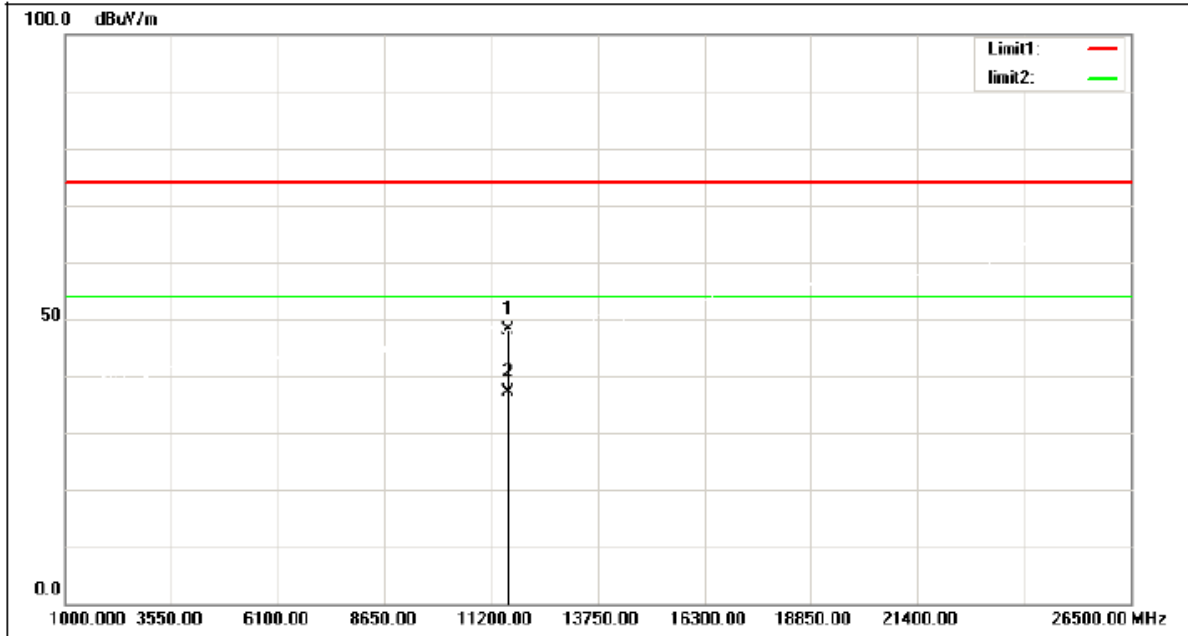

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	41.97	6.23	48.20	74.00	-25.80	peak
2	11590.000	30.83	6.23	37.06	54.00	-16.94	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz


Horizontal

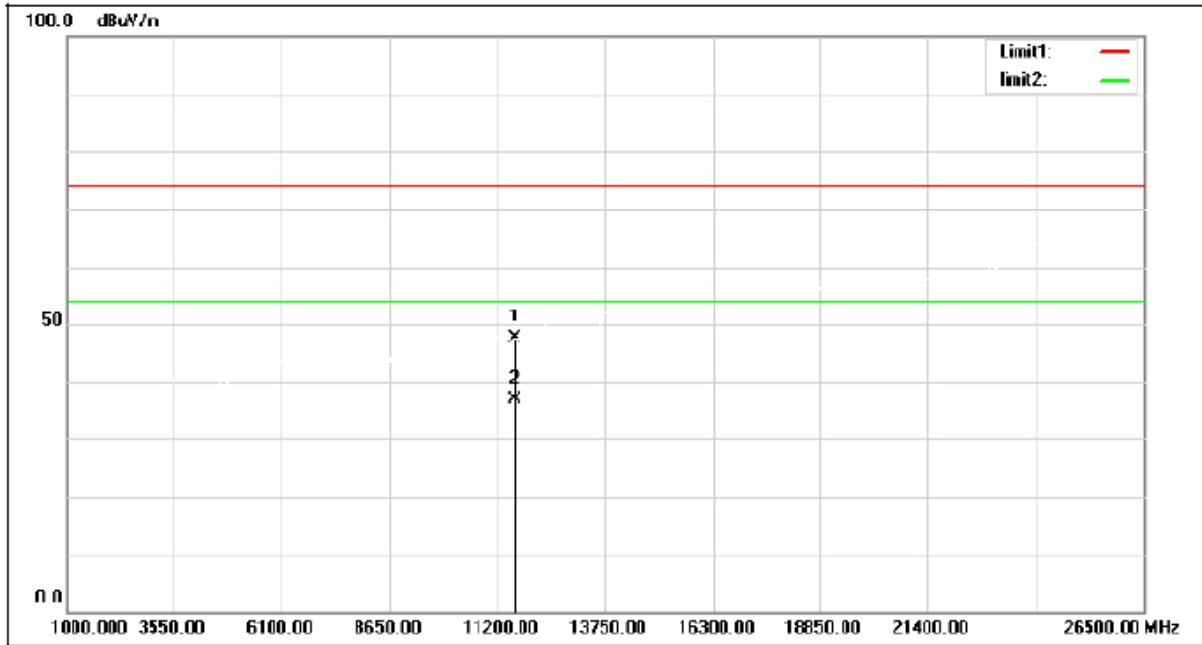

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	41.47	6.23	47.70	74.00	-26.30	peak
2	11590.000	30.72	6.23	36.95	54.00	-17.05	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz


Vertical

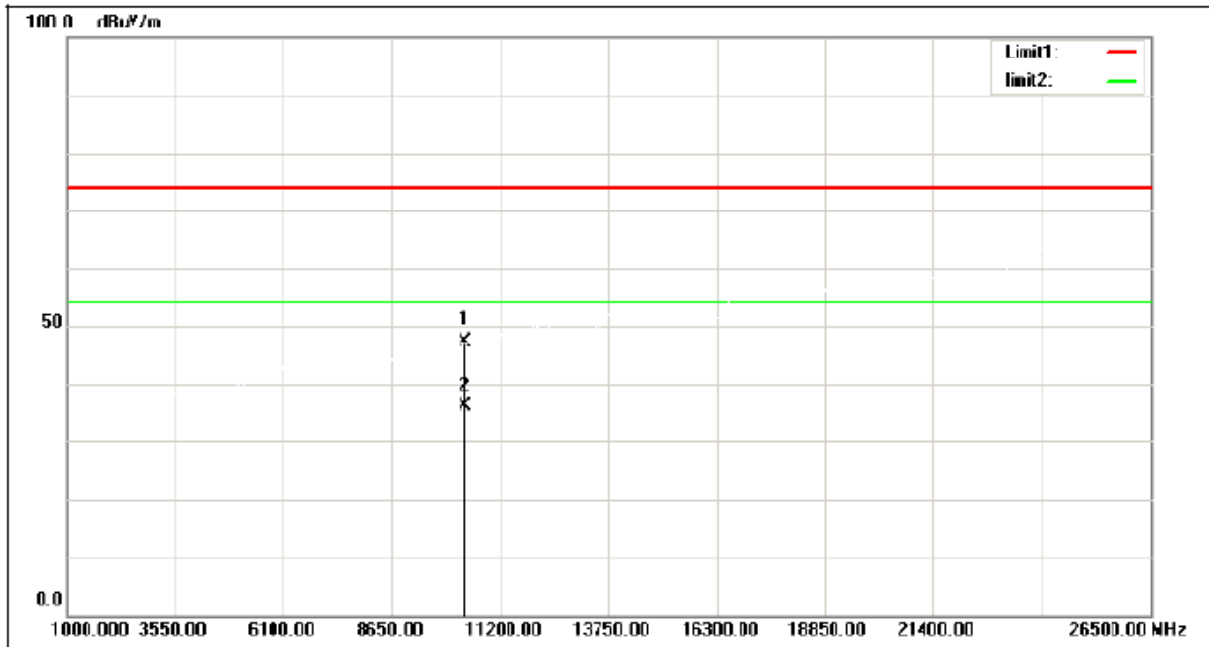

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	42.80	4.53	47.33	74.00	-26.67	peak
2	10360.000	31.69	4.53	36.22	54.00	-17.78	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz


Horizontal

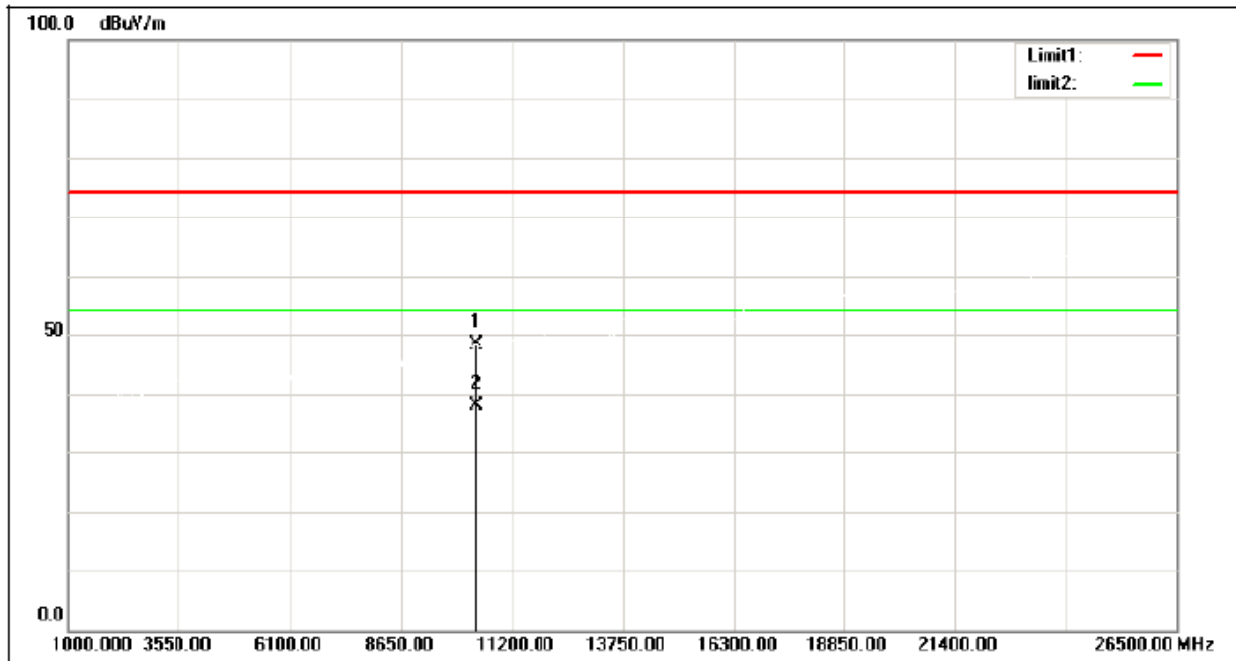

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	43.80	4.53	48.33	74.00	-25.67	peak
2	10360.000	33.61	4.53	38.14	54.00	-15.86	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz


Vertical

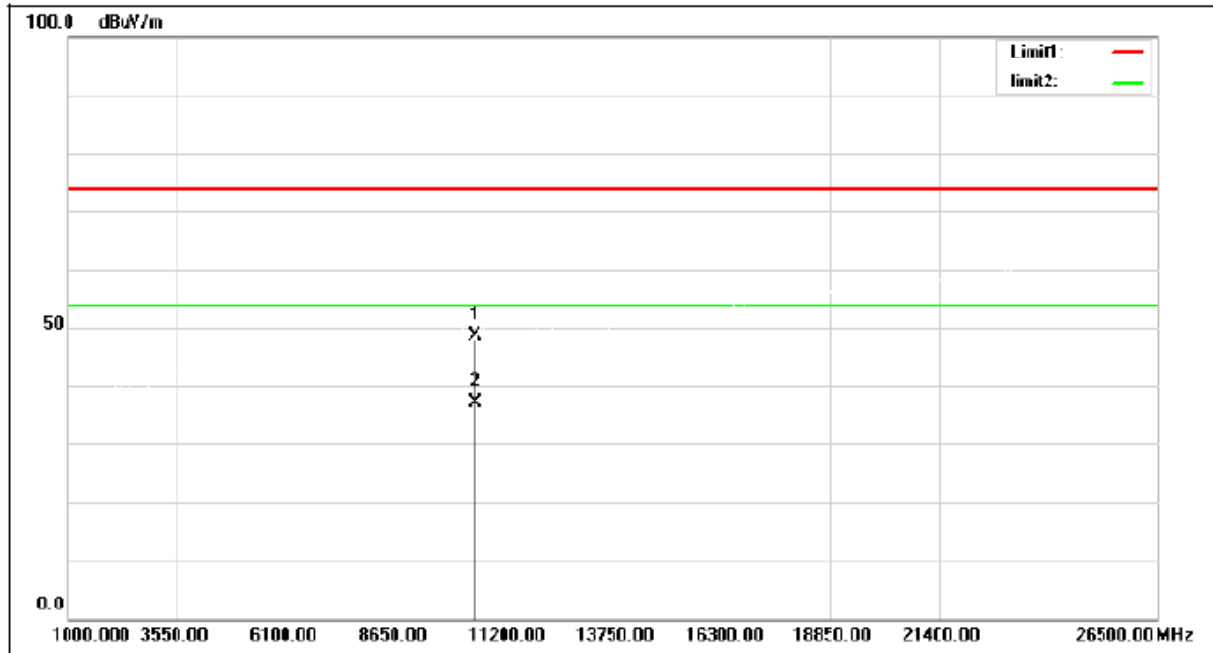

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	43.68	5.01	48.69	74.00	-25.31	peak
2	10520.000	32.17	5.01	37.18	54.00	-16.82	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz


Horizontal

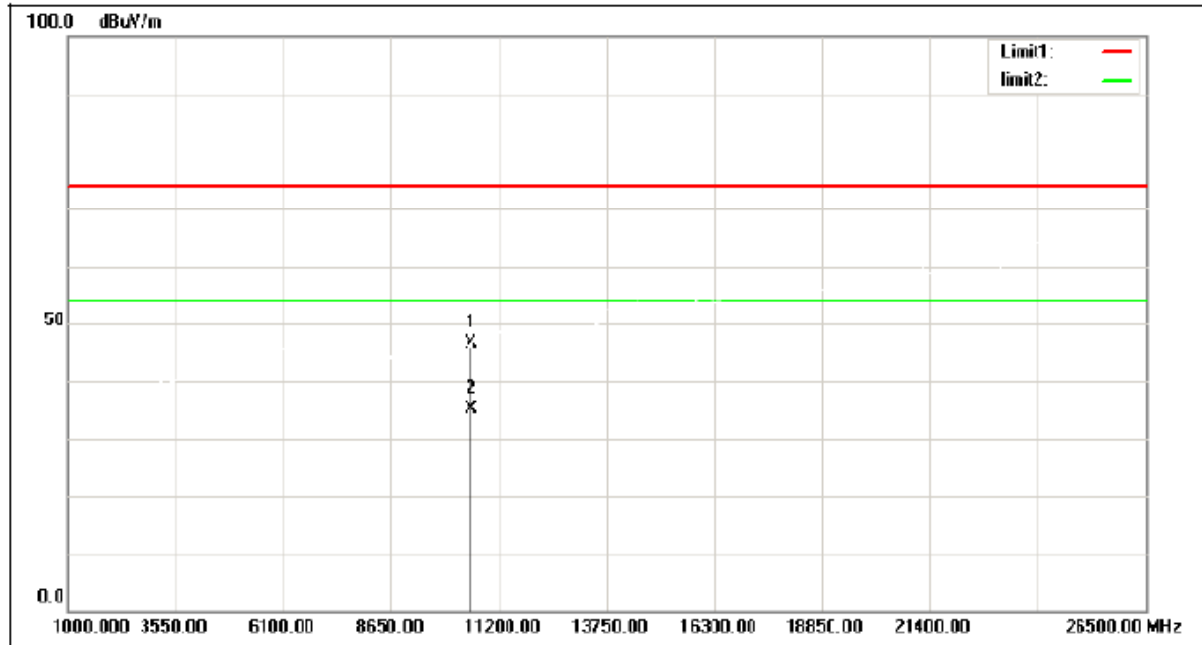

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	41.68	5.01	46.69	74.00	-27.31	peak
2	10520.000	30.17	5.01	35.18	54.00	-18.82	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz


Vertical

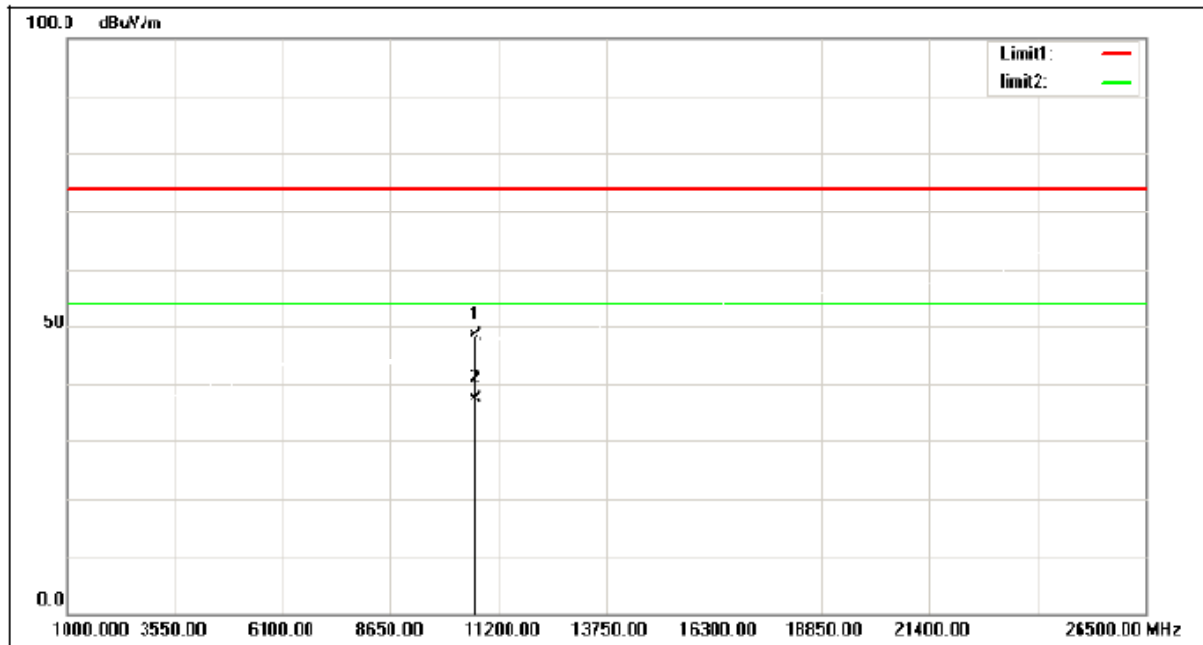

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	42.97	5.38	48.35	74.00	-25.65	peak
2	10640.000	32.11	5.38	37.49	54.00	-16.51	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz


Horizontal

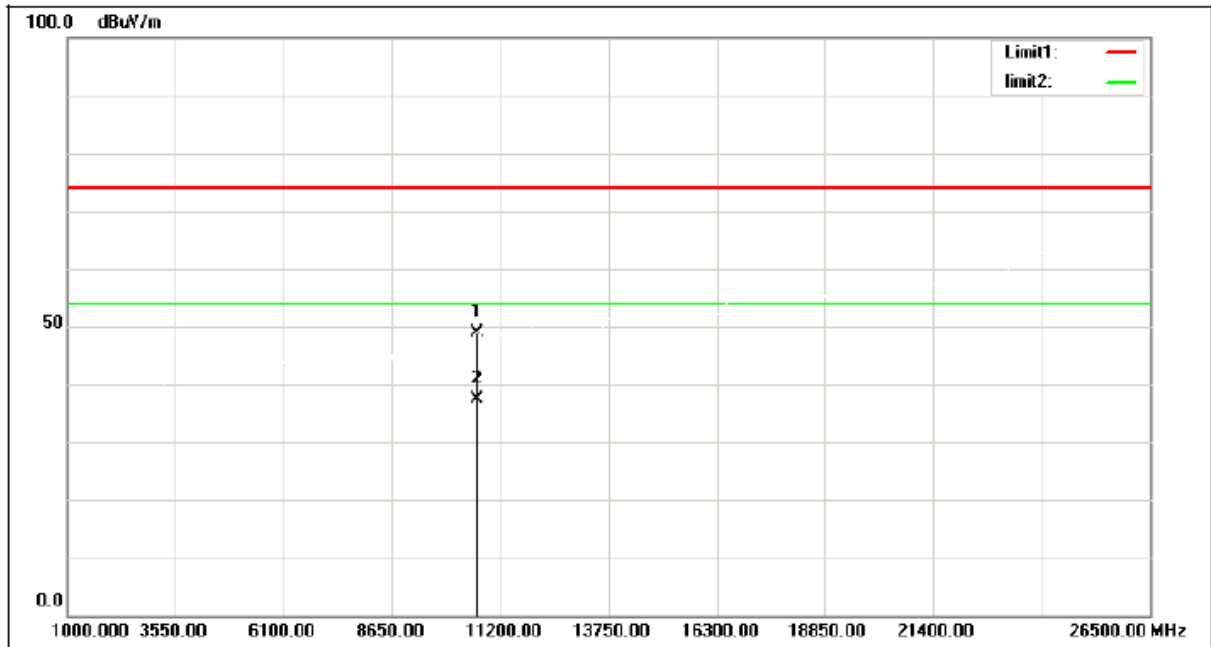

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	43.47	5.38	48.85	74.00	-25.15	peak
2	10640.000	32.07	5.38	37.45	54.00	-16.55	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz


Vertical

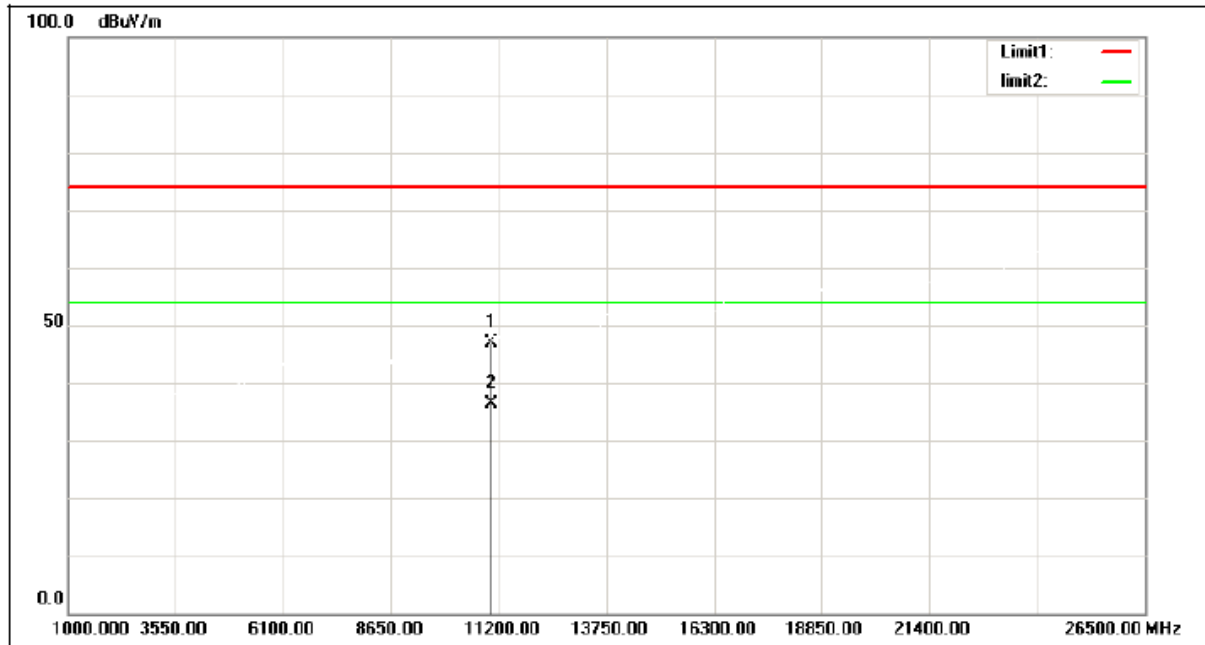

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	40.47	6.50	46.97	74.00	-27.03	peak
2	11000.000	29.99	6.50	36.49	54.00	-17.51	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz


Horizontal

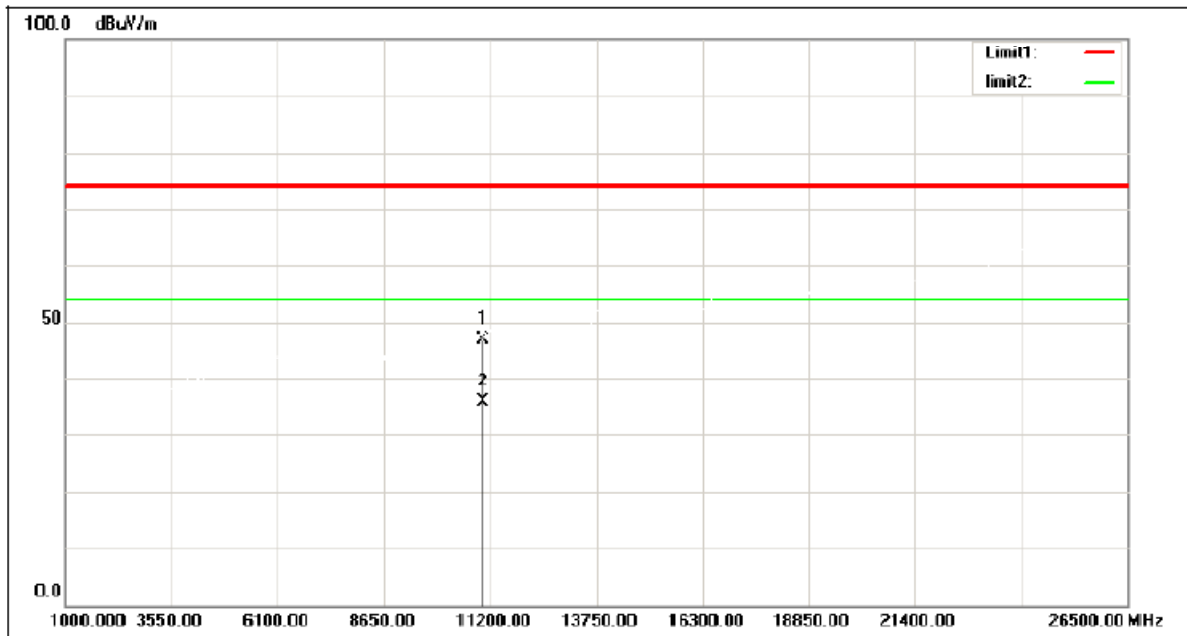

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	40.47	6.50	46.97	74.00	-27.03	peak
2	11000.000	29.35	6.50	35.85	54.00	-18.15	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5600 MHz


Vertical

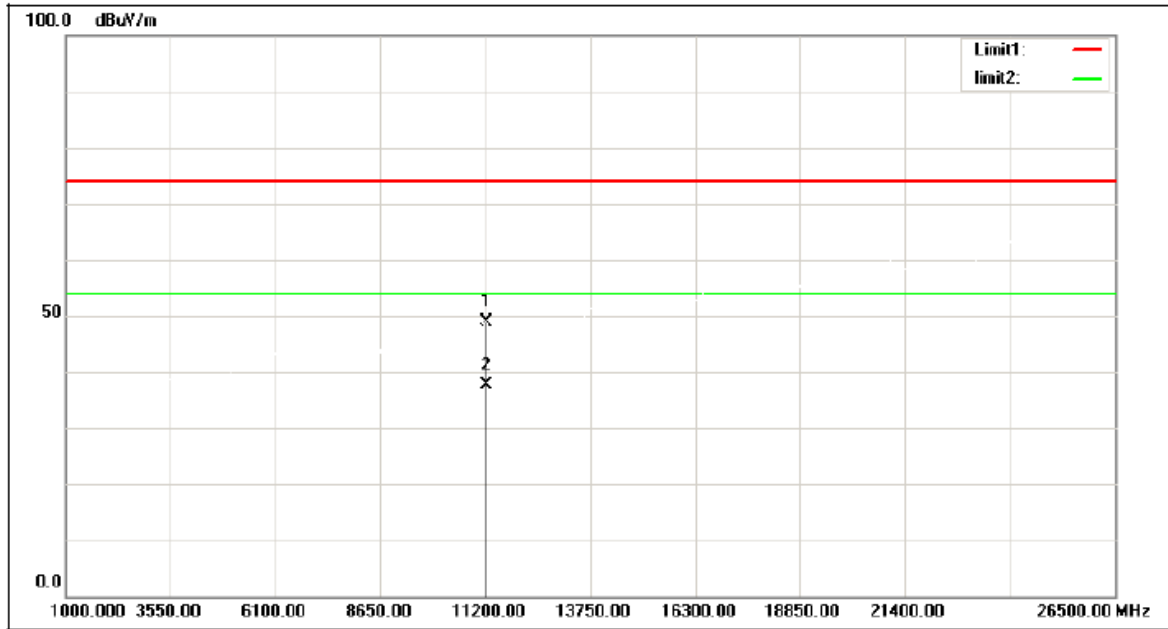

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	42.55	6.41	48.96	74.00	-25.04	peak
2	11200.000	31.13	6.41	37.54	54.00	-16.46	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5600 MHz


Horizontal

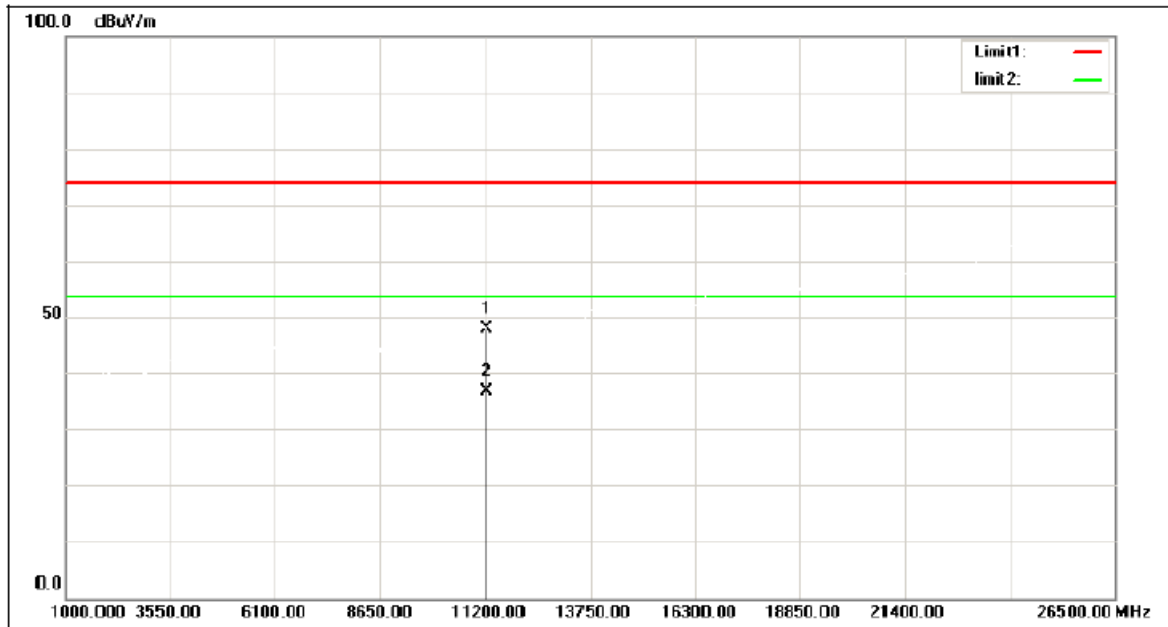

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	41.55	6.41	47.96	74.00	-26.04	peak
2	11200.000	30.18	6.41	36.59	54.00	-17.41	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz


Vertical

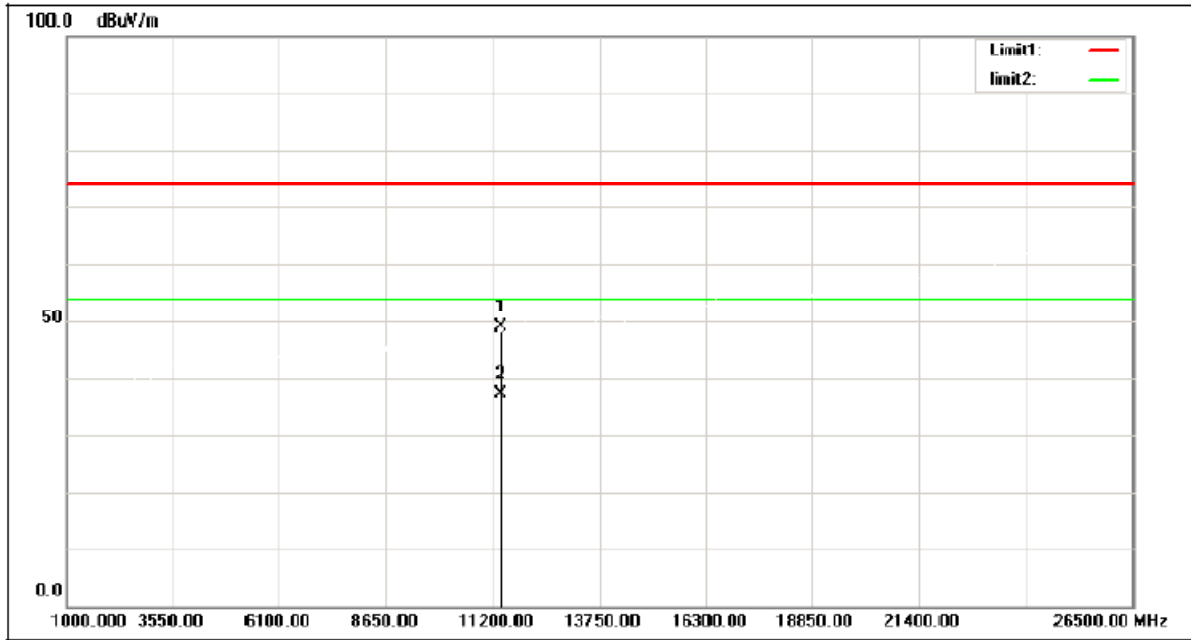

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	42.51	6.31	48.82	74.00	-25.18	peak
2	11400.000	30.84	6.31	37.15	54.00	-16.85	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz


Horizontal

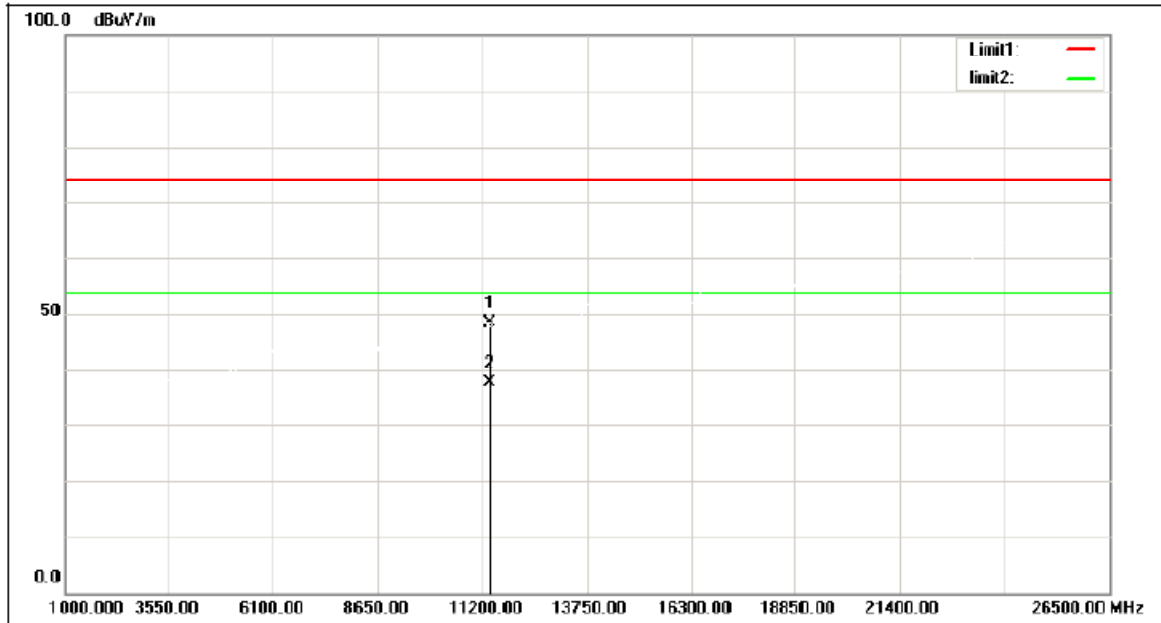

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	42.01	6.31	48.32	74.00	-25.68	peak
2	11400.000	31.28	6.31	37.59	54.00	-16.41	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz


Vertical

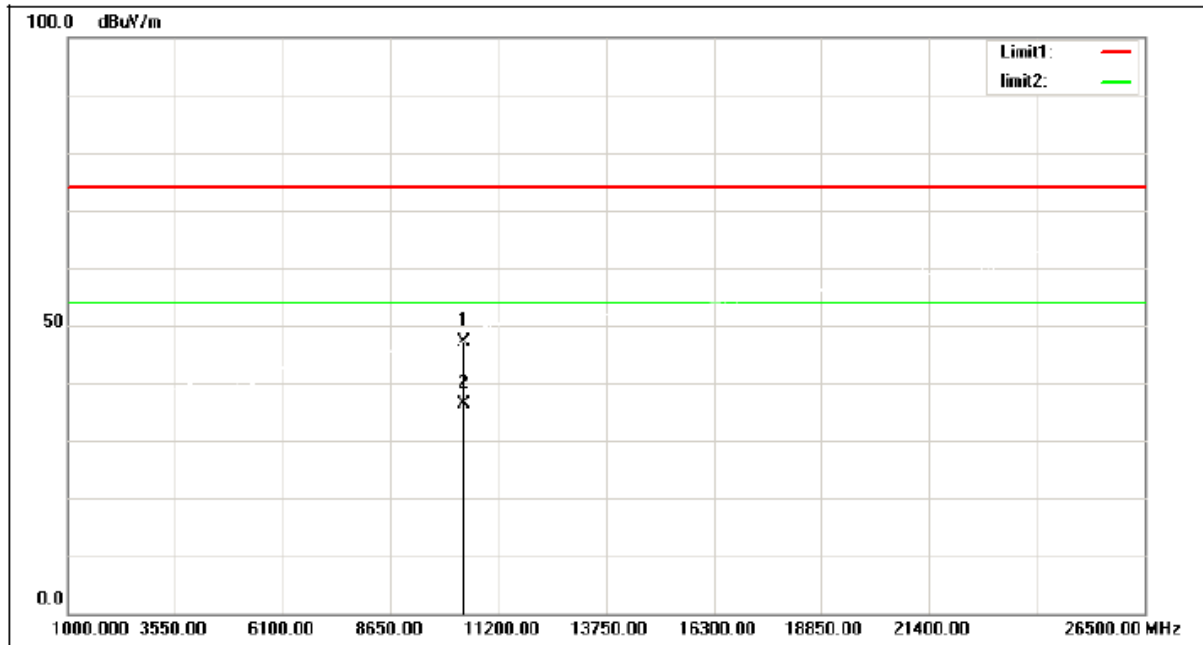

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	42.57	4.59	47.16	74.00	-26.84	peak
2	10380.000	31.89	4.59	36.48	54.00	-17.52	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz


Horizontal

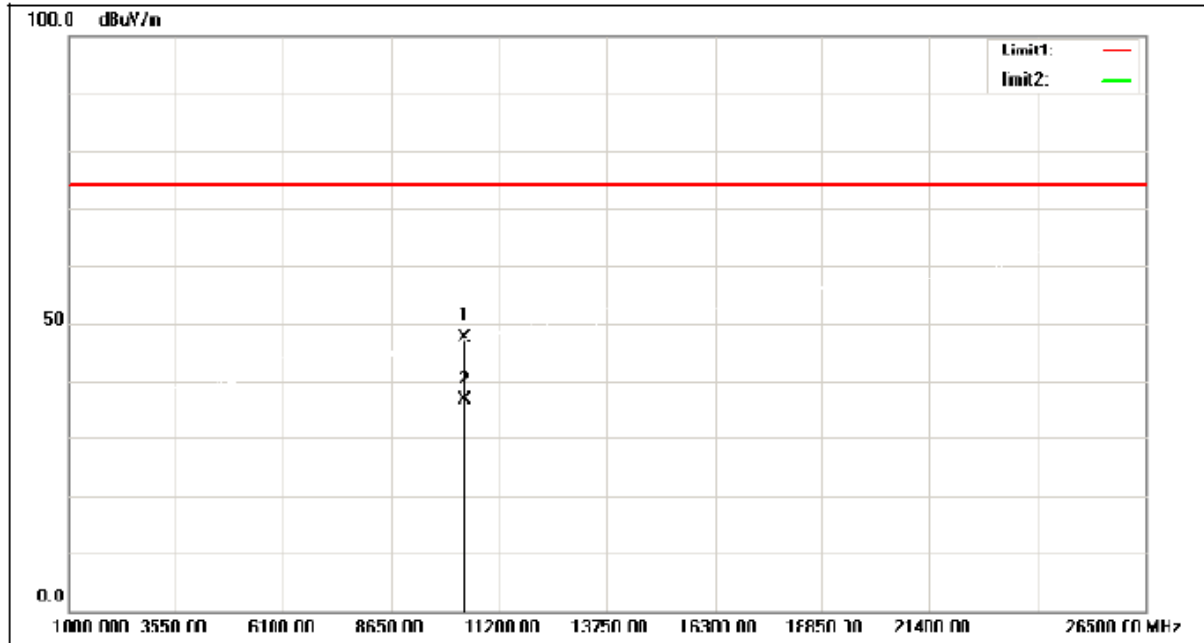

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	43.07	4.59	47.66	74.00	-26.34	peak
2	10380.000	31.96	4.59	36.55	54.00	-17.45	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz


Vertical

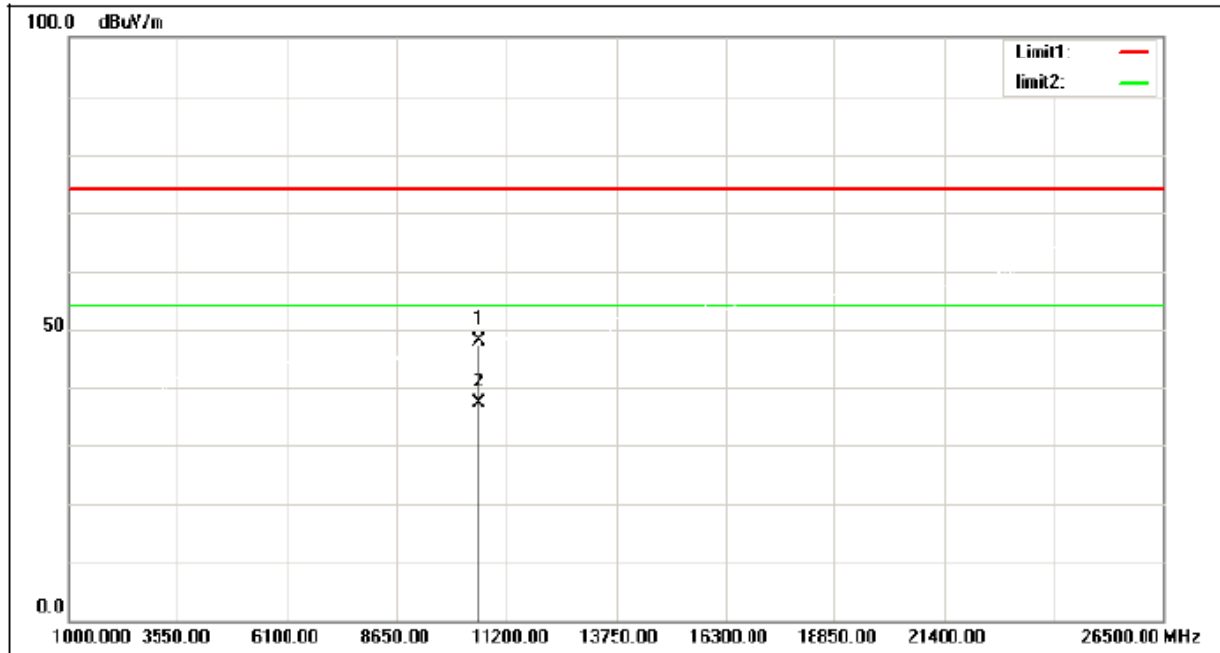

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	43.12	5.07	48.19	74.00	-25.81	peak
2	10540.000	32.41	5.07	37.48	54.00	-16.52	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz


Horizontal

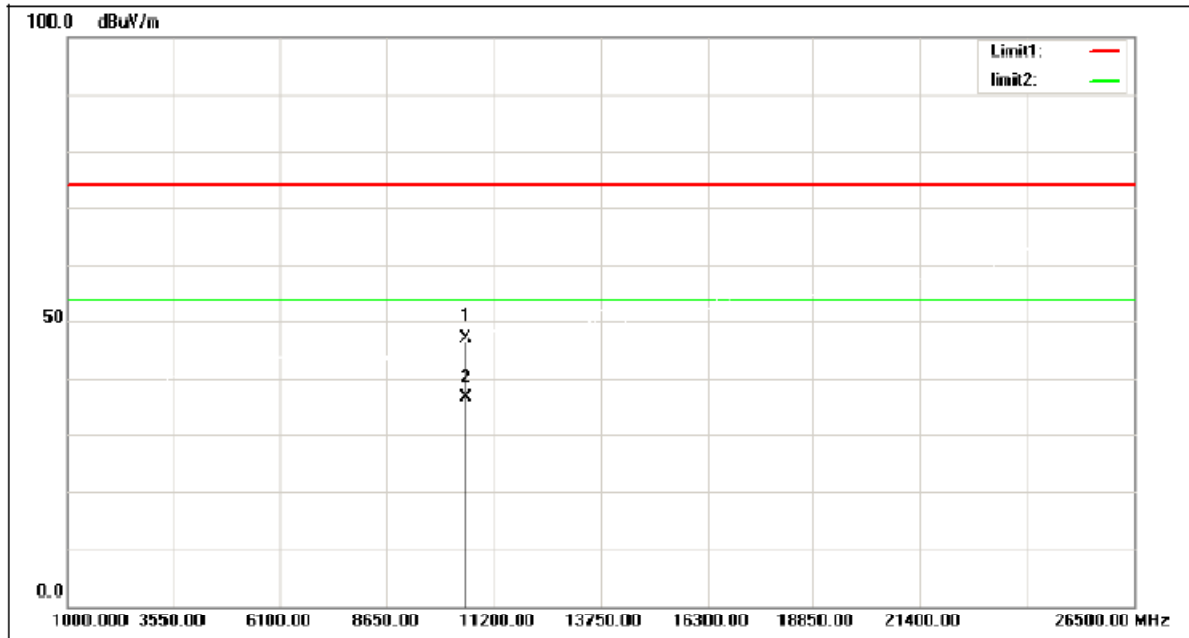

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	42.12	5.07	47.19	74.00	-26.81	peak
2	10540.000	31.67	5.07	36.74	54.00	-17.26	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz


Vertical

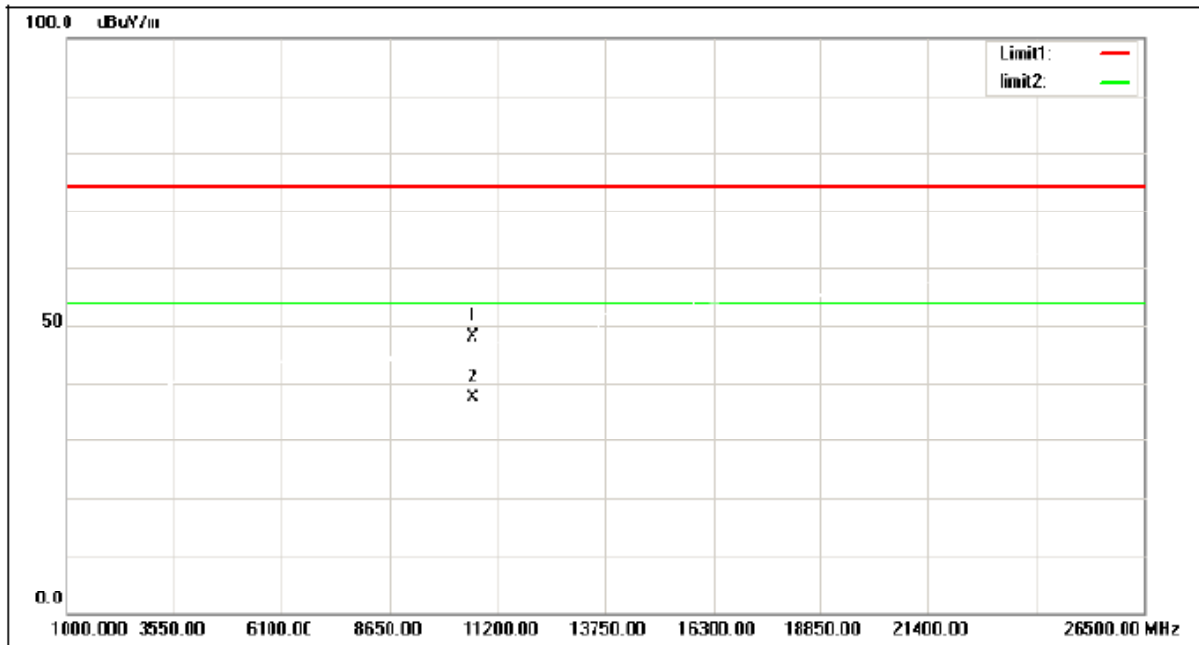

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	42.69	5.32	48.01	74.00	-25.99	peak
2	10620.000	32.13	5.32	37.45	54.00	-16.55	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz


Horizontal

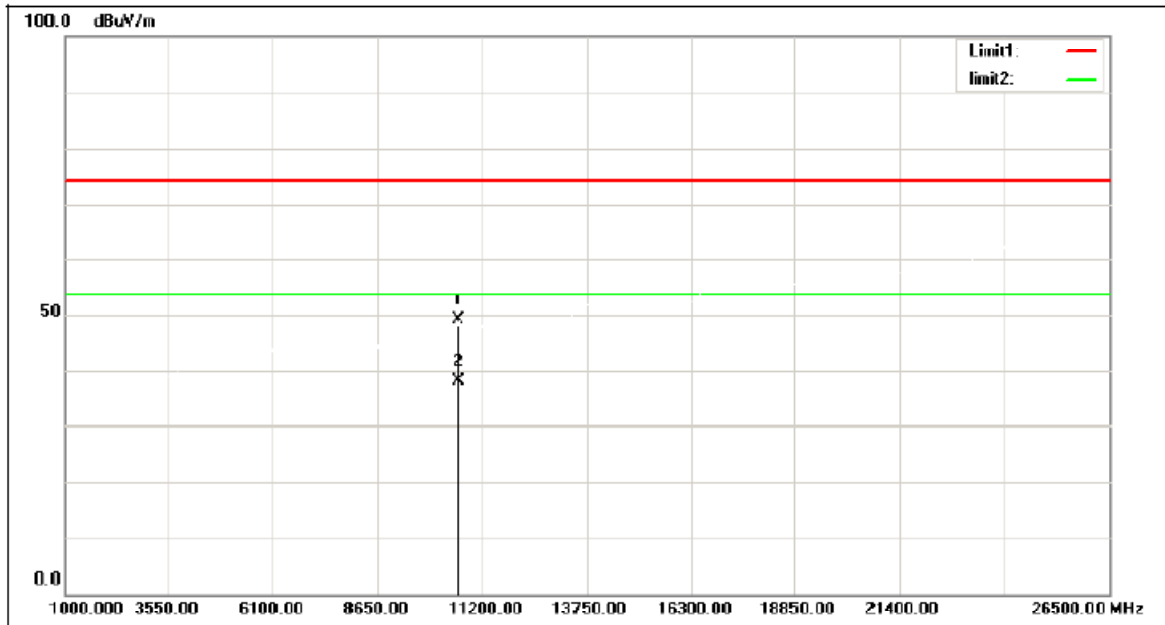

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	43.69	5.32	49.01	74.00	-24.99	peak
2	10620.000	32.87	5.32	38.19	54.00	-15.81	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz


Vertical

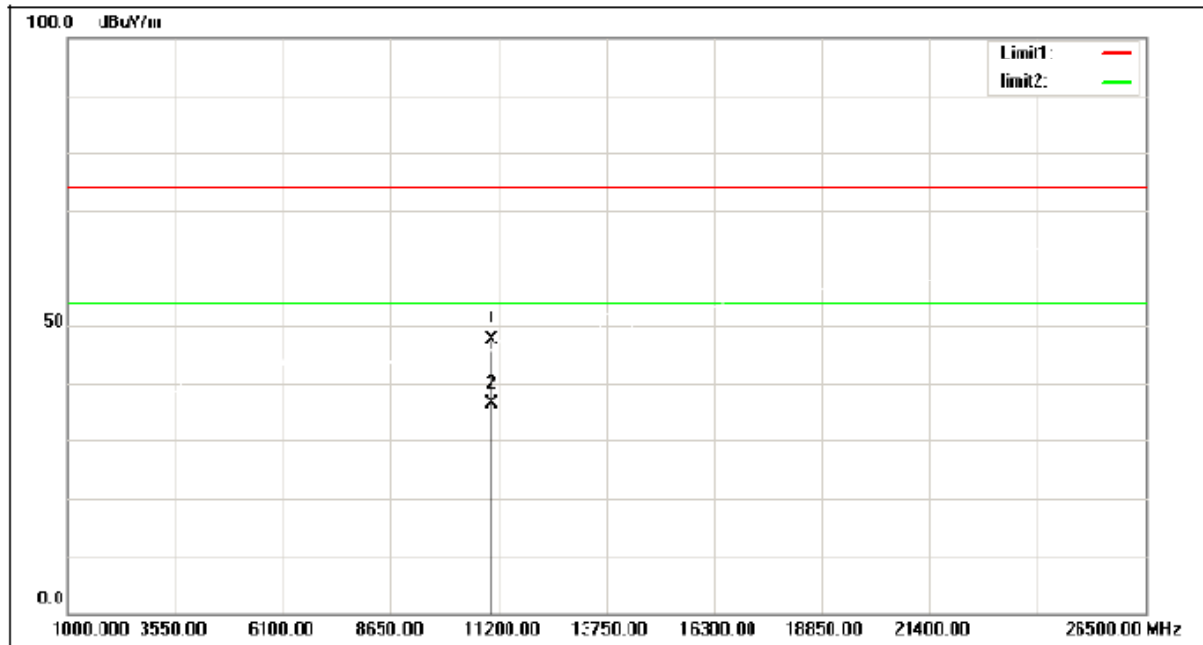

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	41.23	6.48	47.71	74.00	-26.29	peak
2	11020.000	29.99	6.48	36.47	54.00	-17.53	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz


Horizontal

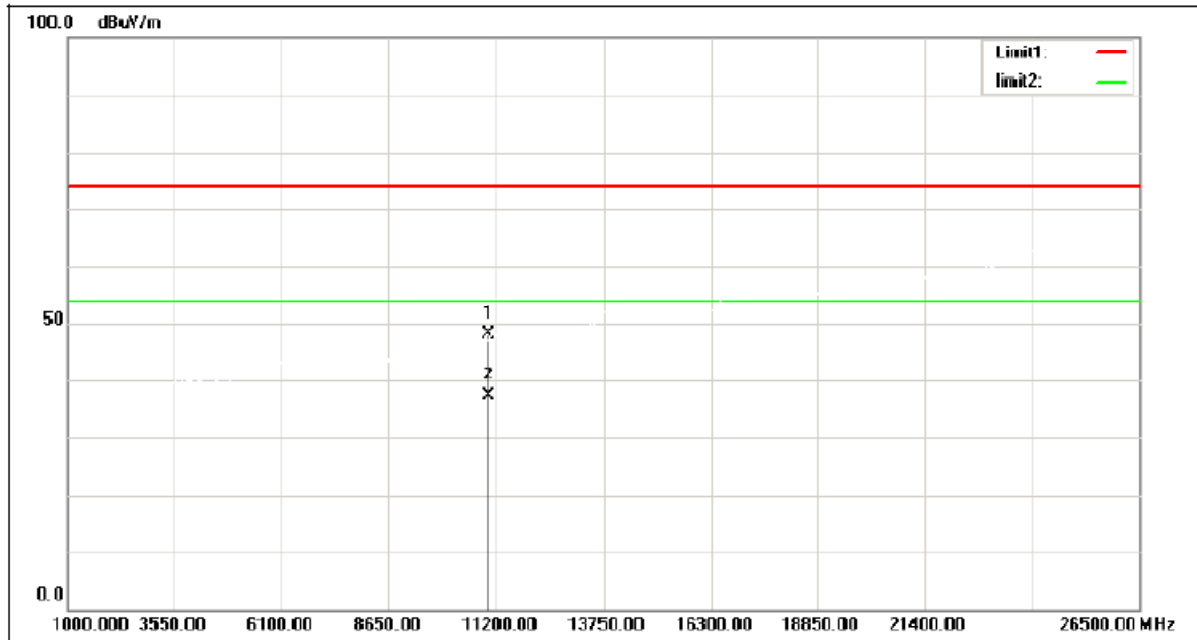

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	41.73	6.48	48.21	74.00	-25.79	peak
2	11020.000	31.00	6.48	37.48	54.00	-16.52	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5590 MHz


Vertical

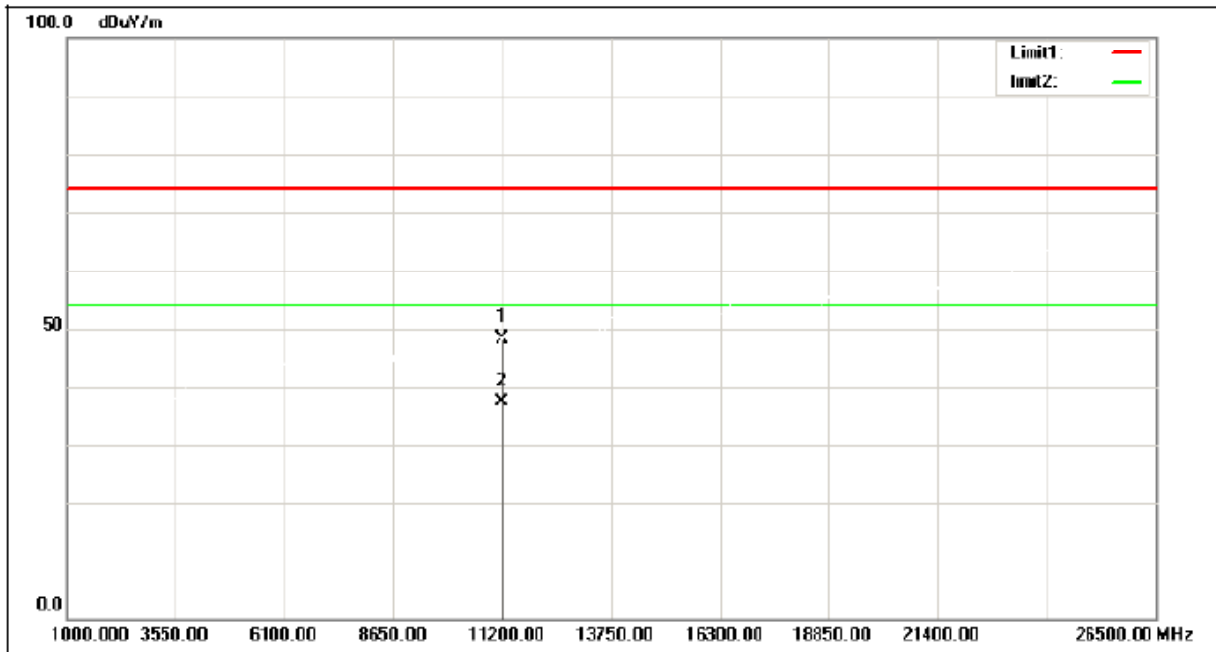

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	42.04	6.42	48.46	74.00	-25.54	peak
2	11180.000	31.07	6.42	37.49	54.00	-16.51	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5590 MHz


Horizontal

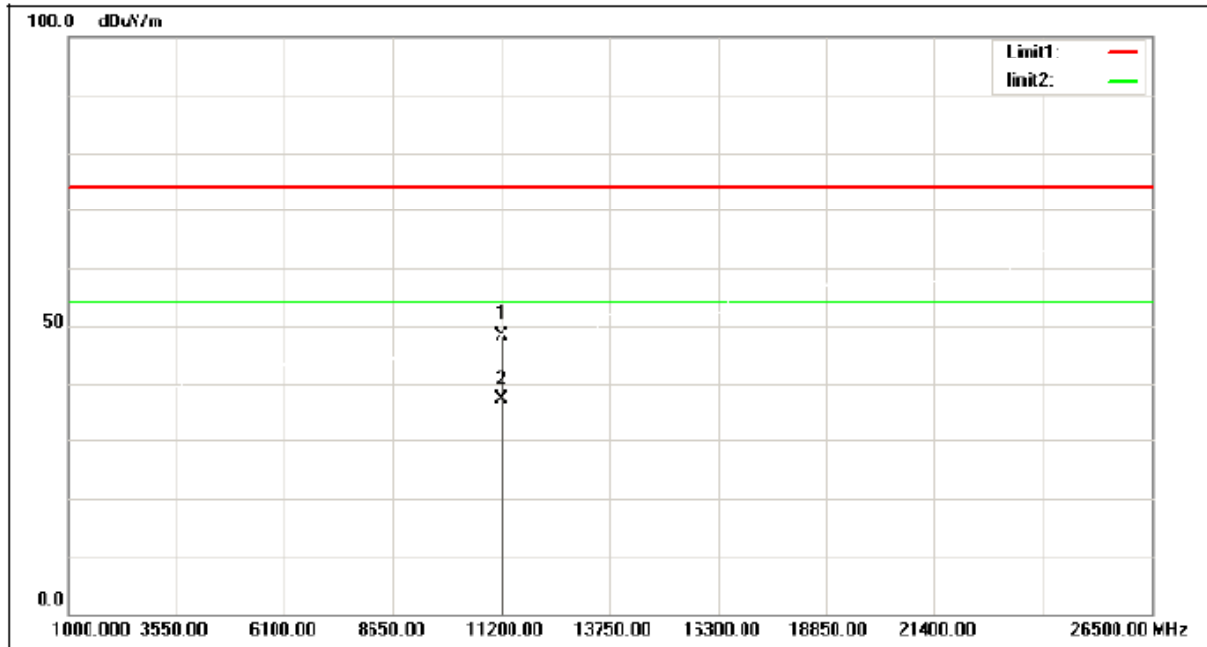

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	42.04	6.42	48.46	74.00	-25.54	peak
2	11180.000	30.76	6.42	37.18	54.00	-16.82	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz


Vertical

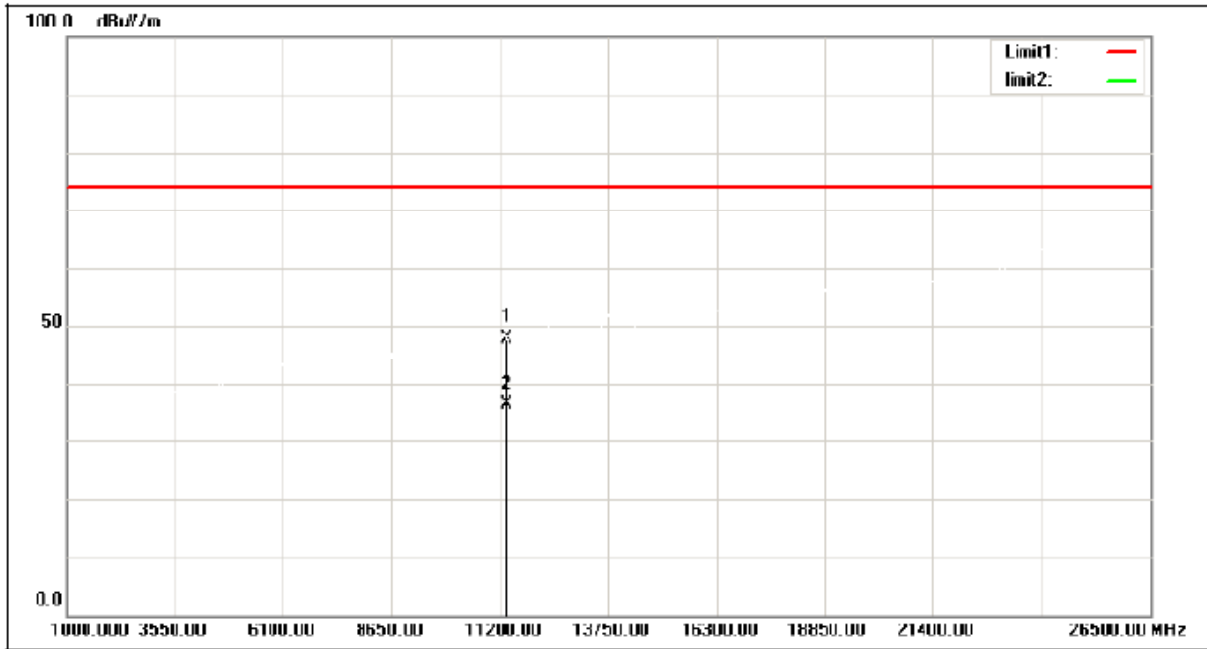

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	41.59	6.34	47.93	74.00	-26.07	peak
2	11340.000	30.15	6.34	36.49	54.00	-17.51	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz


Horizontal

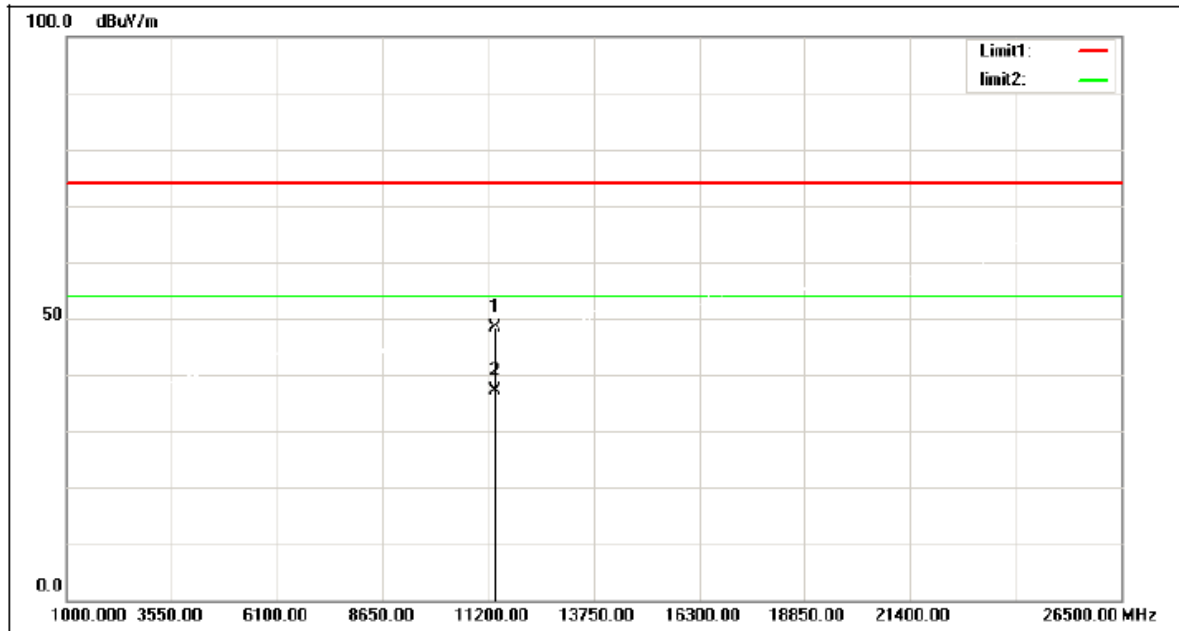

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	42.09	6.34	48.43	74.00	-25.57	peak
2	11340.000	30.83	6.34	37.17	54.00	-16.83	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz


Vertical

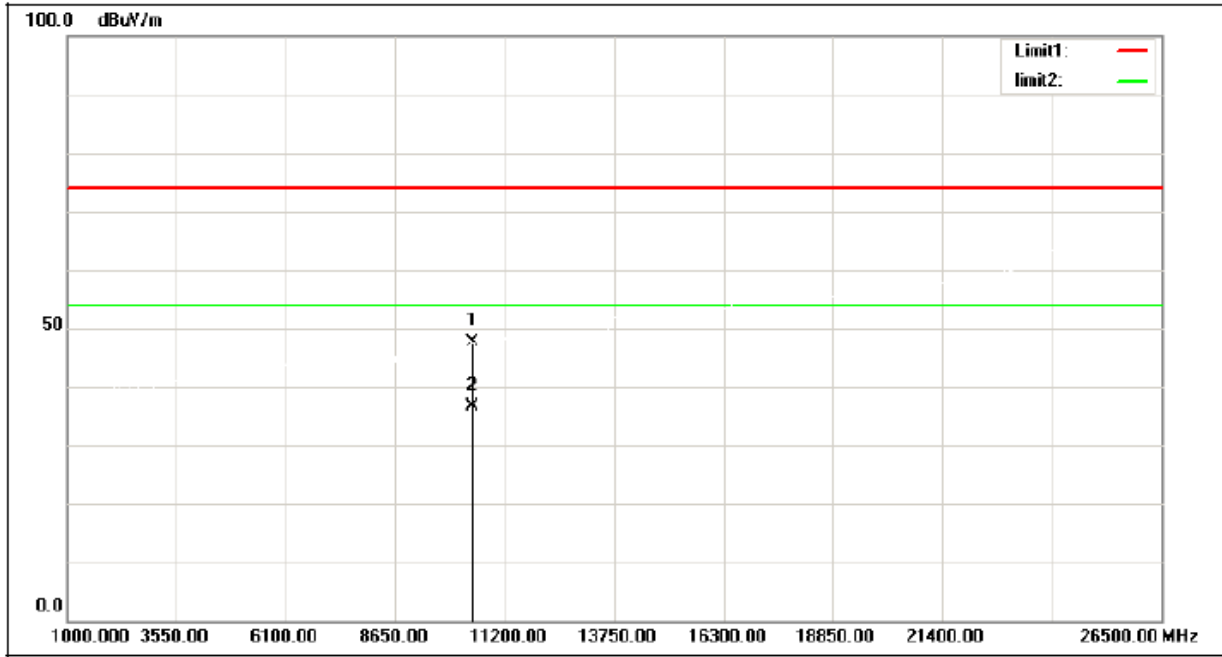

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	42.96	4.70	47.66	74.00	-26.34	peak
2	10420.000	31.85	4.70	36.55	54.00	-17.45	AVG

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz


Horizontal

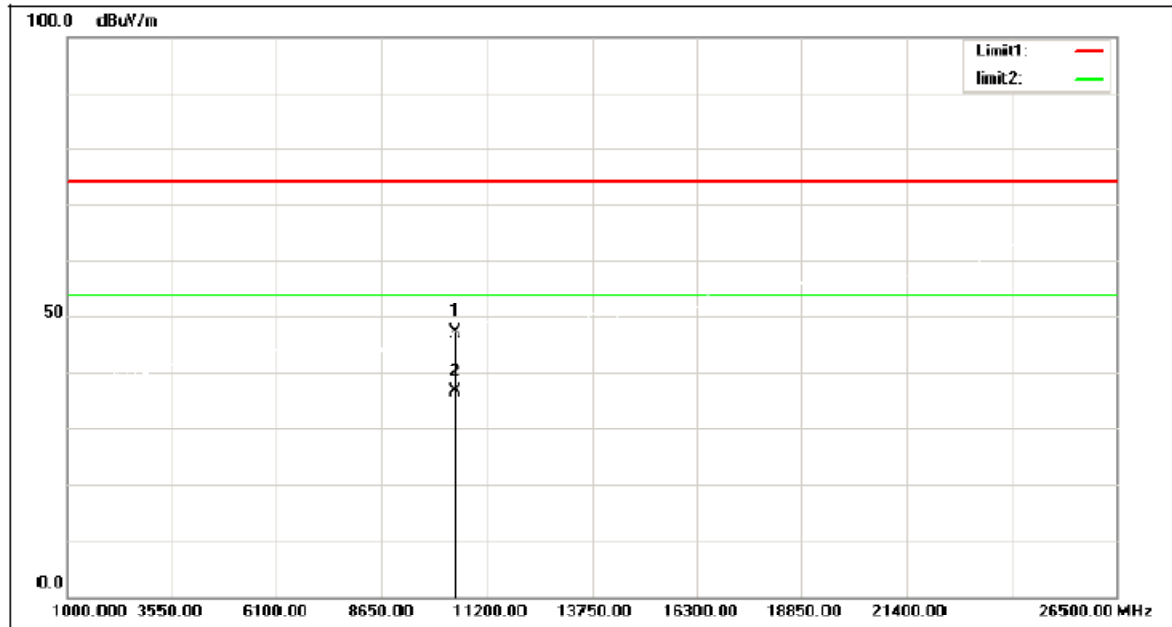

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	42.46	4.70	47.16	74.00	-26.84	peak
2	10420.000	31.98	4.70	36.68	54.00	-17.32	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz


Vertical

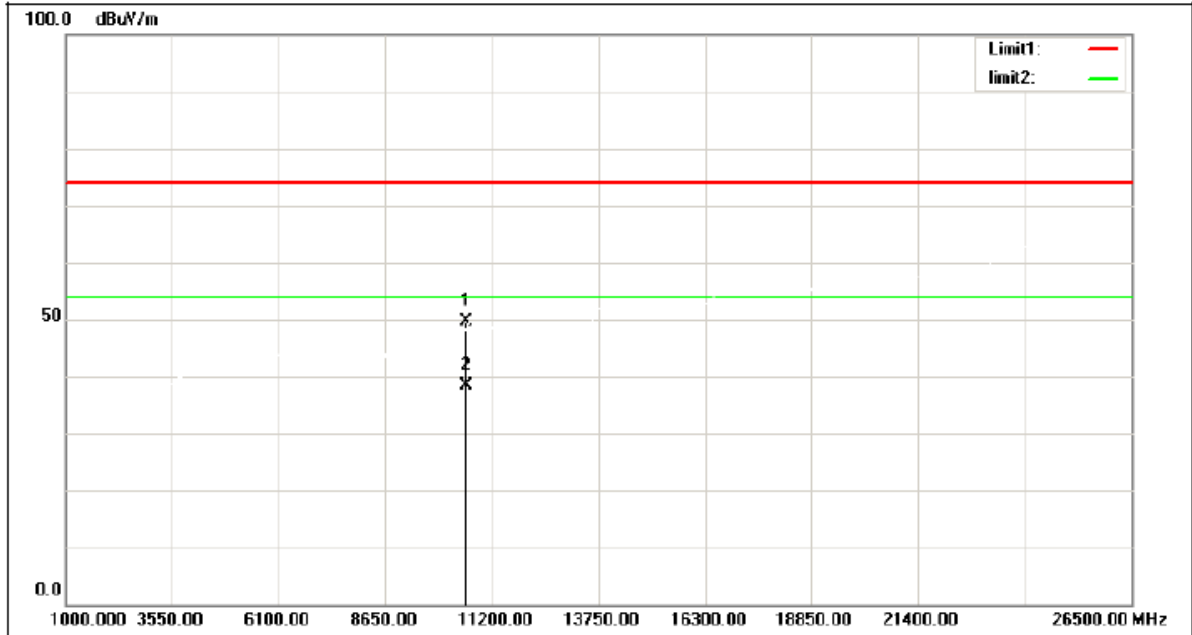

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	44.30	5.21	49.51	74.00	-24.49	peak
2	10580.000	33.28	5.21	38.49	54.00	-15.51	AVG

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz


Horizontal

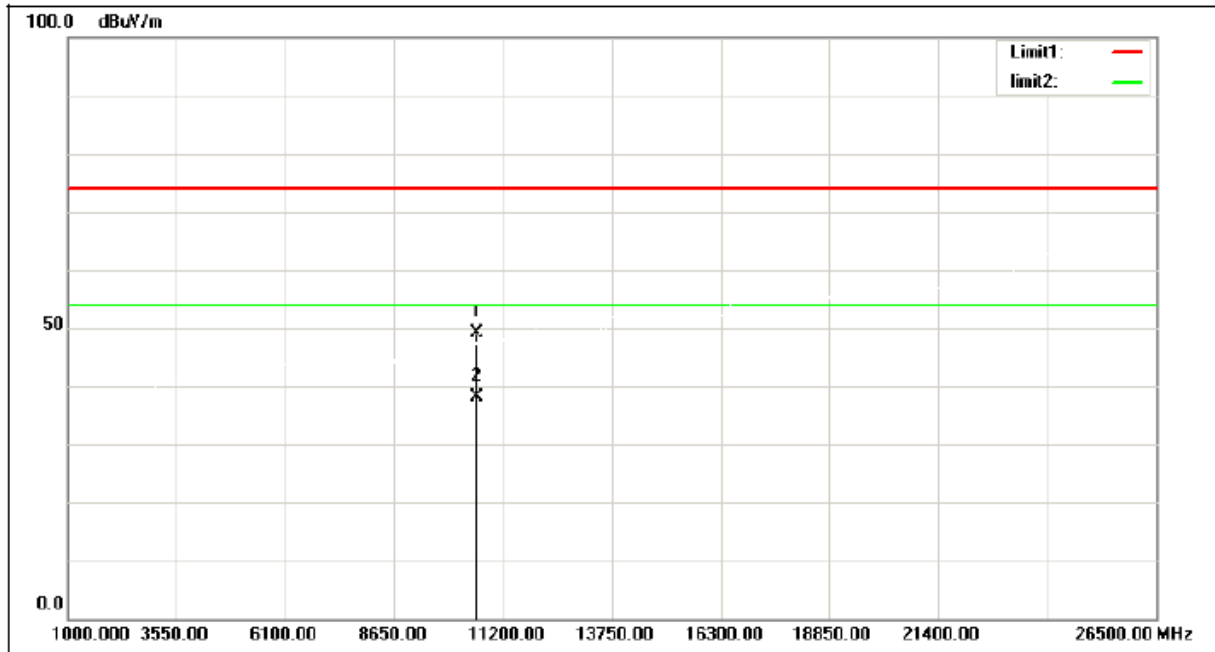

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	43.80	5.21	49.01	74.00	-24.99	peak
2	10580.000	32.94	5.21	38.15	54.00	-15.85	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz


Vertical

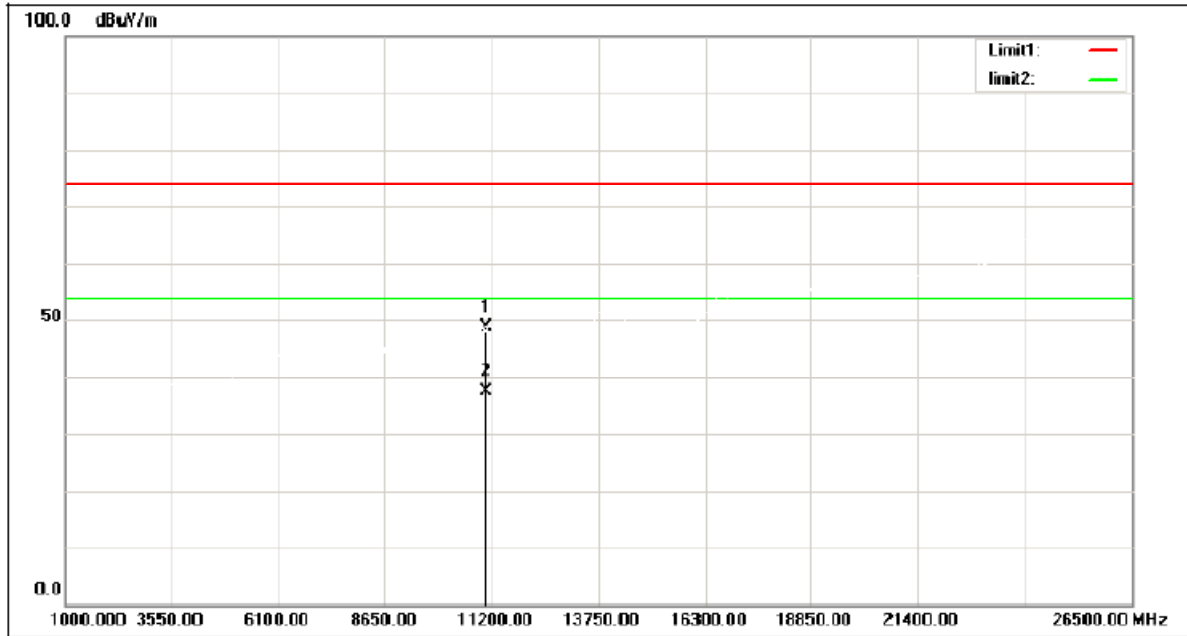

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	42.24	6.47	48.71	74.00	-25.29	peak
2	11060.000	30.80	6.47	37.27	54.00	-16.73	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz


Horizontal

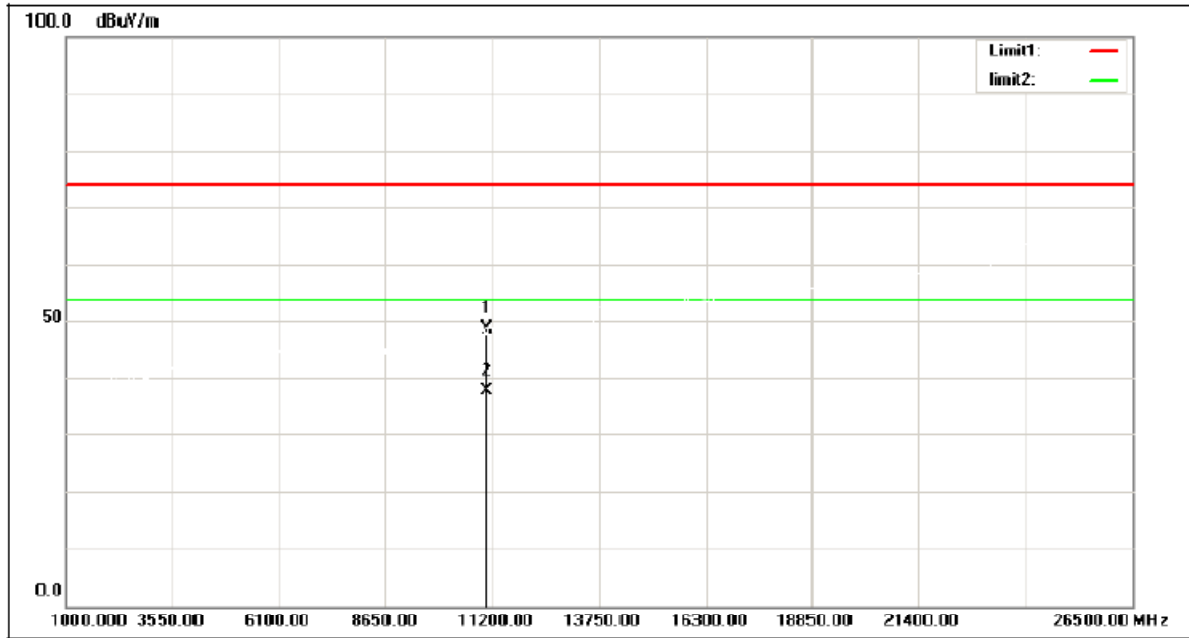

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	42.24	6.47	48.71	74.00	-25.29	peak
2	11060.000	31.12	6.47	37.59	54.00	-16.41	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz


Vertical

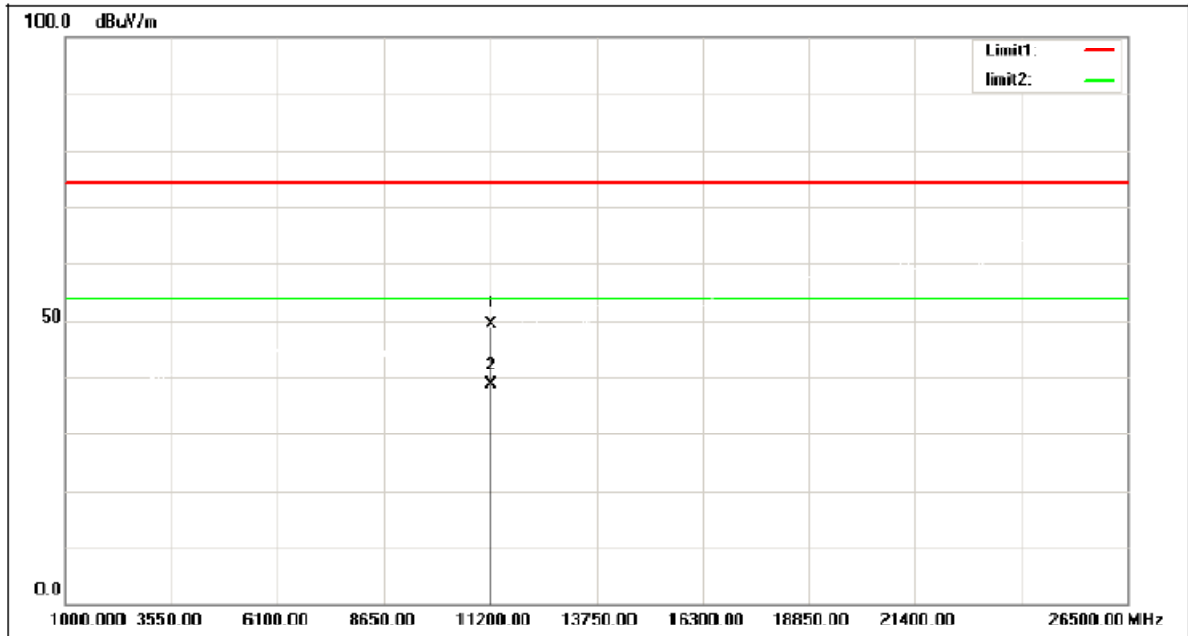

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	42.89	6.39	49.28	74.00	-24.72	peak
2	11220.000	32.22	6.39	38.61	54.00	-15.39	AVG

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz


Horizontal

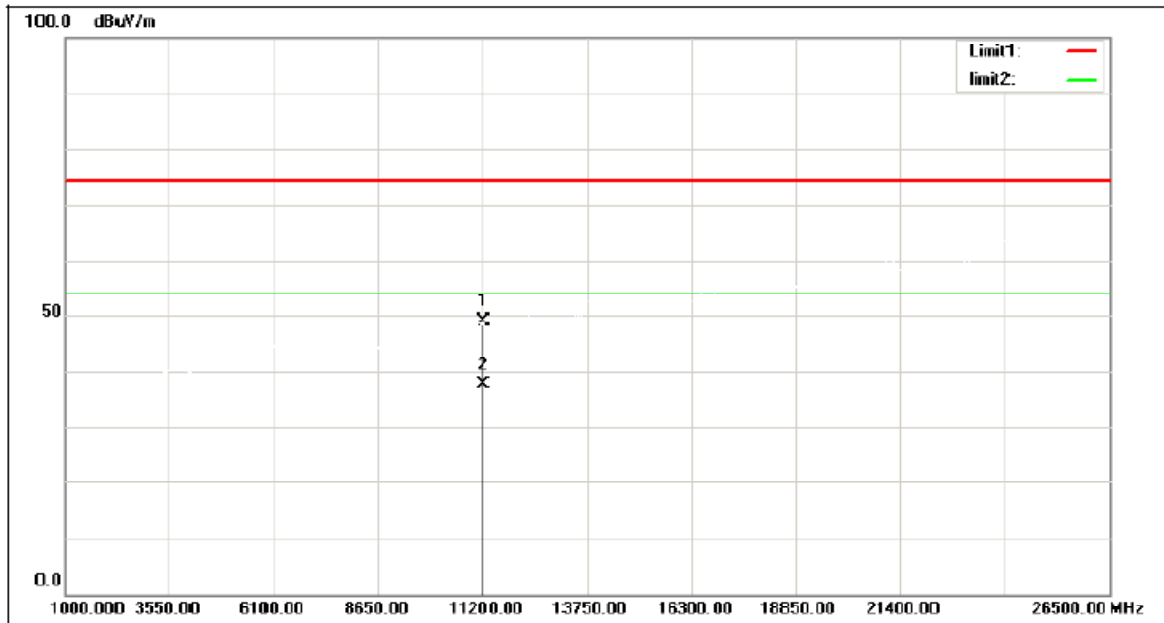

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	42.39	6.39	48.78	74.00	-25.22	peak
2	11220.000	31.30	6.39	37.69	54.00	-16.31	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz


Vertical

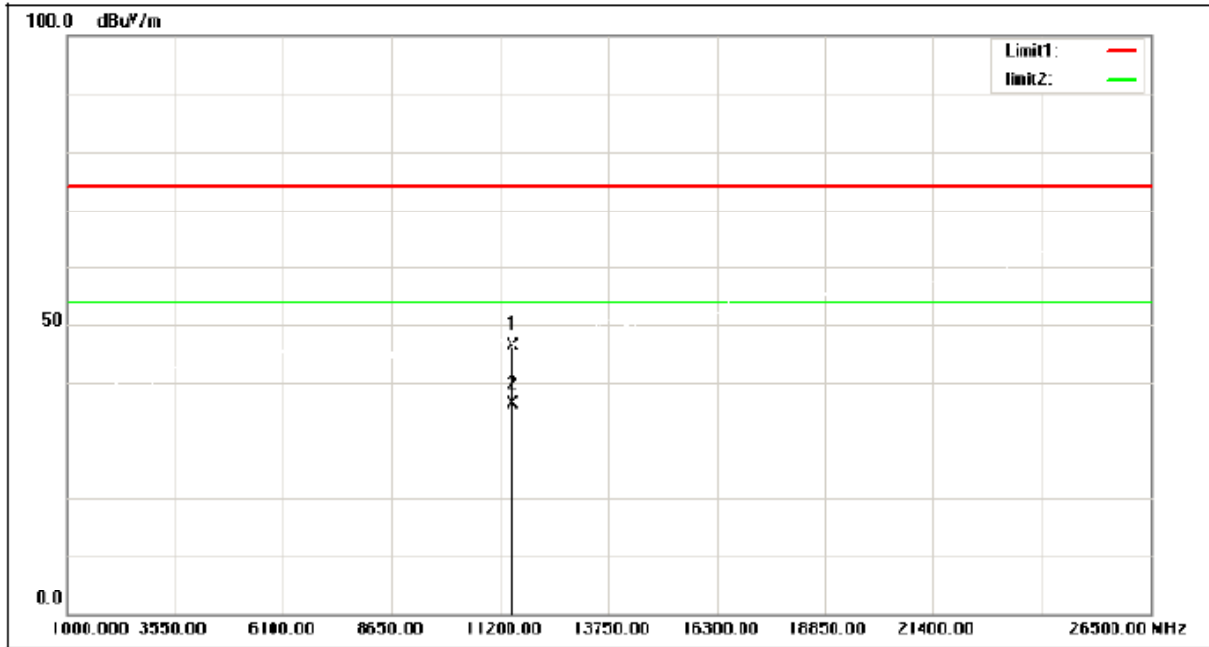

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	40.22	6.27	46.49	74.00	-27.51	peak
2	11490.000	29.85	6.27	36.12	54.00	-17.88	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz


Horizontal

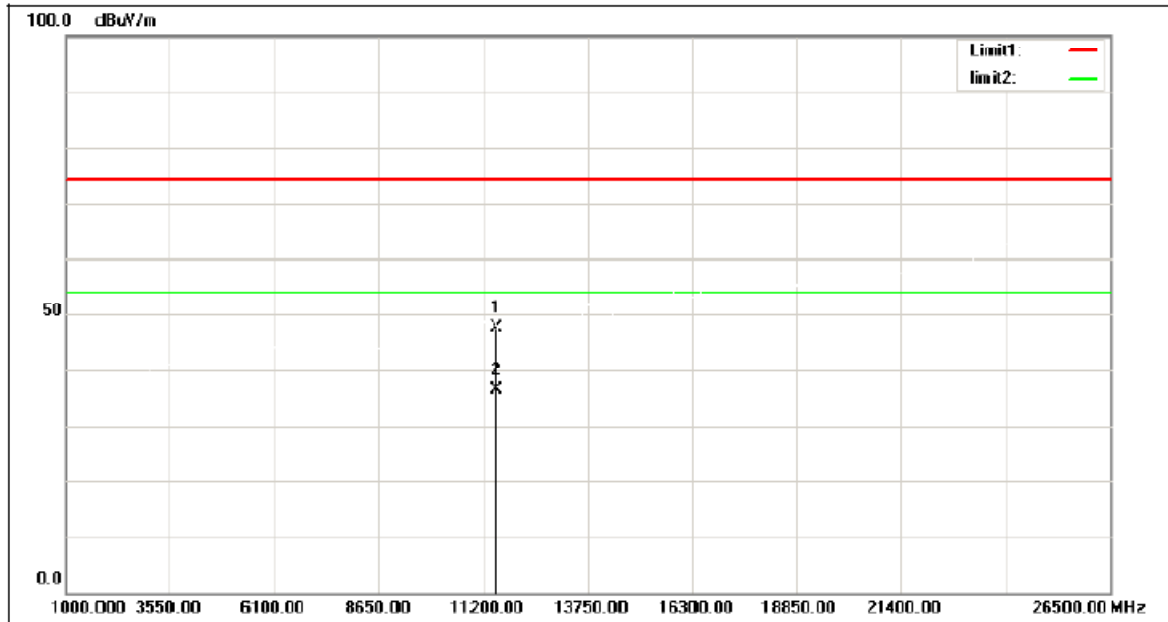

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	41.22	6.27	47.49	74.00	-26.51	peak
2	11490.000	30.14	6.27	36.41	54.00	-17.59	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz


Vertical

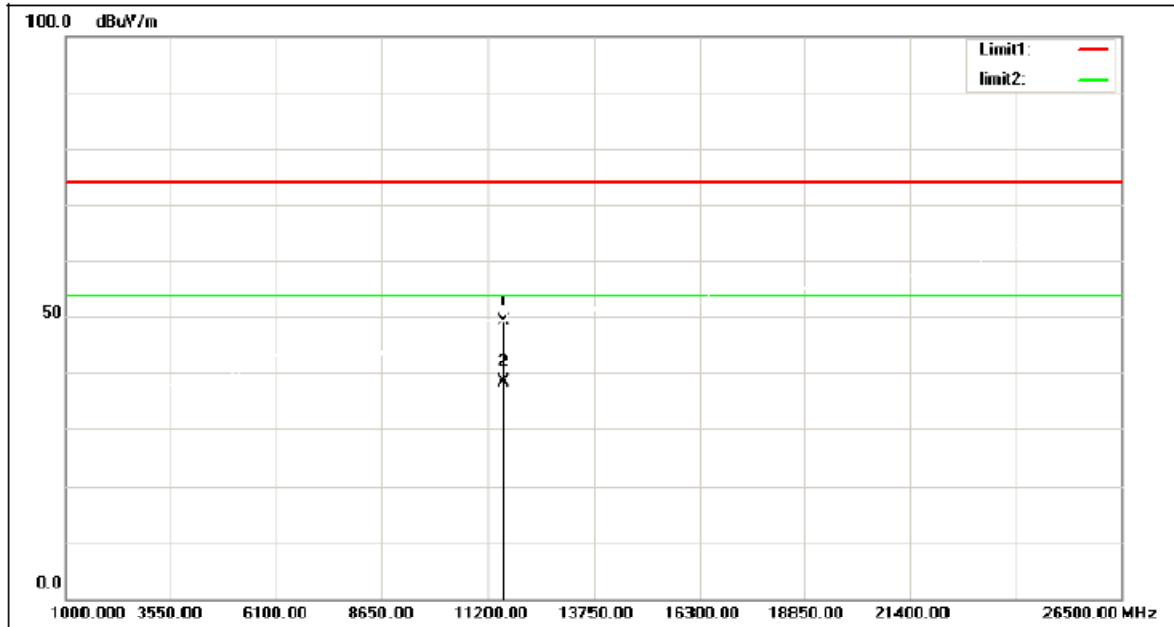

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	42.80	6.22	49.02	74.00	-24.98	peak
2	11570.000	32.04	6.22	38.26	54.00	-15.74	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz


Horizontal

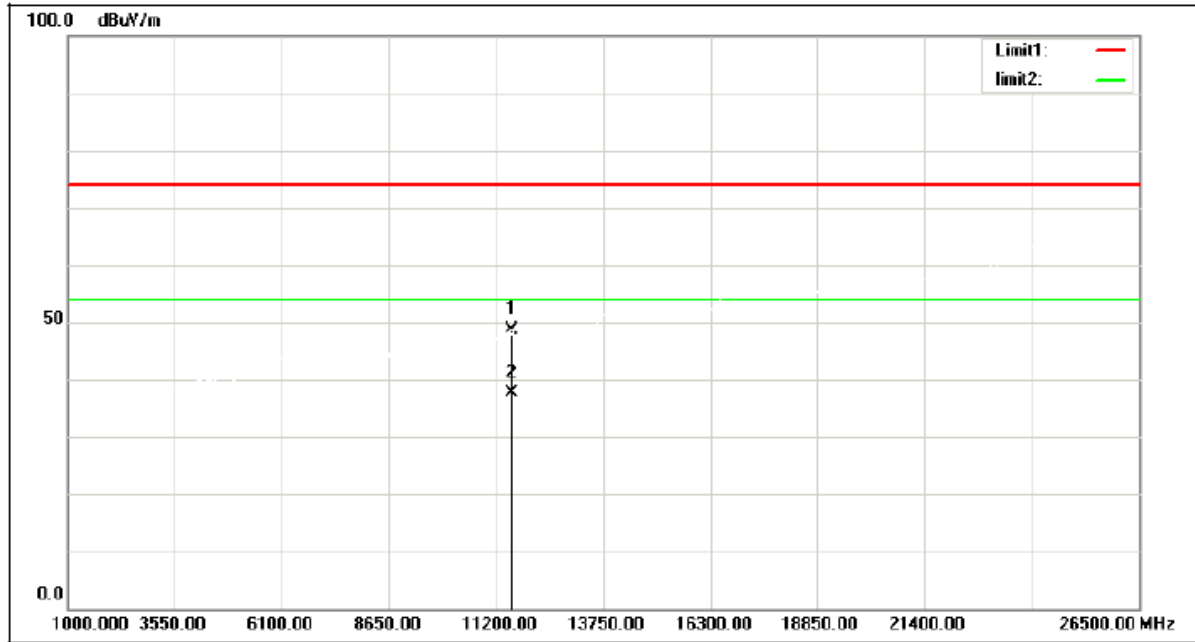

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	42.30	6.22	48.52	74.00	-25.48	peak
2	11570.000	31.37	6.22	37.59	54.00	-16.41	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz


Vertical

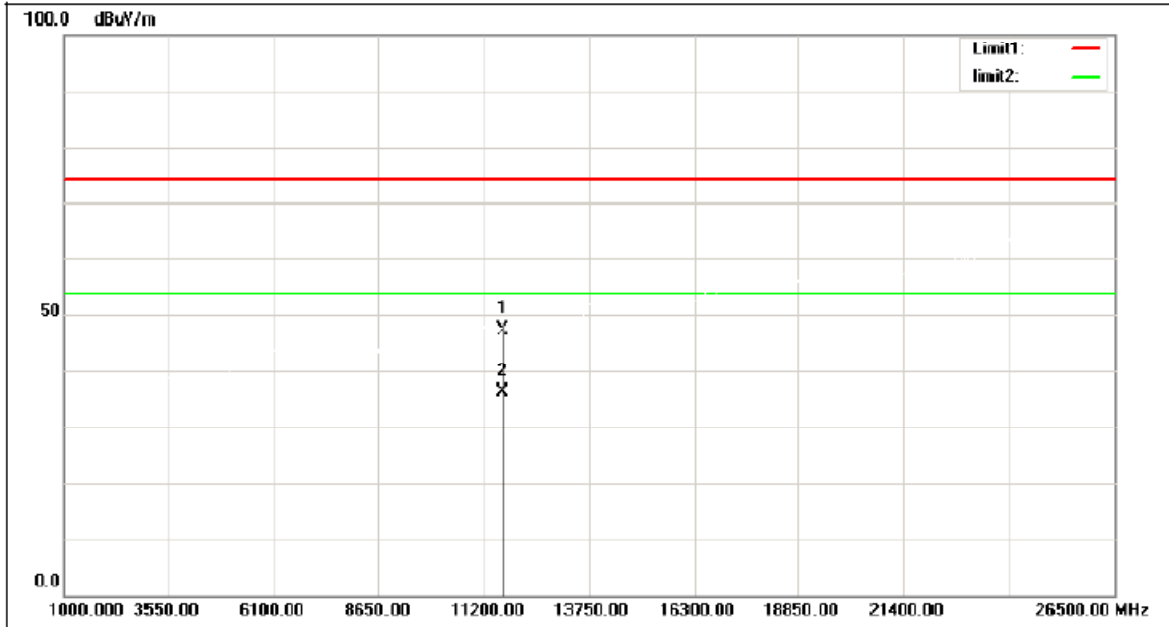

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	41.13	6.19	47.32	74.00	-26.68	peak
2	11650.000	30.28	6.19	36.47	54.00	-17.53	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz


Horizontal

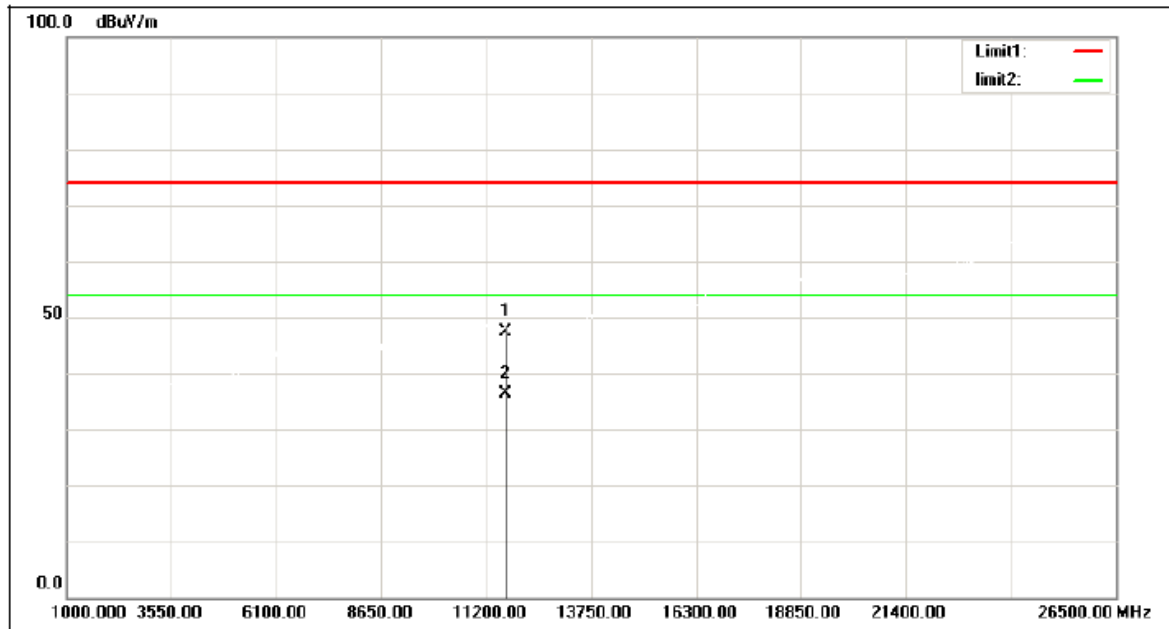

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	41.13	6.19	47.32	74.00	-26.68	peak
2	11650.000	30.10	6.19	36.29	54.00	-17.71	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz


Vertical

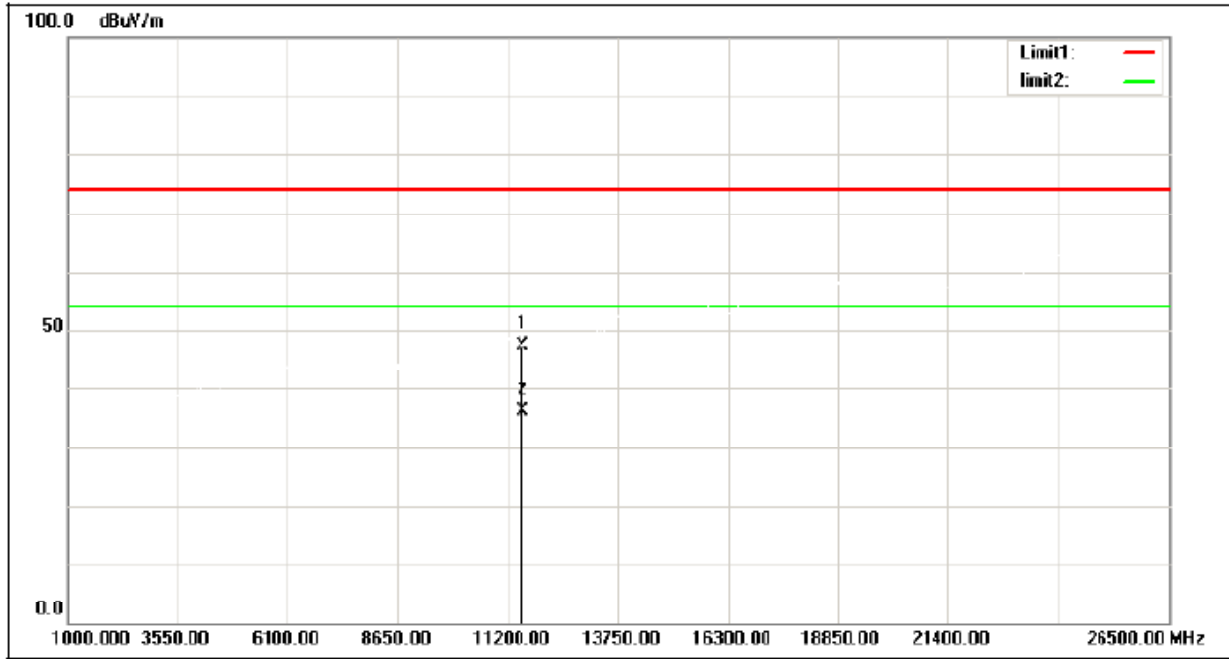

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	41.23	6.26	47.49	74.00	-26.51	peak
2	11510.000	29.95	6.26	36.21	54.00	-17.79	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz


Horizontal

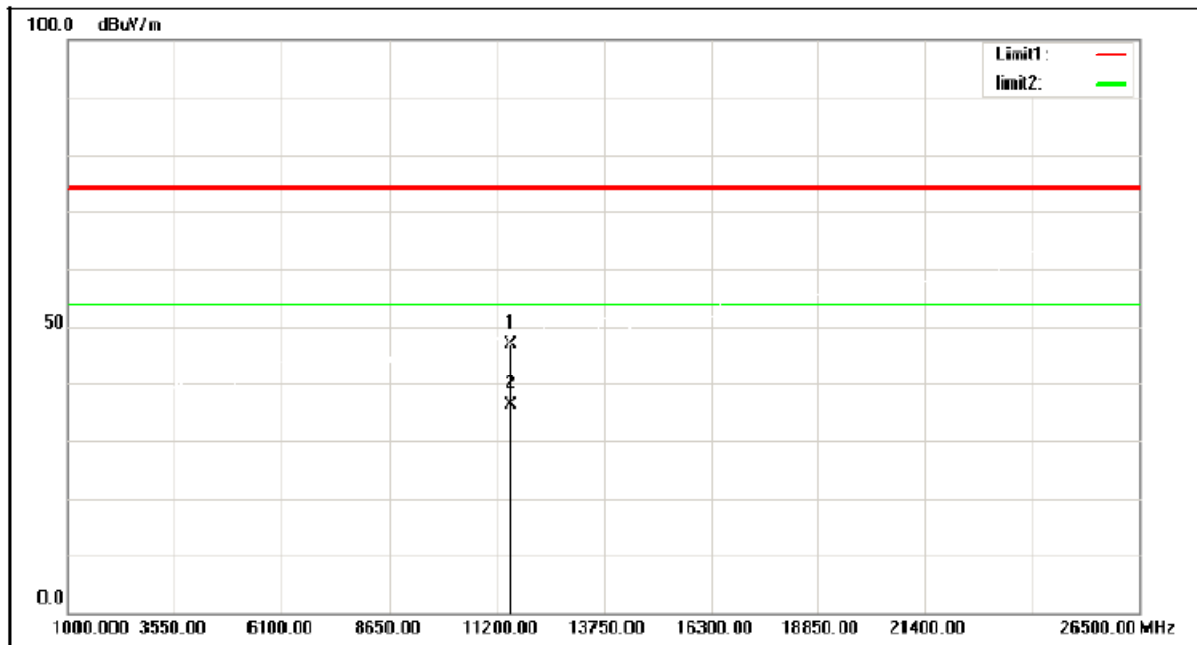

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	40.73	6.26	46.99	74.00	-27.01	peak
2	11510.000	30.21	6.26	36.47	54.00	-17.53	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz


Vertical

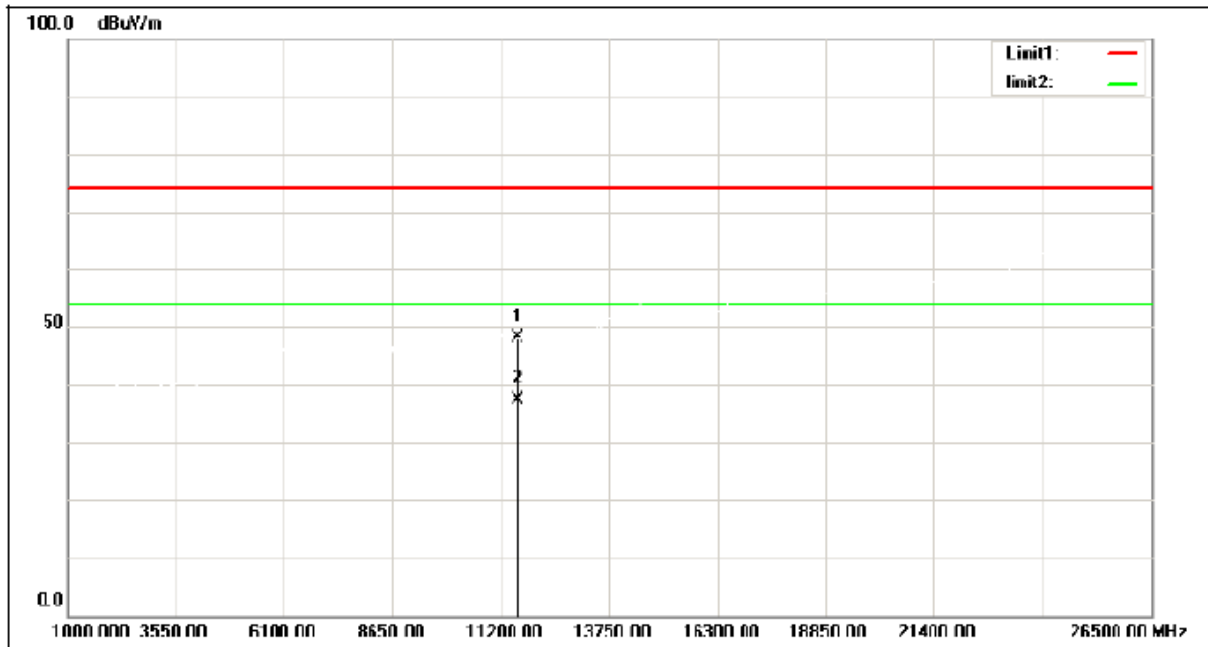

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	41.97	6.23	48.20	74.00	-25.80	peak
2	11590.000	31.25	6.23	37.48	54.00	-16.52	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz


Horizontal

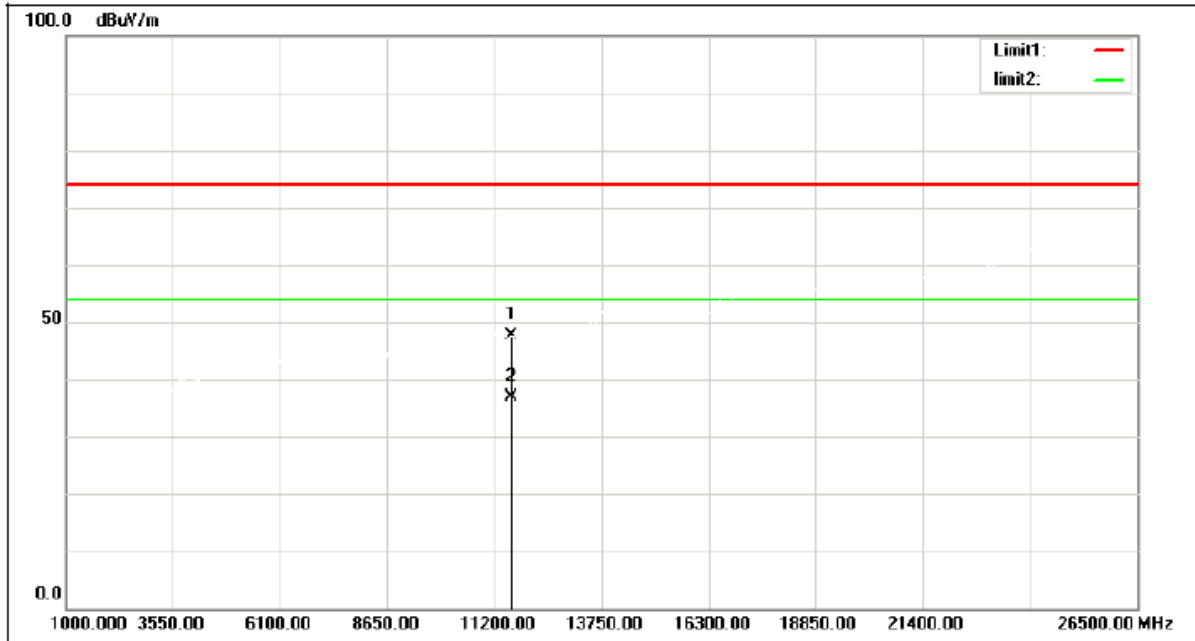

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	41.47	6.23	47.70	74.00	-26.30	peak
2	11590.000	30.62	6.23	36.85	54.00	-17.15	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz


Vertical

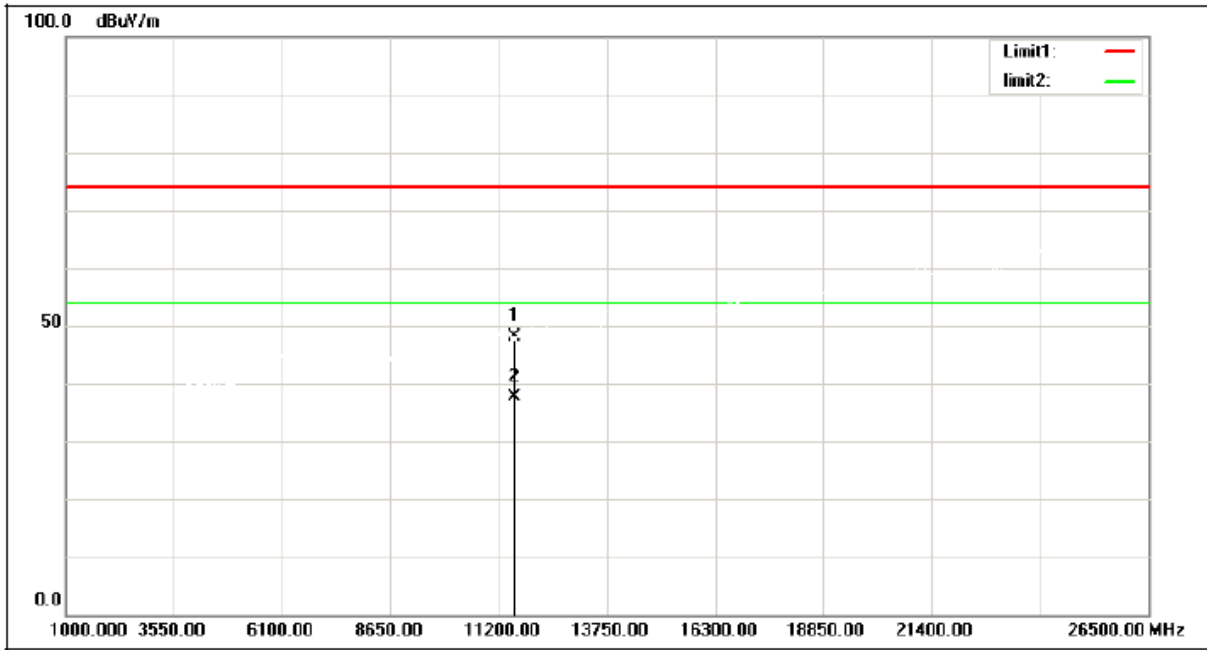

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	41.78	6.24	48.02	74.00	-25.98	peak
2	11550.000	31.44	6.24	37.68	54.00	-16.32	AVG

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

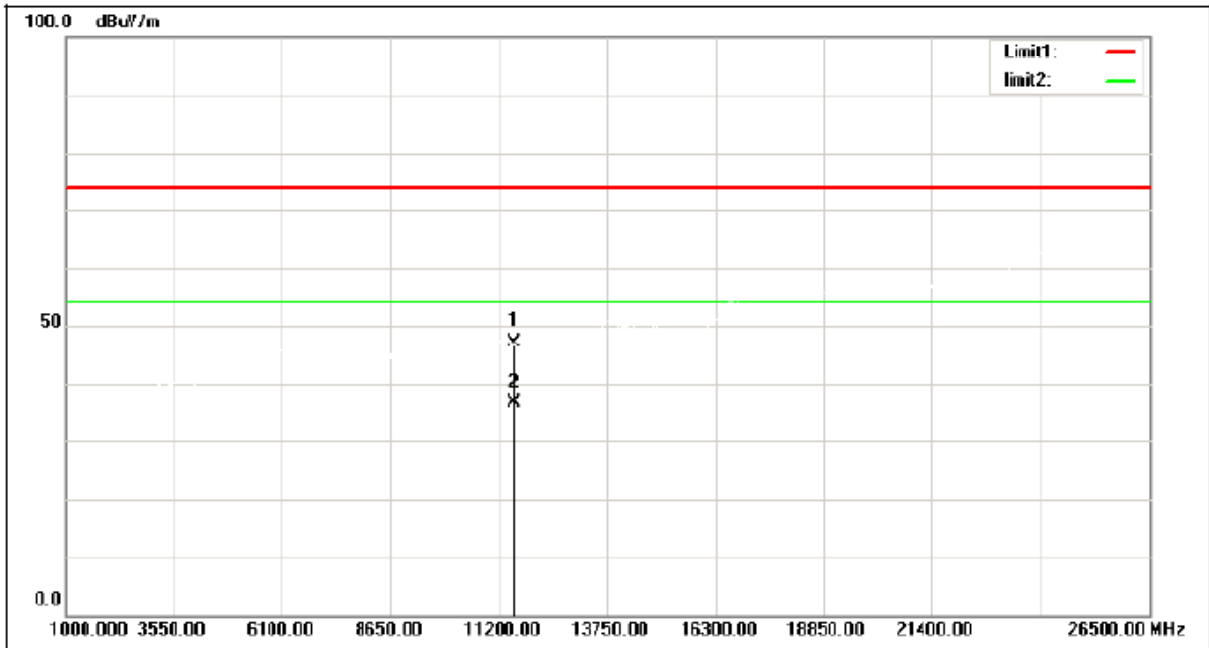

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	40.78	6.24	47.02	74.00	-26.98	peak
2	11550.000	30.28	6.24	36.52	54.00	-17.48	AVG

6 BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407) RSS-Gen and RSS-247			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a) 15.407(e)	26 dB Bandwidth	-	5150-5250
RSS-247 6.2.1.1 RSS-247 6.2.4.1	6dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE AND SETTING

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

b. Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz) 1 MHz (Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz) 3 MHz (Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For UNII-3:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB / 6dB below carrier.

6.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2022/05/23
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

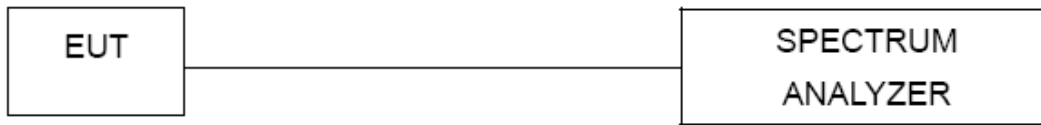6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

UNII-1_TX A Mode			
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	19.89	16.637
40	5200	20.20	16.694
48	5240	20.08	16.638

CH36



CH40



CH48



UNII-2A_TX A Mode			
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	20.14	16.655
60	5300	20.09	16.616
64	5320	19.91	16.624

CH52



CH60



CH64




UNII-2C_TX A Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	20.20	16.640
120	5600	20.31	16.686
140	5700	20.04	16.643

CH100



CH120

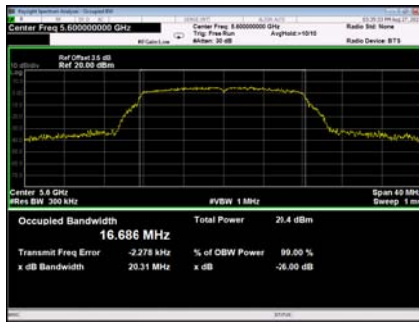


CH140




UNII-1_TX N (HT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	20.33	17.677
40	5200	20.50	17.714
48	5240	20.57	17.678

CH36

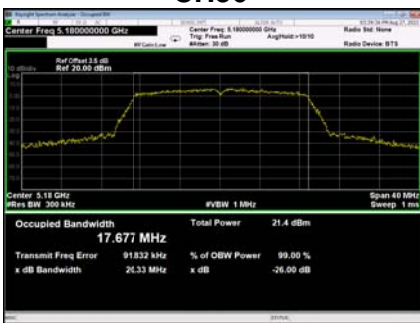

CH40

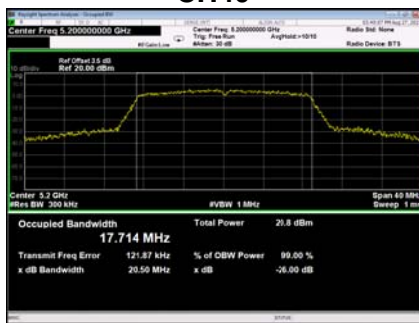

CH48




UNII-2A_TX N (HT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	20.41	17.702
60	5300	20.41	17.695
64	5320	20.46	17.640

CH52



CH60

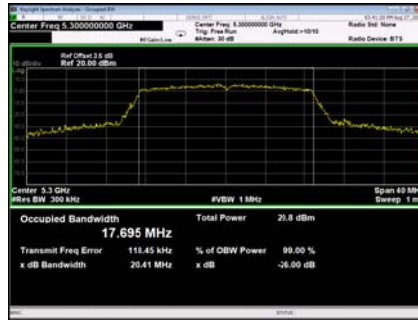

CH64



UNII-2C_TX N (HT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	20.09	17.659
120	5600	20.40	17.699
140	5700	20.46	17.719

CH100



CH120




CH140




UNII-1_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	41.28	36.231
46	5230	42.14	36.262

CH38

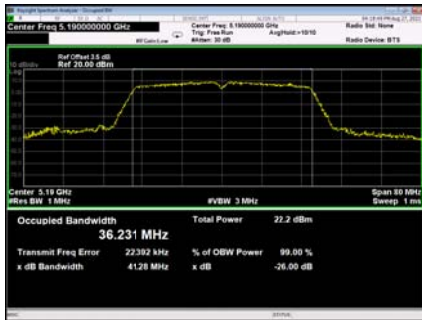

CH46

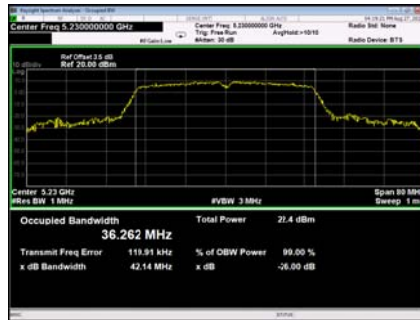


UNII-2A_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	41.76	36.284
62	5310	41.11	36.198

CH54



CH62

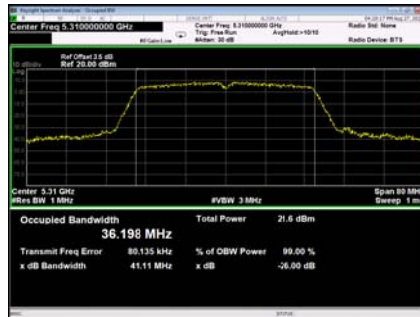

UNII-2C_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	41.18	36.114
118	5590	41.49	36.303
134	5670	50.37	36.450


CH102



CH118



CH134

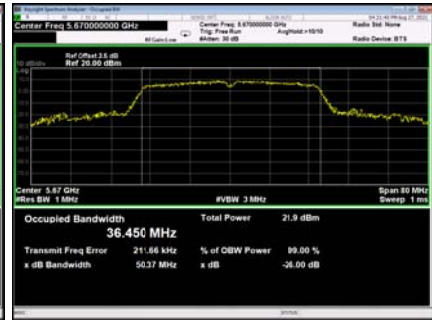

UNII-3_TX A Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
149	5745	15.14	16.661	500	PASS
157	5785	14.85	16.669	500	PASS
165	5825	15.12	16.584	500	PASS

6 dB Bandwidth



99% Emission Bandwidth

