



CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

WIFI Module

MODEL NUMBER: WC5FM2601F

FCC ID: 2AC23-WC5F

REPORT NUMBER: 4790487037-1

ISSUE DATE: August 5, 2022

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou
City,Guangdong,China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	08/05/2022	Initial Issue	

Note: This is a report base on 4789971838.2-4 which is issued by UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch on July 20, 2021. The module WC5FM2601F had already applied for single module approval and the FCC ID is 2AC23-WC5F. Now the customer wants to add two antennas but the module remained unchanged. The antenna type of the new antennas is the same as the original antenna, but the gain is different.

Spot check had been done for the conducted output power, the power of module remained unchanged after MU consideration , so we retest all radiated emission and show in this report but others data were refer to the original test report.

The summary of spot-check test data compared to the original test data.

Item	Test Mode	Frequency (MHz)	Antenna	Worst Case Test Result		
				Original Test Result (dBm)	Spot Check Result (dBm)	Difference
Conducted AV Power	802.11b	2412	0	20.03	19.56	-0.47
			1	20.50	20.44	-0.06
	802.11g	2412	0	19.39	19.41	0.02
			1	19.15	19.22	0.07
	802.11n HT20	2462	0	16.56	16.37	-0.19
			1	16.22	16.15	-0.07
			Total	19.40	19.27	-0.13
	802.11n HT40	2437	0	16.64	16.55	-0.09
			1	16.31	16.36	-0.05
			Total	19.49	19.47	-0.02



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass
Note: 1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when <Accuracy Method> decision rule is applied.			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	8
4.2. <i>MEASUREMENT UNCERTAINTY</i>	8
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	9
5.2. <i>CHANNEL LIST</i>	9
5.3. <i>MAXIMUM OUTPUT POWER</i>	9
5.4. <i>TEST CHANNEL CONFIGURATION</i>	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	10
5.6. <i>THE WORSE CASE CONFIGURATIONS</i>	11
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	12
5.8. <i>DESCRIPTION OF TEST SETUP</i>	15
6. MEASURING INSTRUMENT AND SOFTWARE USED	16
7. ANTENNA PORT TEST RESULTS	19
7.1. <i>ON TIME AND DUTY CYCLE</i>	19
7.2. <i>6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i>	20
7.3. <i>CONDUCTED OUTPUT POWER</i>	22
7.4. <i>POWER SPECTRAL DENSITY</i>	23
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS</i>	25
8. RADIATED TEST RESULTS	27
8.1. <i>RESTRICTED BANDEDGE</i>	33
8.1.1. 802.11b SISO MODE	33
8.1.2. 802.11g SISO MODE	35
8.1.3. 802.11n HT20 MIMO MODE	39
8.1.4. 802.11n HT40 MIMO MODE	43
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)</i>	47
8.2.1. 802.11b SISO MODE	47
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)</i>	53
8.3.1. 802.11b SISO MODE	53
8.3.2. 802.11g SISO MODE	59
8.3.3. 802.11n HT20 MIMO MODE	65
8.3.4. 802.11n HT40 MIMO MODE	71



8.5.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	77
8.5.1.	802.11n HT20 MIMO MODE	77
8.6.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	79
8.6.1.	802.11n HT20 MIMO MODE	79
8.7.	SPURIOUS EMISSIONS BELOW 30 MHz	81
8.7.1.	802.11n HT20 MIMO MODE	81
9.	AC POWER LINE CONDUCTED EMISSIONS	84
9.1.	802.11n HT20 MIMO MODE	85
10.	ANTENNA REQUIREMENTS	87
11.	Appendix	88
11.1.	Appendix A: DTS Bandwidth	88
11.1.1.	Test Result	88
11.1.2.	Test Graphs	89
11.2.	Appendix B: Occupied Channel Bandwidth	97
11.2.1.	Test Result	97
11.2.2.	Test Graphs	98
11.3.	Appendix C: Maximum Average Conducted Output Power	106
11.3.1.	Test Result	106
11.3.2.	Spot Check Test Result	107
11.4.	Appendix D: Maximum Power Spectral Density	108
11.4.1.	Test Result	108
11.4.2.	Test Graphs	109
11.5.	Appendix E: Band edge measurements	117
11.5.1.	Test Result	117
11.5.2.	Test Graphs	118
11.6.	Appendix F: Conducted Spurious Emission	124
11.6.1.	Test Result	124
11.6.2.	Test Graphs	126
11.7.	Appendix G: Duty Cycle	150
11.7.1.	Test Result	150
11.7.2.	Test Graphs	151



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

EUT Information

EUT Name: WIFI Module
Model: WC5FM2601F
Brand: GSD
Last Time Sample Received Date: June 4, 2021
This Time Sample Received Date: July 12, 2022
Sample Status: Normal
Sample ID: 3964244/5143871
Date of Tested for Last Time: June 4, 2021 ~ June 18, 2021
Date of Tested for This Time: July 12, 2022 ~ August 2, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Kebo Zhang
Senior Project Engineer

Checked By:

Denny Huang
Senior Project Engineer

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	WIFI Module
Model Name:	WC5FM2601F
Radio Technology	IEEE802.11b/g/n HT20/HT40
Operation Frequency	IEEE 802.11b: 2412MHz ~ 2462MHz IEEE 802.11g: 2412MHz ~ 2462MHz IEEE 802.11n HT20: 2412MHz ~ 2462MHz IEEE 802.11n HT40: 2422MHz ~ 2452MHz
Modulation	IEEE 802.11b: DSSS (CCK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Rated Input	DC 3.3 V

5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	20.50	22.62
g	2412 ~ 2462	1-11[11]	19.39	21.71
n HT20	2412 ~ 2462	1-11[11]	19.40	21.72
n HT40	2422 ~ 2452	3-9[7]	19.49	21.81

**5.4. TEST CHANNEL CONFIGURATION**

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QA Tool					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	0	25	25	23	/		
	1	25	25	23			
802.11g	0	24	23	20			
	1	24	23	20			
802.11n HT20	0	20	20	20			
	1	20	20	20			
802.11n HT40	0	/			1F	20	1D
	1	/			1F	20	1D



5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11b/g only support SISO mode.

802.11 n HT20/HT40 support SISO and MIMO mode.

802.11a SISO mode, Antenna 0 and Antenna 1 has the same power setting, so only Antenna 0 worst case test data were recorded in the report.

802.11n SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 0 and Core 1 correspond to antenna 0 and antenna 1 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spartial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, CDD mode have the maximum power setting, so we only chose the worst case mode CDD for final testing.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna Group 1				
Antenna No.	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)	Manufacturer
0	2412 ~ 2462	PIFA	2.32	Zhongshan B&T Communication Technology Co., Ltd
1	2412 ~ 2462	PIFA	2	/

The EUT support Cyclic Shift Diversity (CDD), Space Time Coding (STBC), Spatial Division Multiplexing (SDM) modes.

According to KDB 662911 D01:

The Directional Gain was calculated as the following method:

The EUT support Cyclic Shift Diversity (CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain = $G_{ANT} + \text{Array Gain} = 2.32 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain = $G_{ANT} + \text{Array Gain} = 5.32 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

For STBC and SDM mode:

For output power measurements and power spectral density (PSD) measurements

Directional gain = $G_{ANT} = 2.32 \text{ dBi}$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.

Note:

1. WLAN 2.4G & WLAN 5G can't transmit simultaneously. (Declared by client)



Antenna Group 2				
Antenna No.	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)	Manufacturer
0	2412 ~ 2462	PIFA	1.72	Shenzhen Yishengbang Technology Company Limited
1	2412 ~ 2462	PIFA	2	/

The EUT support Cyclic Shift Diversity (CDD), Space Time Coding (STBC), Spatial Division Multiplexing (SDM) modes.

According to KDB 662911 D01:

The Directional Gain was calculated as the following method:

The EUT support Cyclic Shift Diversity (CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain = $G_{ANT} + \text{Array Gain} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain = $G_{ANT} + \text{Array Gain} = 5 \text{ dBi}$

Array Gain = $10 \log (N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

For STBC and SDM mode:

For output power measurements and power spectral density (PSD) measurements

Directional gain = $G_{ANT} = 1.72 \text{ dBi}$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.

Note:

1. WLAN 2.4G & WLAN 5G can't transmit simultaneously. (Declared by client)



Note:

1. The value of the antenna gain was declared by customer.
2. Antenna No. 1 for each group is the same as the original antenna.
3. Antenna No. 0 is new antenna and it has 2 kinds which is made by difference manufacturer (B&T and Yishengbang).
4. For Antenna No. 0, pre-scan had been done for all the antennas and cables, but only the worst data (B&T Antenna) was recorded in the report.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	XIAOXIN 5000	/
2	UART	/	/	/
3	AC Adapter	Lenovo	ADLX65YCC3D	Input: 100-240 Vac, 50/60 Hz Output: 20 Vdc, 3.25A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	N/A	N/A	1	N/A


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

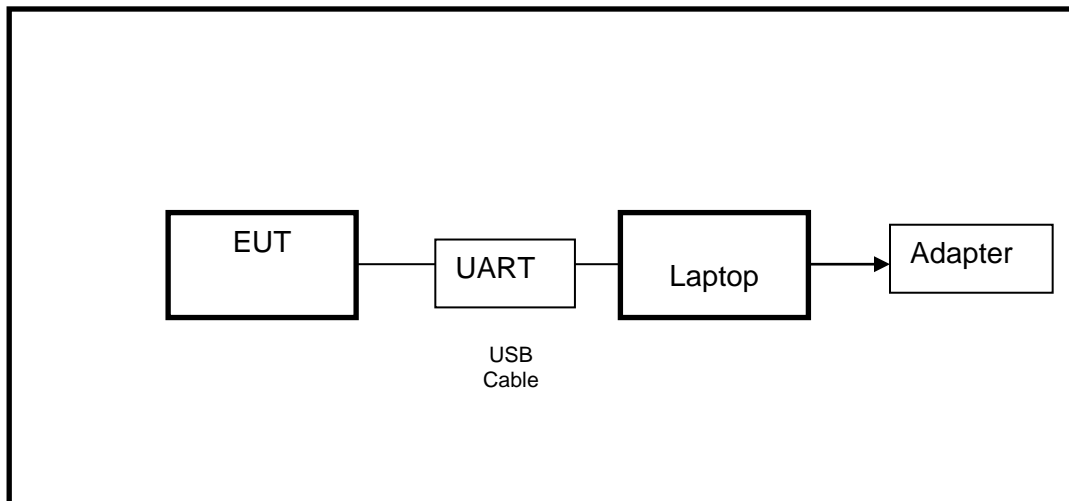

Note: AC adapter only use for AC POWER LINE CONDUCTED EMISSIONS testing.



6. MEASURING INSTRUMENT AND SOFTWARE USED

Last time calibration information:

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 02, 2021	Aug. 01, 2024
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1



Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Nov.20,2020	Nov.19,2021
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Nov.20,2020	Nov.19,2021
DC power supply	Keysight	E3642A	MY55159130	Nov.24,2020	Nov.23,2021
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Nov. 20, 2020	Nov. 19, 2021

This time calibration information:

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022



Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.30, 2021	Oct.29, 2022
DC power supply	Keysight	E3642A	MY55159130	Oct.30, 2021	Oct.29, 2022
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2022
Software					
Description		Manufacturer	Name		Version
Tonsend SRD Test System		Tonsend	JS1120-3 RF Test System		2.6.77.0518

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.4 °C	Relative Humidity	59.2 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix G.

7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

- a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

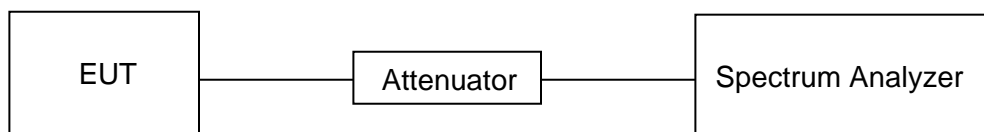



TEST ENVIRONMENT

Temperature	25.4 °C	Relative Humidity	59.2 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix A & B.

7.3. CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).
Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.4 °C	Relative Humidity	59.2 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix C.

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.4 °C	Relative Humidity	59.2 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V



RESULTS

Please refer to appendix D.



7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.4 °C	Relative Humidity	59.2 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

Please refer to appendix E & F.



8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.0 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

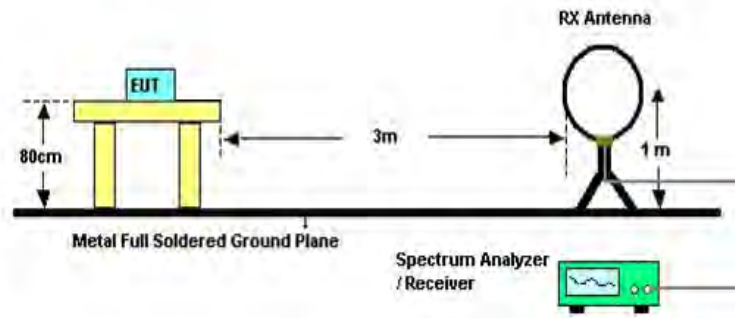


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

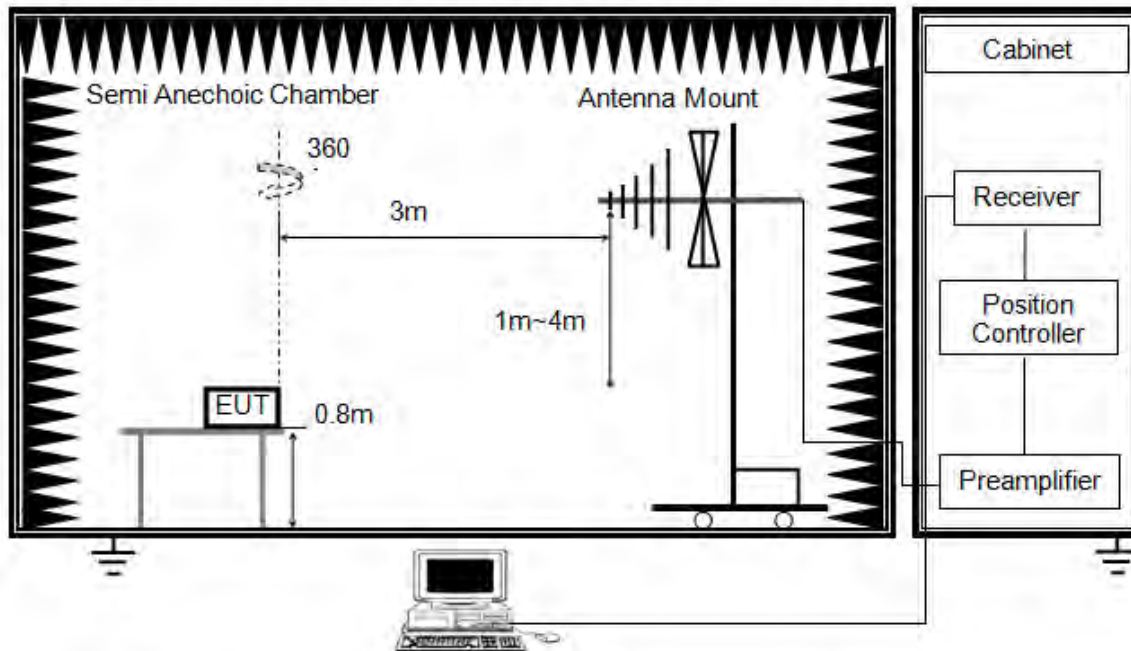


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

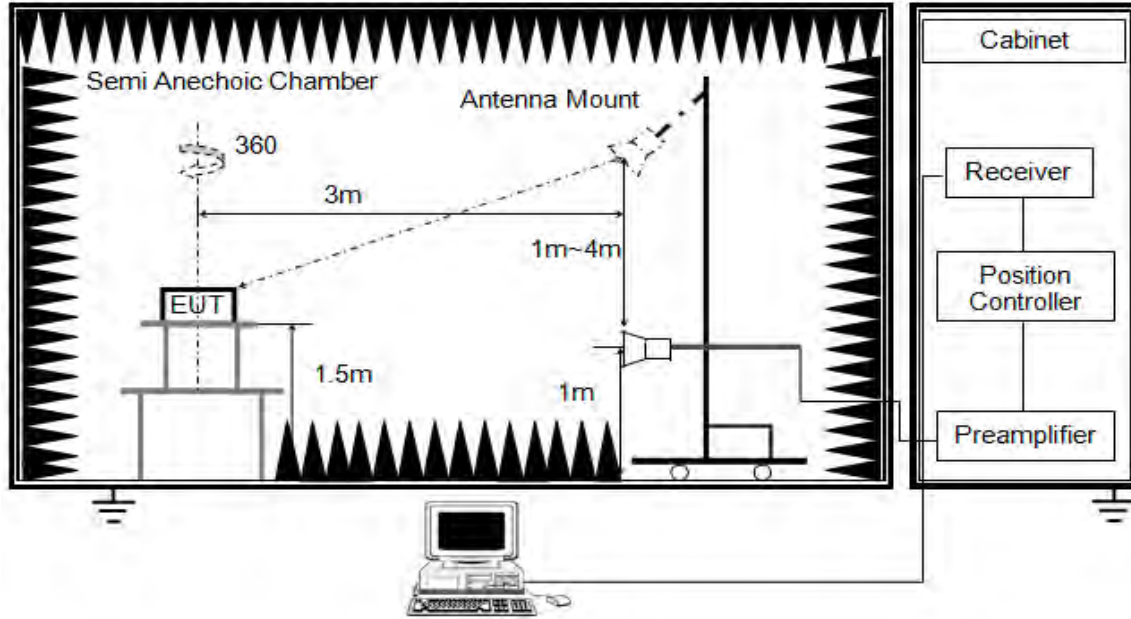


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

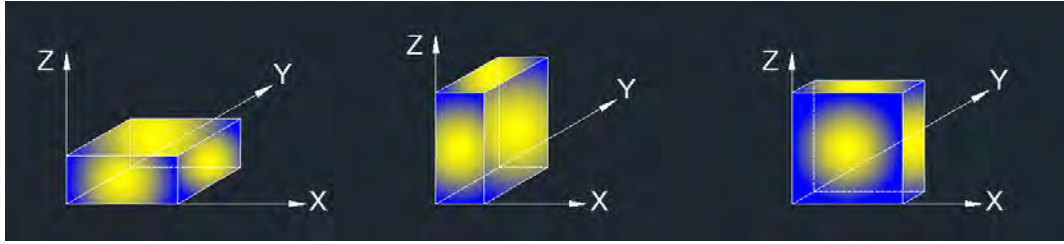

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST ENVIRONMENT

Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS


8.1. RESTRICTED BANDEDGE

8.1.1. 802.11b SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

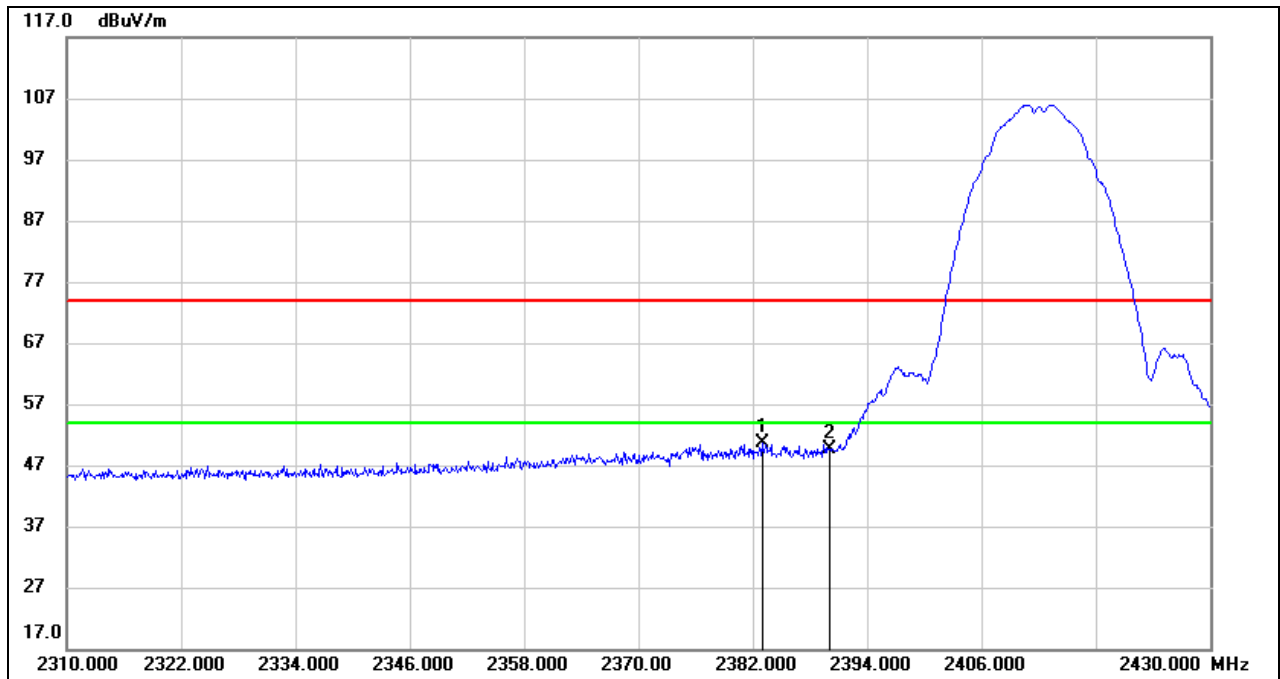

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.960	18.43	32.14	50.57	74.00	-23.43	peak
2	2390.000	17.47	32.16	49.63	74.00	-24.37	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

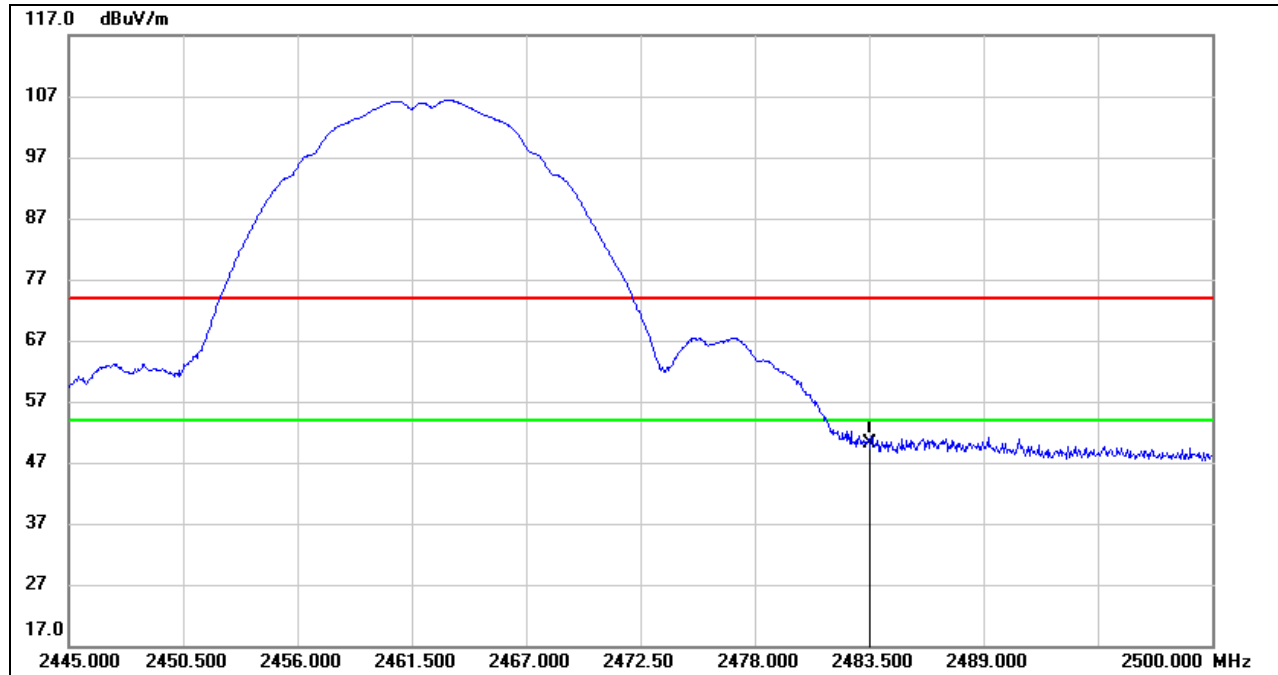

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.69	32.44	50.13	74.00	-23.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.
 Note: Both antennas have been tested, only the worst data was recorded in the report.

8.1.2. 802.11g SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

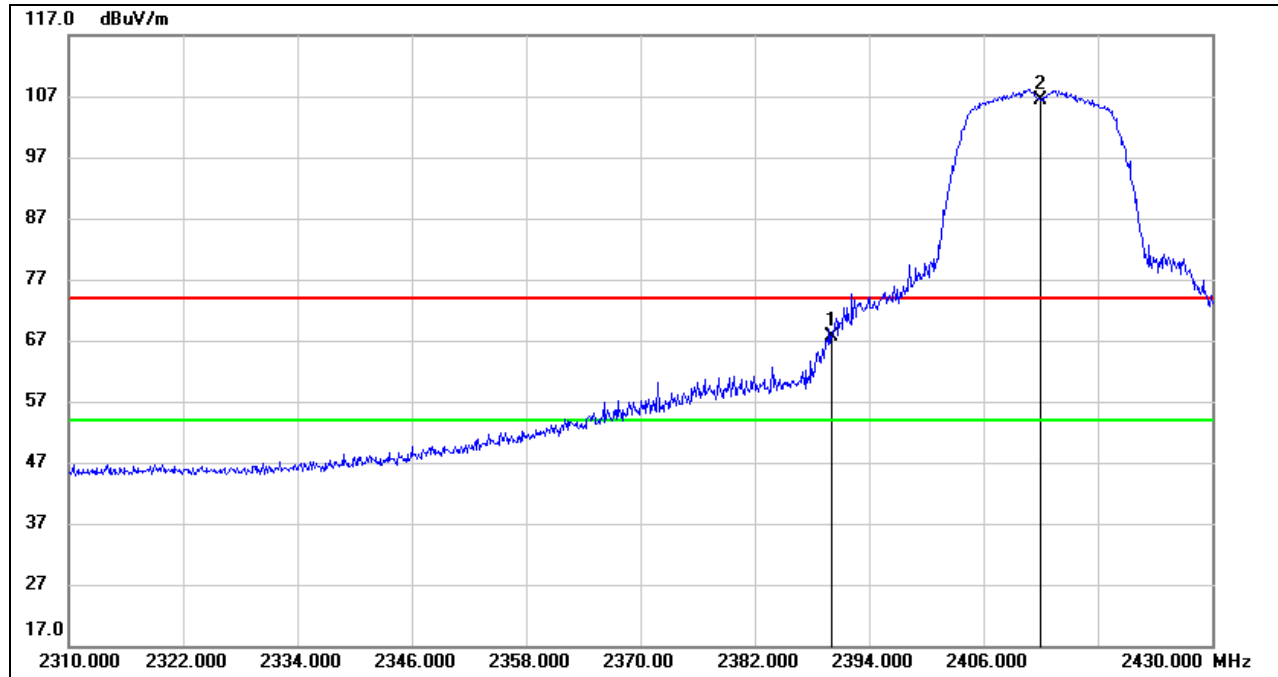

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	35.38	32.16	67.54	74.00	-6.46	peak
2	2412.000	74.10	32.22	106.32	/	/	Fundamental


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

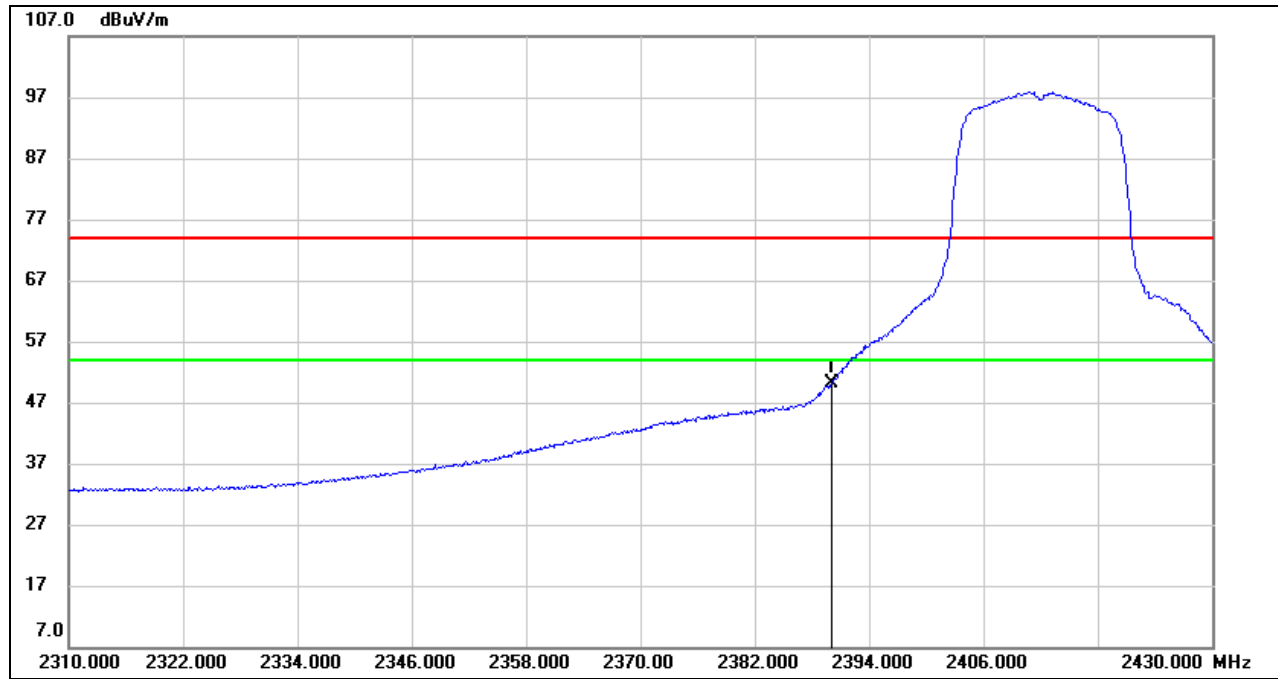


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	17.88	32.16	50.04	54.00	-3.96	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 3. For the transmitting duration, please refer to clause 7.1.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


PEAK

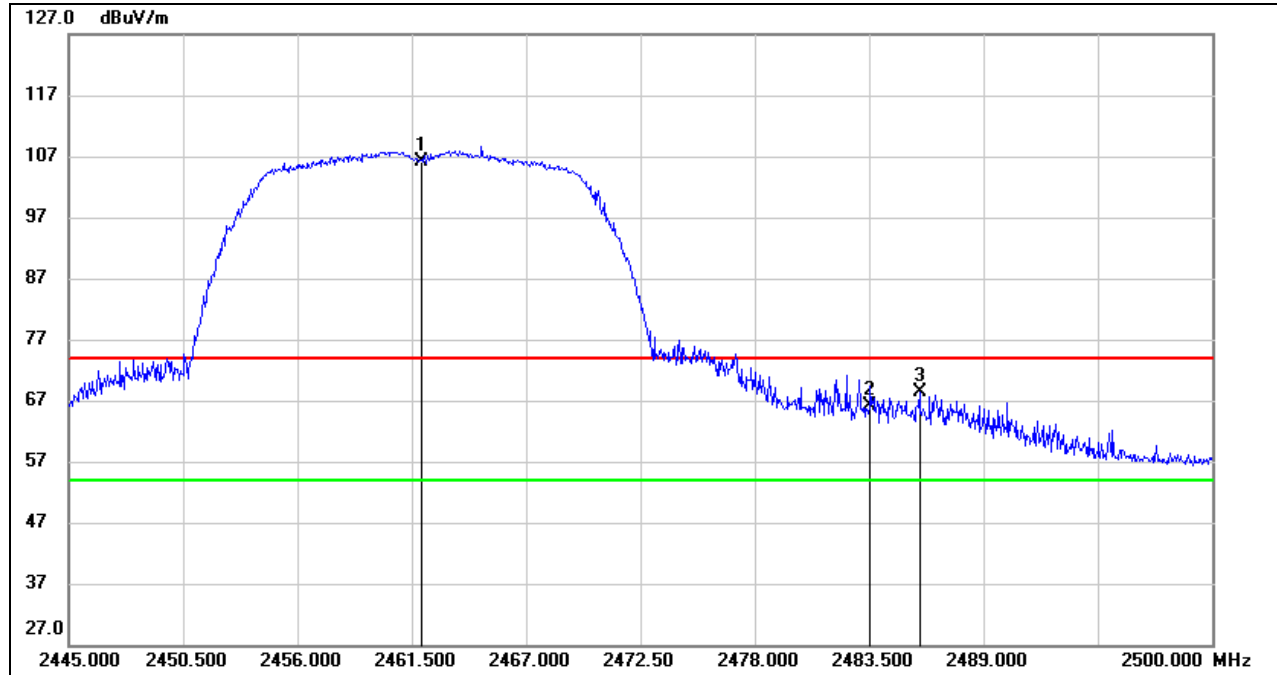

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.000	73.87	32.37	106.24	/	/	Fundamental
2	2483.500	33.72	32.44	66.16	74.00	-7.84	peak
3	2485.920	35.86	32.44	68.30	74.00	-5.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

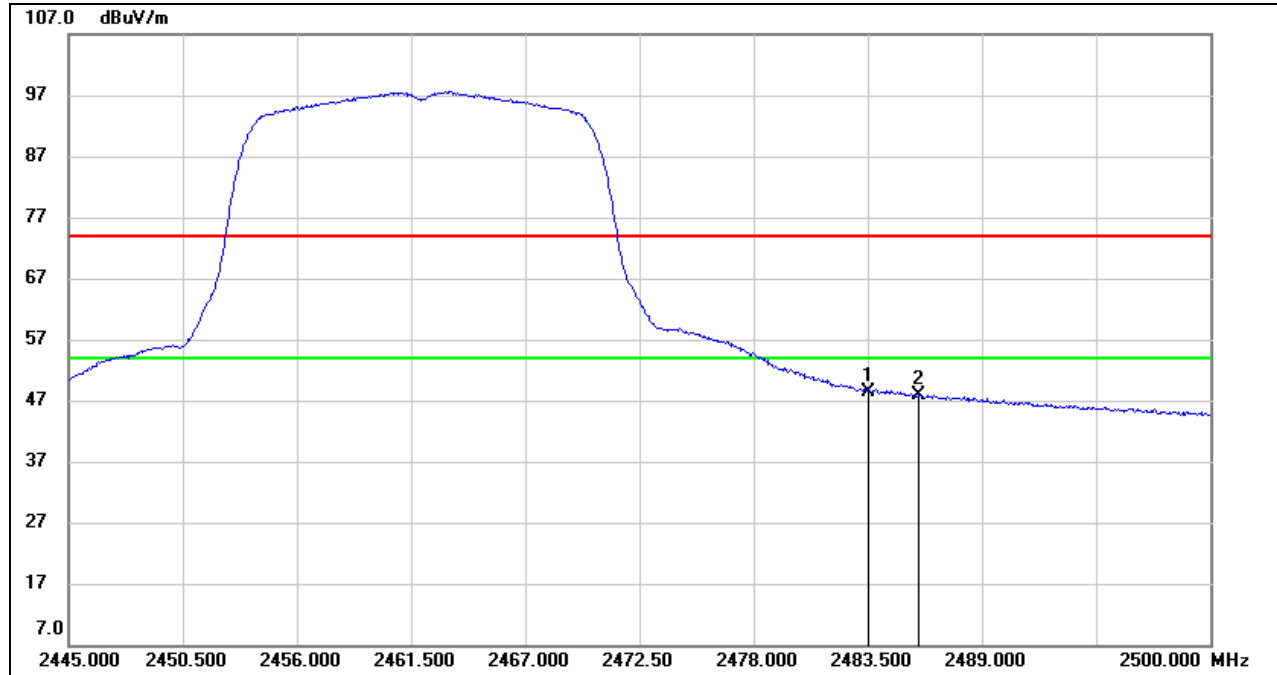

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.95	32.44	48.39	54.00	-5.61	AVG
2	2485.920	15.48	32.44	47.92	54.00	-6.08	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 3. For the transmitting duration, please refer to clause 7.1.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.
 Note: Both antennas have been tested, only the worst data was recorded in the report.

8.1.3. 802.11n HT20 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

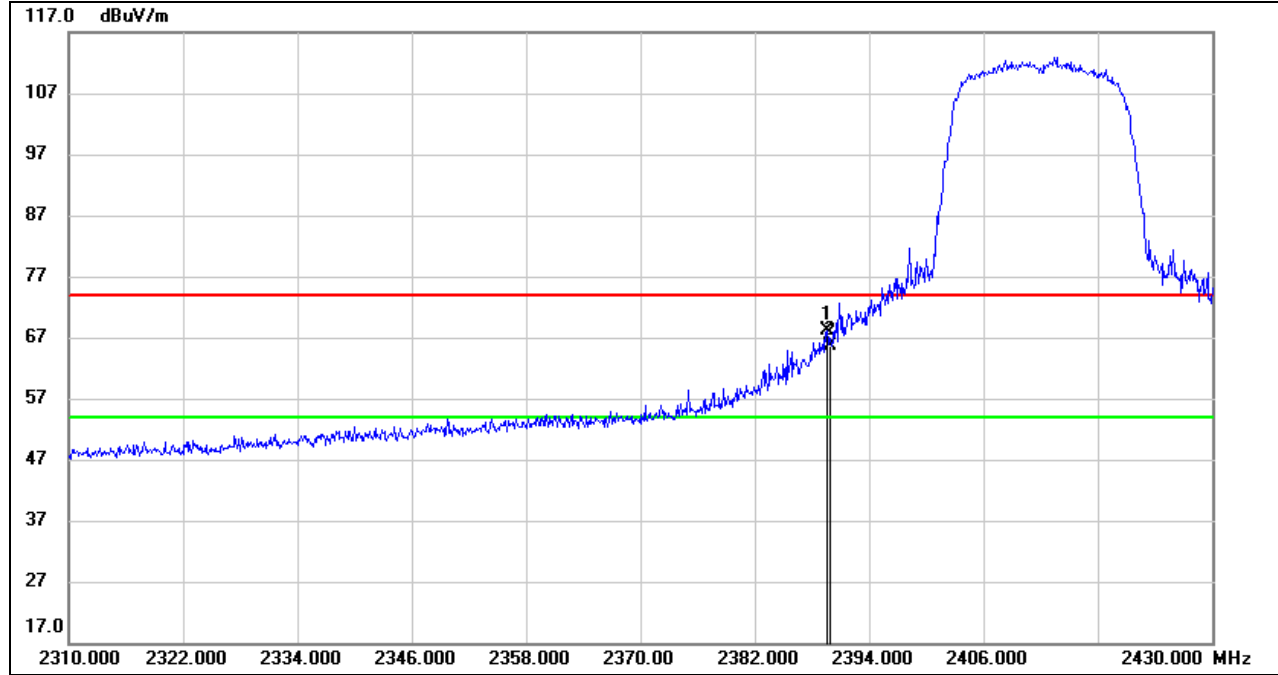

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	35.95	32.16	68.11	74.00	-5.89	peak
2	2390.000	33.47	32.16	65.63	74.00	-8.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

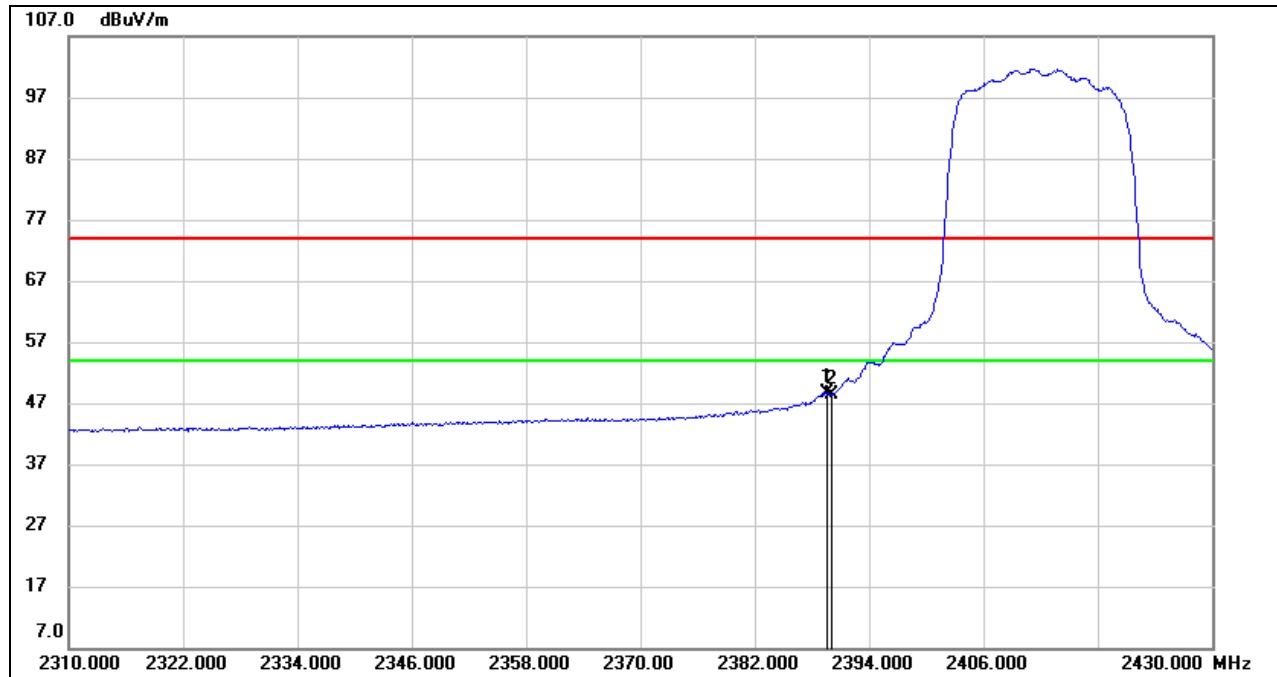


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	16.48	32.16	48.64	54.00	-5.36	AVG
2	2390.000	16.29	32.16	48.45	54.00	-5.55	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 3. For the transmitting duration, please refer to clause 7.1.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


PEAK

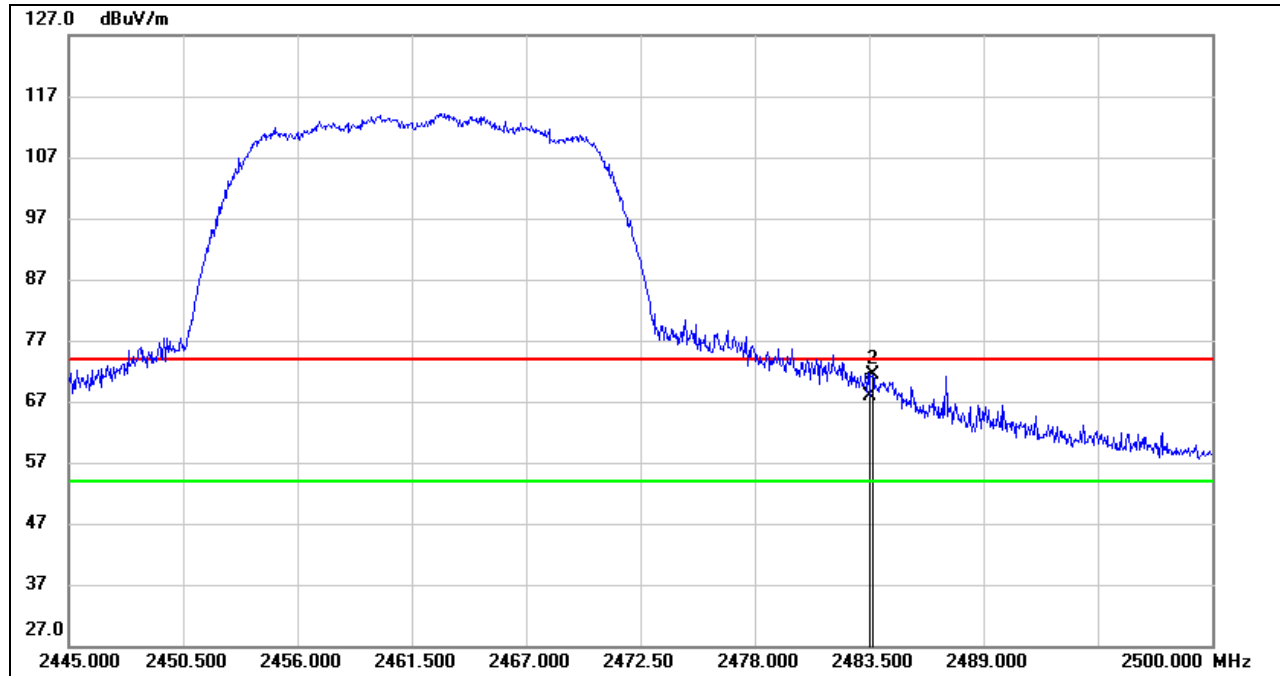

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.52	32.44	67.96	74.00	-6.04	peak
2	2483.665	38.98	32.44	71.42	74.00	-2.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

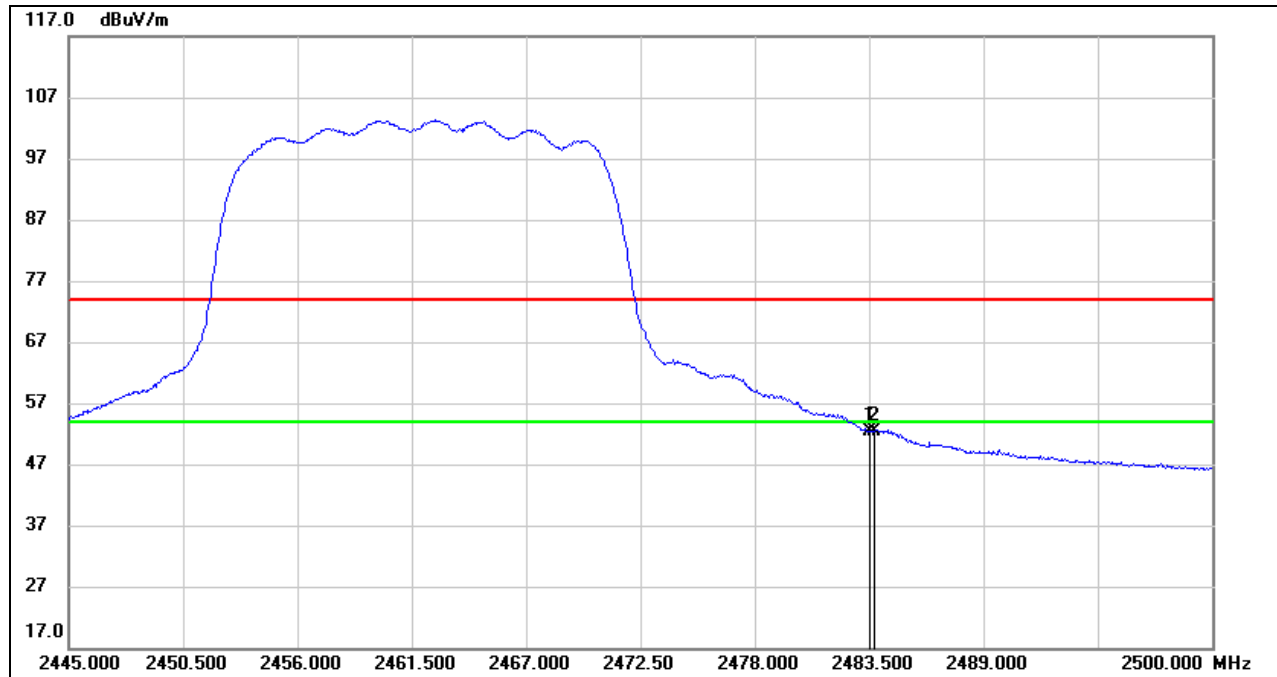

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.90	32.44	52.34	54.00	-1.66	AVG
2	2483.665	19.94	32.44	52.38	54.00	-1.62	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 3. For the transmitting duration, please refer to clause 7.1.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.
 Note: All modes have been tested, only the worst data was recorded in the report.



8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

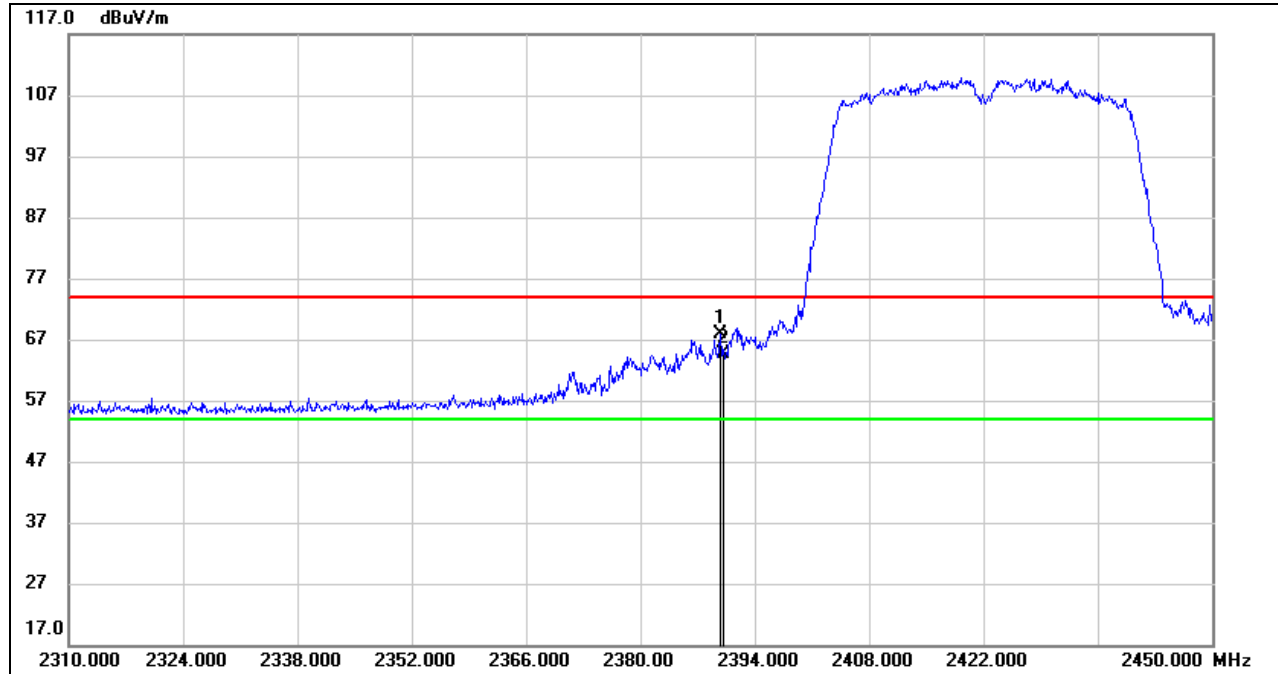

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	35.84	32.16	68.00	74.00	-6.00	peak
2	2390.000	32.41	32.16	64.57	74.00	-9.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

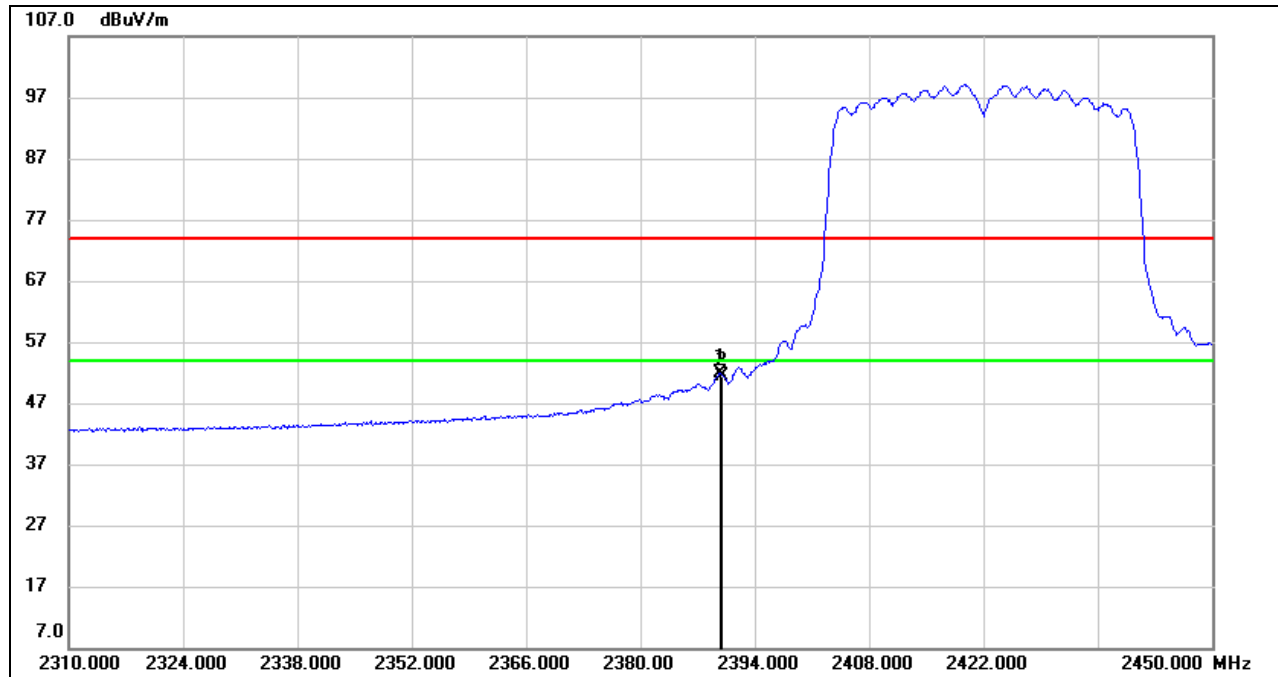


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	19.63	32.16	51.79	54.00	-2.21	AVG
2	2390.000	19.29	32.16	51.45	54.00	-2.55	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 3. For the transmitting duration, please refer to clause 7.1.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


PEAK

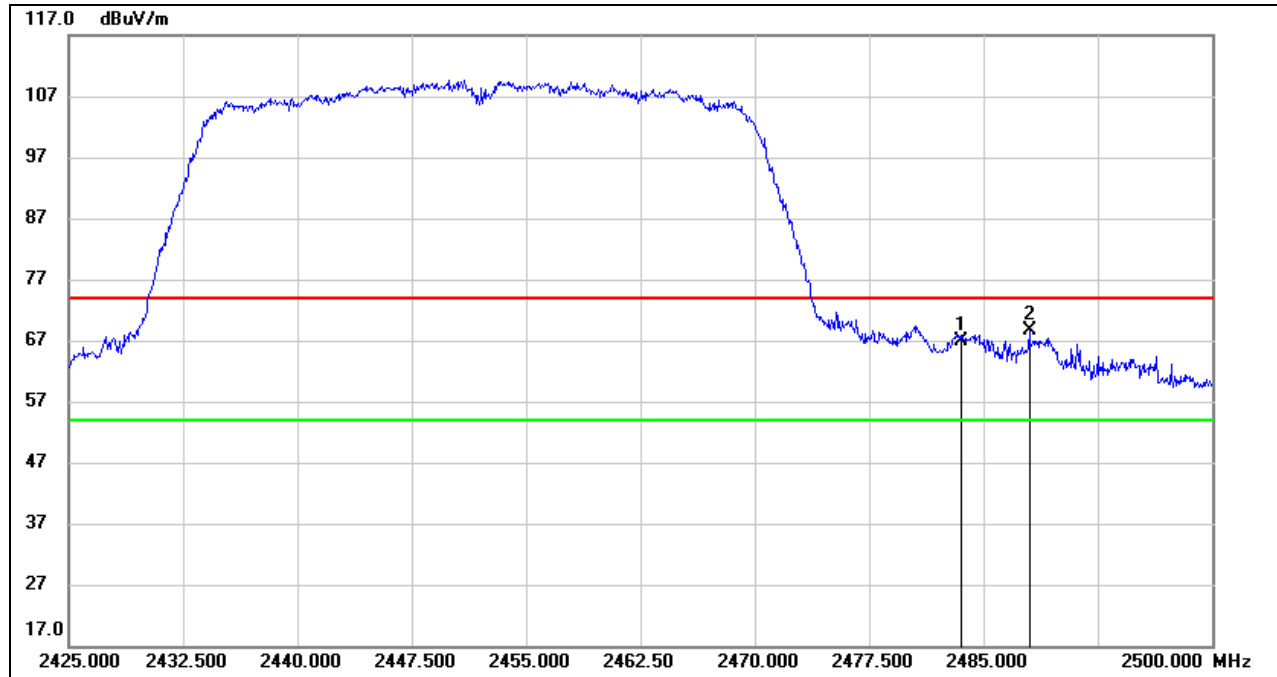

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.41	32.44	66.85	74.00	-7.15	peak
2	2488.000	36.16	32.46	68.62	74.00	-5.38	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

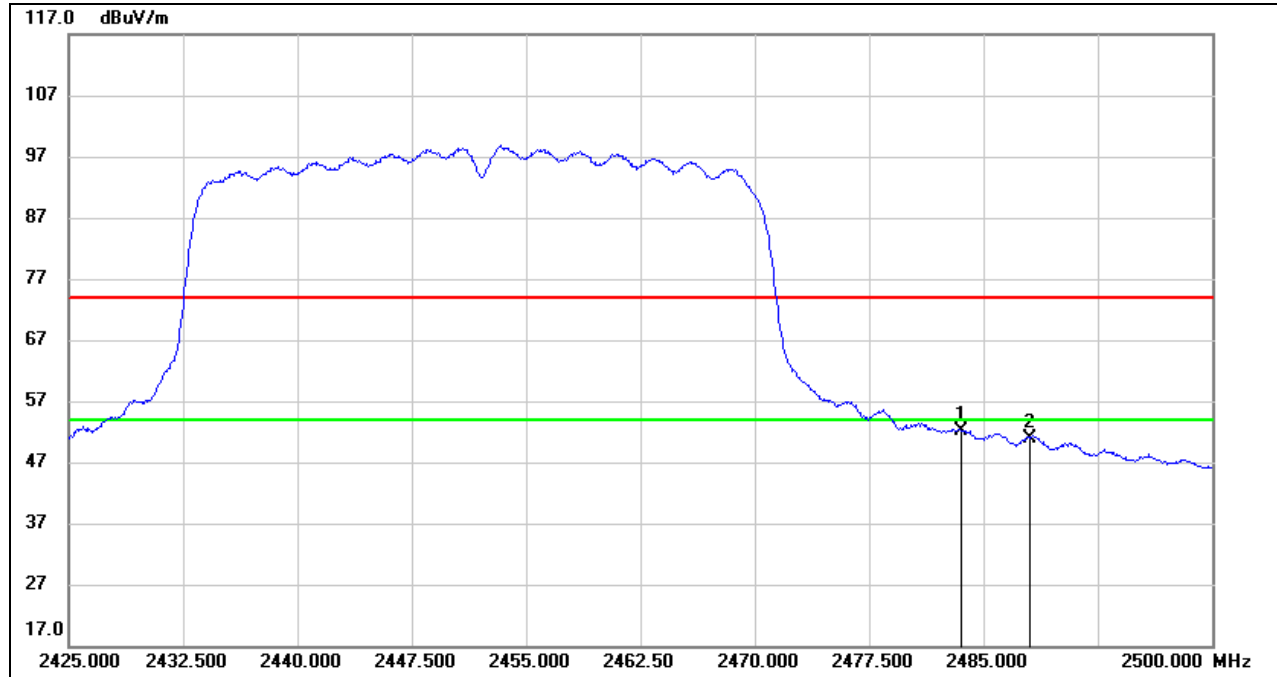

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.81	32.44	52.25	54.00	-1.75	AVG
2	2488.000	18.46	32.46	50.92	54.00	-3.08	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 3. For the transmitting duration, please refer to clause 7.1.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.
 Note: All modes have been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

8.2.1. 802.11b SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

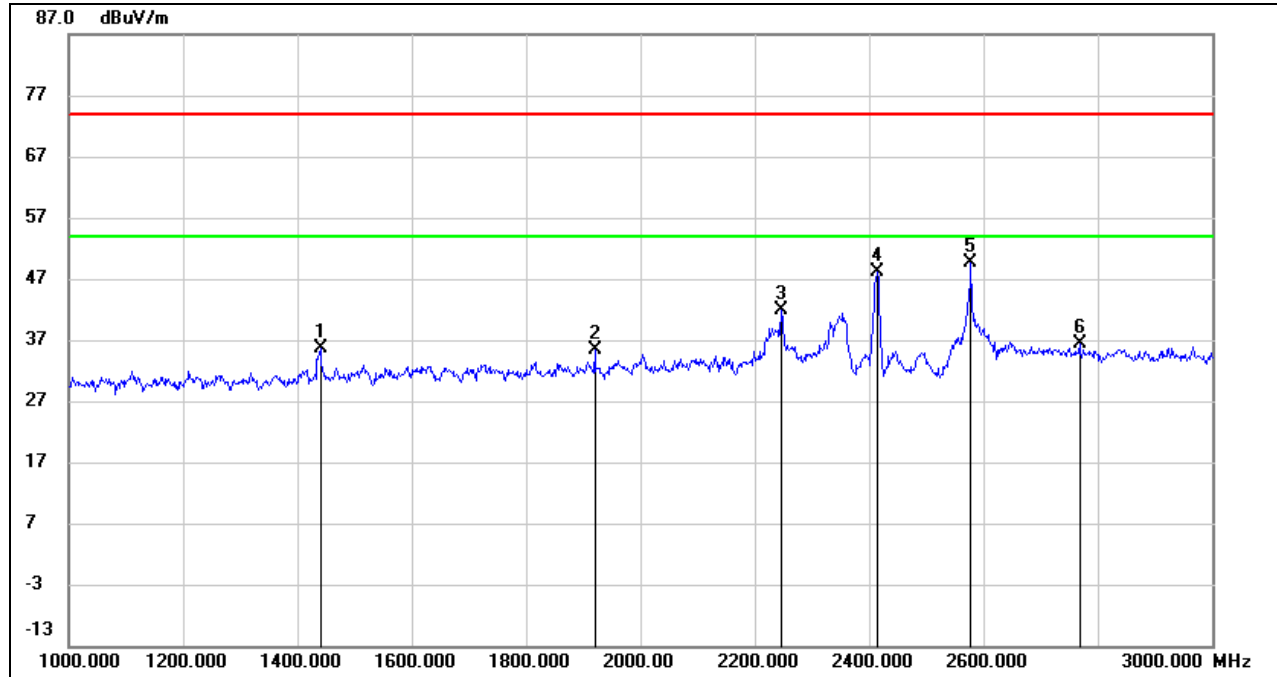

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1440.000	48.49	-12.98	35.51	74.00	-38.49	peak
2	1920.000	46.70	-11.32	35.38	74.00	-38.62	peak
3	2246.000	51.65	-9.80	41.85	74.00	-32.15	peak
4	2412.000	56.97	-8.93	48.04	/	/	Fundamental
5	2578.000	57.84	-8.26	49.58	74.00	-24.42	peak
6	2768.000	44.03	-7.68	36.35	74.00	-37.65	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

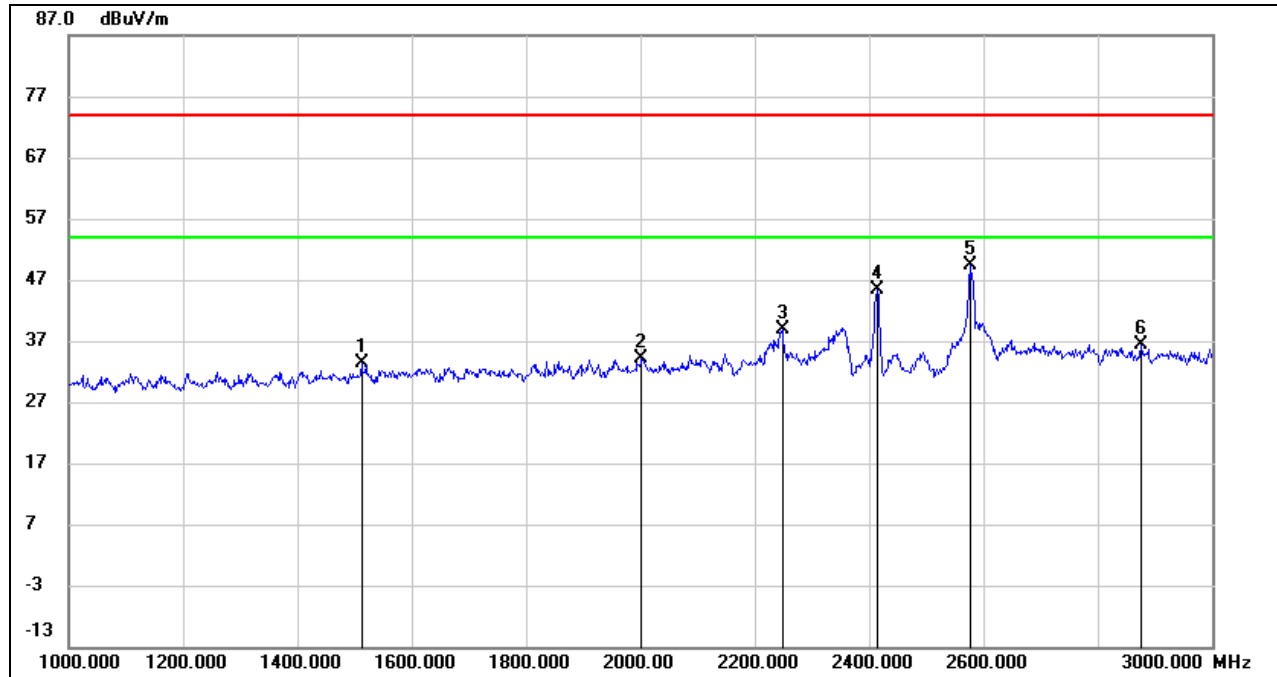**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1512.000	45.93	-12.67	33.26	74.00	-40.74	peak
2	2002.000	45.25	-11.05	34.20	74.00	-39.80	peak
3	2248.000	48.75	-9.79	38.96	74.00	-35.04	peak
4	2412.000	54.30	-8.93	45.37	/	/	Fundamental
5	2576.000	57.66	-8.26	49.40	74.00	-24.60	peak
6	2876.000	43.78	-7.35	36.43	74.00	-37.57	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

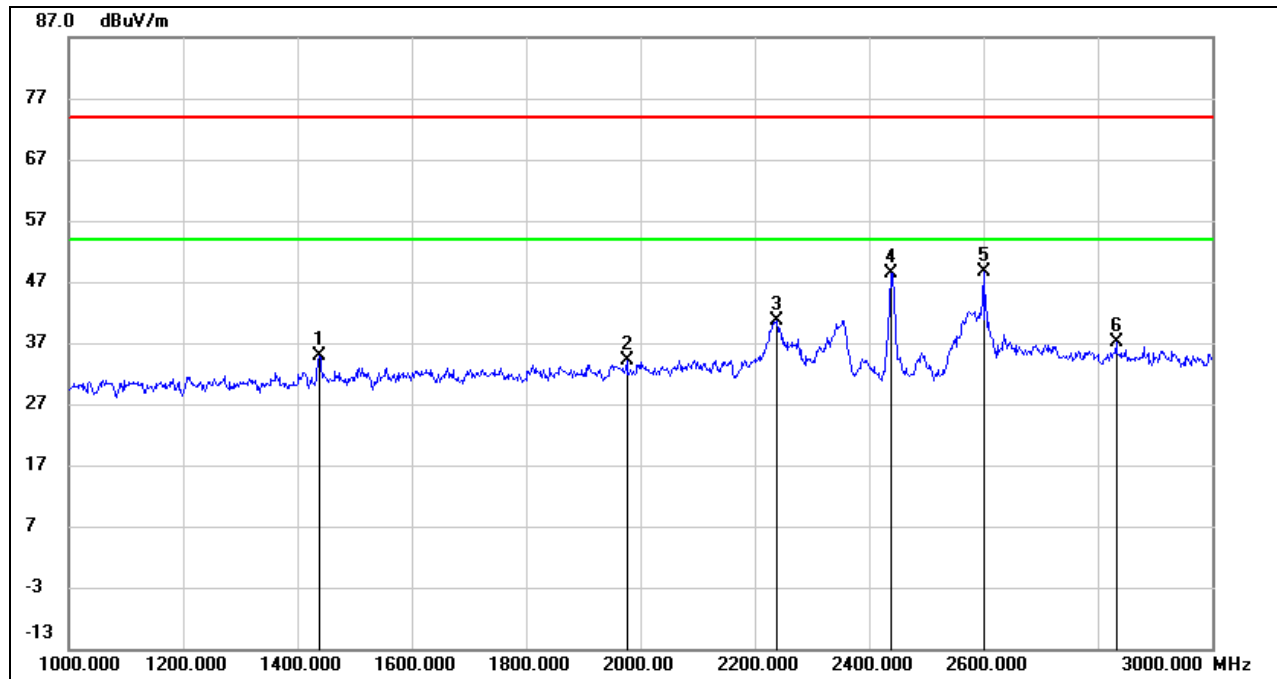

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	47.93	-13.00	34.93	74.00	-39.07	peak
2	1976.000	45.22	-11.14	34.08	74.00	-39.92	peak
3	2238.000	50.36	-9.83	40.53	74.00	-33.47	peak
4	2437.000	57.18	-8.80	48.38	/	/	Fundamental
5	2600.000	56.77	-8.19	48.58	74.00	-25.42	peak
6	2832.000	44.61	-7.49	37.12	74.00	-36.88	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

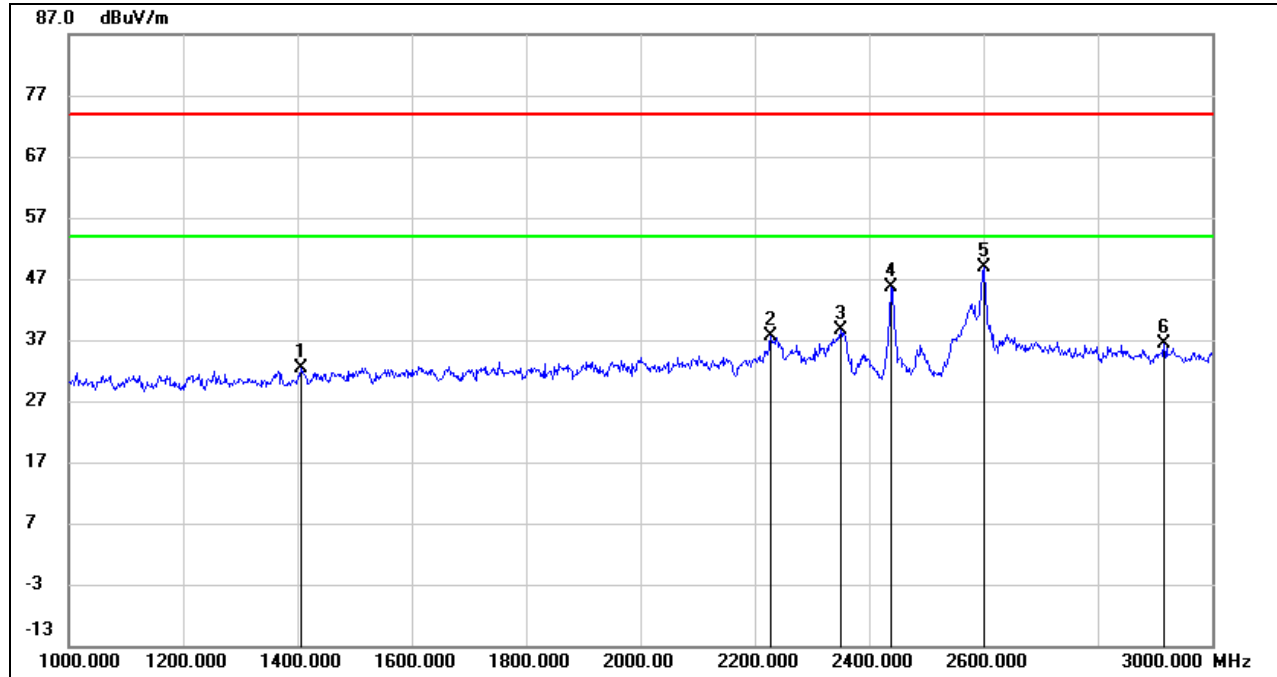

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1406.000	45.51	-13.15	32.36	74.00	-41.64	peak
2	2228.000	47.53	-9.89	37.64	74.00	-36.36	peak
3	2350.000	47.97	-9.26	38.71	74.00	-35.29	peak
4	2437.000	54.34	-8.80	45.54	/	/	Fundamental
5	2600.000	57.05	-8.19	48.86	74.00	-25.14	peak
6	2916.000	43.52	-7.23	36.29	74.00	-37.71	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

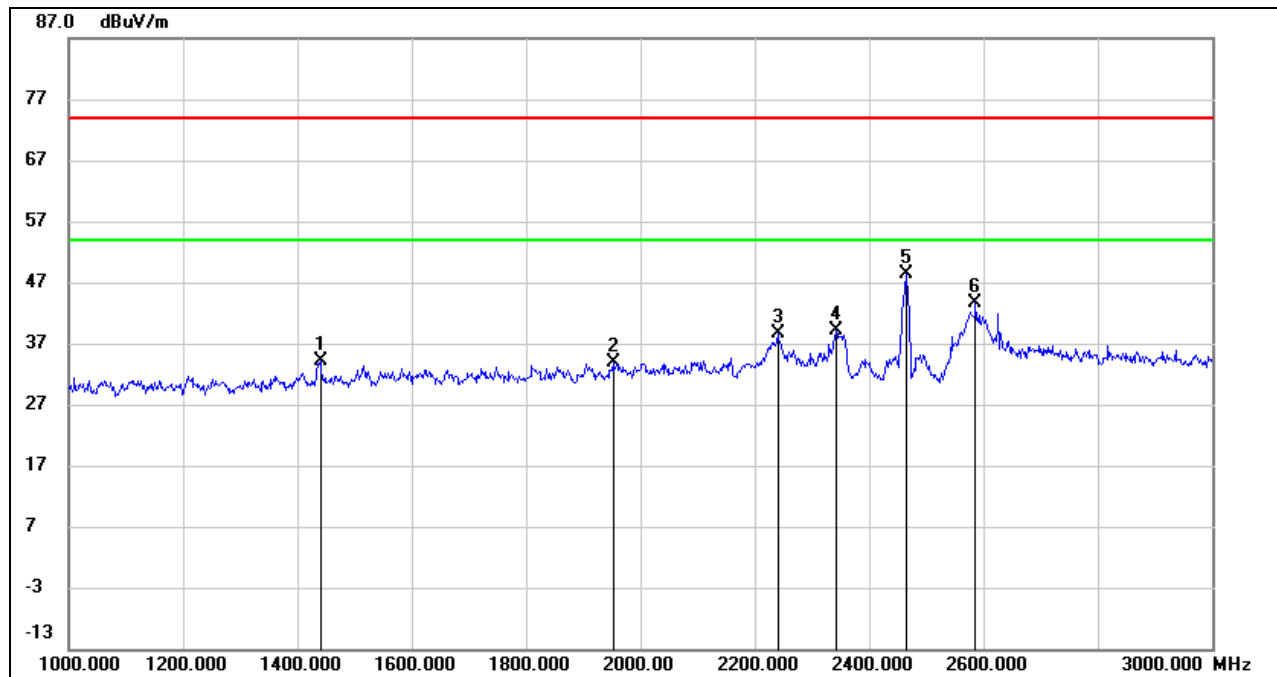

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1440.000	47.19	-12.98	34.21	74.00	-39.79	peak
2	1952.000	45.21	-11.22	33.99	74.00	-40.01	peak
3	2240.000	48.51	-9.83	38.68	74.00	-35.32	peak
4	2342.000	48.47	-9.30	39.17	74.00	-34.83	peak
5	2462.000	57.05	-8.68	48.37	/	/	Fundamental
6	2586.000	51.83	-8.24	43.59	74.00	-30.41	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

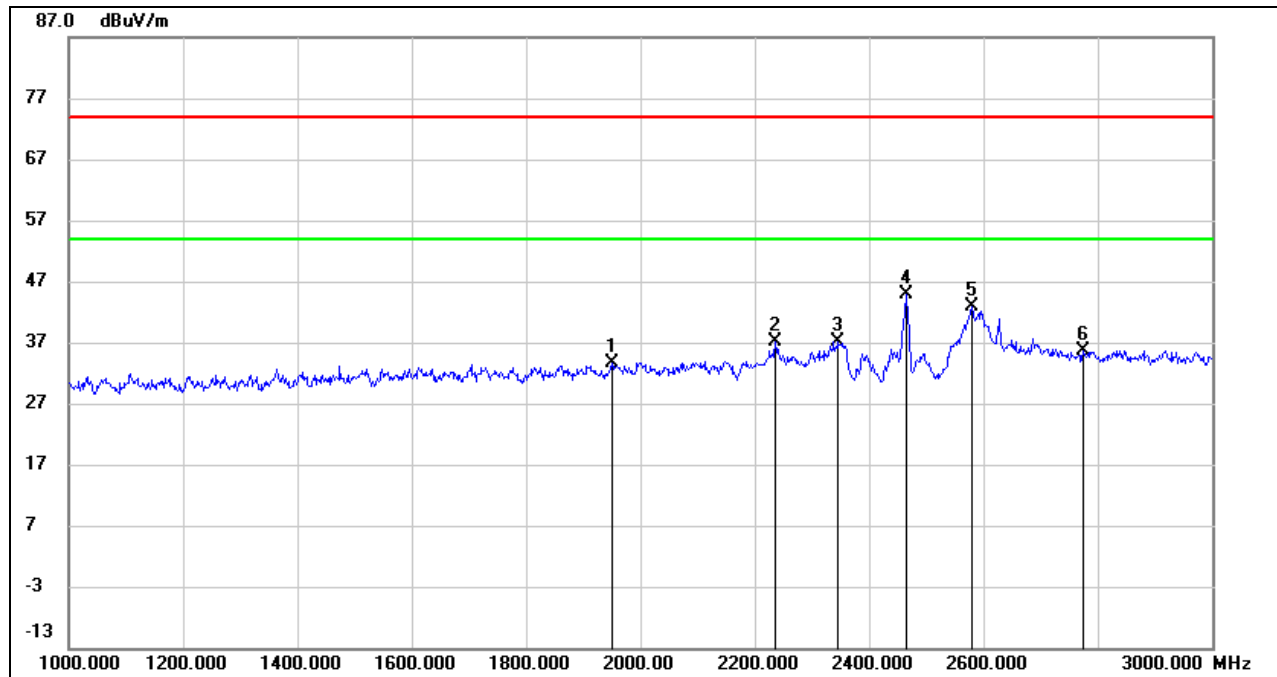HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1950.000	44.82	-11.22	33.60	74.00	-40.40	peak
2	2236.000	46.89	-9.85	37.04	74.00	-36.96	peak
3	2346.000	46.51	-9.28	37.23	74.00	-36.77	peak
4	2462.000	53.48	-8.68	44.80	/	/	Fundamental
5	2580.000	51.23	-8.25	42.98	74.00	-31.02	peak
6	2774.000	43.35	-7.67	35.68	74.00	-38.32	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: The two antennas had been tested, but only the worst data was recorded in the report.


Note: All modes and channels have been tested, only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

8.3.1. 802.11b SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

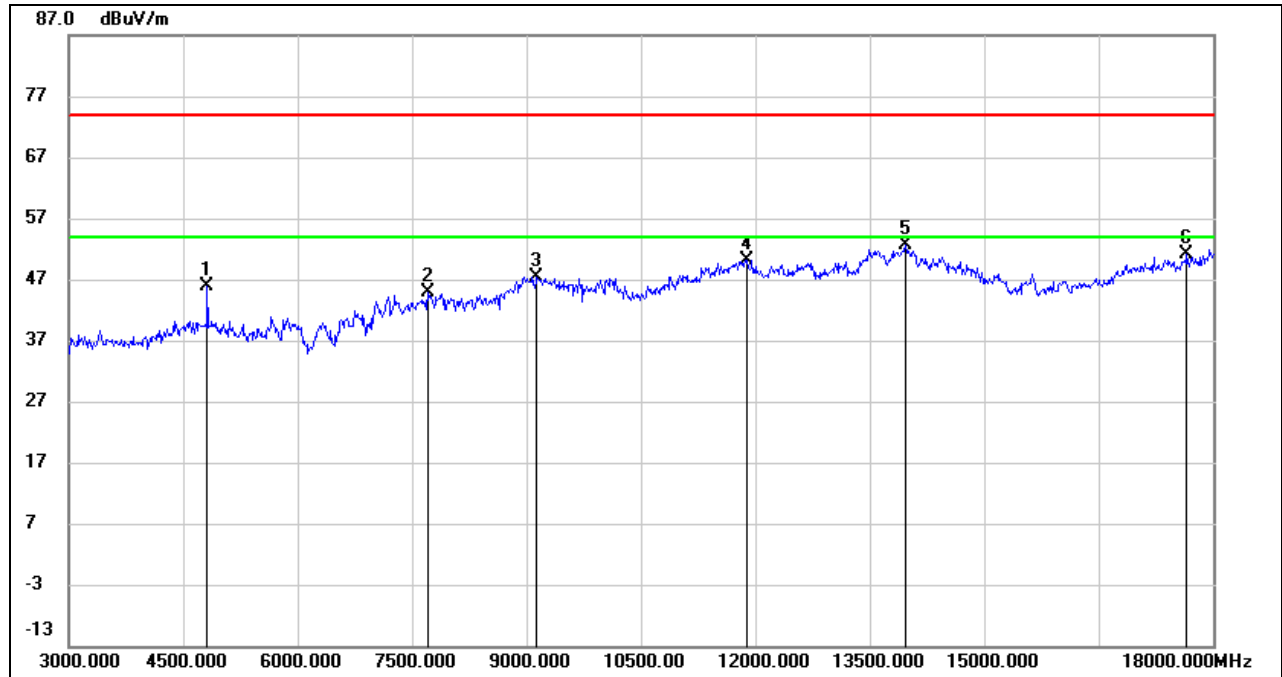

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	46.21	-0.26	45.95	74.00	-28.05	peak
2	7710.000	38.49	6.33	44.82	74.00	-29.18	peak
3	9135.000	36.91	10.55	47.46	74.00	-26.54	peak
4	11895.000	32.55	17.68	50.23	74.00	-23.77	peak
5	13965.000	30.62	21.89	52.51	74.00	-21.49	peak
6	17655.000	27.43	23.64	51.07	74.00	-22.93	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

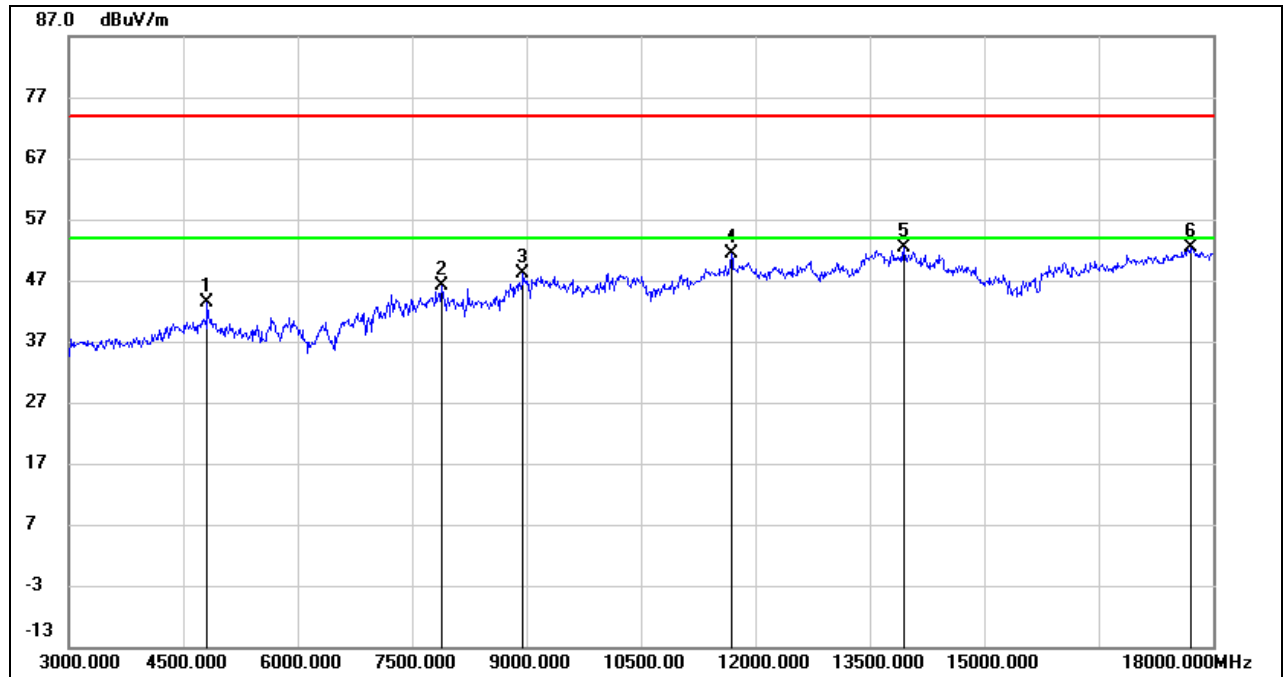

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.73	-0.26	43.47	74.00	-30.53	peak
2	7890.000	39.82	6.31	46.13	74.00	-27.87	peak
3	8955.000	38.01	10.16	48.17	74.00	-25.83	peak
4	11685.000	34.20	17.10	51.30	74.00	-22.70	peak
5	13950.000	30.40	21.86	52.26	74.00	-21.74	peak
6	17700.000	28.36	23.91	52.27	74.00	-21.73	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

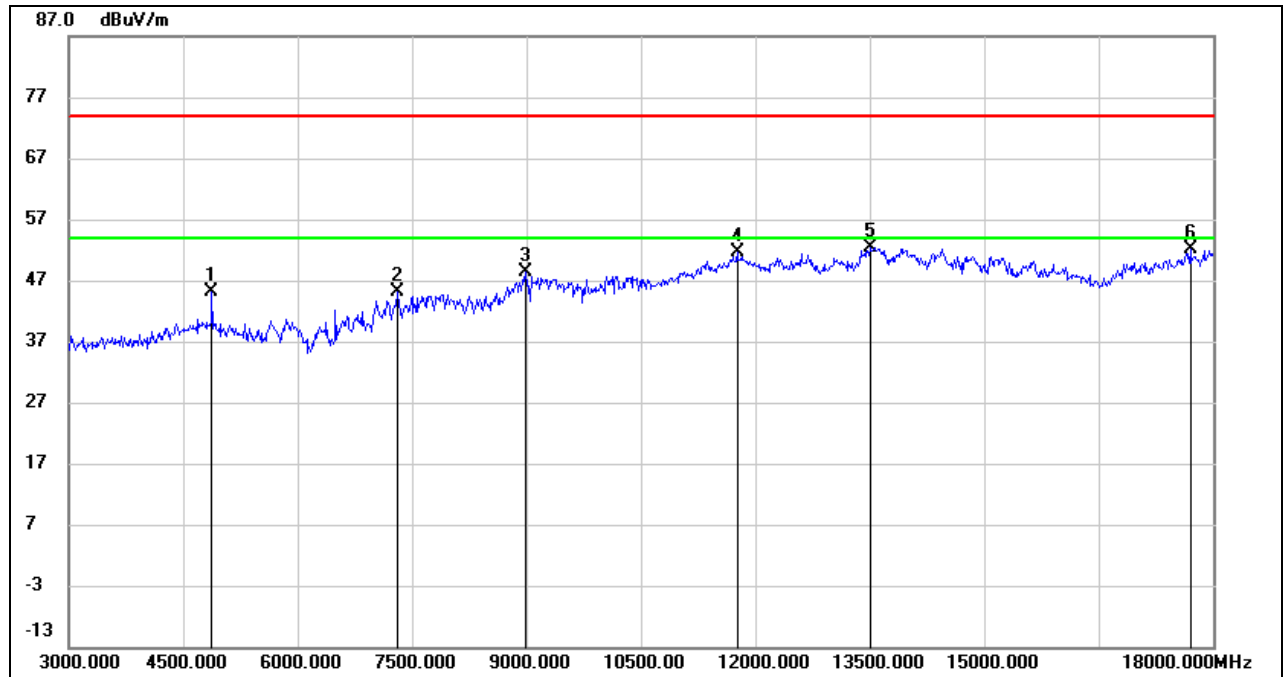


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.16	-0.03	45.13	74.00	-28.87	peak
2	7305.000	38.59	6.47	45.06	74.00	-28.94	peak
3	8985.000	38.09	10.37	48.46	74.00	-25.54	peak
4	11760.000	34.29	17.31	51.60	74.00	-22.40	peak
5	13500.000	31.59	20.90	52.49	74.00	-21.51	peak
6	17700.000	28.28	23.91	52.19	74.00	-21.81	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

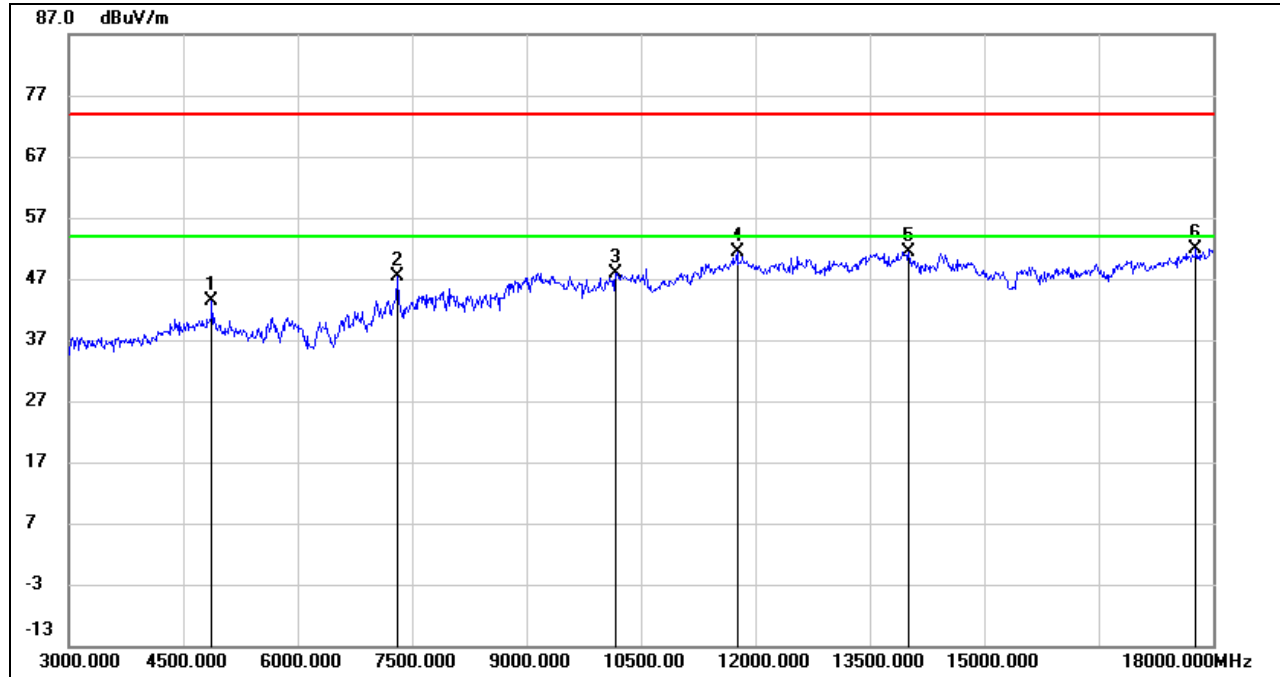

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.33	-0.03	43.30	74.00	-30.70	peak
2	7305.000	41.03	6.47	47.50	74.00	-26.50	peak
3	10170.000	35.54	12.34	47.88	74.00	-26.12	peak
4	11760.000	33.99	17.31	51.30	74.00	-22.70	peak
5	14010.000	29.41	21.93	51.34	74.00	-22.66	peak
6	17775.000	27.47	24.36	51.83	74.00	-22.17	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

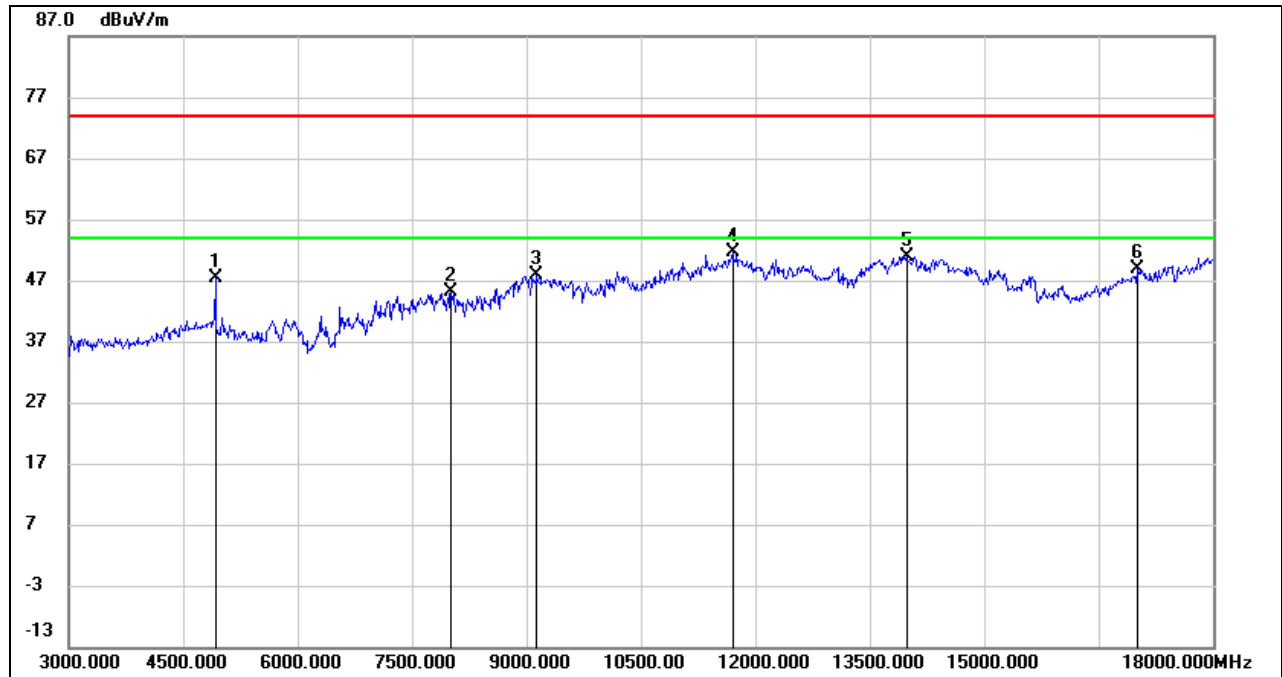**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	47.18	0.14	47.32	74.00	-26.68	peak
2	8010.000	38.84	6.32	45.16	74.00	-28.84	peak
3	9135.000	37.30	10.55	47.85	74.00	-26.15	peak
4	11700.000	34.37	17.14	51.51	74.00	-22.49	peak
5	13980.000	29.03	21.92	50.95	74.00	-23.05	peak
6	17010.000	27.87	20.93	48.80	74.00	-25.20	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

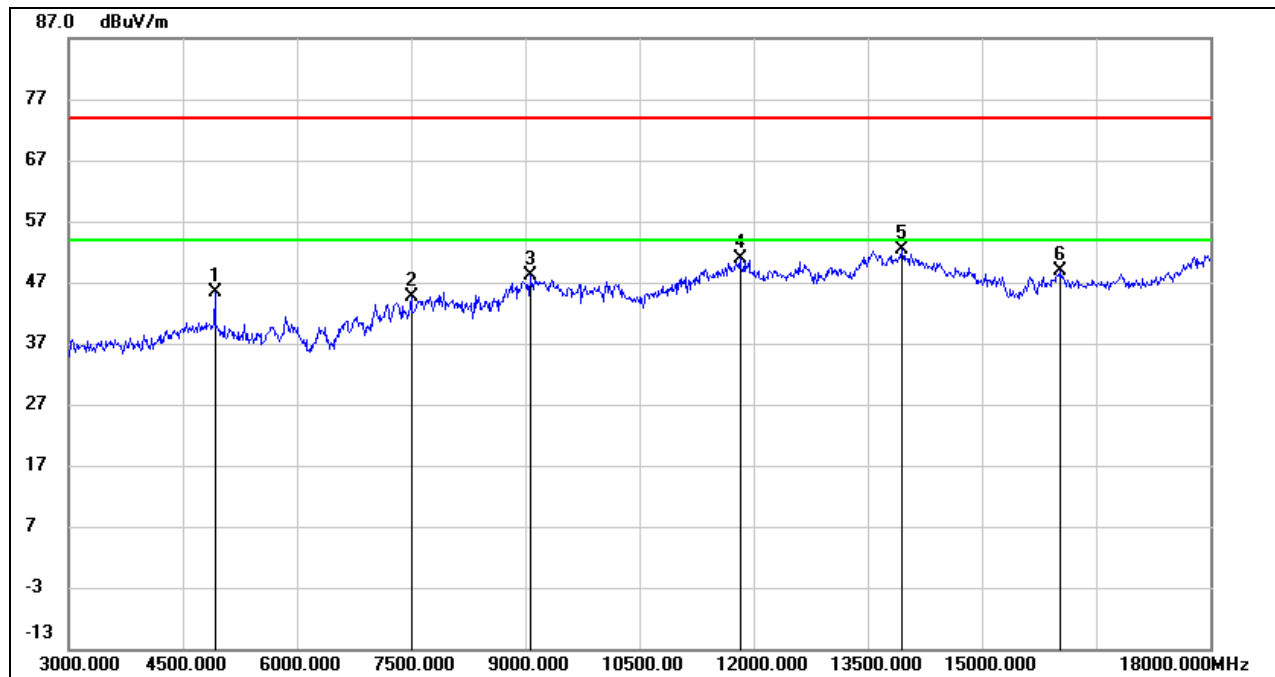**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	45.26	0.14	45.40	74.00	-28.60	peak
2	7500.000	38.25	6.33	44.58	74.00	-29.42	peak
3	9060.000	37.68	10.51	48.19	74.00	-25.81	peak
4	11820.000	33.43	17.47	50.90	74.00	-23.10	peak
5	13950.000	30.45	21.86	52.31	74.00	-21.69	peak
6	16035.000	31.07	17.80	48.87	74.00	-25.13	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

4. For the transmitting duration, please refer to clause 7.1.

5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.

8.3.2. 802.11g SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

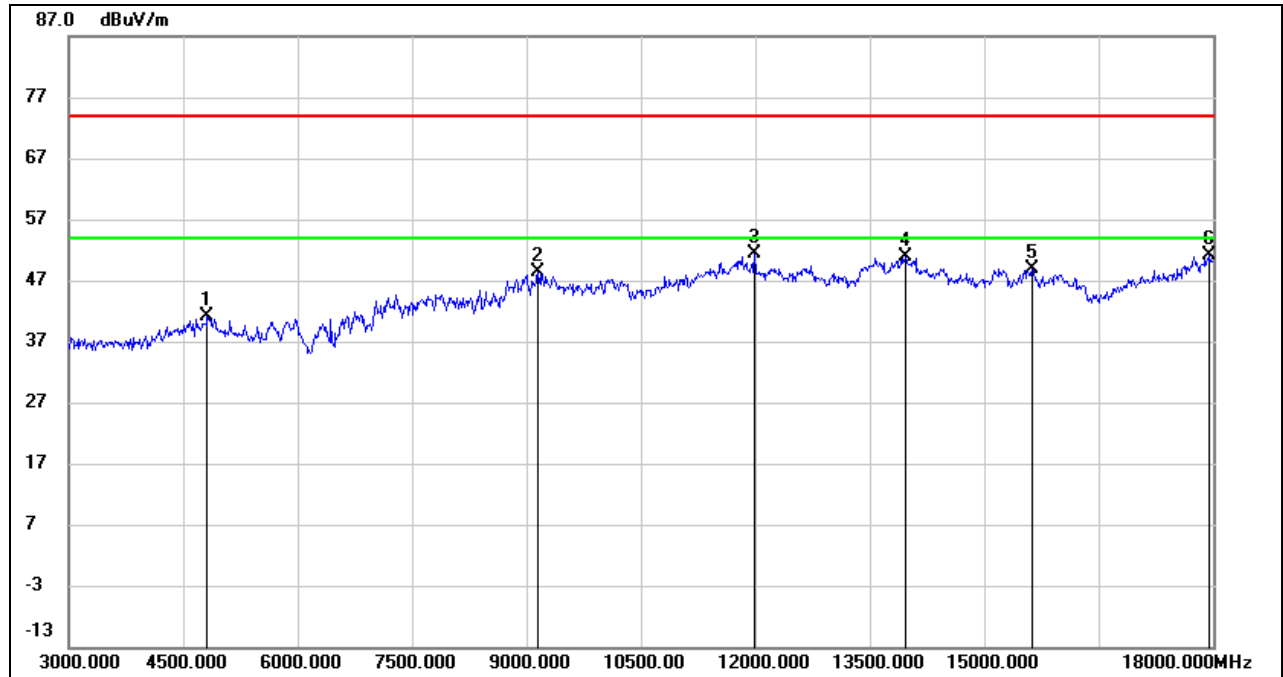

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	41.35	-0.26	41.09	74.00	-32.91	peak
2	9150.000	37.94	10.54	48.48	74.00	-25.52	peak
3	11985.000	33.48	17.92	51.40	74.00	-22.60	peak
4	13965.000	28.93	21.89	50.82	74.00	-23.18	peak
5	15630.000	31.50	17.49	48.99	74.00	-25.01	peak
6	17955.000	25.60	25.42	51.02	74.00	-22.98	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.


4. For the transmitting duration, please refer to clause 7.1.

5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

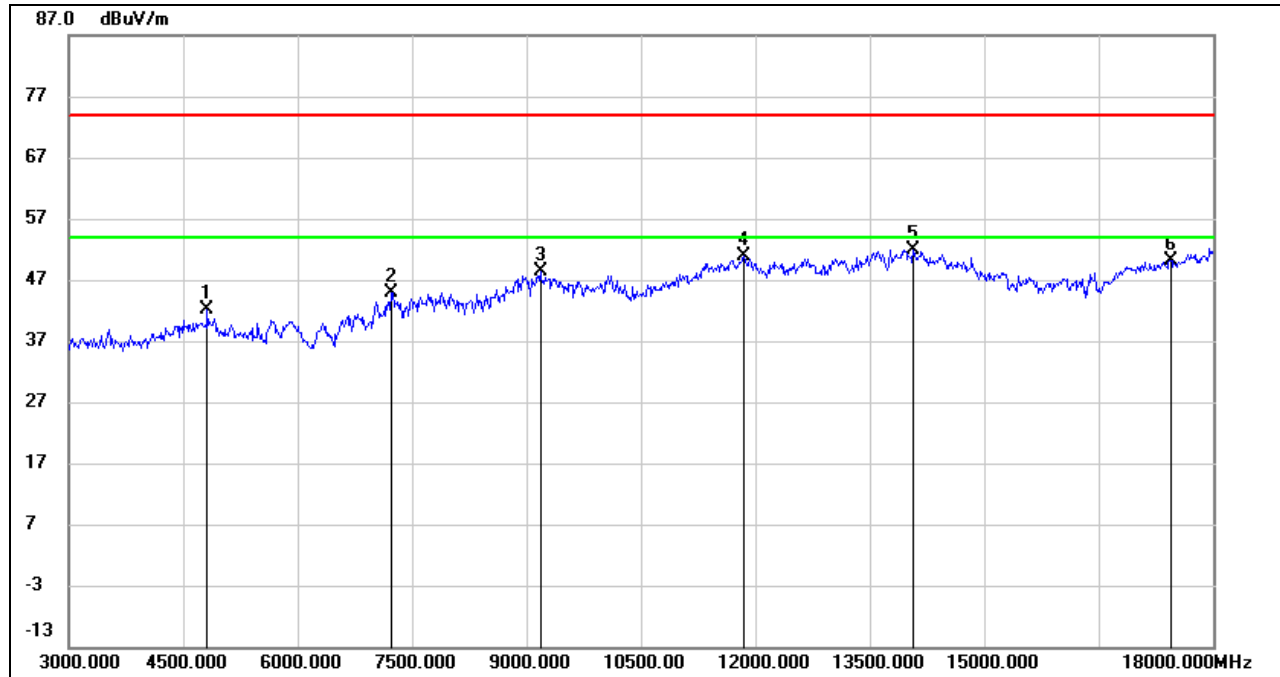


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	42.33	-0.26	42.07	74.00	-31.93	peak
2	7230.000	38.46	6.53	44.99	74.00	-29.01	peak
3	9180.000	37.80	10.56	48.36	74.00	-25.64	peak
4	11850.000	33.24	17.56	50.80	74.00	-23.20	peak
5	14070.000	30.26	21.67	51.93	74.00	-22.07	peak
6	17445.000	27.59	22.54	50.13	74.00	-23.87	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

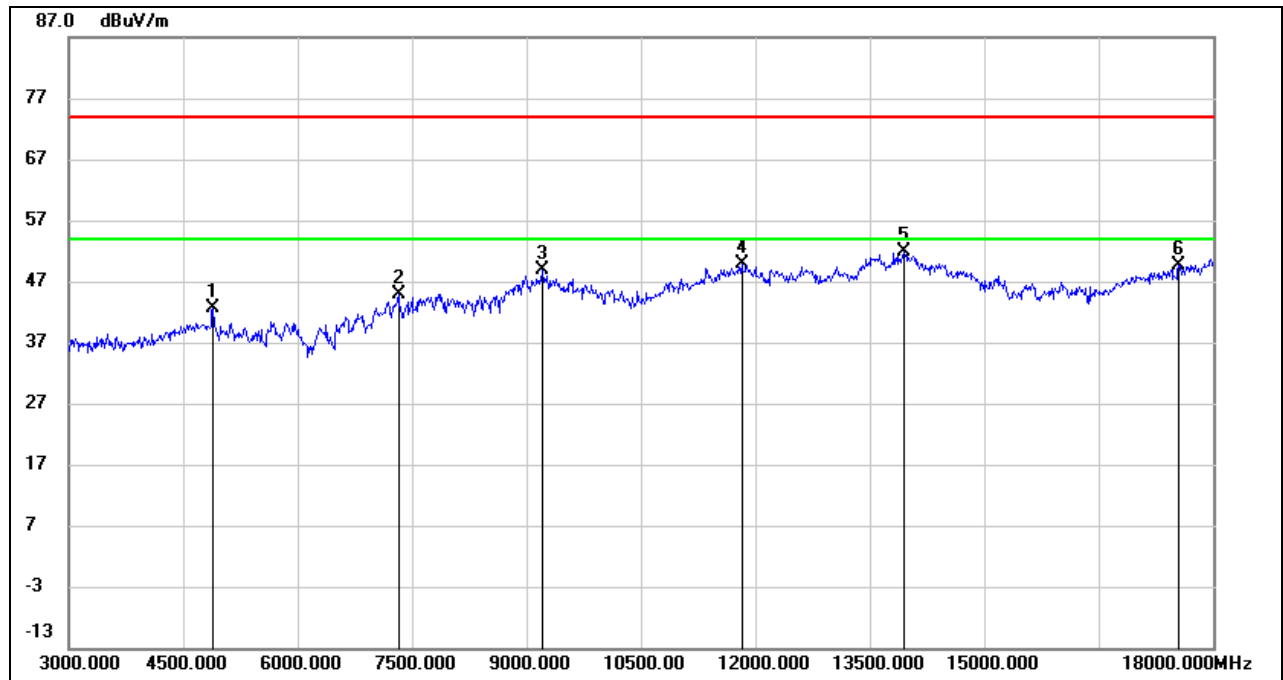

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	42.53	0.03	42.56	74.00	-31.44	peak
2	7320.000	38.47	6.46	44.93	74.00	-29.07	peak
3	9210.000	38.19	10.57	48.76	74.00	-25.24	peak
4	11820.000	32.50	17.47	49.97	74.00	-24.03	peak
5	13950.000	29.99	21.86	51.85	74.00	-22.15	peak
6	17550.000	26.51	23.03	49.54	74.00	-24.46	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

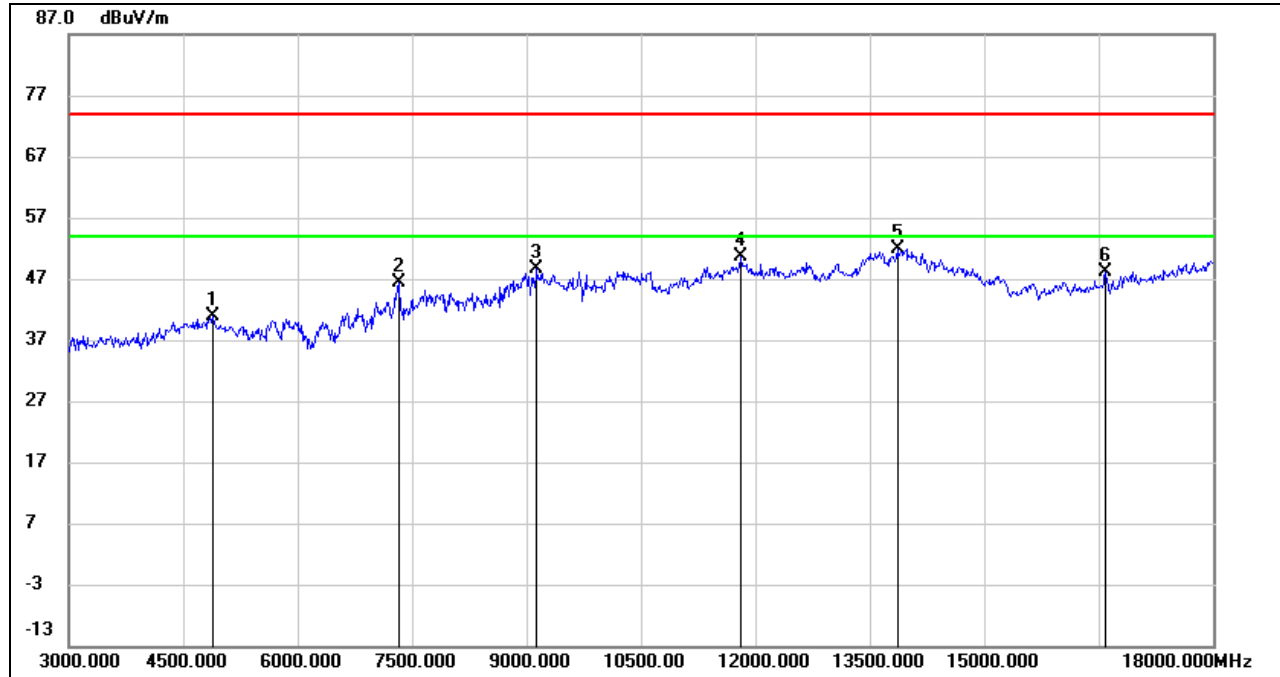

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	40.76	0.03	40.79	74.00	-33.21	peak
2	7320.000	39.86	6.46	46.32	74.00	-27.68	peak
3	9135.000	38.06	10.55	48.61	74.00	-25.39	peak
4	11805.000	33.14	17.43	50.57	74.00	-23.43	peak
5	13860.000	30.13	21.67	51.80	74.00	-22.20	peak
6	16590.000	29.16	19.07	48.23	74.00	-25.77	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

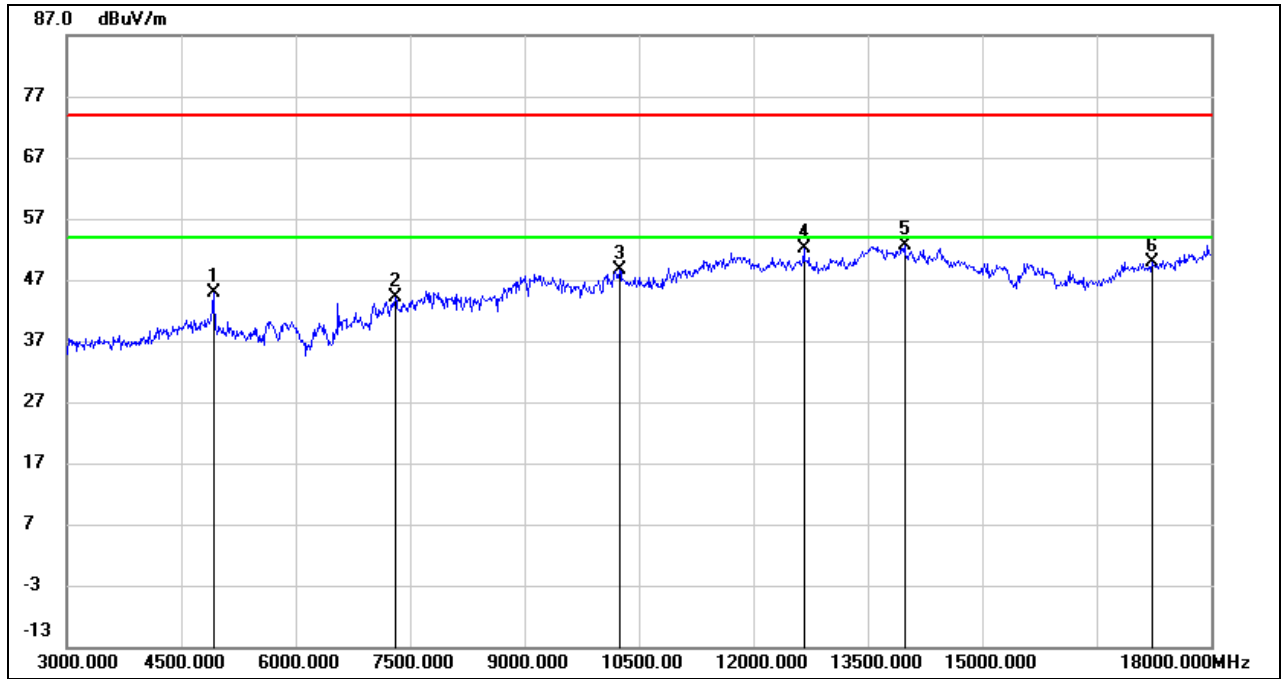

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.62	0.14	44.76	74.00	-29.24	peak
2	7305.000	37.75	6.47	44.22	74.00	-29.78	peak
3	10245.000	36.16	12.48	48.64	74.00	-25.36	peak
4	12660.000	34.17	17.95	52.12	74.00	-21.88	peak
5	13980.000	30.69	21.92	52.61	74.00	-21.39	peak
6	17220.000	28.24	21.71	49.95	74.00	-24.05	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

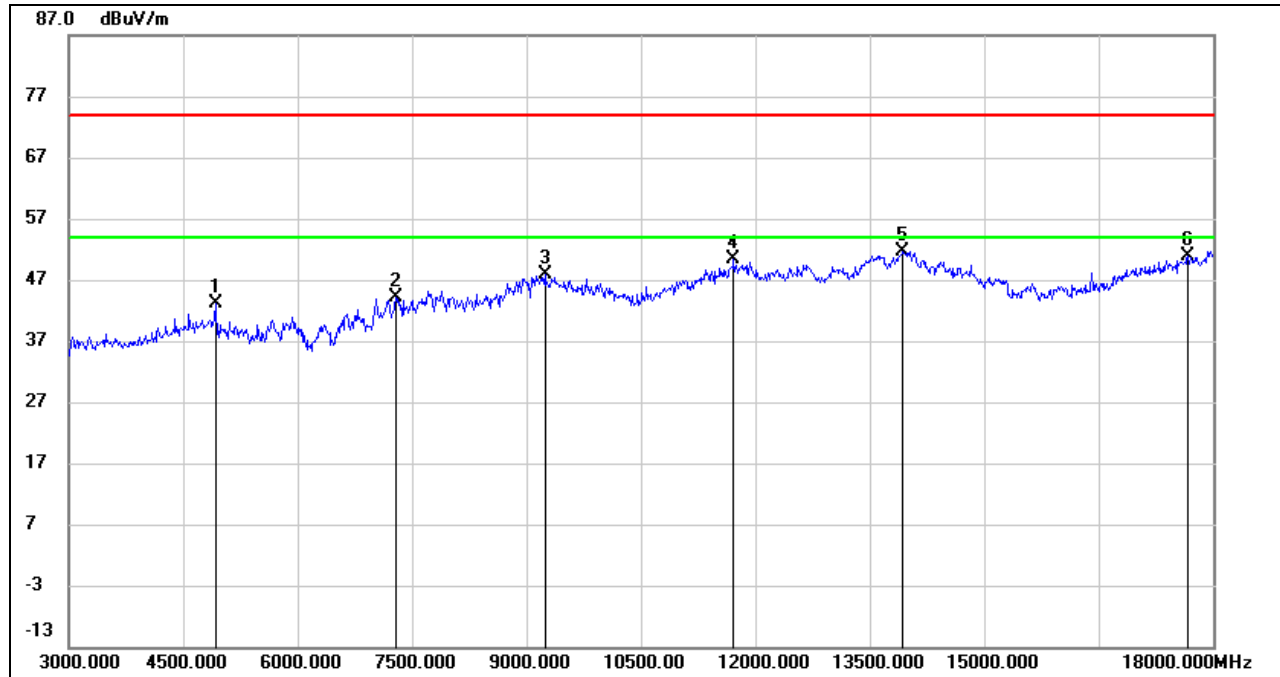


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.88	0.14	43.02	74.00	-30.98	peak
2	7290.000	37.54	6.48	44.02	74.00	-29.98	peak
3	9240.000	37.23	10.58	47.81	74.00	-26.19	peak
4	11715.000	33.16	17.19	50.35	74.00	-23.65	peak
5	13935.000	29.83	21.82	51.65	74.00	-22.35	peak
6	17670.000	27.09	23.73	50.82	74.00	-23.18	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.

8.3.3. 802.11n HT20 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

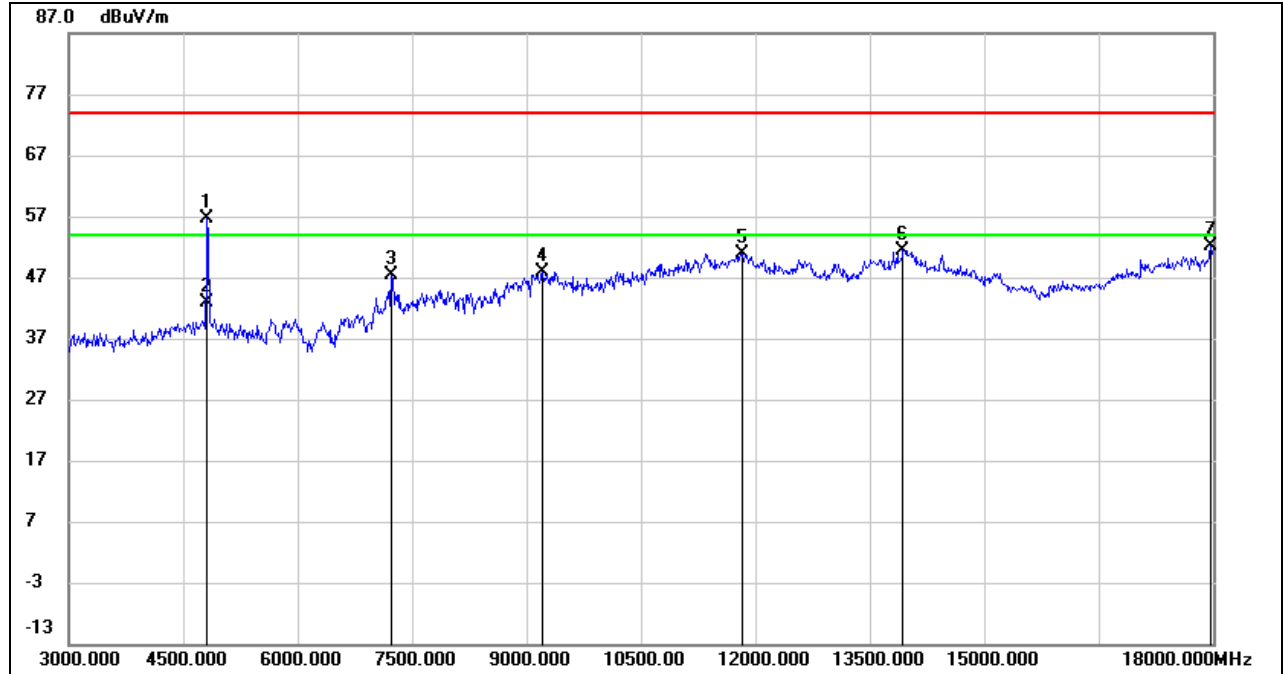

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	56.82	-0.26	56.56	74.00	-17.44	peak
2	4815.000	43.18	-0.26	42.92	54.00	-11.08	AVG
3	7230.000	40.94	6.53	47.47	74.00	-26.53	peak
4	9210.000	37.30	10.57	47.87	74.00	-26.13	peak
5	11835.000	33.47	17.51	50.98	74.00	-23.02	peak
6	13935.000	29.53	21.82	51.35	74.00	-22.65	peak
7	17970.000	26.56	25.51	52.07	74.00	-21.93	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

4. For the transmitting duration, please refer to clause 7.1.

5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

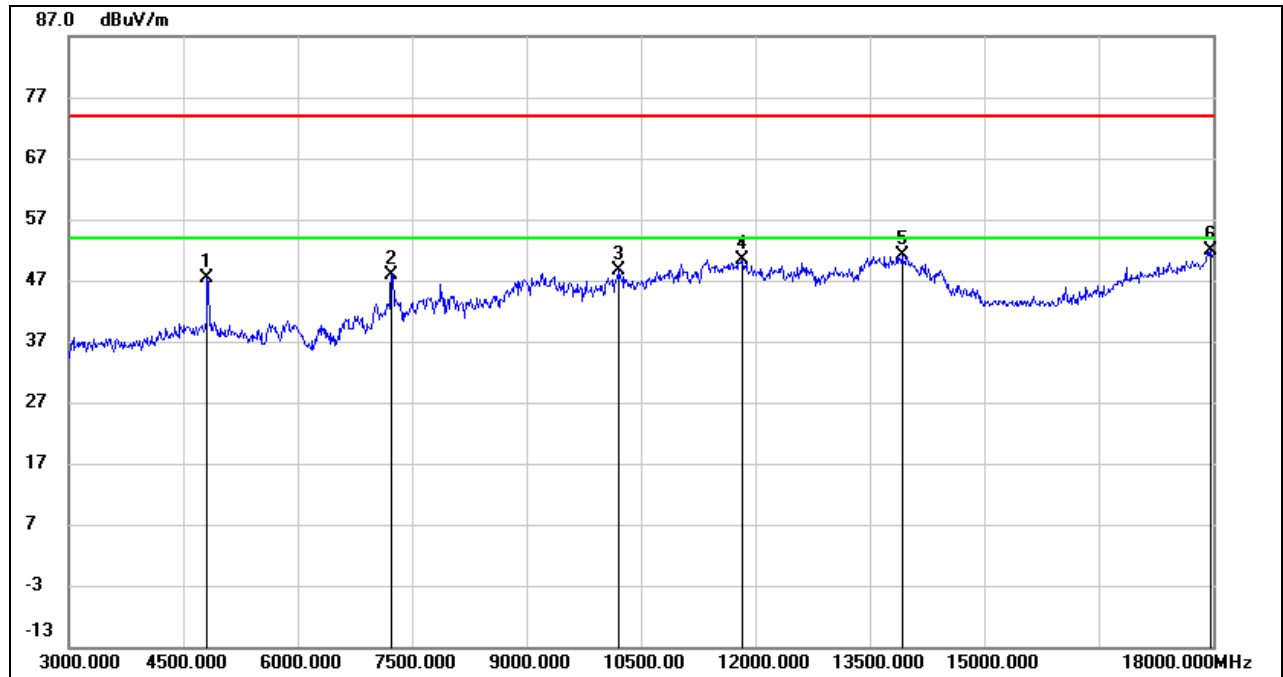


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	47.73	-0.26	47.47	74.00	-26.53	peak
2	7230.000	41.44	6.53	47.97	74.00	-26.03	peak
3	10215.000	36.28	12.43	48.71	74.00	-25.29	peak
4	11835.000	32.86	17.51	50.37	74.00	-23.63	peak
5	13920.000	29.33	21.79	51.12	74.00	-22.88	peak
6	17970.000	26.41	25.51	51.92	74.00	-22.08	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

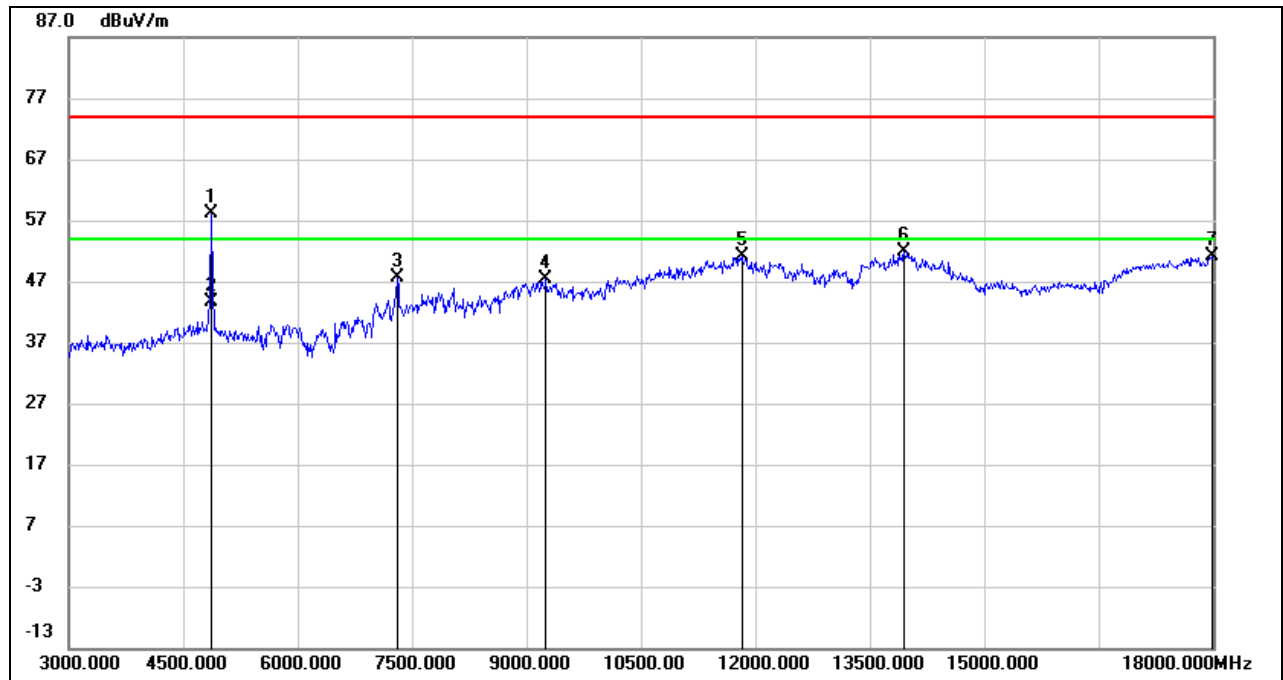

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	58.23	-0.03	58.20	74.00	-15.80	peak
2	4875.000	43.62	-0.03	43.59	54.00	-10.41	AVG
3	7305.000	41.15	6.47	47.62	74.00	-26.38	peak
4	9255.000	36.89	10.59	47.48	74.00	-26.52	peak
5	11820.000	33.78	17.47	51.25	74.00	-22.75	peak
6	13950.000	30.11	21.86	51.97	74.00	-22.03	peak
7	17985.000	25.56	25.60	51.16	74.00	-22.84	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

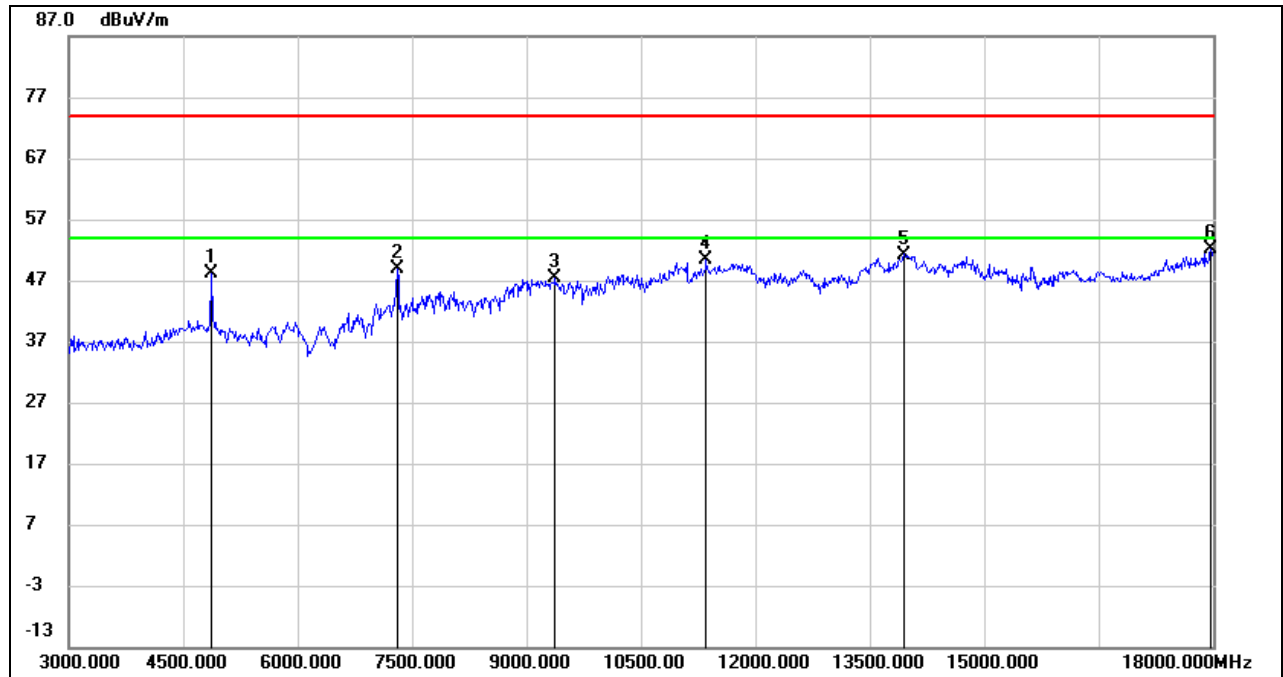


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	48.19	-0.03	48.16	74.00	-25.84	peak
2	7305.000	42.32	6.47	48.79	74.00	-25.21	peak
3	9375.000	36.68	10.64	47.32	74.00	-26.68	peak
4	11355.000	34.43	16.06	50.49	74.00	-23.51	peak
5	13950.000	29.39	21.86	51.25	74.00	-22.75	peak
6	17970.000	26.68	25.51	52.19	74.00	-21.81	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

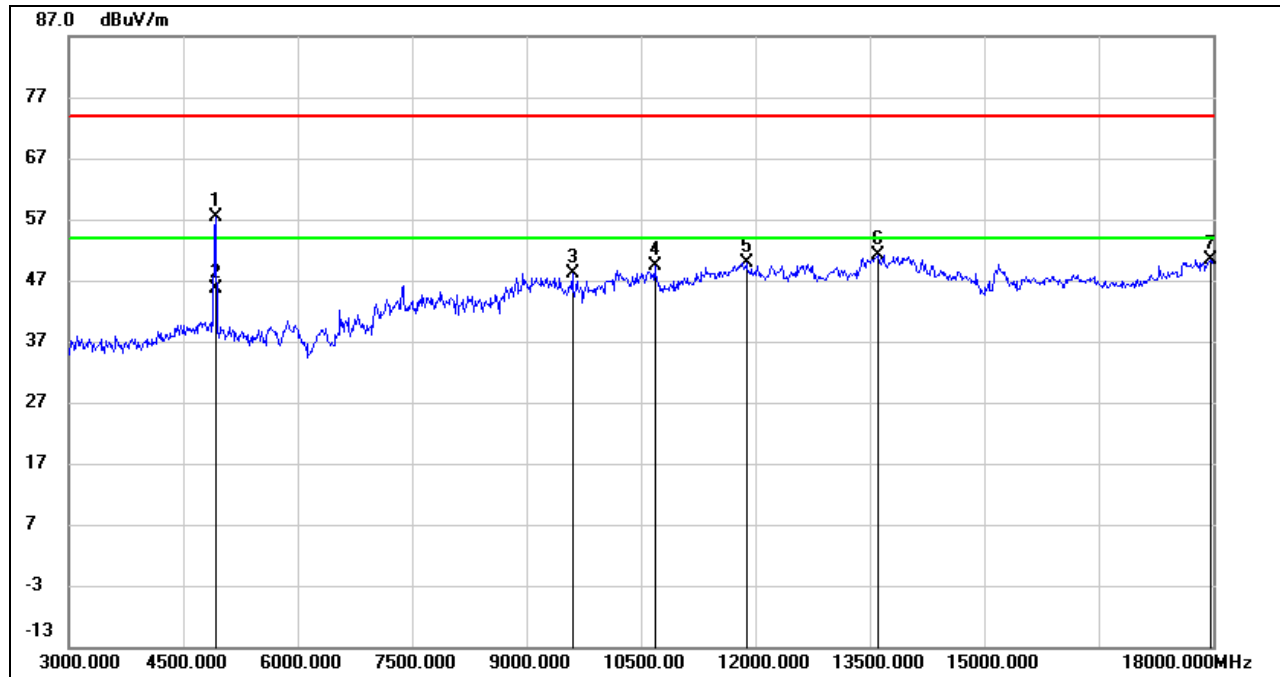


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	57.23	0.14	57.37	74.00	-16.63	peak
2	4920.000	45.47	0.14	45.61	54.00	-8.39	AVG
3	9600.000	37.20	10.95	48.15	74.00	-25.85	peak
4	10680.000	35.84	13.62	49.46	74.00	-24.54	peak
5	11880.000	32.27	17.63	49.90	74.00	-24.10	peak
6	13605.000	30.07	21.12	51.19	74.00	-22.81	peak
7	17970.000	24.98	25.51	50.49	74.00	-23.51	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

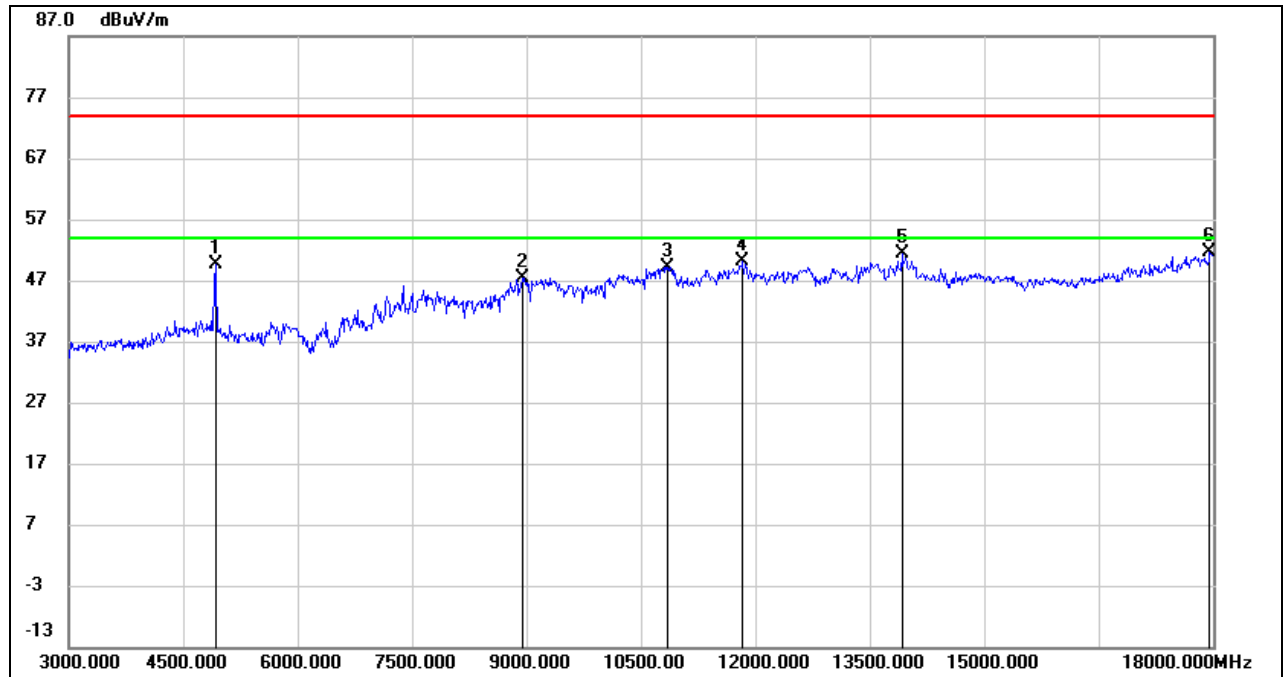

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	49.53	0.14	49.67	74.00	-24.33	peak
2	8940.000	37.44	10.04	47.48	74.00	-26.52	peak
3	10845.000	34.92	14.21	49.13	74.00	-24.87	peak
4	11835.000	32.56	17.51	50.07	74.00	-23.93	peak
5	13920.000	29.53	21.79	51.32	74.00	-22.68	peak
6	17955.000	26.29	25.42	51.71	74.00	-22.29	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. Peak: Peak detector.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All modes and channels have been tested, only the worst data was recorded in the report.



8.3.4. 802.11n HT40 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

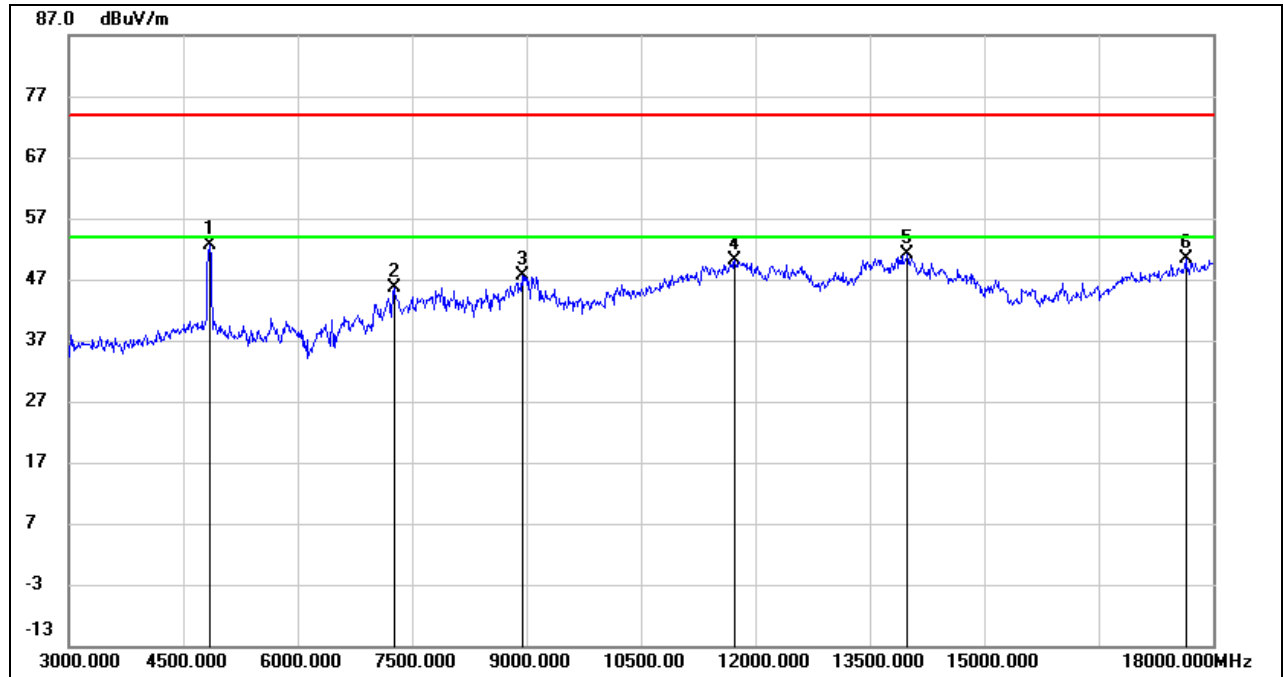


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	52.89	-0.15	52.74	74.00	-21.26	peak
2	7260.000	39.01	6.50	45.51	74.00	-28.49	peak
3	8940.000	37.70	10.04	47.74	74.00	-26.26	peak
4	11730.000	32.81	17.22	50.03	74.00	-23.97	peak
5	13995.000	29.06	21.95	51.01	74.00	-22.99	peak
6	17640.000	26.83	23.56	50.39	74.00	-23.61	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

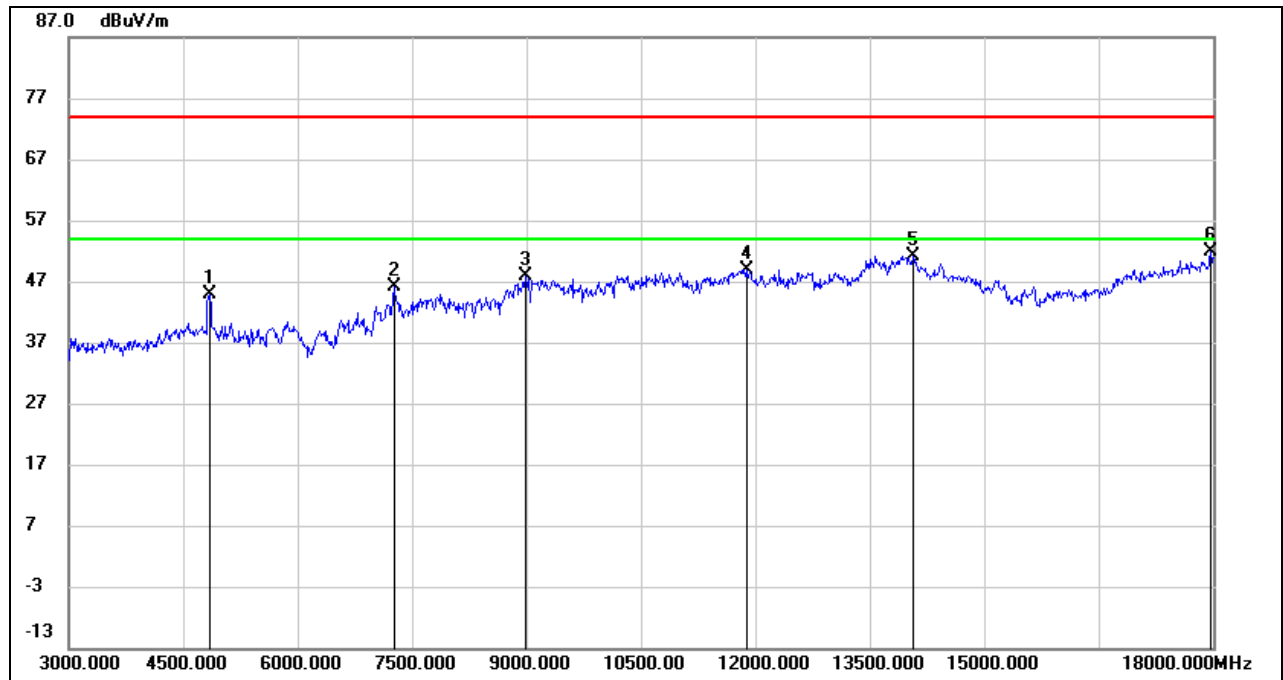

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	44.94	-0.15	44.79	74.00	-29.21	peak
2	7260.000	39.72	6.50	46.22	74.00	-27.78	peak
3	8985.000	37.44	10.37	47.81	74.00	-26.19	peak
4	11880.000	31.29	17.63	48.92	74.00	-25.08	peak
5	14070.000	29.54	21.67	51.21	74.00	-22.79	peak
6	17970.000	26.25	25.51	51.76	74.00	-22.24	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

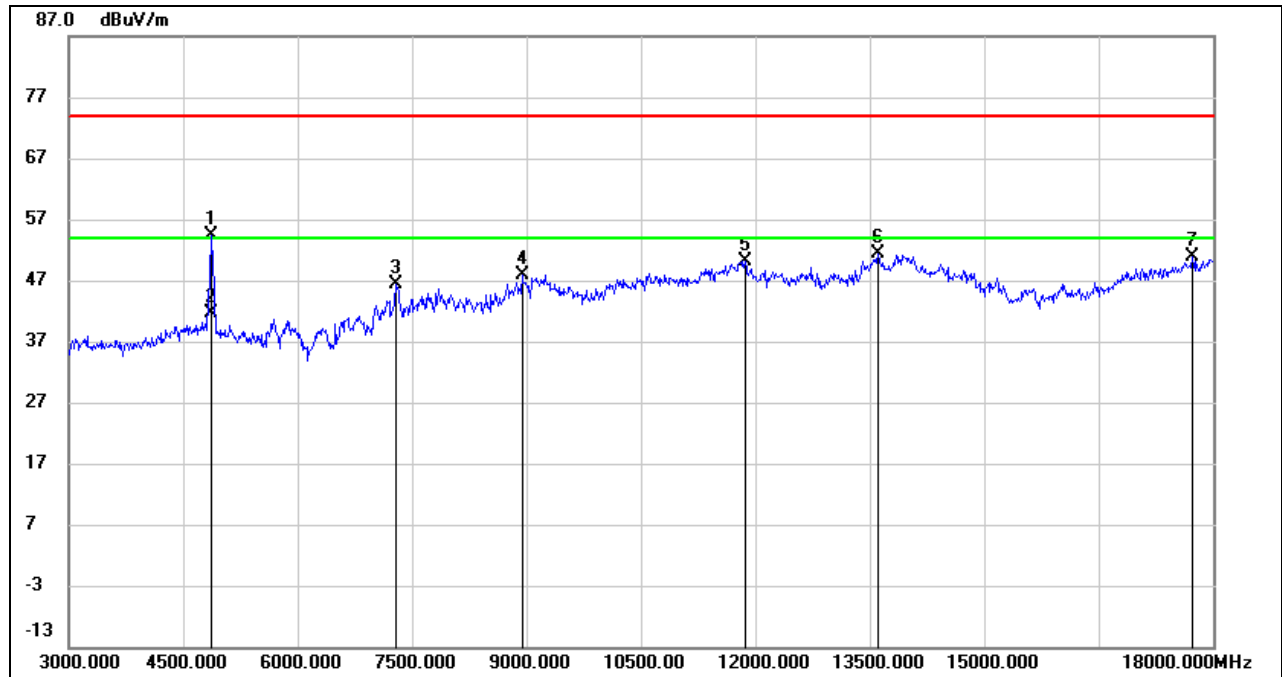HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	54.54	-0.09	54.45	74.00	-19.55	peak
2	4860.000	41.74	-0.09	41.65	54.00	-12.35	AVG
3	7290.000	39.97	6.48	46.45	74.00	-27.55	peak
4	8940.000	37.88	10.04	47.92	74.00	-26.08	peak
5	11865.000	32.63	17.59	50.22	74.00	-23.78	peak
6	13605.000	30.34	21.12	51.46	74.00	-22.54	peak
7	17730.000	26.83	24.09	50.92	74.00	-23.08	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

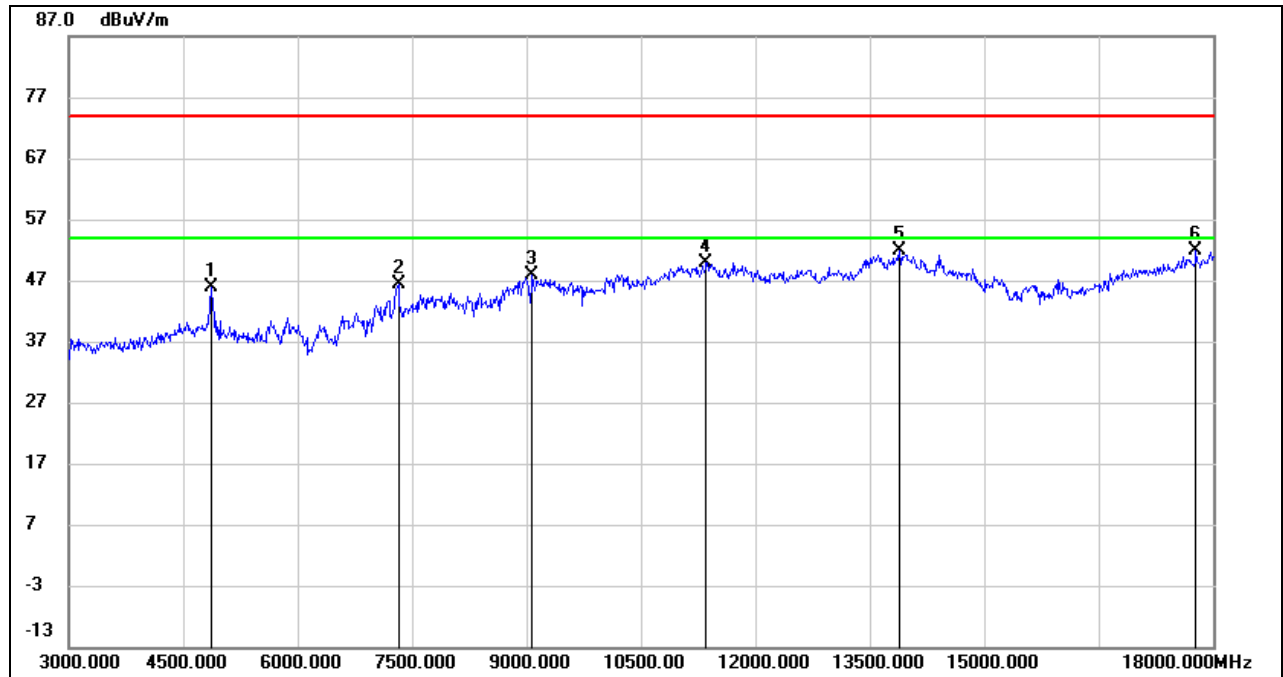

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	45.97	-0.09	45.88	74.00	-28.12	peak
2	7320.000	39.93	6.46	46.39	74.00	-27.61	peak
3	9075.000	37.24	10.52	47.76	74.00	-26.24	peak
4	11355.000	33.83	16.06	49.89	74.00	-24.11	peak
5	13890.000	30.17	21.72	51.89	74.00	-22.11	peak
6	17775.000	27.61	24.36	51.97	74.00	-22.03	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

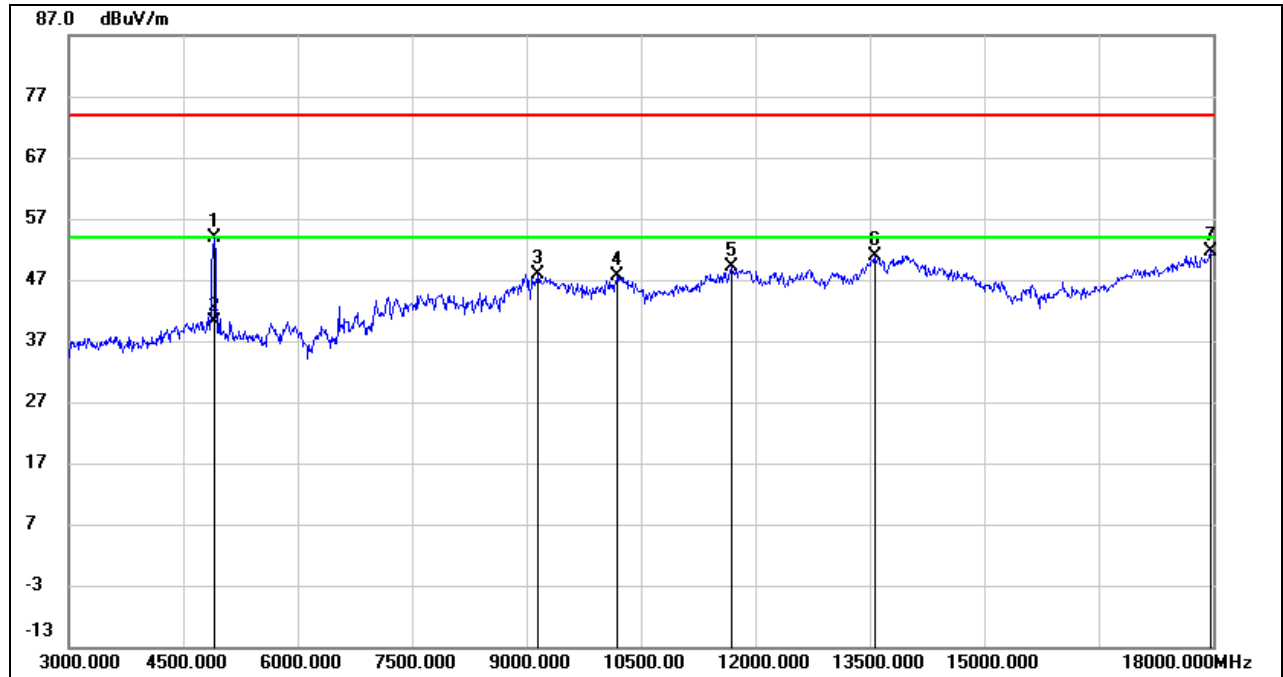


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	53.68	0.09	53.77	74.00	-20.23	peak
2	4905.000	40.14	0.09	40.23	54.00	-13.77	AVG
3	9150.000	37.26	10.54	47.80	74.00	-26.20	peak
4	10185.000	35.29	12.38	47.67	74.00	-26.33	peak
5	11685.000	31.96	17.10	49.06	74.00	-24.94	peak
6	13560.000	29.92	21.04	50.96	74.00	-23.04	peak
7	17970.000	26.01	25.51	51.52	74.00	-22.48	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

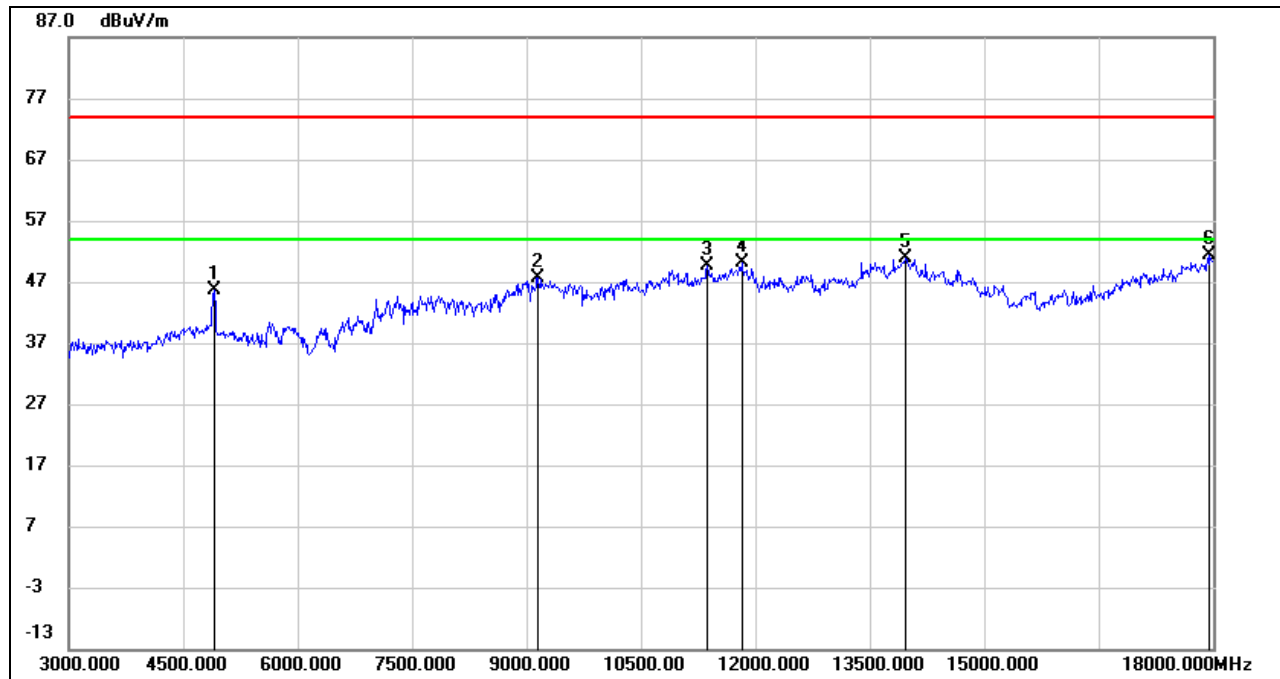

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	45.46	0.09	45.55	74.00	-28.45	peak
2	9150.000	37.03	10.54	47.57	74.00	-26.43	peak
3	11370.000	33.51	16.12	49.63	74.00	-24.37	peak
4	11820.000	32.54	17.47	50.01	74.00	-23.99	peak
5	13965.000	28.95	21.89	50.84	74.00	-23.16	peak
6	17955.000	25.93	25.42	51.35	74.00	-22.65	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All modes and channels have been tested, only the worst data was recorded in the report.

8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.5.1. 802.11n HT20 MIMO MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

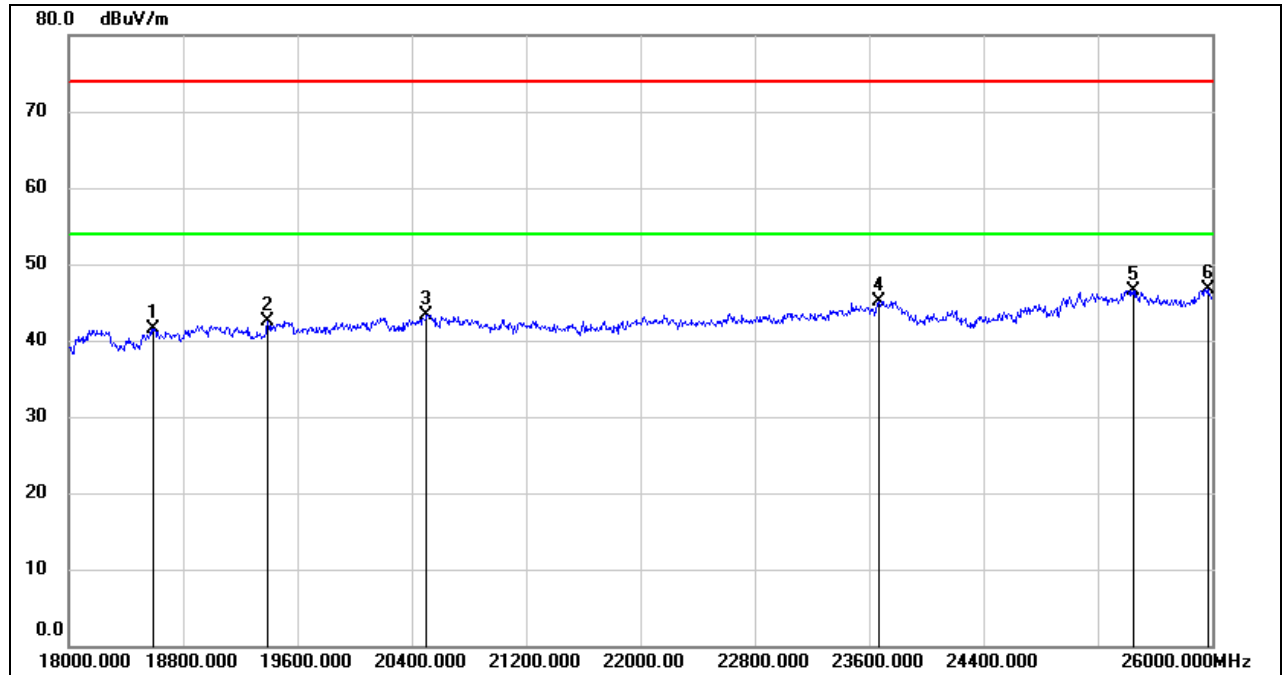


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	46.75	-5.31	41.44	74.00	-32.56	peak
2	19392.000	48.12	-5.57	42.55	74.00	-31.45	peak
3	20504.000	48.71	-5.35	43.36	74.00	-30.64	peak
4	23664.000	48.32	-3.18	45.14	74.00	-28.86	peak
5	25448.000	48.33	-1.76	46.57	74.00	-27.43	peak
6	25968.000	47.63	-1.00	46.63	74.00	-27.37	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

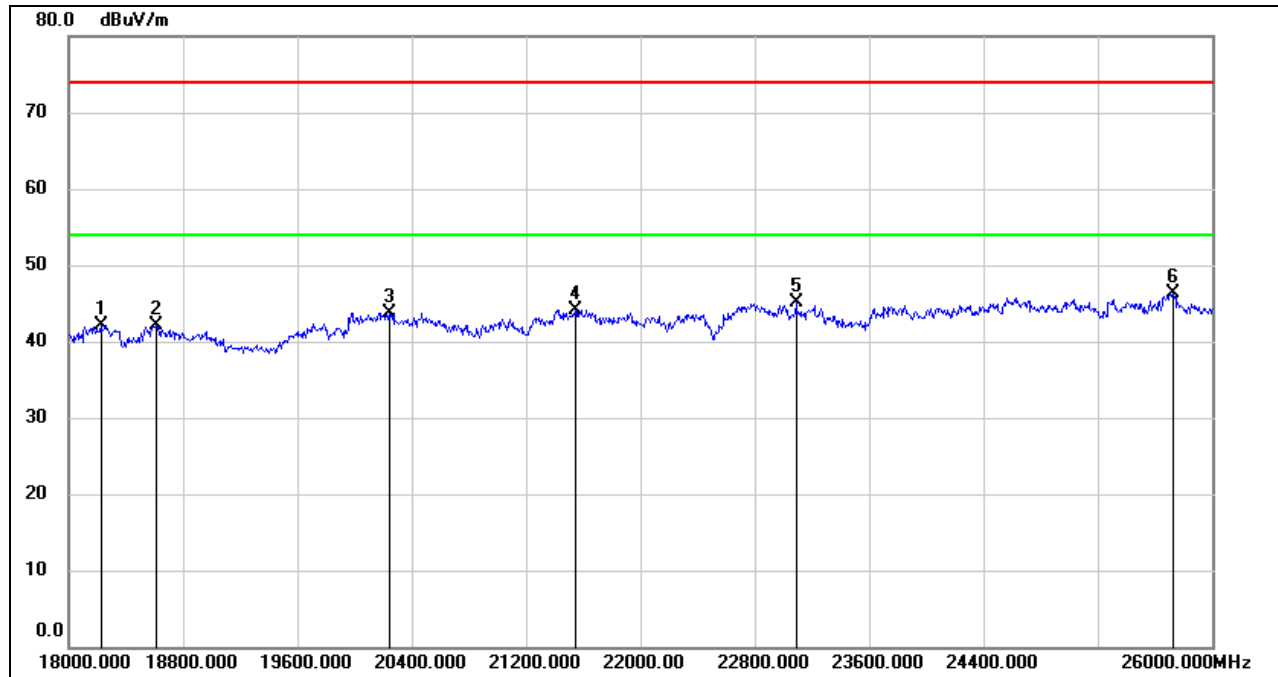

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	47.58	-5.53	42.05	74.00	-31.95	peak
2	18616.000	47.39	-5.34	42.05	74.00	-31.95	peak
3	20240.000	49.32	-5.61	43.71	74.00	-30.29	peak
4	21544.000	48.76	-4.63	44.13	74.00	-29.87	peak
5	23088.000	48.52	-3.41	45.11	74.00	-28.89	peak
6	25728.000	47.11	-0.72	46.39	74.00	-27.61	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

Note: All the modes had been tested, but only the worst data was recorded in the report.

8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.6.1. 802.11n HT20 MIMO MODE


SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

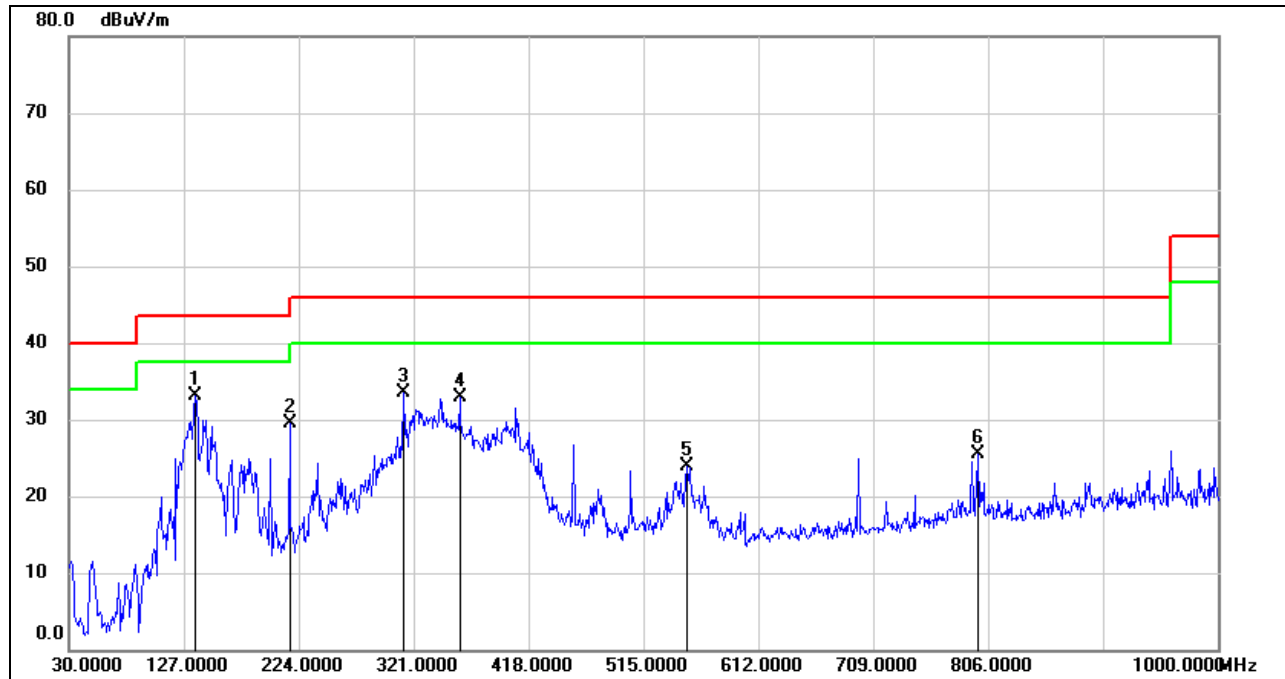

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	136.7000	52.15	-19.02	33.13	43.50	-10.37	QP
2	216.2400	47.27	-17.84	29.43	46.00	-16.57	QP
3	312.2700	48.56	-15.01	33.55	46.00	-12.45	QP
4	359.8000	46.94	-14.10	32.84	46.00	-13.16	QP
5	551.8600	34.33	-10.46	23.87	46.00	-22.13	QP
6	797.2700	32.82	-7.35	25.47	46.00	-20.53	QP

- Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

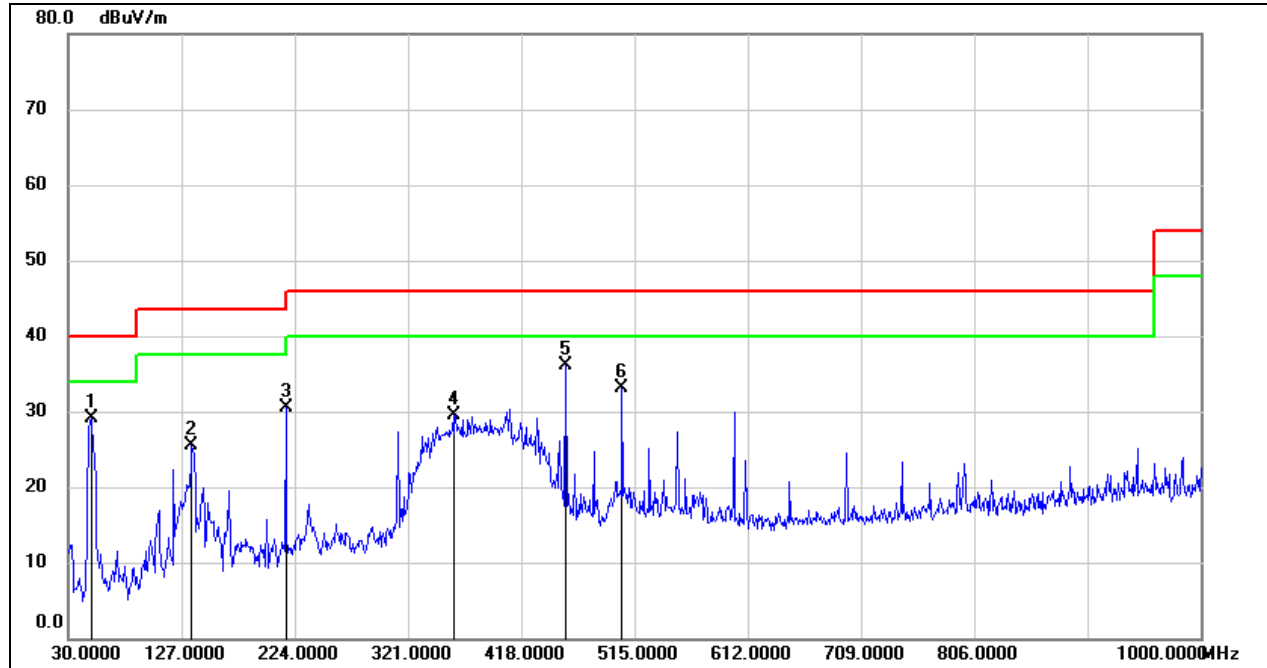

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.4000	49.87	-20.72	29.15	40.00	-10.85	QP
2	135.7300	44.49	-19.06	25.43	43.50	-18.07	QP
3	216.2400	48.30	-17.84	30.46	46.00	-15.54	QP
4	359.8000	43.59	-14.10	29.49	46.00	-16.51	QP
5	455.8300	48.44	-12.27	36.17	46.00	-9.83	QP
6	504.3300	44.50	-11.37	33.13	46.00	-12.87	QP

- Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

8.7. SPURIOUS EMISSIONS BELOW 30 MHz

8.7.1. 802.11n HT20 MIMO MODE

SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz ~ 150 kHz

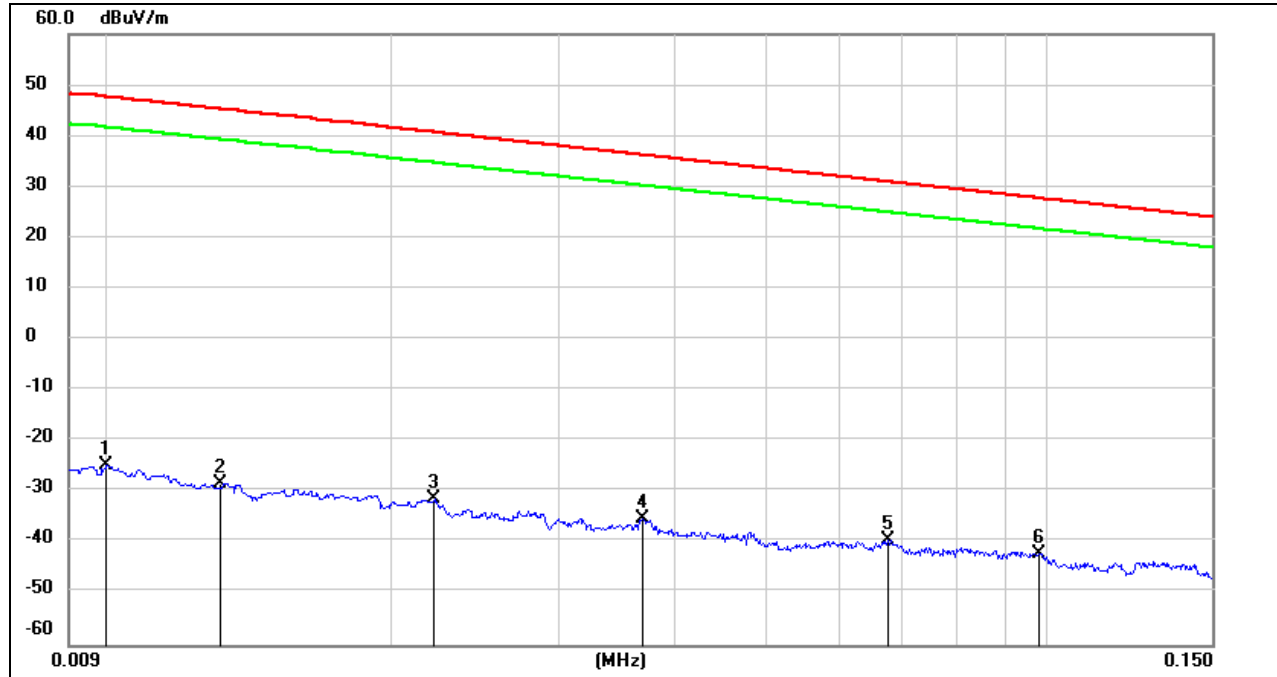


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	76.72	-101.40	-24.68	47.60	-72.28	peak
2	0.0131	72.97	-101.38	-28.41	45.25	-73.66	peak
3	0.0221	70.13	-101.35	-31.22	40.71	-71.93	peak
4	0.0369	66.19	-101.42	-35.23	36.26	-71.49	peak
5	0.0675	62.14	-101.56	-39.42	31.02	-70.44	peak
6	0.0981	59.77	-101.78	-42.01	27.77	-69.78	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

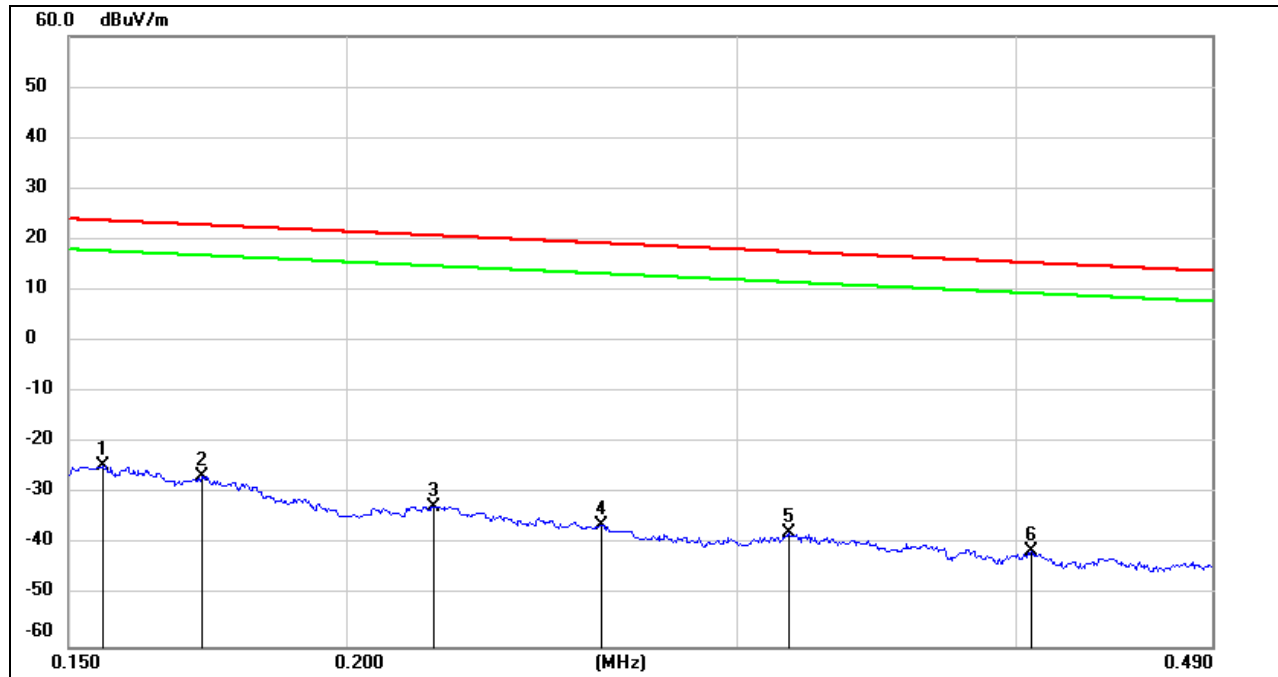


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	77.27	-101.65	-24.38	23.77	-48.15	peak
2	0.1720	75.19	-101.67	-26.48	22.90	-49.38	peak
3	0.2190	69.27	-101.75	-32.48	20.79	-53.27	peak
4	0.2605	65.64	-101.81	-36.17	19.28	-55.45	peak
5	0.3163	64.20	-101.87	-37.67	17.60	-55.27	peak
6	0.4062	60.64	-101.96	-41.32	15.43	-56.75	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

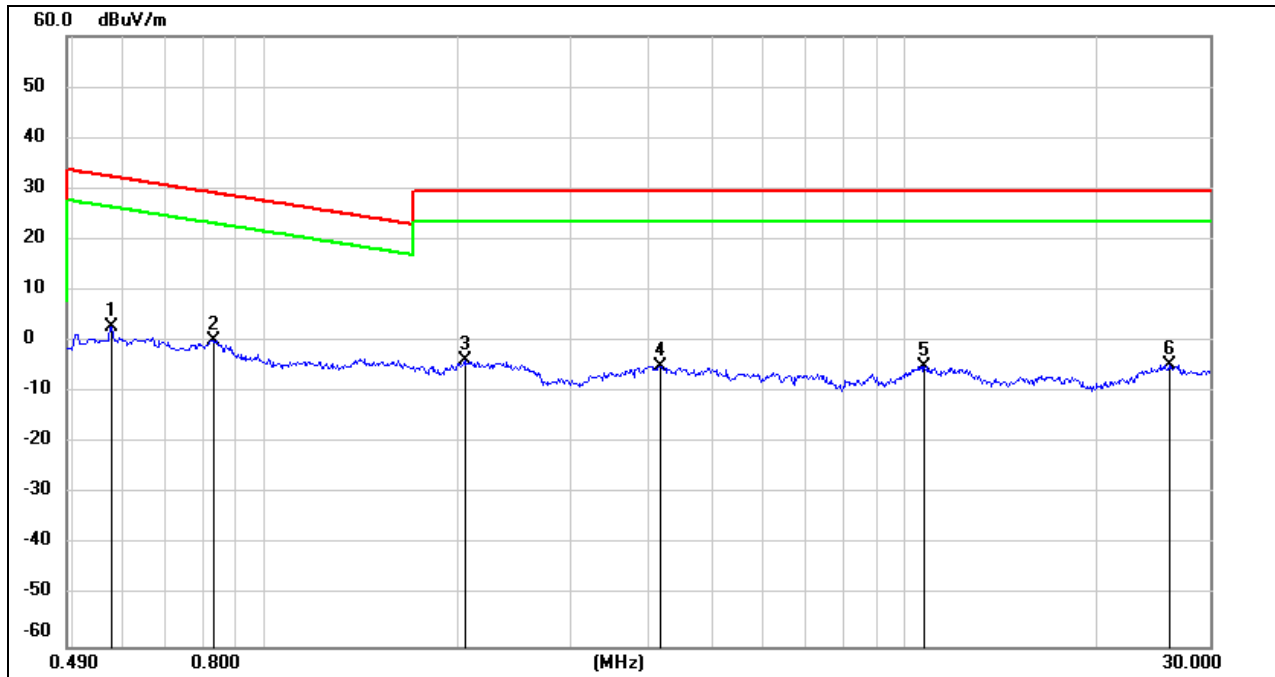

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5753	64.89	-62.08	2.81	32.41	-29.60	peak
2	0.8296	62.44	-62.17	0.27	29.23	-28.96	peak
3	2.0539	58.20	-61.81	-3.61	29.54	-33.15	peak
4	4.1492	56.50	-61.36	-4.86	29.54	-34.40	peak
5	10.7299	55.98	-60.83	-4.85	29.54	-34.39	peak
6	25.8978	55.76	-60.36	-4.60	29.54	-34.14	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

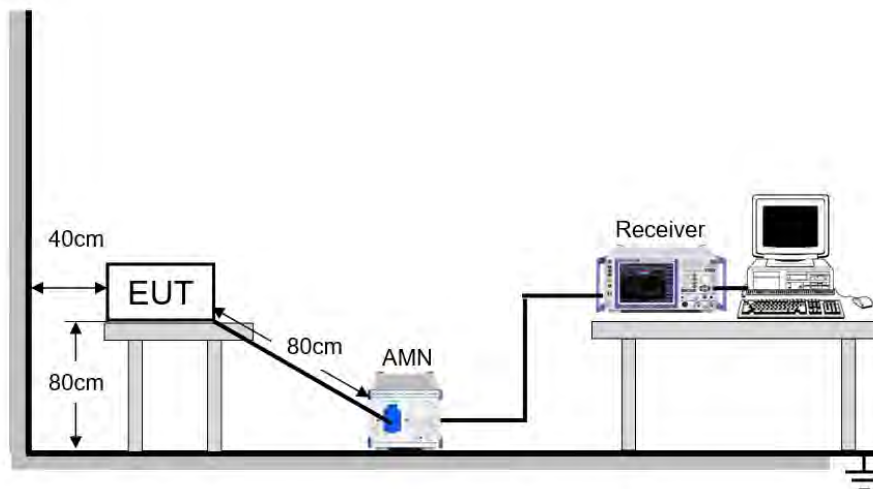

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


TEST ENVIRONMENT

Temperature	23.8 °C	Relative Humidity	72.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

RESULTS

9.1. 802.11n HT20 MIMO MODE

LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

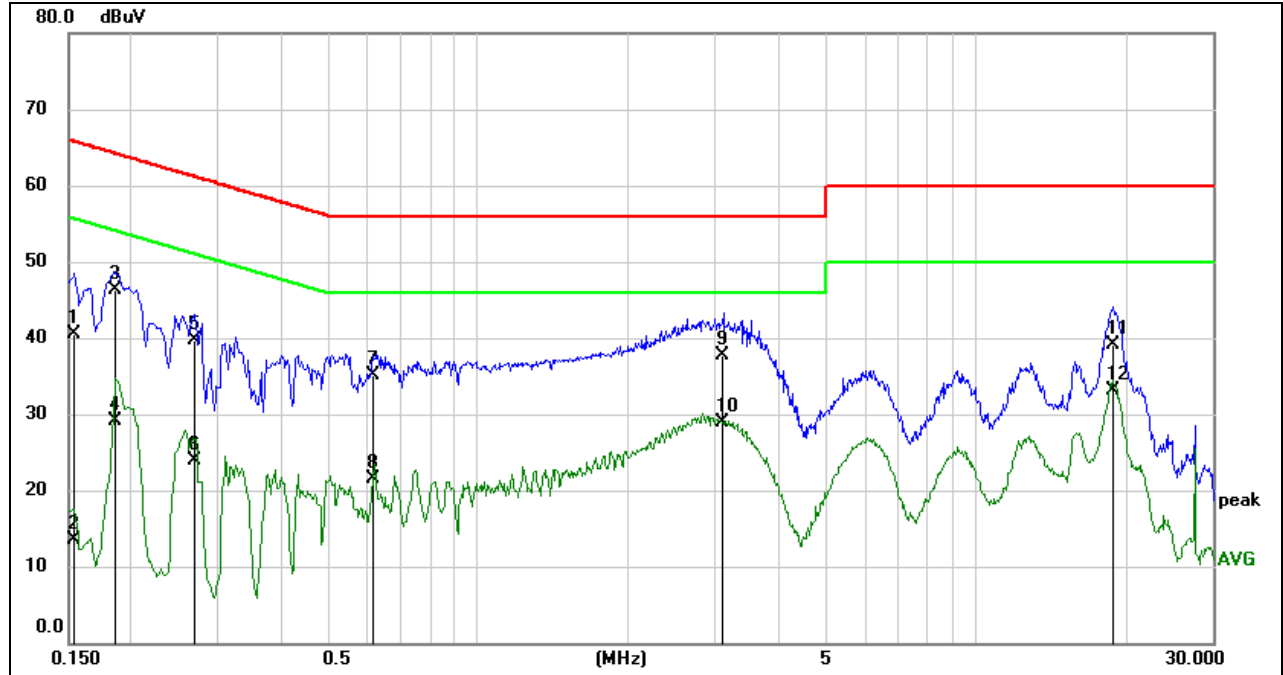

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1537	30.84	9.59	40.43	65.80	-25.37	QP
2	0.1537	3.99	9.59	13.58	55.80	-42.22	AVG
3	0.1860	36.77	9.59	46.36	64.21	-17.85	QP
4	0.1860	19.53	9.59	29.12	54.21	-25.09	AVG
5	0.2694	30.04	9.59	39.63	61.14	-21.51	QP
6	0.2694	14.23	9.59	23.82	51.14	-27.32	AVG
7	0.6147	25.45	9.60	35.05	56.00	-20.95	QP
8	0.6147	11.86	9.60	21.46	46.00	-24.54	AVG
9	3.0877	28.00	9.62	37.62	56.00	-18.38	QP
10	3.0877	19.21	9.62	28.83	46.00	-17.17	AVG
11	18.9280	29.40	9.80	39.20	60.00	-20.80	QP
12	18.9280	23.33	9.80	33.13	50.00	-16.87	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

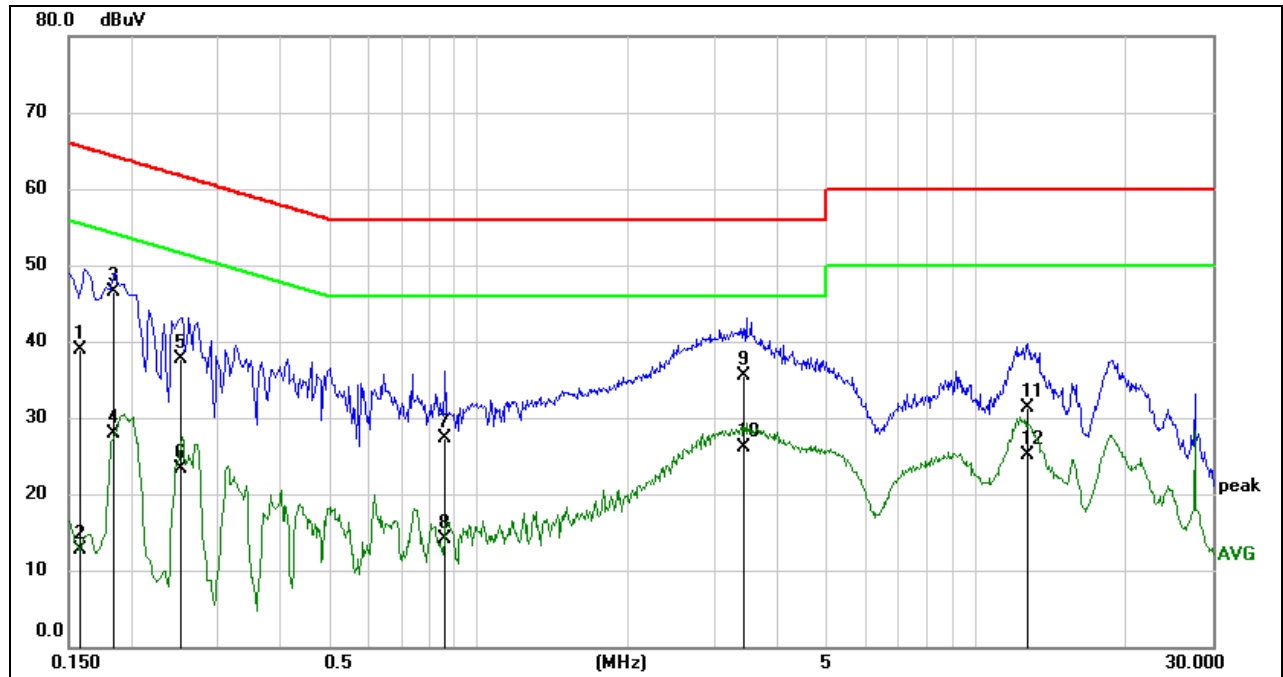

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1582	29.27	9.59	38.86	65.56	-26.70	QP
2	0.1582	3.05	9.59	12.64	55.56	-42.92	AVG
3	0.1841	36.99	9.59	46.58	64.30	-17.72	QP
4	0.1841	18.37	9.59	27.96	54.30	-26.34	AVG
5	0.2509	28.18	9.59	37.77	61.73	-23.96	QP
6	0.2509	13.80	9.59	23.39	51.73	-28.34	AVG
7	0.8562	17.77	9.60	27.37	56.00	-28.63	QP
8	0.8562	4.47	9.60	14.07	46.00	-31.93	AVG
9	3.4234	25.93	9.61	35.54	56.00	-20.46	QP
10	3.4234	16.55	9.61	26.16	46.00	-19.84	AVG
11	12.7351	21.67	9.66	31.33	60.00	-28.67	QP
12	12.7351	15.49	9.66	25.15	50.00	-24.85	AVG

Note: 1. Result = Reading +Correct Factor.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.



10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies



11. Appendix

11.1. Appendix A: DTS Bandwidth

11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	9.080	2407.480	2416.560	0.5	PASS
	Ant1	2412	9.120	2407.480	2416.600	0.5	PASS
	Ant0	2437	8.120	2432.960	2441.080	0.5	PASS
	Ant1	2437	9.120	2432.480	2441.600	0.5	PASS
	Ant0	2462	8.680	2457.440	2466.120	0.5	PASS
	Ant1	2462	8.680	2457.440	2466.120	0.5	PASS
11G	Ant0	2412	15.200	2404.440	2419.640	0.5	PASS
	Ant1	2412	14.280	2404.440	2418.720	0.5	PASS
	Ant0	2437	15.160	2429.440	2444.600	0.5	PASS
	Ant1	2437	16.000	2428.840	2444.840	0.5	PASS
	Ant0	2462	15.880	2454.080	2469.960	0.5	PASS
	Ant1	2462	15.600	2454.240	2469.840	0.5	PASS
11N20MIMO	Ant0	2412	17.640	2403.200	2420.840	0.5	PASS
	Ant1	2412	17.000	2403.840	2420.840	0.5	PASS
	Ant0	2437	17.480	2428.360	2445.840	0.5	PASS
	Ant1	2437	17.640	2428.200	2445.840	0.5	PASS
	Ant0	2462	17.640	2453.200	2470.840	0.5	PASS
	Ant1	2462	17.680	2453.200	2470.880	0.5	PASS
11N40MIMO	Ant0	2422	35.200	2404.400	2439.600	0.5	PASS
	Ant1	2422	35.200	2404.400	2439.600	0.5	PASS
	Ant0	2437	35.200	2419.480	2454.680	0.5	PASS
	Ant1	2437	35.120	2419.480	2454.600	0.5	PASS
	Ant0	2452	35.280	2434.400	2469.680	0.5	PASS
	Ant1	2452	35.280	2434.400	2469.680	0.5	PASS

11.1.2. Test Graphs




11B_Ant1_2412



11B_Ant2_2412



11B_Ant1_2437

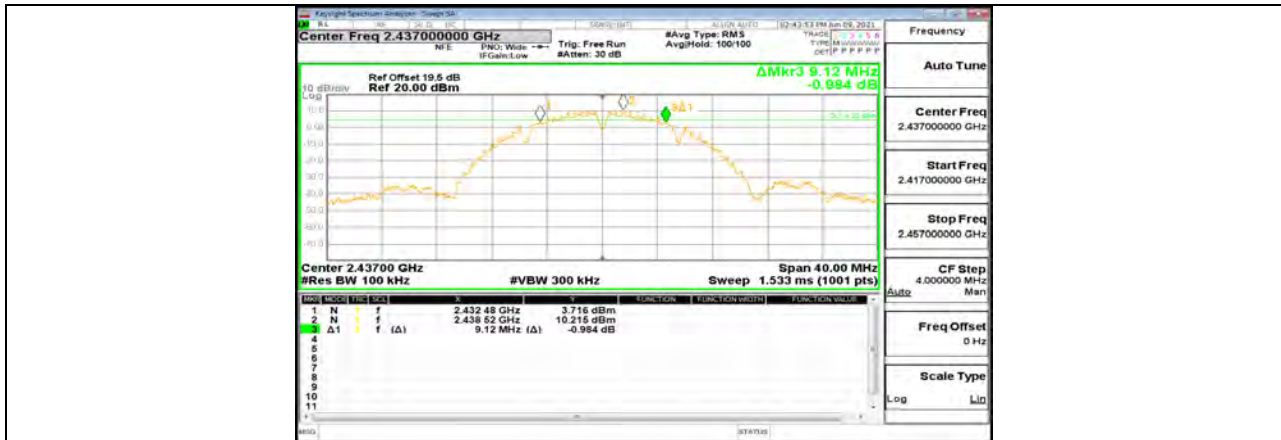


11B_Ant2_2437




11B_Ant1_2462



11B_Ant2_2462

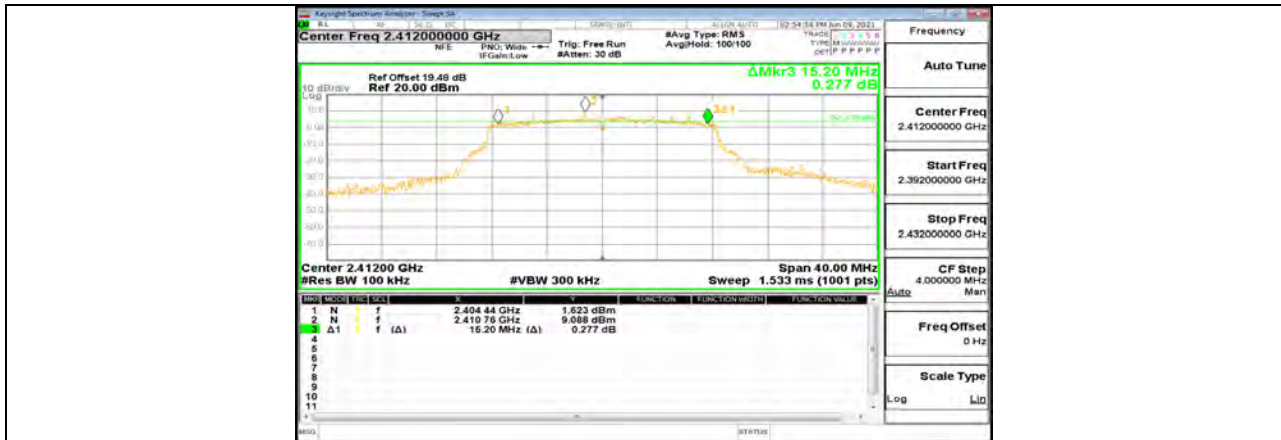


11G_Ant1_2412

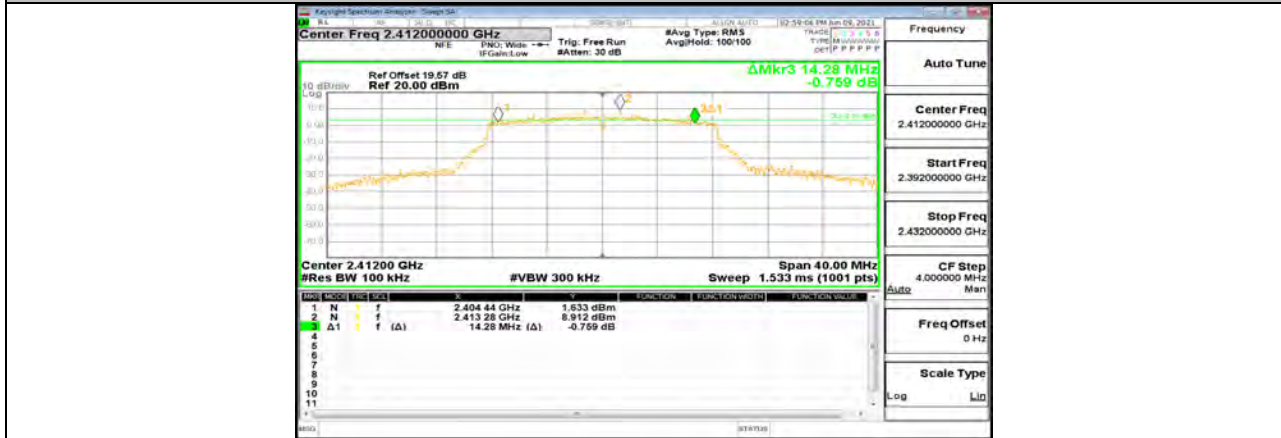

11G_Ant2_2412



11G_Ant1_2437

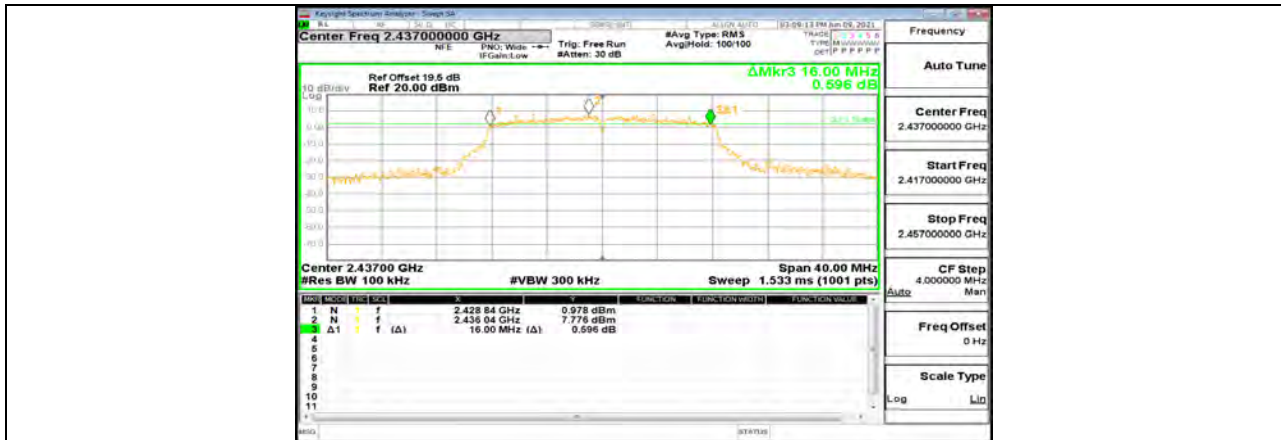

11G_Ant2_2437



11G_Ant1_2462



11G_Ant2_2462




11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412




11N20MIMO_Ant1_2437

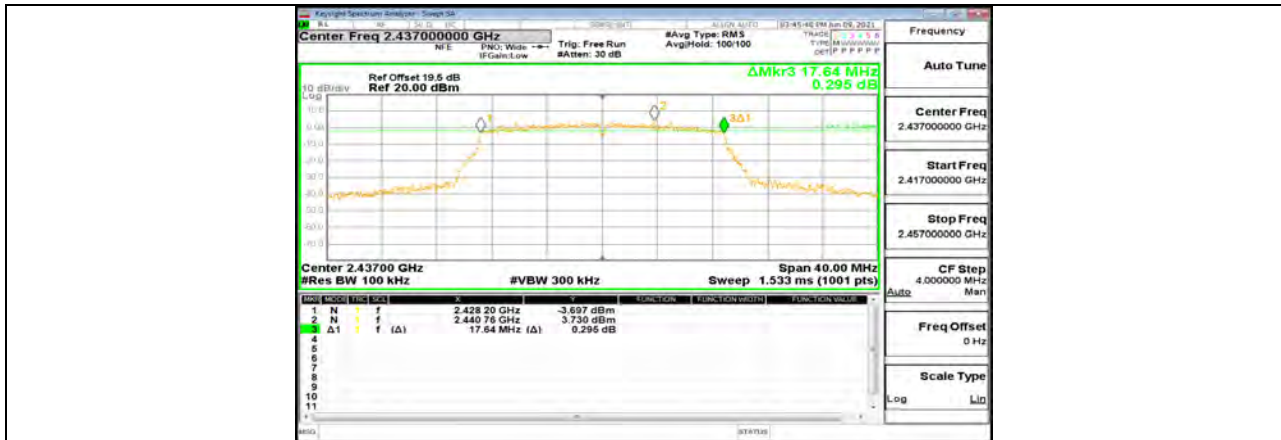


11N20MIMO_Ant2_2437



11N20MIMO_Ant1_2462

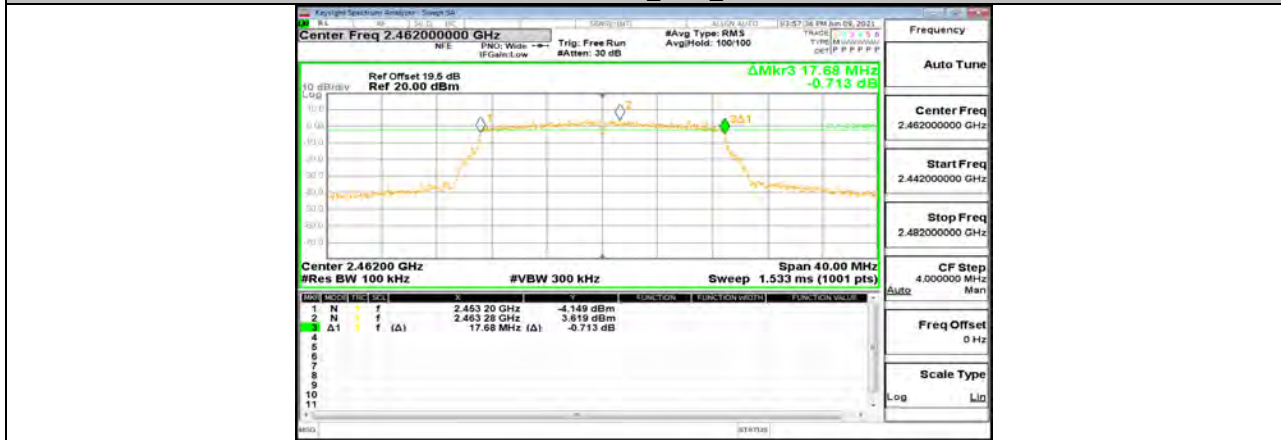


11N20MIMO_Ant2_2462

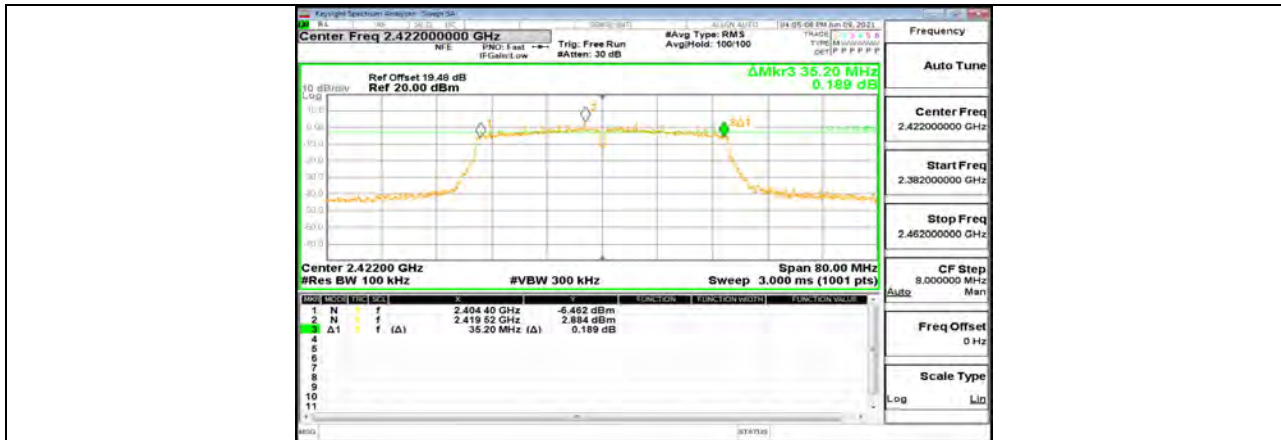


11N40MIMO_Ant1_2422



11N40MIMO_Ant2_2422

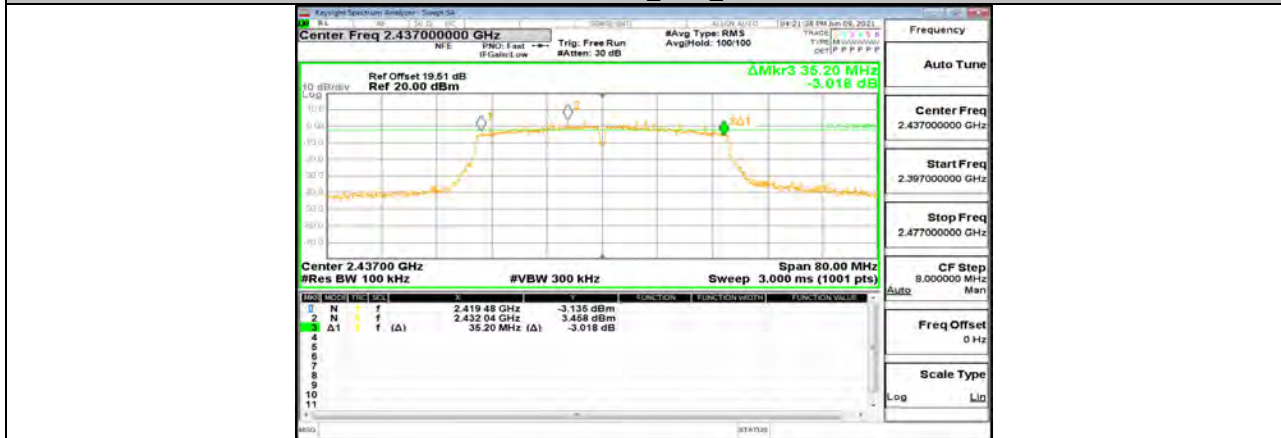


11N40MIMO_Ant1_2437

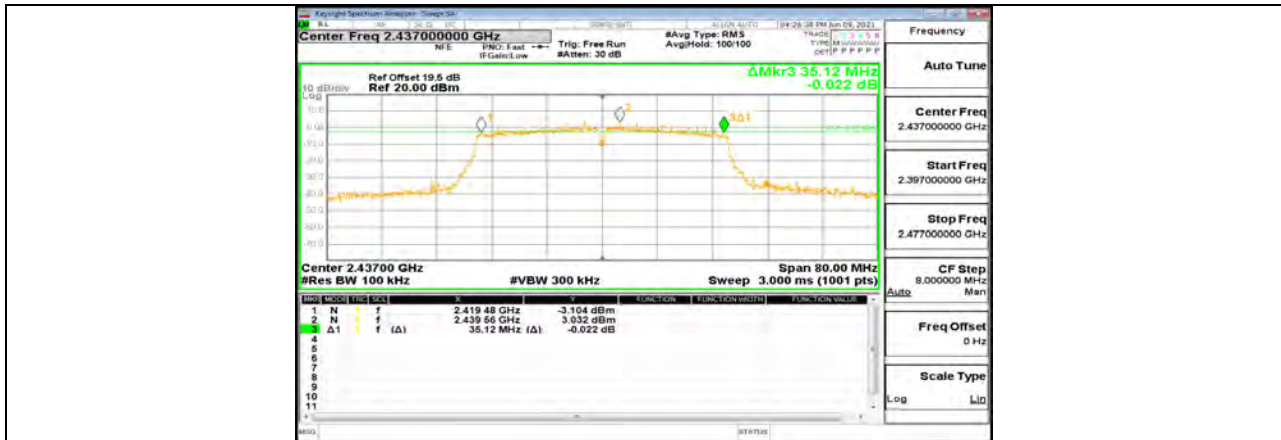

11N40MIMO_Ant2_2437



11N40MIMO_Ant1_2452

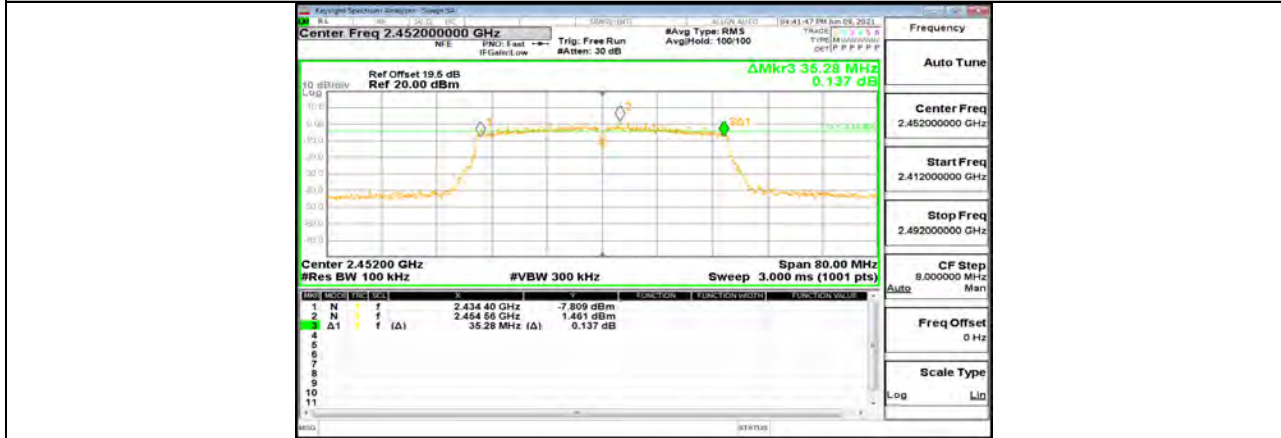

11N40MIMO_Ant2_2452


**11.2. Appendix B: Occupied Channel Bandwidth****11.2.1. Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant0	2412	14.010	2405.047	2419.057	PASS
	Ant1	2412	13.821	2405.133	2418.954	PASS
	Ant0	2437	13.821	2430.161	2443.982	PASS
	Ant1	2437	13.659	2430.213	2443.872	PASS
	Ant0	2462	13.704	2455.184	2468.888	PASS
	Ant1	2462	13.485	2455.310	2468.795	PASS
11G	Ant0	2412	16.869	2403.641	2420.510	PASS
	Ant1	2412	16.888	2403.630	2420.518	PASS
	Ant0	2437	17.004	2428.589	2445.593	PASS
	Ant1	2437	16.968	2428.572	2445.540	PASS
	Ant0	2462	16.806	2453.651	2470.457	PASS
	Ant1	2462	16.900	2453.619	2470.519	PASS
11N20MIMO	Ant0	2412	17.785	2403.152	2420.937	PASS
	Ant1	2412	17.761	2403.181	2420.942	PASS
	Ant0	2437	17.828	2428.143	2445.971	PASS
	Ant1	2437	17.723	2428.171	2445.894	PASS
	Ant0	2462	17.846	2453.145	2470.991	PASS
	Ant1	2462	17.730	2453.185	2470.915	PASS
11N40MIMO	Ant0	2422	36.109	2404.012	2440.121	PASS
	Ant1	2422	36.047	2404.056	2440.103	PASS
	Ant0	2437	35.996	2419.083	2455.079	PASS
	Ant1	2437	36.074	2419.004	2455.078	PASS
	Ant0	2452	36.153	2434.054	2470.207	PASS
	Ant1	2452	36.049	2434.063	2470.112	PASS




11.2.2. Test Graphs




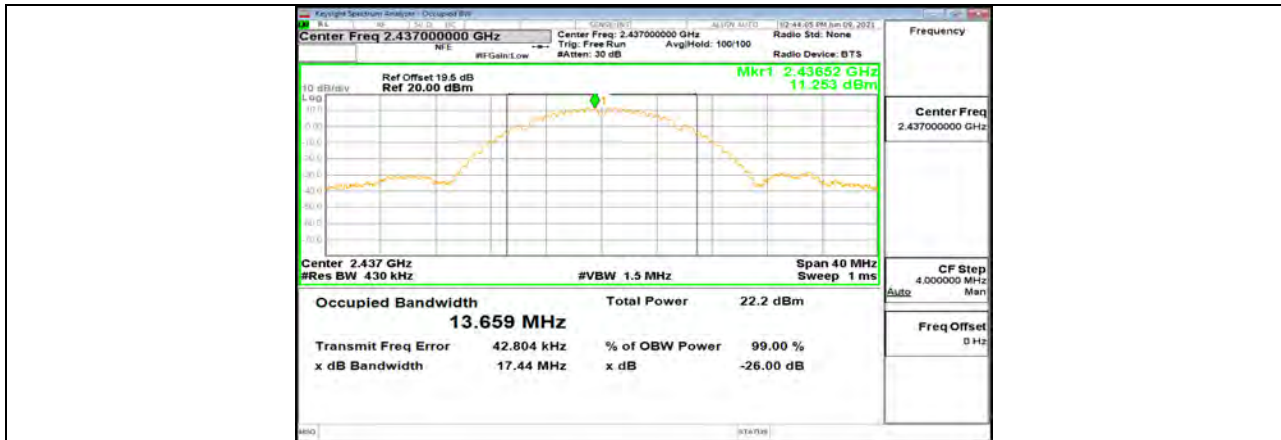


11B_Ant2_2437

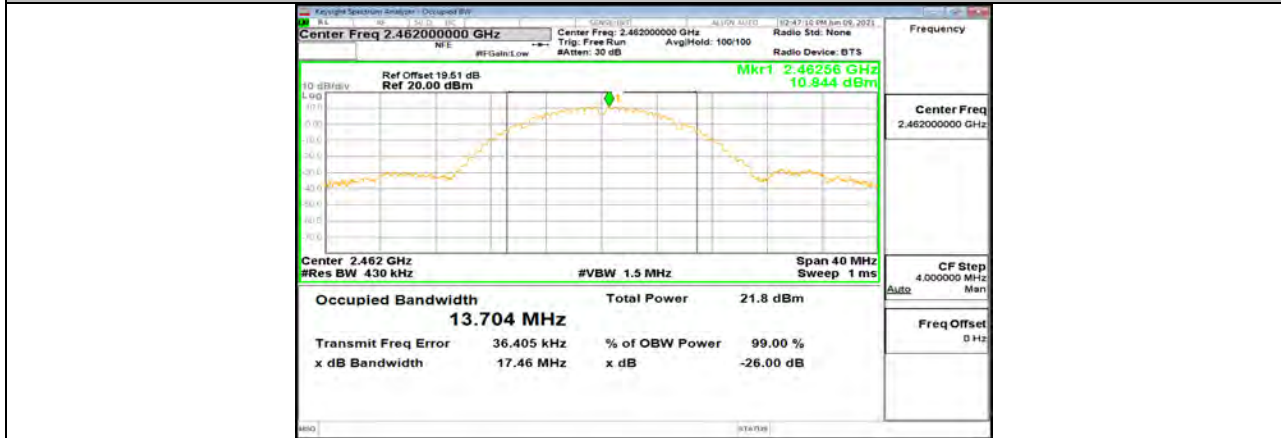


11B_Ant1_2462

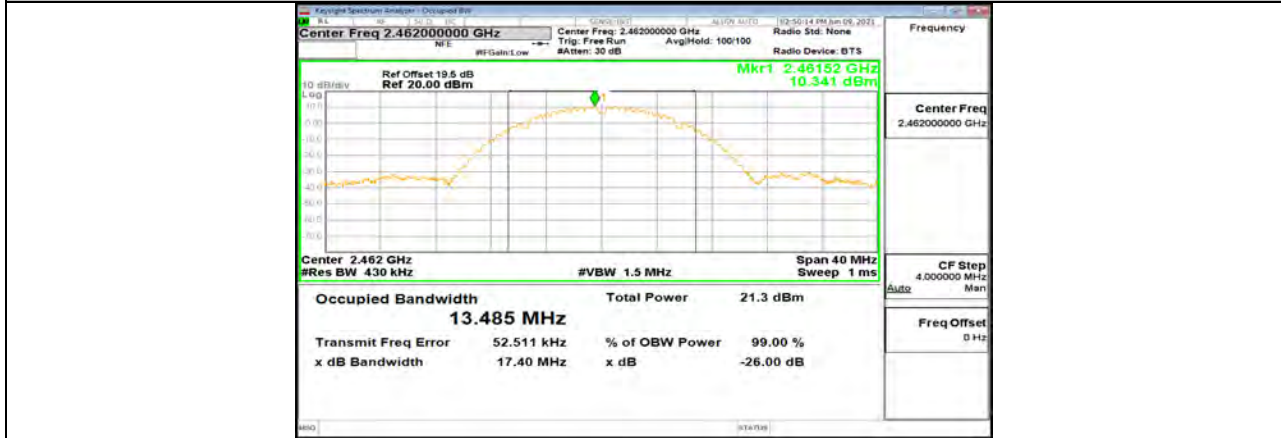


11B_Ant2_2462

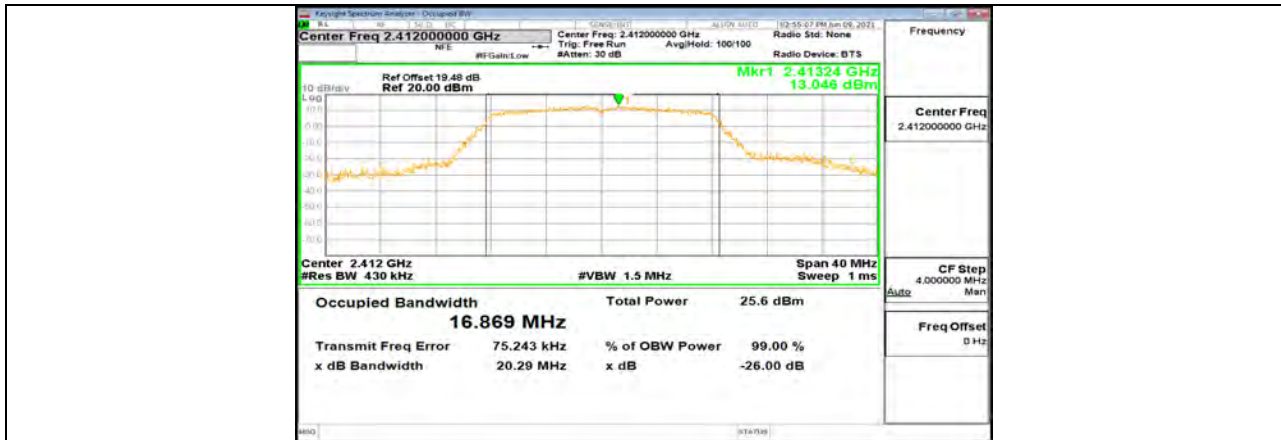


11G_Ant1_2412

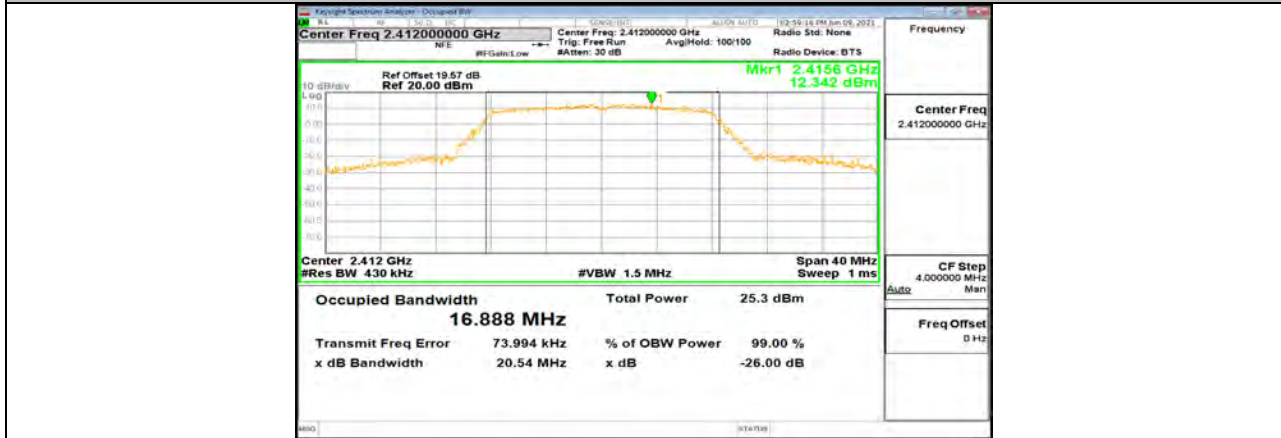


11G_Ant2_2412

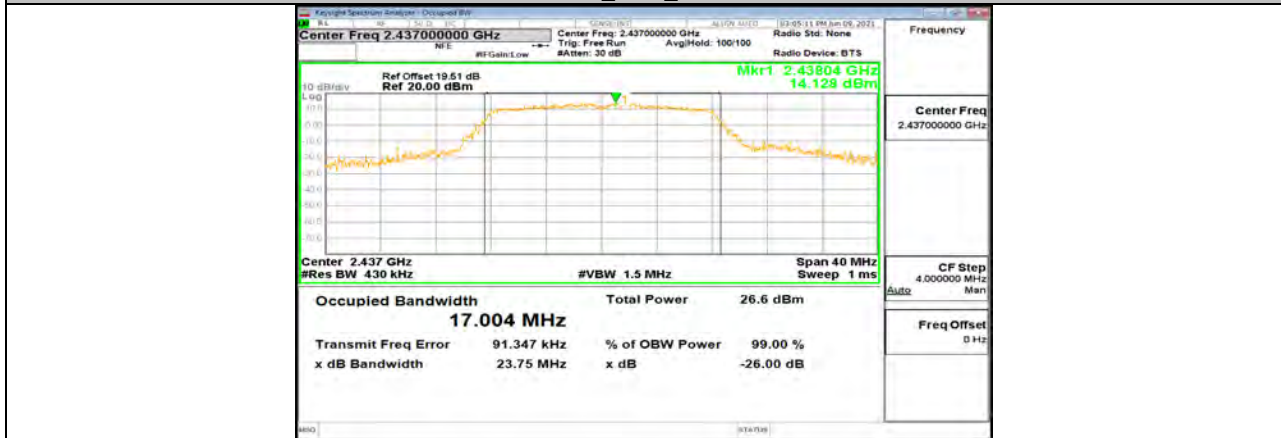


11G_Ant1_2437

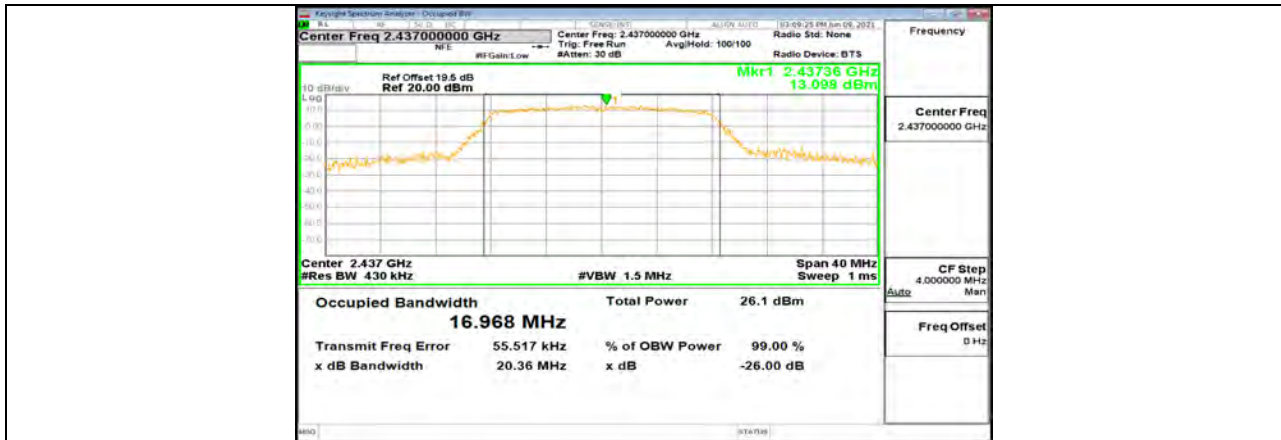


11G_Ant2_2437

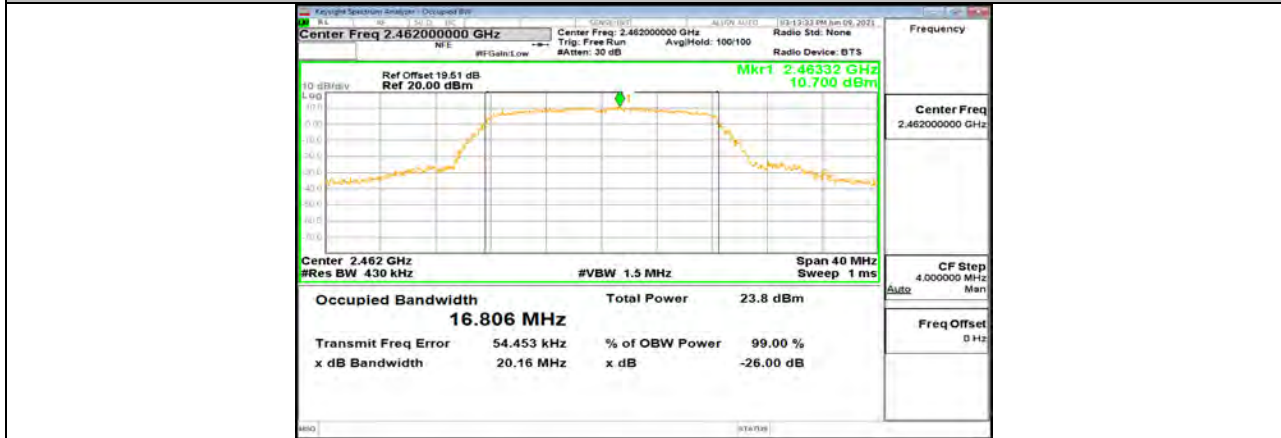


11G_Ant1_2462

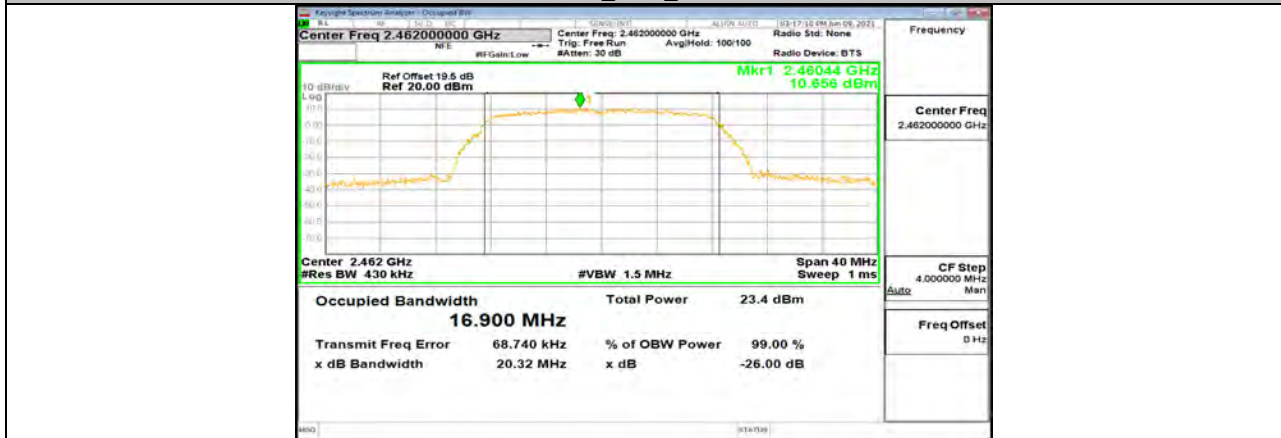


11G_Ant2_2462

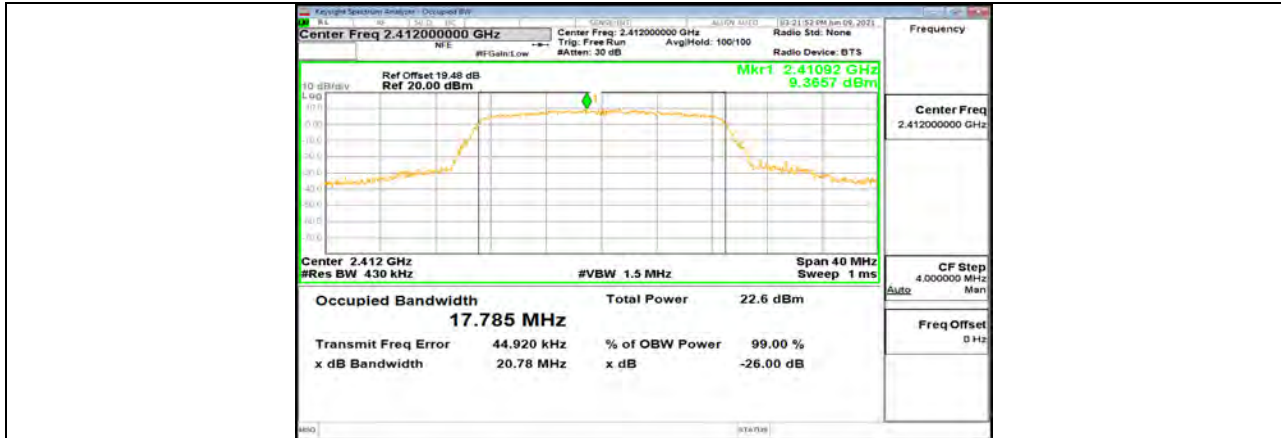


11N20MIMO_Ant1_2412

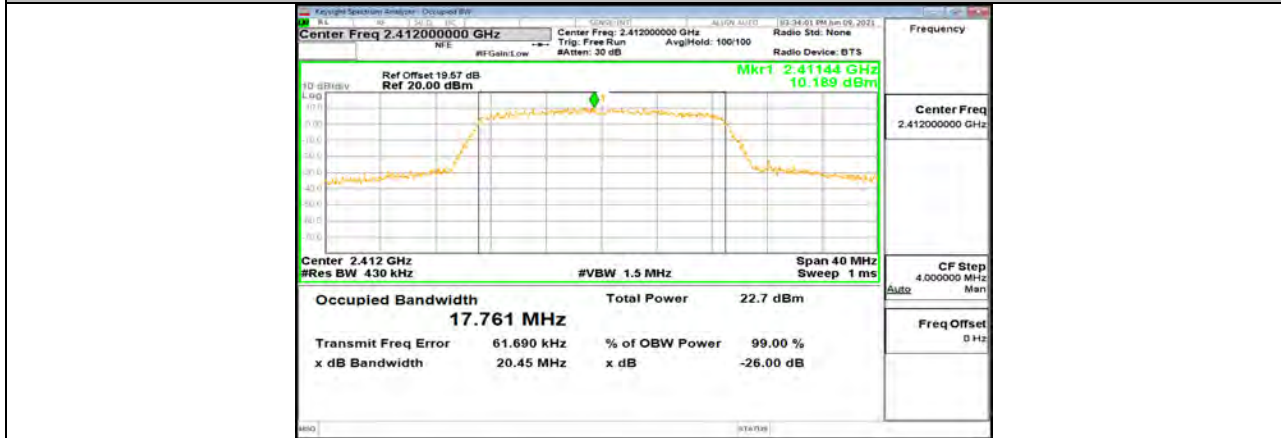


11N20MIMO_Ant2_2412

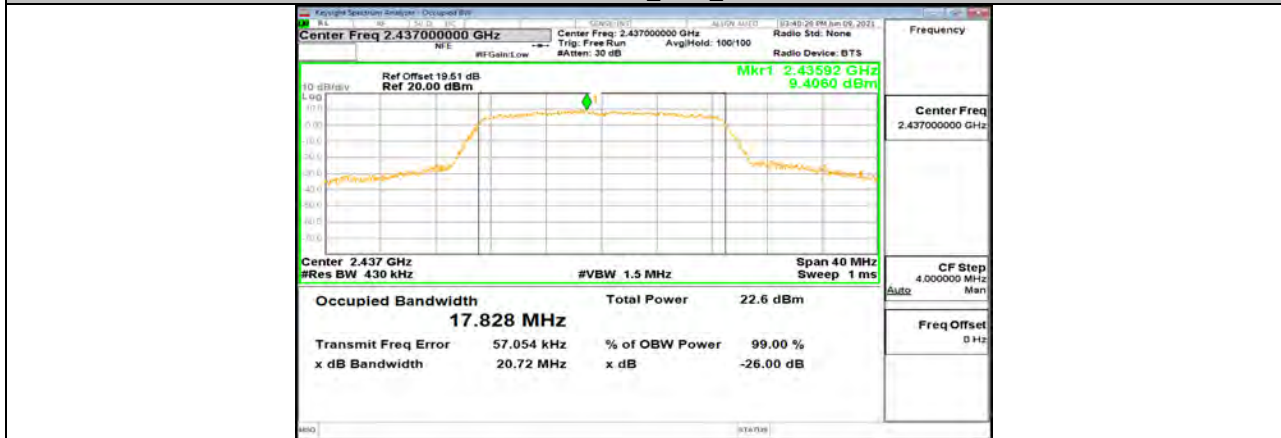


11N20MIMO_Ant1_2437

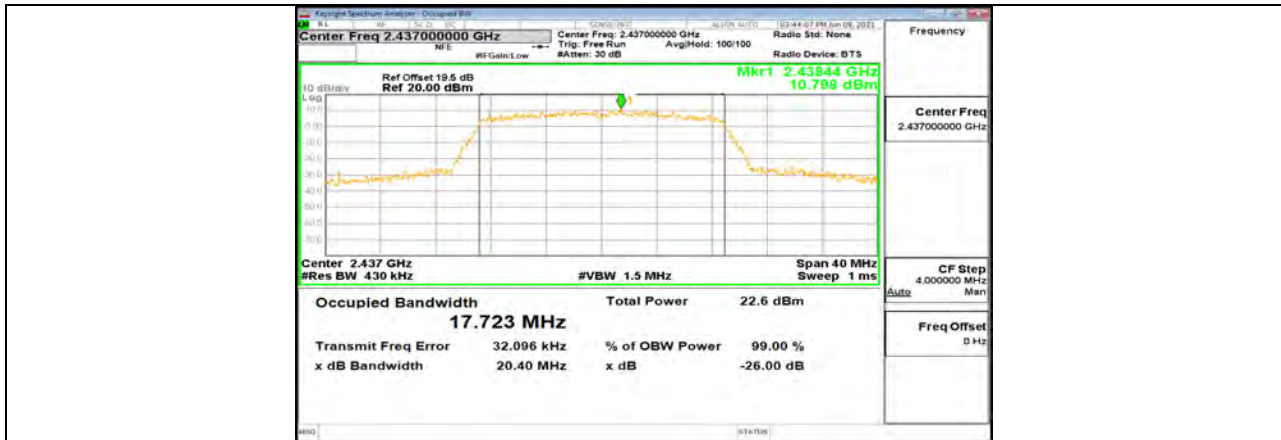


11N20MIMO_Ant2_2437

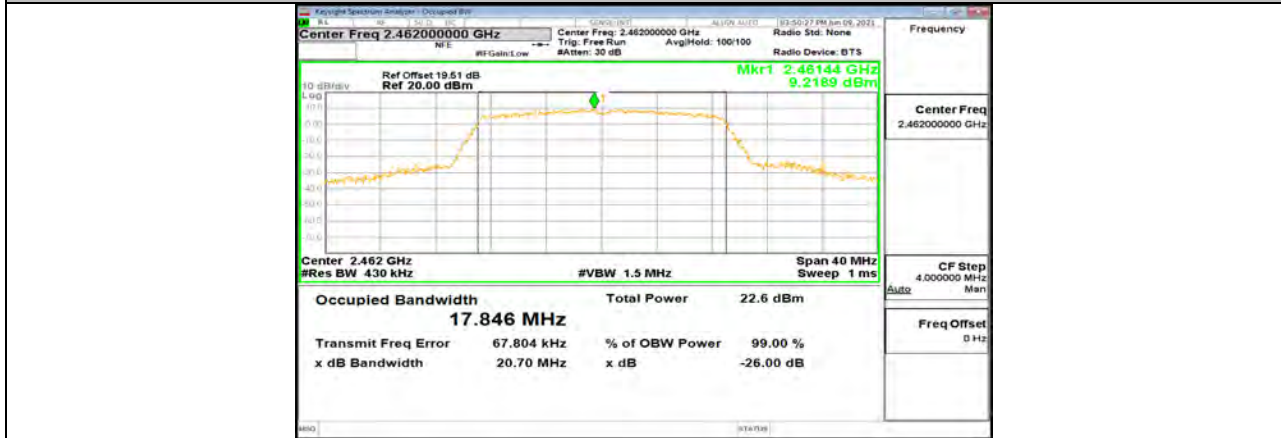


11N20MIMO_Ant1_2462

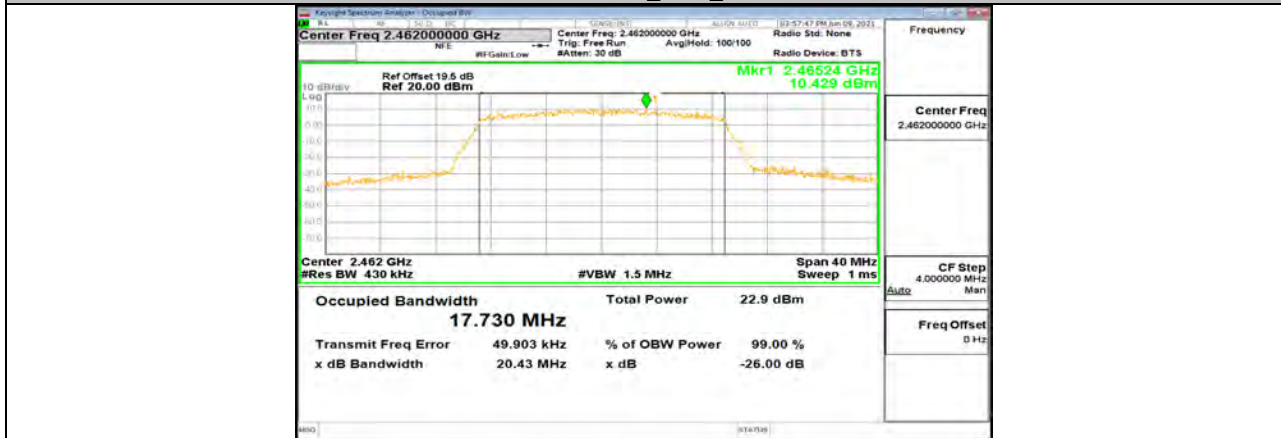


11N20MIMO_Ant2_2462

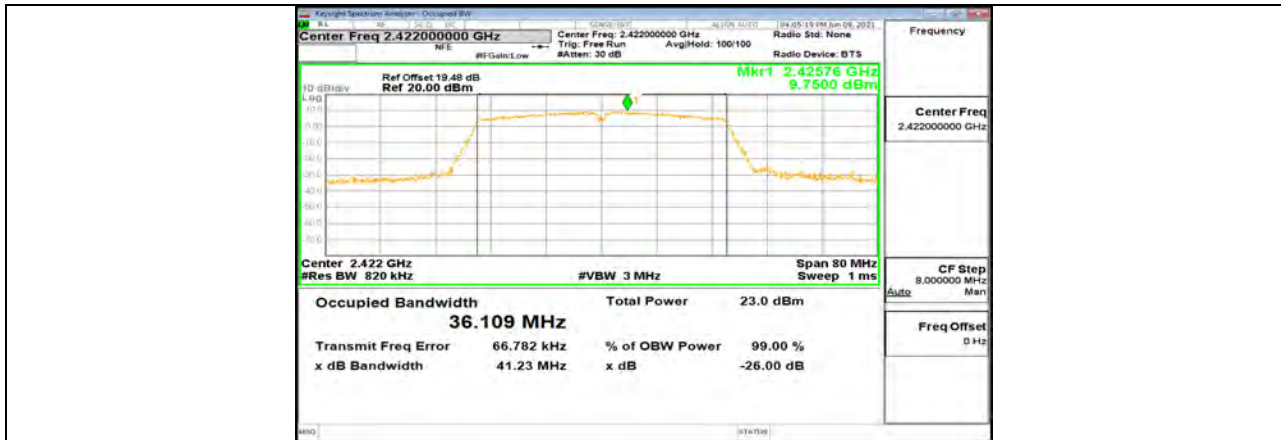


11N40MIMO_Ant1_2422

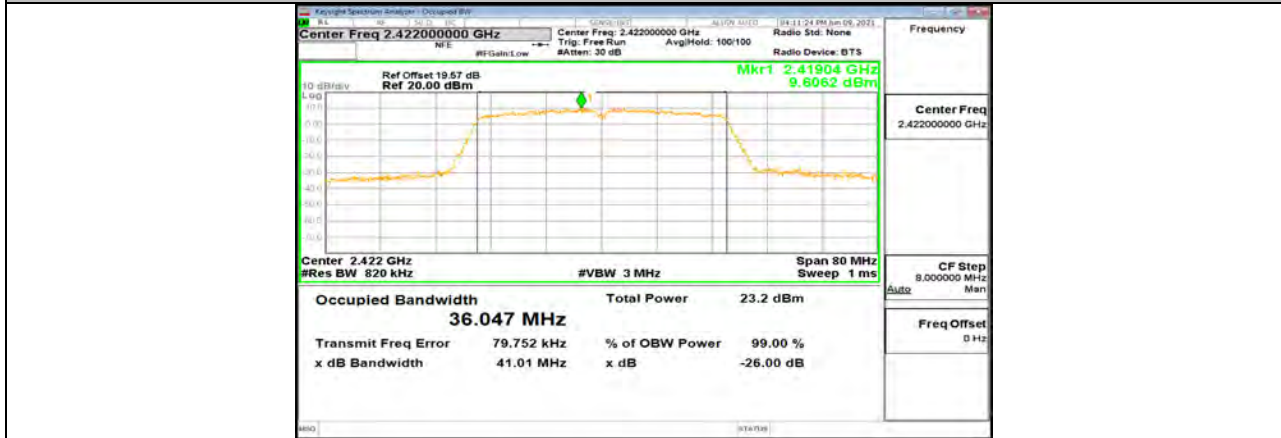


11N40MIMO_Ant2_2422

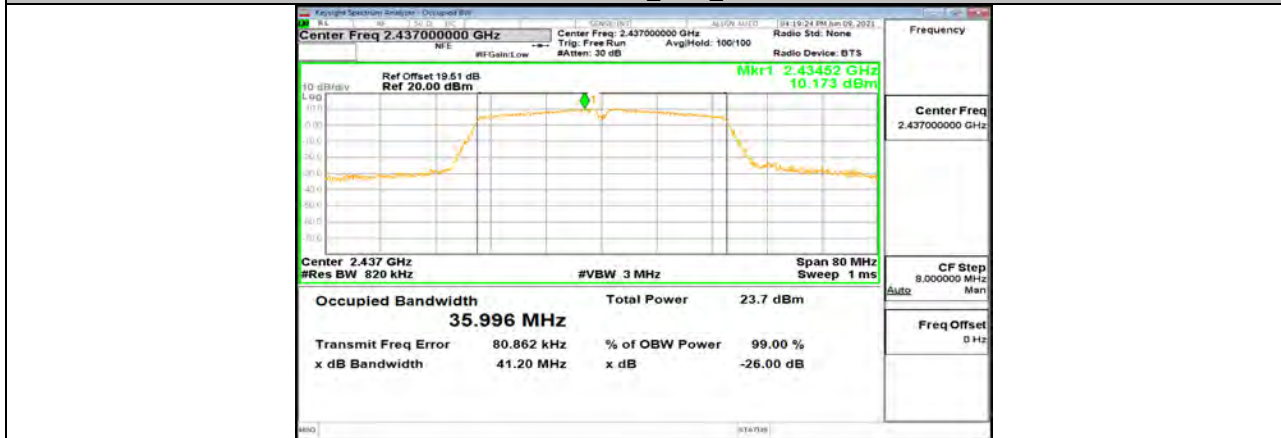


11N40MIMO_Ant1_2437

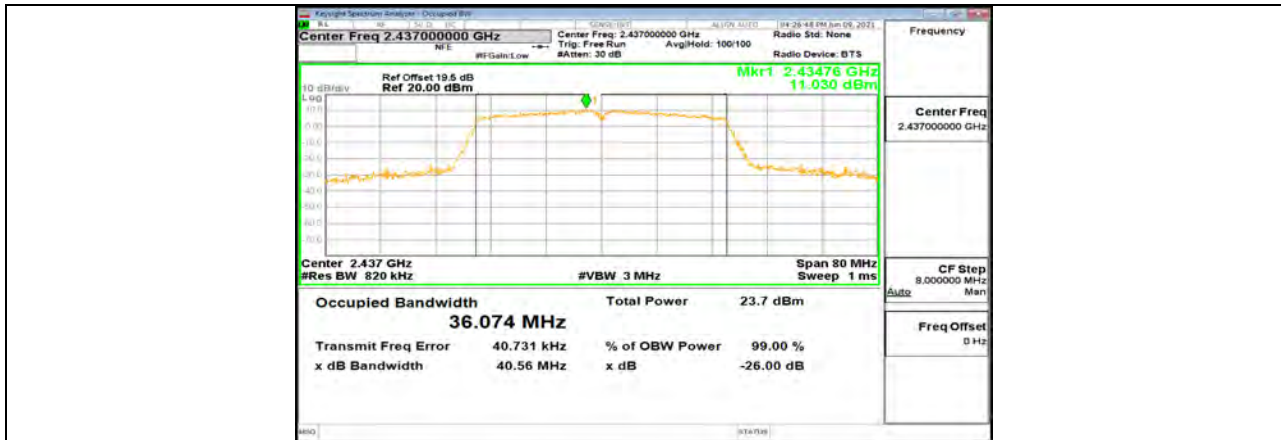

11N40MIMO_Ant2_2437

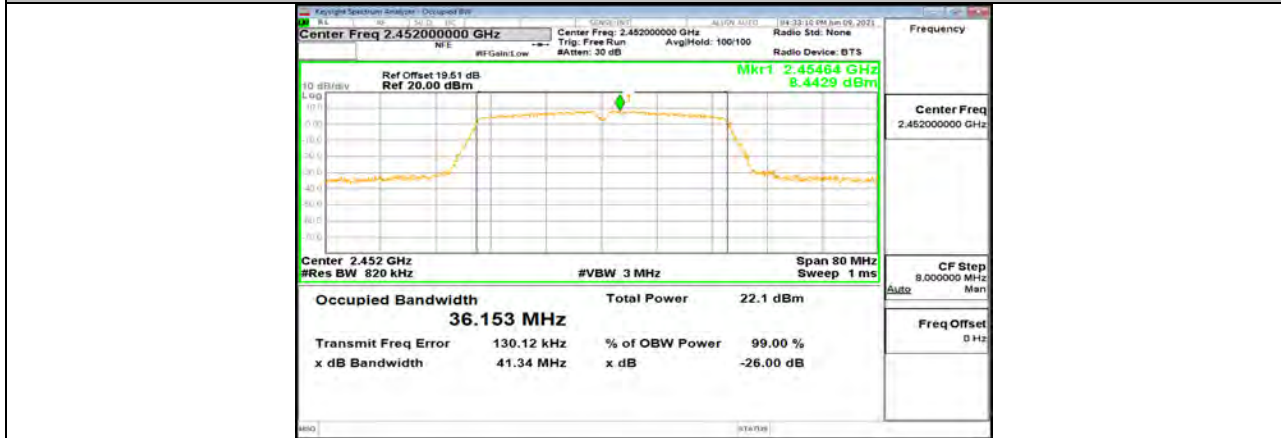

11N40MIMO_Ant1_2452

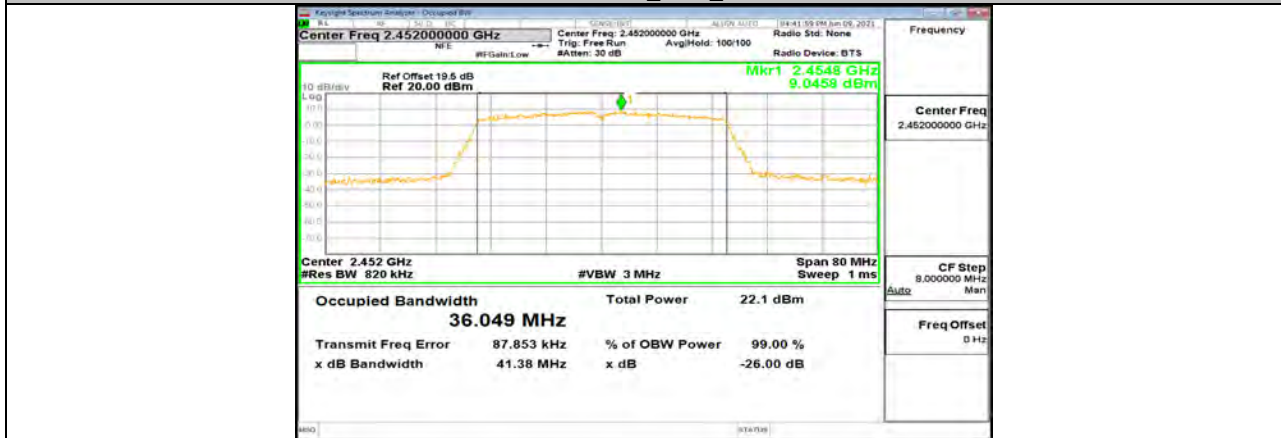

11N40MIMO_Ant2_2452



11.3. Appendix C: Maximum Average Conducted Output Power
11.3.1. Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant0	2412	20.03	<=30	PASS
	Ant1	2412	20.50	<=30	PASS
	Ant0	2437	19.97	<=30	PASS
	Ant1	2437	19.42	<=30	PASS
	Ant0	2462	18.83	<=30	PASS
	Ant1	2462	18.58	<=30	PASS
11G	Ant0	2412	19.39	<=30	PASS
	Ant1	2412	19.15	<=30	PASS
	Ant0	2437	18.49	<=30	PASS
	Ant1	2437	18.09	<=30	PASS
	Ant0	2462	17.75	<=30	PASS
	Ant1	2462	17.53	<=30	PASS
11N20MIMO	Ant0	2412	16.48	<=30	PASS
	Ant1	2412	16.13	<=30	PASS
	total	2412	19.32	<=30	PASS
	Ant0	2437	16.48	<=30	PASS
	Ant1	2437	16.04	<=30	PASS
	total	2437	19.28	<=30	PASS
	Ant0	2462	16.56	<=30	PASS
	Ant1	2462	16.22	<=30	PASS
total	2462	19.40	<=30	PASS	
11N40MIMO	Ant0	2422	16.09	<=30	PASS
	Ant1	2422	15.81	<=30	PASS
	total	2422	18.96	<=30	PASS
	Ant0	2437	16.64	<=30	PASS
	Ant1	2437	16.31	<=30	PASS
	total	2437	19.49	<=30	PASS
	Ant0	2452	15.23	<=30	PASS
	Ant1	2452	14.79	<=30	PASS
total	2452	18.03	<=30	PASS	

Note: 1. Conducted Power=Meas. Level+ Correction Factor
2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.



11.3.2. Spot Check Test Result


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant0	2412	19.56	<=30	PASS
	Ant1	2412	20.44	<=30	PASS
11G	Ant0	2412	19.41	<=30	PASS
	Ant1	2412	19.22	<=30	PASS
11N20MIMO	Ant0	2462	16.37	<=30	PASS
	Ant1	2462	16.15	<=30	PASS
	total	2462	19.27	<=30	PASS
11N40MIMO	Ant0	2437	16.55	<=30	PASS
	Ant1	2437	16.36	<=30	PASS
	total	2437	19.47	<=30	PASS




11.4. Appendix D: Maximum Power Spectral Density
11.4.1. Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant0	2412	-1.67	<=8	PASS
	Ant1	2412	-0.58	<=8	PASS
	Ant0	2437	-0.64	<=8	PASS
	Ant1	2437	-2.23	<=8	PASS
	Ant0	2462	-3.45	<=8	PASS
	Ant1	2462	-3.64	<=8	PASS
11G	Ant0	2412	-4.67	<=8	PASS
	Ant1	2412	-4.26	<=8	PASS
	Ant0	2437	-5.52	<=8	PASS
	Ant1	2437	-6.26	<=8	PASS
	Ant0	2462	-5.27	<=8	PASS
	Ant1	2462	-5.91	<=8	PASS
11N20MIMO	Ant0	2412	-7.41	<=8	PASS
	Ant1	2412	-7.55	<=8	PASS
	total	2412	-4.47	<=8	PASS
	Ant0	2437	-7.51	<=8	PASS
	Ant1	2437	-7.83	<=8	PASS
	total	2437	-4.66	<=8	PASS
	Ant0	2462	-7.22	<=8	PASS
	Ant1	2462	-7.9	<=8	PASS
	total	2462	-4.54	<=8	PASS
11N40MIMO	Ant0	2422	-10.88	<=8	PASS
	Ant1	2422	-11.53	<=8	PASS
	total	2422	-8.18	<=8	PASS
	Ant0	2437	-10.18	<=8	PASS
	Ant1	2437	-8.28	<=8	PASS
	total	2437	-6.12	<=8	PASS
	Ant0	2452	-11.71	<=8	PASS
	Ant1	2452	-12	<=8	PASS
	total	2452	-8.84	<=8	PASS

11.4.2. Test Graphs

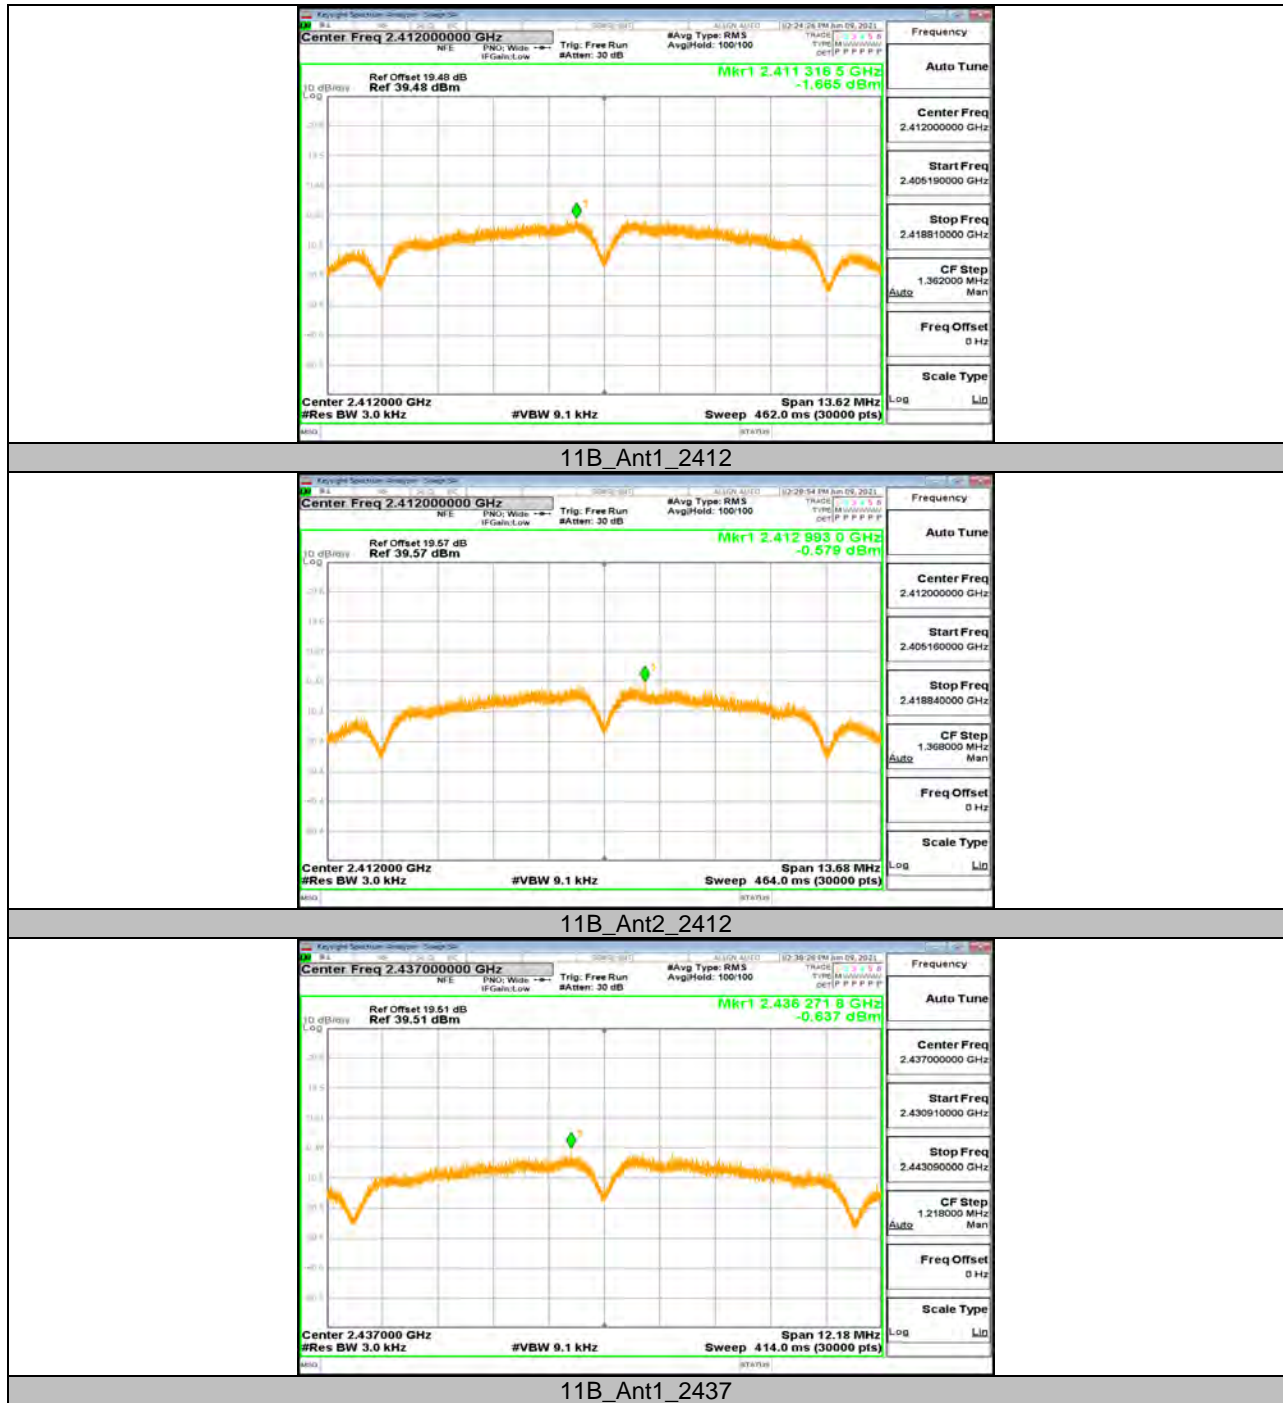

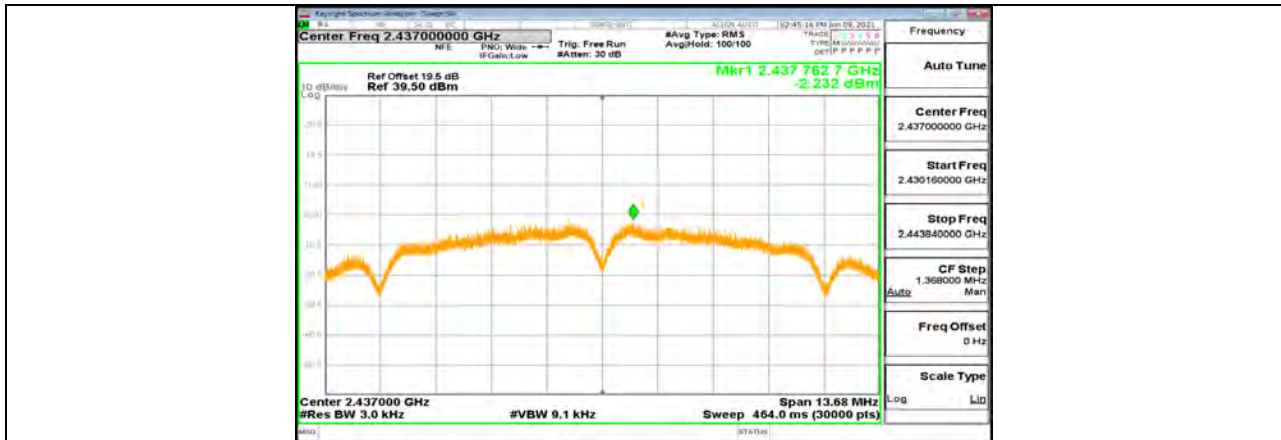

11B_Ant2_2437



11B_Ant1_2462




11B_Ant2_2462




11G_Ant1_2412




11G_Ant2_2412

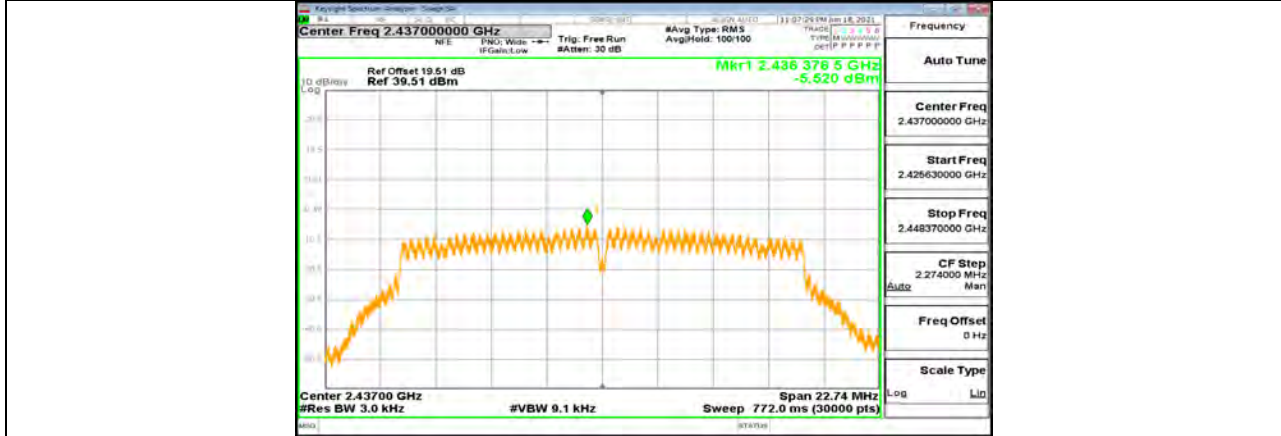

11G_Ant1_2437

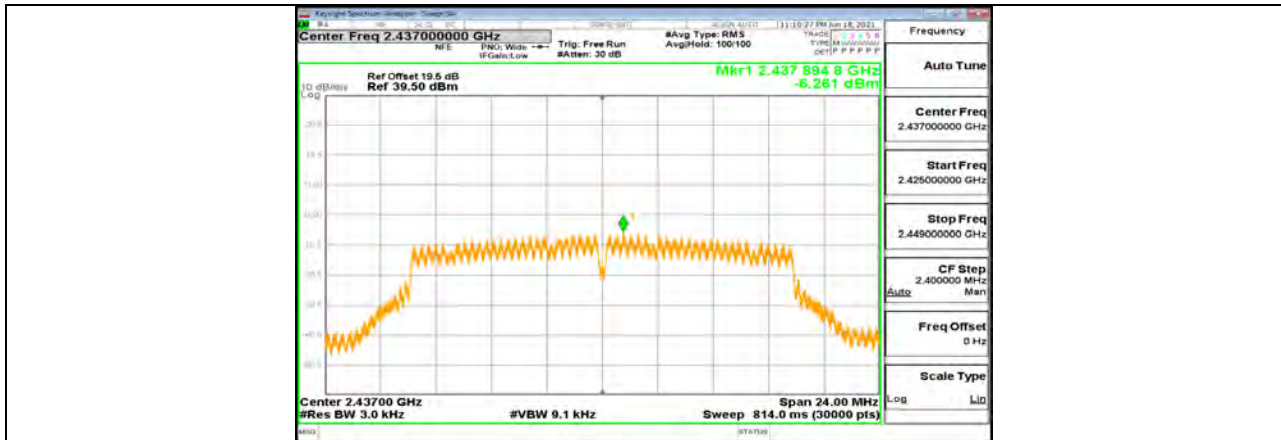


11G_Ant2_2437

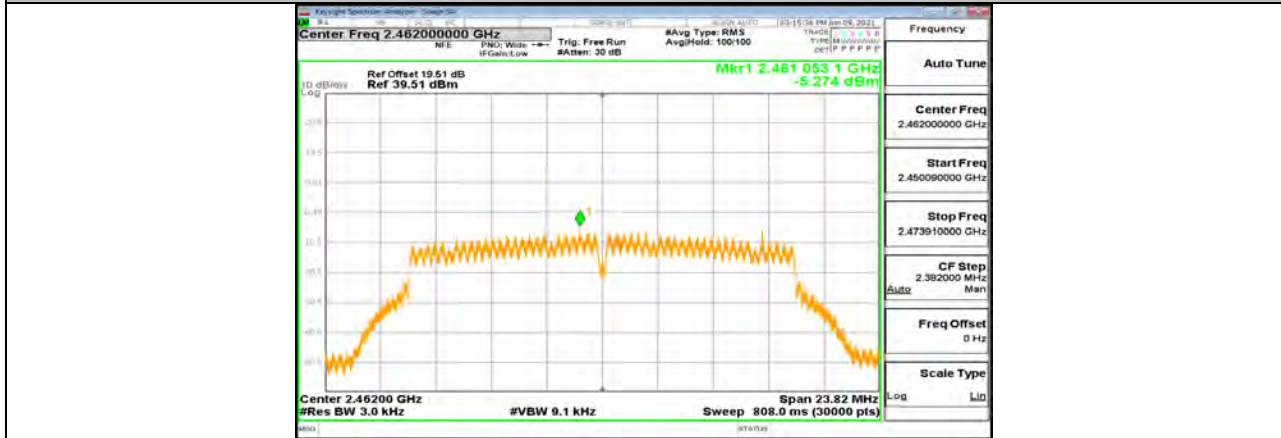

11G_Ant1_2462




11G_Ant2_2462

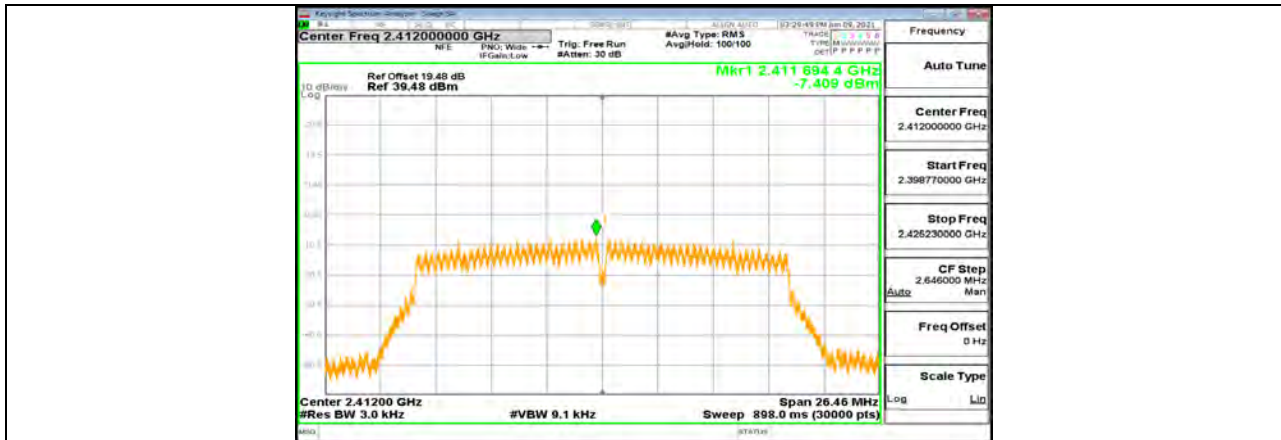


11N20MIMO_Ant1_2412




11N20MIMO_Ant2_2412

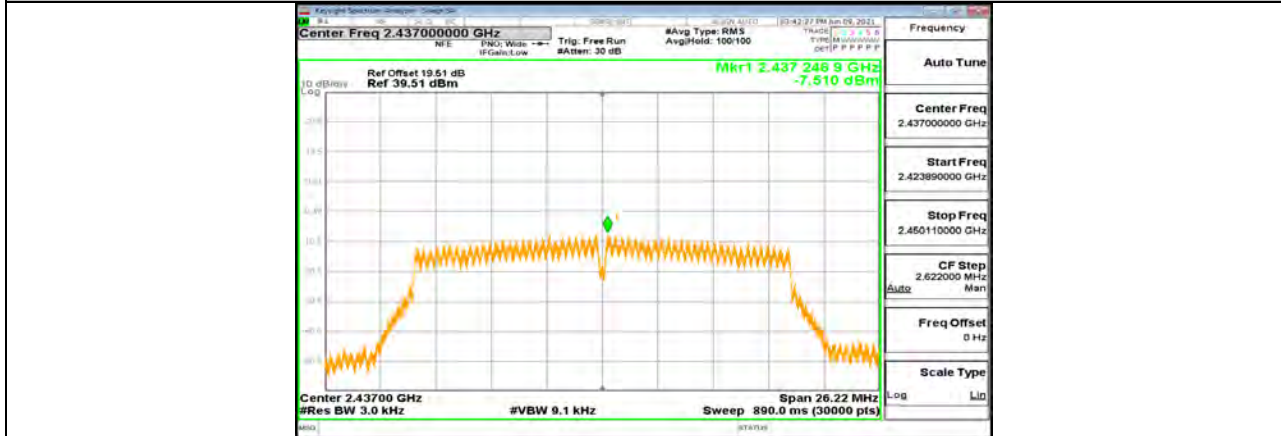


11N20MIMO_Ant1_2437

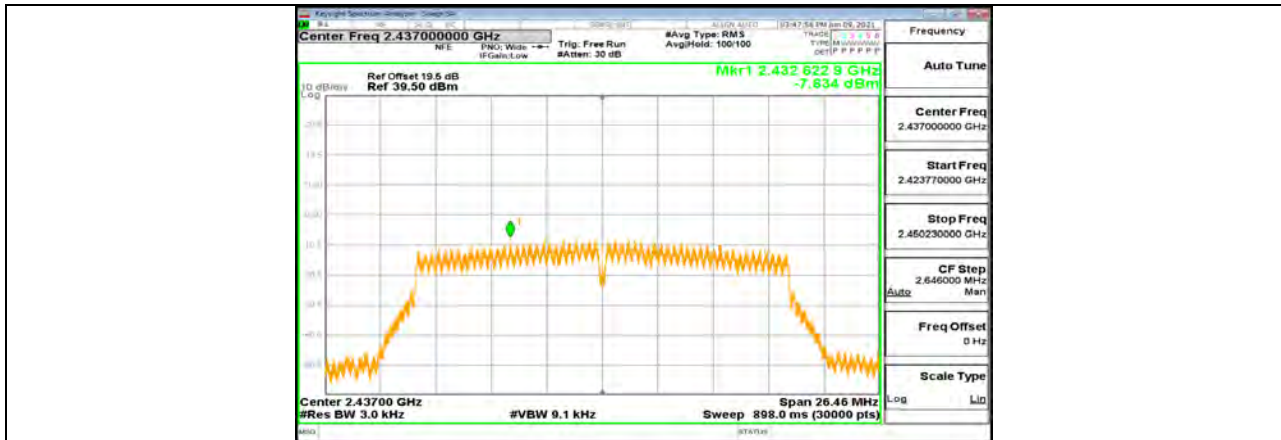


11N20MIMO_Ant2_2437

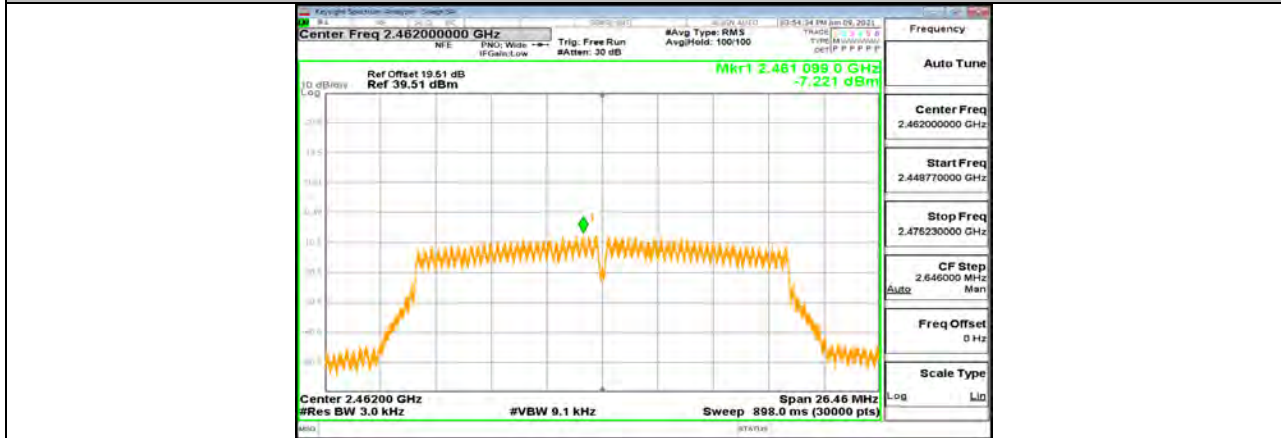


11N20MIMO_Ant1_2462

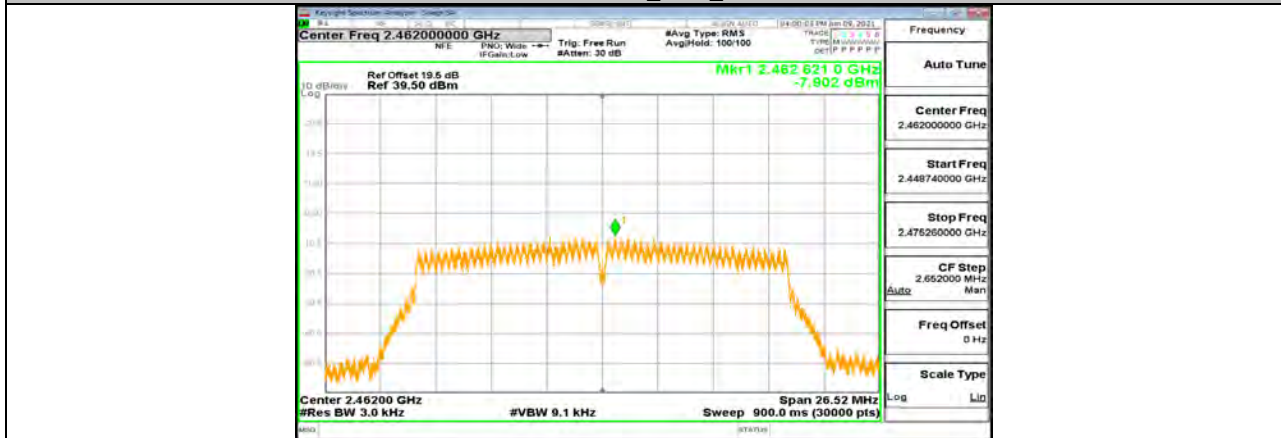

11N20MIMO_Ant2_2462

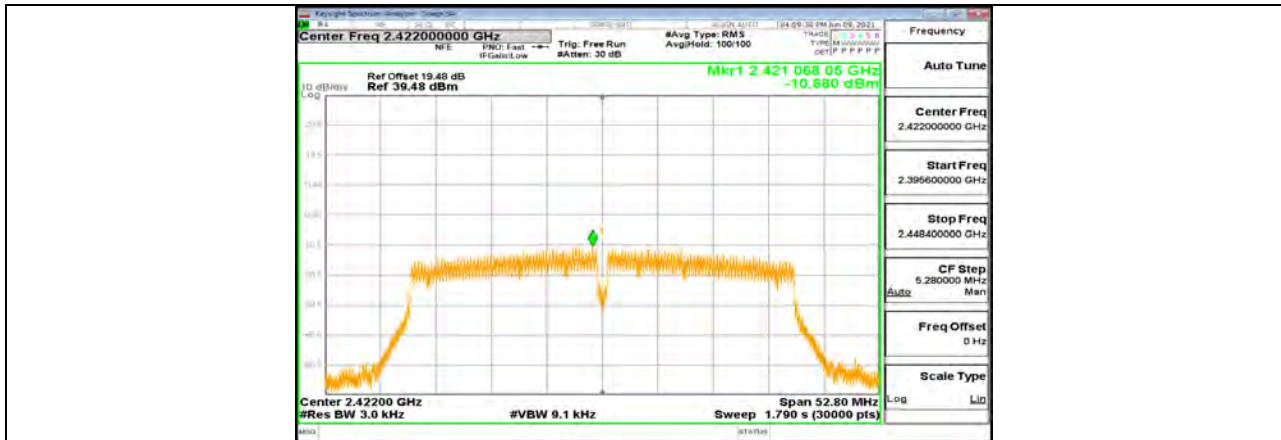


11N40MIMO_Ant1_2422

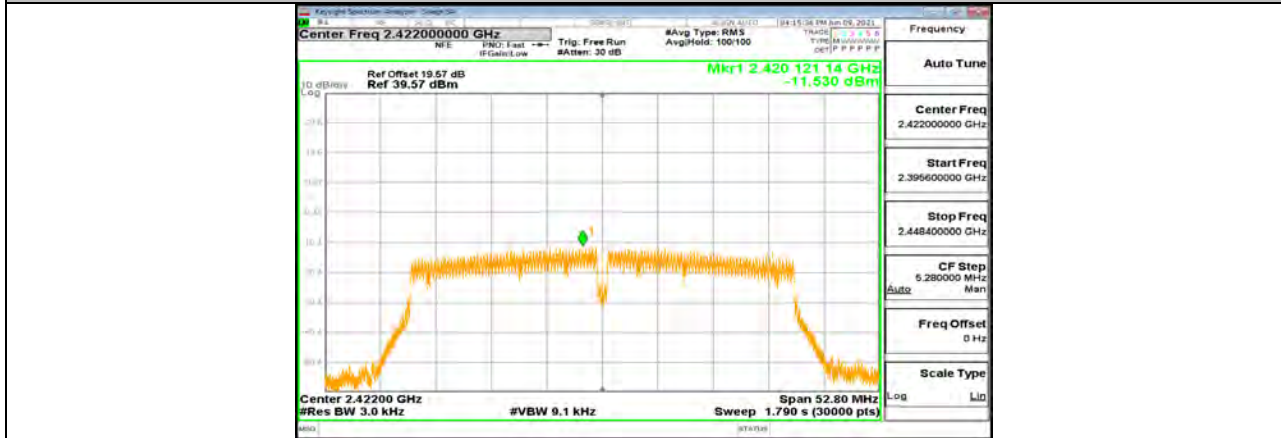

11N40MIMO_Ant2_2422



11N40MIMO_Ant1_2437

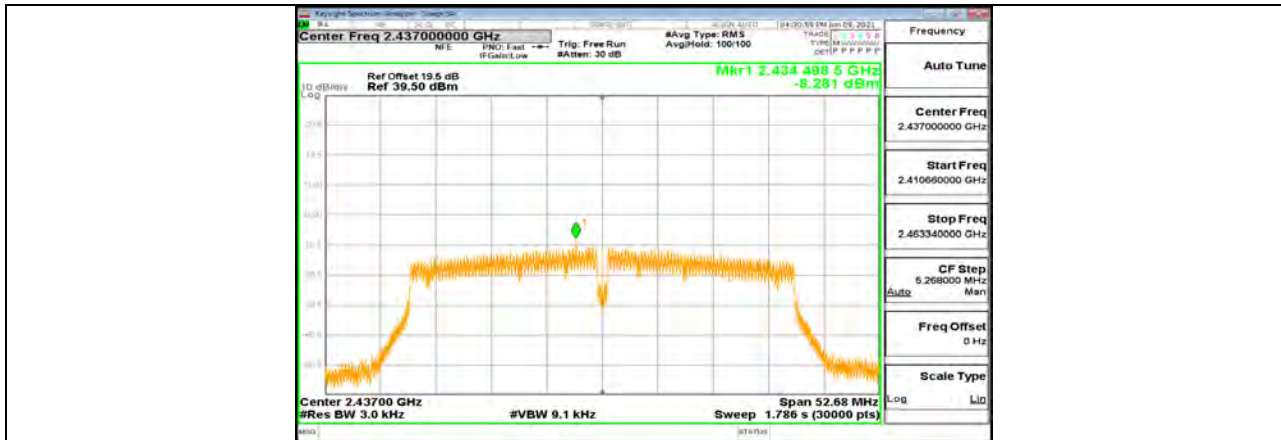

11N40MIMO_Ant2_2437



11N40MIMO_Ant1_2452



11N40MIMO_Ant2_2452



11.5. Appendix E: Band edge measurements

11.5.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant0	Low	2412	12.72	-27.67	<=-17.28	PASS
	Ant1	Low	2412	12.12	-29.79	<=-17.88	PASS
	Ant0	High	2462	10.17	-40.48	<=-19.83	PASS
	Ant1	High	2462	10.15	-40.77	<=-19.86	PASS
11G	Ant0	Low	2412	9.12	-28.19	<=-20.88	PASS
	Ant1	Low	2412	8.80	-25.92	<=-21.2	PASS
	Ant0	High	2462	7.28	-40.23	<=-22.72	PASS
	Ant1	High	2462	6.97	-40.81	<=-23.04	PASS
11N20MIMO	Ant0	Low	2412	6.00	-33.16	<=-24	PASS
	Ant1	Low	2412	5.78	-34.44	<=-24.22	PASS
	Ant0	High	2462	6.41	-40.59	<=-23.59	PASS
	Ant1	High	2462	5.96	-39.4	<=-24.05	PASS
11N40MIMO	Ant0	Low	2422	2.99	-36.57	<=-27.01	PASS
	Ant1	Low	2422	2.64	-36.23	<=-27.36	PASS
	Ant0	High	2452	2.15	-39.9	<=-27.85	PASS
	Ant1	High	2452	1.88	-40.31	<=-28.12	PASS

11.5.2. Test Graphs



11B_Ant1_Low_2412



11B_Ant2_Low_2412



11B_Ant1_High_2462



11B_Ant2_High_2462



11G_Ant1_Low_2412



11G_Ant2_Low_2412




11G_Ant1_High_2462



11G_Ant2_High_2462



11N20MIMO_Ant1_Low_2412

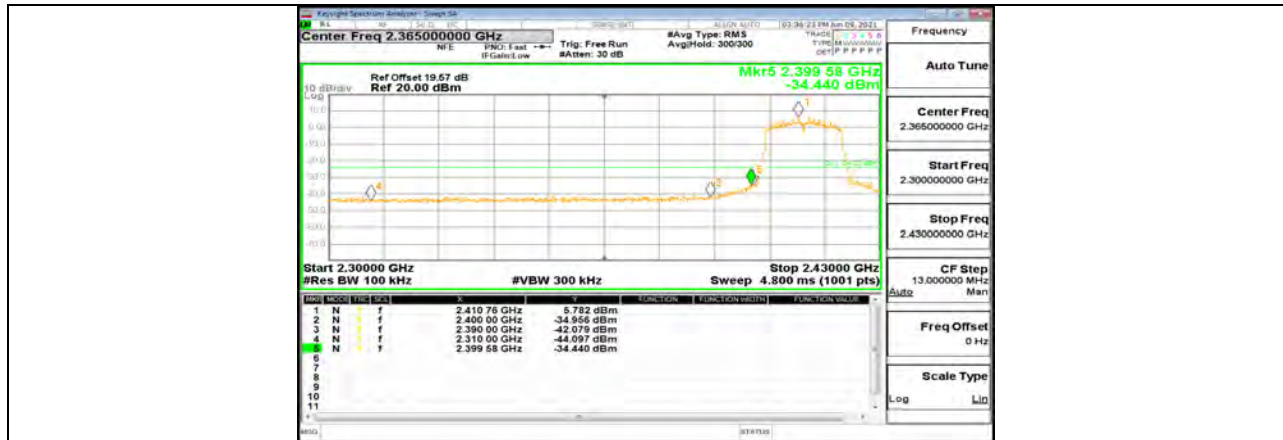

11N20MIMO_Ant2_Low_2412




11N20MIMO_Ant1_High_2462



11N20MIMO_Ant2_High_2462



11N40MIMO_Ant1_Low_2422

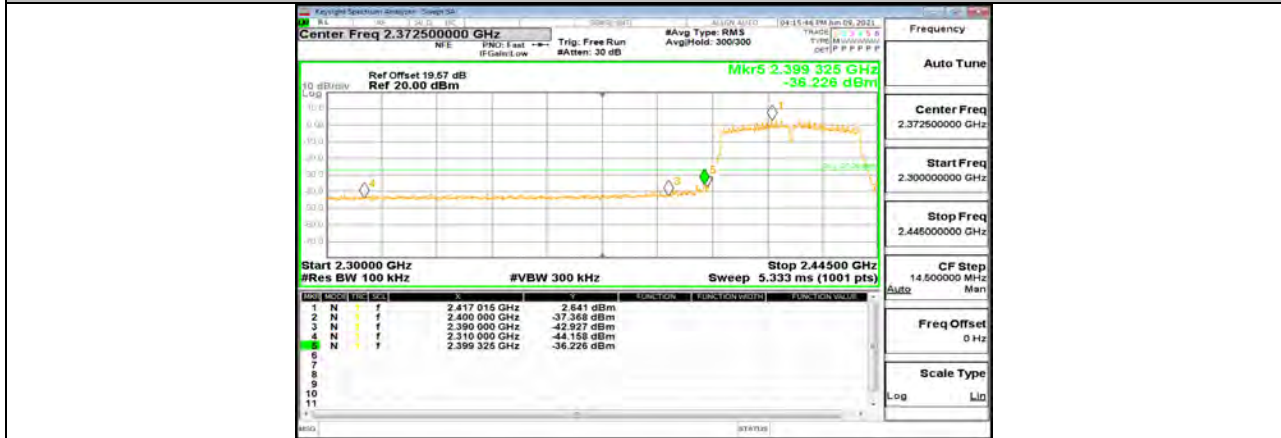

11N40MIMO_Ant2_Low_2422



11N40MIMO_Ant1_High_2452



11N40MIMO_Ant2_High_2452

**11.6. Appendix F: Conducted Spurious Emission****11.6.1. Test Result**

Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant0	2412	Reference	11.27	---	PASS
			30~1000	-52.82	<=-18.73	PASS
			1000~26500	-43.57	<=-18.73	PASS
	Ant1	2412	Reference	11.97	---	PASS
			30~1000	-53.25	<=-18.03	PASS
			1000~26500	-44.59	<=-18.03	PASS
	Ant0	2437	Reference	11.53	---	PASS
			30~1000	-53.37	<=-18.47	PASS
			1000~26500	-44.62	<=-18.47	PASS
	Ant1	2437	Reference	10.38	---	PASS
			30~1000	-53.32	<=-19.62	PASS
			1000~26500	-44.74	<=-19.62	PASS
	Ant0	2462	Reference	10.17	---	PASS
			30~1000	-53.54	<=-19.83	PASS
			1000~26500	-44.42	<=-19.83	PASS
	Ant1	2462	Reference	10.23	---	PASS
			30~1000	-53.64	<=-19.77	PASS
			1000~26500	-43.79	<=-19.77	PASS
11G	Ant0	2412	Reference	9.05	---	PASS
			30~1000	-53.35	<=-20.96	PASS
			1000~26500	-43.66	<=-20.96	PASS
	Ant1	2412	Reference	7.51	---	PASS
			30~1000	-53.14	<=-22.49	PASS
			1000~26500	-44.44	<=-22.49	PASS
	Ant0	2437	Reference	10.25	---	PASS
			30~1000	-52.16	<=-19.75	PASS
			1000~26500	-44.48	<=-19.75	PASS
	Ant1	2437	Reference	9.12	---	PASS
			30~1000	-53.22	<=-20.88	PASS
			1000~26500	-43.92	<=-20.88	PASS
	Ant0	2462	Reference	5.75	---	PASS
			30~1000	-53.11	<=-24.26	PASS
			1000~26500	-44.69	<=-24.26	PASS
	Ant1	2462	Reference	6.92	---	PASS
			30~1000	-53.6	<=-23.08	PASS
			1000~26500	-44.72	<=-23.08	PASS
11N20MIMO	Ant0	2412	Reference	4.96	---	PASS
			30~1000	-53.56	<=-25.04	PASS
			1000~26500	-44.38	<=-25.04	PASS
	Ant1	2412	Reference	5.14	---	PASS
			30~1000	-53.57	<=-24.86	PASS
			1000~26500	-43.92	<=-24.86	PASS
	Ant0	2437	Reference	5.51	---	PASS
			30~1000	-53.43	<=-24.49	PASS
			1000~26500	-45.32	<=-24.49	PASS
	Ant1	2437	Reference	4.52	---	PASS
			30~1000	-53.5	<=-25.48	PASS
			1000~26500	-44.34	<=-25.48	PASS
	Ant0	2462	Reference	6.48	---	PASS
			30~1000	-53.42	<=-23.52	PASS
			1000~26500	-44.79	<=-23.52	PASS
	Ant1	2462	Reference	5.02	---	PASS
			30~1000	-53.33	<=-24.98	PASS




11N40MIMO	Ant0	2422	1000~26500	-44.95	<=-24.98	PASS	
			Reference	2.74	---	PASS	
			30~1000	-50.37	<=-27.26	PASS	
	Ant1	2422	1000~26500	-44.51	<=-27.26	PASS	
			Reference	2.31	---	PASS	
			30~1000	-53.81	<=-27.69	PASS	
	Ant0	2437	1000~26500	-43.47	<=-27.69	PASS	
			Reference	3.65	---	PASS	
			30~1000	-51.19	<=-26.35	PASS	
	Ant1	2437	1000~26500	-44.49	<=-26.35	PASS	
			Reference	3.53	---	PASS	
			30~1000	-52.54	<=-26.48	PASS	
	Ant0	2452	1000~26500	-44.89	<=-26.48	PASS	
			Reference	1.65	---	PASS	
			30~1000	-51.42	<=-28.35	PASS	
	Ant1	2452	1000~26500	-44.28	<=-28.35	PASS	
			Reference	1.60	---	PASS	
			30~1000	-52.34	<=-28.4	PASS	
				1000~26500	-44.81	<=-28.4	PASS

11.6.2. Test Graphs






11B_Ant2_2412_0-Reference

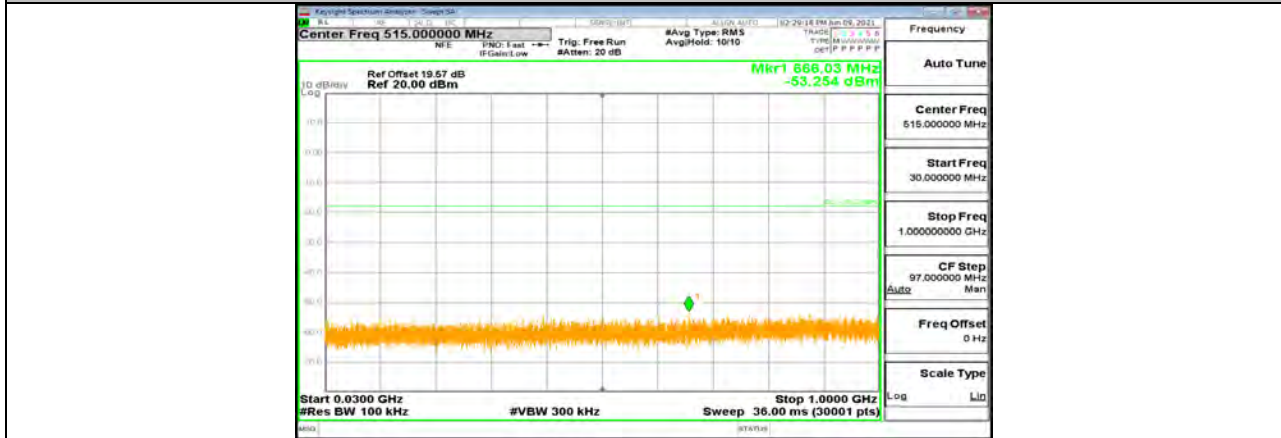


11B_Ant2_2412_30-1000

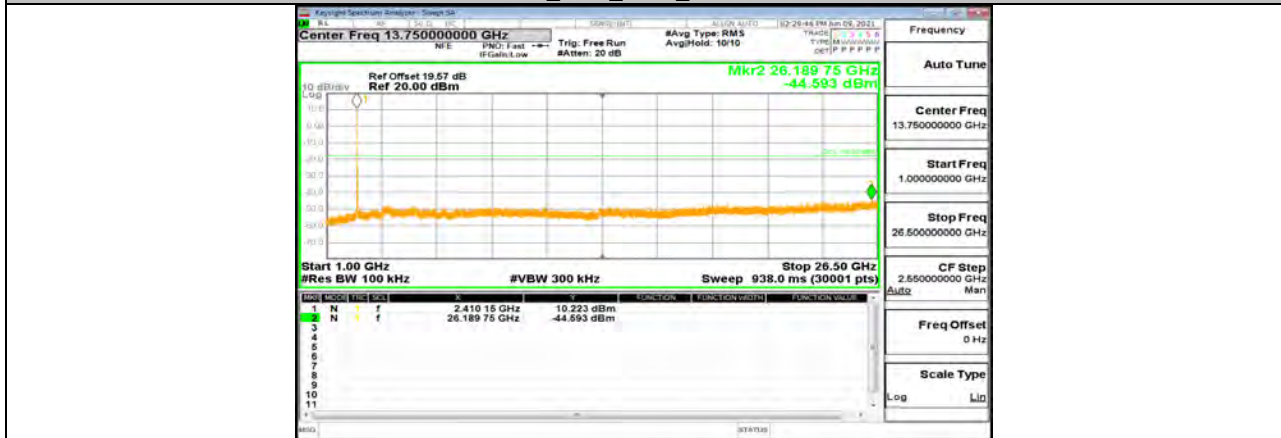


11B_Ant2_2412_1000-26500



11B_Ant1_2437_0-Reference

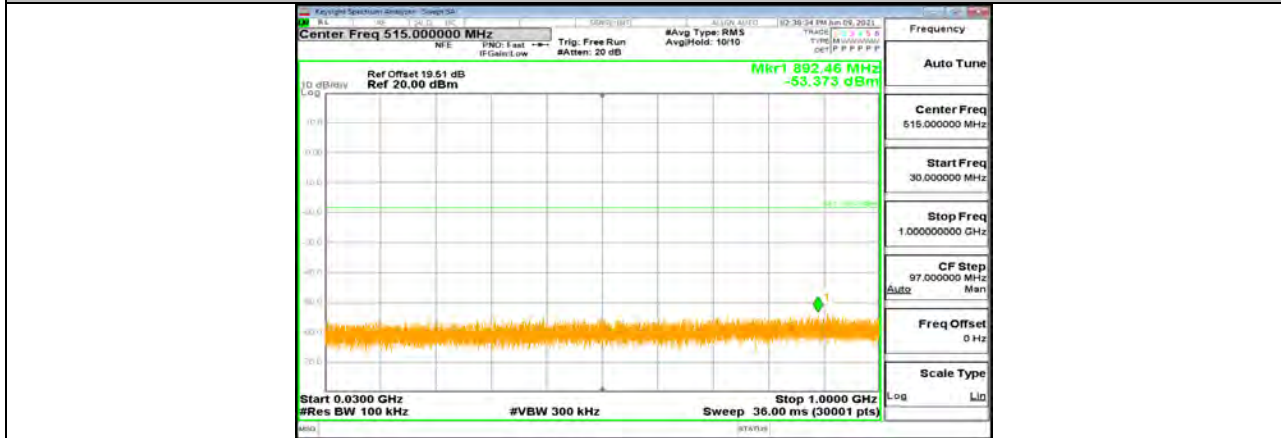


11B_Ant1_2437_30-1000

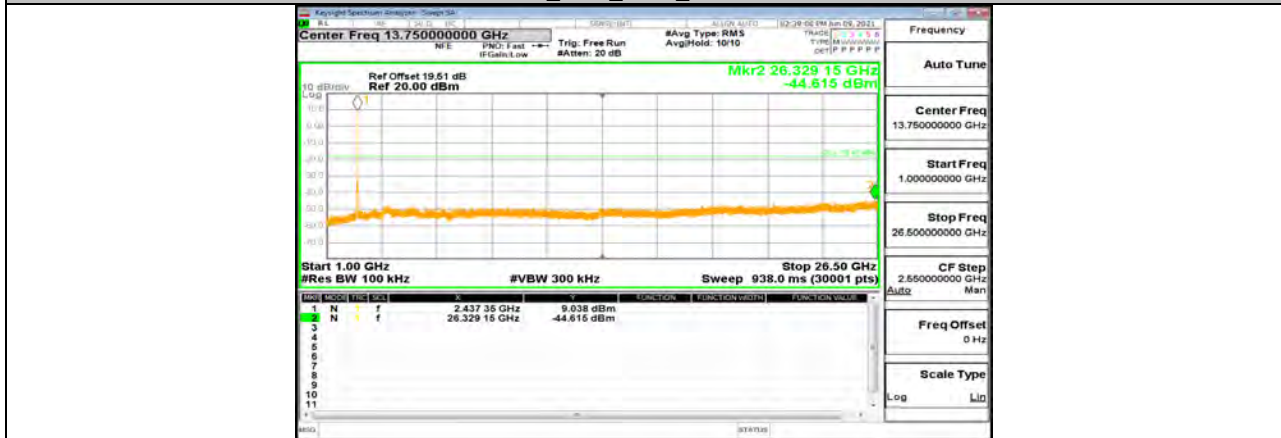


11B_Ant1_2437_1000-26500



11B_Ant2_2437_0-Reference

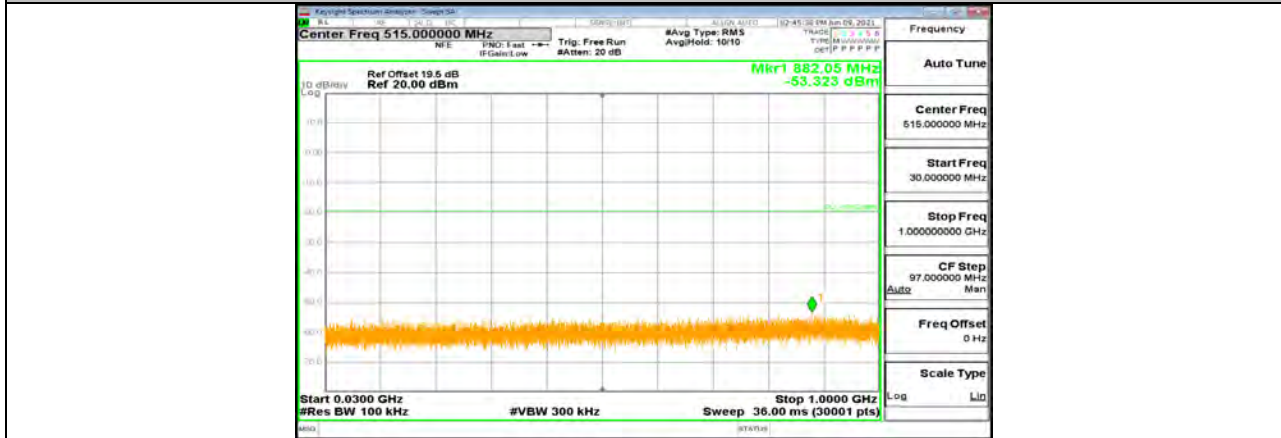


11B_Ant2_2437_30~1000

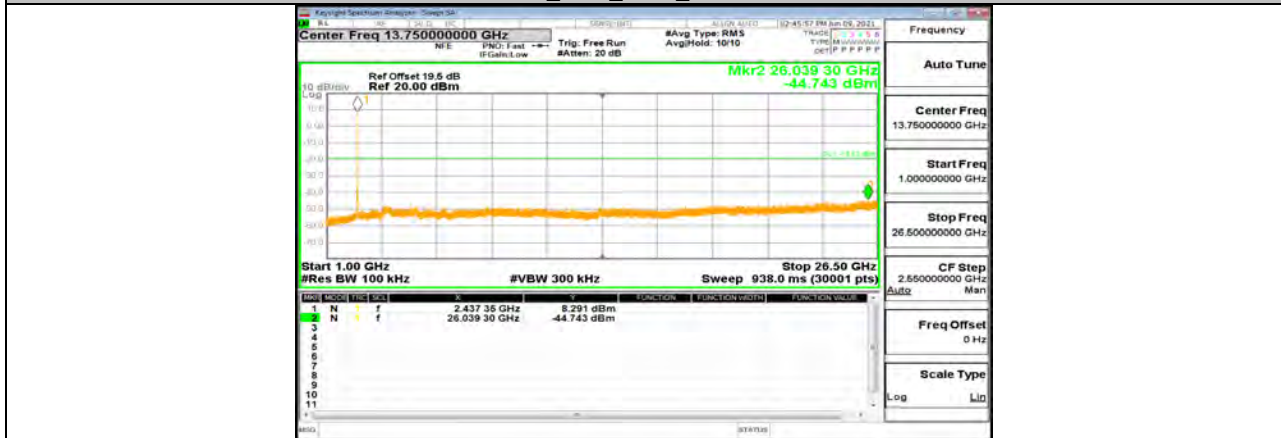


11B_Ant2_2437_1000~26500



11B_Ant1_2462_0-Reference

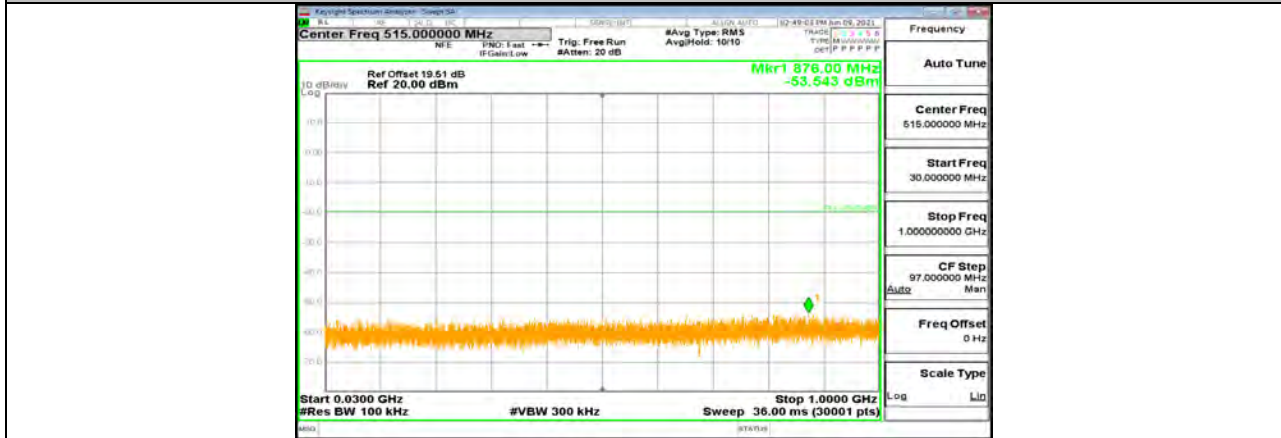


11B_Ant1_2462_30-1000

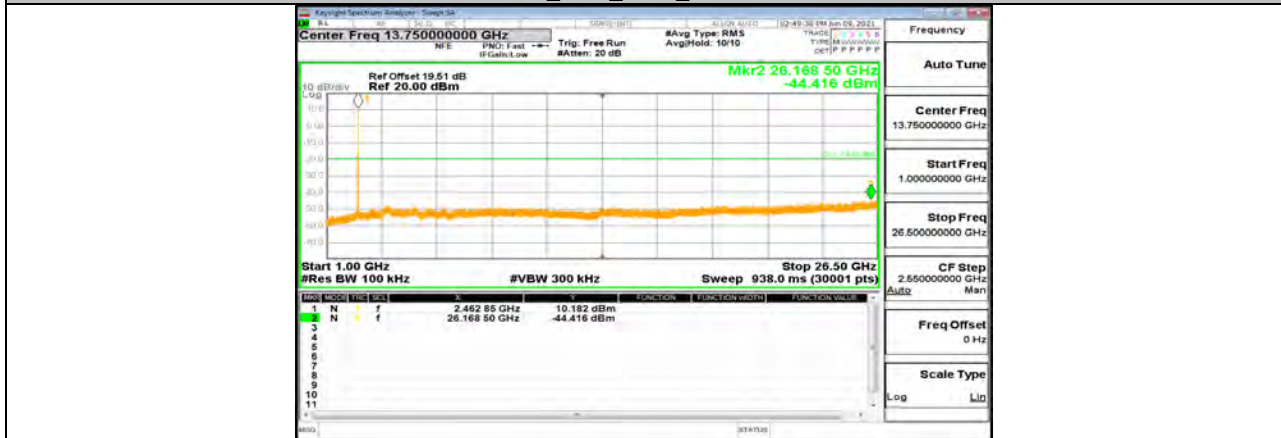

11B_Ant1_2462_1000-26500



11B_Ant2_2462_0-Reference

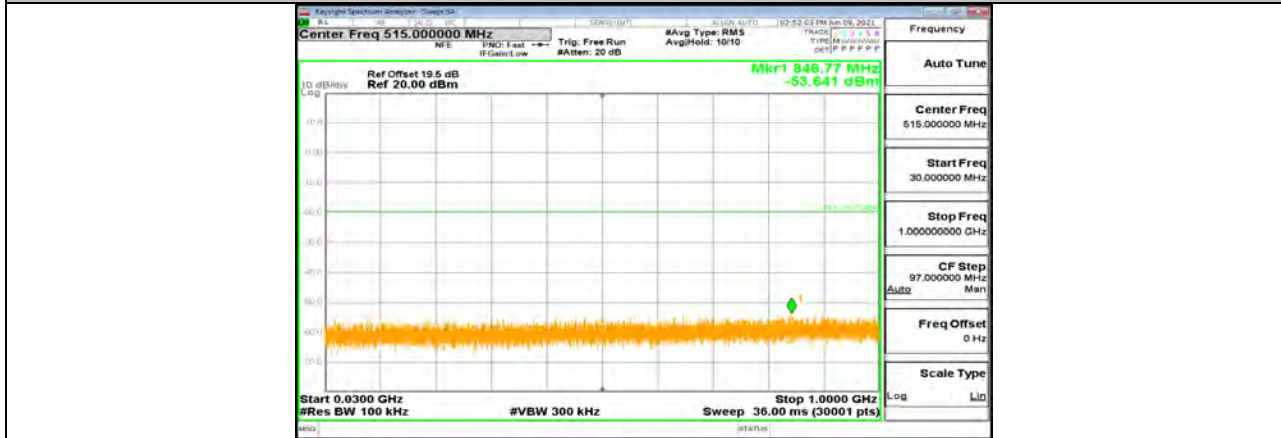


11B_Ant2_2462_30-1000



11B_Ant2_2462_1000-26500



11G_Ant1_2412_0-Reference

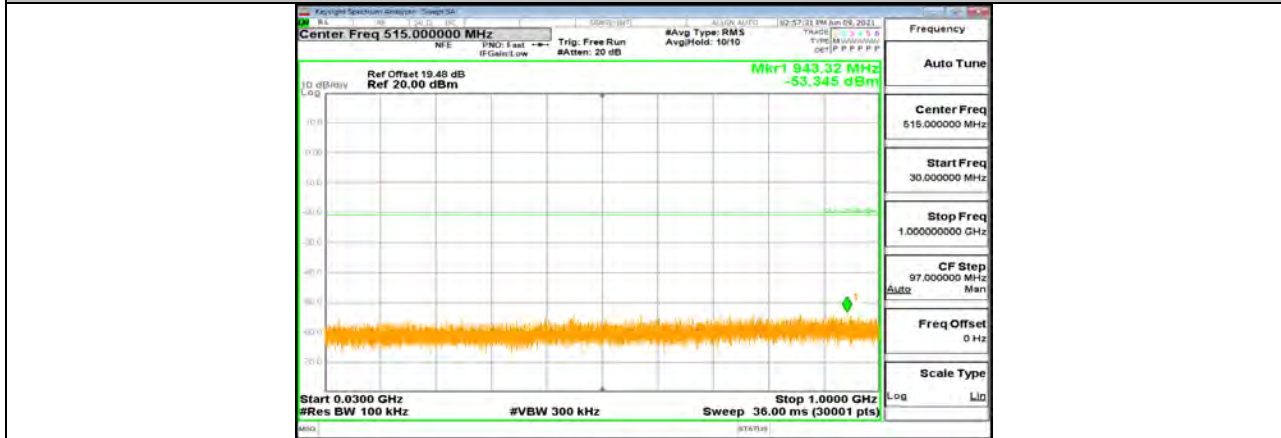


11G_Ant1_2412_30-1000




11G_Ant1_2412_1000-26500



11G_Ant2_2412_0-Reference

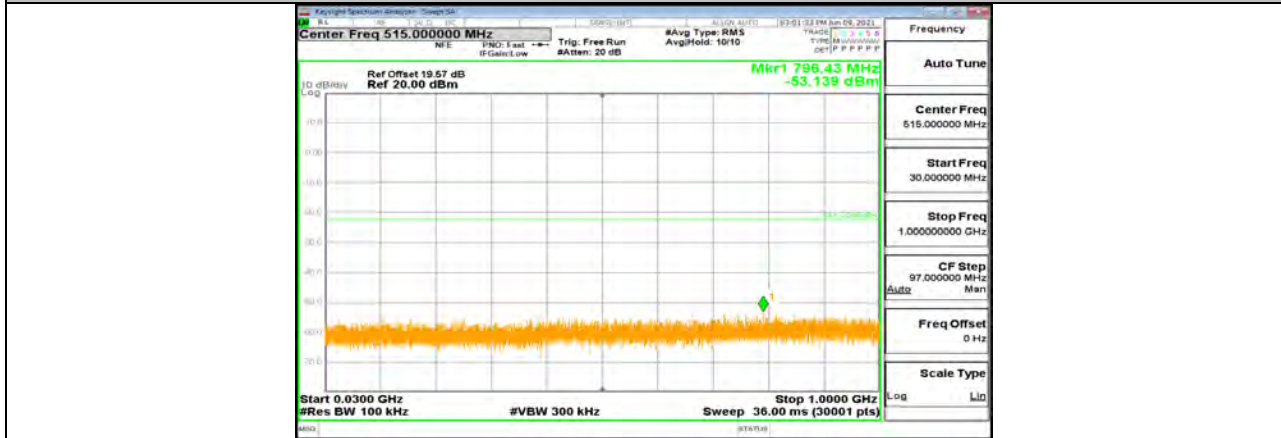


11G_Ant2_2412_30-1000

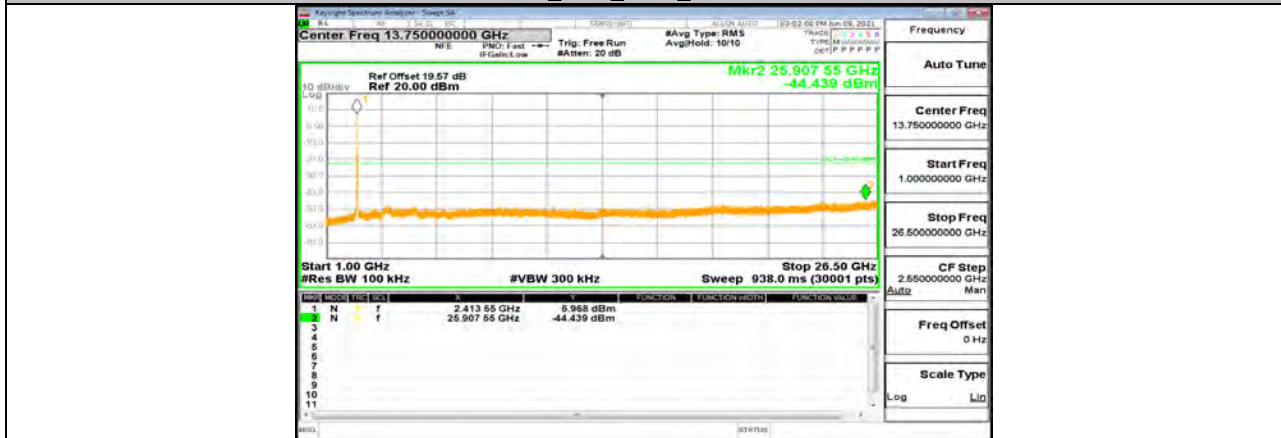


11G_Ant2_2412_1000-26500



11G_Ant1_2437_0-Reference

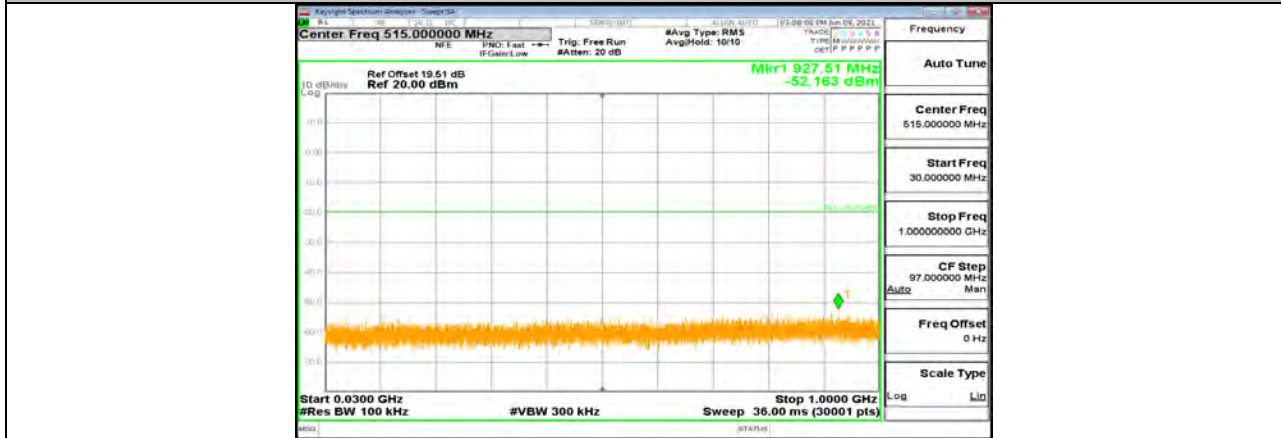


11G_Ant1_2437_30-1000

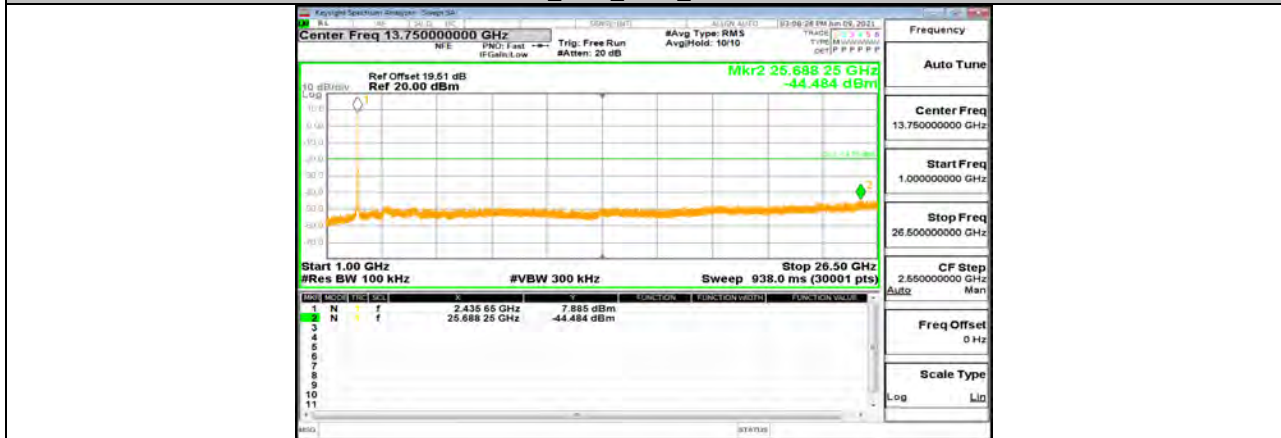

11G_Ant1_2437_1000-26500



11G_Ant2_2437_0-Reference

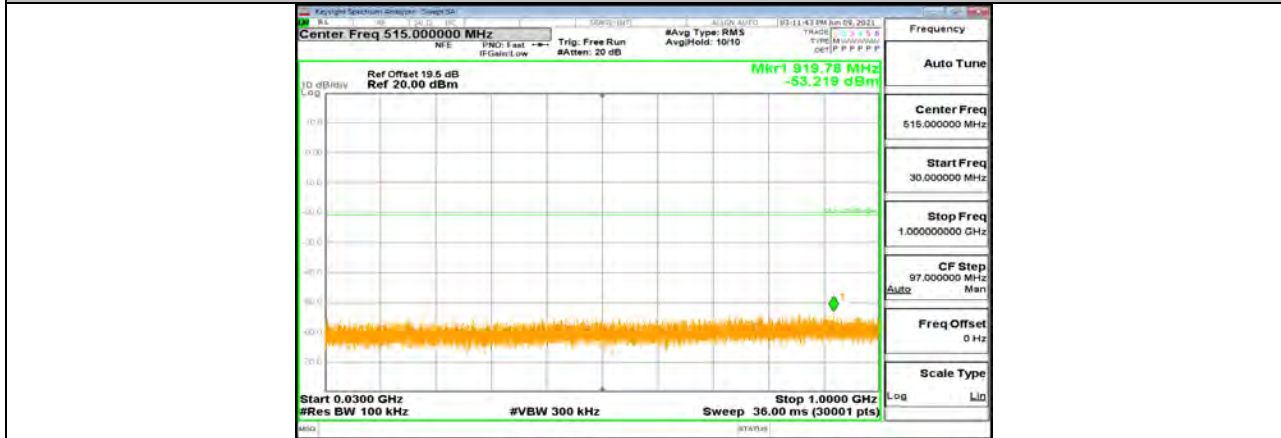


11G_Ant2_2437_30-1000




11G_Ant2_2437_1000-26500



11G_Ant1_2462_0-Reference

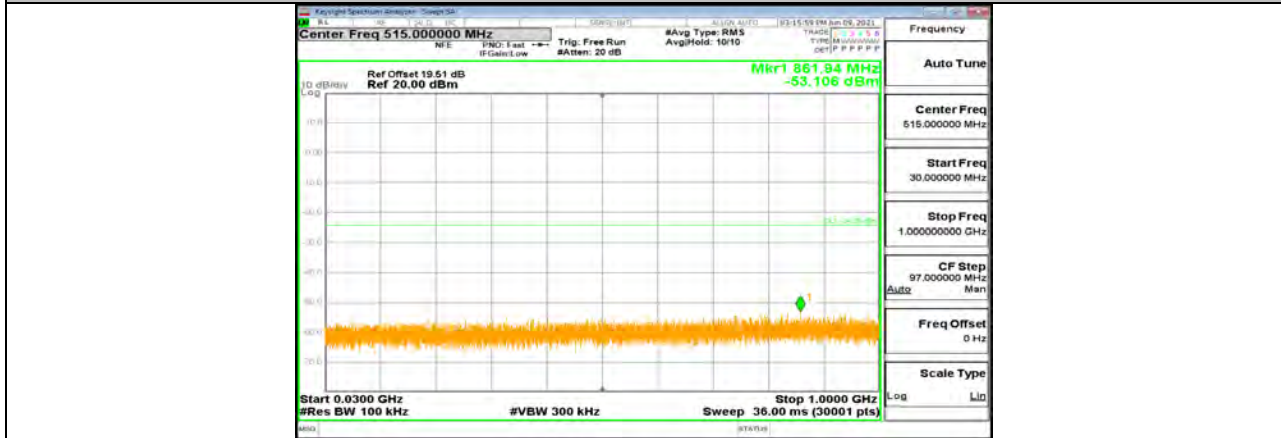


11G_Ant1_2462_30-1000

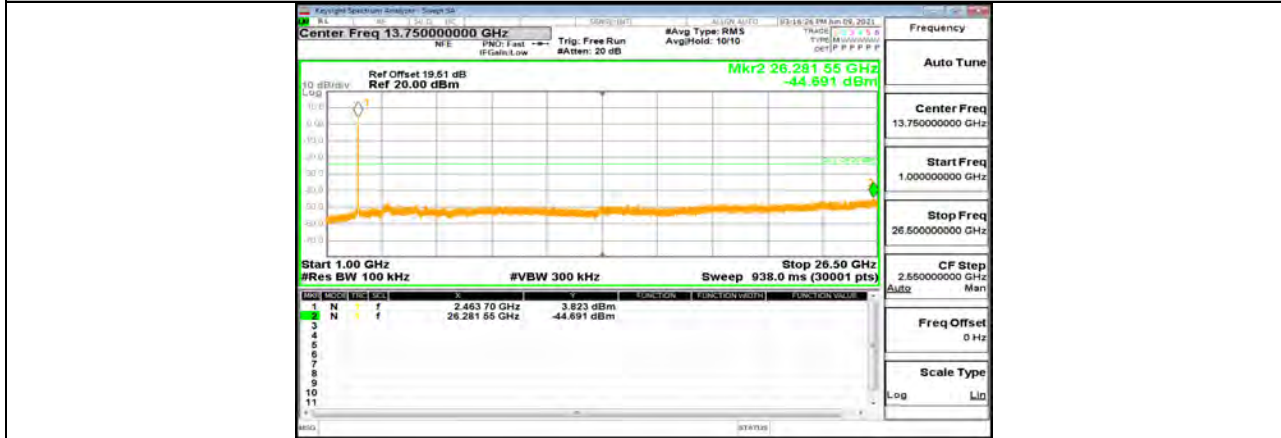


11G_Ant1_2462_1000-26500



11G_Ant2_2462_0-Reference

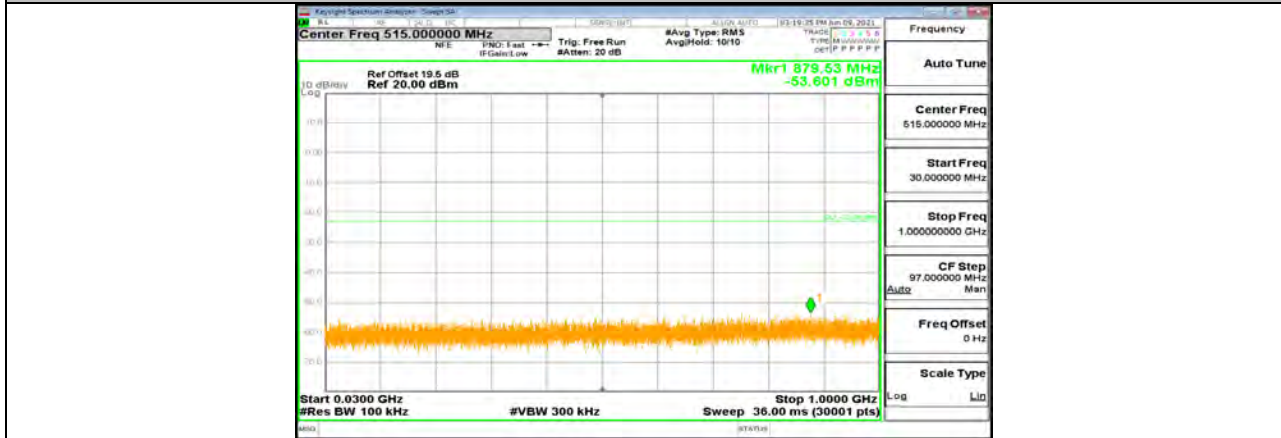


11G_Ant2_2462_30-1000

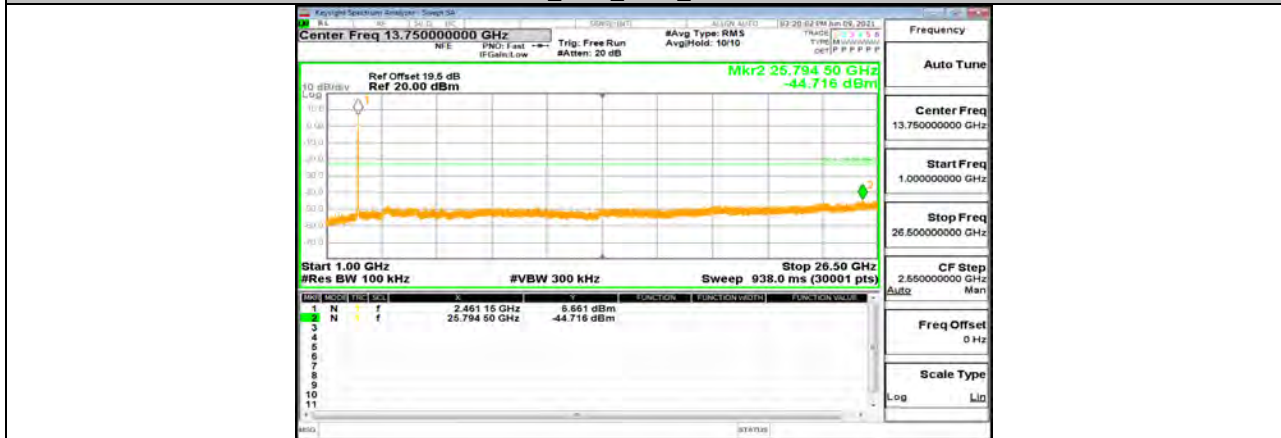

11G_Ant2_2462_1000-26500



11N20MIMO_Ant1_2412_0~Reference

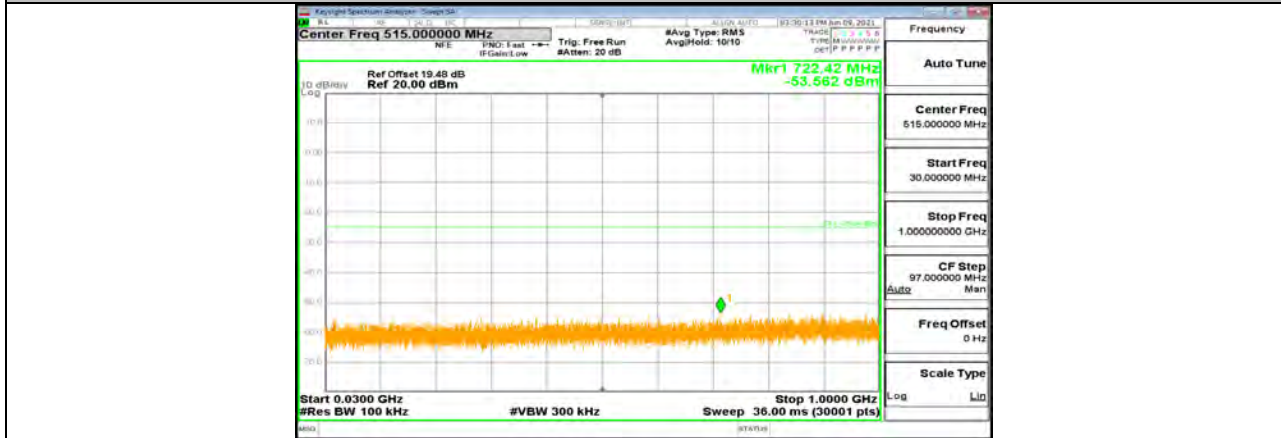


11N20MIMO_Ant1_2412_30~1000




11N20MIMO_Ant1_2412_1000~26500



11N20MIMO_Ant2_2412_0~Reference

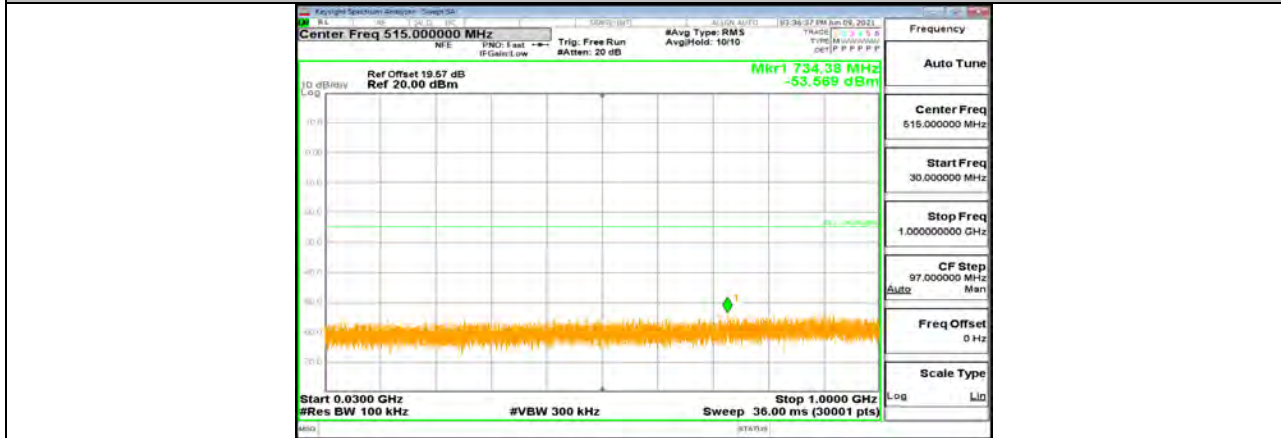


11N20MIMO_Ant2_2412_30~1000

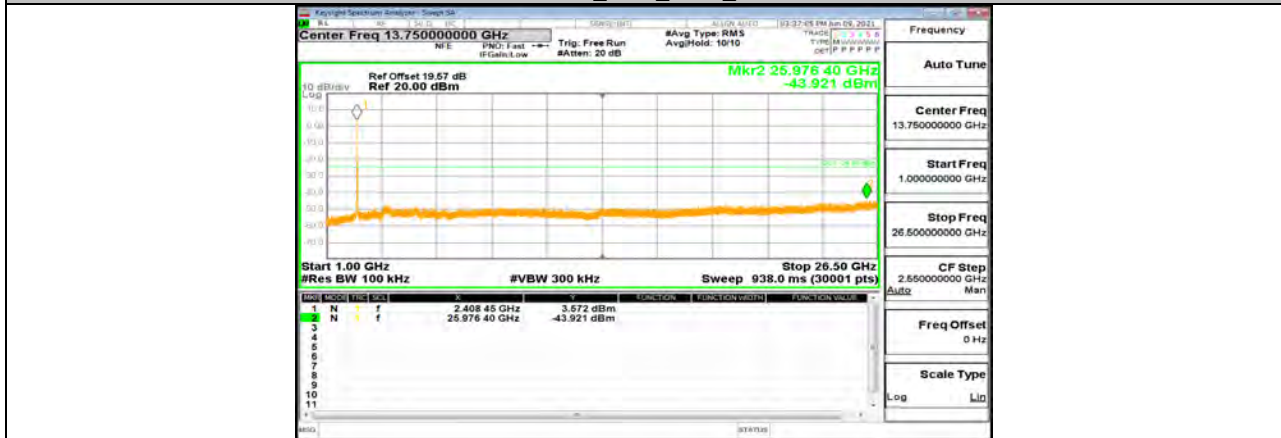


11N20MIMO_Ant2_2412_1000~26500



11N20MIMO_Ant1_2437_0~Reference

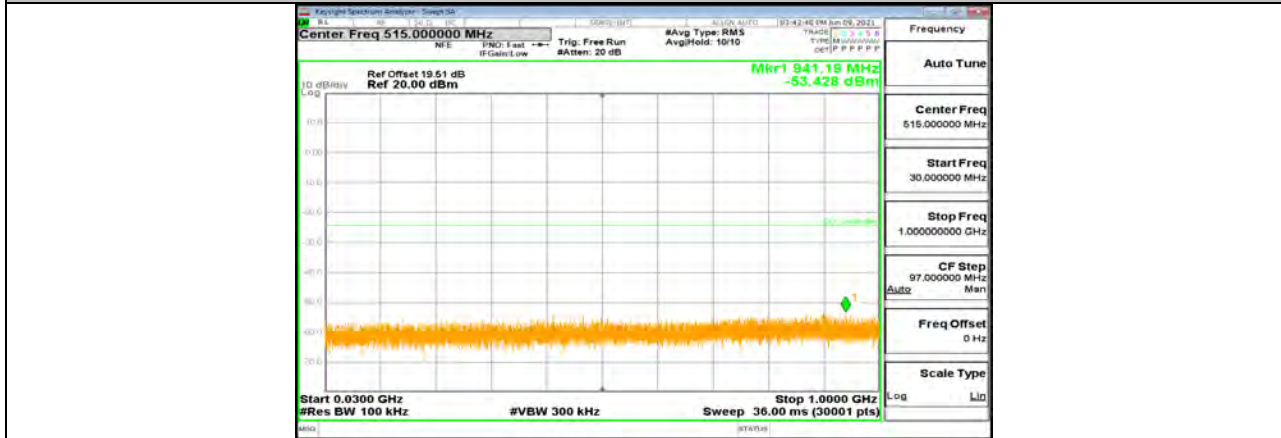


11N20MIMO_Ant1_2437_30~1000

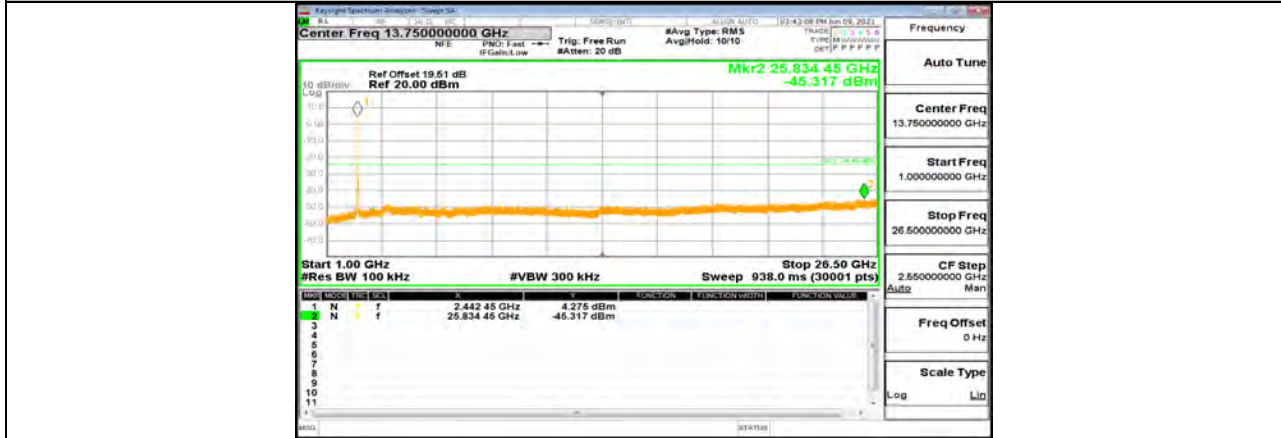

11N20MIMO_Ant1_2437_1000~26500




11N20MIMO_Ant2_2437_0~Reference

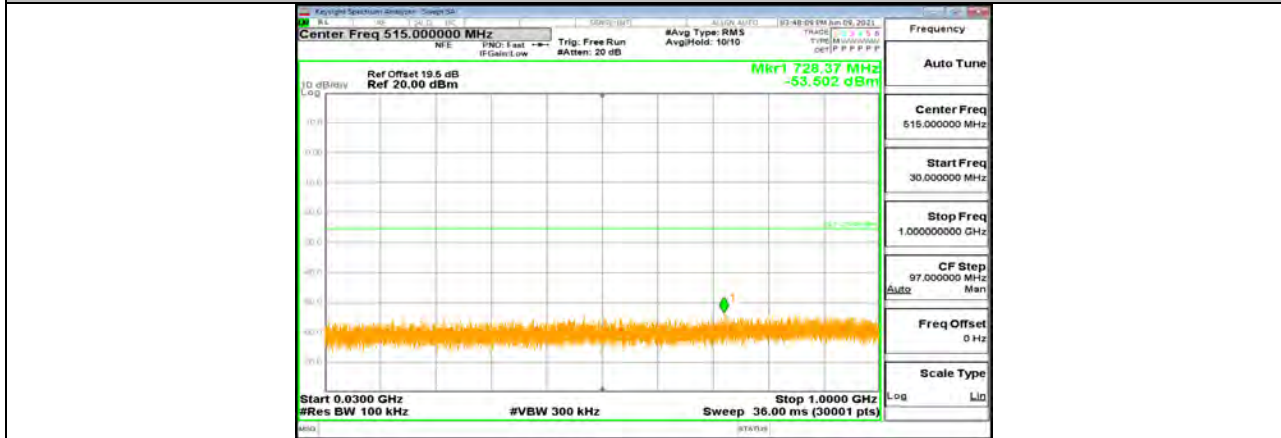


11N20MIMO_Ant2_2437_30~1000



11N20MIMO_Ant2_2437_1000~26500

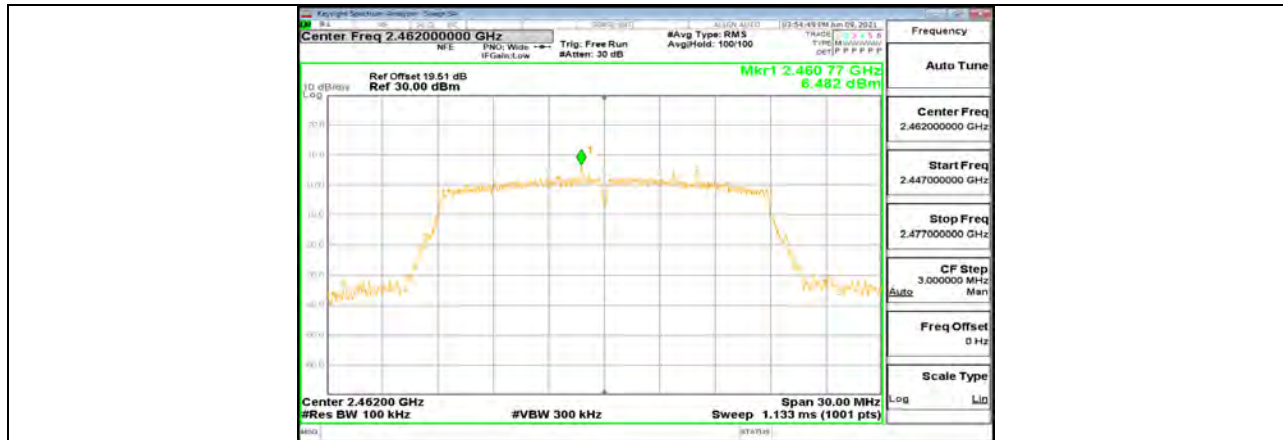

11N20MIMO_Ant1_2462_0~Reference

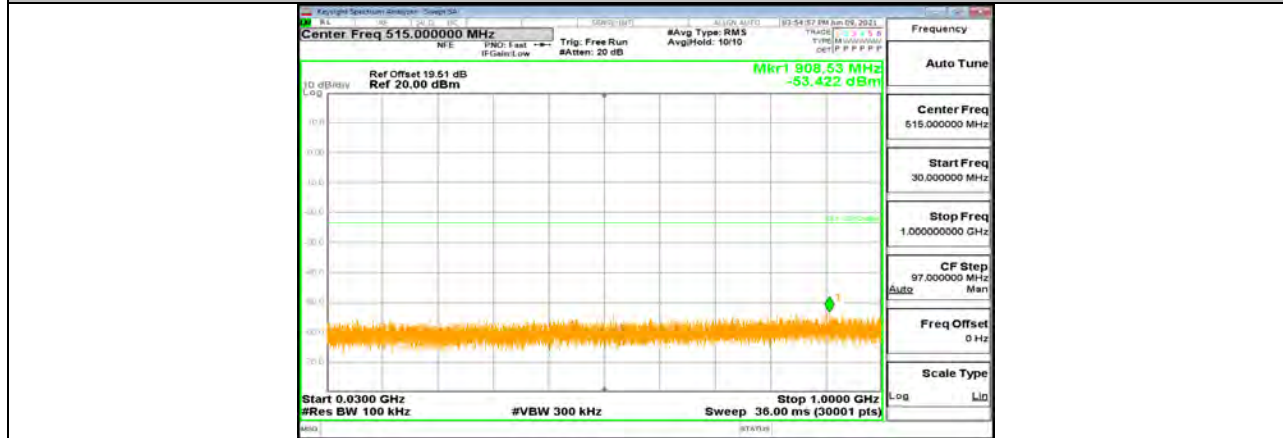


11N20MIMO_Ant1_2462_30~1000




11N20MIMO_Ant1_2462_1000~26500



11N20MIMO_Ant2_2462_0~Reference

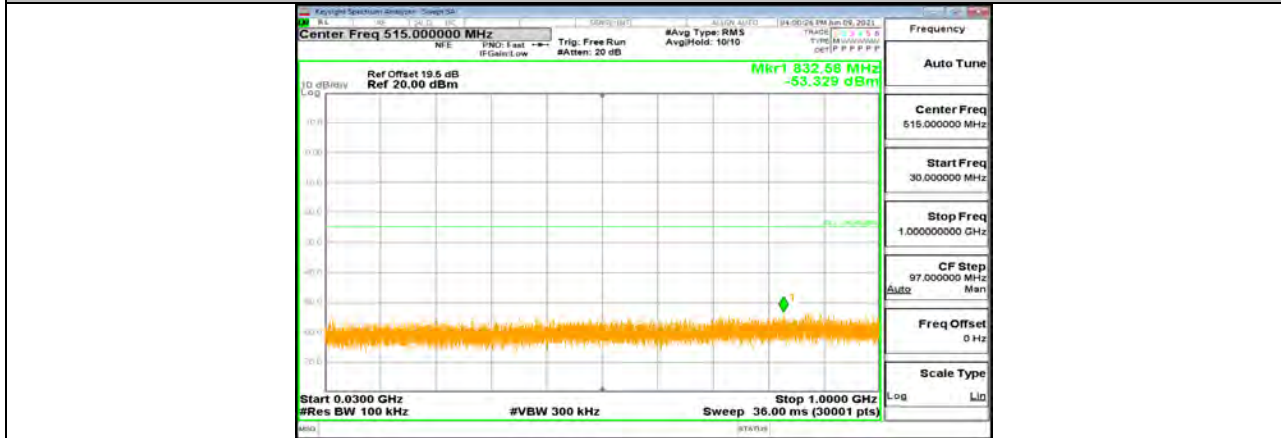


11N20MIMO_Ant2_2462_30~1000

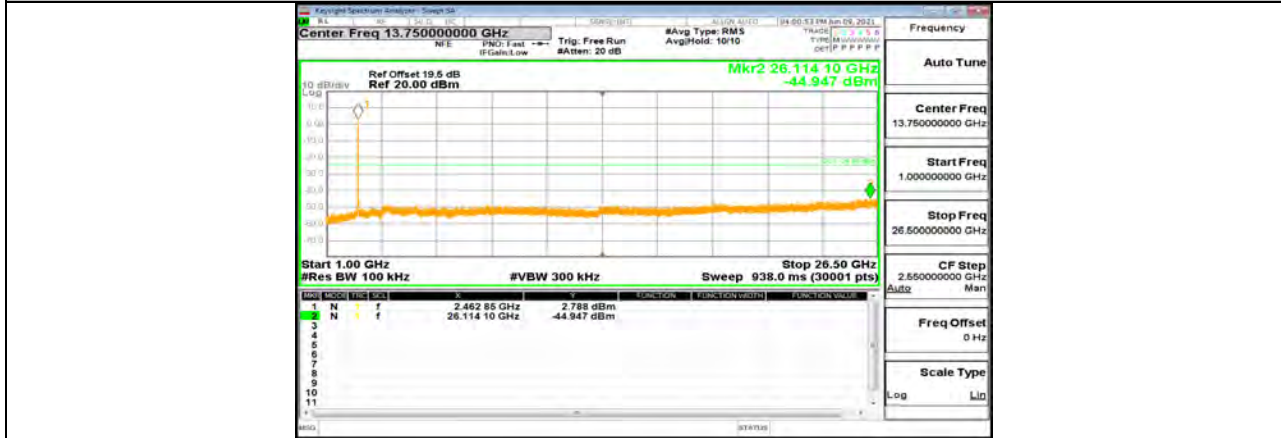


11N20MIMO_Ant2_2462_1000~26500




11N40MIMO_Ant1_2422_0~Reference

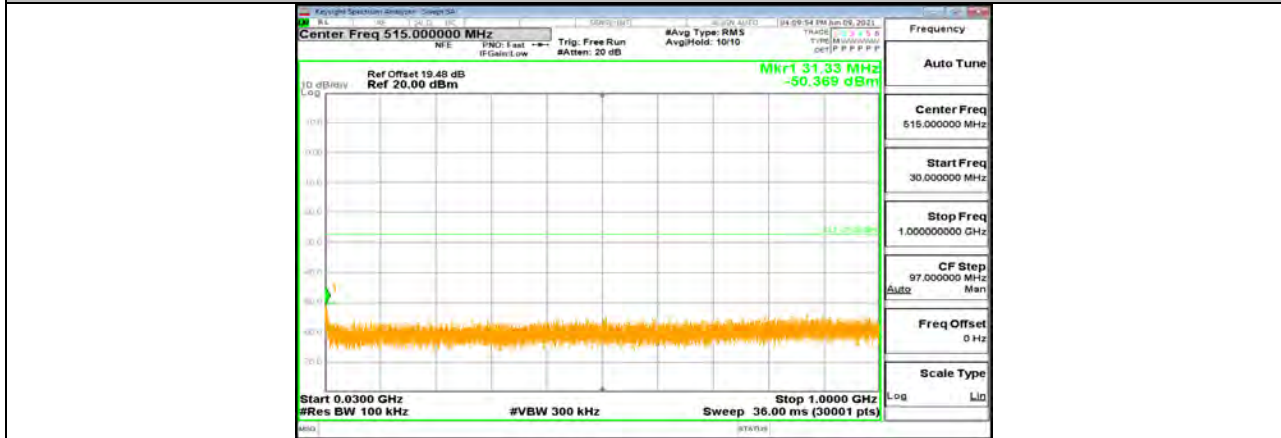


11N40MIMO_Ant1_2422_30~1000

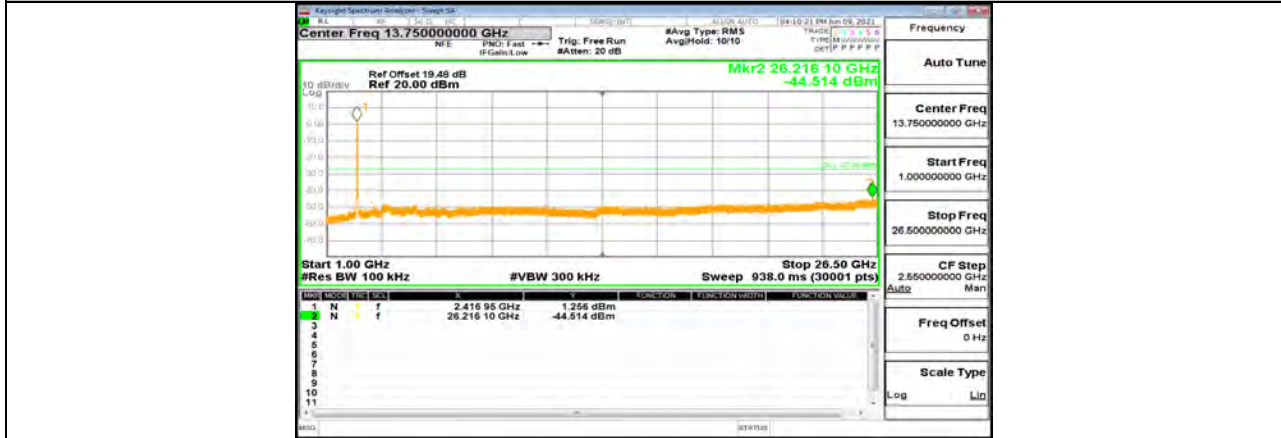


11N40MIMO_Ant1_2422_1000~26500

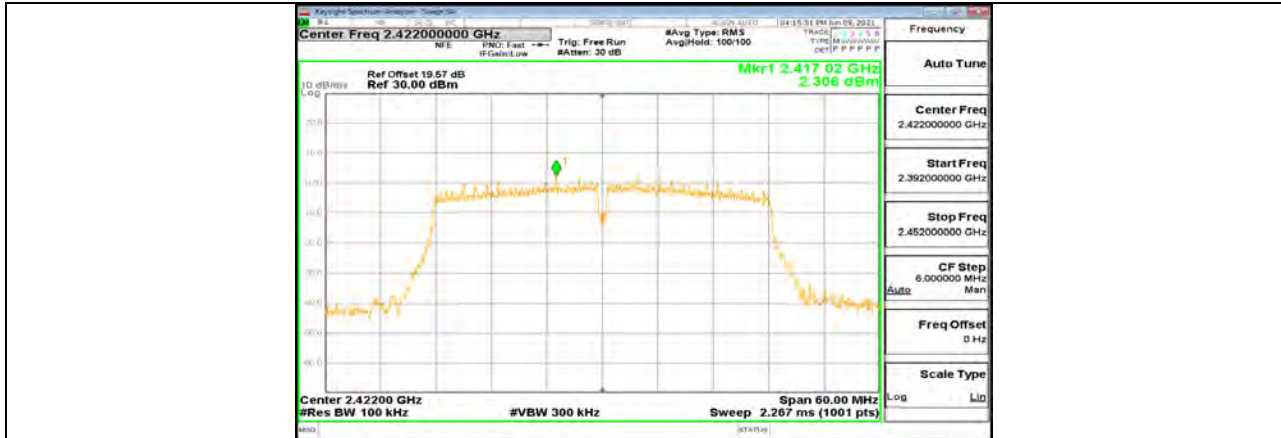


11N40MIMO_Ant2_2422_0~Reference

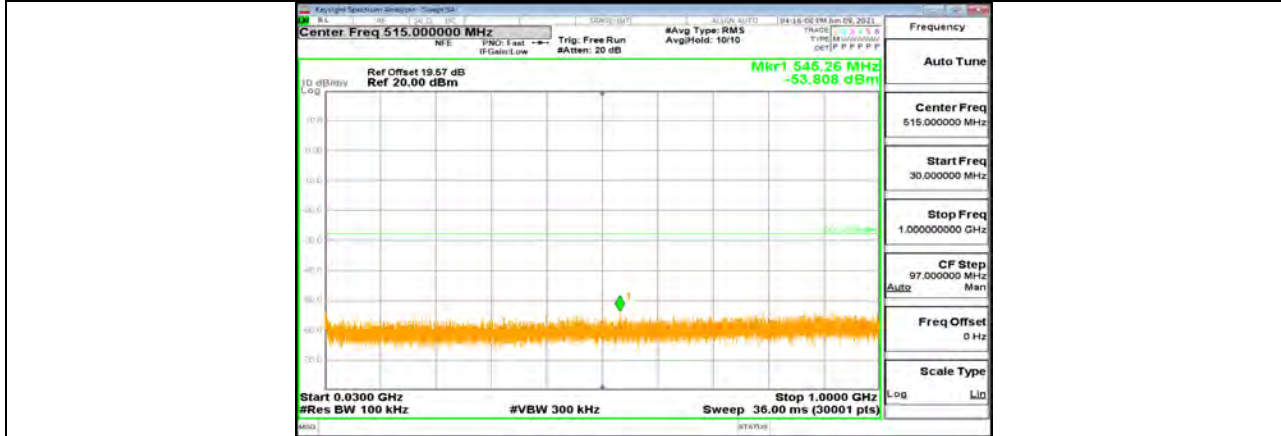


11N40MIMO_Ant2_2422_30~1000

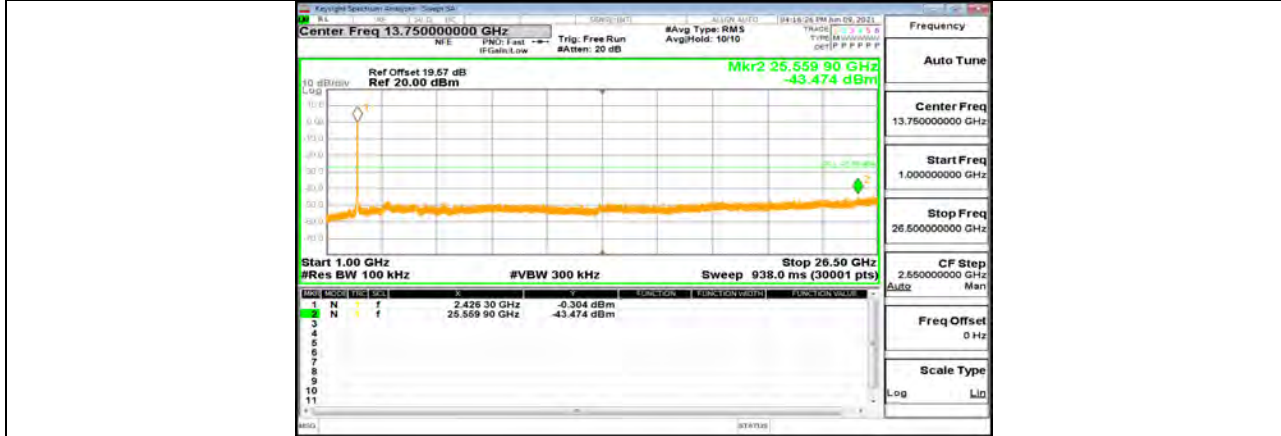

11N40MIMO_Ant2_2422_1000~26500

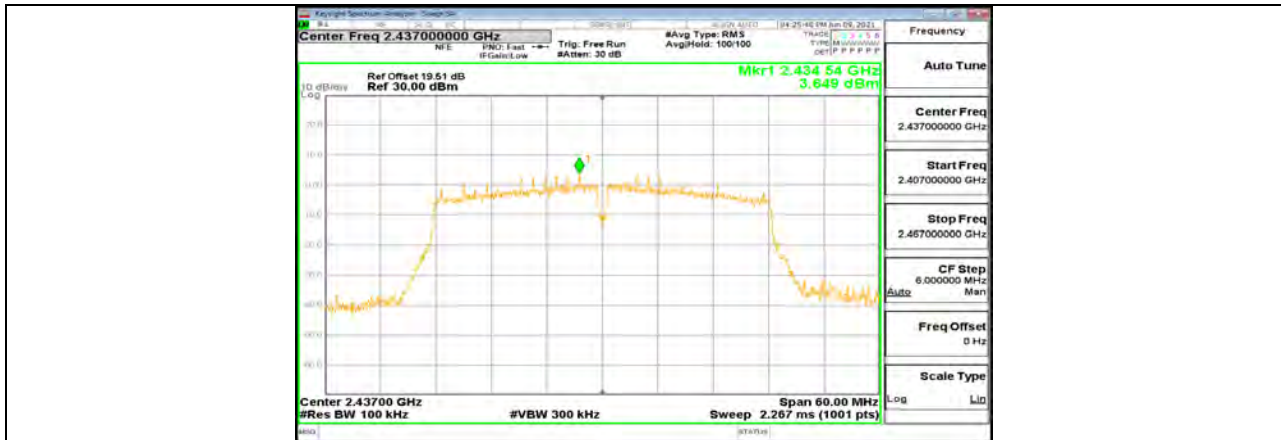


11N40MIMO_Ant1_2437_0~Reference

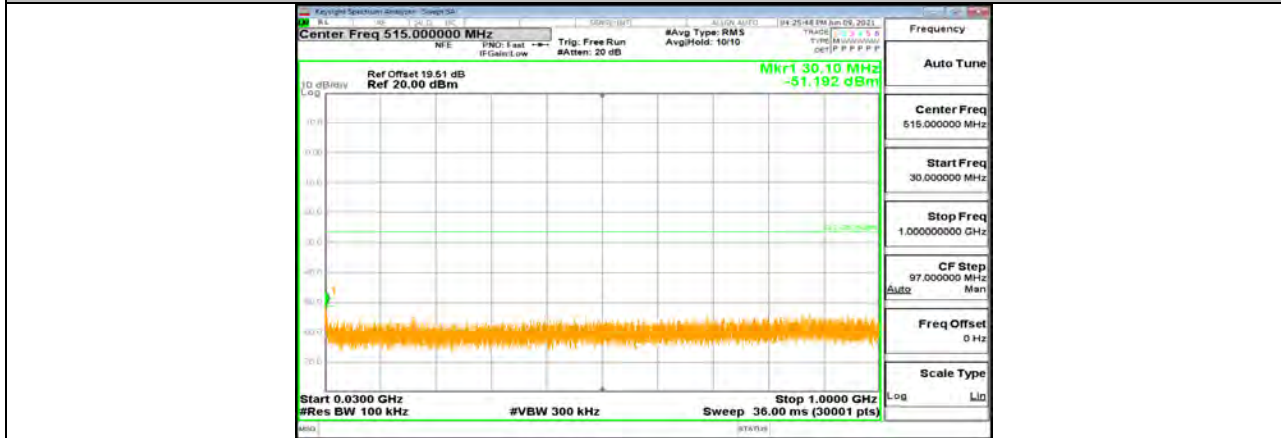


11N40MIMO_Ant1_2437_30~1000



11N40MIMO_Ant1_2437_1000~26500

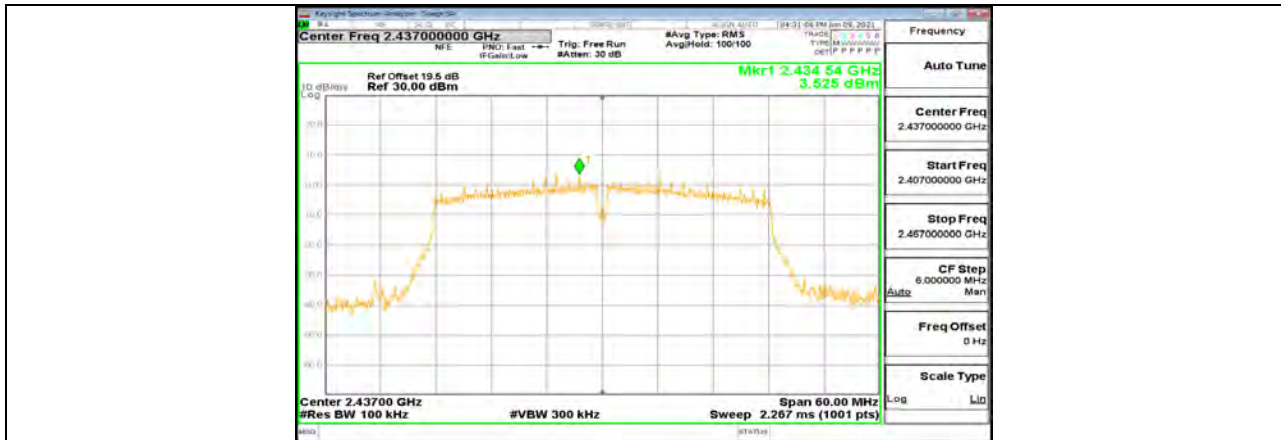


11N40MIMO_Ant2_2437_0~Reference

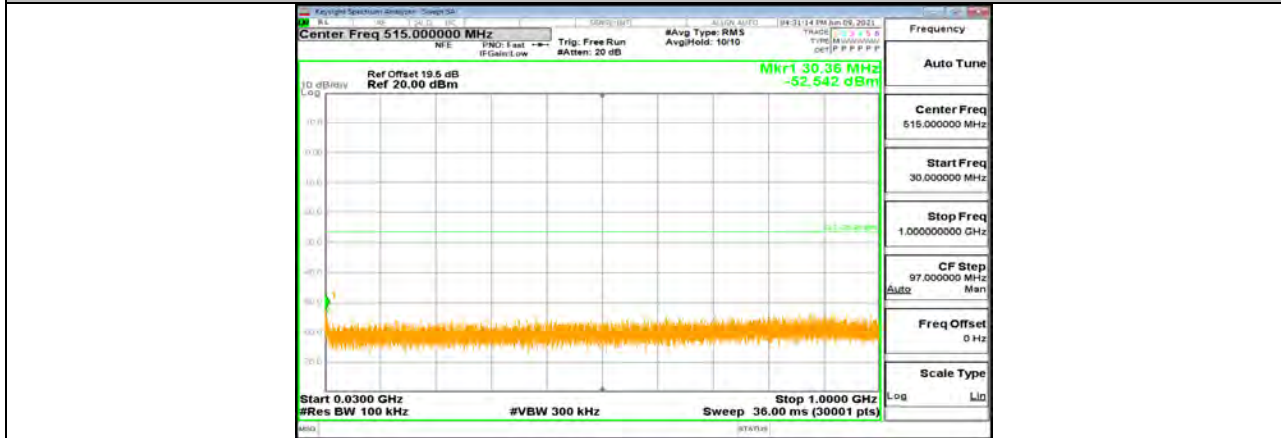


11N40MIMO_Ant2_2437_30~1000




11N40MIMO_Ant2_2437_1000~26500

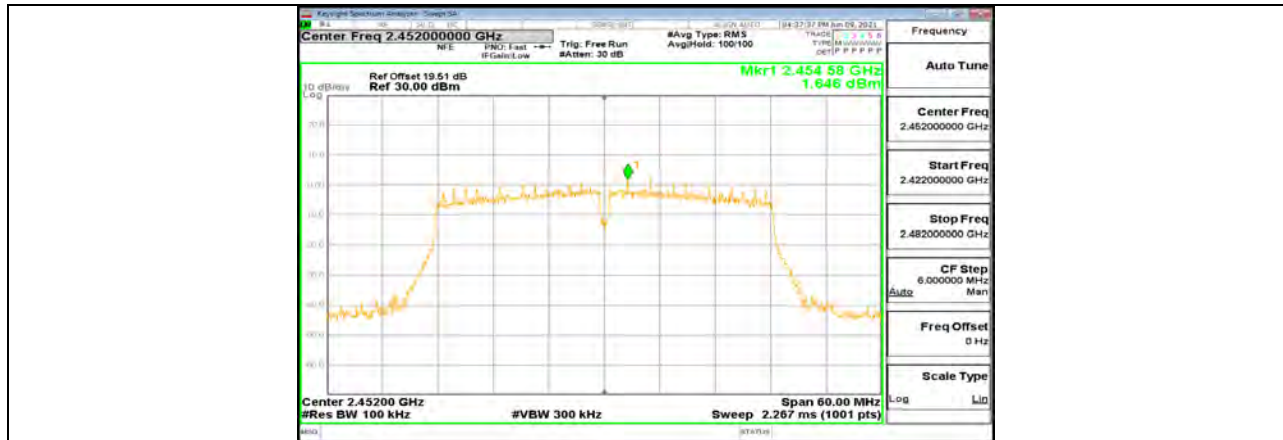


11N40MIMO_Ant1_2452_0~Reference

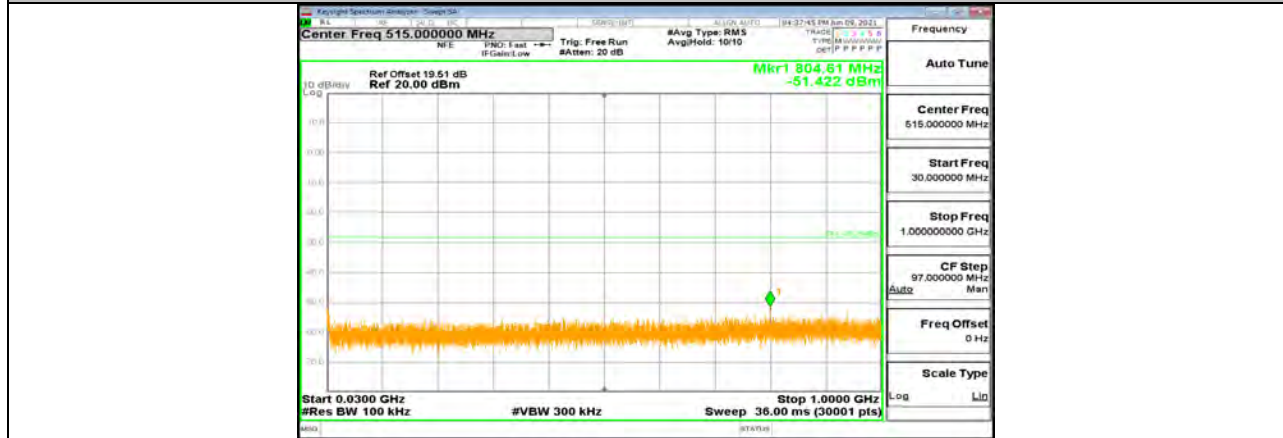


11N40MIMO_Ant1_2452_30~1000

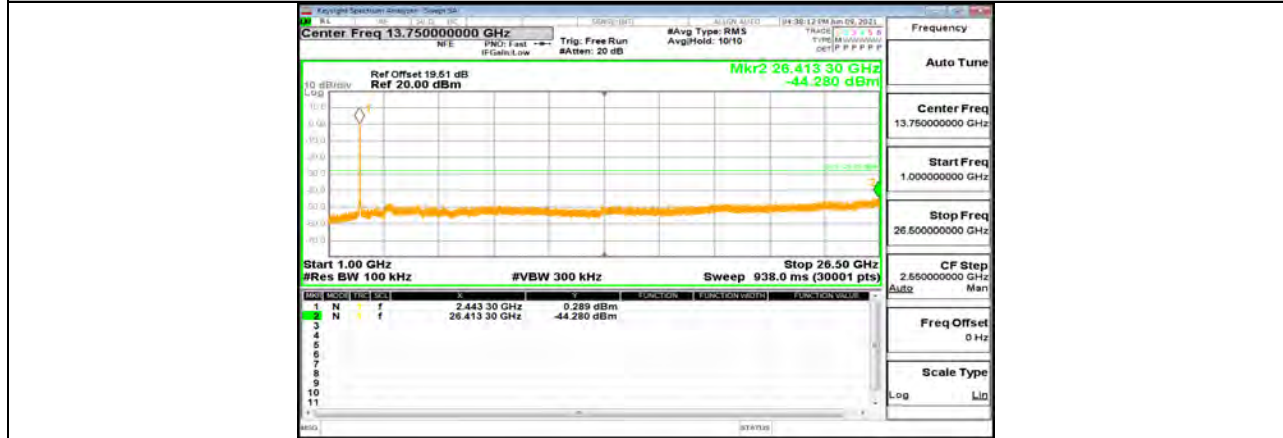


11N40MIMO_Ant1_2452_1000~26500

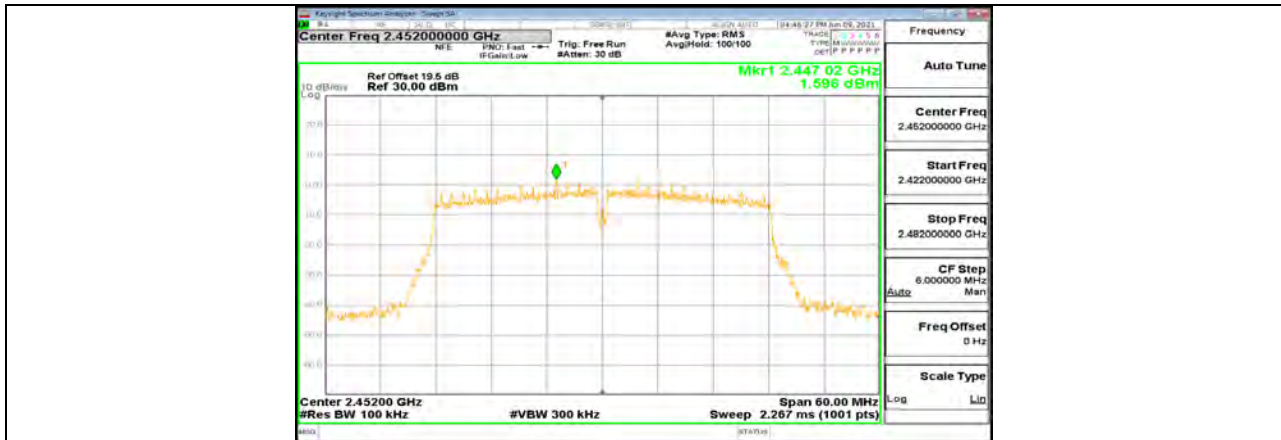

11N40MIMO_Ant2_2452_0~Reference

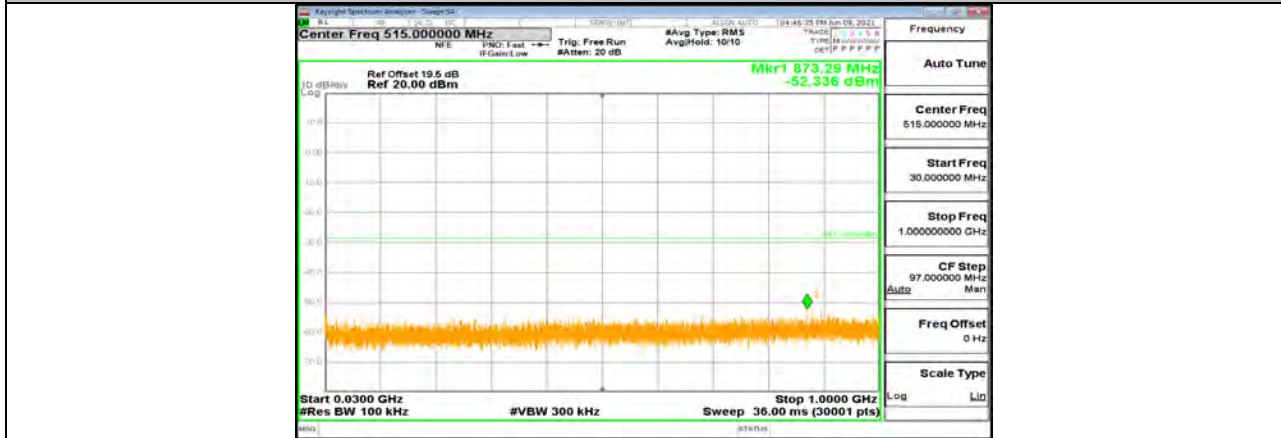

11N40MIMO_Ant2_2452_30~1000

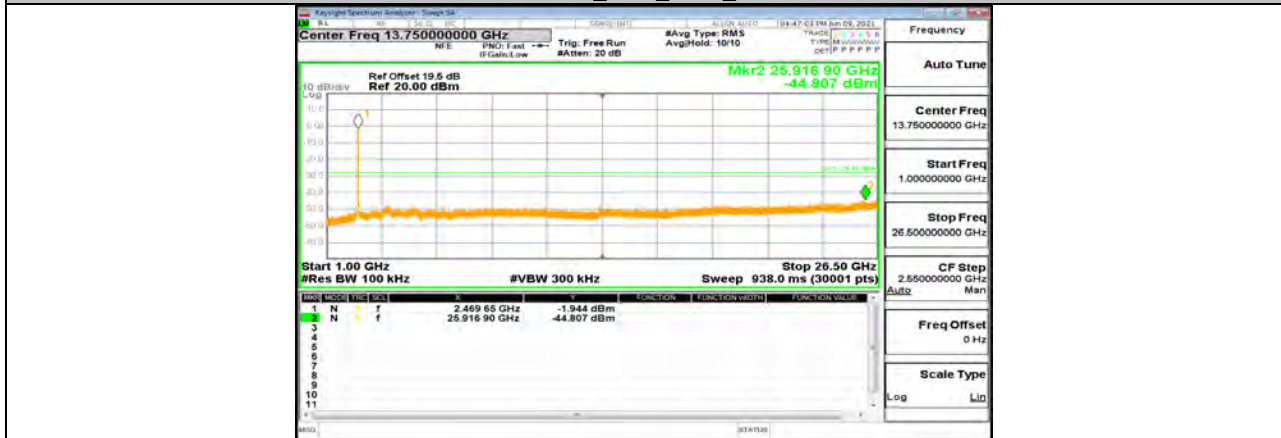

11N40MIMO_Ant2_2452_1000~26500



11.7. Appendix G: Duty Cycle
11.7.1. Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.38	8.42	0.9952	99.52	0.02	/	0.01
11G	1.39	1.44	0.9653	96.53	0.15	0.72	1
11N20MIMO	1.30	1.35	0.9630	96.30	0.16	0.77	1
11N40MIMO	0.65	0.69	0.9420	94.20	0.26	1.54	2

Note:


Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs

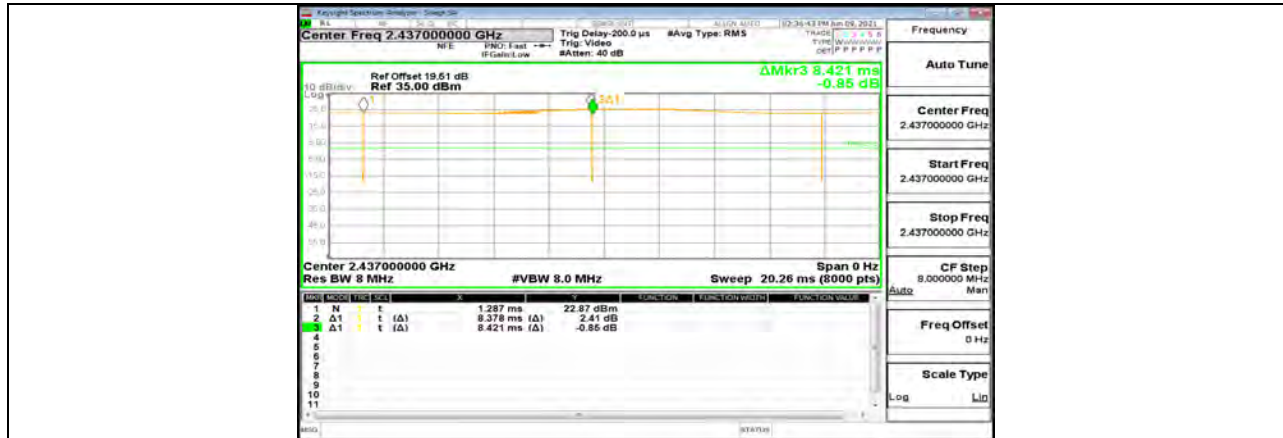


11B_Ant1_2437

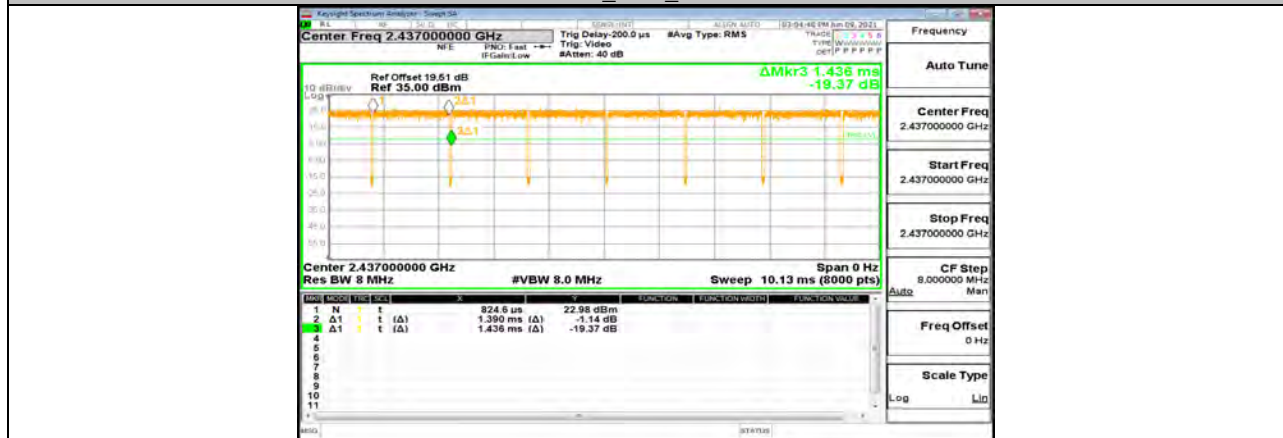

11G_Ant1_2437



11N20MIMO_Ant1_2437

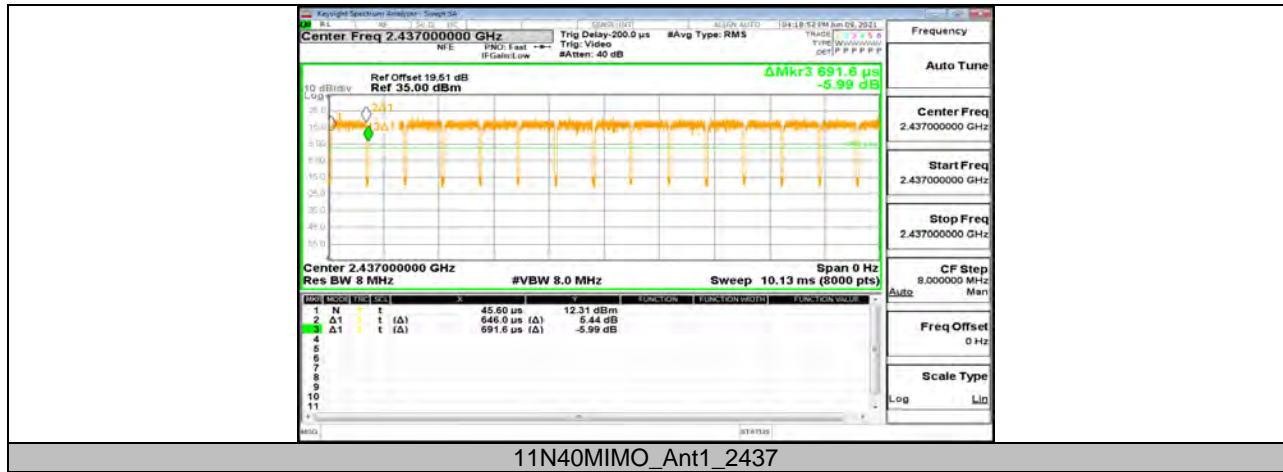

END OF REPORT