



CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: WCT54M2001

FCC ID: 2AC23-WCT54

REPORT NUMBER: 4788997152-1

ISSUE DATE: June 17, 2019

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
NO.75 Zhongkai Development Area Huizhou, Guangdong China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road,
Song Shan Lake Hi-Tech Development Zone, Dongguan, People's Republic of China
Tel: +86 769-22038881
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	6/17/2019	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>9</i>
5.3. <i>CHANNEL LIST</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.7. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>11</i>
5.8. <i>TEST ENVIRONMENT</i>	<i>11</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
5.10. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i>	<i>13</i>
6. MEASUREMENT METHODS	14
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>15</i>
7.2. <i>6 dB DTS BANDWIDTH AND 99% BANDWIDTH</i>	<i>17</i>
7.2.1. <i>GFSK(1Mbps) MODE</i>	<i>18</i>
7.2.2. <i>GFSK(2Mbps) MODE</i>	<i>22</i>
7.3. <i>PEAK CONDUCTED OUTPUT POWER.....</i>	<i>26</i>
7.3.1. <i>GFSK(1Mbps) MODE</i>	<i>27</i>
7.3.2. <i>GFSK(2Mbps) MODE</i>	<i>27</i>
7.4. <i>POWER SPECTRAL DENSITY</i>	<i>28</i>
7.4.1. <i>GFSK(1Mbps) MODE</i>	<i>29</i>
7.4.2. <i>GFSK(2Mbps) MODE</i>	<i>31</i>
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i>	<i>33</i>
7.5.1. <i>GFSK(1Mbps) MODE</i>	<i>34</i>
7.5.2. <i>GFSK(2Mbps) MODE</i>	<i>40</i>
8. RADIATED TEST RESULTS.....	46
8.1. <i>RESTRICTED BANDEDGE.....</i>	<i>51</i>



8.1.1.	GFSK(1Mbps) MODE	51
8.1.2.	GFSK(2Mbps) MODE	55
8.2.	SPURIOUS EMISSIONS (1~3GHz)	59
8.2.1.	GFSK(1Mbps) MODE	59
8.2.2.	GFSK(2Mbps) MODE	65
8.3.	SPURIOUS EMISSIONS (3~18GHz)	71
8.3.1.	GFSK(1Mbps) MODE	71
8.3.2.	GFSK(2Mbps) MODE	77
8.4.	SPURIOUS EMISSIONS 18G ~ 26GHz.....	83
8.4.1.	GFSK(2Mbps) MODE	83
8.4.	SPURIOUS EMISSIONS 30M ~ 1 GHz	85
8.4.1.	GFSK(2Mbps) MODE	85
8.5.	SPURIOUS EMISSIONS BELOW 30M.....	87
8.5.1.	GFSK(2Mbps) MODE	87
9.	AC POWER LINE CONDUCTED EMISSIONS	90
9.1.1.	GFSK(2Mbps) MODE	91
10.	ANTENNA REQUIREMENTS	93



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: NO.75 Zhongkai Development Area Huizhou, Guangdong China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: NO.75 Zhongkai Development Area Huizhou, Guangdong China

EUT Information

EUT Name: WIFI+BT Module
Model: WCT54M2001
Sample Status: Normal
Brand Name: GSD
Sample Received Date: May 7, 2019
Date of Tested: May 10, 2019 ~ June 17, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Checked By:

Kebo Zhang
Engineer Project Associate

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 DTS Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.2dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module		
Model	WCT54M2001		
Product Description	Operation Frequency	2402 MHz ~ 2480 MHz	
	Modulation Type	Data Rate	
	GFSK	1Mbps	
		2Mbps	
Rated Input	DC 3.3V		

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)	EIRP (dBm)
GFSK(1Mbps)	2402-2480	0-39[40]	3.65	8.39
GFSK(2Mbps)	2402-2480	0-39[40]	4.46	9.20



5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK(1Mbps)	CH 0, CH 19, CH 39	2402MHz, 2440MHz, 2480MHz
GFSK(2Mbps)	CH 0, CH 19, CH 39	2402MHz, 2440MHz, 2480MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		WCN_Combo_Tool		
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	1	Default	Default	Default
GFSK(2Mbps)	1	Default	Default	Default



5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2402-2480	PIFA Antenna	4.74

Test Mode	Transmit and Receive Mode	Description
GFSK(1Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
GFSK(2Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BLE	DTS	GFSK(1Mbps)	1Mbit/s
		GFSK(2Mbps)	2Mbit/s

5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	45 ~ 70%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	22 ~ 28°C
Voltage :	VL	N/A
	VN	DC 3.3V
	VH	N/A

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	USB TO UART	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	0.50	/

Note: The USB cable is for debugging only.


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	N/A	N/A	N/A	N/A

TEST SETUP

The EUT can work in an engineer mode with a software through a Laptop.

SETUP DIAGRAM FOR TEST

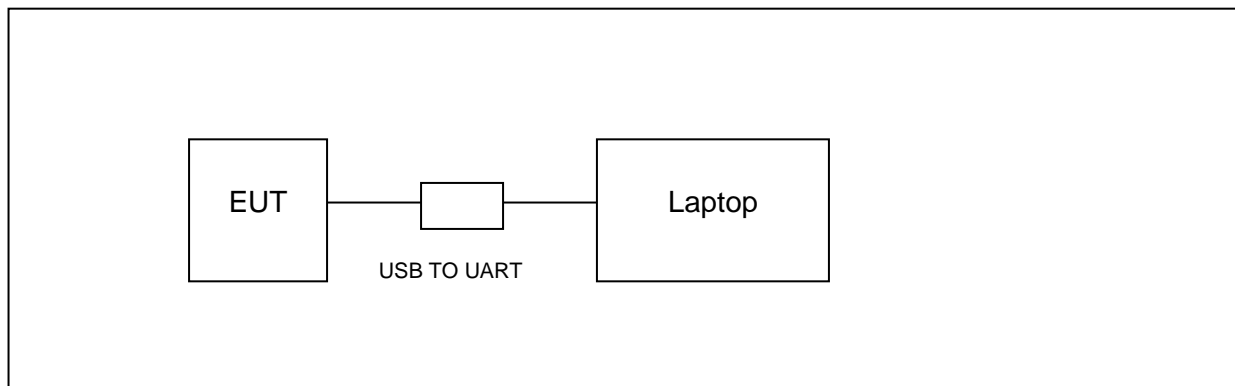



5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Two-Line V- Network	R&S	ENV216	101983	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.10,2018	Dec.10,2019
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305- 00066	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307- 00003	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8- 2350-2400- 2483.5- 2533.5- 40SS	4	Dec.10, 2018	Dec.10, 2019
<input checked="" type="checkbox"/>	High Pass Filter	Wi	WHKX10- 2700-3000- 18000-40SS	23	Dec.10,2018	Dec.10,2019
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		



Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Power Meter	Keysight	N9031A	MY55416024	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Power Sensor	Keysight	N9323A	MY55440013	Dec.10,2018	Dec.10,2019

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth	KDB 558074 D01 DTS Meas Guidance v05r02	8.2
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v05r02	8.3.1.3
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2
8	99% Bandwidth	ANSI C63.10-2013	6.9.3



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK(1Mbps)	2.124	2.500	0.850	84.96%	0.706	0.47	0.5
GFSK(2Mbps)	1.067	1.875	0.569	56.91%	2.449	0.94	1

Note:

Duty Cycle Correction Factor=10log(1/x).


Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)


If that calculated VBW is not available on the analyzer then the next higher value should be used.



GFSK(1Mbps) ON TIME AND DUTY CYCLE MID CH

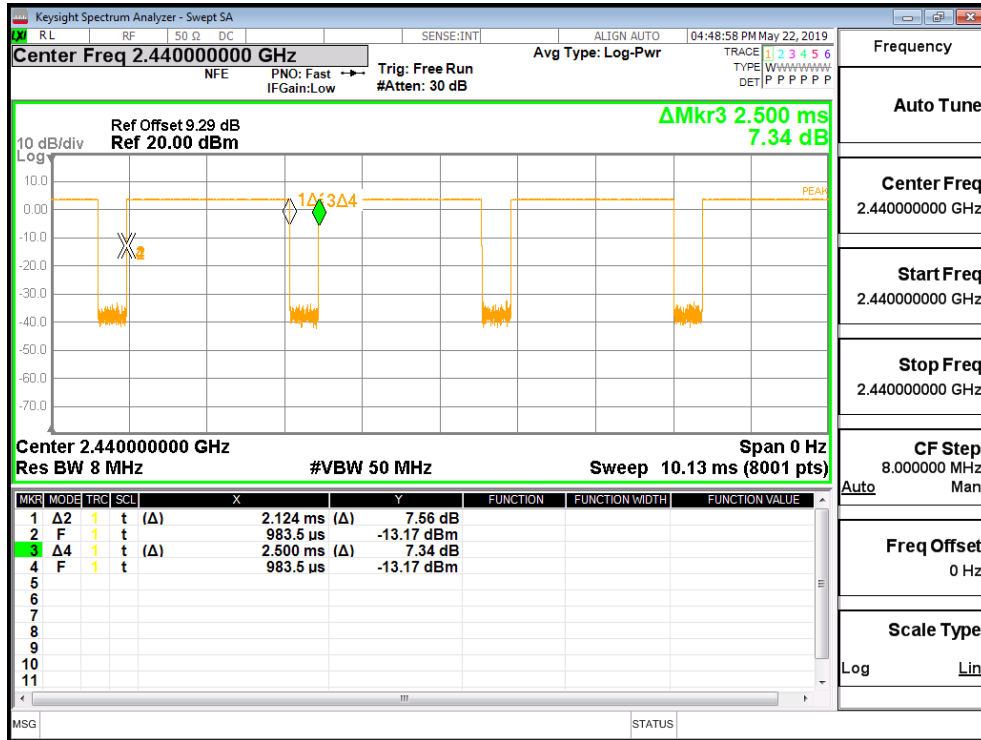

GFSK(2Mbps) ON TIME AND DUTY CYCLE MID CH

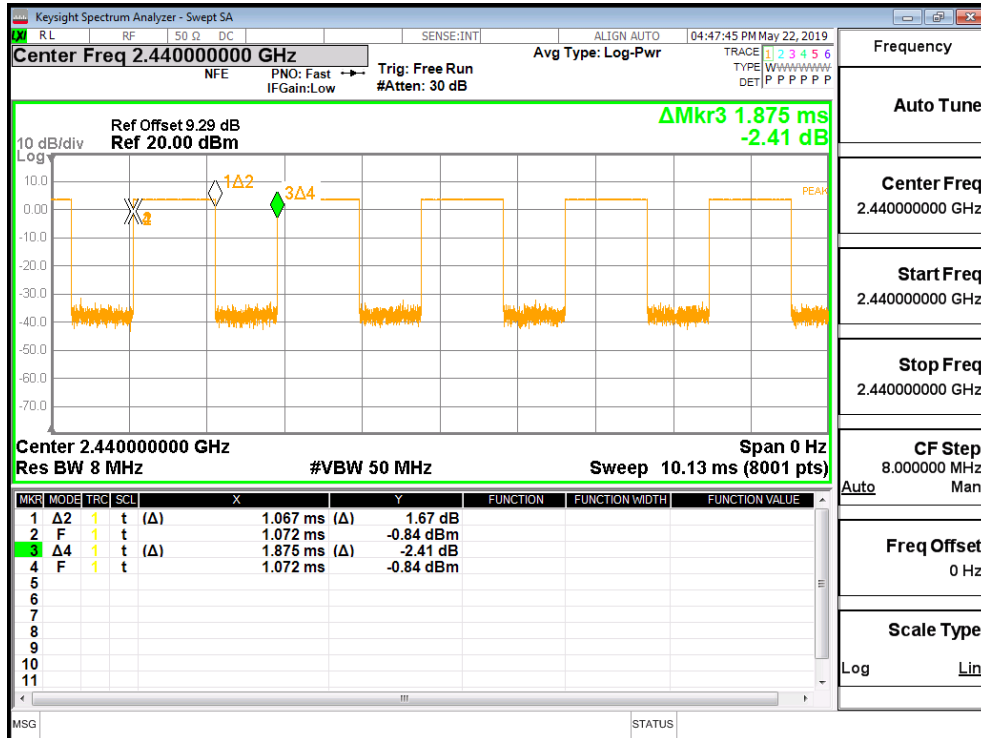

7.2. 6 dB DTS BANDWIDTH AND 99% BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6dB Bandwidth	$\geq 500\text{kHz}$	2400-2483.5
ISED RSS-Gen Clause 6.7	99% Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth : 100KHz For 99% Occupied Bandwidth :1% to 5% of the actual occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Occupied Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB/99% relative to the maximum level measured in the fundamental emission.

TEST SETUP

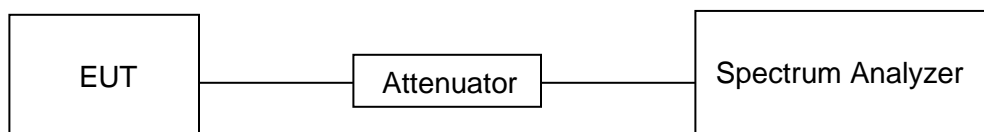




TEST ENVIRONMENT



Temperature	23.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V



RESULTS


7.2.1. GFSK(1Mbps) MODE

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	6dB BW Limit (kHz)	Result
Low	0.6625	1.0280	500	Pass
Middle	0.6627	1.0274	500	Pass
High	0.6617	1.0273	500	Pass

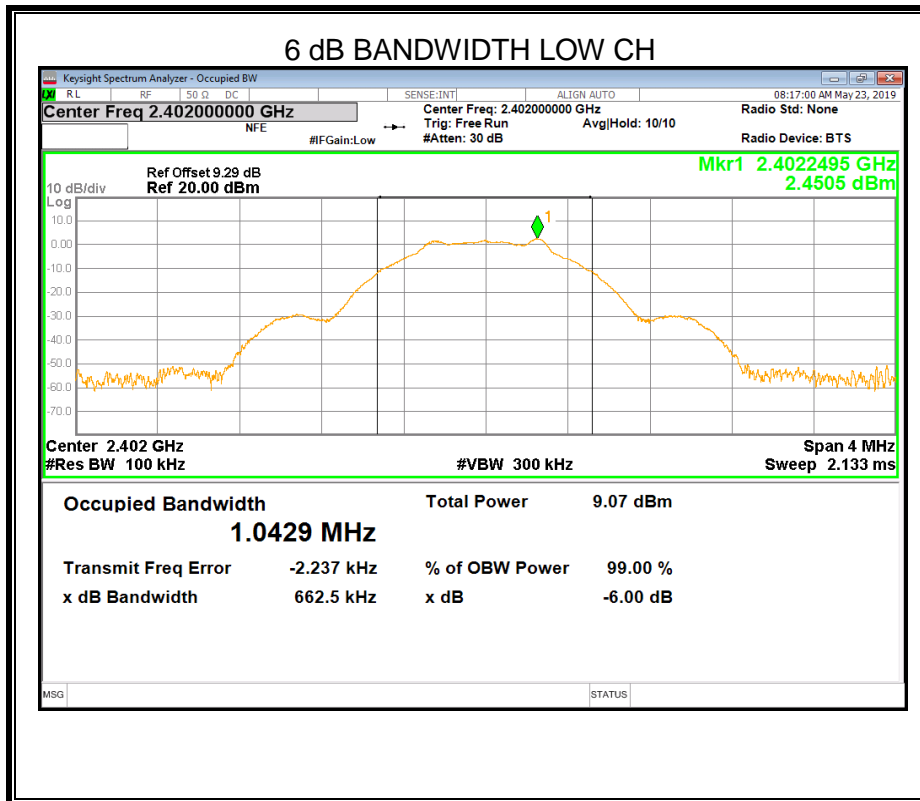

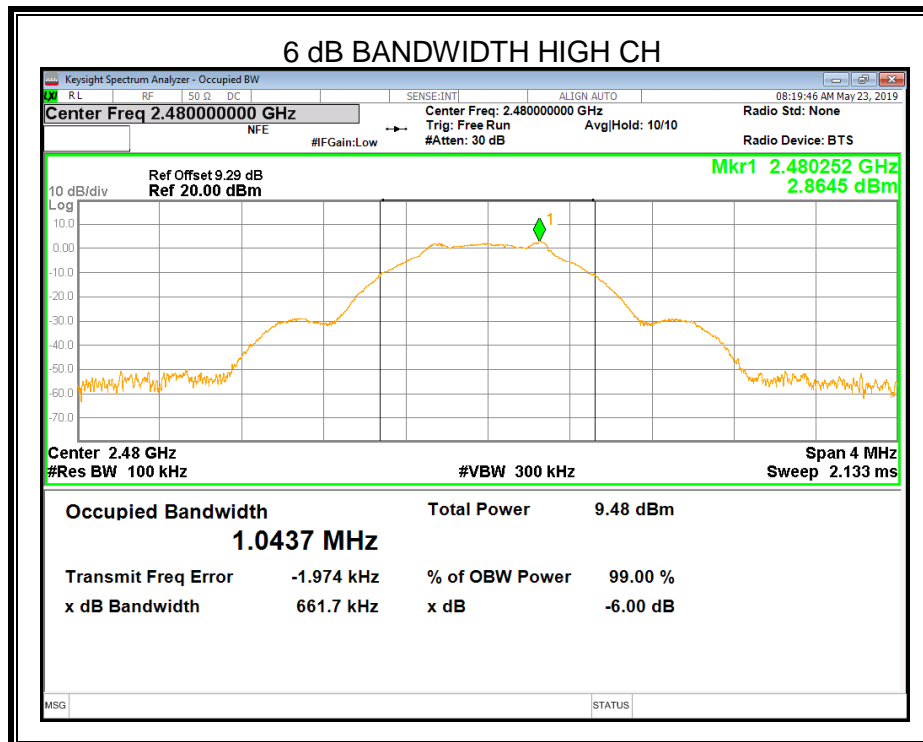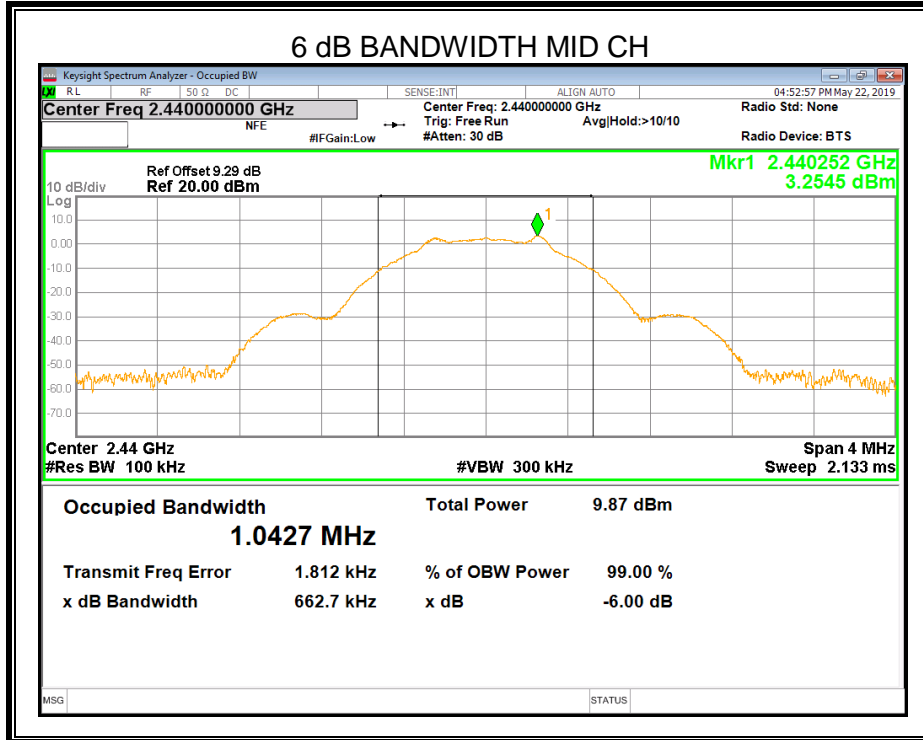

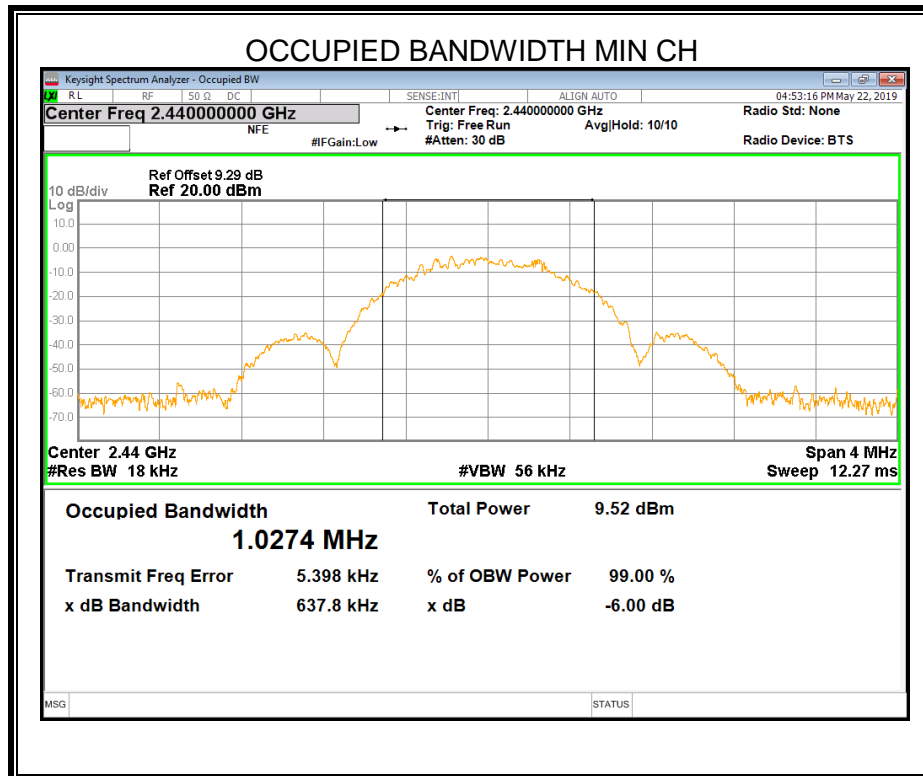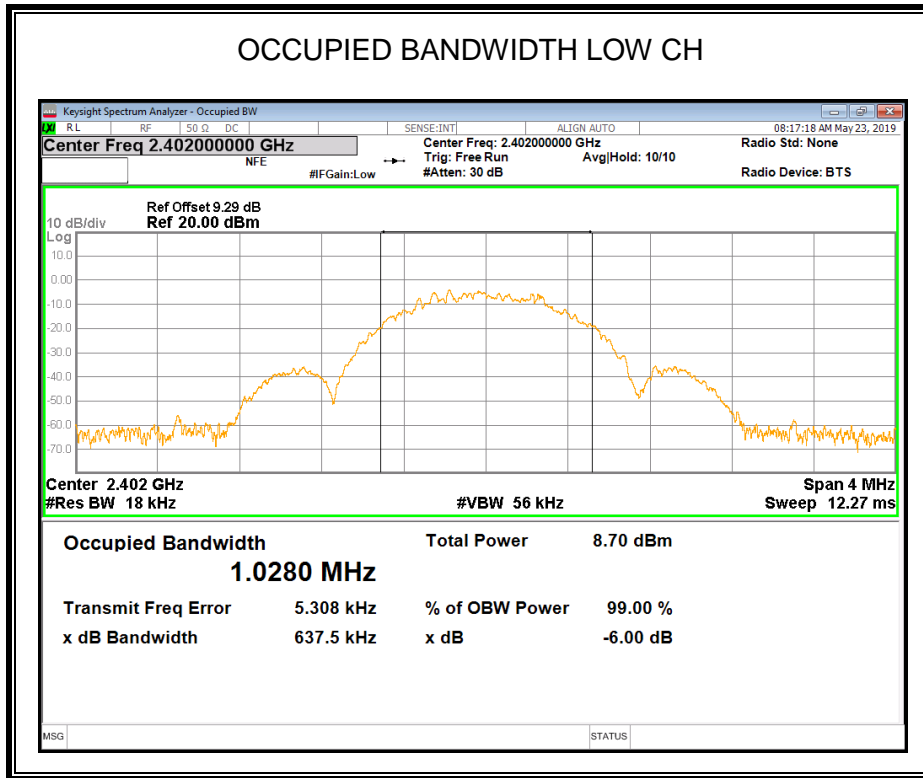



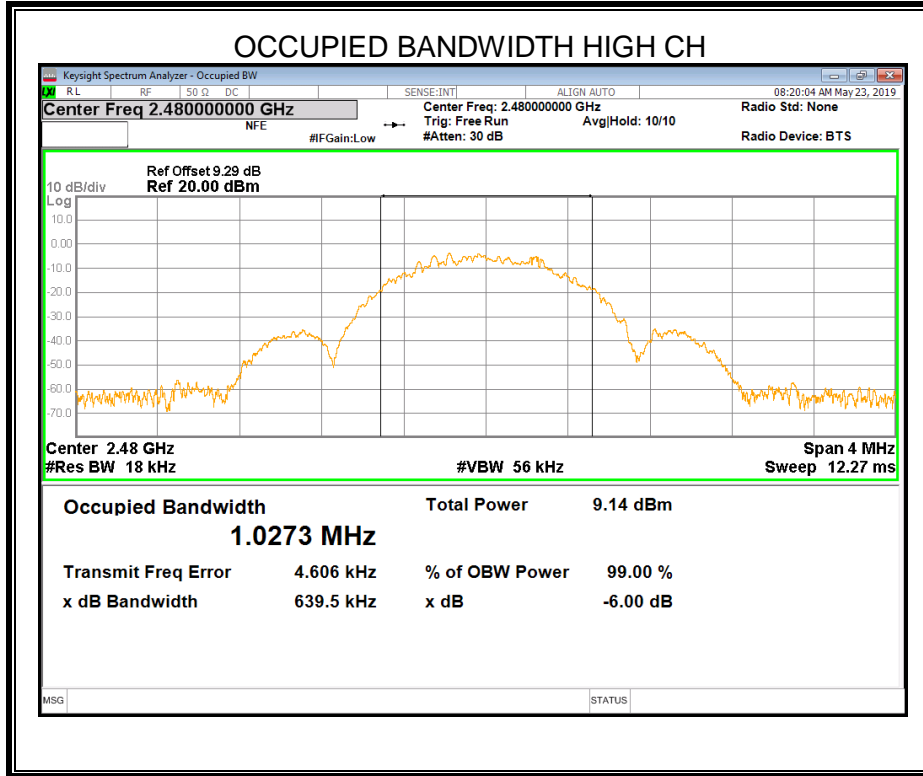







7.2.2. GFSK(2Mbps) MODE

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	6dB BW Limit (kHz)	Result
Low	1.240	2.0516	500	Pass
Middle	1.238	2.0525	500	Pass
High	1.239	2.0516	500	Pass

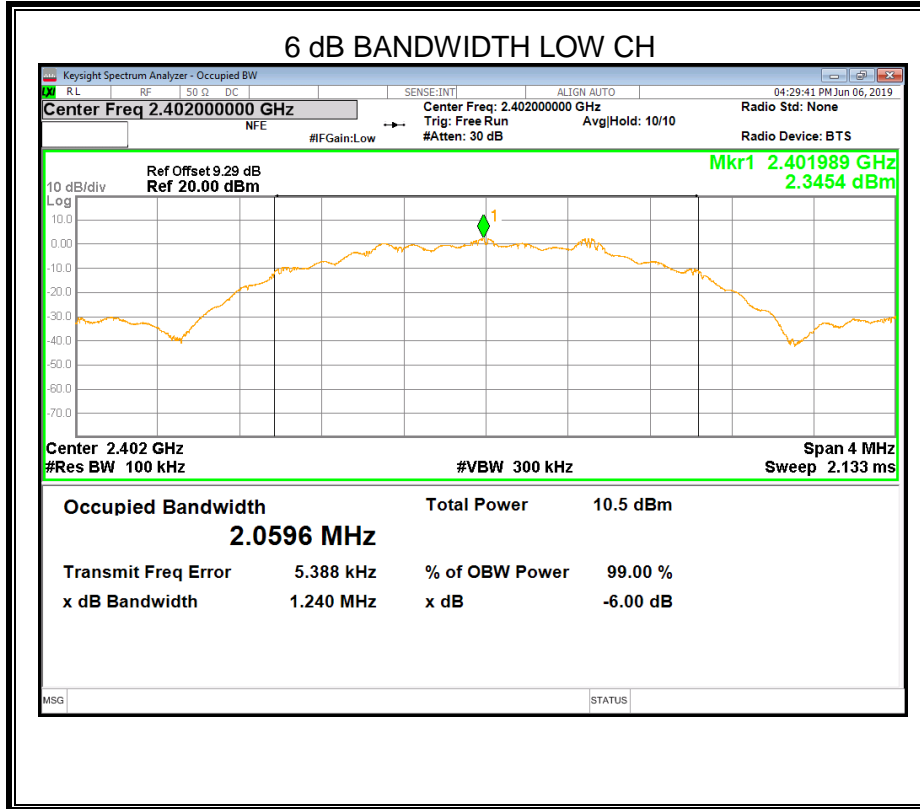

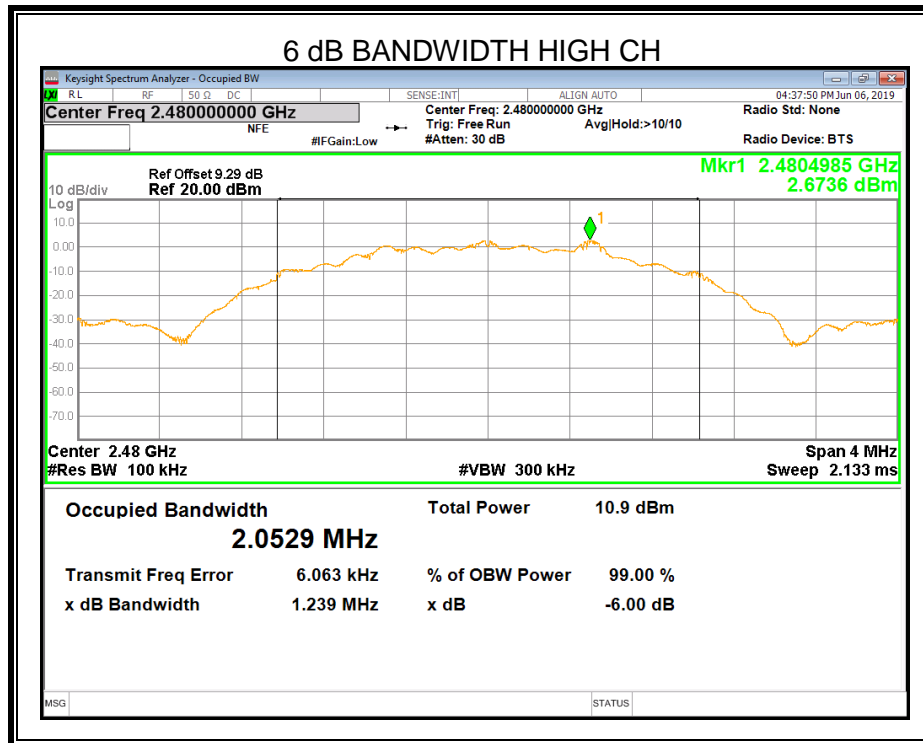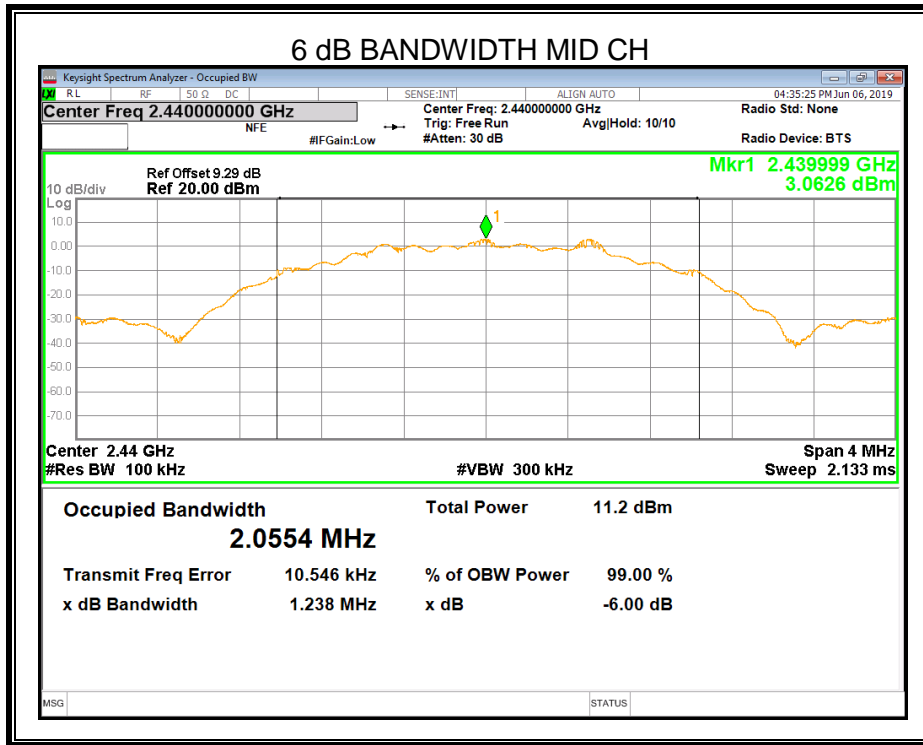

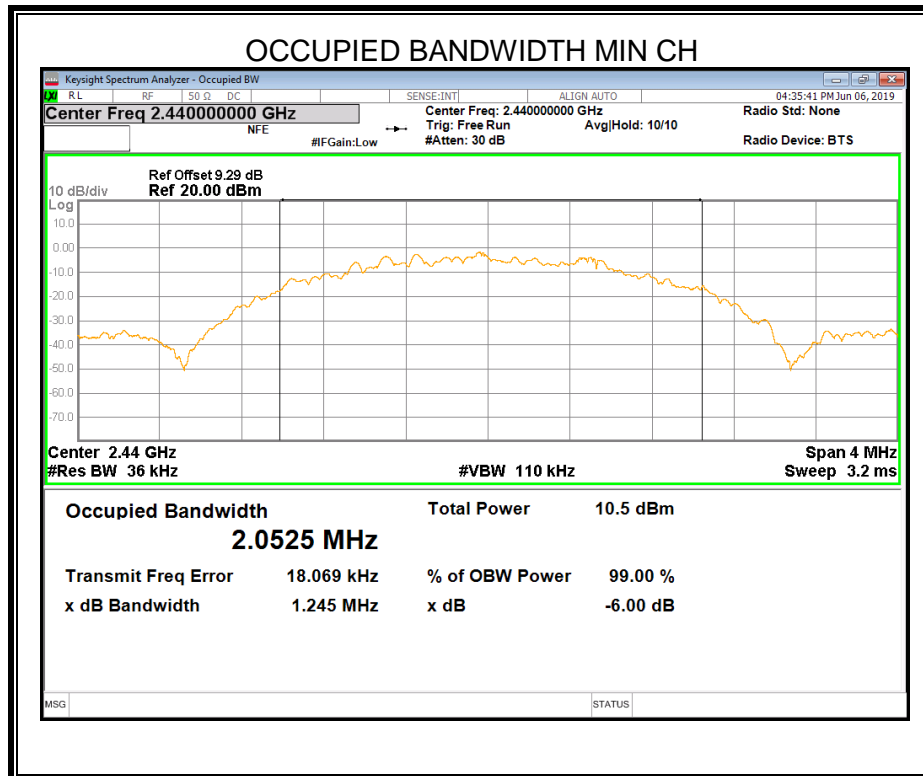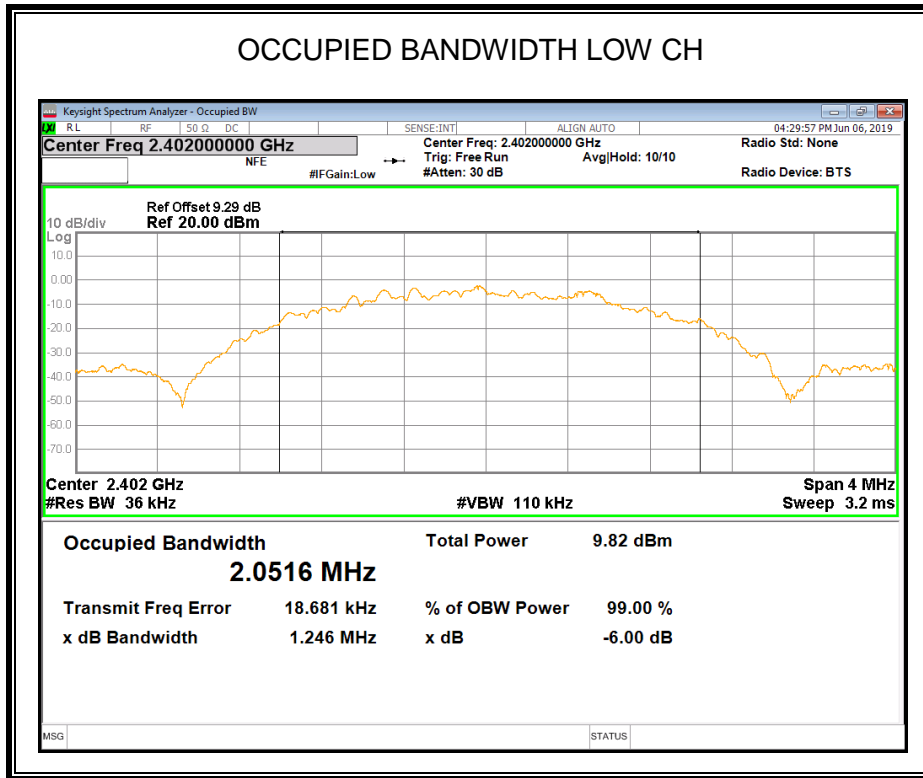

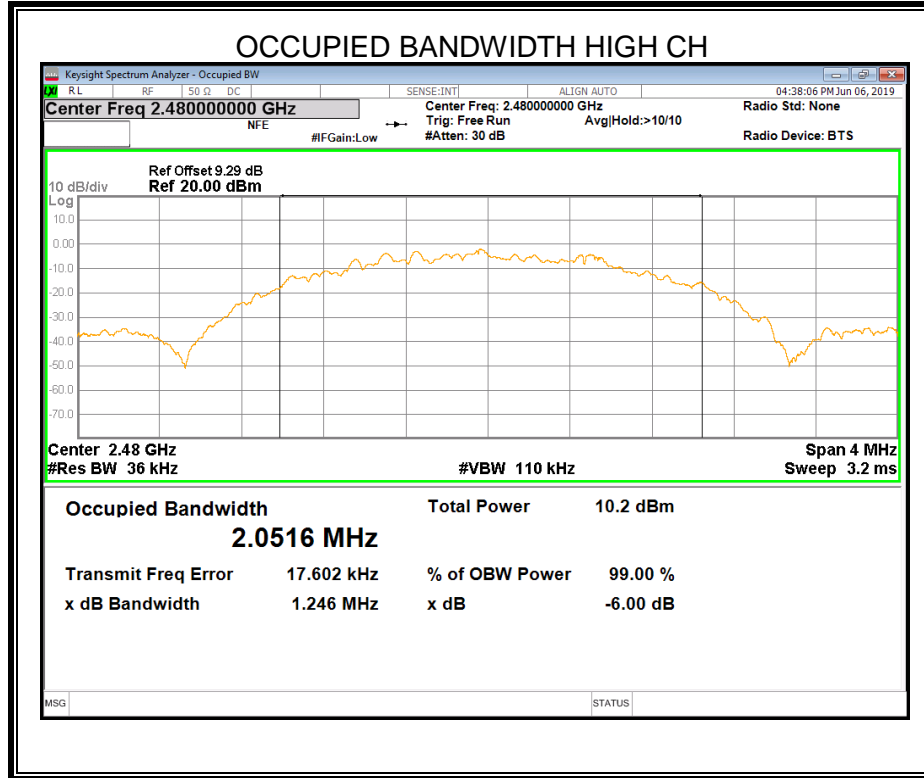



7.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.

TEST SETUP



TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V



7.3.1. GFSK(1Mbps) MODE

Test Channel	Maximum Conducted Output Power(PK)	EIRP	LIMIT
	(dBm)	(dBm)	dBm
Low	3.05	7.79	30
Middle	3.65	8.39	30
High	3.48	8.22	30

7.3.2. GFSK(2Mbps) MODE

Test Channel	Maximum Conducted Output Power(PK)	EIRP	LIMIT
	(dBm)	(dBm)	dBm
Low	3.76	8.50	30
Middle	4.46	9.20	30
High	4.11	8.85	30

Note: EIRP=Maximum Conducted Output Power(PK) + Antenna Gain

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP






TEST ENVIRONMENT



Temperature	23.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

RESULTS

7.4.1. GFSK(1Mbps) MODE

Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-13.639	8	PASS
Middle	-13.051	8	PASS
High	-13.271	8	PASS

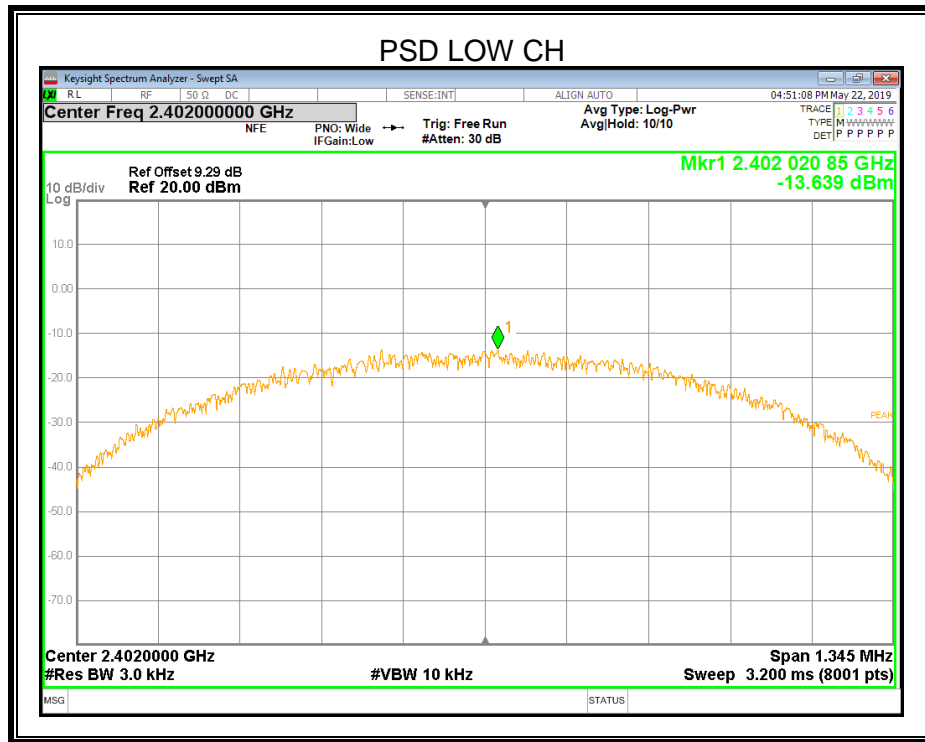


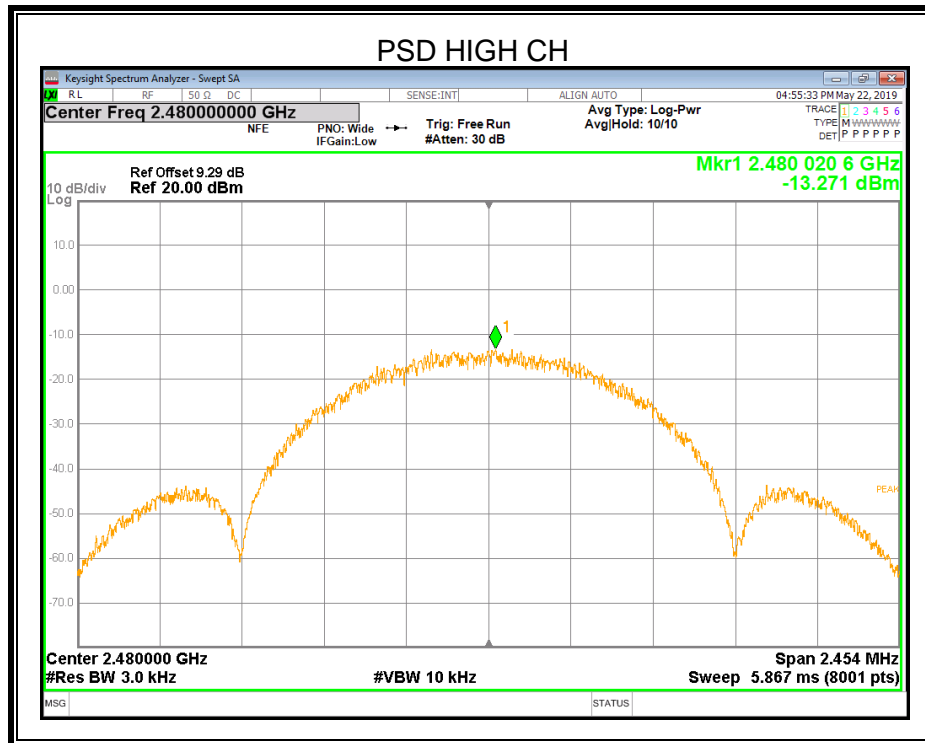
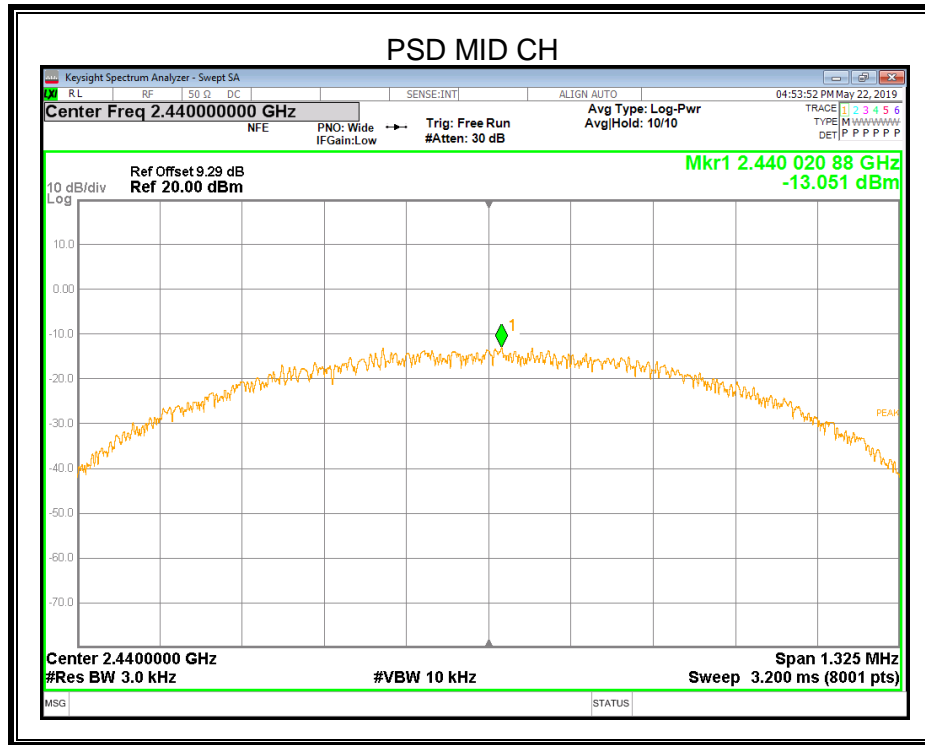




7.4.2. GFSK(2Mbps) MODE

Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-15.627	8	PASS
Middle	-14.901	8	PASS
High	-15.296	8	PASS

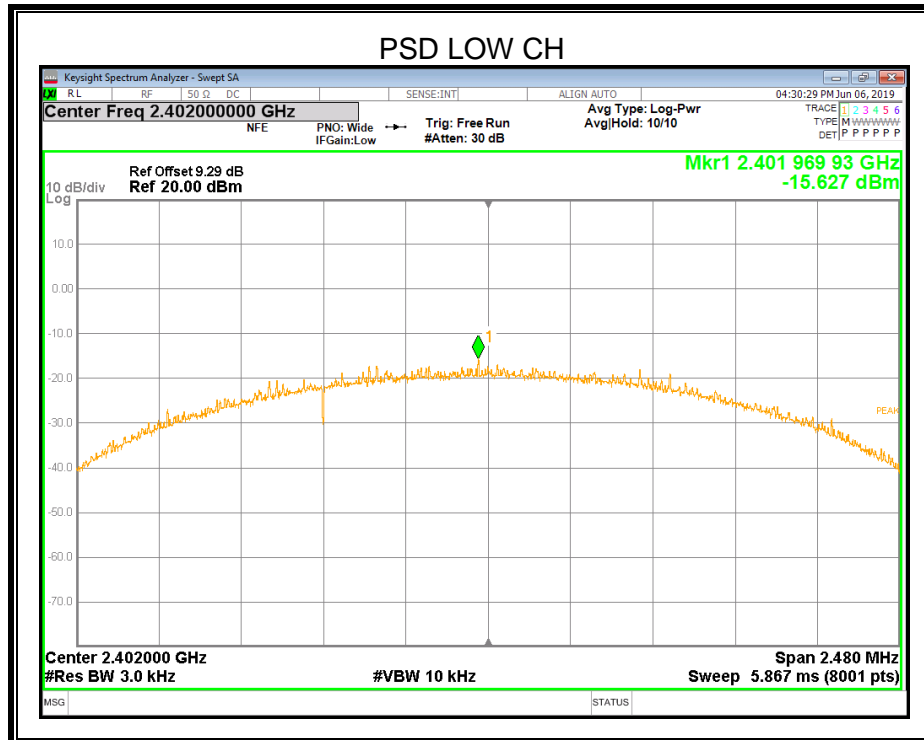

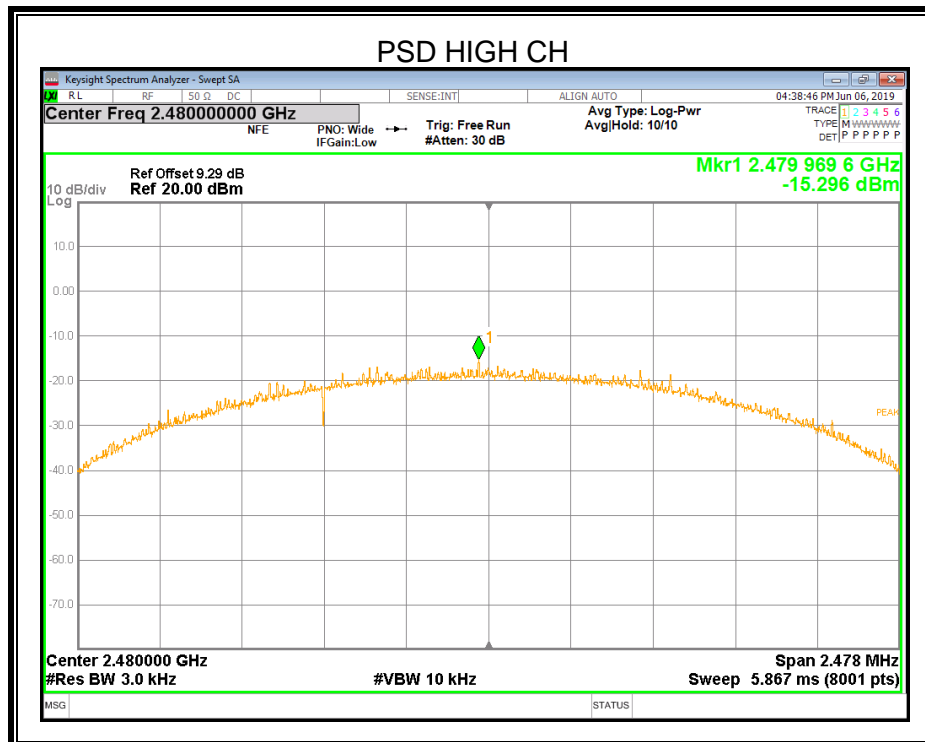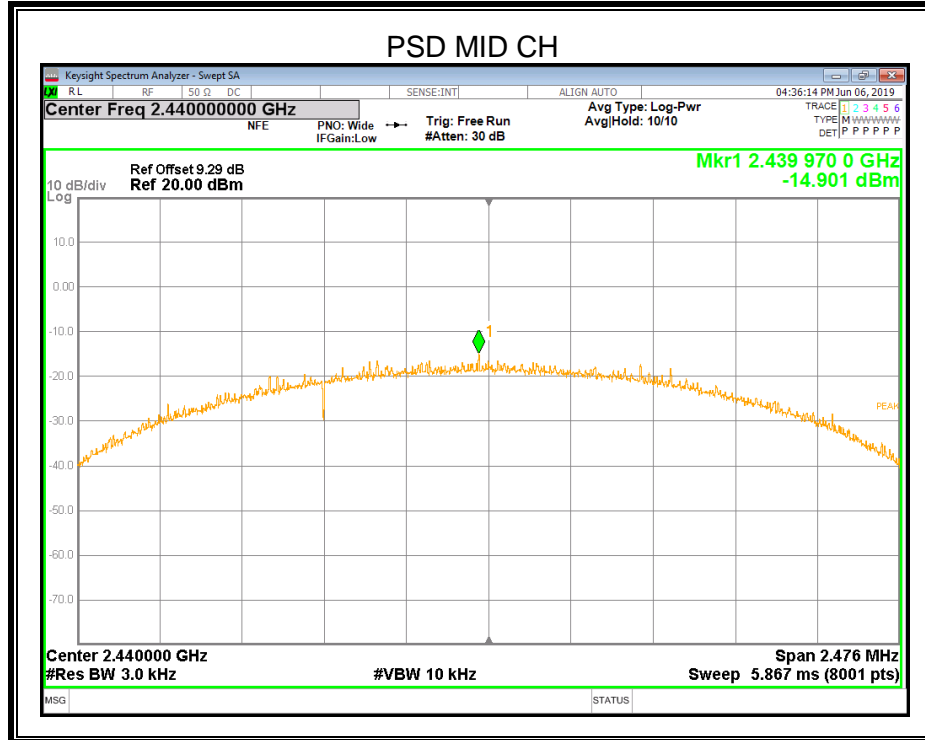



7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.



TEST SETUP




TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

RESULTS


7.5.1. GFSK(1Mbps) MODE

LOW CH BANDEDGE

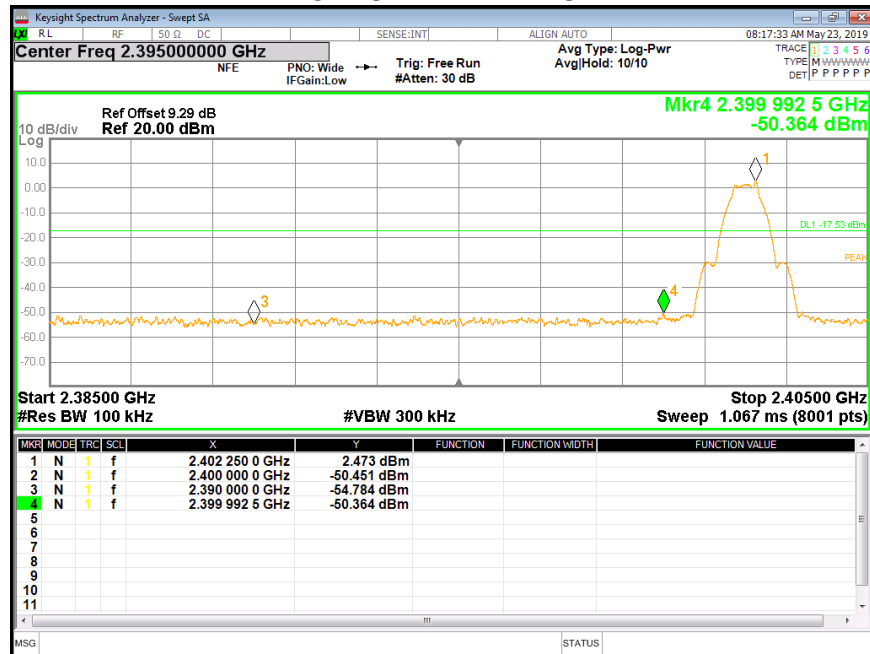




LOW CH SPURIOUS EMISSIONS REFERENCE

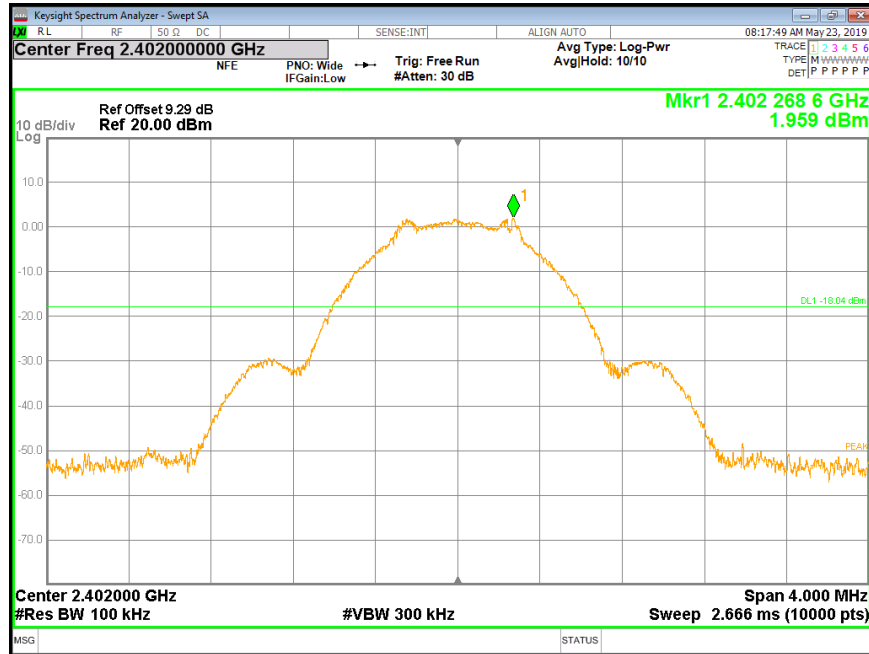


LOW CH SPURIOUS EMISSIONS 30M-10G

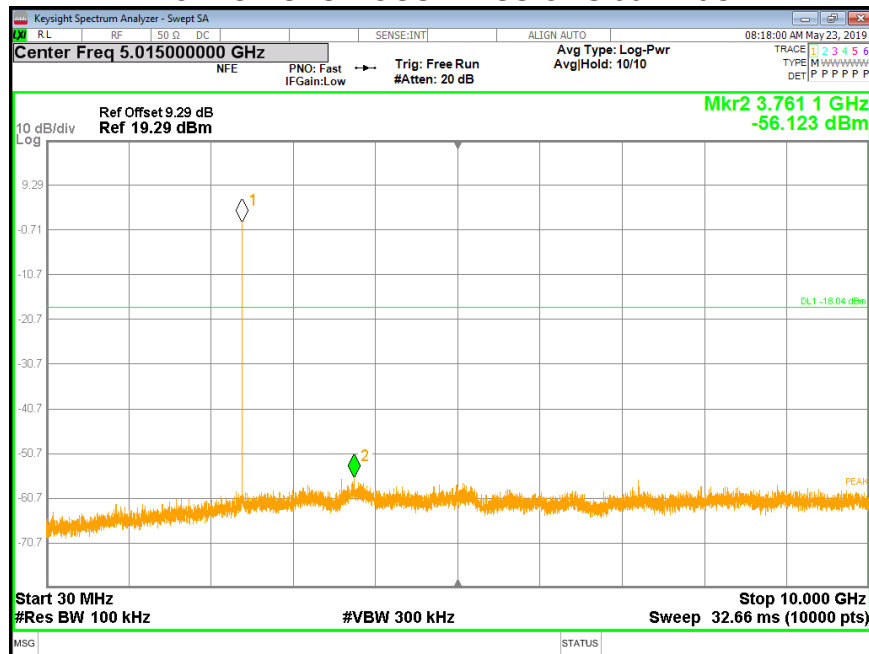




LOW CH SPURIOUS EMISSIONS 10G-26G

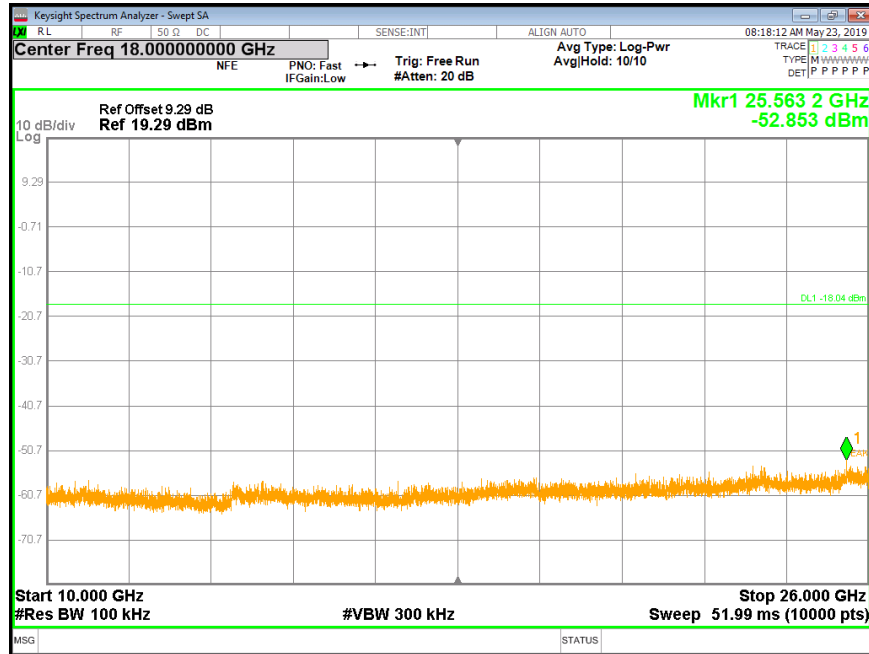


MID CH SPURIOUS EMISSIONS REFERENCE

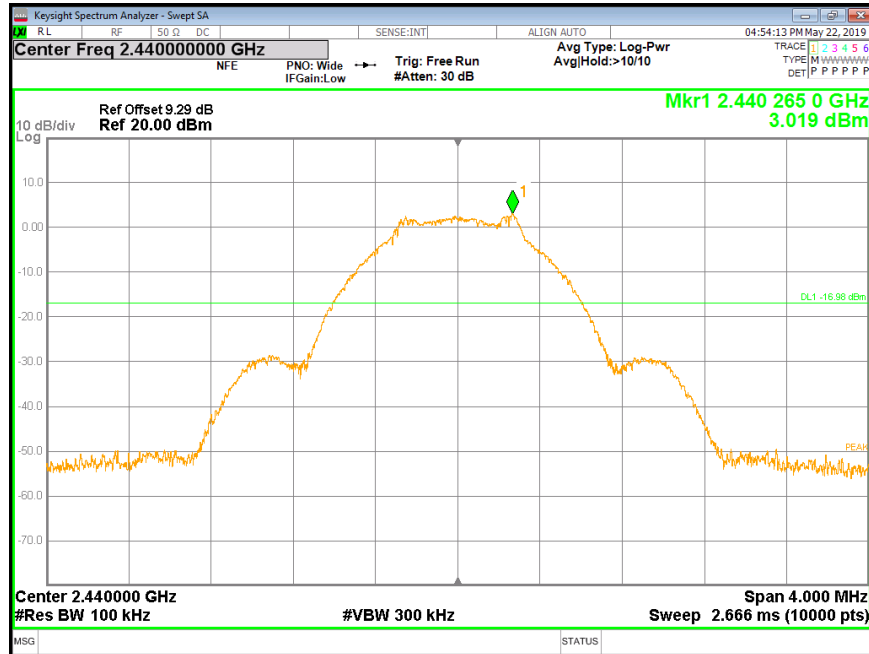




MID CH SPURIOUS EMISSIONS 30M-10G

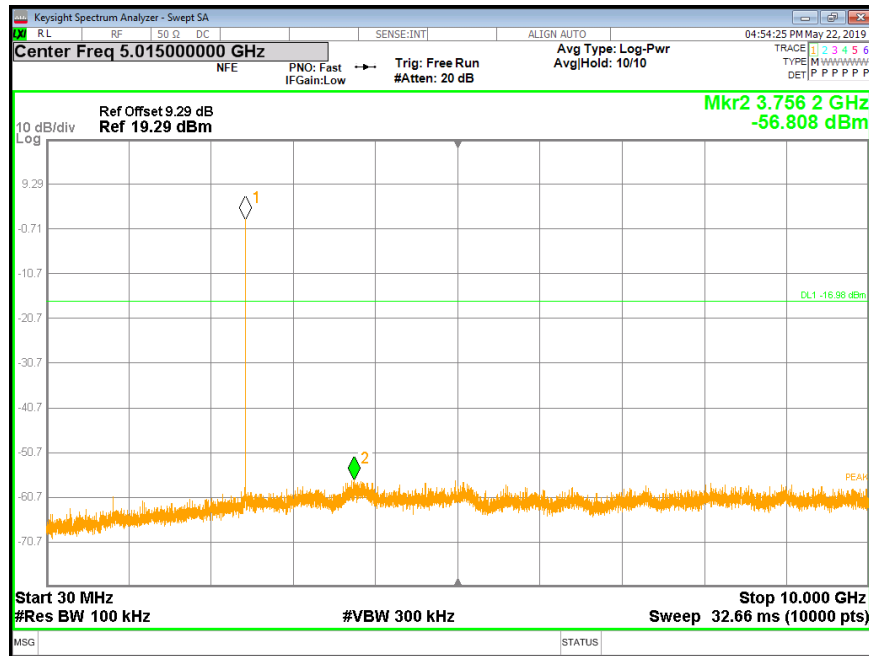


MID CH SPURIOUS EMISSIONS 10G-26G

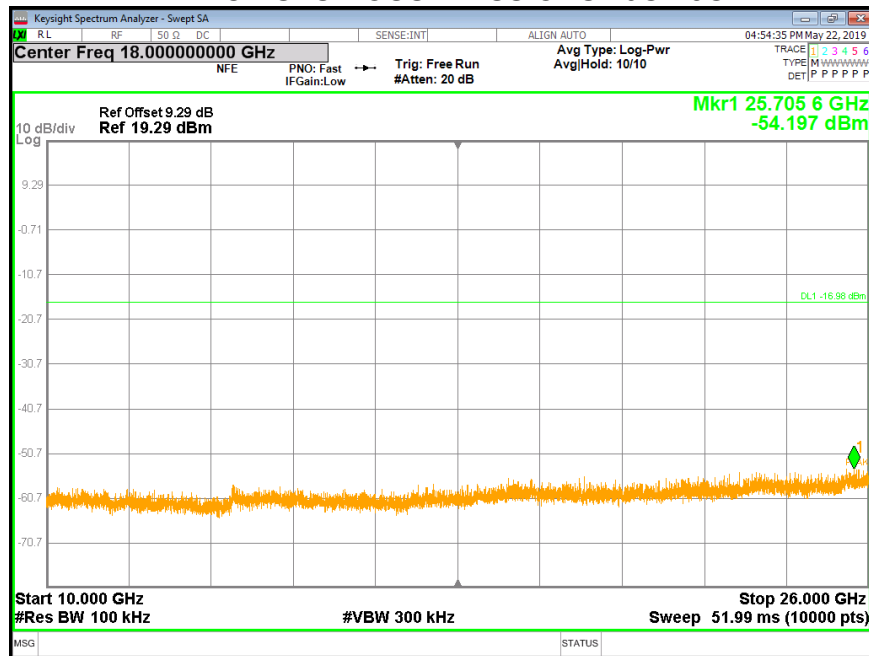




HIGH CH BANDEDGE

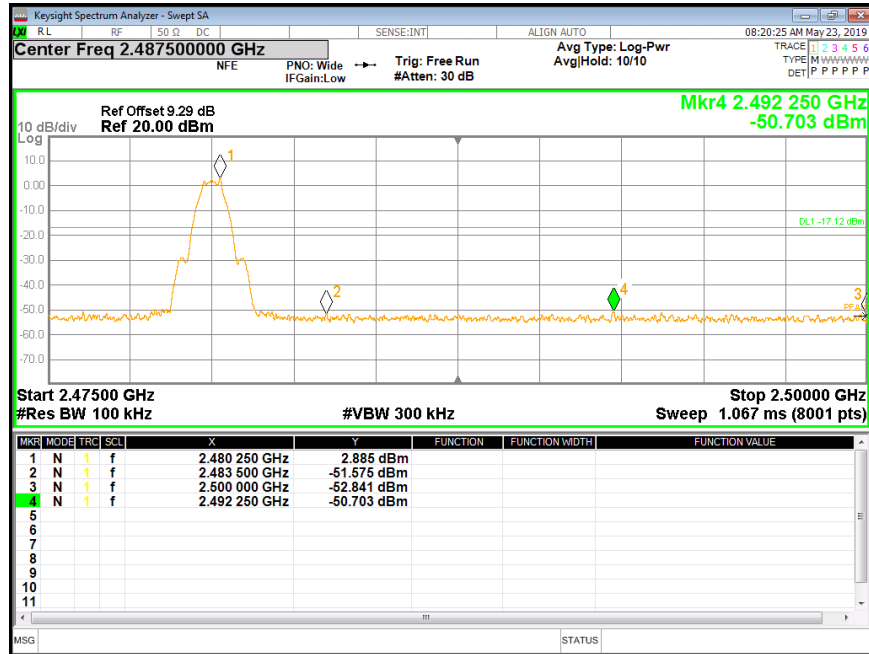


HIGH CH SPURIOUS EMISSIONS REFERENCE

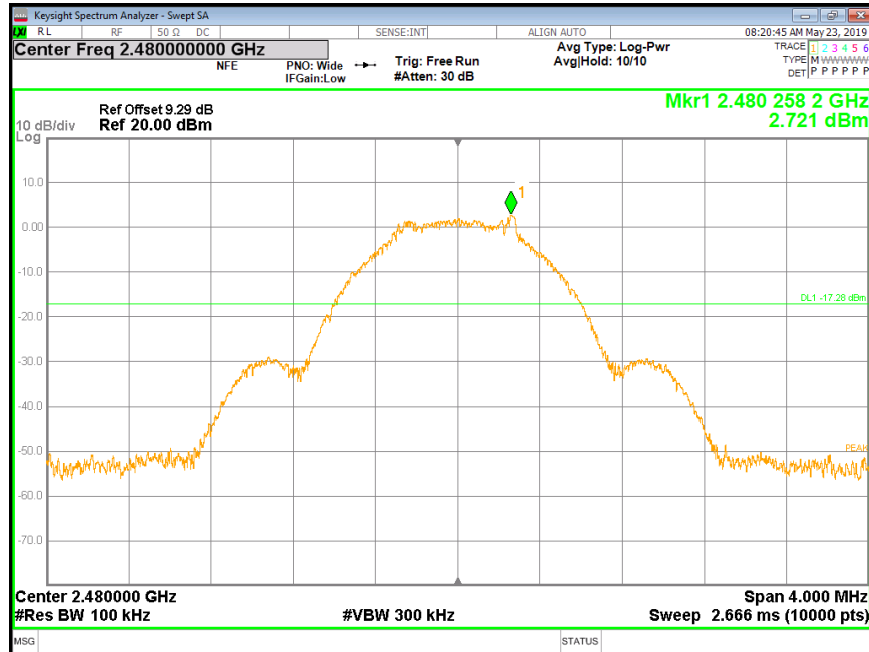




HIGH CH SPURIOUS EMISSIONS 30M-10G

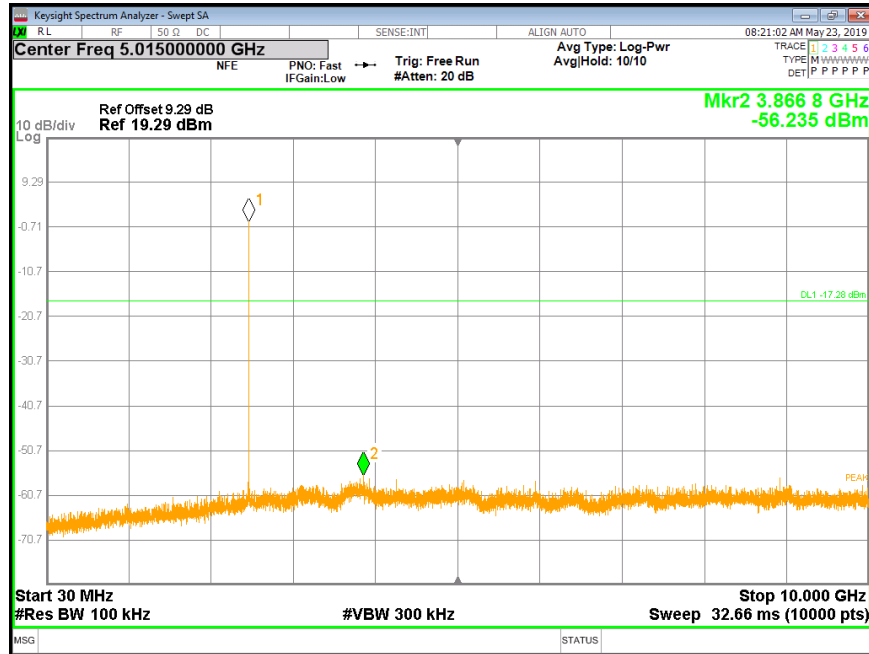


HIGH CH SPURIOUS EMISSIONS 10G-26G

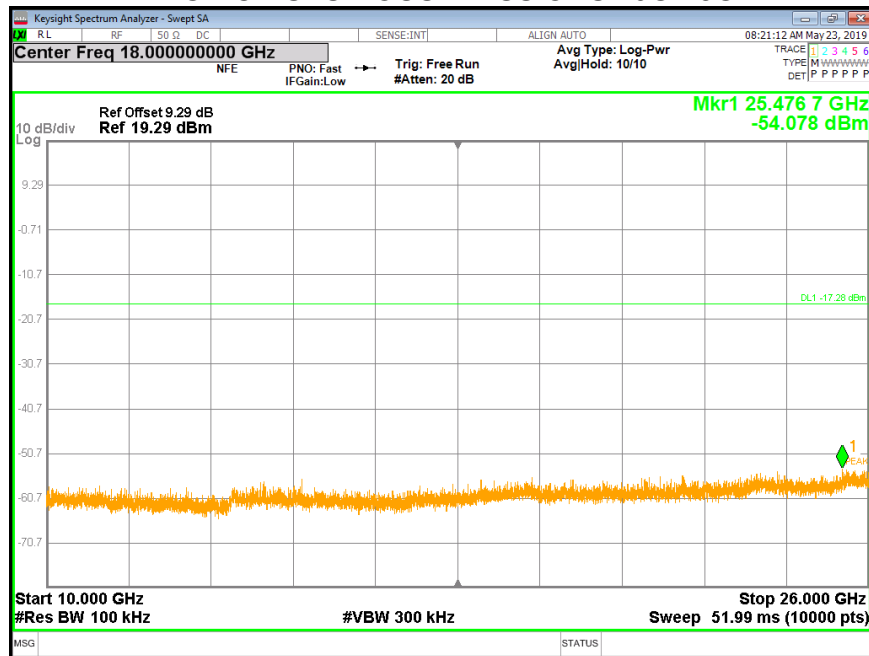




7.5.2. GFSK(2Mbps) MODE

LOW CH BANDEDGE

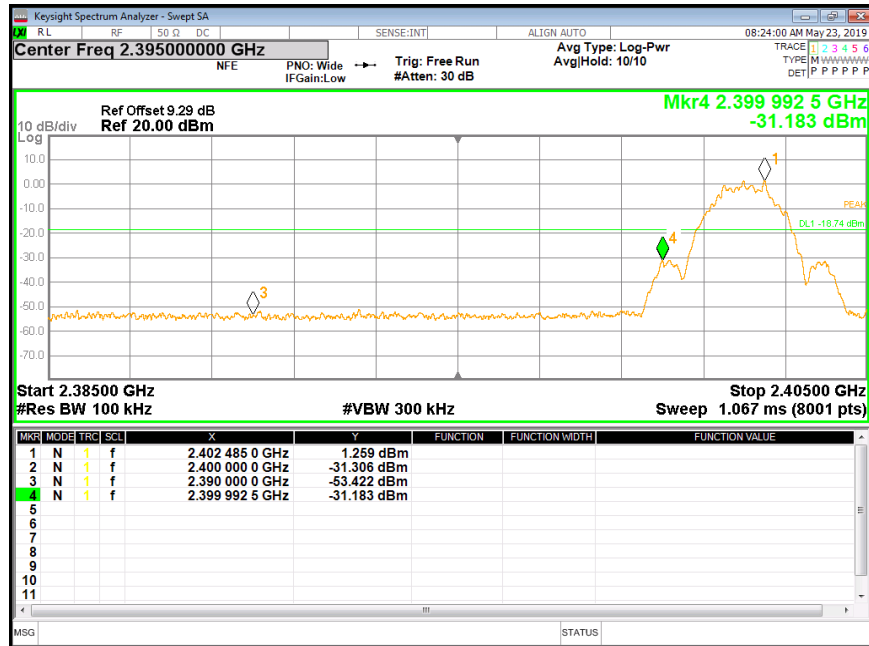


LOW CH SPURIOUS EMISSIONS REFERENCE

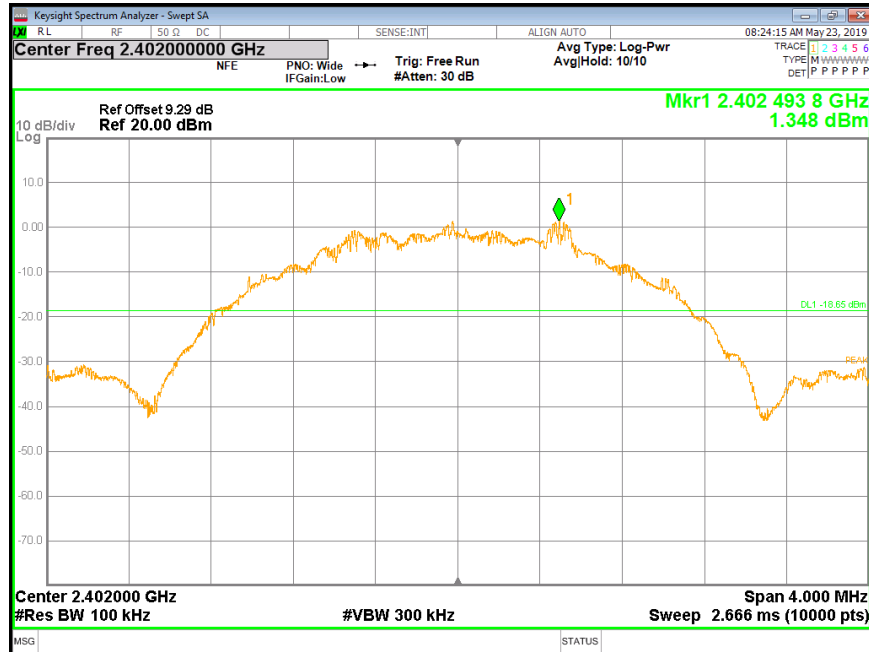




LOW CH SPURIOUS EMISSIONS 30M-10G

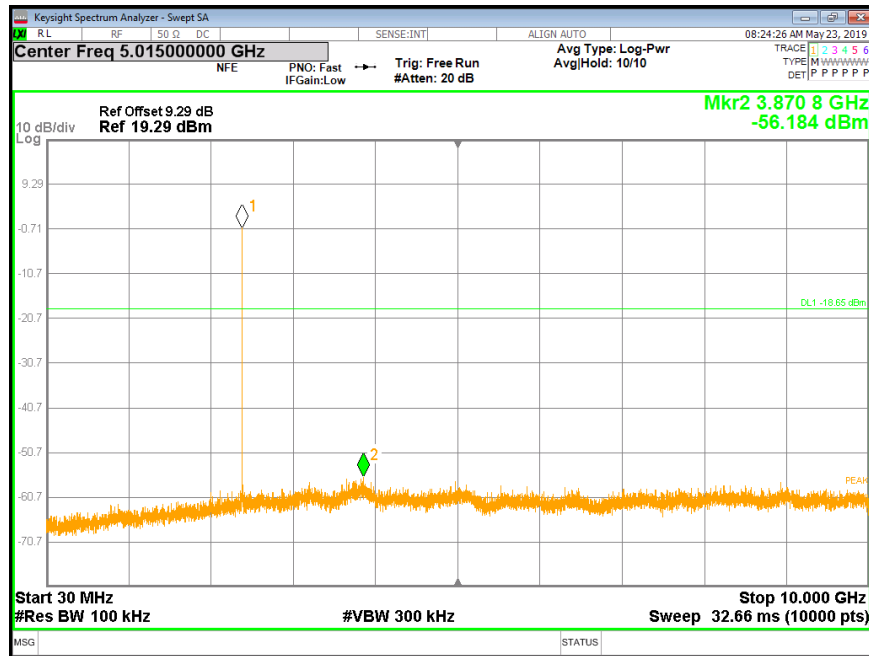


LOW CH SPURIOUS EMISSIONS 10G-26G

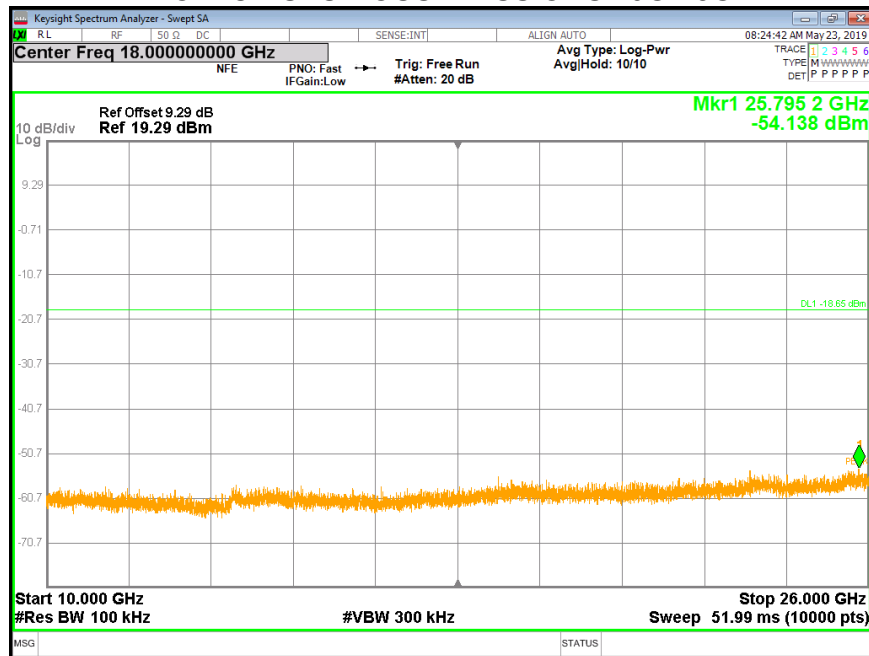




MID CH SPURIOUS EMISSIONS REFERENCE

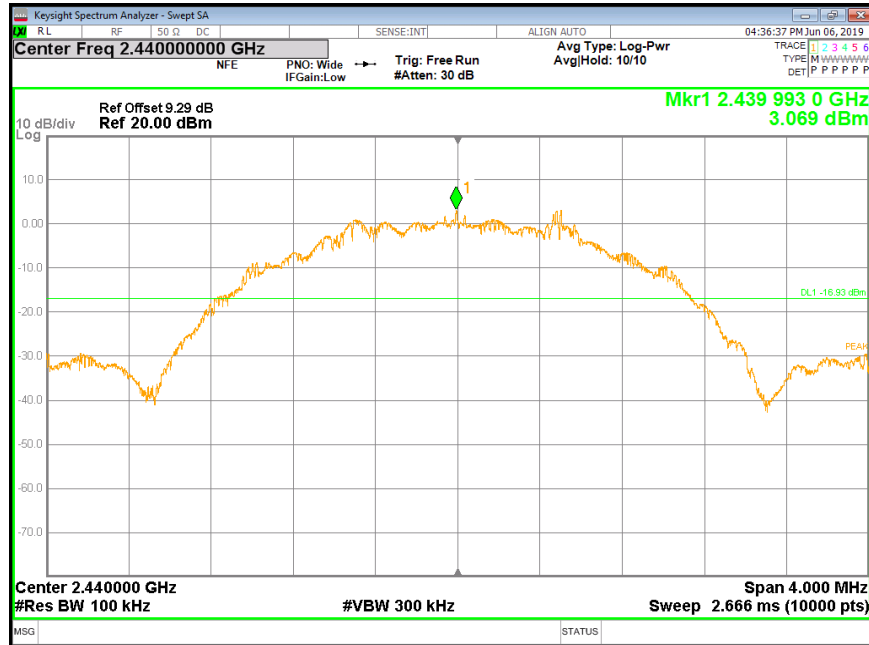


MID CH SPURIOUS EMISSIONS 30M-10G

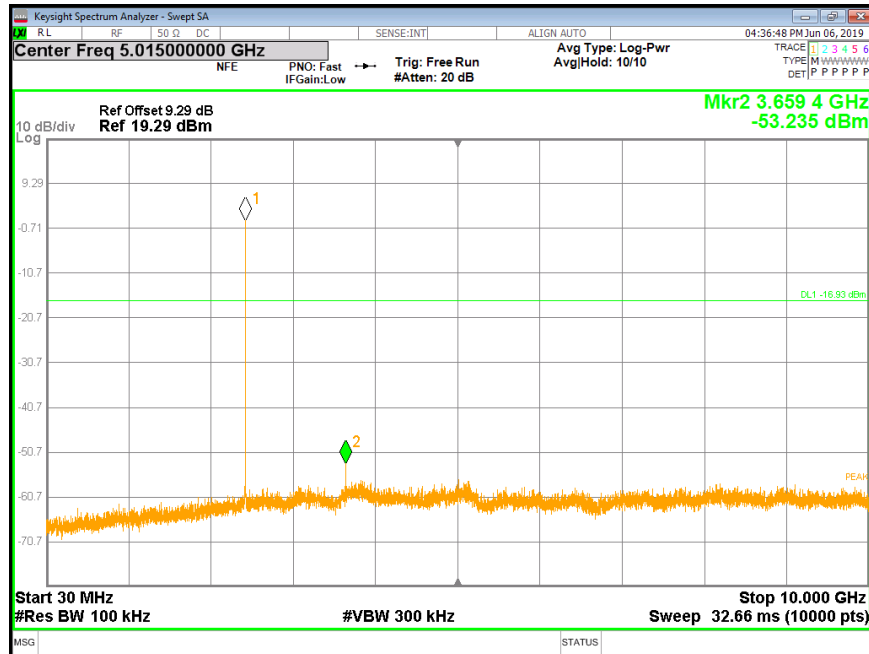




MID CH SPURIOUS EMISSIONS 10G-26G

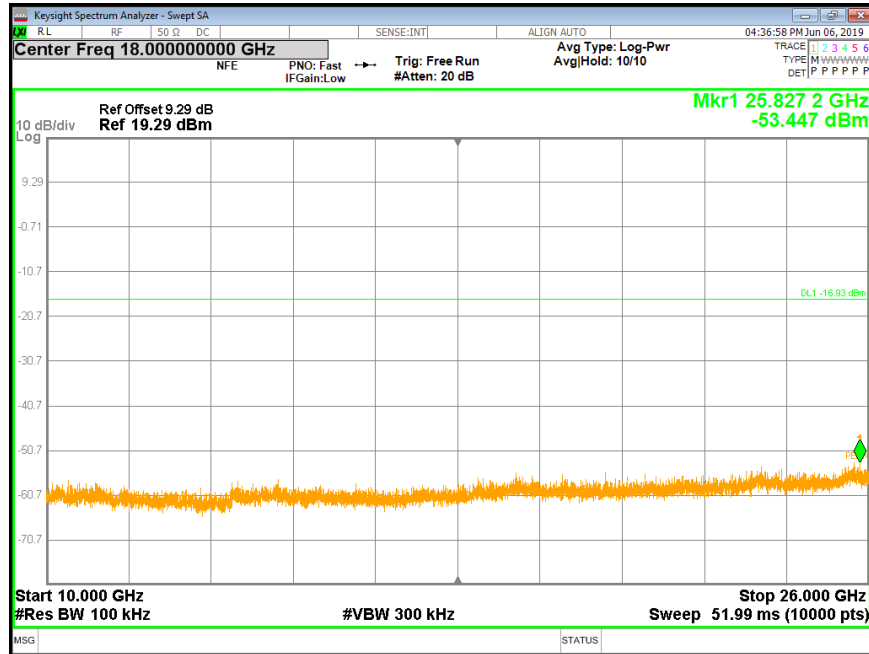


HIGH CH BANDEDAGE

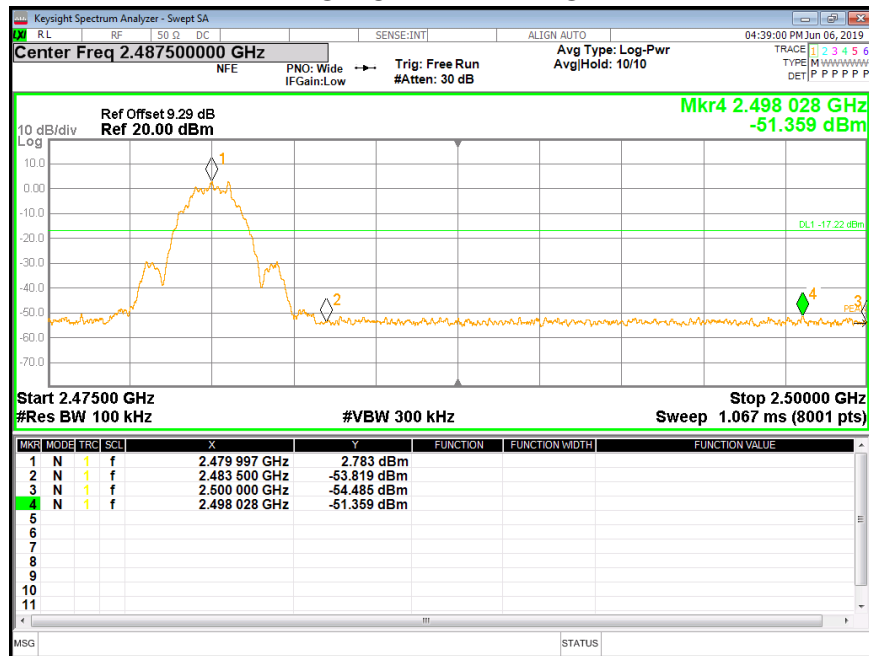




HIGH CH SPURIOUS EMISSIONS REFERENCE

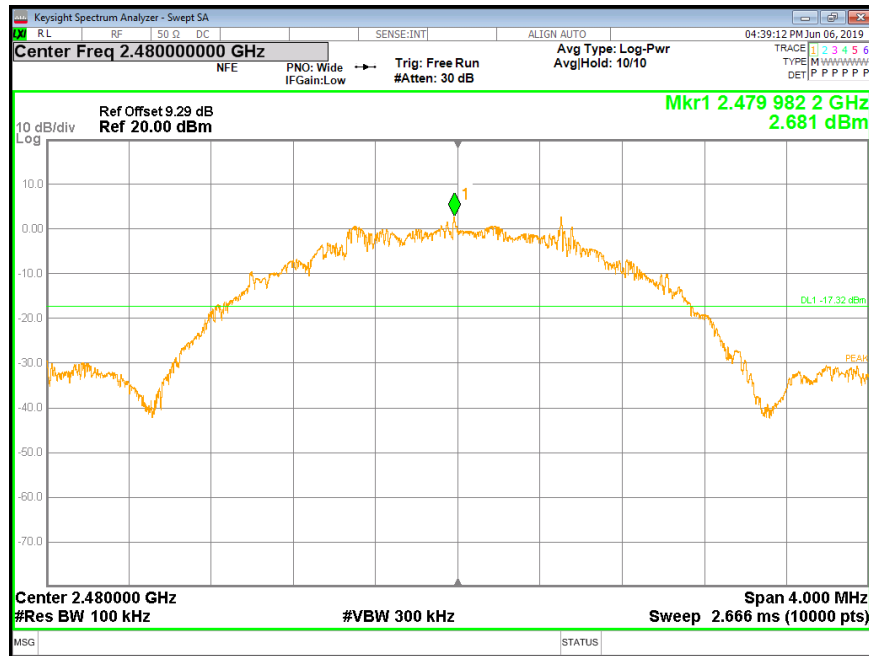


HIGH CH SPURIOUS EMISSIONS 30M-10G

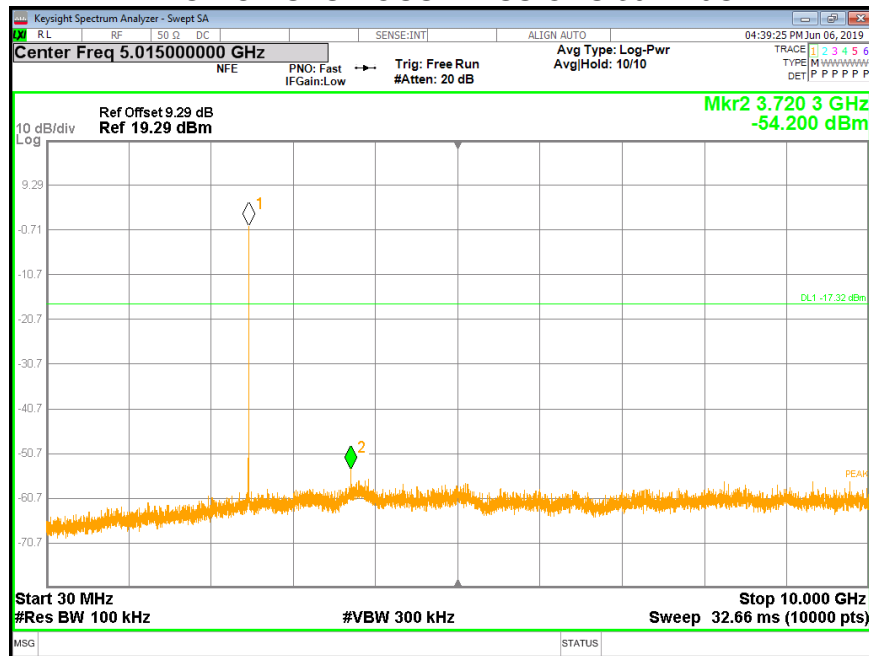



HIGH CH SPURIOUS EMISSIONS 10G-26G

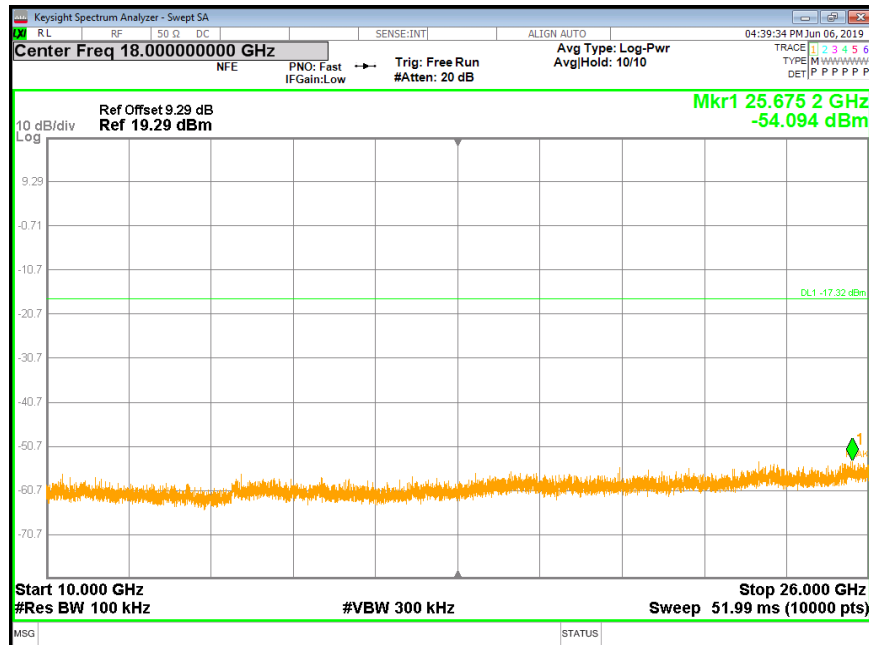



8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10

Radiation Disturbance Test Limit for FCC (Class B)(9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.


Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC §15.205 (a)

TEST SETUP AND PROCEDURE

Below 30MHz

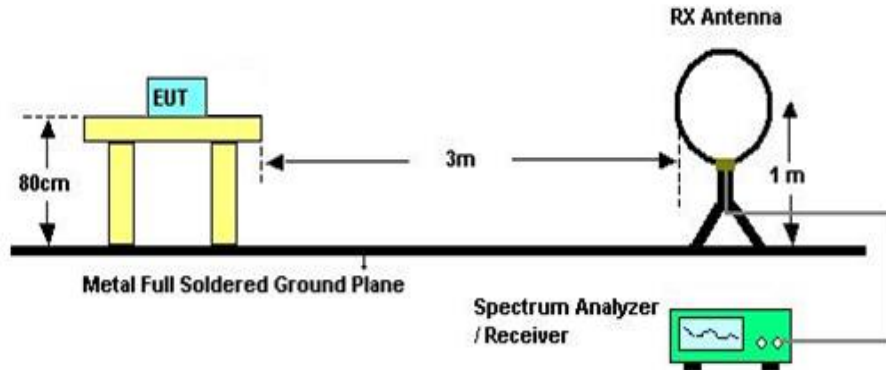


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G and above 30MHz

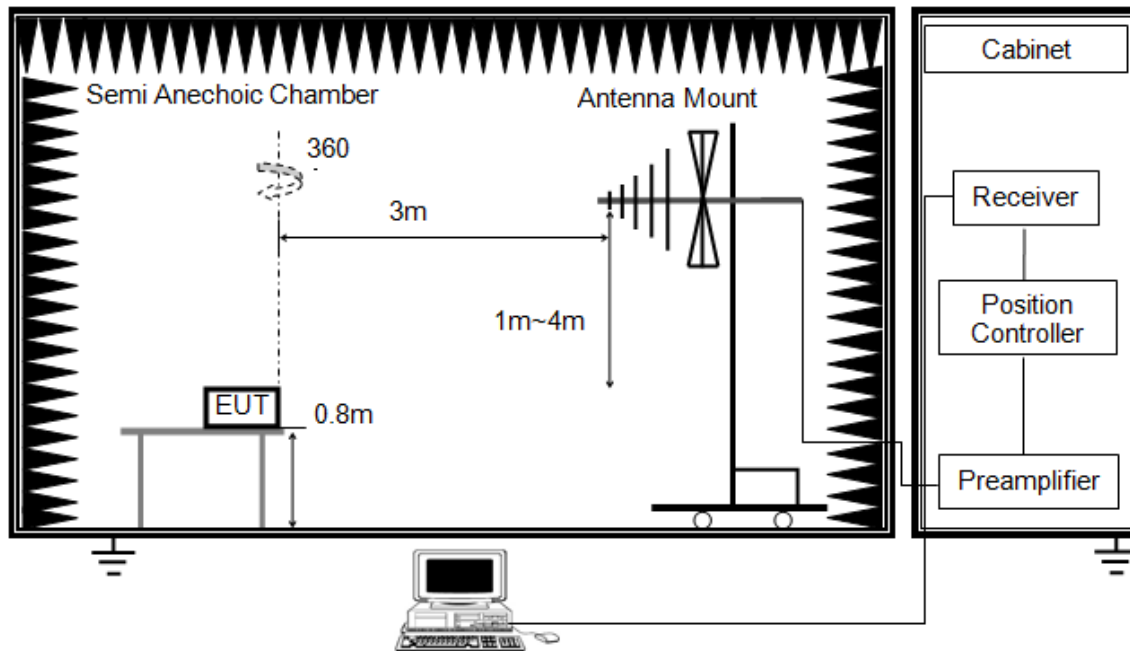


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1G

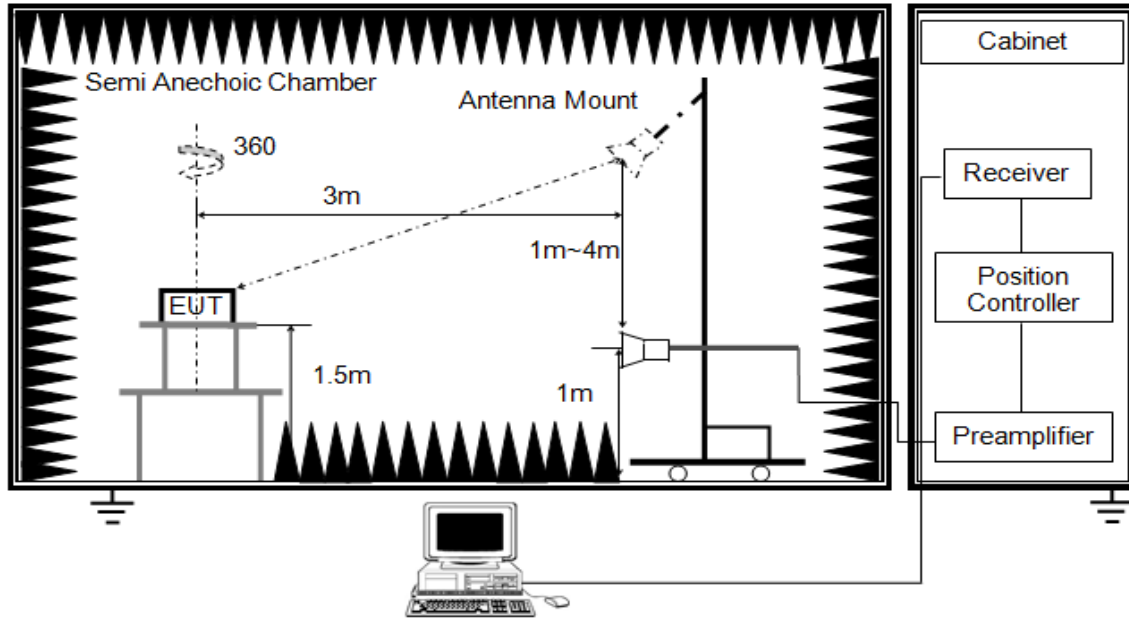


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

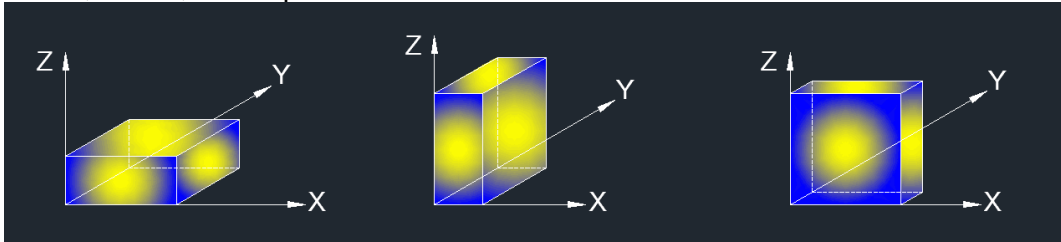

Note 1: For radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

Note 3: All the EUT's emissions had been evaluated for simultaneous transmission with the other WIFI 2.4GHz, WIFI 5GHz and BT transmitter and there were no any additional or worse emissions found.

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V


RESULTS



8.1. RESTRICTED BANDEDGE

8.1.1. GFSK(1Mbps) MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

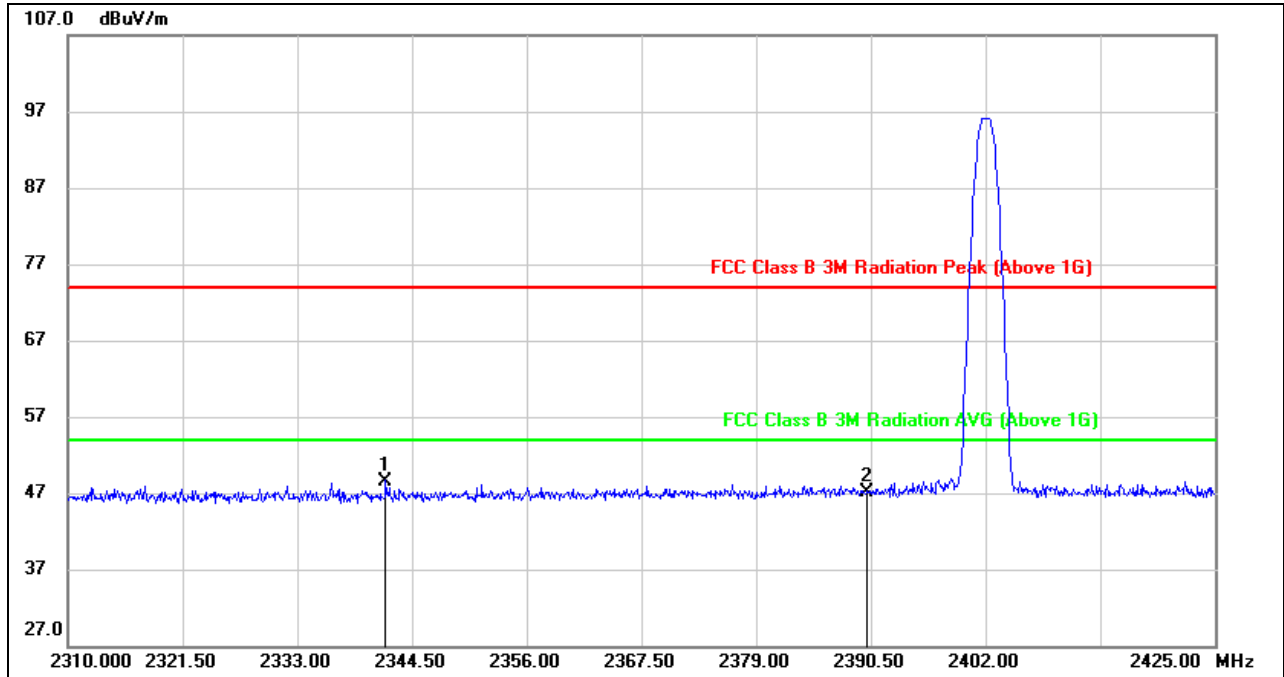


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2341.855	15.81	32.79	48.60	74.00	-25.40	peak
2	2390.000	14.18	32.94	47.12	74.00	-26.88	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

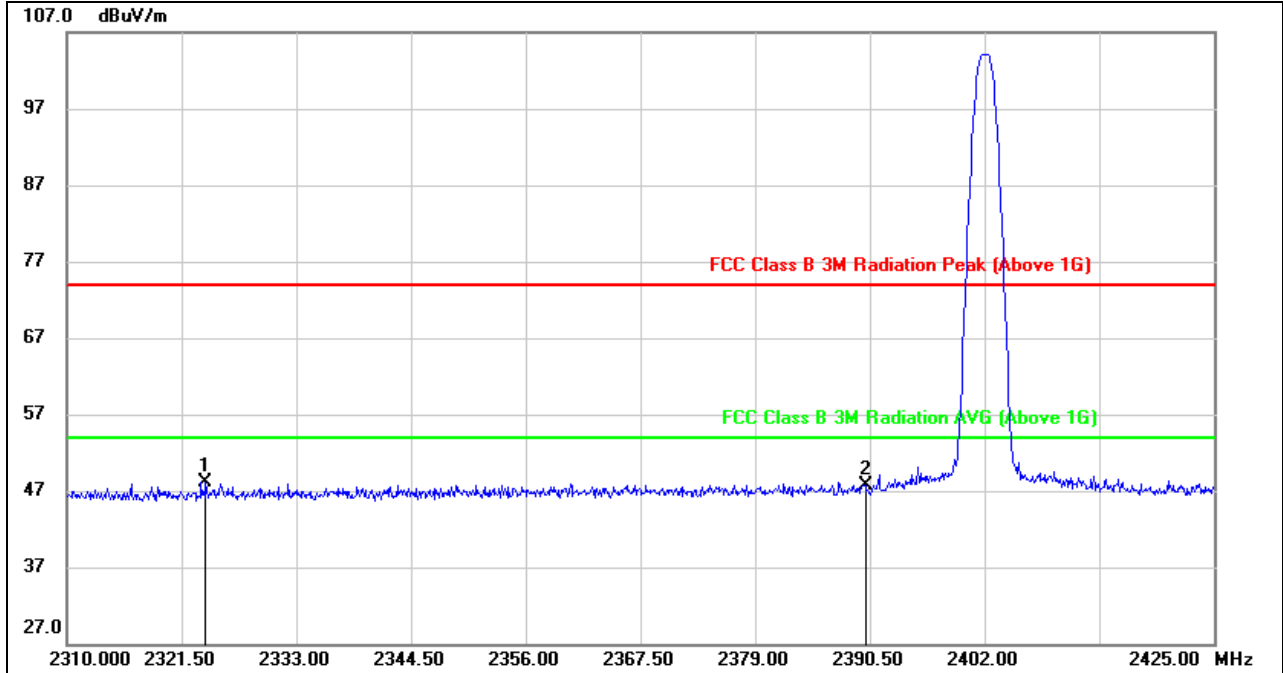


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2323.915	15.33	32.72	48.05	74.00	-25.95	peak
2	2390.000	14.82	32.94	47.76	74.00	-26.24	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

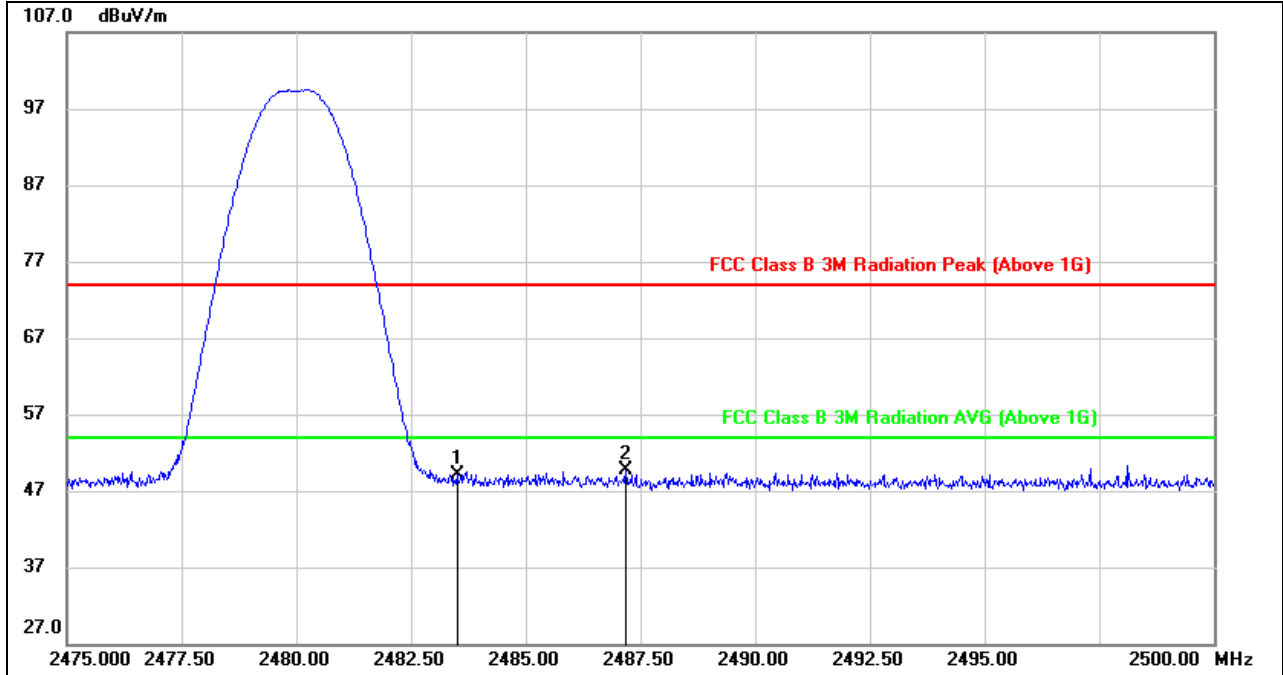


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.57	33.58	49.15	74.00	-24.85	peak
2	2487.175	16.16	33.61	49.77	74.00	-24.23	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

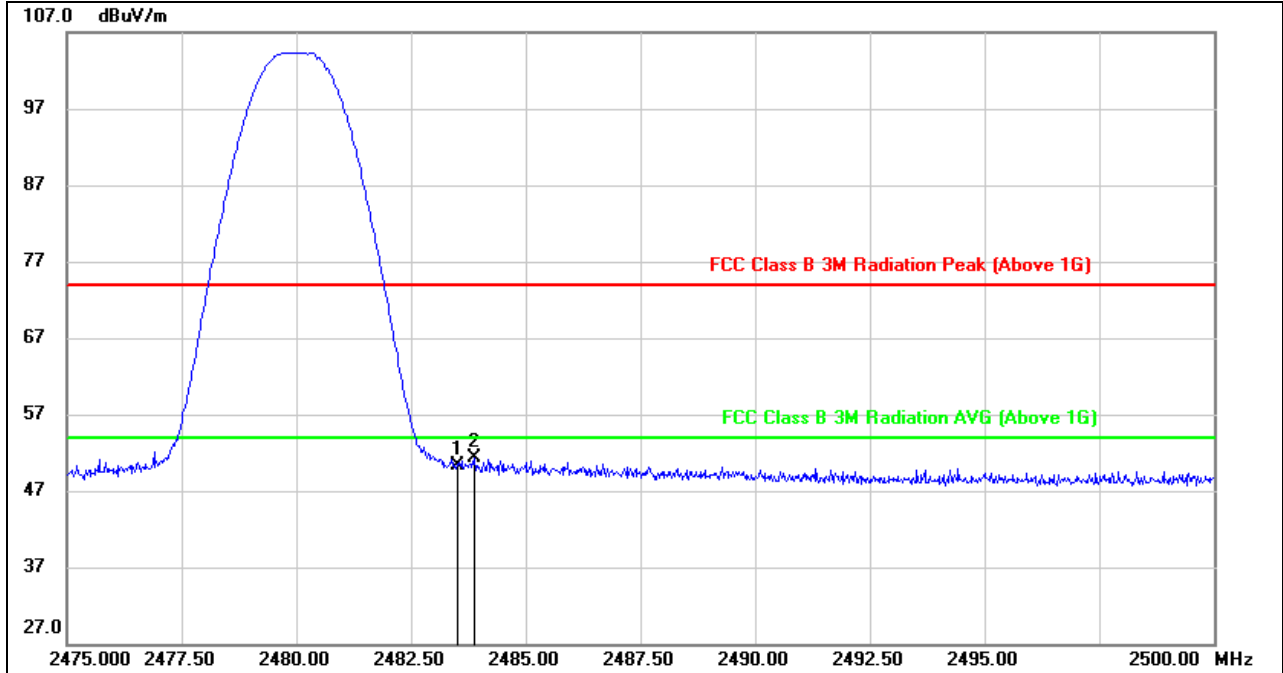


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.68	33.58	50.26	74.00	-23.74	peak
2	2483.875	17.64	33.58	51.22	74.00	-22.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



8.1.2. GFSK(2Mbps) MODE

RESTRICTED BANDEGE (LOW CHANNEL, HORIZONTAL)

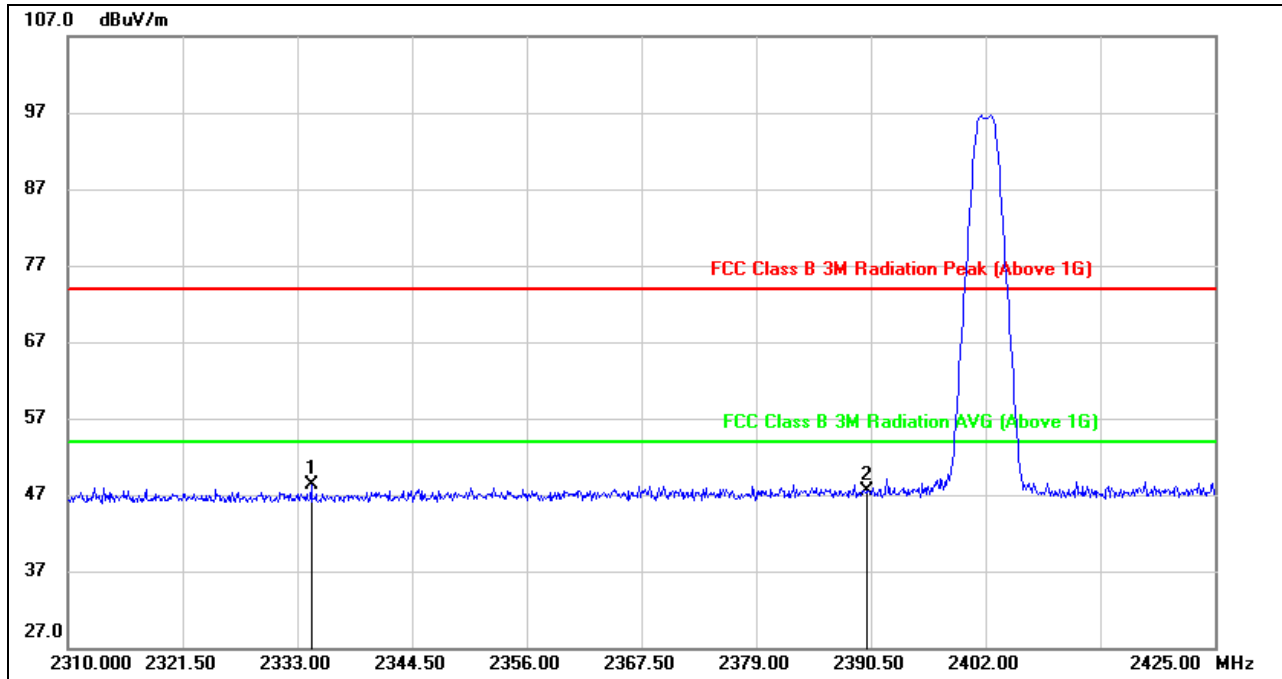


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2334.380	15.61	32.75	48.36	74.00	-25.64	peak
2	2390.000	14.50	32.94	47.44	74.00	-26.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

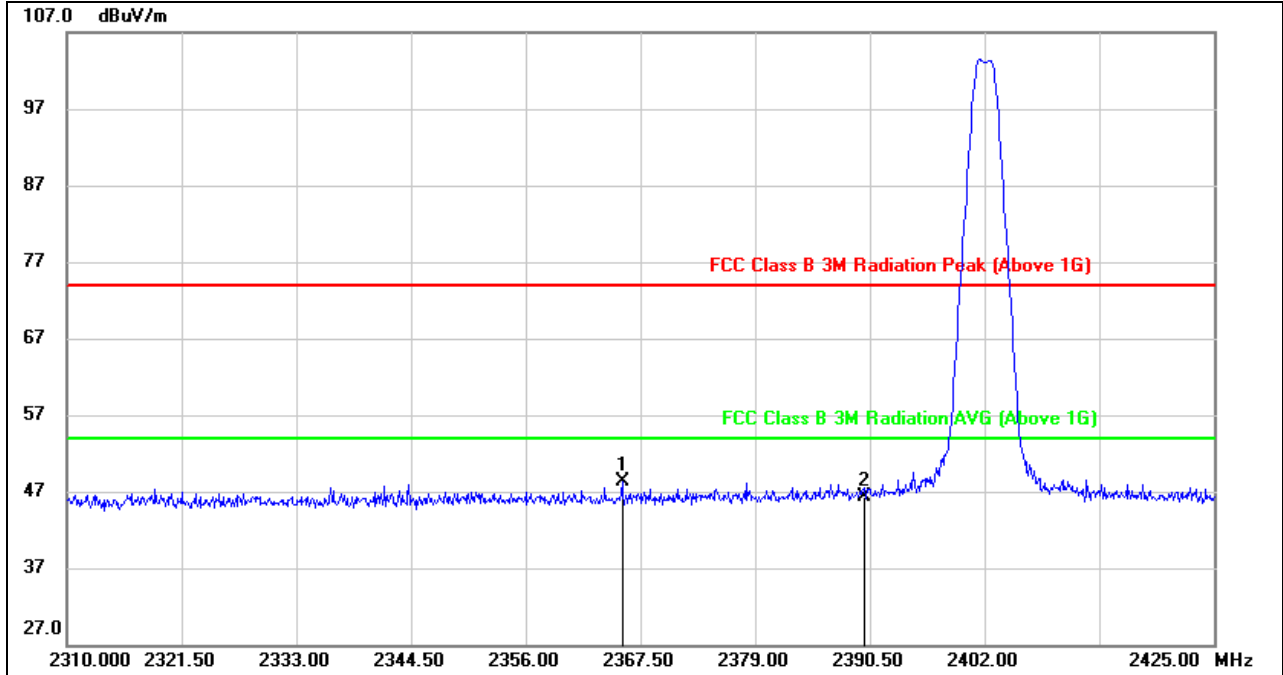


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.660	15.47	32.86	48.33	74.00	-25.67	peak
2	2390.000	13.29	32.94	46.23	74.00	-27.77	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

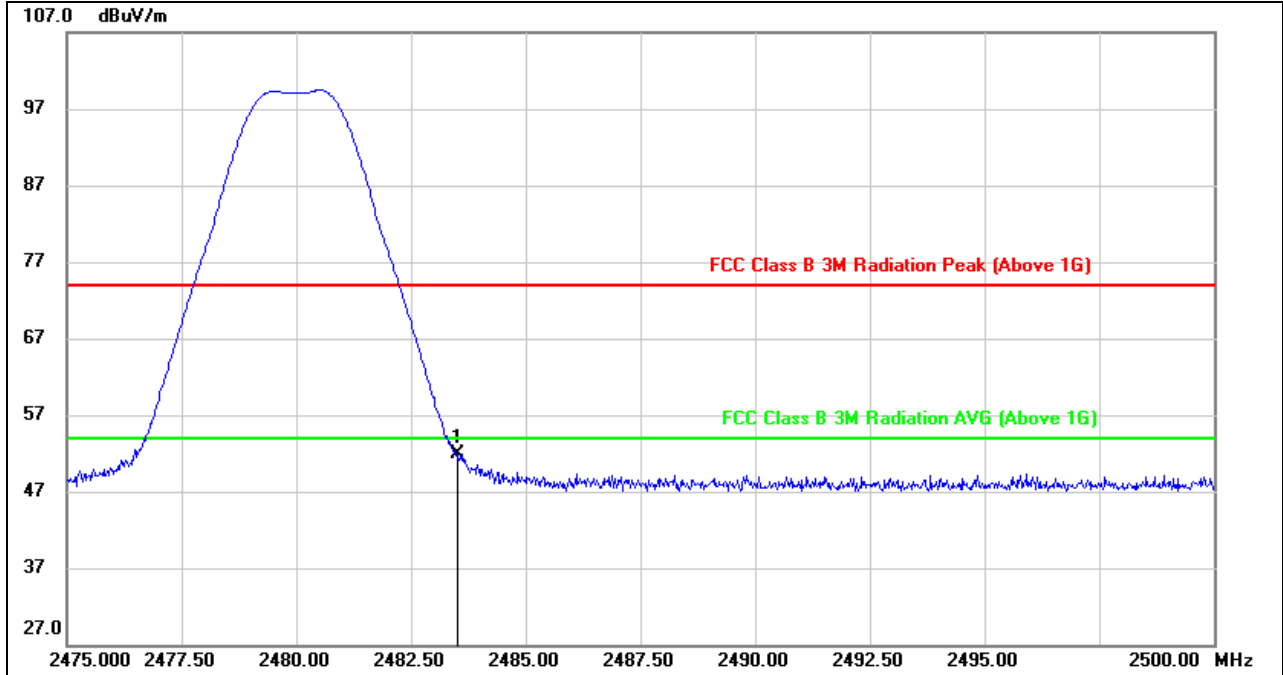


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.28	33.58	51.86	74.00	-22.14	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

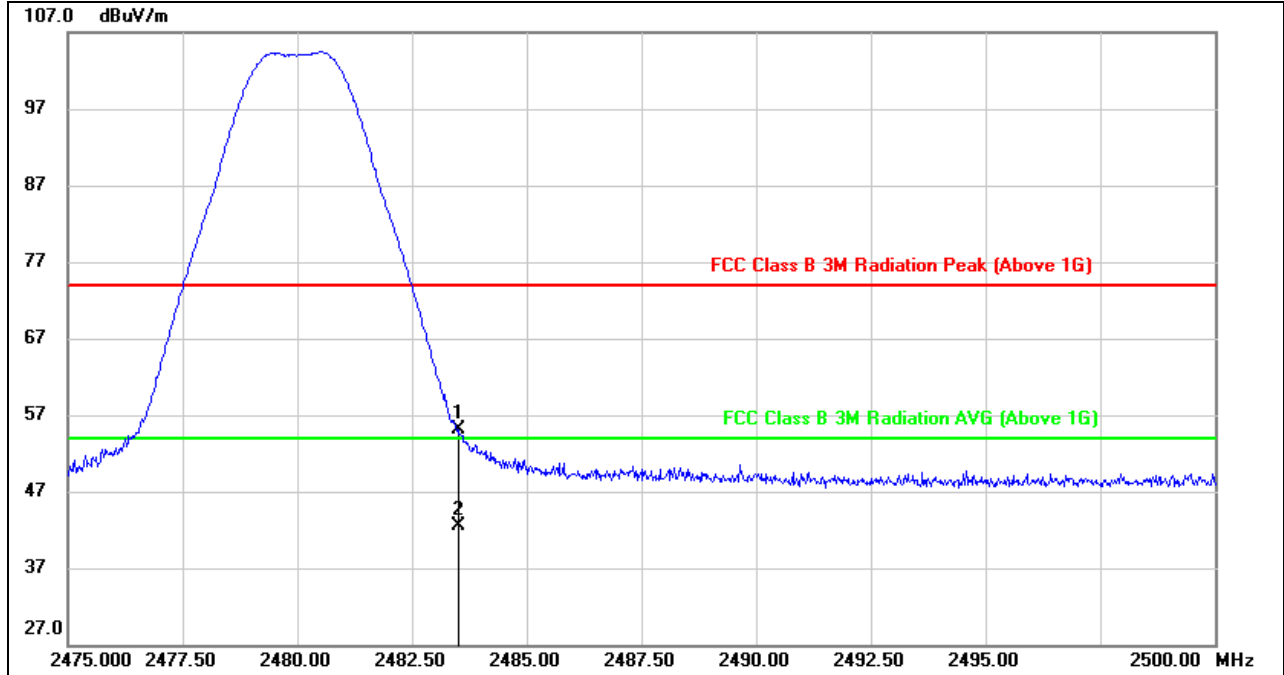

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.50	33.58	55.08	74.00	-18.92	peak
2	2483.500	8.98	33.58	42.56	54.00	-11.44	AVG


- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
 5. For duty cycle, please refer to clause 7.1.
 6. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



8.2. SPURIOUS EMISSIONS (1~3GHz)

8.2.1. GFSK(1Mbps) MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

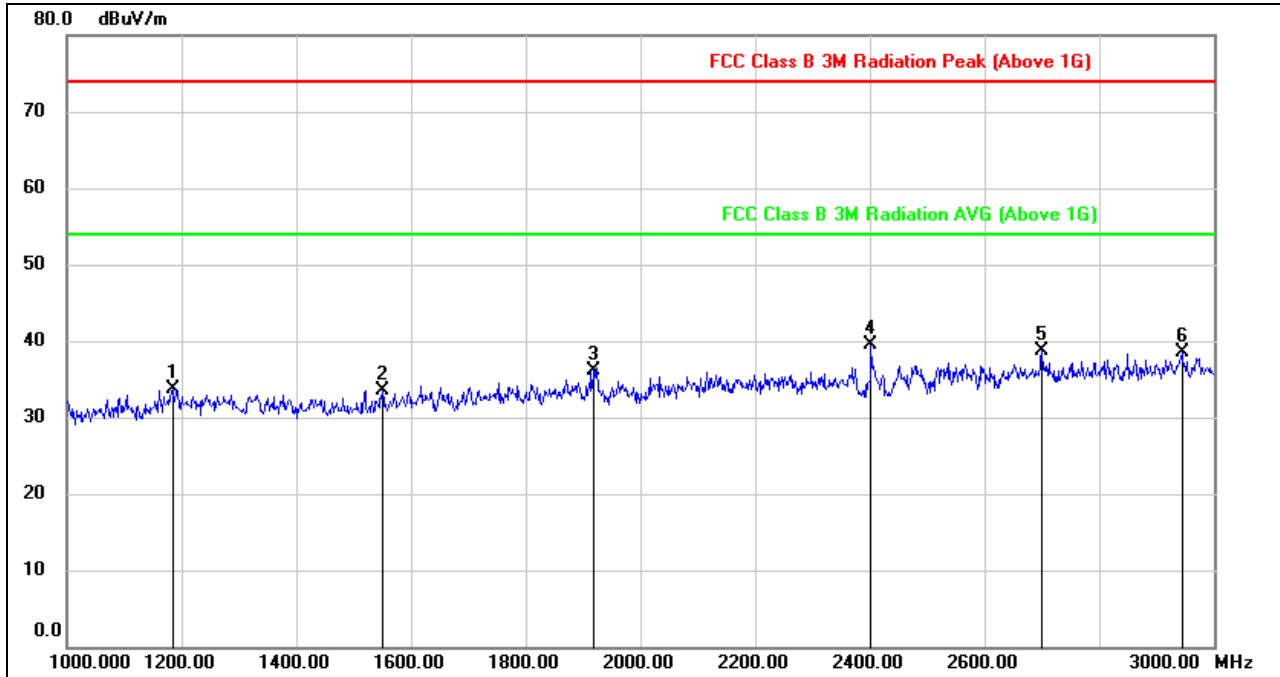


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1184.000	46.14	-12.35	33.79	74.00	-40.21	peak
2	1550.000	44.77	-11.29	33.48	74.00	-40.52	peak
3	1918.000	45.42	-9.36	36.06	74.00	-37.94	peak
4	2402.000	46.46	-7.00	39.46	74.00	-34.54	peak
5	2700.000	44.62	-5.98	38.64	74.00	-35.36	peak
6	2944.000	43.03	-4.55	38.48	74.00	-35.52	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

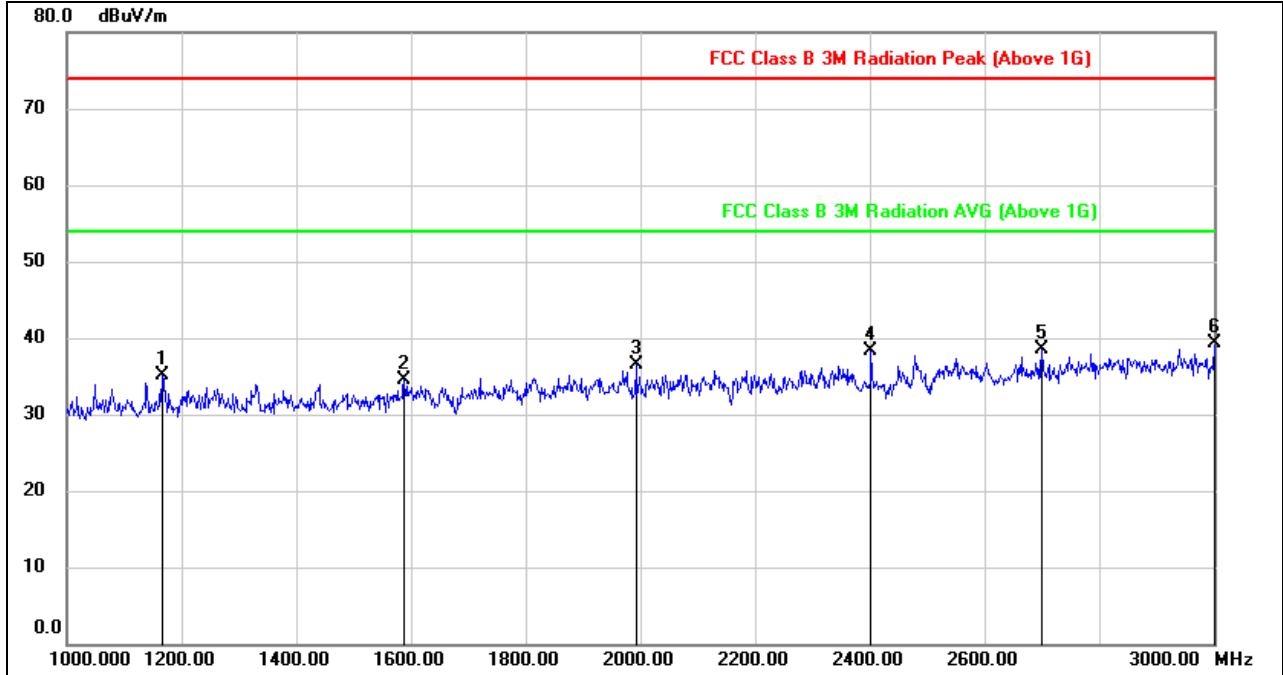


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1166.000	47.61	-12.52	35.09	74.00	-38.91	peak
2	1588.000	45.42	-10.95	34.47	74.00	-39.53	peak
3	1992.000	45.86	-9.42	36.44	74.00	-37.56	peak
4	2402.000	45.28	-7.00	38.28	74.00	-35.72	peak
5	2700.000	44.53	-5.98	38.55	74.00	-35.45	peak
6	3000.000	43.63	-4.32	39.31	74.00	-34.69	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

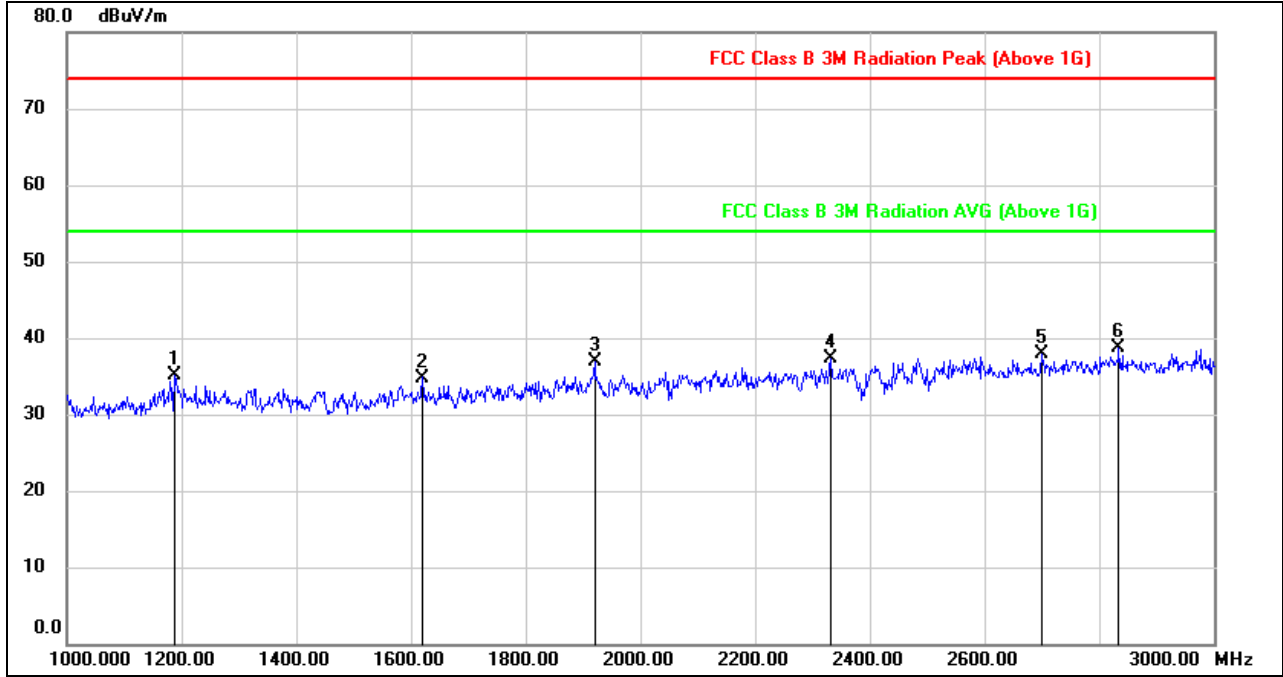


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1188.000	47.48	-12.31	35.17	74.00	-38.83	peak
2	1620.000	45.58	-10.78	34.80	74.00	-39.20	peak
3	1920.000	46.27	-9.36	36.91	74.00	-37.09	peak
4	2332.000	44.69	-7.32	37.37	74.00	-36.63	peak
5	2700.000	43.80	-5.98	37.82	74.00	-36.18	peak
6	2834.000	43.82	-5.10	38.72	74.00	-35.28	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

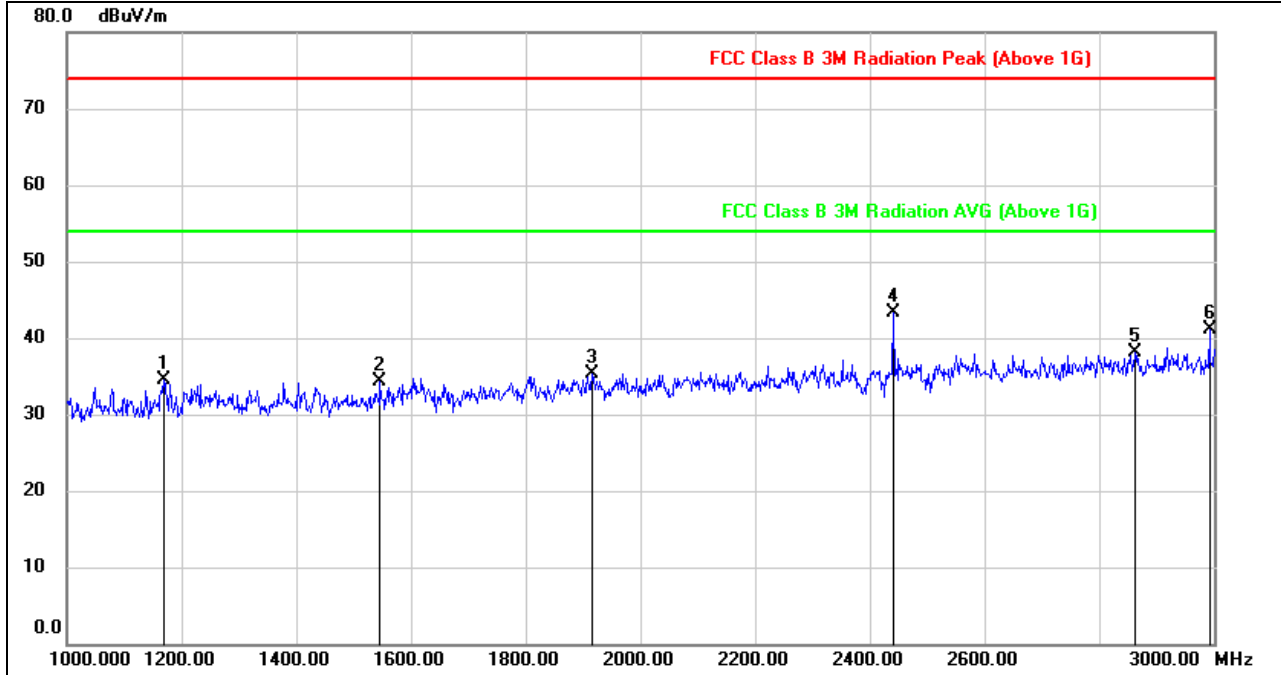


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1168.000	47.06	-12.51	34.55	74.00	-39.45	peak
2	1546.000	45.67	-11.33	34.34	74.00	-39.66	peak
3	1916.000	44.73	-9.36	35.37	74.00	-38.63	peak
4	2440.000	50.00	-6.67	43.33	74.00	-30.67	peak
5	2862.000	43.04	-4.95	38.09	74.00	-35.91	peak
6	2992.000	45.52	-4.36	41.16	74.00	-32.84	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

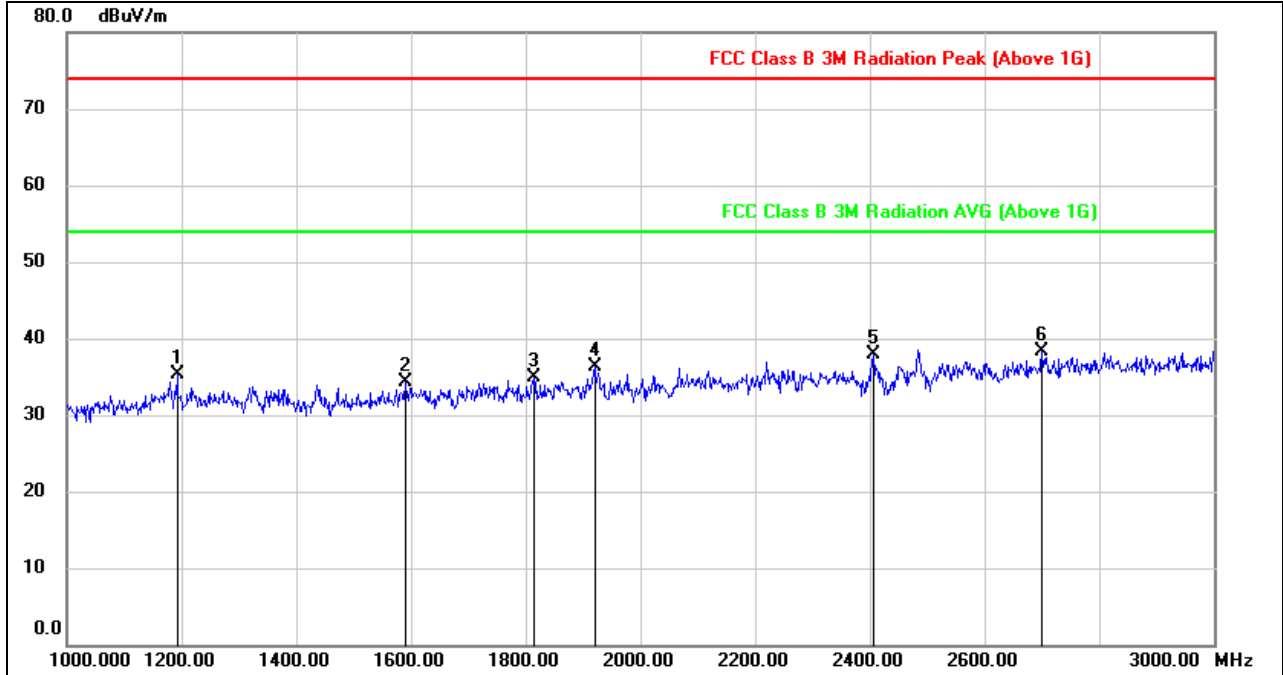


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1192.000	47.48	-12.27	35.21	74.00	-38.79	peak
2	1590.000	45.31	-10.93	34.38	74.00	-39.62	peak
3	1814.000	44.52	-9.58	34.94	74.00	-39.06	peak
4	1920.000	45.58	-9.36	36.22	74.00	-37.78	peak
5	2406.000	44.92	-6.95	37.97	74.00	-36.03	peak
6	2700.000	44.27	-5.98	38.29	74.00	-35.71	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

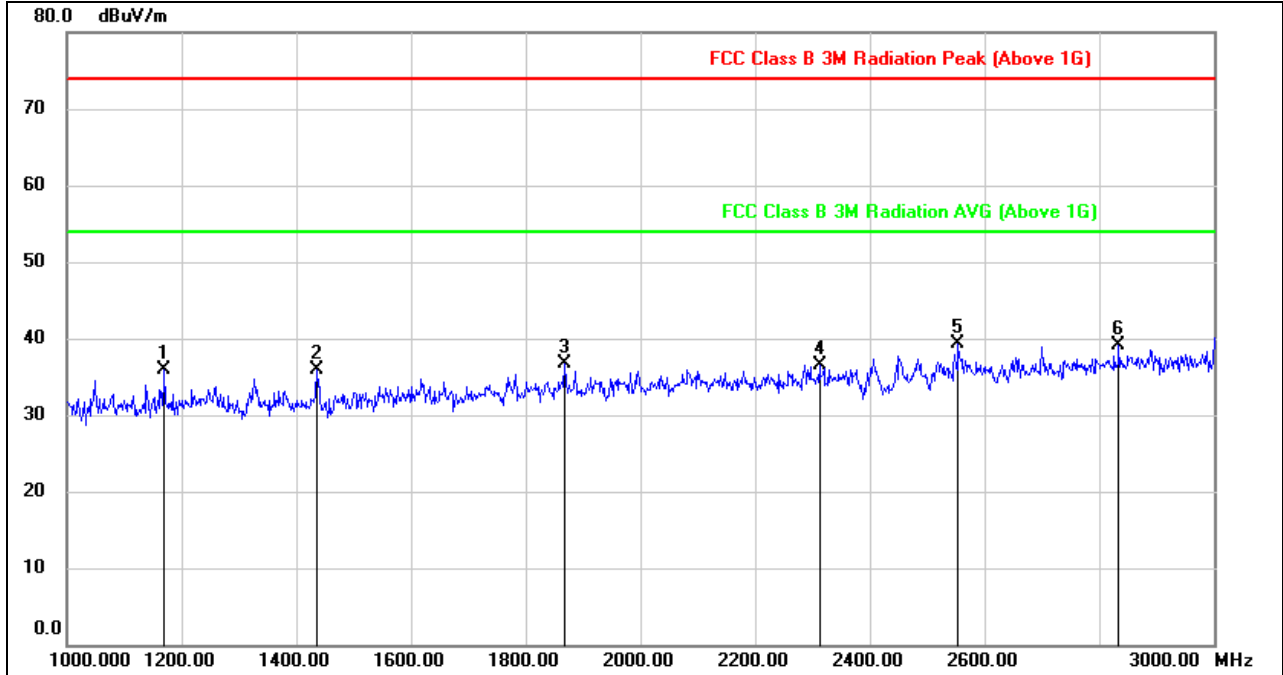


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1170.000	48.37	-12.48	35.89	74.00	-38.11	peak
2	1436.000	47.69	-11.86	35.83	74.00	-38.17	peak
3	1868.000	46.17	-9.44	36.73	74.00	-37.27	peak
4	2312.000	43.96	-7.41	36.55	74.00	-37.45	peak
5	2554.000	45.77	-6.40	39.37	74.00	-34.63	peak
6	2834.000	44.21	-5.10	39.11	74.00	-34.89	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



8.2.2. GFSK(2Mbps) MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

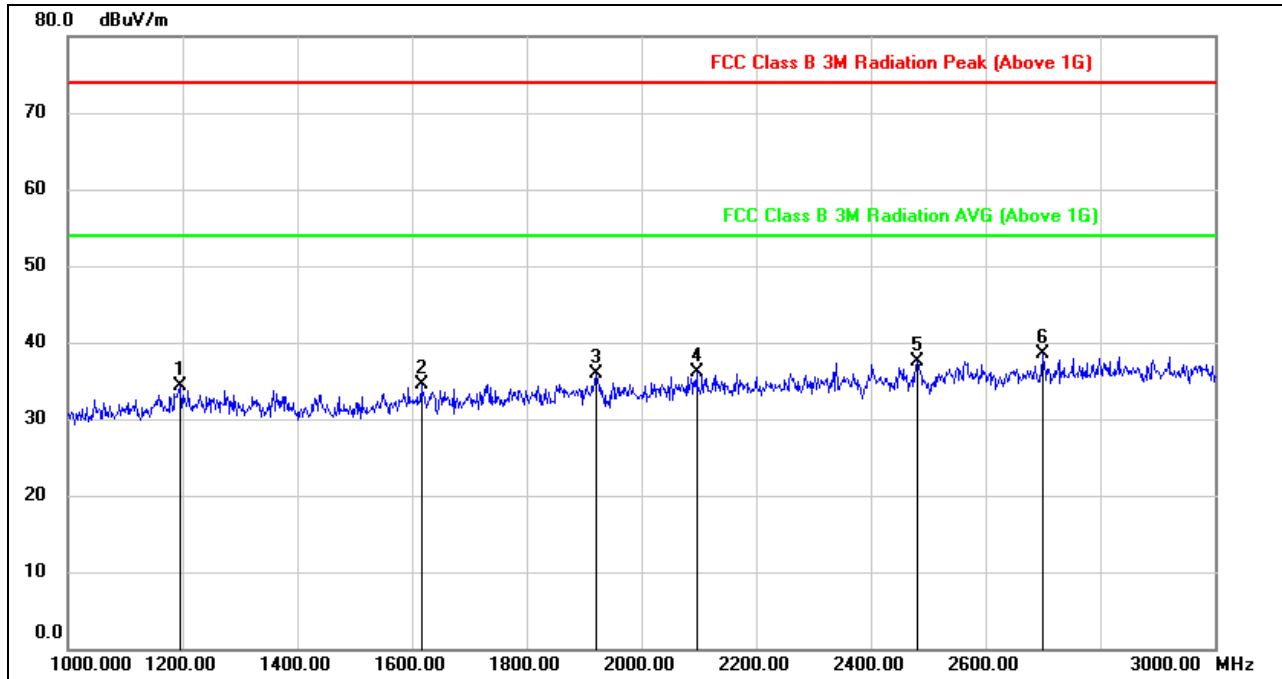


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	46.49	-12.24	34.25	74.00	-39.75	peak
2	1616.000	45.38	-10.79	34.59	74.00	-39.41	peak
3	1922.000	45.26	-9.37	35.89	74.00	-38.11	peak
4	2096.000	44.70	-8.62	36.08	74.00	-37.92	peak
5	2482.000	43.88	-6.32	37.56	74.00	-36.44	peak
6	2700.000	44.42	-5.98	38.44	74.00	-35.56	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

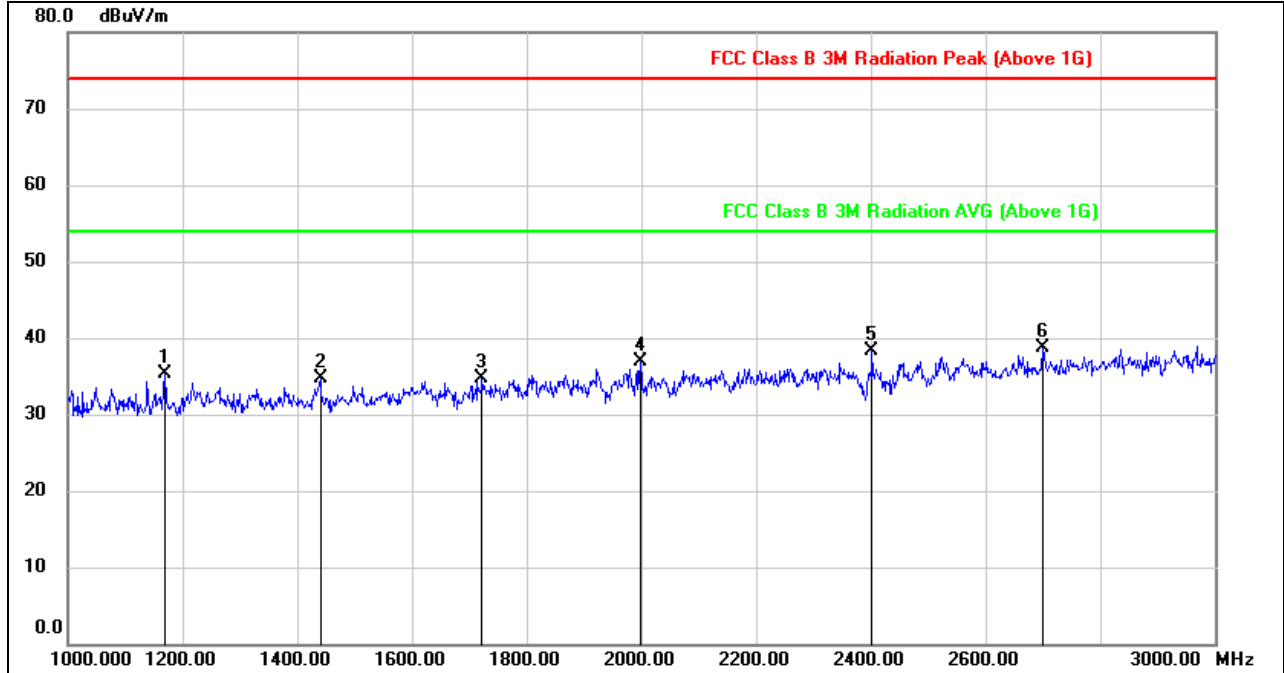


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1168.000	47.81	-12.51	35.30	74.00	-38.70	peak
2	1440.000	46.56	-11.85	34.71	74.00	-39.29	peak
3	1722.000	45.12	-10.39	34.73	74.00	-39.27	peak
4	1998.000	46.36	-9.43	36.93	74.00	-37.07	peak
5	2402.000	45.23	-7.00	38.23	74.00	-35.77	peak
6	2700.000	44.74	-5.98	38.76	74.00	-35.24	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

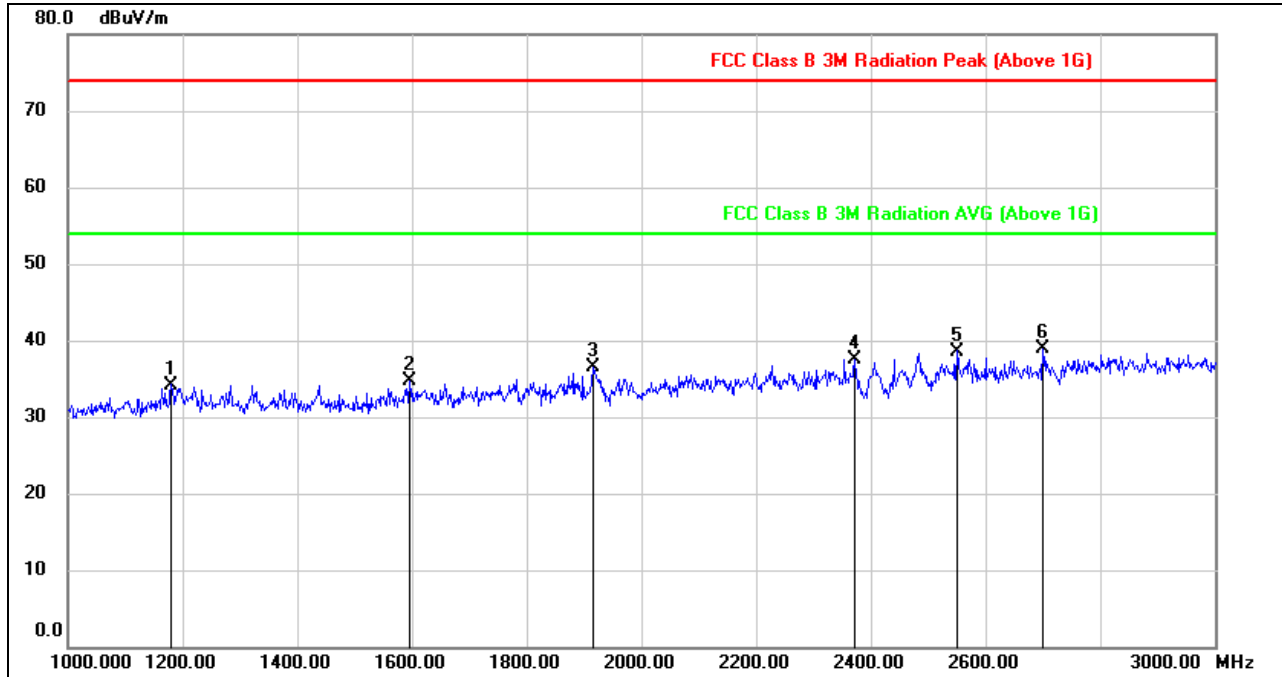


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1180.000	46.59	-12.39	34.20	74.00	-39.80	peak
2	1596.000	45.57	-10.87	34.70	74.00	-39.30	peak
3	1916.000	45.79	-9.36	36.43	74.00	-37.57	peak
4	2372.000	44.68	-7.14	37.54	74.00	-36.46	peak
5	2550.000	44.98	-6.38	38.60	74.00	-35.40	peak
6	2700.000	44.93	-5.98	38.95	74.00	-35.05	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

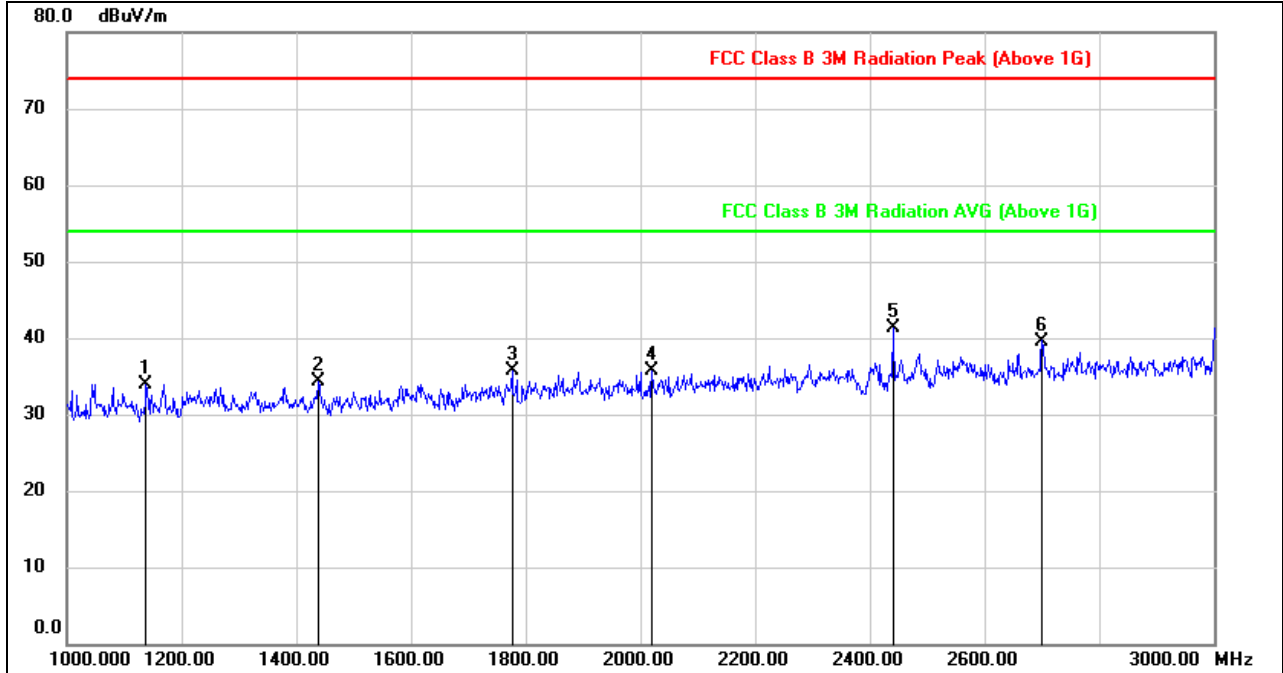


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1138.000	46.73	-12.78	33.95	74.00	-40.05	peak
2	1438.000	46.12	-11.85	34.27	74.00	-39.73	peak
3	1776.000	45.64	-9.86	35.78	74.00	-38.22	peak
4	2020.000	44.88	-9.26	35.62	74.00	-38.38	peak
5	2440.000	47.95	-6.67	41.28	74.00	-32.72	peak
6	2700.000	45.58	-5.98	39.60	74.00	-34.40	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

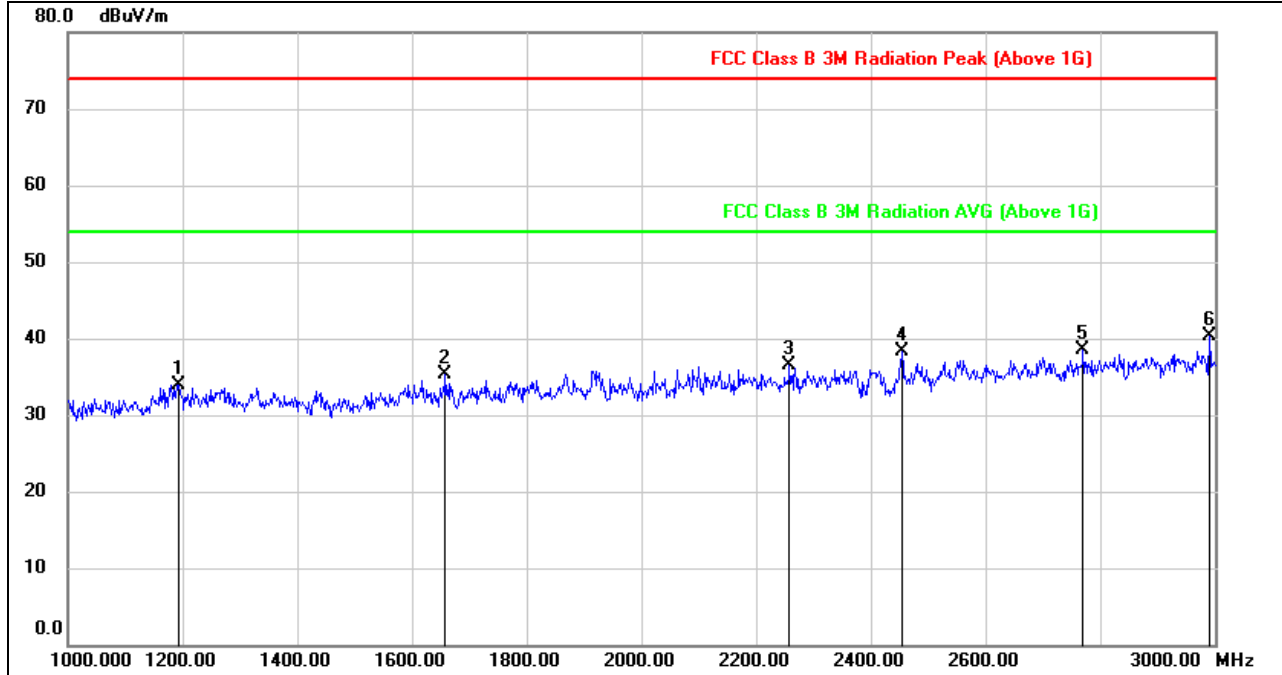


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	46.21	-12.26	33.95	74.00	-40.05	peak
2	1658.000	46.08	-10.70	35.38	74.00	-38.62	peak
3	2258.000	44.22	-7.74	36.48	74.00	-37.52	peak
4	2454.000	44.79	-6.55	38.24	74.00	-35.76	peak
5	2770.000	44.07	-5.50	38.57	74.00	-35.43	peak
6	2990.000	44.61	-4.37	40.24	74.00	-33.76	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

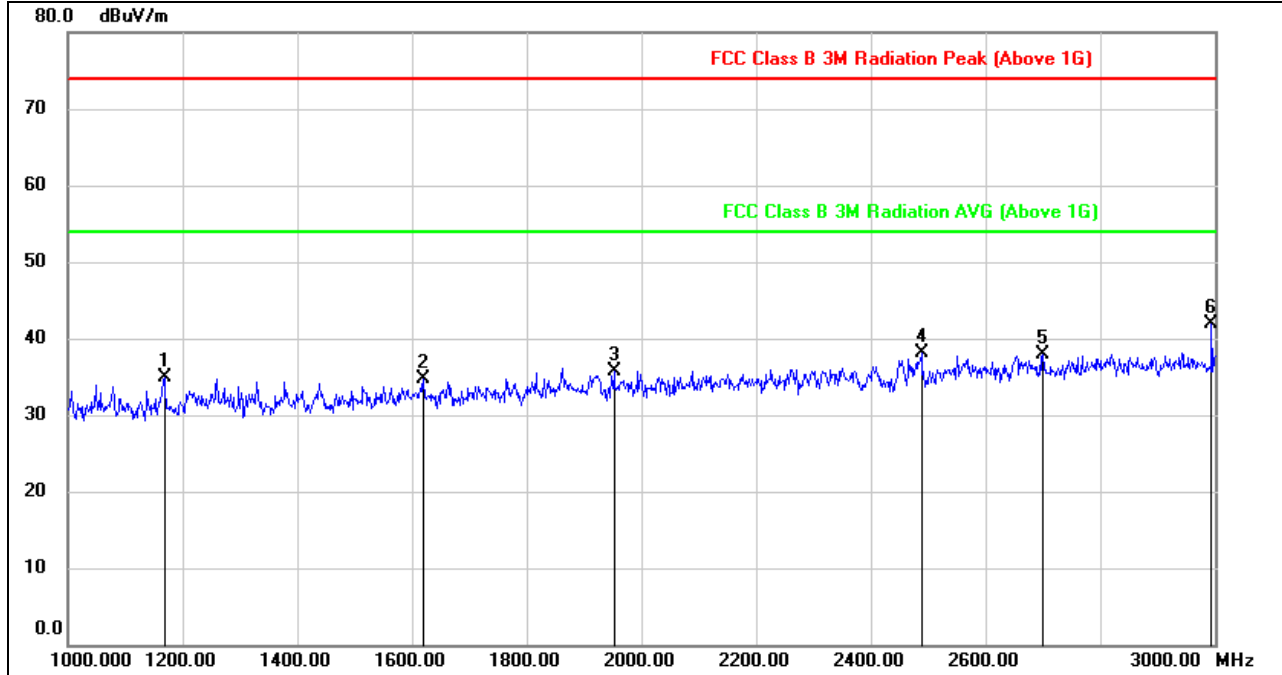

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1168.000	47.50	-12.51	34.99	74.00	-39.01	peak
2	1620.000	45.45	-10.78	34.67	74.00	-39.33	peak
3	1952.000	45.19	-9.39	35.80	74.00	-38.20	peak
4	2488.000	44.45	-6.26	38.19	74.00	-35.81	peak
5	2700.000	43.93	-5.98	37.95	74.00	-36.05	peak
6	2994.000	46.32	-4.34	41.98	74.00	-32.02	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The Band Reject filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



8.3. SPURIOUS EMISSIONS (3~18GHz)

8.3.1. GFSK(1Mbps) MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

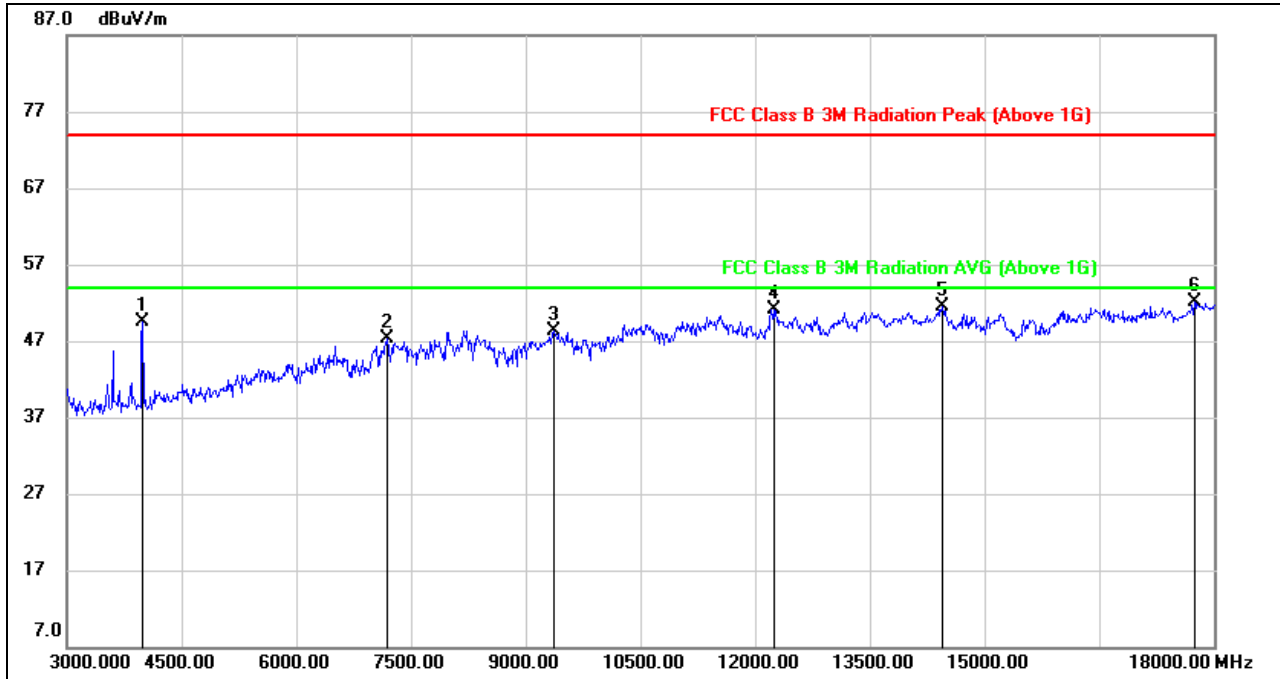


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	52.42	-2.95	49.47	74.00	-24.53	peak
2	7185.000	40.34	6.88	47.22	74.00	-26.78	peak
3	9360.000	38.31	10.05	48.36	74.00	-25.64	peak
4	12240.000	36.89	14.31	51.20	74.00	-22.80	peak
5	14445.000	35.05	16.37	51.42	74.00	-22.58	peak
6	17745.000	29.36	22.68	52.04	74.00	-21.96	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

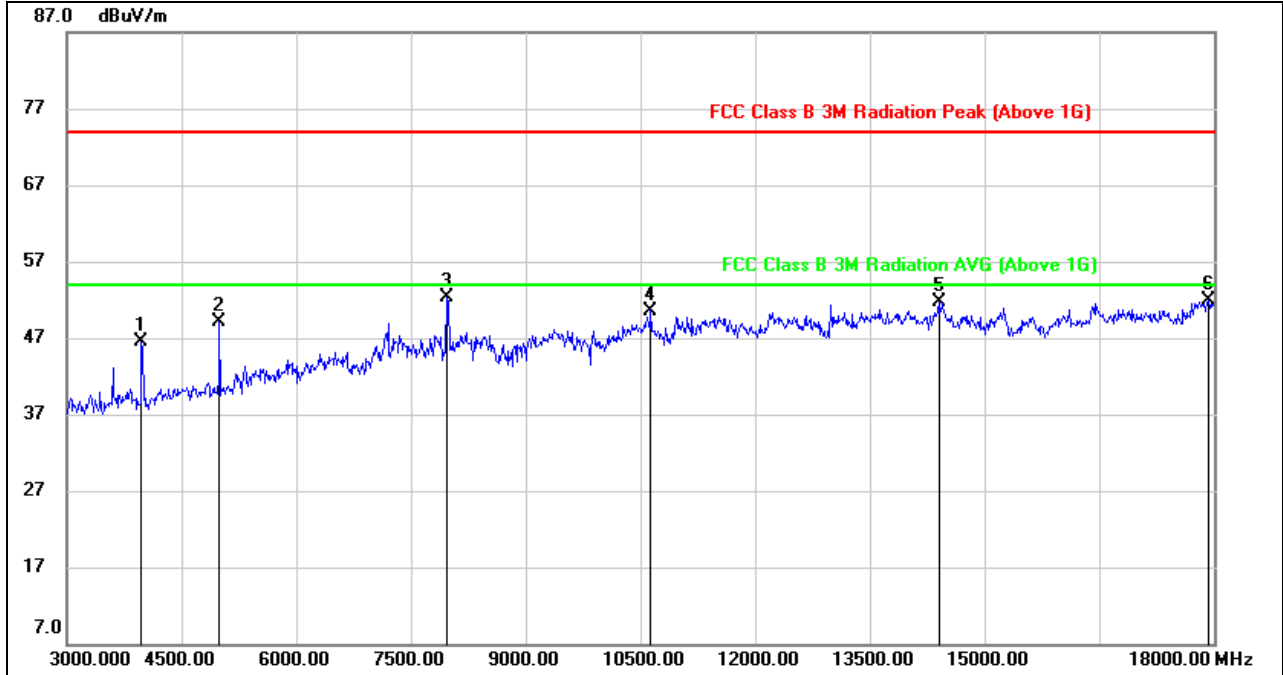


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	49.48	-2.98	46.50	74.00	-27.50	peak
2	4995.000	48.71	0.46	49.17	74.00	-24.83	peak
3	7965.000	44.08	8.26	52.34	74.00	-21.66	peak
4	10635.000	38.01	12.59	50.60	74.00	-23.40	peak
5	14400.000	35.33	16.43	51.76	74.00	-22.24	peak
6	17925.000	28.68	23.18	51.86	74.00	-22.14	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

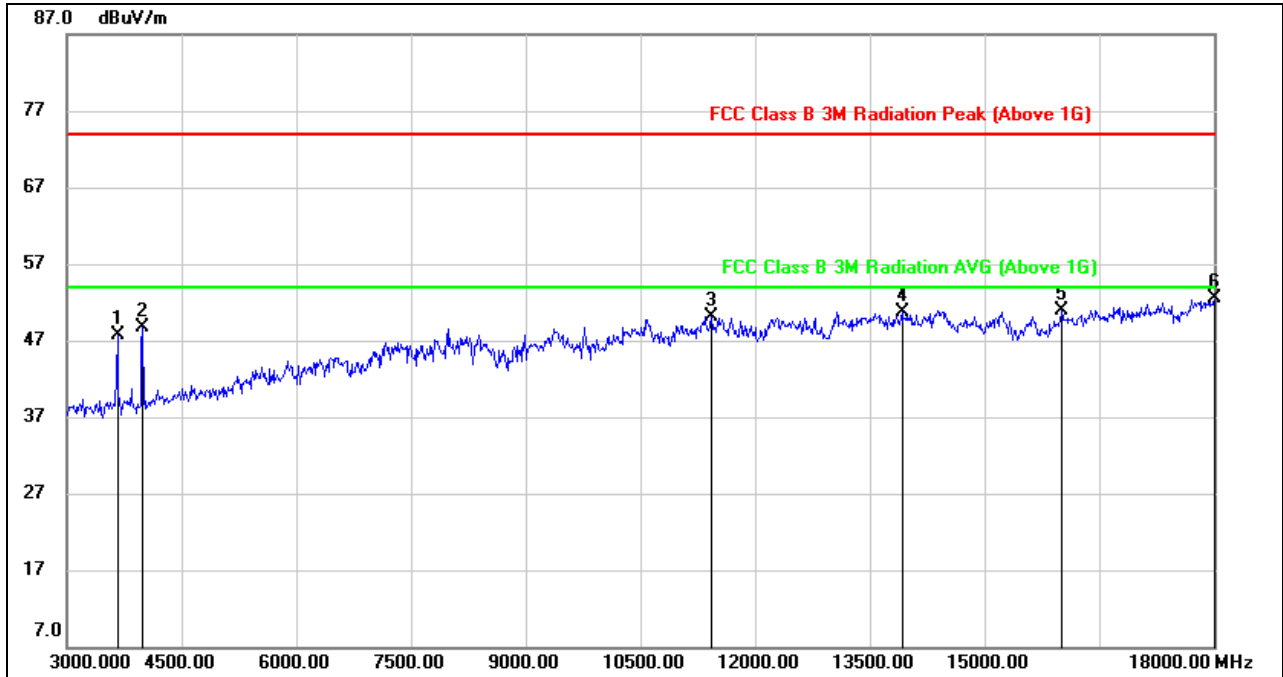


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	50.84	-3.20	47.64	74.00	-26.36	peak
2	3990.000	51.69	-2.95	48.74	74.00	-25.26	peak
3	11430.000	36.52	13.57	50.09	74.00	-23.91	peak
4	13920.000	34.60	16.20	50.80	74.00	-23.20	peak
5	16005.000	33.68	17.20	50.88	74.00	-23.12	peak
6	18000.000	29.15	23.27	52.42	74.00	-21.58	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

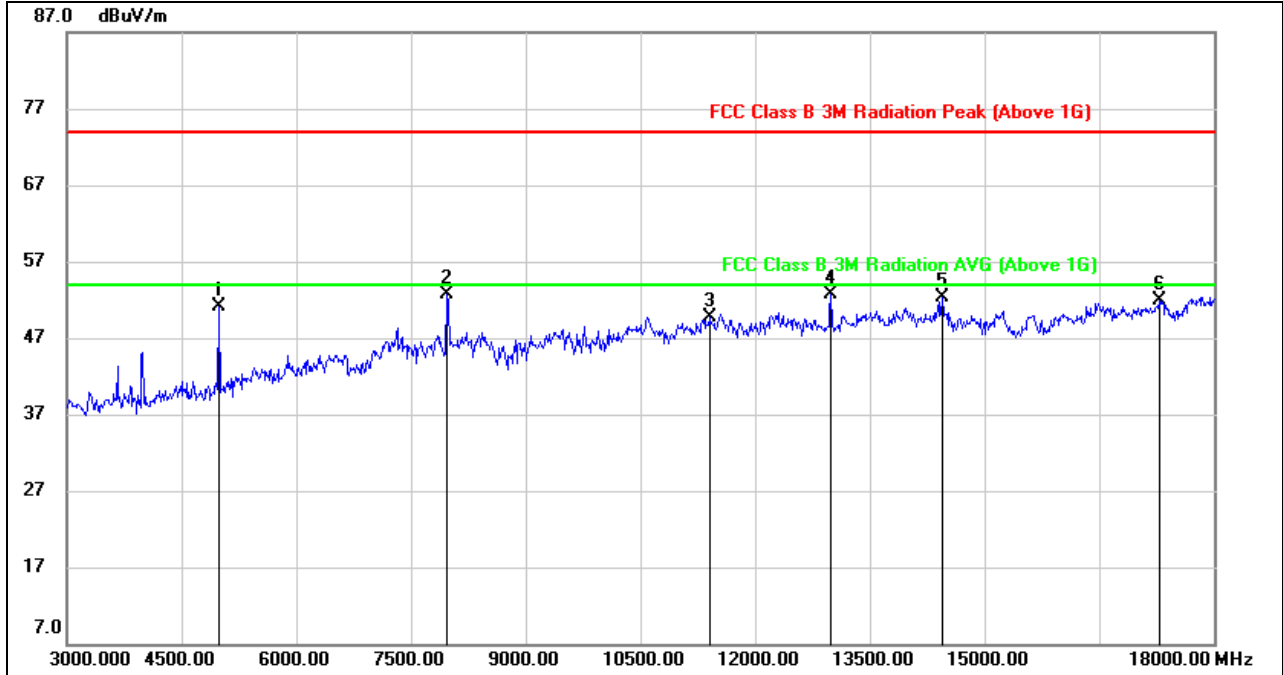


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4980.000	50.66	0.37	51.03	74.00	-22.97	peak
2	7965.000	44.43	8.26	52.69	74.00	-21.31	peak
3	11400.000	36.44	13.36	49.80	74.00	-24.20	peak
4	12990.000	38.05	14.71	52.76	74.00	-21.24	peak
5	14445.000	35.98	16.37	52.35	74.00	-21.65	peak
6	17280.000	30.18	21.72	51.90	74.00	-22.10	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

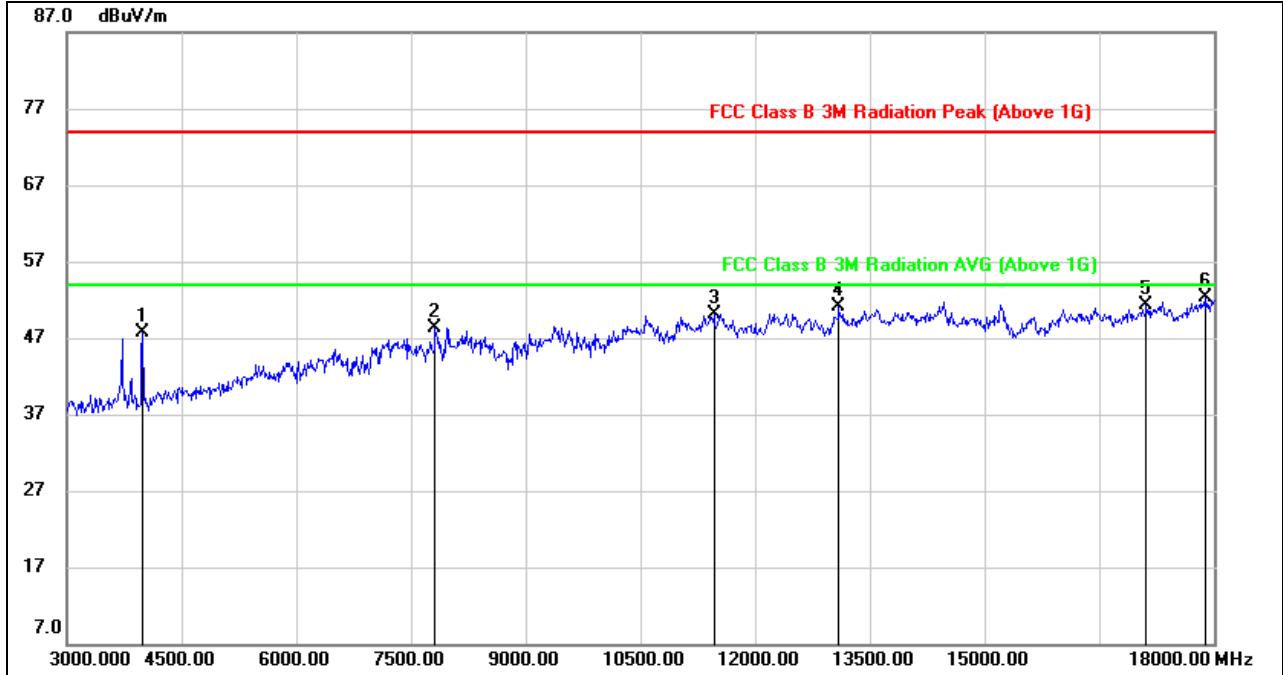


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.72	-2.95	47.77	74.00	-26.23	peak
2	7815.000	39.57	8.81	48.38	74.00	-25.62	peak
3	11460.000	36.37	13.79	50.16	74.00	-23.84	peak
4	13095.000	36.19	14.97	51.16	74.00	-22.84	peak
5	17115.000	30.47	20.81	51.28	74.00	-22.72	peak
6	17895.000	29.18	23.16	52.34	74.00	-21.66	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

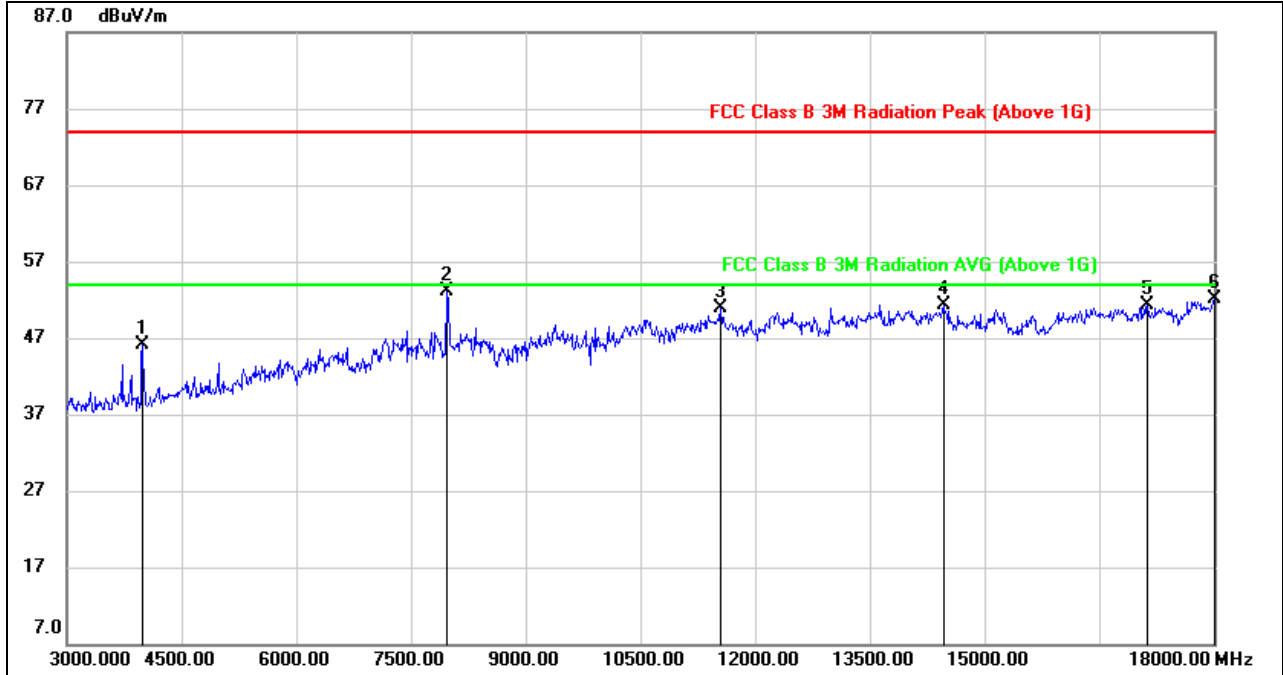


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.00	-2.95	46.05	74.00	-27.95	peak
2	7965.000	44.76	8.26	53.02	74.00	-20.98	peak
3	11550.000	36.75	14.13	50.88	74.00	-23.12	peak
4	14460.000	35.04	16.35	51.39	74.00	-22.61	peak
5	17130.000	30.48	20.84	51.32	74.00	-22.68	peak
6	18000.000	28.93	23.27	52.20	74.00	-21.80	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



8.3.2. GFSK(2Mbps) MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

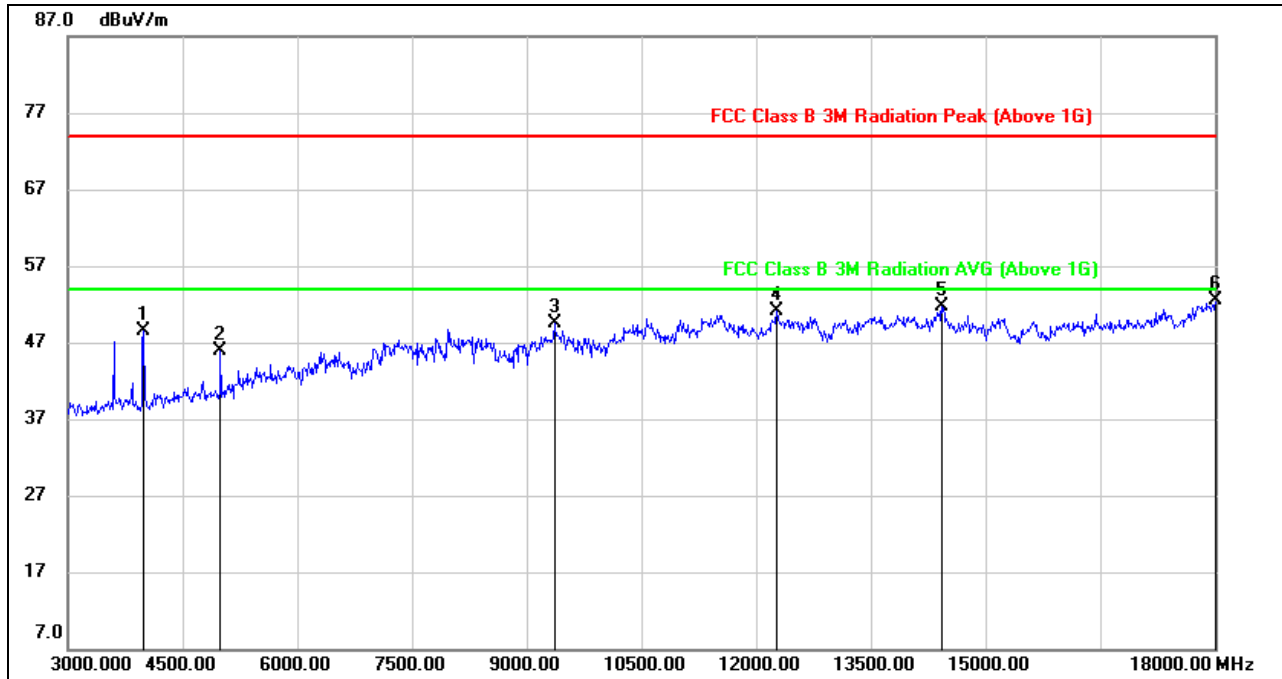


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	51.38	-2.95	48.43	74.00	-25.57	peak
2	4995.000	45.37	0.46	45.83	74.00	-28.17	peak
3	9360.000	39.47	10.05	49.52	74.00	-24.48	peak
4	12270.000	36.82	14.34	51.16	74.00	-22.84	peak
5	14430.000	35.25	16.39	51.64	74.00	-22.36	peak
6	18000.000	29.31	23.27	52.58	74.00	-21.42	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

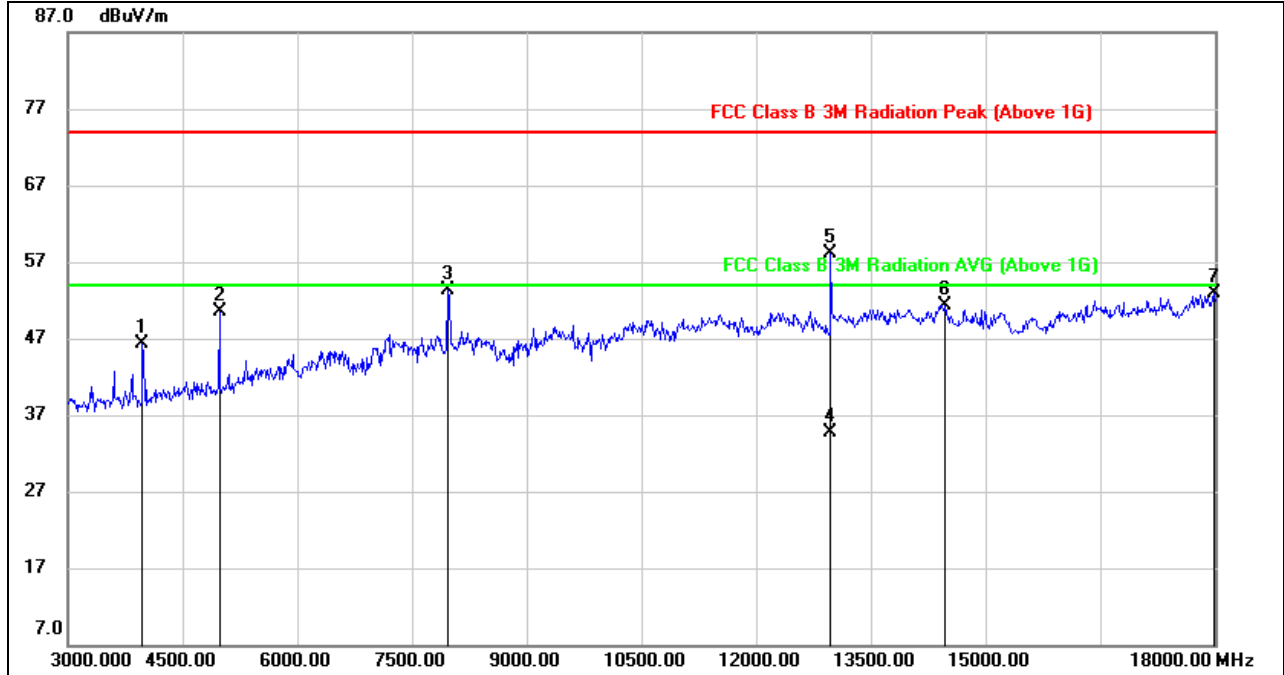


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	49.36	-2.98	46.38	74.00	-27.62	peak
2	4980.000	50.07	0.37	50.44	74.00	-23.56	peak
3	7965.000	45.11	8.26	53.37	74.00	-20.63	peak
4	12973.282	19.99	14.71	34.70	54.00	-19.30	AVG
5	12973.282	43.35	14.71	58.06	74.00	-15.94	peak
6	14475.000	34.98	16.33	51.31	74.00	-22.69	peak
7	17985.000	29.68	23.25	52.93	74.00	-21.07	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$ where: ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. The High Pass filter loss factor already add into the correct factor.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

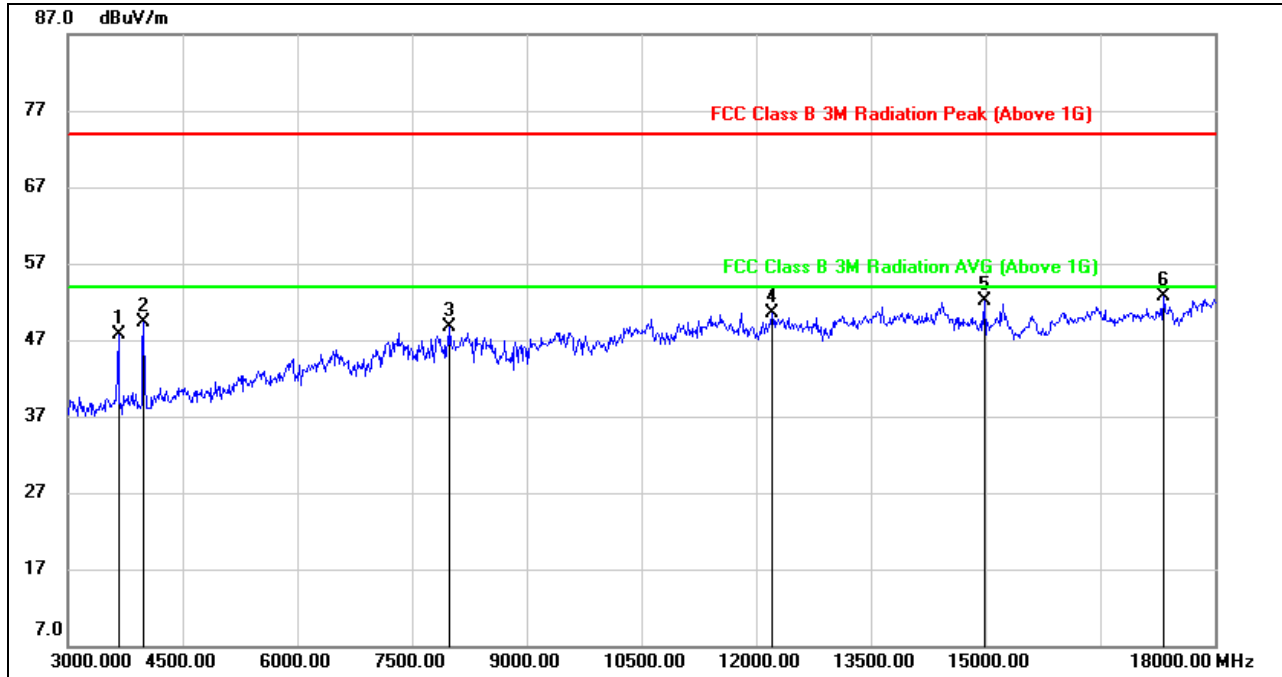


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	50.84	-3.20	47.64	74.00	-26.36	peak
2	3990.000	52.29	-2.95	49.34	74.00	-24.66	peak
3	7995.000	40.55	8.16	48.71	74.00	-25.29	peak
4	12210.000	36.21	14.25	50.46	74.00	-23.54	peak
5	14985.000	36.68	15.47	52.15	74.00	-21.85	peak
6	17325.000	30.86	21.80	52.66	74.00	-21.34	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

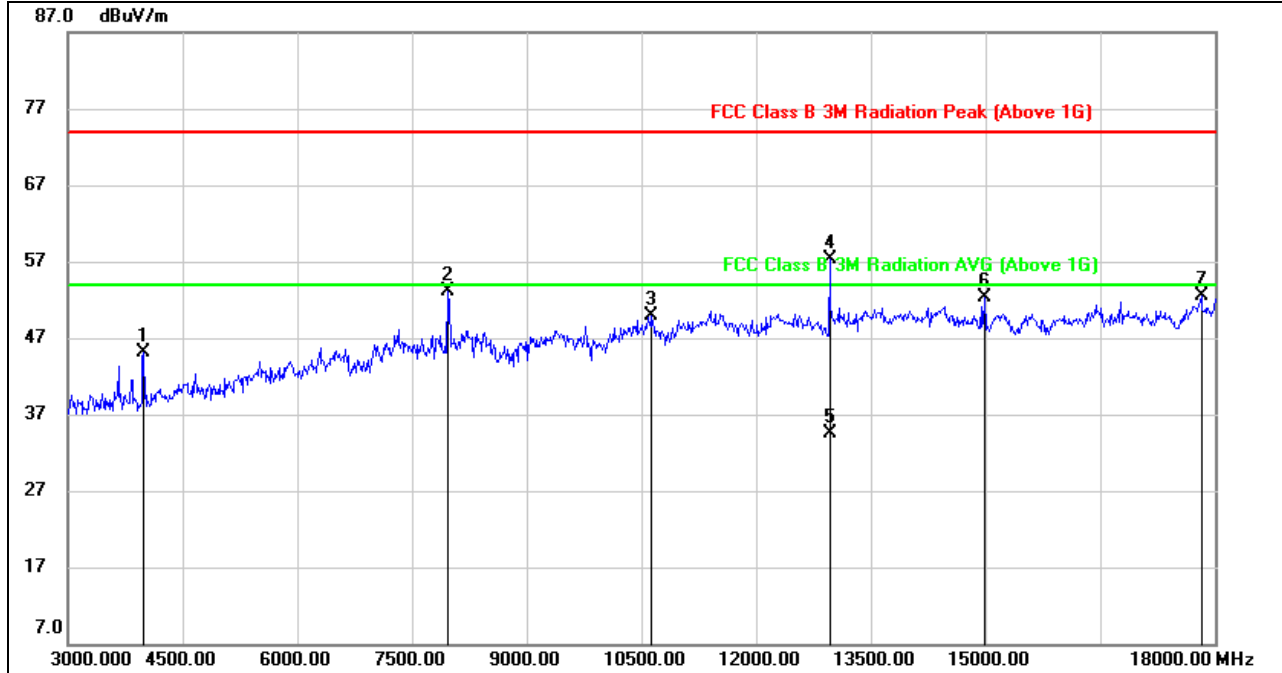


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.97	-2.95	45.02	74.00	-28.98	peak
2	7965.000	44.84	8.26	53.10	74.00	-20.90	peak
3	10635.000	37.36	12.59	49.95	74.00	-24.05	peak
4	12960.000	42.68	14.71	57.39	74.00	-16.61	peak
5	12960.000	19.78	14.71	34.49	54.00	-19.51	AVG
6	14985.000	36.78	15.47	52.25	74.00	-21.75	peak
7	17820.000	29.23	23.21	52.44	74.00	-21.56	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}$ where: t_{on} is transmit duration.
 5. For transmit duration, please refer to clause 6.1.
 6. The High Pass filter loss factor already add into the correct factor.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

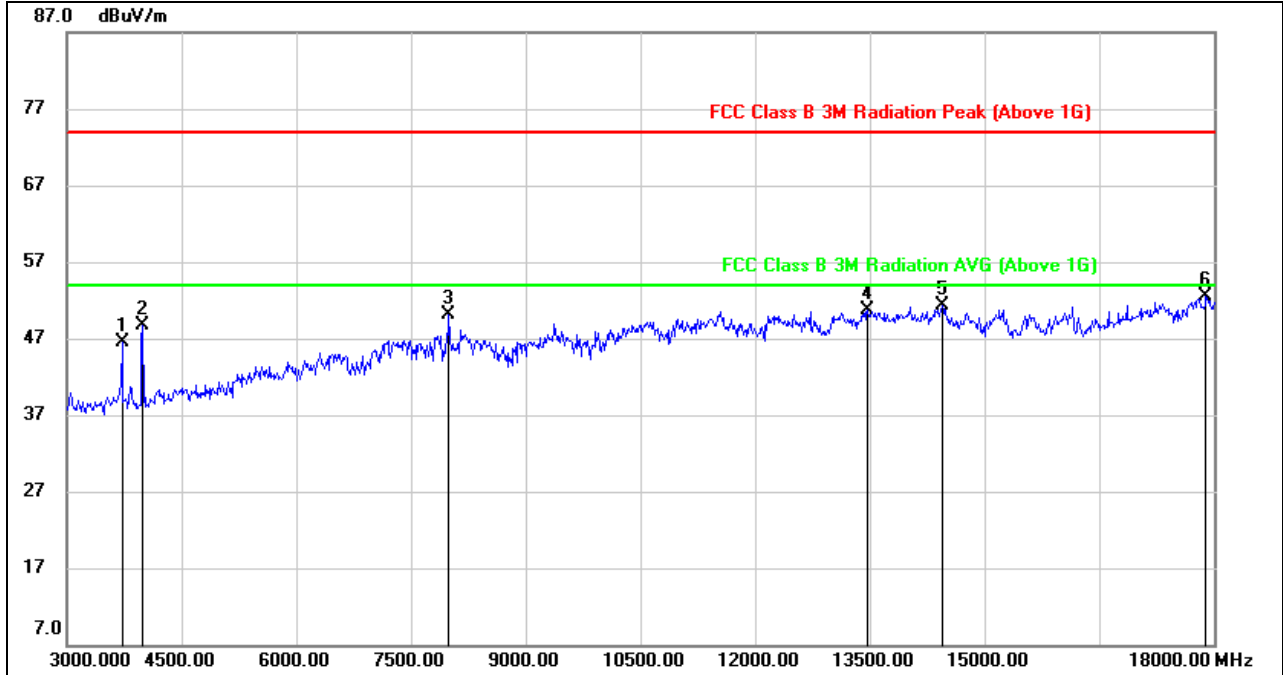


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	49.43	-2.92	46.51	74.00	-27.49	peak
2	3990.000	51.62	-2.95	48.67	74.00	-25.33	peak
3	7995.000	41.86	8.16	50.02	74.00	-23.98	peak
4	13470.000	34.93	15.72	50.65	74.00	-23.35	peak
5	14445.000	34.88	16.37	51.25	74.00	-22.75	peak
6	17895.000	29.28	23.16	52.44	74.00	-21.56	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

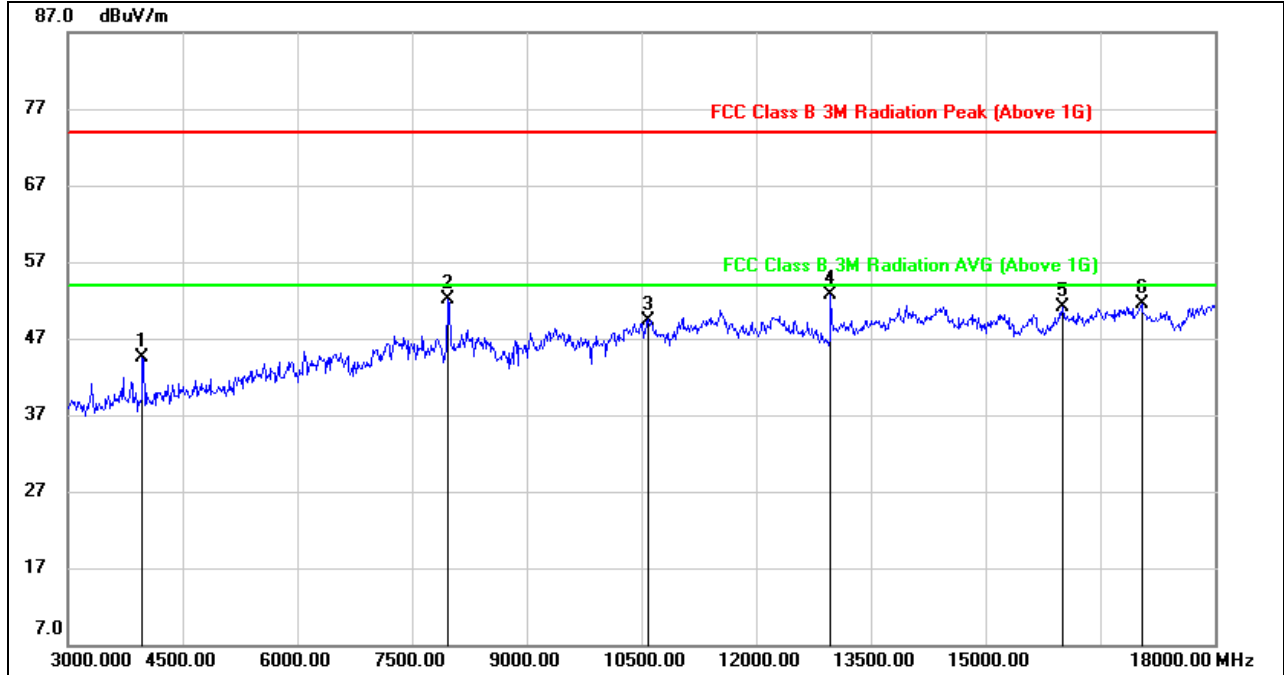

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	47.51	-2.98	44.53	74.00	-29.47	peak
2	7965.000	43.84	8.26	52.10	74.00	-21.90	peak
3	10590.000	36.72	12.68	49.40	74.00	-24.60	peak
4	12975.000	37.99	14.71	52.70	74.00	-21.30	peak
5	16005.000	33.85	17.20	51.05	74.00	-22.95	peak
6	17040.000	31.05	20.51	51.56	74.00	-22.44	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The High Pass filter loss factor already add into the correct factor.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



8.4. SPURIOUS EMISSIONS 18G ~ 26GHz

8.4.1. GFSK(2Mbps) MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

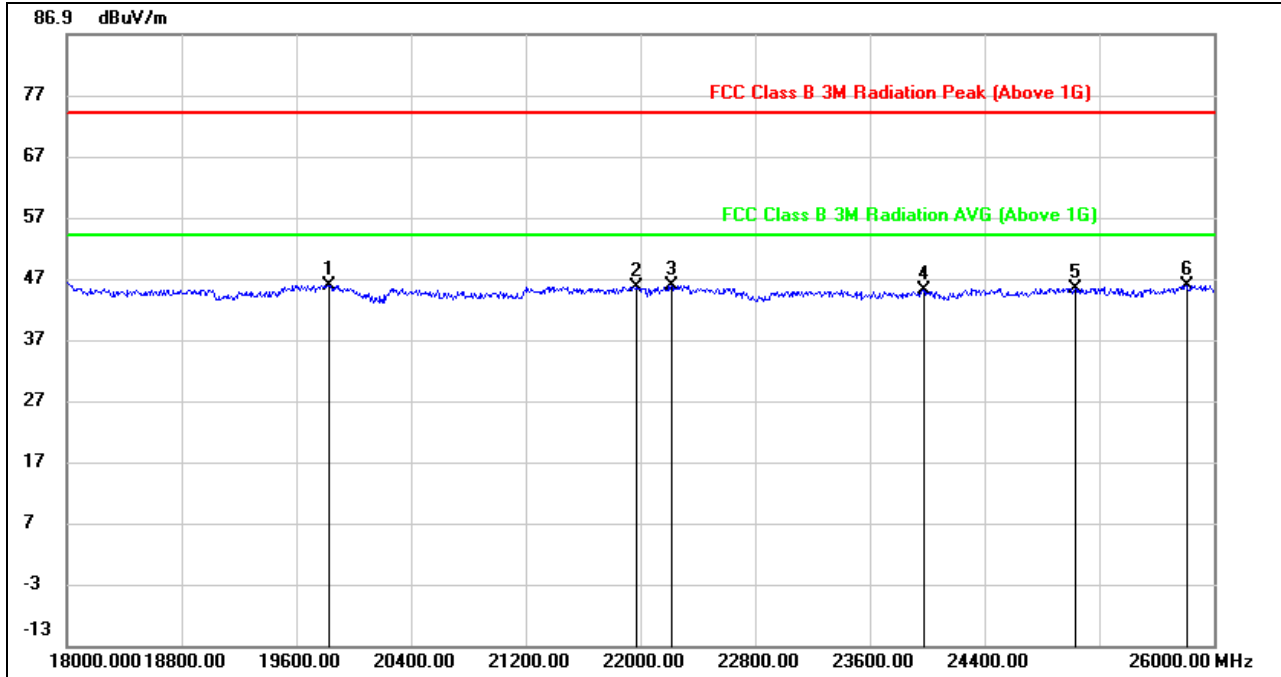

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	19824.000	50.22	-4.34	45.88	74.00	-28.12	peak
2	21976.000	51.81	-6.21	45.60	74.00	-28.40	peak
3	22216.000	51.99	-6.10	45.89	74.00	-28.11	peak
4	23976.000	49.17	-4.08	45.09	74.00	-28.91	peak
5	25032.000	46.48	-1.09	45.39	74.00	-28.61	peak
6	25808.000	47.42	-1.59	45.83	74.00	-28.17	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

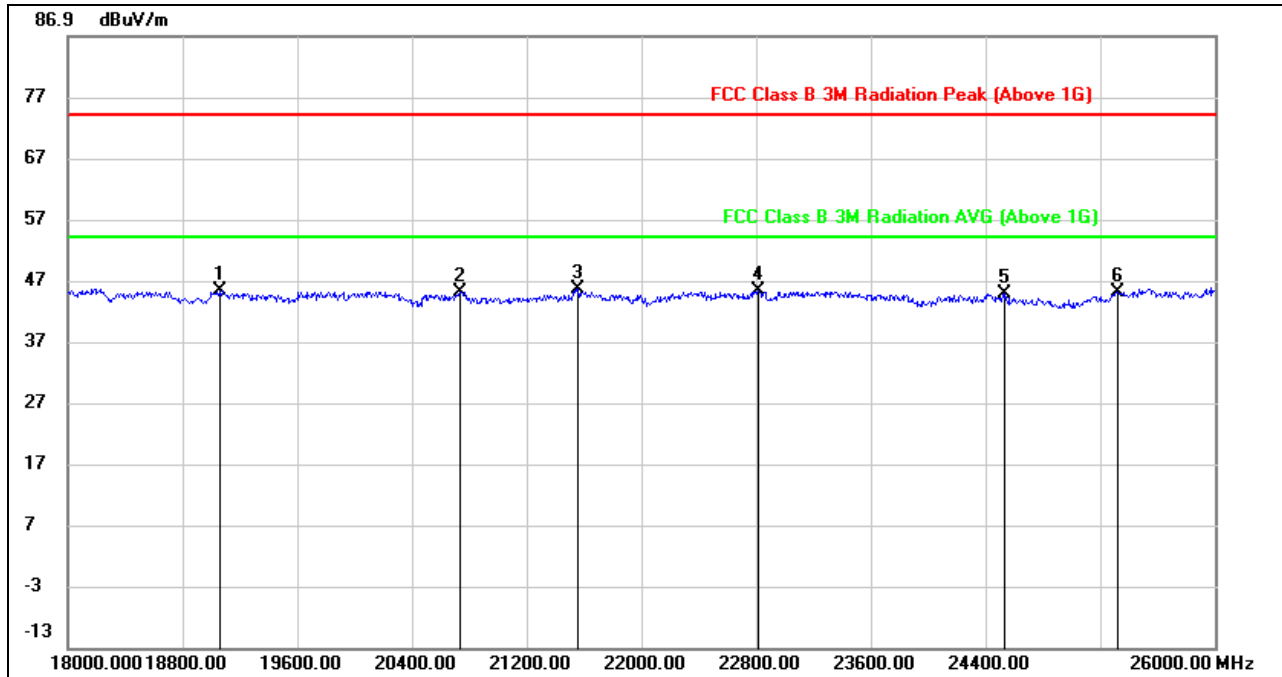

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	19056.000	50.33	-4.93	45.40	74.00	-28.60	peak
2	20736.000	50.22	-5.11	45.11	74.00	-28.89	peak
3	21560.000	51.35	-5.77	45.58	74.00	-28.42	peak
4	22816.000	51.08	-5.71	45.37	74.00	-28.63	peak
5	24528.000	47.36	-2.51	44.85	74.00	-29.15	peak
6	25320.000	46.42	-1.36	45.06	74.00	-28.94	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.


Note: All test mode has been tested, only the worst data record in the report.



8.4. SPURIOUS EMISSIONS 30M ~ 1 GHz

8.4.1. GFSK(2Mbps) MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

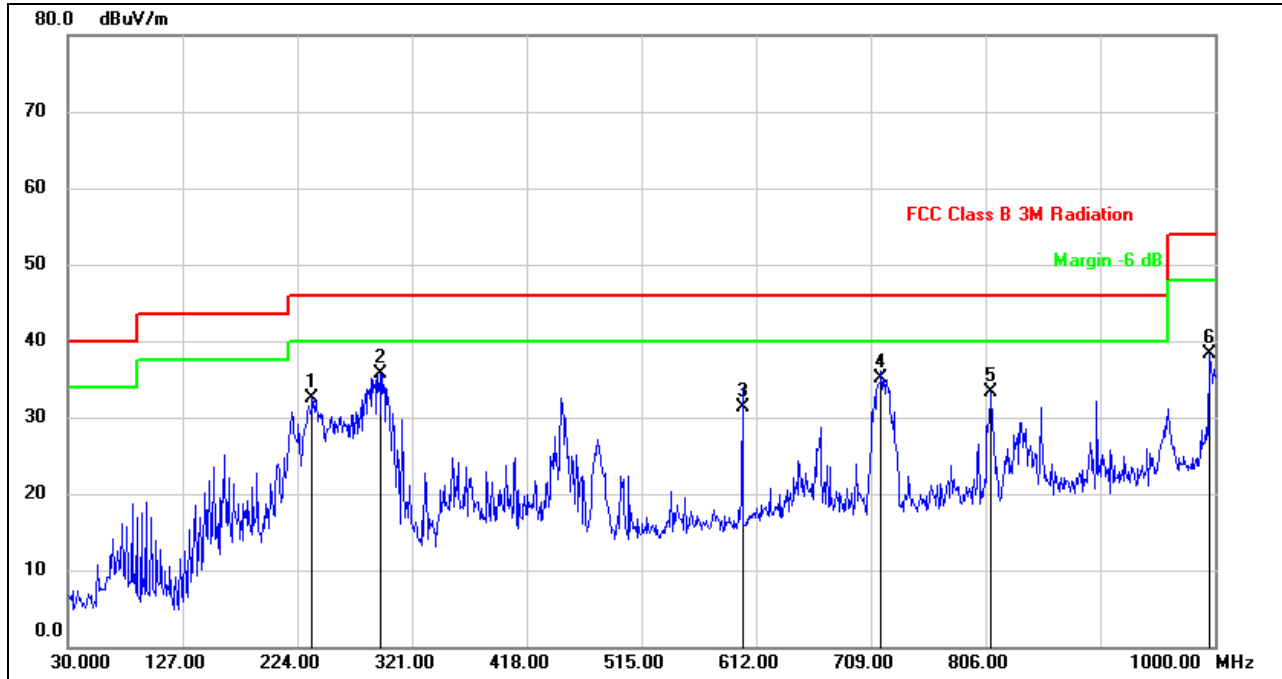


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	236.6100	50.07	-17.47	32.60	46.00	-13.40	QP
2	293.8400	49.97	-14.22	35.75	46.00	-10.25	QP
3	600.3600	39.71	-8.42	31.29	46.00	-14.71	QP
4	717.7300	41.22	-6.16	35.06	46.00	-10.94	QP
5	810.8500	38.51	-5.23	33.28	46.00	-12.72	QP
6	995.1500	41.21	-2.95	38.26	54.00	-15.74	QP

- Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

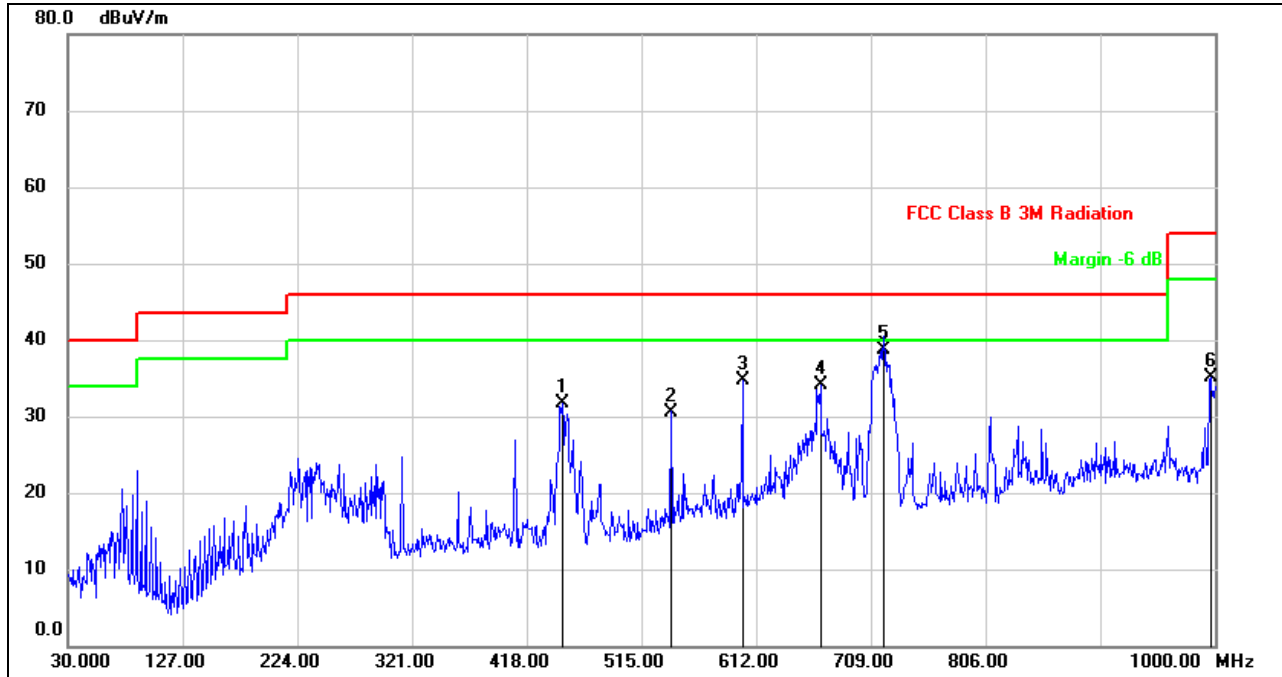

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	448.0700	43.11	-11.45	31.66	46.00	-14.34	QP
2	540.2199	40.19	-9.59	30.60	46.00	-15.40	QP
3	600.3600	43.13	-8.42	34.71	46.00	-11.29	QP
4	666.3200	41.30	-7.23	34.07	46.00	-11.93	QP
5	719.6700	44.74	-6.09	38.65	46.00	-7.35	QP
6	996.1200	38.05	-2.93	35.12	54.00	-18.88	QP

- Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All test mode has been tested, only the worst data record in the report.




8.5. SPURIOUS EMISSIONS BELOW 30M

8.5.1. GFSK(2Mbps) MODE

SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

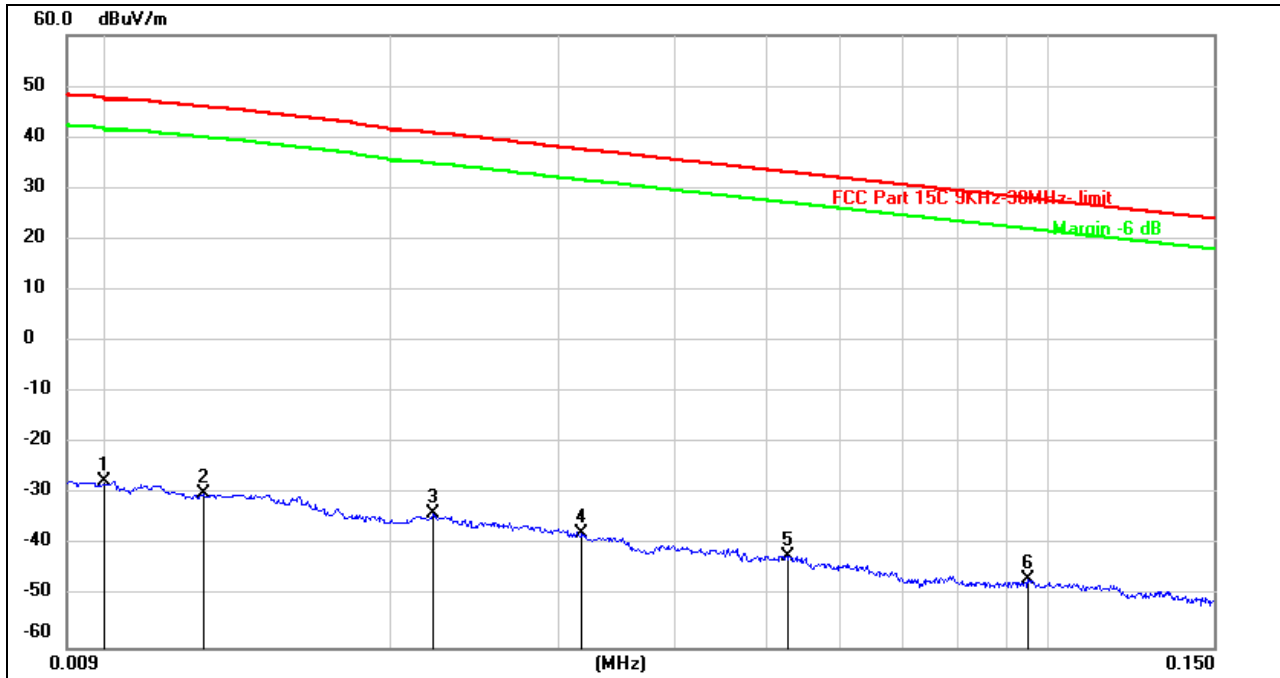

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.0100	73.85	-101.40	-27.55	47.60	-75.15	peak
2	0.0126	71.43	-101.38	-29.95	46.03	-75.98	peak
3	0.0221	67.63	-101.35	-33.72	40.84	-74.56	peak
4	0.0318	63.87	-101.40	-37.53	37.61	-75.14	peak
5	0.0529	59.27	-101.49	-42.22	33.16	-75.38	peak
6	0.0952	55.21	-101.76	-46.55	28.04	-74.59	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



150kHz ~ 490kHz

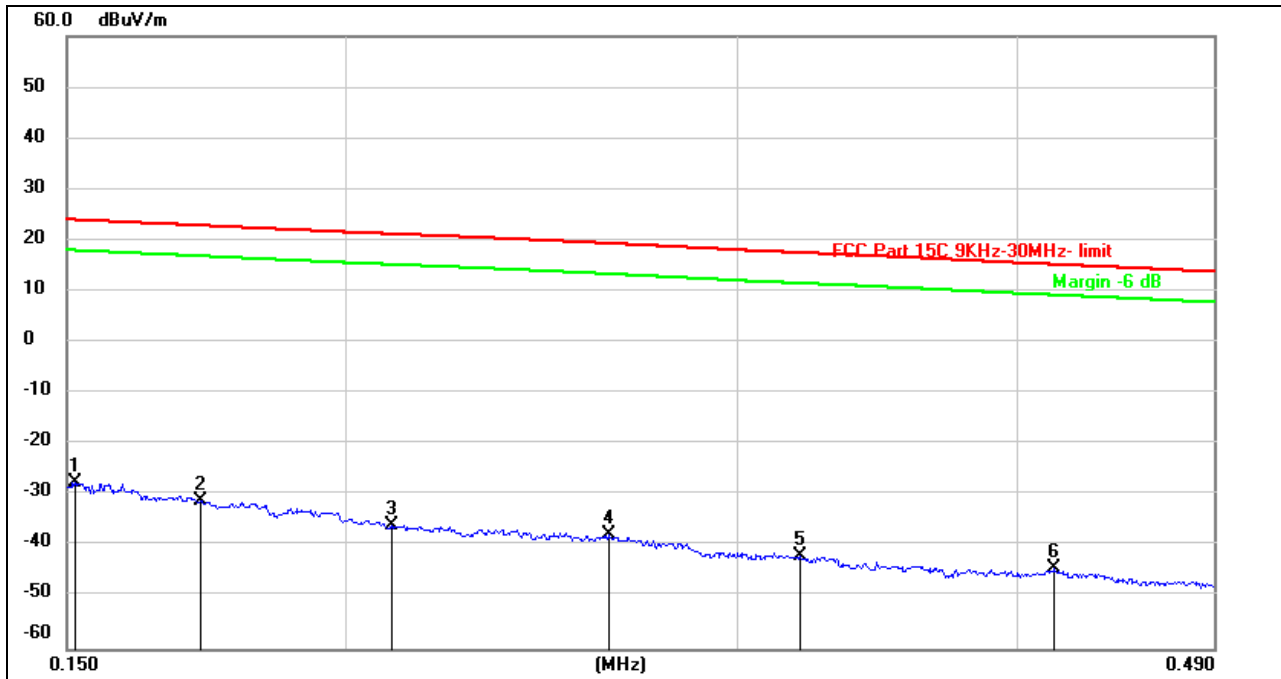


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1512	74.15	-101.63	-27.48	24.01	-51.49	peak
2	0.1720	70.69	-101.67	-30.98	22.90	-53.88	peak
3	0.2096	65.90	-101.73	-35.83	21.24	-57.07	peak
4	0.2625	64.17	-101.82	-37.65	19.38	-57.03	peak
5	0.3195	59.96	-101.88	-41.92	17.57	-59.49	peak
6	0.4158	57.69	-101.98	-44.29	15.25	-59.54	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



490kHz ~ 30MHz

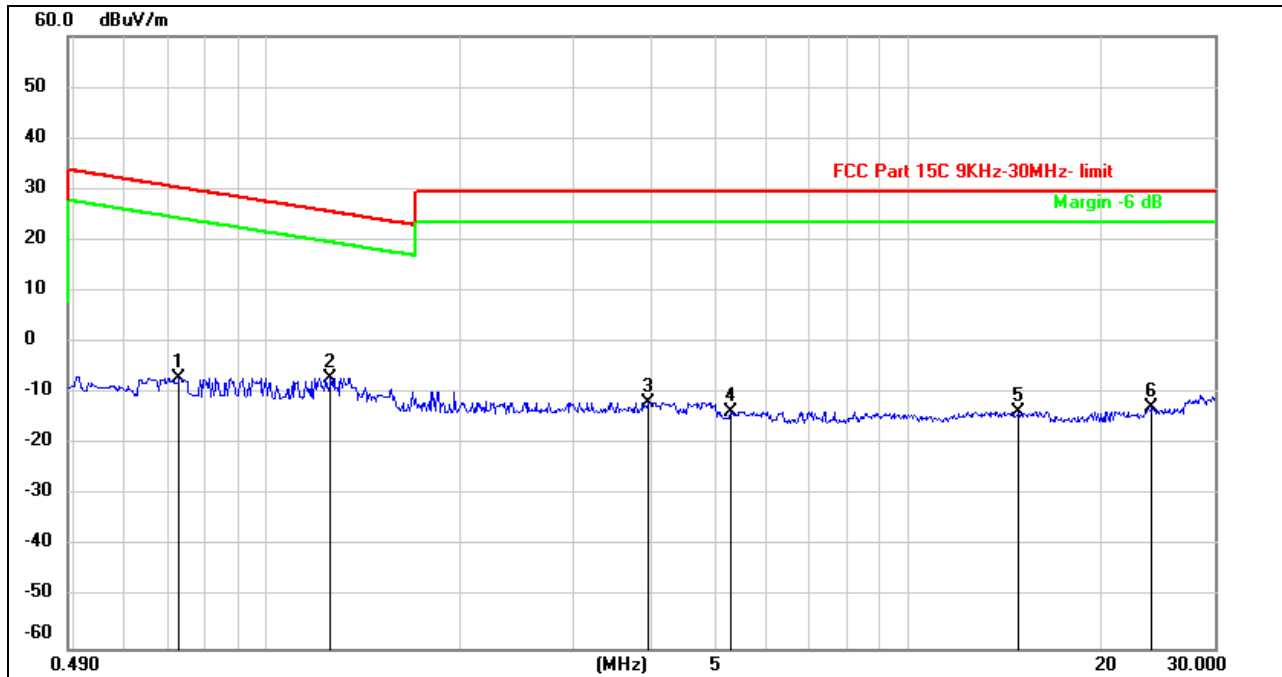

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.7300	55.01	-62.11	-7.10	30.35	-37.45	peak
2	1.2573	55.25	-62.15	-6.90	25.62	-32.52	peak
3	3.9426	49.63	-61.35	-11.72	29.54	-41.26	peak
4	5.3000	47.94	-61.45	-13.51	29.54	-43.05	peak
5	14.8612	47.40	-61.02	-13.62	29.54	-43.16	peak
6	23.9800	47.67	-60.53	-12.86	29.54	-42.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All test mode has been tested, only the worst data record in the report.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

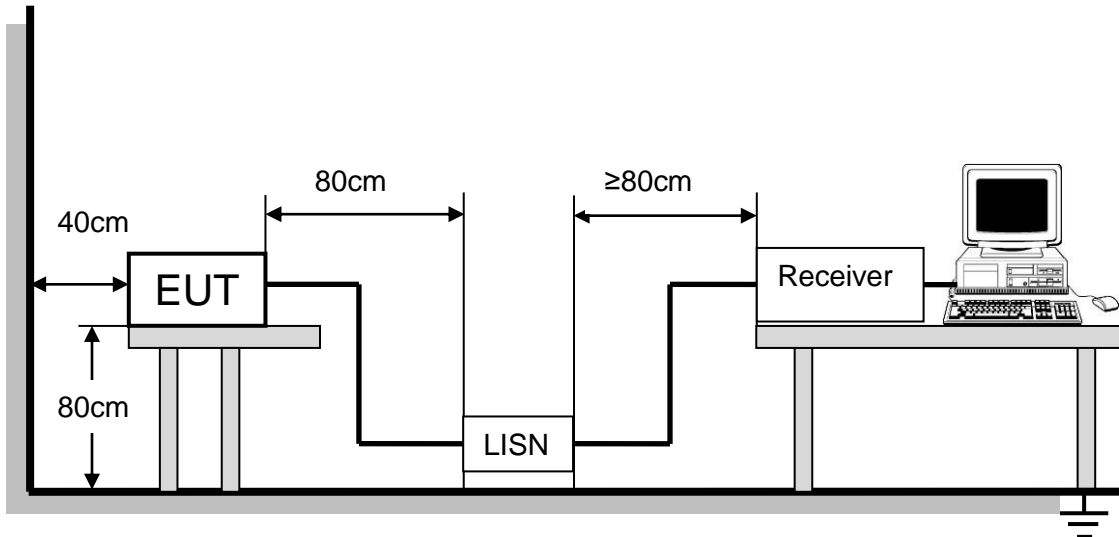


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz. The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



9.1.1. GFSK(2Mbps) MODE

LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

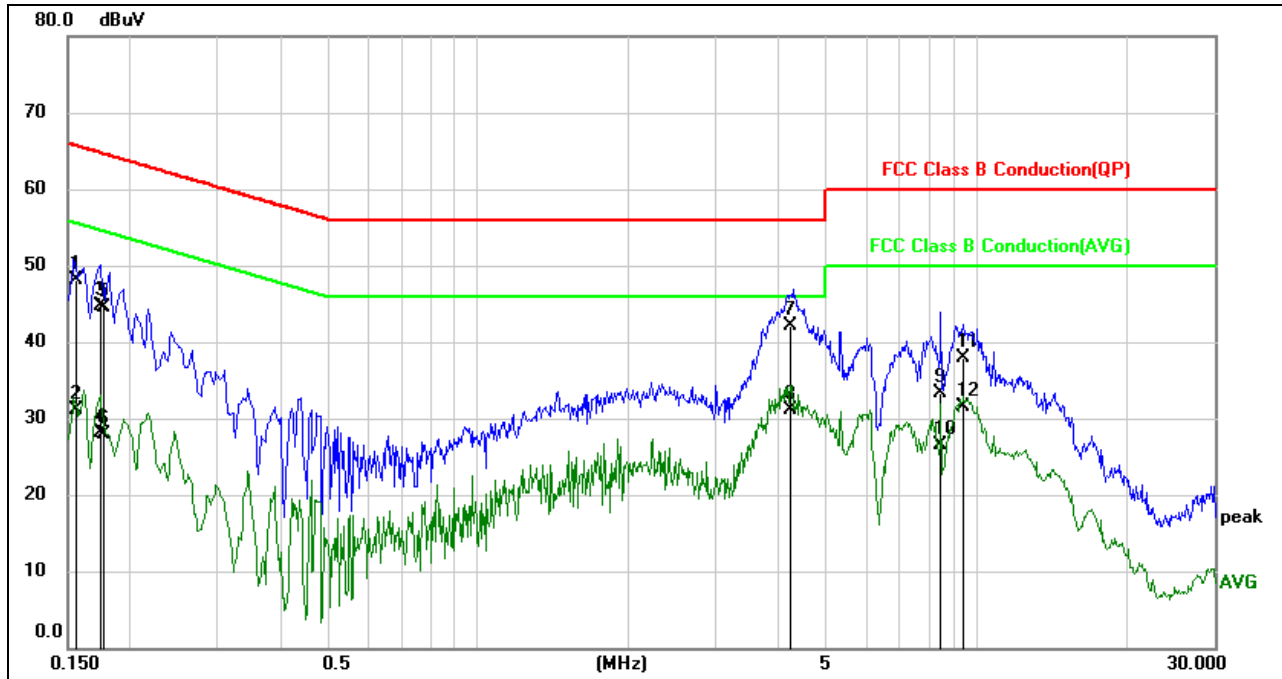


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1561	38.42	9.61	48.03	65.67	-17.64	QP
2	0.1561	21.48	9.61	31.09	55.67	-24.58	AVG
3	0.1737	35.08	9.61	44.69	64.78	-20.09	QP
4	0.1737	18.48	9.61	28.09	54.78	-26.69	AVG
5	0.1776	34.96	9.61	44.57	64.60	-20.03	QP
6	0.1776	18.29	9.61	27.90	54.60	-26.70	AVG
7	4.2063	32.37	9.66	42.03	56.00	-13.97	QP
8	4.2063	21.47	9.66	31.13	46.00	-14.87	AVG
9	8.5056	23.62	9.73	33.35	60.00	-26.65	QP
10	8.5056	16.72	9.73	26.45	50.00	-23.55	AVG
11	9.3440	28.19	9.74	37.93	60.00	-22.07	QP
12	9.3440	21.72	9.74	31.46	50.00	-18.54	AVG

- Note: 1. Result = Reading +Correct Factor.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)

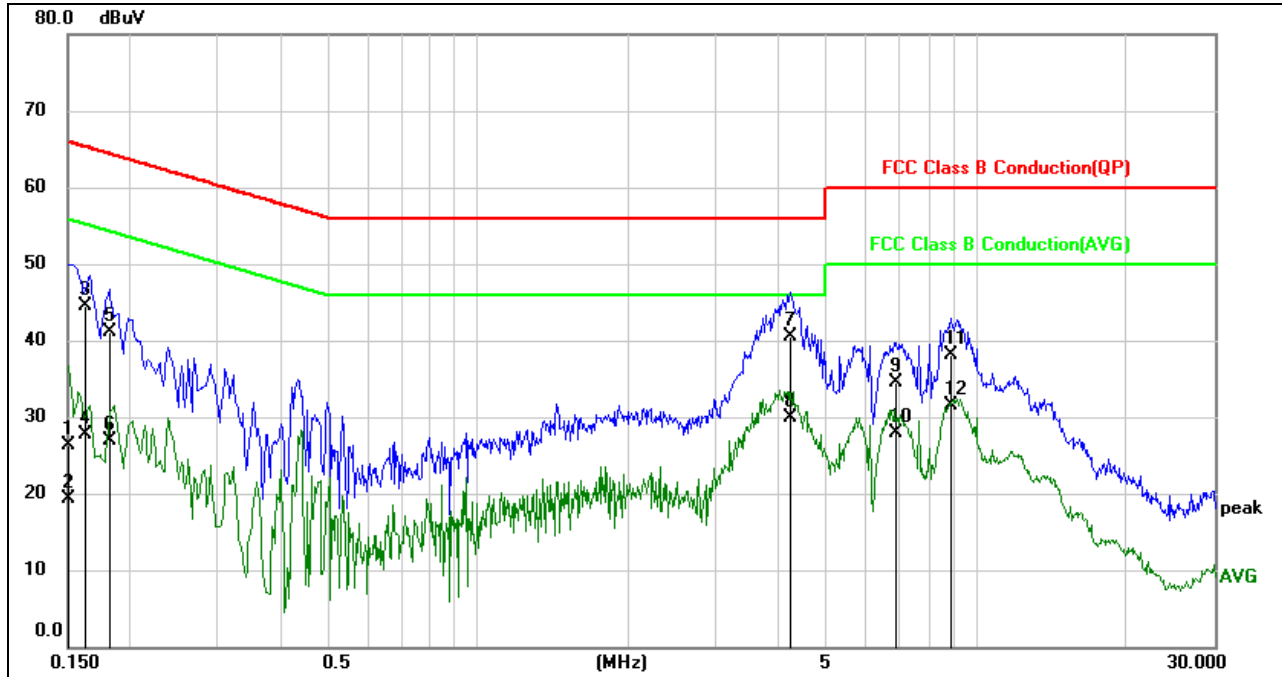

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	16.70	9.60	26.30	66.00	-39.70	QP
2	0.1500	9.75	9.60	19.35	56.00	-36.65	AVG
3	0.1623	34.92	9.60	44.52	65.35	-20.83	QP
4	0.1623	18.02	9.60	27.62	55.35	-27.73	AVG
5	0.1833	31.43	9.60	41.03	64.33	-23.30	QP
6	0.1833	17.27	9.60	26.87	54.33	-27.46	AVG
7	4.2275	30.92	9.66	40.58	56.00	-15.42	QP
8	4.2275	20.32	9.66	29.98	46.00	-16.02	AVG
9	6.9010	24.71	9.71	34.42	60.00	-25.58	QP
10	6.9010	18.16	9.71	27.87	50.00	-22.13	AVG
11	8.8487	28.46	9.74	38.20	60.00	-21.80	QP
12	8.8487	21.67	9.74	31.41	50.00	-18.59	AVG

- Note: 1. Result = Reading +Correct Factor.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All test mode has been tested, only the worst data record in the report.



10. ANTENNA REQUIREMENTS

Applicable requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT