




11N40MIMO_Ant2_5230

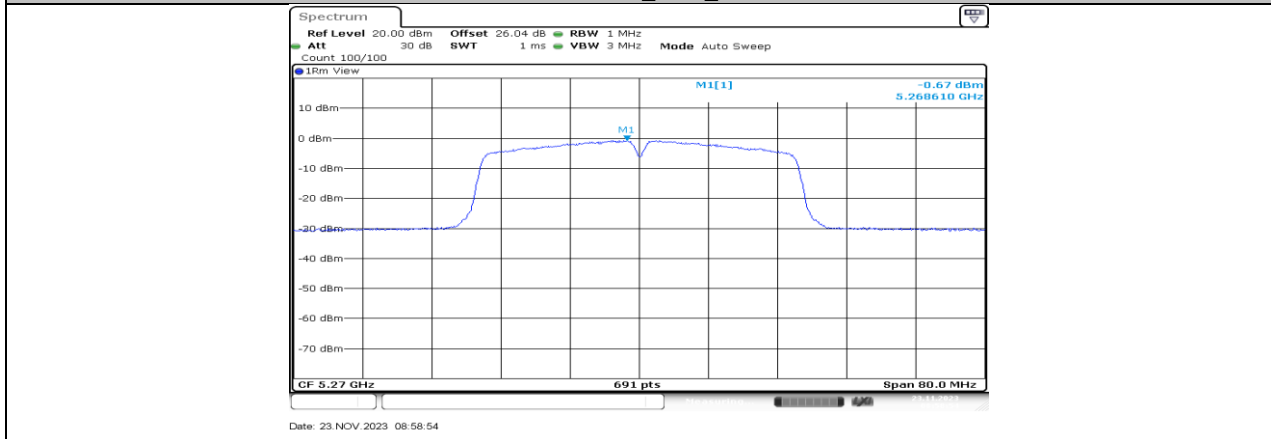



11N40MIMO_Ant1_5270

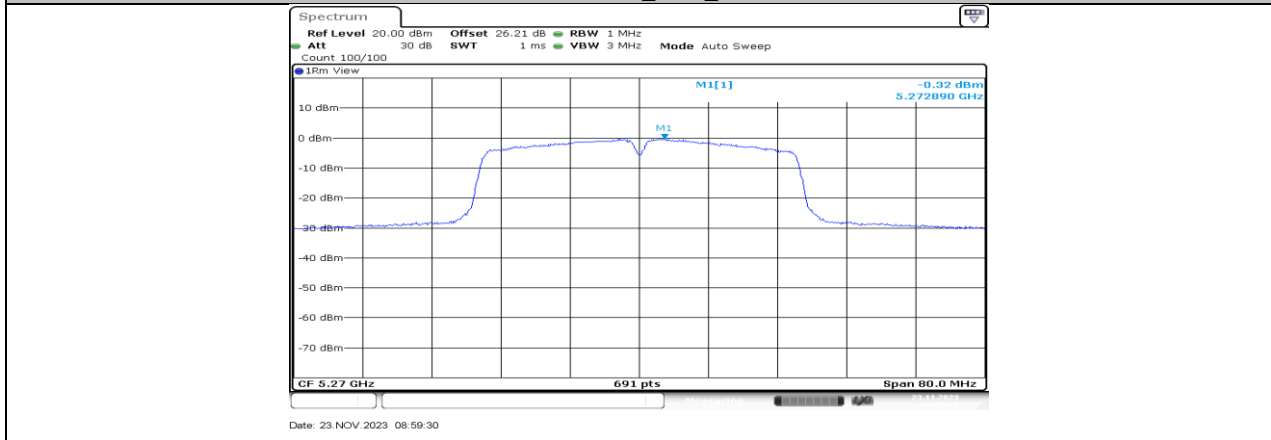


11N40MIMO_Ant2_5270

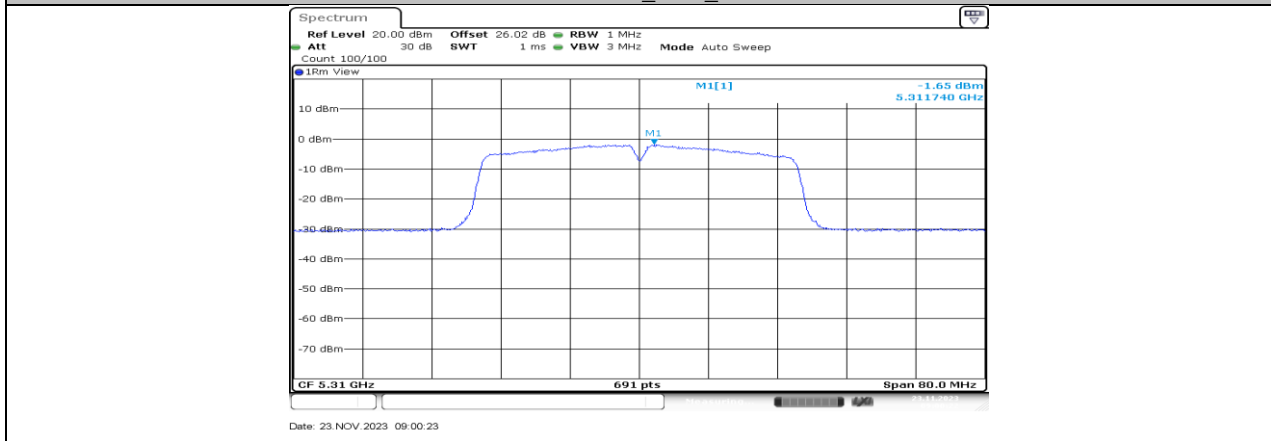

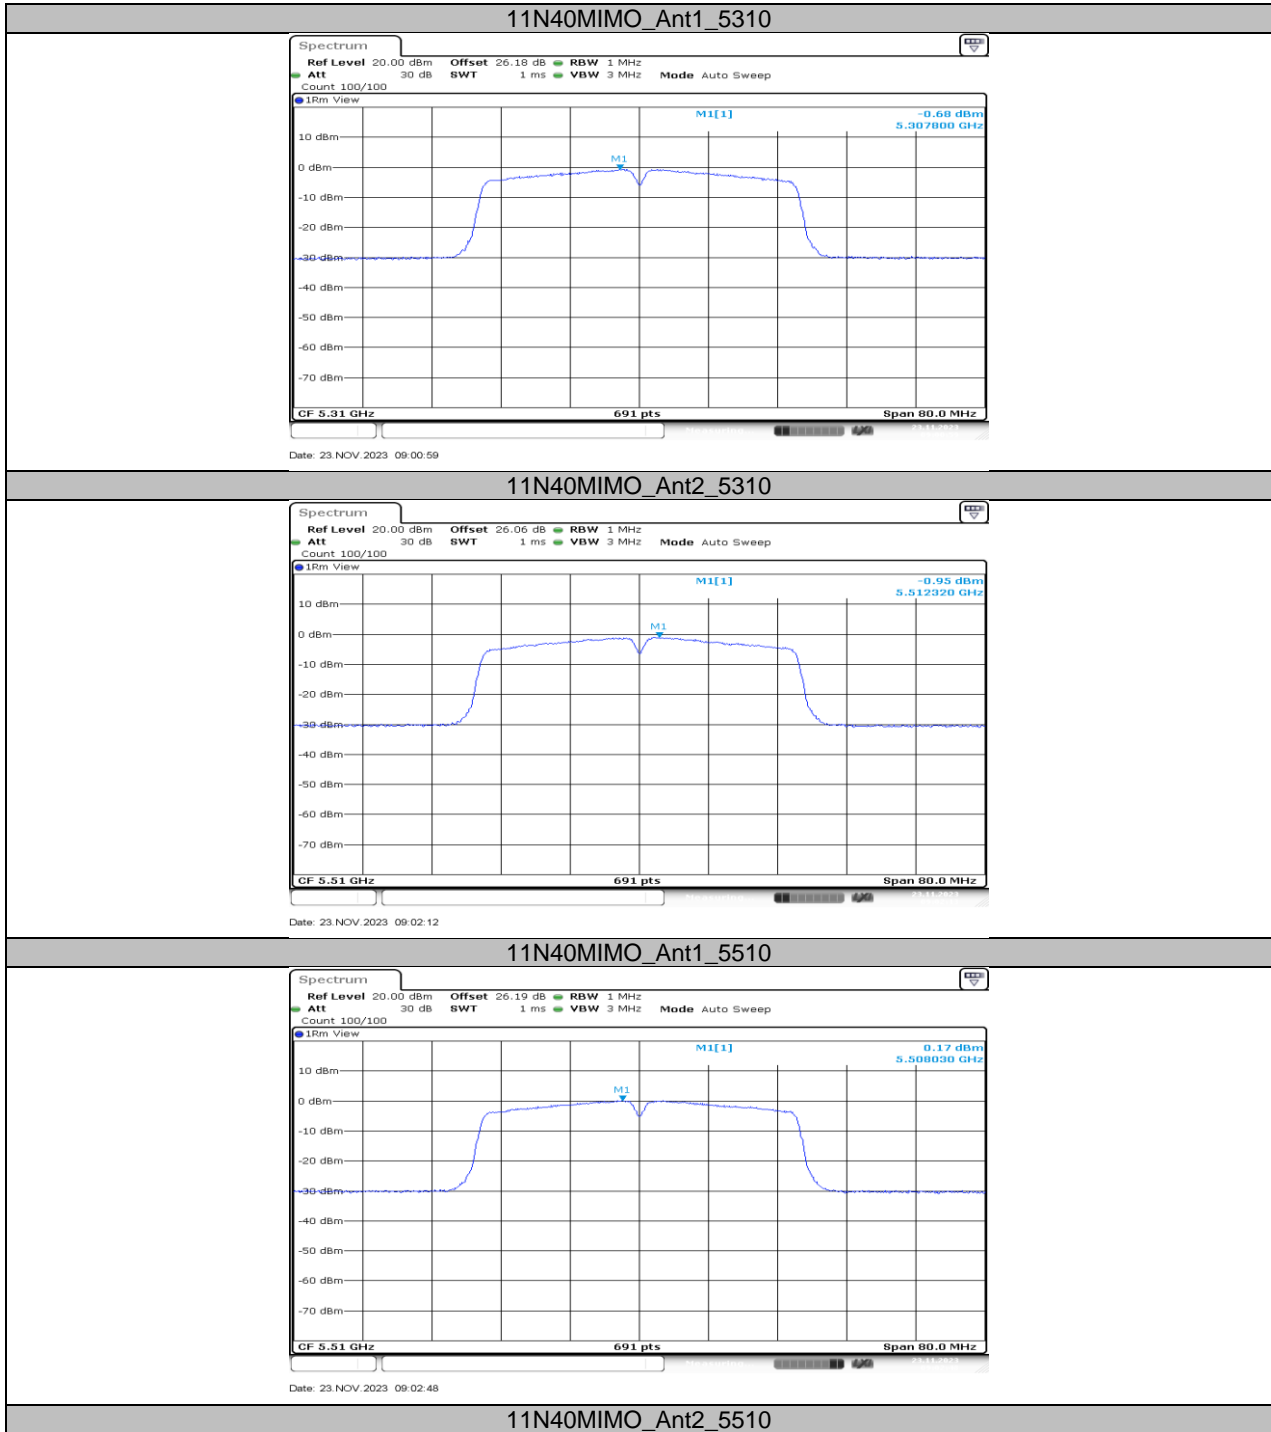


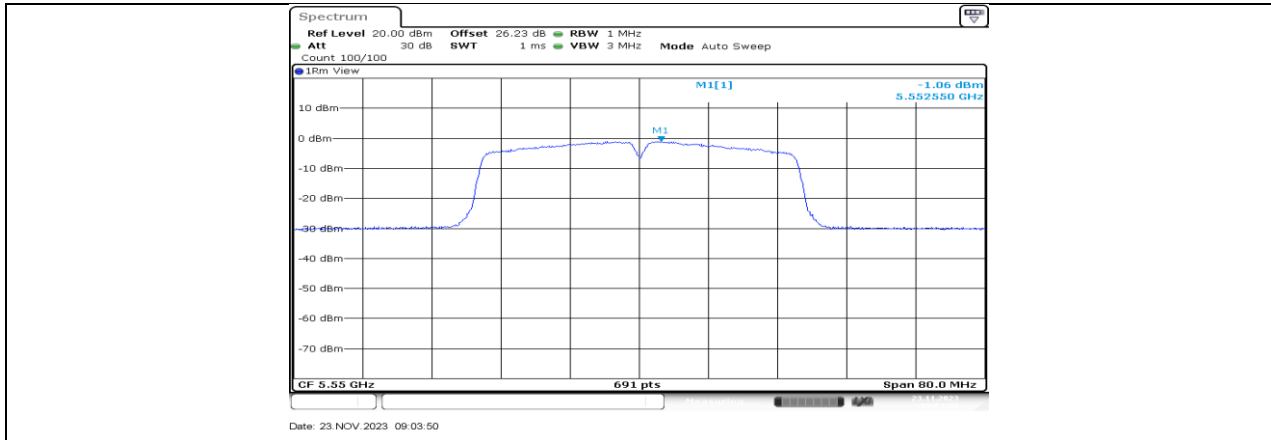


11N40MIMO_Ant1_5550

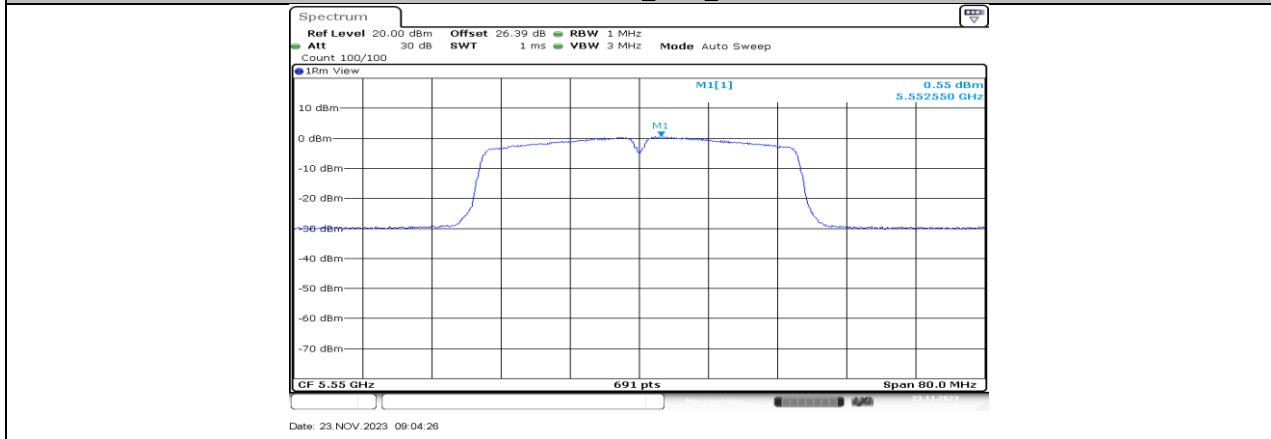



11N40MIMO_Ant2_5550

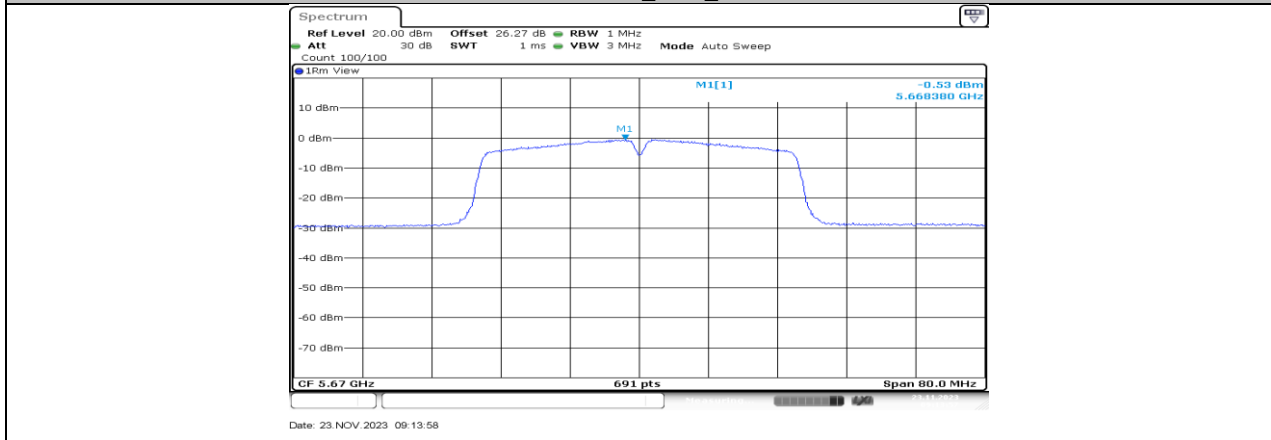


11N40MIMO_Ant1_5670

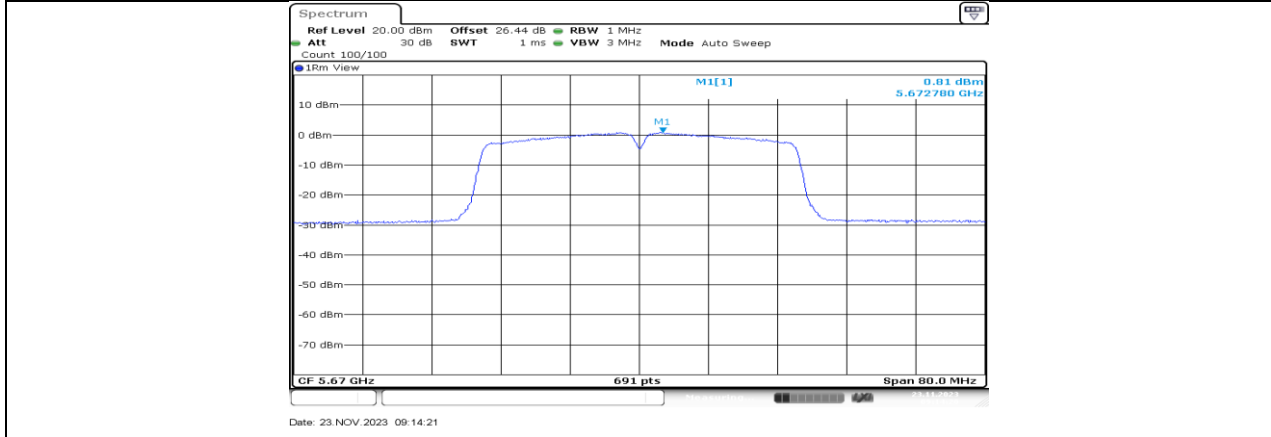

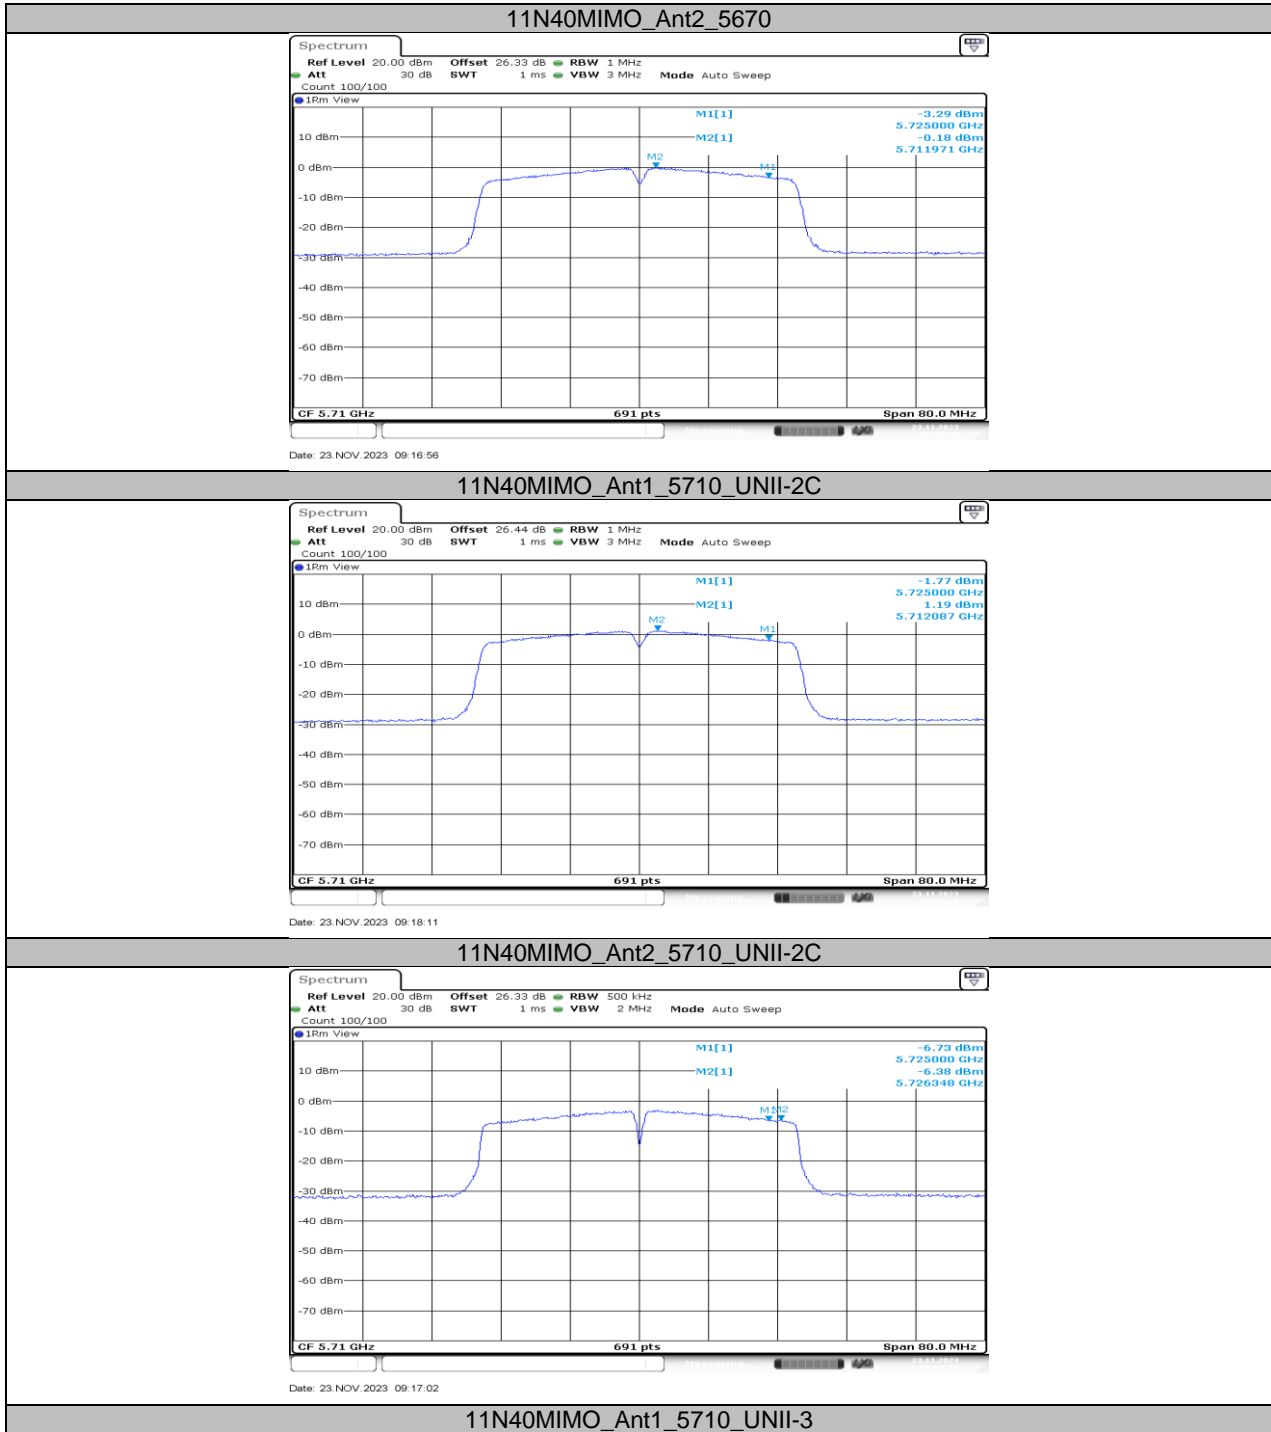


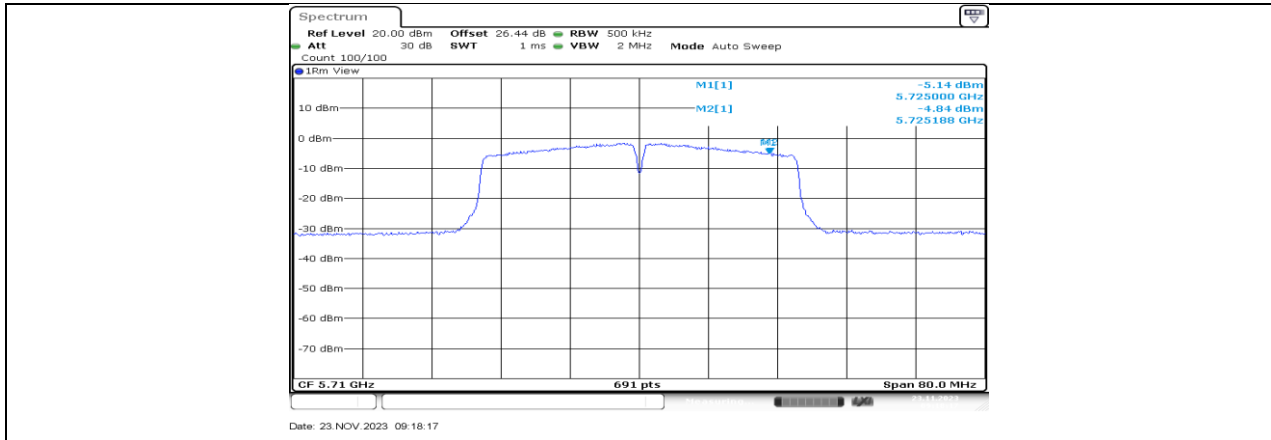


11N40MIMO_Ant2_5710_UNII-3



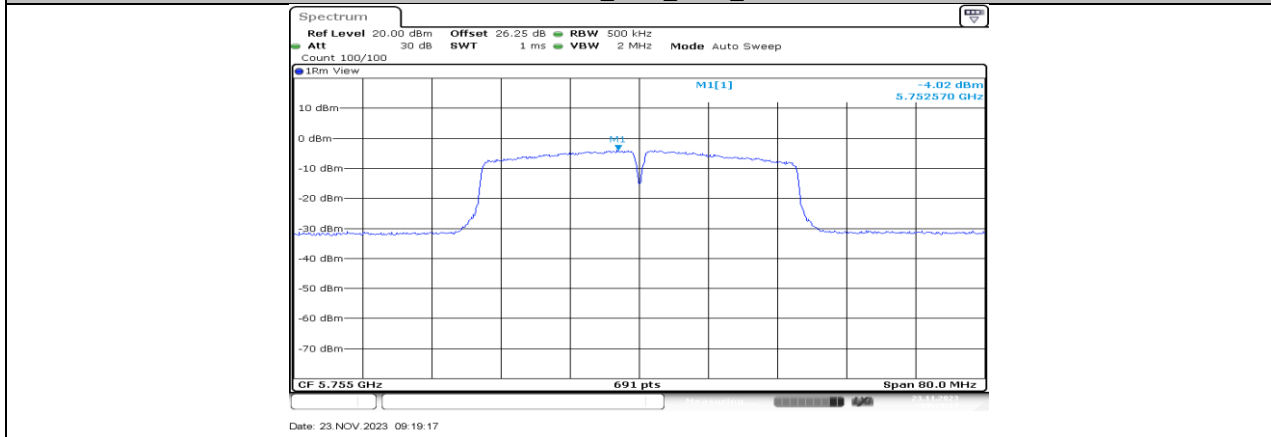


11N40MIMO_Ant1_5755

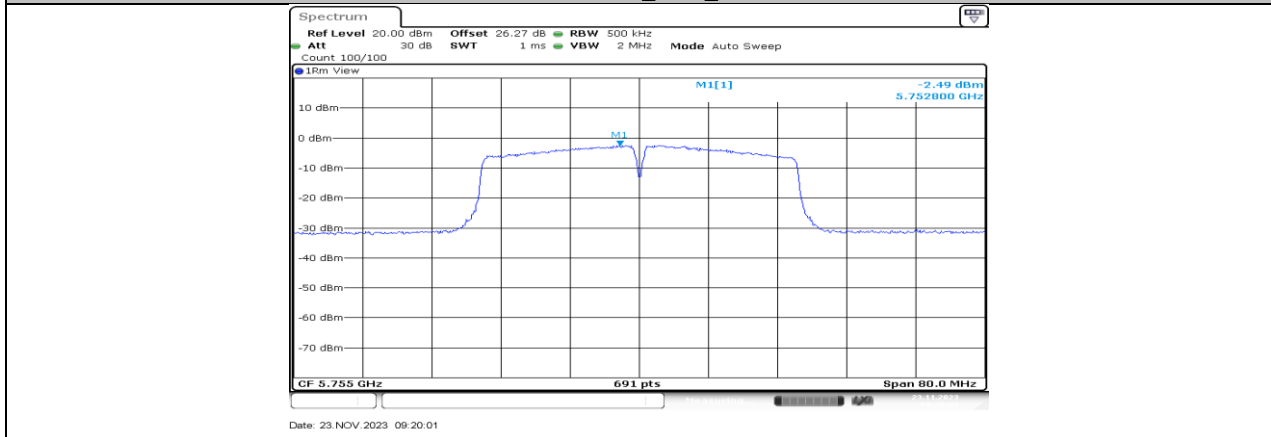


11N40MIMO_Ant2_5755

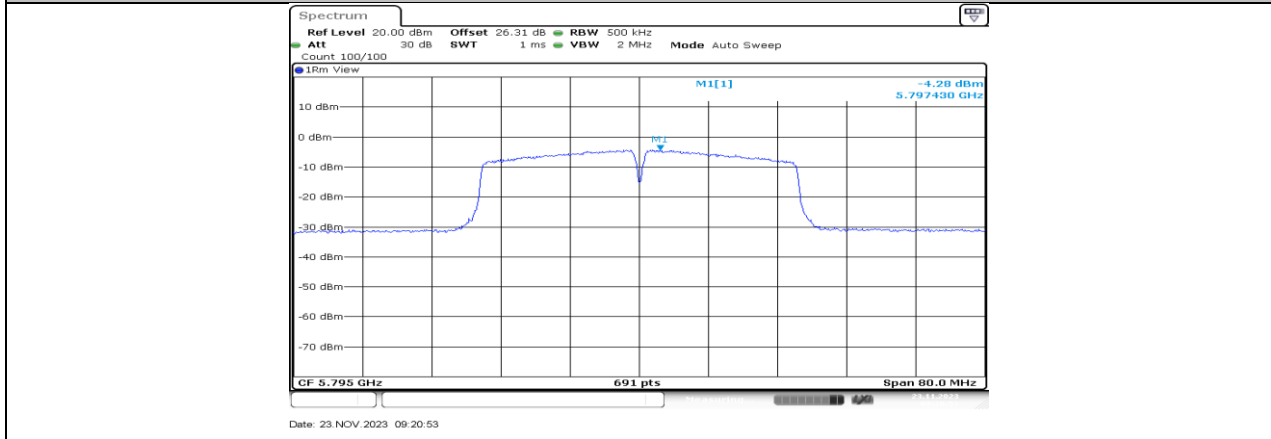


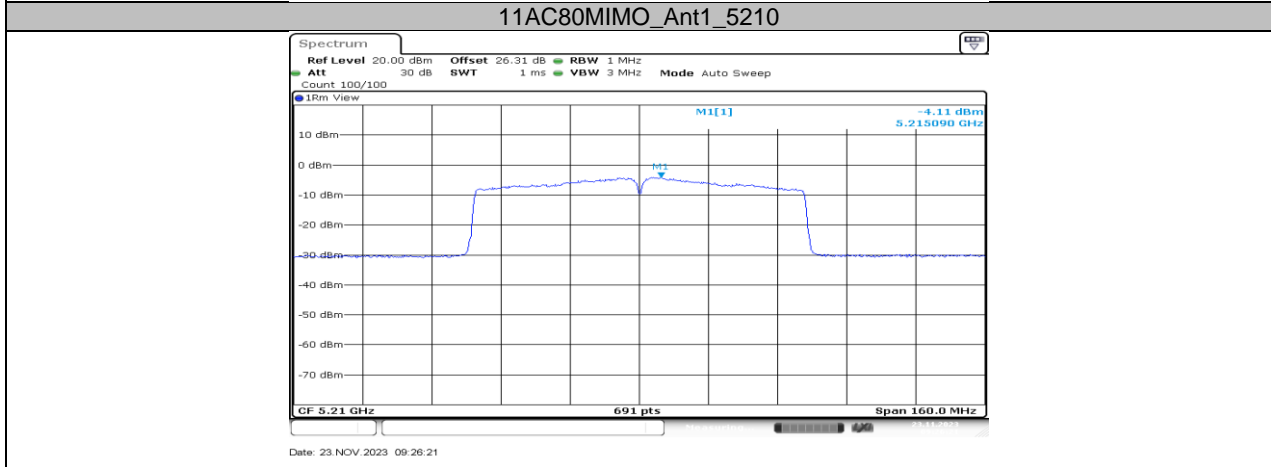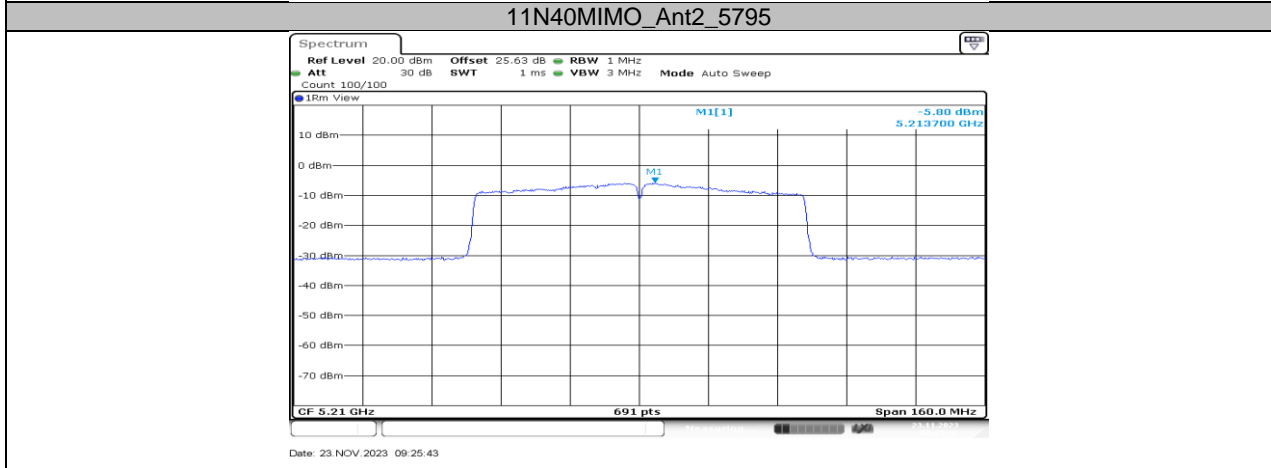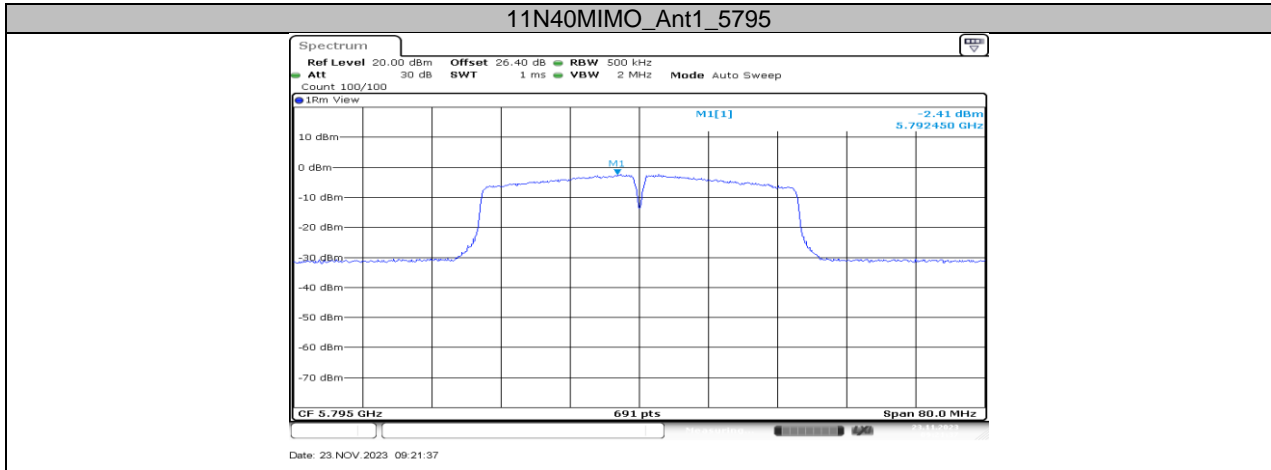


11AC80MIMO_Ant2_5210

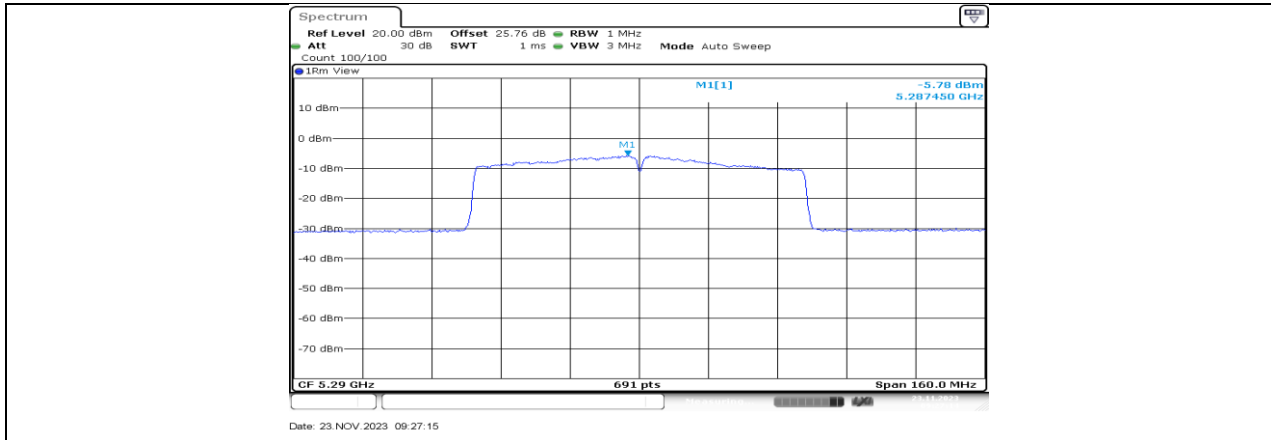


11AC80MIMO_Ant1_5290

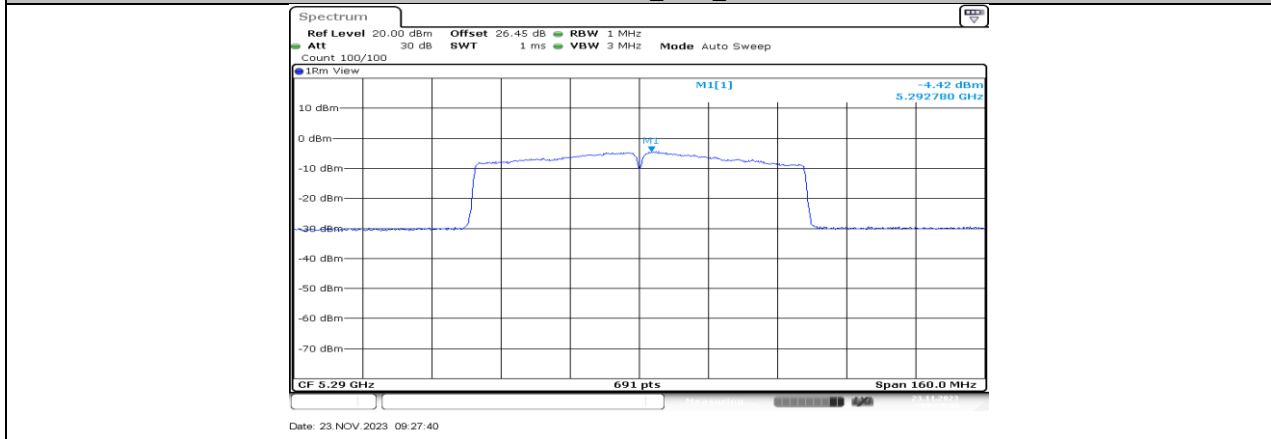



11AC80MIMO_Ant2_5290

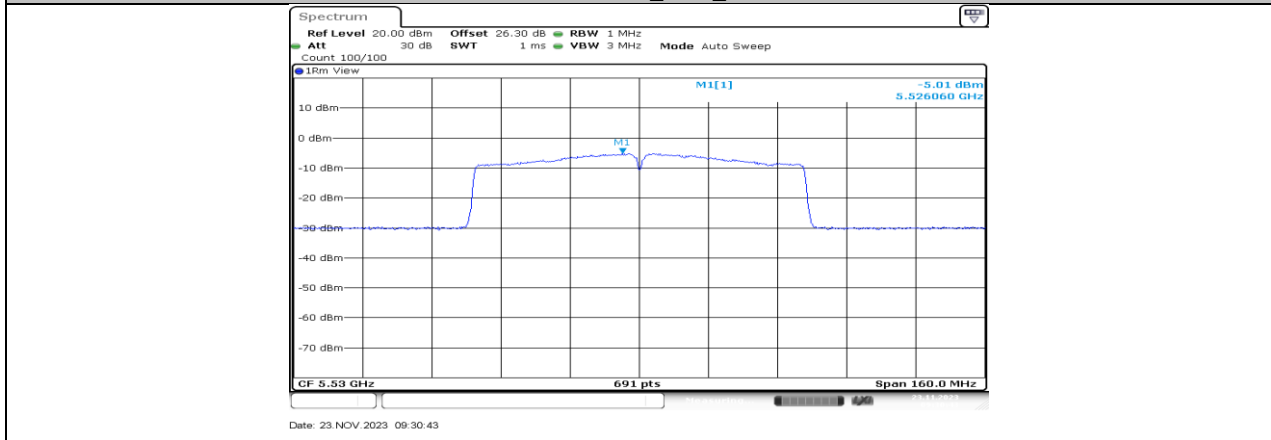


11AC80MIMO_Ant1_5530

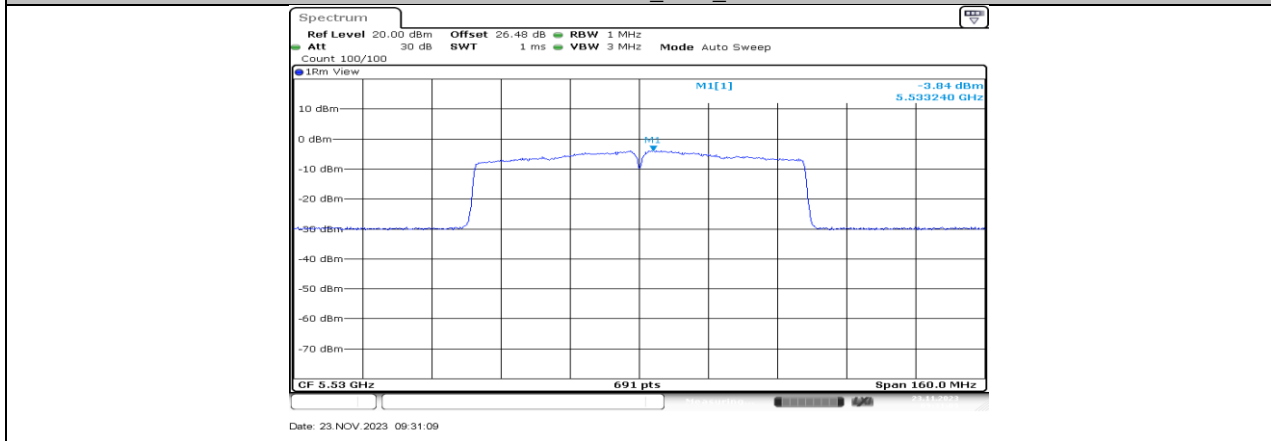

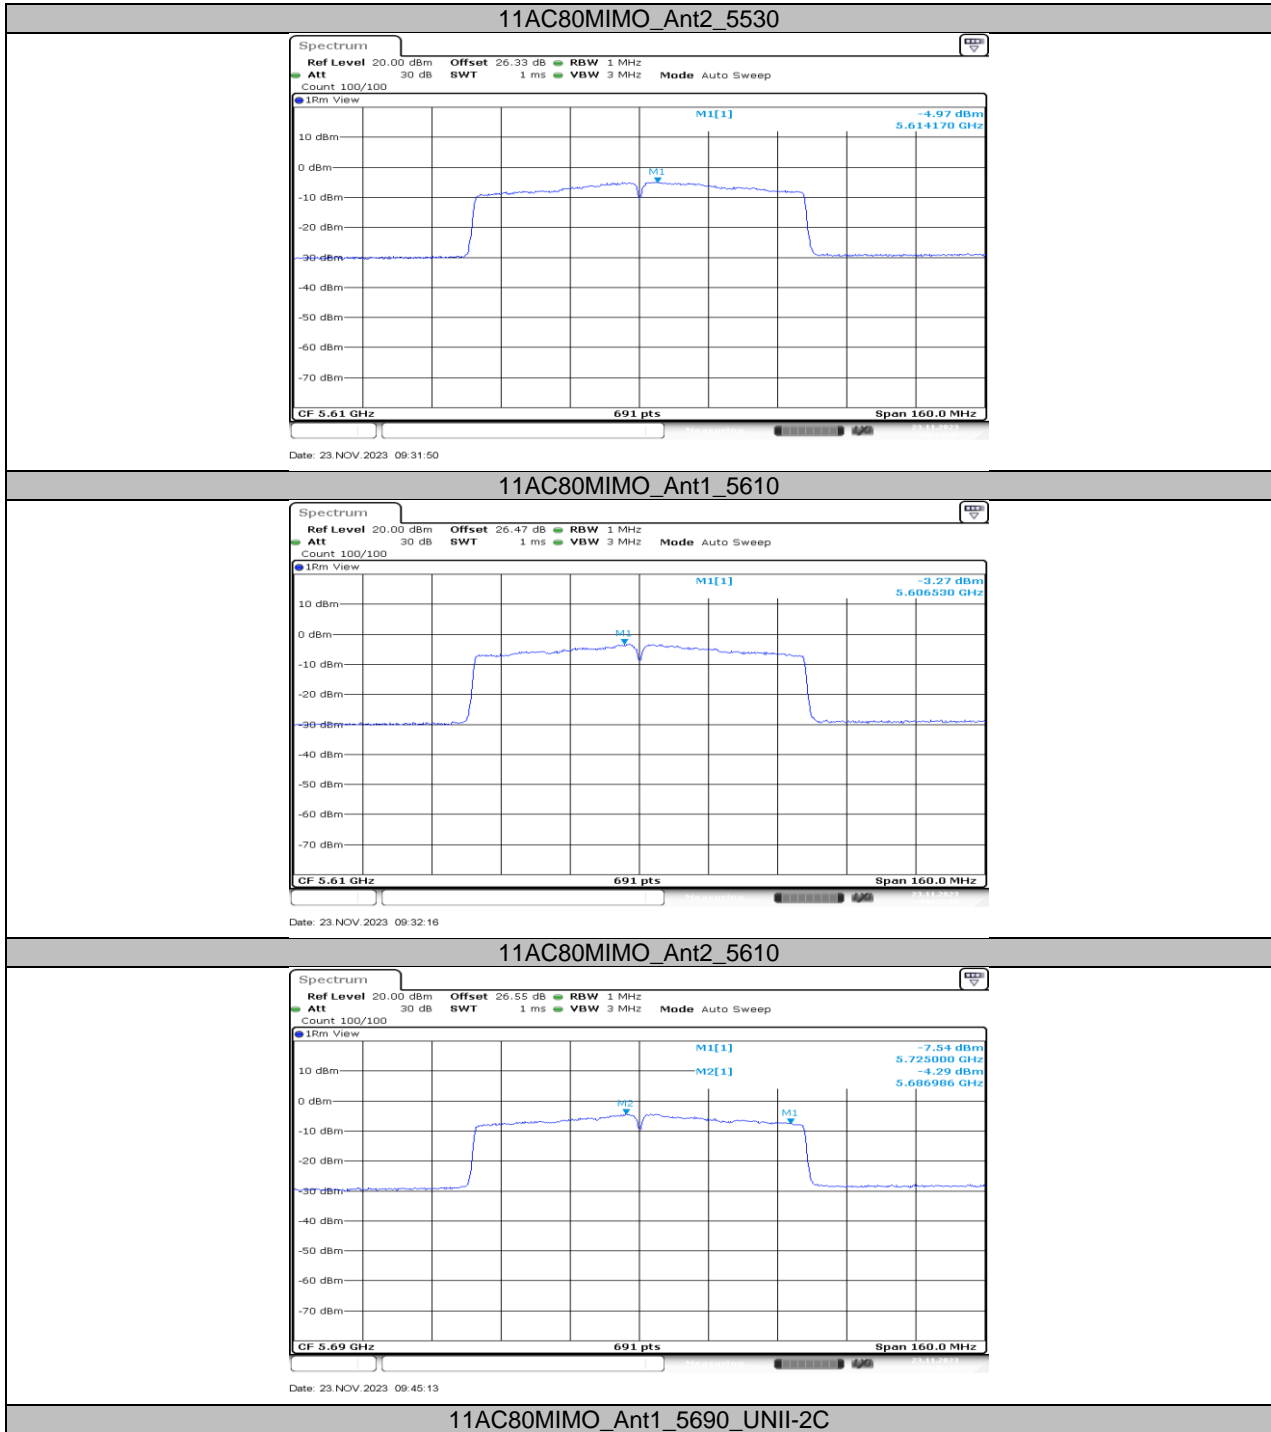


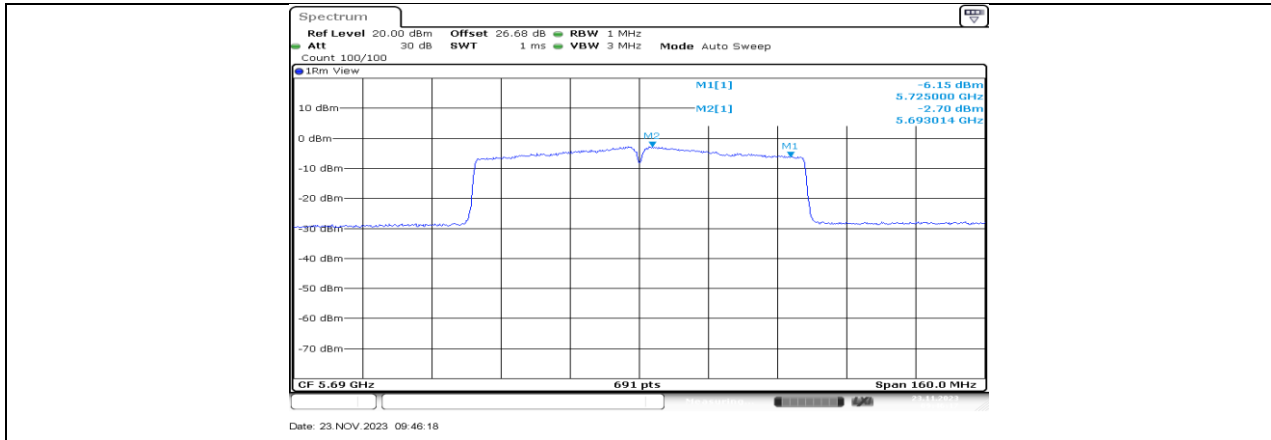


11AC80MIMO_Ant2_5690_UNII-2C

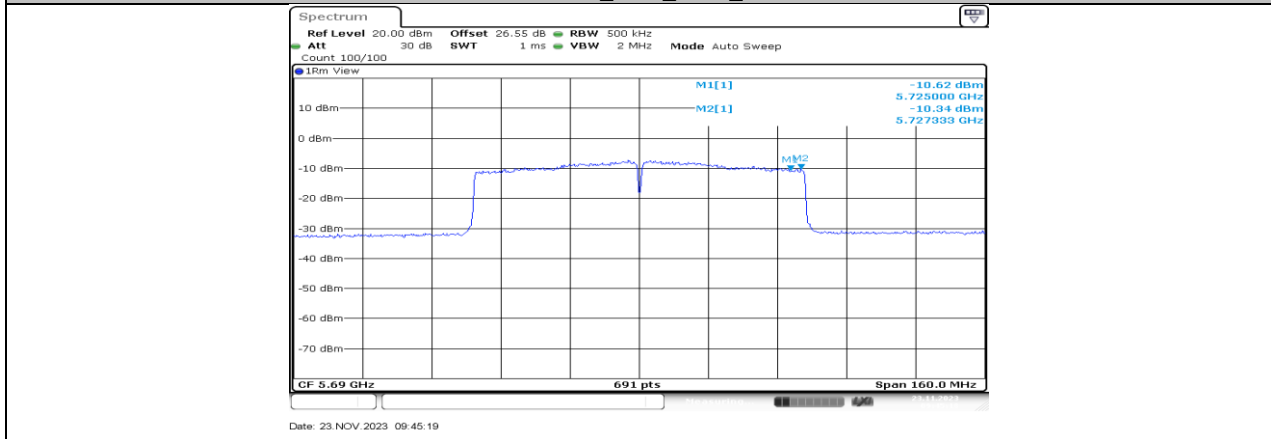


11AC80MIMO_Ant1_5690_UNII-3

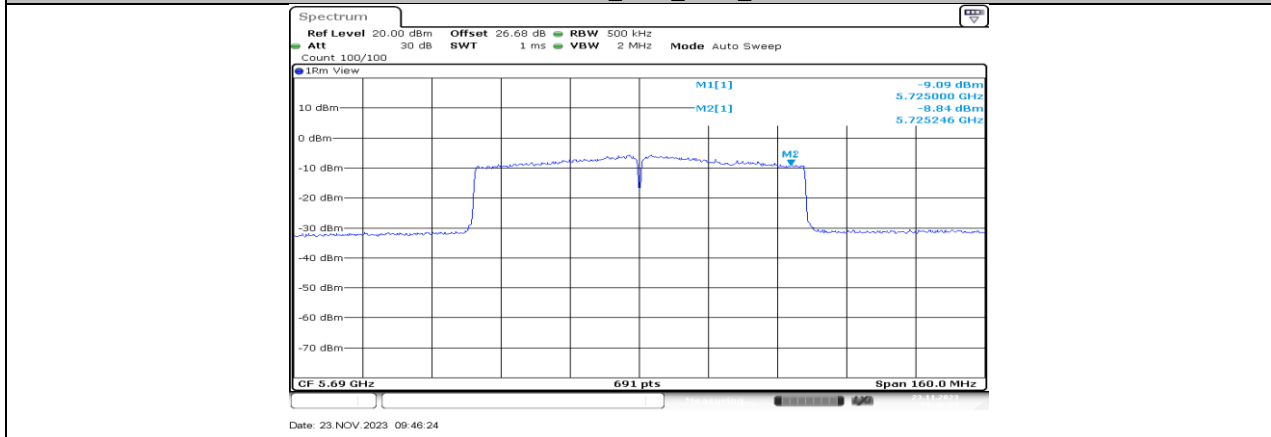

11AC80MIMO_Ant2_5690_UNII-3

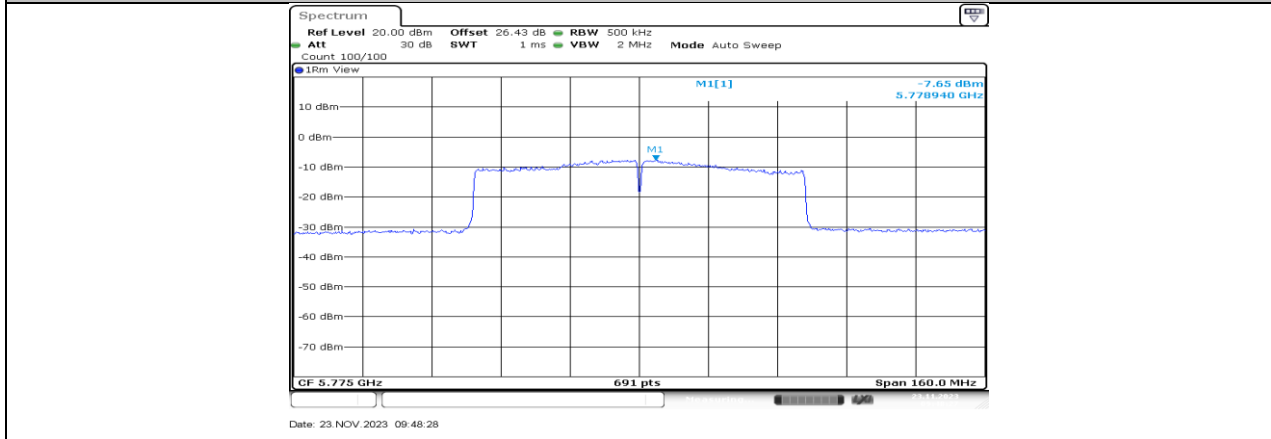

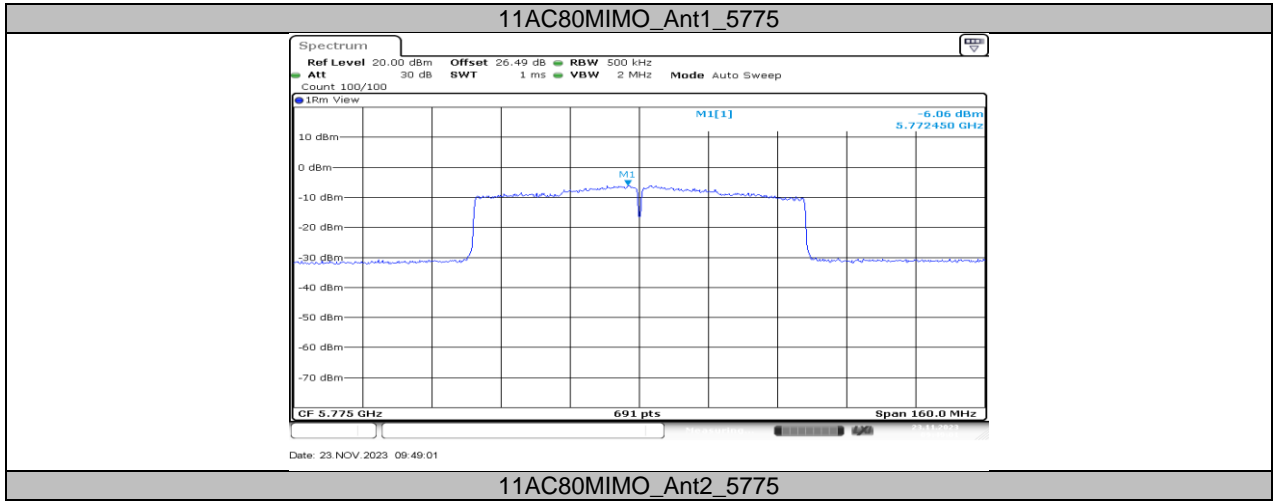

11.6. APPENDIX F: DUTY CYCLE

11.6.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	1.39	1.44	0.9653	96.53	0.15	0.72	1
11N20MIMO	1.3	1.35	0.9630	96.30	0.16	0.77	1
11N40MIMO	0.64	0.69	0.9275	92.75	0.33	1.56	2
11AC80MIMO	0.33	0.37	0.8919	89.19	0.50	3.03	4

Note:


Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.6.2. Test Graphs

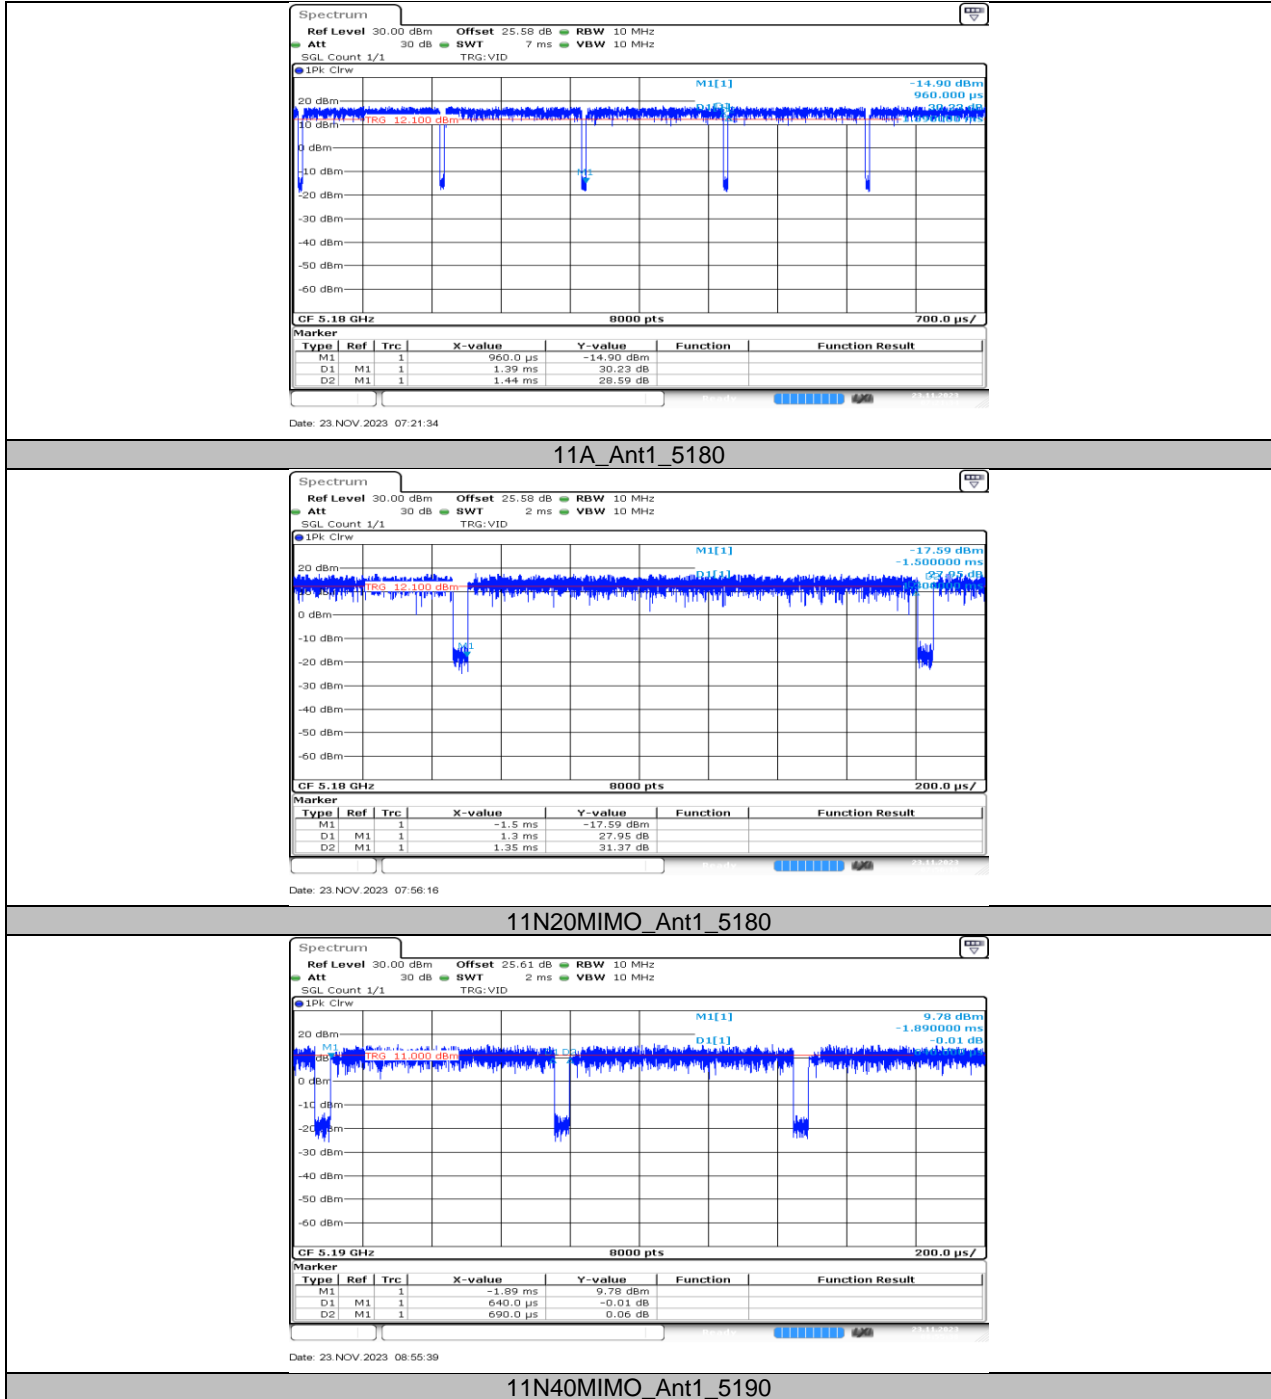

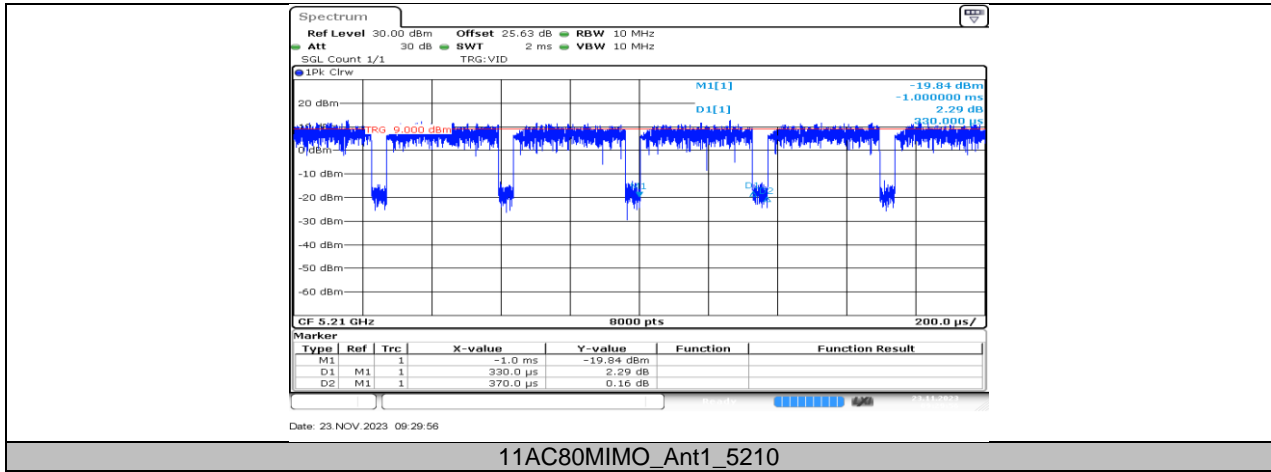

11.7. APPENDIX G: FREQUENCY STABILITY

11.7.1. Test Result

Frequency Error vs. Voltage									
802.11a:5180MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5180.0093	1.79	5179.9809	-3.69	5180.0203	3.91	5179.9778	-4.29
TN	VN	5179.9892	-2.08	5179.9785	-4.16	5179.9884	-2.24	5179.9989	-0.22
TN	VH	5179.9882	-2.28	5179.9763	-4.57	5179.9874	-2.44	5180.0175	3.38

Frequency Error vs. Temperature									
802.11a:5180MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
70	VN	5180.0008	0.16	5180.0065	1.26	5179.9888	-2.16	5180.0106	2.04
60	VN	5179.9761	-4.62	5179.9856	-2.78	5180.0226	4.36	5179.9909	-1.75
50	VN	5179.9776	-4.33	5179.9755	-4.72	5179.9789	-4.07	5179.9989	-0.21
40	VN	5179.9794	-3.99	5179.9849	-2.92	5179.9925	-1.44	5180.0018	0.35
30	VN	5179.9992	-0.15	5179.9874	-2.43	5179.9975	-0.48	5179.9859	-2.73
20	VN	5180.0020	0.39	5180.0151	2.91	5179.9915	-1.64	5179.9918	-1.59
10	VN	5179.9905	-1.84	5179.9965	-0.68	5179.9779	-4.27	5180.0047	0.90
0	VN	5180.0132	2.54	5179.9990	-0.20	5179.9923	-1.49	5180.0062	1.19

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

Frequency Error vs. Voltage									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5825.0133	2.28	5825.0109	1.87	5824.9934	-1.14	5824.9907	-1.59
TN	VN	5824.9822	-3.06	5824.9803	-3.38	5824.9794	-3.53	5825.0035	0.61
TN	VH	5824.9882	-2.03	5824.9909	-1.57	5825.0015	0.26	5825.0046	0.80

Frequency Error vs. Temperature									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
70	VN	5824.9848	-2.61	5825.0011	0.19	5825.0124	2.12	5825.0009	0.15
60	VN	5824.9860	-2.40	5824.9947	-0.92	5824.9891	-1.88	5824.9808	-3.29
50	VN	5824.9894	-1.83	5824.9912	-1.51	5825.0216	3.71	5824.9967	-0.57
40	VN	5825.0210	3.60	5824.9771	-3.94	5825.0104	1.79	5824.9962	-0.65
30	VN	5824.9871	-2.21	5825.0196	3.36	5825.0173	2.97	5824.9979	-0.35
20	VN	5825.0240	4.12	5825.0043	0.74	5824.9771	-3.94	5824.9987	-0.23
10	VN	5825.0147	2.52	5825.0088	1.51	5825.0022	0.38	5824.9793	-3.56
0	VN	5824.9865	-2.32	5824.9956	-0.76	5824.9834	-2.86	5824.9862	-2.38


Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

11.8. APPENDIX H DYNAMIC FREQUENCY SELECTION

11.8.1. Calibration


Mode	Frequency (MHz)	Type	Result	Verdict
ac80	5530	DFS_FCC_T0	See test Graph	Pass

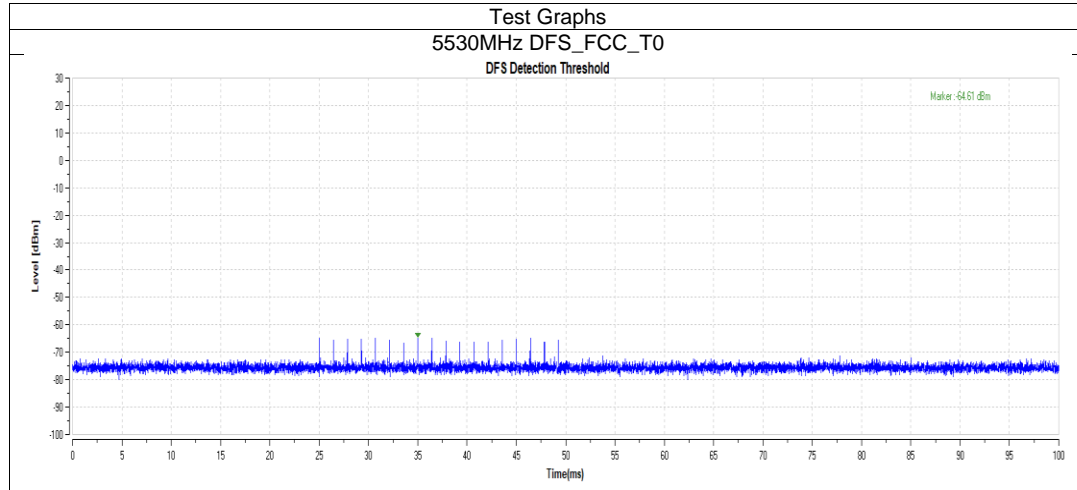

11.8.2. Shutdown Time

Mode	Frequency (MHz)	Channel Move Time (s)	Limit Channel Move Time (s)	Close Transmission Time (s)	Limit Close Transmission Time (s)	Close Transmission Time after 200ms(s)	Limit Close Transmission Time after 200ms (s)	Verdict
ac80	5530	0.492	10	0.016	0.26	0.003	0.06	Pass


Note: All modes have been tested, only the worst data recorded in the report.

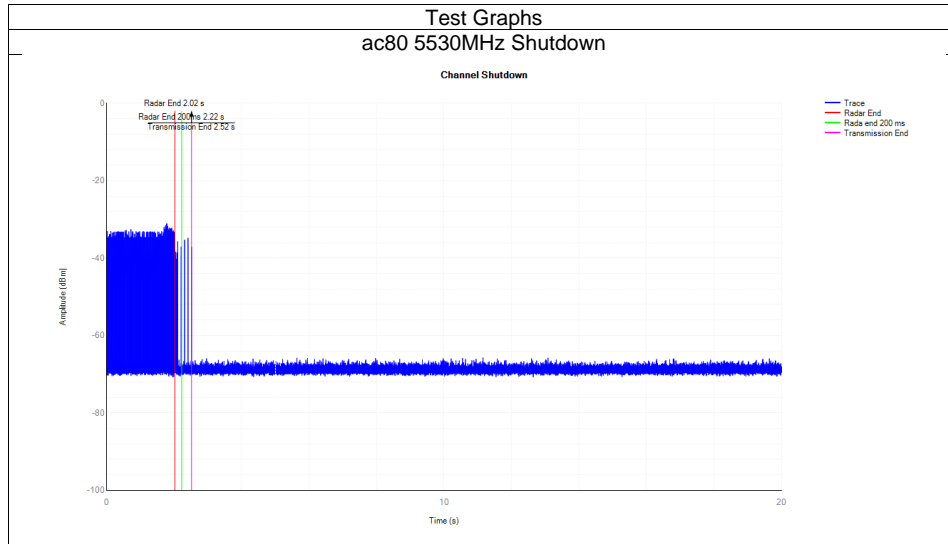

11.8.3. Non-Occupancy

Mode	Frequency (MHz)	Result	Verdict
ac80	5530	See test Graph	Pass

Note: All modes have been tested, only the worst data recorded in the report.

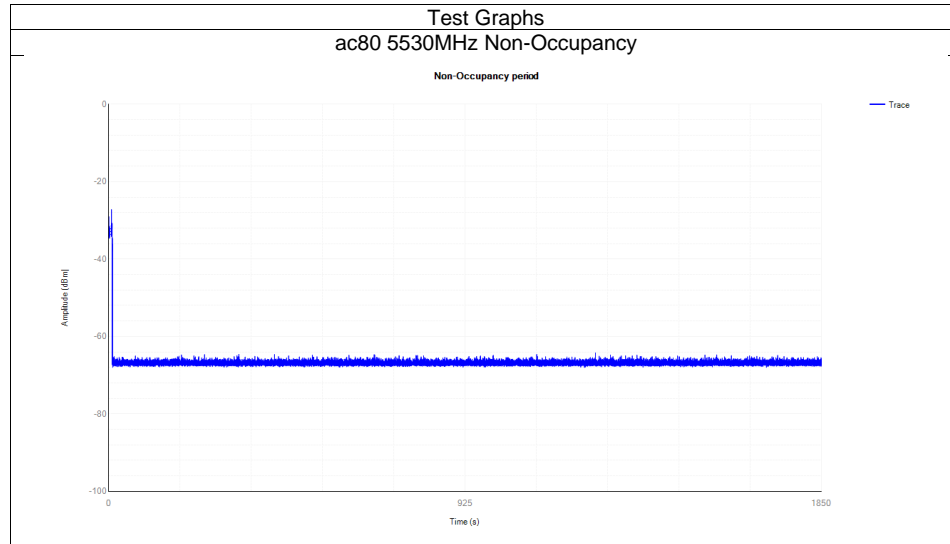

END OF REPORT