



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**TEST REPORT**

*For*

**WIFI Module**

**MODEL NUMBER: WT2JM2601B**

**REPORT NUMBER: 4790541043.2-1-RF-1**

**ISSUE DATE: October 18, 2022**

**FCC ID: 2AC23-WT2J**

**IC: 12290A-WT2J**

*Prepared for*

**Hui Zhou Gaoshengda Technology Co.,LTD  
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou  
City,Guangdong,China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	October 18, 2022	Initial Issue	



### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C><ISED RSS-247 ISSUE 2> when <Accuracy Method> decision rule is applied.



## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>CHANNEL LIST</i> .....	9
5.3. <i>MAXIMUM EIRP</i> .....	9
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	12
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i> .....	13
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED</b> .....	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>17</b>
7.1. <i>CONDUCTED OUTPUT POWER</i> .....	17
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i> .....	18
7.3. <i>POWER SPECTRAL DENSITY</i> .....	20
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i> .....	21
7.5. <i>DUTY CYCLE</i> .....	23
<b>8. RADIATED TEST RESULTS</b> .....	<b>24</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	32
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i> .....	50
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i> .....	56
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i> .....	80
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i> .....	83
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i> .....	85
<b>9. ANTENNA REQUIREMENT</b> .....	<b>87</b>
<b>10. AC POWER LINE CONDUCTED EMISSION</b> .....	<b>88</b>
<b>11. TEST DATA</b> .....	<b>91</b>
11.1. <i>APPENDIX A: DTS BANDWIDTH</i> .....	91



11.1.1.	Test Result.....	91
11.1.2.	Test Graphs .....	92
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....</i>	<i>100</i>
11.2.1.	Test Result.....	100
11.2.2.	Test Graphs .....	101
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	<i>109</i>
11.3.1.	Test Result.....	109
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....</i>	<i>110</i>
11.4.1.	Test Result.....	110
11.4.2.	Test Graphs .....	111
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS.....</i>	<i>119</i>
11.5.1.	Test Result.....	119
11.5.2.	Test Graphs .....	120
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION .....</i>	<i>126</i>
11.6.1.	Test Result.....	126
11.6.2.	Test Graphs .....	128
11.7.	<i>APPENDIX G: DUTY CYCLE.....</i>	<i>152</i>
11.7.1.	Test Result.....	152
11.7.2.	Test Graphs .....	153



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

## Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

## EUT Information

EUT Name: WIFI Module  
Model: WT2JM2601B  
Brand: GSD  
Sample Received Date: August 26, 2022  
Sample Status: Normal  
Sample ID: 5282341  
Date of Tested: August 30, 2022 to October 18, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 2	Pass

Prepared By:

Kebo Zhang  
Senior Project Engineer

Checked By:

Denny Huang  
Senior Project Engineer

Approved By:

Stephen Guo  
Operations Manager



## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 2, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

### Note1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

### Note2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

### Note3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	WIFI Module
Model	WT2JM2601B
Power Supply	DC 3.3 V

Frequency Range:	2412 MHz to 2462 MHz
Radio Technology	IEEE802.11b/g/n HT20/n HT40
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)

### 5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

### 5.3. MAXIMUM EIRP

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	16.19	17.45
g	2412 ~ 2462	1-11[11]	14.19	15.45
n HT20	2412 ~ 2462	1-11[11]	15.43	16.69
n HT40	2422 ~ 2452	3-9[7]	11.08	12.34

**5.4. TEST CHANNEL CONFIGURATION**

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

**5.5. THE WORSE CASE POWER SETTING PARAMETER**

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		MT7603 QA					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	1E	1E	1E	/		
	2	1E	1E	1E			
802.11g	1	1C	1C	1C			
	2	1C	1C	1C			
802.11n HT20	1	1B	1B	1B			
	2	1B	1B	1B			
802.11n HT40	1	/			13	13	13
	2	/			13	13	13

## WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11b/g only support SISO mode.

802.11n HT20/HT40 support SISO and MIMO mode.

802.11b/g SISO mode, Antenna 1 and Antenna 2 has the same power setting, so only Antenna 2 worst case test data were recorded in the report.

802.11n SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spartial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PIFA antenna	1.26
2	2412-2462	PIFA antenna	1.26

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain=  $G_{ANT} + \text{Array Gain} = 1.26 \text{ dBi}$

$G_{ANT}$  : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain=  $G_{ANT} + \text{Array Gain} = 4.27 \text{ dBi}$

Array Gain =  $10 \log(N_{ANT}/N_{SS}) \text{ dB}$ .

$N_{ANT}$  : number of transmit antennas

$N_{SS}$  : number of spatial streams, The worst case directional gain will occur when  $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

### 5.7. SUPPORT UNITS FOR SYSTEM TEST

#### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Lenovo	Legion Y7000P IAH7	/
2	AC Adapter	Lenovo	ADL230SLC3A	02DL143
3	Antenna 1	/	/	/
4	Antenna 1	/	/	/

#### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


#### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

#### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

#### SETUP DIAGRAM FOR TESTS

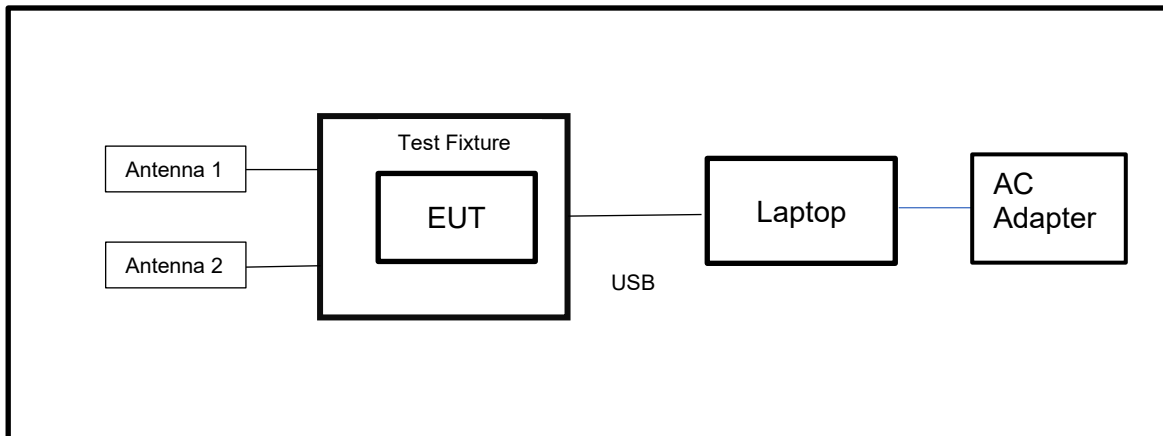

Note: AC Adapter only use in the AC POWER LINE CONDUCTED EMISSION test.

**6. MEASURING EQUIPMENT AND SOFTWARE USED**

<b>R&amp;S TS 8997 Test System</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Vector Signal Generator	R&S	SMBV100A	261637	Oct.30, 2021	Oct.29, 2022
Signal Generator	R&S	SMB100A	178553	Oct.30, 2021	Oct.29, 2022
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
<b>Software</b>					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
<b>Tonsend RF Test System</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.30, 2021	Oct.29, 2022
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.29, 2021	Sep.28, 2022
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.30, 2021	Oct.29, 2022
DC power supply	Keysight	E3642A	MY55159130	Oct.30, 2021	Oct.29, 2022
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2022
<b>Software</b>					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	



Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV20-5120-5150-	2	Oct.31, 2021	Oct.30, 2022



		5350-5380-60SS			
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	Oct.31, 2021	Oct.30, 2022
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	Oct.31, 2021	Oct.30, 2022
<b>Software</b>					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

<b>Other Instrument</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Nov. 4, 2021	Nov. 3, 2022
Barometer	Yiyi	Baro	N/A	Nov. 15, 2021	Nov. 14, 2022





## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	61%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 3.3 V

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 99 % Occupied Bandwidth: $\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

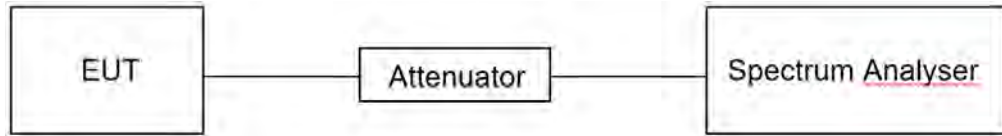**TEST SETUP****TEST ENVIRONMENT**

Temperature	22°C	Relative Humidity	61%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 3.3 V

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A&B

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms) or sample detector
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x OBW bandwidth
Trace	Average
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST SETUP

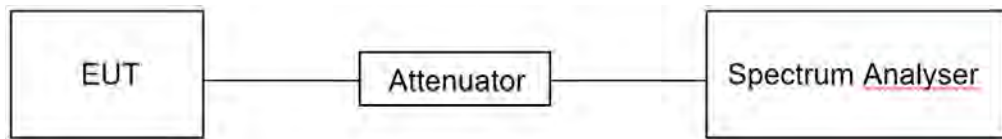

#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	61%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 3.3 V

#### TEST RESULTS

Please refer to section "Test Data" - Appendix D

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

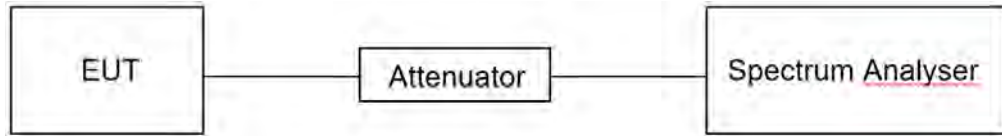**TEST SETUP****TEST ENVIRONMENT**

Temperature	22°C	Relative Humidity	61%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 3.3 V

**TEST RESULTS**

Please refer to section "Test Data" - Appendix F&G

## 7.5. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST SETUP

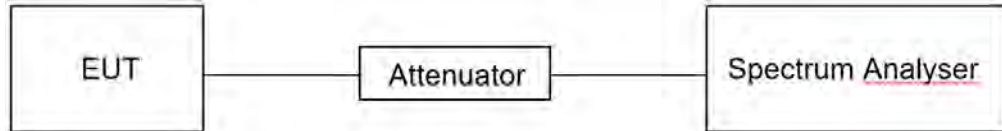

### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	61%
Atmosphere Pressure	101.2kPa	Test Voltage	DC 3.3 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix H



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (uA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.





ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2690 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.80475 - 16.80525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
<sup>2</sup>Above 38.6c

**TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1G

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

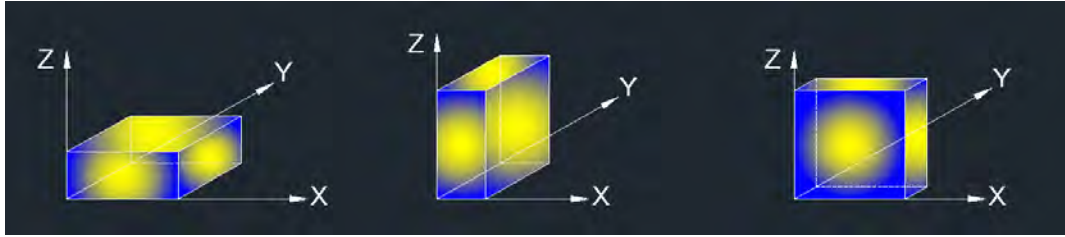

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Band edge note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Horizontal and Vertical have been tested, only the worst data was recorded in the report.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 1GHz-3GHz note:

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.5.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
  8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 3GHz-18GHz note:

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.5.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
  8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.



For Radiate Spurious emission 9kHz-30MHz note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.


For Radiate Spurious emission 18GHz-26GHz note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.


For Radiate Spurious emission 30MHz-1GHz note:

1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.


**TEST SETUP**

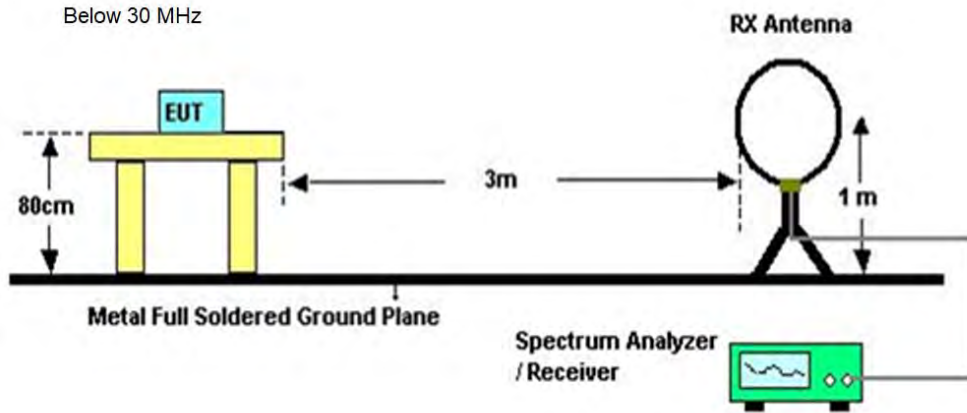

Below 1 GHz and above 30 MHz

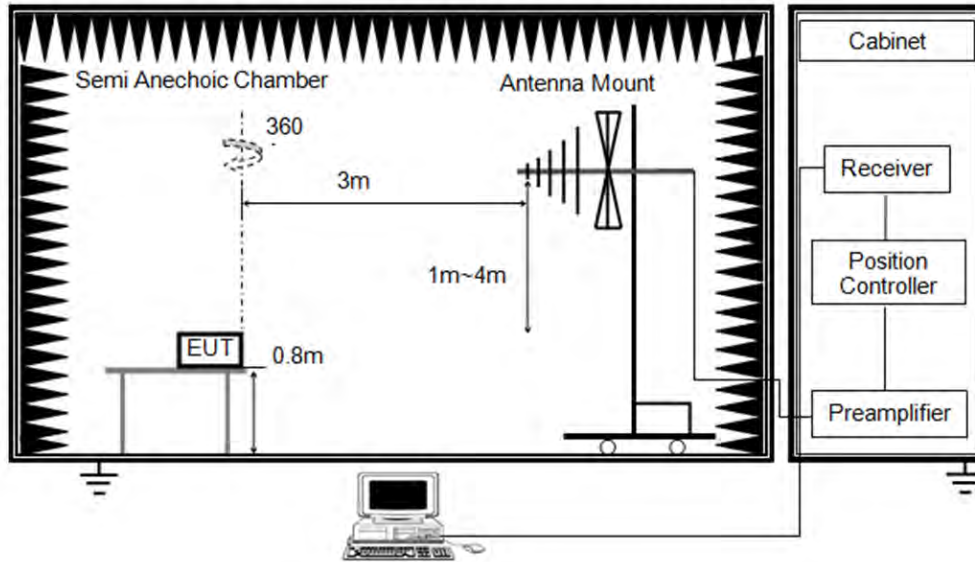

Above 1 GHz

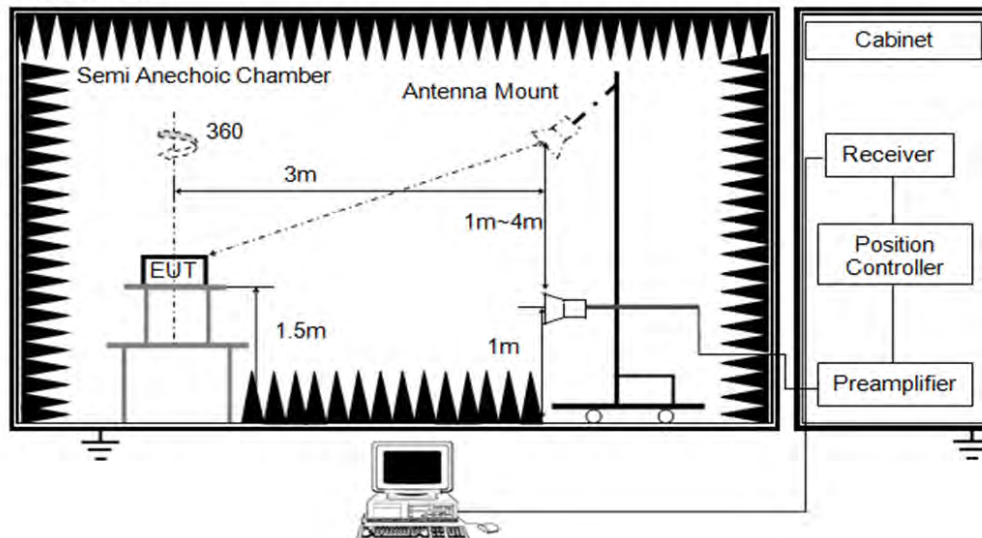



**TEST ENVIRONMENT**


Temperature	25.6°C	Relative Humidity	59%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

**TEST RESULTS**



### 8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Channel:	2412
Polarity:	Horizontal		

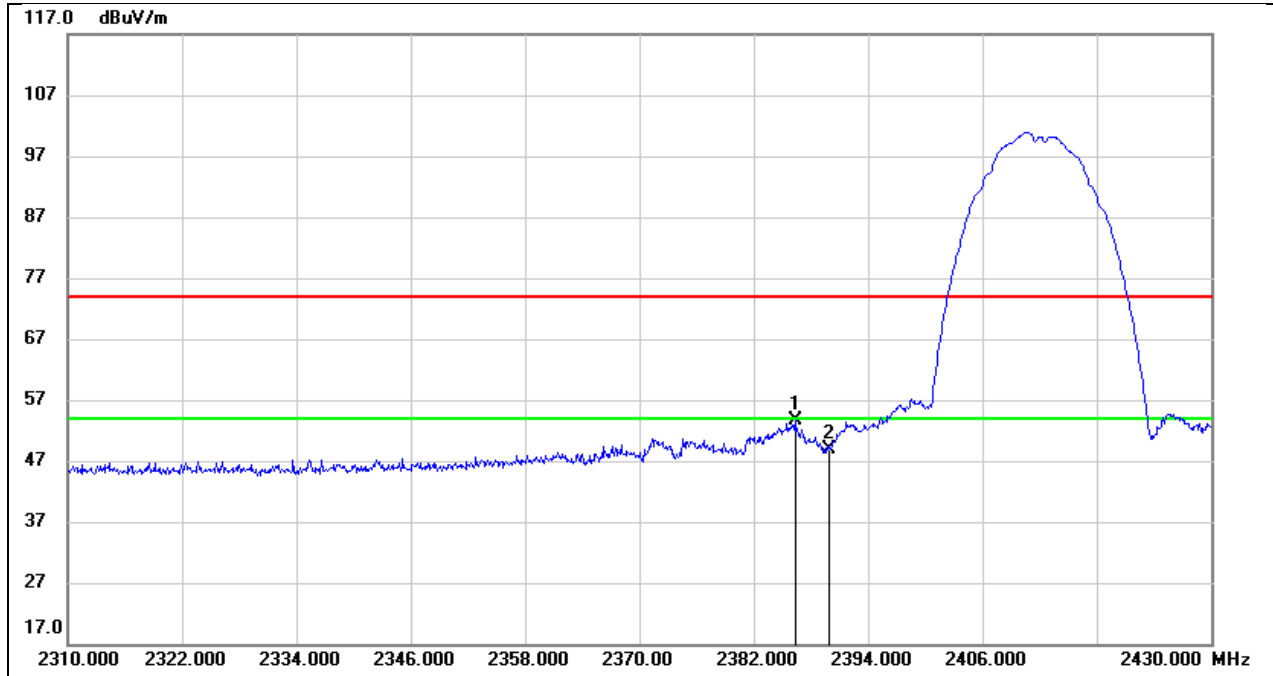


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.320	21.38	32.14	53.52	74.00	-20.48	peak
2	2390.000	16.81	32.16	48.97	74.00	-25.03	peak






Test Mode:	802.11b AV	Channel:	2412
Polarity:	Horizontal		

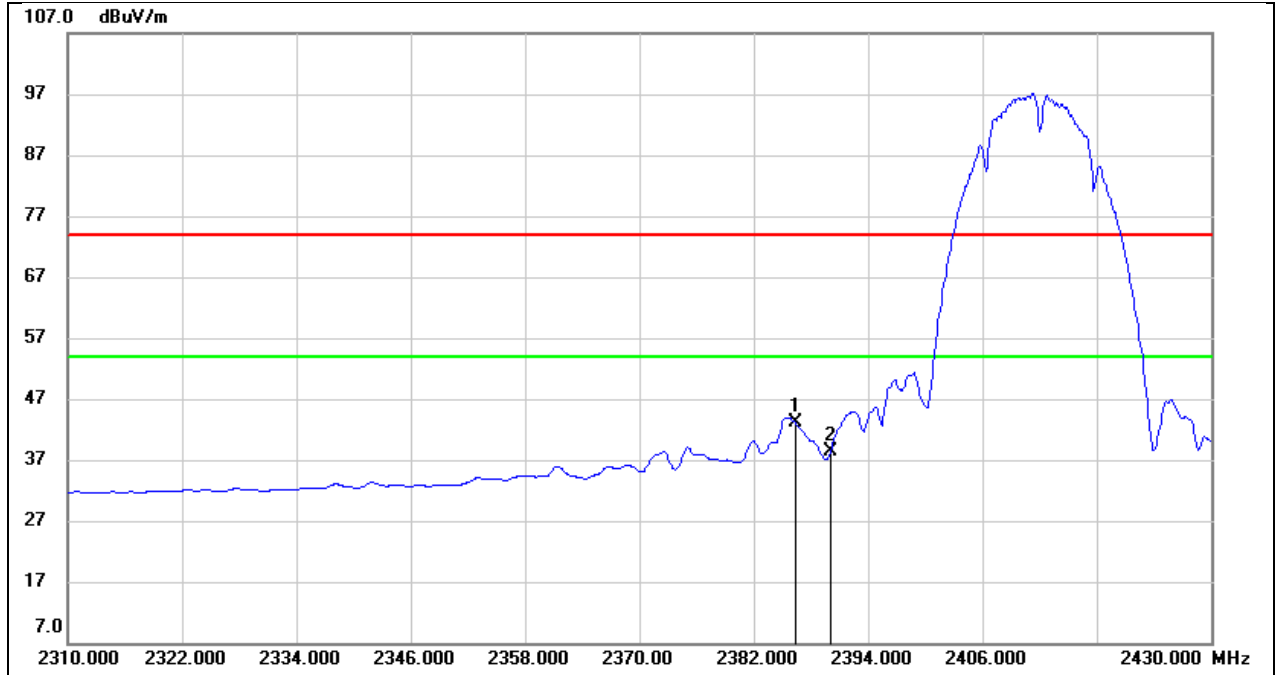

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.320	10.99	32.14	43.13	54.00	-10.87	AVG
2	2390.000	6.11	32.16	38.27	54.00	-15.73	AVG




Test Mode:	802.11b PK	Channel:	2412
Polarity:	Vertical		

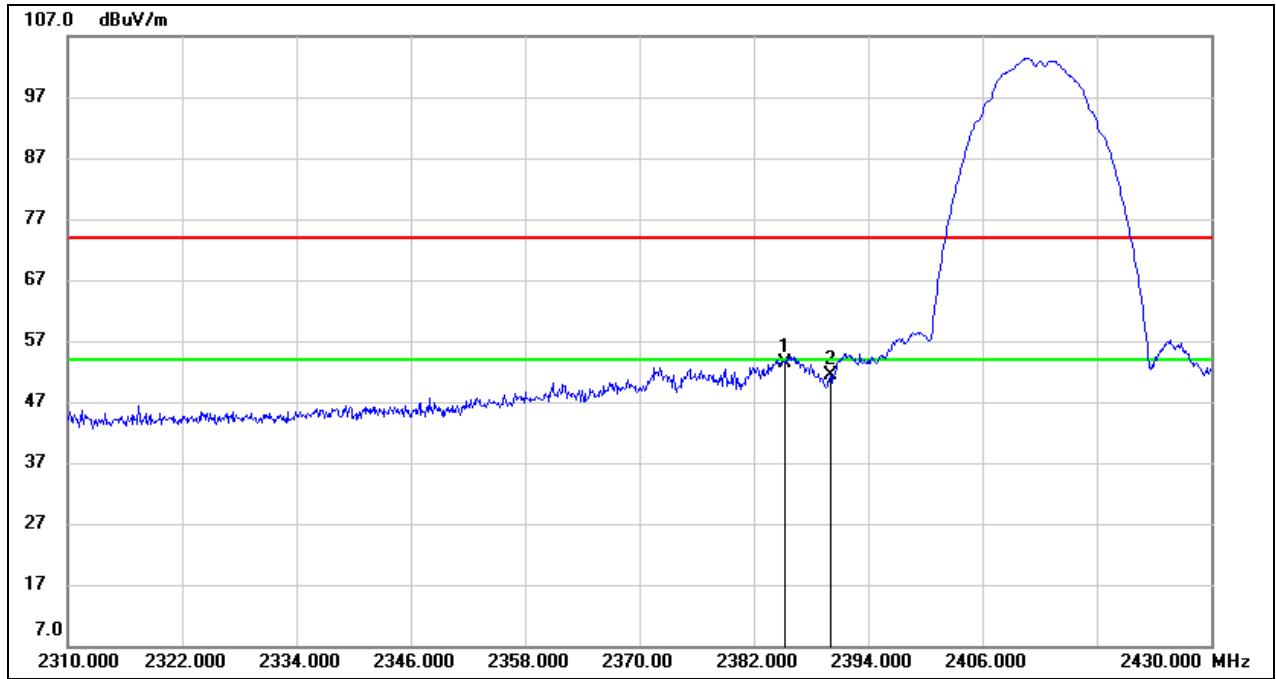

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.240	21.36	32.14	53.50	74.00	-20.50	peak
2	2390.000	19.31	32.16	51.47	74.00	-22.53	peak




Test Mode:	802.11b AV	Channel:	2412
Polarity:	Vertical		

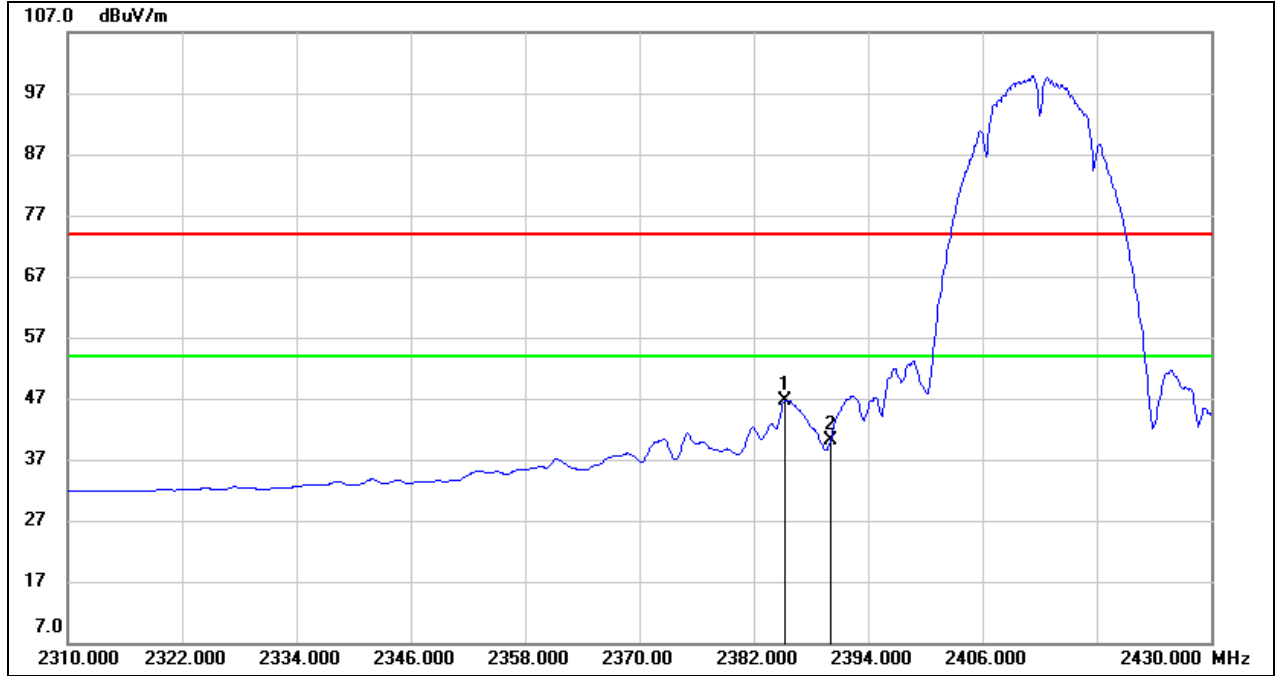

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.240	14.53	32.14	46.67	54.00	-7.33	AVG
2	2390.000	7.90	32.16	40.06	54.00	-13.94	AVG




Test Mode:	802.11b PK	Channel:	2462
Polarity:	Vertical		

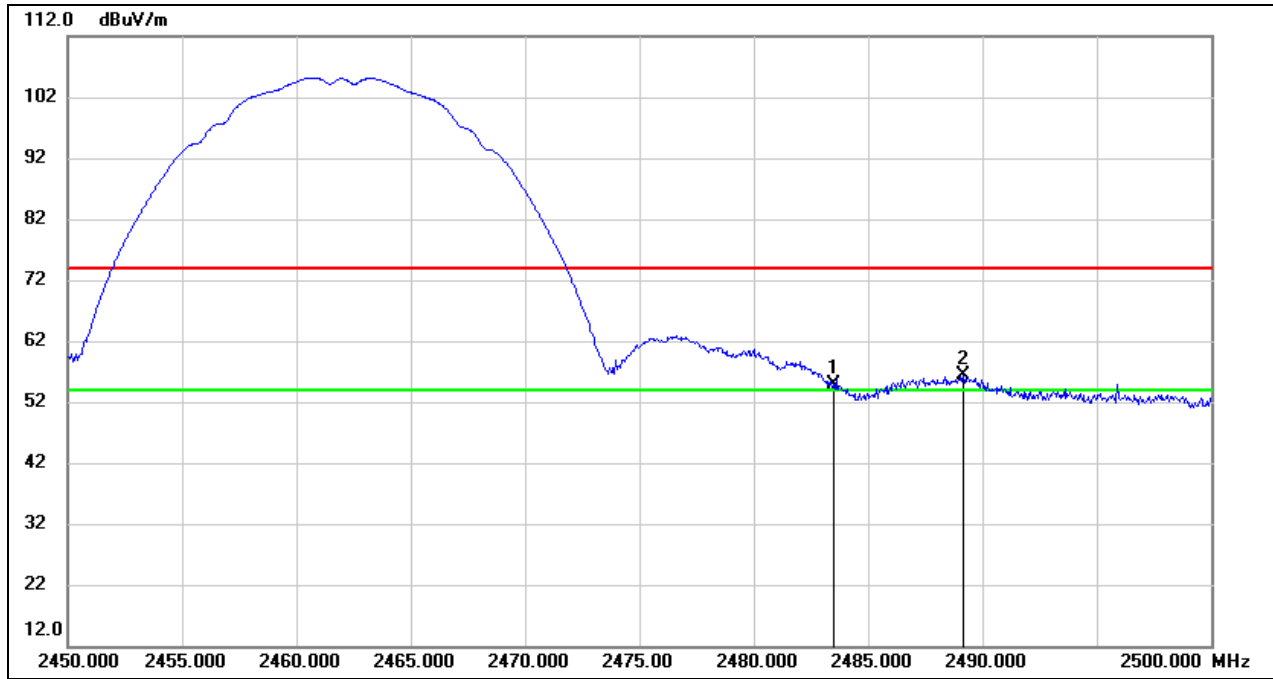

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.52	32.44	54.96	74.00	-19.04	peak
2	2489.150	23.92	32.46	56.38	74.00	-17.62	peak




Test Mode:	802.11b AV	Channel:	2462
Polarity:	Vertical		

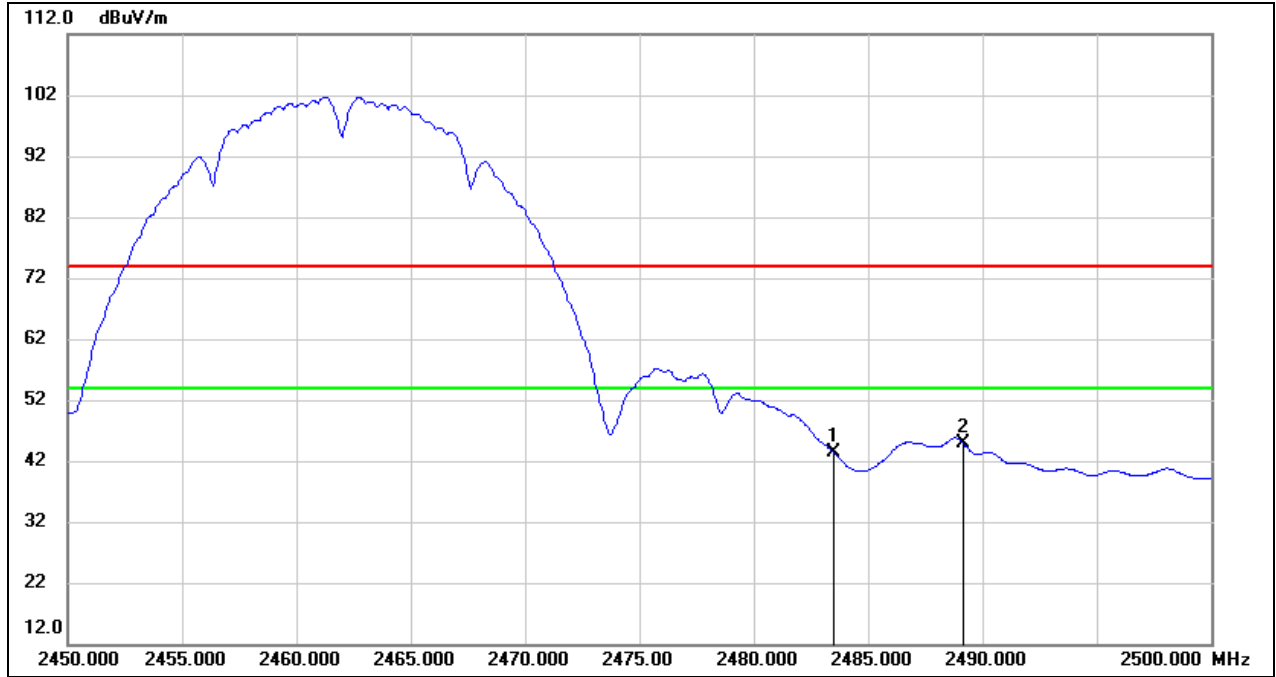

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.97	32.44	43.41	54.00	-10.59	AVG
2	2489.150	12.52	32.46	44.98	54.00	-9.02	AVG




Test Mode:	802.11g PK	Channel:	2412
Polarity:	Vertical		

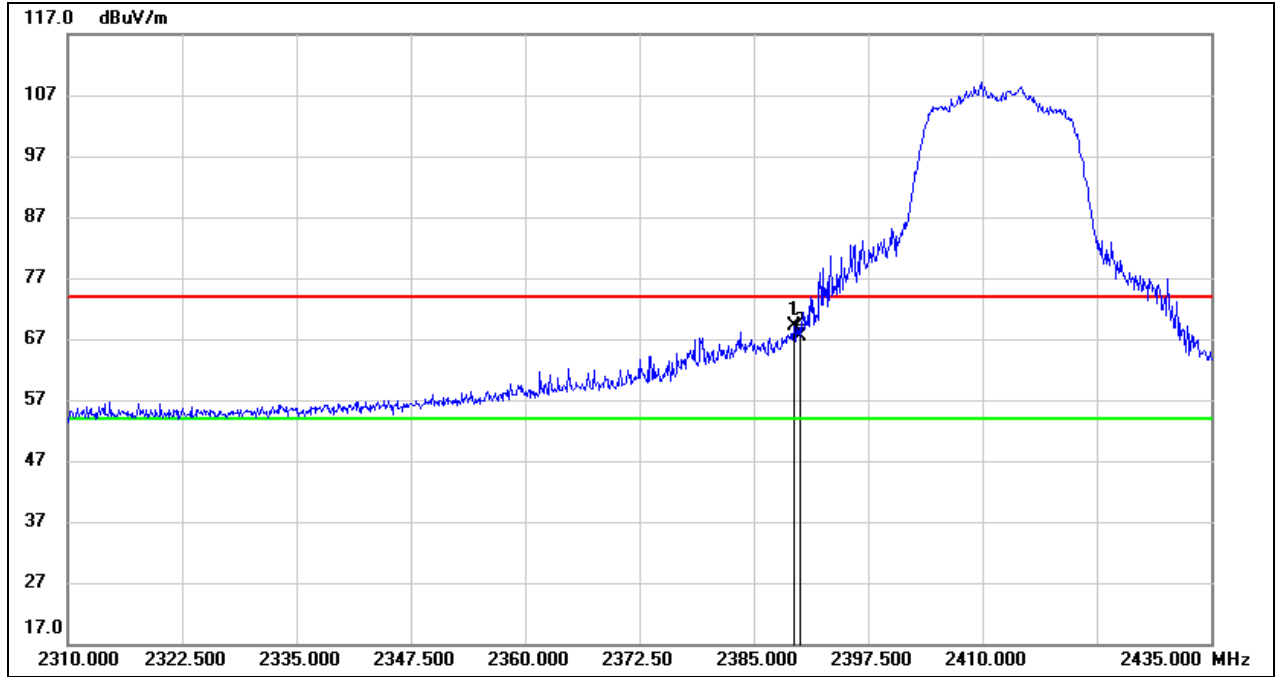

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.375	36.95	32.16	69.11	74.00	-4.89	peak
2	2390.000	35.29	32.16	67.45	74.00	-6.55	peak




Test Mode:	802.11g AV	Channel:	2412
Polarity:	Vertical		

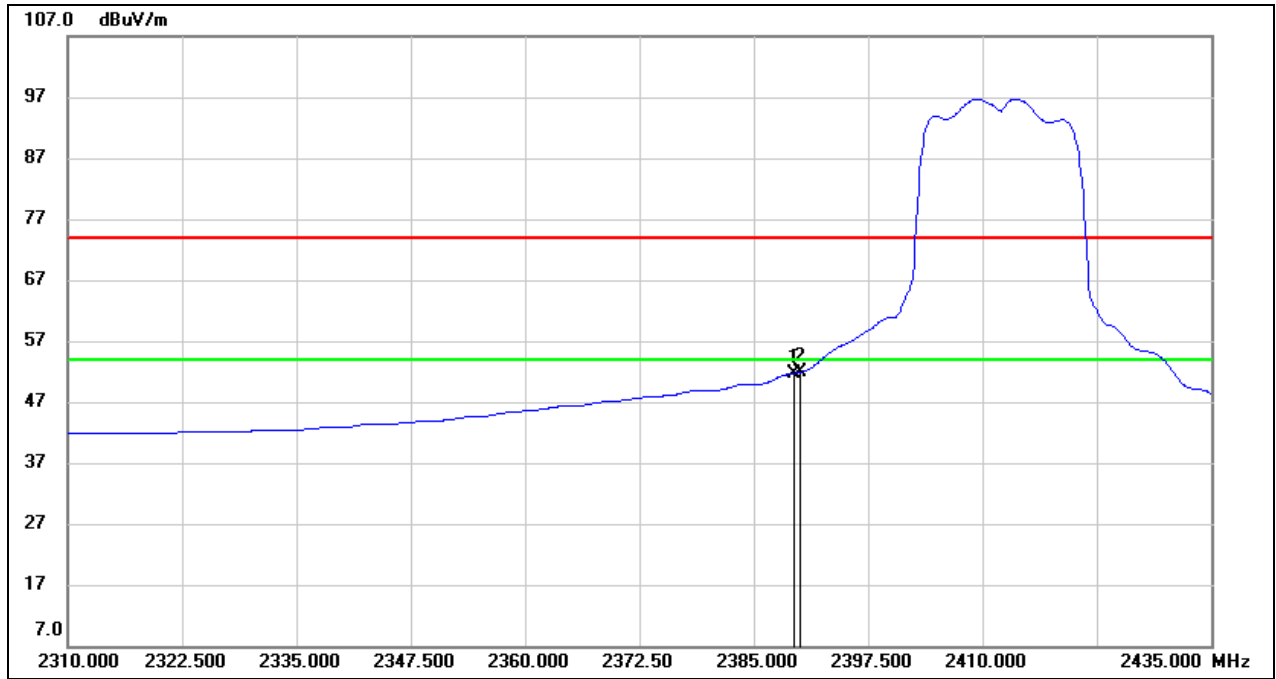

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.375	19.59	32.16	51.75	54.00	-2.25	AVG
2	2390.000	19.72	32.16	51.88	54.00	-2.12	AVG



Test Mode:	802.11g PK	Channel:	2462
Polarity:	Vertical		

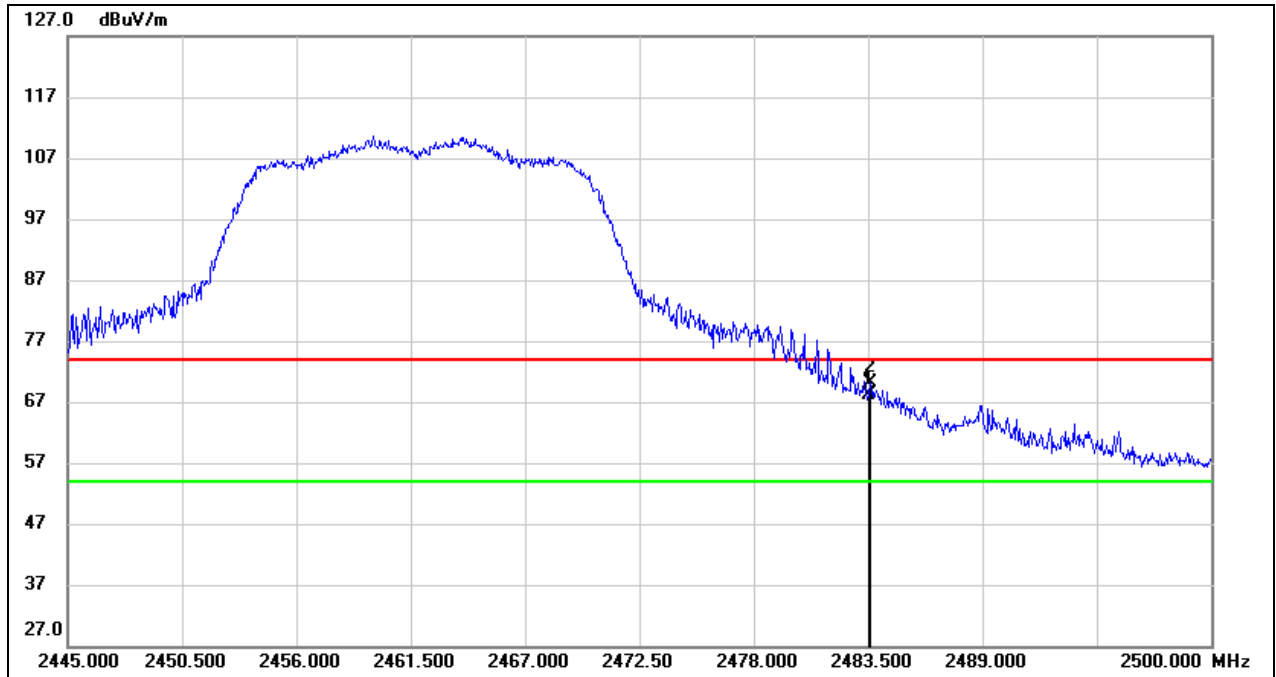


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.67	32.44	68.11	74.00	-5.89	peak
2	2483.610	37.70	32.44	70.14	74.00	-3.86	peak






Test Mode:	802.11g AV	Channel:	2462
Polarity:	Vertical		

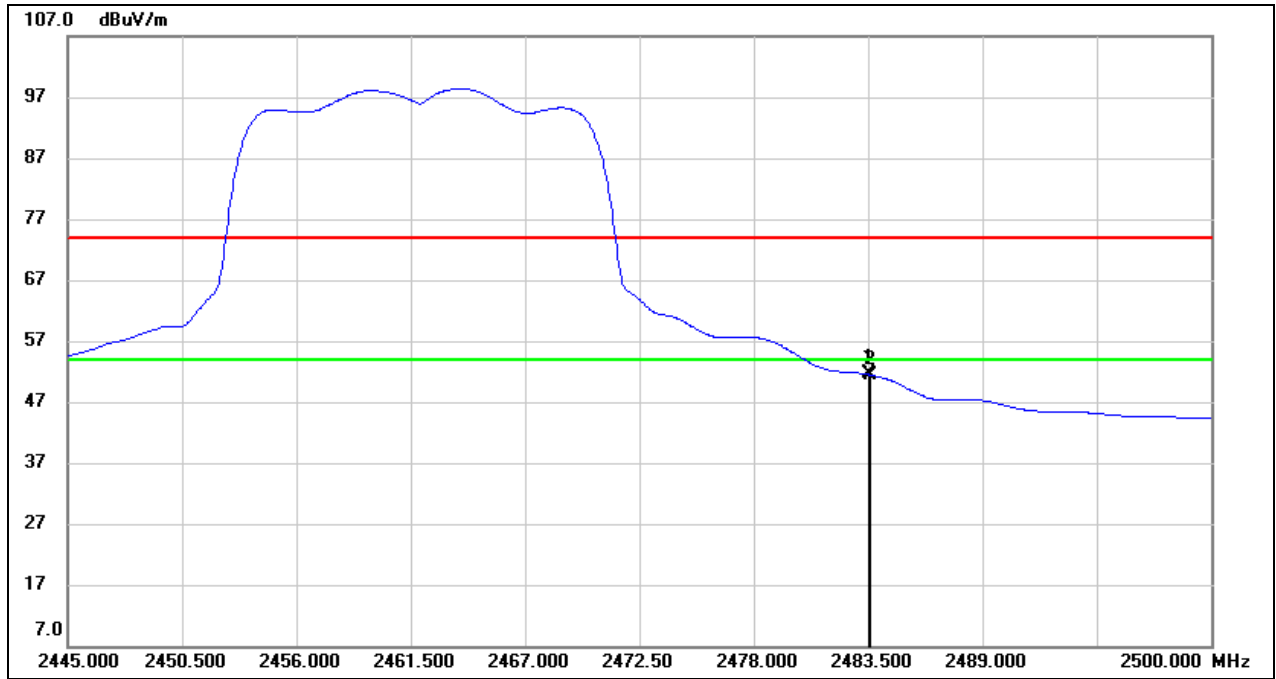

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.09	32.44	51.53	54.00	-2.47	AVG
2	2483.610	18.98	32.44	51.42	54.00	-2.58	AVG




Test Mode:	802.11n HT20 PK	Channel:	2412
Polarity:	Vertical		

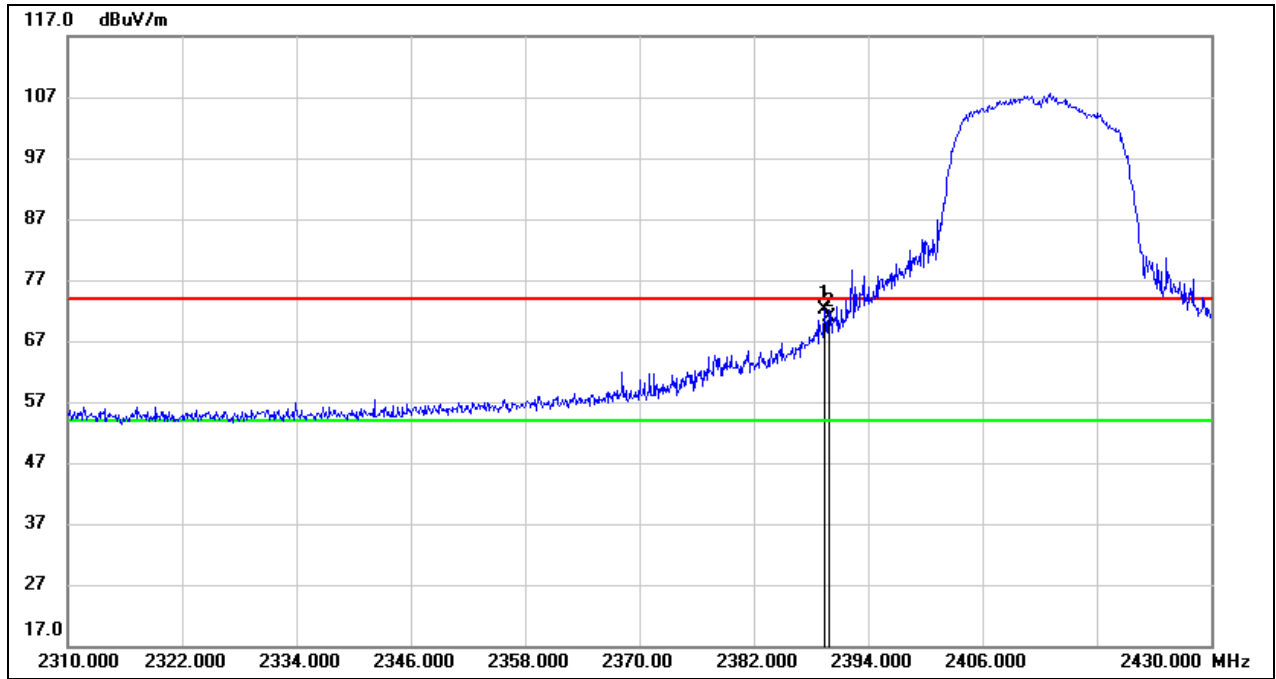

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	39.99	32.16	72.15	74.00	-1.85	peak
2	2390.000	38.63	32.16	70.79	74.00	-3.21	peak




Test Mode:	802.11n HT20 AV	Channel:	2412
Polarity:	Vertical		

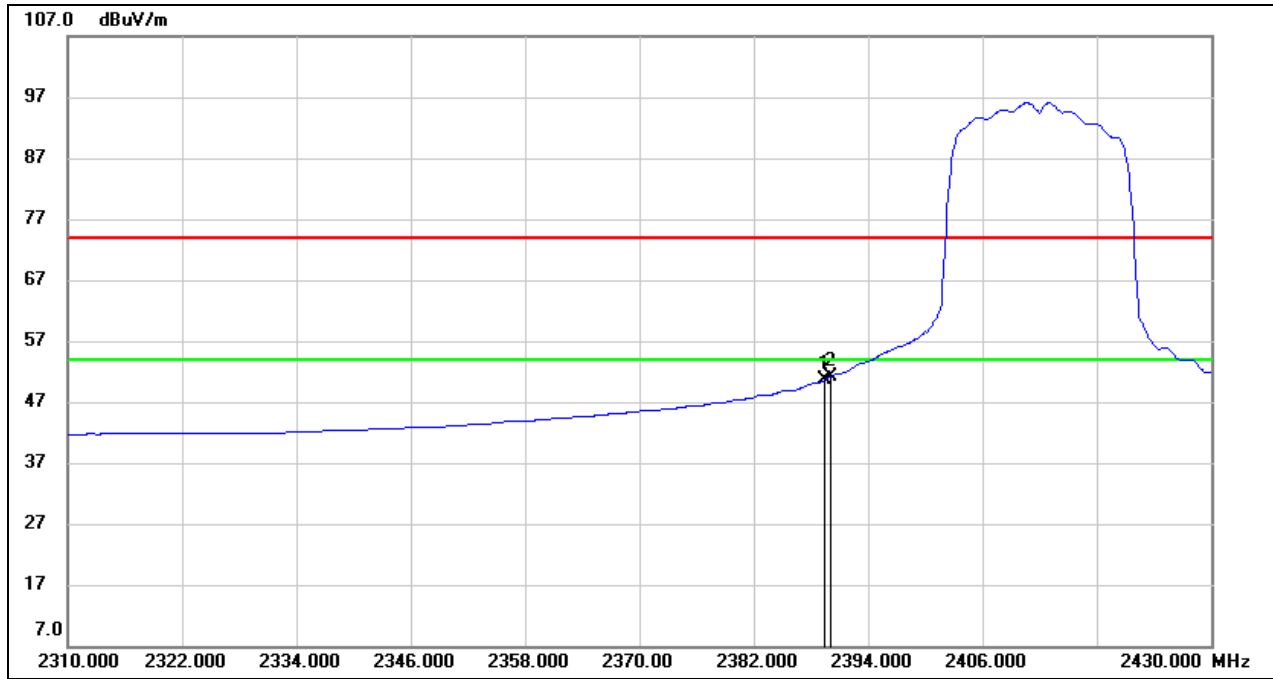

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	18.47	32.16	50.63	54.00	-3.37	AVG
2	2390.000	19.04	32.16	51.20	54.00	-2.80	AVG




Test Mode:	802.11n HT20 PK	Channel:	2462
Polarity:	Vertical		

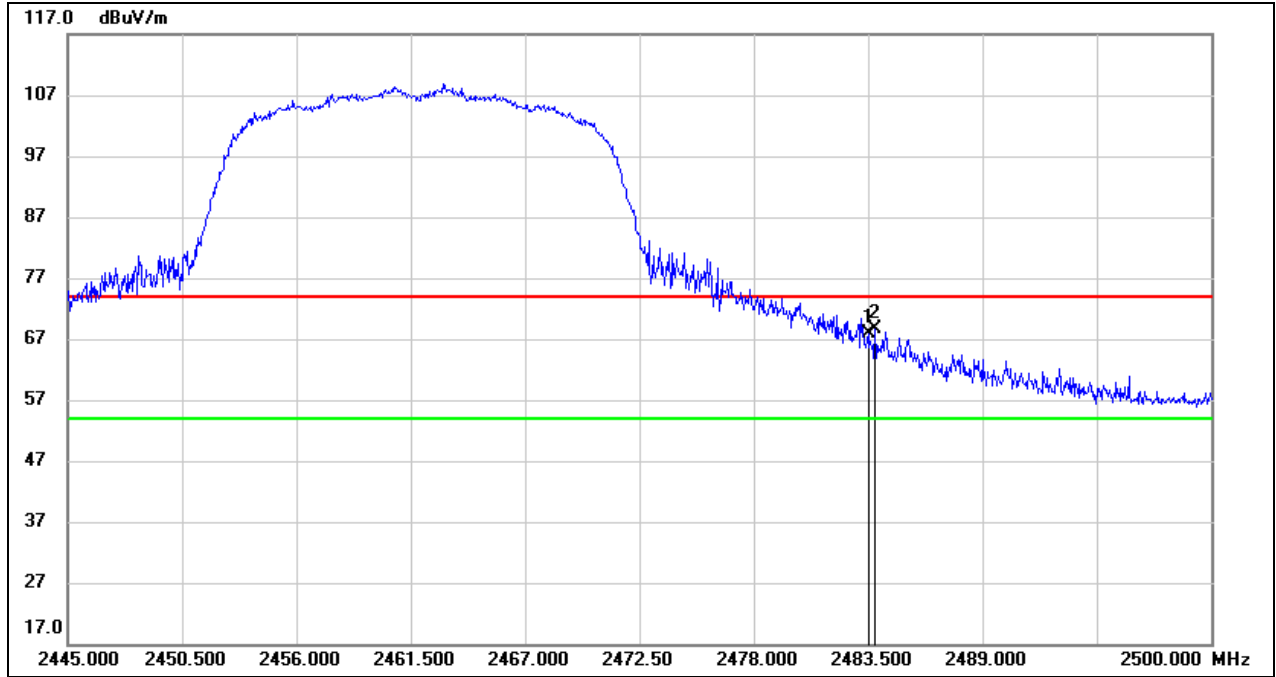

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.36	32.44	67.80	74.00	-6.20	peak
2	2483.830	36.21	32.44	68.65	74.00	-5.35	peak




Test Mode:	802.11n HT20 AV	Channel:	2462
Polarity:	Vertical		

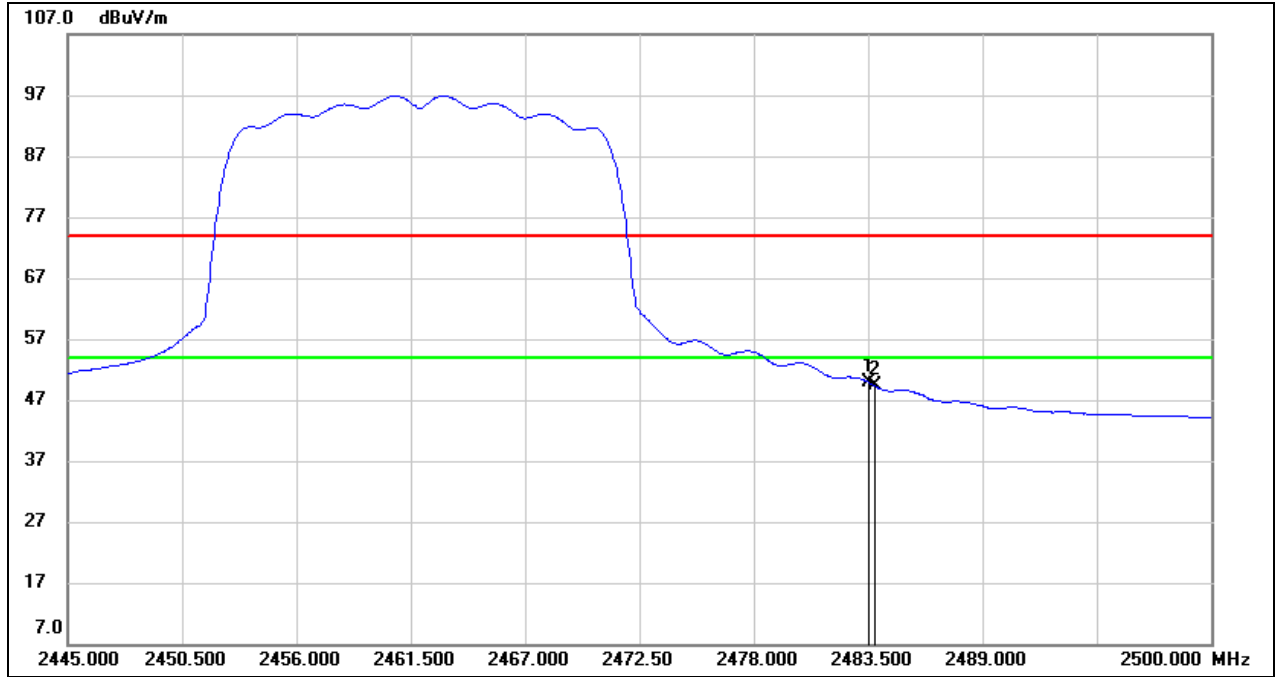

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.47	32.44	49.91	54.00	-4.09	AVG
2	2483.830	16.82	32.44	49.26	54.00	-4.74	AVG




Test Mode:	802.11n HT40 PK	Channel:	2422
Polarity:	Vertical		

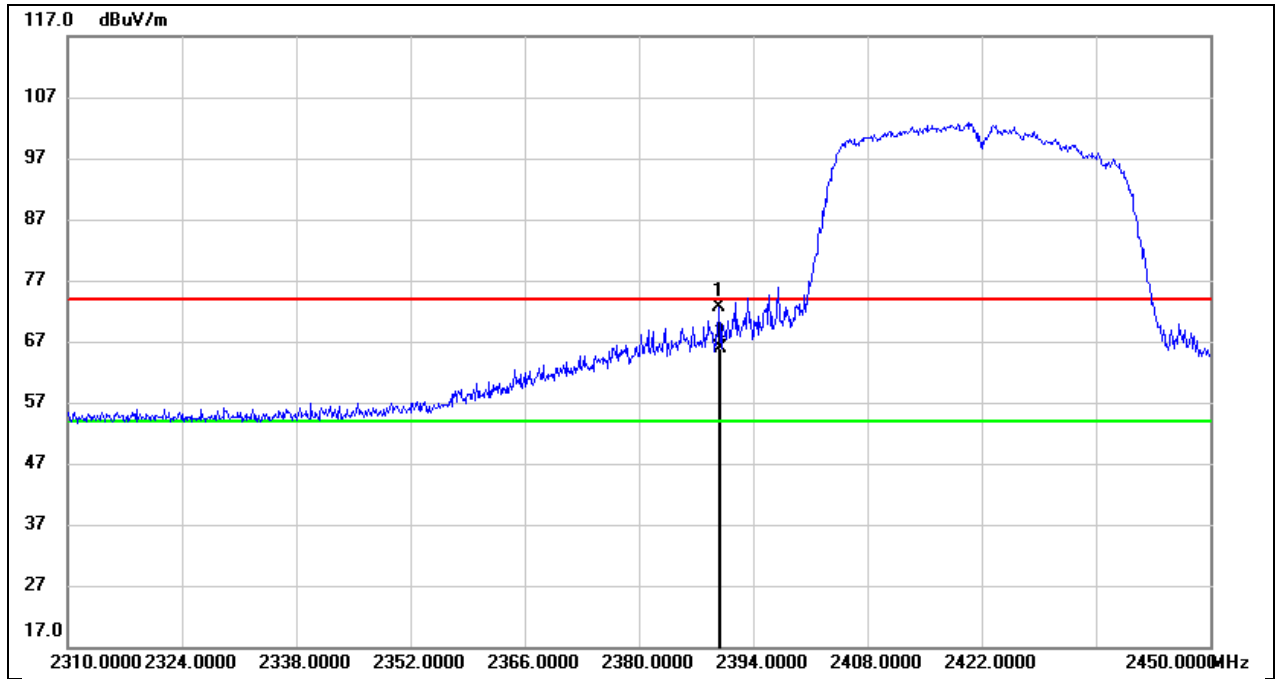

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	40.42	32.16	72.58	74.00	-1.42	peak
2	2390.000	33.70	32.16	65.86	74.00	-8.14	peak




Test Mode:	802.11n HT40 AV	Channel:	2422
Polarity:	Vertical		

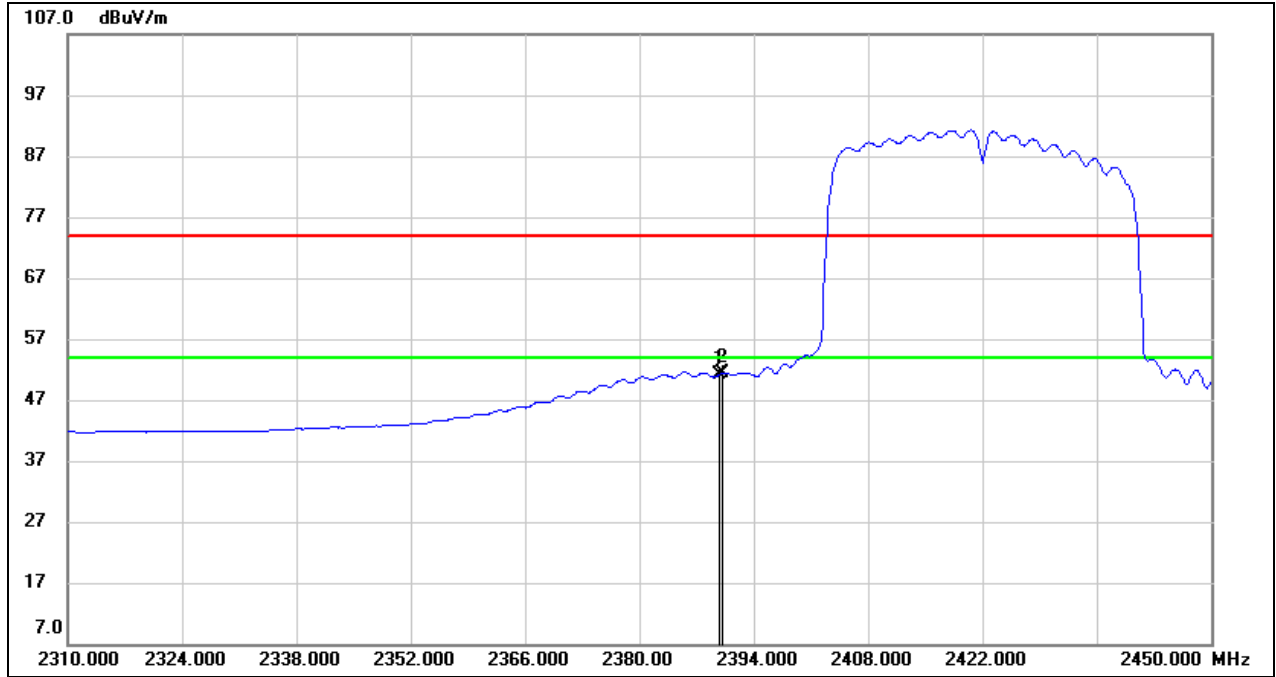

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	19.09	32.16	51.25	54.00	-2.75	AVG
2	2390.000	19.25	32.16	51.41	54.00	-2.59	AVG



Test Mode:	802.11n HT40 PK	Channel:	2452
Polarity:	Vertical		

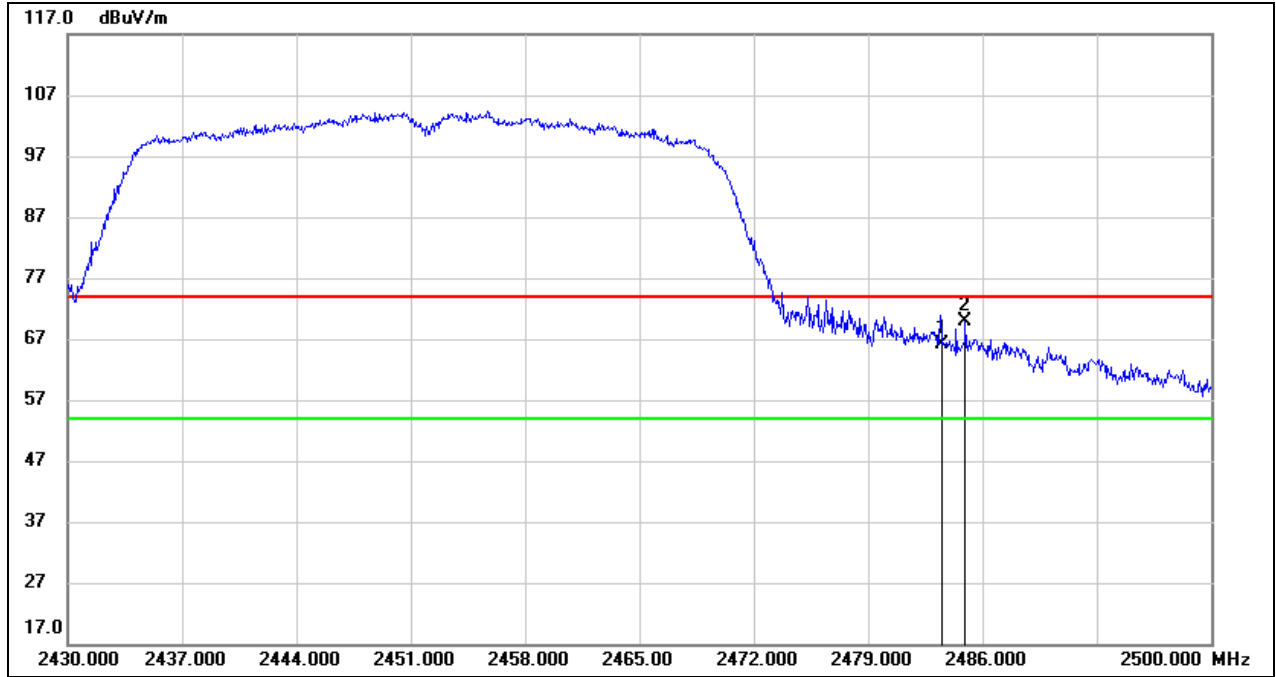


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.74	32.44	66.18	74.00	-7.82	peak
2	2484.950	37.35	32.44	69.79	74.00	-4.21	peak





Test Mode:	802.11n HT40 AV	Channel:	2452
Polarity:	Vertical		

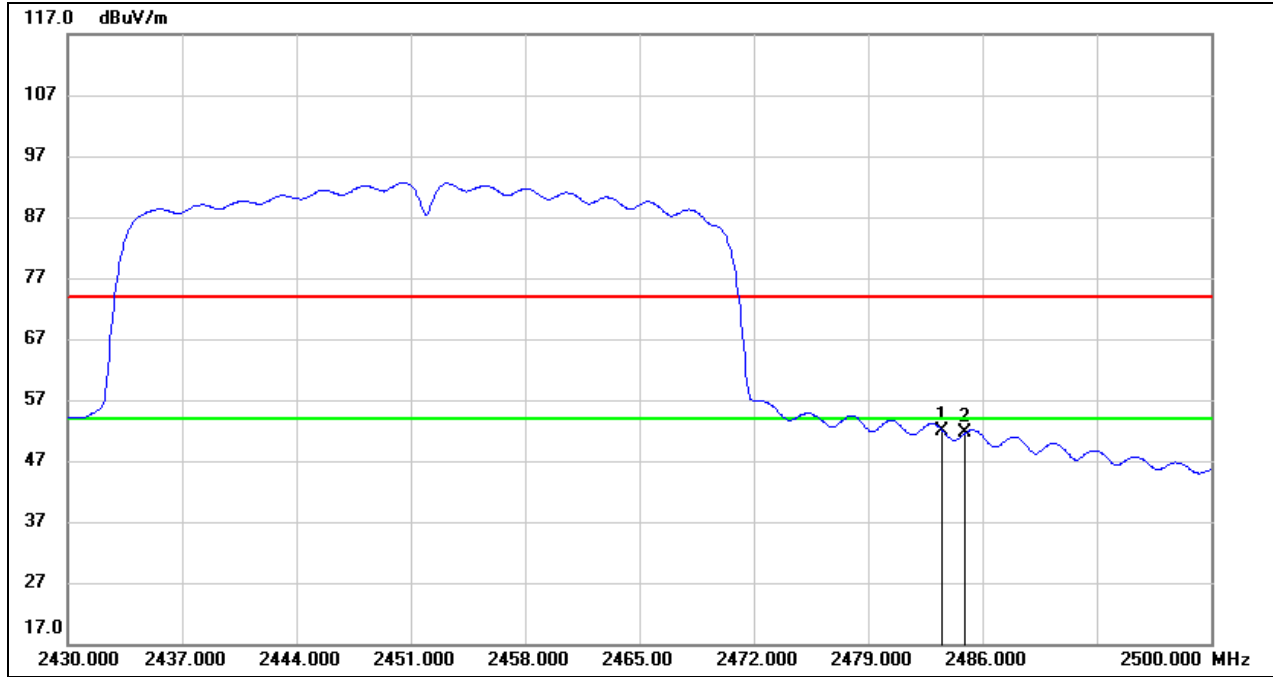


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.54	32.44	51.98	54.00	-2.02	AVG
2	2484.950	19.25	32.44	51.69	54.00	-2.31	AVG



## 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)


Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal		

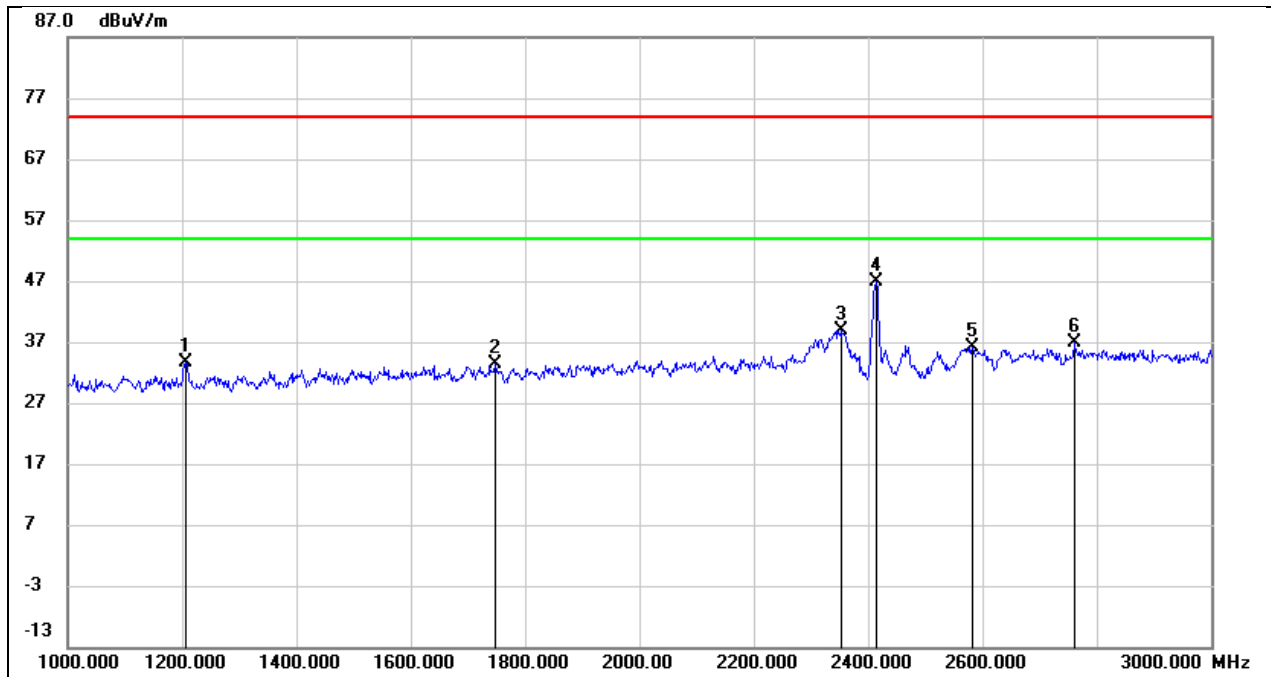

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1206.000	47.64	-14.07	33.57	74.00	-40.43	peak
2	1748.000	45.35	-11.89	33.46	74.00	-40.54	peak
3	2354.000	48.14	-9.24	38.90	74.00	-35.10	peak
4	2412.000	55.81	-8.93	46.88	/	/	fundamental
5	2582.000	44.47	-8.24	36.23	74.00	-37.77	peak
6	2760.000	44.69	-7.70	36.99	74.00	-37.01	peak




Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical		

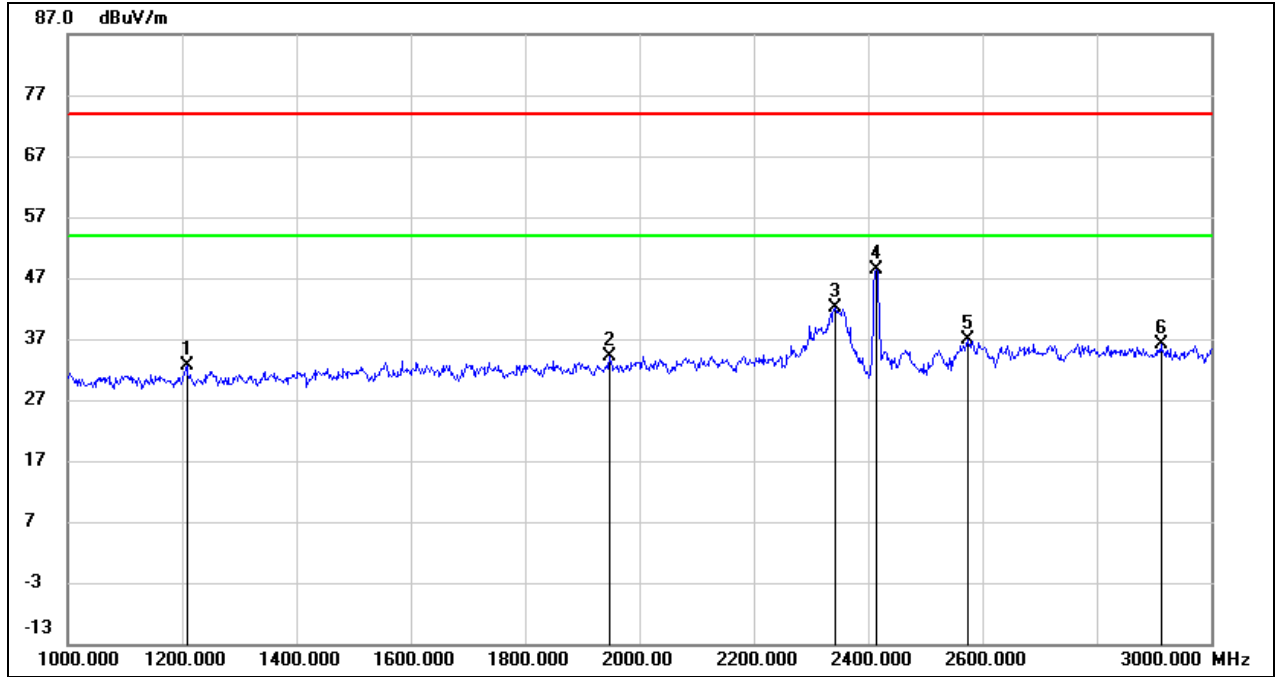

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1208.000	46.59	-14.06	32.53	74.00	-41.47	peak
2	1948.000	45.47	-11.23	34.24	74.00	-39.76	peak
3	2342.000	51.52	-9.30	42.22	74.00	-31.78	peak
4	2412.000	57.31	-8.93	48.38	/	/	fundamental
5	2574.000	45.09	-8.27	36.82	74.00	-37.18	peak
6	2912.000	43.50	-7.25	36.25	74.00	-37.75	peak




Test Mode:	802.11b	Channel:	2437
Polarity:	Horizontal		

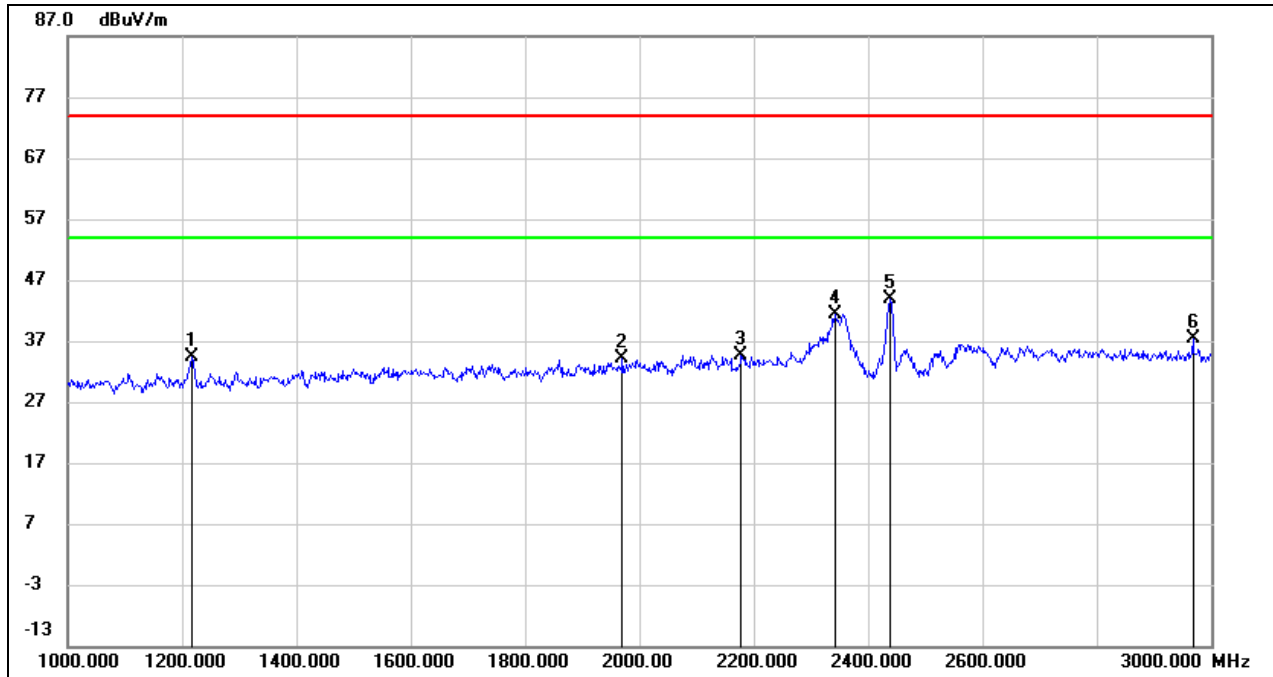

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1216.000	48.48	-14.03	34.45	74.00	-39.55	peak
2	1970.000	45.41	-11.16	34.25	74.00	-39.75	peak
3	2178.000	44.81	-10.15	34.66	74.00	-39.34	peak
4	2342.000	50.69	-9.30	41.39	74.00	-32.61	peak
5	2437.000	52.79	-8.80	43.99	/	/	fundamental
6	2968.000	44.39	-7.08	37.31	74.00	-36.69	peak




Test Mode:	802.11b	Channel:	2437
Polarity:	Vertical		

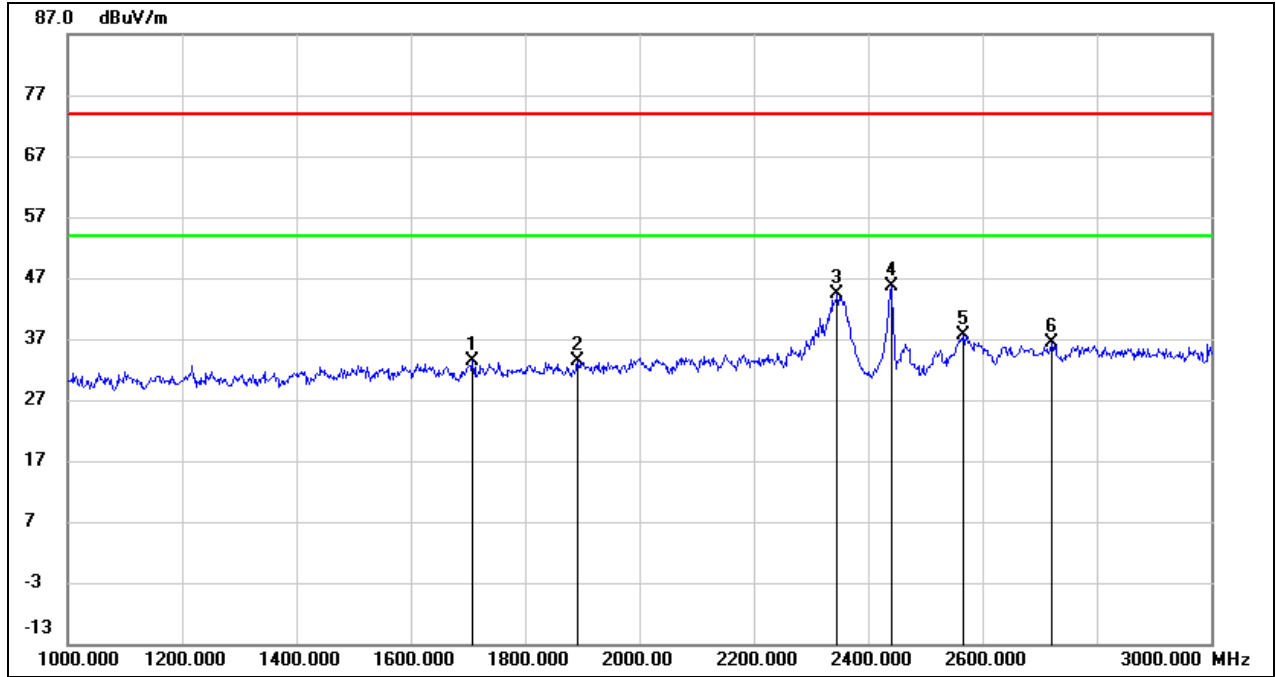

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1708.000	45.52	-12.02	33.50	74.00	-40.50	peak
2	1892.000	44.85	-11.42	33.43	74.00	-40.57	peak
3	2346.000	53.56	-9.28	44.28	74.00	-29.72	peak
4	2437.000	54.35	-8.80	45.55	/	/	fundamental
5	2566.000	45.86	-8.29	37.57	74.00	-36.43	peak
6	2722.000	44.10	-7.81	36.29	74.00	-37.71	peak




Test Mode:	802.11b	Channel:	2462
Polarity:	Horizontal		

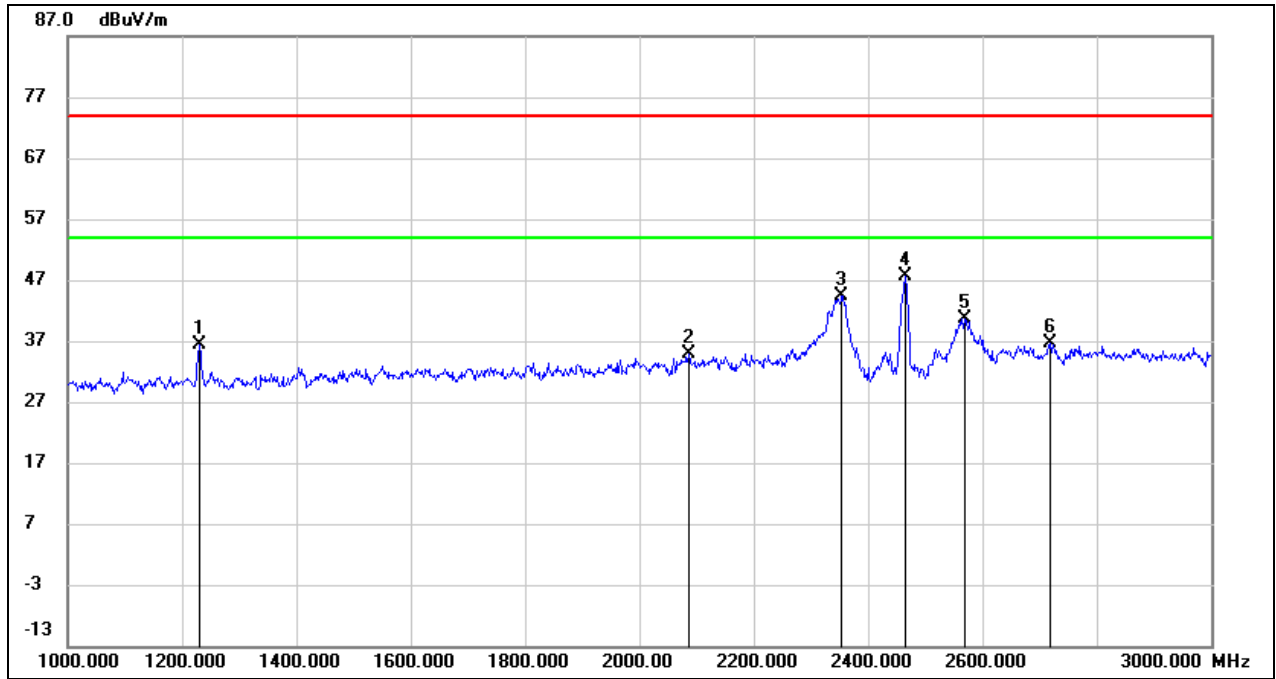

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1230.000	50.24	-13.96	36.28	74.00	-37.72	peak
2	2086.000	45.57	-10.62	34.95	74.00	-39.05	peak
3	2354.000	53.69	-9.24	44.45	74.00	-29.55	peak
4	2462.000	56.38	-8.68	47.70	/	/	fundamental
5	2568.000	48.94	-8.28	40.66	74.00	-33.34	peak
6	2718.000	44.38	-7.84	36.54	74.00	-37.46	peak




Test Mode:	802.11b	Channel:	2462
Polarity:	Vertical		

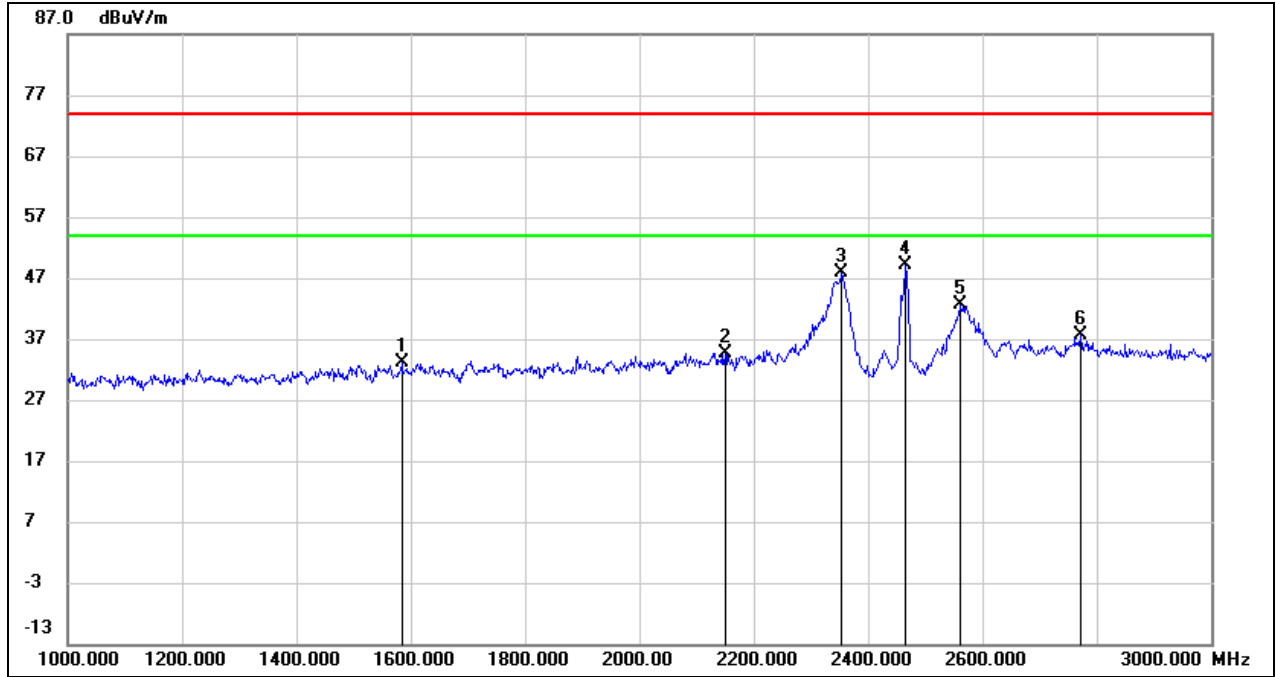

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1584.000	45.57	-12.43	33.14	74.00	-40.86	peak
2	2150.000	44.99	-10.28	34.71	74.00	-39.29	peak
3	2354.000	57.22	-9.24	47.98	74.00	-26.02	peak
4	2462.000	57.91	-8.66	49.25	/	/	fundamental
5	2562.000	50.82	-8.31	42.51	74.00	-31.49	peak
6	2772.000	45.40	-7.67	37.73	74.00	-36.27	peak

**8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)**

Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal		

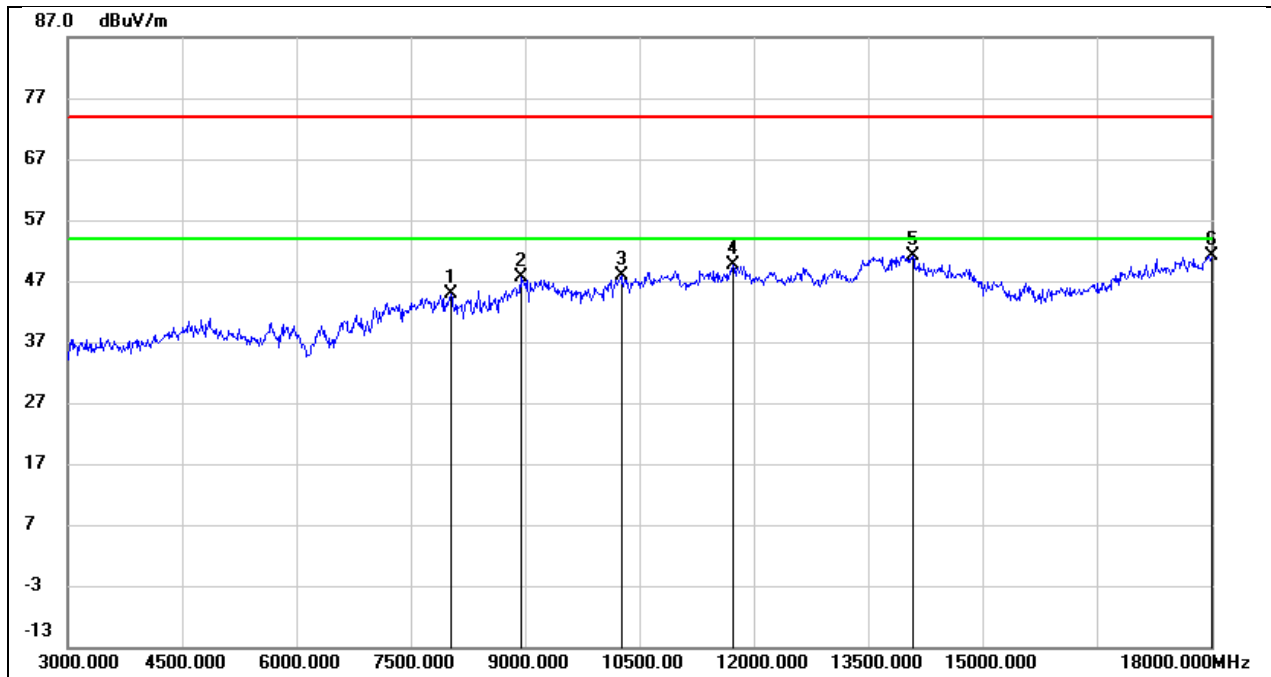


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8025.000	38.60	6.34	44.94	74.00	-29.06	peak
2	8940.000	37.48	10.04	47.52	74.00	-26.48	peak
3	10260.000	35.24	12.52	47.76	74.00	-26.24	peak
4	11730.000	32.33	17.22	49.55	74.00	-24.45	peak
5	14085.000	29.60	21.61	51.21	74.00	-22.79	peak
6	18000.000	25.37	25.69	51.06	74.00	-22.94	peak






Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical		

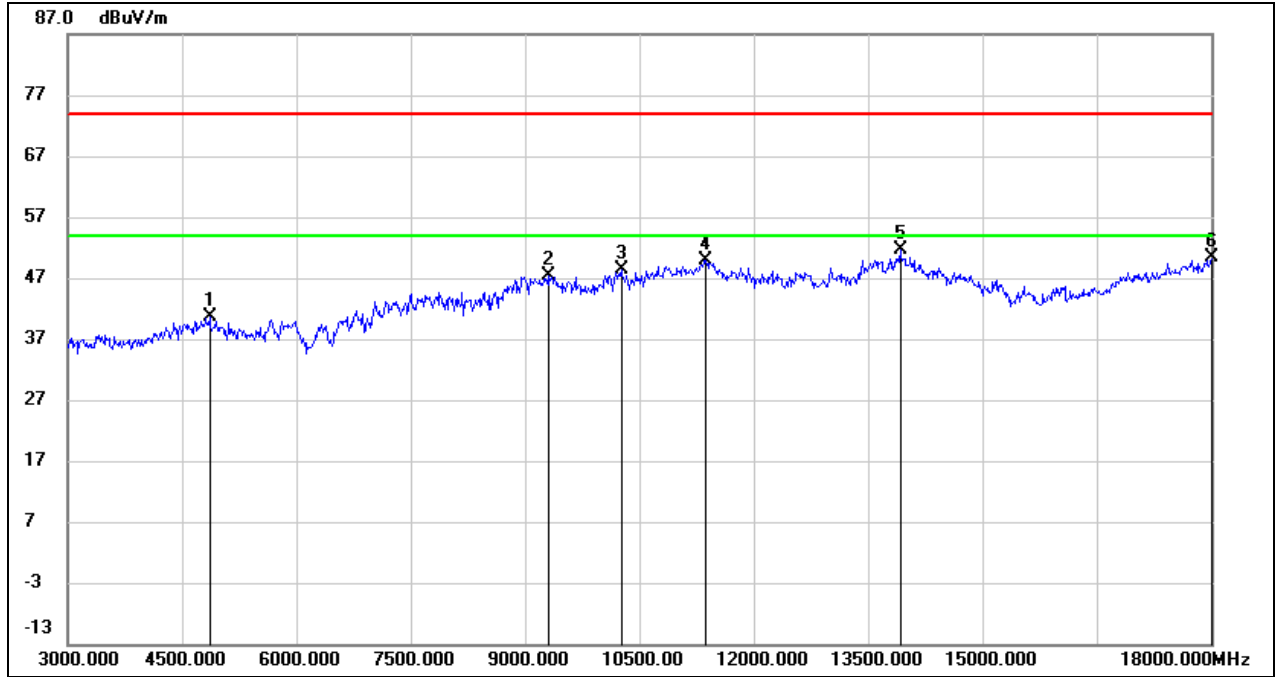

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.68	-0.09	40.59	74.00	-33.41	peak
2	9300.000	36.70	10.61	47.31	74.00	-26.69	peak
3	10260.000	35.74	12.52	48.26	74.00	-25.74	peak
4	11370.000	33.81	16.12	49.93	74.00	-24.07	peak
5	13920.000	29.76	21.79	51.55	74.00	-22.45	peak
6	18000.000	24.59	25.69	50.28	74.00	-23.72	peak




Test Mode:	802.11b	Channel:	2437
Polarity:	Horizontal		

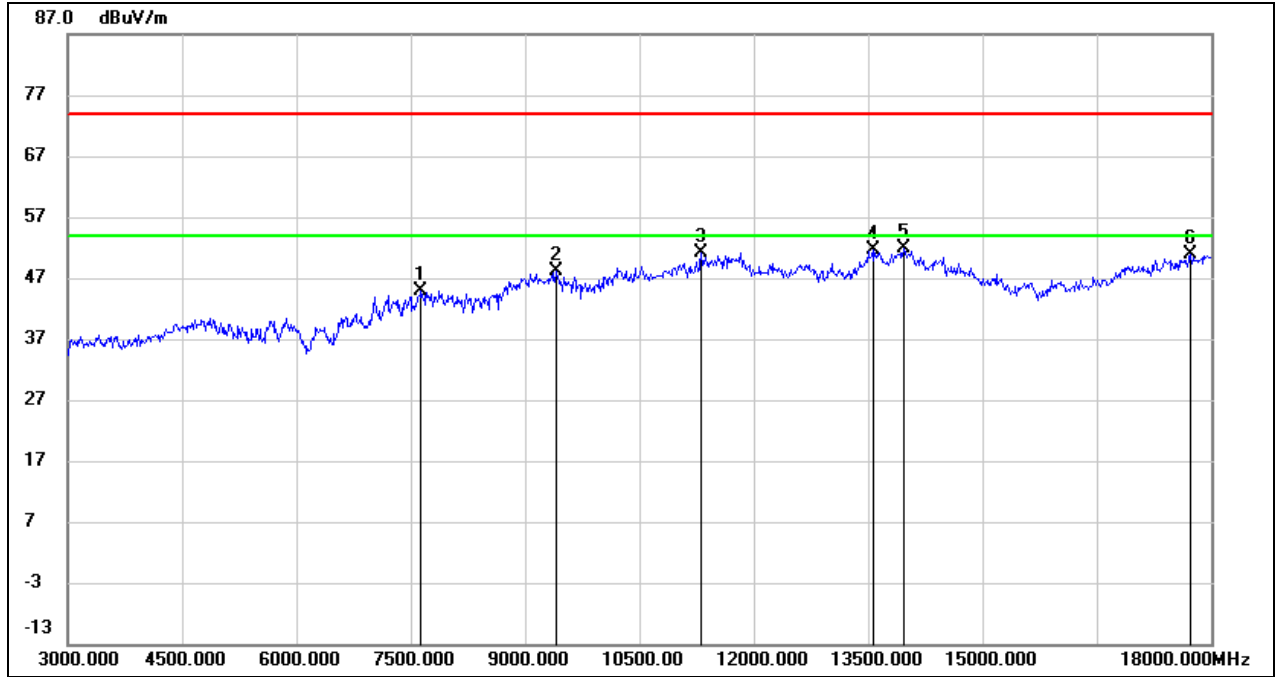

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7635.000	38.45	6.33	44.78	74.00	-29.22	peak
2	9405.000	37.42	10.66	48.08	74.00	-25.92	peak
3	11310.000	35.23	15.91	51.14	74.00	-22.86	peak
4	13560.000	30.55	21.04	51.59	74.00	-22.41	peak
5	13965.000	30.11	21.89	52.00	74.00	-22.00	peak
6	17730.000	26.73	24.09	50.82	74.00	-23.18	peak




Test Mode:	802.11b	Channel:	2437
Polarity:	Vertical		

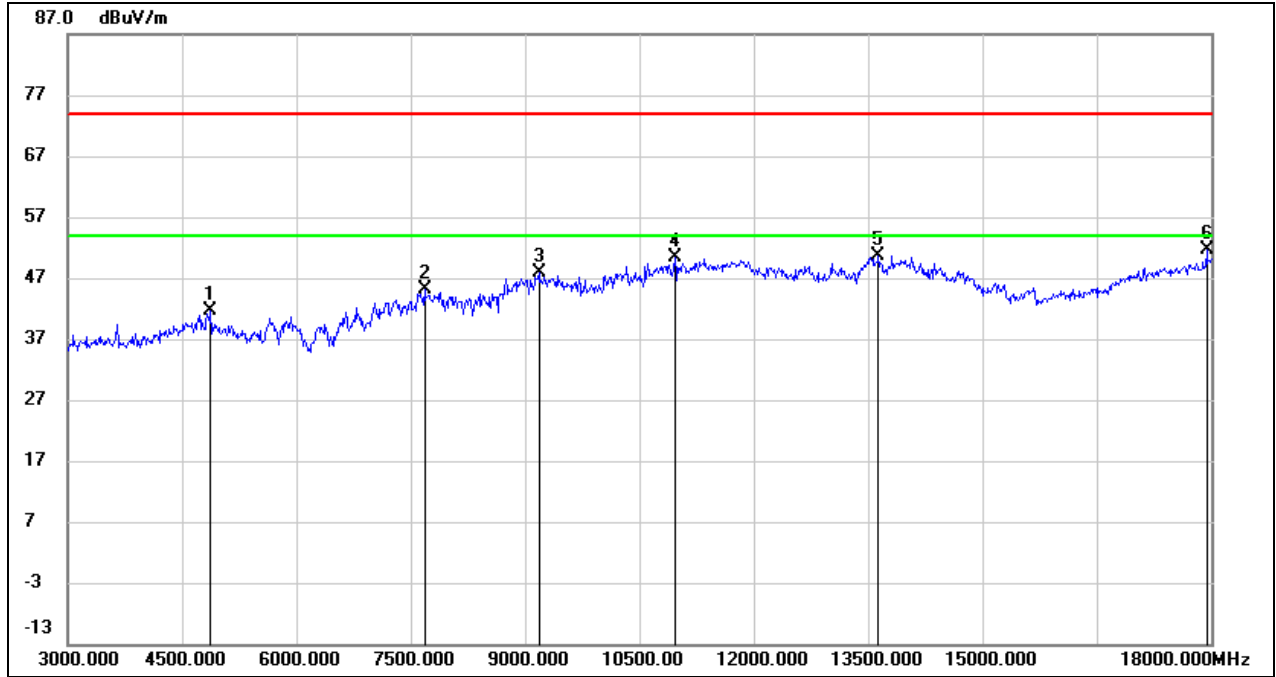

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.62	-0.03	41.59	74.00	-32.41	peak
2	7680.000	38.85	6.32	45.17	74.00	-28.83	peak
3	9180.000	37.23	10.56	47.79	74.00	-26.21	peak
4	10965.000	35.71	14.64	50.35	74.00	-23.65	peak
5	13635.000	29.38	21.19	50.57	74.00	-23.43	peak
6	17940.000	26.22	25.34	51.56	74.00	-22.44	peak




Test Mode:	802.11b	Channel:	2462
Polarity:	Horizontal		

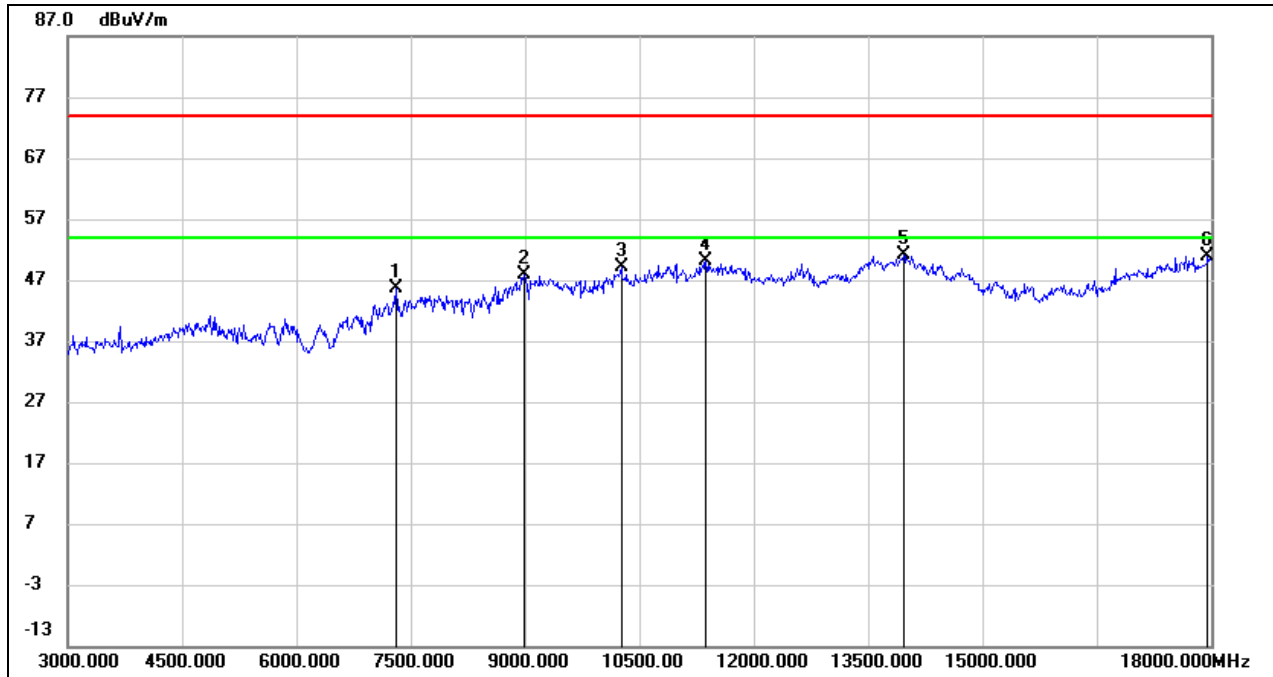

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	39.04	6.47	45.51	74.00	-28.49	peak
2	8985.000	37.41	10.37	47.78	74.00	-26.22	peak
3	10260.000	36.50	12.52	49.02	74.00	-24.98	peak
4	11370.000	33.95	16.12	50.07	74.00	-23.93	peak
5	13965.000	29.30	21.89	51.19	74.00	-22.81	peak
6	17955.000	25.58	25.42	51.00	74.00	-23.00	peak




Test Mode:	802.11b	Channel:	2462
Polarity:	Vertical		

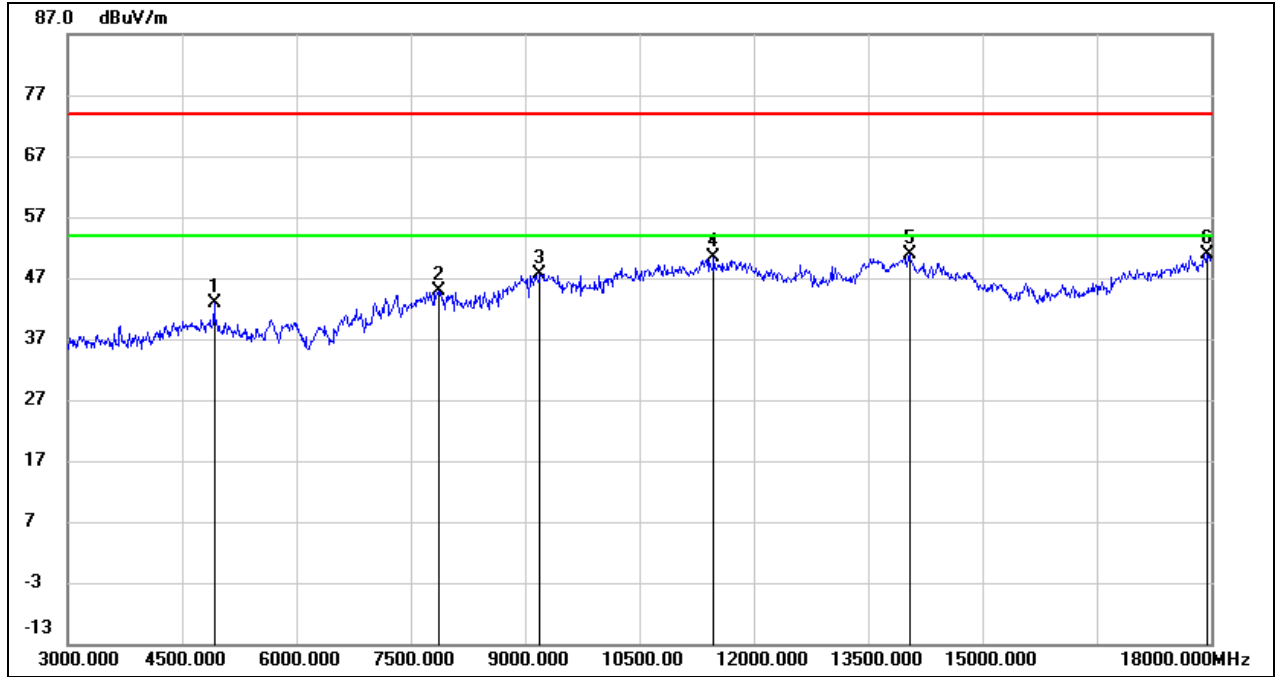

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	42.70	0.14	42.84	74.00	-31.16	peak
2	7875.000	38.46	6.31	44.77	74.00	-29.23	peak
3	9195.000	37.14	10.56	47.70	74.00	-26.30	peak
4	11475.000	33.89	16.51	50.40	74.00	-23.60	peak
5	14040.000	29.09	21.79	50.88	74.00	-23.12	peak
6	17955.000	25.41	25.42	50.83	74.00	-23.17	peak




Test Mode:	802.11g	Channel:	2412
Polarity:	Horizontal		

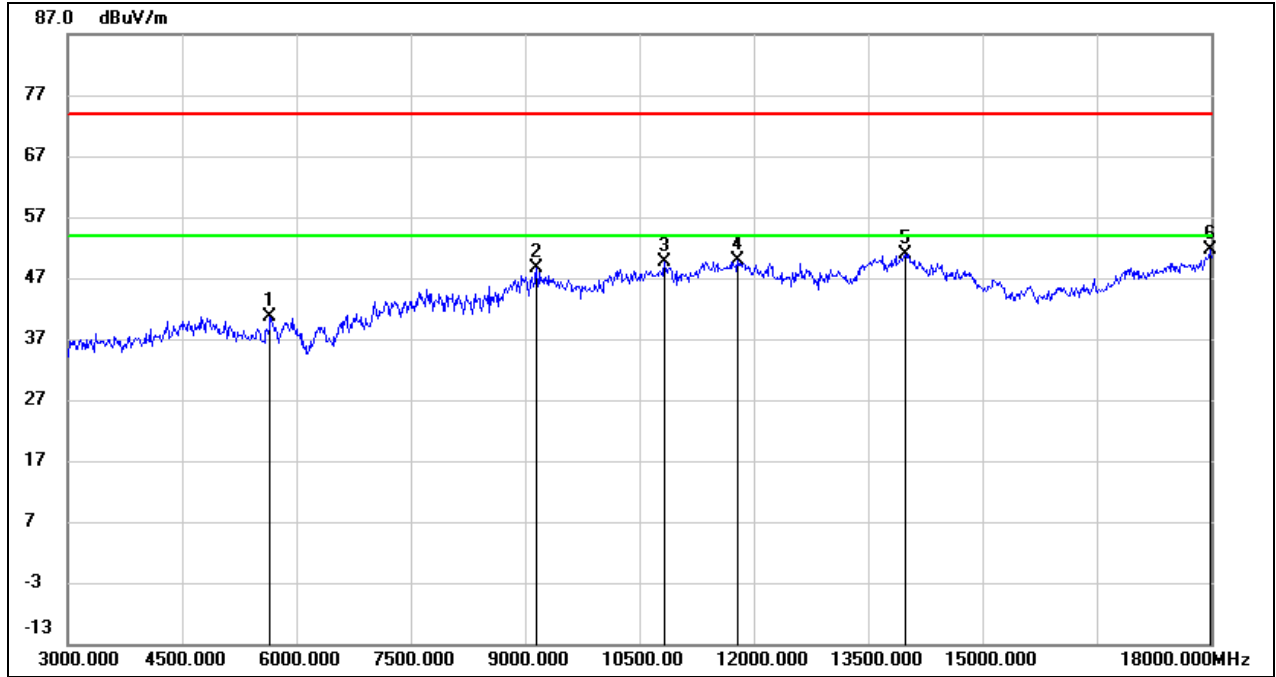

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.34	1.29	40.63	74.00	-33.37	peak
2	9150.000	38.05	10.54	48.59	74.00	-25.41	peak
3	10830.000	35.42	14.16	49.58	74.00	-24.42	peak
4	11790.000	32.39	17.38	49.77	74.00	-24.23	peak
5	13980.000	29.05	21.92	50.97	74.00	-23.03	peak
6	17985.000	25.96	25.60	51.56	74.00	-22.44	peak




Test Mode:	802.11g	Channel:	2412
Polarity:	Vertical		

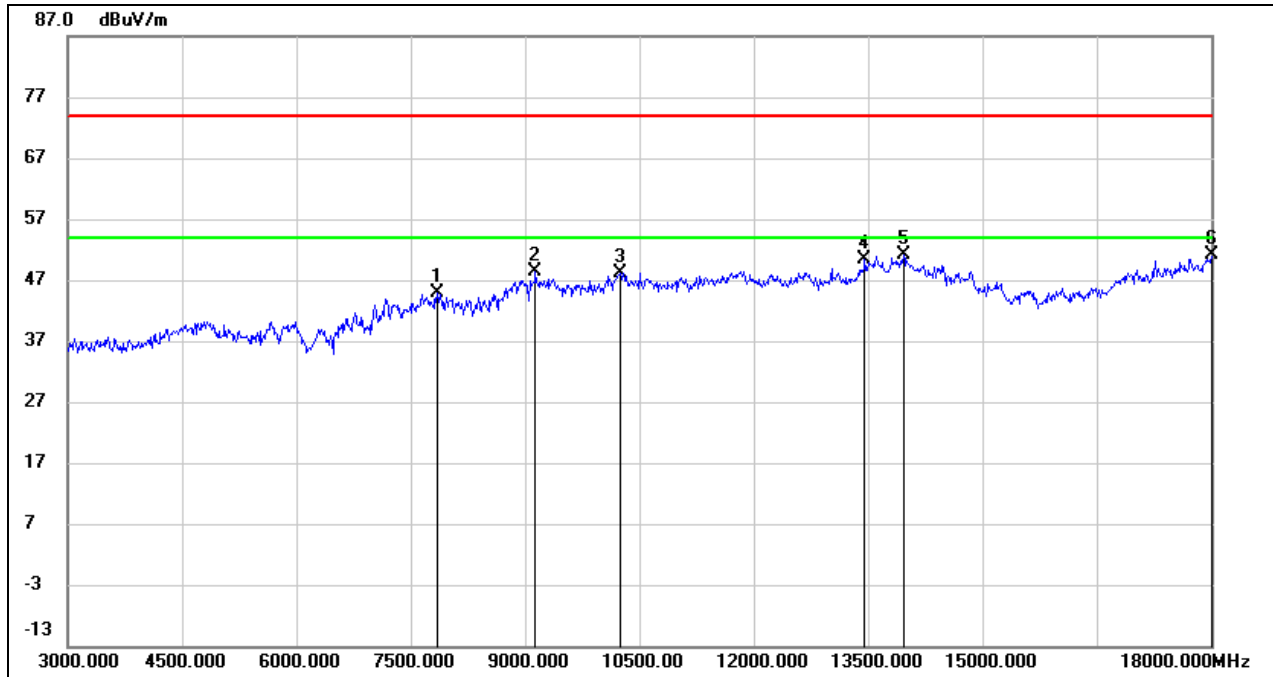

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7845.000	38.64	6.32	44.96	74.00	-29.04	peak
2	9135.000	37.84	10.55	48.39	74.00	-25.61	peak
3	10245.000	35.68	12.48	48.16	74.00	-25.84	peak
4	13455.000	29.74	20.71	50.45	74.00	-23.55	peak
5	13965.000	29.17	21.89	51.06	74.00	-22.94	peak
6	18000.000	25.53	25.69	51.22	74.00	-22.78	peak



Test Mode:	802.11g	Channel:	2437
Polarity:	Horizontal		

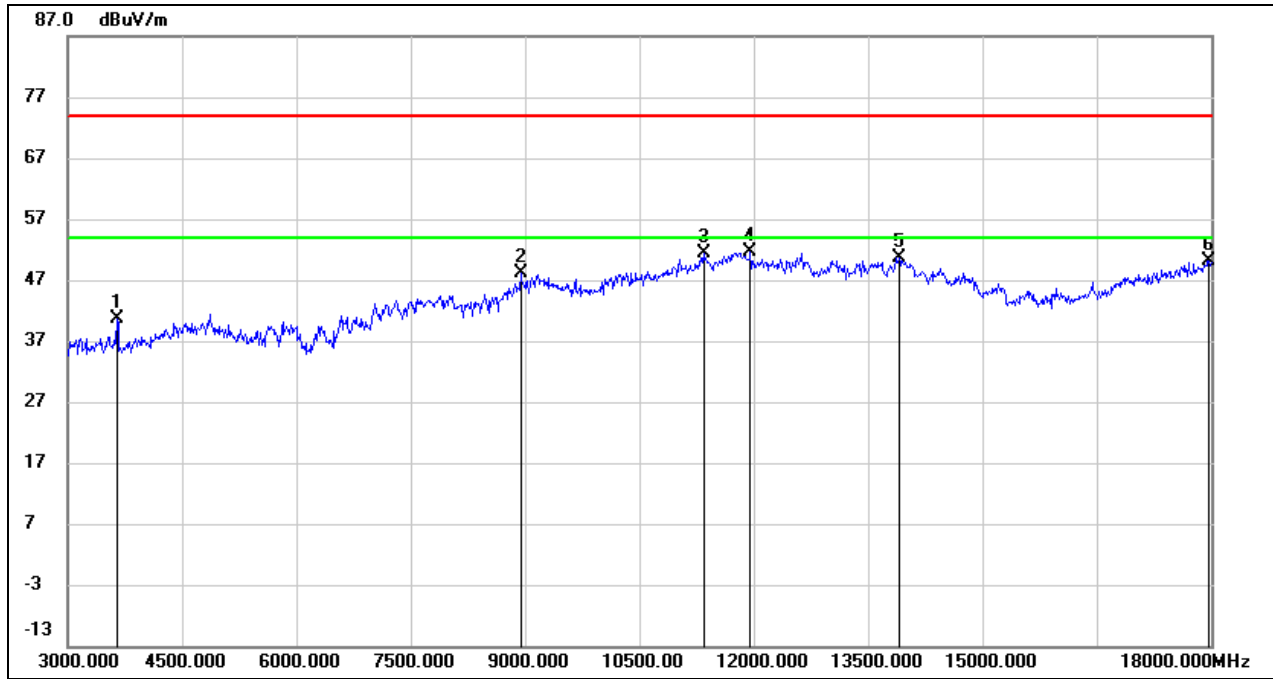


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3645.000	45.26	-4.62	40.64	74.00	-33.36	peak
2	8940.000	37.97	10.04	48.01	74.00	-25.99	peak
3	11340.000	35.33	16.01	51.34	74.00	-22.66	peak
4	11955.000	33.90	17.83	51.73	74.00	-22.27	peak
5	13905.000	28.86	21.76	50.62	74.00	-23.38	peak
6	17970.000	24.71	25.51	50.22	74.00	-23.78	peak






Test Mode:	802.11g	Channel:	2437
Polarity:	Vertical		

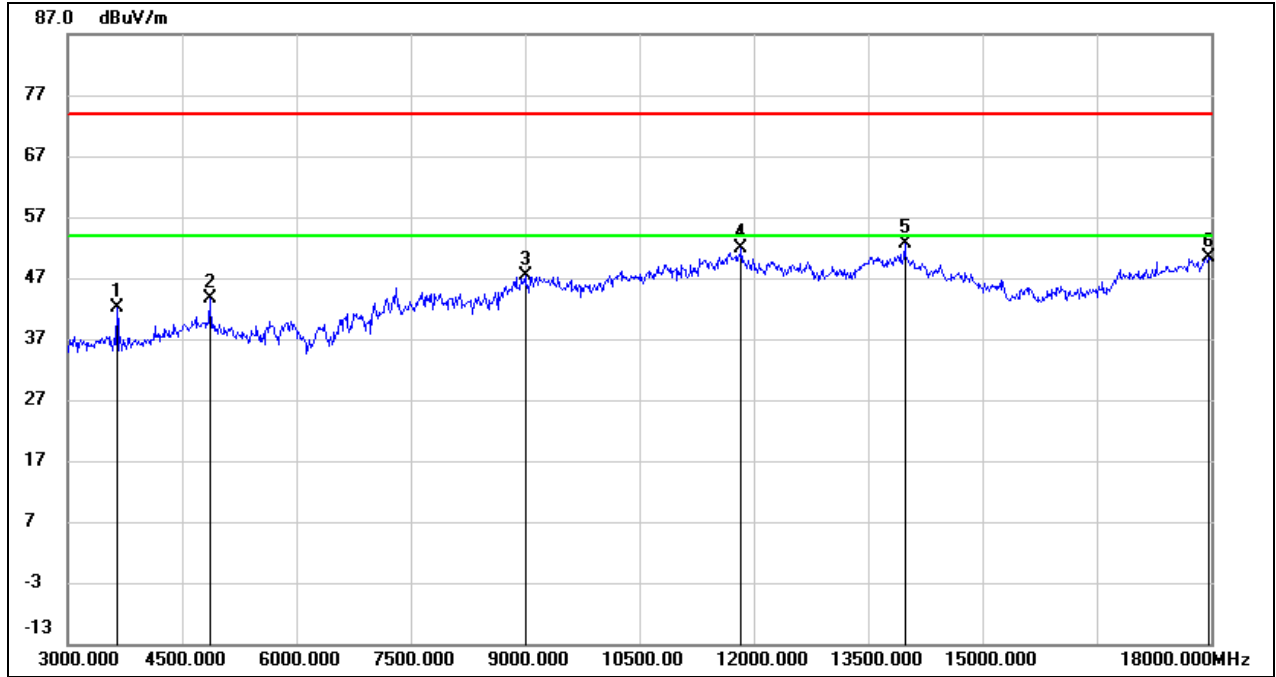

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3645.000	46.86	-4.62	42.24	74.00	-31.76	peak
2	4860.000	43.66	-0.09	43.57	74.00	-30.43	peak
3	9000.000	36.81	10.48	47.29	74.00	-26.71	peak
4	11835.000	34.33	17.51	51.84	74.00	-22.16	peak
5	13980.000	30.62	21.92	52.54	74.00	-21.46	peak
6	17970.000	24.83	25.51	50.34	74.00	-23.66	peak




Test Mode:	802.11g	Channel:	2462
Polarity:	Horizontal		

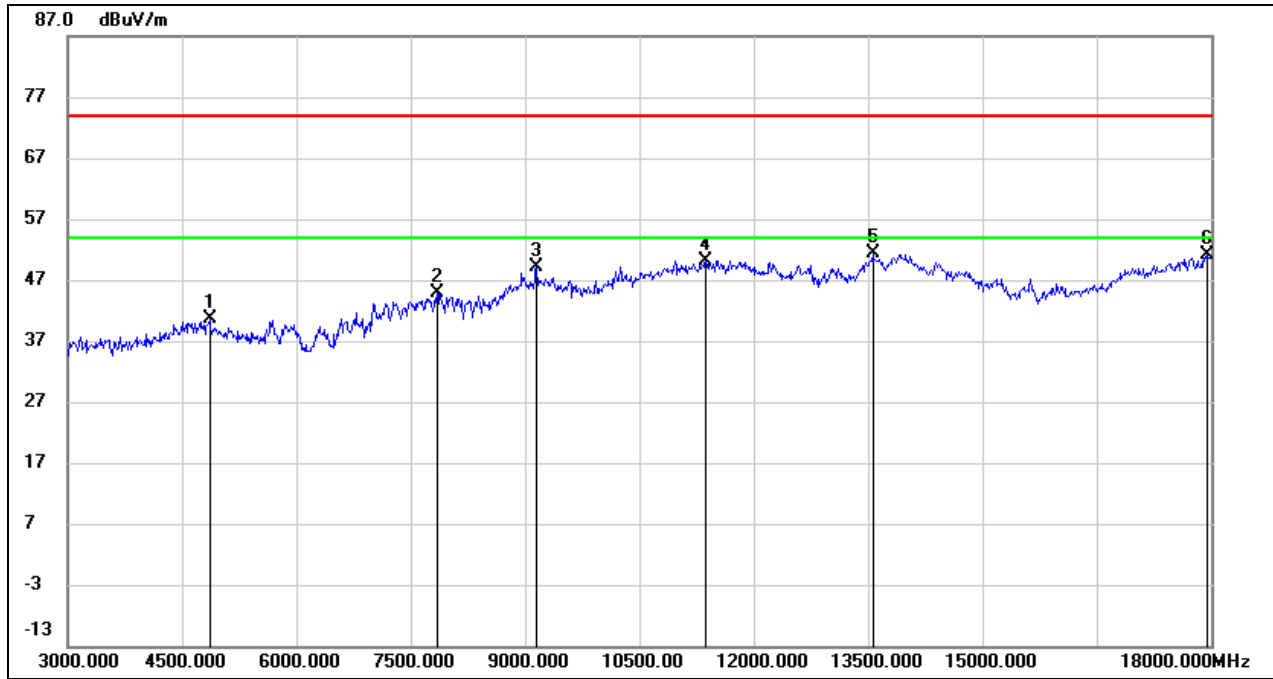

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.62	-0.09	40.53	74.00	-33.47	peak
2	7845.000	38.54	6.32	44.86	74.00	-29.14	peak
3	9150.000	38.54	10.54	49.08	74.00	-24.92	peak
4	11370.000	34.09	16.12	50.21	74.00	-23.79	peak
5	13560.000	30.33	21.04	51.37	74.00	-22.63	peak
6	17940.000	25.68	25.34	51.02	74.00	-22.98	peak




Test Mode:	802.11g	Channel:	2462
Polarity:	Vertical		

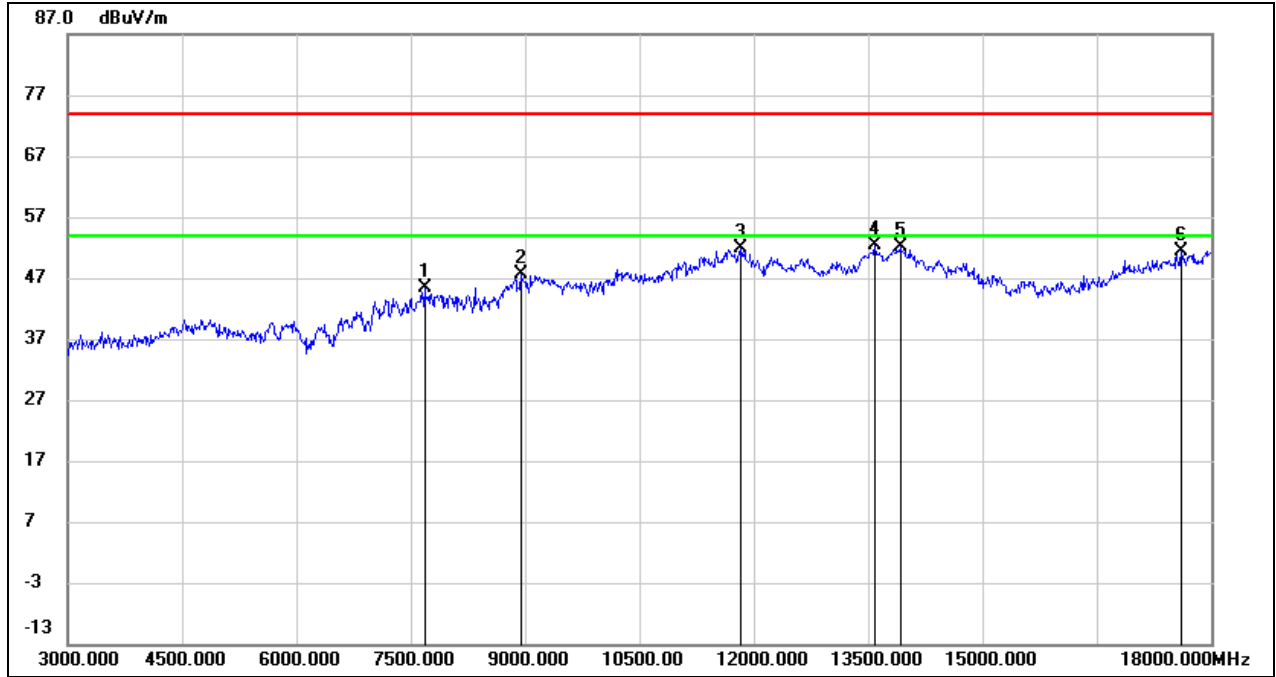

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7680.000	39.02	6.32	45.34	74.00	-28.66	peak
2	8940.000	37.53	10.04	47.57	74.00	-26.43	peak
3	11835.000	34.30	17.51	51.81	74.00	-22.19	peak
4	13590.000	31.28	21.09	52.37	74.00	-21.63	peak
5	13920.000	30.23	21.79	52.02	74.00	-21.98	peak
6	17610.000	28.05	23.38	51.43	74.00	-22.57	peak




Test Mode:	802.11n HT20	Channel:	2412
Polarity:	Horizontal		

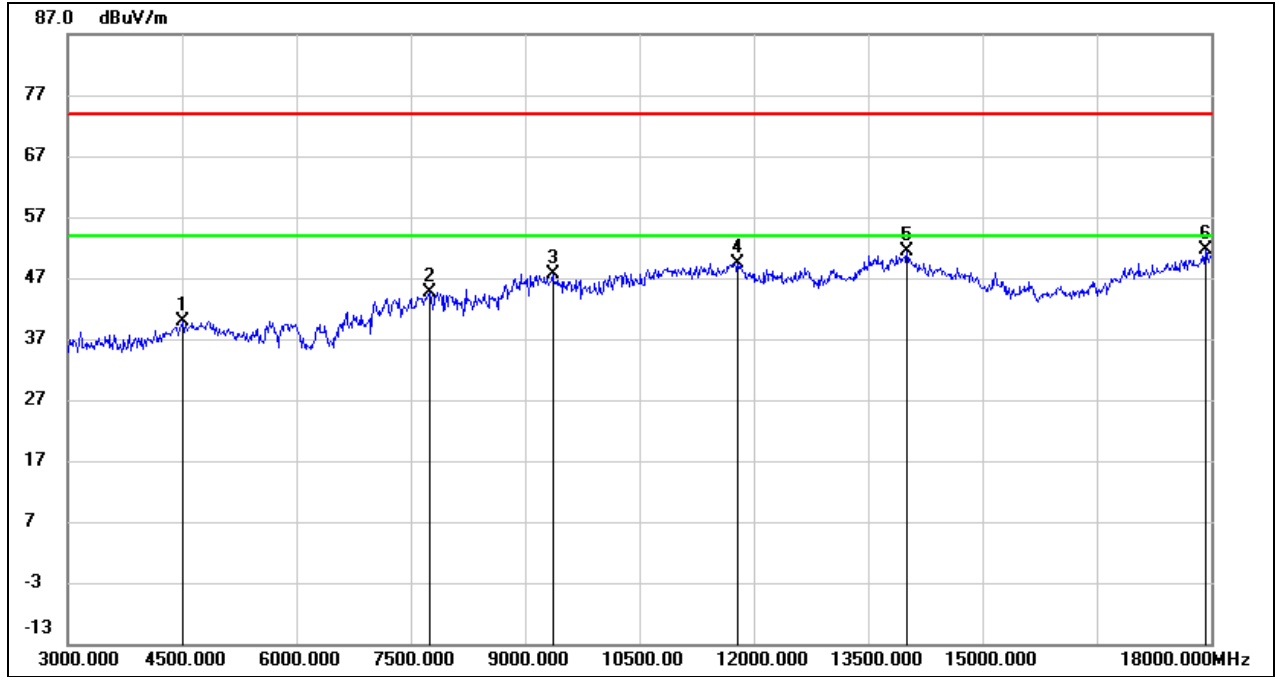

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4515.000	41.36	-1.40	39.96	74.00	-34.04	peak
2	7740.000	38.22	6.32	44.54	74.00	-29.46	peak
3	9360.000	36.91	10.64	47.55	74.00	-26.45	peak
4	11790.000	32.08	17.38	49.46	74.00	-24.54	peak
5	14010.000	29.40	21.93	51.33	74.00	-22.67	peak
6	17925.000	26.34	25.25	51.59	74.00	-22.41	peak




Test Mode:	802.11n HT20	Channel:	2412
Polarity:	Vertical		

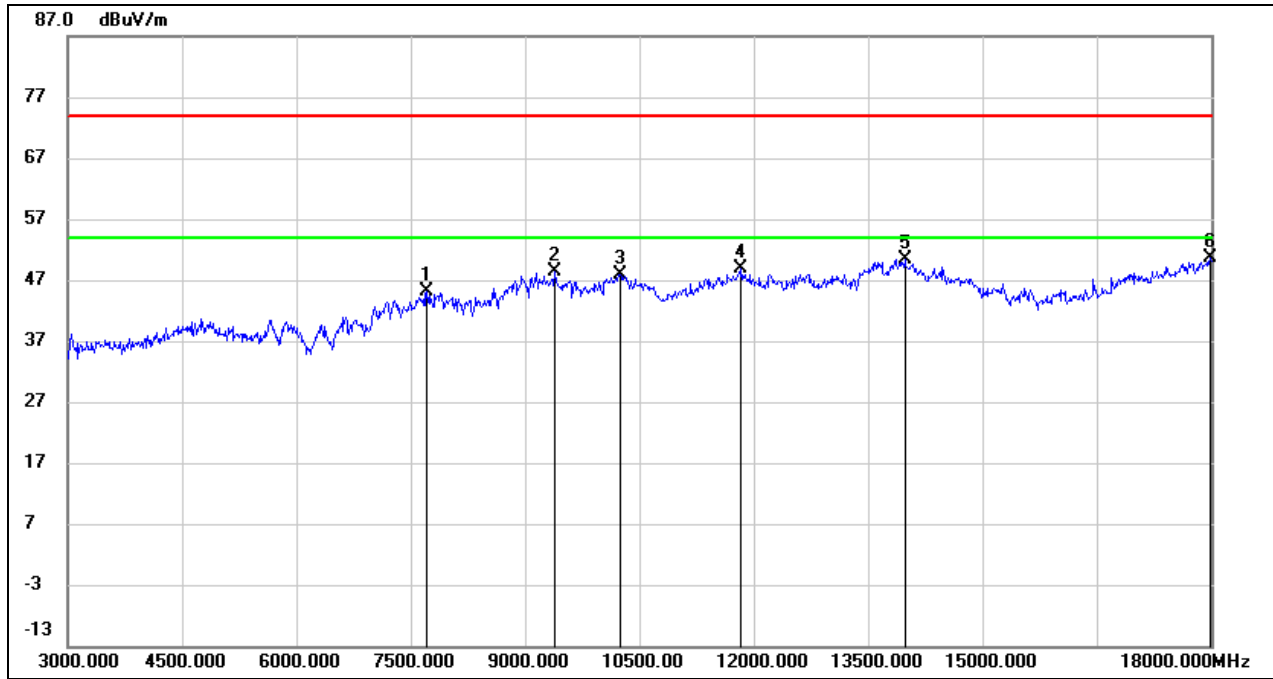

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7710.000	38.68	6.33	45.01	74.00	-28.99	peak
2	9390.000	37.83	10.64	48.47	74.00	-25.53	peak
3	10245.000	35.34	12.48	47.82	74.00	-26.18	peak
4	11835.000	31.33	17.51	48.84	74.00	-25.16	peak
5	13980.000	28.56	21.92	50.48	74.00	-23.52	peak
6	17985.000	25.03	25.60	50.63	74.00	-23.37	peak




Test Mode:	802.11n HT20	Channel:	2437
Polarity:	Horizontal		

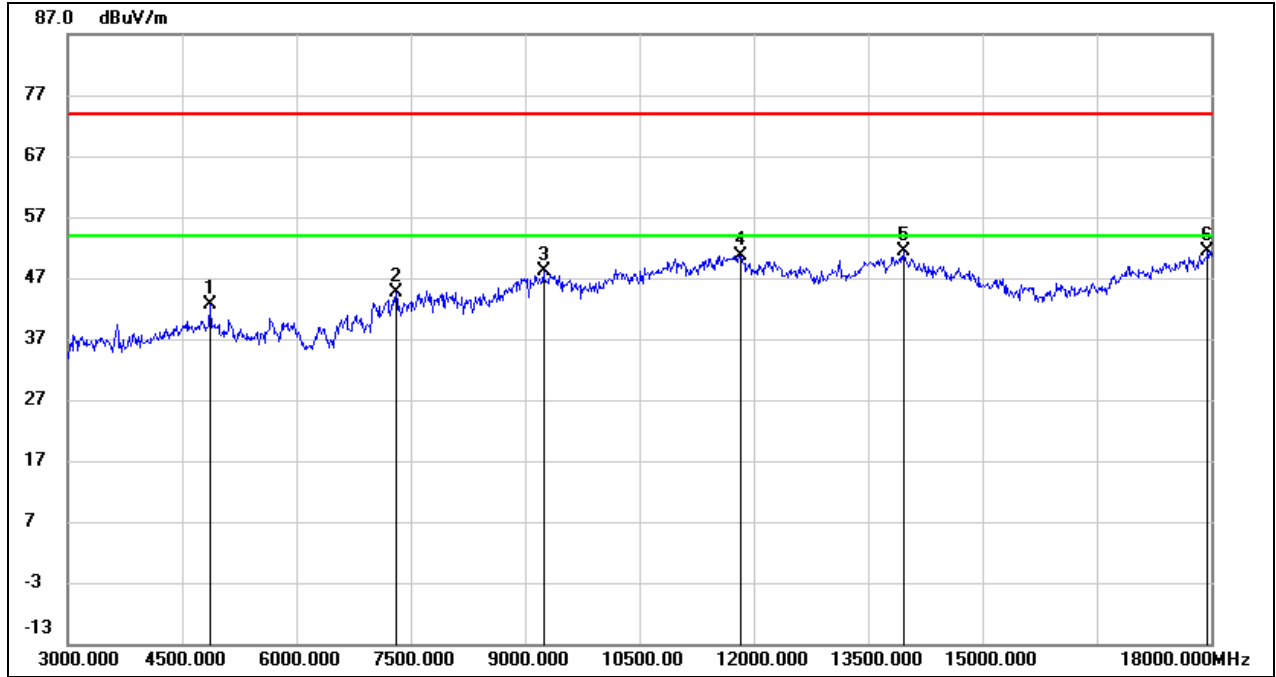

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	42.63	-0.09	42.54	74.00	-31.46	peak
2	7305.000	38.15	6.47	44.62	74.00	-29.38	peak
3	9240.000	37.60	10.58	48.18	74.00	-25.82	peak
4	11820.000	33.27	17.47	50.74	74.00	-23.26	peak
5	13965.000	29.46	21.89	51.35	74.00	-22.65	peak
6	17955.000	26.00	25.42	51.42	74.00	-22.58	peak




Test Mode:	802.11n HT20	Channel:	2437
Polarity:	Vertical		

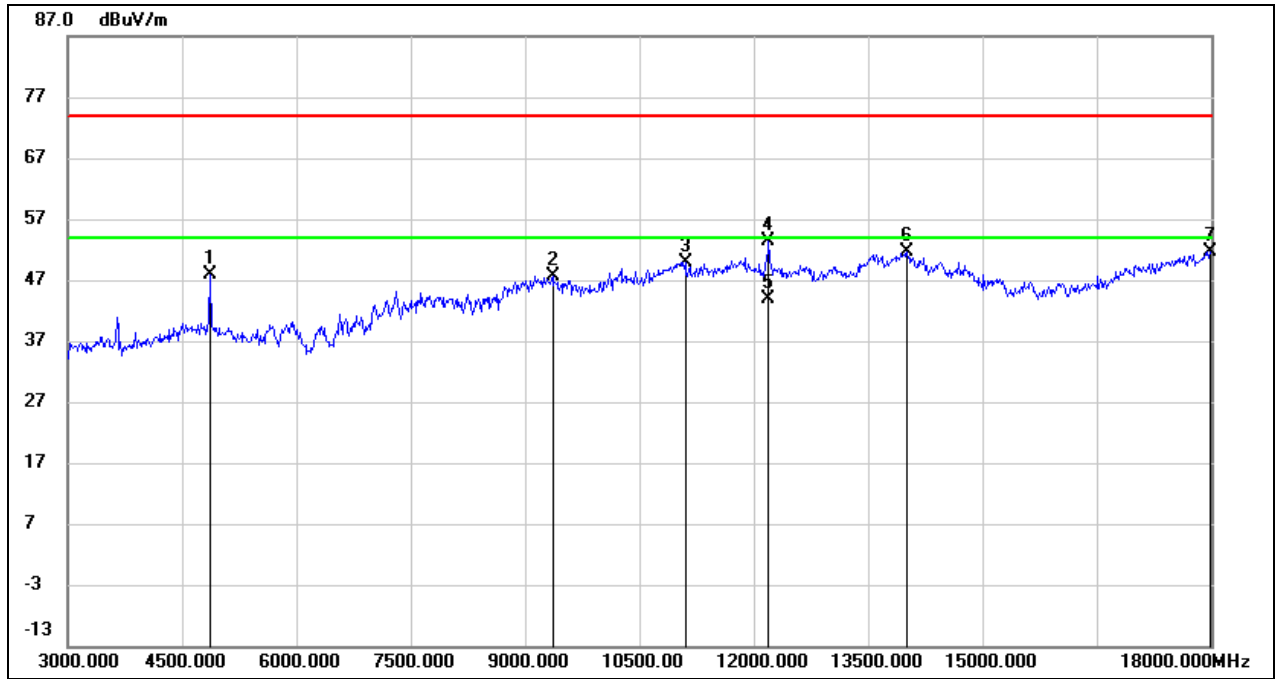

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	48.00	-0.09	47.91	74.00	-26.09	peak
2	9360.000	36.90	10.64	47.54	74.00	-26.46	peak
3	11100.000	34.85	15.14	49.99	74.00	-24.01	peak
4	12195.000	35.46	17.82	53.28	74.00	-20.72	peak
5	12195.000	26.00	17.82	43.82	54.00	-10.18	AVG
6	14010.000	29.76	21.93	51.69	74.00	-22.31	peak
7	17985.000	26.01	25.60	51.61	74.00	-22.39	peak



Test Mode:	802.11n HT20	Channel:	2462
Polarity:	Horizontal		

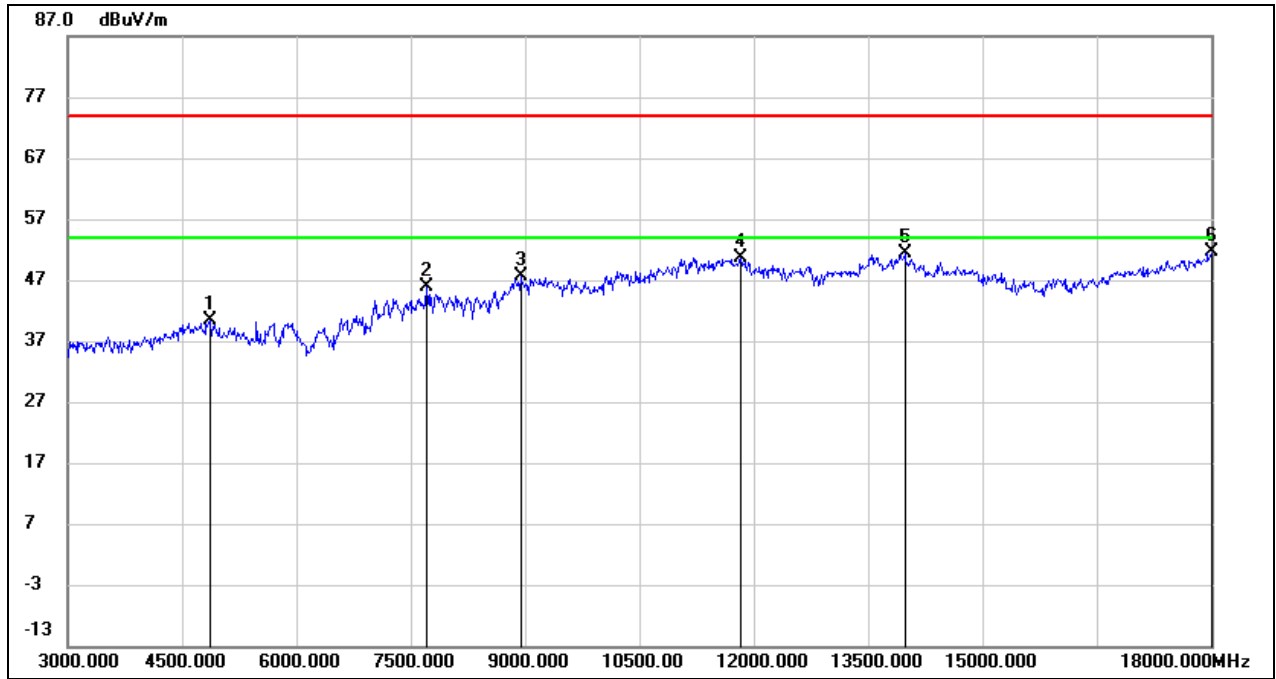


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	40.45	-0.03	40.42	74.00	-33.58	peak
2	7710.000	39.47	6.33	45.80	74.00	-28.20	peak
3	8940.000	37.50	10.04	47.54	74.00	-26.46	peak
4	11820.000	33.19	17.47	50.66	74.00	-23.34	peak
5	13980.000	29.54	21.92	51.46	74.00	-22.54	peak
6	18000.000	25.90	25.69	51.59	74.00	-22.41	peak






Test Mode:	802.11n HT20	Channel:	2462
Polarity:	Vertical		

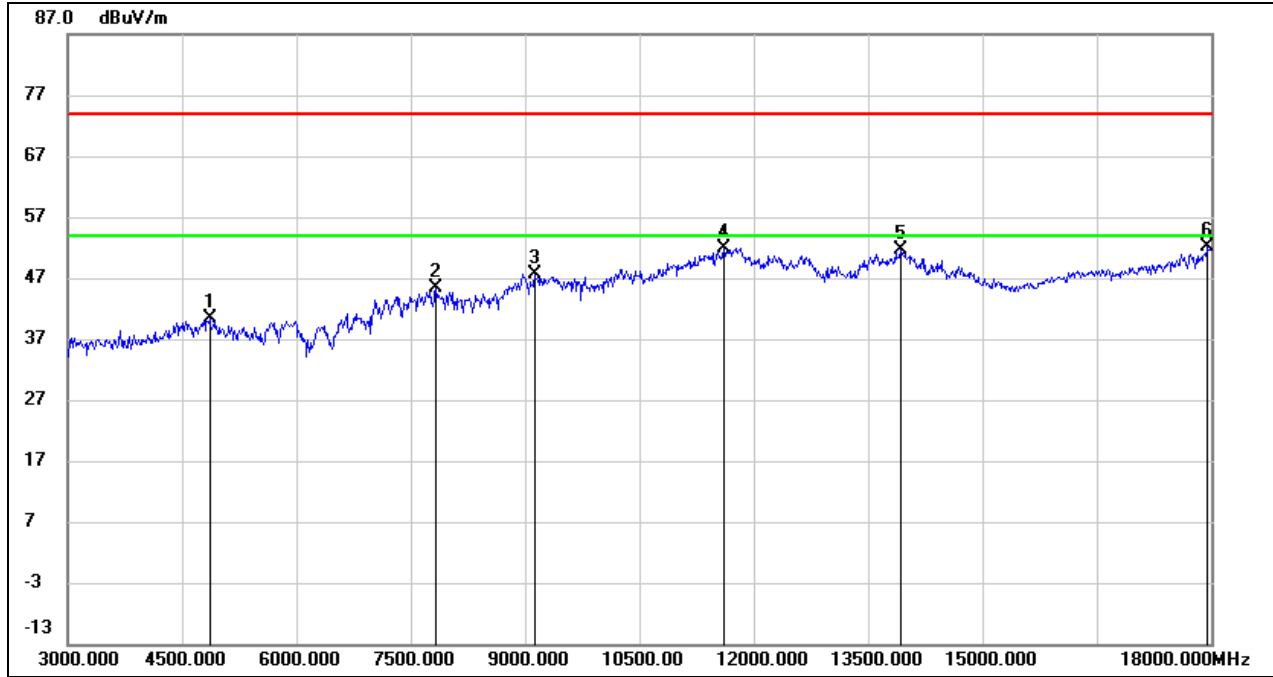

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.55	-0.09	40.46	74.00	-33.54	peak
2	7830.000	39.01	6.32	45.33	74.00	-28.67	peak
3	9120.000	37.20	10.53	47.73	74.00	-26.27	peak
4	11610.000	35.07	16.90	51.97	74.00	-22.03	peak
5	13935.000	29.81	21.82	51.63	74.00	-22.37	peak
6	17955.000	26.70	25.42	52.12	74.00	-21.88	peak




Test Mode:	802.11n HT40	Channel:	2422
Polarity:	Horizontal		

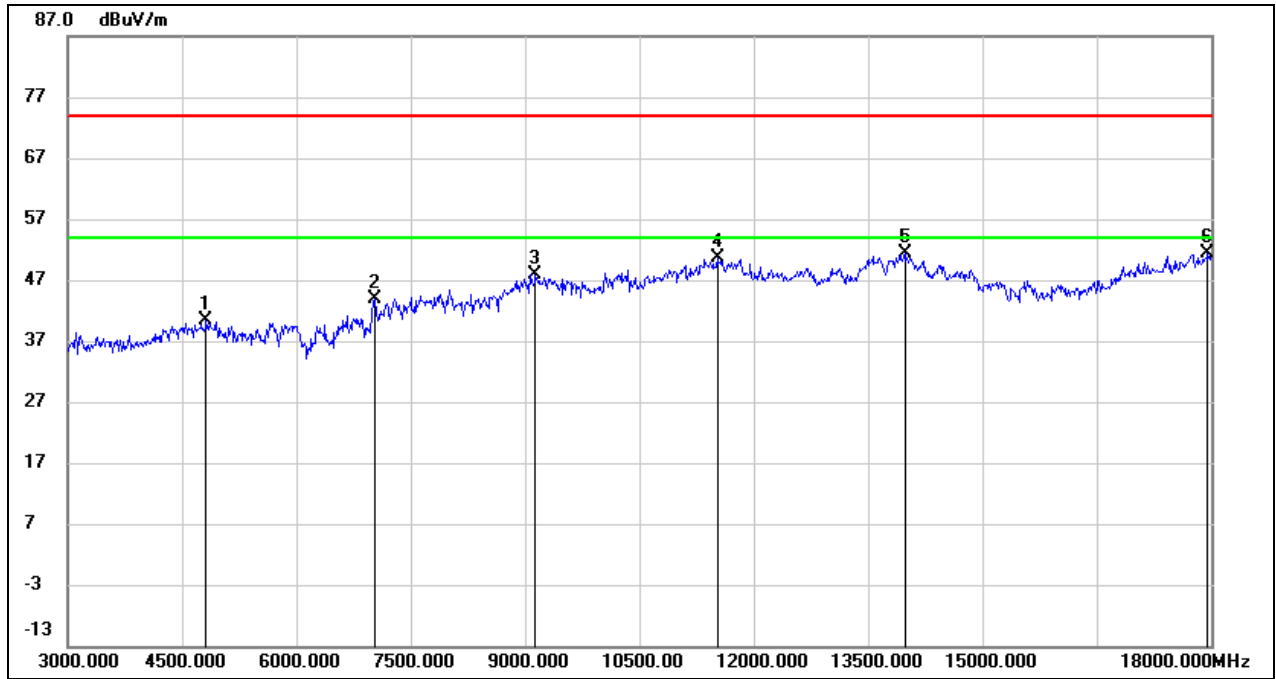

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	40.63	-0.26	40.37	74.00	-33.63	peak
2	7035.000	37.17	6.67	43.84	74.00	-30.16	peak
3	9135.000	37.27	10.55	47.82	74.00	-26.18	peak
4	11520.000	33.96	16.65	50.61	74.00	-23.39	peak
5	13980.000	29.36	21.92	51.28	74.00	-22.72	peak
6	17955.000	26.06	25.42	51.48	74.00	-22.52	peak




Test Mode:	802.11n HT40	Channel:	2422
Polarity:	Vertical		

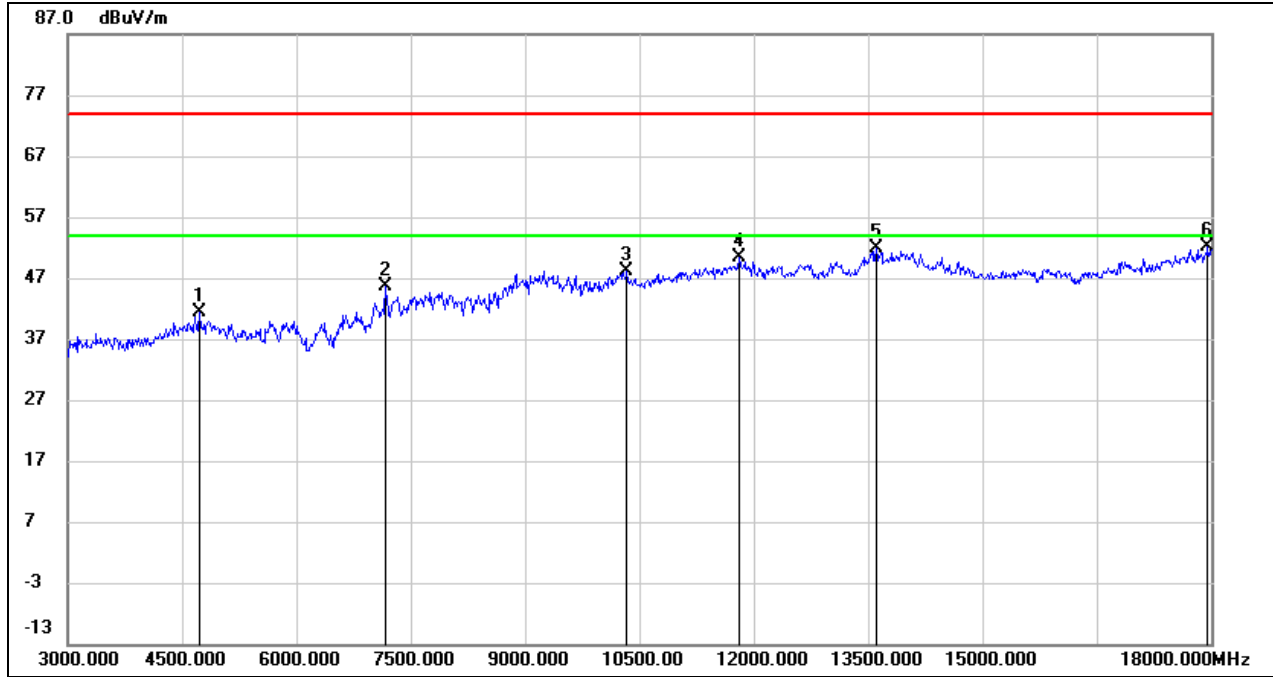

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4725.000	41.97	-0.59	41.38	74.00	-32.62	peak
2	7170.000	38.97	6.56	45.53	74.00	-28.47	peak
3	10335.000	35.50	12.67	48.17	74.00	-25.83	peak
4	11805.000	33.02	17.43	50.45	74.00	-23.55	peak
5	13605.000	30.66	21.12	51.78	74.00	-22.22	peak
6	17955.000	26.76	25.42	52.18	74.00	-21.82	peak




Test Mode:	802.11n HT40	Channel:	2437
Polarity:	Horizontal		

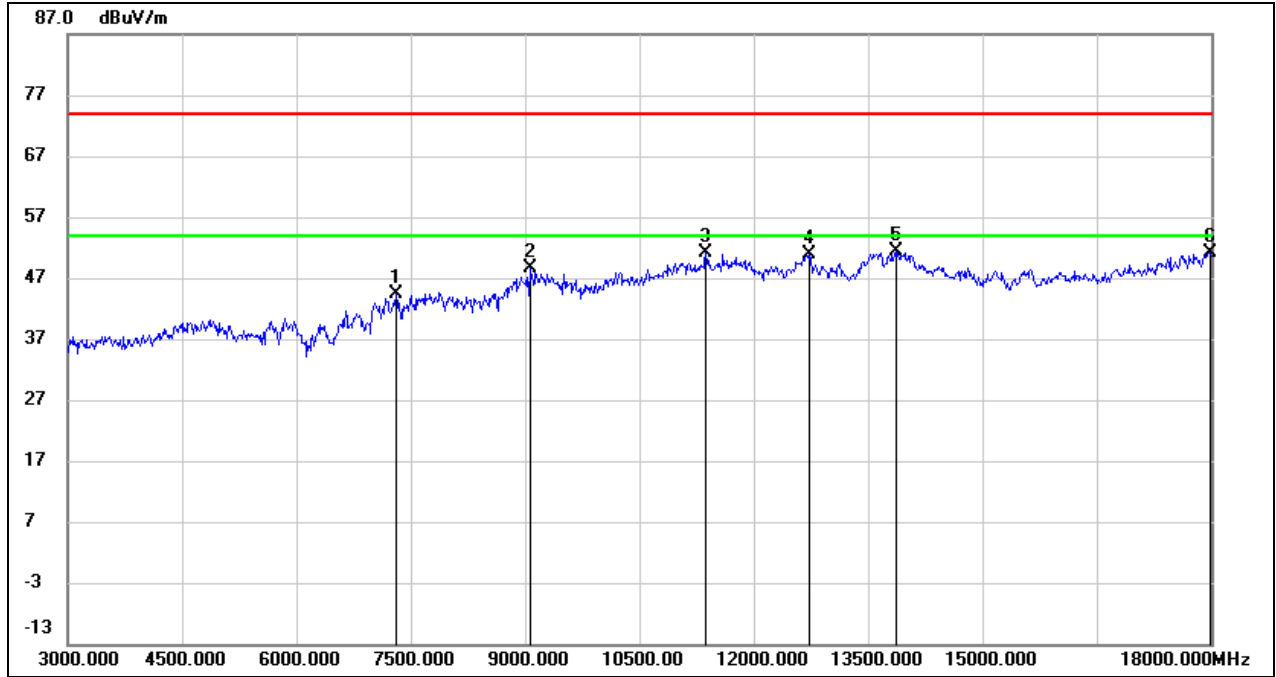

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	37.86	6.47	44.33	74.00	-29.67	peak
2	9060.000	38.12	10.51	48.63	74.00	-25.37	peak
3	11370.000	35.13	16.12	51.25	74.00	-22.75	peak
4	12720.000	32.74	18.08	50.82	74.00	-23.18	peak
5	13860.000	29.83	21.67	51.50	74.00	-22.50	peak
6	17985.000	25.55	25.60	51.15	74.00	-22.85	peak




Test Mode:	802.11n HT40	Channel:	2437
Polarity:	Vertical		

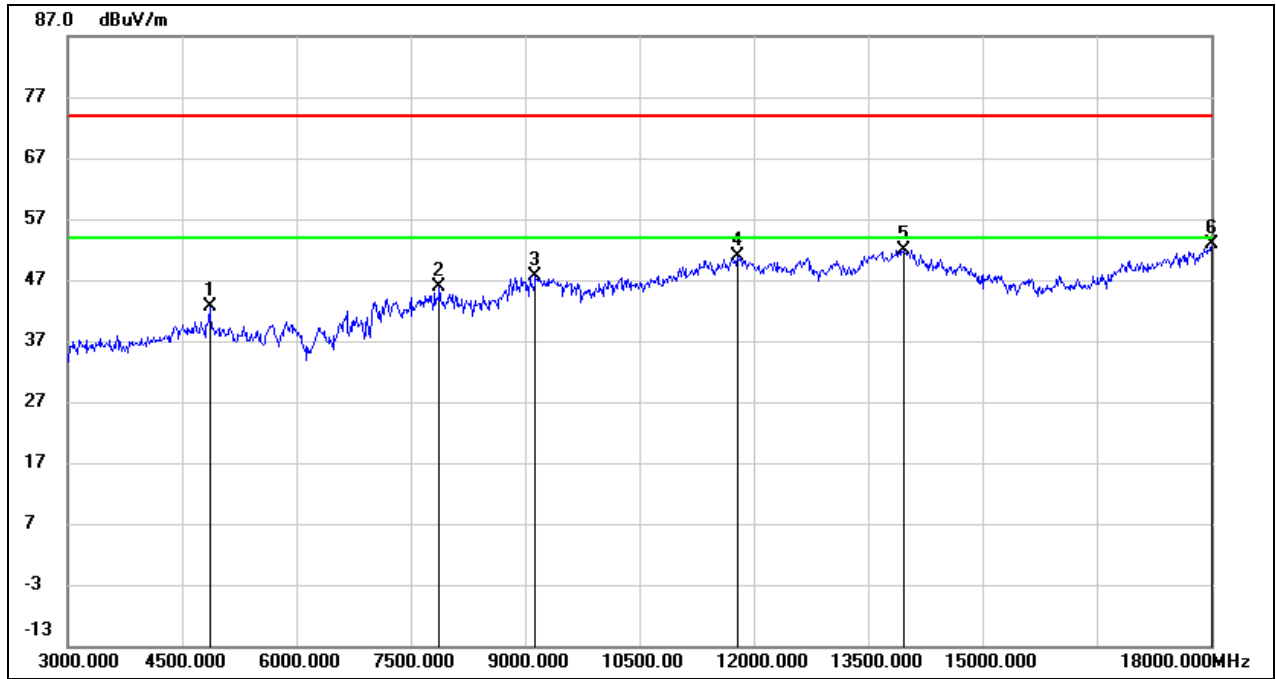

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	42.66	-0.09	42.57	74.00	-31.43	peak
2	7875.000	39.66	6.31	45.97	74.00	-28.03	peak
3	9135.000	37.03	10.55	47.58	74.00	-26.42	peak
4	11790.000	33.45	17.38	50.83	74.00	-23.17	peak
5	13965.000	30.06	21.89	51.95	74.00	-22.05	peak
6	18000.000	27.18	25.69	52.87	74.00	-21.13	peak




Test Mode:	802.11n HT40	Channel:	2452
Polarity:	Horizontal		

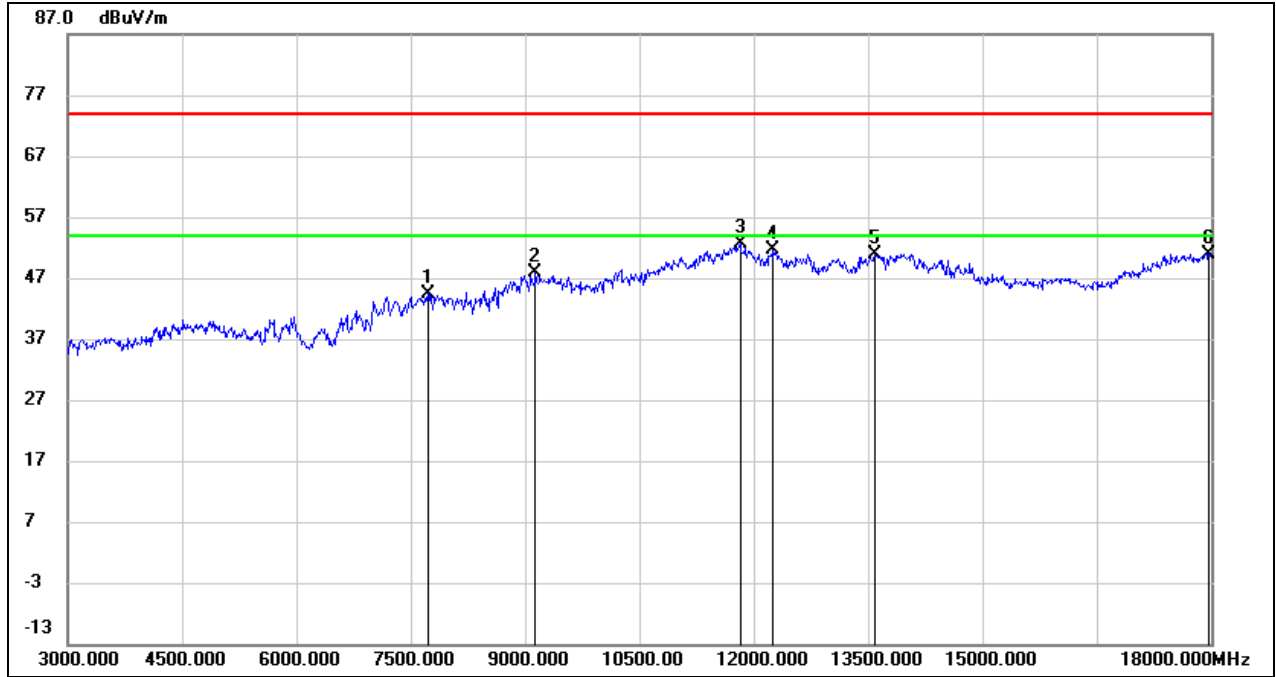

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7725.000	37.98	6.32	44.30	74.00	-29.70	peak
2	9135.000	37.41	10.55	47.96	74.00	-26.04	peak
3	11820.000	35.17	17.47	52.64	74.00	-21.36	peak
4	12255.000	33.96	17.78	51.74	74.00	-22.26	peak
5	13590.000	29.89	21.09	50.98	74.00	-23.02	peak
6	17970.000	25.48	25.51	50.99	74.00	-23.01	peak



Test Mode:	802.11n HT40	Channel:	2452
Polarity:	Vertical		

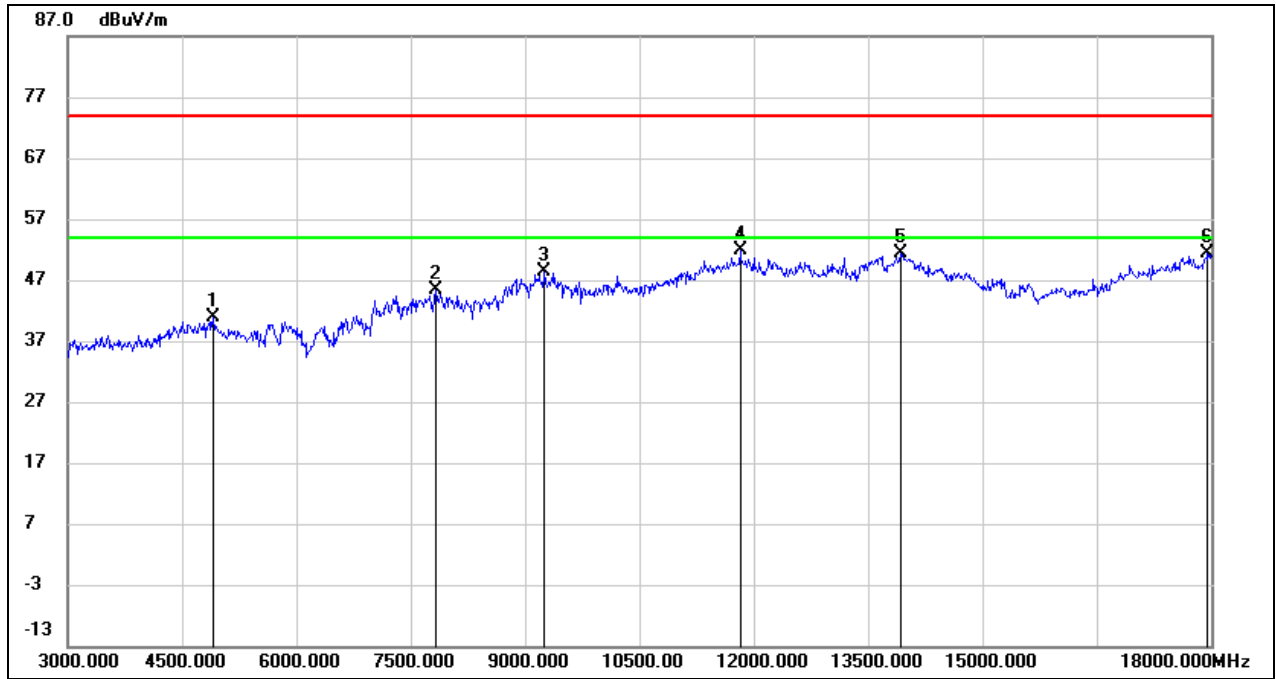


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	40.73	0.09	40.82	74.00	-33.18	peak
2	7830.000	39.02	6.32	45.34	74.00	-28.66	peak
3	9255.000	37.68	10.59	48.27	74.00	-25.73	peak
4	11820.000	34.29	17.47	51.76	74.00	-22.24	peak
5	13920.000	29.47	21.79	51.26	74.00	-22.74	peak
6	17955.000	26.08	25.42	51.50	74.00	-22.50	peak



### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Channel:	2412
Polarity:	FACE ON		

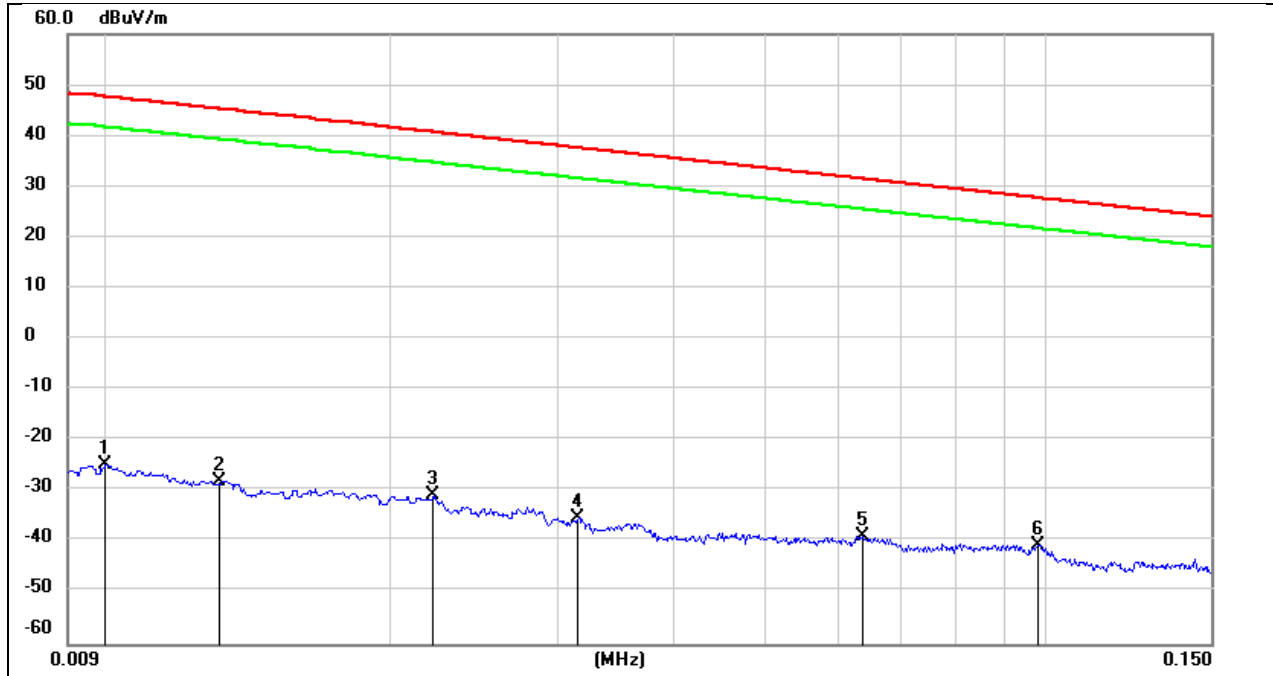


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.72	-101.40	-24.68	47.60	-76.18	-3.90	-72.28	peak
2	0.0131	73.47	-101.38	-27.91	45.25	-79.41	-6.25	-73.16	peak
3	0.0221	70.63	-101.35	-30.72	40.71	-82.22	-10.79	-71.43	peak
4	0.0316	66.24	-101.40	-35.16	37.61	-86.66	-13.89	-72.77	peak
5	0.0636	62.81	-101.54	-38.73	31.53	-90.23	-19.97	-70.26	peak
6	0.0981	61.27	-101.78	-40.51	27.77	-92.01	-23.73	-68.28	peak






Test Mode:	802.11b	Channel:	2412
Polarity:	FACE ON		

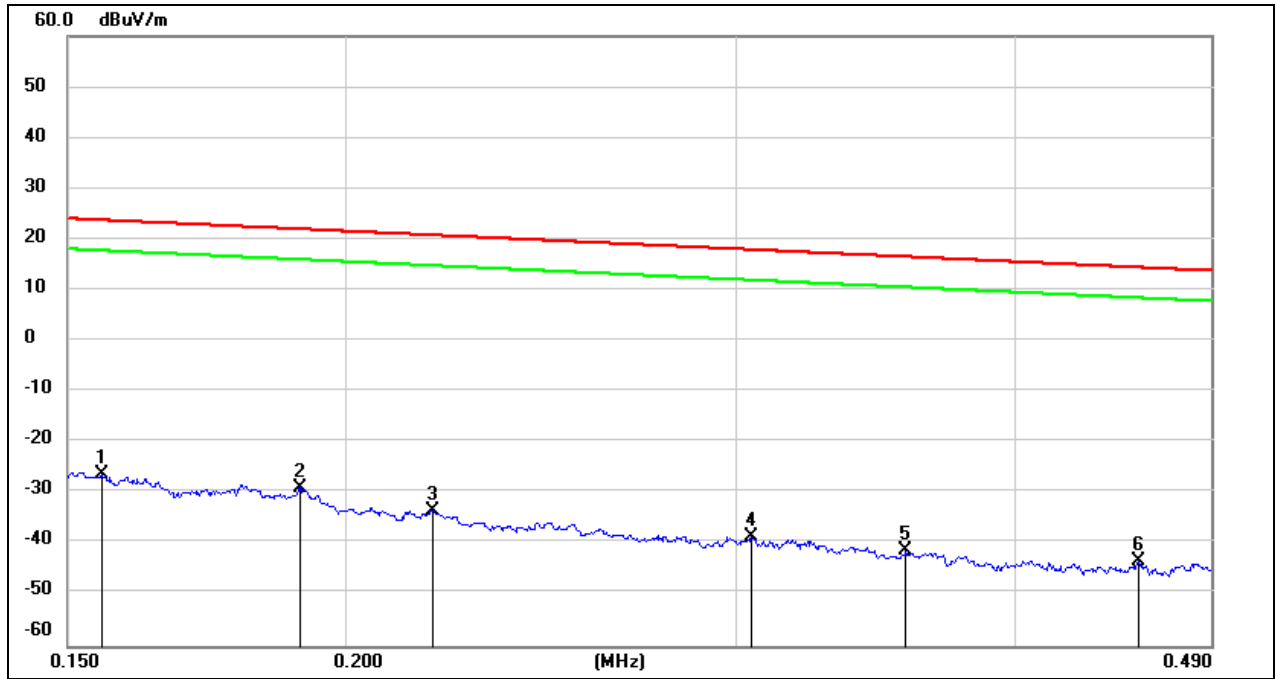

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.27	-101.65	-26.38	23.77	-77.88	-27.73	-50.15	peak
2	0.1907	72.90	-101.70	-28.80	22.00	-80.30	-29.50	-50.80	peak
3	0.2190	68.27	-101.75	-33.48	20.79	-84.98	-30.71	-54.27	peak
4	0.3047	63.34	-101.86	-38.52	17.92	-90.02	-33.58	-56.44	peak
5	0.3573	60.58	-101.91	-41.33	16.54	-92.83	-34.96	-57.87	peak
6	0.4550	58.64	-102.02	-43.38	14.44	-94.88	-37.06	-57.82	peak




Test Mode:	802.11b	Channel:	2412
Polarity:	FACE ON		

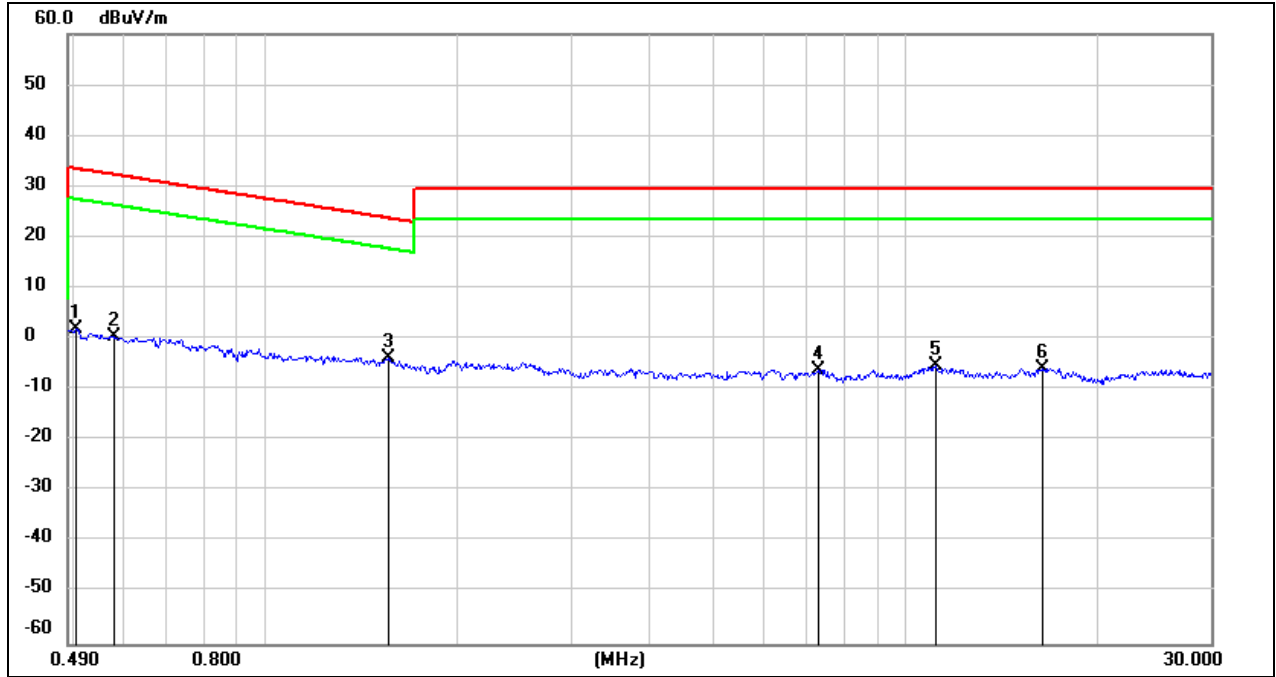

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-49.64	-17.94	-31.70	peak
2	0.5785	62.40	-62.08	0.32	32.36	-51.18	-19.14	-32.04	peak
3	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
4	7.3361	55.08	-61.17	-6.09	29.54	-57.59	-21.96	-35.63	peak
5	11.1431	55.49	-60.85	-5.36	29.54	-56.86	-21.96	-34.90	peak
6	16.3959	55.17	-60.96	-5.79	29.54	-57.29	-21.96	-35.33	peak

**8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)**


Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal		

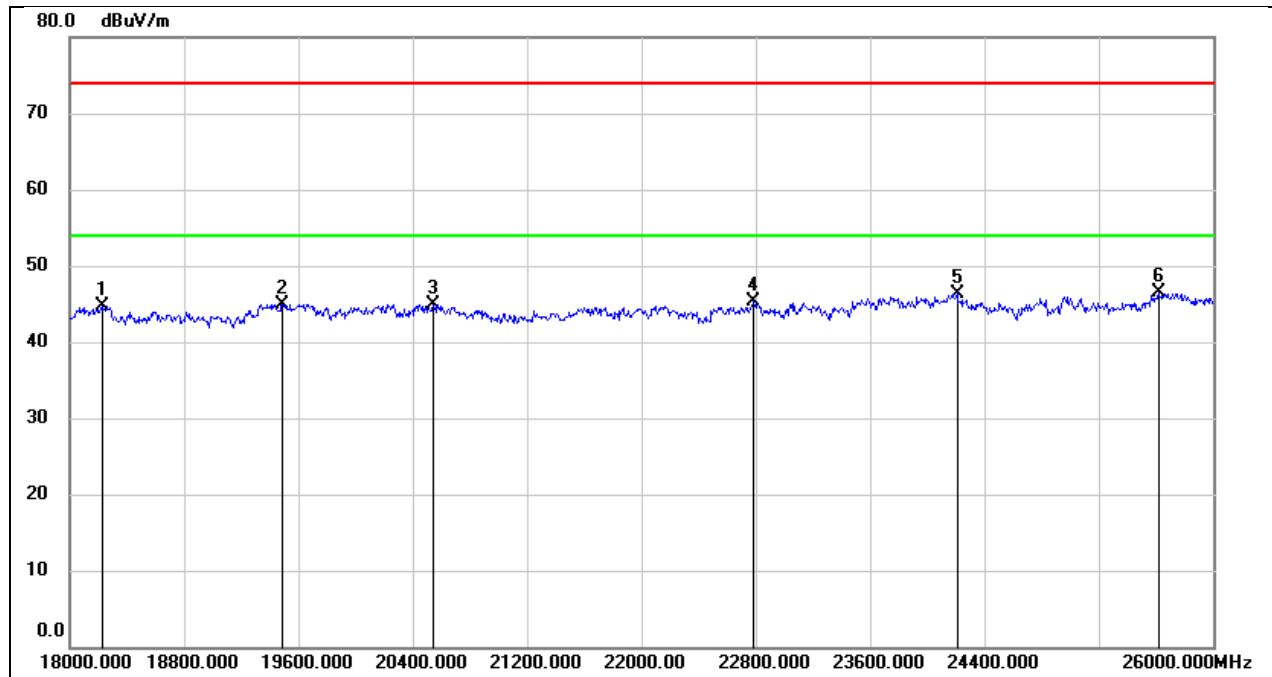

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18232.000	50.25	-5.54	44.71	74.00	-29.29	peak
2	19488.000	50.55	-5.56	44.99	74.00	-29.01	peak
3	20544.000	50.20	-5.31	44.89	74.00	-29.11	peak
4	22784.000	48.98	-3.65	45.33	74.00	-28.67	peak
5	24208.000	49.21	-2.81	46.40	74.00	-27.60	peak
6	25616.000	47.68	-1.24	46.44	74.00	-27.56	peak




Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical		

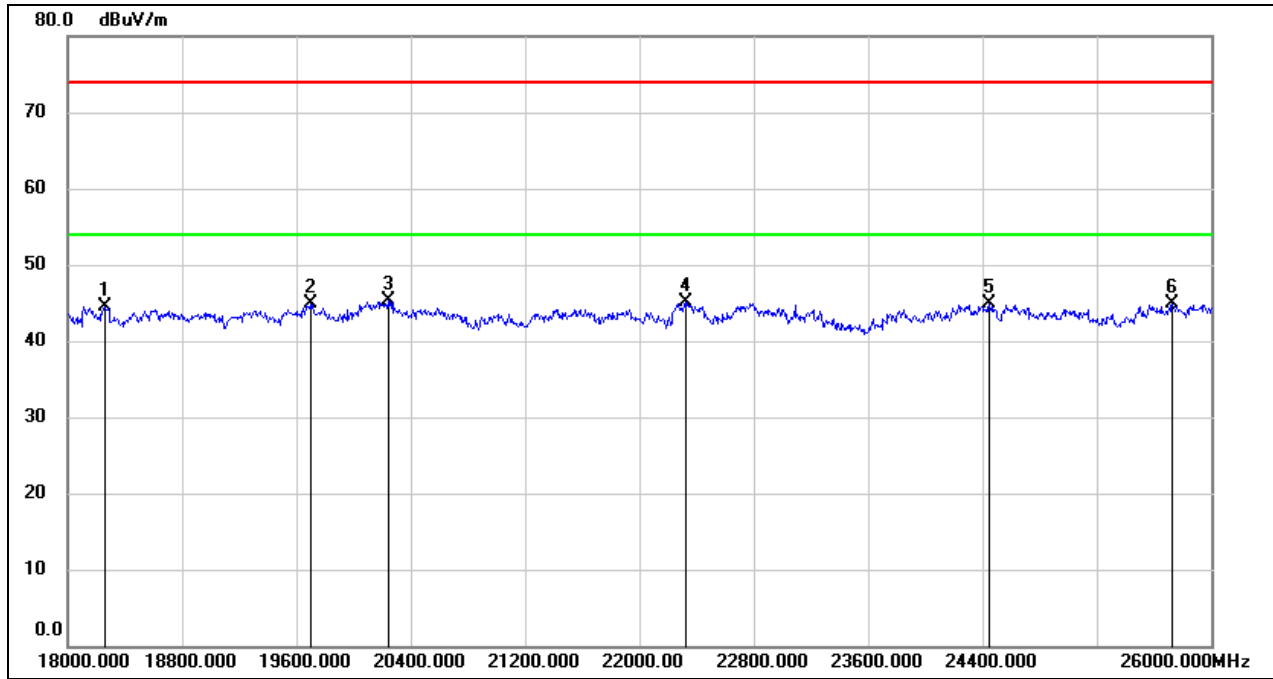

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18256.000	50.09	-5.55	44.54	74.00	-29.46	peak
2	19696.000	50.15	-5.32	44.83	74.00	-29.17	peak
3	20240.000	50.82	-5.61	45.21	74.00	-28.79	peak
4	22328.000	49.20	-4.11	45.09	74.00	-28.91	peak
5	24448.000	47.42	-2.42	45.00	74.00	-29.00	peak
6	25728.000	45.61	-0.72	44.89	74.00	-29.11	peak

**8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)**


Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

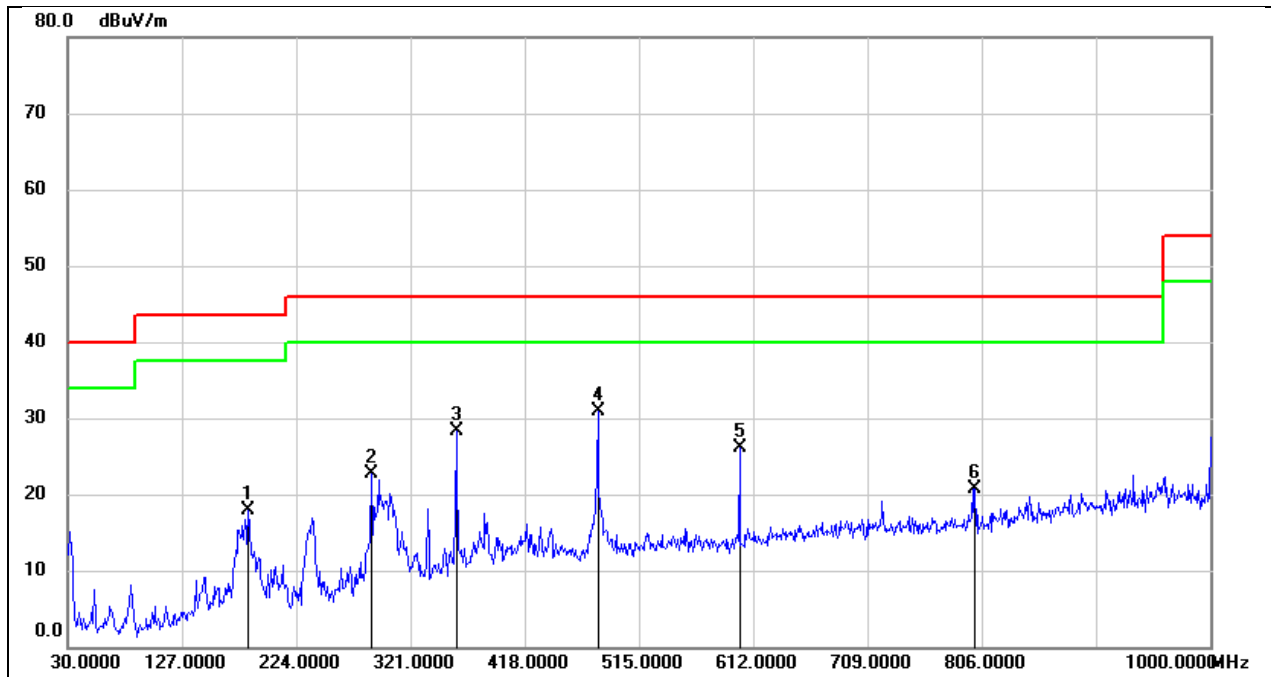

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	183.2600	34.70	-16.77	17.93	43.50	-25.57	QP
2	288.0200	38.68	-16.06	22.62	46.00	-23.38	QP
3	359.8000	42.38	-14.10	28.28	46.00	-17.72	QP
4	480.0800	42.63	-11.79	30.84	46.00	-15.16	QP
5	600.3600	35.68	-9.54	26.14	46.00	-19.86	QP
6	800.1800	28.12	-7.33	20.79	46.00	-25.21	QP



Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical	Test Voltage:	DC 3.3 V

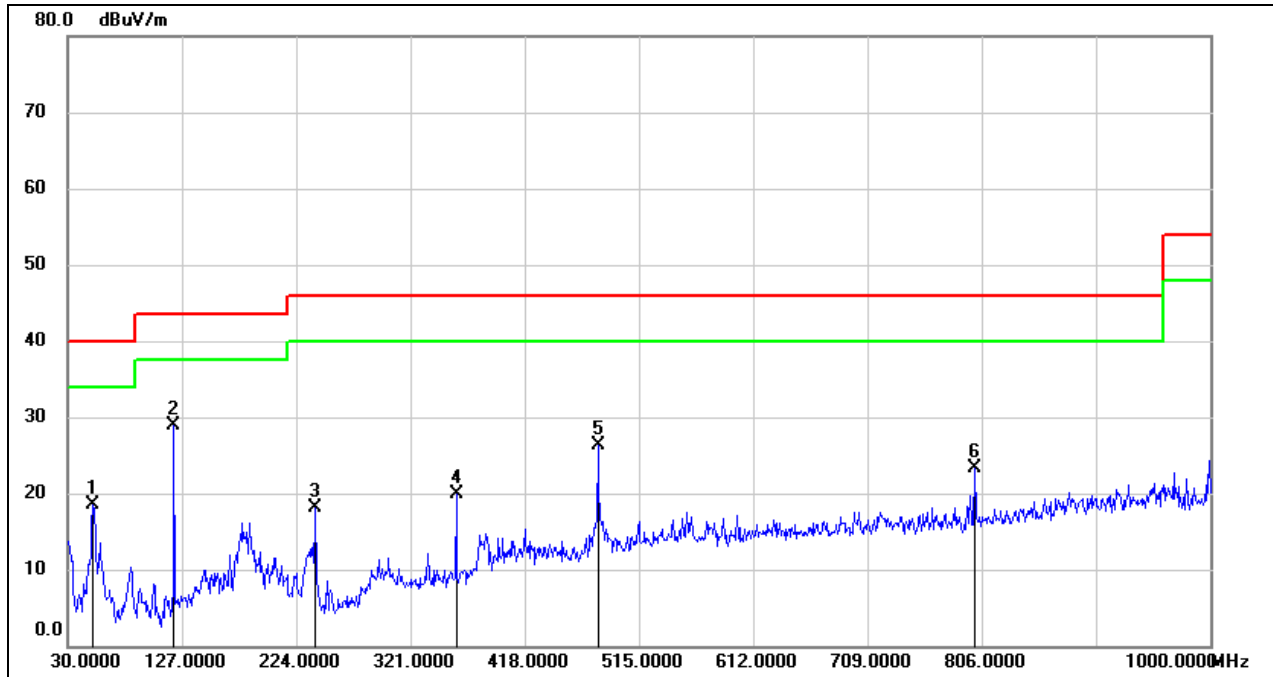

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	39.14	-20.73	18.41	40.00	-21.59	QP
2	120.2100	48.71	-19.85	28.86	43.50	-14.64	QP
3	240.4900	37.19	-19.17	18.02	46.00	-27.98	QP
4	359.8000	34.00	-14.10	19.90	46.00	-26.10	QP
5	480.0800	38.06	-11.79	26.27	46.00	-19.73	QP
6	800.1800	30.54	-7.33	23.21	46.00	-22.79	QP



## 9. ANTENNA REQUIREMENT

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

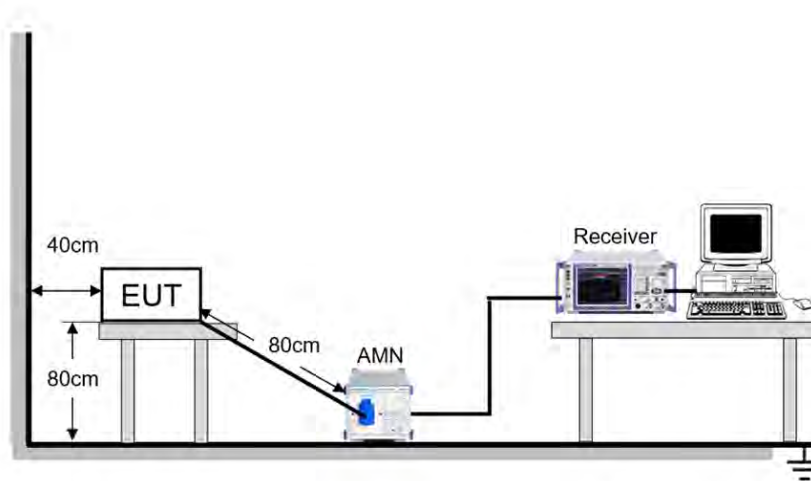


### TEST ENVIRONMENT

Temperature	24.9°C	Relative Humidity	60.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60Hz



**TEST RESULTS**

Test Mode:	802.11n HT20	Channel:	2412
Line:	Line		

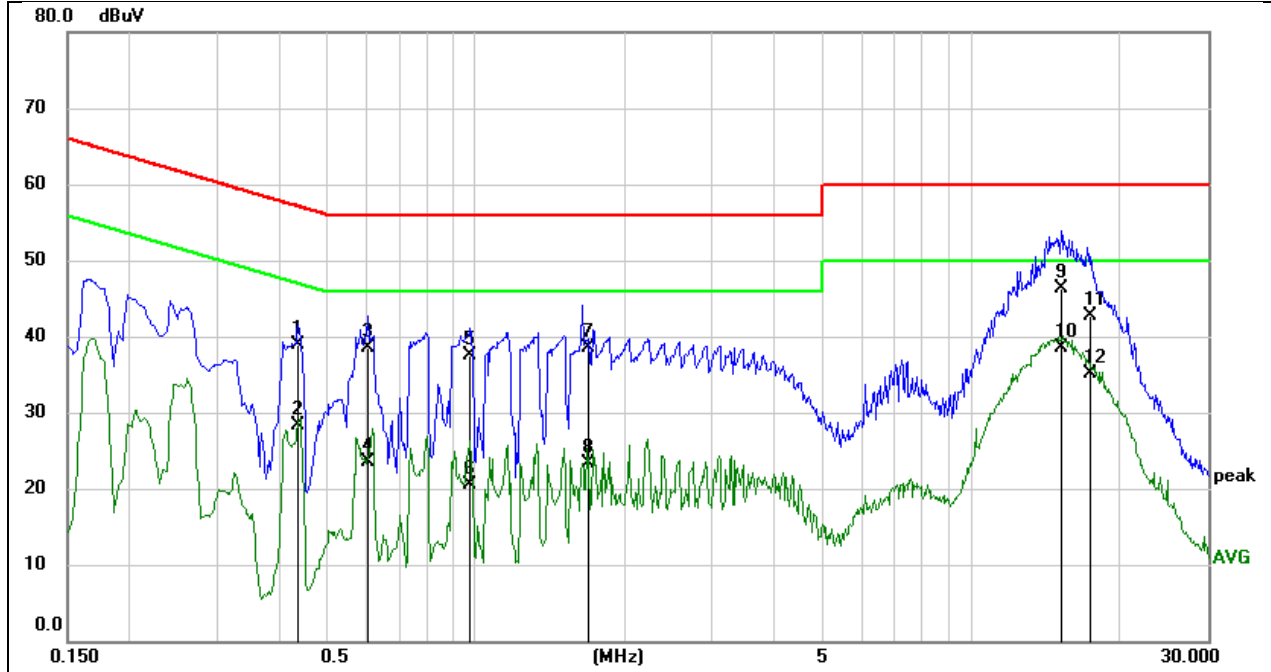

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4386	29.51	9.36	38.87	57.09	-18.22	QP
2	0.4386	19.00	9.36	28.36	47.09	-18.73	AVG
3	0.6026	29.14	9.45	38.59	56.00	-17.41	QP
4	0.6026	14.13	9.45	23.58	46.00	-22.42	AVG
5	0.9816	27.95	9.61	37.56	56.00	-18.44	QP
6	0.9816	10.82	9.61	20.43	46.00	-25.57	AVG
7	1.6855	28.98	9.62	38.60	56.00	-17.40	QP
8	1.6855	13.69	9.62	23.31	46.00	-22.69	AVG
9	15.2502	36.66	9.74	46.40	60.00	-13.60	QP
10	15.2502	28.74	9.74	38.48	50.00	-11.52	AVG
11	17.4200	32.97	9.74	42.71	60.00	-17.29	QP
12	17.4200	25.32	9.74	35.06	50.00	-14.94	AVG


**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



Test Mode:	802.11n HT20	Channel:	2412
Line:	Neutral		

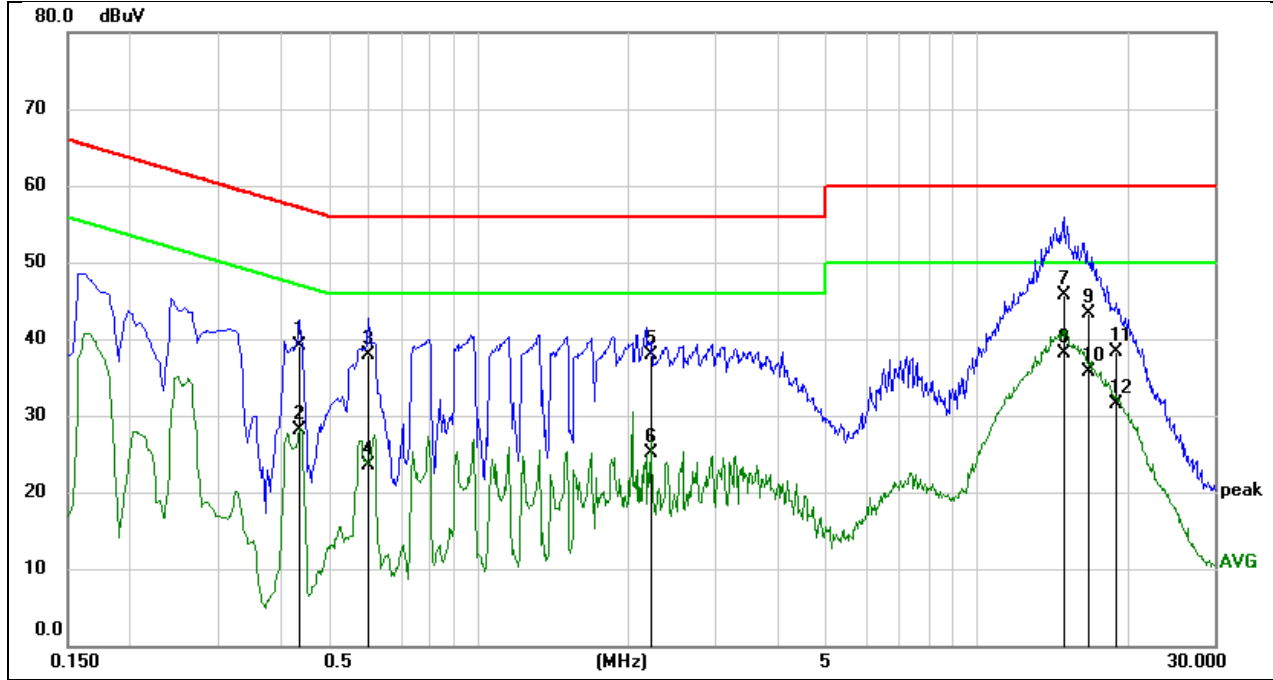

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4395	29.82	9.36	39.18	57.07	-17.89	QP
2	0.4395	18.69	9.36	28.05	47.07	-19.02	AVG
3	0.5995	28.40	9.45	37.85	56.00	-18.15	QP
4	0.5995	13.97	9.45	23.42	46.00	-22.58	AVG
5	2.2153	28.20	9.63	37.83	56.00	-18.17	QP
6	2.2153	15.51	9.63	25.14	46.00	-20.86	AVG
7	14.9264	35.85	9.76	45.61	60.00	-14.39	QP
8	14.9264	28.29	9.76	38.05	50.00	-11.95	AVG
9	16.8840	33.60	9.73	43.33	60.00	-16.67	QP
10	16.8840	25.88	9.73	35.61	50.00	-14.39	AVG
11	19.0482	28.47	9.74	38.21	60.00	-21.79	QP
12	19.0482	21.67	9.74	31.41	50.00	-18.59	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.





## 11. TEST DATA

### 11.1. APPENDIX A: DTS BANDWIDTH


#### 11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.04	2406.96	2417.00	0.5	PASS
	Ant2	2412	9.56	2406.96	2416.52	0.5	PASS
	Ant1	2437	10.04	2431.96	2442.00	0.5	PASS
	Ant2	2437	9.60	2431.96	2441.56	0.5	PASS
	Ant1	2462	10.04	2456.96	2467.00	0.5	PASS
	Ant2	2462	10.08	2456.96	2467.04	0.5	PASS
11G	Ant1	2412	13.44	2404.44	2417.88	0.5	PASS
	Ant2	2412	14.64	2404.24	2418.88	0.5	PASS
	Ant1	2437	15.44	2429.08	2444.52	0.5	PASS
	Ant2	2437	15.08	2429.44	2444.52	0.5	PASS
	Ant1	2462	15.68	2453.84	2469.52	0.5	PASS
	Ant2	2462	16.28	2453.84	2470.12	0.5	PASS
11N20MIMO	Ant1	2412	14.72	2404.84	2419.56	0.5	PASS
	Ant2	2412	15.92	2403.60	2419.52	0.5	PASS
	Ant1	2437	11.92	2430.68	2442.60	0.5	PASS
	Ant2	2437	15.04	2429.48	2444.52	0.5	PASS
	Ant1	2462	15.08	2454.44	2469.52	0.5	PASS
	Ant2	2462	16.52	2453.60	2470.12	0.5	PASS
11N40MIMO	Ant1	2422	35.04	2404.48	2439.52	0.5	PASS
	Ant2	2422	32.56	2404.48	2437.04	0.5	PASS
	Ant1	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant2	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant1	2452	35.04	2434.48	2469.52	0.5	PASS
	Ant2	2452	35.04	2434.48	2469.52	0.5	PASS


### 11.1.2. Test Graphs

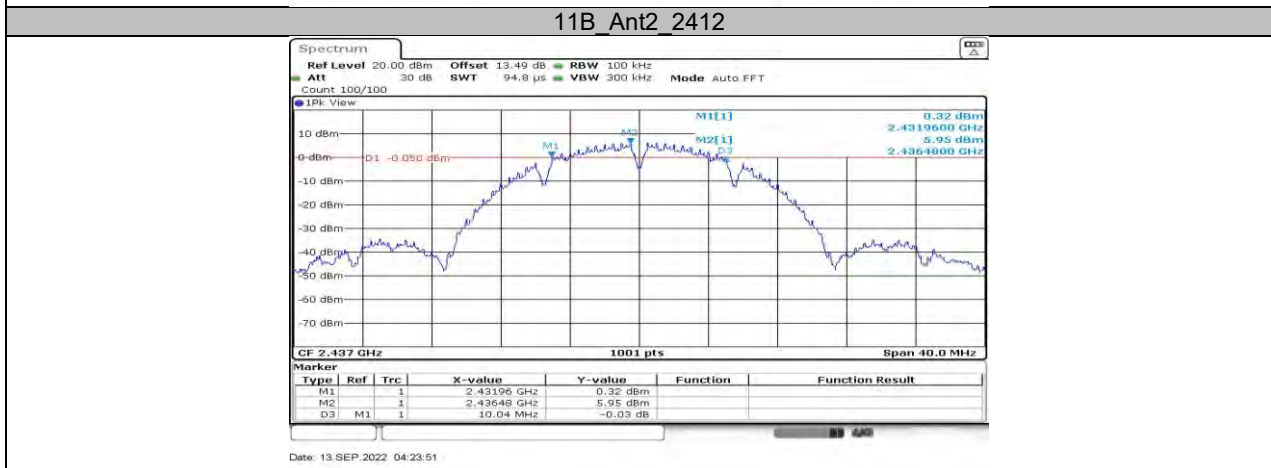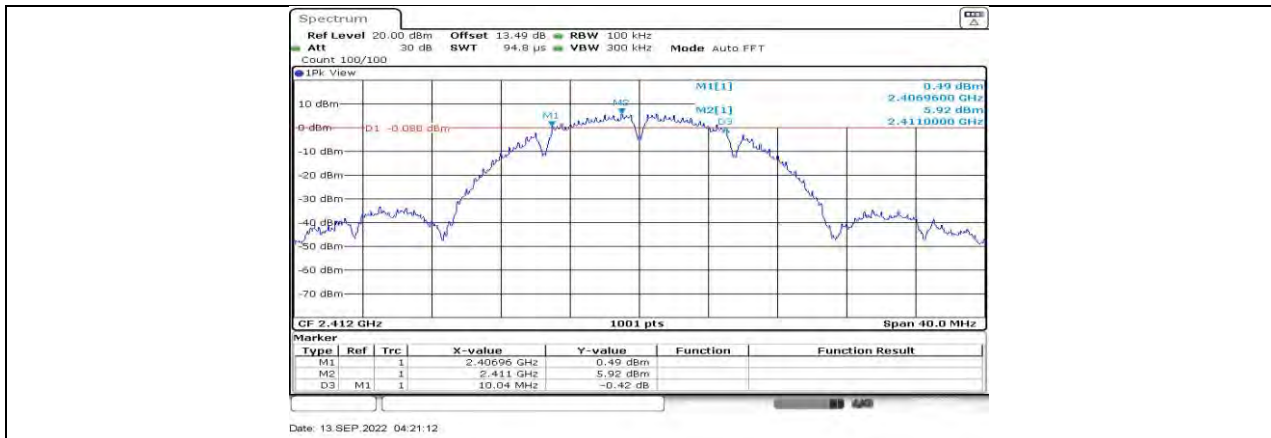

**11B Ant1 2437**

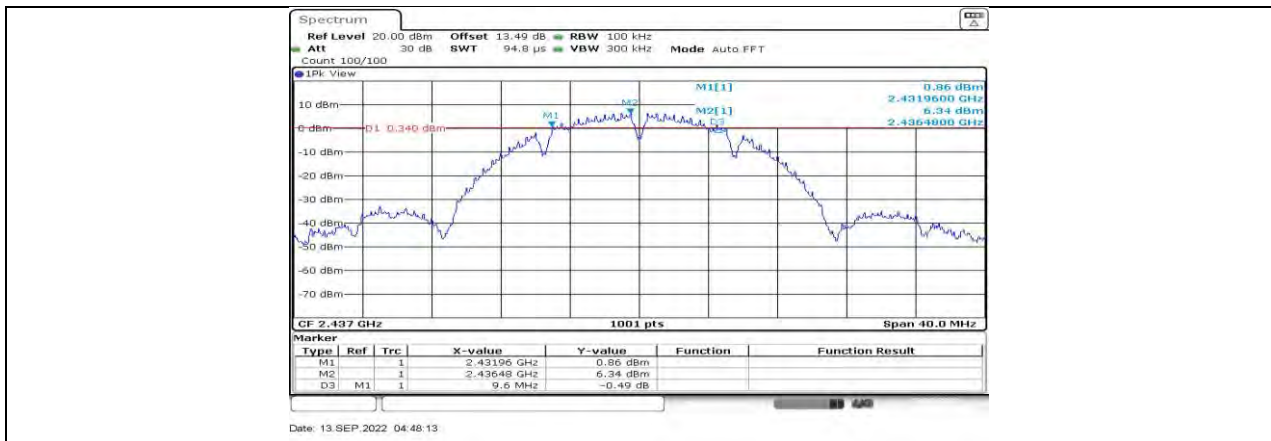


11B Ant2 2437

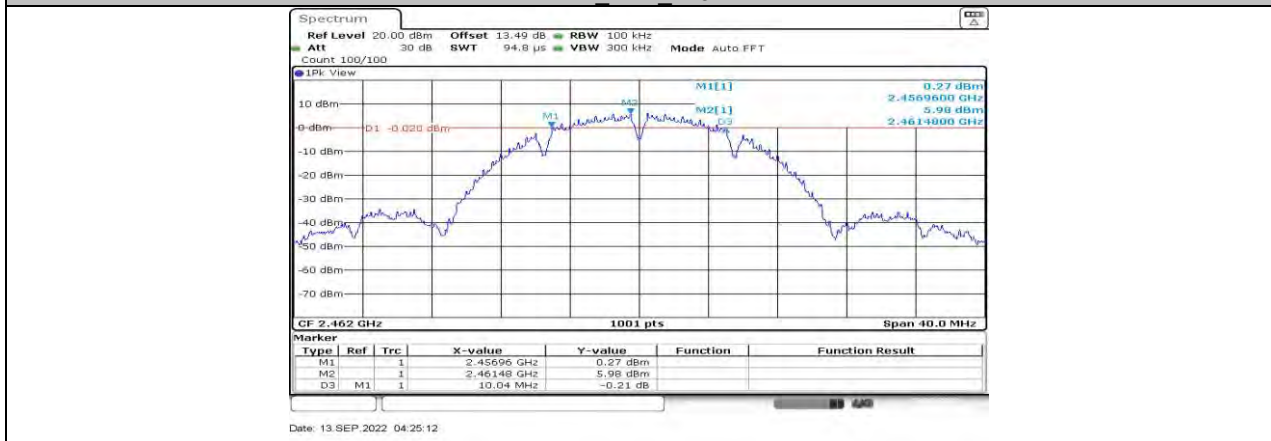

11B Ant1 2462




11B Ant2 2462

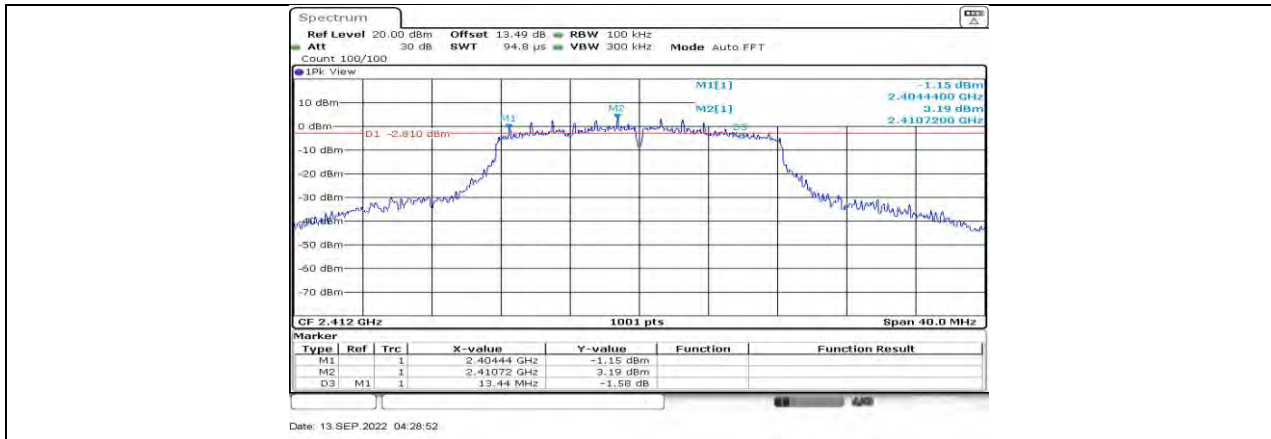


11G Ant1 2412




11G Ant2 2412

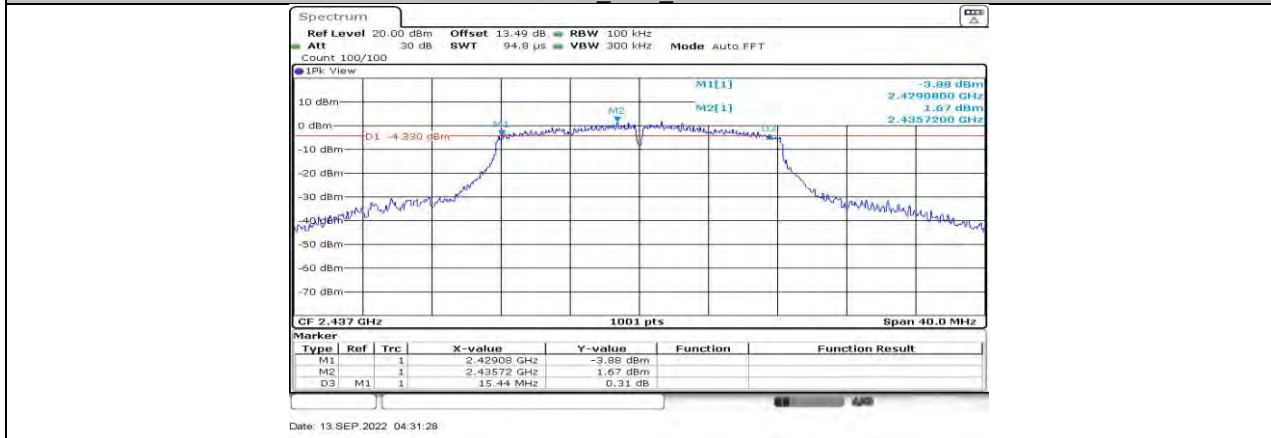


11G Ant1 2437

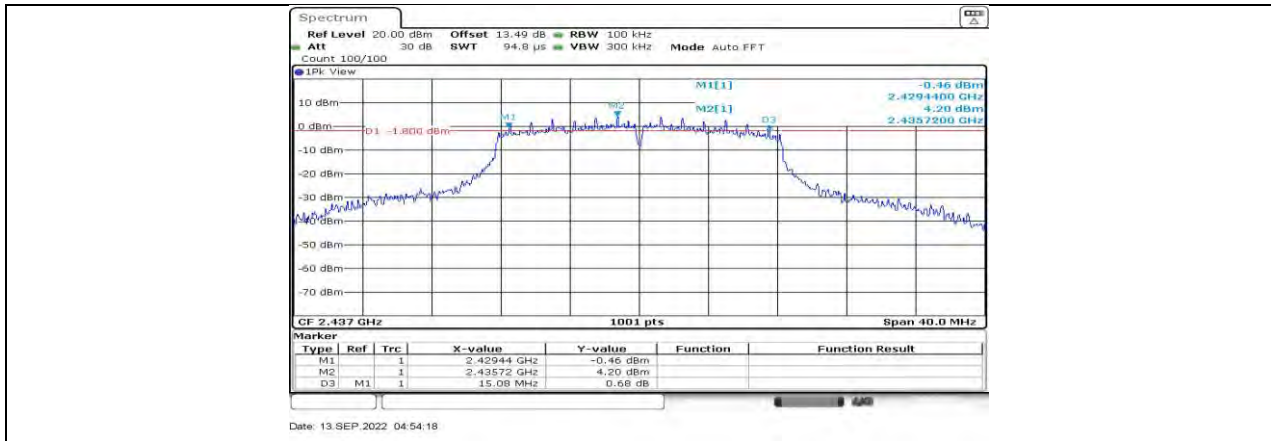


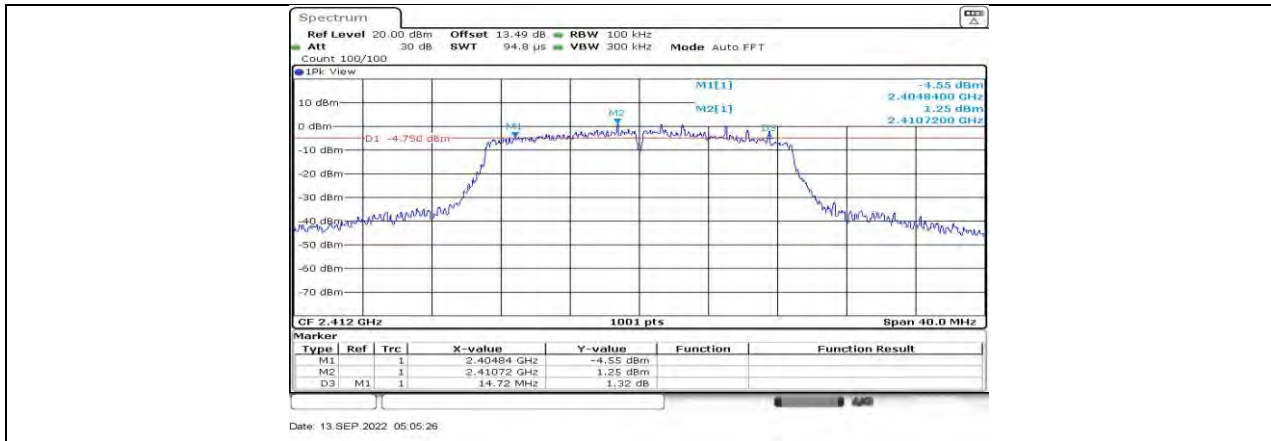

11N20MIMO Ant1 2412

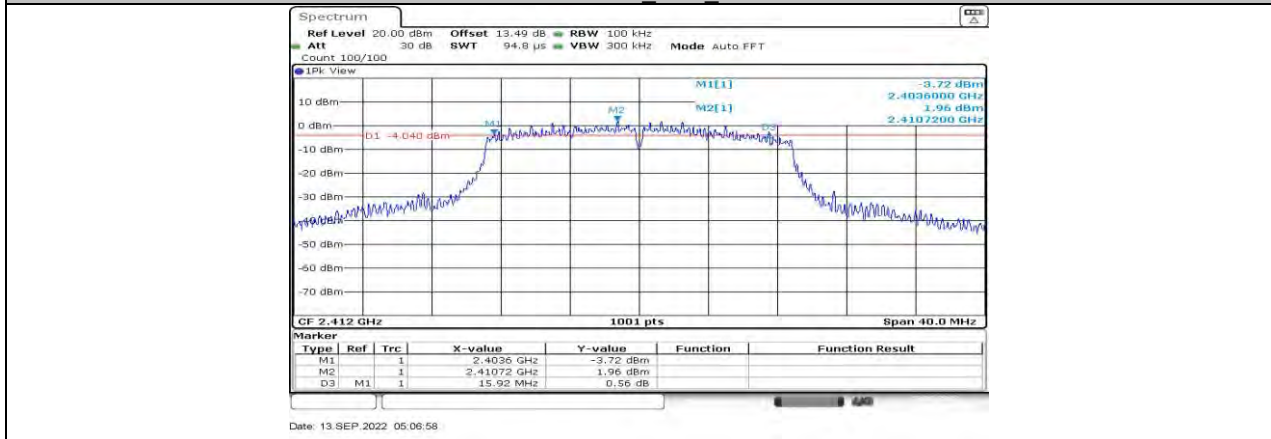


11N20MIMO Ant2 2412

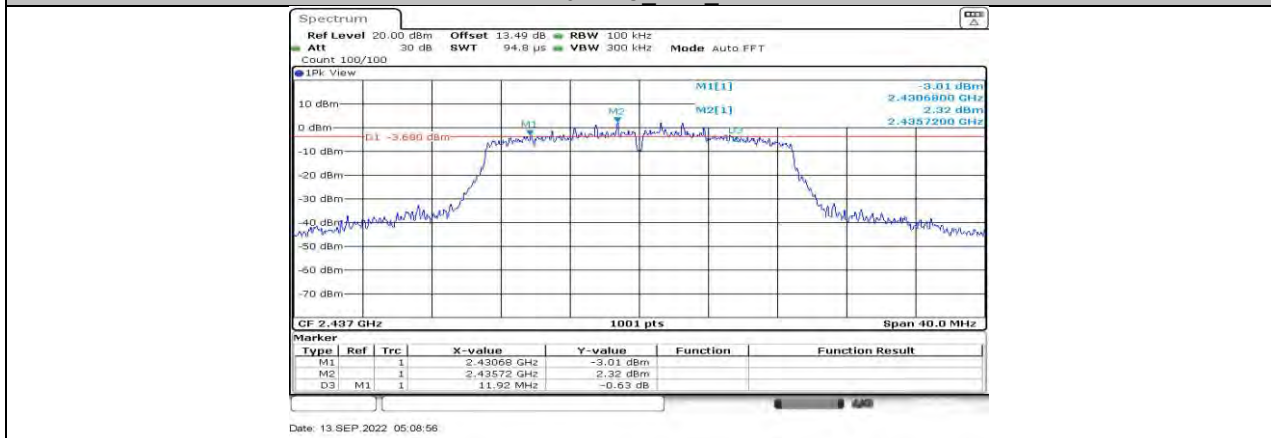


11N20MIMO Ant1 2437




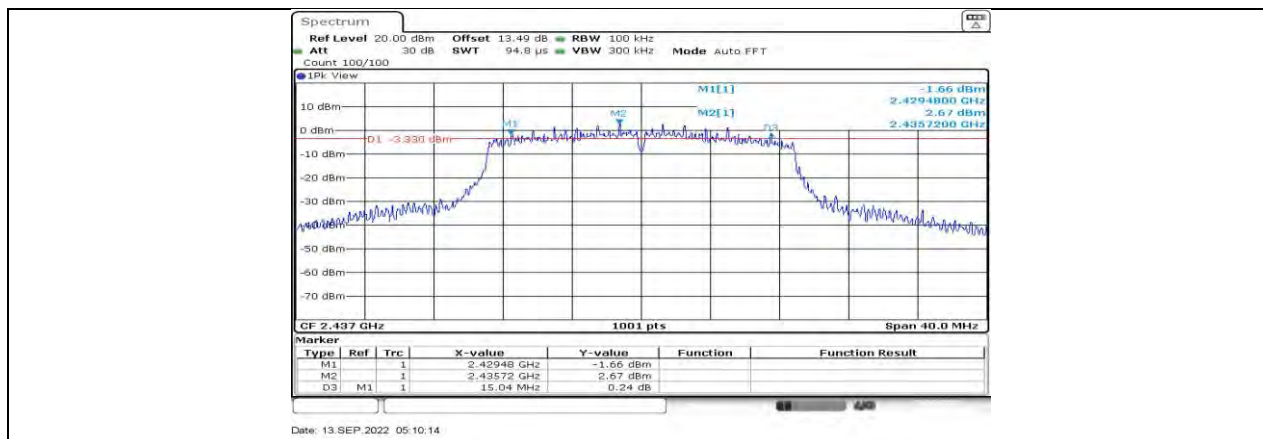


11N20MIMO Ant2 2437

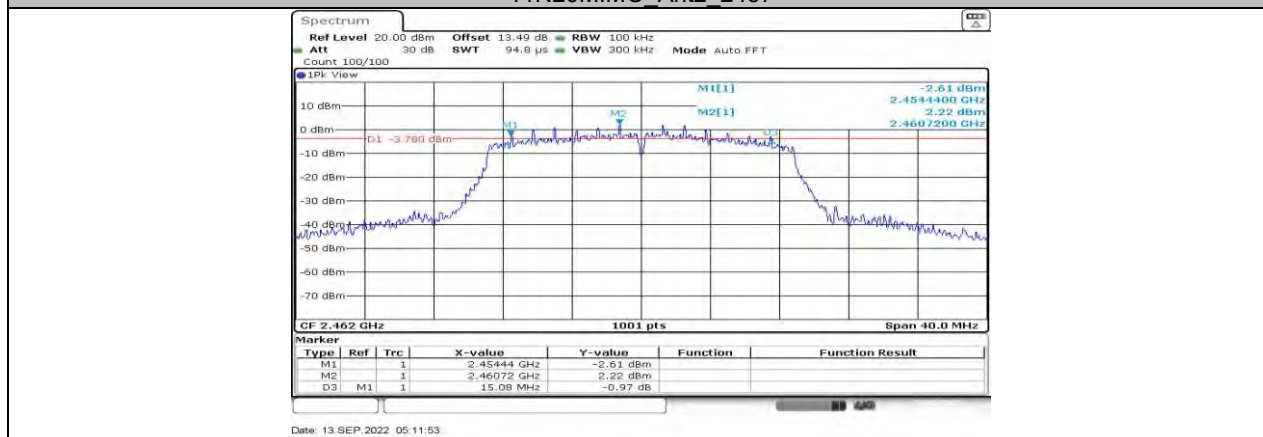


11N20MIMO Ant1 2462

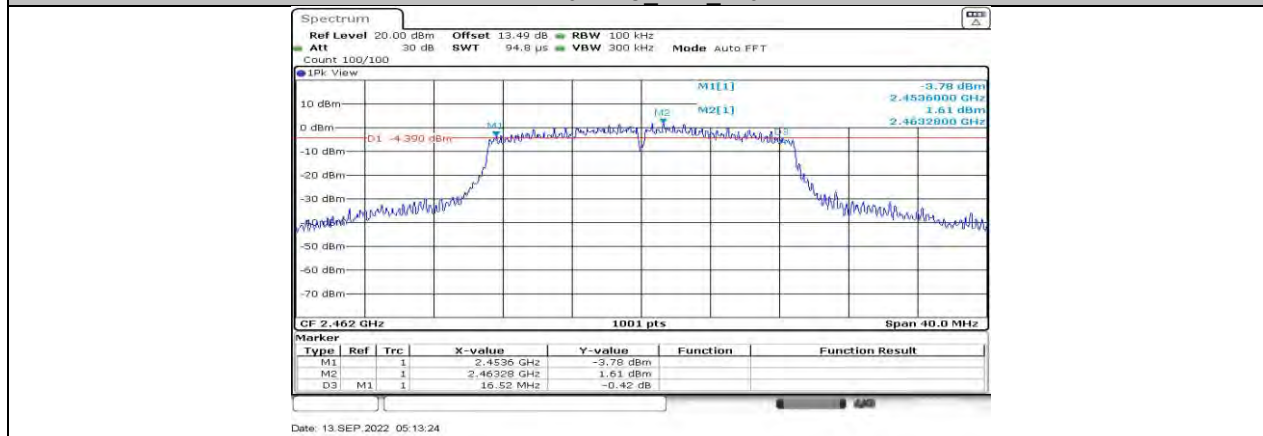


11N20MIMO Ant2 2462

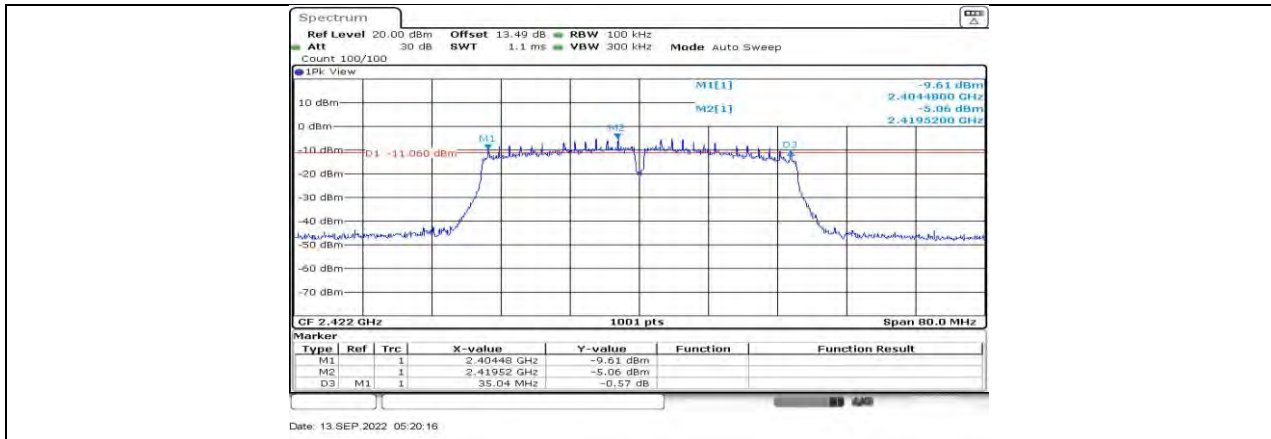




11N40MIMO Ant1 2422

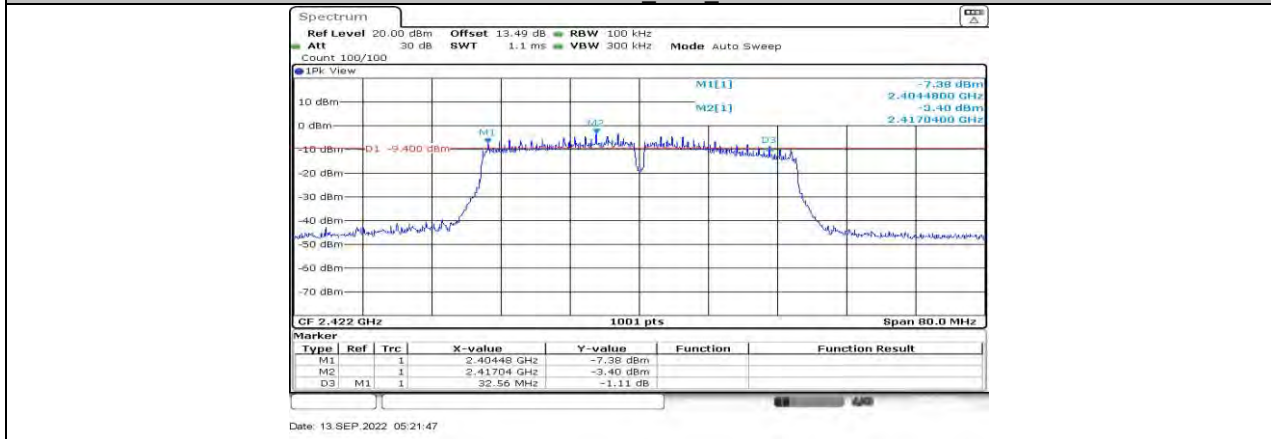

11N40MIMO Ant2 2422

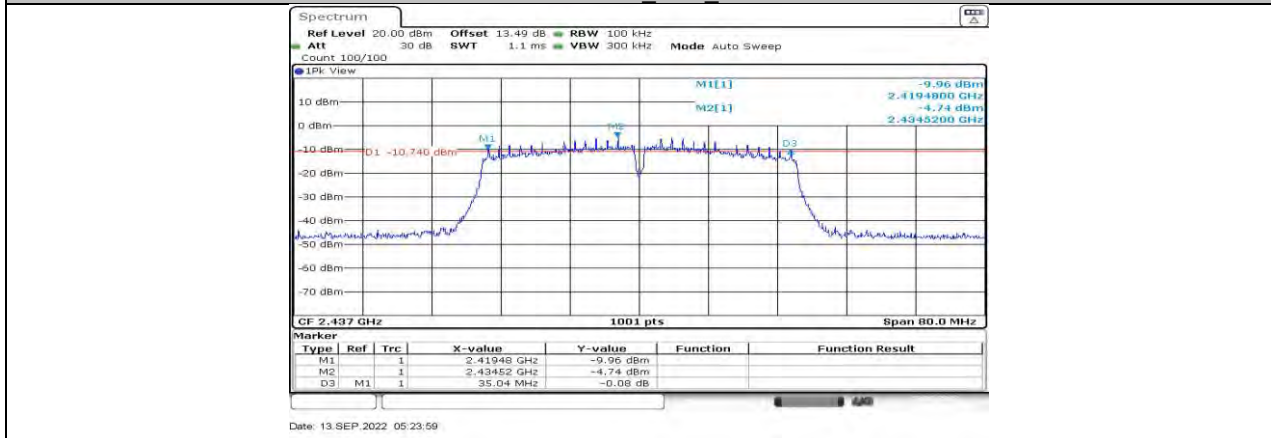




11N40MIMO Ant1 2437

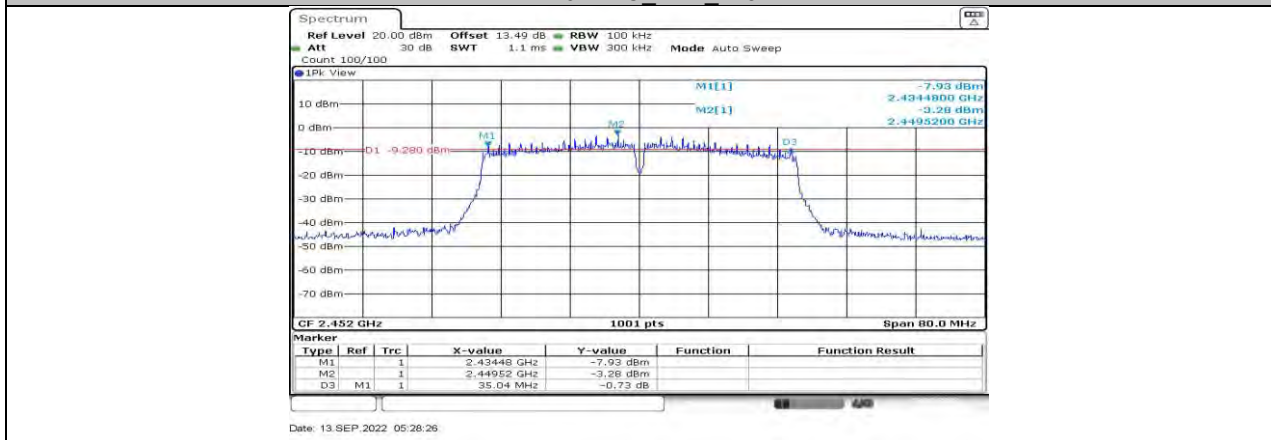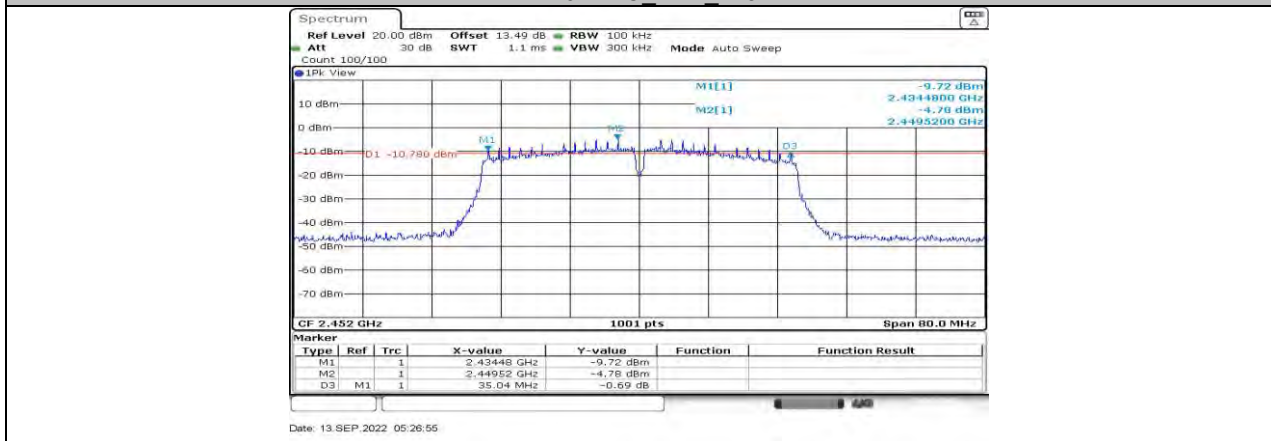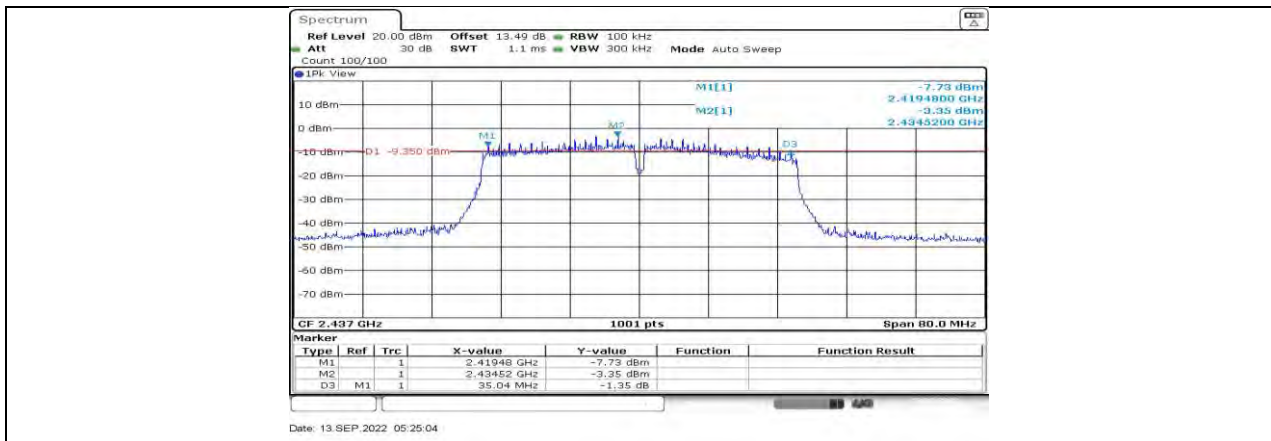


**11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH****11.2.1. Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.466	2404.6873	2419.1528	PASS
	Ant2	2412	14.426	2404.6474	2419.0729	PASS
	Ant1	2437	14.426	2429.7672	2444.1928	PASS
	Ant2	2437	14.466	2429.6474	2444.1129	PASS
	Ant1	2462	14.426	2454.7273	2469.1528	PASS
	Ant2	2462	14.386	2454.7672	2469.1528	PASS
11G	Ant1	2412	17.303	2403.2488	2420.5514	PASS
	Ant2	2412	16.823	2403.4885	2420.3117	PASS
	Ant1	2437	17.223	2428.3287	2445.5514	PASS
	Ant2	2437	16.823	2428.5285	2445.3516	PASS
	Ant1	2462	17.183	2453.3287	2470.5115	PASS
	Ant2	2462	16.783	2453.6084	2470.3916	PASS
11N20MIMO	Ant1	2412	17.942	2402.9690	2420.9111	PASS
	Ant2	2412	17.582	2403.1688	2420.7512	PASS
	Ant1	2437	17.942	2428.0090	2445.9510	PASS
	Ant2	2437	17.622	2428.1688	2445.7912	PASS
	Ant1	2462	17.902	2453.0090	2470.9111	PASS
	Ant2	2462	17.582	2453.2088	2470.7912	PASS
11N40MIMO	Ant1	2422	36.044	2403.9381	2439.9820	PASS
	Ant2	2422	36.204	2403.6983	2439.9021	PASS
	Ant1	2437	36.044	2418.9381	2454.9820	PASS
	Ant2	2437	36.284	2418.6983	2454.9820	PASS
	Ant1	2452	35.964	2433.9381	2469.9021	PASS
	Ant2	2452	36.284	2433.7782	2470.0619	PASS

### 11.2.2. Test Graphs

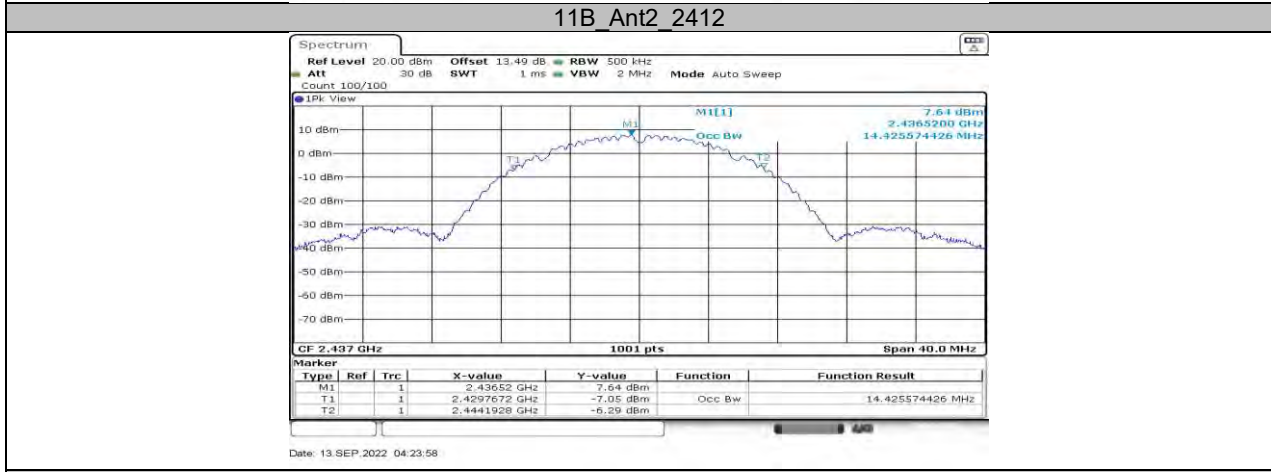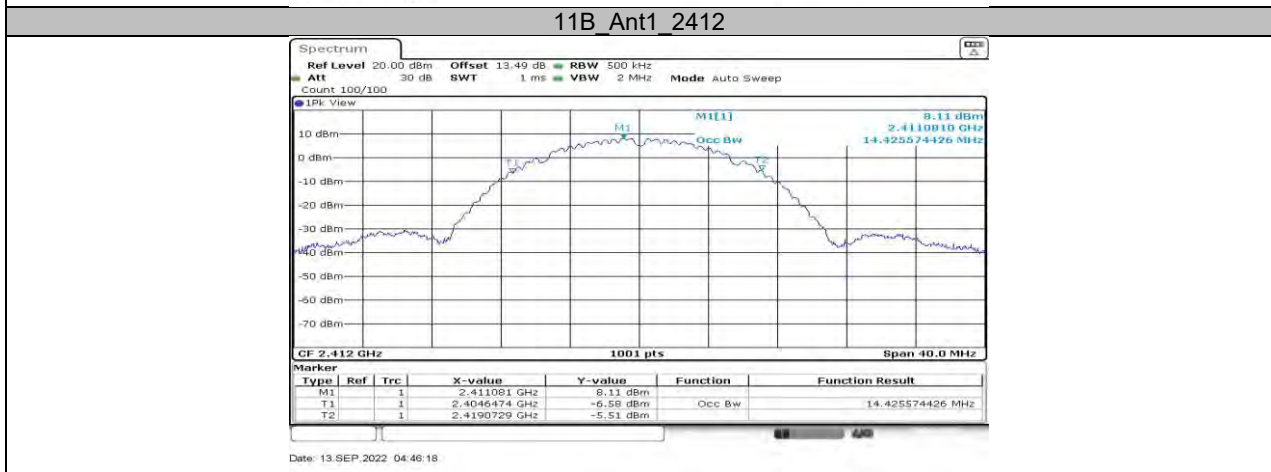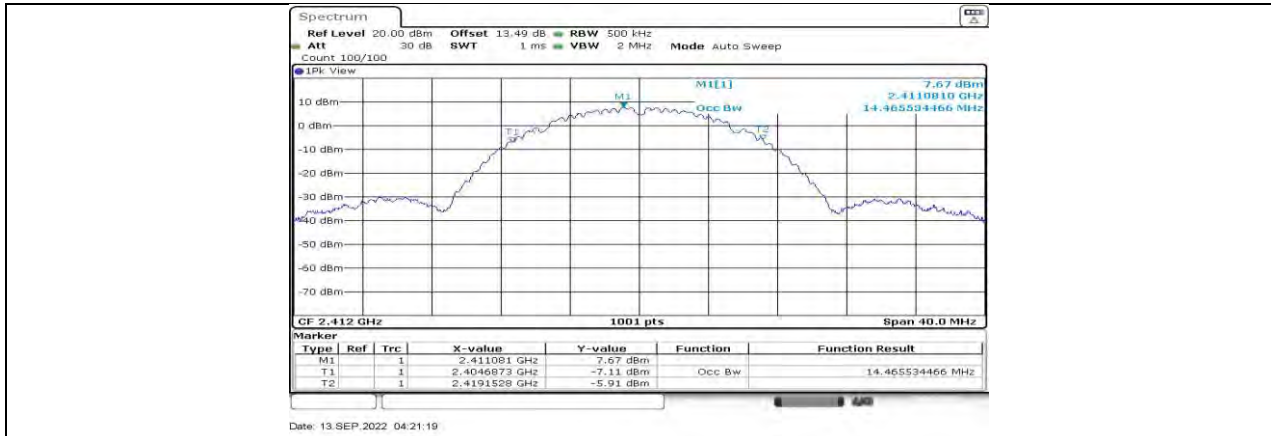


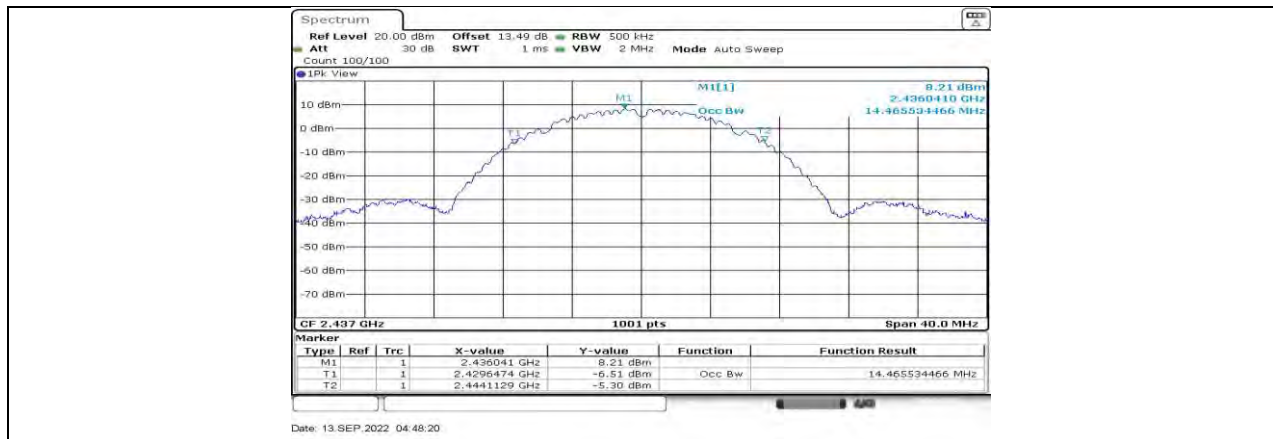


11B Ant2 2437

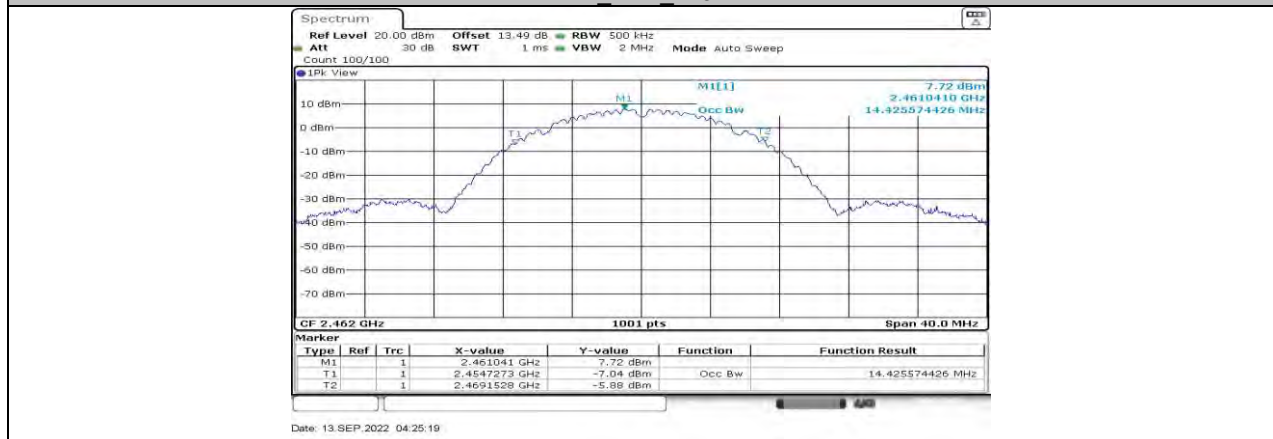


11B Ant1 2462

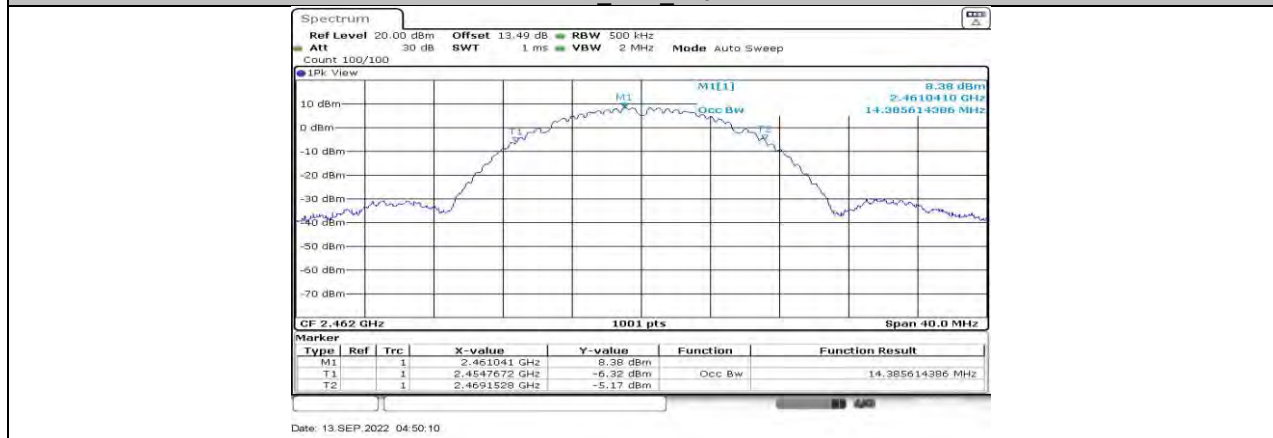


11B Ant2 2462

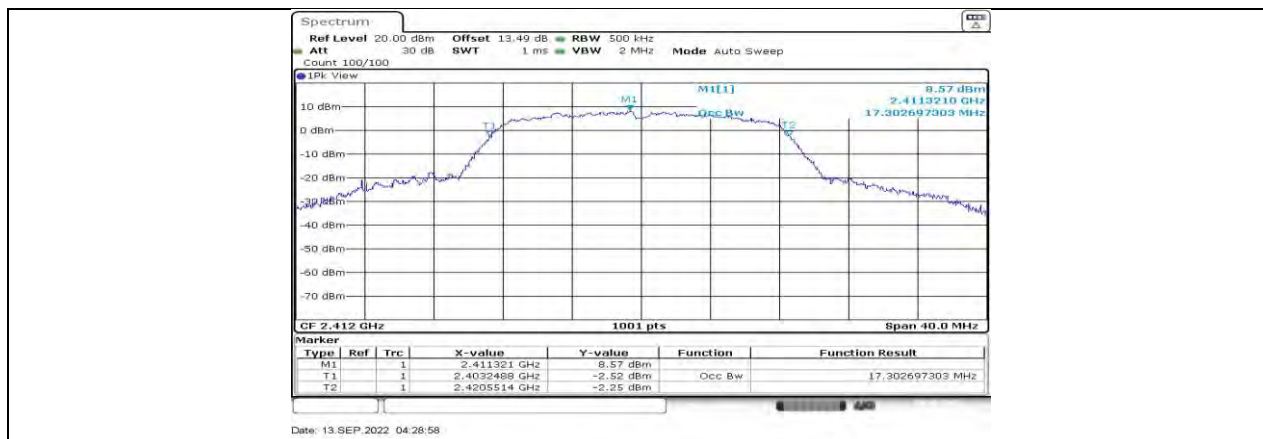


11G Ant1 2412

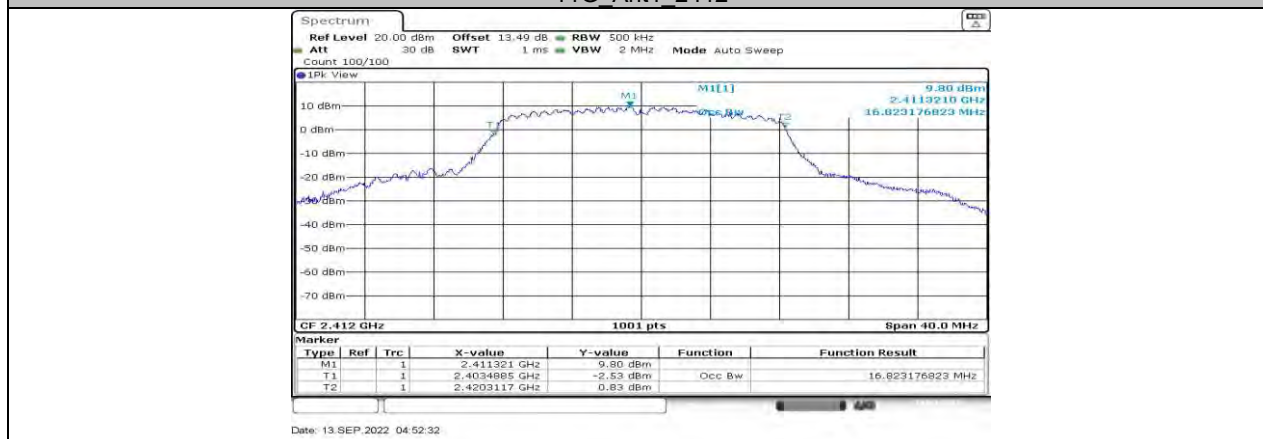


11G Ant2 2412

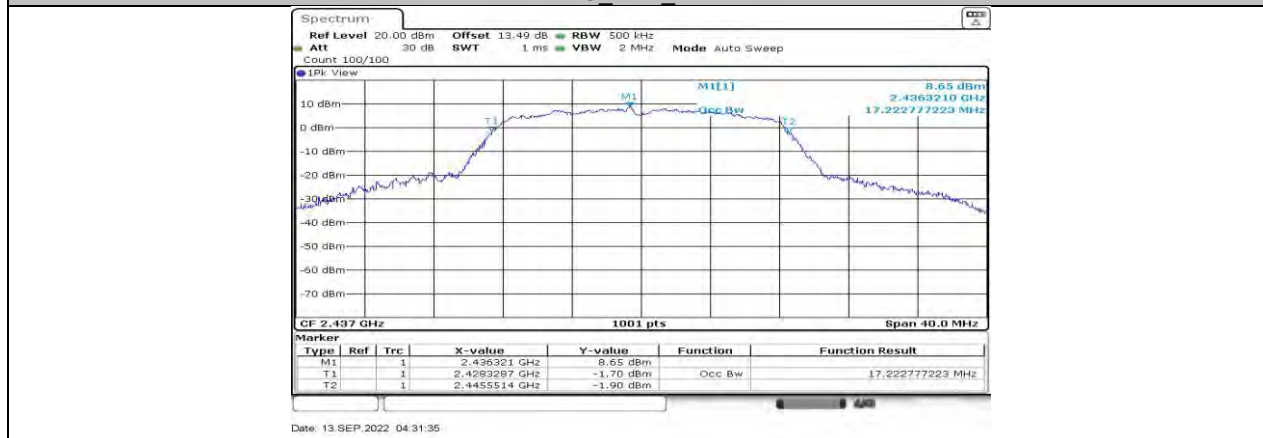


11G Ant1 2437

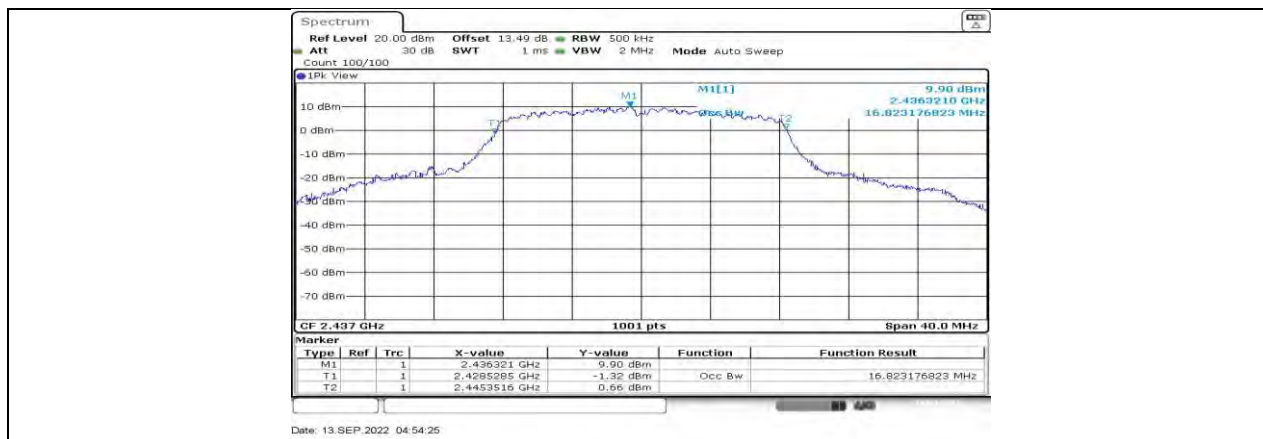

11G Ant2\_2437

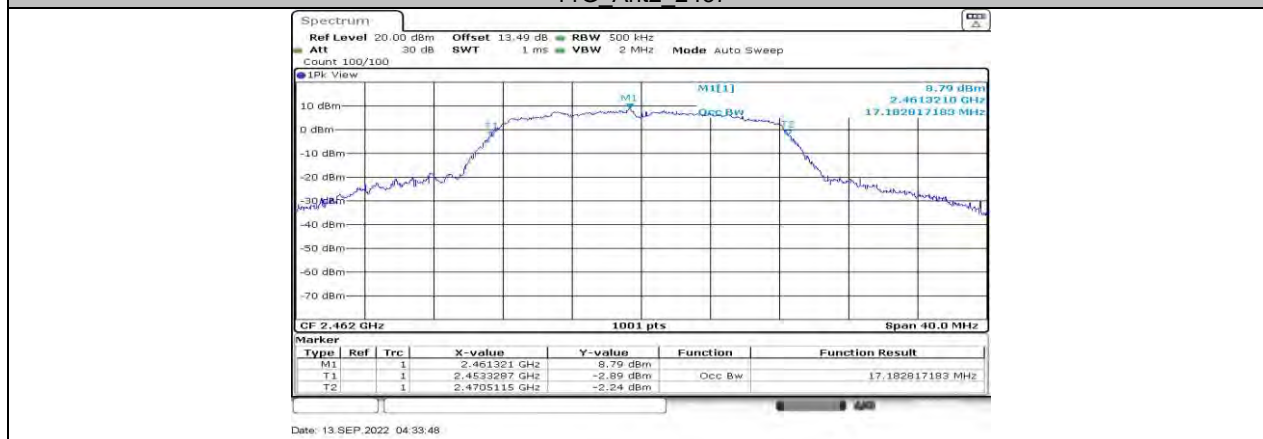


11G Ant1\_2462

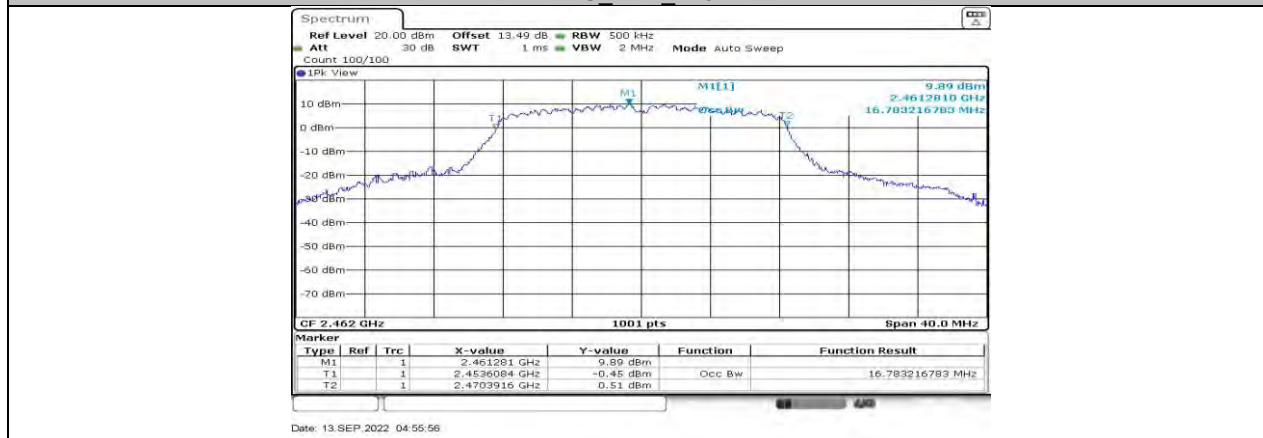


11G Ant2\_2462




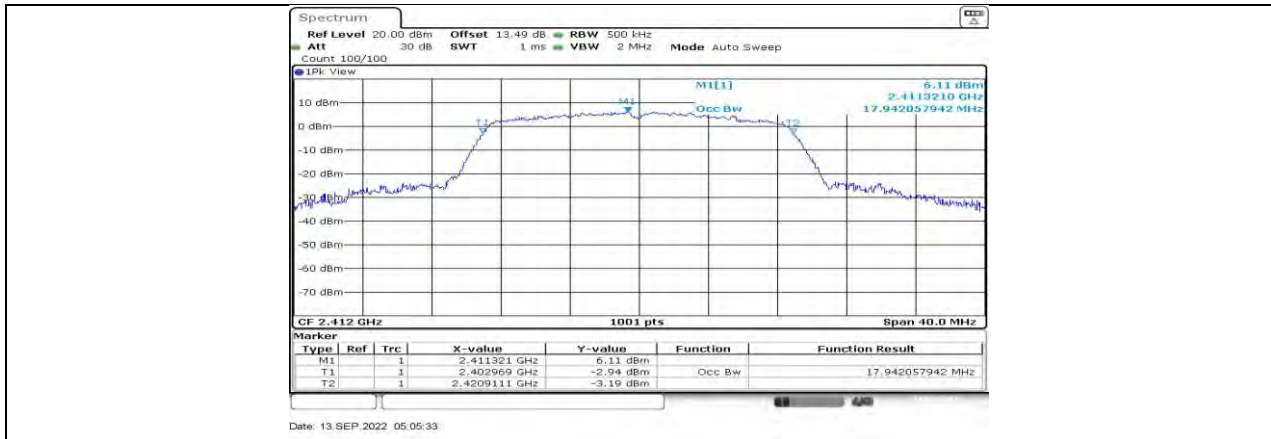


11N20MIMO Ant1 2412

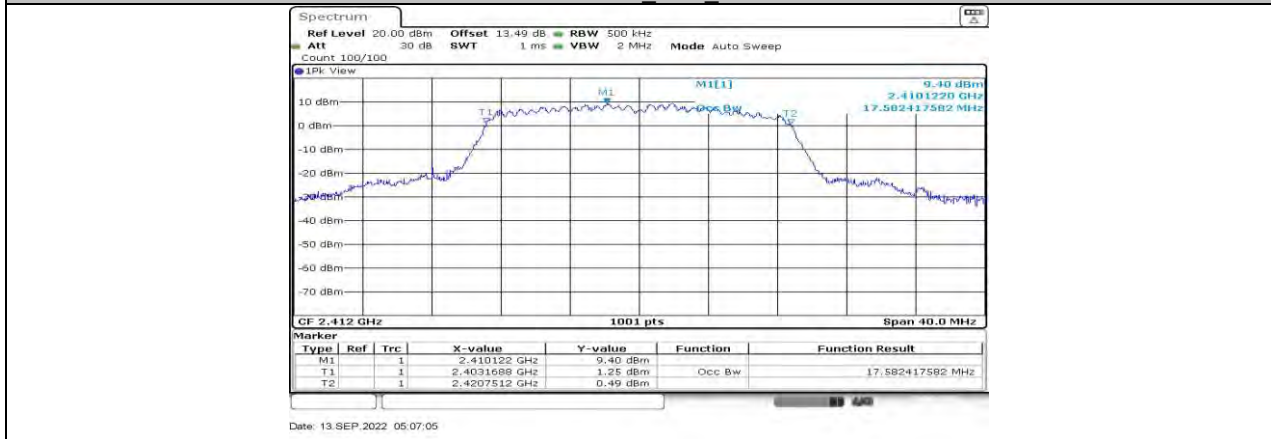


11N20MIMO Ant2 2412

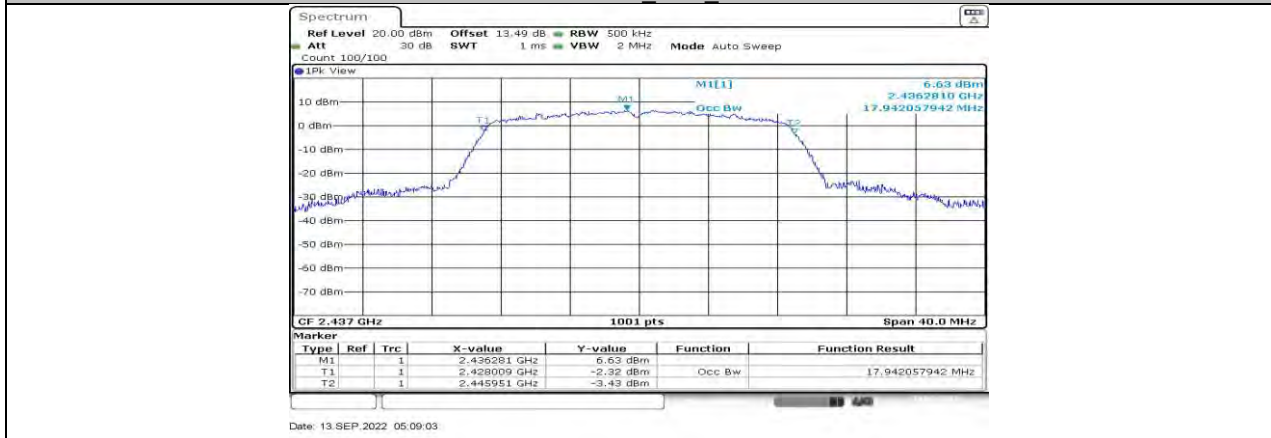


11N20MIMO Ant1 2437

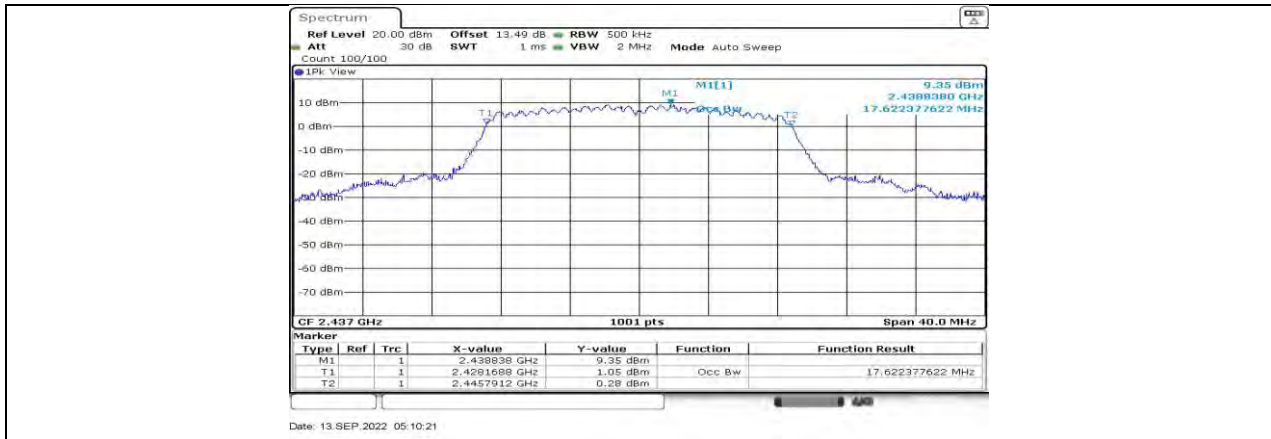


11N20MIMO Ant2 2437

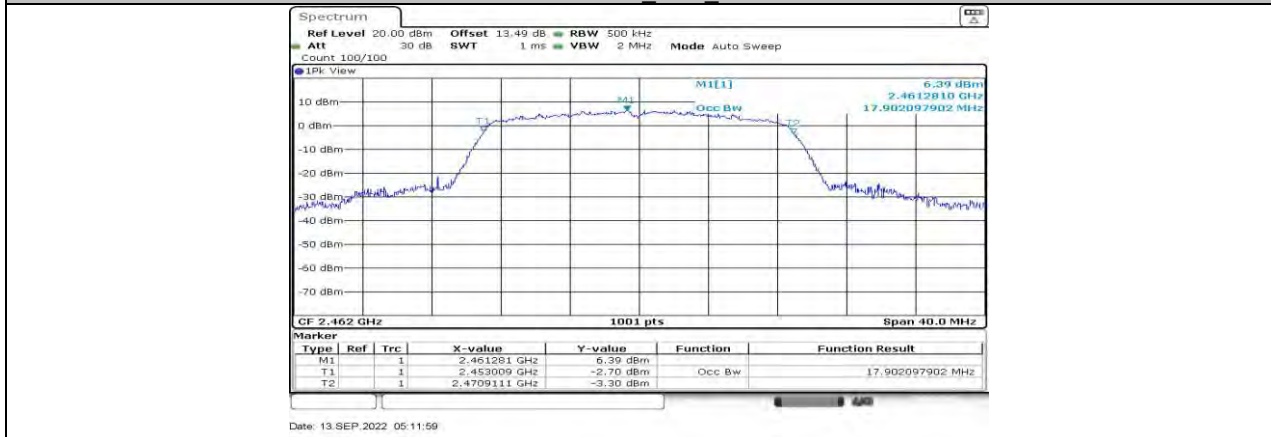

11N20MIMO Ant1 2462

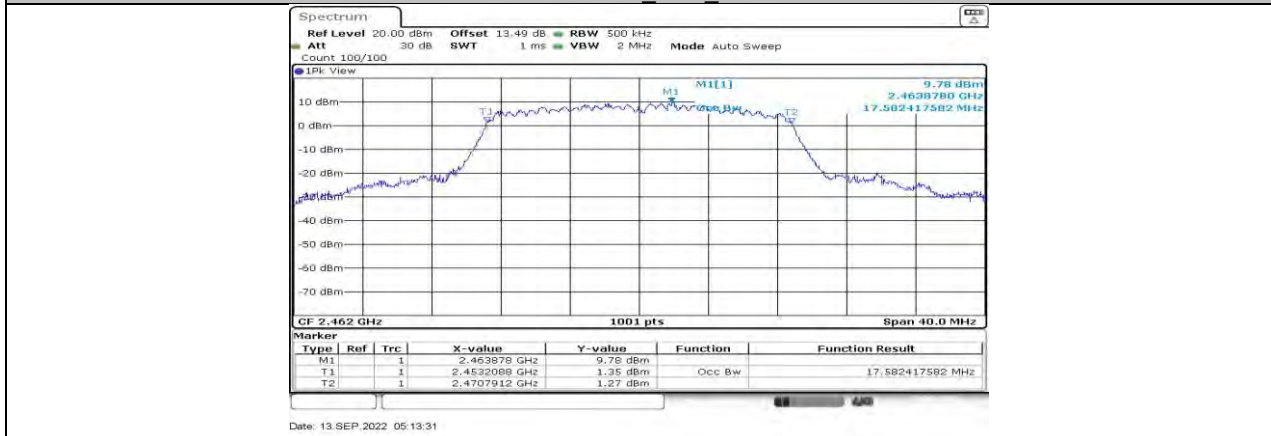


11N20MIMO Ant2 2462

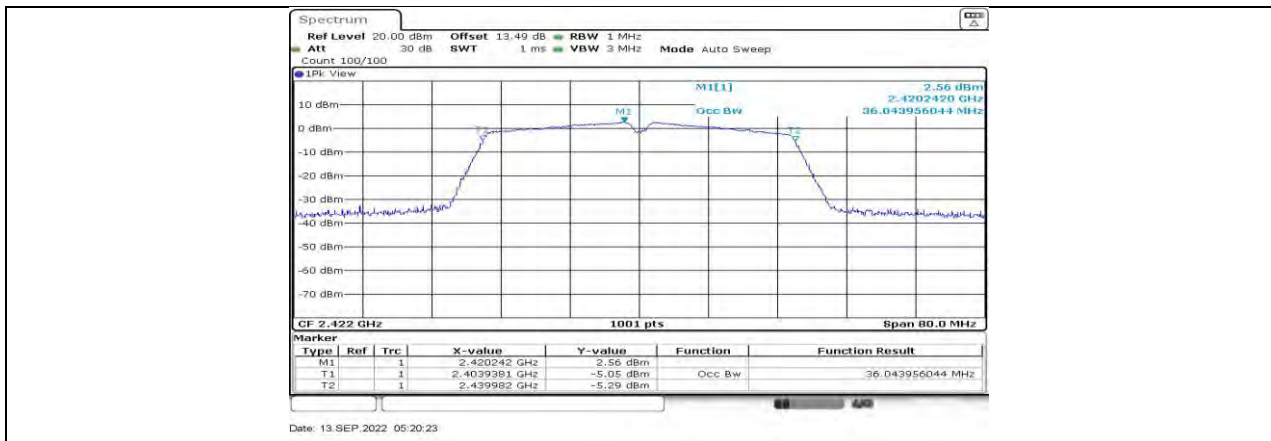


11N40MIMO Ant1 2422




11N40MIMO Ant2 2422

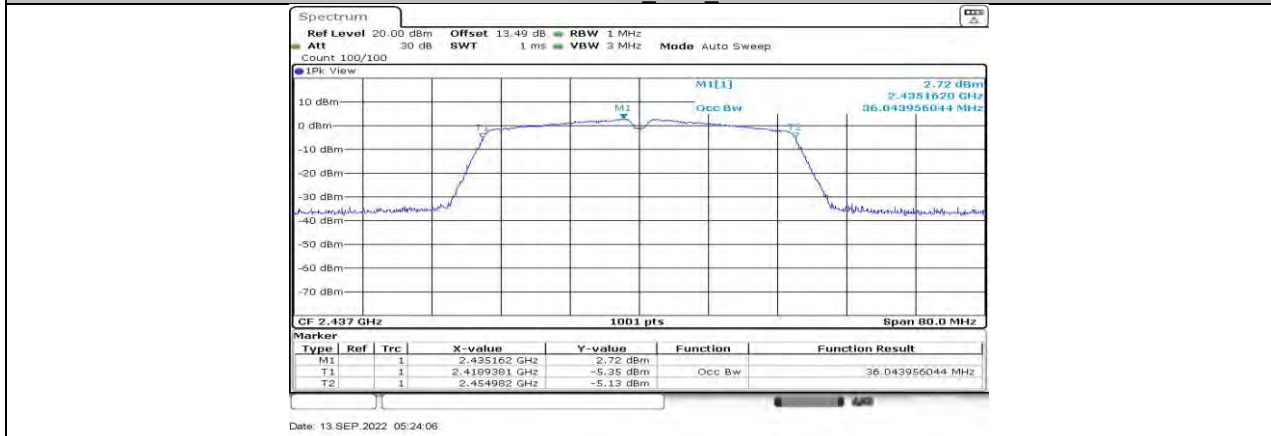

11N40MIMO Ant1 2437

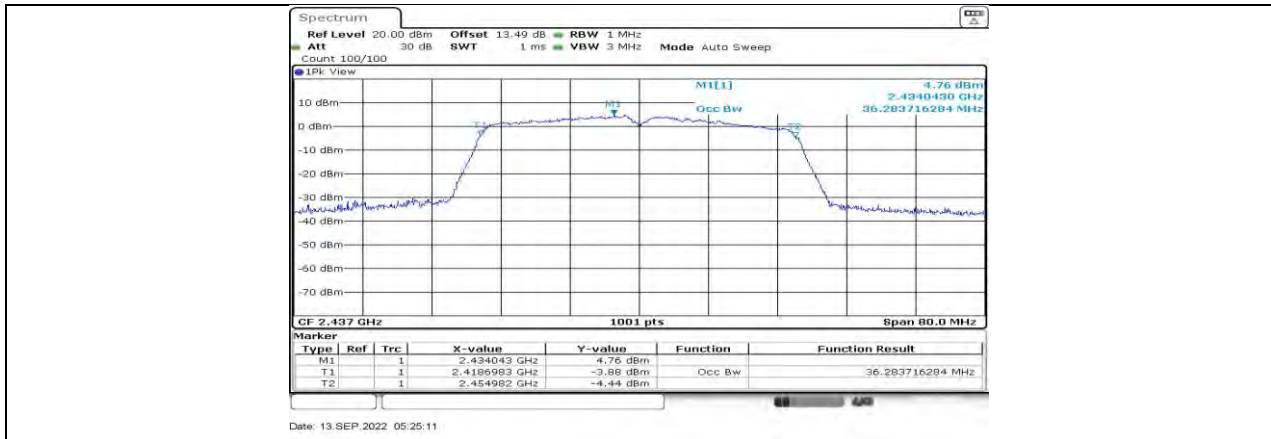

11N40MIMO Ant2 2437

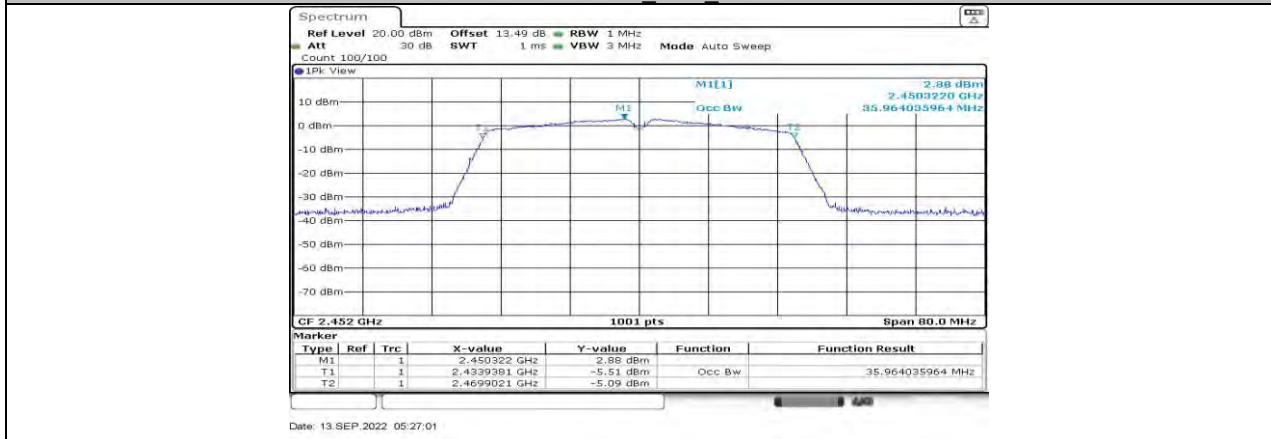

11N40MIMO Ant1 2452



11N40MIMO Ant2 2452

**11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER****11.3.1. Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	15.50	≤30.00	PASS
	Ant2	2412	15.84	≤30.00	PASS
	Ant1	2437	15.51	≤30.00	PASS
	Ant2	2437	16.00	≤30.00	PASS
	Ant1	2462	15.52	≤30.00	PASS
	Ant2	2462	16.19	≤30.00	PASS
11G	Ant1	2412	13.36	≤30.00	PASS
	Ant2	2412	13.90	≤30.00	PASS
	Ant1	2437	13.45	≤30.00	PASS
	Ant2	2437	14.00	≤30.00	PASS
	Ant1	2462	13.44	≤30.00	PASS
	Ant2	2462	14.19	≤30.00	PASS
11N20MIMO	Ant1	2412	11.56	≤30.00	PASS
	Ant2	2412	12.60	≤30.00	PASS
	total	2412	15.12	≤30.00	PASS
	Ant1	2437	11.87	≤30.00	PASS
	Ant2	2437	12.63	≤30.00	PASS
	total	2437	15.28	≤30.00	PASS
	Ant1	2462	11.88	≤30.00	PASS
	Ant2	2462	12.90	≤30.00	PASS
total	2462	15.43	≤30.00	PASS	
11N40MIMO	Ant1	2422	7.17	≤30.00	PASS
	Ant2	2422	8.53	≤30.00	PASS
	total	2422	10.91	≤30.00	PASS
	Ant1	2437	7.26	≤30.00	PASS
	Ant2	2437	8.50	≤30.00	PASS
	total	2437	10.93	≤30.00	PASS
	Ant1	2452	7.34	≤30.00	PASS
	Ant2	2452	8.69	≤30.00	PASS
	total	2452	11.08	≤30.00	PASS


Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.


**11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY****11.4.1. Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.96	≤8.00	PASS
	Ant2	2412	-15.07	≤8.00	PASS
	Ant1	2437	-13.68	≤8.00	PASS
	Ant2	2437	-15.04	≤8.00	PASS
	Ant1	2462	-15.62	≤8.00	PASS
	Ant2	2462	-14.95	≤8.00	PASS
11G	Ant1	2412	-17.56	≤8.00	PASS
	Ant2	2412	-16.6	≤8.00	PASS
	Ant1	2437	-17.03	≤8.00	PASS
	Ant2	2437	-16.73	≤8.00	PASS
	Ant1	2462	-16.9	≤8.00	PASS
	Ant2	2462	-16.42	≤8.00	PASS
11N20MIMO	Ant1	2412	-19.66	≤8.00	PASS
	Ant2	2412	-18.82	≤8.00	PASS
	total	2412	-16.21	≤8.00	PASS
	Ant1	2437	-19.52	≤8.00	PASS
	Ant2	2437	-18.28	≤8.00	PASS
	total	2437	-15.85	≤8.00	PASS
	Ant1	2462	-19.24	≤8.00	PASS
	Ant2	2462	-18.24	≤8.00	PASS
total	2462	-15.70	≤8.00	PASS	
11N40MIMO	Ant1	2422	-26.42	≤8.00	PASS
	Ant2	2422	-24.97	≤8.00	PASS
	total	2422	-22.62	≤8.00	PASS
	Ant1	2437	-25.88	≤8.00	PASS
	Ant2	2437	-25.21	≤8.00	PASS
	total	2437	-22.52	≤8.00	PASS
	Ant1	2452	-26.05	≤8.00	PASS
	Ant2	2452	-25.15	≤8.00	PASS
	total	2452	-22.57	≤8.00	PASS


### 11.4.2. Test Graphs

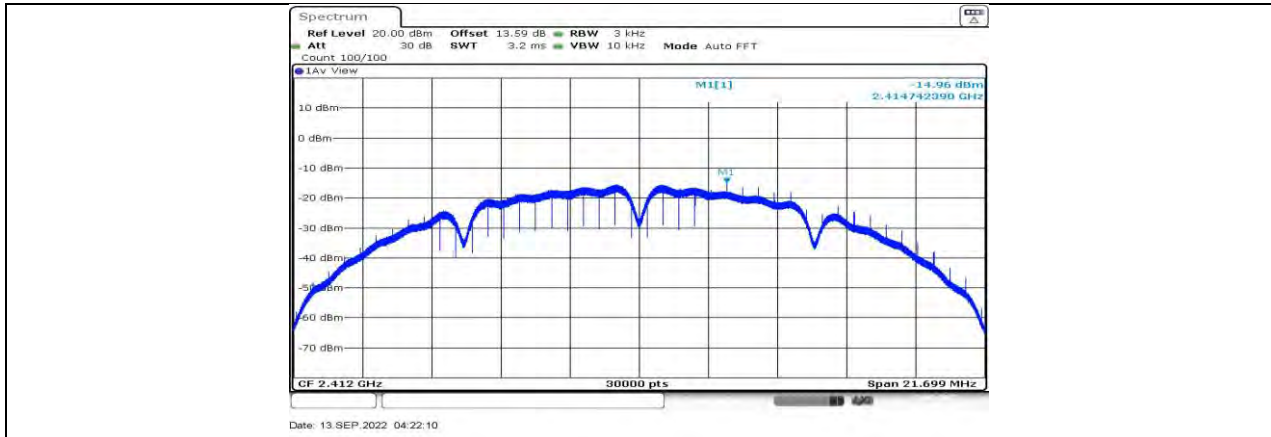

11B Ant1 2412

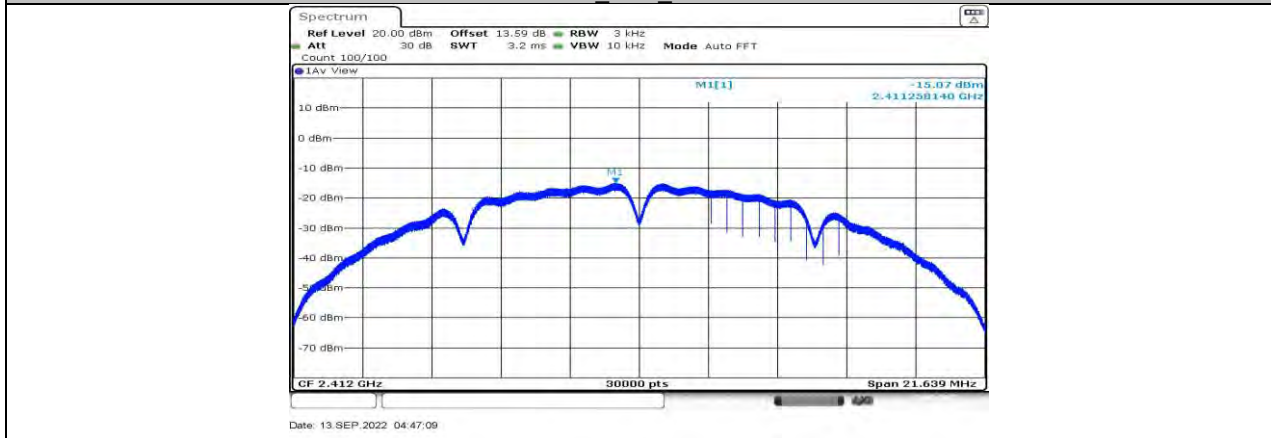


11B Ant2 2412

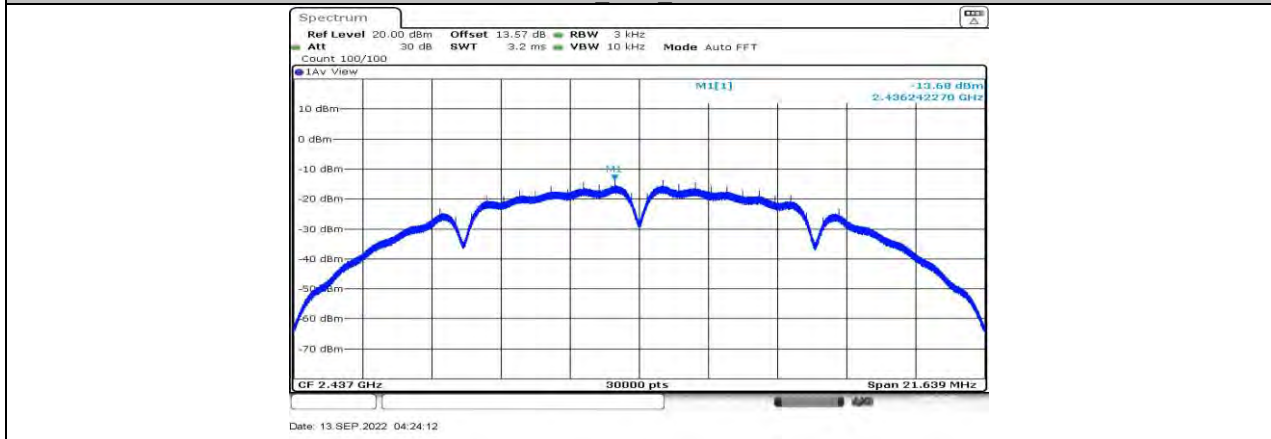


11B Ant1 2437






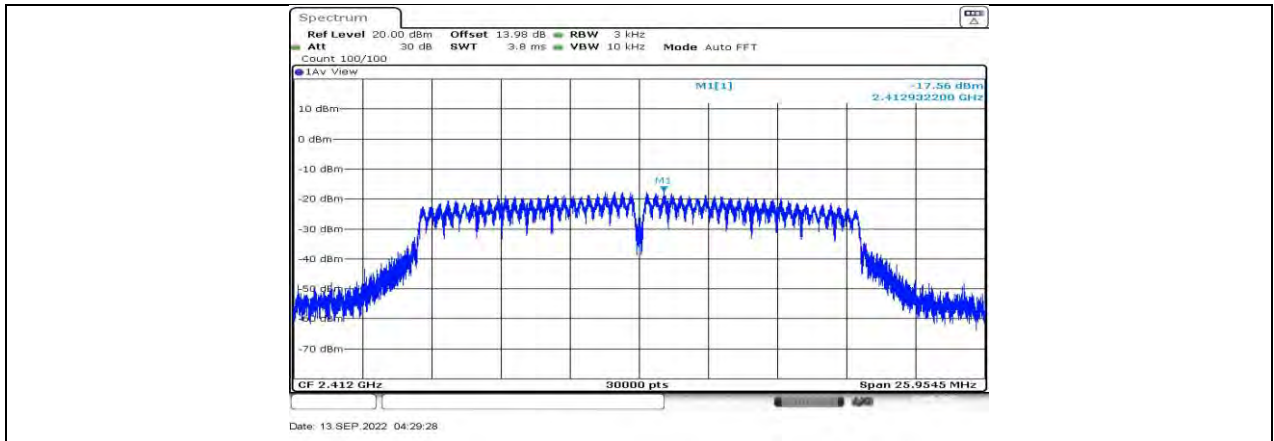


11G Ant1\_2412

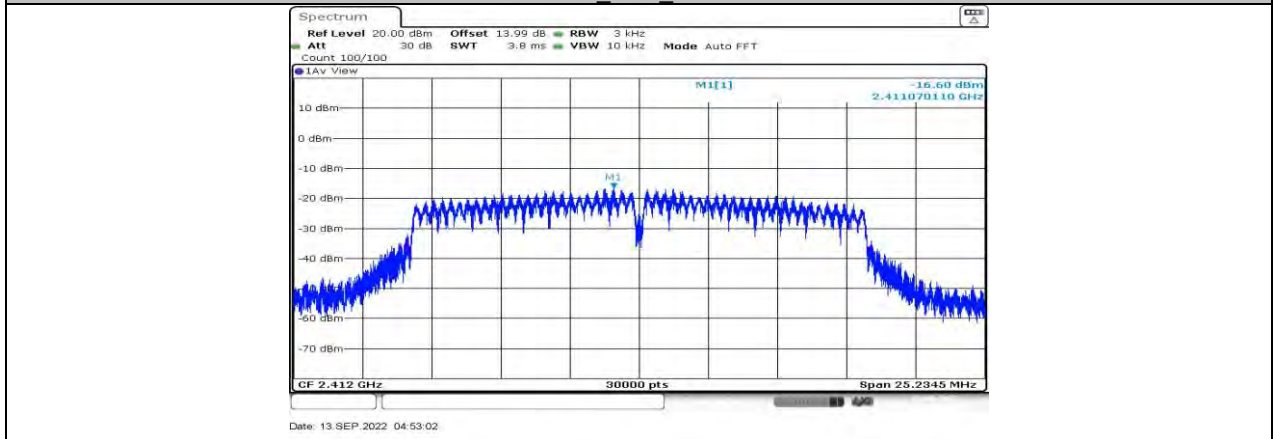


11G Ant2\_2412

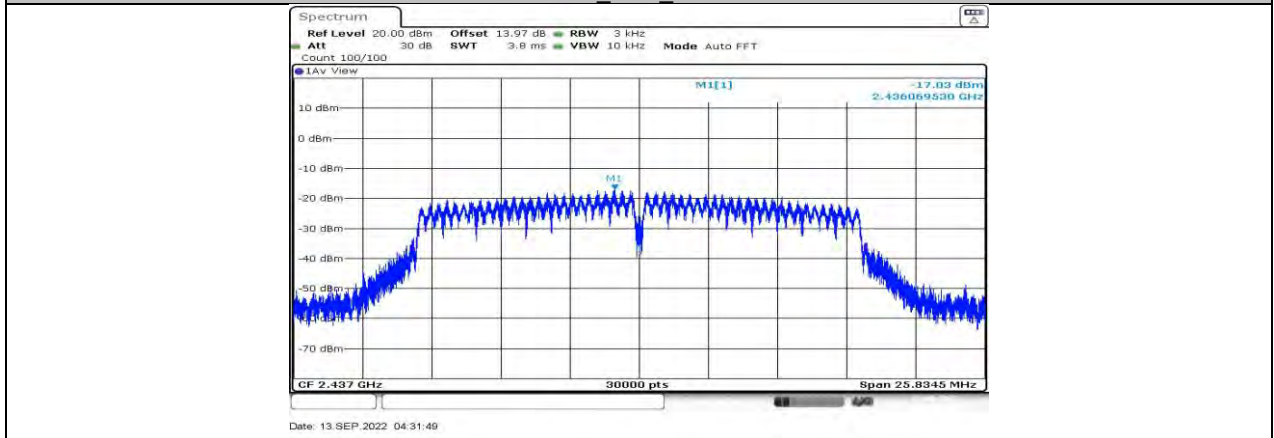


11G Ant1\_2437

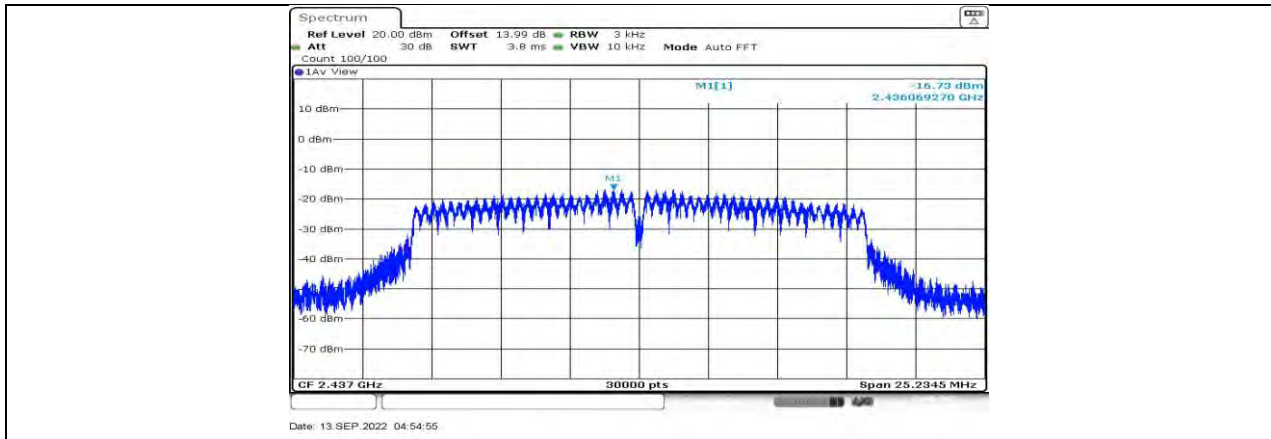


11G Ant2\_2437

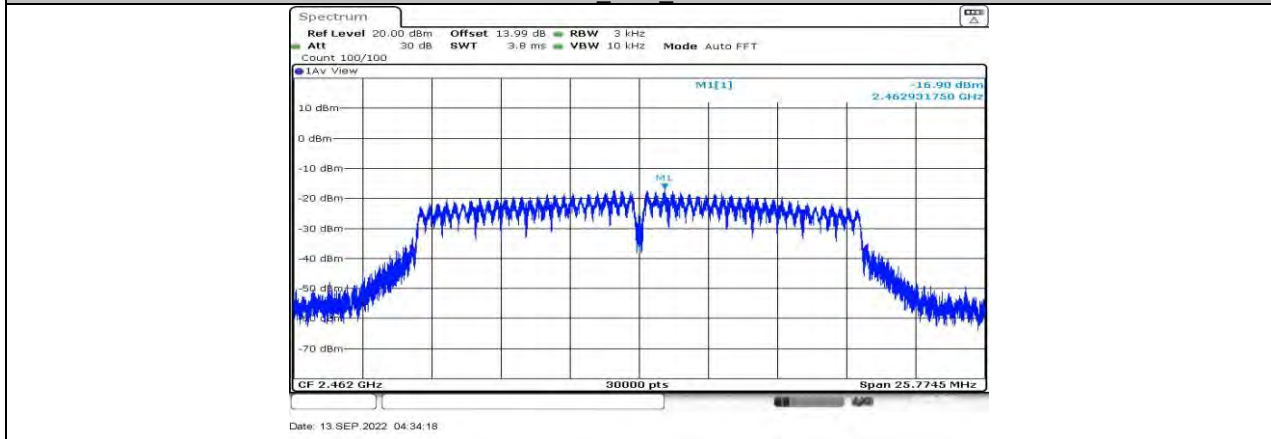


11G Ant1\_2462

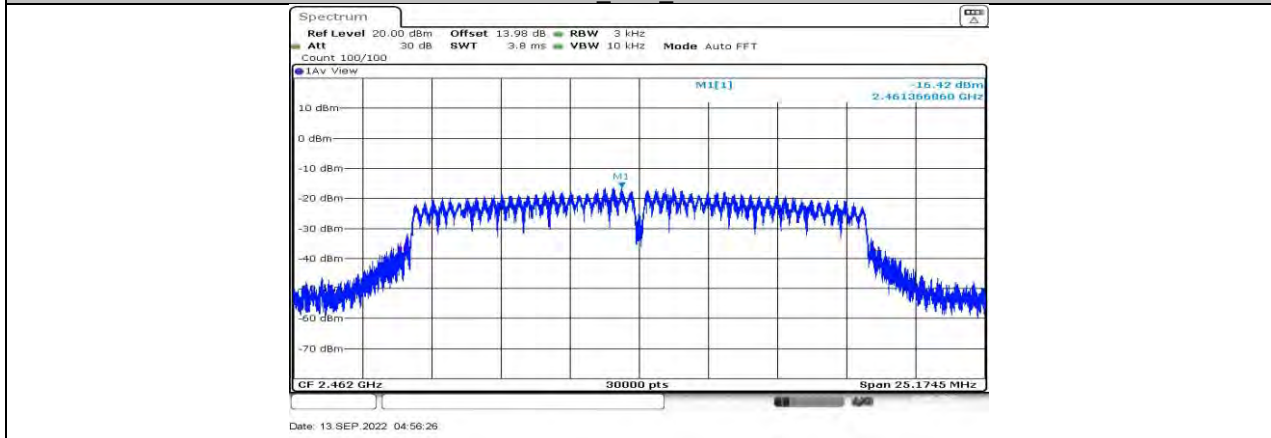


11G Ant2\_2462

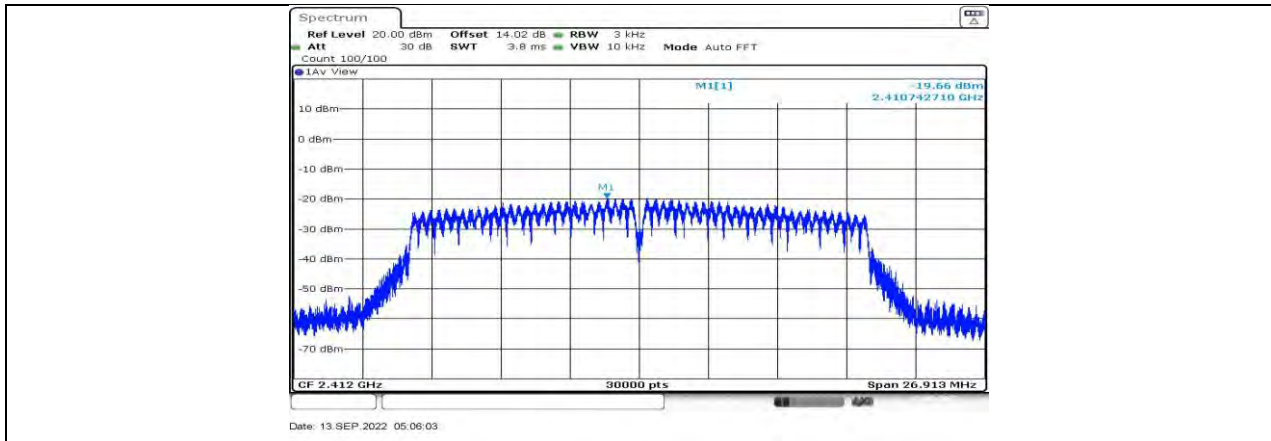


11N20MIMO Ant1 2412

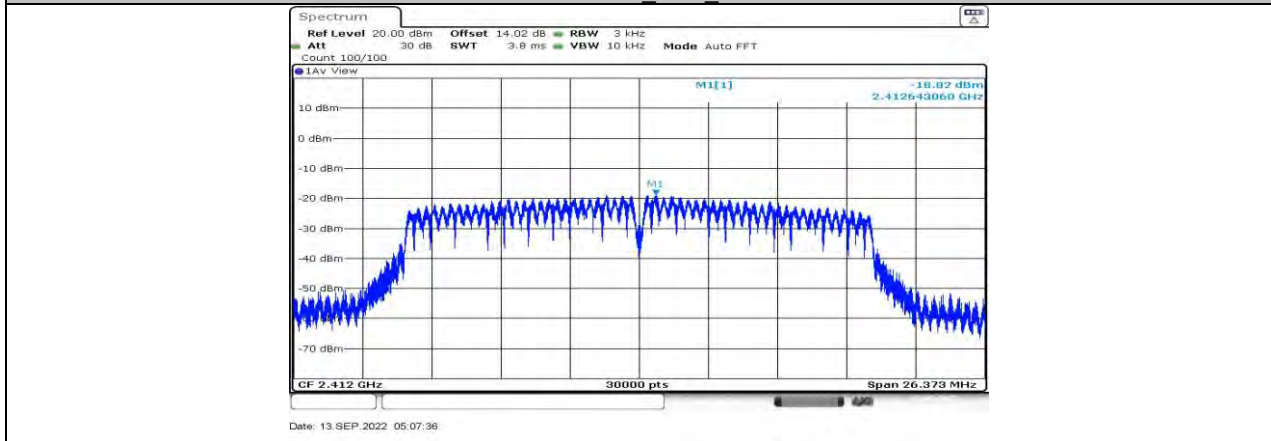


11N20MIMO Ant2 2412

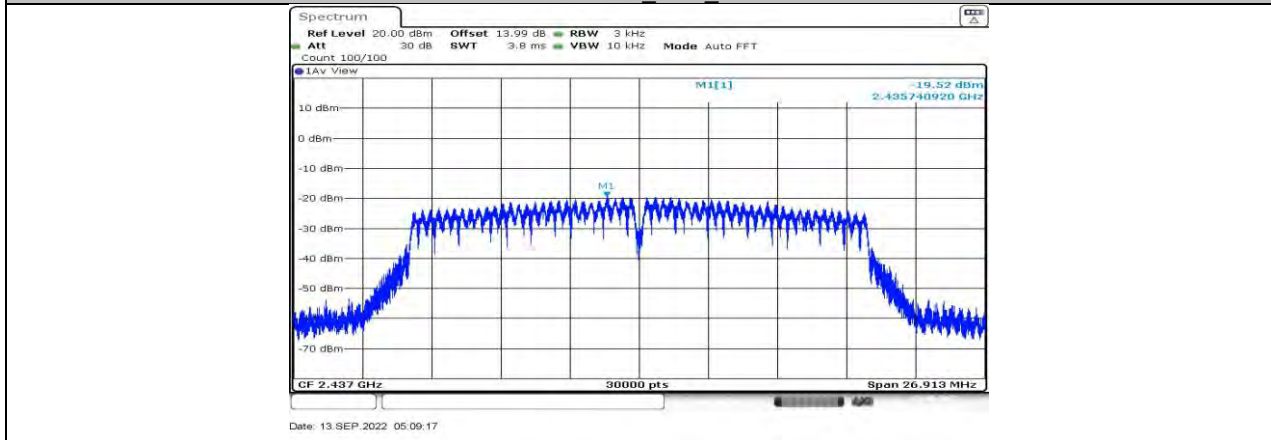


11N20MIMO Ant1 2437

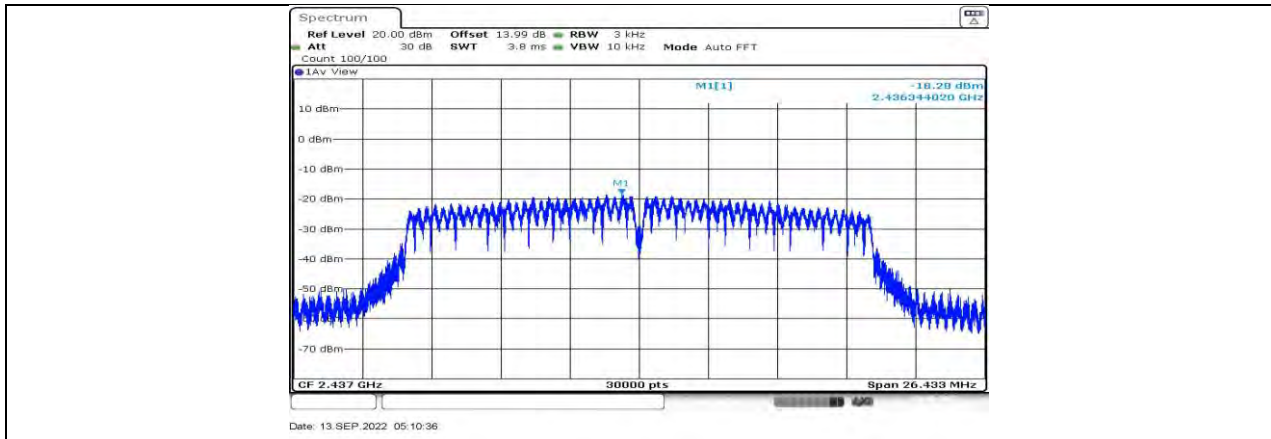


11N20MIMO\_Ant2\_2437

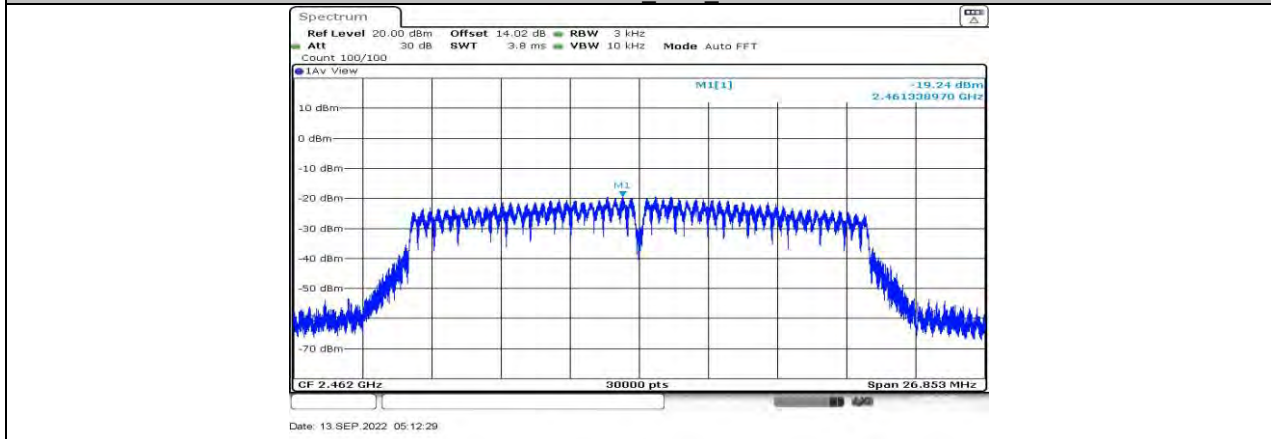


11N20MIMO\_Ant1\_2462

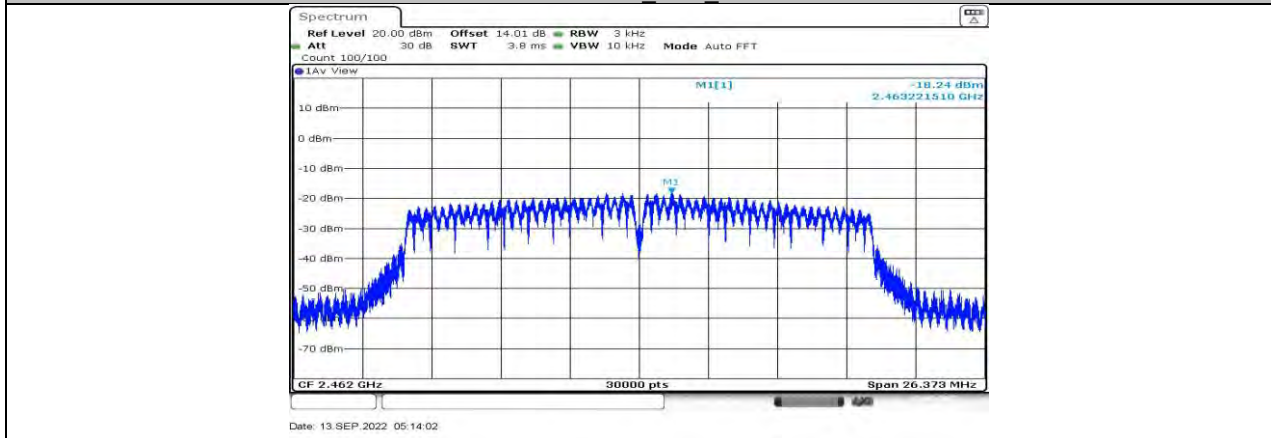


11N20MIMO\_Ant2\_2462

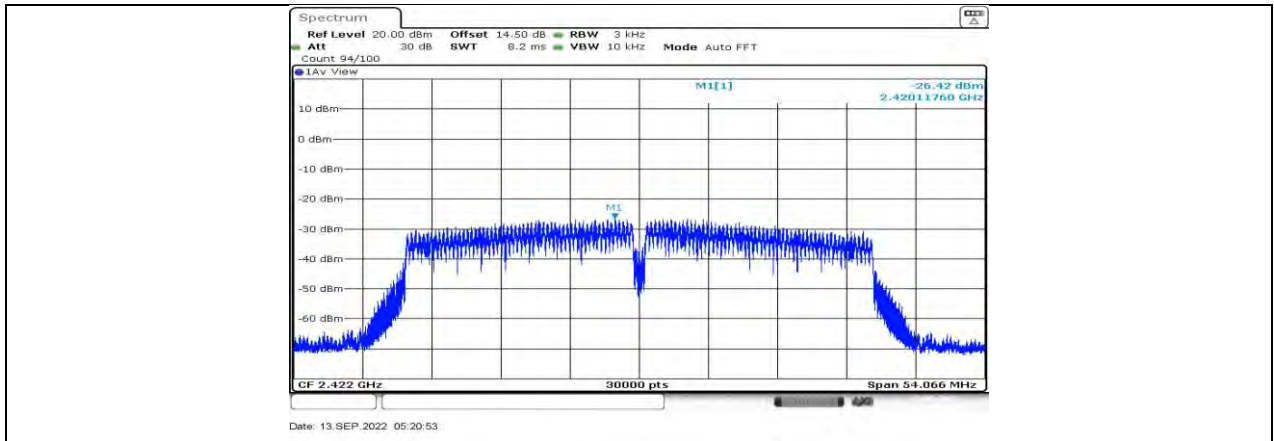


11N40MIMO Ant1 2422

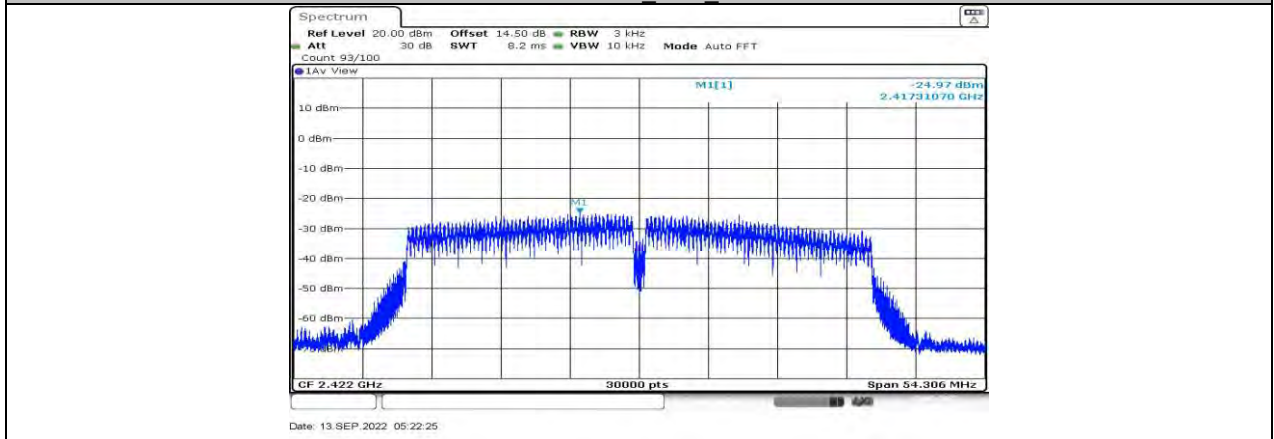


11N40MIMO Ant2 2422

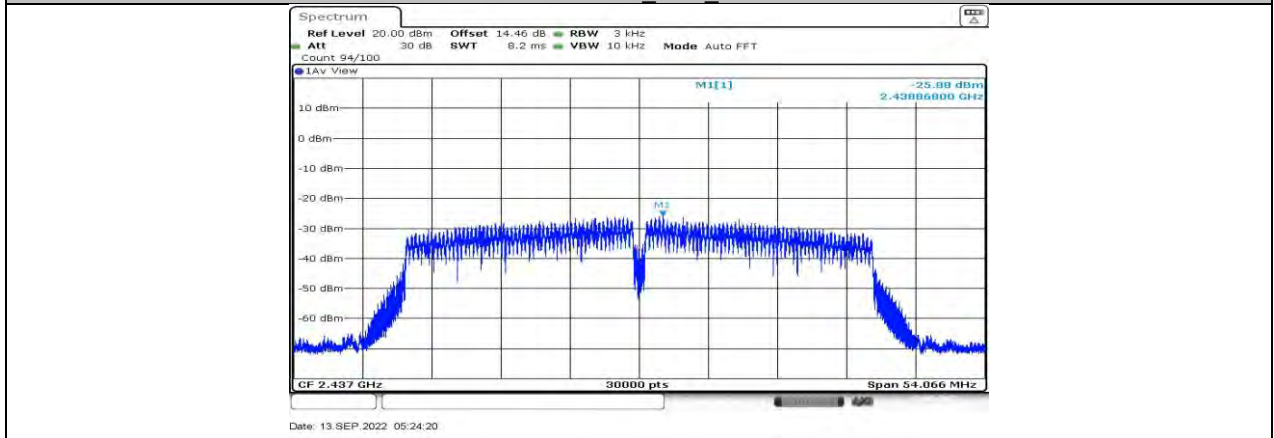


11N40MIMO Ant1 2437

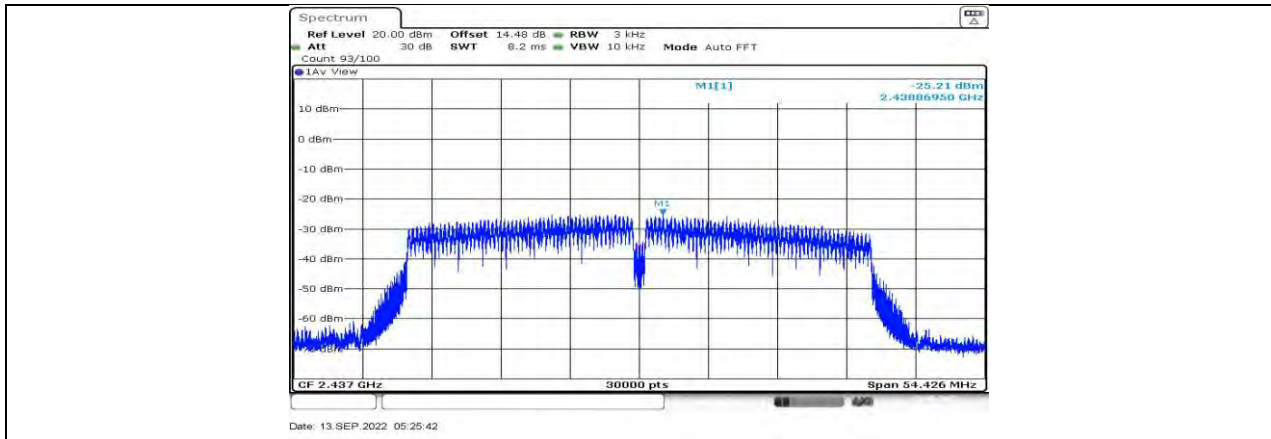

11N40MIMO\_Ant2\_2437

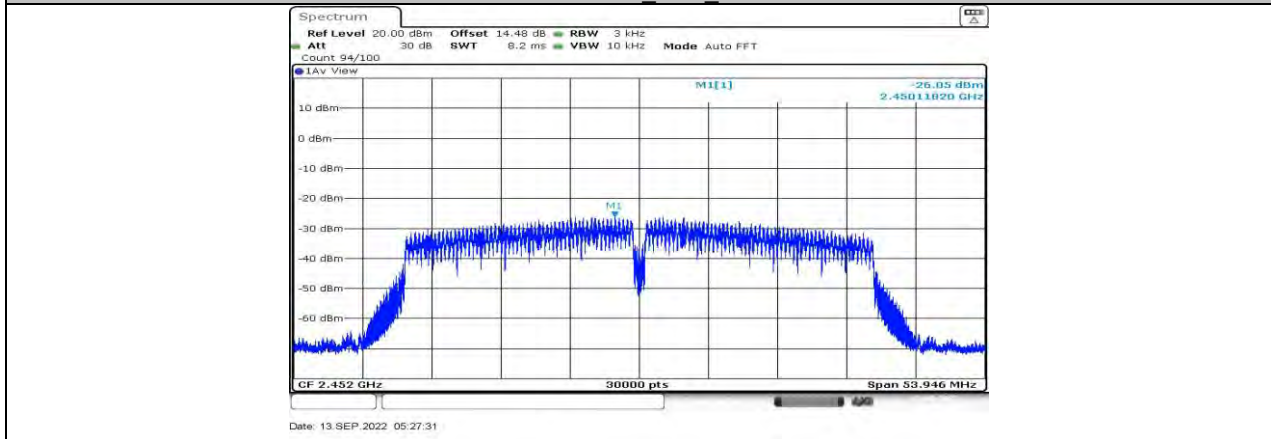

11N40MIMO\_Ant1\_2452

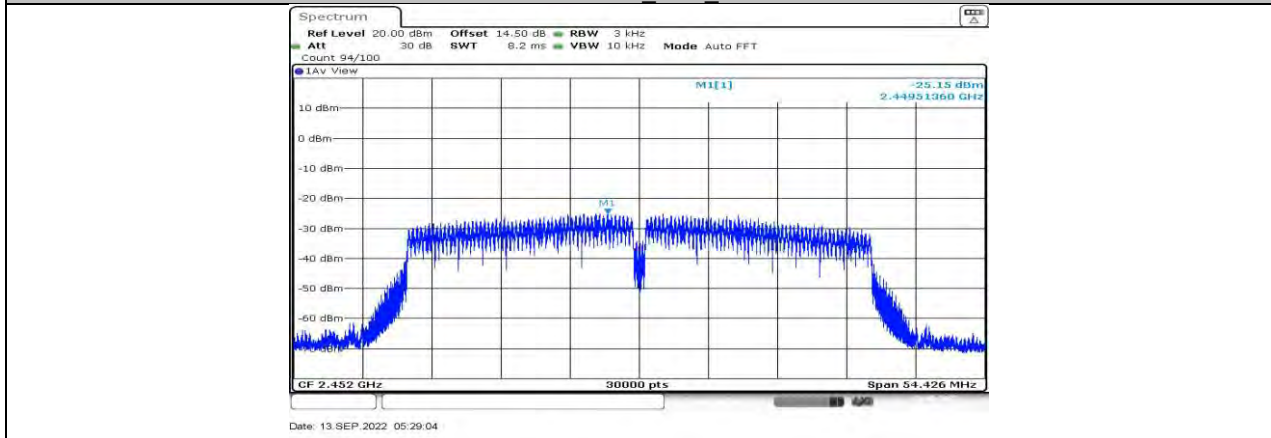

11N40MIMO\_Ant2\_2452






## 11.5. APPENDIX E: BAND EDGE MEASUREMENTS


### 11.5.1. Test Result

Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	5.94	-33.7	≤-24.06	PASS
	Ant2	Low	2412	6.57	-34.29	≤-23.43	PASS
	Ant1	High	2462	5.96	-45.74	≤-24.04	PASS
	Ant2	High	2462	6.60	-45.85	≤-23.4	PASS
11G	Ant1	Low	2412	3.63	-29.95	≤-26.37	PASS
	Ant2	Low	2412	4.11	-26.13	≤-25.89	PASS
	Ant1	High	2462	3.83	-43.9	≤-26.17	PASS
	Ant2	High	2462	2.90	-42.46	≤-27.1	PASS
11N20MIMO	Ant1	Low	2412	1.19	-34.97	≤-28.81	PASS
	Ant2	Low	2412	1.51	-30.47	≤-28.49	PASS
	Ant1	High	2462	1.08	-44.66	≤-28.92	PASS
	Ant2	High	2462	2.53	-43.77	≤-27.47	PASS
11N40MIMO	Ant1	Low	2422	-5.81	-43.42	≤-35.81	PASS
	Ant2	Low	2422	-4.01	-40.57	≤-34.01	PASS
	Ant1	High	2452	-5.42	-45.41	≤-35.42	PASS
	Ant2	High	2452	-5.12	-45.03	≤-35.12	PASS

### 11.5.2. Test Graphs

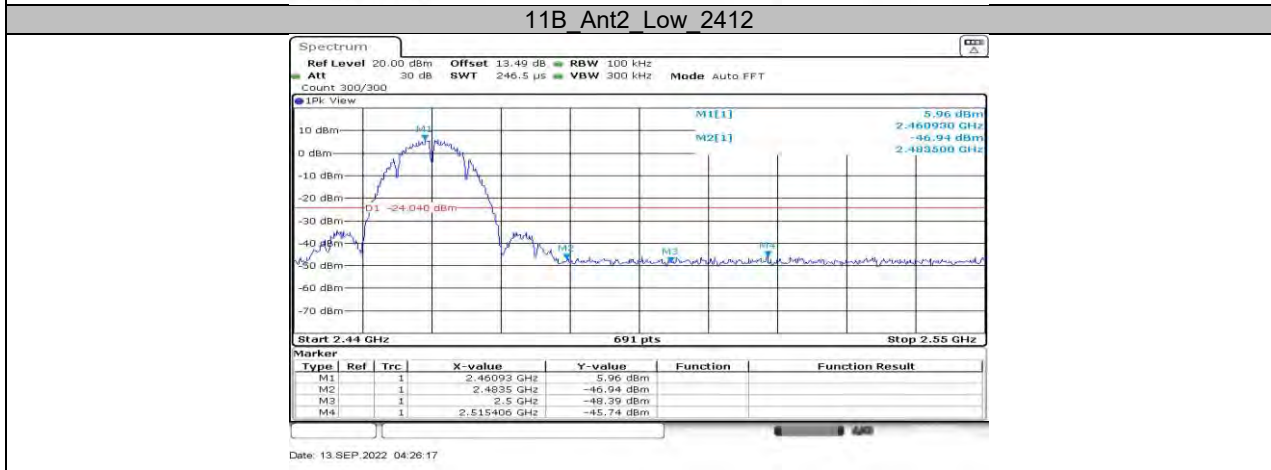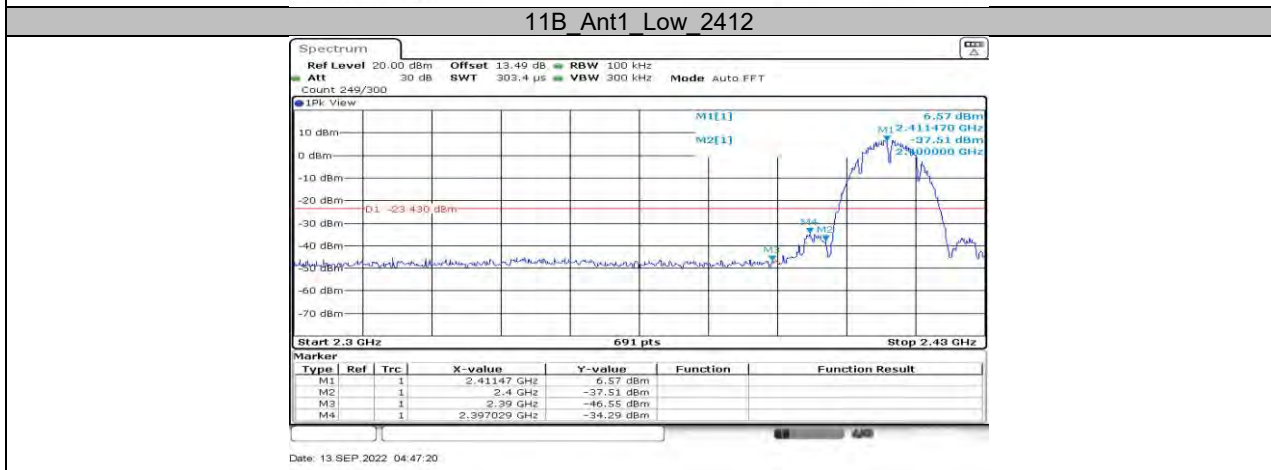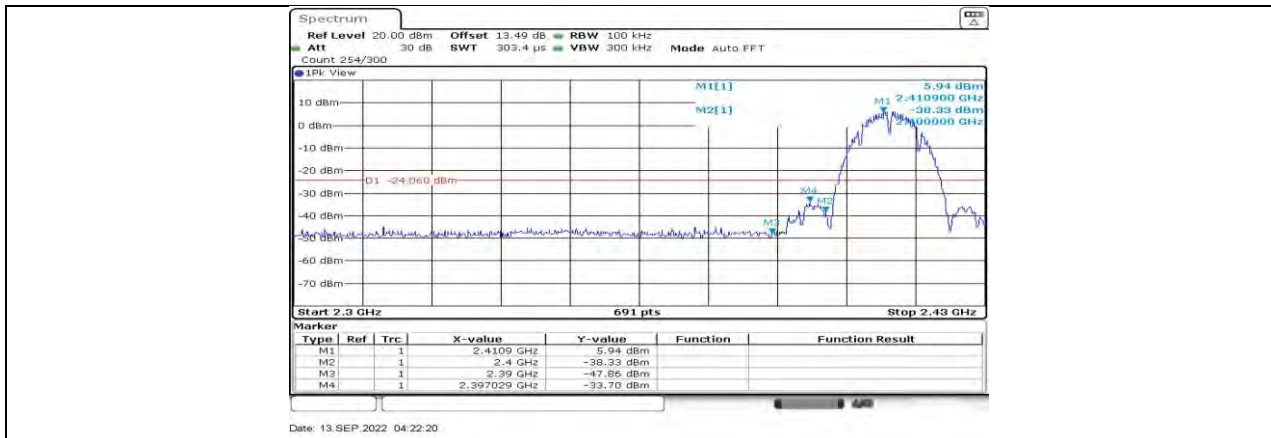




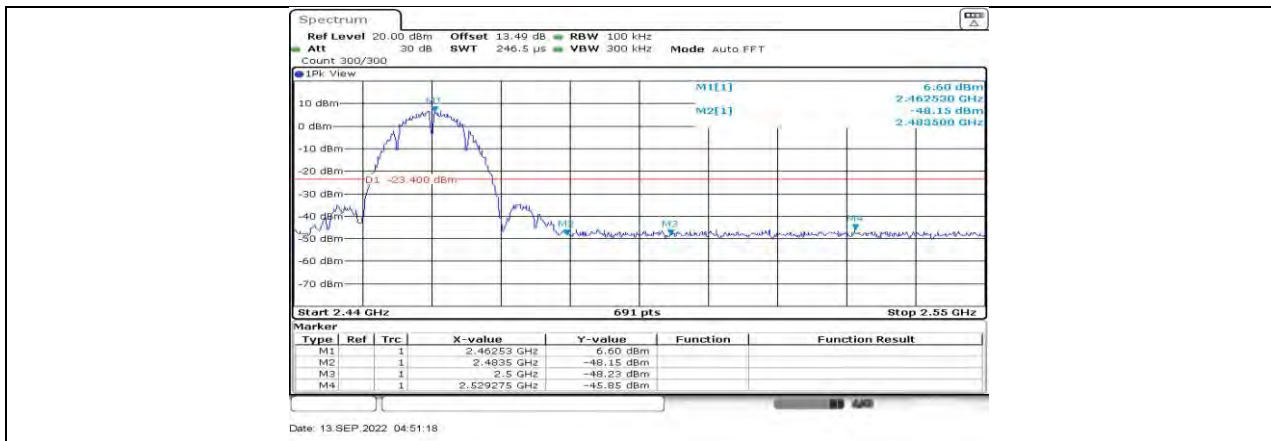





11G Ant1 High 2462

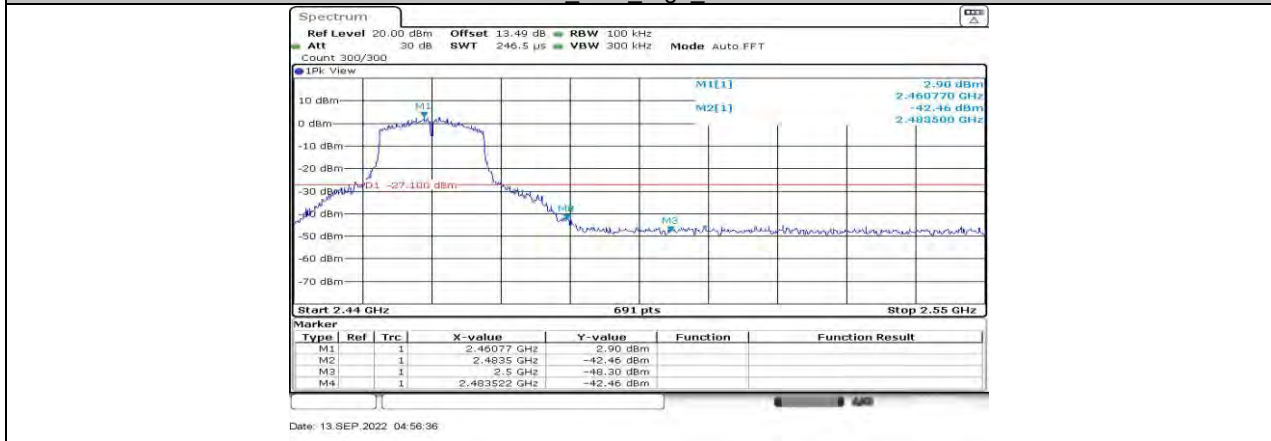

11G Ant2 High 2462

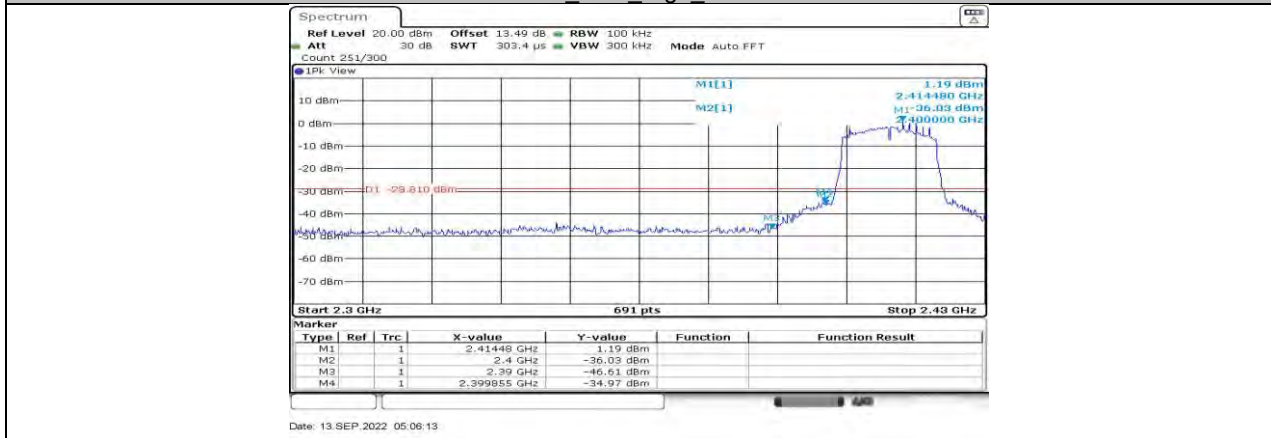

11N20MIMO Ant1 Low 2412

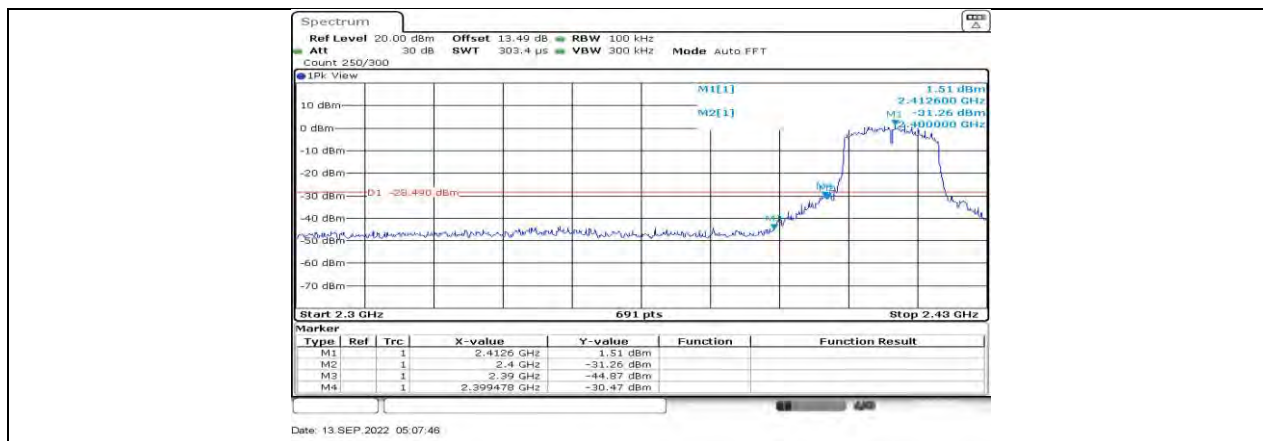

11N20MIMO Ant2 Low 2412



11N20MIMO Ant1 High 2462




11N20MIMO Ant2 High 2462



11N40MIMO Ant1 Low 2422



11N40MIMO Ant2 Low 2422

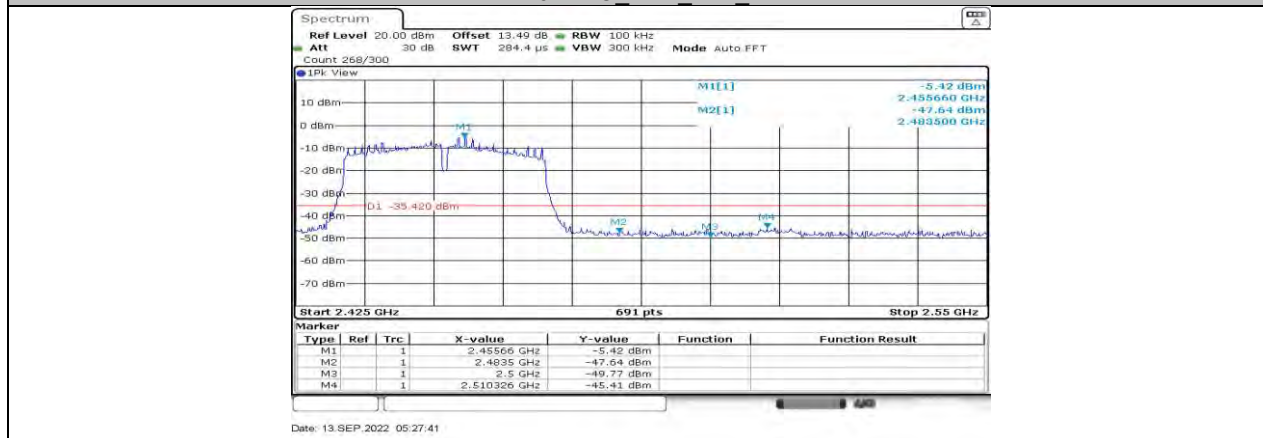

11N40MIMO Ant1 High 2452




**11.6. APPENDIX F: CONDUCTED SPURIOUS EMISSION****11.6.1. Test Result**

Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict	
11B	Ant1	2412	Reference	6.28	---	PASS	
			30~1000	-54.37	≤-23.72	PASS	
			1000~26500	-48.78	≤-23.72	PASS	
	Ant2	2412	Reference	6.69	---	PASS	
			30~1000	-54.65	≤-23.31	PASS	
			1000~26500	-49.79	≤-23.31	PASS	
	Ant1	2437	Reference	6.29	---	PASS	
			30~1000	-53.99	≤-23.71	PASS	
			1000~26500	-49.2	≤-23.71	PASS	
	Ant2	2437	Reference	6.63	---	PASS	
			30~1000	-53.63	≤-23.37	PASS	
			1000~26500	-48.88	≤-23.37	PASS	
	Ant1	2462	Reference	6.22	---	PASS	
			30~1000	-53.65	≤-23.78	PASS	
			1000~26500	-48.82	≤-23.78	PASS	
	Ant2	2462	Reference	6.82	---	PASS	
			30~1000	-53.62	≤-23.18	PASS	
			1000~26500	-47.2	≤-23.18	PASS	
	11G	Ant1	2412	Reference	2.63	---	PASS
				30~1000	-54.43	≤-27.37	PASS
				1000~26500	-48.95	≤-27.37	PASS
		Ant2	2412	Reference	3.90	---	PASS
				30~1000	-51.16	≤-26.1	PASS
				1000~26500	-49.31	≤-26.1	PASS
Ant1		2437	Reference	3.75	---	PASS	
			30~1000	-53.43	≤-26.25	PASS	
			1000~26500	-49.2	≤-26.25	PASS	
Ant2		2437	Reference	4.32	---	PASS	
			30~1000	-52.37	≤-25.68	PASS	
			1000~26500	-49.13	≤-25.68	PASS	
Ant1		2462	Reference	3.93	---	PASS	
			30~1000	-53.98	≤-26.07	PASS	
			1000~26500	-47.91	≤-26.07	PASS	
Ant2		2462	Reference	3.27	---	PASS	
			30~1000	-52.94	≤-26.73	PASS	
			1000~26500	-49.63	≤-26.73	PASS	
11N20MIMO		Ant1	2412	Reference	0.93	---	PASS
				30~1000	-53.28	≤-29.07	PASS
				1000~26500	-49.29	≤-29.07	PASS
		Ant2	2412	Reference	2.93	---	PASS
				30~1000	-52.6	≤-27.07	PASS
				1000~26500	-49.61	≤-27.07	PASS
	Ant1	2437	Reference	2.24	---	PASS	
			30~1000	-54.35	≤-27.76	PASS	
			1000~26500	-49.36	≤-27.76	PASS	
	Ant2	2437	Reference	2.36	---	PASS	
			30~1000	-50.74	≤-27.64	PASS	
			1000~26500	-49.71	≤-27.64	PASS	
	Ant1	2462	Reference	2.51	---	PASS	
			30~1000	-53.53	≤-27.49	PASS	
			1000~26500	-46.2	≤-27.49	PASS	
	Ant2	2462	Reference	2.79	---	PASS	
			30~1000	-53.37	≤-27.21	PASS	
			1000~26500	-49.44	≤-27.21	PASS	
	11N40MIMO	Ant1	2422	Reference	-5.58	---	PASS
				30~1000	-53.5	≤-35.58	PASS
				1000~26500	-49.03	≤-35.58	PASS




	Ant2	2422	Reference	-3.62	---	PASS
			30~1000	-54.51	$\leq$ -33.62	PASS
			1000~26500	-49.12	$\leq$ -33.62	PASS
	Ant1	2437	Reference	-4.86	---	PASS
			30~1000	-54.61	$\leq$ -34.86	PASS
			1000~26500	-49.03	$\leq$ -34.86	PASS
	Ant2	2437	Reference	-3.45	---	PASS
			30~1000	-53.65	$\leq$ -33.45	PASS
			1000~26500	-48.9	$\leq$ -33.45	PASS
	Ant1	2452	Reference	-5.16	---	PASS
			30~1000	-54.55	$\leq$ -35.16	PASS
			1000~26500	-49.39	$\leq$ -35.16	PASS
	Ant2	2452	Reference	-3.42	---	PASS
			30~1000	-51.76	$\leq$ -33.42	PASS
			1000~26500	-48.77	$\leq$ -33.42	PASS


### 11.6.2. Test Graphs

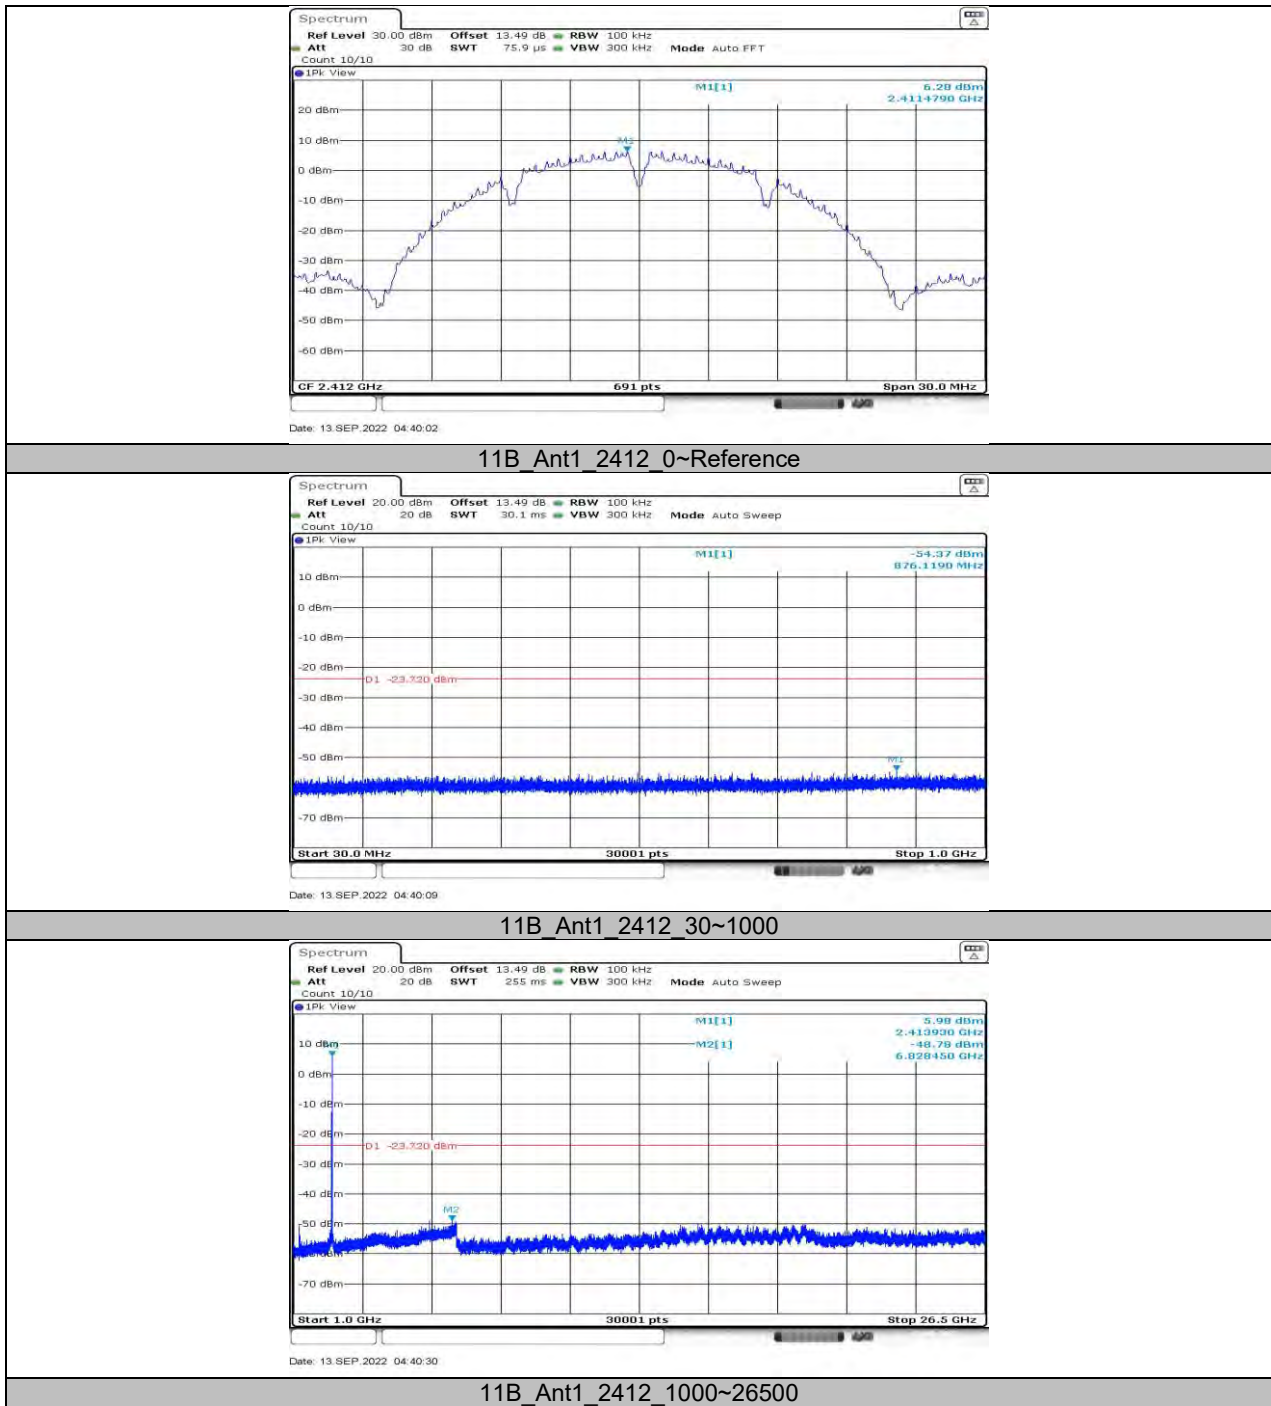




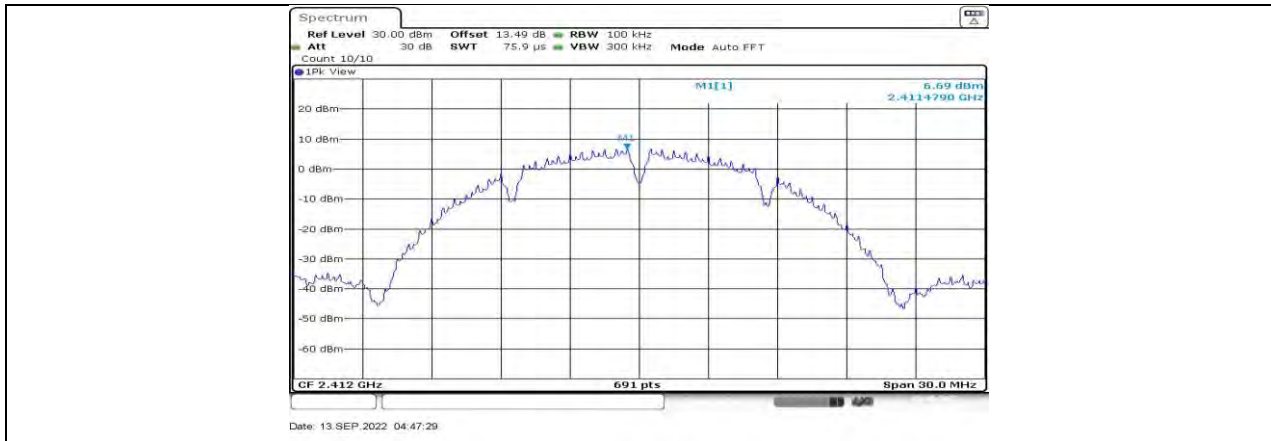


11B\_Ant2\_2412\_0~Reference

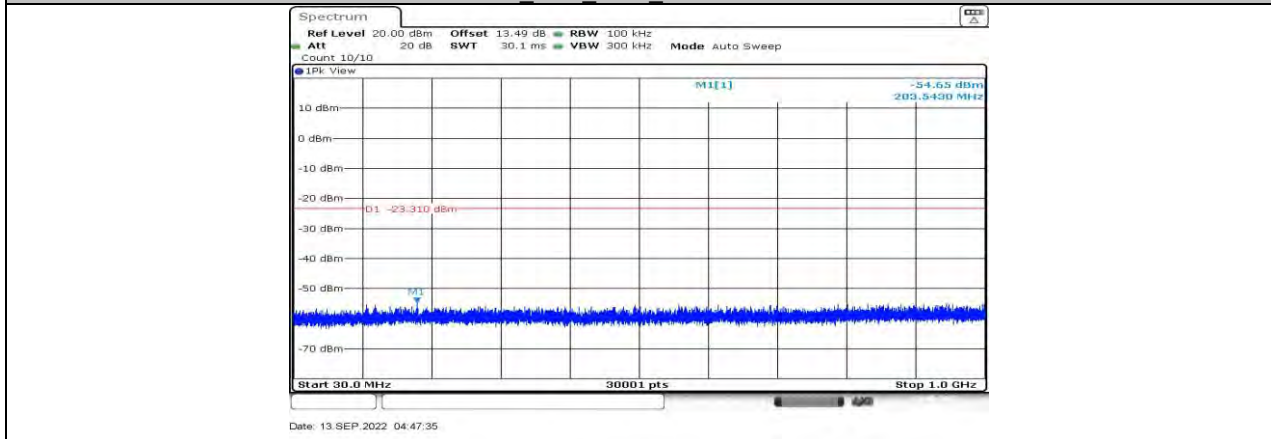


11B\_Ant2\_2412\_30~1000

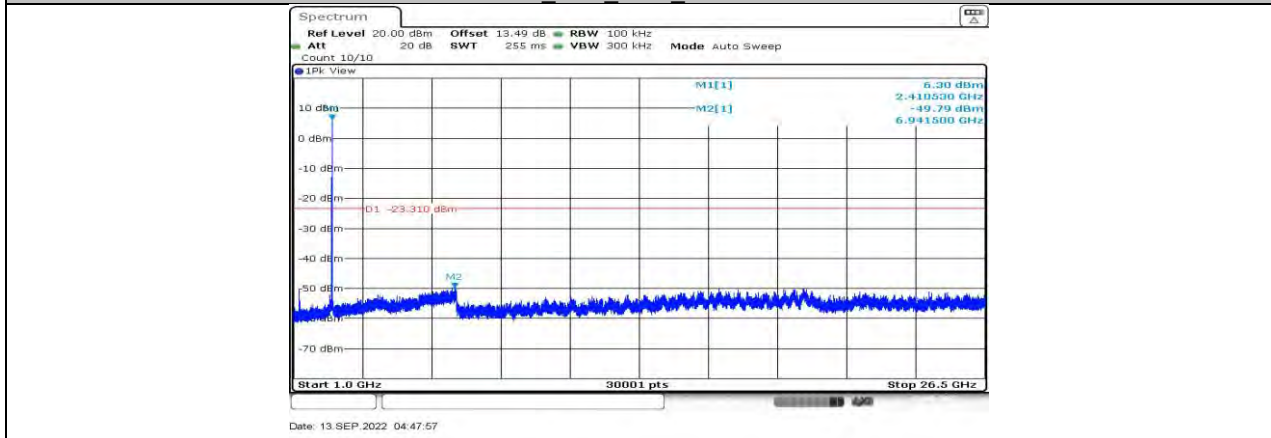


11B\_Ant2\_2412\_1000~26500

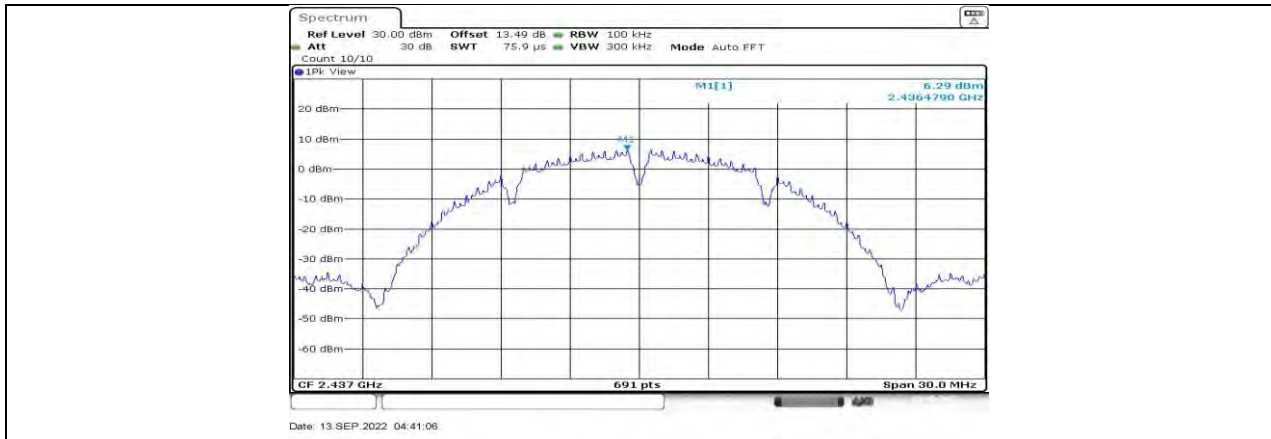


11B\_Ant1\_2437\_0~Reference

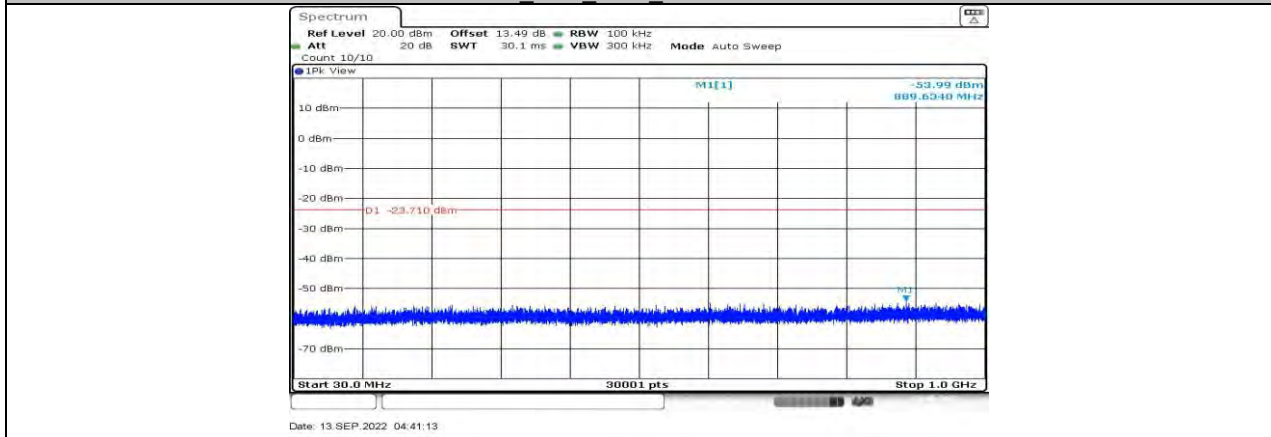


11B\_Ant1\_2437\_30~1000

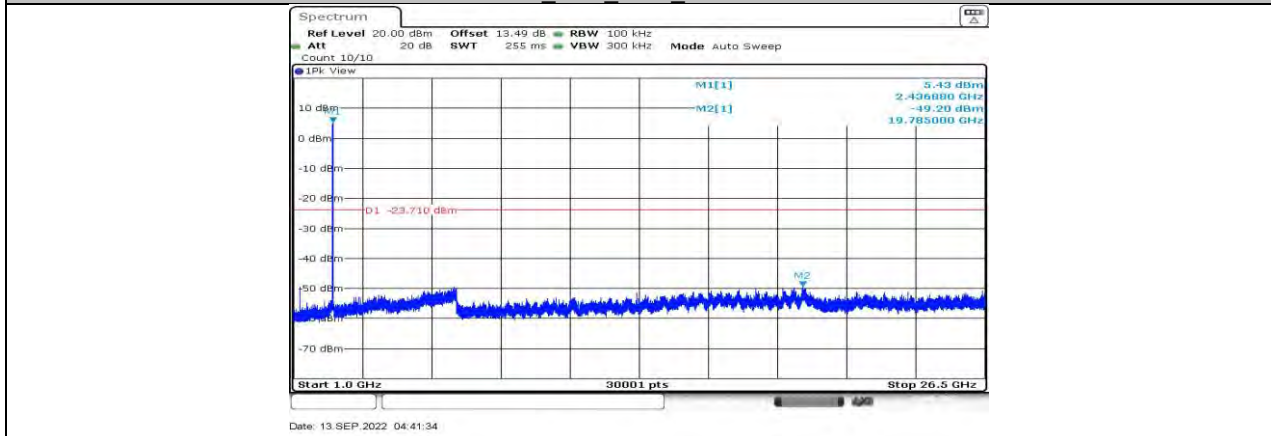


11B\_Ant1\_2437\_1000~26500

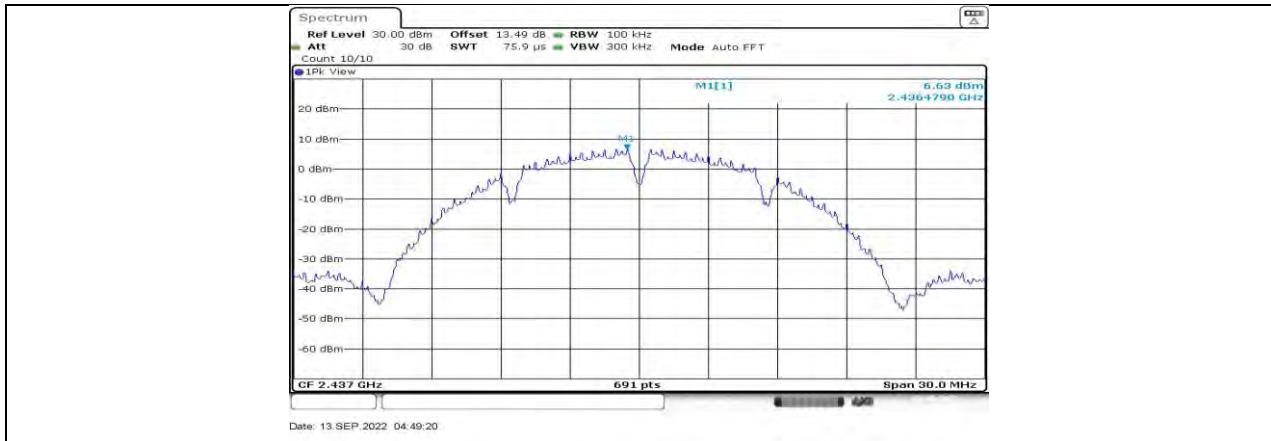


11B\_Ant2\_2437\_0~Reference

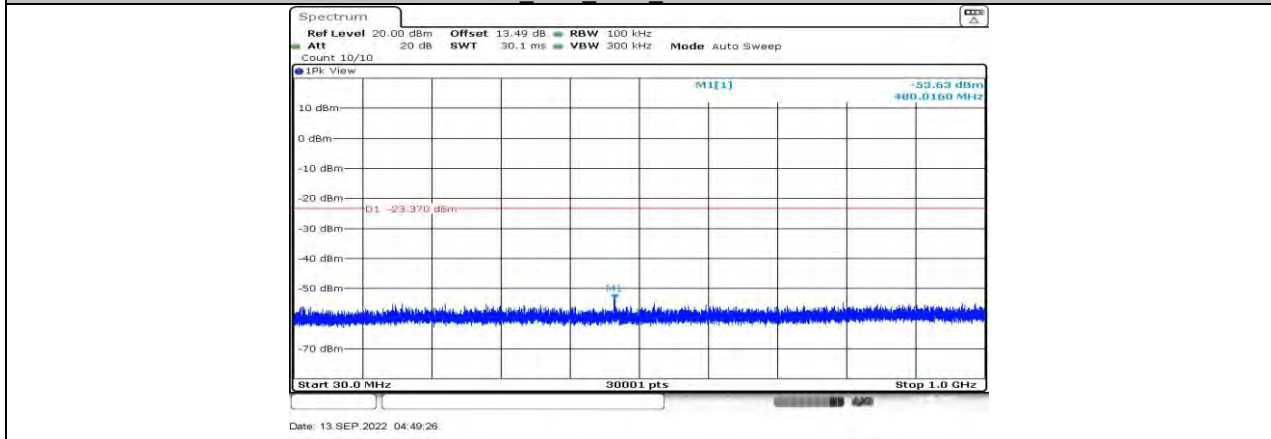


11B\_Ant2\_2437\_30~1000

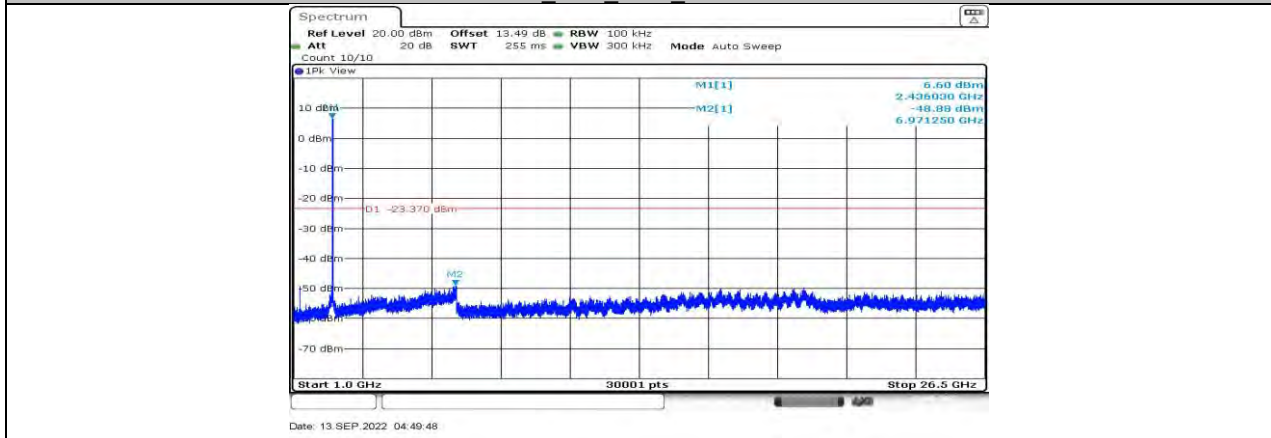


11B\_Ant2\_2437\_1000~26500

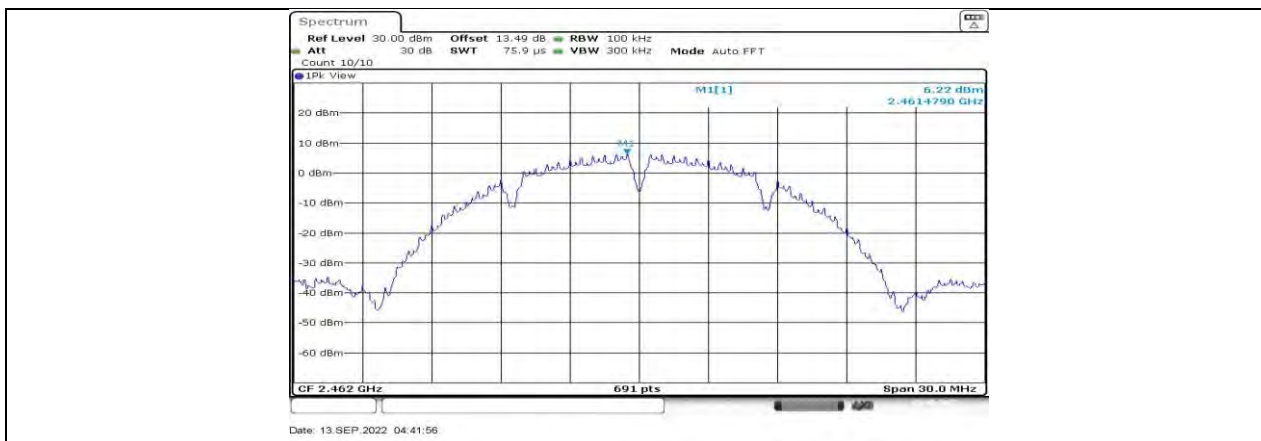


11B\_Ant1\_2462\_0~Reference

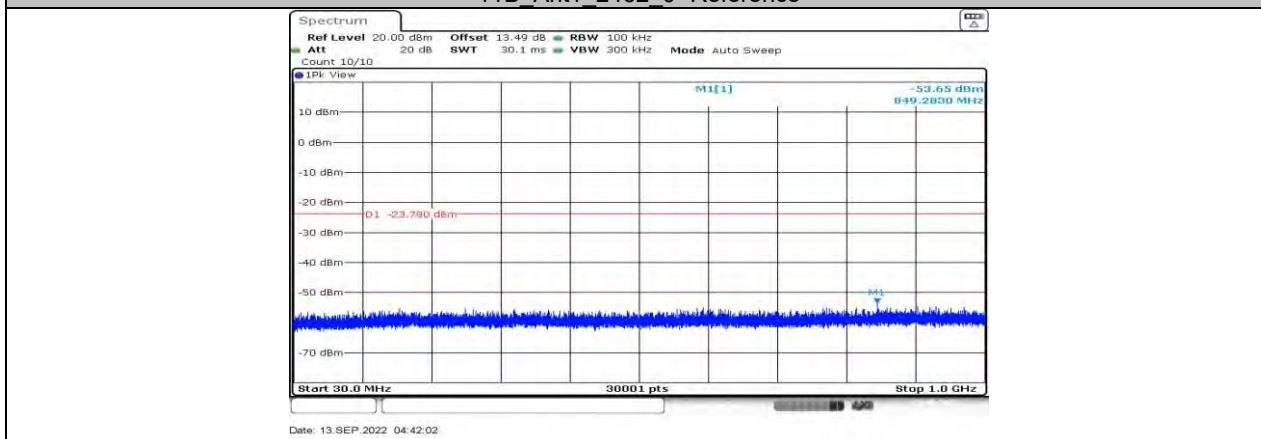


11B\_Ant1\_2462\_30~1000

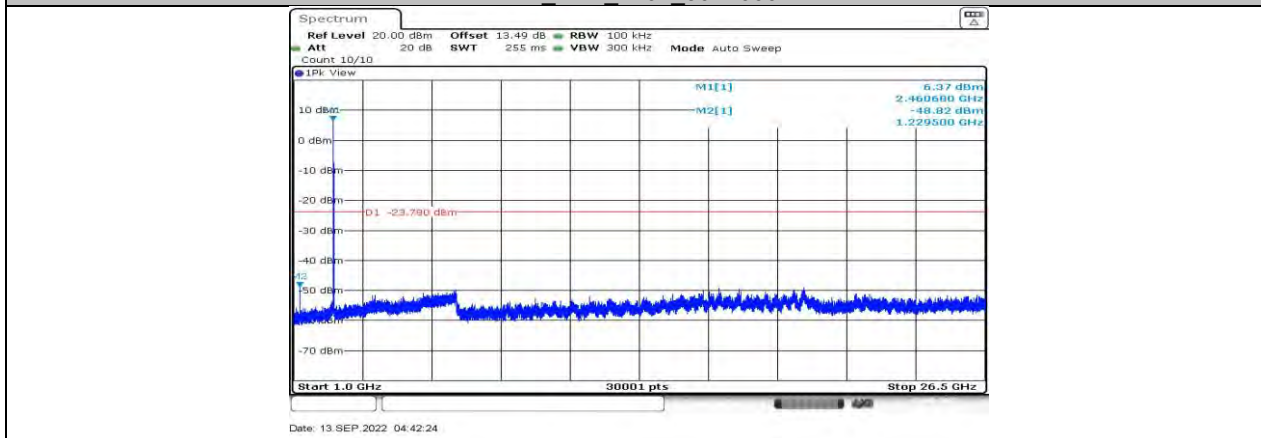


11B\_Ant1\_2462\_1000~26500

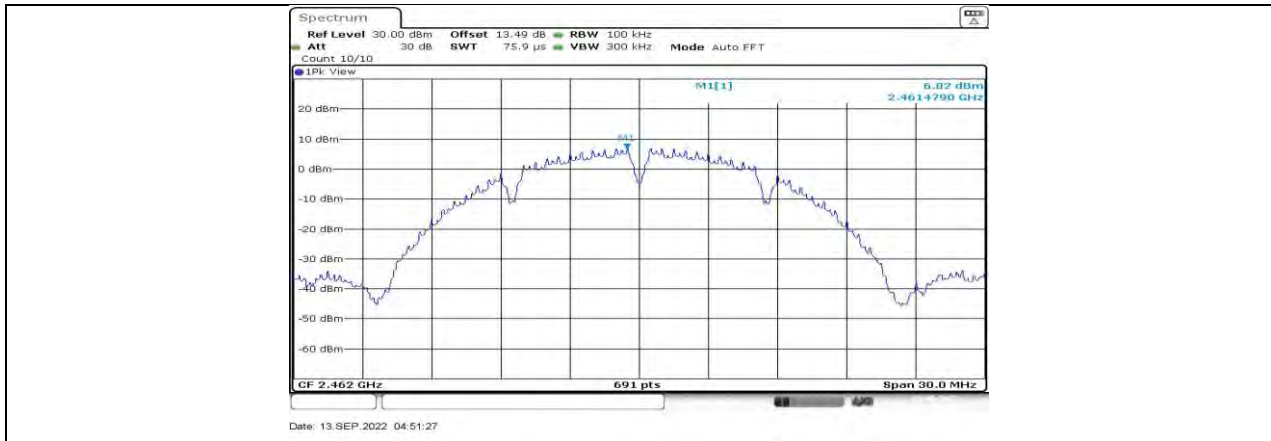


11B\_Ant2\_2462\_0~Reference

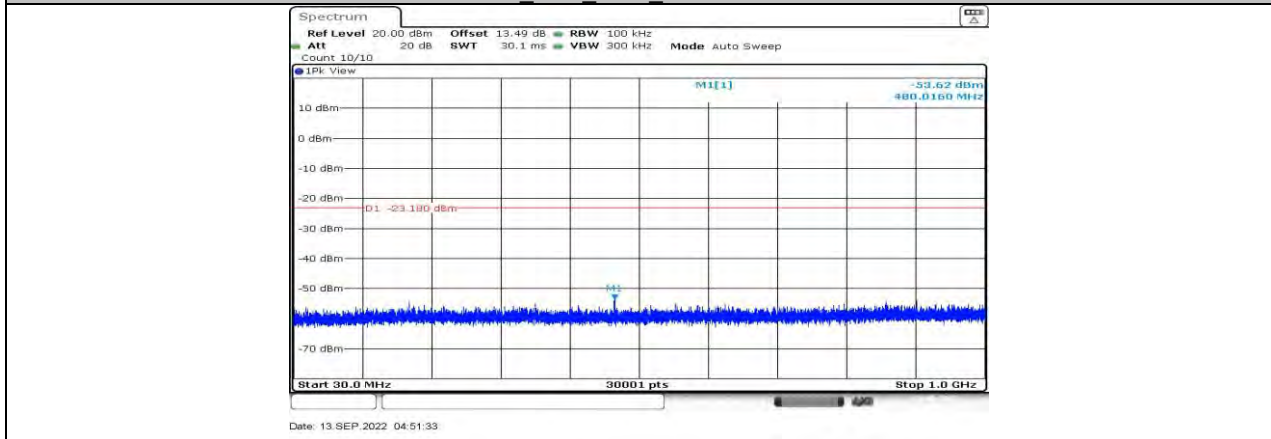


11B\_Ant2\_2462\_30~1000

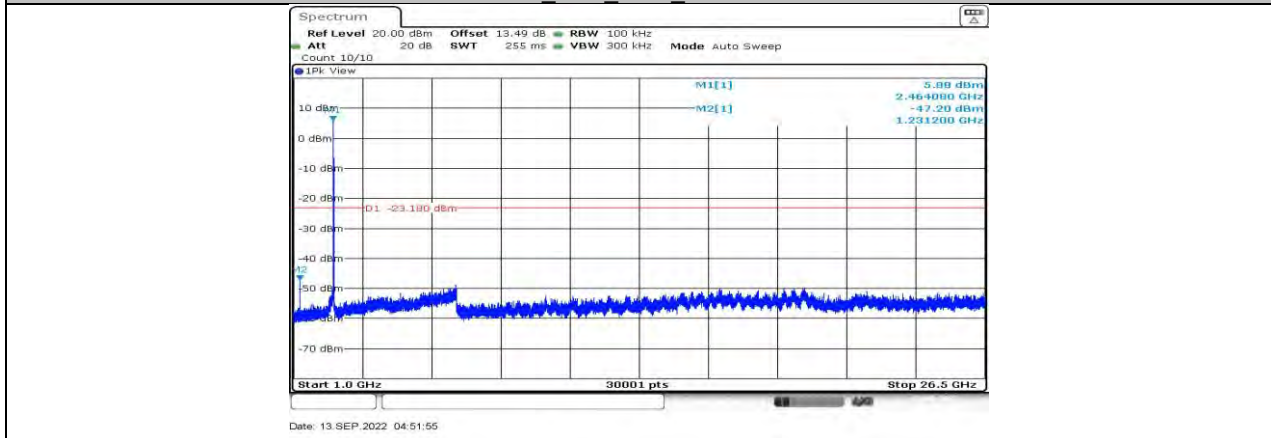


11B\_Ant2\_2462\_1000~26500

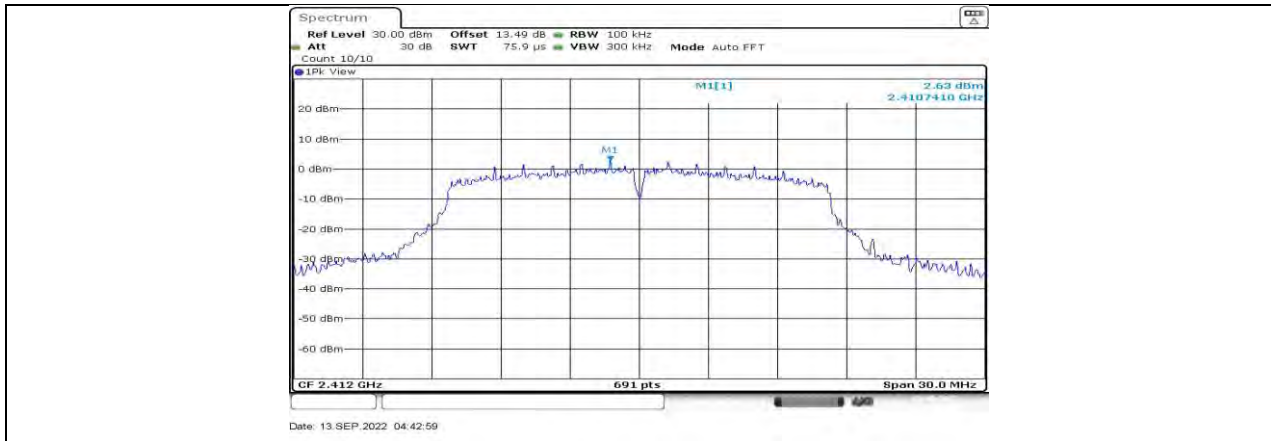


11G Ant1\_2412\_0~Reference

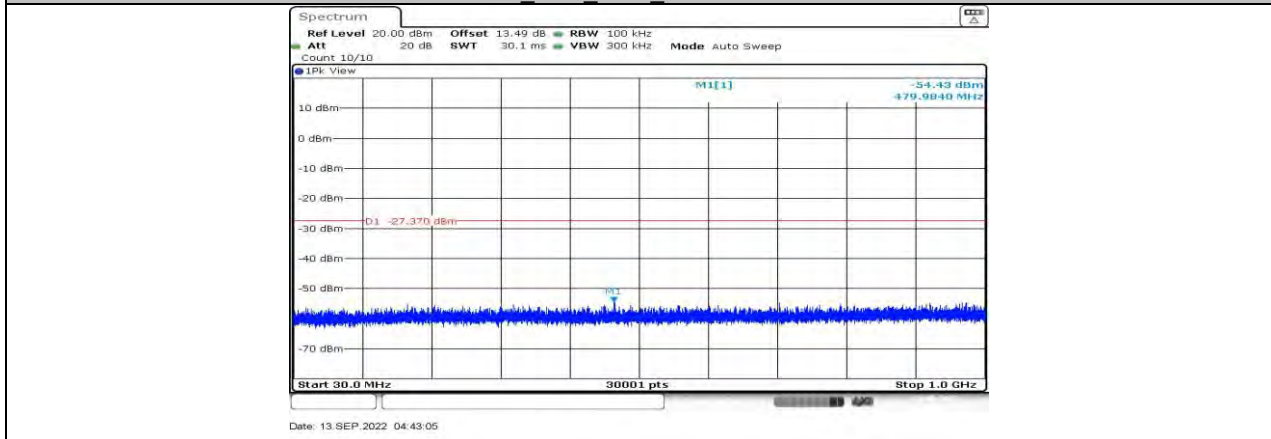


11G Ant1\_2412\_30~1000

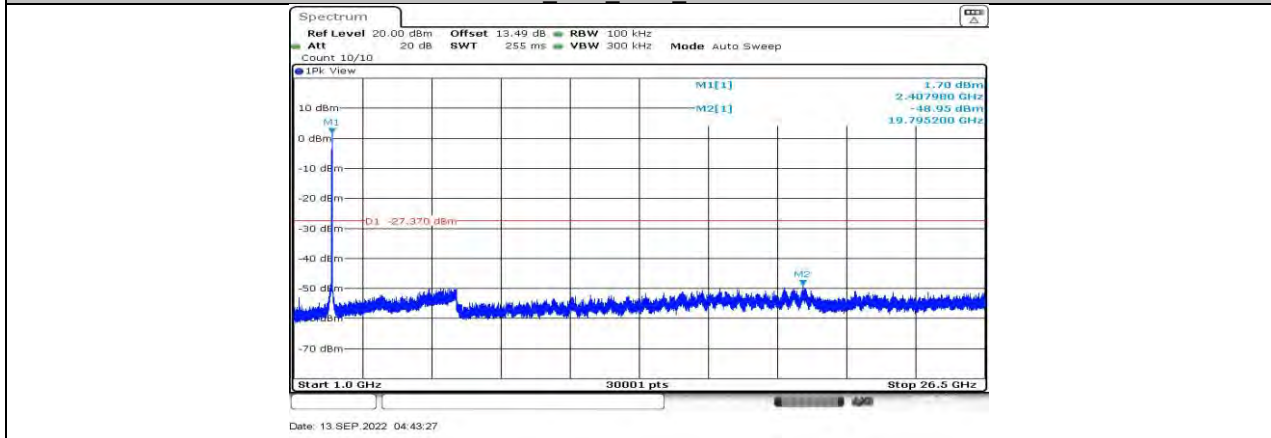


11G Ant1\_2412\_1000~26500

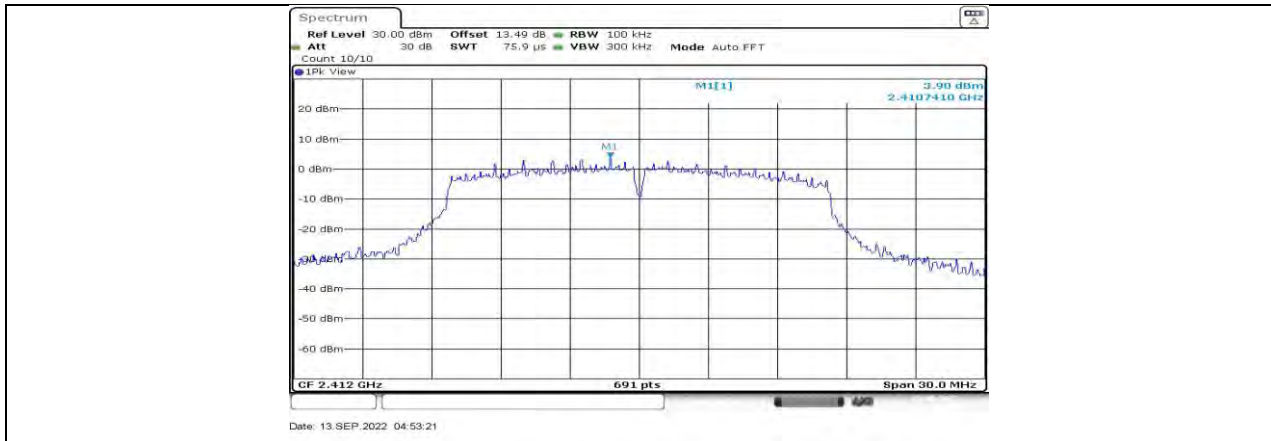


11G Ant2\_2412\_0~Reference

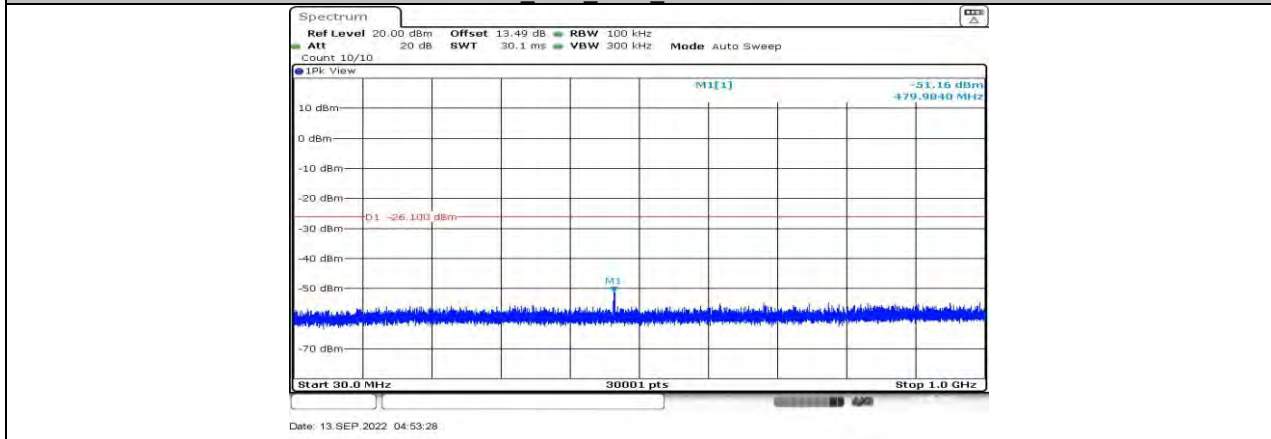


11G Ant2\_2412\_30~1000

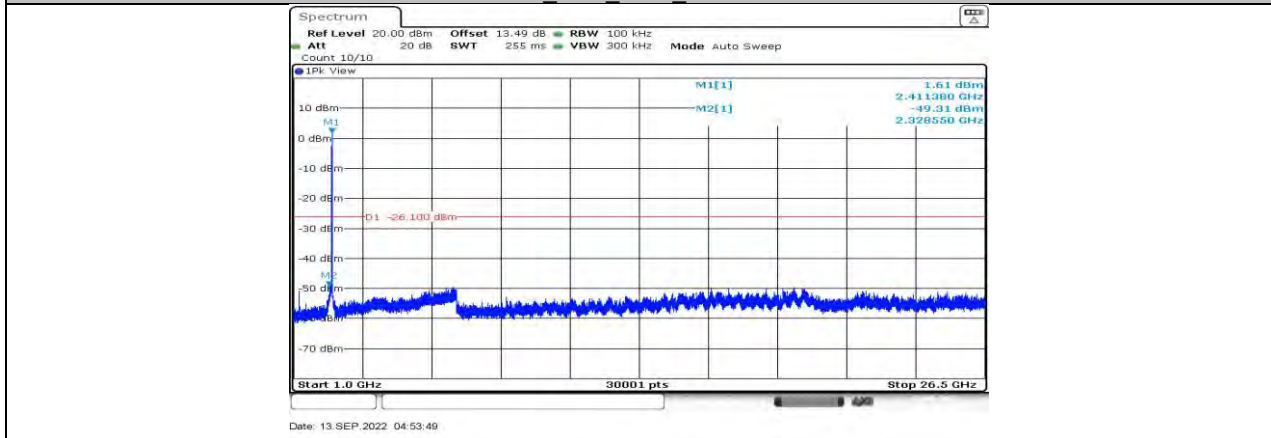


11G Ant2\_2412\_1000~26500

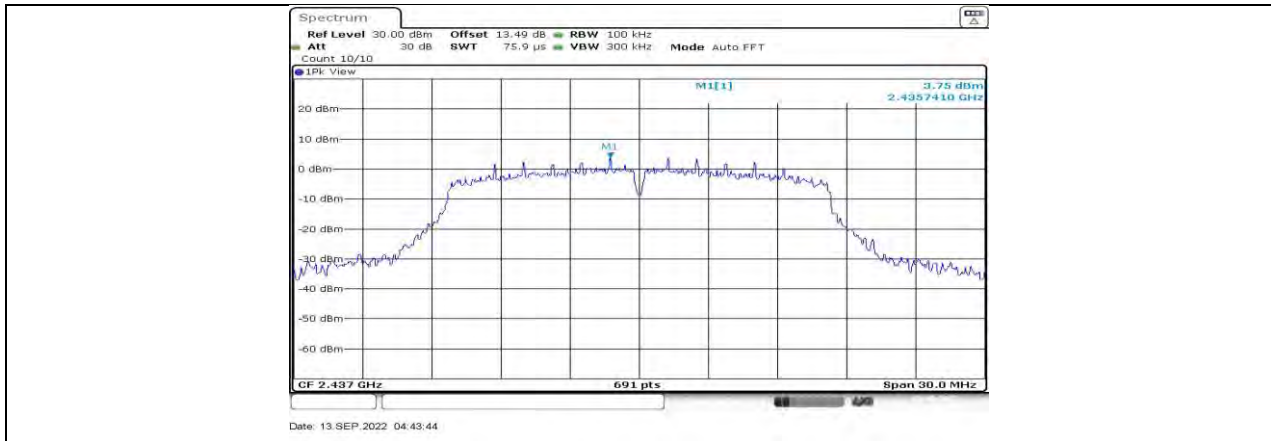

11G Ant1\_2437\_0~Reference

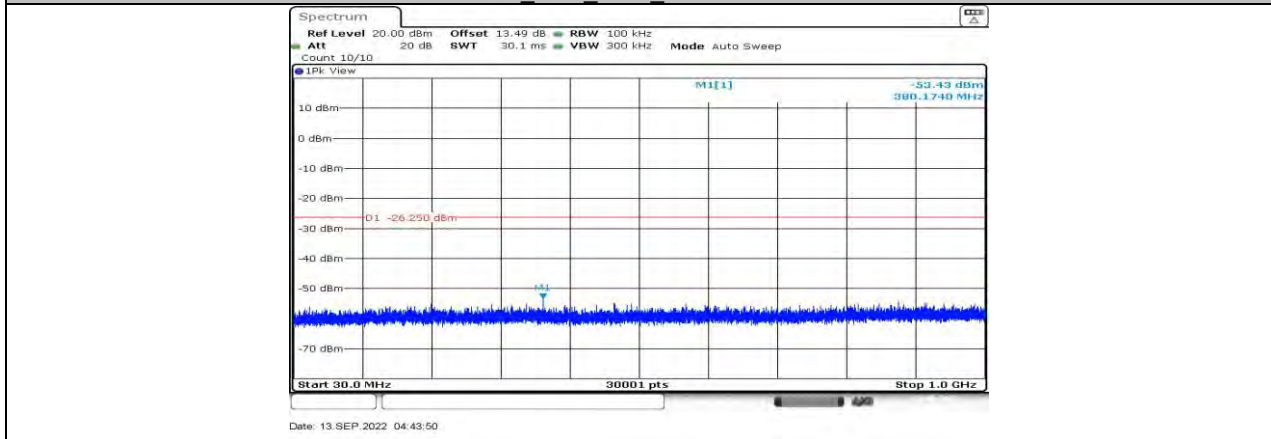


11G Ant1\_2437\_30~1000

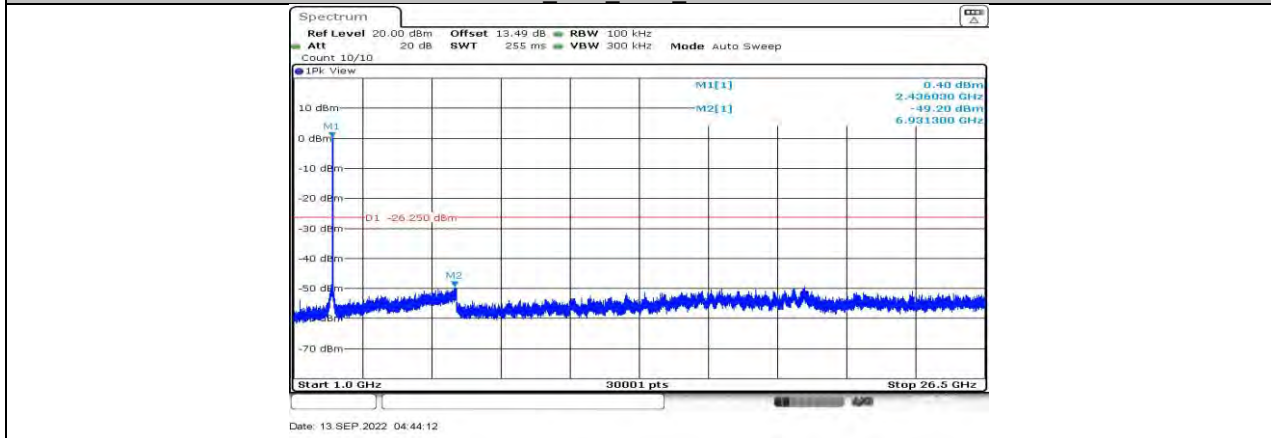


11G Ant1\_2437\_1000~26500




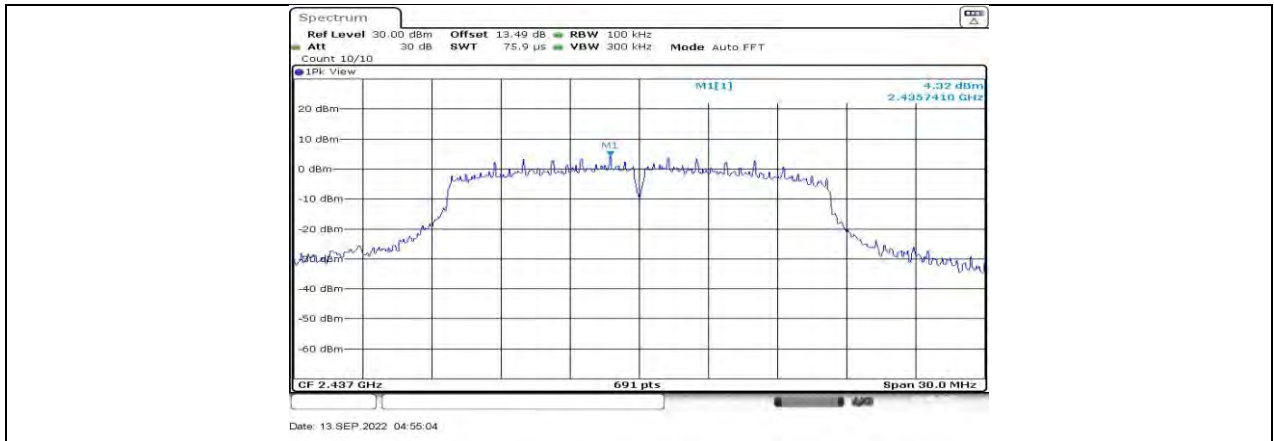


11G Ant2 2437 0~Reference

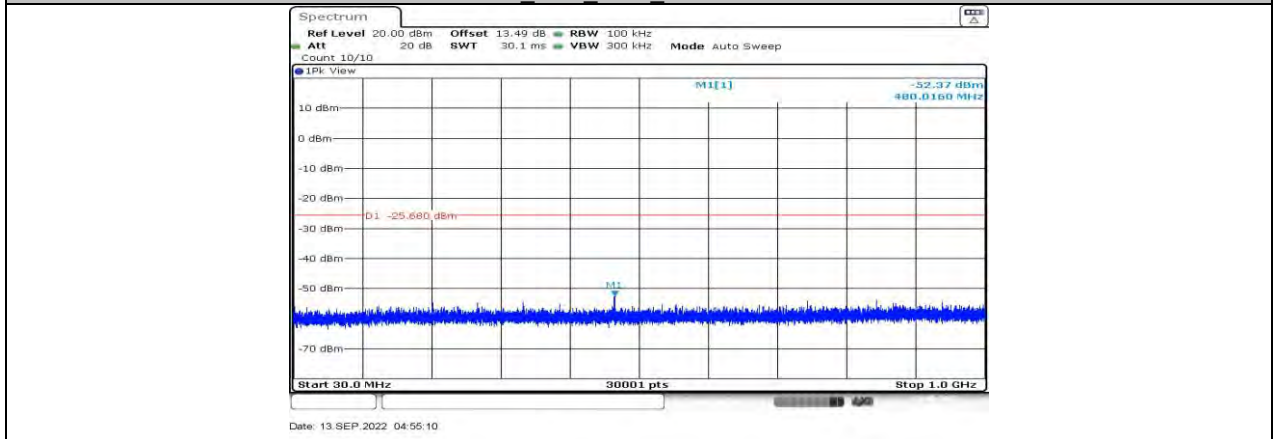


11G Ant2 2437 30~1000

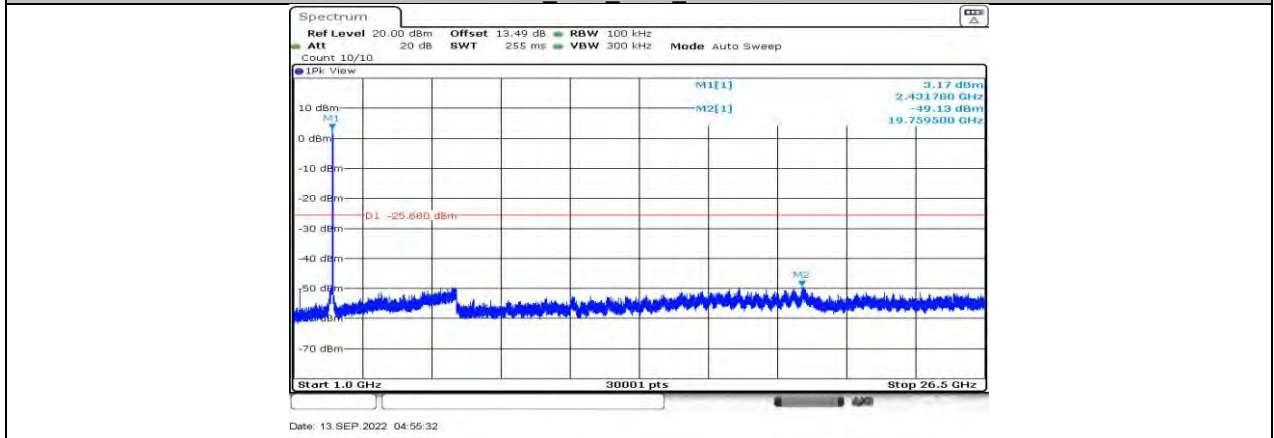


11G Ant2 2437 1000~26500

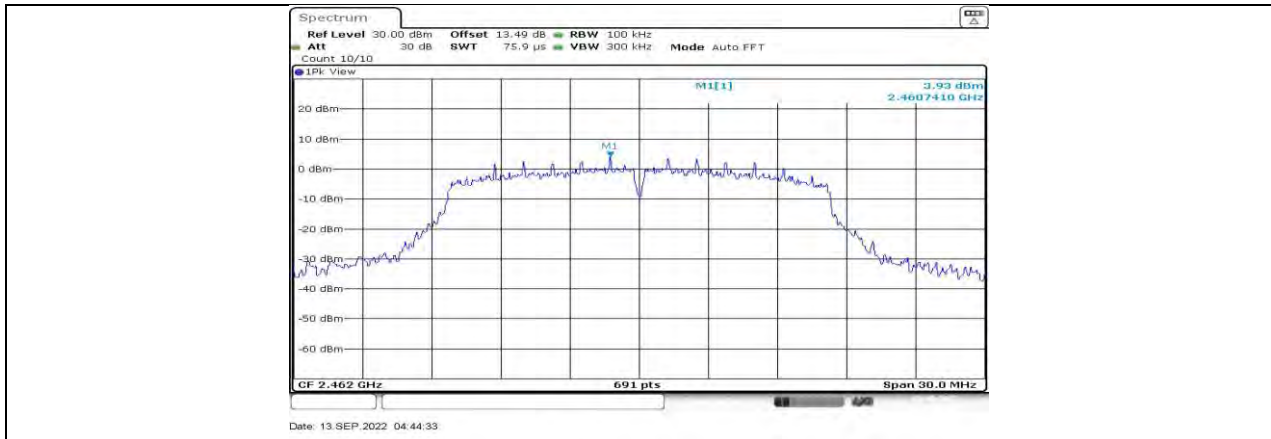


11G Ant1\_2462\_0~Reference

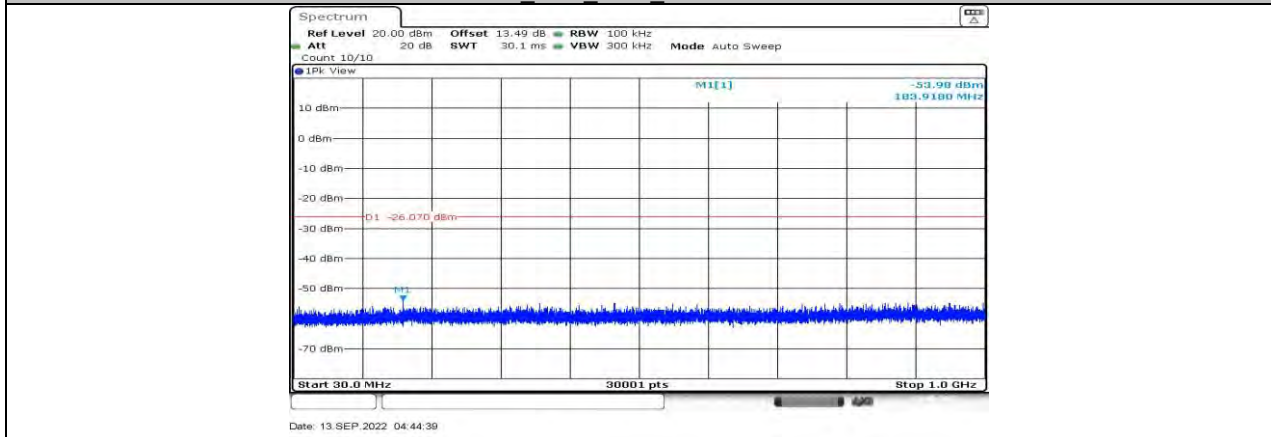


11G Ant1\_2462\_30~1000

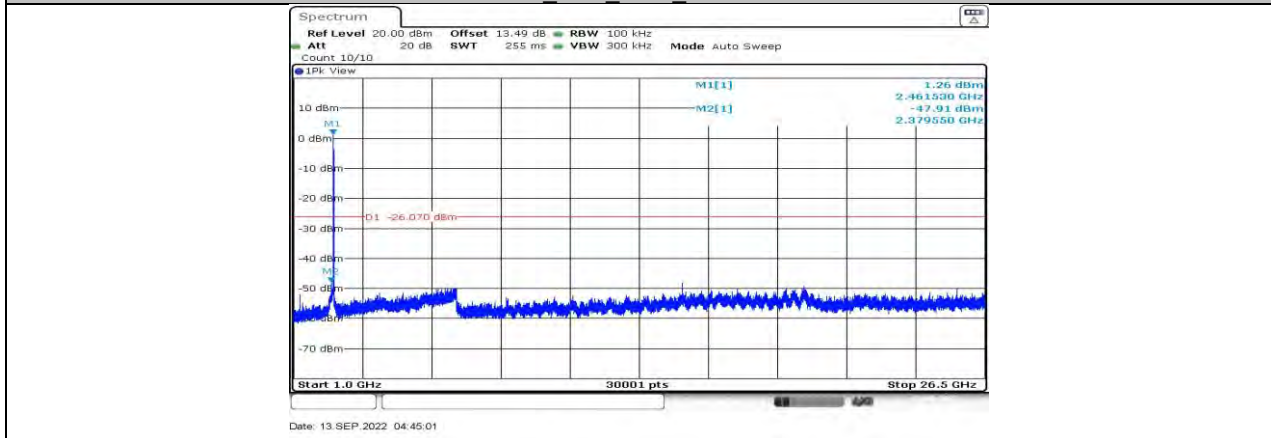


11G Ant1\_2462\_1000~26500

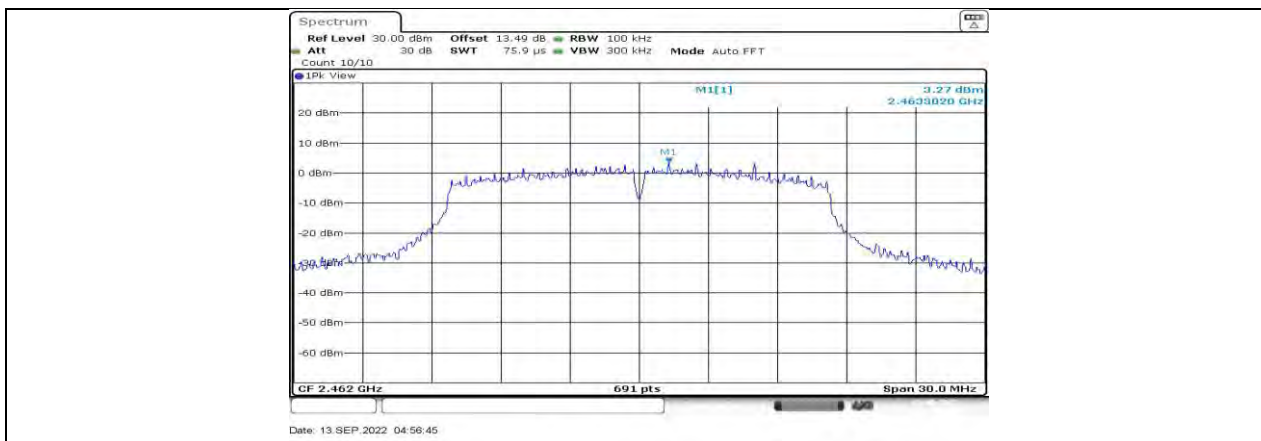


11G Ant2\_2462\_0~Reference

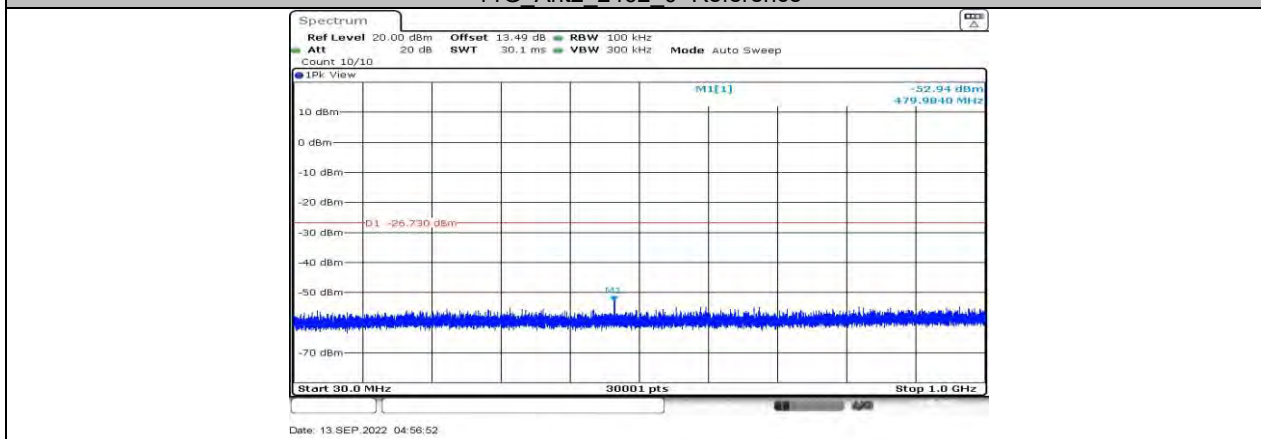


11G Ant2\_2462\_30~1000

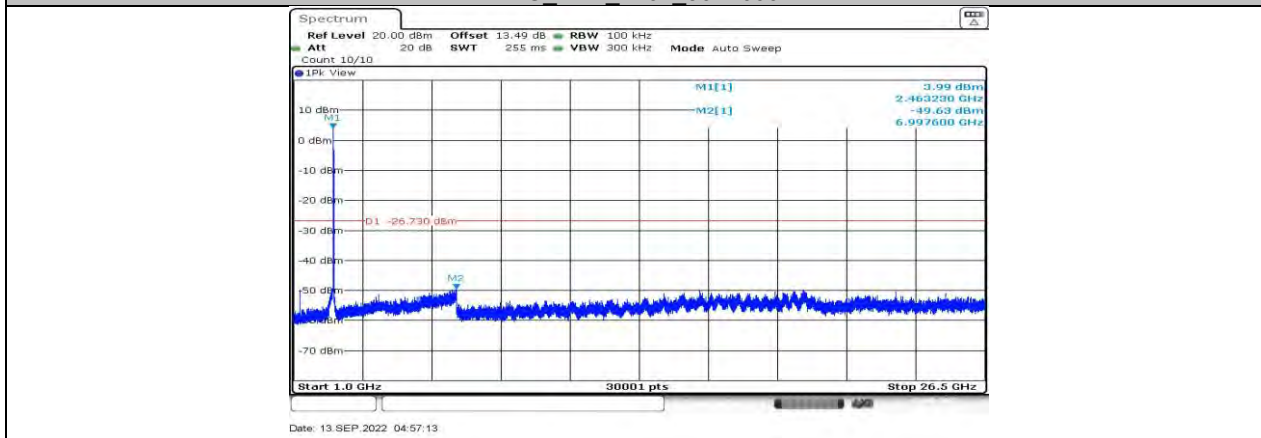


11G Ant2\_2462\_1000~26500

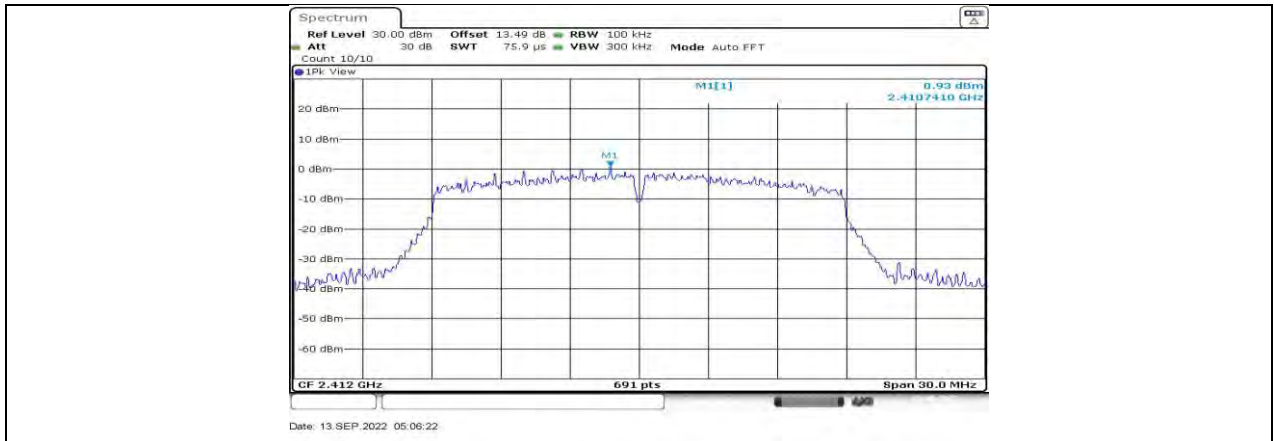


11N20MIMO Ant1\_2412\_0~Reference

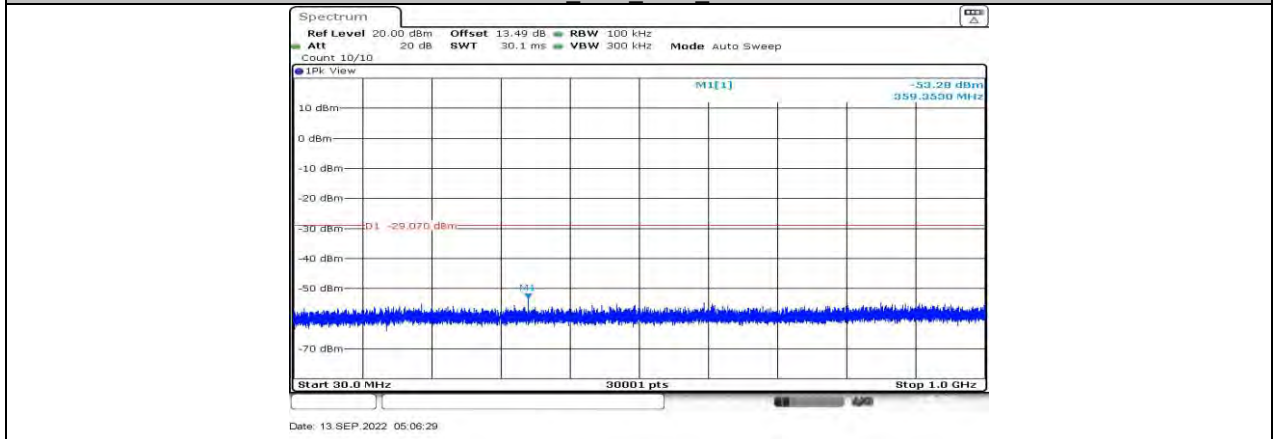


11N20MIMO Ant1\_2412\_30~1000

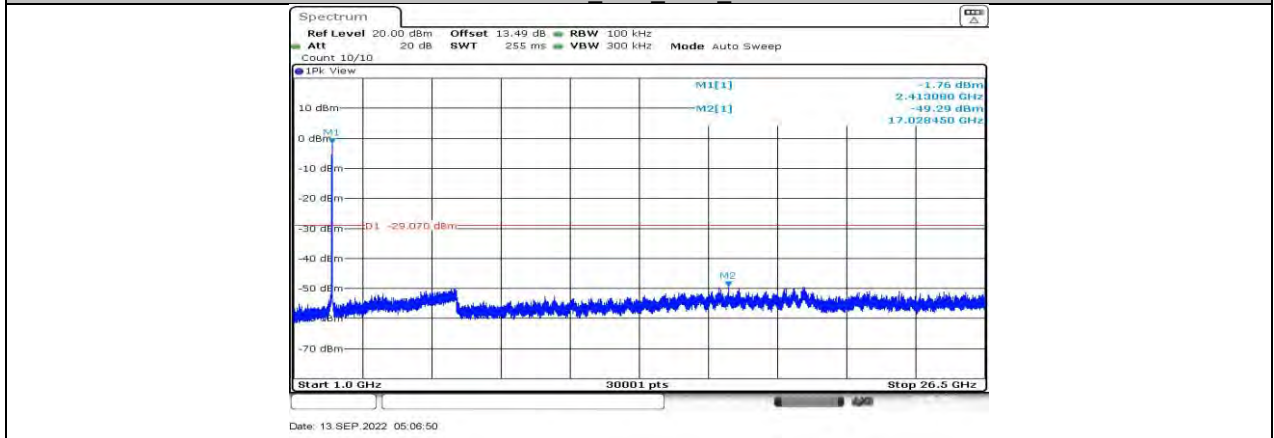


11N20MIMO Ant1\_2412\_1000~26500

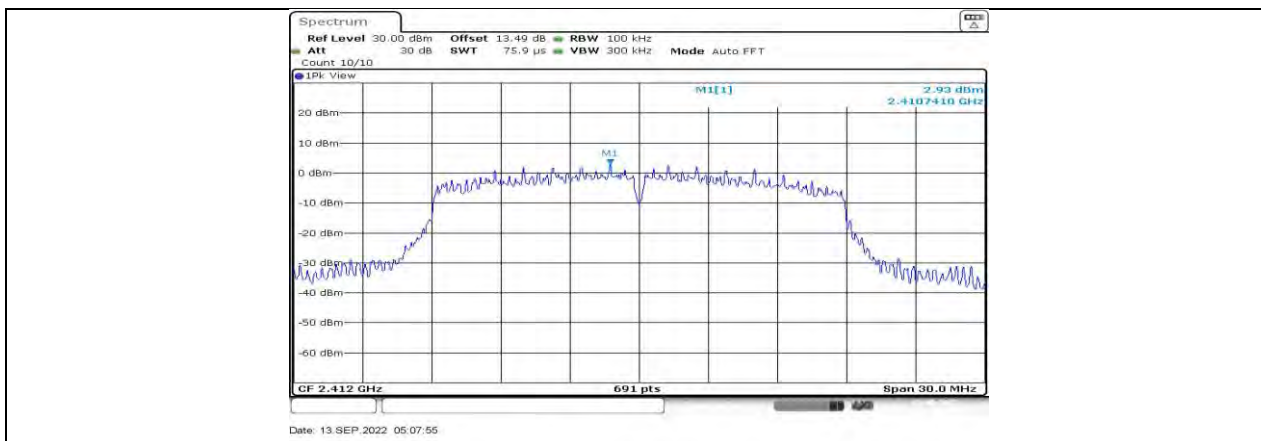


11N20MIMO\_Ant2\_2412\_0~Reference

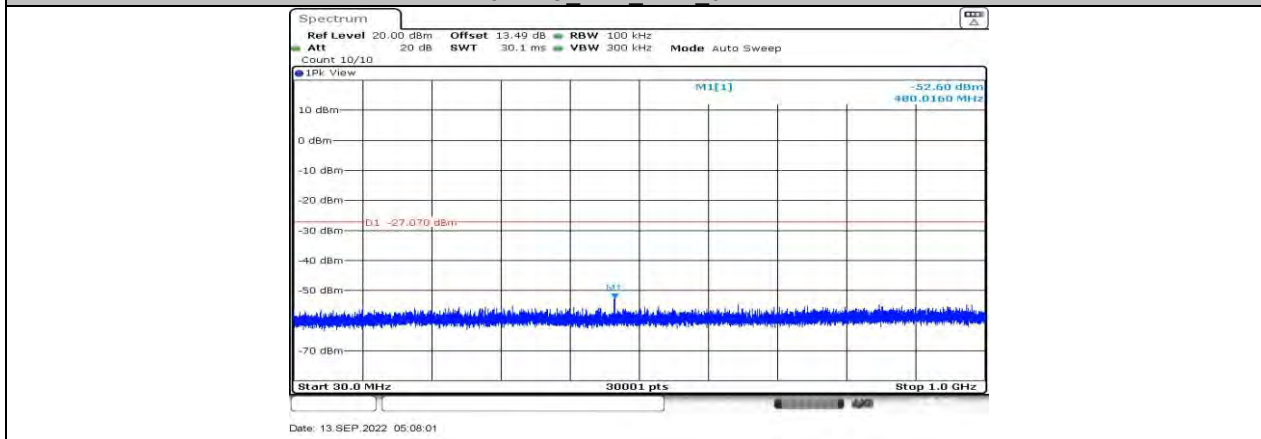


11N20MIMO\_Ant2\_2412\_30~1000

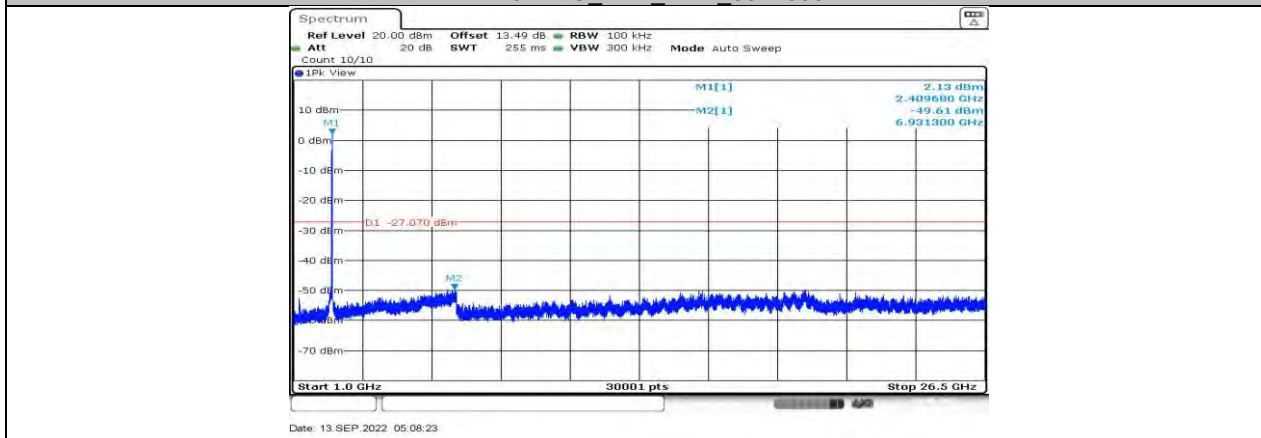


11N20MIMO\_Ant2\_2412\_1000~26500

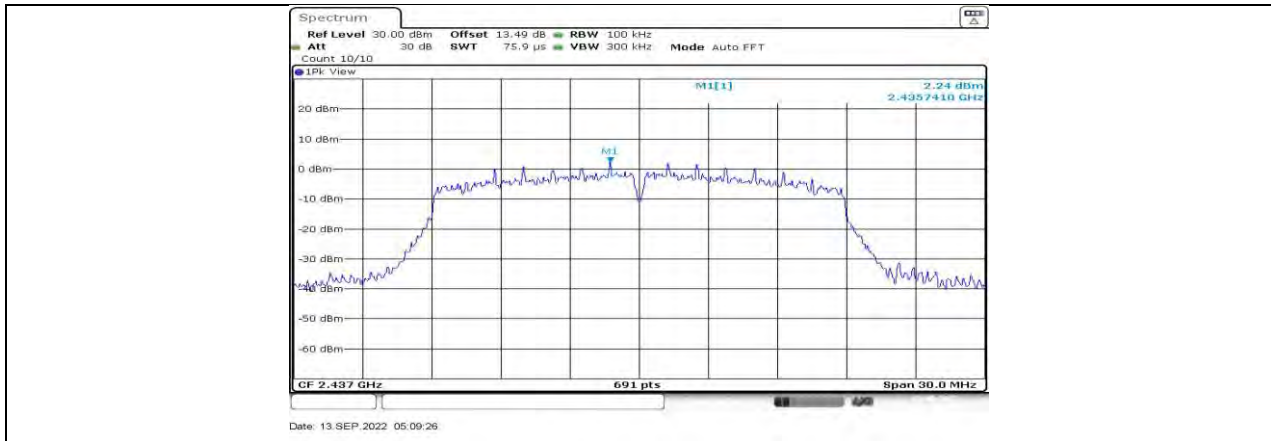


11N20MIMO Ant1\_2437\_0~Reference

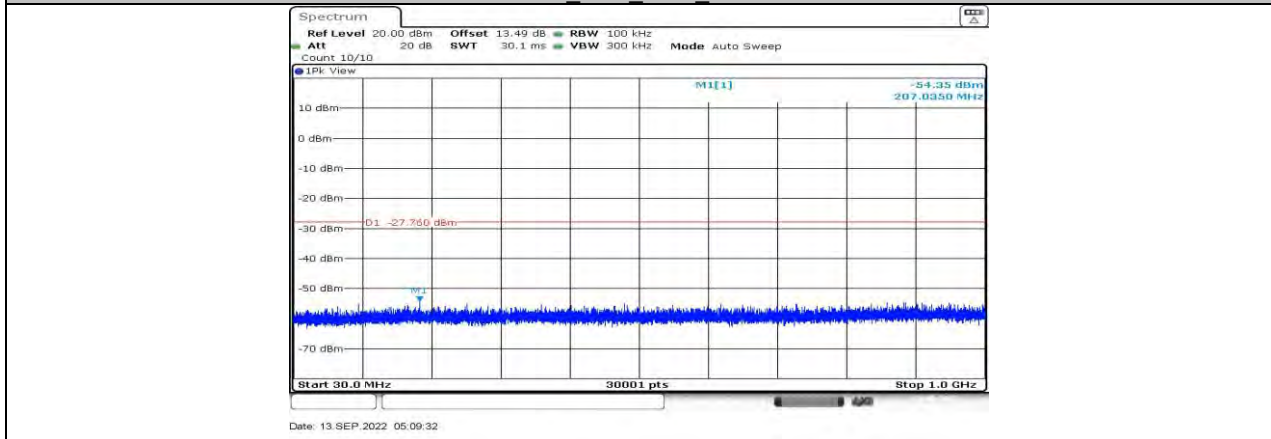


11N20MIMO Ant1\_2437\_30~1000

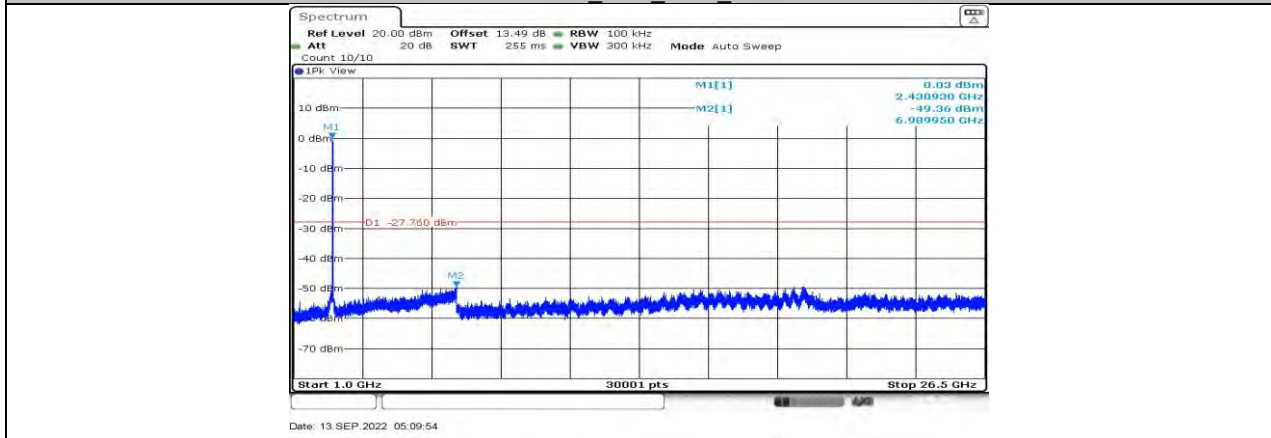


11N20MIMO Ant1\_2437\_1000~26500

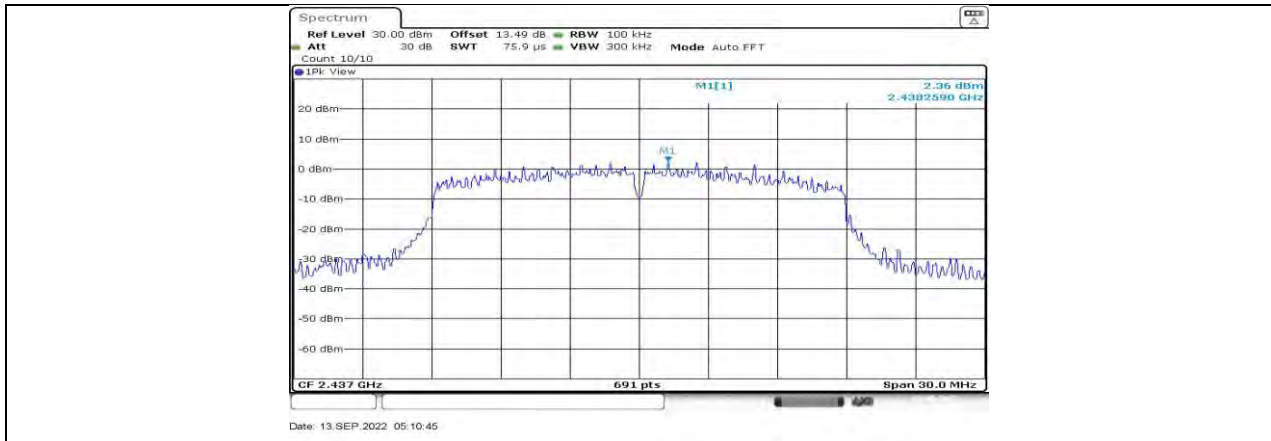

11N20MIMO\_Ant2\_2437\_0~Reference

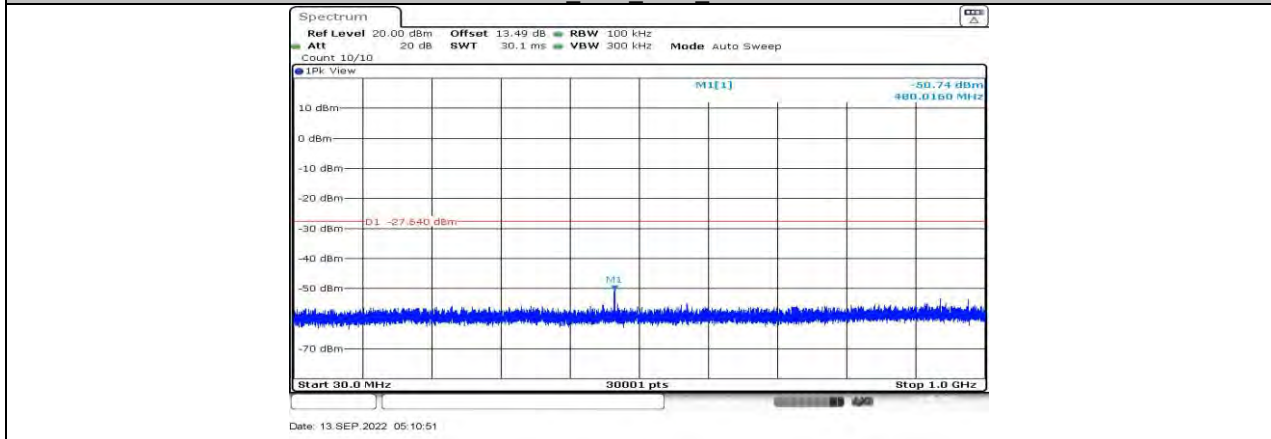


11N20MIMO\_Ant2\_2437\_30~1000

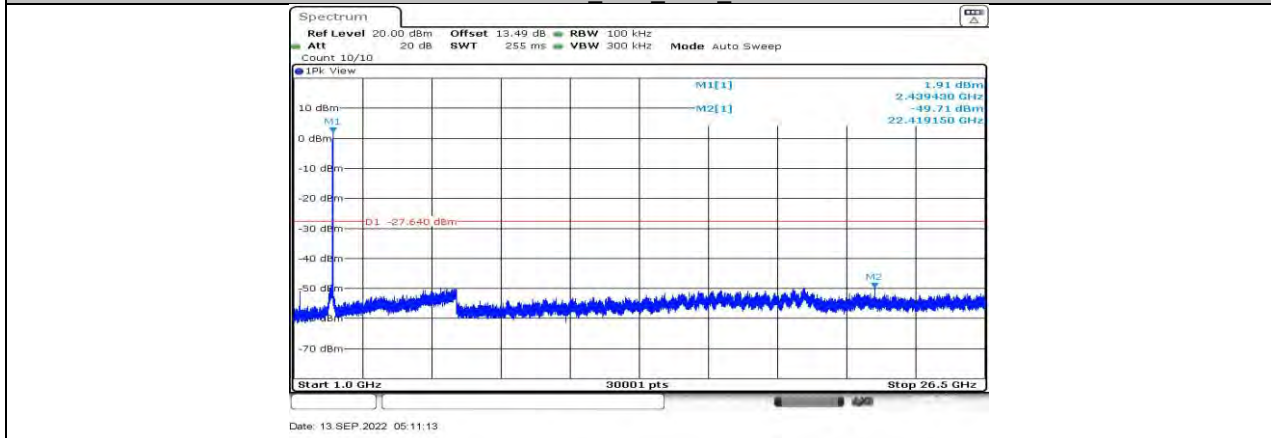


11N20MIMO\_Ant2\_2437\_1000~26500



11N20MIMO Ant1\_2462\_0~Reference

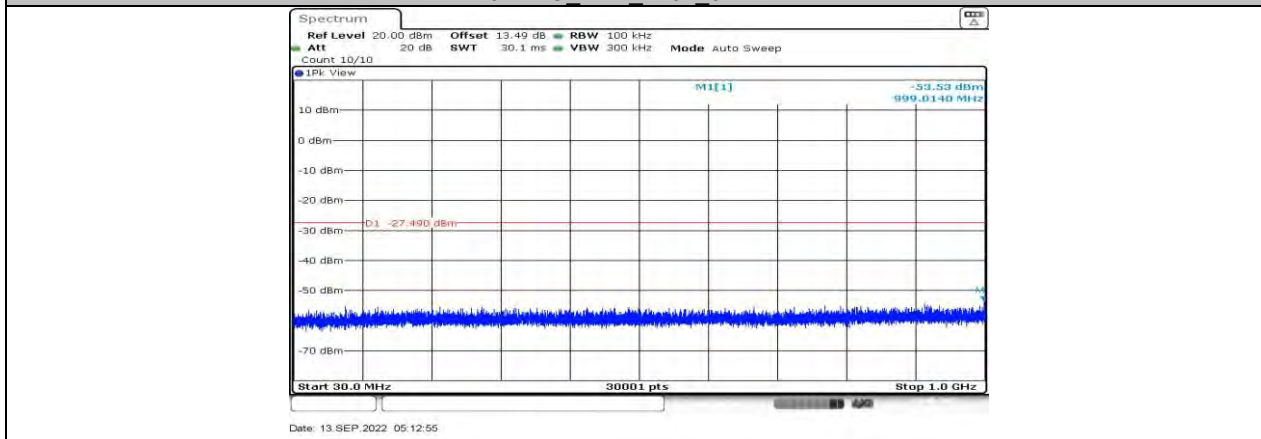


11N20MIMO Ant1\_2462\_30~1000

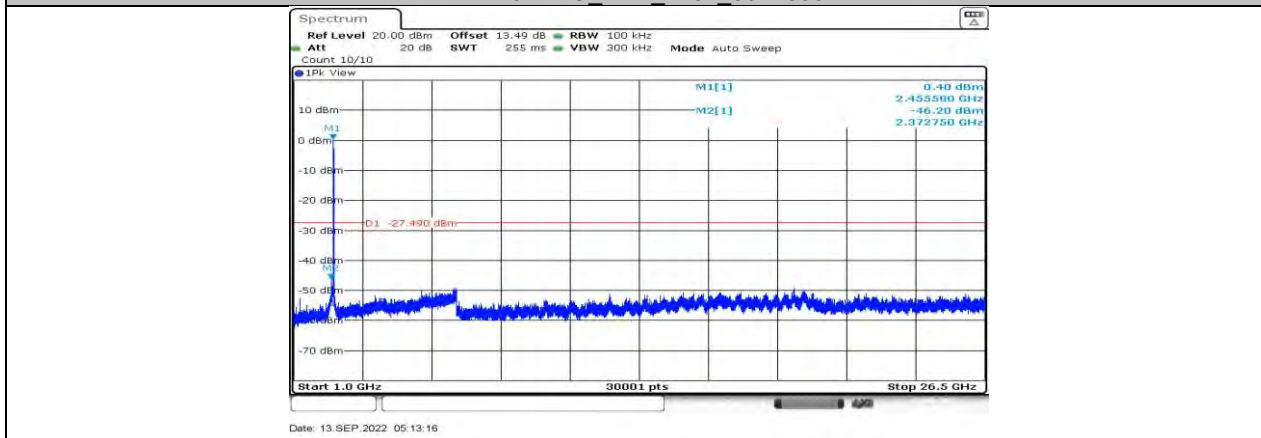


11N20MIMO Ant1\_2462\_1000~26500




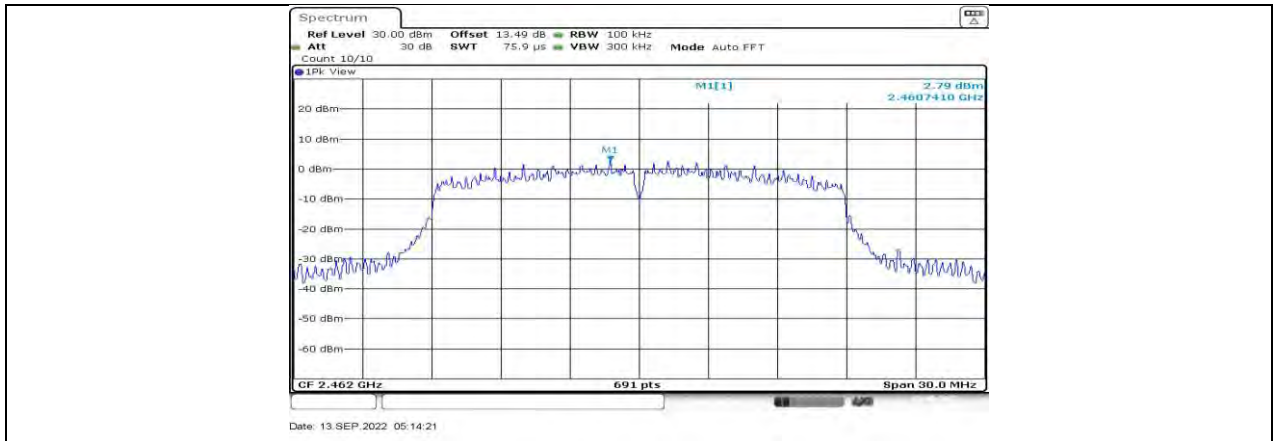


11N20MIMO\_Ant2\_2462\_0~Reference

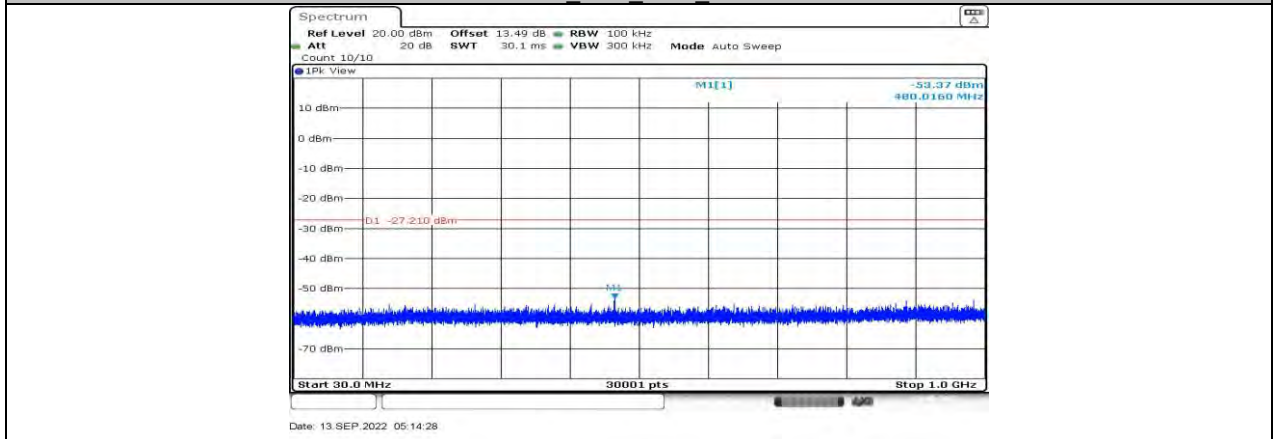


11N20MIMO\_Ant2\_2462\_30~1000

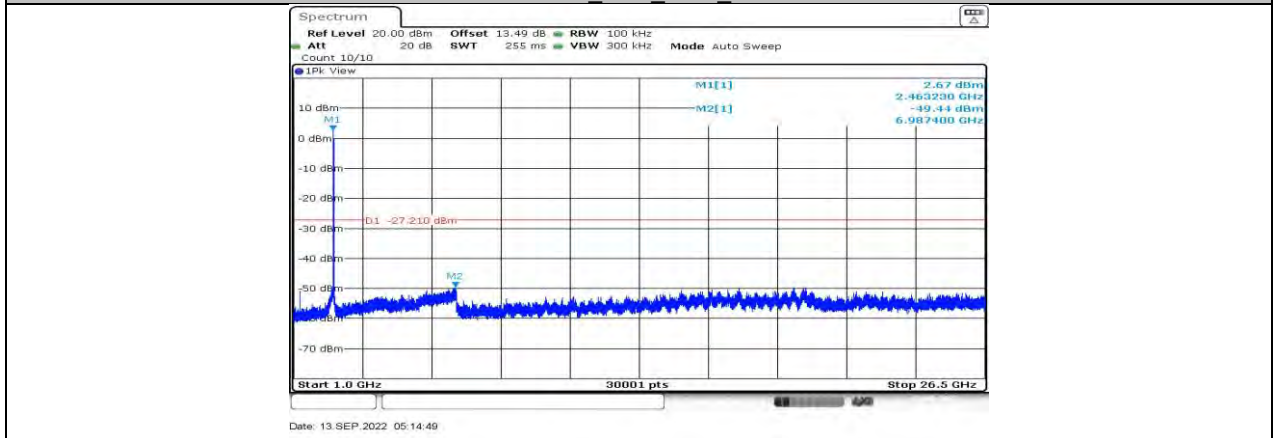


11N20MIMO\_Ant2\_2462\_1000~26500

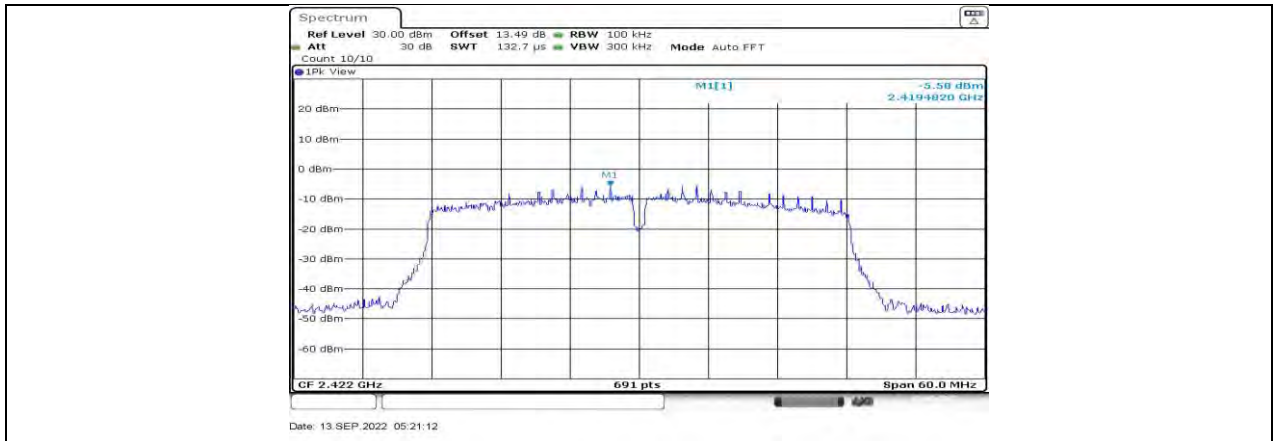


11N40MIMO Ant1\_2422\_0~Reference

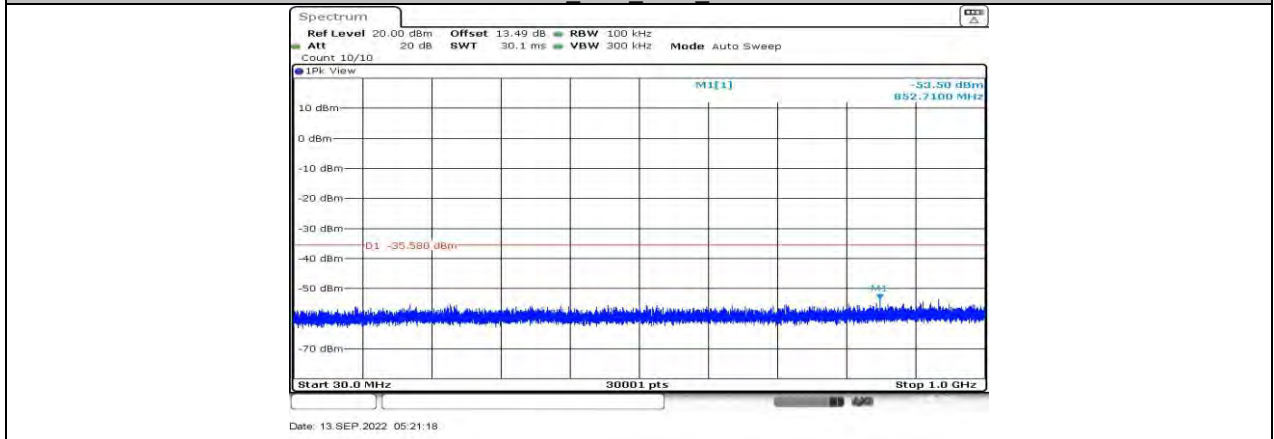


11N40MIMO Ant1\_2422\_30~1000

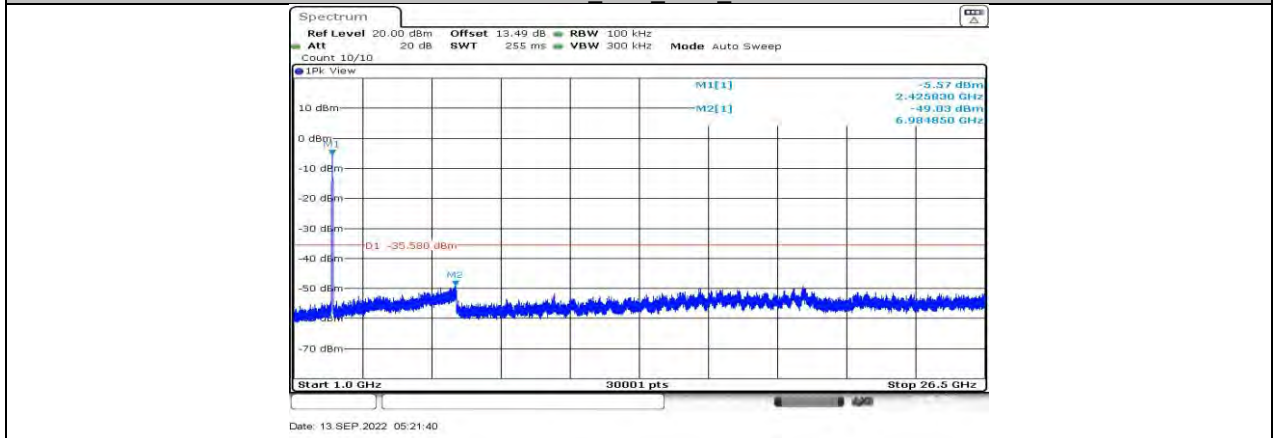


11N40MIMO Ant1\_2422\_1000~26500

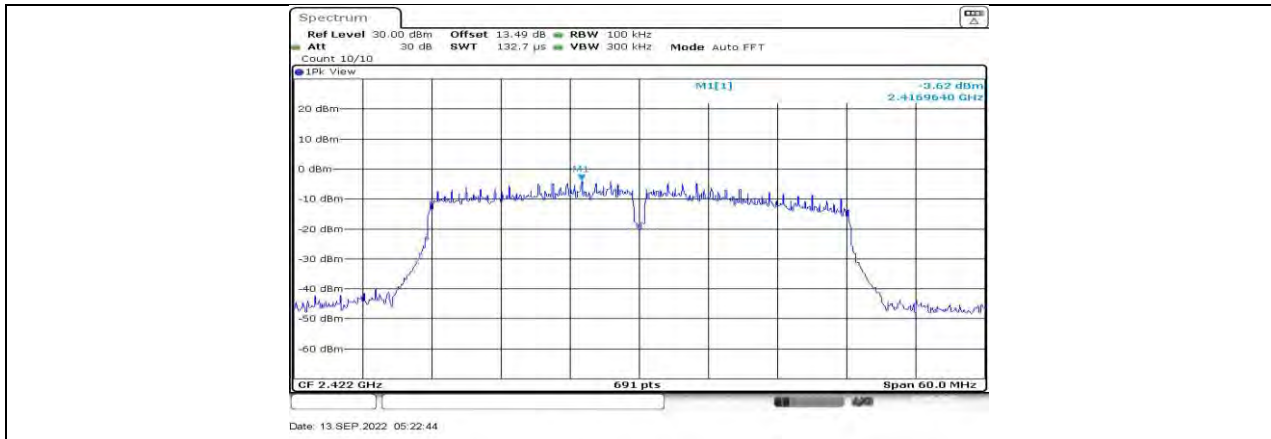


11N40MIMO Ant2 2422 0~Reference

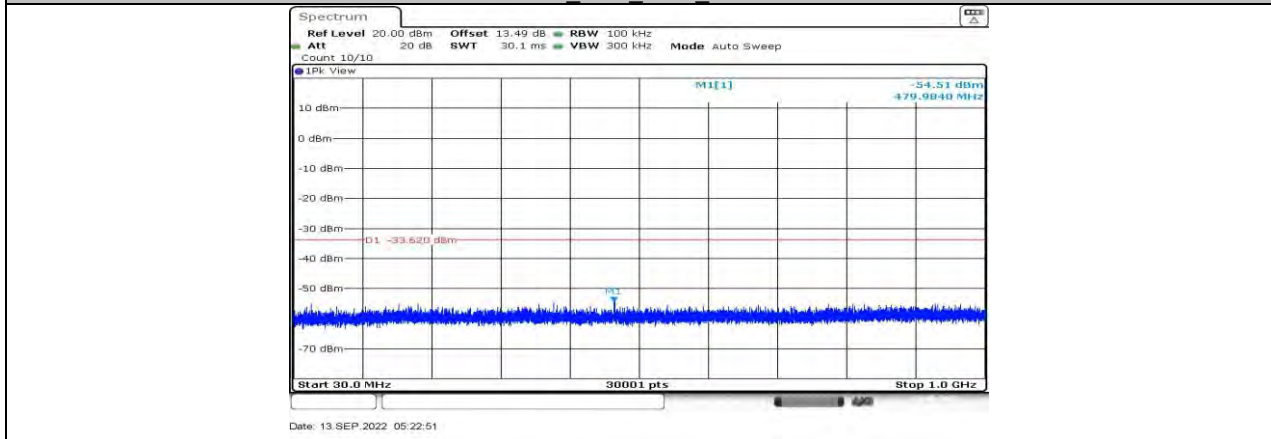


11N40MIMO Ant2 2422 30~1000

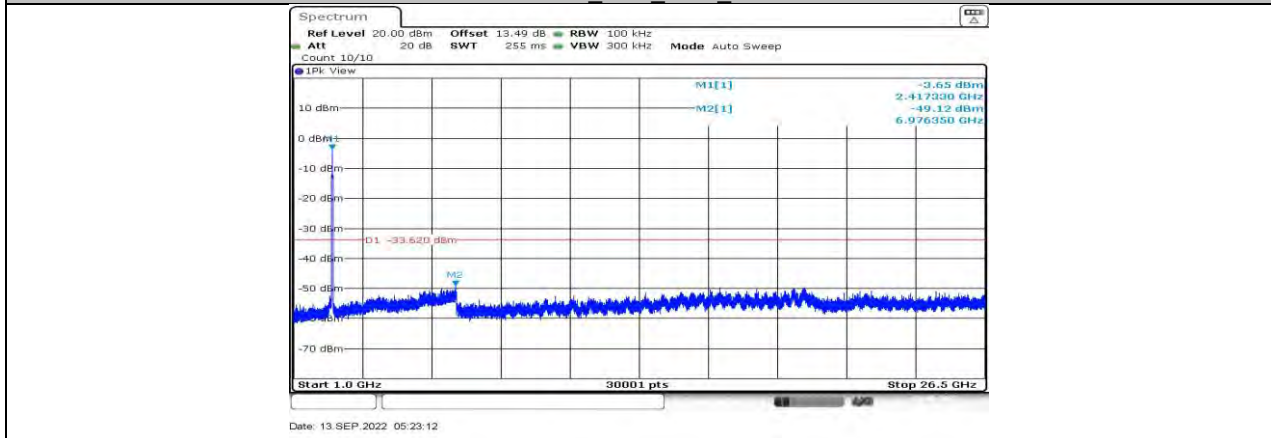


11N40MIMO Ant2 2422 1000~26500

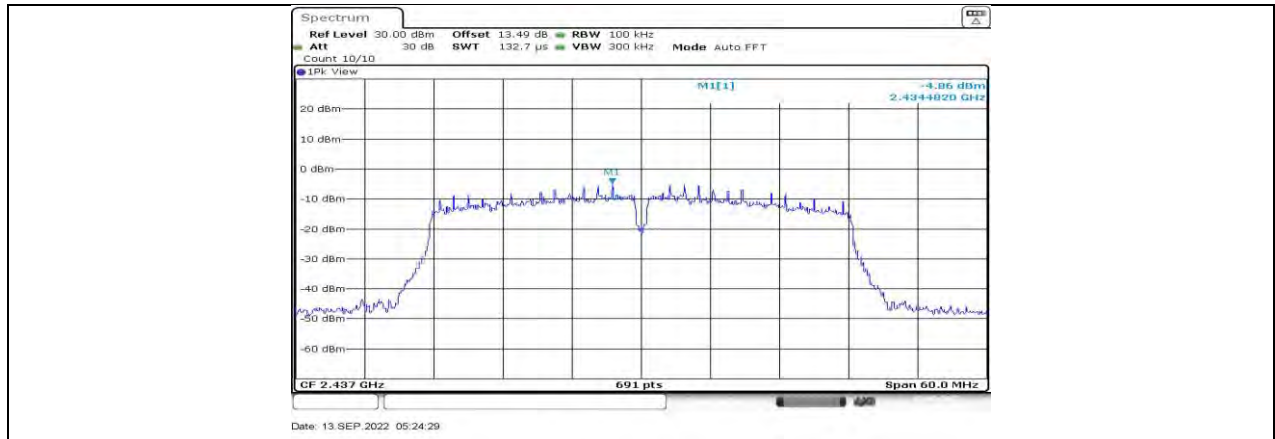


11N40MIMO Ant1\_2437\_0~Reference

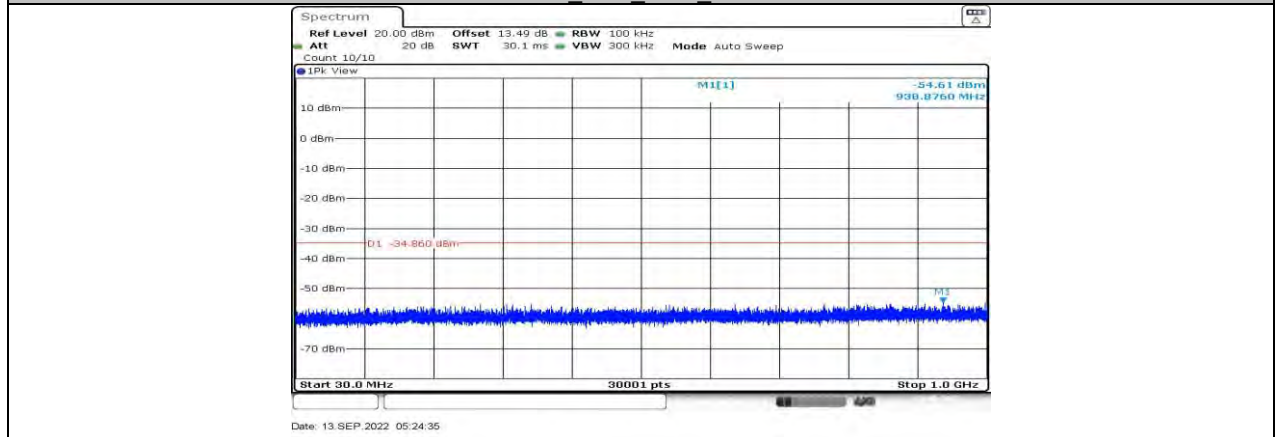


11N40MIMO Ant1\_2437\_30~1000

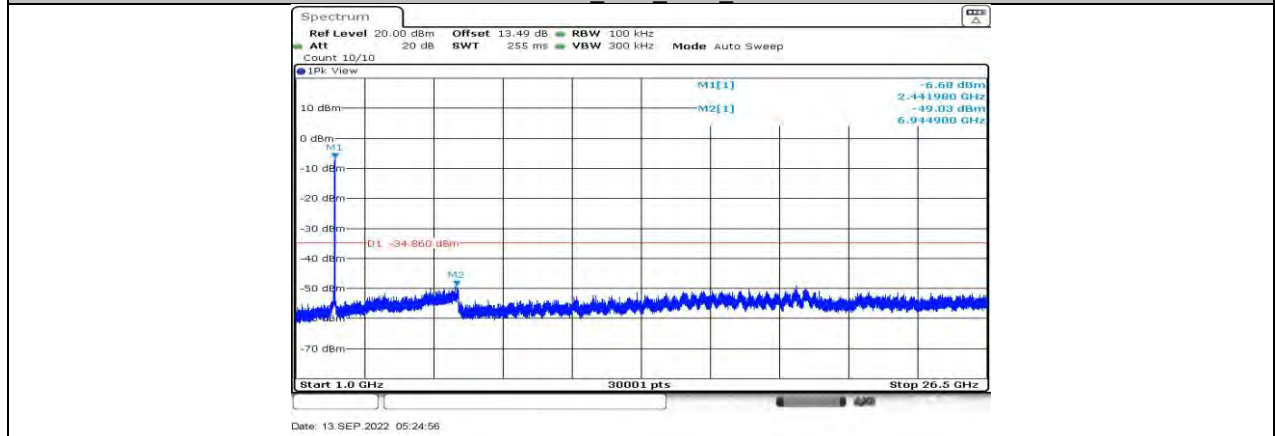


11N40MIMO Ant1\_2437\_1000~26500

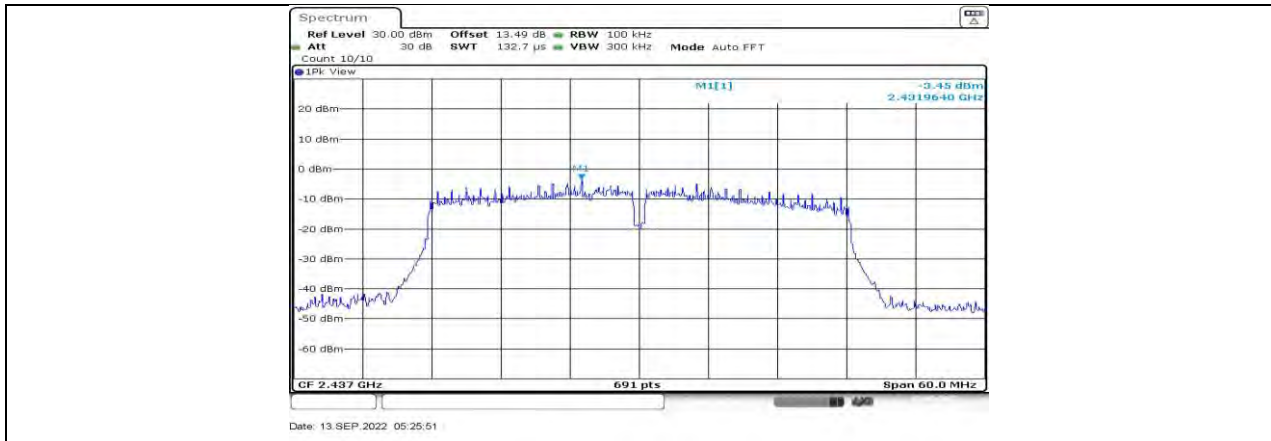


11N40MIMO Ant2 2437 0~Reference

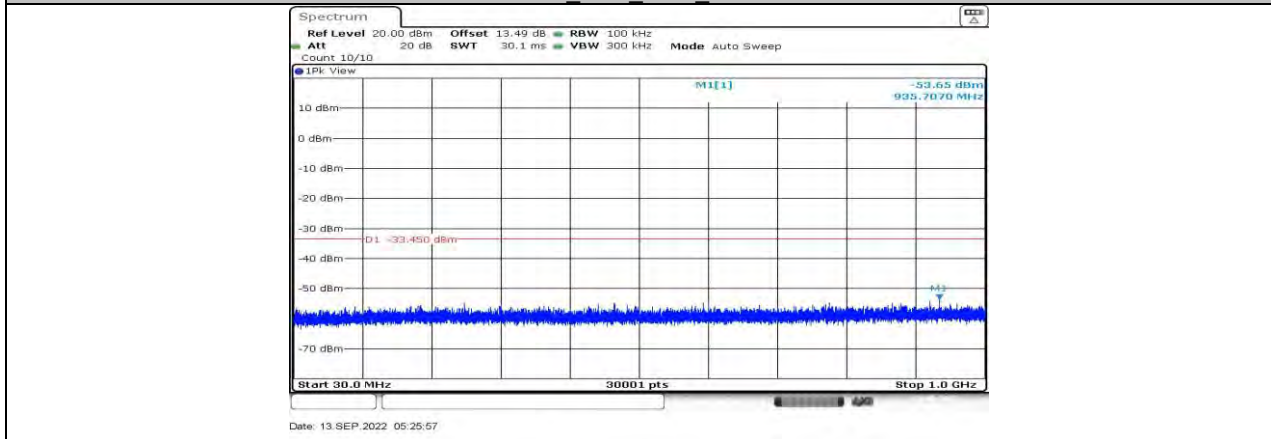


11N40MIMO Ant2 2437 30~1000

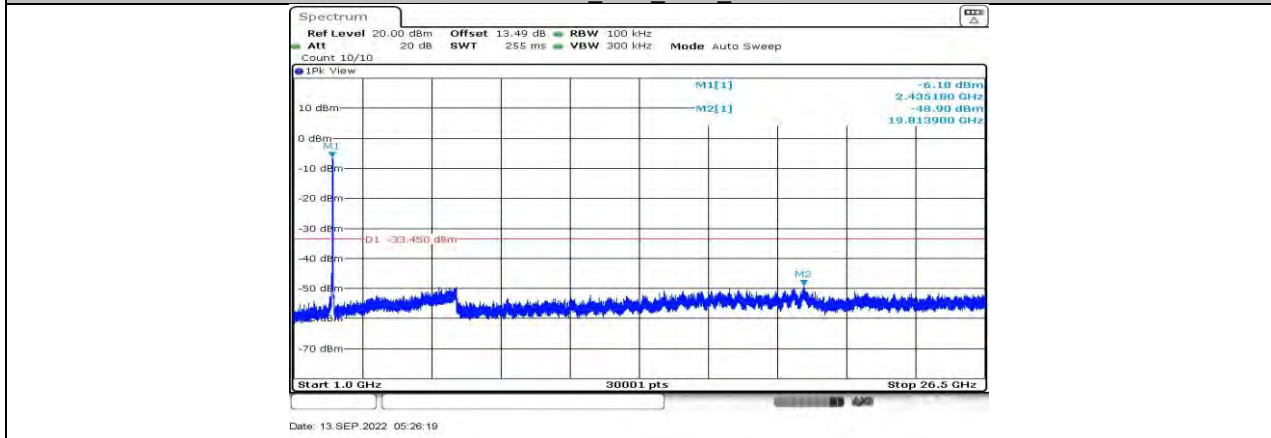


11N40MIMO Ant2 2437 1000~26500

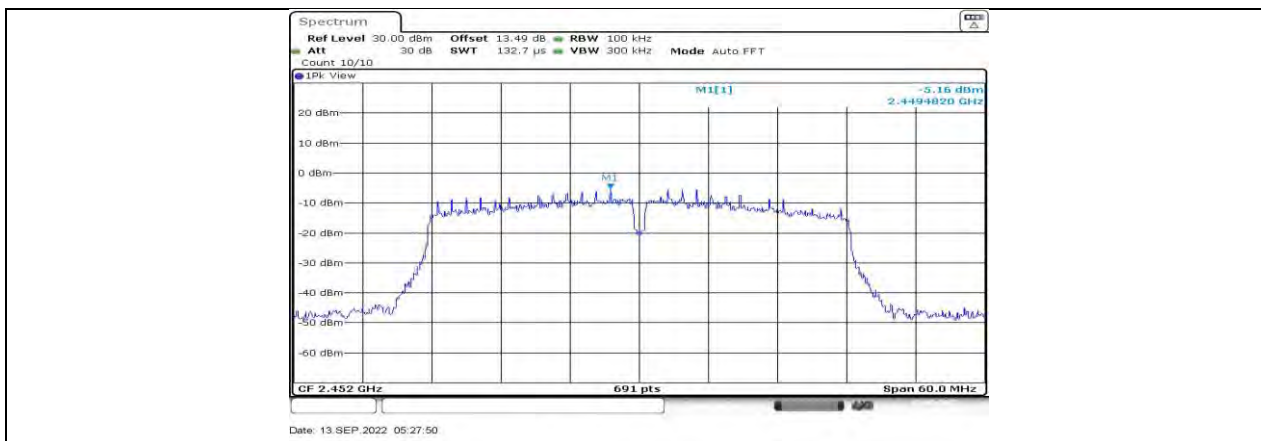


11N40MIMO Ant1\_2452\_0~Reference

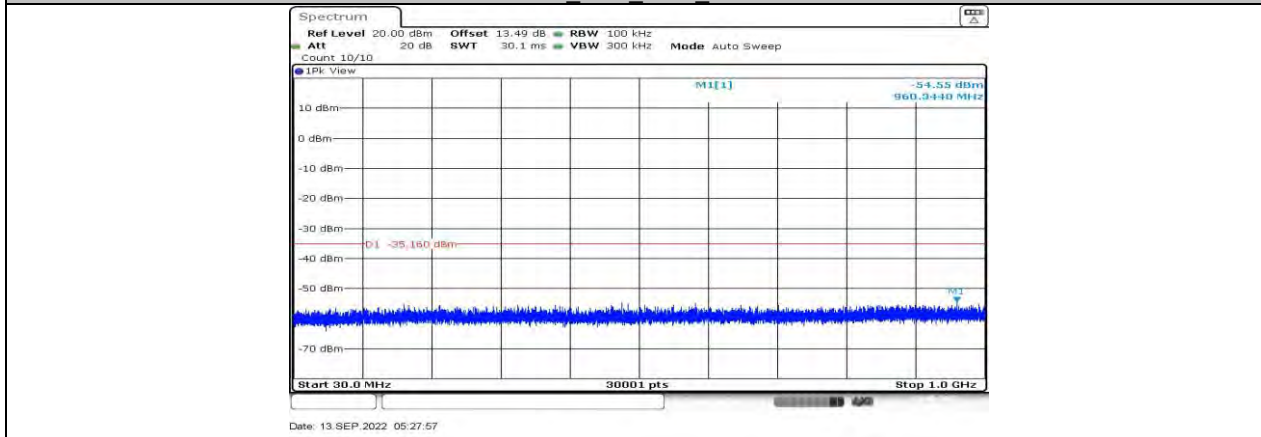


11N40MIMO Ant1\_2452\_30~1000

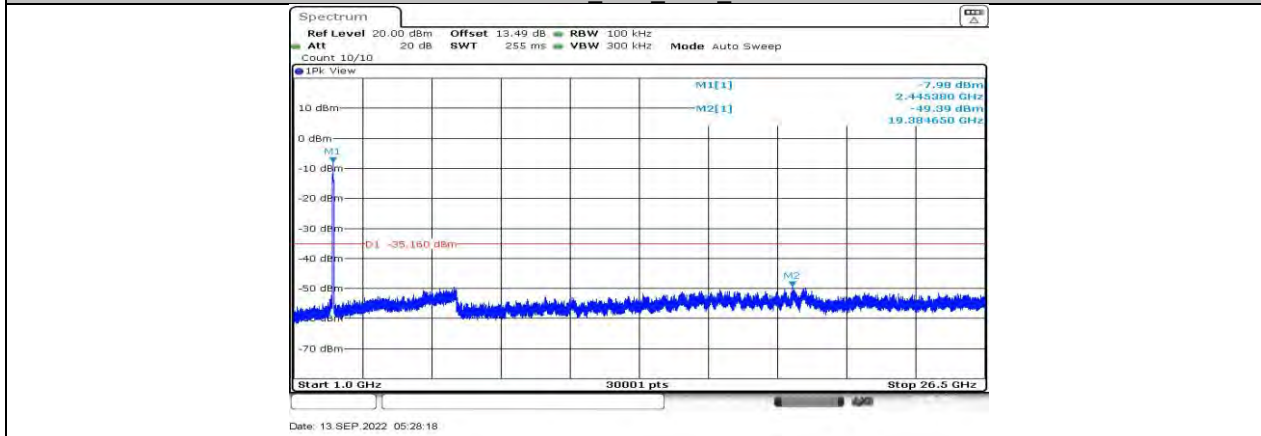


11N40MIMO Ant1\_2452\_1000~26500

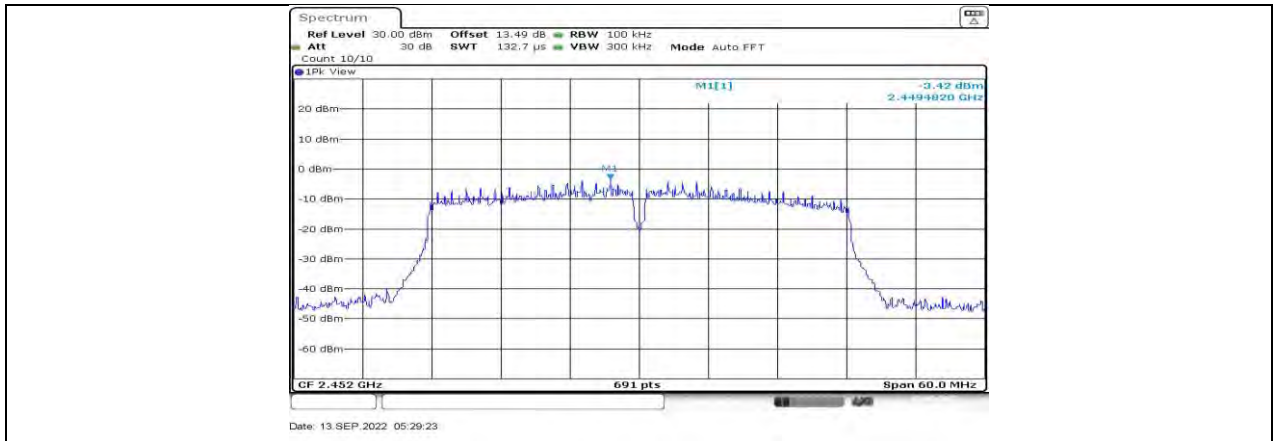

11N40MIMO Ant2 2452 0~Reference

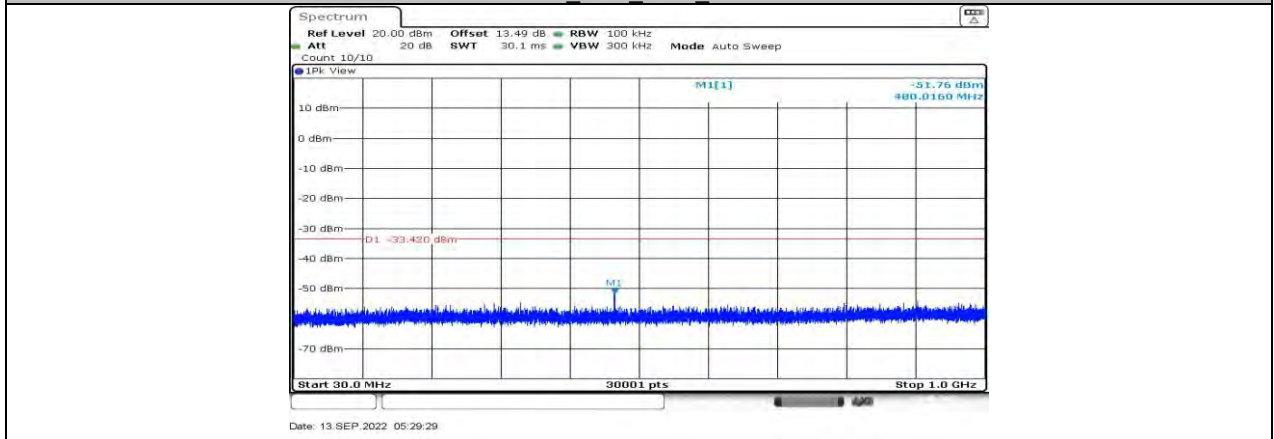

11N40MIMO Ant2 2452 30~1000

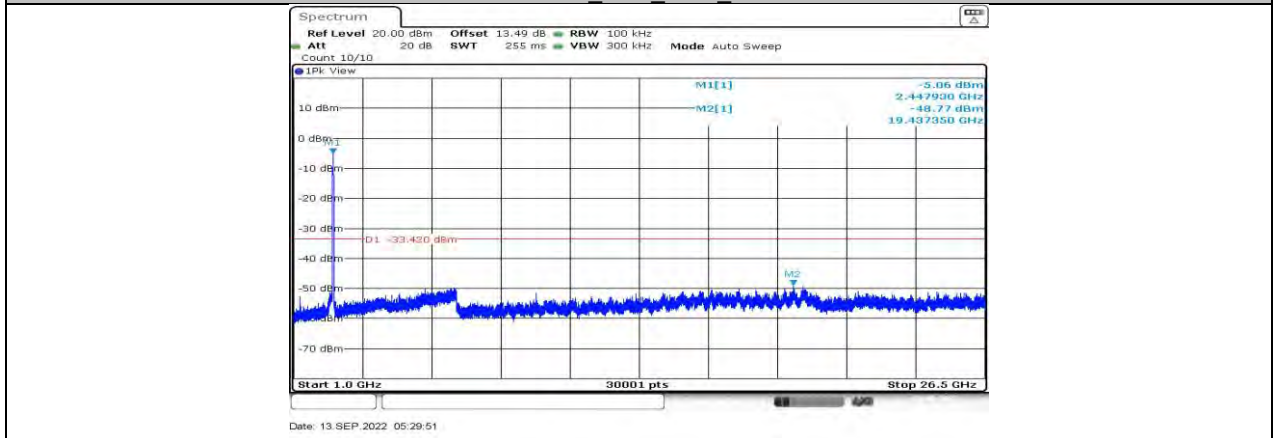

11N40MIMO Ant2 2452 1000~26500



## 11.7. APPENDIX G: DUTY CYCLE

### 11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.39	8.54	0.9824	98.24	0.08	/	0.01
11G	1.38	1.54	0.8961	89.61	0.48	0.72	1
11N20MIMO	1.30	1.47	0.8844	88.44	0.53	0.77	1
11N40MIMO	0.64	0.80	0.8000	80.00	0.97	1.56	2

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)




Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.

If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW  $\leq$  RBW/100 (i.e., 10 kHz) but not less than 10 Hz.



### 11.7.2. Test Graphs

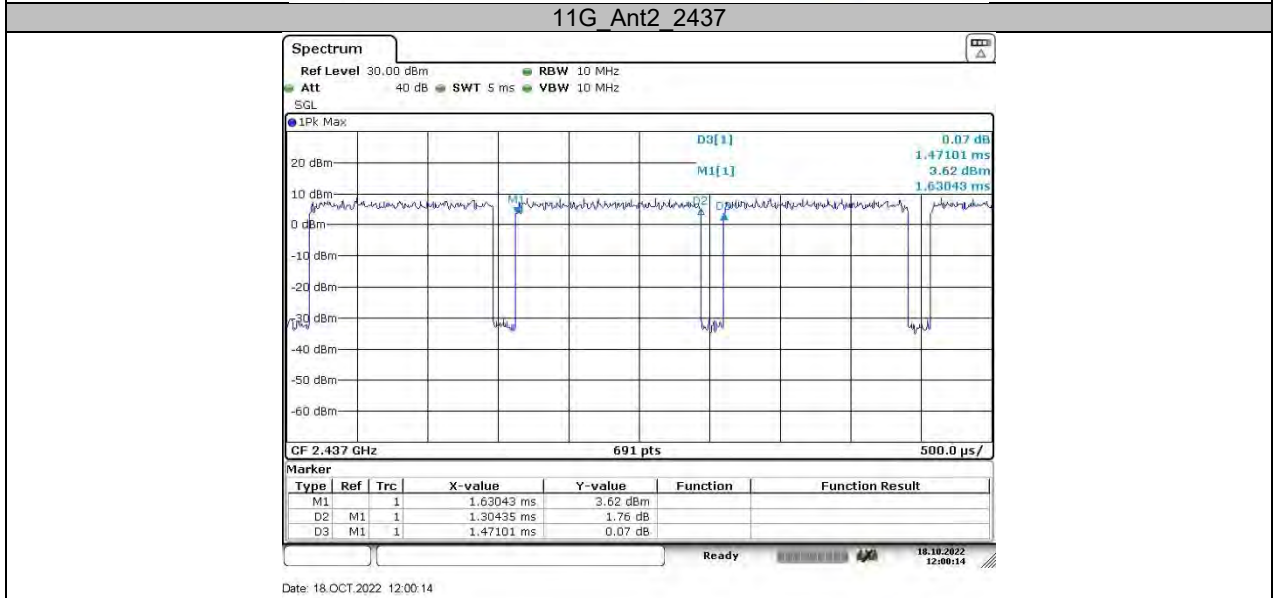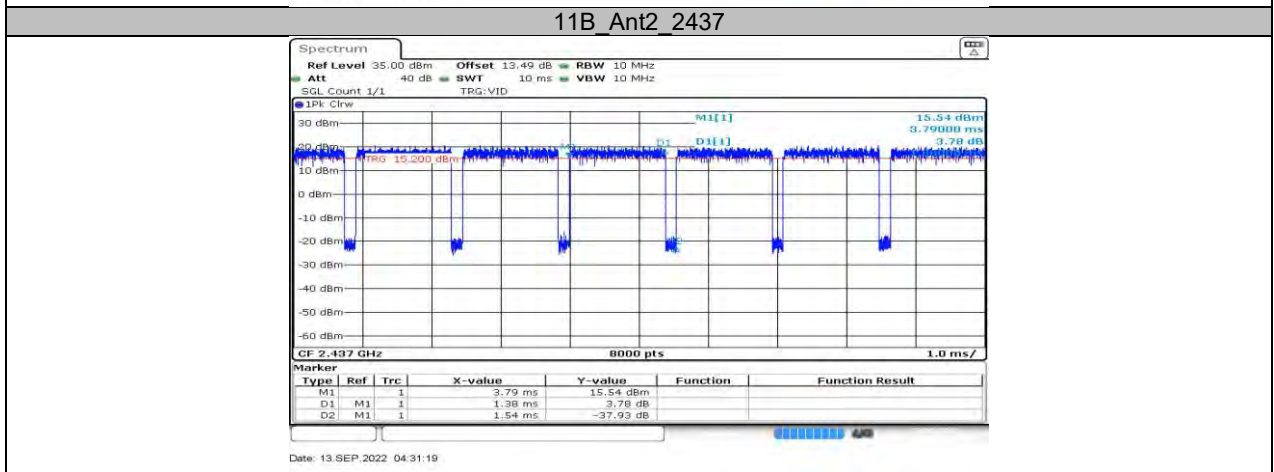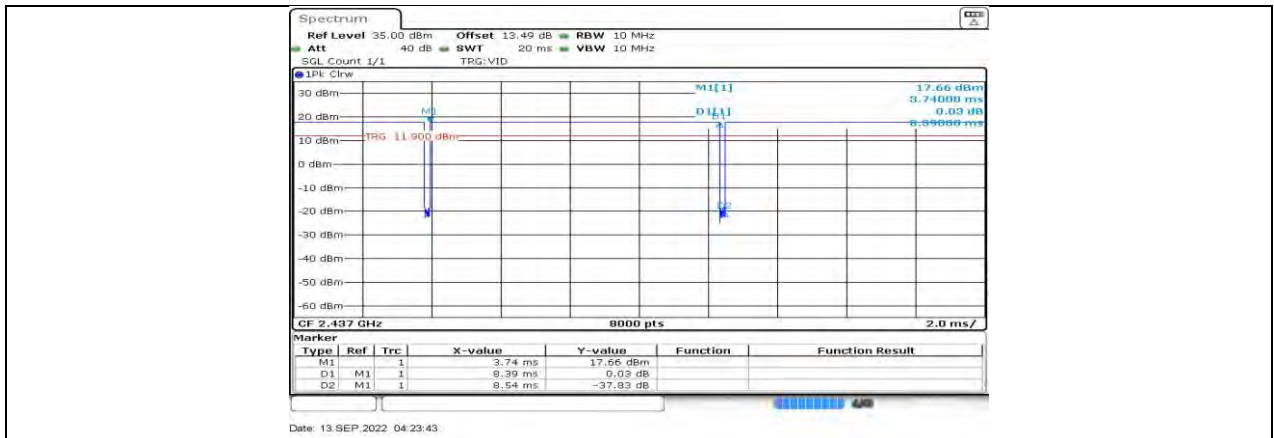

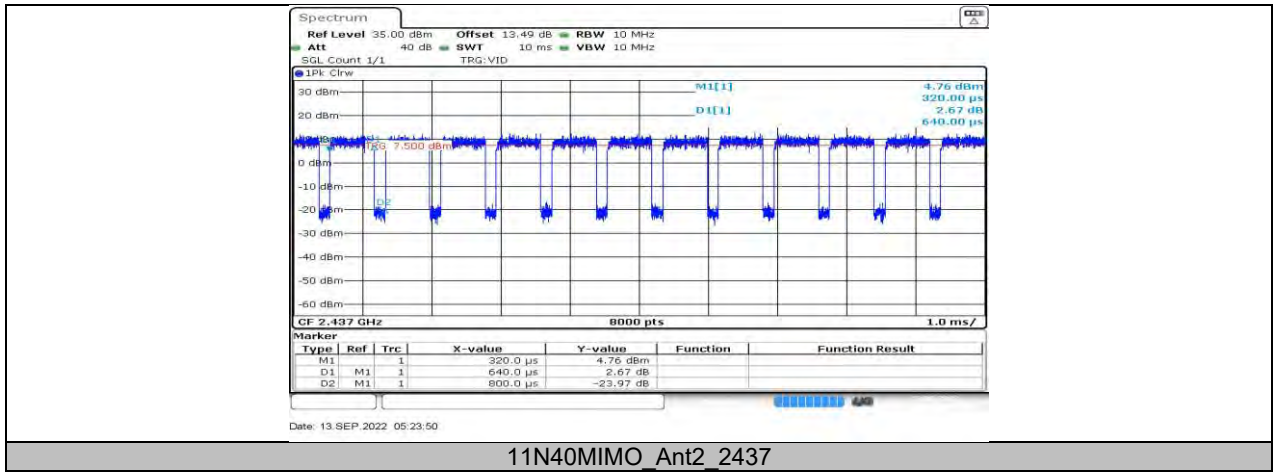

**END OF REPORT**