Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 3.3 V

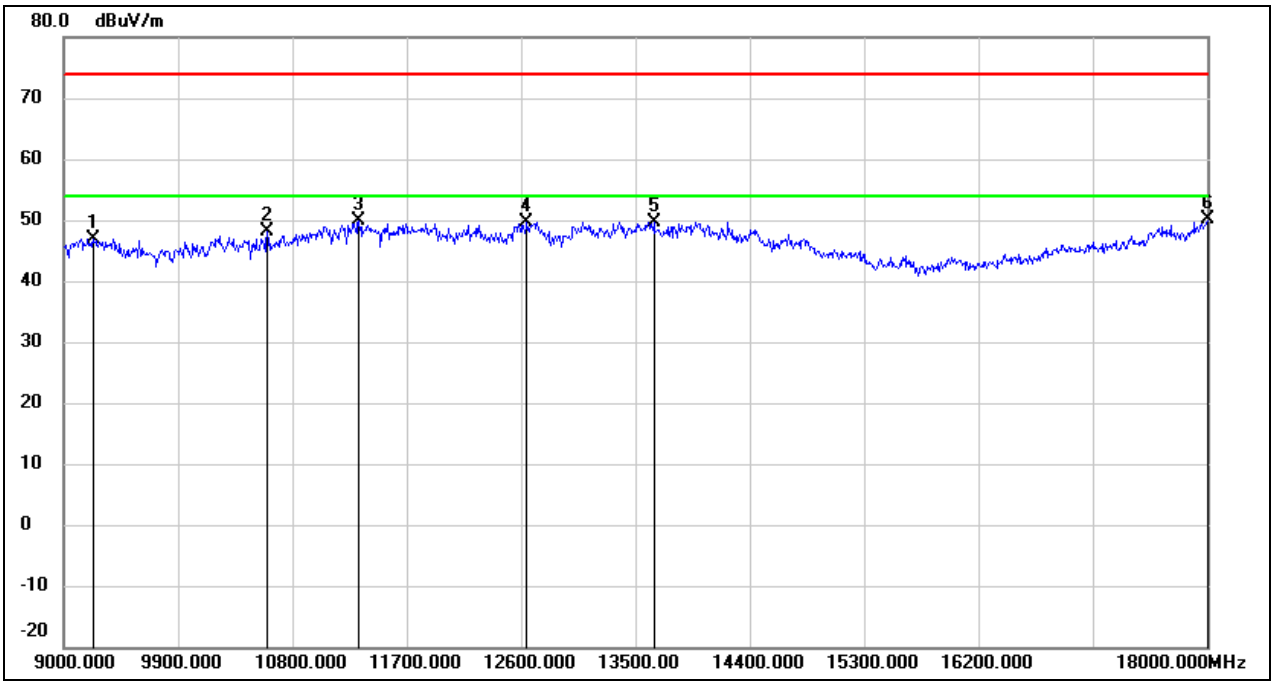

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9234.000	36.13	10.84	46.97	74.00	-27.03	peak
2	10602.000	34.63	13.45	48.08	74.00	-25.92	peak
3	11322.000	33.86	15.90	49.76	74.00	-24.24	peak
4	12645.000	31.70	17.92	49.62	74.00	-24.38	peak
5	13644.000	28.57	21.11	49.68	74.00	-24.32	peak
6	18000.000	24.86	25.16	50.02	74.00	-23.98	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6165
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

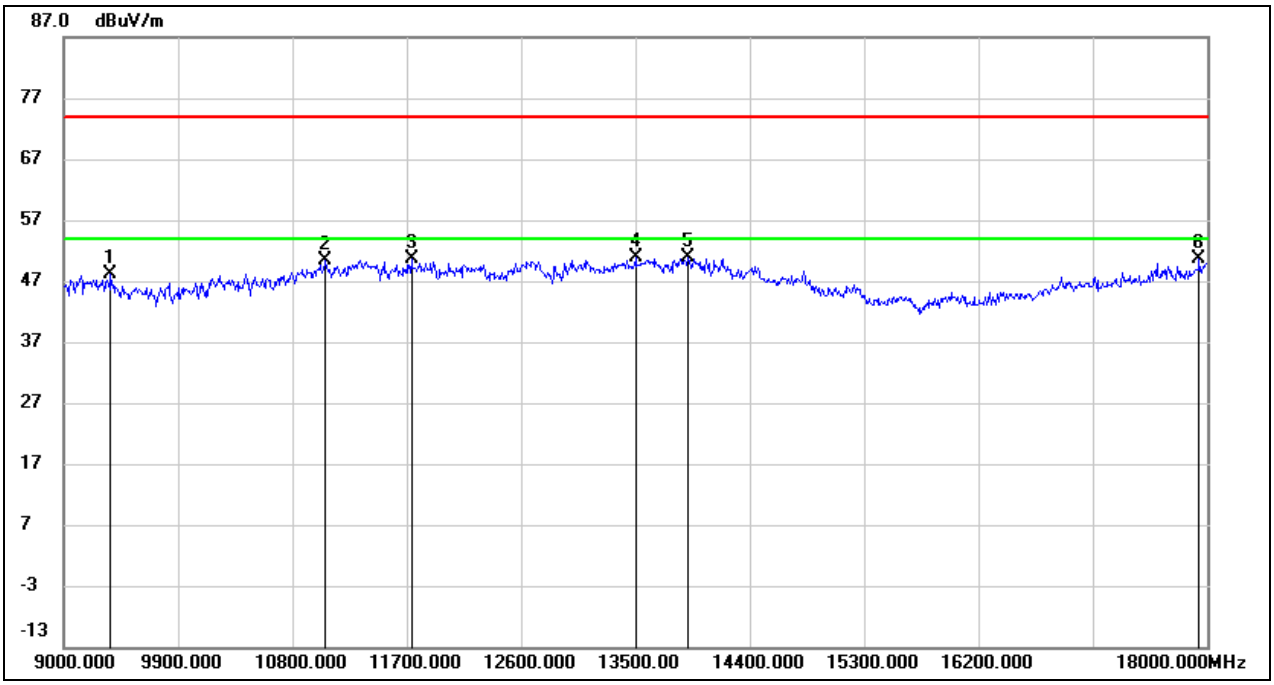

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9369.000	37.19	10.87	48.06	74.00	-25.94	peak
2	11061.000	35.44	14.96	50.40	74.00	-23.60	peak
3	11736.000	33.40	17.18	50.58	74.00	-23.42	peak
4	13500.000	30.06	20.81	50.87	74.00	-23.13	peak
5	13914.000	29.11	21.69	50.80	74.00	-23.20	peak
6	17937.000	25.90	24.76	50.66	74.00	-23.34	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6165
Polarity:	Vertical	Test Voltage:	DC 3.3 V

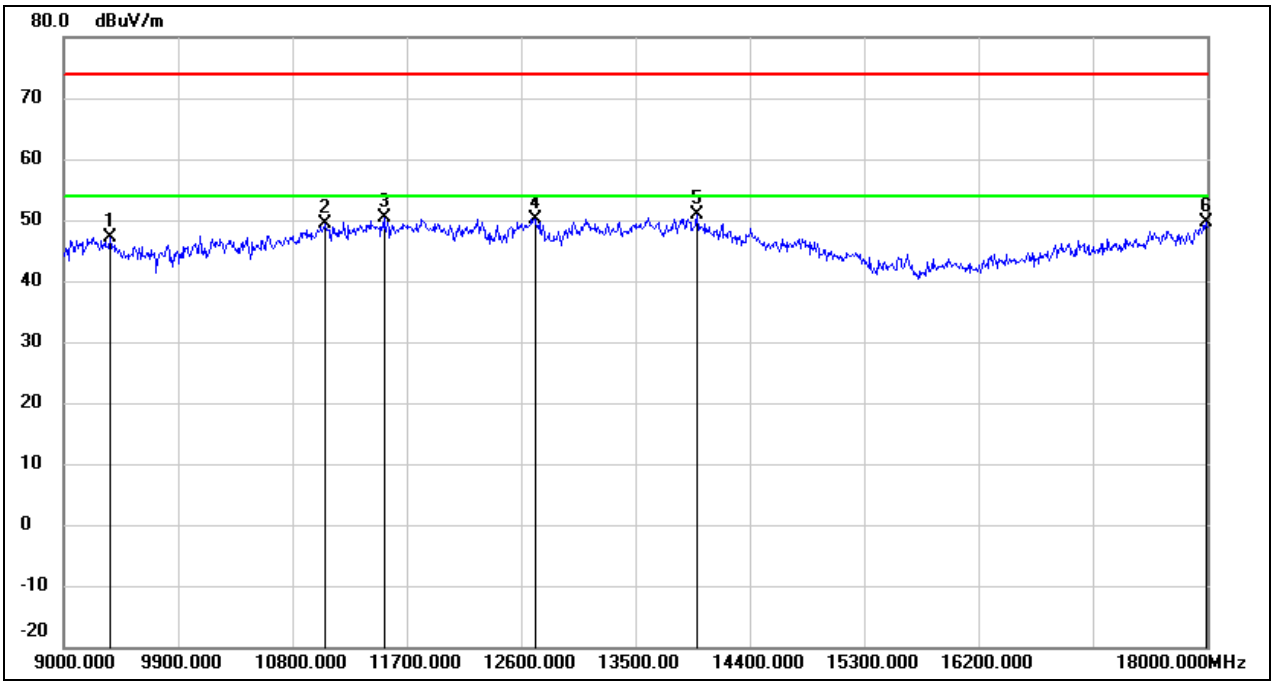

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9360.000	36.31	10.87	47.18	74.00	-26.82	peak
2	11052.000	34.44	14.94	49.38	74.00	-24.62	peak
3	11520.000	33.89	16.59	50.48	74.00	-23.52	peak
4	12708.000	32.01	18.10	50.11	74.00	-23.89	peak
5	13986.000	28.98	21.85	50.83	74.00	-23.17	peak
6	17991.000	24.45	25.11	49.56	74.00	-24.44	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6405
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

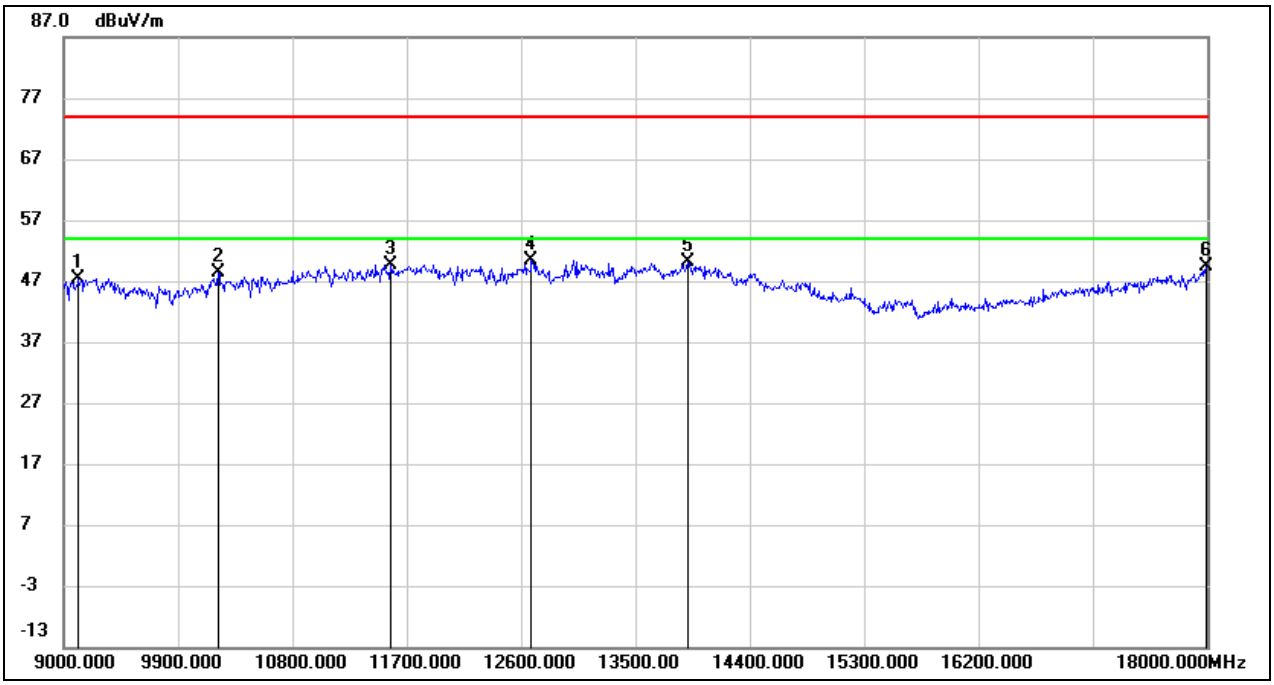

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9117.000	36.56	10.83	47.39	74.00	-26.61	peak
2	10215.000	35.75	12.52	48.27	74.00	-25.73	peak
3	11574.000	32.95	16.74	49.69	74.00	-24.31	peak
4	12681.000	32.41	18.03	50.44	74.00	-23.56	peak
5	13914.000	28.40	21.69	50.09	74.00	-23.91	peak
6	17991.000	24.38	25.11	49.49	74.00	-24.51	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6405
Polarity:	Vertical	Test Voltage:	DC 3.3 V

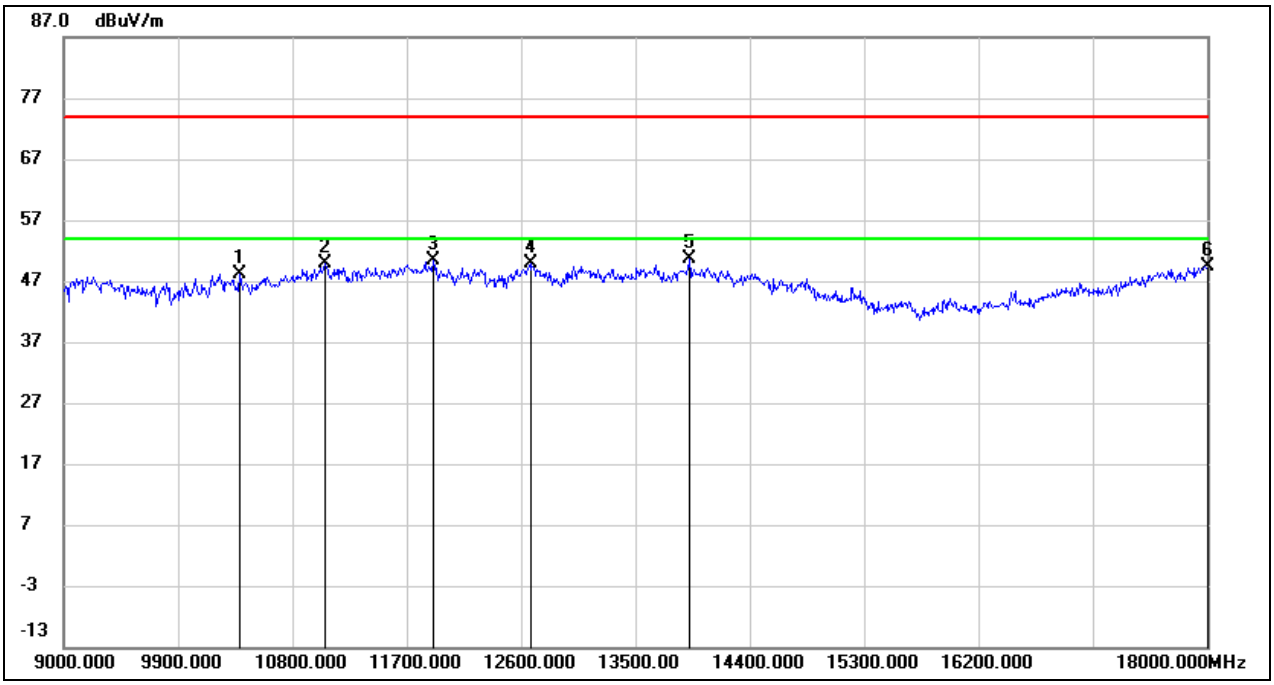

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10386.000	35.30	12.89	48.19	74.00	-25.81	peak
2	11052.000	34.95	14.94	49.89	74.00	-24.11	peak
3	11907.000	32.65	17.66	50.31	74.00	-23.69	peak
4	12672.000	31.98	18.00	49.98	74.00	-24.02	peak
5	13923.000	28.79	21.72	50.51	74.00	-23.49	peak
6	18000.000	24.14	25.16	49.30	74.00	-24.70	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6445
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

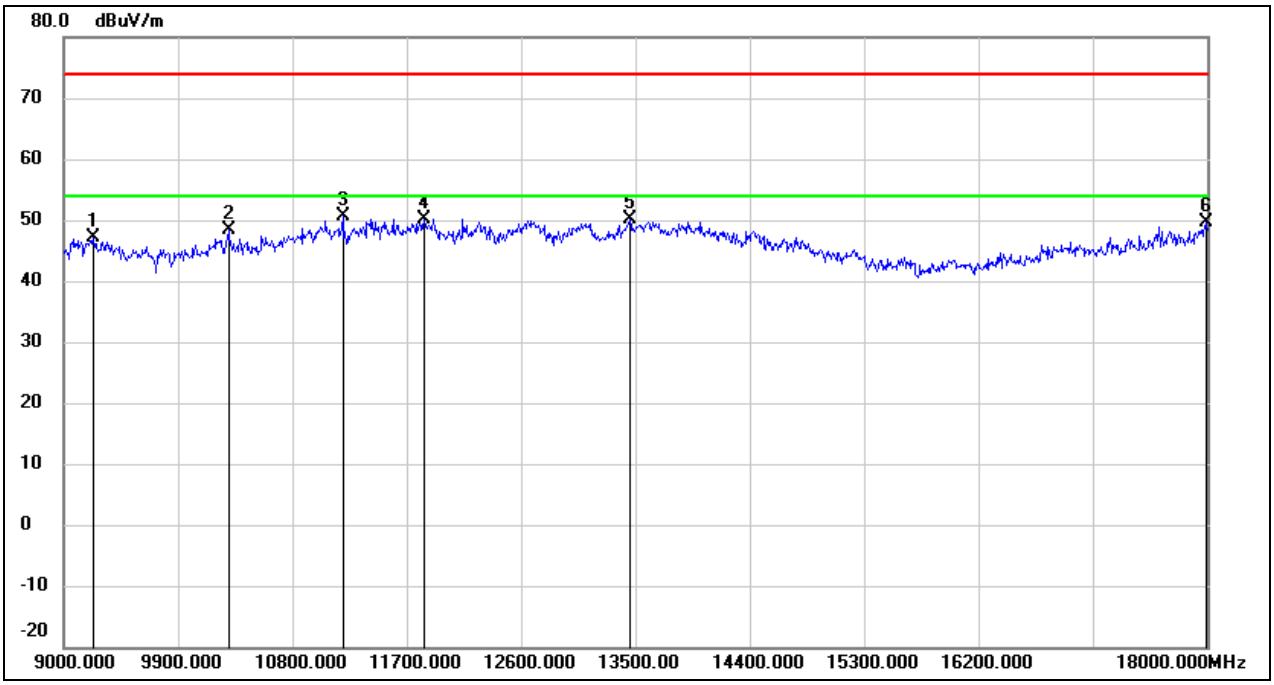

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9234.000	36.39	10.84	47.23	74.00	-26.77	peak
2	10296.000	35.63	12.69	48.32	74.00	-25.68	peak
3	11196.000	35.09	15.44	50.53	74.00	-23.47	peak
4	11835.000	32.65	17.46	50.11	74.00	-23.89	peak
5	13455.000	29.40	20.64	50.04	74.00	-23.96	peak
6	17991.000	24.57	25.11	49.68	74.00	-24.32	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6445
Polarity:	Vertical	Test Voltage:	DC 3.3 V

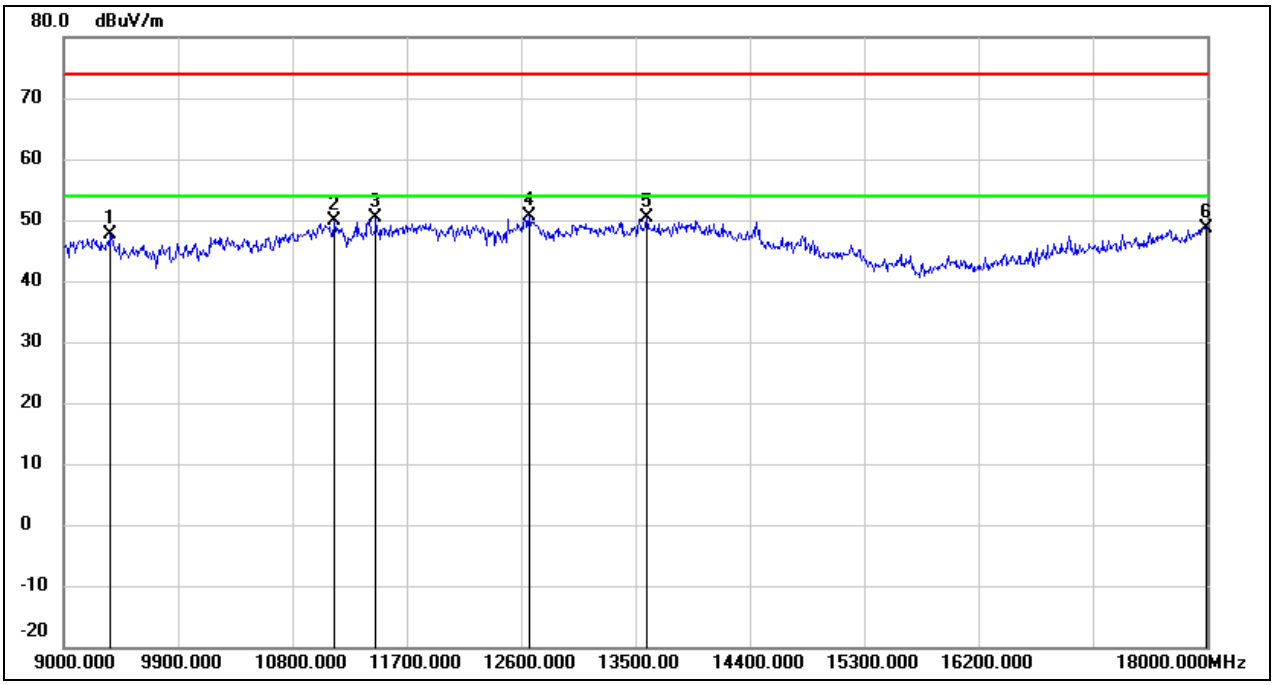

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9360.000	36.87	10.87	47.74	74.00	-26.26	peak
2	11133.000	34.71	15.23	49.94	74.00	-24.06	peak
3	11457.000	34.10	16.38	50.48	74.00	-23.52	peak
4	12663.000	32.75	17.98	50.73	74.00	-23.27	peak
5	13590.000	29.30	21.00	50.30	74.00	-23.70	peak
6	17991.000	23.63	25.11	48.74	74.00	-25.26	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6485
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

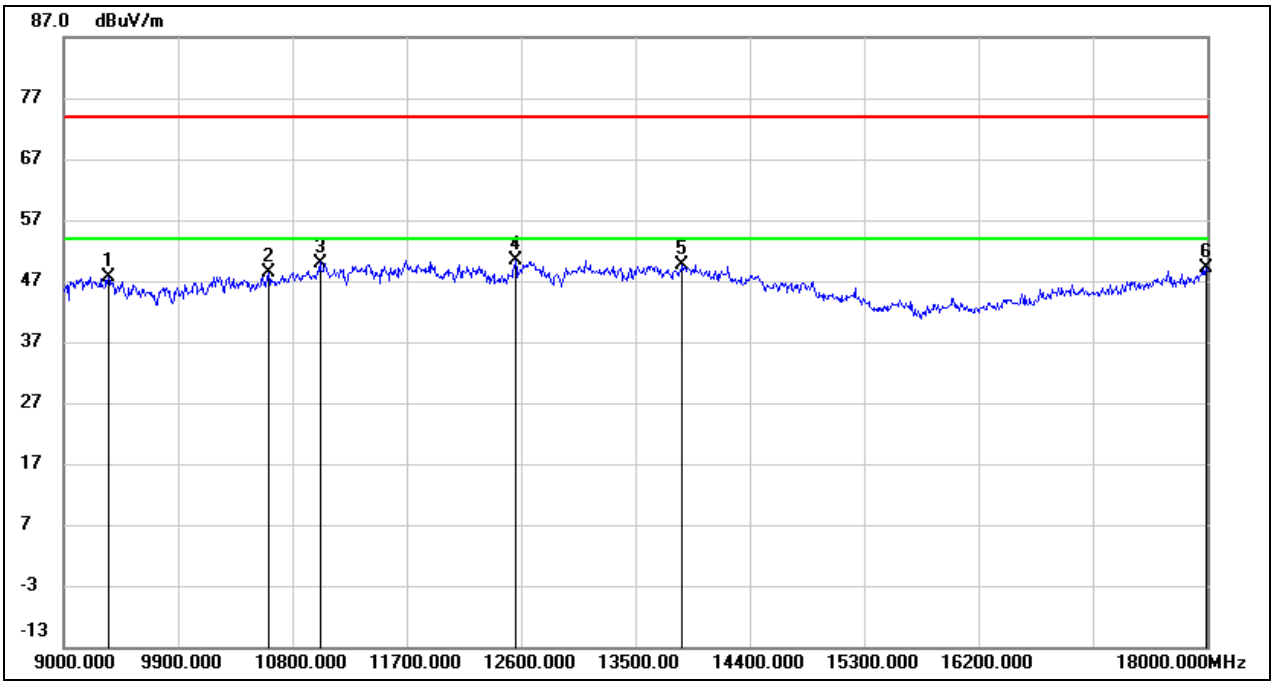

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9351.000	36.76	10.86	47.62	74.00	-26.38	peak
2	10611.000	34.83	13.48	48.31	74.00	-25.69	peak
3	11016.000	35.19	14.81	50.00	74.00	-24.00	peak
4	12555.000	32.61	17.68	50.29	74.00	-23.71	peak
5	13869.000	28.15	21.59	49.74	74.00	-24.26	peak
6	17991.000	23.93	25.11	49.04	74.00	-24.96	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6485
Polarity:	Vertical	Test Voltage:	DC 3.3 V

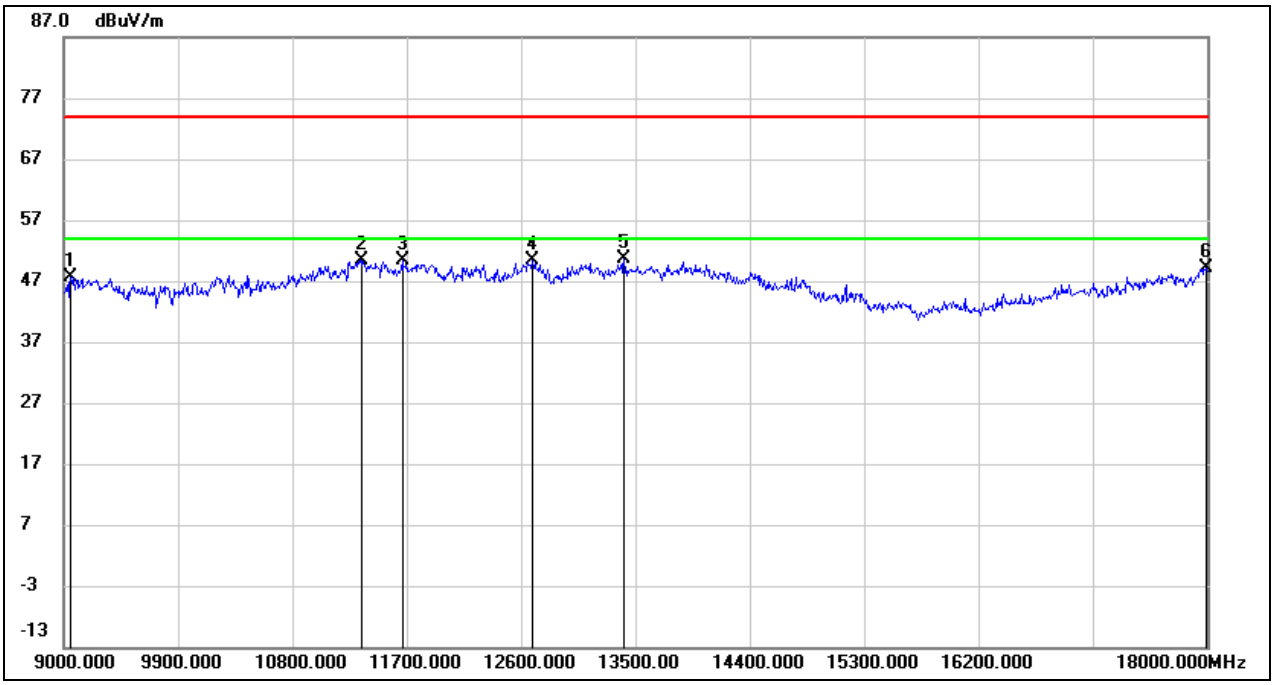

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9054.000	36.86	10.82	47.68	74.00	-26.32	peak
2	11349.000	34.44	15.99	50.43	74.00	-23.57	peak
3	11664.000	33.33	16.98	50.31	74.00	-23.69	peak
4	12690.000	32.35	18.05	50.40	74.00	-23.60	peak
5	13410.000	30.13	20.46	50.59	74.00	-23.41	peak
6	17991.000	24.10	25.11	49.21	74.00	-24.79	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6525
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

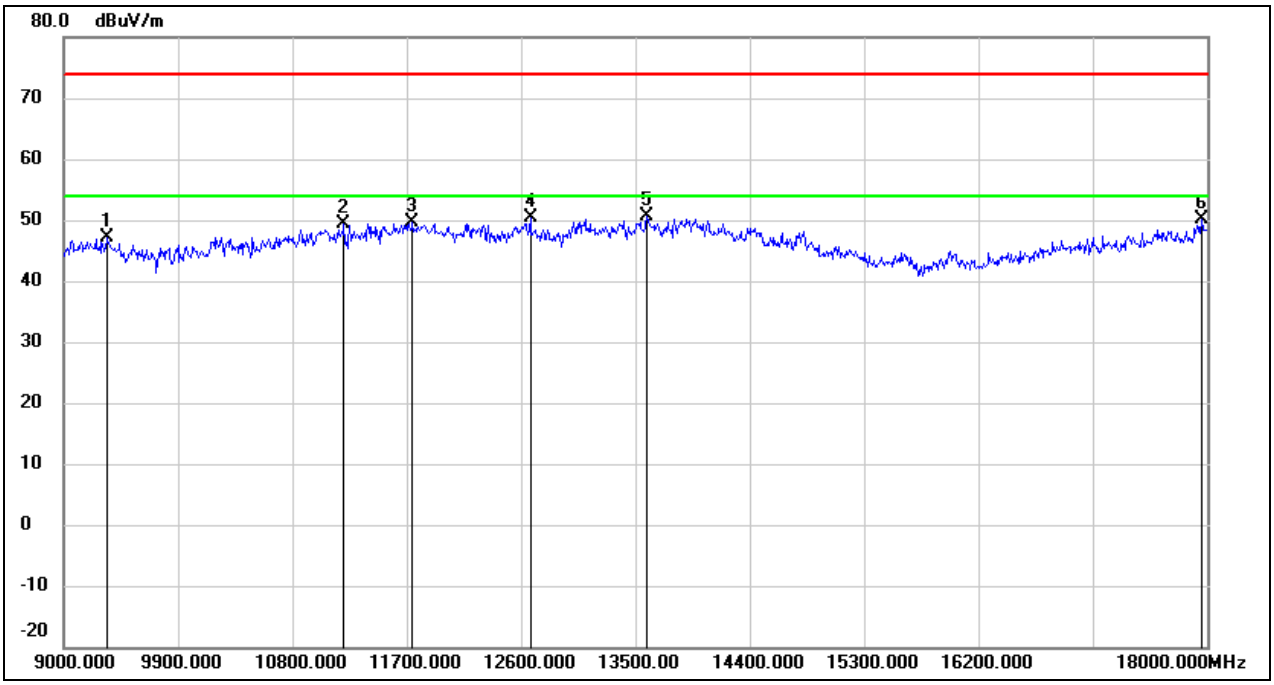

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9342.000	36.34	10.87	47.21	74.00	-26.79	peak
2	11205.000	33.96	15.48	49.44	74.00	-24.56	peak
3	11745.000	32.36	17.21	49.57	74.00	-24.43	peak
4	12672.000	32.41	18.00	50.41	74.00	-23.59	peak
5	13590.000	29.68	21.00	50.68	74.00	-23.32	peak
6	17955.000	25.35	24.87	50.22	74.00	-23.78	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6525
Polarity:	Vertical	Test Voltage:	DC 3.3 V

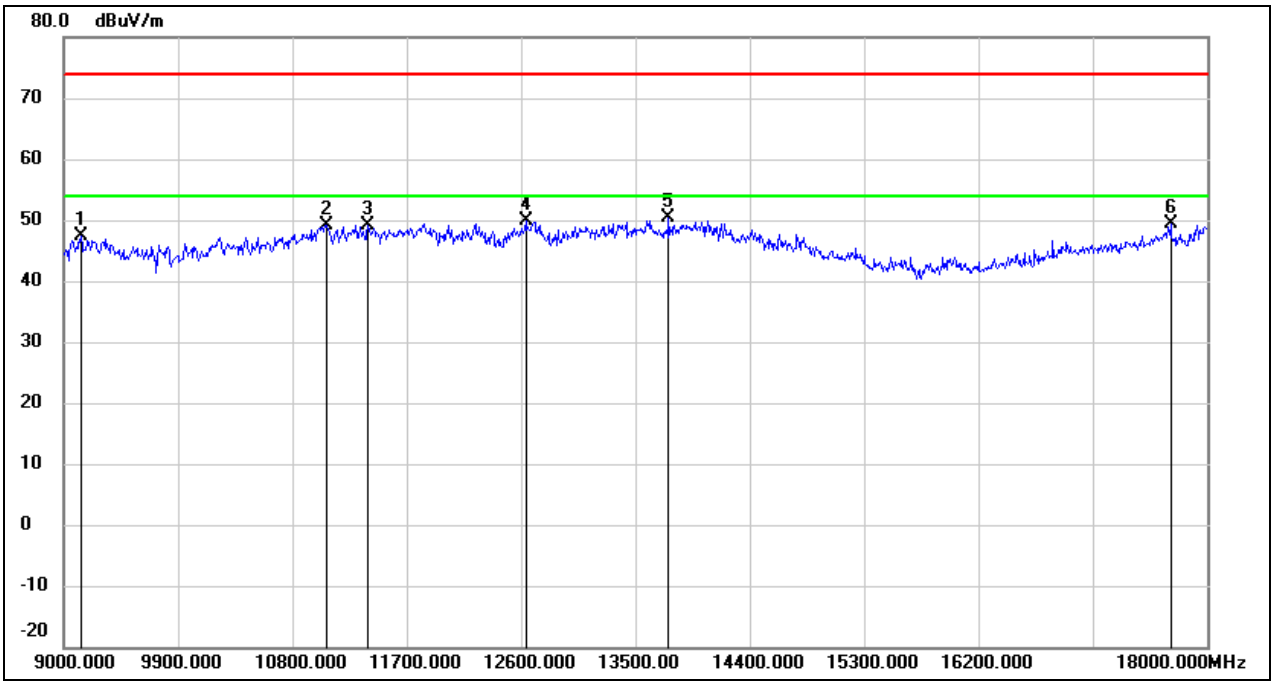

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9135.000	36.52	10.84	47.36	74.00	-26.64	peak
2	11070.000	34.19	15.00	49.19	74.00	-24.81	peak
3	11394.000	33.05	16.15	49.20	74.00	-24.80	peak
4	12636.000	31.94	17.90	49.84	74.00	-24.16	peak
5	13761.000	28.99	21.37	50.36	74.00	-23.64	peak
6	17712.000	26.11	23.32	49.43	74.00	-24.57	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6565
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

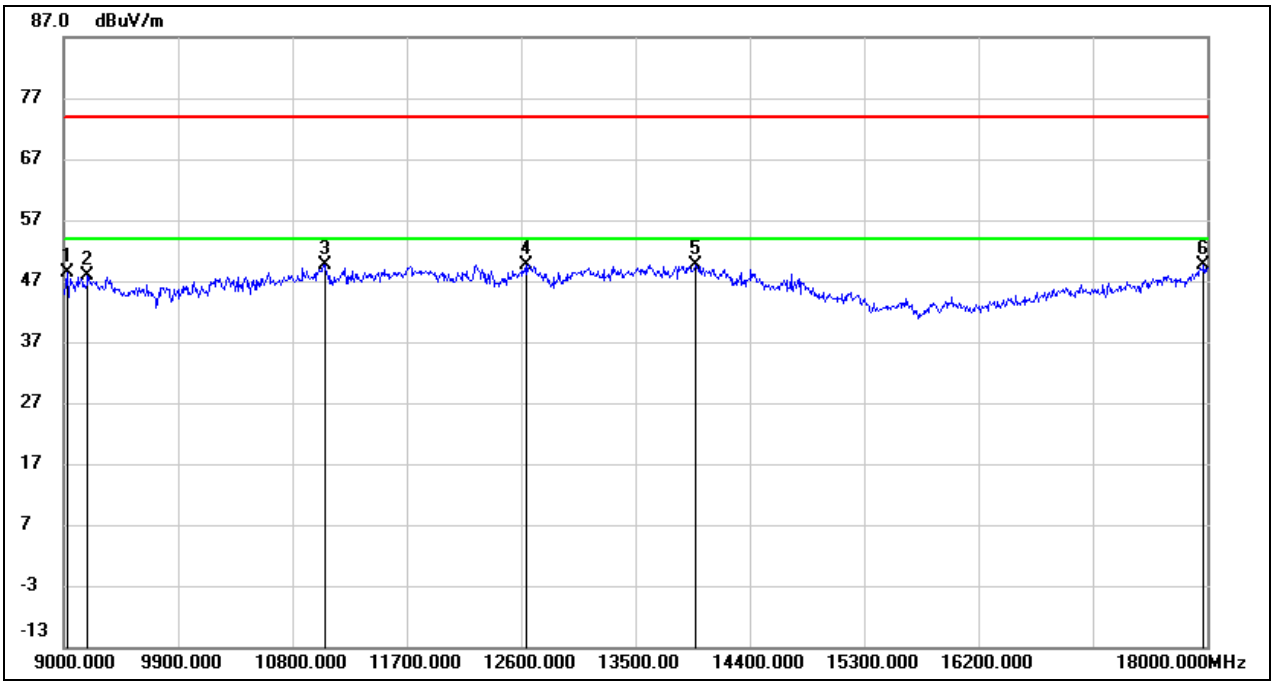

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9027.000	37.47	10.81	48.28	74.00	-25.72	peak
2	9189.000	37.01	10.84	47.85	74.00	-26.15	peak
3	11061.000	34.74	14.96	49.70	74.00	-24.30	peak
4	12636.000	31.78	17.90	49.68	74.00	-24.32	peak
5	13977.000	27.83	21.83	49.66	74.00	-24.34	peak
6	17973.000	24.67	24.99	49.66	74.00	-24.34	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6565
Polarity:	Vertical	Test Voltage:	DC 3.3 V

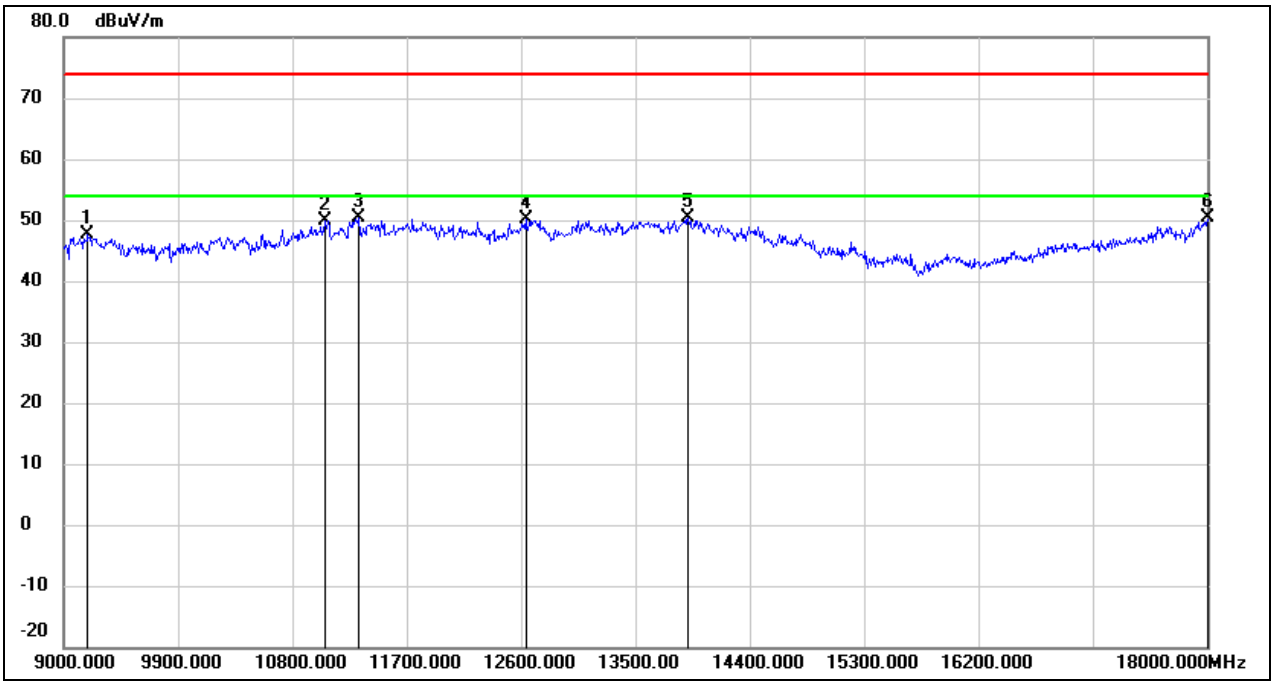

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.68	10.84	47.52	74.00	-26.48	peak
2	11052.000	35.05	14.94	49.99	74.00	-24.01	peak
3	11322.000	34.48	15.90	50.38	74.00	-23.62	peak
4	12636.000	32.21	17.90	50.11	74.00	-23.89	peak
5	13914.000	28.61	21.69	50.30	74.00	-23.70	peak
6	18000.000	25.18	25.16	50.34	74.00	-23.66	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6725
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

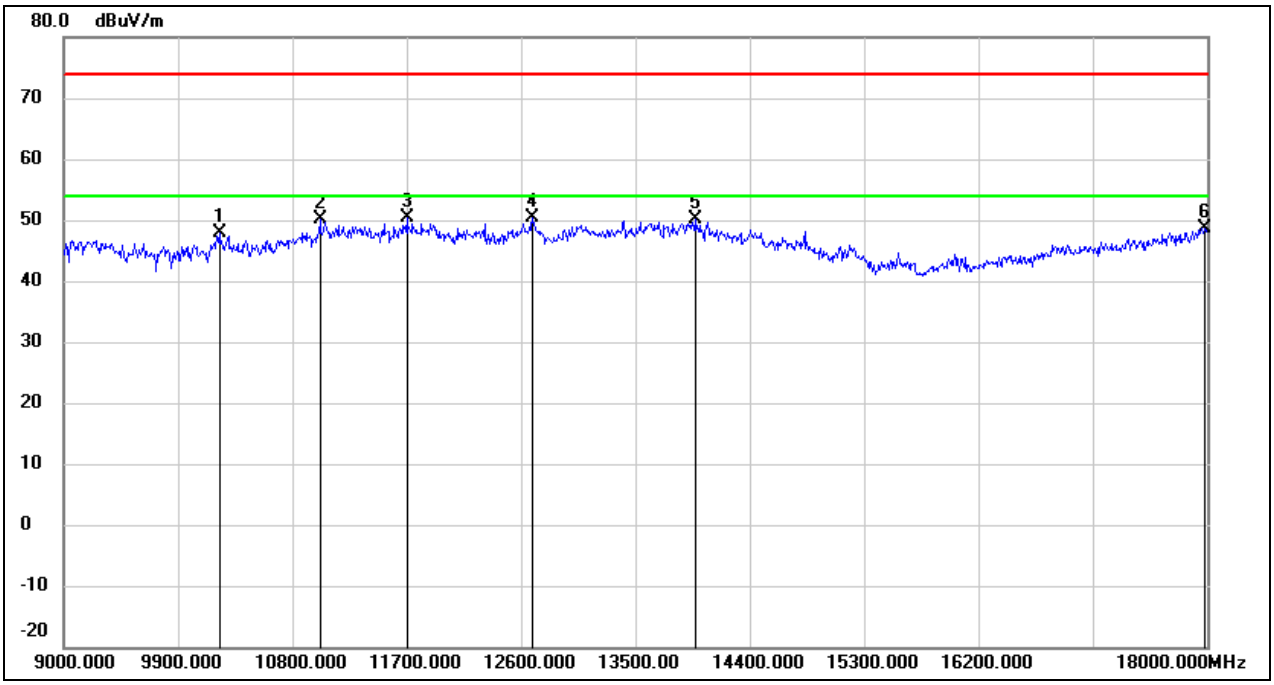

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10224.000	35.42	12.55	47.97	74.00	-26.03	peak
2	11016.000	35.27	14.81	50.08	74.00	-23.92	peak
3	11700.000	33.38	17.08	50.46	74.00	-23.54	peak
4	12690.000	32.41	18.05	50.46	74.00	-23.54	peak
5	13968.000	28.35	21.81	50.16	74.00	-23.84	peak
6	17982.000	23.57	25.04	48.61	74.00	-25.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6725
Polarity:	Vertical	Test Voltage:	DC 3.3 V

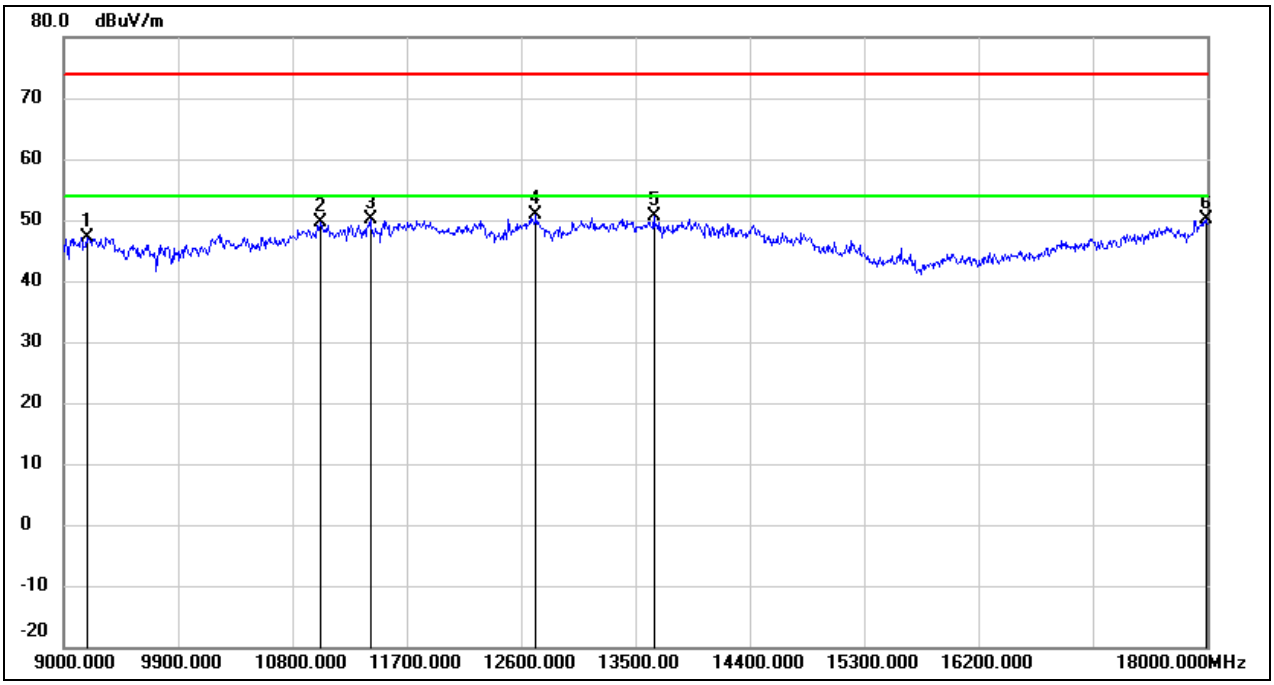

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9180.000	36.35	10.84	47.19	74.00	-26.81	peak
2	11025.000	34.82	14.83	49.65	74.00	-24.35	peak
3	11412.000	33.86	16.22	50.08	74.00	-23.92	peak
4	12717.000	32.86	18.11	50.97	74.00	-23.03	peak
5	13644.000	29.52	21.11	50.63	74.00	-23.37	peak
6	17991.000	24.92	25.11	50.03	74.00	-23.97	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6845
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

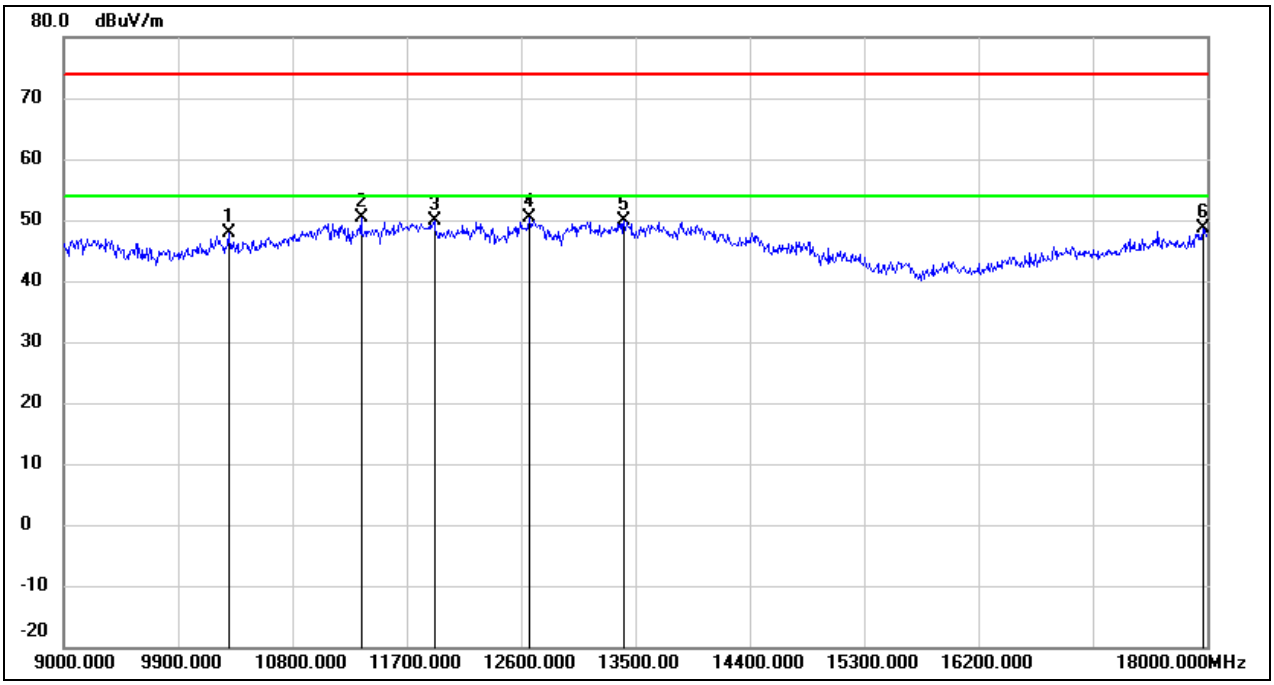

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	35.26	12.69	47.95	74.00	-26.05	peak
2	11340.000	34.30	15.96	50.26	74.00	-23.74	peak
3	11916.000	32.15	17.68	49.83	74.00	-24.17	peak
4	12663.000	32.51	17.98	50.49	74.00	-23.51	peak
5	13410.000	29.35	20.46	49.81	74.00	-24.19	peak
6	17964.000	23.79	24.92	48.71	74.00	-25.29	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6845
Polarity:	Vertical	Test Voltage:	DC 3.3 V

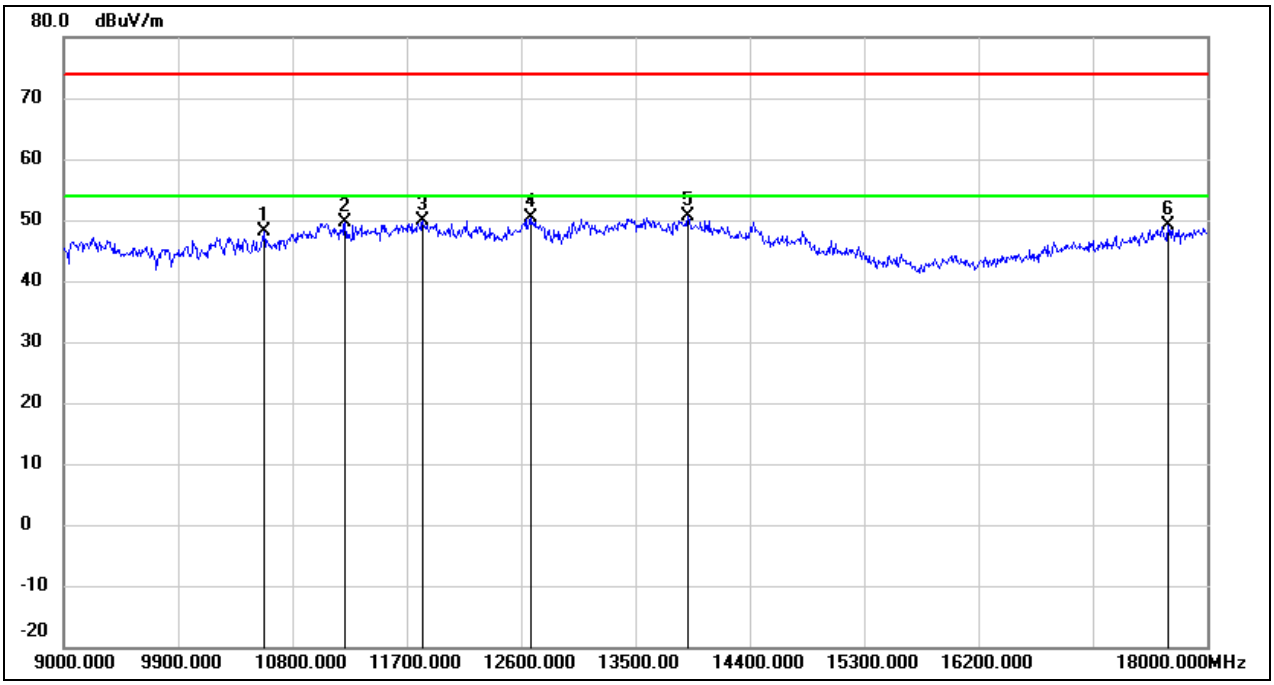

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10575.000	34.86	13.36	48.22	74.00	-25.78	peak
2	11214.000	34.08	15.51	49.59	74.00	-24.41	peak
3	11826.000	32.57	17.42	49.99	74.00	-24.01	peak
4	12672.000	32.46	18.00	50.46	74.00	-23.54	peak
5	13914.000	28.83	21.69	50.52	74.00	-23.48	peak
6	17694.000	26.04	23.20	49.24	74.00	-24.76	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6885
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

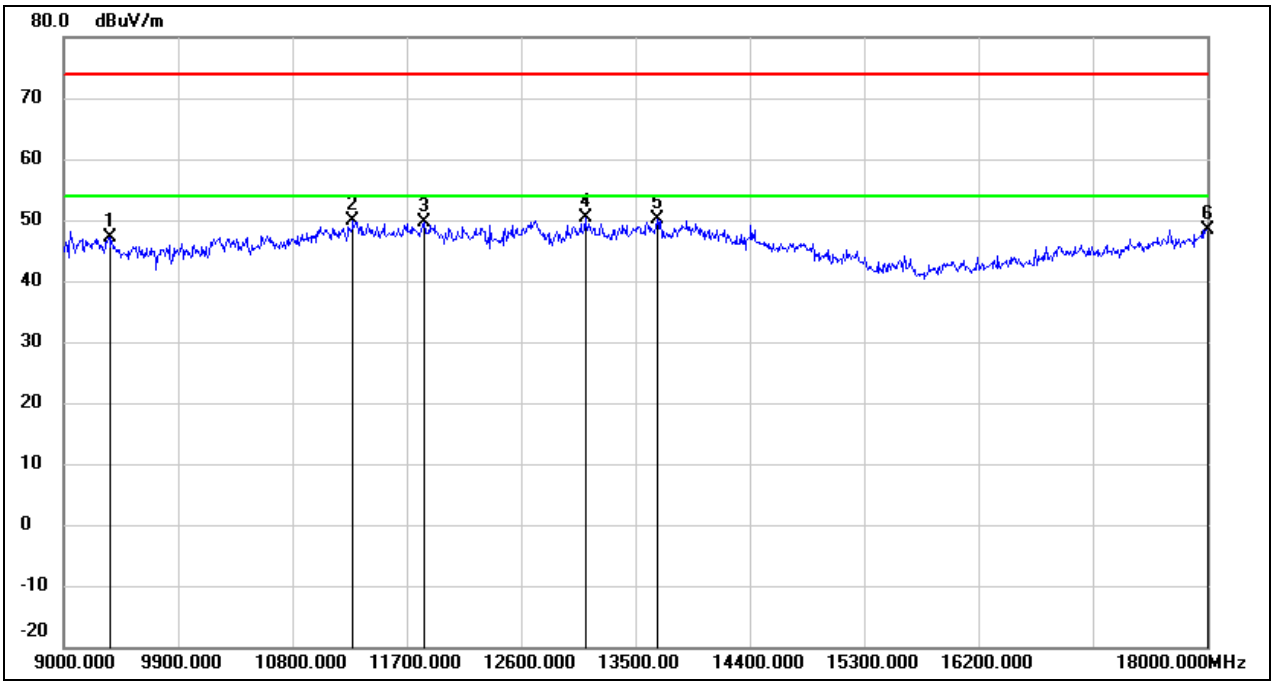

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9360.000	36.37	10.87	47.24	74.00	-26.76	peak
2	11277.000	34.14	15.73	49.87	74.00	-24.13	peak
3	11835.000	32.16	17.46	49.62	74.00	-24.38	peak
4	13104.000	31.14	19.29	50.43	74.00	-23.57	peak
5	13671.000	28.95	21.18	50.13	74.00	-23.87	peak
6	18000.000	23.29	25.16	48.45	74.00	-25.55	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	6885
Polarity:	Vertical	Test Voltage:	DC 3.3 V

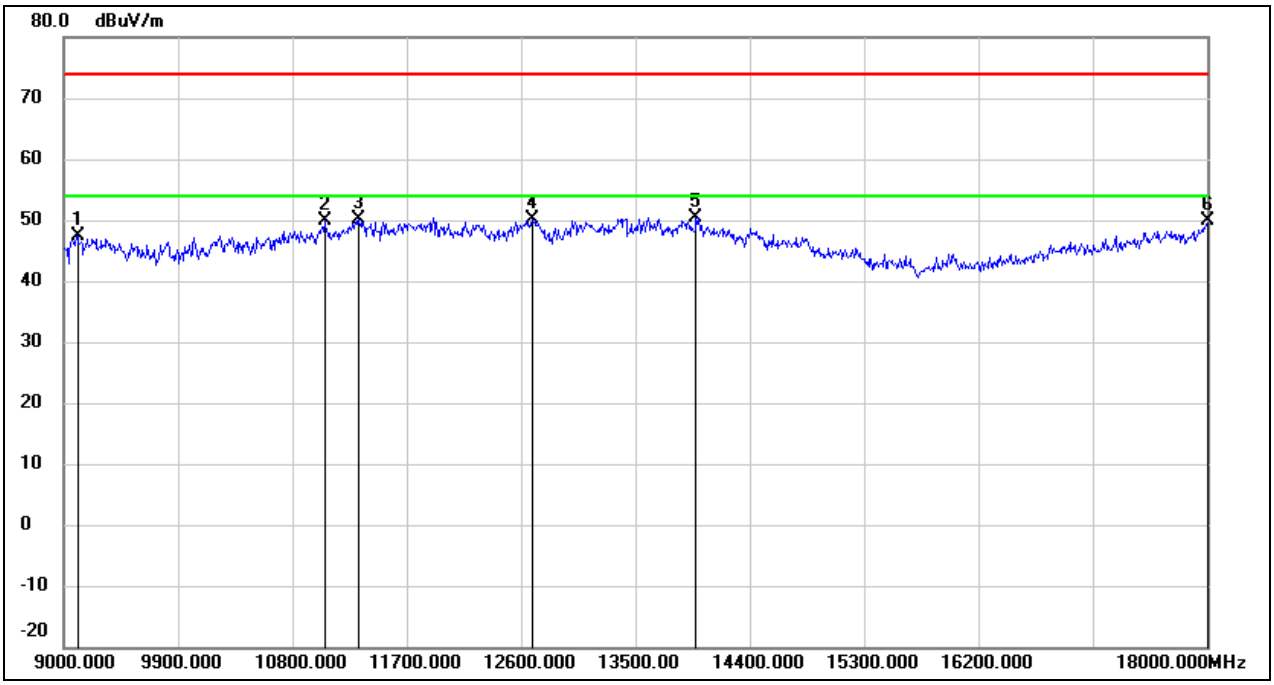

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9108.000	36.52	10.83	47.35	74.00	-26.65	peak
2	11052.000	34.95	14.94	49.89	74.00	-24.11	peak
3	11322.000	34.17	15.90	50.07	74.00	-23.93	peak
4	12690.000	32.14	18.05	50.19	74.00	-23.81	peak
5	13977.000	28.55	21.83	50.38	74.00	-23.62	peak
6	18000.000	24.77	25.16	49.93	74.00	-24.07	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	7005
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

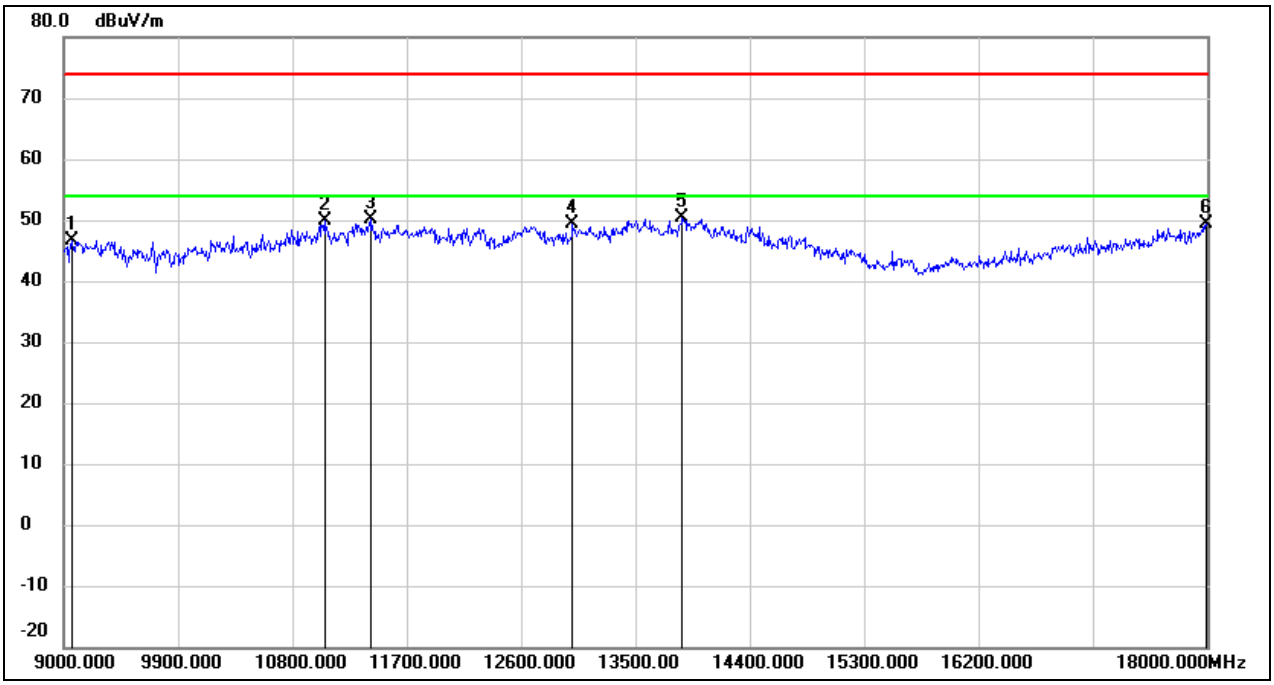

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9063.000	35.74	10.82	46.56	74.00	-27.44	peak
2	11052.000	35.03	14.94	49.97	74.00	-24.03	peak
3	11421.000	33.83	16.25	50.08	74.00	-23.92	peak
4	13005.000	30.44	18.91	49.35	74.00	-24.65	peak
5	13869.000	28.72	21.59	50.31	74.00	-23.69	peak
6	17991.000	24.35	25.11	49.46	74.00	-24.54	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	7005
Polarity:	Vertical	Test Voltage:	DC 3.3 V

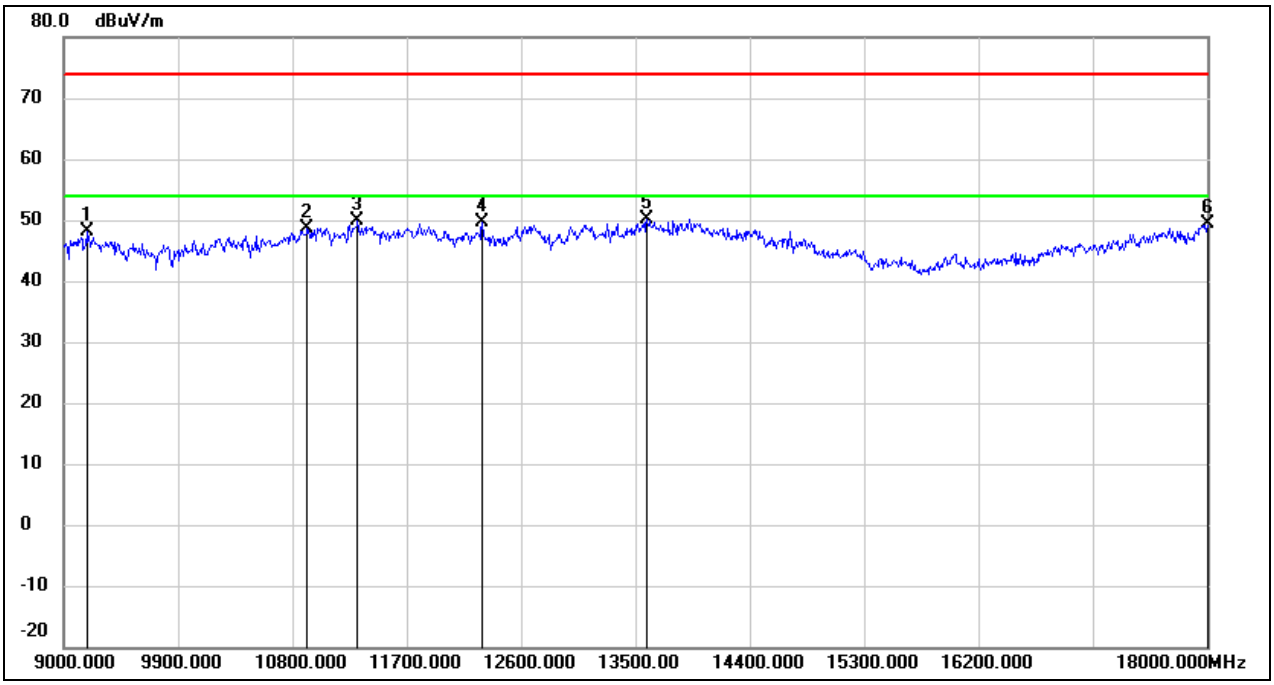

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9180.000	37.22	10.84	48.06	74.00	-25.94	peak
2	10917.000	34.18	14.48	48.66	74.00	-25.34	peak
3	11313.000	33.94	15.86	49.80	74.00	-24.20	peak
4	12294.000	31.96	17.68	49.64	74.00	-24.36	peak
5	13590.000	29.14	21.00	50.14	74.00	-23.86	peak
6	18000.000	24.30	25.16	49.46	74.00	-24.54	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

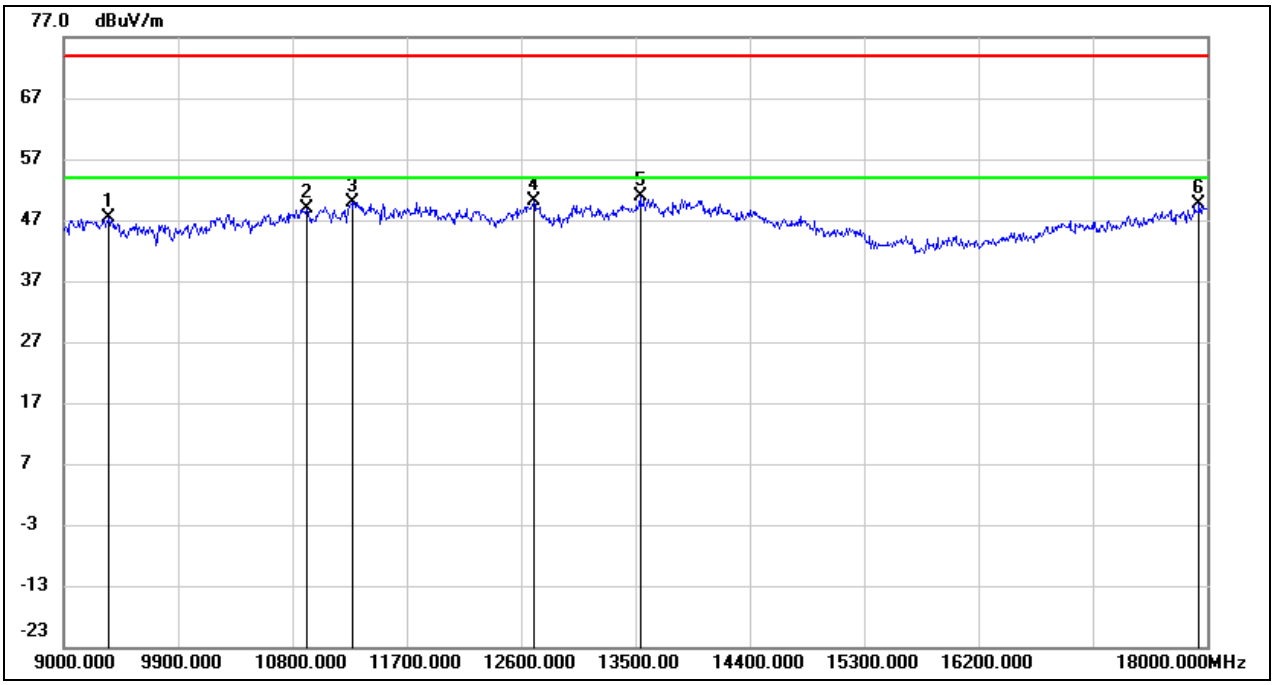

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9351.000	36.48	10.86	47.34	74.00	-26.66	peak
2	10917.000	34.42	14.48	48.90	74.00	-25.10	peak
3	11268.000	34.19	15.71	49.90	74.00	-24.10	peak
4	12699.000	32.06	18.07	50.13	74.00	-23.87	peak
5	13536.000	29.89	20.90	50.79	74.00	-23.21	peak
6	17937.000	24.77	24.76	49.53	74.00	-24.47	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	7085
Polarity:	Vertical	Test Voltage:	DC 3.3 V

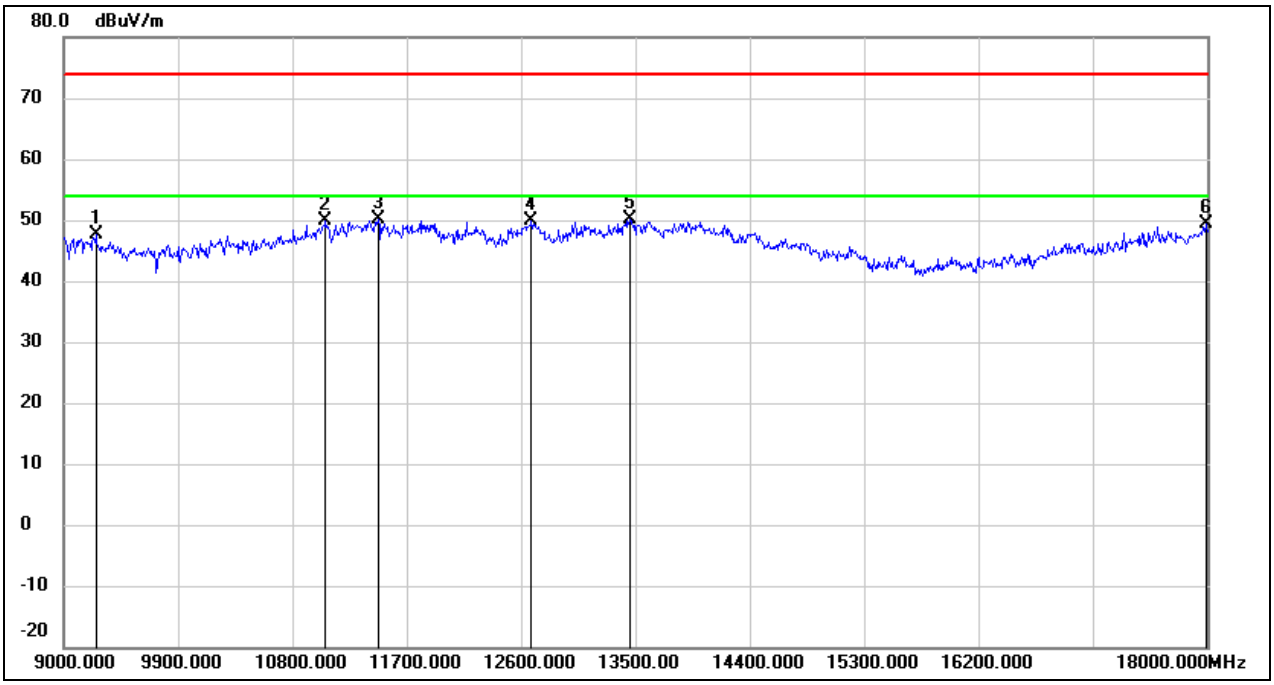

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.70	10.85	47.55	74.00	-26.45	peak
2	11061.000	35.03	14.96	49.99	74.00	-24.01	peak
3	11475.000	33.76	16.44	50.20	74.00	-23.80	peak
4	12681.000	31.77	18.03	49.80	74.00	-24.20	peak
5	13455.000	29.48	20.64	50.12	74.00	-23.88	peak
6	17991.000	24.20	25.11	49.31	74.00	-24.69	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

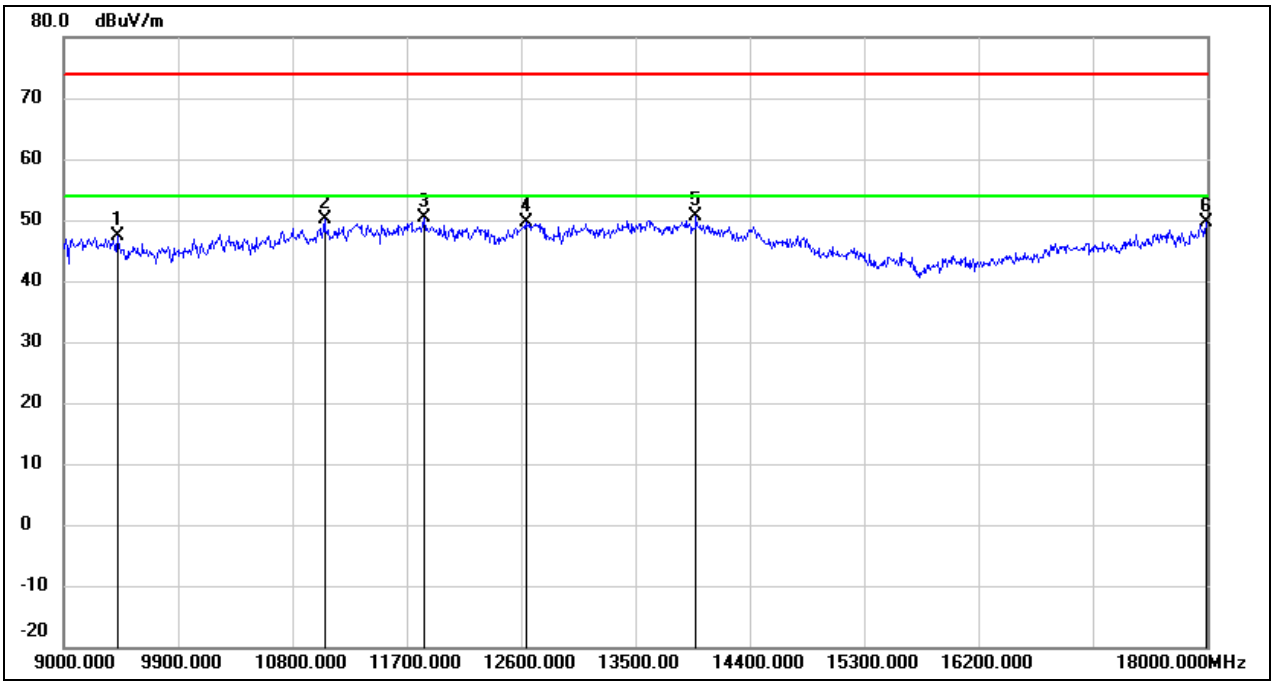

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9423.000	36.44	10.88	47.32	74.00	-26.68	peak
2	11052.000	35.10	14.94	50.04	74.00	-23.96	peak
3	11835.000	32.98	17.46	50.44	74.00	-23.56	peak
4	12636.000	31.63	17.90	49.53	74.00	-24.47	peak
5	13977.000	28.85	21.83	50.68	74.00	-23.32	peak
6	17991.000	24.53	25.11	49.64	74.00	-24.36	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 3.3 V

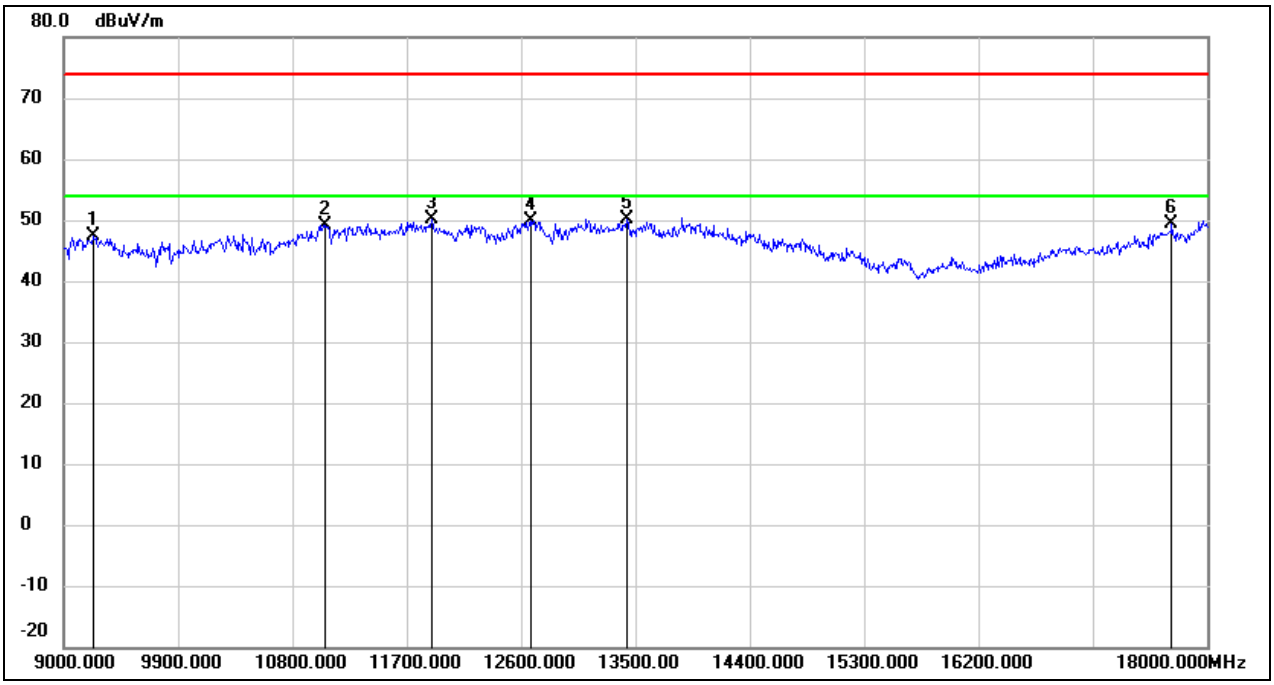

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9234.000	36.58	10.84	47.42	74.00	-26.58	peak
2	11052.000	34.25	14.94	49.19	74.00	-24.81	peak
3	11898.000	32.49	17.63	50.12	74.00	-23.88	peak
4	12672.000	31.84	18.00	49.84	74.00	-24.16	peak
5	13437.000	29.47	20.57	50.04	74.00	-23.96	peak
6	17721.000	25.88	23.38	49.26	74.00	-24.74	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6145
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

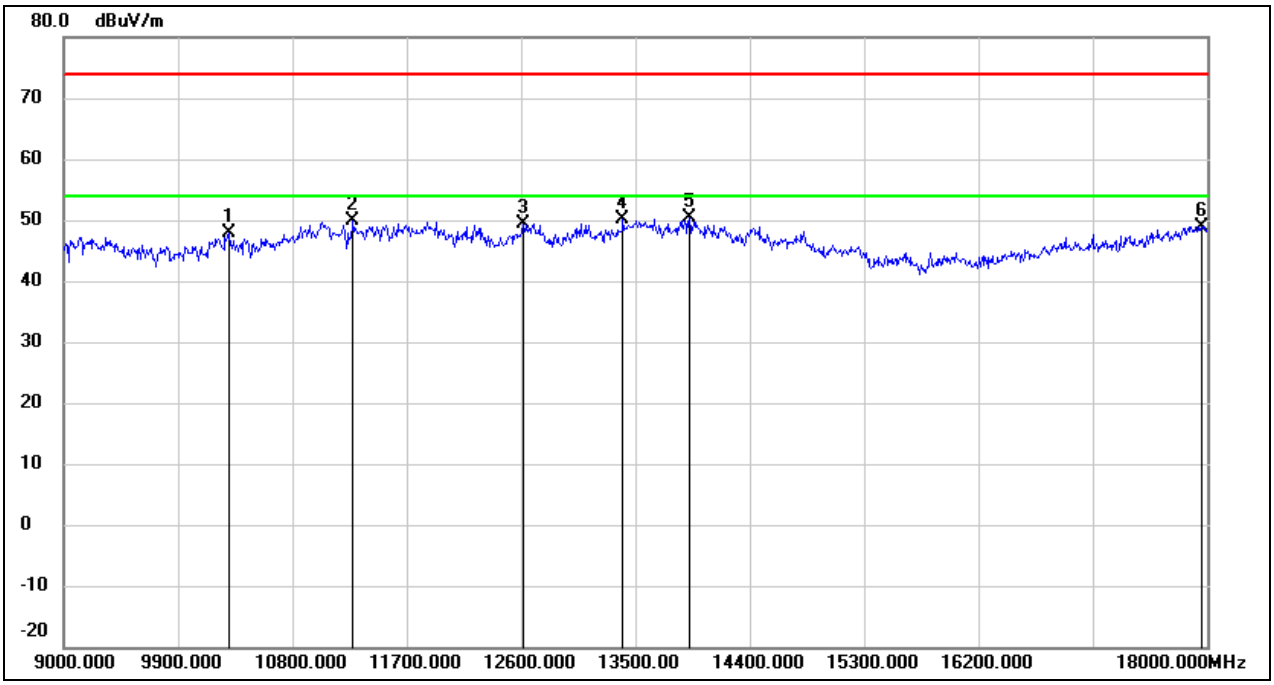

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	35.16	12.69	47.85	74.00	-26.15	peak
2	11277.000	34.10	15.73	49.83	74.00	-24.17	peak
3	12618.000	31.64	17.84	49.48	74.00	-24.52	peak
4	13401.000	29.58	20.43	50.01	74.00	-23.99	peak
5	13923.000	28.60	21.72	50.32	74.00	-23.68	peak
6	17955.000	24.13	24.87	49.00	74.00	-25.00	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6145
Polarity:	Vertical	Test Voltage:	DC 3.3 V

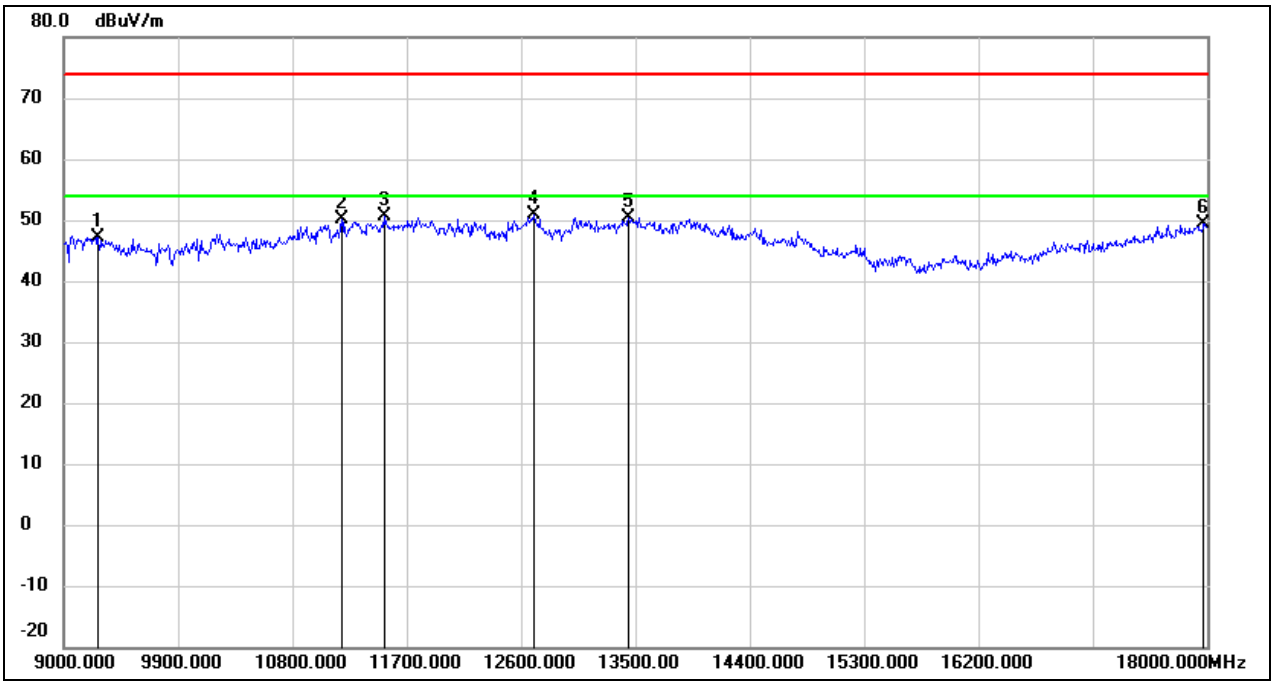

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9270.000	36.25	10.85	47.10	74.00	-26.90	peak
2	11187.000	34.72	15.42	50.14	74.00	-23.86	peak
3	11520.000	33.98	16.59	50.57	74.00	-23.43	peak
4	12699.000	32.87	18.07	50.94	74.00	-23.06	peak
5	13446.000	29.73	20.60	50.33	74.00	-23.67	peak
6	17973.000	24.43	24.99	49.42	74.00	-24.58	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6385
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

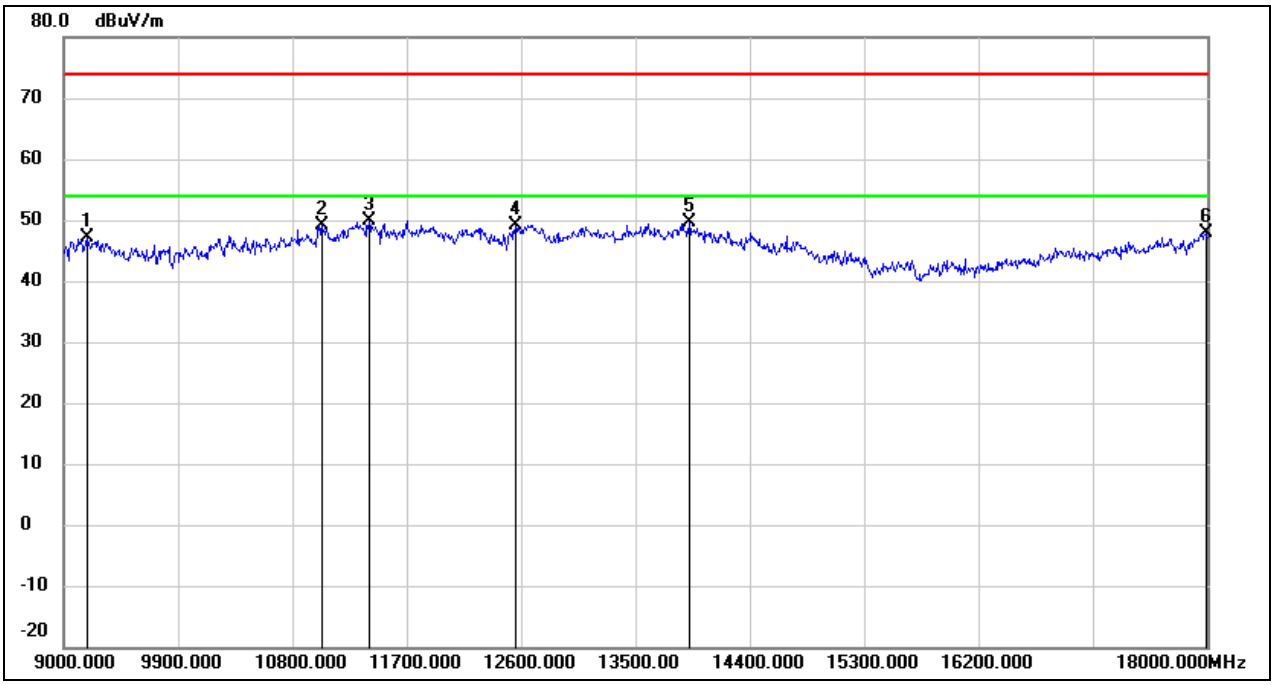

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9180.000	36.21	10.84	47.05	74.00	-26.95	peak
2	11034.000	34.29	14.87	49.16	74.00	-24.84	peak
3	11403.000	33.71	16.19	49.90	74.00	-24.10	peak
4	12555.000	31.49	17.68	49.17	74.00	-24.83	peak
5	13923.000	28.00	21.72	49.72	74.00	-24.28	peak
6	17991.000	22.86	25.11	47.97	74.00	-26.03	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6385
Polarity:	Vertical	Test Voltage:	DC 3.3 V

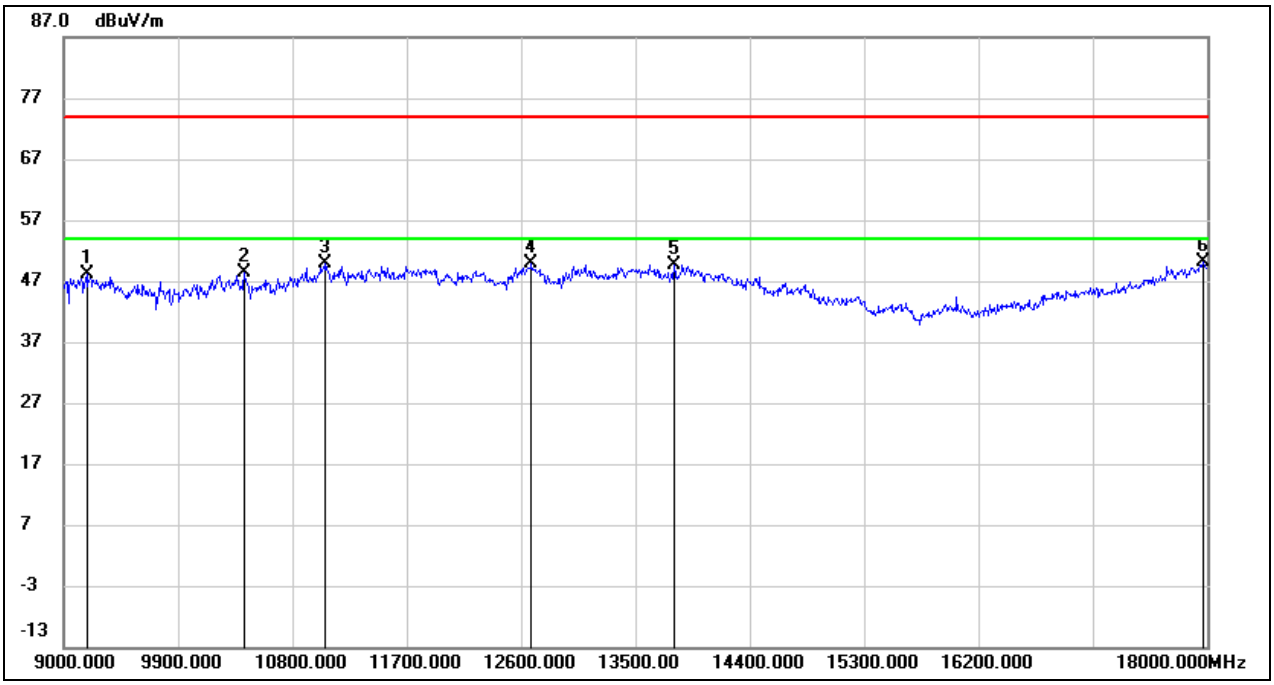

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9180.000	37.32	10.84	48.16	74.00	-25.84	peak
2	10422.000	35.32	12.96	48.28	74.00	-25.72	peak
3	11061.000	34.93	14.96	49.89	74.00	-24.11	peak
4	12681.000	31.73	18.03	49.76	74.00	-24.24	peak
5	13806.000	28.14	21.46	49.60	74.00	-24.40	peak
6	17973.000	25.16	24.99	50.15	74.00	-23.85	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6465
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

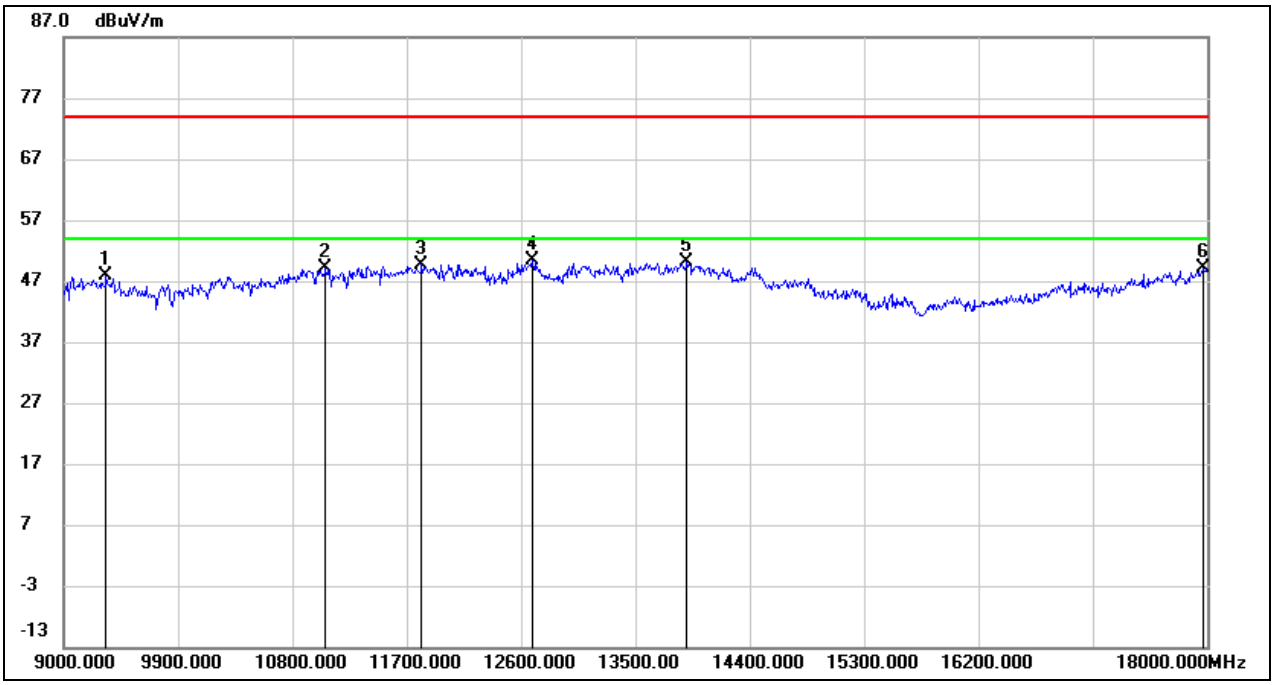

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9333.000	36.93	10.86	47.79	74.00	-26.21	peak
2	11061.000	34.10	14.96	49.06	74.00	-24.94	peak
3	11817.000	32.35	17.40	49.75	74.00	-24.25	peak
4	12690.000	32.27	18.05	50.32	74.00	-23.68	peak
5	13905.000	28.33	21.68	50.01	74.00	-23.99	peak
6	17973.000	24.06	24.99	49.05	74.00	-24.95	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6465
Polarity:	Vertical	Test Voltage:	DC 3.3 V

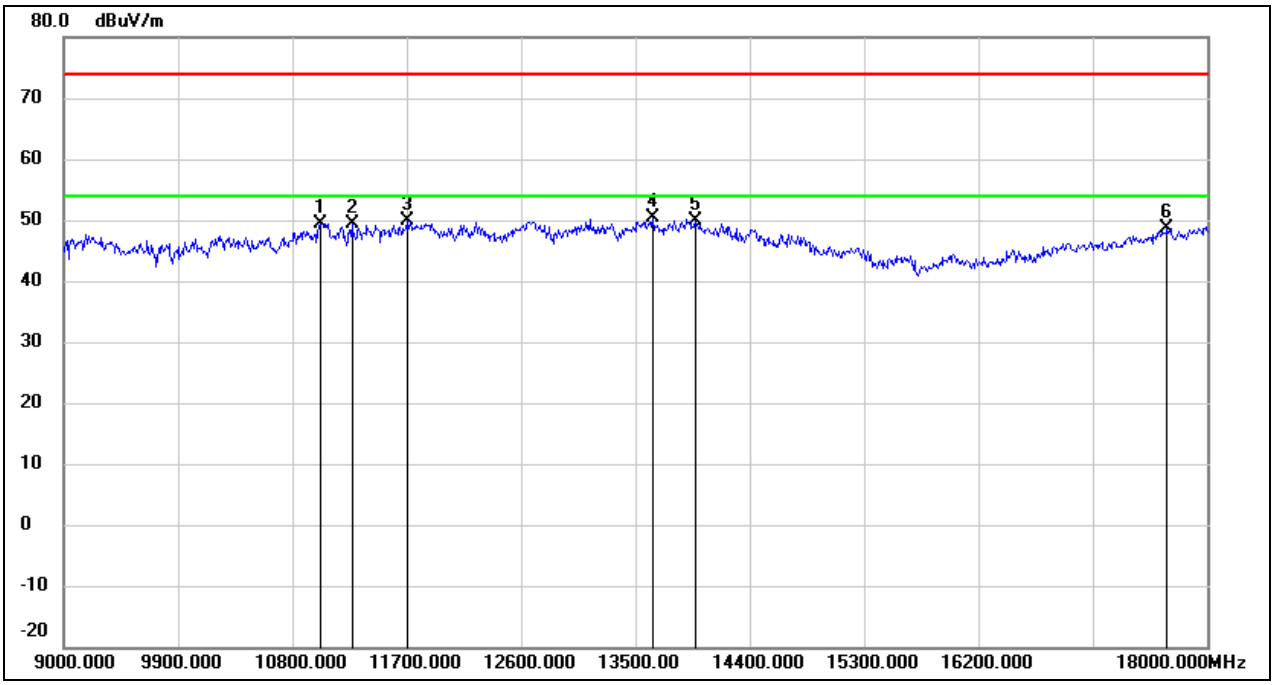

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11025.000	34.49	14.83	49.32	74.00	-24.68	peak
2	11268.000	33.64	15.71	49.35	74.00	-24.65	peak
3	11700.000	32.91	17.08	49.99	74.00	-24.01	peak
4	13635.000	29.16	21.10	50.26	74.00	-23.74	peak
5	13968.000	28.08	21.81	49.89	74.00	-24.11	peak
6	17685.000	25.57	23.14	48.71	74.00	-25.29	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6545
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

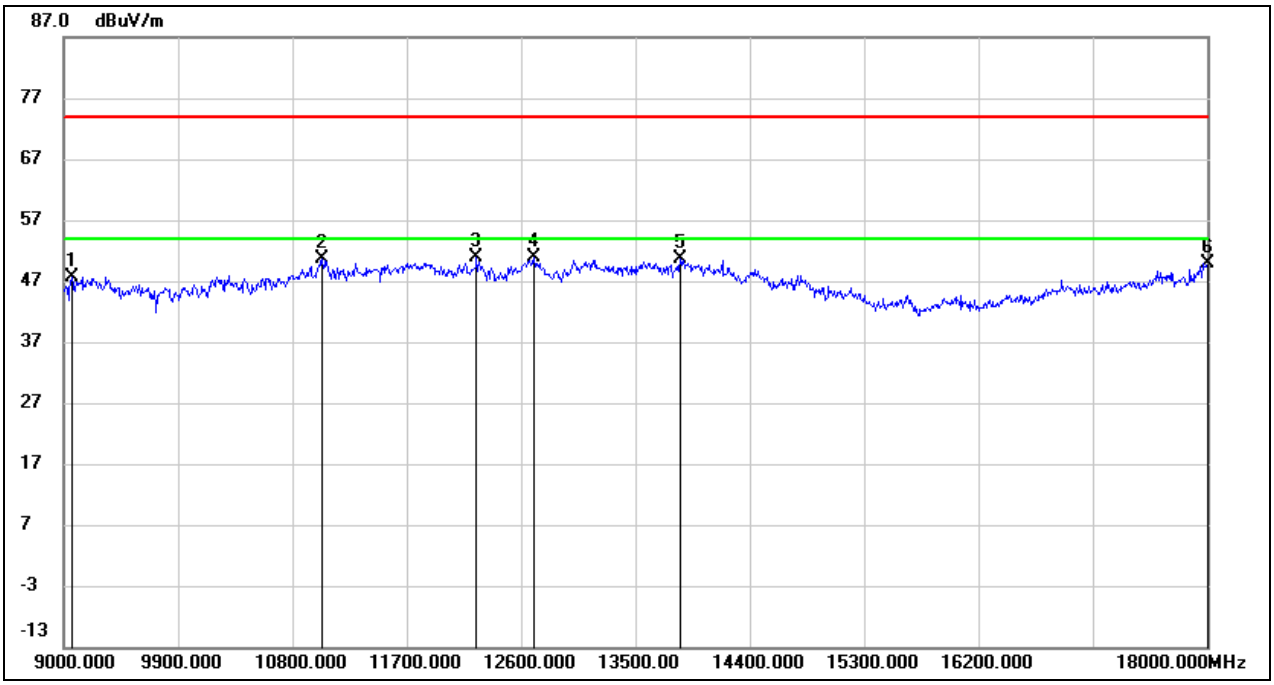

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9063.000	36.92	10.82	47.74	74.00	-26.26	peak
2	11034.000	35.65	14.87	50.52	74.00	-23.48	peak
3	12249.000	33.04	17.72	50.76	74.00	-23.24	peak
4	12699.000	32.81	18.07	50.88	74.00	-23.12	peak
5	13851.000	28.95	21.56	50.51	74.00	-23.49	peak
6	18000.000	24.80	25.16	49.96	74.00	-24.04	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6545
Polarity:	Vertical	Test Voltage:	DC 3.3 V

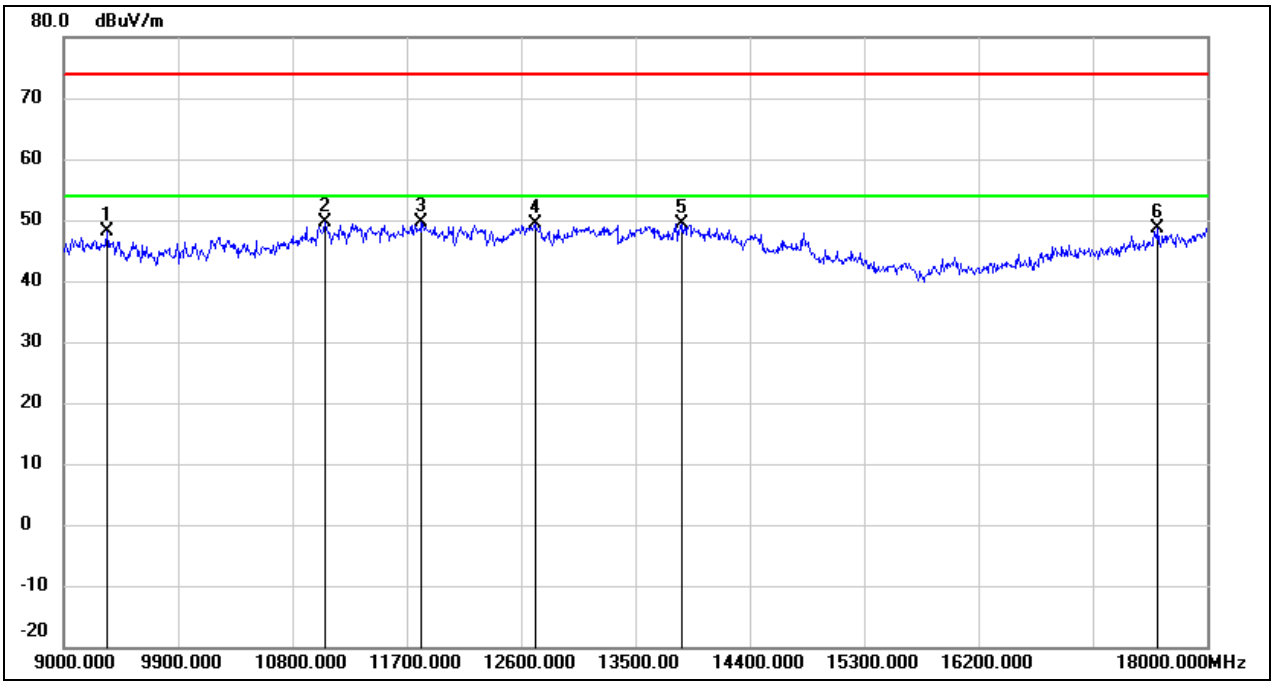

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9342.000	37.20	10.87	48.07	74.00	-25.93	peak
2	11052.000	34.79	14.94	49.73	74.00	-24.27	peak
3	11817.000	32.31	17.40	49.71	74.00	-24.29	peak
4	12708.000	31.25	18.10	49.35	74.00	-24.65	peak
5	13860.000	27.88	21.59	49.47	74.00	-24.53	peak
6	17613.000	25.84	22.69	48.53	74.00	-25.47	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6705
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

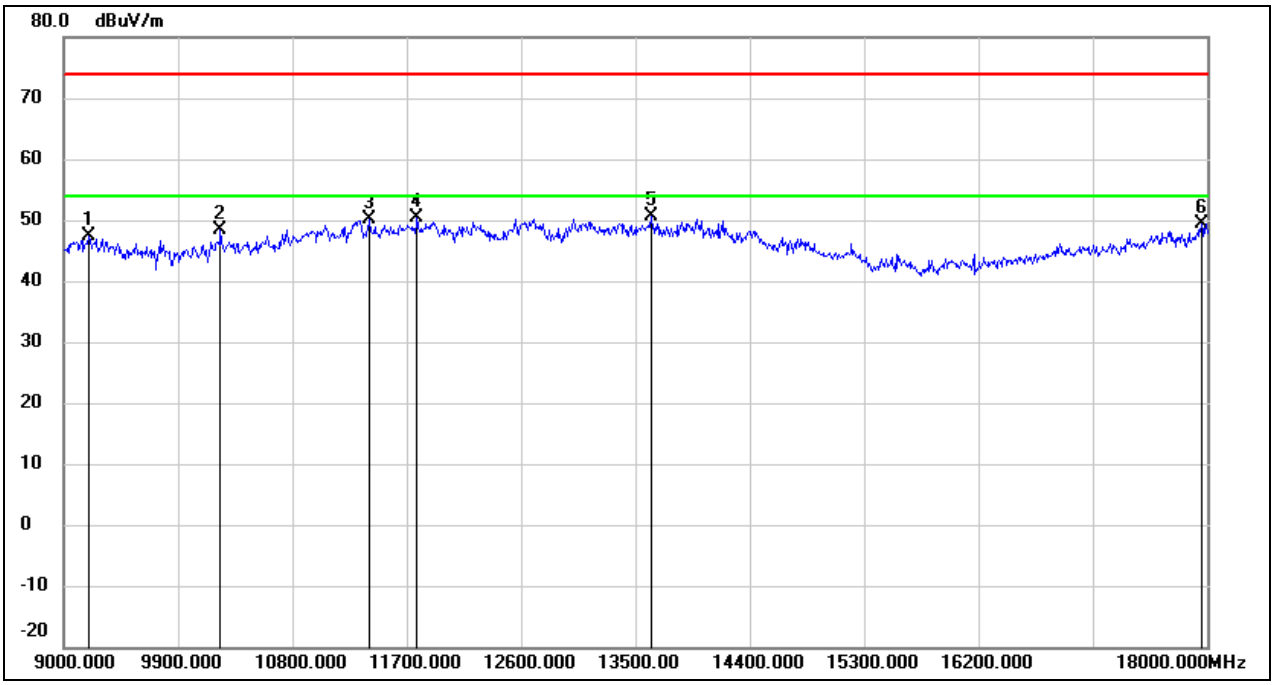

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9198.000	36.45	10.85	47.30	74.00	-26.70	peak
2	10233.000	35.72	12.57	48.29	74.00	-25.71	peak
3	11403.000	33.85	16.19	50.04	74.00	-23.96	peak
4	11781.000	33.12	17.30	50.42	74.00	-23.58	peak
5	13626.000	29.65	21.08	50.73	74.00	-23.27	peak
6	17955.000	24.62	24.87	49.49	74.00	-24.51	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6705
Polarity:	Vertical	Test Voltage:	DC 3.3 V

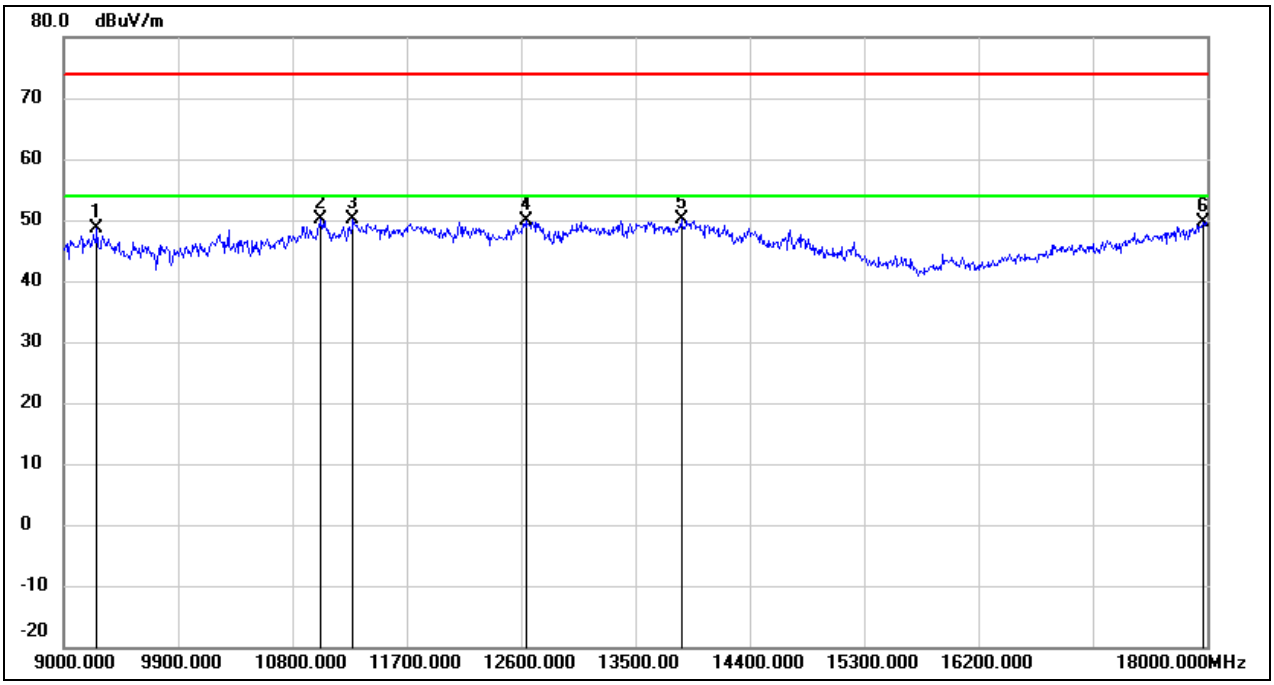

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9261.000	37.79	10.85	48.64	74.00	-25.36	peak
2	11025.000	35.19	14.83	50.02	74.00	-23.98	peak
3	11277.000	34.28	15.73	50.01	74.00	-23.99	peak
4	12636.000	32.02	17.90	49.92	74.00	-24.08	peak
5	13860.000	28.43	21.59	50.02	74.00	-23.98	peak
6	17964.000	24.83	24.92	49.75	74.00	-24.25	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

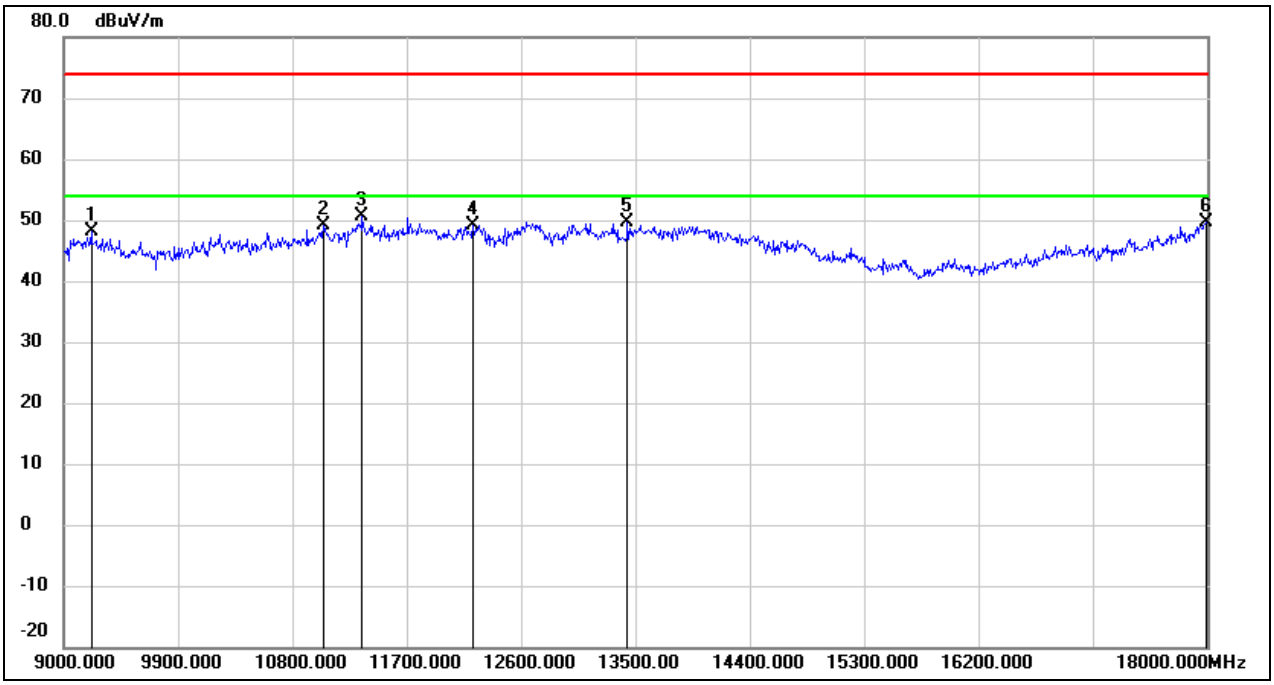

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9216.000	37.27	10.85	48.12	74.00	-25.88	peak
2	11043.000	34.20	14.90	49.10	74.00	-24.90	peak
3	11349.000	34.58	15.99	50.57	74.00	-23.43	peak
4	12222.000	31.36	17.74	49.10	74.00	-24.90	peak
5	13437.000	29.08	20.57	49.65	74.00	-24.35	peak
6	17991.000	24.42	25.11	49.53	74.00	-24.47	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

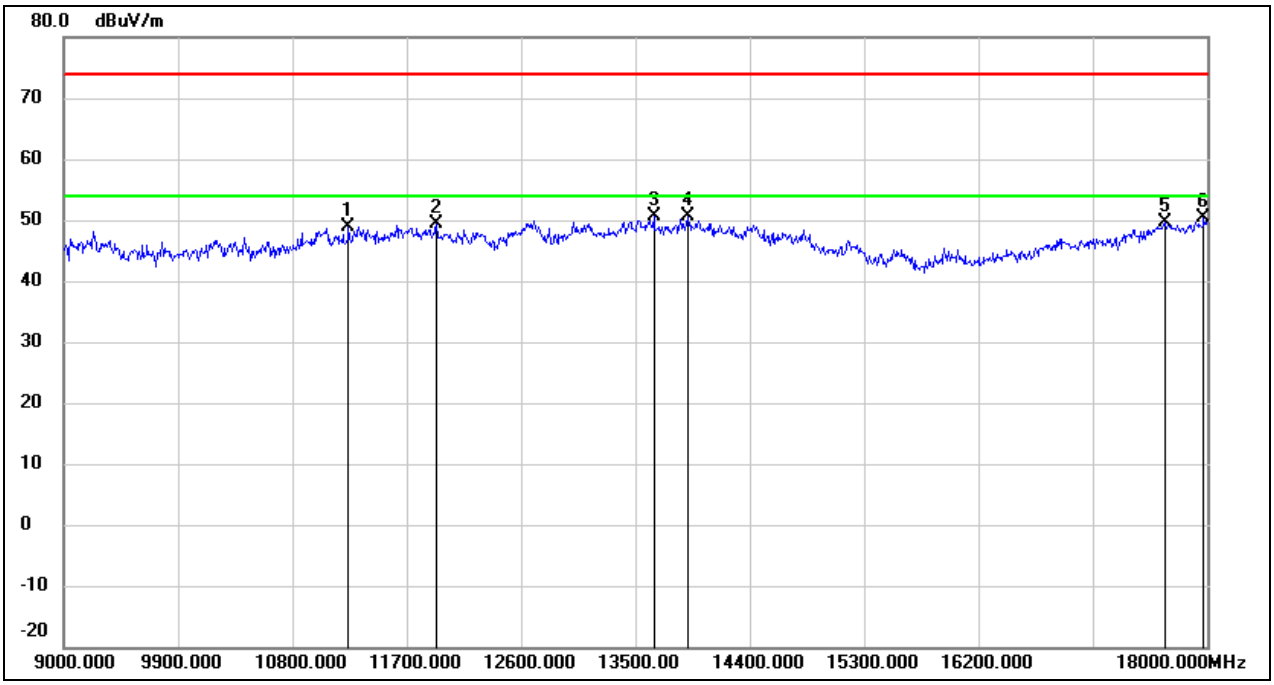

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11241.000	33.24	15.61	48.85	74.00	-25.15	peak
2	11934.000	31.55	17.73	49.28	74.00	-24.72	peak
3	13644.000	29.40	21.11	50.51	74.00	-23.49	peak
4	13914.000	29.02	21.69	50.71	74.00	-23.29	peak
5	17667.000	26.50	23.02	49.52	74.00	-24.48	peak
6	17973.000	25.36	24.99	50.35	74.00	-23.65	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6865
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

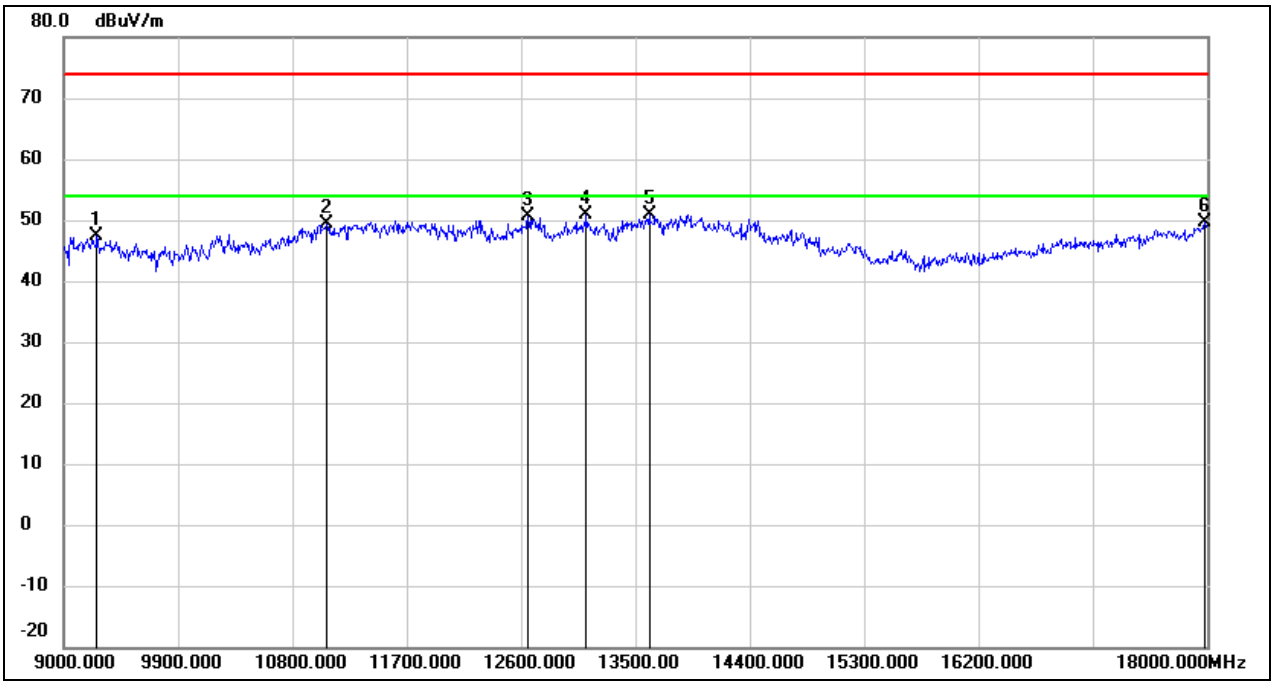

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9261.000	36.46	10.85	47.31	74.00	-26.69	peak
2	11070.000	34.29	15.00	49.29	74.00	-24.71	peak
3	12654.000	32.67	17.94	50.61	74.00	-23.39	peak
4	13113.000	31.43	19.33	50.76	74.00	-23.24	peak
5	13608.000	29.77	21.05	50.82	74.00	-23.18	peak
6	17982.000	24.51	25.04	49.55	74.00	-24.45	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6865
Polarity:	Vertical	Test Voltage:	DC 3.3 V

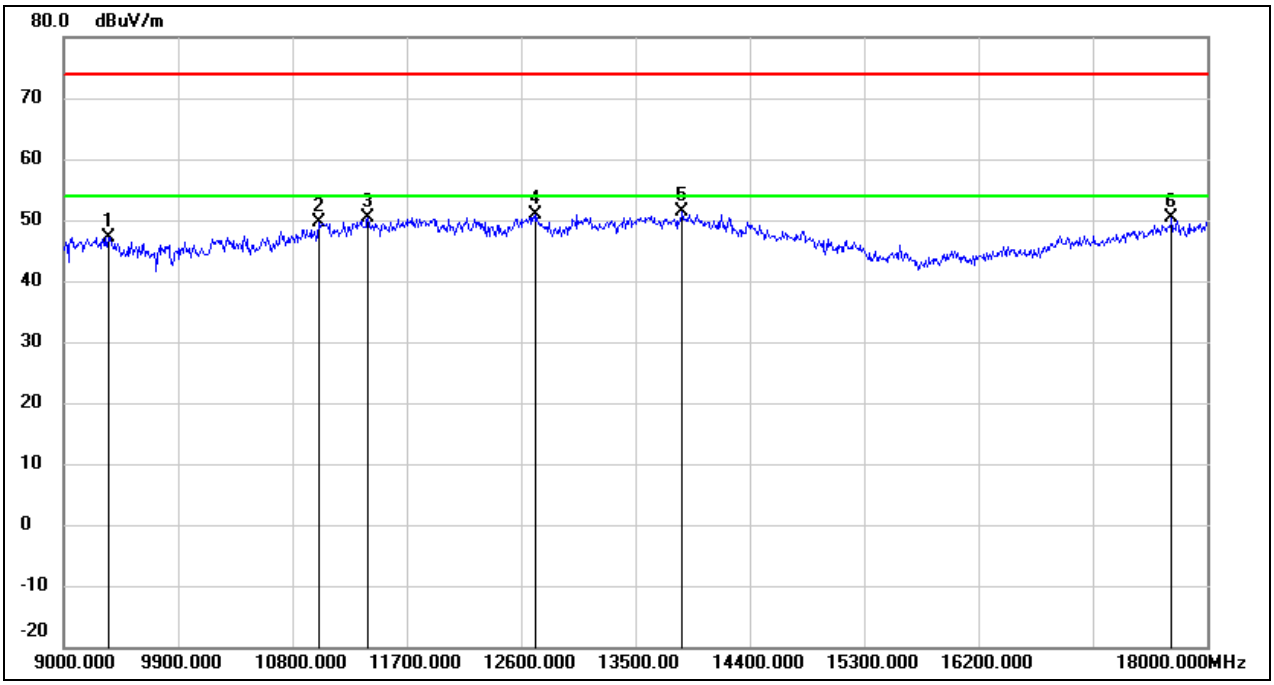

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9351.000	36.17	10.86	47.03	74.00	-26.97	peak
2	11007.000	34.77	14.77	49.54	74.00	-24.46	peak
3	11394.000	34.27	16.15	50.42	74.00	-23.58	peak
4	12717.000	32.78	18.11	50.89	74.00	-23.11	peak
5	13869.000	29.75	21.59	51.34	74.00	-22.66	peak
6	17721.000	27.04	23.38	50.42	74.00	-23.58	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6945
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

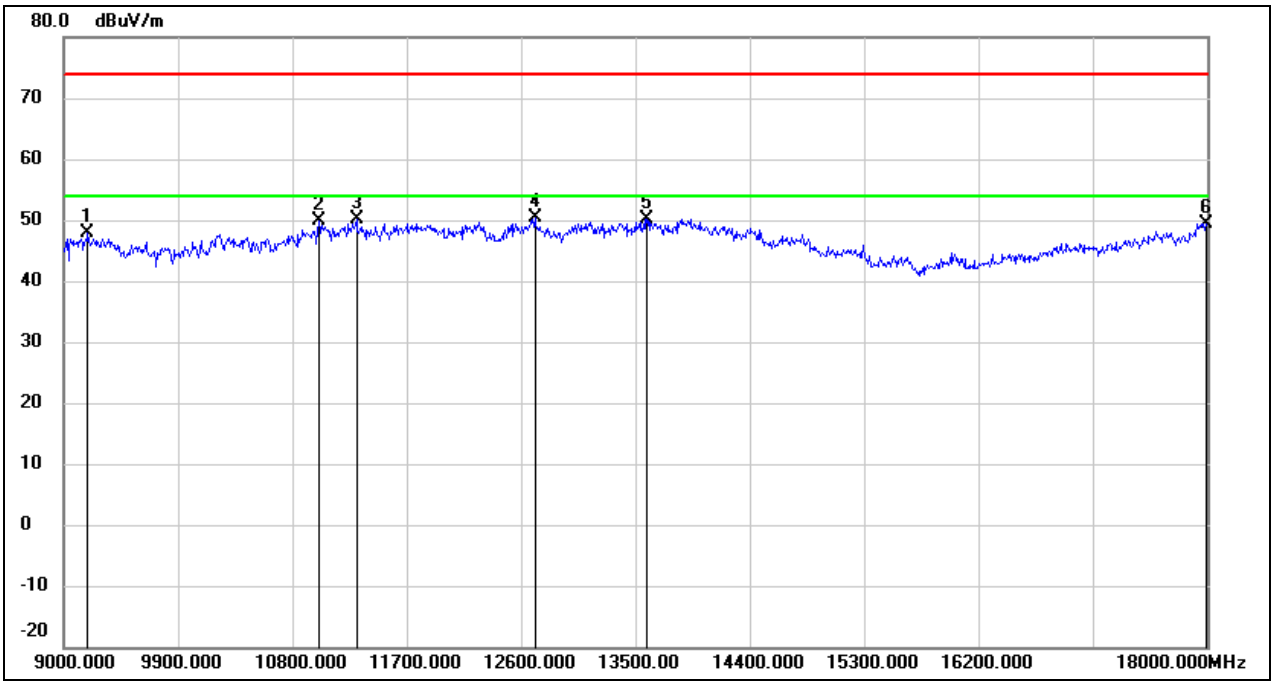

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.13	10.84	47.97	74.00	-26.03	peak
2	11007.000	35.15	14.77	49.92	74.00	-24.08	peak
3	11304.000	34.34	15.84	50.18	74.00	-23.82	peak
4	12708.000	32.37	18.10	50.47	74.00	-23.53	peak
5	13590.000	29.12	21.00	50.12	74.00	-23.88	peak
6	17991.000	24.36	25.11	49.47	74.00	-24.53	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	6945
Polarity:	Vertical	Test Voltage:	DC 3.3 V

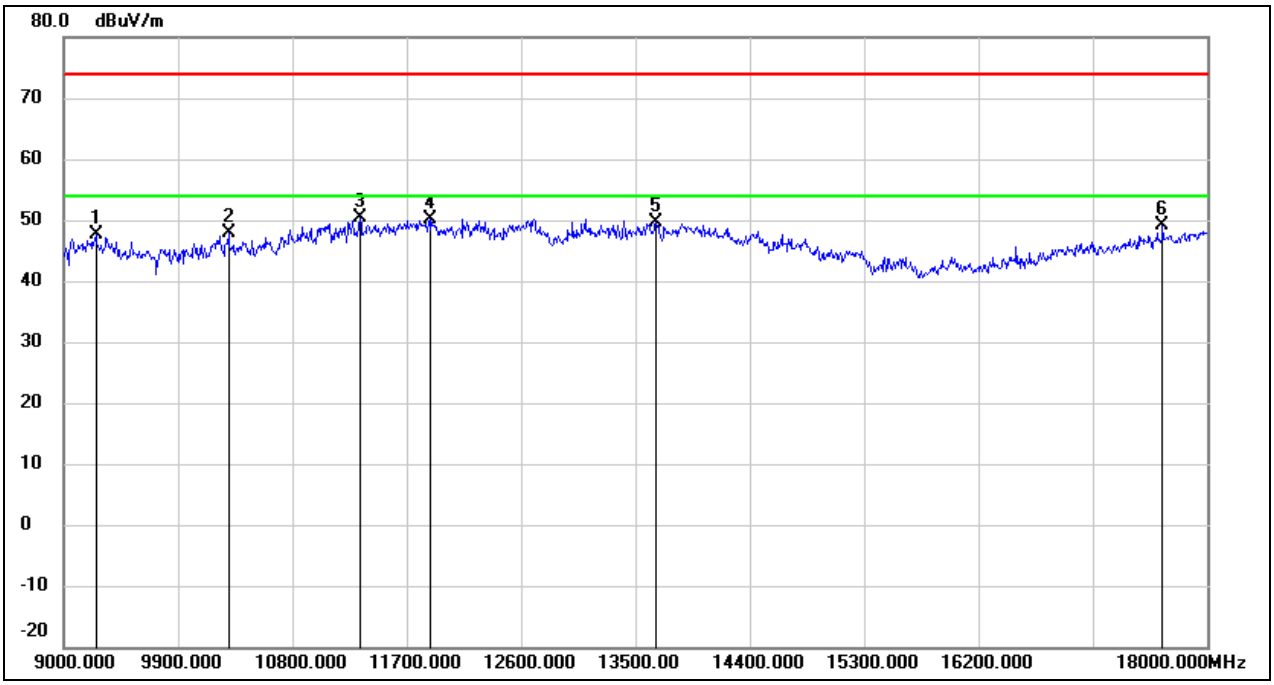

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.81	10.85	47.66	74.00	-26.34	peak
2	10296.000	35.08	12.69	47.77	74.00	-26.23	peak
3	11331.000	34.48	15.93	50.41	74.00	-23.59	peak
4	11880.000	32.58	17.58	50.16	74.00	-23.84	peak
5	13662.000	28.37	21.16	49.53	74.00	-24.47	peak
6	17649.000	26.22	22.91	49.13	74.00	-24.87	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

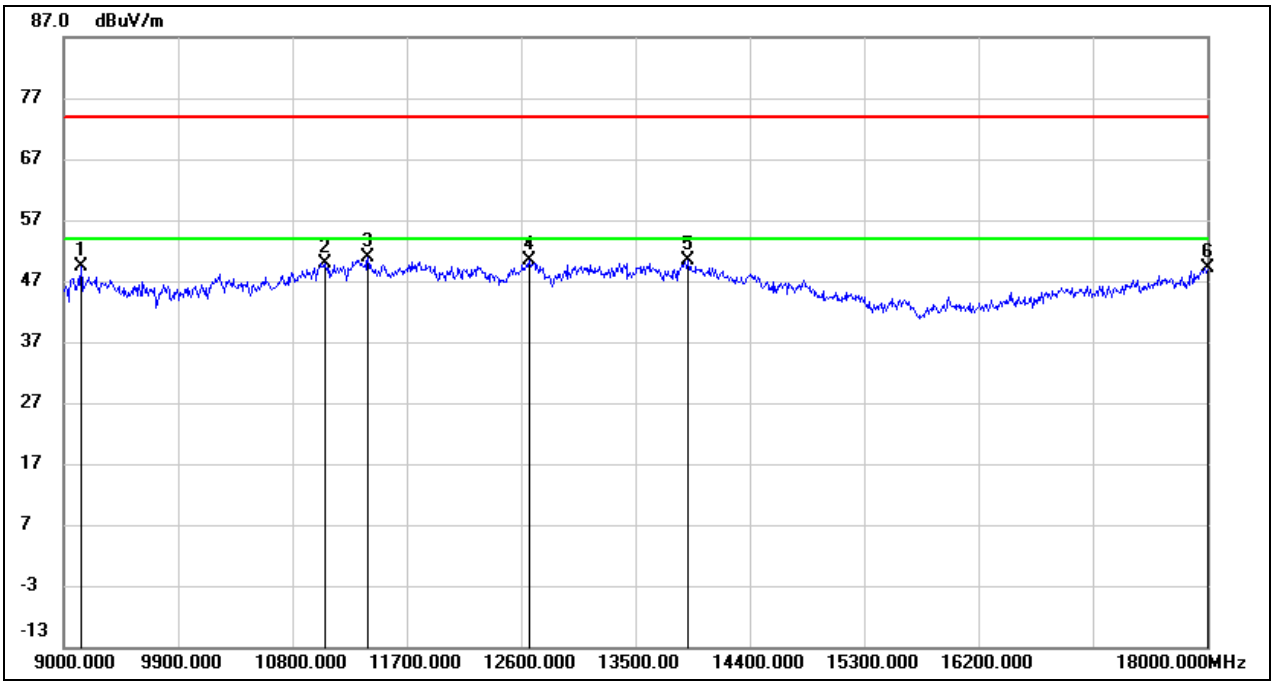

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9135.000	38.51	10.84	49.35	74.00	-24.65	peak
2	11052.000	35.00	14.94	49.94	74.00	-24.06	peak
3	11394.000	34.74	16.15	50.89	74.00	-23.11	peak
4	12663.000	32.44	17.98	50.42	74.00	-23.58	peak
5	13914.000	28.64	21.69	50.33	74.00	-23.67	peak
6	18000.000	24.01	25.16	49.17	74.00	-24.83	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	7025
Polarity:	Vertical	Test Voltage:	DC 3.3 V

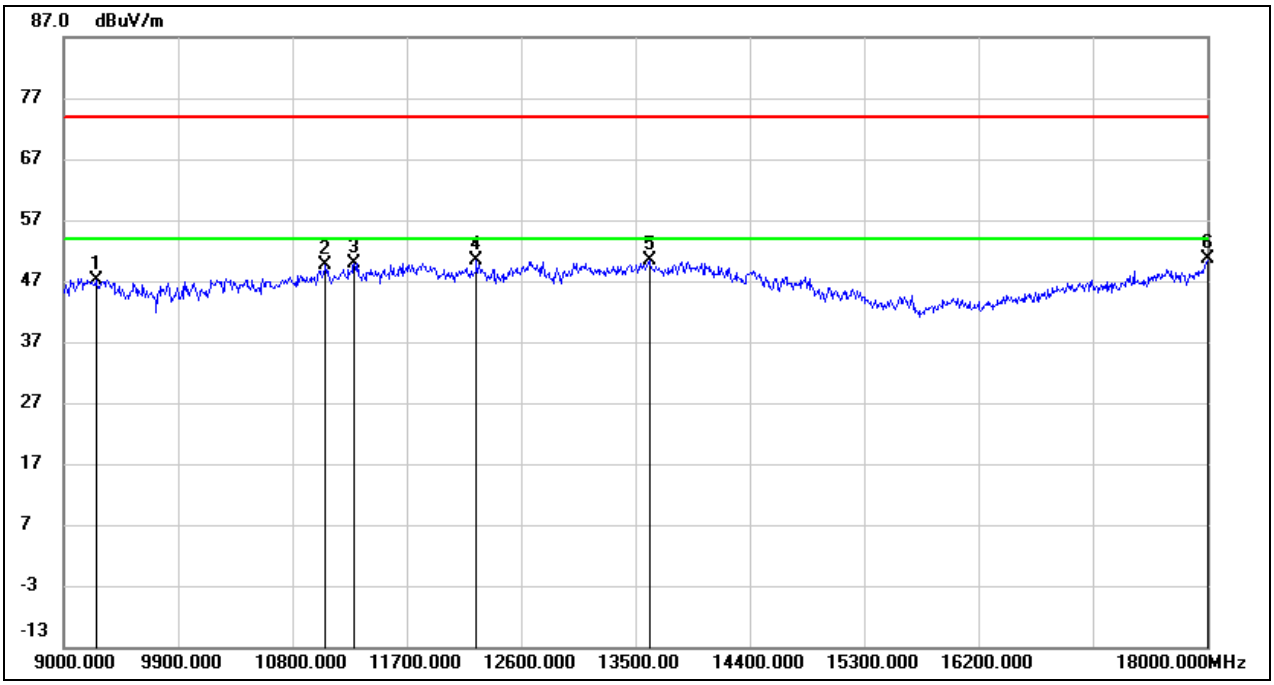

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.34	10.85	47.19	74.00	-26.81	peak
2	11061.000	34.71	14.96	49.67	74.00	-24.33	peak
3	11286.000	34.20	15.77	49.97	74.00	-24.03	peak
4	12249.000	32.66	17.72	50.38	74.00	-23.62	peak
5	13608.000	29.31	21.05	50.36	74.00	-23.64	peak
6	18000.000	25.41	25.16	50.57	74.00	-23.43	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.6. SPURIOUS EMISSIONS(9 GHZ~18 GHZ) FOR SINGLE PARTIAL RU

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	26Tone	Ru Index	RU0

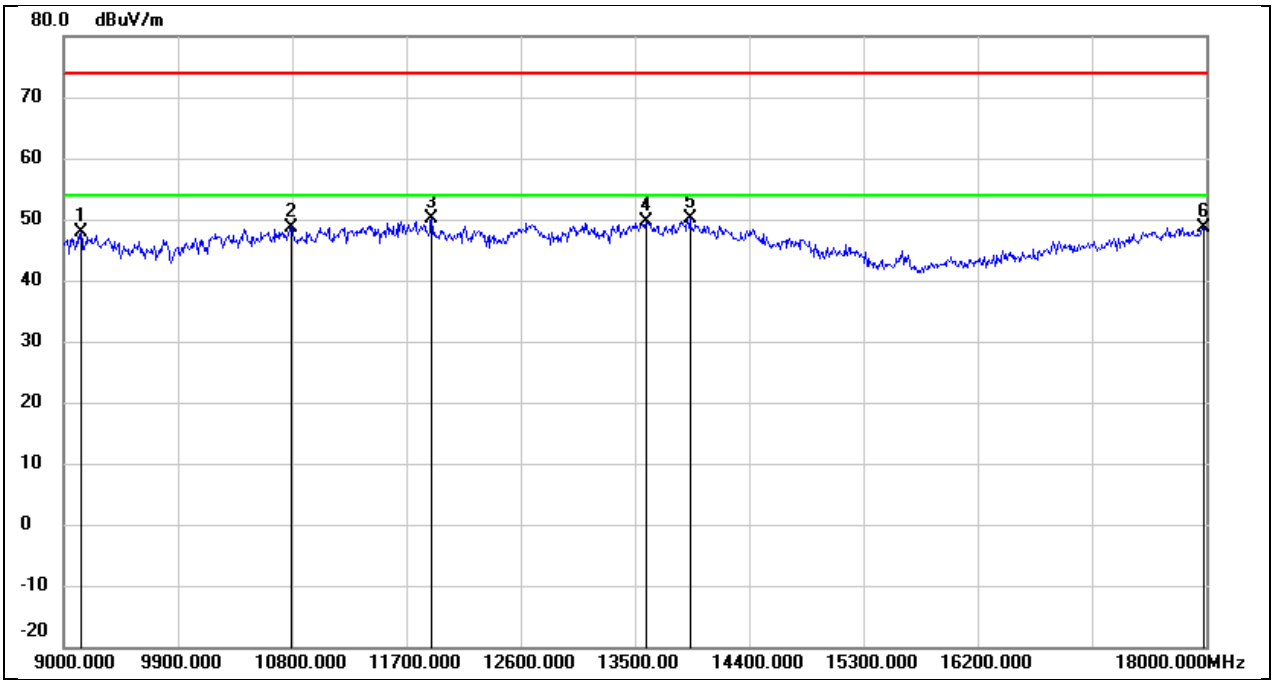

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9135.000	37.10	10.84	47.94	74.00	-26.06	peak
2	10791.000	34.68	14.07	48.75	74.00	-25.25	peak
3	11898.000	32.47	17.63	50.10	74.00	-23.90	peak
4	13590.000	28.62	21.00	49.62	74.00	-24.38	peak
5	13932.000	28.39	21.74	50.13	74.00	-23.87	peak
6	17982.000	23.65	25.04	48.69	74.00	-25.31	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	26Tone	Ru Index	RU0

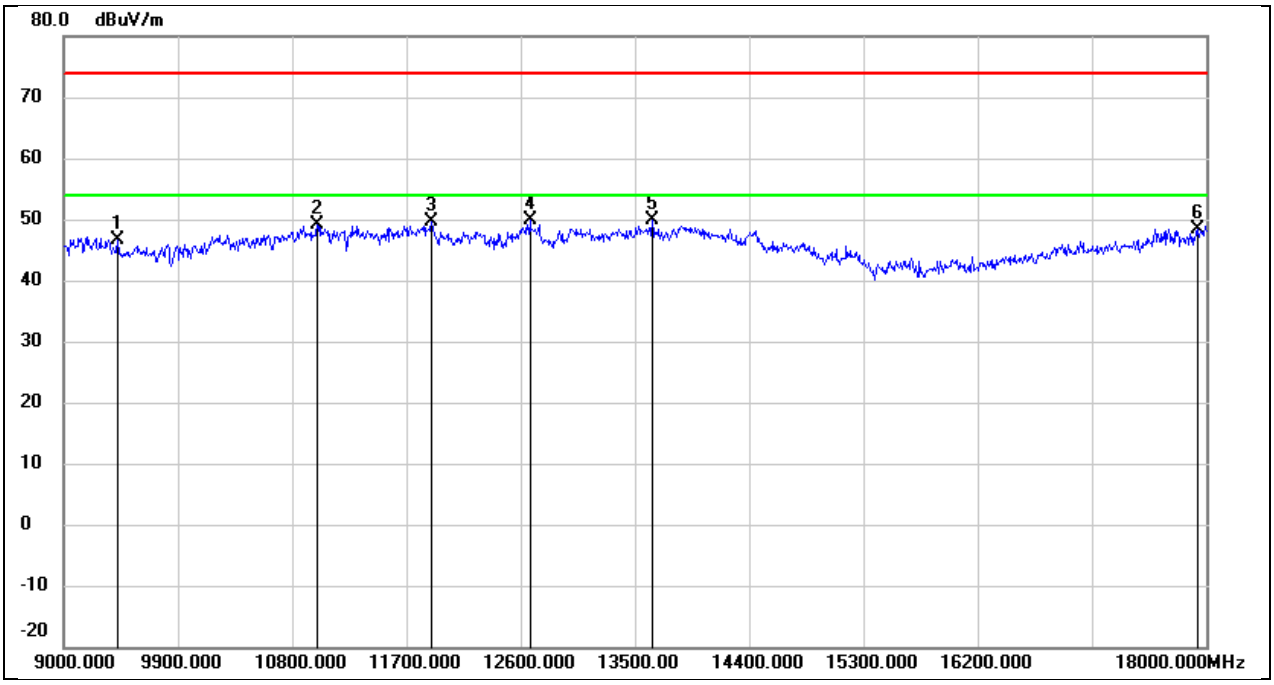

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9423.000	35.69	10.88	46.57	74.00	-27.43	peak
2	10998.000	34.31	14.75	49.06	74.00	-24.94	peak
3	11898.000	31.98	17.63	49.61	74.00	-24.39	peak
4	12672.000	31.83	18.00	49.83	74.00	-24.17	peak
5	13635.000	28.66	21.10	49.76	74.00	-24.24	peak
6	17928.000	23.77	24.70	48.47	74.00	-25.53	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	52Tone	Ru Index	RU37

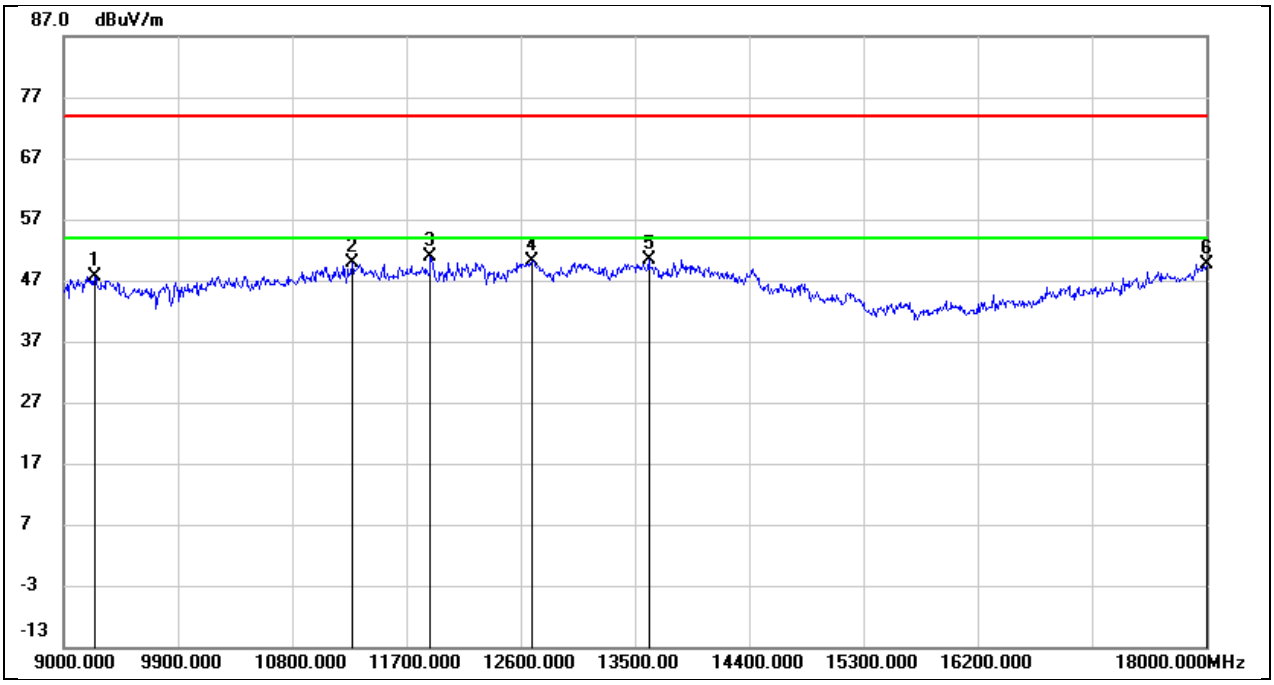

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9243.000	36.70	10.85	47.55	74.00	-26.45	peak
2	11277.000	34.13	15.73	49.86	74.00	-24.14	peak
3	11889.000	33.30	17.60	50.90	74.00	-23.10	peak
4	12690.000	32.16	18.05	50.21	74.00	-23.79	peak
5	13608.000	29.37	21.05	50.42	74.00	-23.58	peak
6	18000.000	24.47	25.16	49.63	74.00	-24.37	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	52Tone	Ru Index	RU37

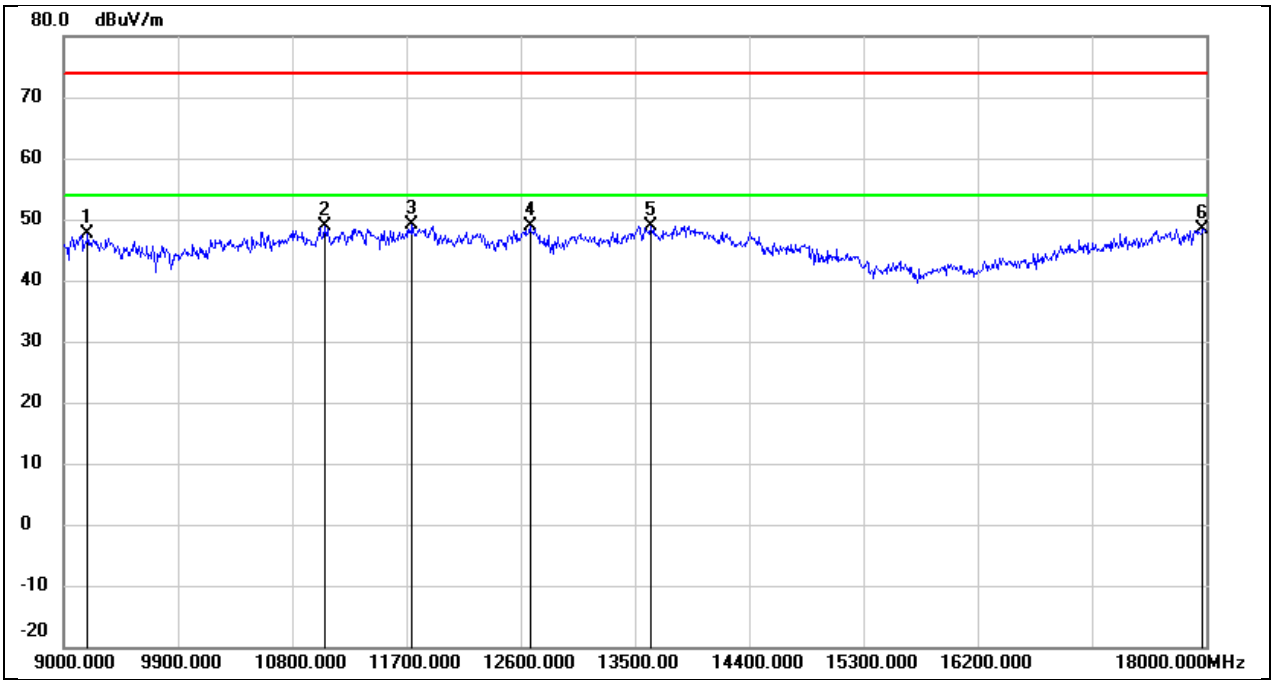

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.80	10.84	47.64	74.00	-26.36	peak
2	11052.000	33.82	14.94	48.76	74.00	-25.24	peak
3	11745.000	31.82	17.21	49.03	74.00	-24.97	peak
4	12672.000	30.83	18.00	48.83	74.00	-25.17	peak
5	13626.000	27.83	21.08	48.91	74.00	-25.09	peak
6	17973.000	23.44	24.99	48.43	74.00	-25.57	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	106Tone	Ru Index	RU53

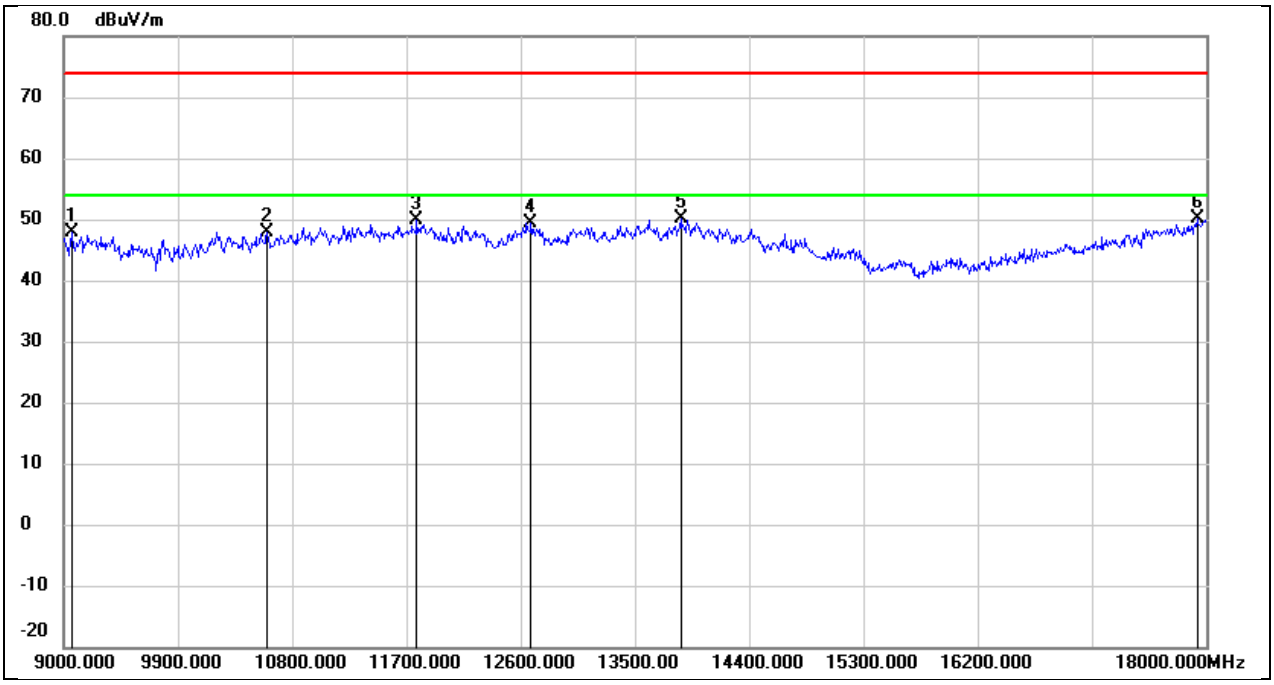

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9063.000	36.94	10.82	47.76	74.00	-26.24	peak
2	10602.000	34.40	13.45	47.85	74.00	-26.15	peak
3	11781.000	32.64	17.30	49.94	74.00	-24.06	peak
4	12681.000	31.45	18.03	49.48	74.00	-24.52	peak
5	13860.000	28.43	21.59	50.02	74.00	-23.98	peak
6	17928.000	25.46	24.70	50.16	74.00	-23.84	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	106Tone	Ru Index	RU53

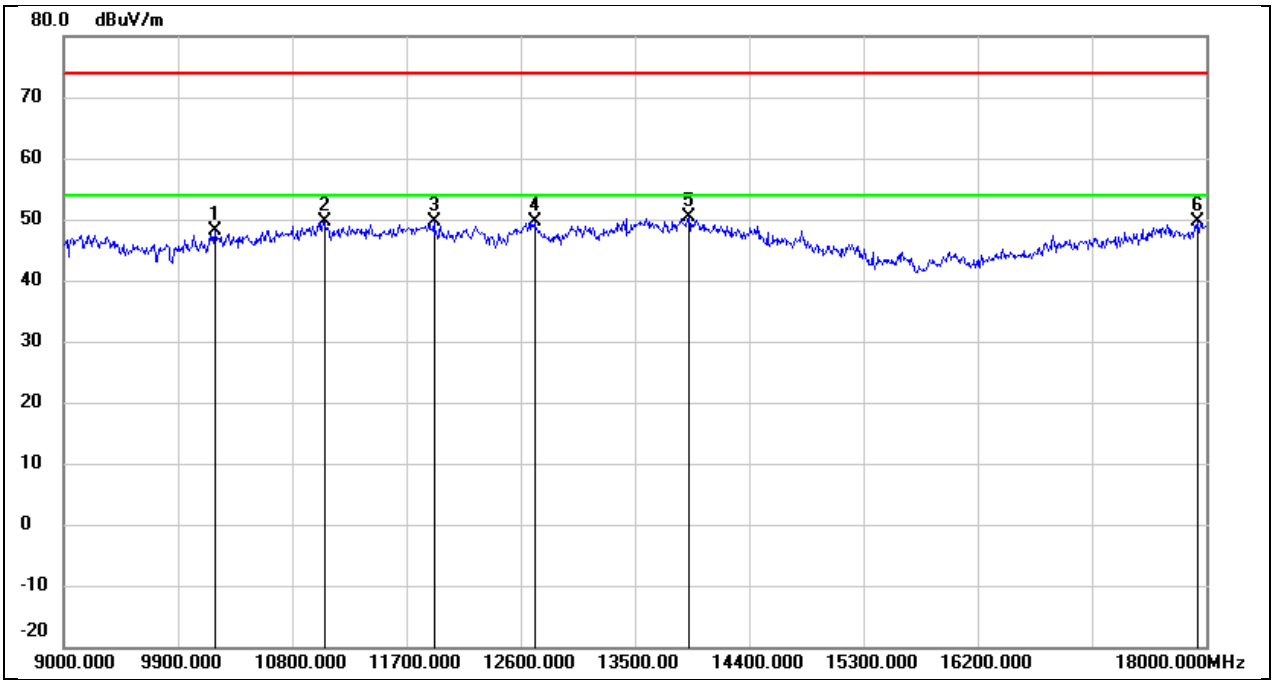

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10188.000	35.58	12.47	48.05	74.00	-25.95	peak
2	11052.000	34.79	14.94	49.73	74.00	-24.27	peak
3	11916.000	31.88	17.68	49.56	74.00	-24.44	peak
4	12708.000	31.52	18.10	49.62	74.00	-24.38	peak
5	13923.000	28.63	21.72	50.35	74.00	-23.65	peak
6	17928.000	25.05	24.70	49.75	74.00	-24.25	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	26Tone	Ru Index	RU0

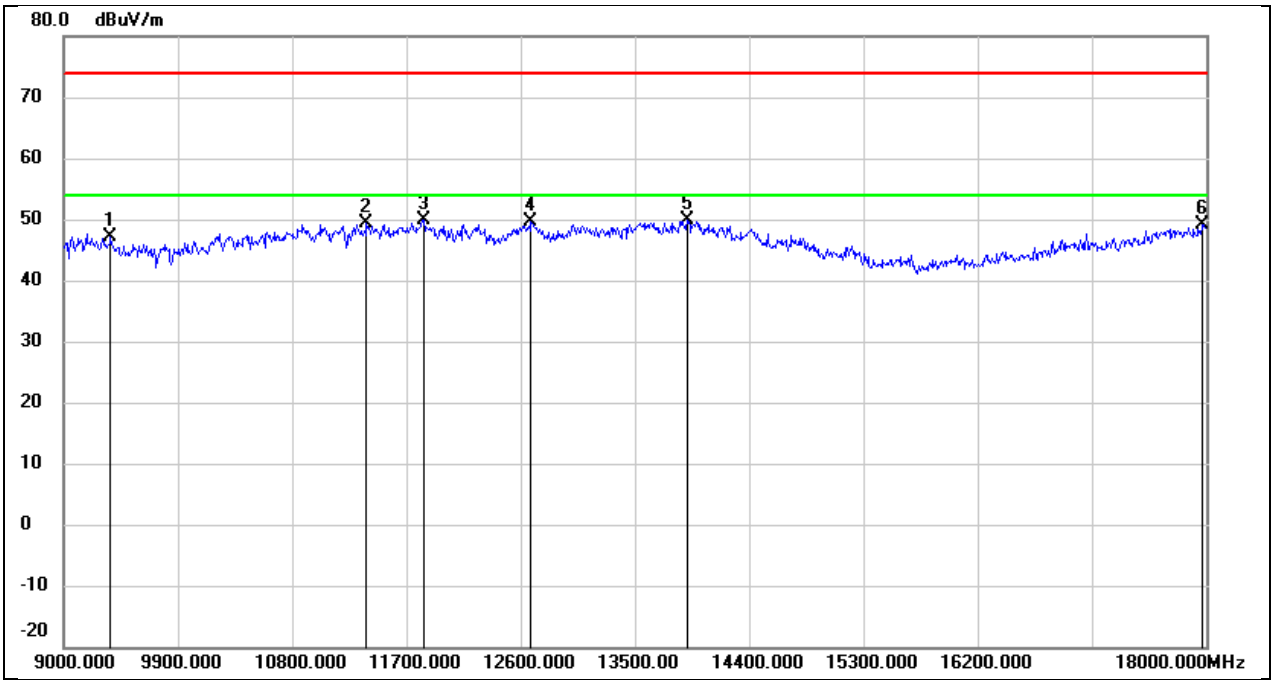

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9369.000	36.29	10.87	47.16	74.00	-26.84	peak
2	11385.000	33.31	16.12	49.43	74.00	-24.57	peak
3	11835.000	32.45	17.46	49.91	74.00	-24.09	peak
4	12681.000	31.54	18.03	49.57	74.00	-24.43	peak
5	13914.000	28.27	21.69	49.96	74.00	-24.04	peak
6	17973.000	24.16	24.99	49.15	74.00	-24.85	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	26Tone	Ru Index	RU0

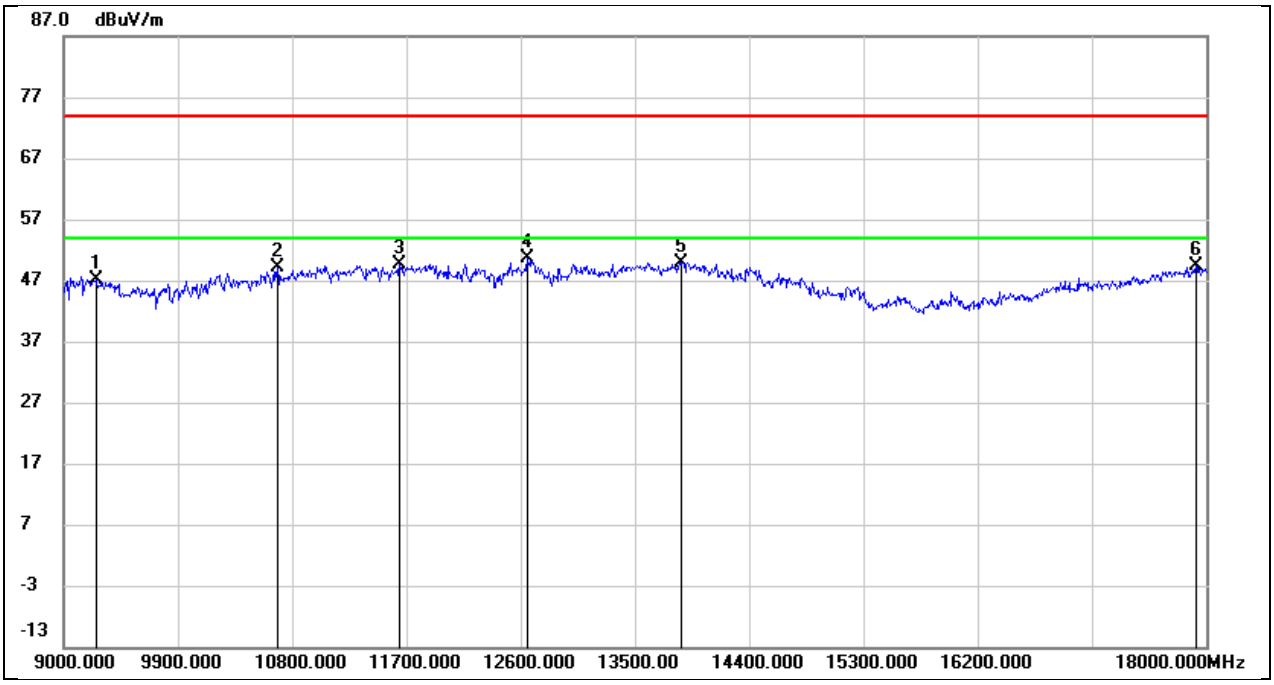

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.27	10.85	47.12	74.00	-26.88	peak
2	10683.000	35.31	13.72	49.03	74.00	-24.97	peak
3	11646.000	32.74	16.94	49.68	74.00	-24.32	peak
4	12654.000	32.76	17.94	50.70	74.00	-23.30	peak
5	13860.000	28.28	21.59	49.87	74.00	-24.13	peak
6	17919.000	24.62	24.64	49.26	74.00	-24.74	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	52Tone	Ru Index	RU37

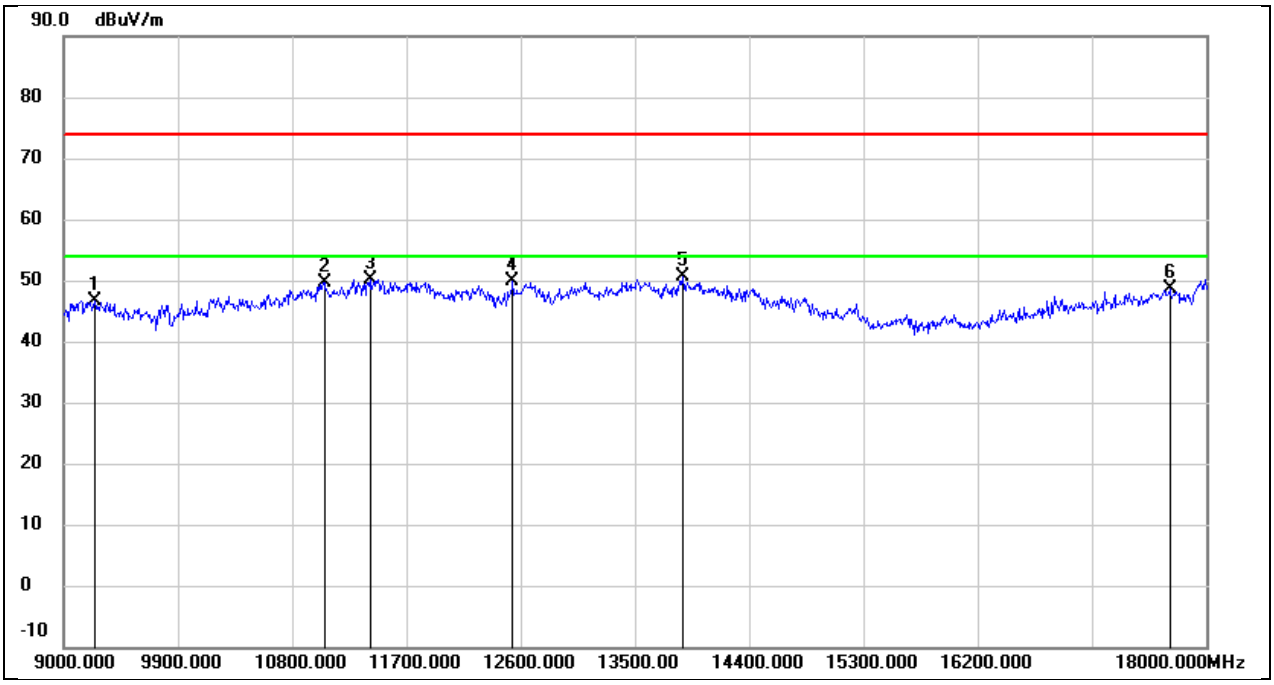

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9243.000	35.83	10.85	46.68	74.00	-27.32	peak
2	11052.000	34.79	14.94	49.73	74.00	-24.27	peak
3	11421.000	33.79	16.25	50.04	74.00	-23.96	peak
4	12537.000	32.29	17.63	49.92	74.00	-24.08	peak
5	13878.000	29.06	21.62	50.68	74.00	-23.32	peak
6	17712.000	25.31	23.32	48.63	74.00	-25.37	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	52Tone	Ru Index	RU37

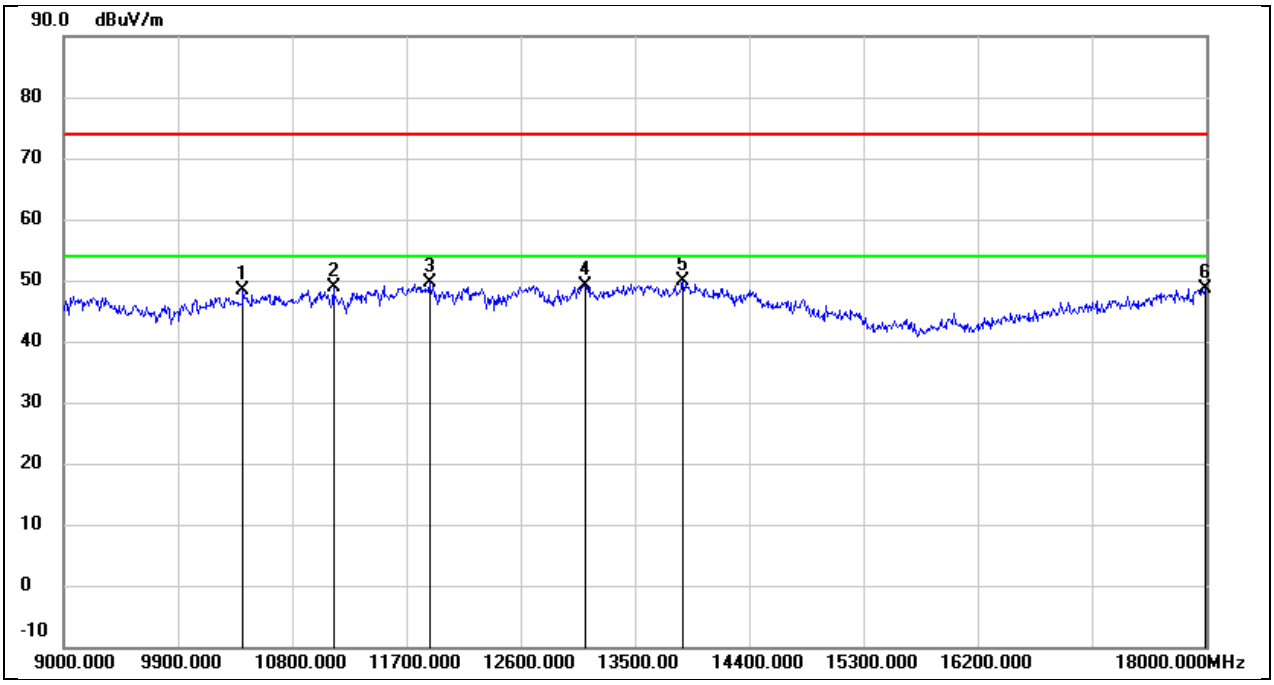

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10413.000	35.33	12.94	48.27	74.00	-25.73	peak
2	11124.000	33.78	15.19	48.97	74.00	-25.03	peak
3	11880.000	32.11	17.58	49.69	74.00	-24.31	peak
4	13113.000	29.87	19.33	49.20	74.00	-24.80	peak
5	13878.000	28.22	21.62	49.84	74.00	-24.16	peak
6	17991.000	23.59	25.11	48.70	74.00	-25.30	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	106Tone	Ru Index	RU53

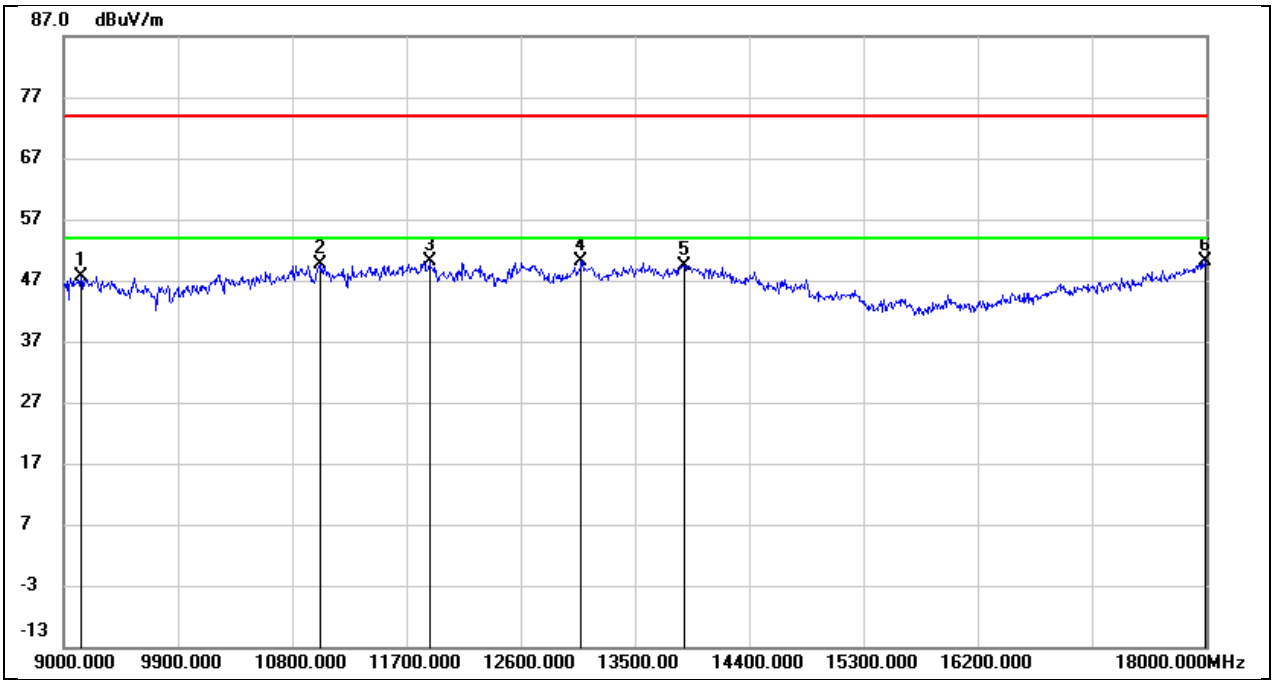

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9135.000	36.86	10.84	47.70	74.00	-26.30	peak
2	11025.000	34.90	14.83	49.73	74.00	-24.27	peak
3	11880.000	32.63	17.58	50.21	74.00	-23.79	peak
4	13077.000	30.93	19.18	50.11	74.00	-23.89	peak
5	13887.000	27.77	21.64	49.41	74.00	-24.59	peak
6	17991.000	25.11	25.11	50.22	74.00	-23.78	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	106Tone	Ru Index	RU53

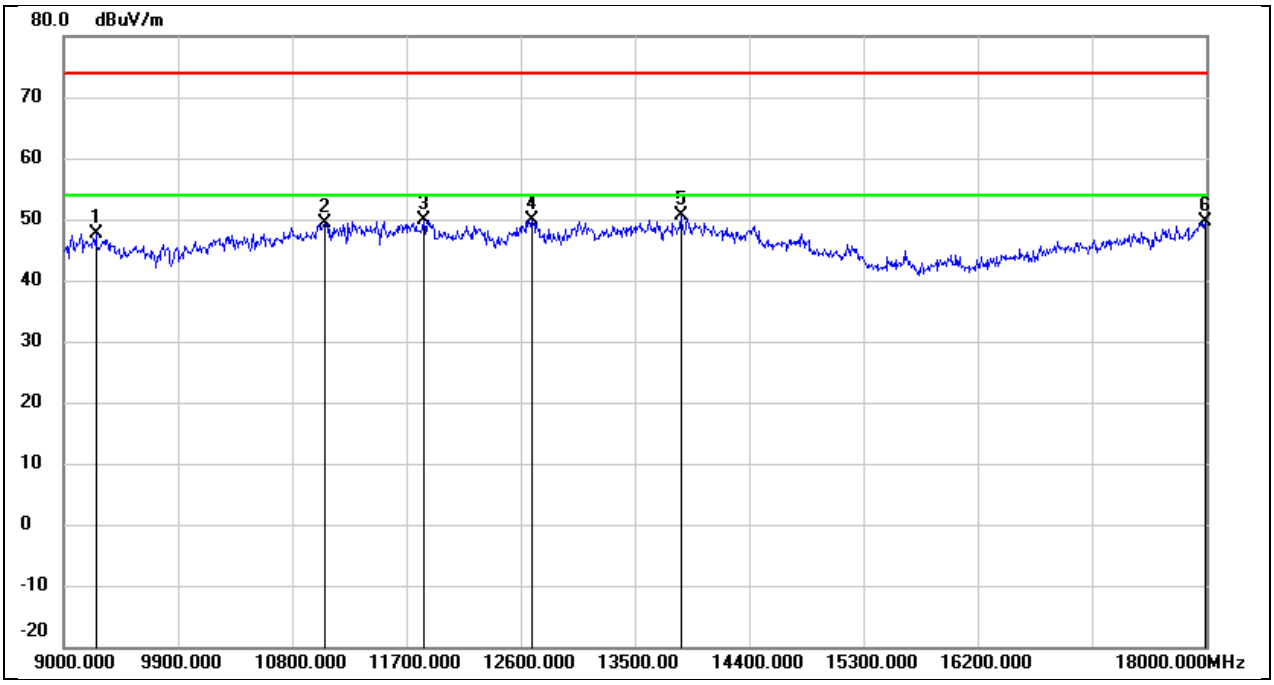

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9252.000	36.84	10.85	47.69	74.00	-26.31	peak
2	11052.000	34.46	14.94	49.40	74.00	-24.60	peak
3	11835.000	32.36	17.46	49.82	74.00	-24.18	peak
4	12690.000	31.85	18.05	49.90	74.00	-24.10	peak
5	13860.000	29.09	21.59	50.68	74.00	-23.32	peak
6	17991.000	24.61	25.11	49.72	74.00	-24.28	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	242Tone	Ru Index	RU61

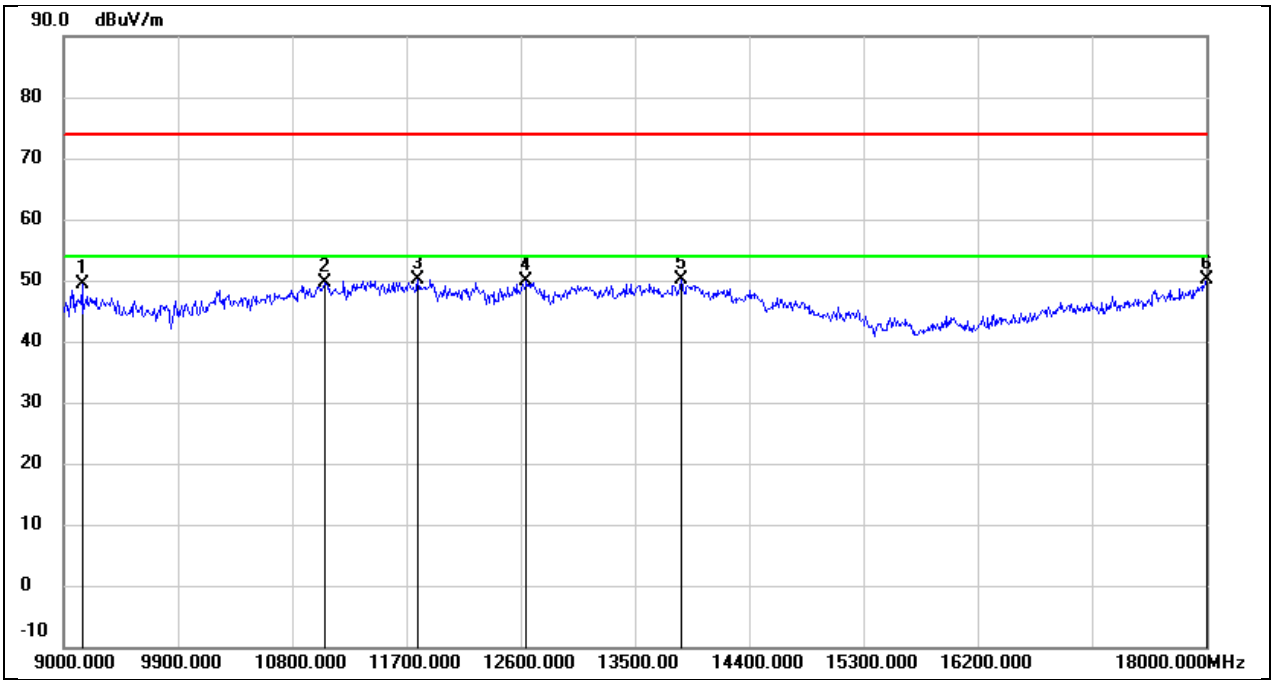

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9144.000	38.61	10.83	49.44	74.00	-24.56	peak
2	11052.000	34.65	14.94	49.59	74.00	-24.41	peak
3	11790.000	32.71	17.33	50.04	74.00	-23.96	peak
4	12645.000	31.94	17.92	49.86	74.00	-24.14	peak
5	13869.000	28.56	21.59	50.15	74.00	-23.85	peak
6	18000.000	25.02	25.16	50.18	74.00	-23.82	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	242Tone	Ru Index	RU61

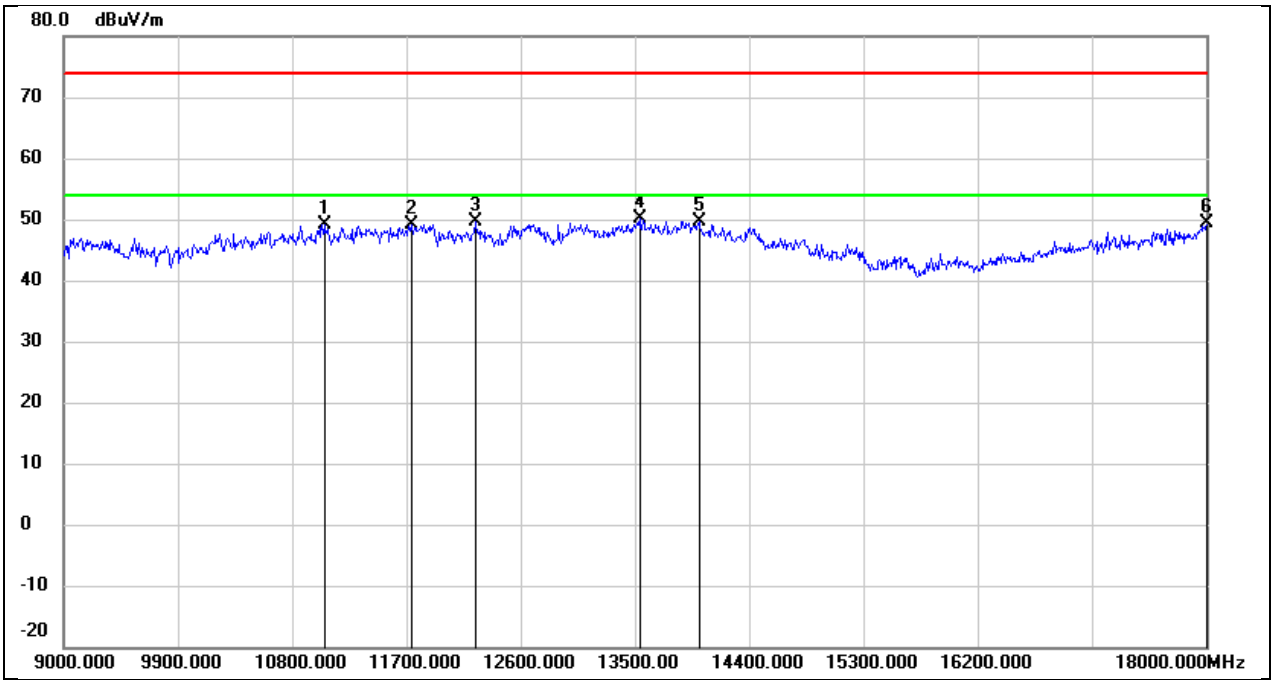

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11052.000	34.23	14.94	49.17	74.00	-24.83	peak
2	11736.000	31.95	17.18	49.13	74.00	-24.87	peak
3	12240.000	31.81	17.73	49.54	74.00	-24.46	peak
4	13536.000	29.15	20.90	50.05	74.00	-23.95	peak
5	14004.000	27.81	21.86	49.67	74.00	-24.33	peak
6	18000.000	24.17	25.16	49.33	74.00	-24.67	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	26Tone	Ru Index	RU0

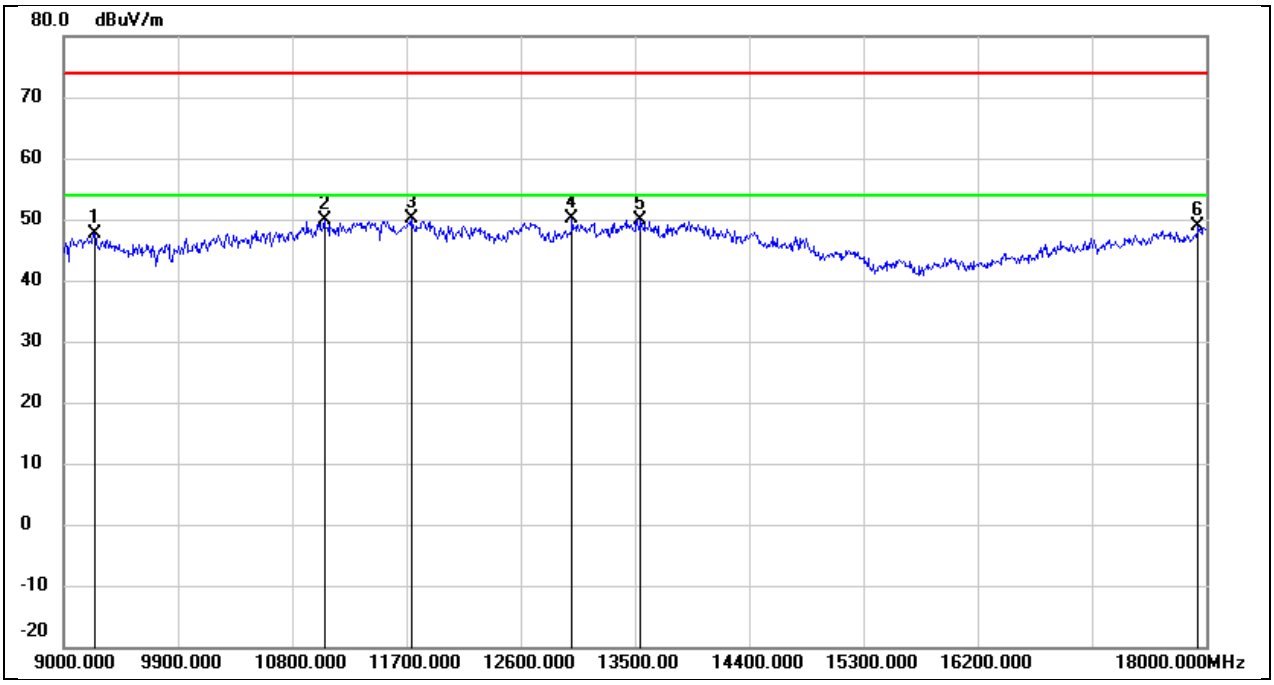

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9243.000	36.88	10.85	47.73	74.00	-26.27	peak
2	11052.000	34.96	14.94	49.90	74.00	-24.10	peak
3	11736.000	32.93	17.18	50.11	74.00	-23.89	peak
4	13005.000	31.26	18.91	50.17	74.00	-23.83	peak
5	13545.000	29.01	20.90	49.91	74.00	-24.09	peak
6	17937.000	24.06	24.76	48.82	74.00	-25.18	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	26Tone	Ru Index	RU0

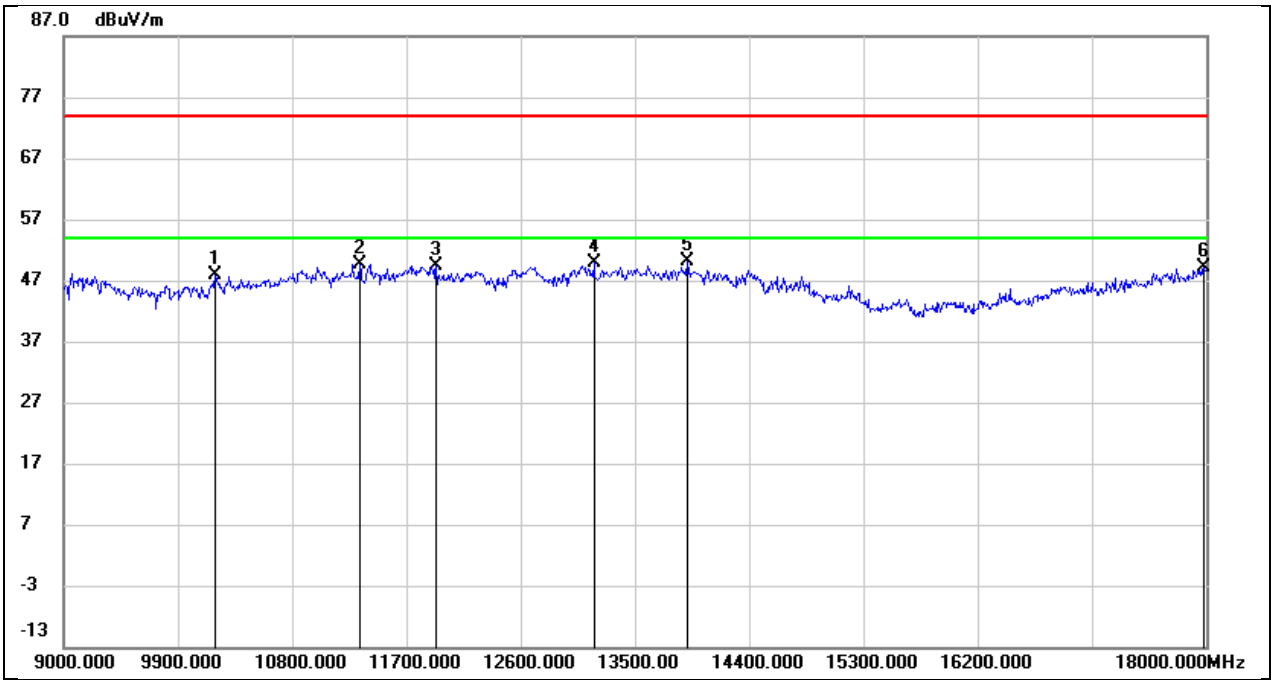

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10188.000	35.51	12.47	47.98	74.00	-26.02	peak
2	11331.000	33.60	15.93	49.53	74.00	-24.47	peak
3	11934.000	31.75	17.73	49.48	74.00	-24.52	peak
4	13176.000	30.20	19.57	49.77	74.00	-24.23	peak
5	13914.000	28.41	21.69	50.10	74.00	-23.90	peak
6	17982.000	23.98	25.04	49.02	74.00	-24.98	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	52Tone	Ru Index	RU37

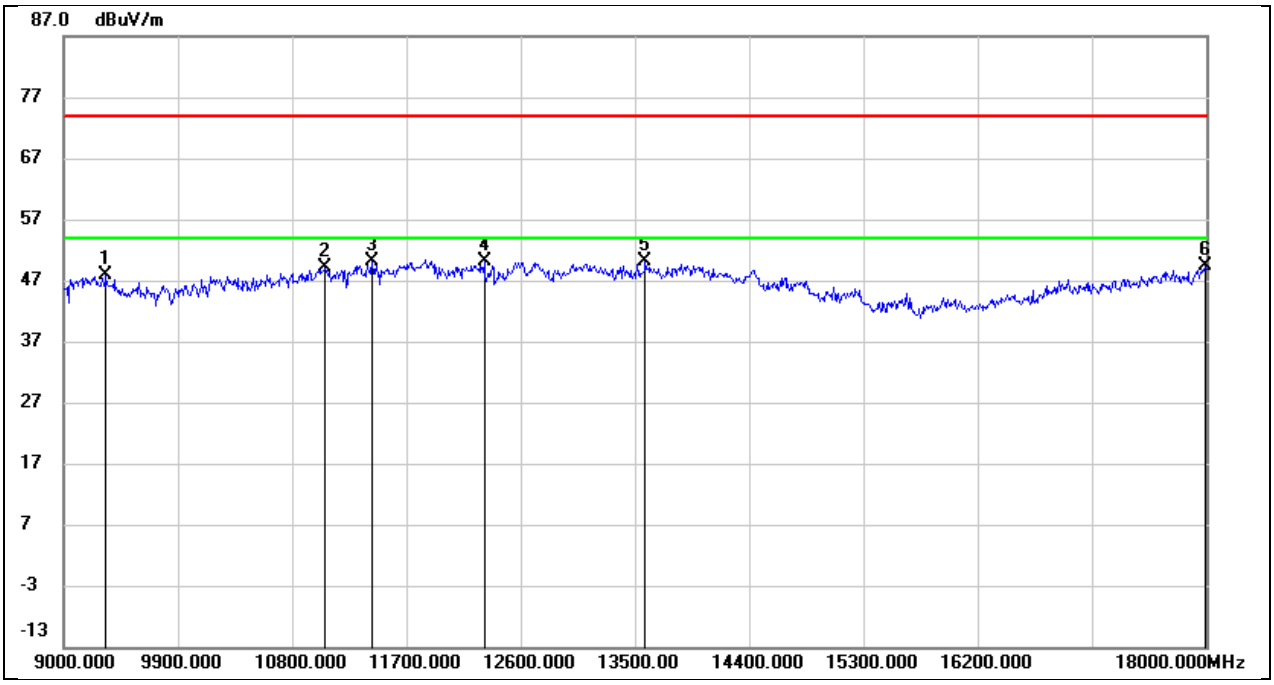

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9333.000	36.98	10.86	47.84	74.00	-26.16	peak
2	11061.000	34.24	14.96	49.20	74.00	-24.80	peak
3	11430.000	33.88	16.28	50.16	74.00	-23.84	peak
4	12312.000	32.49	17.67	50.16	74.00	-23.84	peak
5	13581.000	29.13	20.99	50.12	74.00	-23.88	peak
6	17991.000	24.15	25.11	49.26	74.00	-24.74	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	52Tone	Ru Index	RU37

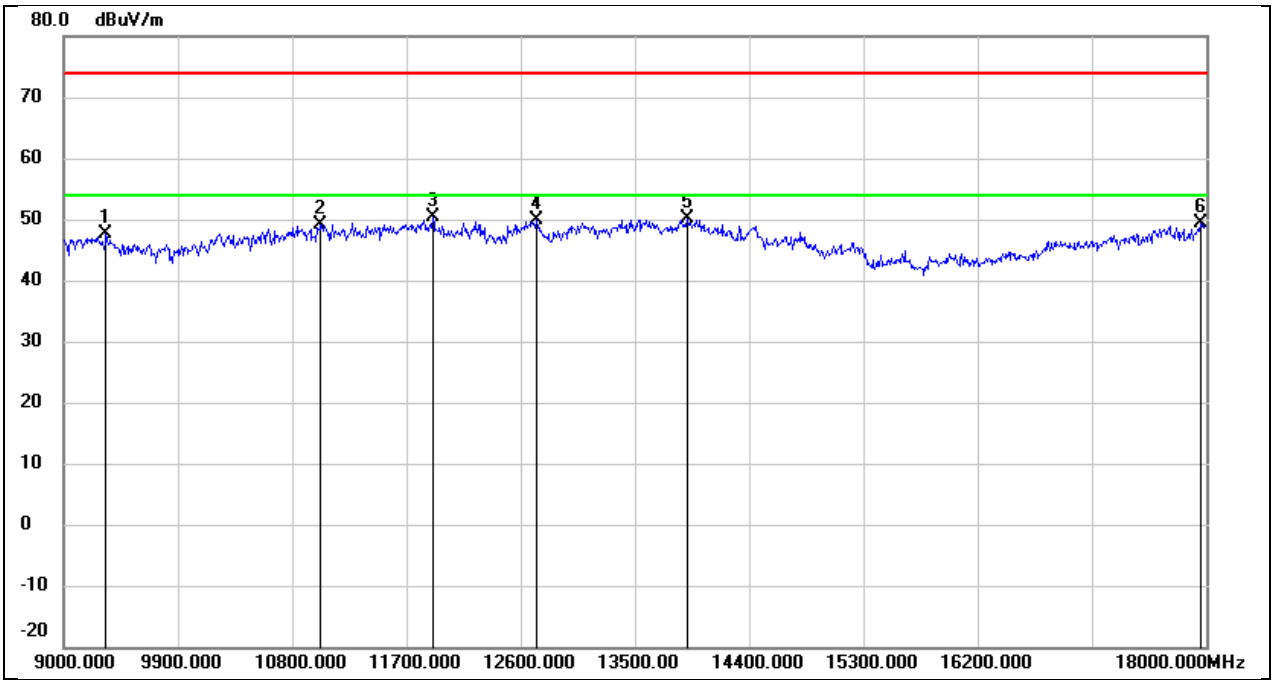

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9333.000	36.84	10.86	47.70	74.00	-26.30	peak
2	11025.000	34.35	14.83	49.18	74.00	-24.82	peak
3	11907.000	32.75	17.66	50.41	74.00	-23.59	peak
4	12726.000	31.66	18.14	49.80	74.00	-24.20	peak
5	13914.000	28.45	21.69	50.14	74.00	-23.86	peak
6	17955.000	24.42	24.87	49.29	74.00	-24.71	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	106Tone	Ru Index	RU53

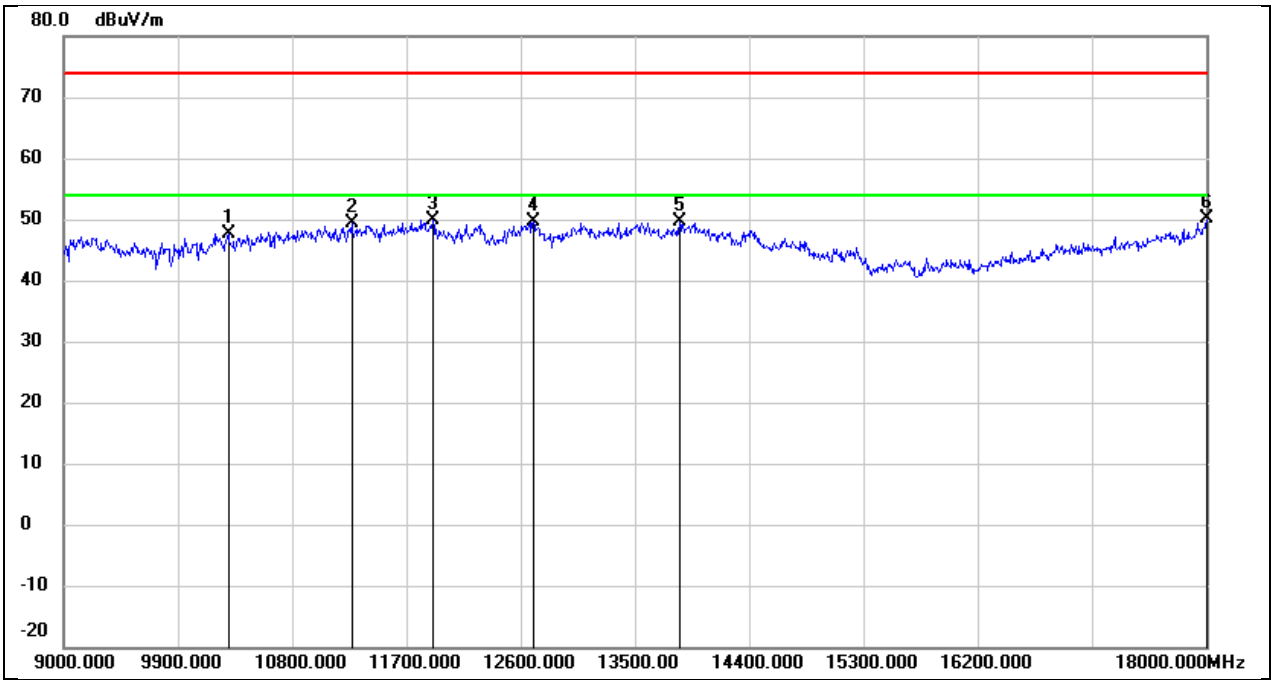

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	34.93	12.69	47.62	74.00	-26.38	peak
2	11268.000	33.66	15.71	49.37	74.00	-24.63	peak
3	11907.000	32.32	17.66	49.98	74.00	-24.02	peak
4	12699.000	31.54	18.07	49.61	74.00	-24.39	peak
5	13851.000	27.98	21.56	49.54	74.00	-24.46	peak
6	18000.000	24.85	25.16	50.01	74.00	-23.99	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	106Tone	Ru Index	RU53

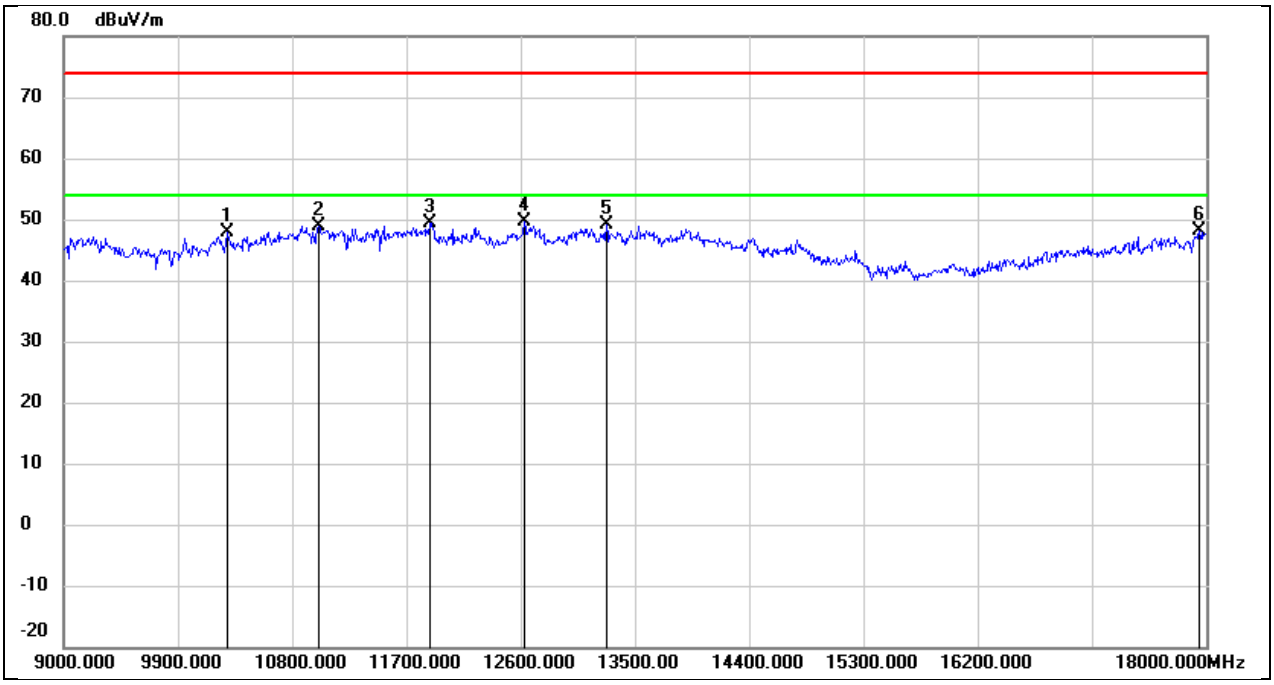

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10287.000	35.23	12.68	47.91	74.00	-26.09	peak
2	11007.000	34.22	14.77	48.99	74.00	-25.01	peak
3	11880.000	31.81	17.58	49.39	74.00	-24.61	peak
4	12627.000	31.83	17.87	49.70	74.00	-24.30	peak
5	13275.000	29.16	19.95	49.11	74.00	-24.89	peak
6	17946.000	23.30	24.82	48.12	74.00	-25.88	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	242Tone	Ru Index	RU61

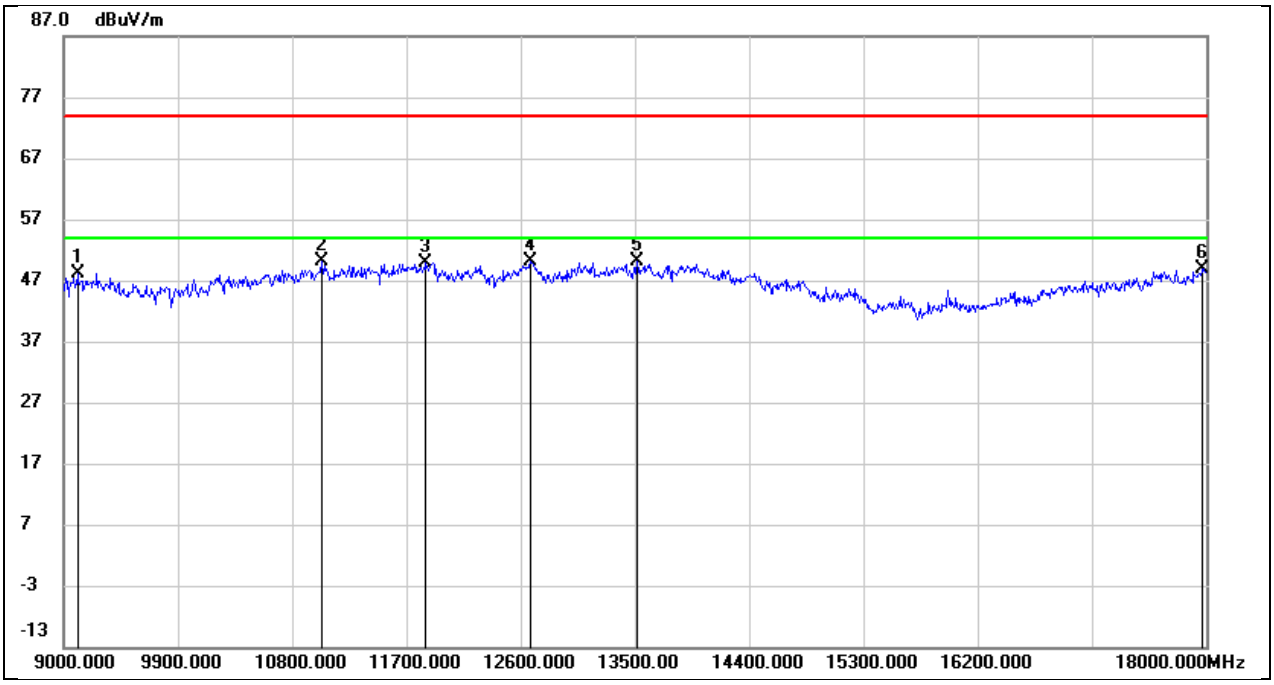

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9108.000	37.26	10.83	48.09	74.00	-25.91	peak
2	11034.000	35.18	14.87	50.05	74.00	-23.95	peak
3	11853.000	32.34	17.50	49.84	74.00	-24.16	peak
4	12672.000	32.06	18.00	50.06	74.00	-23.94	peak
5	13518.000	29.20	20.85	50.05	74.00	-23.95	peak
6	17973.000	23.84	24.99	48.83	74.00	-25.17	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	242Tone	Ru Index	RU61

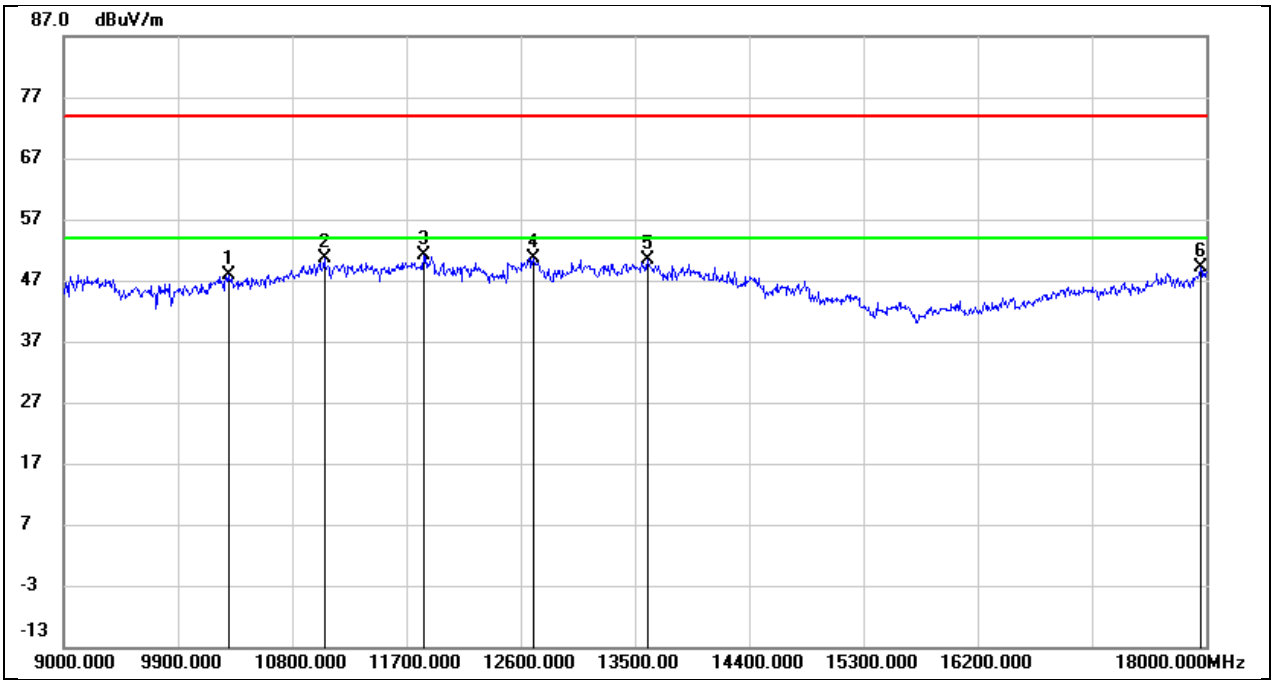

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10296.000	35.08	12.69	47.77	74.00	-26.23	peak
2	11052.000	35.73	14.94	50.67	74.00	-23.33	peak
3	11835.000	33.74	17.46	51.20	74.00	-22.80	peak
4	12699.000	32.54	18.07	50.61	74.00	-23.39	peak
5	13599.000	29.24	21.02	50.26	74.00	-23.74	peak
6	17955.000	24.21	24.87	49.08	74.00	-24.92	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 3.3 V
Ru Size	484Tone	Ru Index	RU65

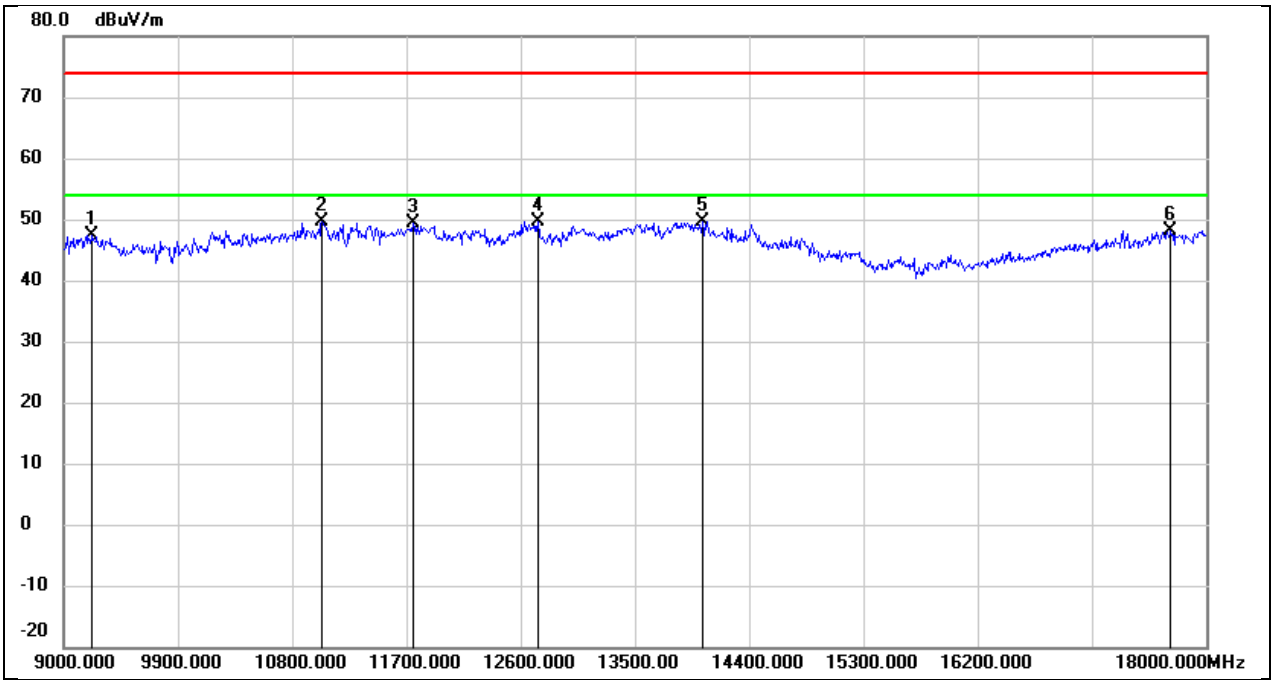

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9216.000	36.59	10.85	47.44	74.00	-26.56	peak
2	11034.000	34.83	14.87	49.70	74.00	-24.30	peak
3	11754.000	32.15	17.23	49.38	74.00	-24.62	peak
4	12735.000	31.38	18.17	49.55	74.00	-24.45	peak
5	14031.000	27.89	21.74	49.63	74.00	-24.37	peak
6	17721.000	24.70	23.38	48.08	74.00	-25.92	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 3.3 V
Ru Size	484Tone	Ru Index	RU65

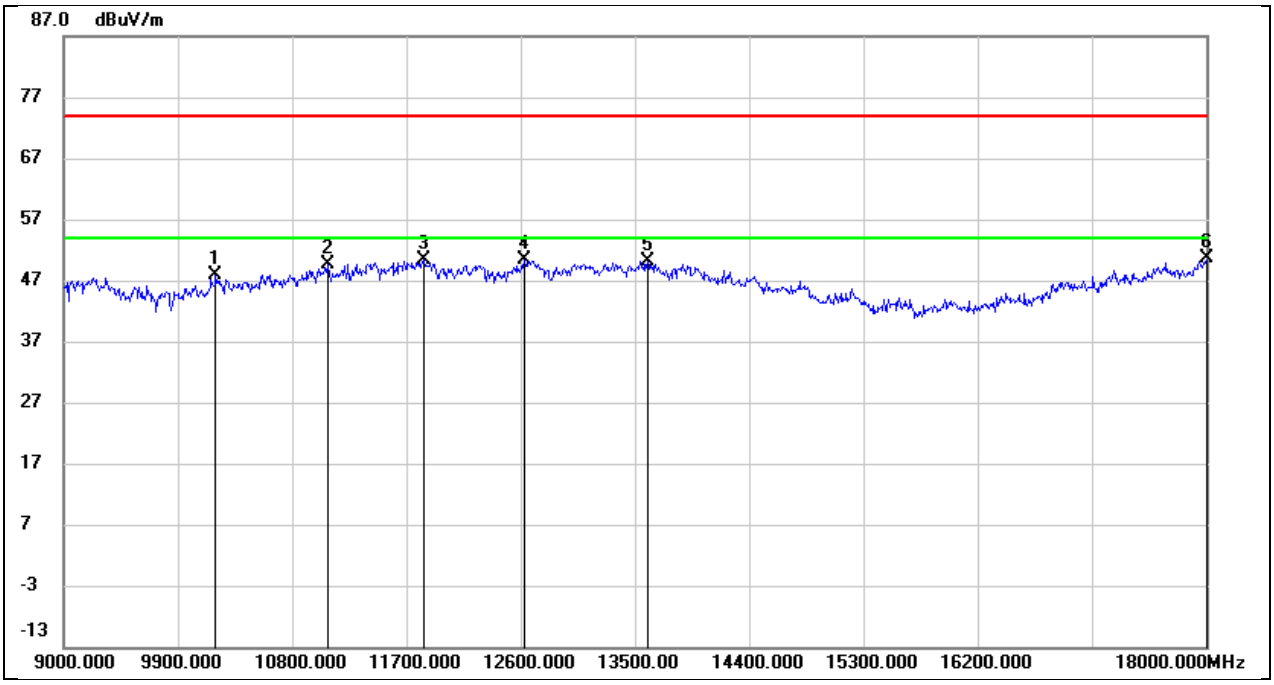

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10197.000	35.50	12.49	47.99	74.00	-26.01	peak
2	11079.000	34.71	15.03	49.74	74.00	-24.26	peak
3	11835.000	32.92	17.46	50.38	74.00	-23.62	peak
4	12627.000	32.53	17.87	50.40	74.00	-23.60	peak
5	13599.000	29.03	21.02	50.05	74.00	-23.95	peak
6	18000.000	25.51	25.16	50.67	74.00	-23.33	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ) FOR FULL RU WORST CASE

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	FACE ON	Test Voltage:	DC 3.3 V

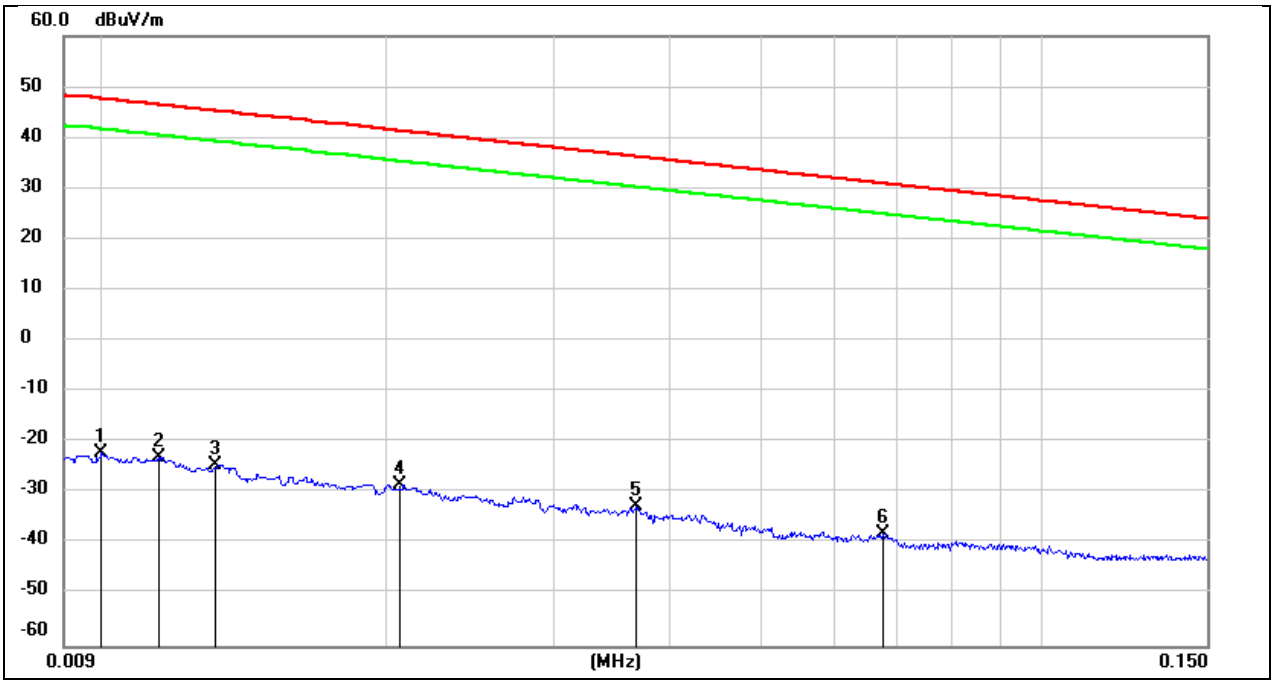

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0100	79.22	-101.40	-22.18	47.60	-73.68	-3.90	-69.78	peak
2	0.0114	78.50	-101.40	-22.90	46.46	-74.40	-5.04	-69.36	peak
3	0.0131	76.97	-101.38	-24.41	45.25	-75.91	-6.25	-69.66	peak
4	0.0206	72.92	-101.35	-28.43	41.32	-79.93	-10.18	-69.75	peak
5	0.0367	68.75	-101.42	-32.67	36.31	-84.17	-15.19	-68.98	peak
6	0.0675	63.64	-101.56	-37.92	31.02	-89.42	-20.48	-68.94	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	FACE ON	Test Voltage:	DC 3.3 V

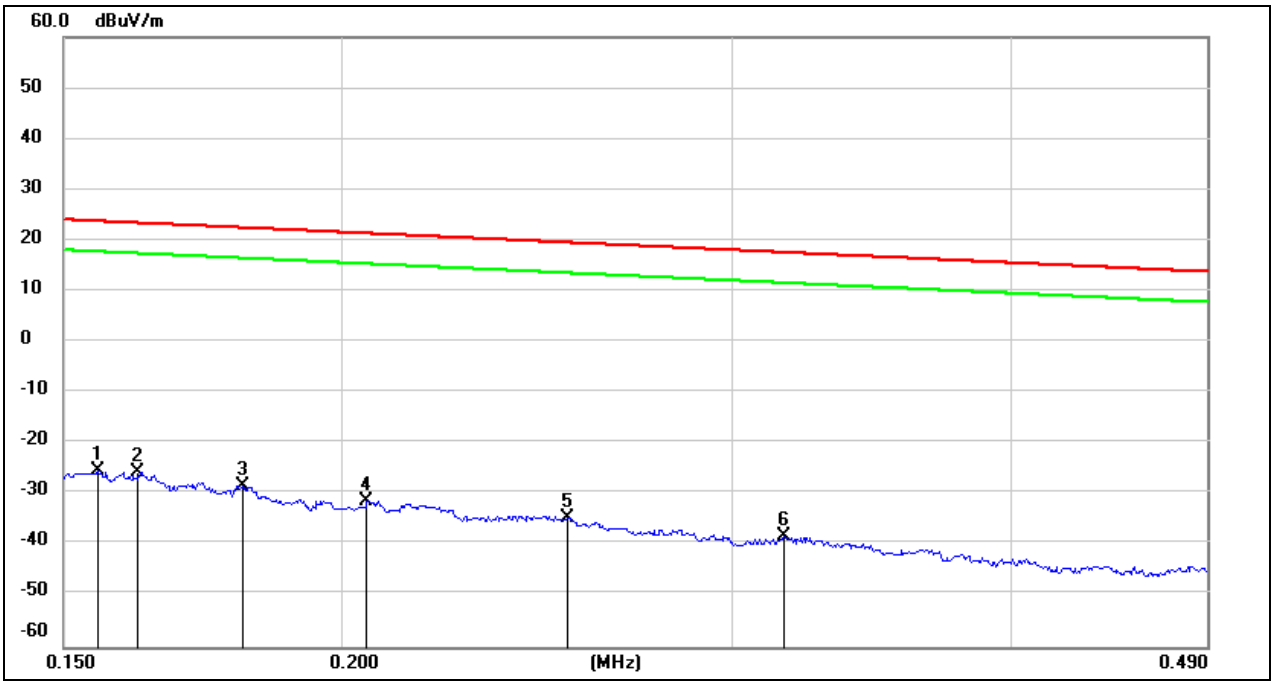

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1554	76.27	-101.65	-25.38	23.77	-76.88	-27.73	-49.15	peak
2	0.1621	75.92	-101.65	-25.73	23.41	-77.23	-28.09	-49.14	peak
3	0.1806	73.43	-101.68	-28.25	22.47	-79.75	-29.03	-50.72	peak
4	0.2053	70.29	-101.73	-31.44	21.35	-82.94	-30.15	-52.79	peak
5	0.2530	67.14	-101.80	-34.66	19.54	-86.16	-31.96	-54.20	peak
6	0.3163	63.70	-101.87	-38.17	17.60	-89.67	-33.90	-55.77	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	FACE ON	Test Voltage:	DC 3.3 V

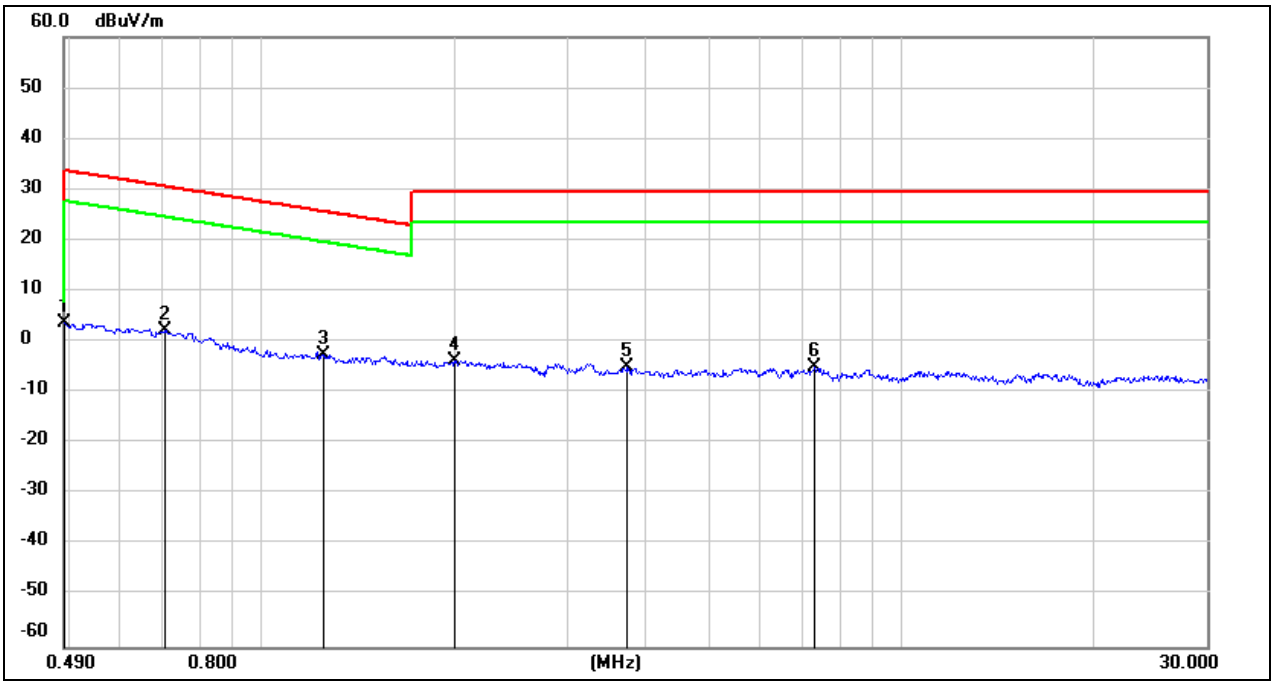

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.4900	65.72	-62.06	3.66	13.80	-47.84	-37.70	-10.14	peak
2	0.7066	64.40	-62.11	2.29	30.62	-49.21	-20.88	-28.33	peak
3	1.2459	59.75	-62.16	-2.41	25.70	-53.91	-25.80	-28.11	peak
4	2.0013	58.02	-61.82	-3.80	29.54	-55.30	-21.96	-33.34	peak
5	3.7360	56.33	-61.40	-5.07	29.54	-56.57	-21.96	-34.61	peak
6	7.3361	56.08	-61.17	-5.09	29.54	-56.59	-21.96	-34.63	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ) FOR FULL RU WORST CASE

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

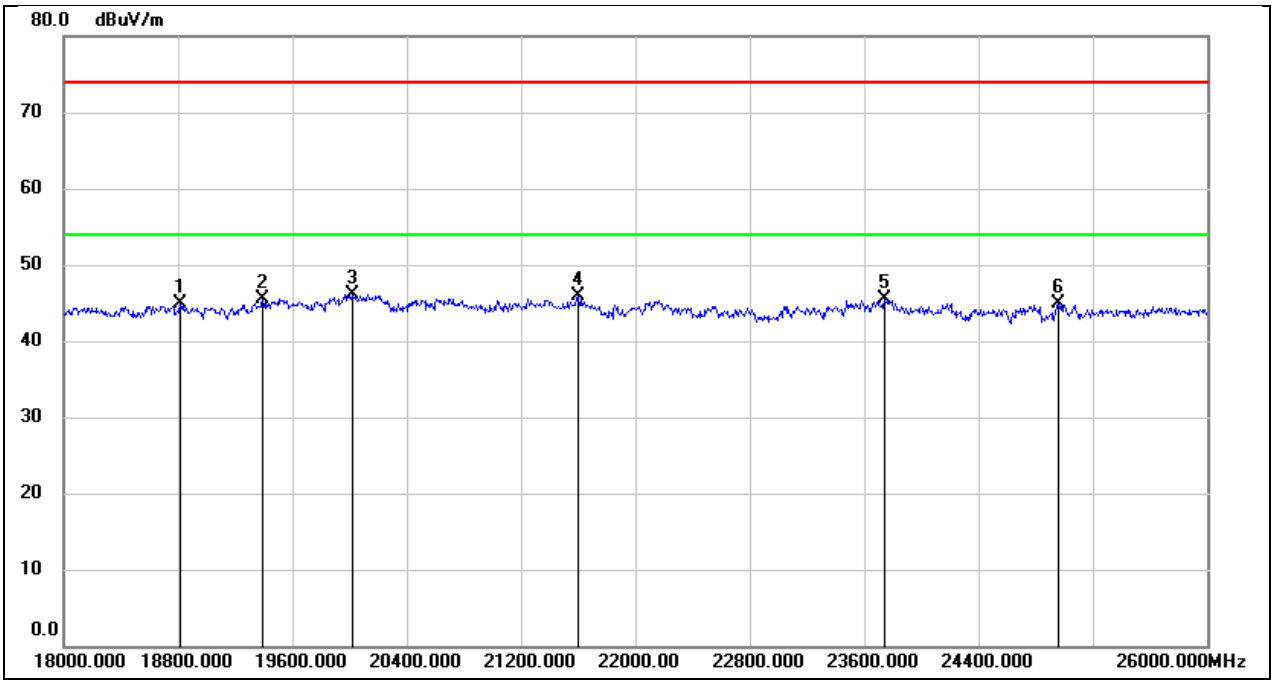

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18816.000	50.21	-5.38	44.83	74.00	-29.17	peak
2	19392.000	51.12	-5.57	45.55	74.00	-28.45	peak
3	20016.000	51.56	-5.47	46.09	74.00	-27.91	peak
4	21600.000	50.52	-4.54	45.98	74.00	-28.02	peak
5	23744.000	48.65	-3.20	45.45	74.00	-28.55	peak
6	24960.000	47.14	-2.14	45.00	74.00	-29.00	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 3.3 V

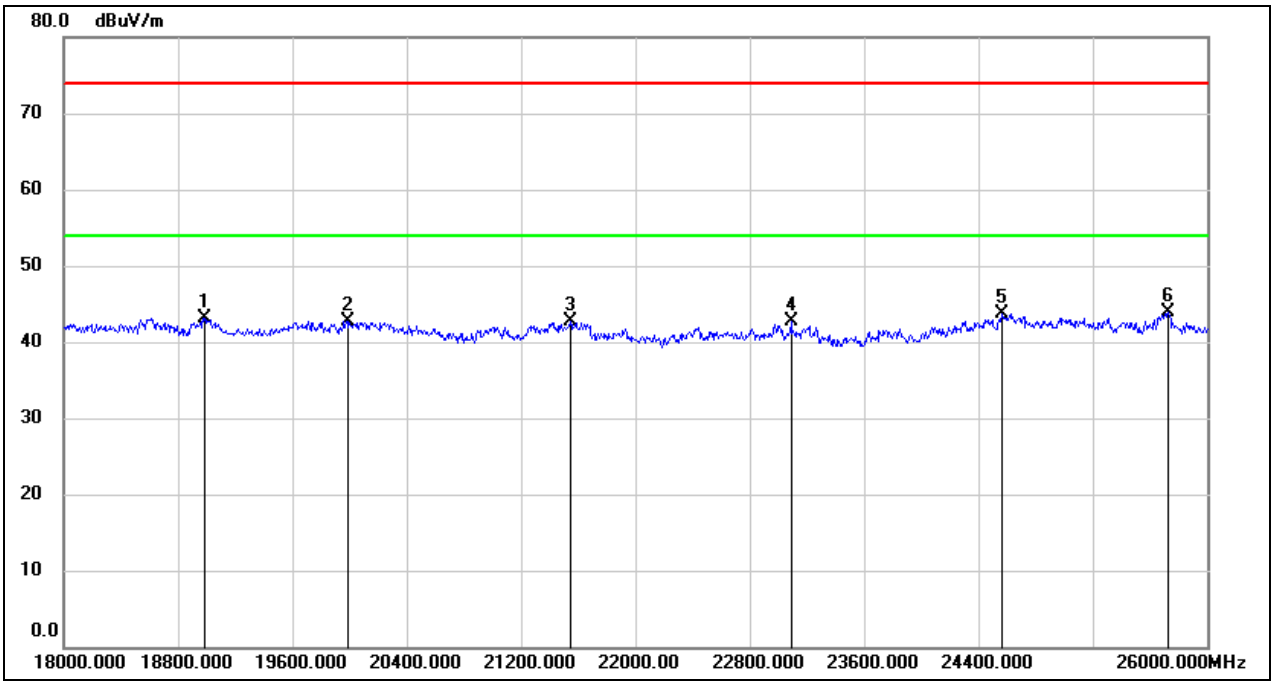

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18984.000	48.29	-5.23	43.06	74.00	-30.94	peak
2	19984.000	48.21	-5.44	42.77	74.00	-31.23	peak
3	21544.000	47.26	-4.63	42.63	74.00	-31.37	peak
4	23088.000	46.02	-3.41	42.61	74.00	-31.39	peak
5	24568.000	46.10	-2.33	43.77	74.00	-30.23	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.9. SPURIOUS EMISSIONS(26 GHZ~40 GHZ) FOR FULL RU WORST CASE

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

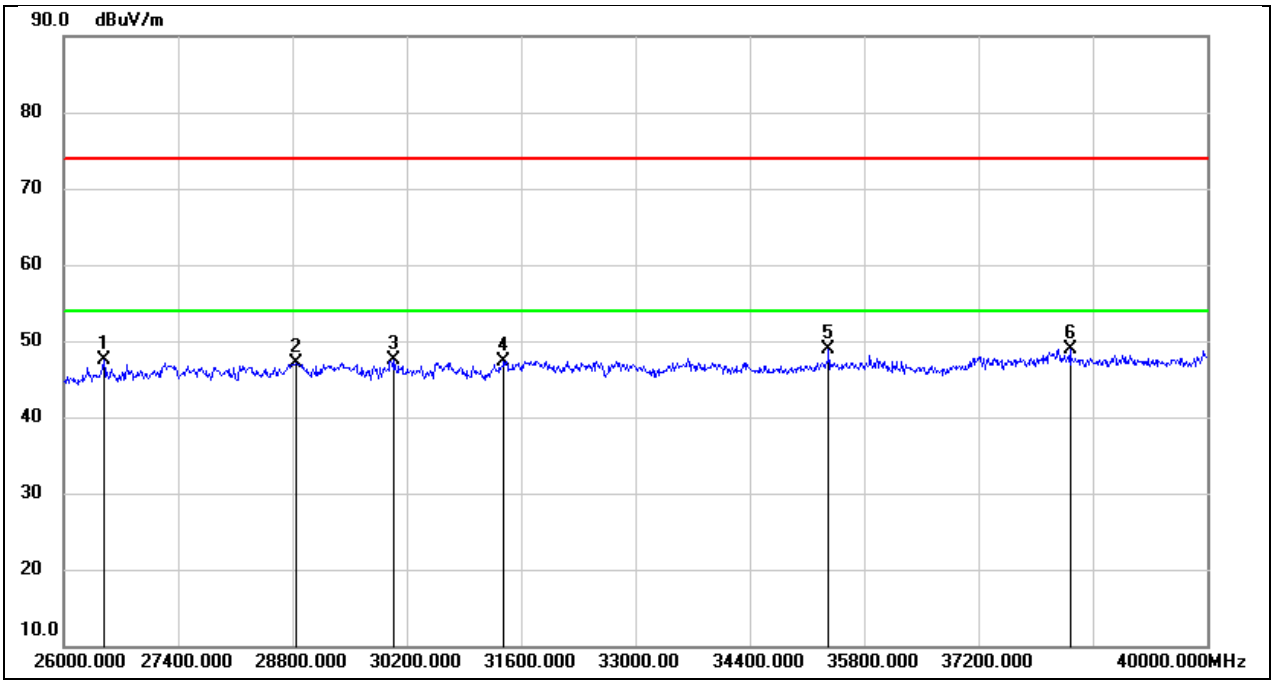

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	52.29	-4.74	47.55	74.00	-26.45	peak
2	28842.000	47.93	-0.84	47.09	74.00	-26.91	peak
3	30046.000	48.71	-1.28	47.43	74.00	-26.57	peak
4	31390.000	48.43	-1.03	47.40	74.00	-26.60	peak
5	35366.000	46.40	2.59	48.99	74.00	-25.01	peak
6	38320.000	45.06	3.77	48.83	74.00	-25.17	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 3.3 V

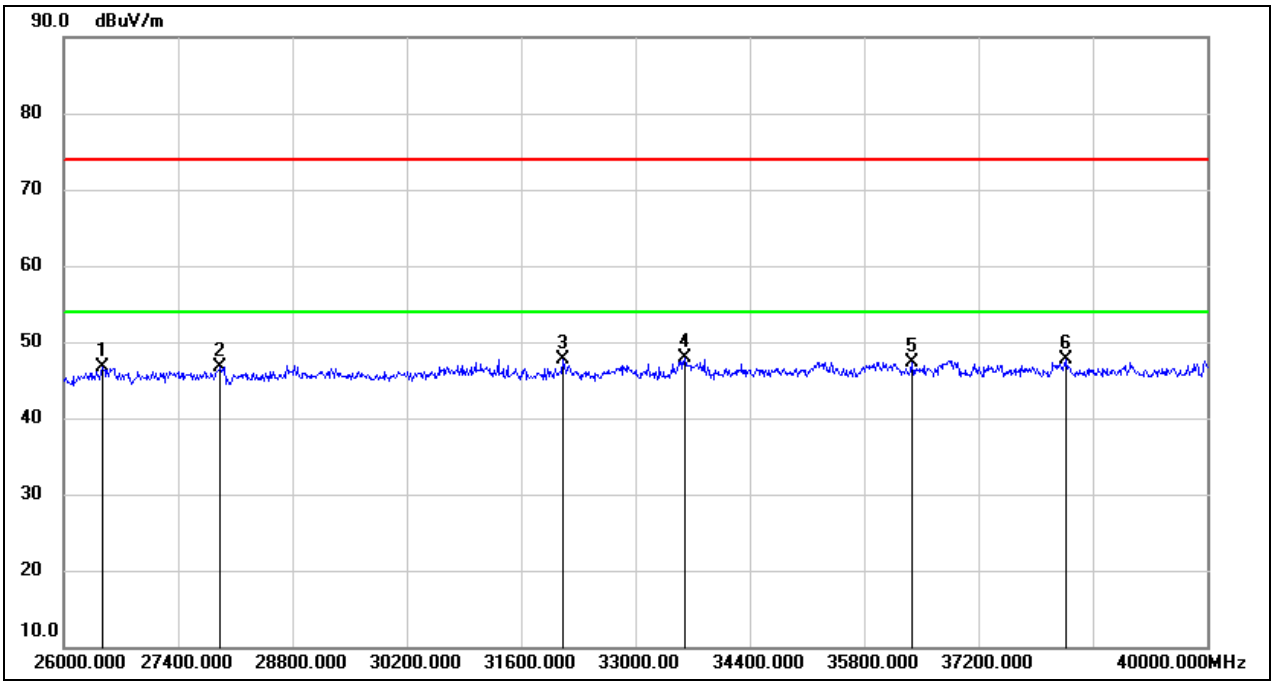

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	51.53	-4.78	46.75	74.00	-27.25	peak
2	27918.000	50.65	-3.89	46.76	74.00	-27.24	peak
3	32104.000	49.49	-1.75	47.74	74.00	-26.26	peak
4	33602.000	47.51	0.46	47.97	74.00	-26.03	peak
5	36388.000	43.82	3.52	47.34	74.00	-26.66	peak
6	38278.000	43.82	3.82	47.64	74.00	-26.36	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.10. SPURIOUS EMISSIONS(30 MHZ~1 GHZ) FOR FULL RU WORST CASE

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

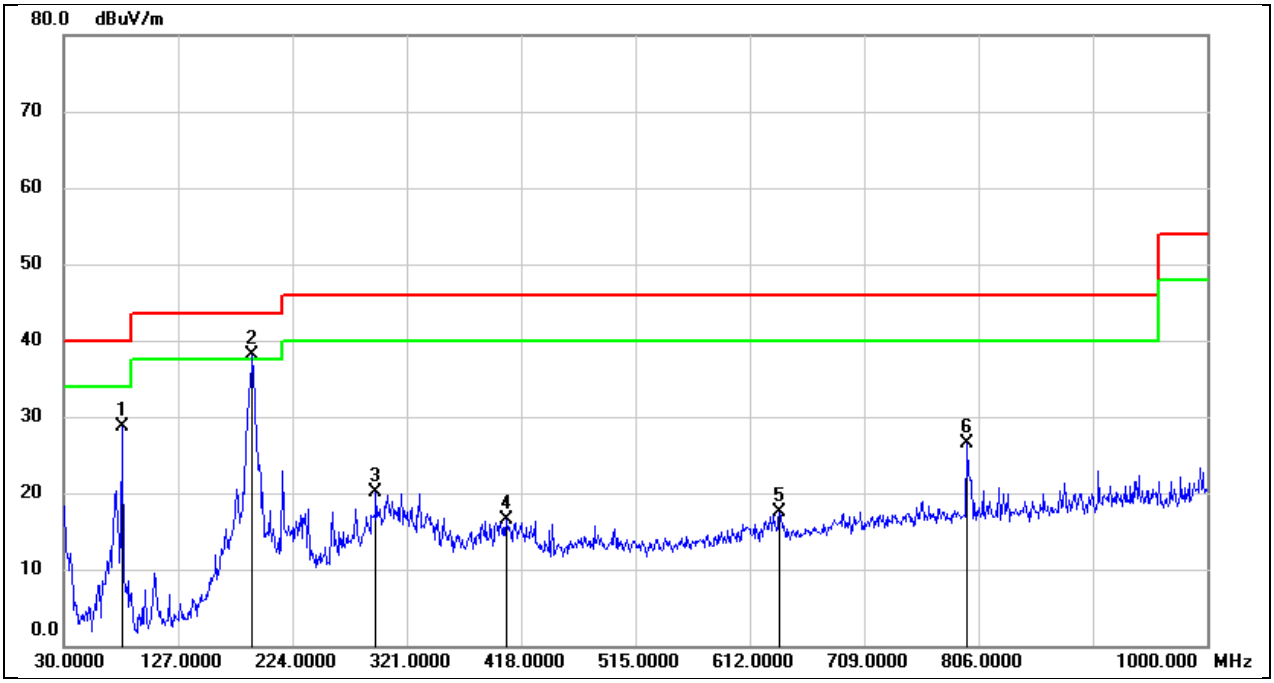

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	79.4700	50.19	-21.50	28.69	40.00	-11.31	QP
2	190.0500	54.88	-16.70	38.18	43.50	-5.32	QP
3	294.8100	35.69	-15.59	20.10	46.00	-25.90	QP
4	405.3900	29.29	-12.81	16.48	46.00	-29.52	QP
5	637.2199	26.81	-9.40	17.41	46.00	-28.59	QP
6	796.3000	33.05	-6.64	26.41	46.00	-19.59	QP

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 3.3 V

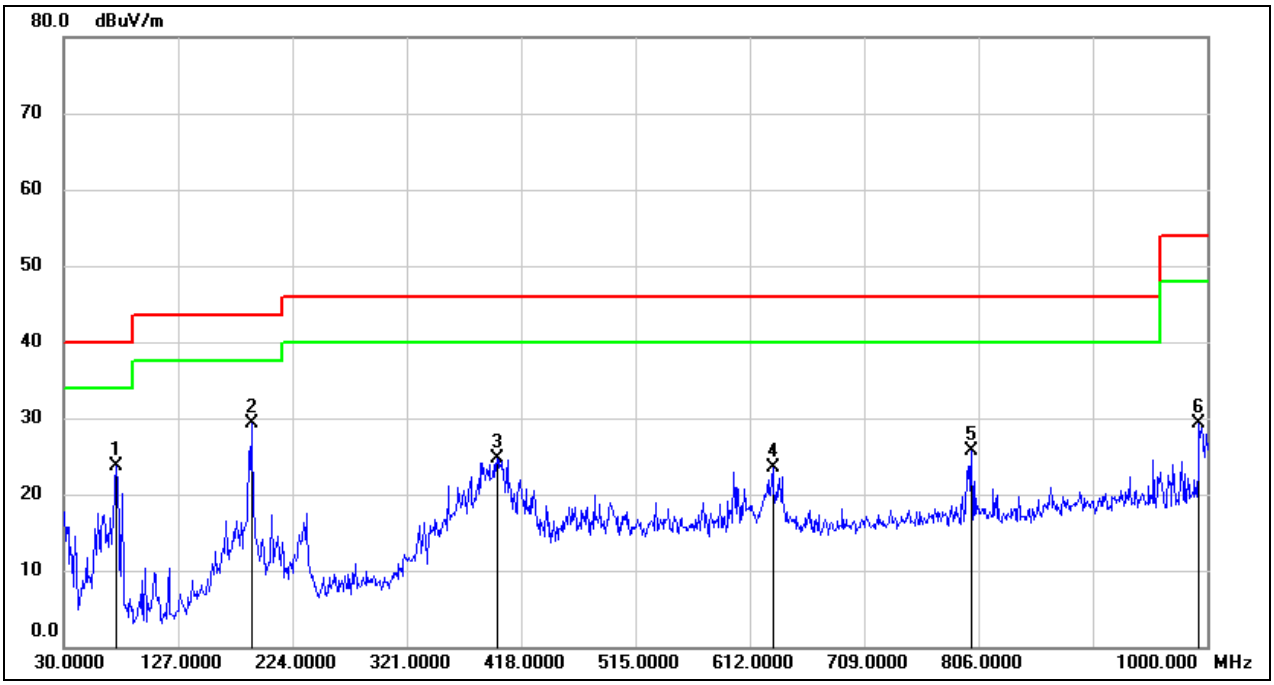

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	74.6200	44.90	-21.12	23.78	40.00	-16.22	QP
2	189.0800	45.95	-16.68	29.27	43.50	-14.23	QP
3	397.6300	37.71	-12.95	24.76	46.00	-21.24	QP
4	631.4000	32.95	-9.37	23.58	46.00	-22.42	QP
5	800.1800	32.25	-6.63	25.62	46.00	-20.38	QP
6	993.2100	33.36	-4.10	29.26	54.00	-24.74	QP

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

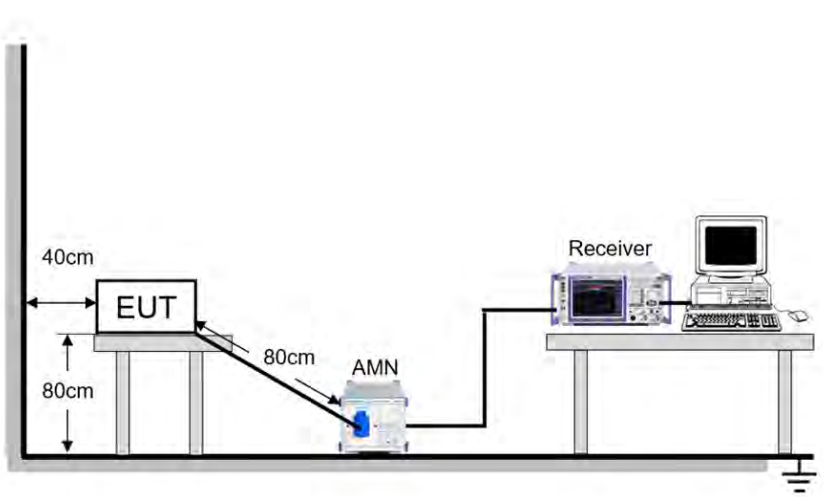

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST ENVIRONMENT

Temperature	23.7℃	Relative Humidity	62.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	August 7, 2023	Test By	Wite Chen

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST RESULTS FOR FULL RU WORST CASE

Test Mode:	802.11ax 20	Frequency(MHz):	5955
Line:	Line		

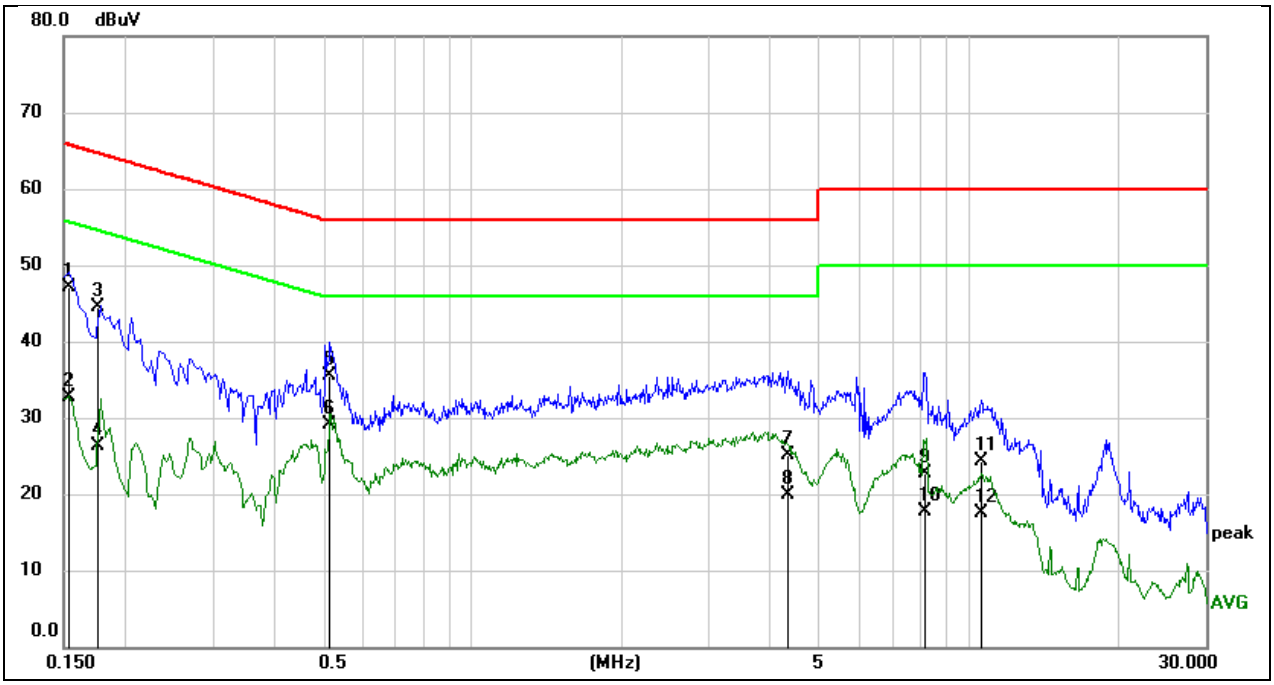

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1532	37.56	9.59	47.15	65.82	-18.67	QP
2	0.1532	23.11	9.59	32.70	55.82	-23.12	AVG
3	0.1753	34.90	9.59	44.49	64.71	-20.22	QP
4	0.1753	16.62	9.59	26.21	54.71	-28.50	AVG
5	0.5159	26.00	9.60	35.60	56.00	-20.40	QP
6	0.5159	19.59	9.60	29.19	46.00	-16.81	AVG
7	4.3465	15.49	9.70	25.19	56.00	-30.81	QP
8	4.3465	10.28	9.70	19.98	46.00	-26.02	AVG
9	8.1497	13.09	9.71	22.80	60.00	-37.20	QP
10	8.1497	8.00	9.71	17.71	50.00	-32.29	AVG
11	10.6312	14.62	9.73	24.35	60.00	-35.65	QP
12	10.6312	7.79	9.73	17.52	50.00	-32.48	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax 20	Frequency(MHz):	5955
Line:	Neutral		

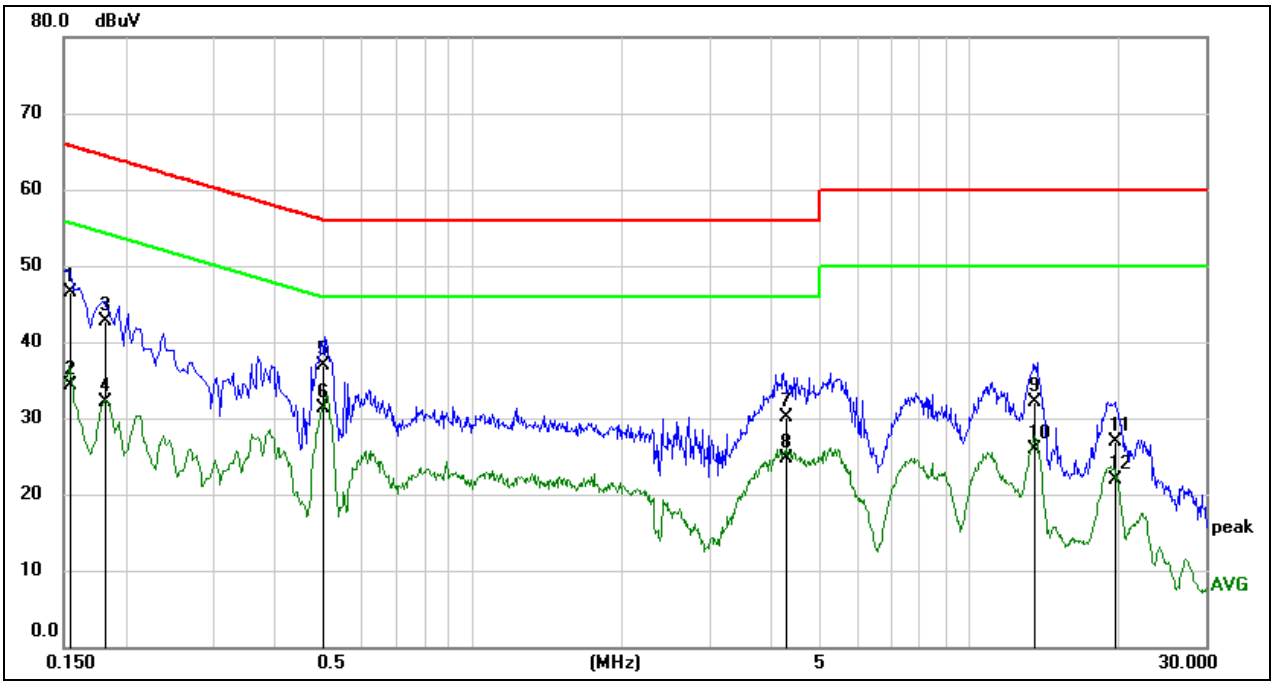

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1549	36.92	9.50	46.42	65.73	-19.31	QP
2	0.1549	24.77	9.50	34.27	55.73	-21.46	AVG
3	0.1833	33.05	9.56	42.61	64.33	-21.72	QP
4	0.1833	22.59	9.56	32.15	54.33	-22.18	AVG
5	0.5016	27.35	9.50	36.85	56.00	-19.15	QP
6	0.5016	21.82	9.50	31.32	46.00	-14.68	AVG
7	4.2764	20.44	9.60	30.04	56.00	-25.96	QP
8	4.2764	15.17	9.60	24.77	46.00	-21.23	AVG
9	13.6397	22.43	9.66	32.09	60.00	-27.91	QP
10	13.6397	16.20	9.66	25.86	50.00	-24.14	AVG
11	19.6583	17.24	9.73	26.97	60.00	-33.03	QP
12	19.6583	12.23	9.73	21.96	50.00	-28.04	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)
For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

11. TEST DATA

11.1. APPENDIX A1: EMISSION BANDWIDTH FOR FULL RU

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11AX20MIMO	Ant0	5955	23.48	5943.08	5966.56	PASS
	Ant1	5955	22.12	5944.08	5966.20	PASS
	Ant0	6175	22.52	6163.28	6185.80	PASS
	Ant1	6175	22.28	6163.92	6186.20	PASS
	Ant0	6415	22.00	6403.88	6425.88	PASS
	Ant1	6415	22.00	6404.04	6426.04	PASS
	Ant0	6435	23.32	6422.92	6446.24	PASS
	Ant1	6435	22.48	6423.48	6445.96	PASS
	Ant0	6475	22.04	6463.96	6486.00	PASS
	Ant1	6475	22.04	6463.80	6485.84	PASS
	Ant0	6515	22.16	6503.80	6525.96	PASS
	Ant1	6515	22.08	6504.24	6526.32	PASS
	Ant0	6535	21.92	6523.64	6545.56	PASS
	Ant1	6535	21.84	6523.80	6545.64	PASS
	Ant0	6715	23.04	6703.08	6726.12	PASS
	Ant1	6715	21.84	6703.80	6725.64	PASS
	Ant0	6855	22.56	6843.36	6865.92	PASS
	Ant1	6855	22.68	6843.24	6865.92	PASS
	Ant0	6875	23.44	6862.32	6885.76	PASS
	Ant1	6875	23.04	6863.80	6886.84	PASS
	Ant0	7015	22.20	7003.80	7026.00	PASS
	Ant1	7015	22.08	7003.56	7025.64	PASS
	Ant0	7115	21.96	7104.00	7125.96	PASS
	Ant1	7115	23.08	7102.64	7125.72	PASS
11AX40MIMO	Ant0	5965	39.52	5945.16	5984.68	PASS
	Ant1	5965	39.36	5945.32	5984.68	PASS
	Ant0	6165	39.44	6145.24	6184.68	PASS
	Ant1	6165	39.76	6145.00	6184.76	PASS
	Ant0	6405	39.68	6385.00	6424.68	PASS
	Ant1	6405	39.60	6385.08	6424.68	PASS
	Ant0	6445	39.60	6425.16	6464.76	PASS
	Ant1	6445	39.44	6425.32	6464.76	PASS
	Ant0	6485	39.52	6465.16	6504.68	PASS
	Ant1	6485	39.60	6465.08	6504.68	PASS
	Ant0	6525	39.44	6505.24	6544.68	PASS
	Ant1	6525	39.52	6505.24	6544.76	PASS
	Ant0	6565	39.60	6545.16	6584.76	PASS
	Ant1	6565	39.52	6545.24	6584.76	PASS
	Ant0	6725	39.60	6705.16	6744.76	PASS
	Ant1	6725	39.68	6705.08	6744.76	PASS
	Ant0	6845	39.52	6825.16	6864.68	PASS
	Ant1	6845	39.44	6825.32	6864.76	PASS
	Ant0	6885	39.52	6865.16	6904.68	PASS
	Ant1	6885	39.60	6865.08	6904.68	PASS
	Ant0	7005	39.68	6985.08	7024.76	PASS
	Ant1	7005	39.60	6985.16	7024.76	PASS
	Ant0	7085	39.60	7065.16	7104.76	PASS
	Ant1	7085	39.52	7065.24	7104.76	PASS
11AX80MIMO	Ant0	5985	80.48	5944.84	6025.32	PASS
	Ant1	5985	80.00	5945.00	6025.00	PASS
	Ant0	6145	80.32	6104.84	6185.16	PASS
	Ant1	6145	80.00	6105.00	6185.00	PASS
	Ant0	6385	80.00	6345.00	6425.00	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

	Ant1	6385	80.00	6345.00	6425.00	PASS
	Ant0	6465	80.32	6424.84	6505.16	PASS
	Ant1	6465	80.00	6425.00	6505.00	PASS
	Ant0	6545	80.64	6504.68	6585.32	PASS
	Ant1	6545	80.16	6504.84	6585.00	PASS
	Ant0	6705	80.48	6664.68	6745.16	PASS
	Ant1	6705	80.00	6664.84	6744.84	PASS
	Ant0	6785	80.48	6744.68	6825.16	PASS
	Ant1	6785	80.16	6744.84	6825.00	PASS
	Ant0	6865	80.64	6824.68	6905.32	PASS
	Ant1	6865	80.16	6824.84	6905.00	PASS
	Ant0	6945	80.16	6904.84	6985.00	PASS
	Ant1	6945	80.00	6905.00	6985.00	PASS
	Ant0	7025	80.16	6985.00	7065.16	PASS
	Ant1	7025	80.16	6985.00	7065.16	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

11.1.2. Test Graphs

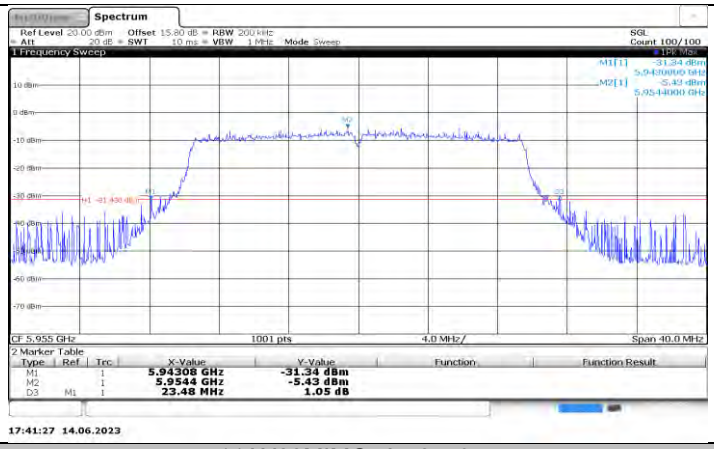

11AX20MIMO_Ant0_5955

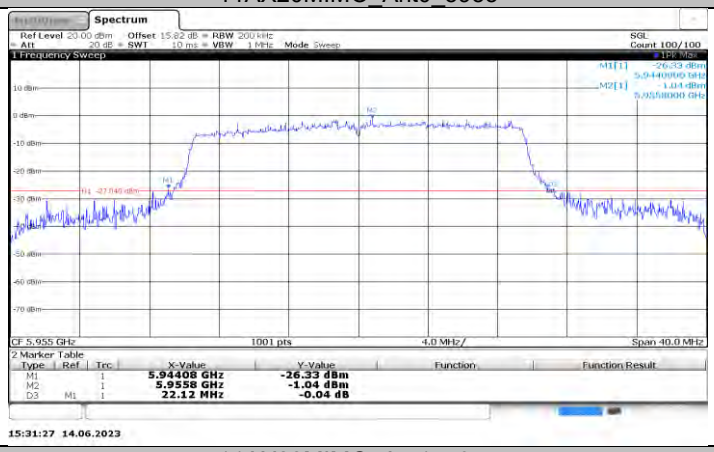

11AX20MIMO_Ant1_5955

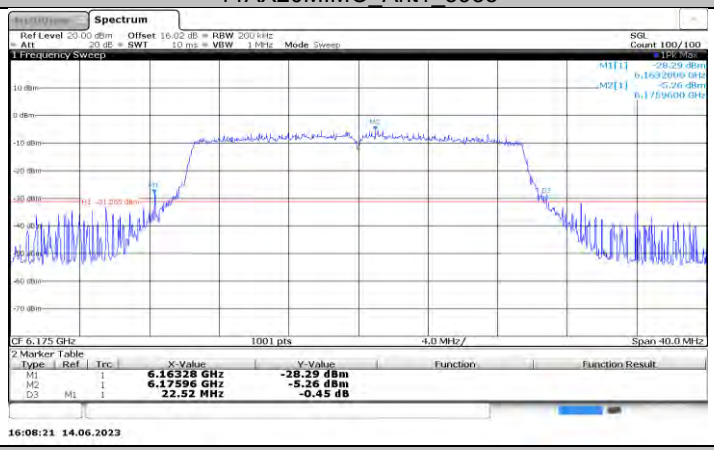

11AX20MIMO_Ant0_6175

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

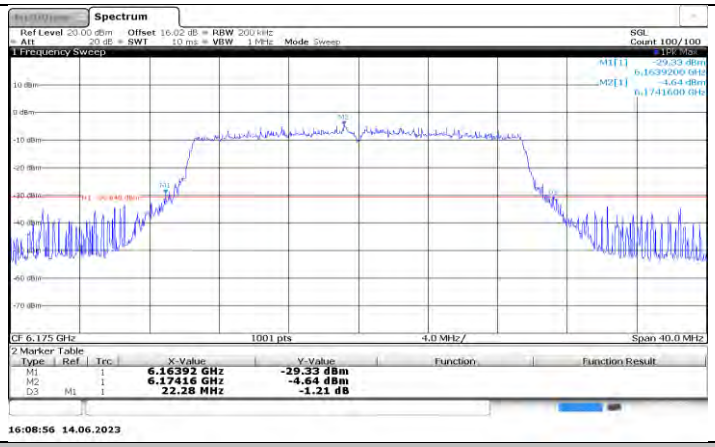

11AX20MIMO_Ant1_6175

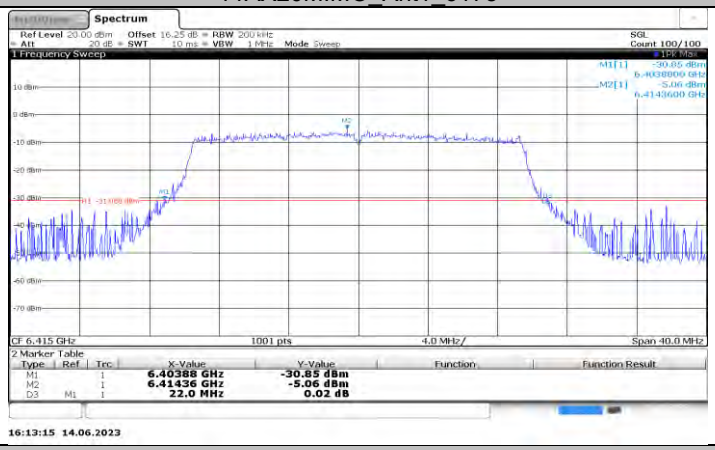

11AX20MIMO_Ant0_6415

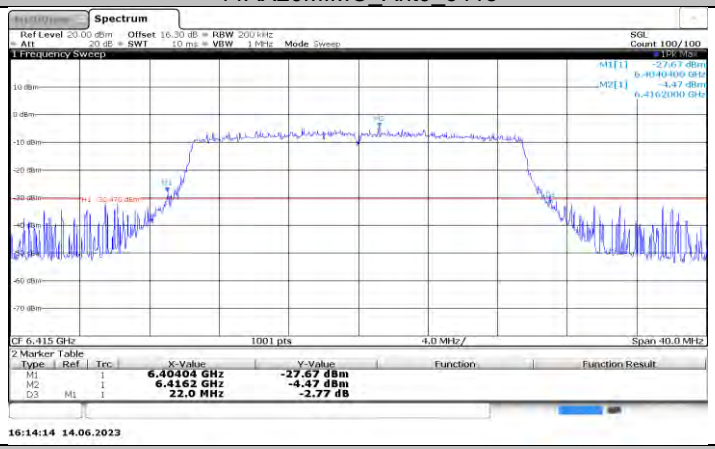

11AX20MIMO_Ant1_6415

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

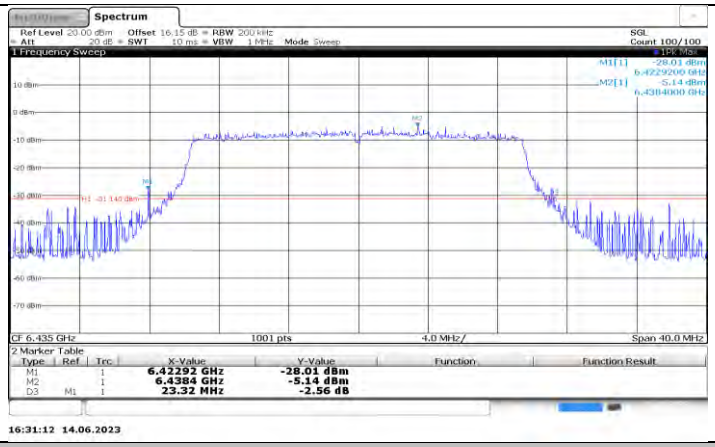

11AX20MIMO_Ant0_6435

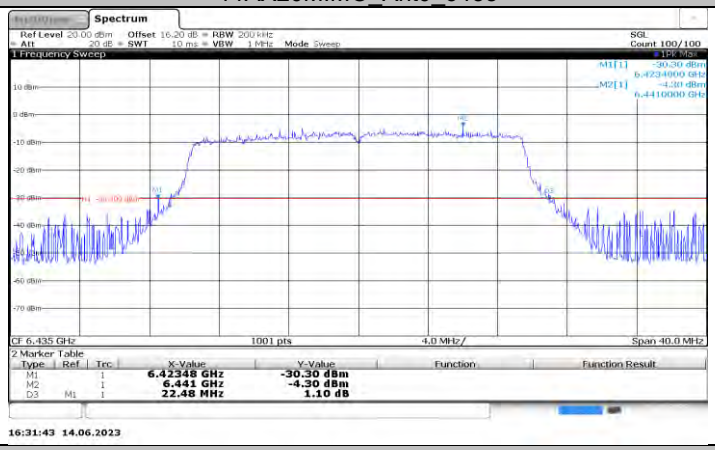

11AX20MIMO_Ant1_6435

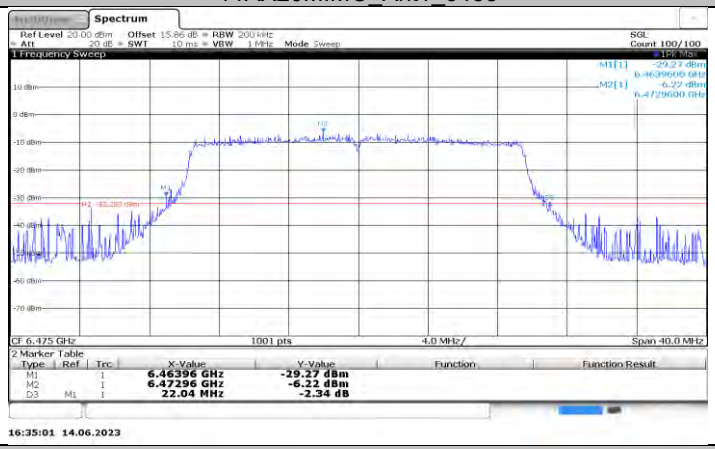

11AX20MIMO_Ant0_6475

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

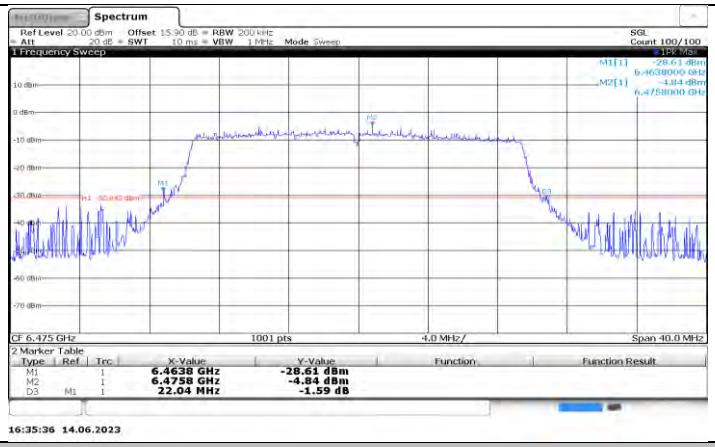

11AX20MIMO_Ant1_6475

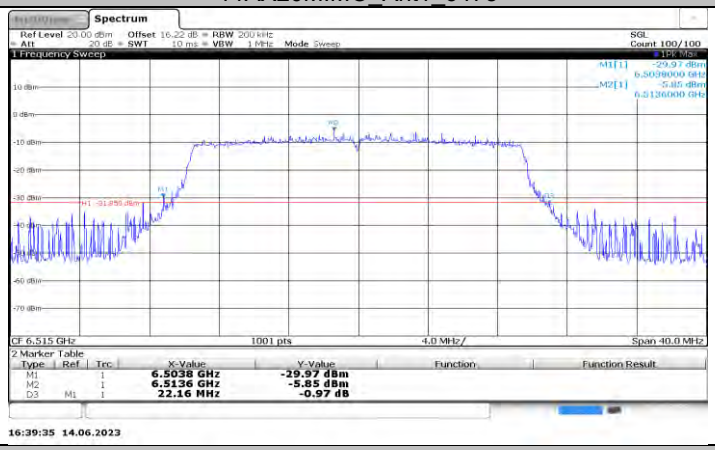

11AX20MIMO_Ant0_6515

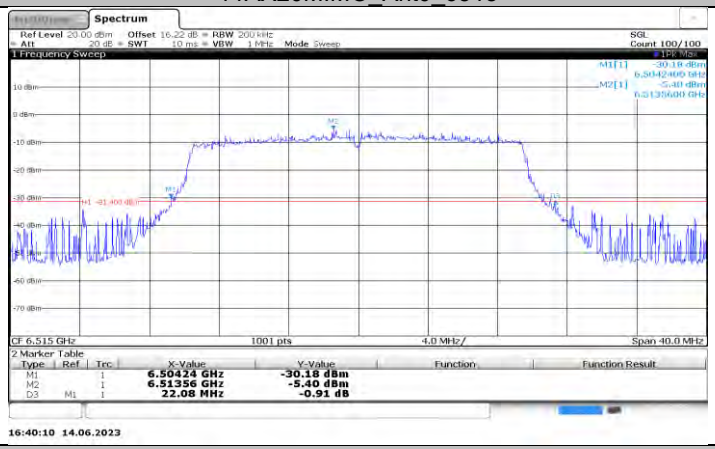

11AX20MIMO_Ant1_6515

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

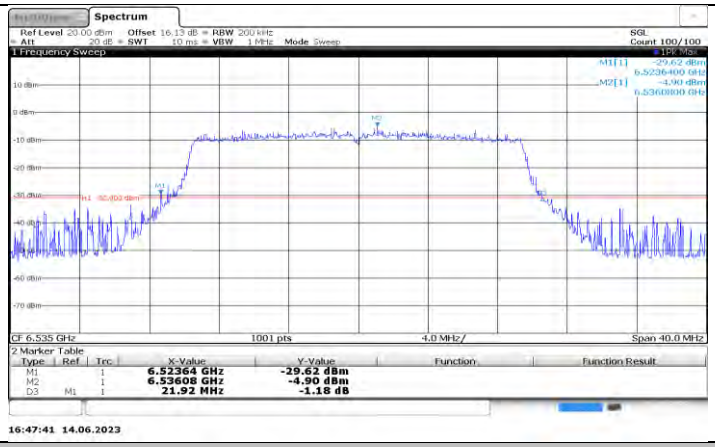

11AX20MIMO_Ant0_6535

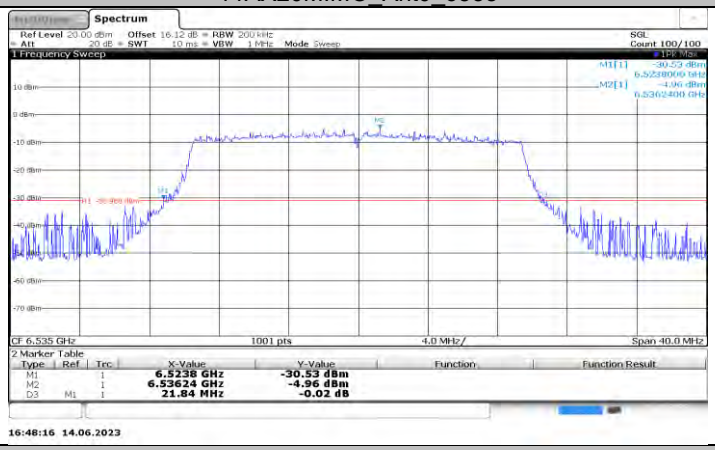

11AX20MIMO_Ant1_6535

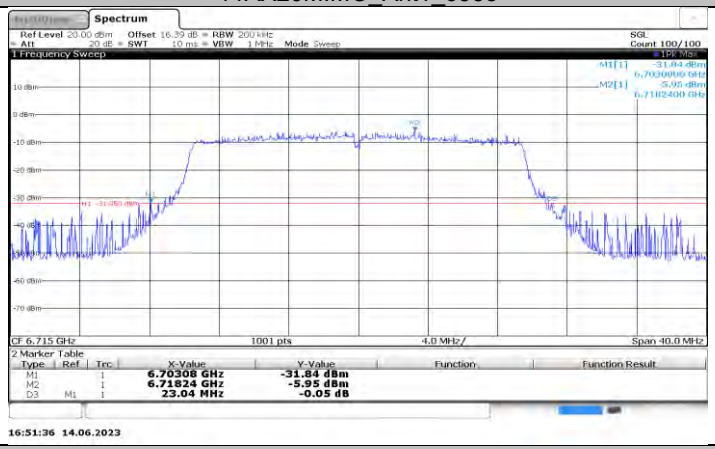

11AX20MIMO_Ant0_6715

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

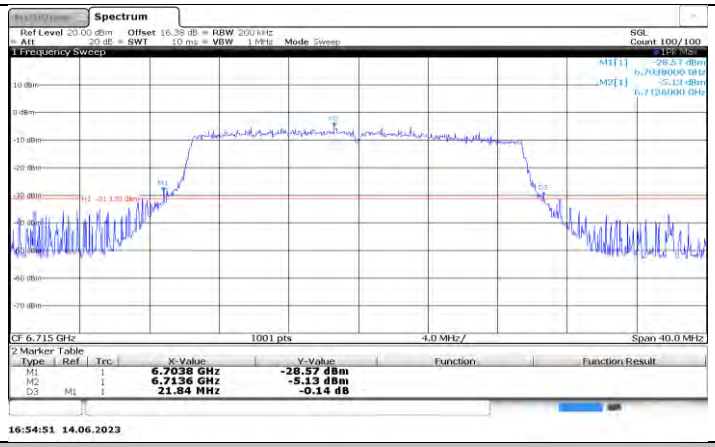

11AX20MIMO_Ant1_6715

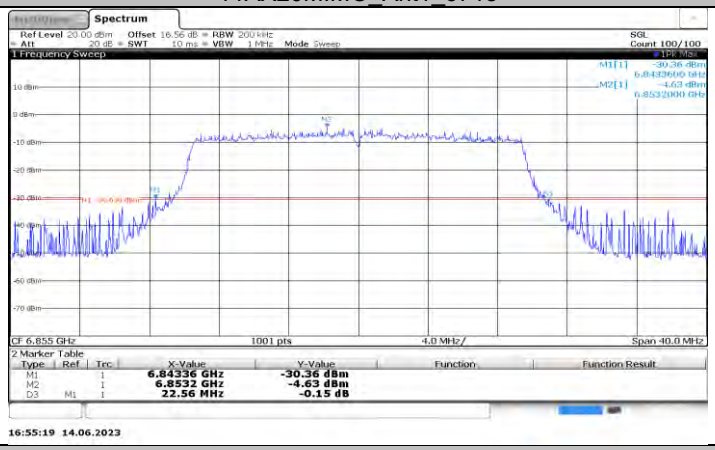

11AX20MIMO_Ant0_6855

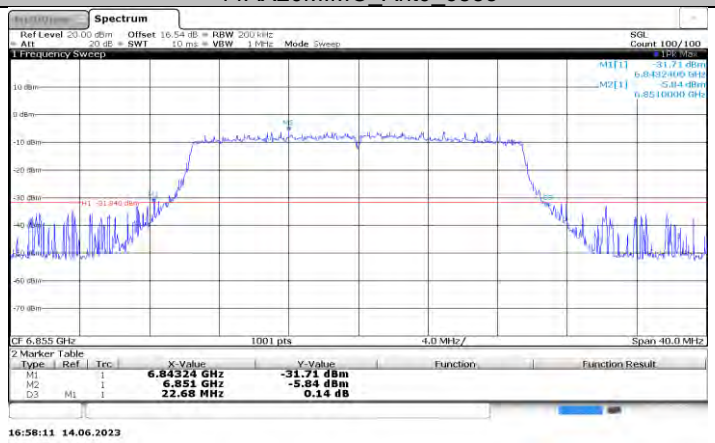

11AX20MIMO_Ant1_6855

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

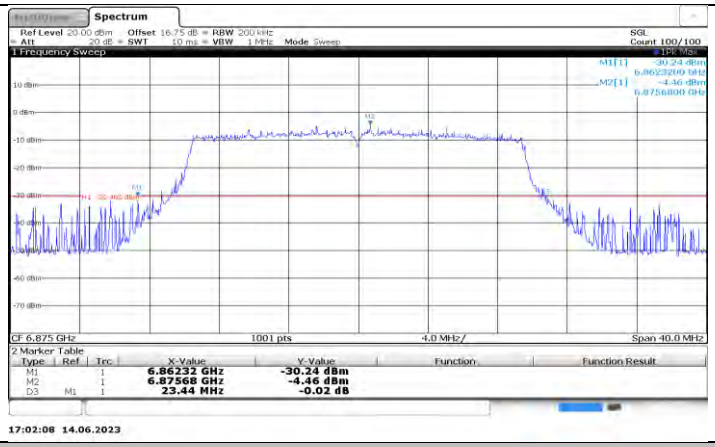

11AX20MIMO_Ant0_6875

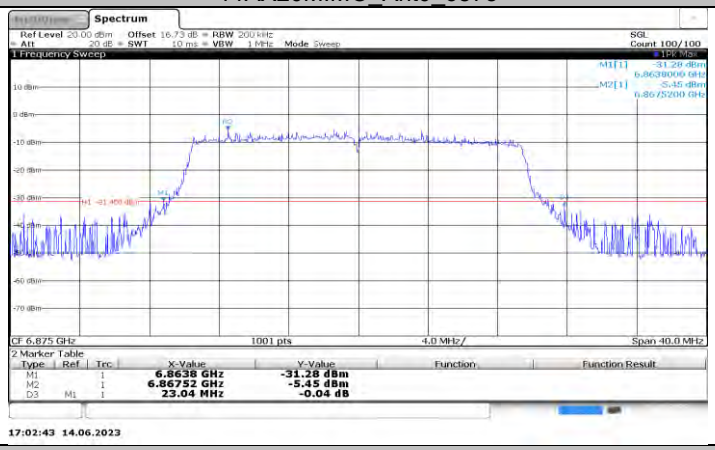

11AX20MIMO_Ant1_6875

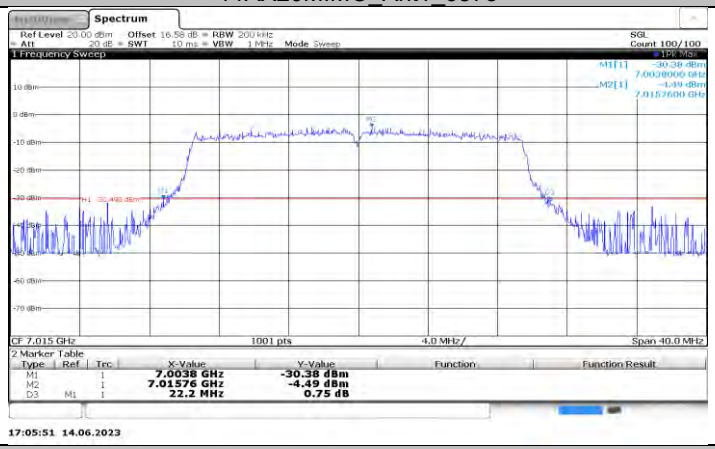

11AX20MIMO_Ant0_7015

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

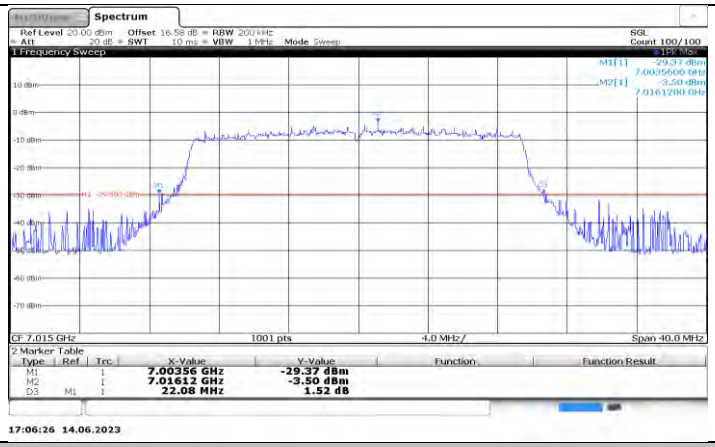

11AX20MIMO_Ant1_7015

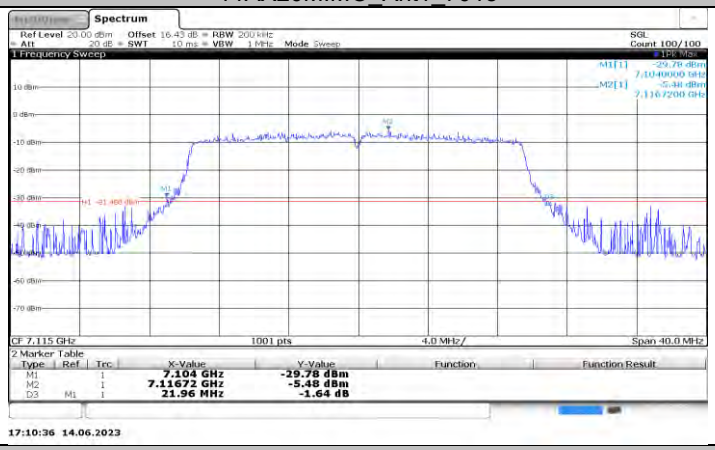

11AX20MIMO_Ant0_7115

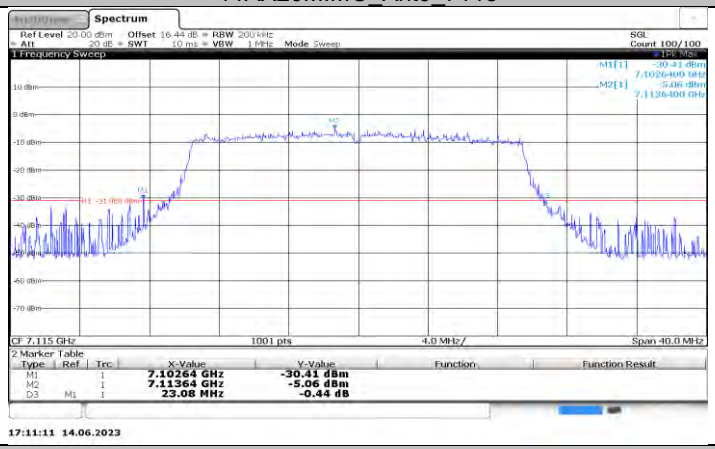

11AX20MIMO_Ant1_7115

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

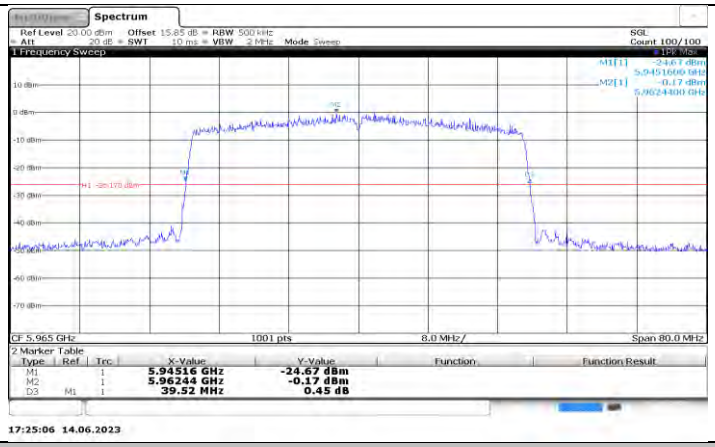

11AX40MIMO_Ant0_5965

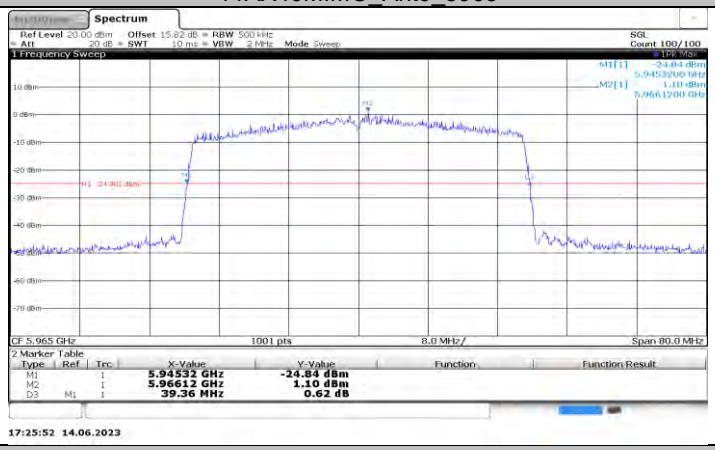

11AX40MIMO_Ant1_5965

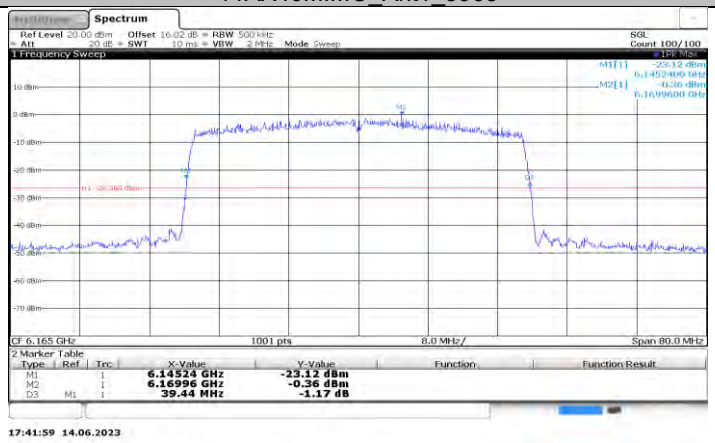

11AX40MIMO_Ant0_6165

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

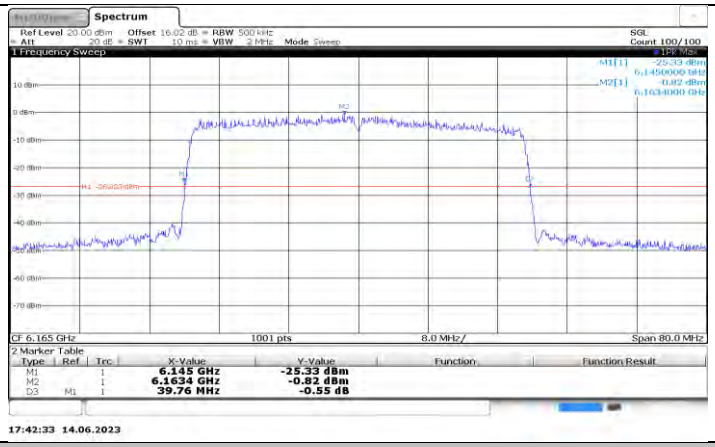

11AX40MIMO_Ant1_6165

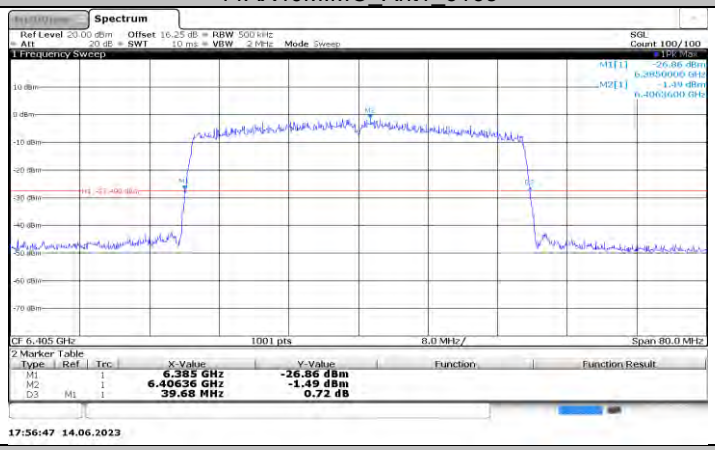

11AX40MIMO_Ant0_6405

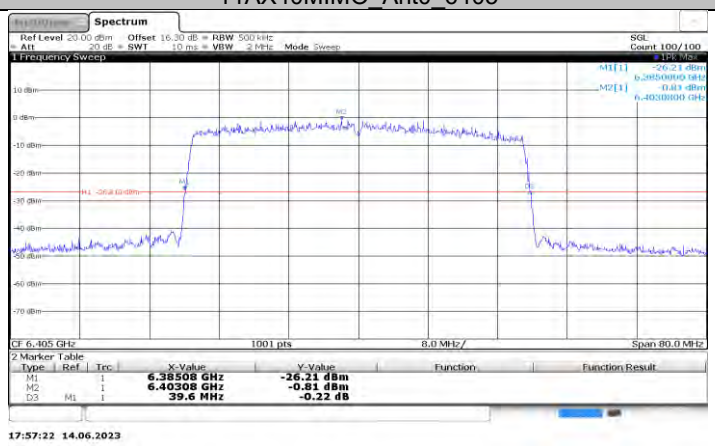

11AX40MIMO_Ant1_6405

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

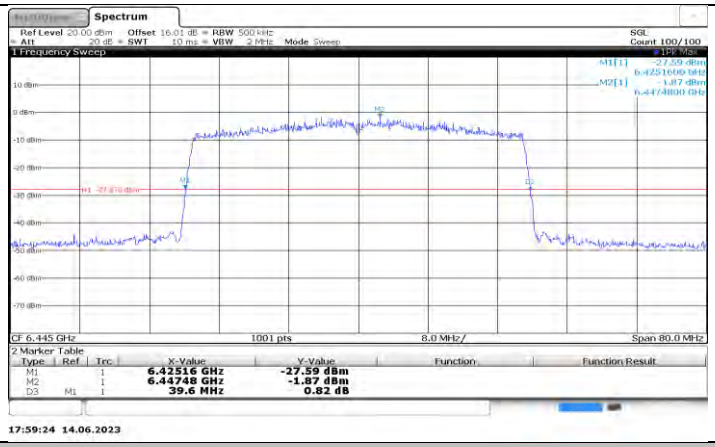

11AX40MIMO_Ant0_6445

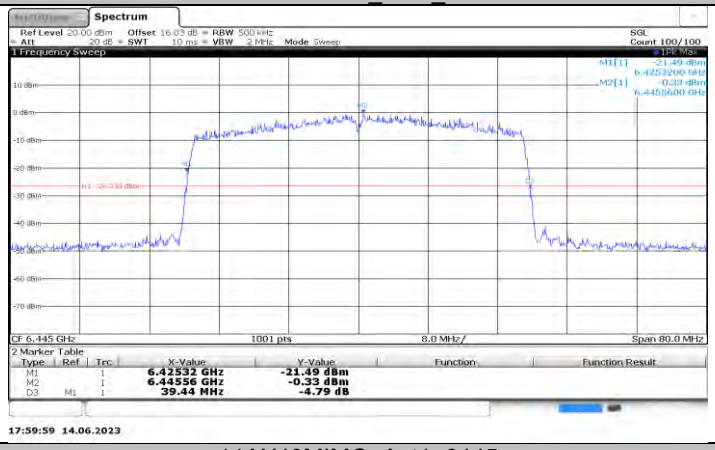

11AX40MIMO_Ant1_6445

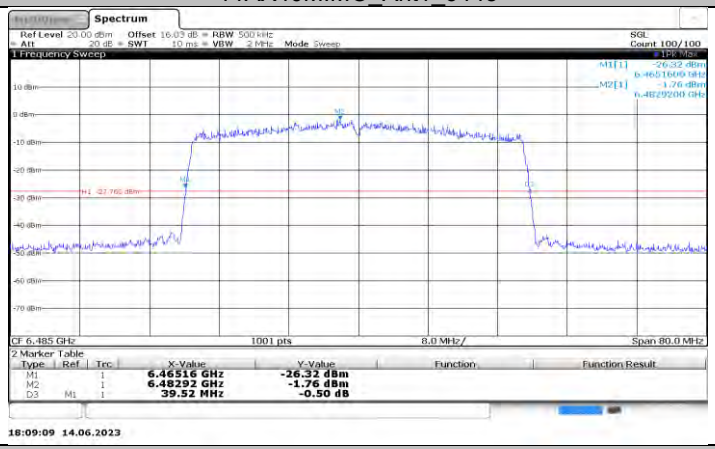

11AX40MIMO_Ant0_6485

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

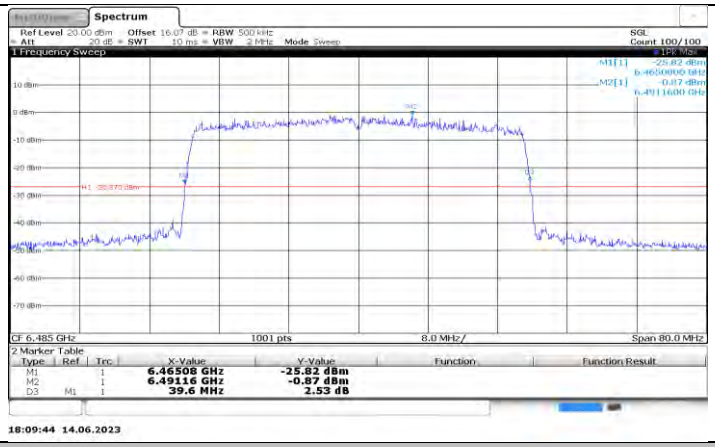

11AX40MIMO_Ant1_6485

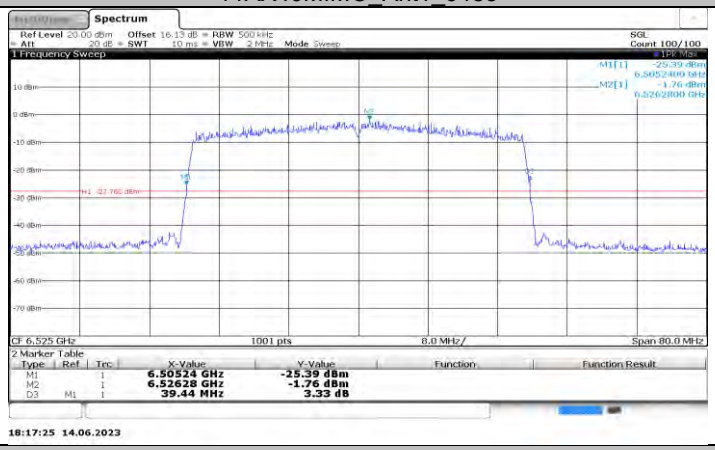

11AX40MIMO_Ant0_6525

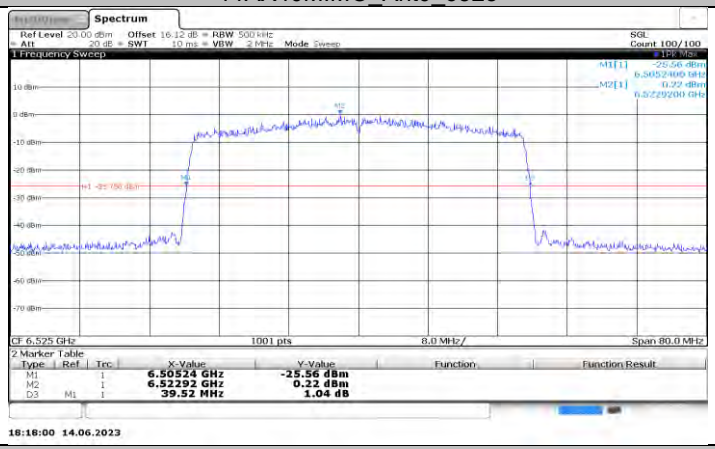

11AX40MIMO_Ant1_6525

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

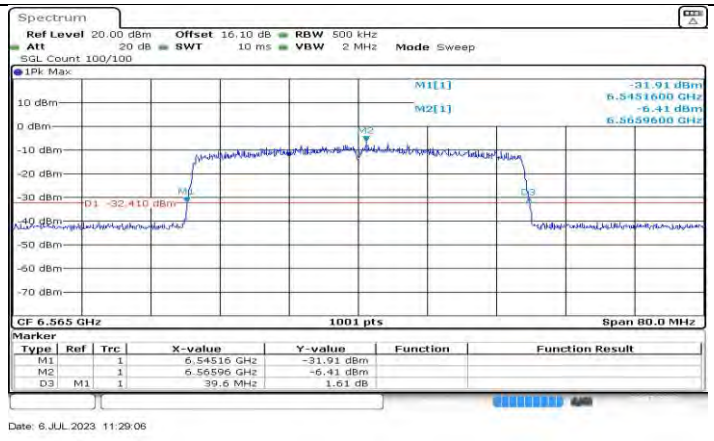

11AX40MIMO_Ant0_6565

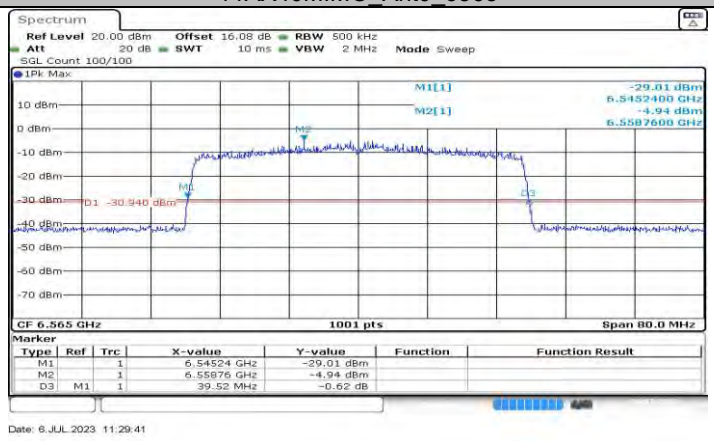

11AX40MIMO_Ant1_6565

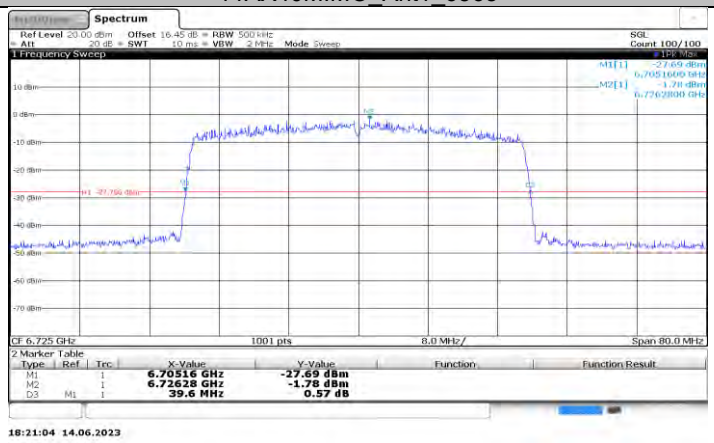

11AX40MIMO_Ant0_6725

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

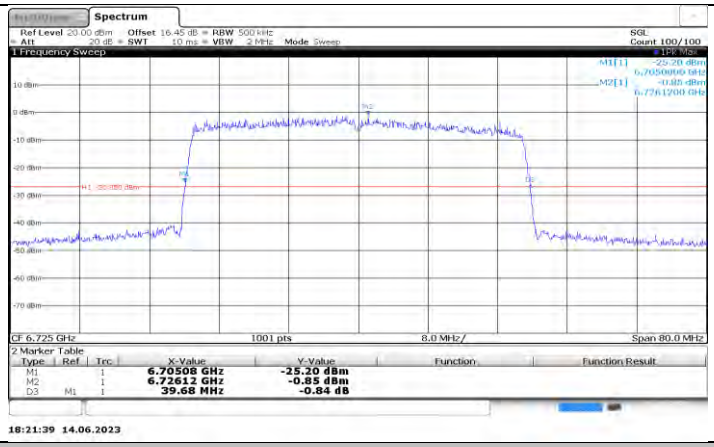

11AX40MIMO_Ant1_6725

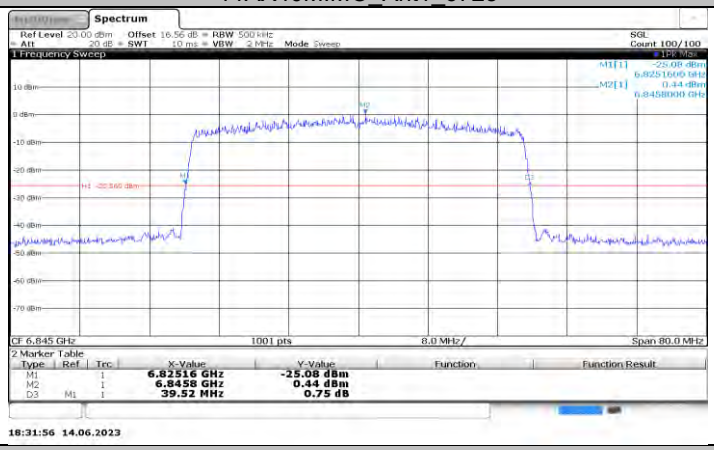

11AX40MIMO_Ant0_6845

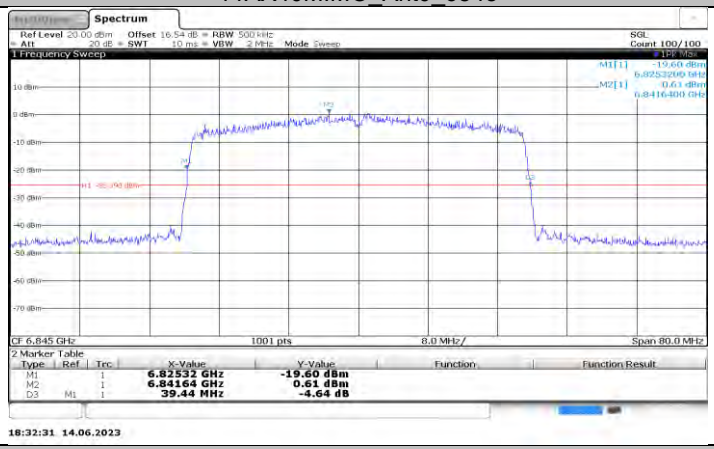

11AX40MIMO_Ant1_6845

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

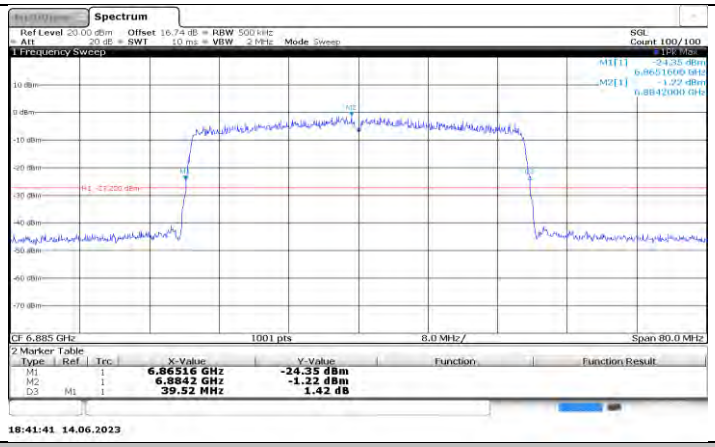

11AX40MIMO_Ant0_6885

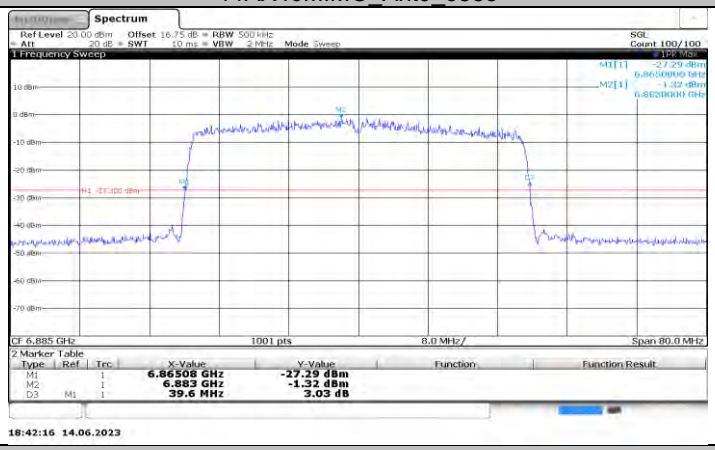

11AX40MIMO_Ant1_6885

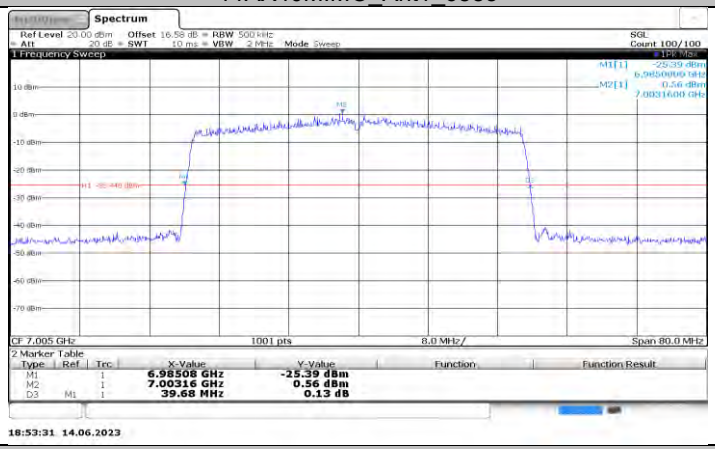

11AX40MIMO_Ant0_7005

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

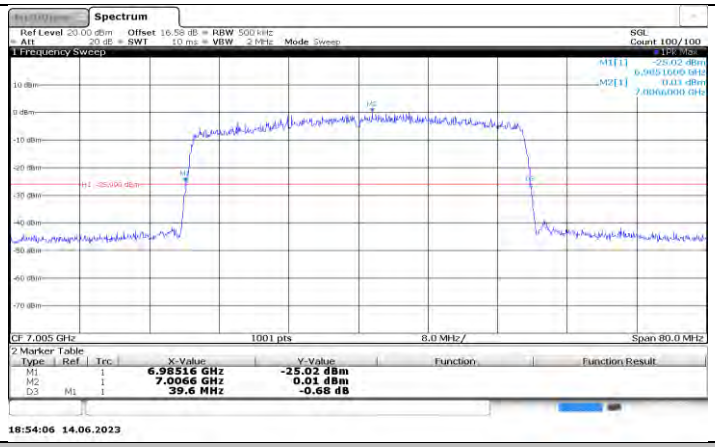

11AX40MIMO_Ant1_7005

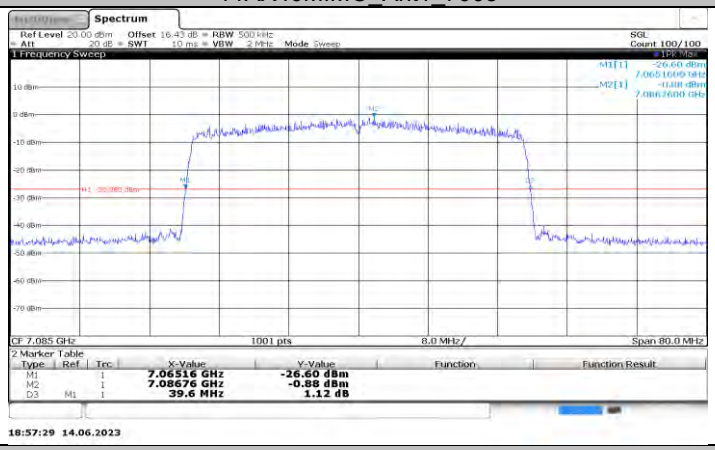

11AX40MIMO_Ant0_7085

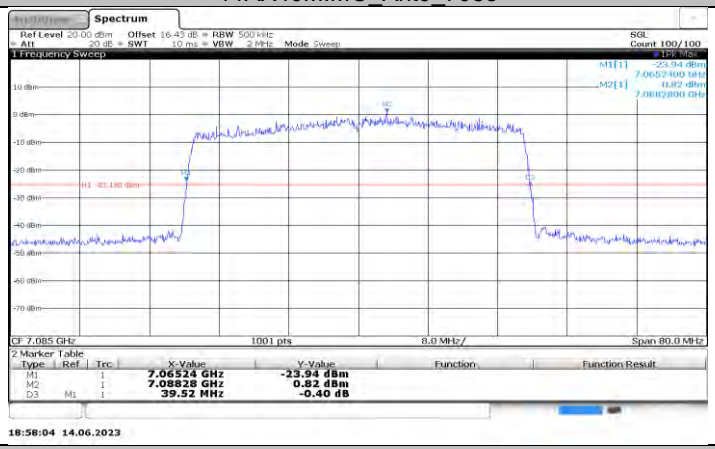

11AX40MIMO_Ant1_7085

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

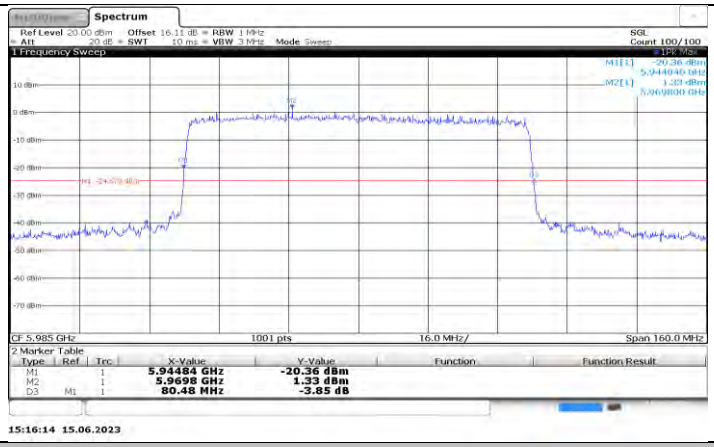

11AX80MIMO_Ant0_5985

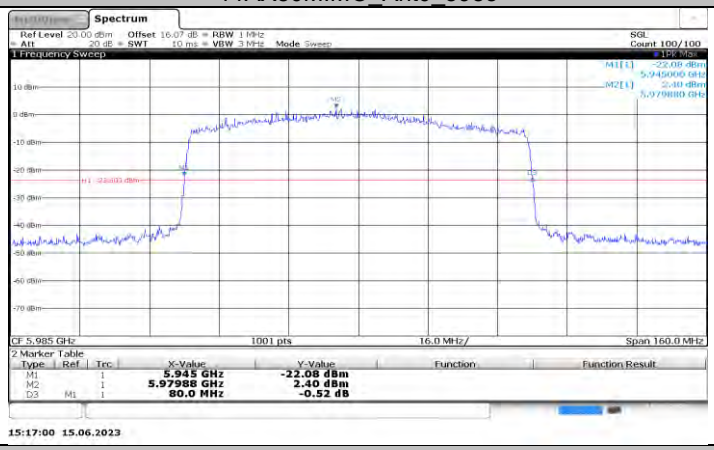

11AX80MIMO_Ant1_5985

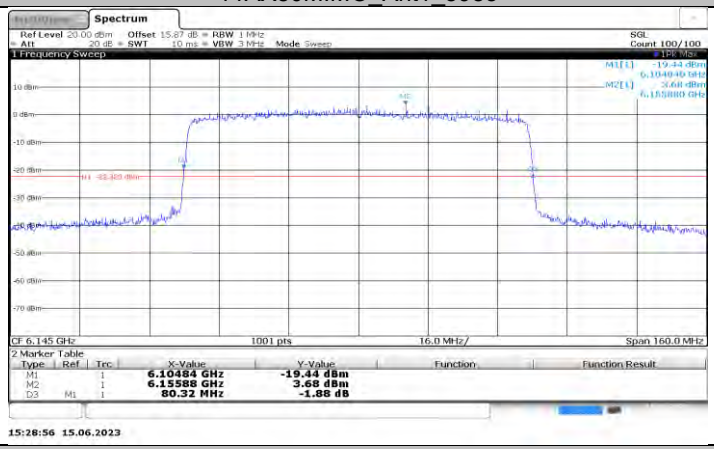

11AX80MIMO_Ant0_6145

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

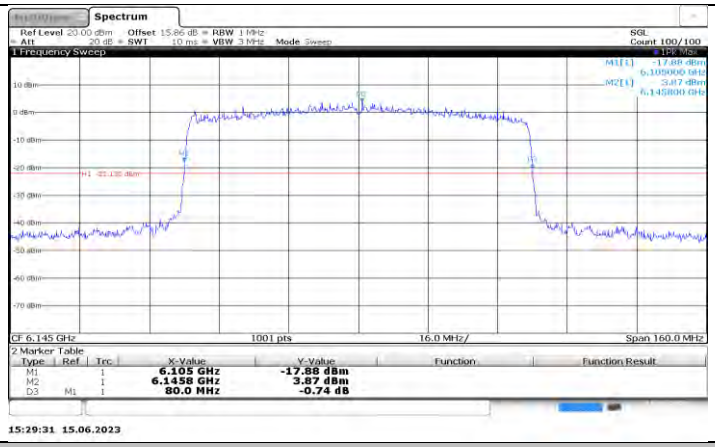

11AX80MIMO_Ant1_6145

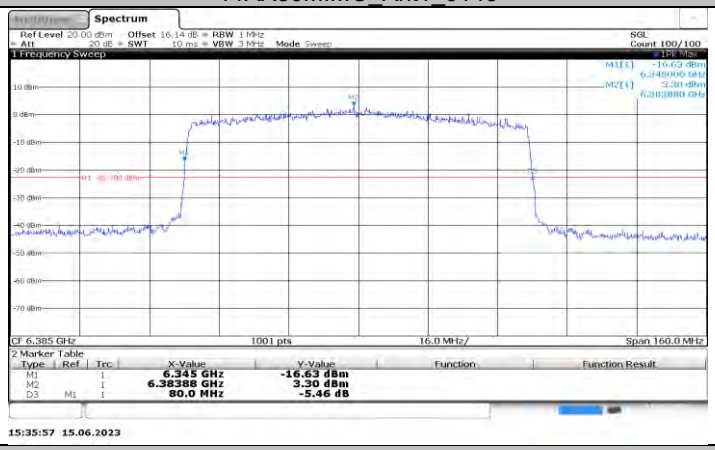

11AX80MIMO_Ant0_6385

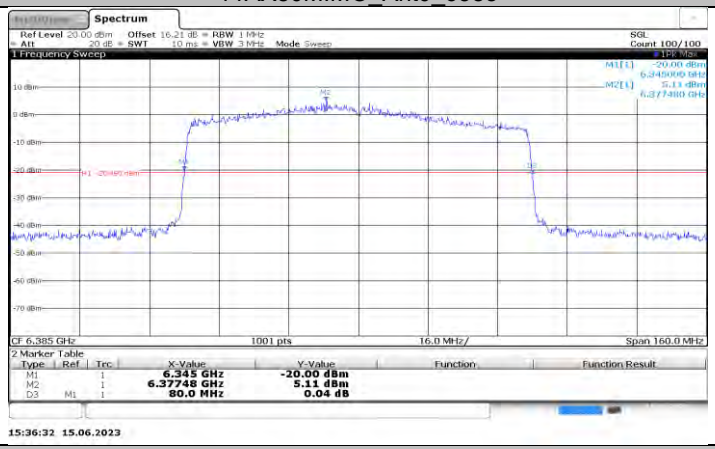

11AX80MIMO_Ant1_6385

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

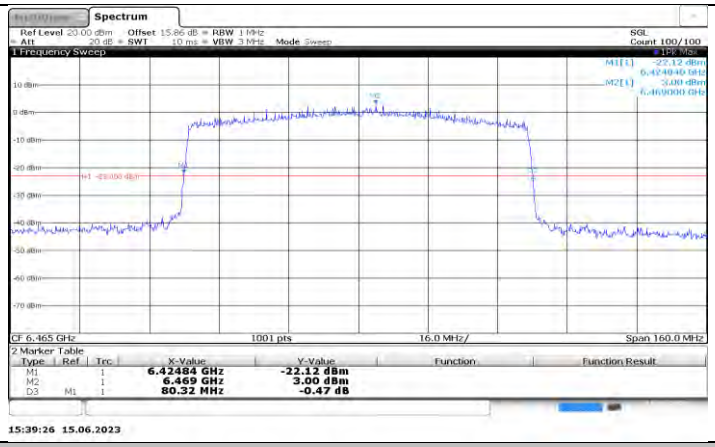

11AX80MIMO_Ant0_6465

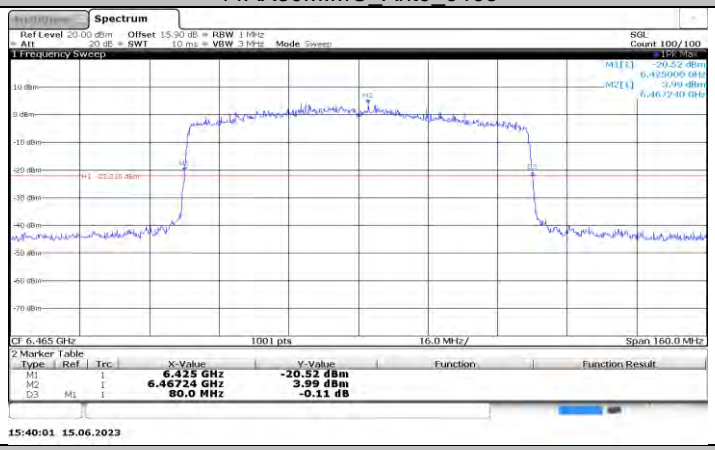

11AX80MIMO_Ant1_6465

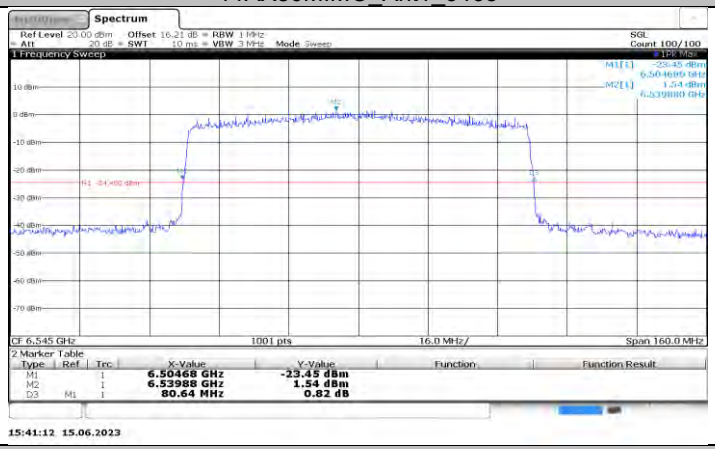

11AX80MIMO_Ant0_6545

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

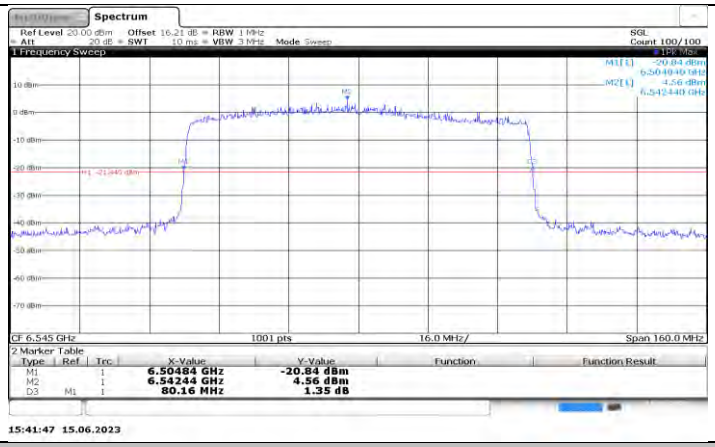

11AX80MIMO_Ant1_6545

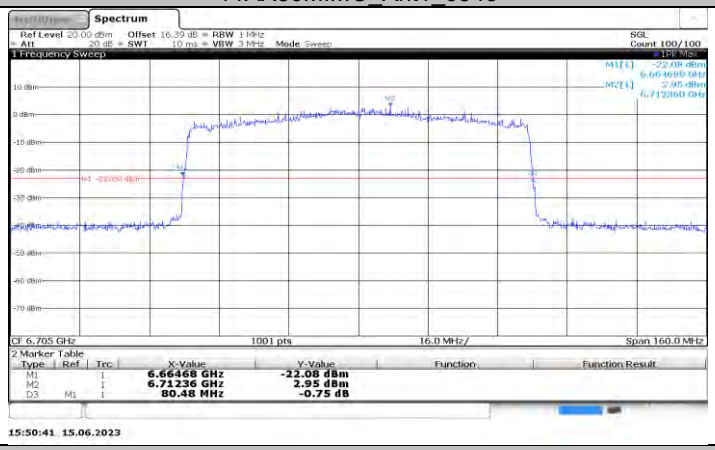

11AX80MIMO_Ant0_6705

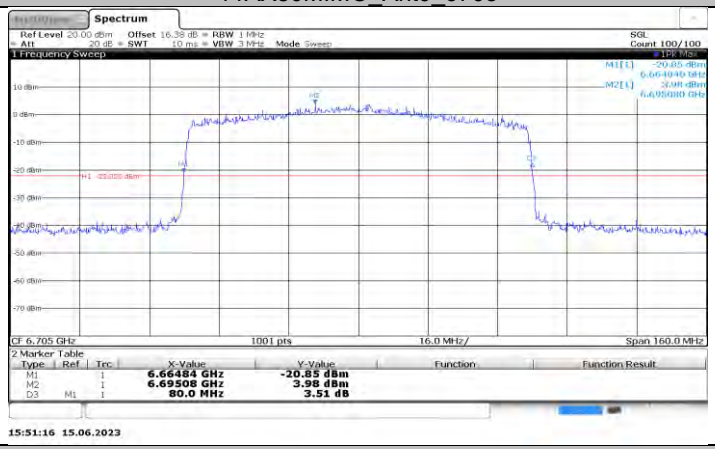

11AX80MIMO_Ant1_6705

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

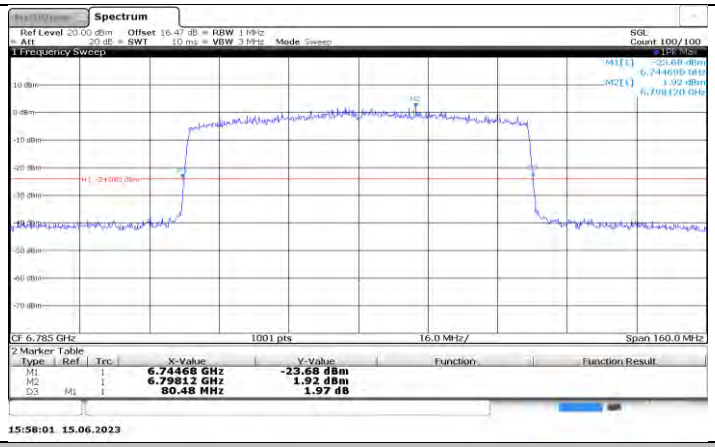

11AX80MIMO_Ant0_6785

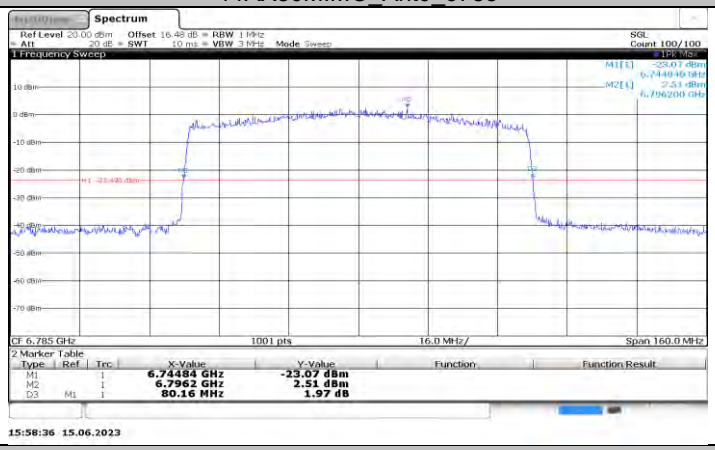

11AX80MIMO_Ant1_6785

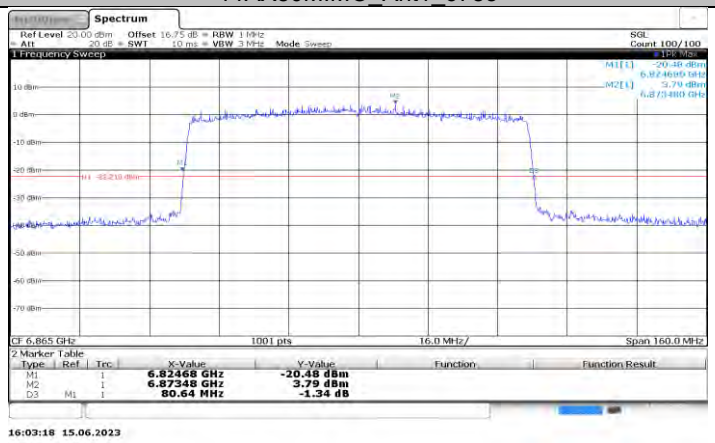

11AX80MIMO_Ant0_6865

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

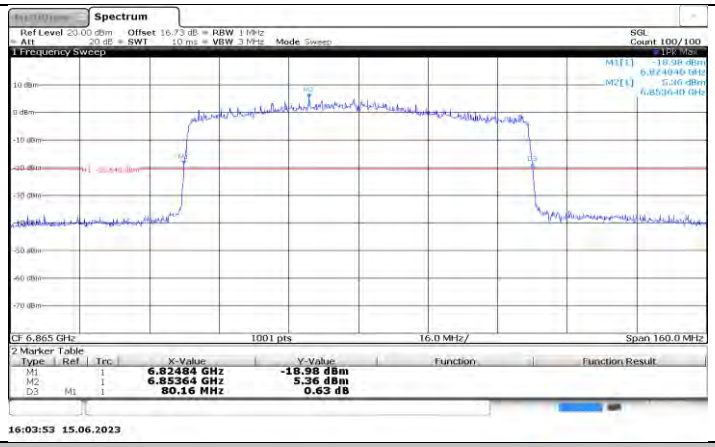

11AX80MIMO_Ant1_6865

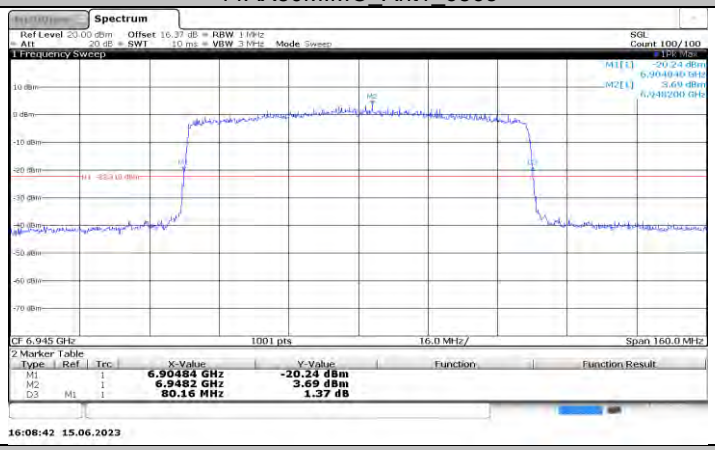

11AX80MIMO_Ant0_6945

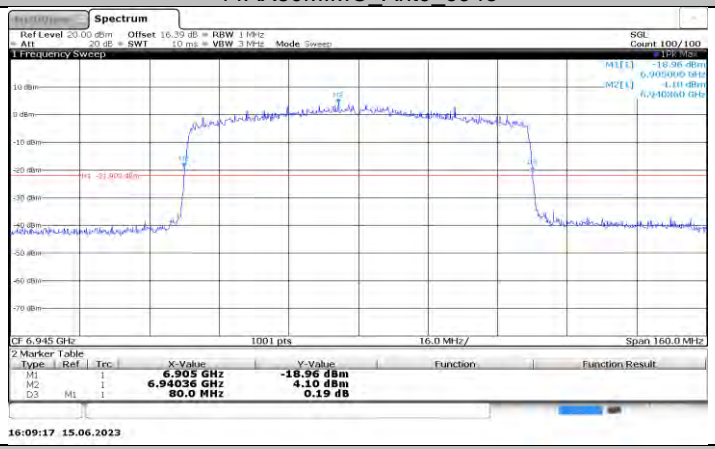

11AX80MIMO_Ant1_6945

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

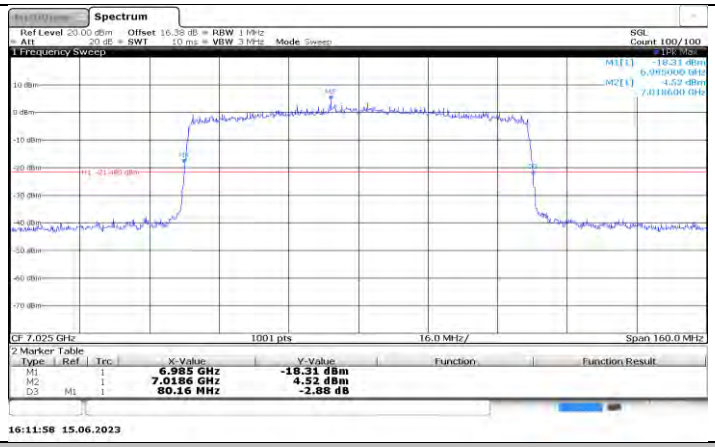

11AX80MIMO_Ant0_7025

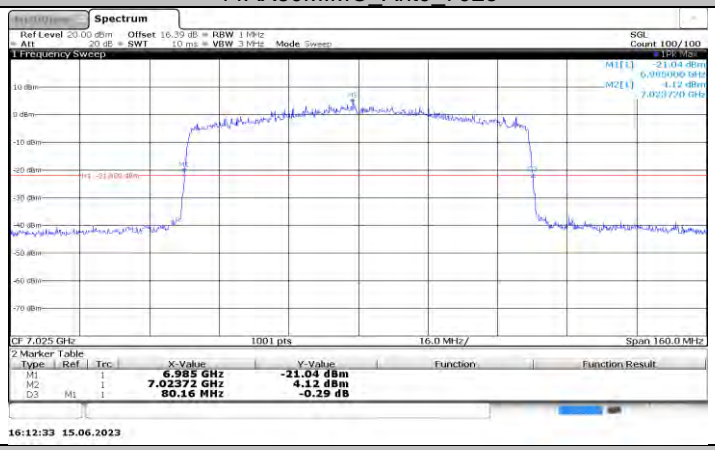

11AX80MIMO_Ant1_7025

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

11.2. APPENDIX A1: EMISSION BANDWIDTH FOR SINGLE PARTIAL RU

11.2.1. Test Result

Test Mode	Antenna	Channel	Ru Size	Ru Index	26db BW [MHz]	FL [MHz]	FH [MHz]	Verdict
11AX20MIMO	Ant0	5955	26Tone	RU0	20.52	5943.64	5964.16	PASS
	Ant1	5955	26Tone	RU0	20.16	5943.84	5964.00	PASS
	Ant0	6175	26Tone	RU4	18.32	6165.92	6184.24	PASS
			52Tone	RU37	20.68	6163.60	6184.28	PASS
			106Tone	RU53	22.04	6162.64	6184.68	PASS
	Ant1	6175	26Tone	RU4	18.00	6166.00	6184.00	PASS
			52Tone	RU37	21.72	6162.40	6184.12	PASS
			106Tone	RU53	21.80	6162.36	6184.16	PASS
	Ant0	6415	26Tone	RU8	20.68	6405.88	6426.56	PASS
	Ant1	6415	26Tone	RU8	20.72	6405.92	6426.64	PASS
	Ant0	6435	26Tone	RU0	20.40	6423.52	6443.92	PASS
	Ant1	6435	26Tone	RU0	20.08	6423.84	6443.92	PASS
	Ant0	6475	26Tone	RU4	18.00	6465.96	6483.96	PASS
			52Tone	RU37	20.76	6463.40	6484.16	PASS
			106Tone	RU53	20.64	6463.60	6484.24	PASS
	Ant1	6475	26Tone	RU4	17.96	6465.96	6483.92	PASS
			52Tone	RU37	20.32	6463.64	6483.96	PASS
			106Tone	RU53	20.48	6463.48	6483.96	PASS
	Ant0	6515	26Tone	RU8	20.52	6505.84	6526.36	PASS
	Ant1	6515	26Tone	RU8	19.80	6506.00	6525.80	PASS
	Ant0	6535	26Tone	RU0	20.48	6523.44	6543.92	PASS
	Ant1	6535	26Tone	RU0	20.12	6523.80	6543.92	PASS
	Ant0	6715	26Tone	RU4	18.08	6705.84	6723.92	PASS
			52Tone	RU37	20.80	6703.16	6723.96	PASS
			106Tone	RU53	20.40	6703.52	6723.92	PASS
	Ant1	6715	26Tone	RU4	18.00	6705.92	6723.92	PASS
			52Tone	RU37	20.16	6703.76	6723.92	PASS
			106Tone	RU53	21.04	6702.96	6724.00	PASS
	Ant0	6855	26Tone	RU8	20.36	6845.84	6866.20	PASS
	Ant1	6855	26Tone	RU8	20.16	6845.92	6866.08	PASS
	Ant0	6875	26Tone	RU0	20.28	6863.60	6883.88	PASS
	Ant1	6875	26Tone	RU0	20.12	6863.80	6883.92	PASS
	Ant0	7015	26Tone	RU4	18.08	7005.84	7023.92	PASS
			52Tone	RU37	20.48	7003.52	7024.00	PASS
			106Tone	RU53	21.84	7002.16	7024.00	PASS
	Ant1	7015	26Tone	RU4	18.00	7005.92	7023.92	PASS
			52Tone	RU37	20.52	7003.44	7023.96	PASS
			106Tone	RU53	20.04	7003.92	7023.96	PASS
	Ant0	7115	26Tone	RU8	21.08	7105.76	7126.84	PASS
	Ant1	7115	26Tone	RU8	20.20	7106.00	7126.20	PASS
11AX40MIMO	Ant0	5965	26Tone	RU0	20.72	5943.40	5964.12	PASS
	Ant1	5965	26Tone	RU0	20.32	5943.80	5964.12	PASS
	Ant0	6165	26Tone	RU8	23.20	6145.80	6169.00	PASS
			52Tone	RU37	20.00	6144.92	6164.92	PASS
			106Tone	RU53	20.08	6145.00	6165.08	PASS
			242Tone	RU61	39.60	6145.00	6184.60	PASS
	Ant1	6165	26Tone	RU8	22.00	6145.88	6167.88	PASS
			52Tone	RU37	19.52	6145.00	6164.52	PASS
			106Tone	RU53	19.36	6145.08	6164.44	PASS
			242Tone	RU61	39.52	6145.08	6184.60	PASS
	Ant0	6405	26Tone	RU17	19.36	6405.64	6425.00	PASS
	Ant1	6405	26Tone	RU17	19.12	6405.80	6424.92	PASS
	Ant0	6445	26Tone	RU0	19.04	6425.00	6444.04	PASS
	Ant1	6445	26Tone	RU0	19.12	6425.00	6444.12	PASS
	Ant0	6485	26Tone	RU8	21.12	6465.96	6487.08	PASS
			52Tone	RU37	19.28	6465.00	6484.28	PASS
			106Tone	RU53	20.00	6464.92	6484.92	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

			242Tone	RU61	39.36	6465.16	6504.52	PASS
	Ant1	6485	26Tone	RU8	21.84	6465.88	6487.72	PASS
			52Tone	RU37	19.44	6465.00	6484.44	PASS
			106Tone	RU53	19.68	6465.00	6484.68	PASS
			242Tone	RU61	38.96	6465.16	6504.12	PASS
	Ant0	6525	26Tone	RU17	19.28	6525.64	6544.92	PASS
	Ant1	6525	26Tone	RU17	19.12	6525.80	6544.92	PASS
	Ant0	6565	26Tone	RU0	20.80	6543.32	6564.12	PASS
	Ant1	6565	26Tone	RU0	20.40	6543.64	6564.04	PASS
	Ant0	6725	26Tone	RU8	22.64	6705.96	6728.60	PASS
			52Tone	RU37	19.12	6704.92	6724.04	PASS
			106Tone	RU53	19.36	6705.00	6724.36	PASS
			242Tone	RU61	39.36	6705.08	6744.44	PASS
	Ant1	6725	26Tone	RU8	22.56	6705.72	6728.28	PASS
			52Tone	RU37	19.36	6704.92	6724.28	PASS
			106Tone	RU53	19.52	6705.00	6724.52	PASS
			242Tone	RU61	39.20	6705.08	6744.28	PASS
	Ant0	6845	26Tone	RU17	19.28	6845.64	6864.92	PASS
	Ant1	6845	26Tone	RU17	18.96	6845.88	6864.84	PASS
	Ant0	6885	26Tone	RU0	20.64	6863.40	6884.04	PASS
	Ant1	6885	26Tone	RU0	21.28	6862.76	6884.04	PASS
	Ant0	7005	26Tone	RU8	21.76	6985.88	7007.64	PASS
			52Tone	RU37	19.20	6985.00	7004.20	PASS
			106Tone	RU53	19.44	6985.00	7004.44	PASS
			242Tone	RU61	39.44	6985.08	7024.52	PASS
	Ant1	7005	26Tone	RU8	20.48	6985.88	7006.36	PASS
			52Tone	RU37	19.60	6984.84	7004.44	PASS
			106Tone	RU53	19.60	6985.00	7004.60	PASS
			242Tone	RU61	39.36	6985.08	7024.44	PASS
	Ant0	7085	26Tone	RU17	19.52	7085.48	7105.00	PASS
	Ant1	7085	26Tone	RU17	18.88	7085.96	7104.84	PASS
11AX80MIMO	Ant0	5985	26Tone	RU0	22.08	5942.44	5964.52	PASS
	Ant1	5985	26Tone	RU0	21.44	5943.08	5964.52	PASS
	Ant0	6145	26Tone	RU17	24.00	6125.00	6149.00	PASS
			52Tone	RU37	21.60	6104.52	6126.12	PASS
			106Tone	RU53	22.56	6104.52	6127.08	PASS
			242Tone	RU61	34.72	6104.68	6139.40	PASS
			484Tone	RU65	80.00	6104.68	6184.68	PASS
	Ant1	6145	26Tone	RU17	24.16	6124.84	6149.00	PASS
			52Tone	RU37	20.48	6104.68	6125.16	PASS
			106Tone	RU53	22.40	6104.52	6126.92	PASS
			242Tone	RU61	30.24	6104.52	6134.76	PASS
			484Tone	RU65	79.84	6104.68	6184.52	PASS
	Ant0	6385	26Tone	RU36	20.64	6404.68	6425.32	PASS
	Ant1	6385	26Tone	RU36	19.84	6405.48	6425.32	PASS
	Ant0	6465	26Tone	RU17	25.60	6444.52	6470.12	PASS
			52Tone	RU37	20.48	6424.52	6445.00	PASS
			106Tone	RU53	22.08	6424.52	6446.60	PASS
			242Tone	RU61	27.20	6424.52	6451.72	PASS
			484Tone	RU65	80.16	6424.52	6504.68	PASS
	Ant1	6465	26Tone	RU17	25.28	6445.32	6470.60	PASS
			52Tone	RU37	20.96	6424.52	6445.48	PASS
			106Tone	RU53	22.72	6424.52	6447.24	PASS
			242Tone	RU61	29.92	6424.52	6454.44	PASS
			484Tone	RU65	79.68	6424.68	6504.36	PASS
	Ant0	6545	26Tone	RU0	20.00	6504.52	6524.52	PASS
				RU36	22.72	6502.12	6524.84	PASS
	Ant1	6545	26Tone	RU0	20.16	6504.52	6524.68	PASS
				RU36	20.16	6504.52	6524.68	PASS
	Ant0	6705	26Tone	RU17	26.08	6685.00	6711.08	PASS
			52Tone	RU37	20.96	6664.52	6685.48	PASS
			106Tone	RU53	22.56	6664.68	6687.24	PASS
			242Tone	RU61	31.20	6664.68	6695.88	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

			484Tone	RU65	80.00	6664.84	6744.84	PASS
	Ant1	6705	26Tone	RU17	24.64	6685.48	6710.12	PASS
			52Tone	RU37	20.96	6664.52	6685.48	PASS
			106Tone	RU53	22.56	6664.52	6687.08	PASS
			242Tone	RU61	29.92	6664.52	6694.44	PASS
			484Tone	RU65	79.68	6664.68	6744.36	PASS
	Ant0	6785	26Tone	RU36	20.32	6805.00	6825.32	PASS
	Ant1	6785	26Tone	RU36	20.00	6805.48	6825.48	PASS
	Ant0	6865	26Tone	RU0	19.68	6824.68	6844.36	PASS
	Ant1	6865	26Tone	RU0	20.00	6824.52	6844.52	PASS
	Ant0	6945	26Tone	RU17	24.48	6924.84	6949.32	PASS
			52Tone	RU37	21.28	6904.52	6925.80	PASS
			106Tone	RU53	22.56	6904.68	6927.24	PASS
			242Tone	RU61	32.32	6904.52	6936.84	PASS
			484Tone	RU65	79.52	6904.84	6984.36	PASS
	Ant1	6945	26Tone	RU17	24.16	6925.48	6949.64	PASS
			52Tone	RU37	20.48	6904.68	6925.16	PASS
			106Tone	RU53	22.24	6904.68	6926.92	PASS
			242Tone	RU61	30.72	6904.68	6935.40	PASS
			484Tone	RU65	80.00	6904.68	6984.68	PASS
	Ant0	7025	26Tone	RU36	20.48	7045.00	7065.48	PASS
	Ant1	7025	26Tone	RU36	19.84	7045.48	7065.32	PASS

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

11.2.1. Test Graphs

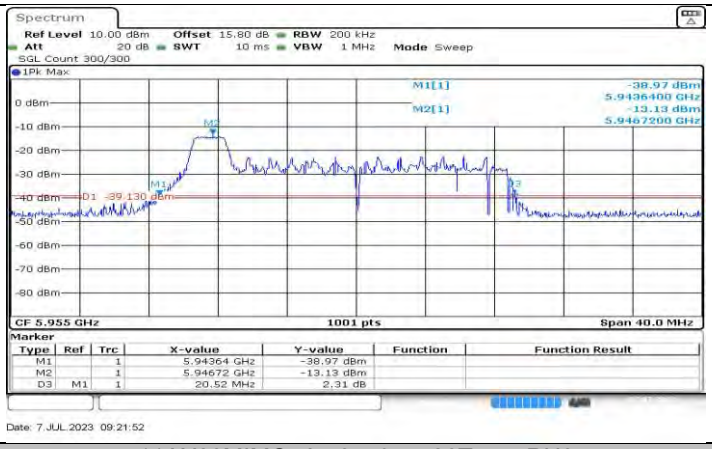

11AX20MIMO_Ant0_5955_26Tone_RU0

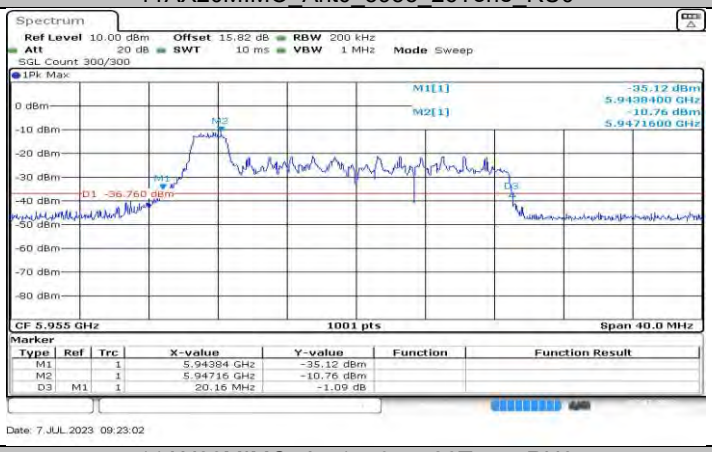

11AX20MIMO_Ant1_5955_26Tone_RU0

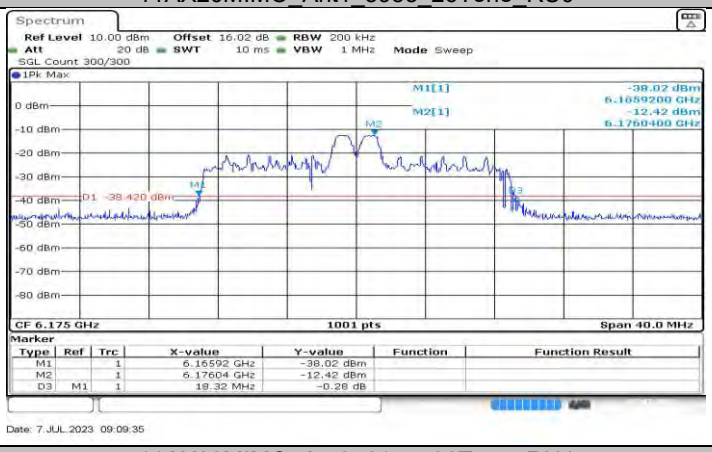

11AX20MIMO_Ant0_6175_26Tone_RU4

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

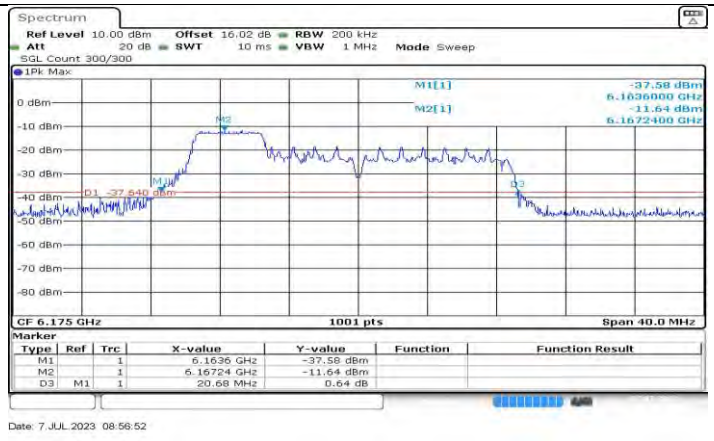

11AX20MIMO_Ant0_6175_52Tone_RU37

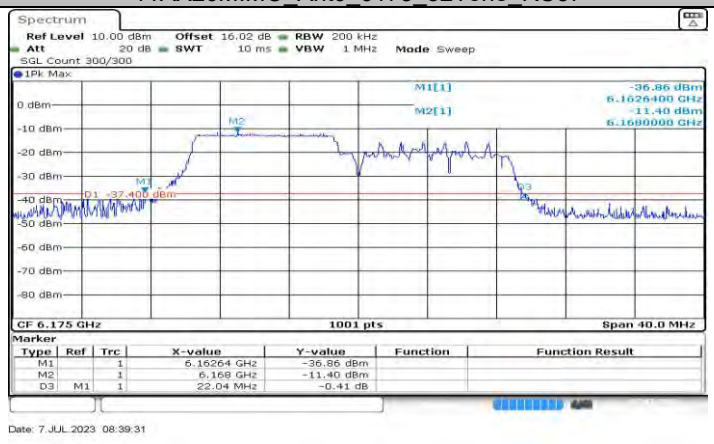

11AX20MIMO_Ant0_6175_106Tone_RU53

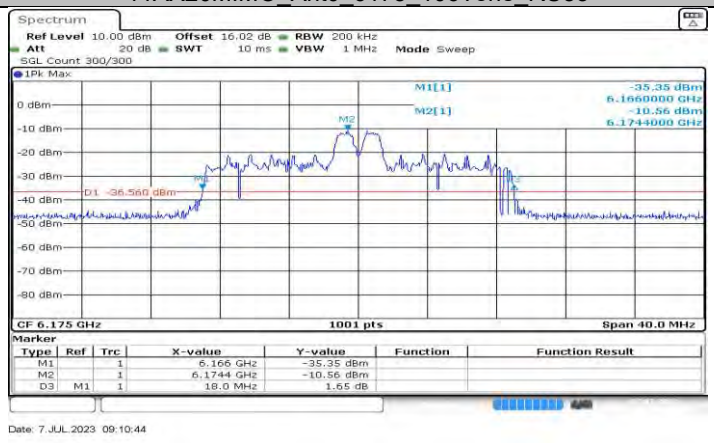

11AX20MIMO_Ant1_6175_26Tone_RU4

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

11AX20MIMO_Ant1_6175_52Tone_RU37

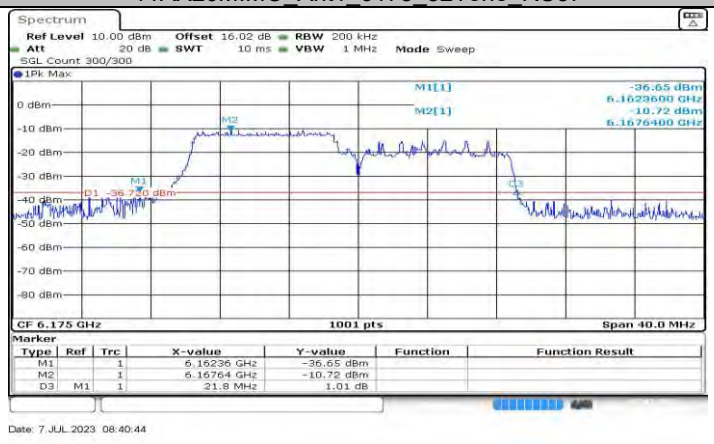

11AX20MIMO_Ant1_6175_106Tone_RU53

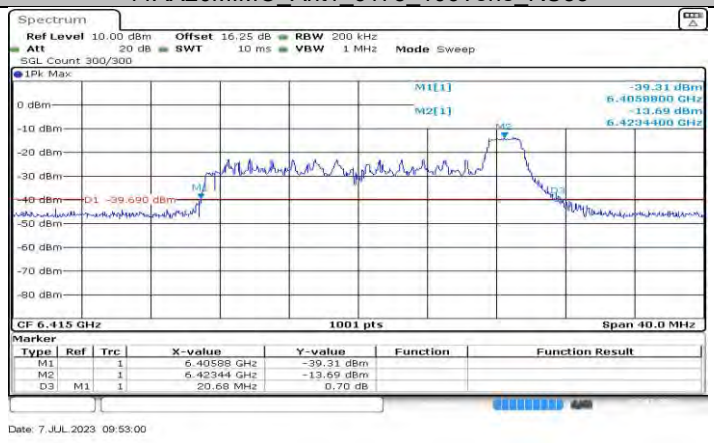

11AX20MIMO_Ant0_6415_26Tone_RU8

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

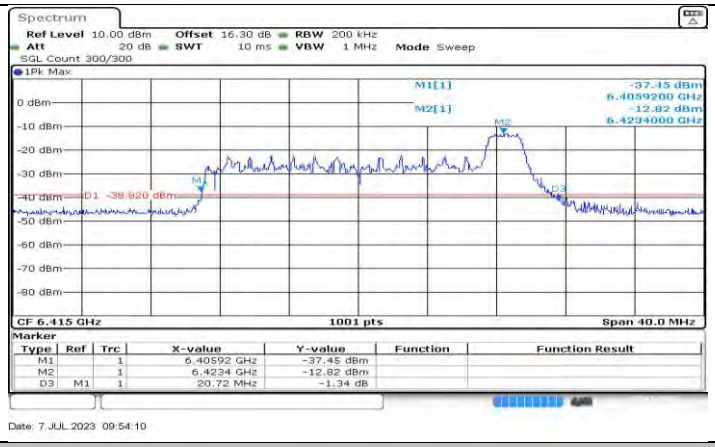

11AX20MIMO_Ant1_6415_26Tone_RU8

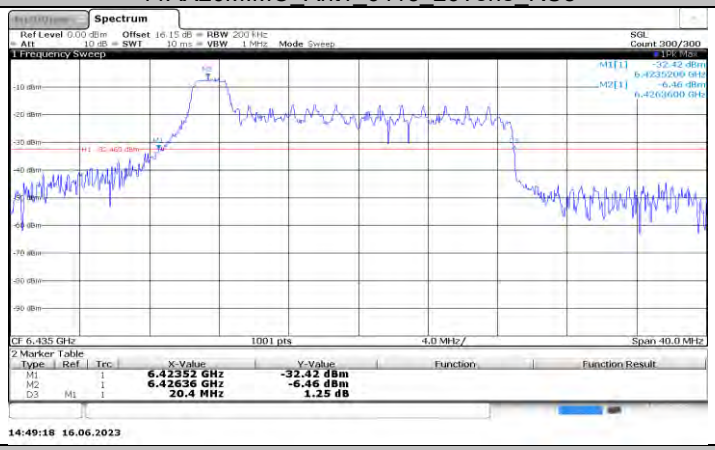

11AX20MIMO_Ant0_6435_26Tone_RU0

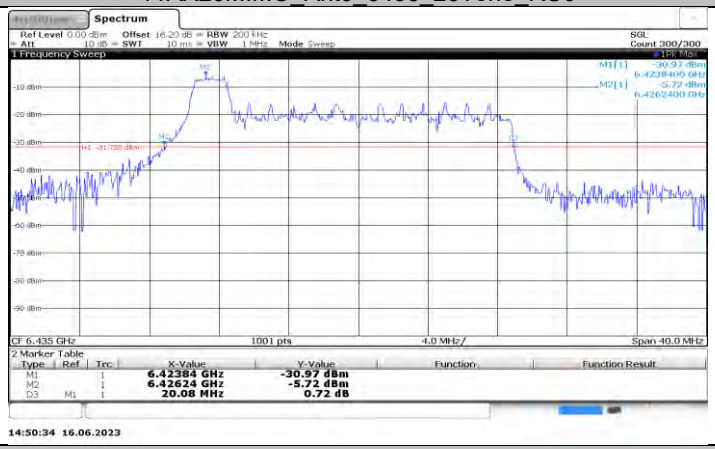

11AX20MIMO_Ant1_6435_26Tone_RU0

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

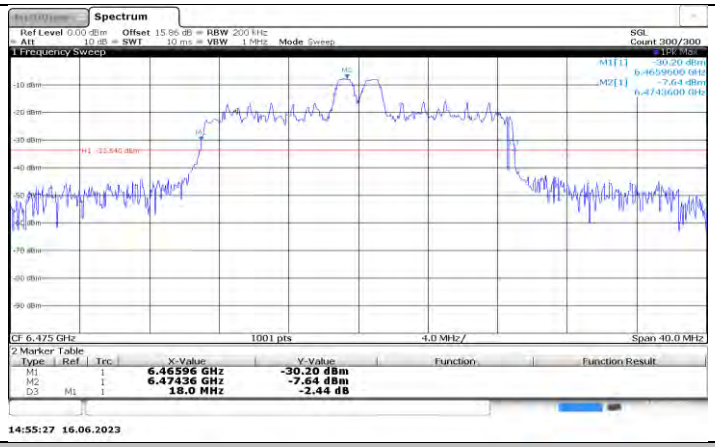

11AX20MIMO_Ant0_6475_26Tone_RU4

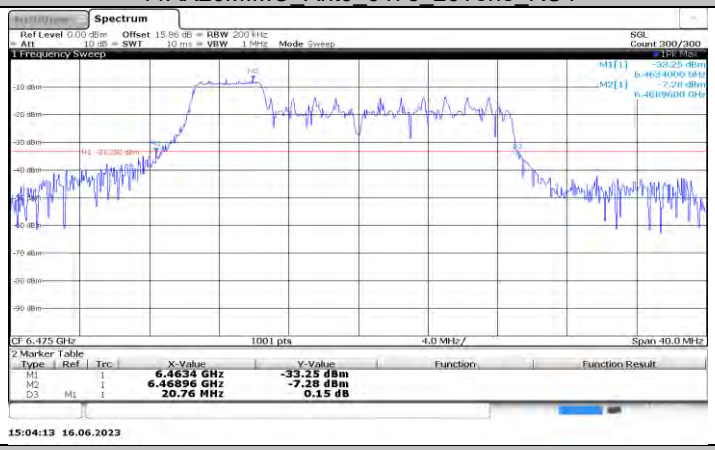

11AX20MIMO_Ant0_6475_52Tone_RU37

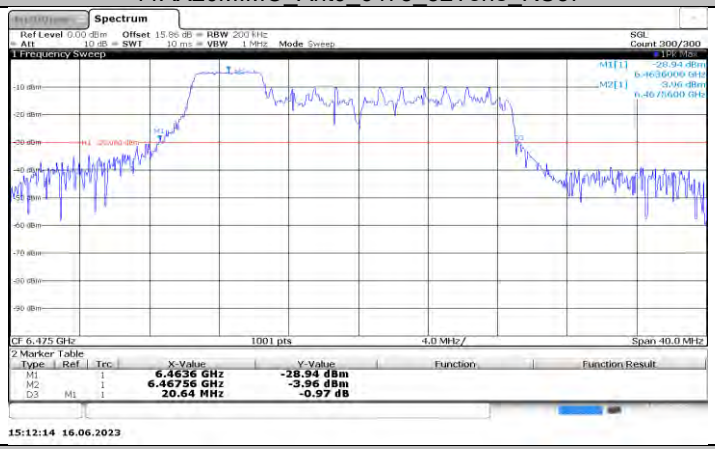

11AX20MIMO_Ant0_6475_106Tone_RU53

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.