



Test Mode:	802.11a 20	Channel:	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

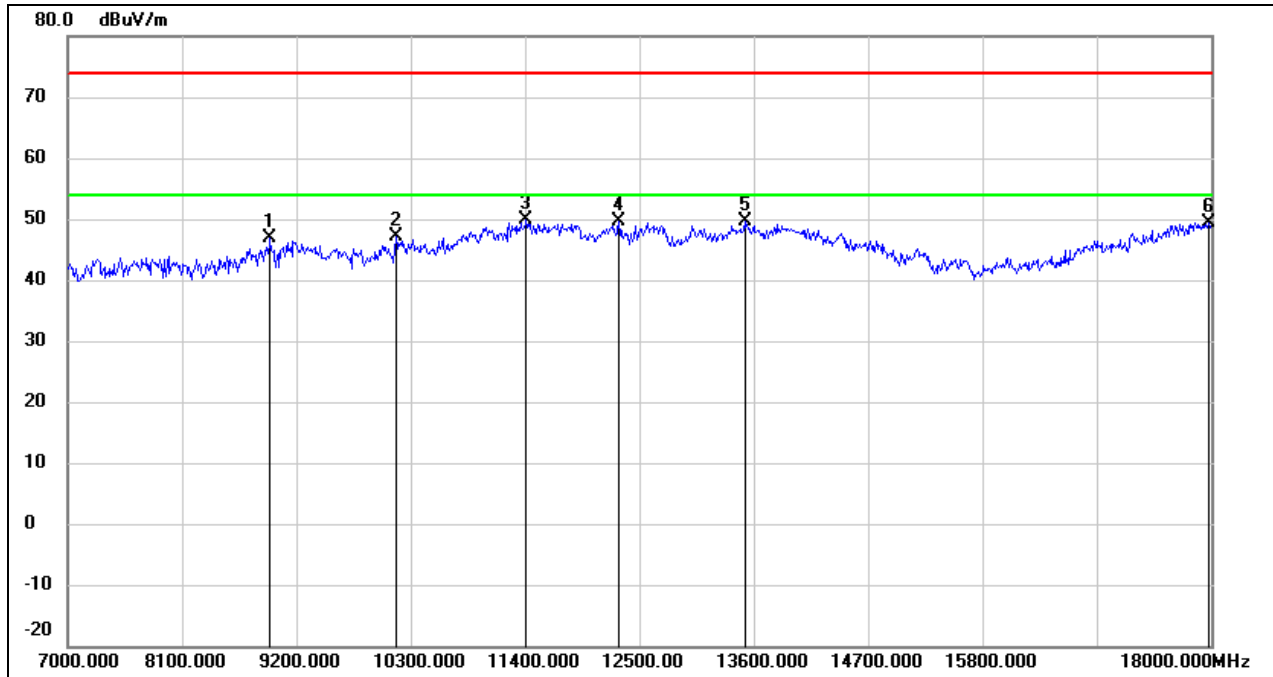


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8947.000	36.81	9.98	46.79	74.00	-27.21	peak
2	10157.000	35.14	12.10	47.24	74.00	-26.76	peak
3	11411.000	33.59	16.41	50.00	74.00	-24.00	peak
4	12302.000	31.97	17.78	49.75	74.00	-24.25	peak
5	13512.000	28.89	20.68	49.57	74.00	-24.43	peak
6	17978.000	23.42	25.97	49.39	74.00	-24.61	peak

Test Mode:	802.11a 20	Channel:	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

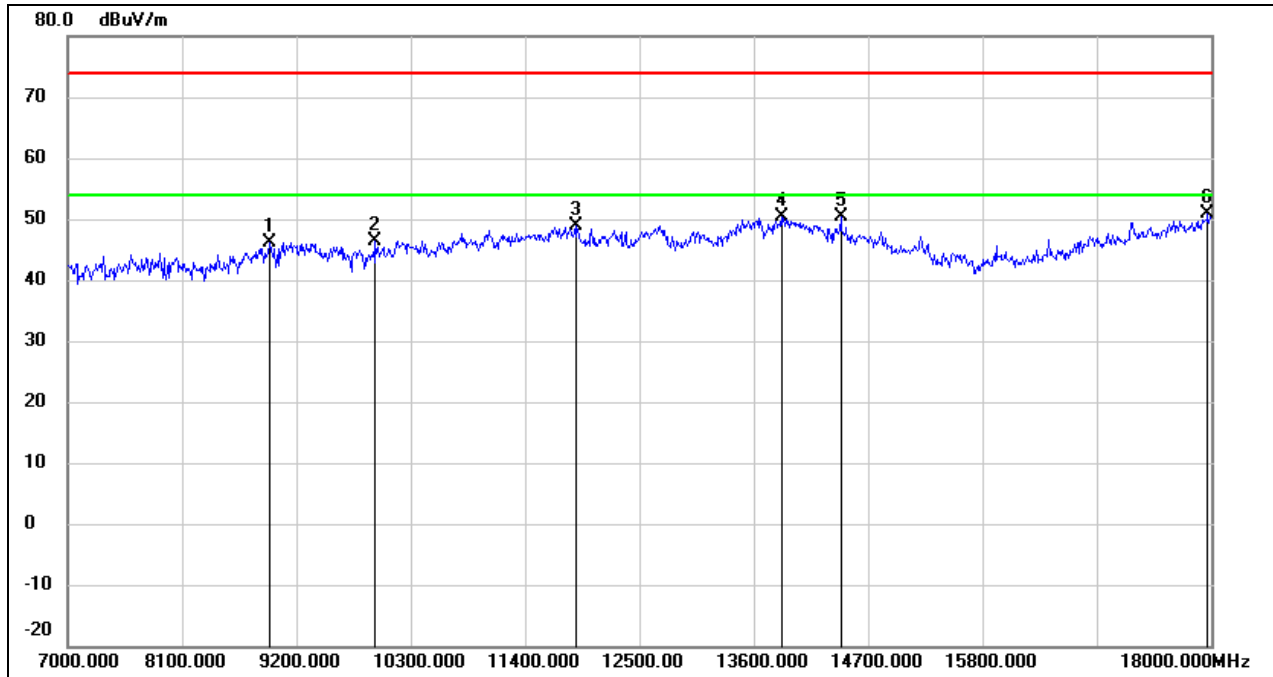


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8947.000	36.22	9.98	46.20	74.00	-27.80	peak
2	9959.000	34.69	11.68	46.37	74.00	-27.63	peak
3	11884.000	31.42	17.48	48.90	74.00	-25.10	peak
4	13864.000	28.88	21.53	50.41	74.00	-23.59	peak
5	14436.000	30.24	20.05	50.29	74.00	-23.71	peak
6	17967.000	24.91	25.89	50.80	74.00	-23.20	peak

Test Mode:	802.11a 20	Channel:	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

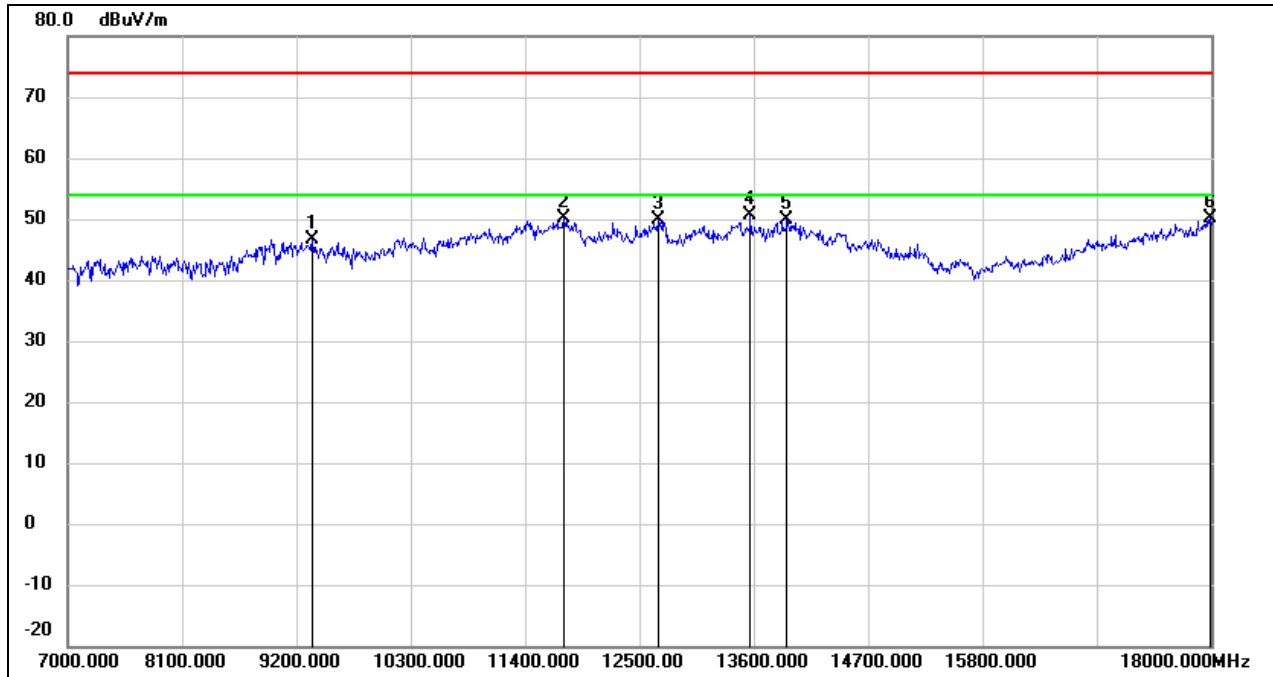


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.09	10.56	46.65	74.00	-27.35	peak
2	11774.000	32.86	17.28	50.14	74.00	-23.86	peak
3	12676.000	31.80	18.05	49.85	74.00	-24.15	peak
4	13567.000	29.82	20.80	50.62	74.00	-23.38	peak
5	13919.000	28.20	21.68	49.88	74.00	-24.12	peak
6	17989.000	24.03	26.04	50.07	74.00	-23.93	peak

Test Mode:	802.11a 20	Channel:	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

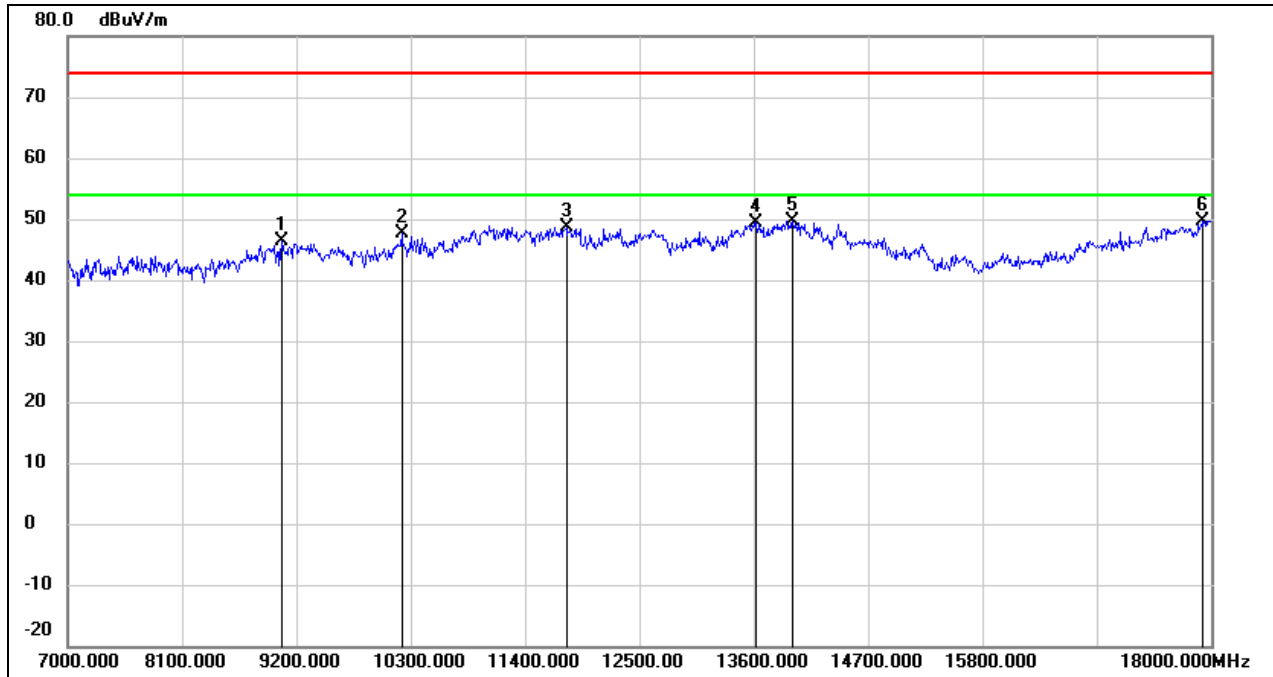


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	35.98	10.38	46.36	74.00	-27.64	peak
2	10212.000	35.30	12.21	47.51	74.00	-26.49	peak
3	11796.000	31.31	17.32	48.63	74.00	-25.37	peak
4	13622.000	28.54	20.95	49.49	74.00	-24.51	peak
5	13974.000	27.82	21.82	49.64	74.00	-24.36	peak
6	17912.000	24.21	25.52	49.73	74.00	-24.27	peak

Test Mode:	802.11a 20	Channel:	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

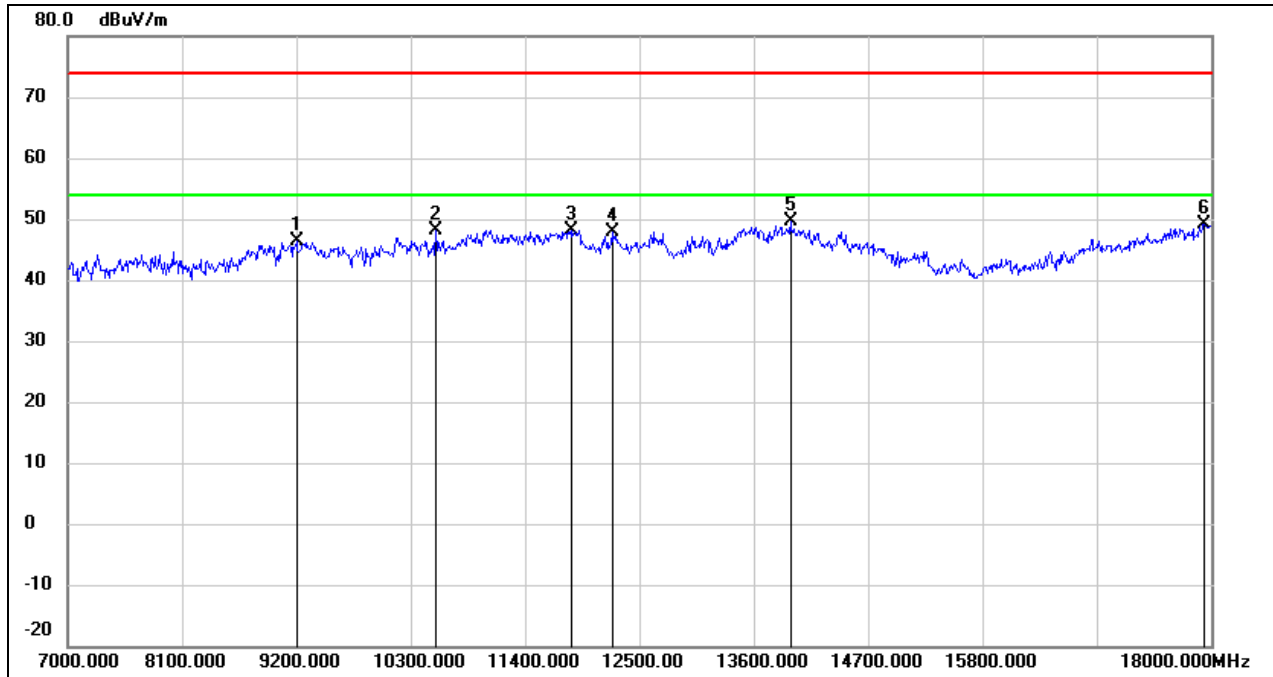


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	35.89	10.46	46.35	74.00	-27.65	peak
2	10542.000	35.23	12.98	48.21	74.00	-25.79	peak
3	11840.000	30.85	17.40	48.25	74.00	-25.75	peak
4	12236.000	30.20	17.76	47.96	74.00	-26.04	peak
5	13952.000	27.80	21.76	49.56	74.00	-24.44	peak
6	17934.000	23.41	25.67	49.08	74.00	-24.92	peak

Test Mode:	802.11a 20	Channel:	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

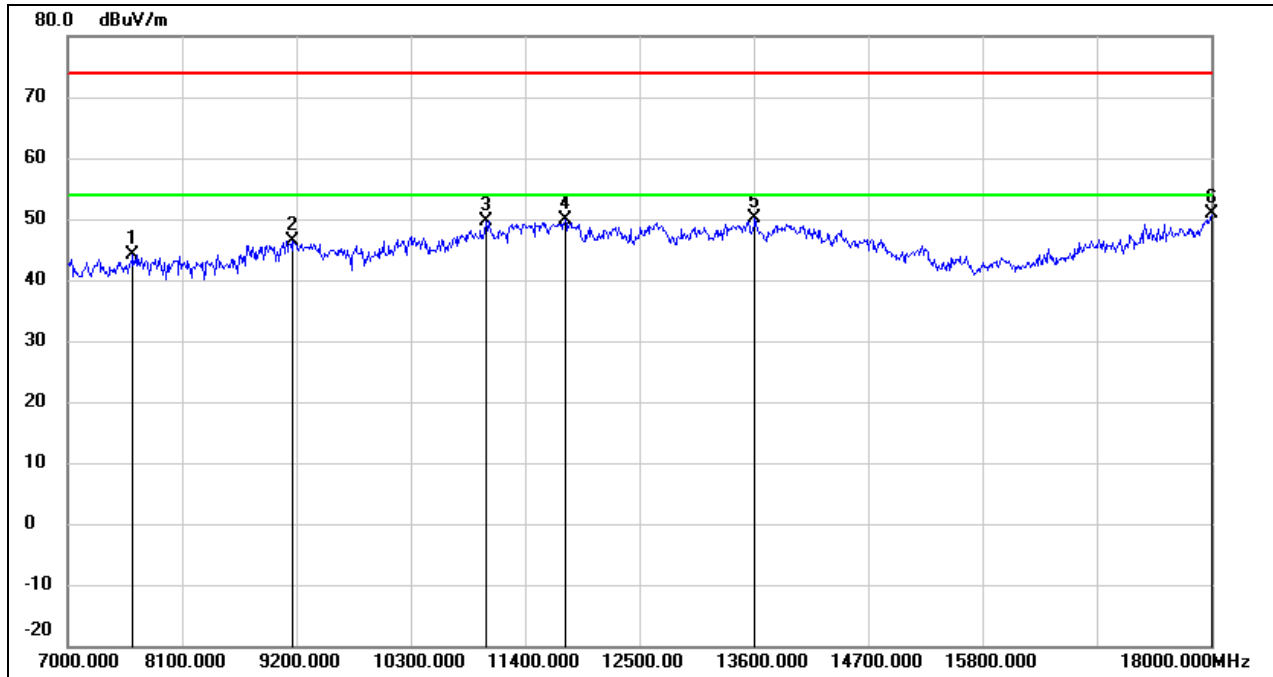


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7627.000	37.42	6.76	44.18	74.00	-29.82	peak
2	9167.000	35.90	10.45	46.35	74.00	-27.65	peak
3	11026.000	34.75	14.82	49.57	74.00	-24.43	peak
4	11785.000	32.49	17.30	49.79	74.00	-24.21	peak
5	13611.000	29.31	20.92	50.23	74.00	-23.77	peak
6	18000.000	24.78	26.12	50.90	74.00	-23.10	peak

Test Mode:	802.11n HT20	Channel:	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

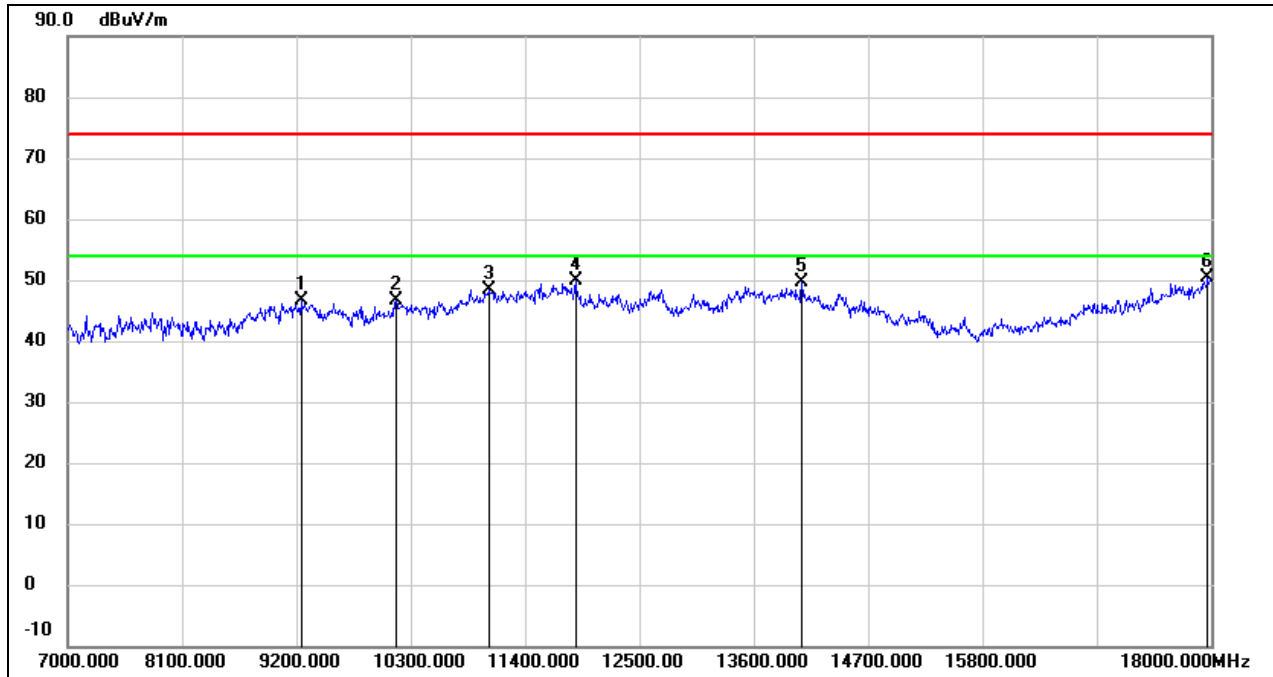


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.19	10.49	46.68	74.00	-27.32	peak
2	10157.000	34.42	12.10	46.52	74.00	-27.48	peak
3	11048.000	33.46	14.91	48.37	74.00	-25.63	peak
4	11884.000	32.44	17.48	49.92	74.00	-24.08	peak
5	14062.000	27.90	21.62	49.52	74.00	-24.48	peak
6	17967.000	24.57	25.89	50.46	74.00	-23.54	peak

Test Mode:	802.11n HT20	Channel:	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

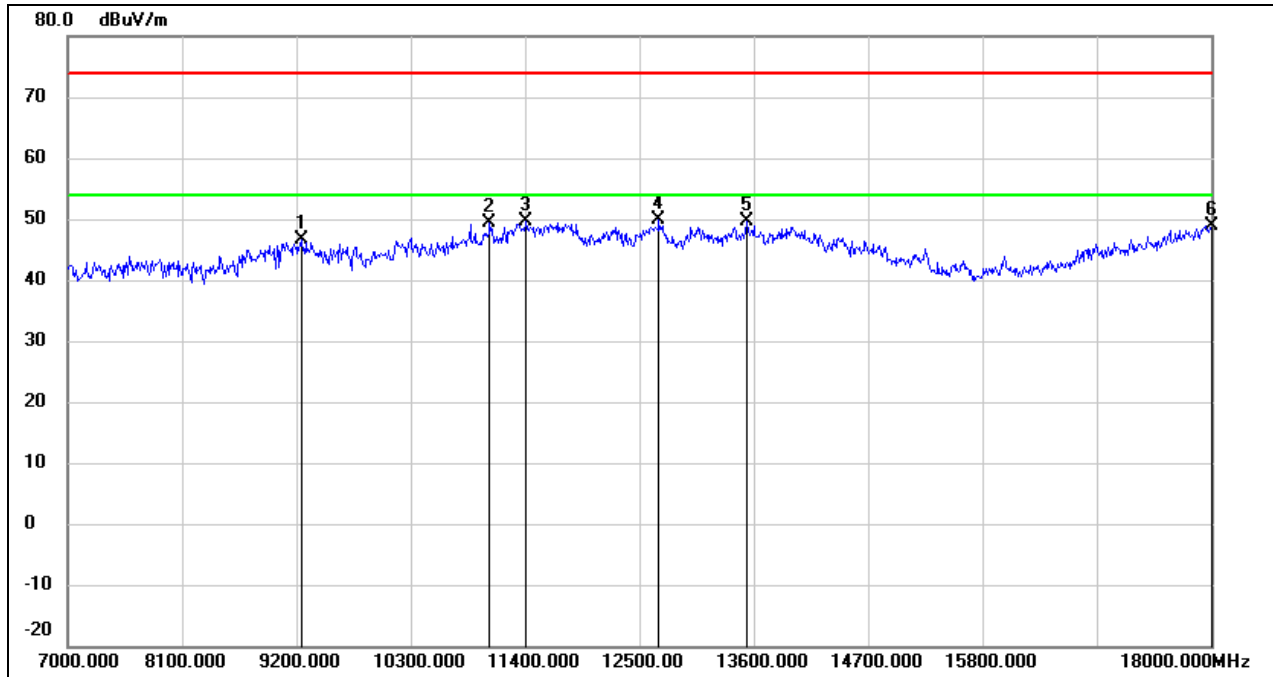


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.10	10.49	46.59	74.00	-27.41	peak
2	11059.000	34.31	14.96	49.27	74.00	-24.73	peak
3	11411.000	33.11	16.41	49.52	74.00	-24.48	peak
4	12687.000	31.92	18.05	49.97	74.00	-24.03	peak
5	13534.000	29.01	20.73	49.74	74.00	-24.26	peak
6	18000.000	22.87	26.12	48.99	74.00	-25.01	peak

Test Mode:	802.11n HT20	Channel:	5200
Polarity:	Horizontal	Test Voltage:	DC 5 V

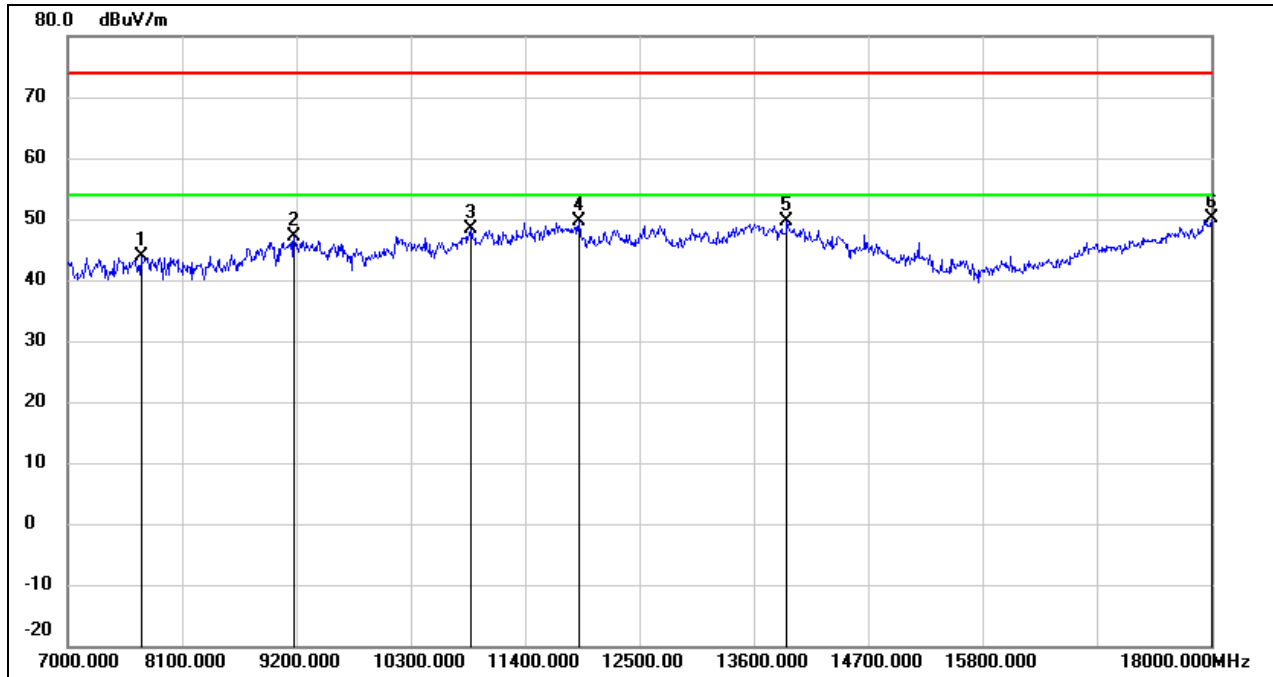


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	37.11	6.69	43.80	74.00	-30.20	peak
2	9178.000	36.62	10.45	47.07	74.00	-26.93	peak
3	10883.000	34.10	14.27	48.37	74.00	-25.63	peak
4	11917.000	31.97	17.54	49.51	74.00	-24.49	peak
5	13919.000	27.83	21.68	49.51	74.00	-24.49	peak
6	18000.000	23.89	26.12	50.01	74.00	-23.99	peak

Test Mode:	802.11n HT20	Channel:	5200
Polarity:	Vertical	Test Voltage:	DC 5 V

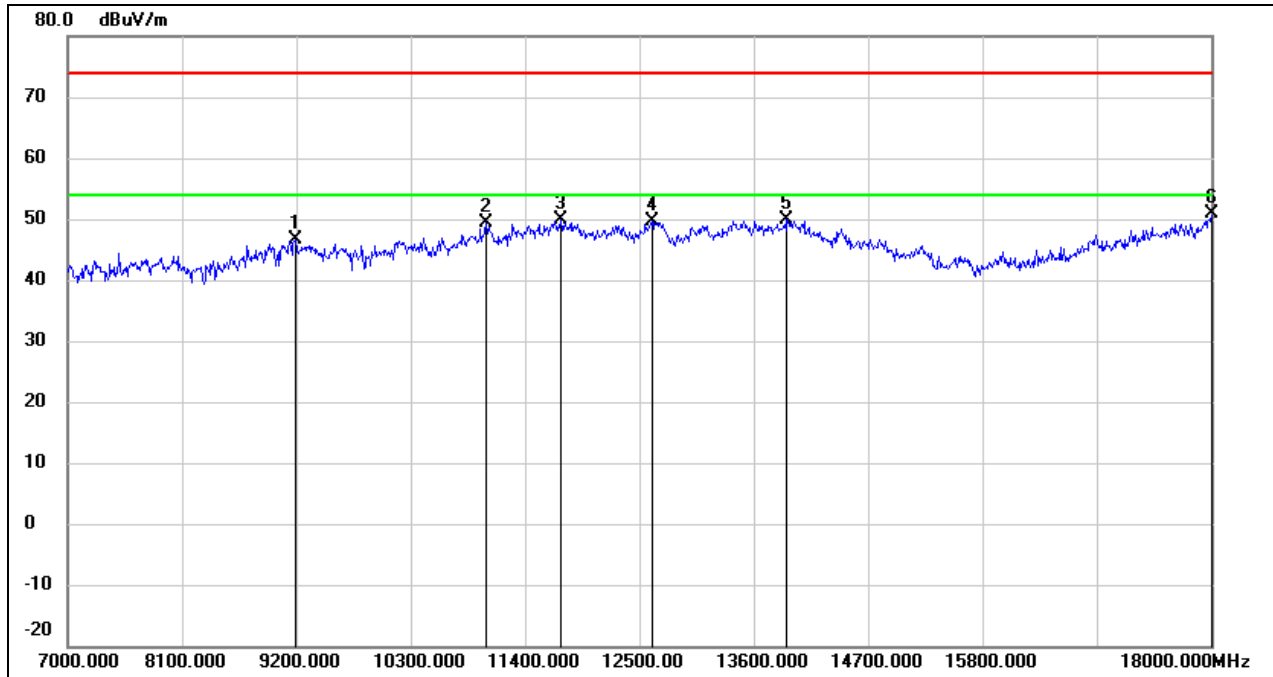


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.17	10.46	46.63	74.00	-27.37	peak
2	11026.000	34.61	14.82	49.43	74.00	-24.57	peak
3	11741.000	32.58	17.22	49.80	74.00	-24.20	peak
4	12621.000	31.55	17.98	49.53	74.00	-24.47	peak
5	13919.000	28.30	21.68	49.98	74.00	-24.02	peak
6	18000.000	24.66	26.12	50.78	74.00	-23.22	peak

Test Mode:	802.11n HT20	Channel:	5240
Polarity:	Horizontal	Test Voltage:	DC 5 V

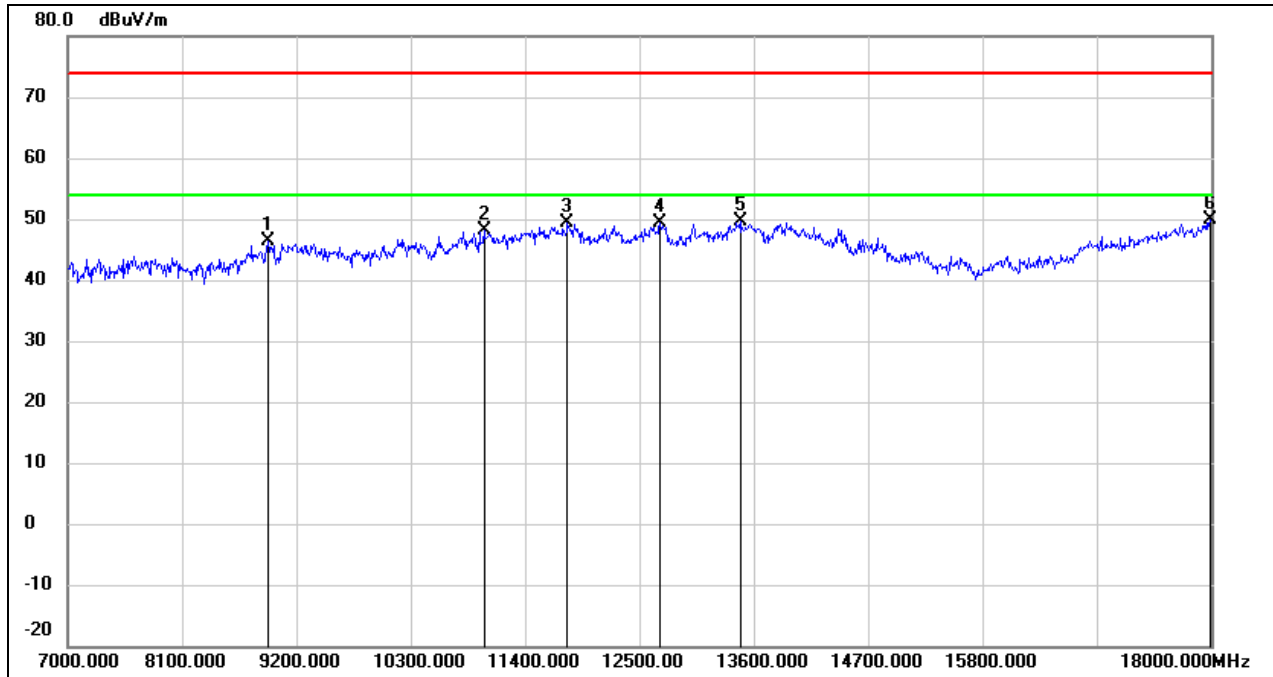


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8925.000	36.57	9.82	46.39	74.00	-27.61	peak
2	11004.000	33.51	14.74	48.25	74.00	-25.75	peak
3	11807.000	32.08	17.34	49.42	74.00	-24.58	peak
4	12698.000	31.24	18.08	49.32	74.00	-24.68	peak
5	13468.000	29.22	20.50	49.72	74.00	-24.28	peak
6	17989.000	23.84	26.04	49.88	74.00	-24.12	peak

Test Mode:	802.11n HT20	Channel:	5240
Polarity:	Vertical	Test Voltage:	DC 5 V

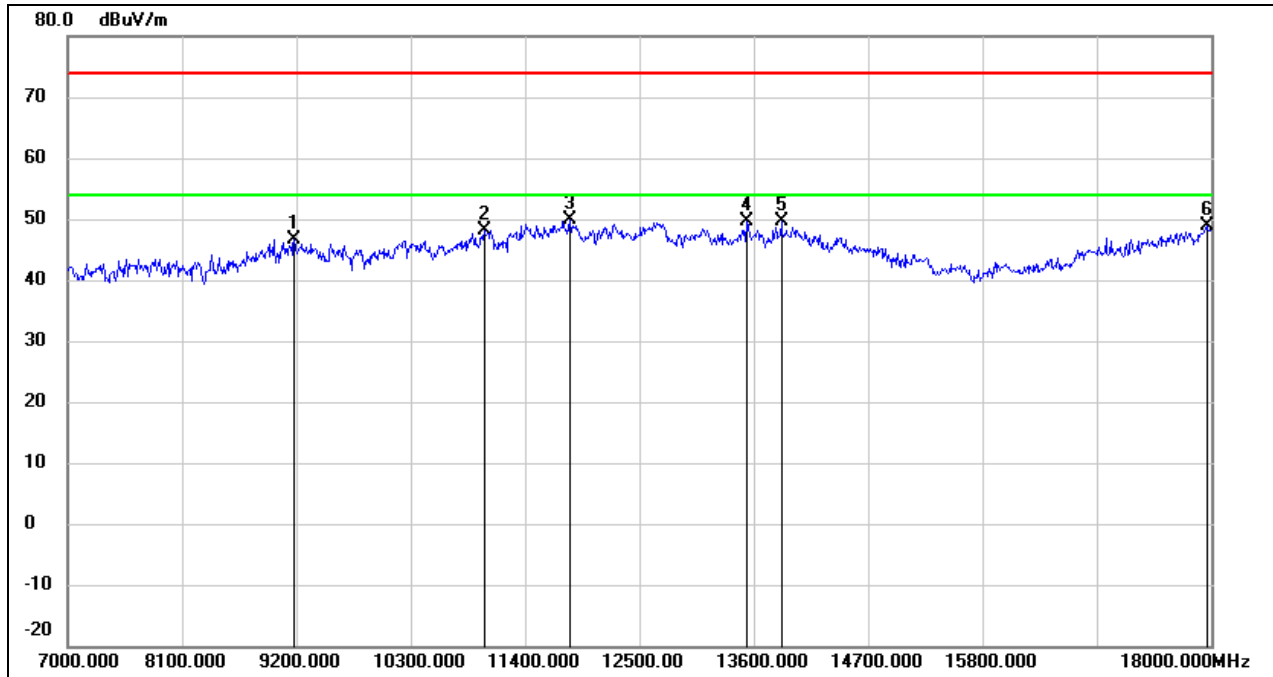


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.16	10.45	46.61	74.00	-27.39	peak
2	11004.000	33.40	14.74	48.14	74.00	-25.86	peak
3	11829.000	32.43	17.38	49.81	74.00	-24.19	peak
4	13534.000	28.93	20.73	49.66	74.00	-24.34	peak
5	13864.000	28.10	21.53	49.63	74.00	-24.37	peak
6	17956.000	23.06	25.82	48.88	74.00	-25.12	peak

Test Mode:	802.11n HT20	Channel:	5260
Polarity:	Horizontal	Test Voltage:	DC 5 V

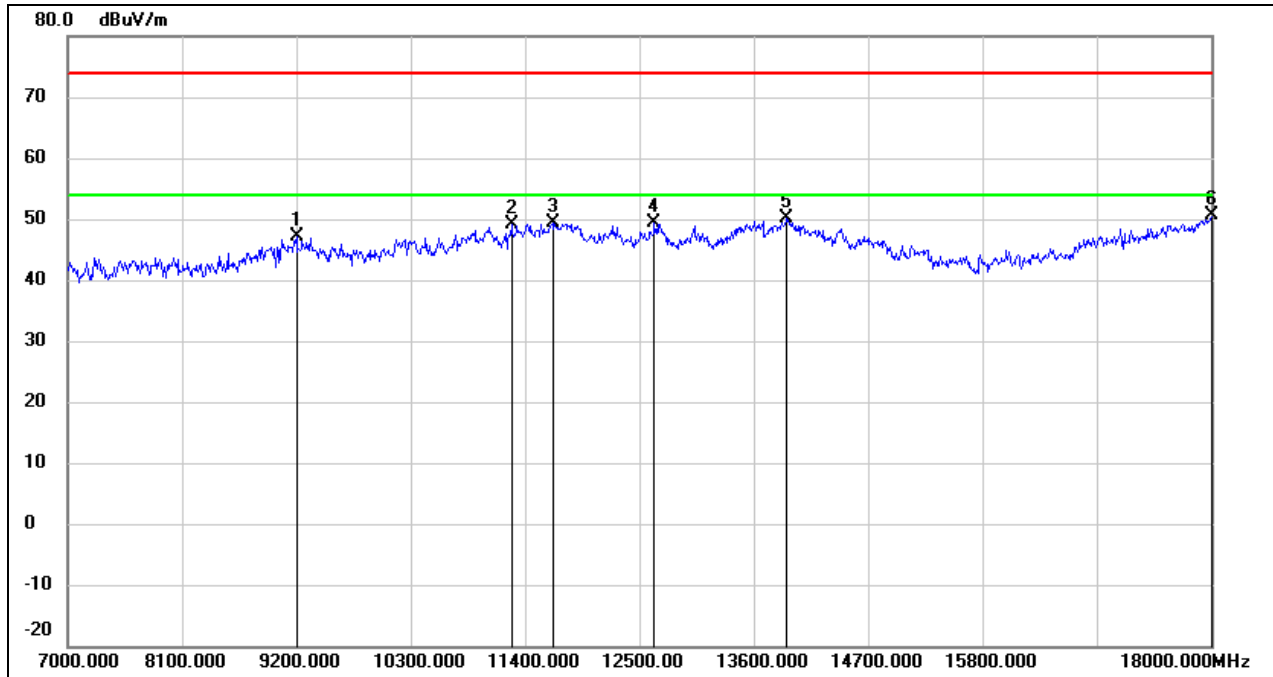


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	36.74	10.46	47.20	74.00	-26.80	peak
2	11268.000	33.26	15.83	49.09	74.00	-24.91	peak
3	11664.000	32.39	17.08	49.47	74.00	-24.53	peak
4	12643.000	31.26	18.01	49.27	74.00	-24.73	peak
5	13919.000	28.50	21.68	50.18	74.00	-23.82	peak
6	18000.000	24.46	26.12	50.58	74.00	-23.42	peak

Test Mode:	802.11n HT20	Channel:	5260
Polarity:	Vertical	Test Voltage:	DC 5 V

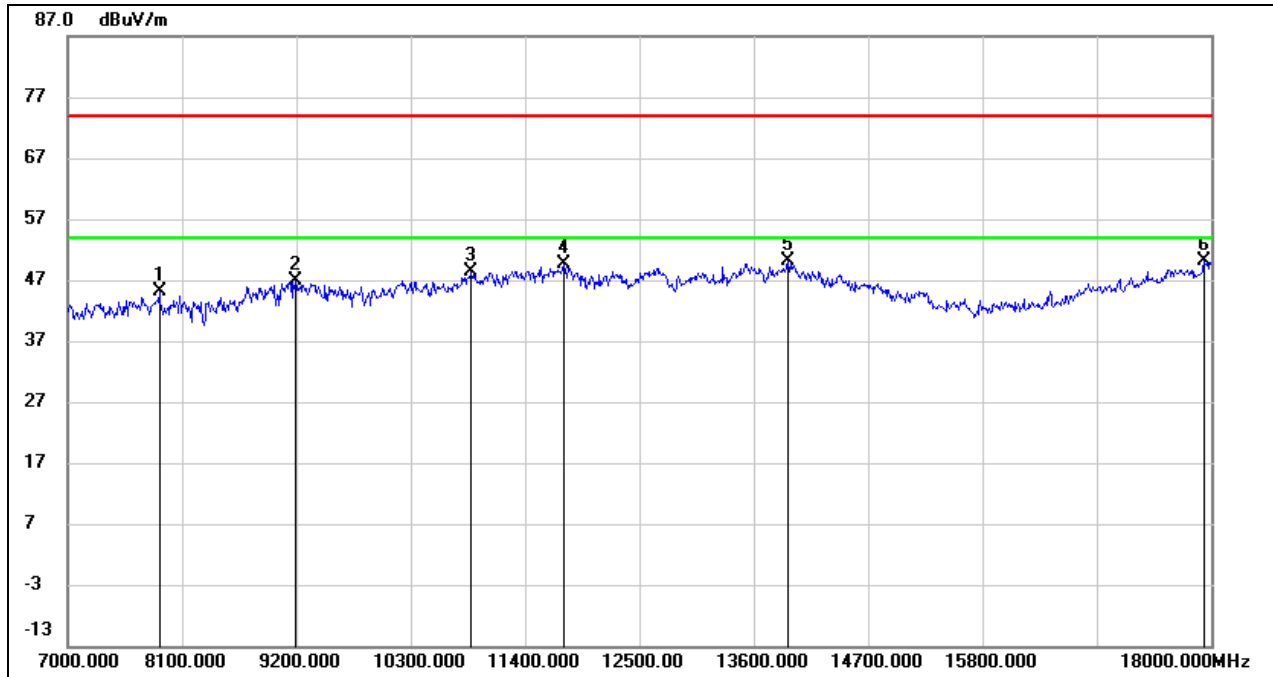


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.53	6.54	45.07	74.00	-28.93	peak
2	9189.000	36.37	10.46	46.83	74.00	-27.17	peak
3	10883.000	34.05	14.27	48.32	74.00	-25.68	peak
4	11774.000	32.27	17.28	49.55	74.00	-24.45	peak
5	13930.000	28.37	21.71	50.08	74.00	-23.92	peak
6	17934.000	24.56	25.67	50.23	74.00	-23.77	peak

Test Mode:	802.11n HT20	Channel:	5280
Polarity:	Horizontal	Test Voltage:	DC 5 V

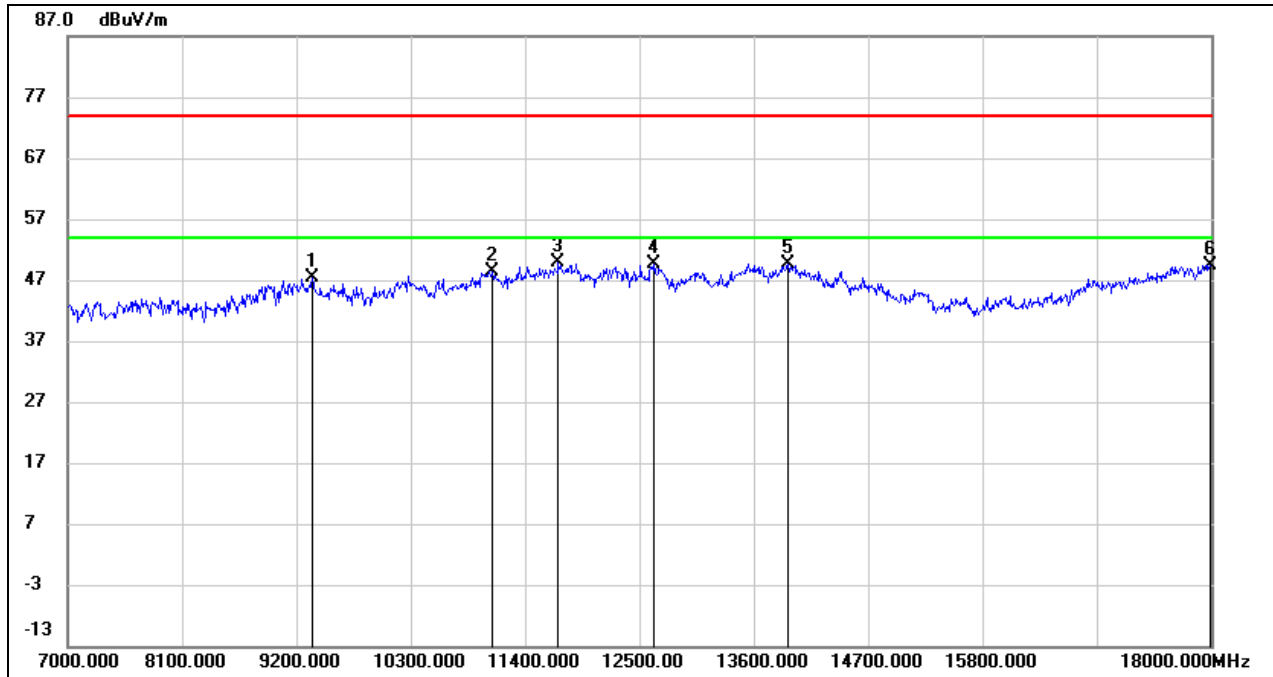


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.75	10.56	47.31	74.00	-26.69	peak
2	11081.000	33.29	15.05	48.34	74.00	-25.66	peak
3	11719.000	32.76	17.18	49.94	74.00	-24.06	peak
4	12643.000	31.73	18.01	49.74	74.00	-24.26	peak
5	13930.000	27.95	21.71	49.66	74.00	-24.34	peak
6	17989.000	23.42	26.04	49.46	74.00	-24.54	peak

Test Mode:	802.11n HT20	Channel:	5280
Polarity:	Vertical	Test Voltage:	DC 5 V

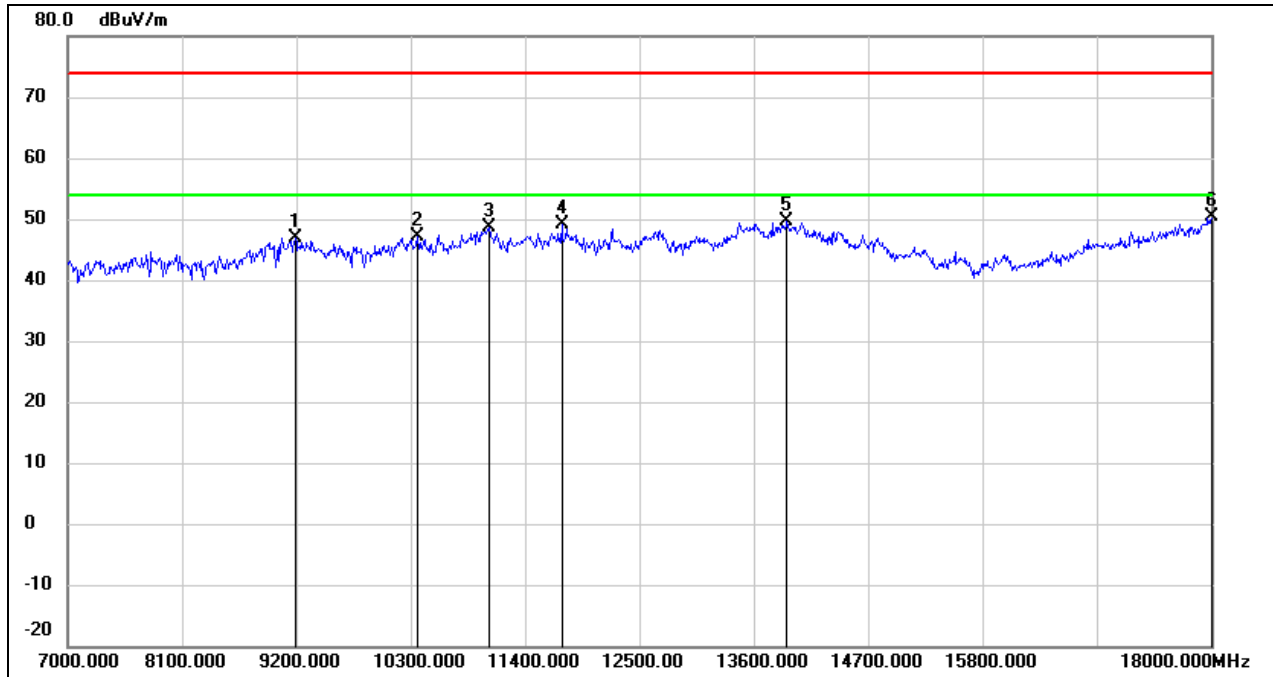


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.50	10.46	46.96	74.00	-27.04	peak
2	10366.000	34.49	12.54	47.03	74.00	-26.97	peak
3	11059.000	33.63	14.96	48.59	74.00	-25.41	peak
4	11752.000	31.77	17.24	49.01	74.00	-24.99	peak
5	13919.000	27.84	21.68	49.52	74.00	-24.48	peak
6	18000.000	24.21	26.12	50.33	74.00	-23.67	peak

Test Mode:	802.11n HT20	Channel:	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

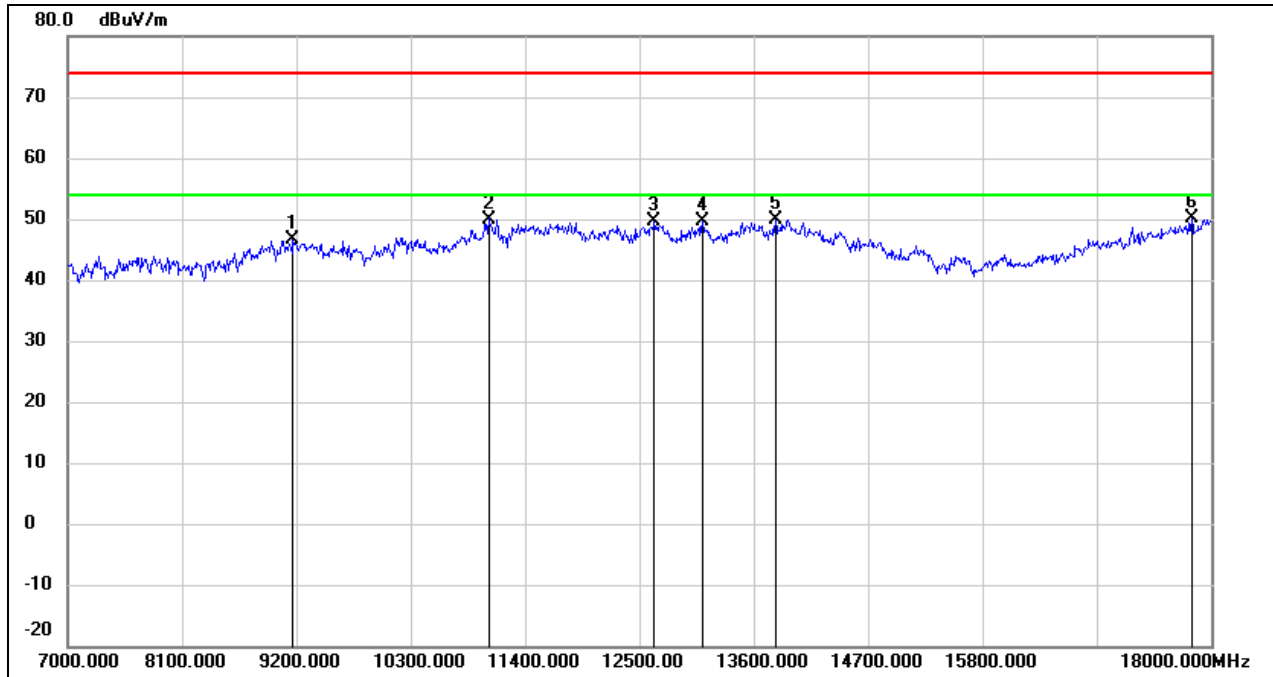


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.09	10.45	46.54	74.00	-27.46	peak
2	11048.000	35.09	14.91	50.00	74.00	-24.00	peak
3	12643.000	31.55	18.01	49.56	74.00	-24.44	peak
4	13105.000	30.72	18.91	49.63	74.00	-24.37	peak
5	13809.000	28.58	21.41	49.99	74.00	-24.01	peak
6	17813.000	25.38	24.84	50.22	74.00	-23.78	peak

Test Mode:	802.11n HT20	Channel:	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

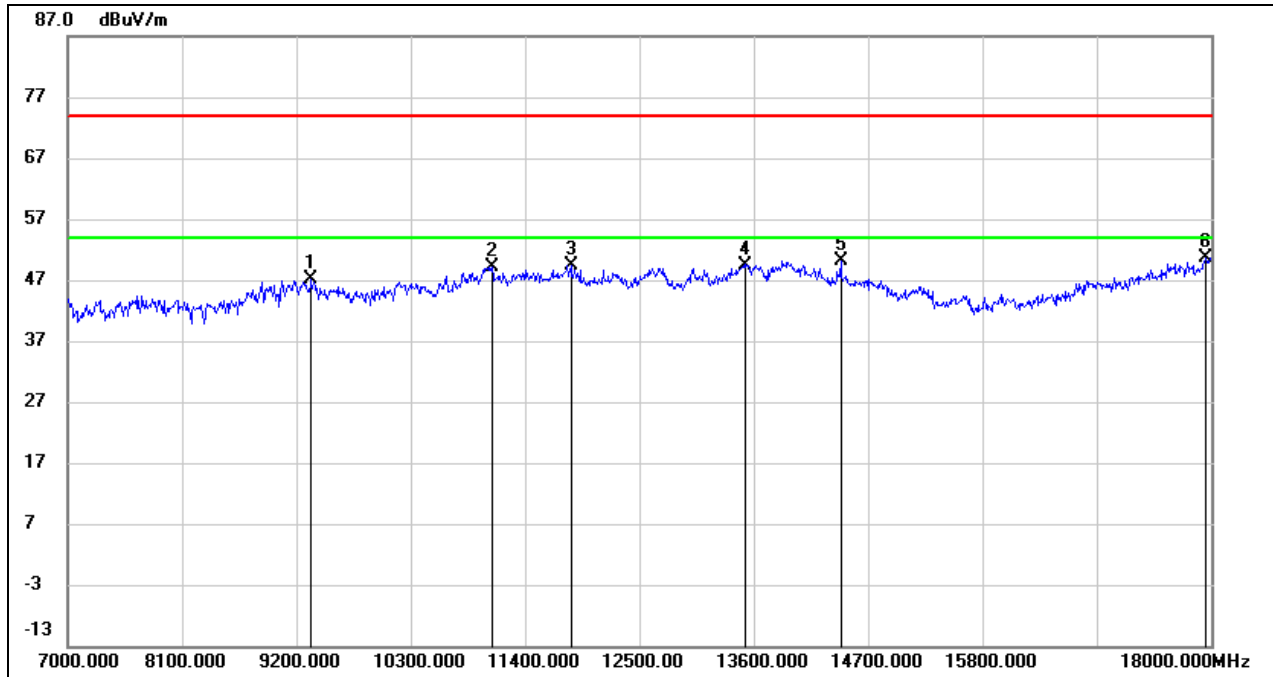


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.57	10.55	47.12	74.00	-26.88	peak
2	11081.000	34.11	15.05	49.16	74.00	-24.84	peak
3	11840.000	32.07	17.40	49.47	74.00	-24.53	peak
4	13512.000	28.82	20.68	49.50	74.00	-24.50	peak
5	14436.000	30.13	20.05	50.18	74.00	-23.82	peak
6	17945.000	24.88	25.75	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Channel:	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

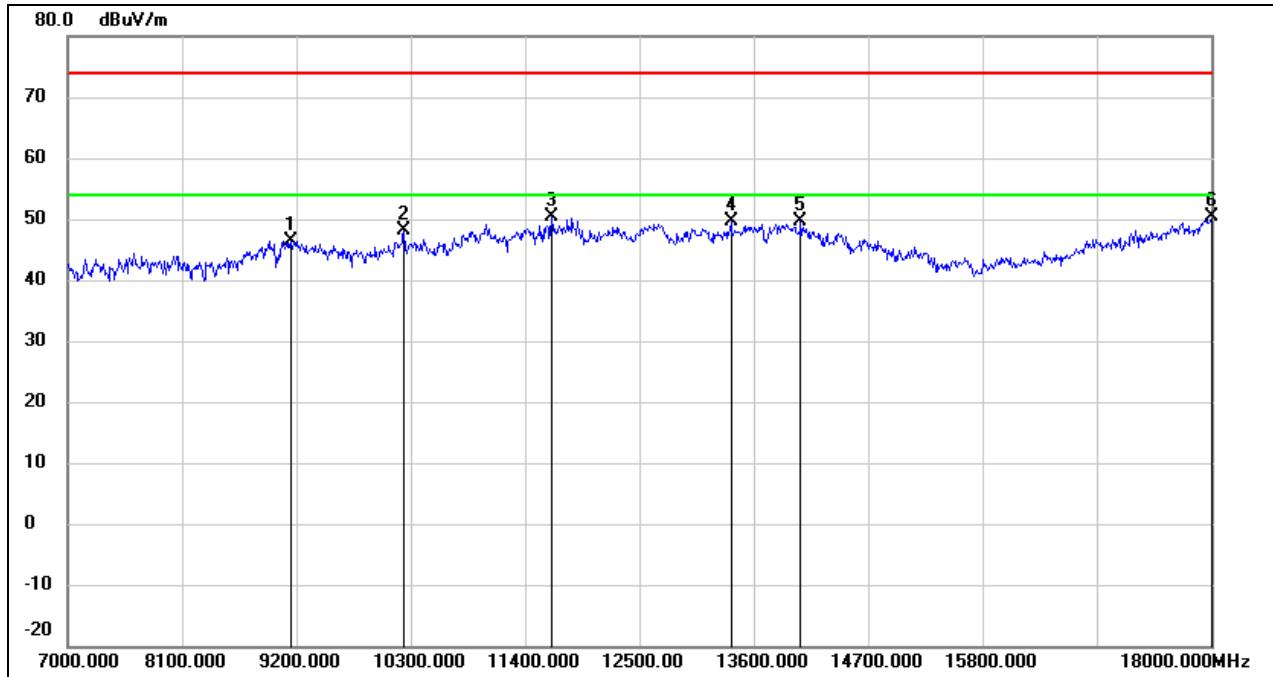


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.00	10.43	46.43	74.00	-27.57	peak
2	10234.000	35.77	12.26	48.03	74.00	-25.97	peak
3	11653.000	33.34	17.05	50.39	74.00	-23.61	peak
4	13380.000	29.42	20.12	49.54	74.00	-24.46	peak
5	14051.000	27.96	21.67	49.63	74.00	-24.37	peak
6	18000.000	24.23	26.12	50.35	74.00	-23.65	peak

Test Mode:	802.11n HT20	Channel:	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

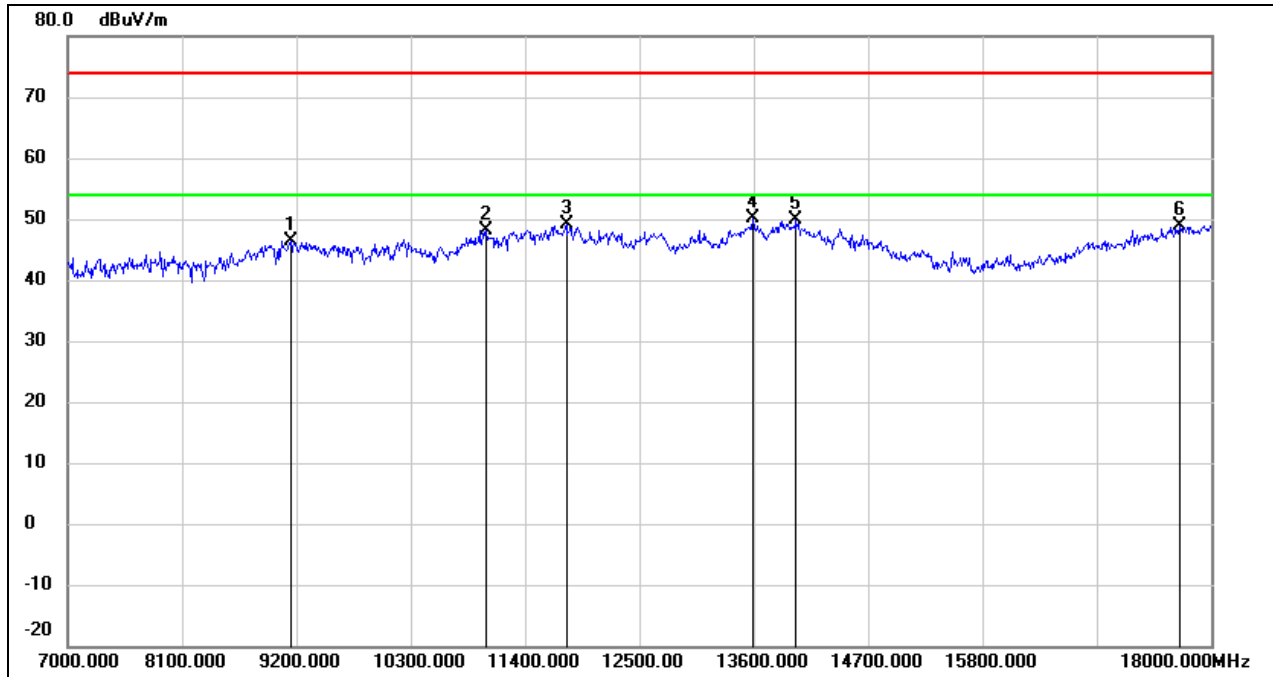


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	35.98	10.43	46.41	74.00	-27.59	peak
2	11026.000	33.41	14.82	48.23	74.00	-25.77	peak
3	11796.000	31.85	17.32	49.17	74.00	-24.83	peak
4	13589.000	29.19	20.86	50.05	74.00	-23.95	peak
5	14007.000	27.94	21.85	49.79	74.00	-24.21	peak
6	17703.000	24.91	24.09	49.00	74.00	-25.00	peak

Test Mode:	802.11n HT20	Channel:	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

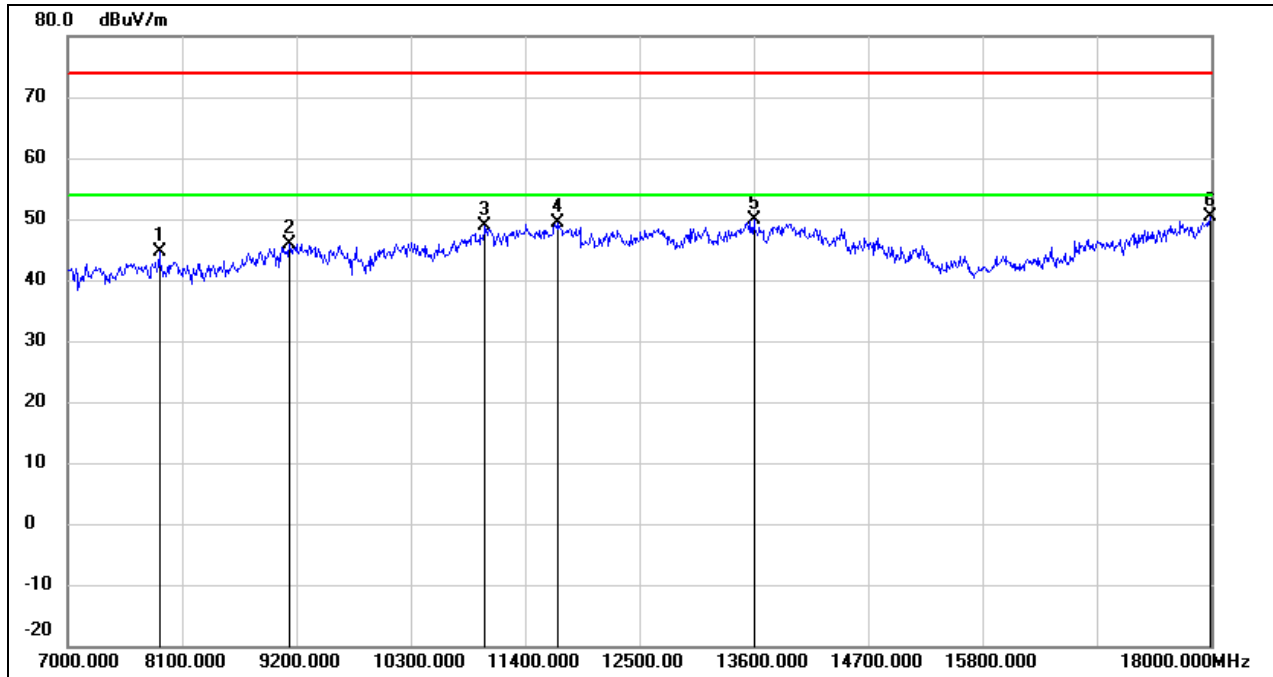


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.11	6.54	44.65	74.00	-29.35	peak
2	9134.000	35.44	10.41	45.85	74.00	-28.15	peak
3	11015.000	34.04	14.79	48.83	74.00	-25.17	peak
4	11719.000	32.12	17.18	49.30	74.00	-24.70	peak
5	13600.000	28.90	20.89	49.79	74.00	-24.21	peak
6	17989.000	24.37	26.04	50.41	74.00	-23.59	peak

Test Mode:	802.11n HT20	Channel:	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

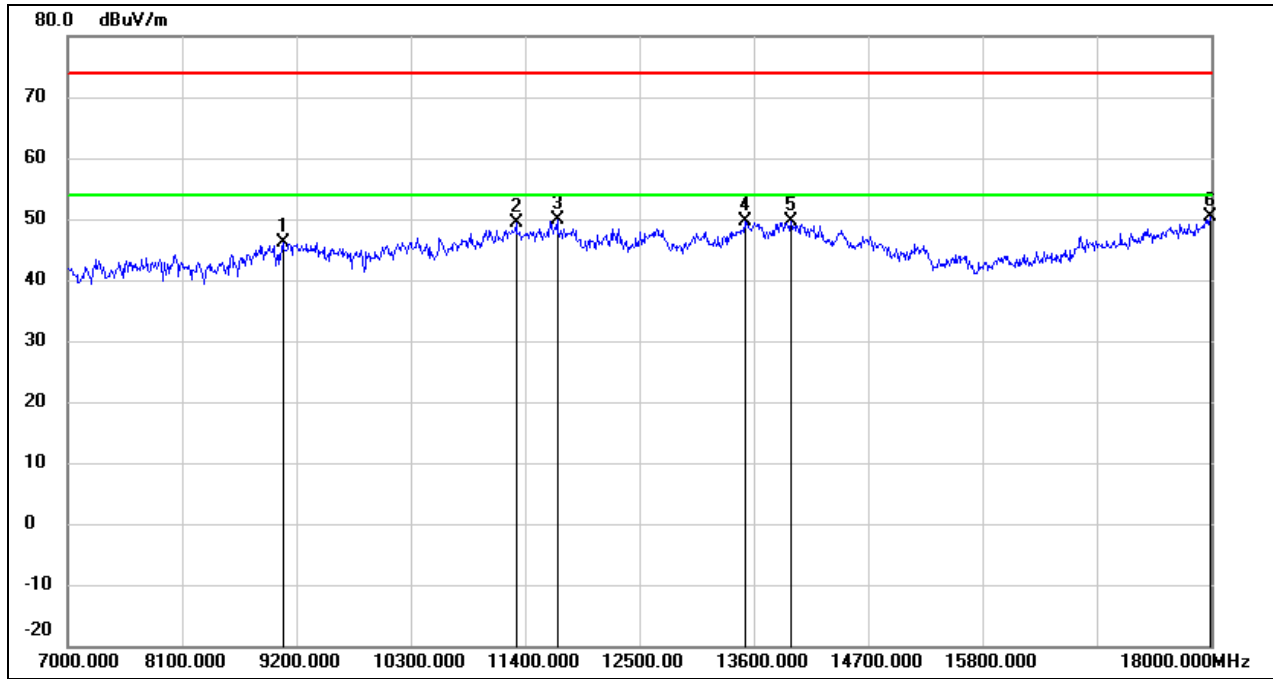


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	35.83	10.39	46.22	74.00	-27.78	peak
2	11312.000	33.39	16.00	49.39	74.00	-24.61	peak
3	11708.000	32.62	17.16	49.78	74.00	-24.22	peak
4	13512.000	29.04	20.68	49.72	74.00	-24.28	peak
5	13952.000	27.98	21.76	49.74	74.00	-24.26	peak
6	17989.000	24.24	26.04	50.28	74.00	-23.72	peak

Test Mode:	802.11n HT20	Channel:	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

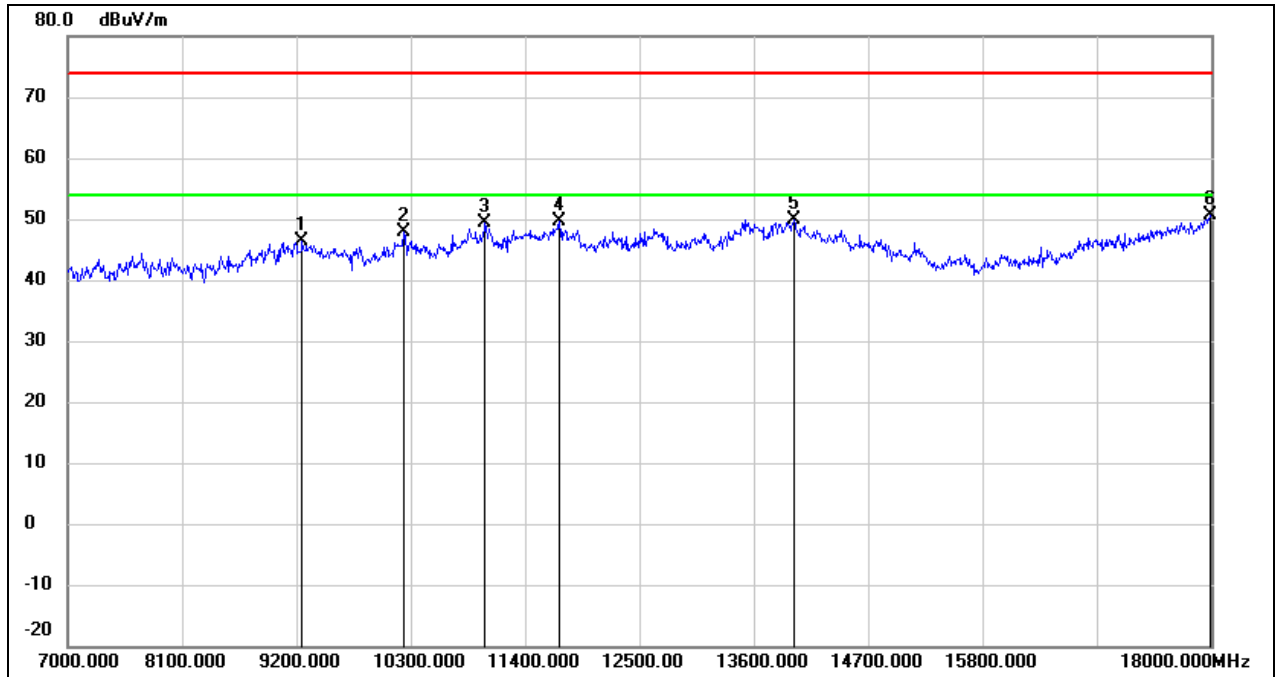


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	35.98	10.51	46.49	74.00	-27.51	peak
2	10234.000	35.71	12.26	47.97	74.00	-26.03	peak
3	11015.000	34.50	14.79	49.29	74.00	-24.71	peak
4	11730.000	32.35	17.19	49.54	74.00	-24.46	peak
5	13985.000	27.99	21.85	49.84	74.00	-24.16	peak
6	17989.000	24.55	26.04	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT20	Channel:	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

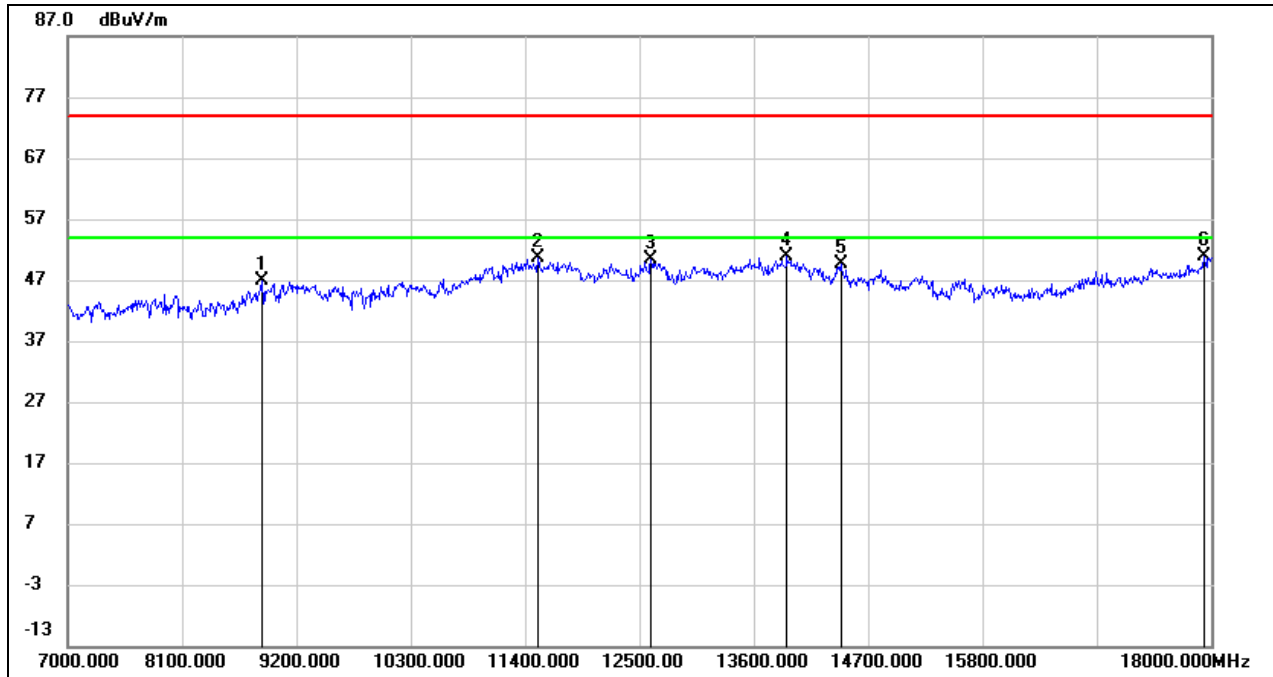


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8870.000	37.46	9.44	46.90	74.00	-27.10	peak
2	11521.000	33.85	16.82	50.67	74.00	-23.33	peak
3	12610.000	32.37	17.97	50.34	74.00	-23.66	peak
4	13919.000	29.13	21.68	50.81	74.00	-23.19	peak
5	14436.000	29.58	20.05	49.63	74.00	-24.37	peak
6	17934.000	25.29	25.67	50.96	74.00	-23.04	peak

Test Mode:	802.11n HT20	Channel:	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

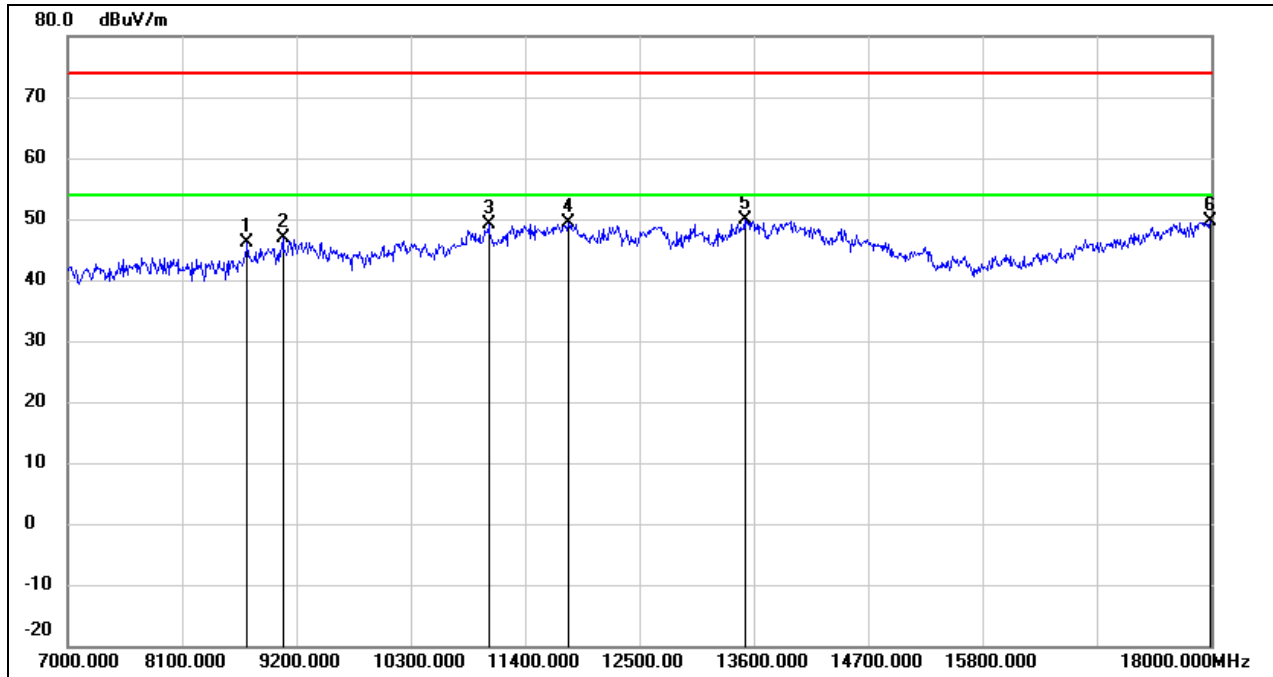


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8727.000	37.79	8.45	46.24	74.00	-27.76	peak
2	9068.000	36.51	10.39	46.90	74.00	-27.10	peak
3	11048.000	34.32	14.91	49.23	74.00	-24.77	peak
4	11818.000	31.93	17.36	49.29	74.00	-24.71	peak
5	13512.000	29.25	20.68	49.93	74.00	-24.07	peak
6	17989.000	23.48	26.04	49.52	74.00	-24.48	peak

Test Mode:	802.11n HT20	Channel:	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

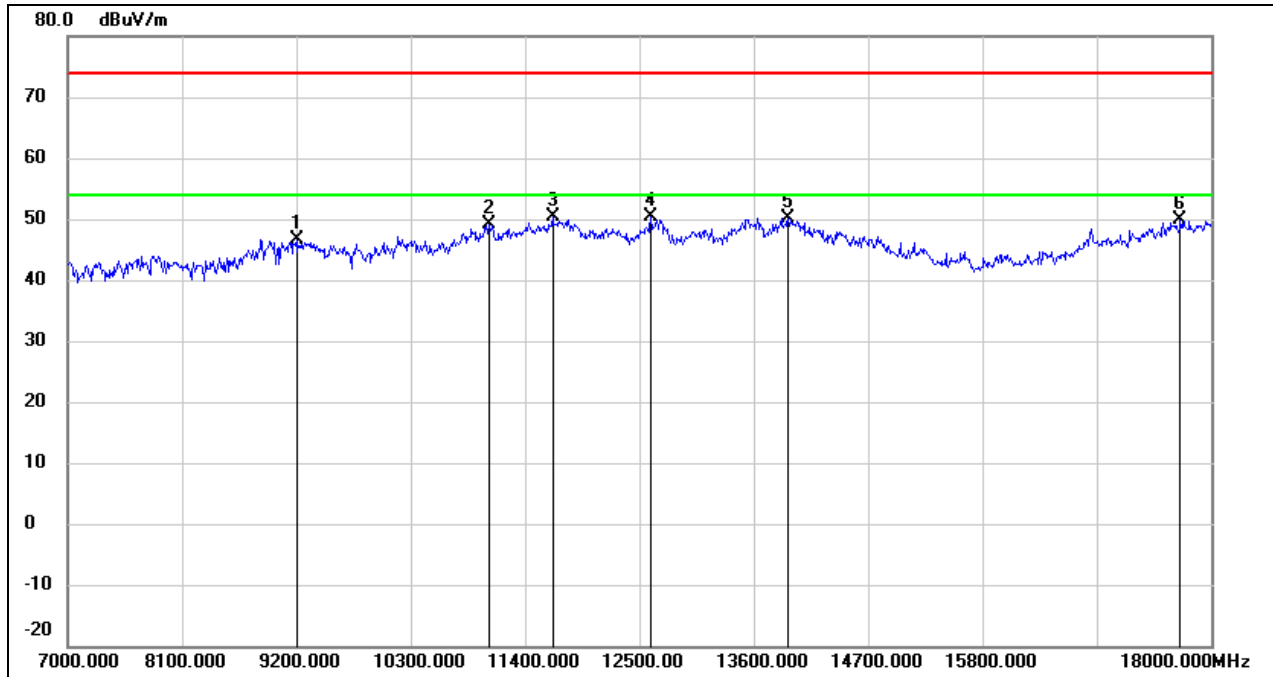


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	36.17	10.46	46.63	74.00	-27.37	peak
2	11048.000	34.19	14.91	49.10	74.00	-24.90	peak
3	11664.000	33.34	17.08	50.42	74.00	-23.58	peak
4	12610.000	32.34	17.97	50.31	74.00	-23.69	peak
5	13930.000	28.53	21.71	50.24	74.00	-23.76	peak
6	17703.000	25.69	24.09	49.78	74.00	-24.22	peak

Test Mode:	802.11n HT20	Channel:	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

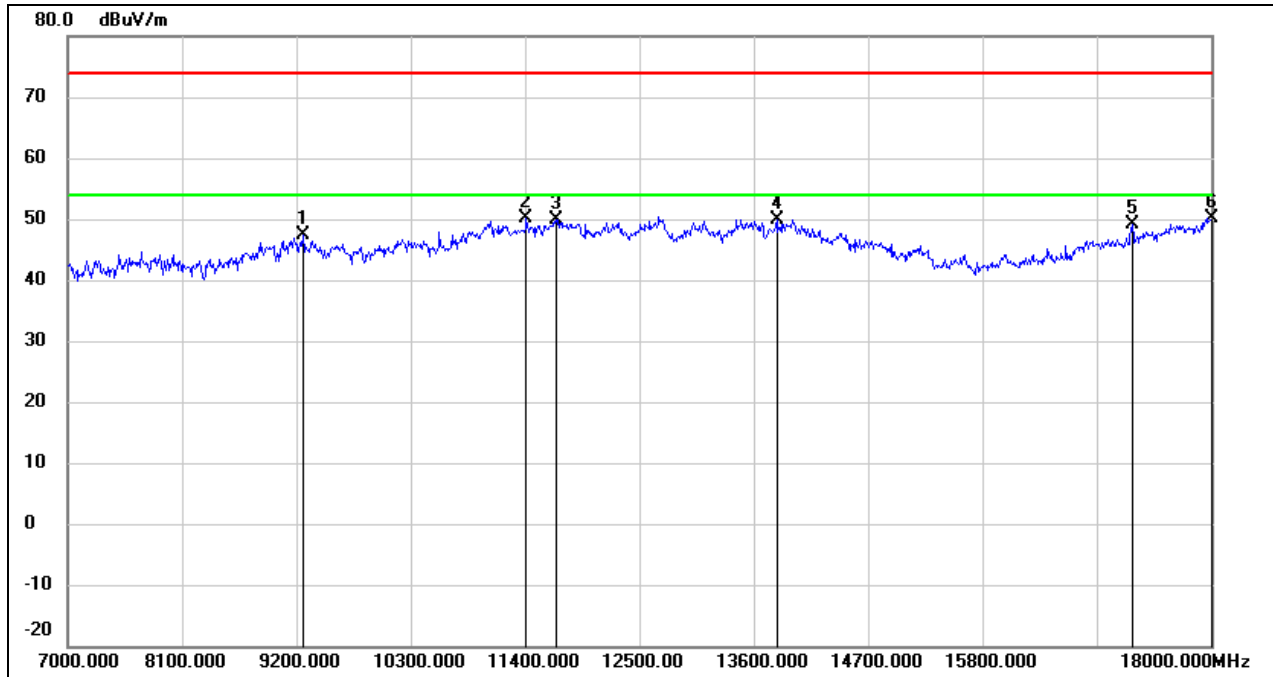


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	36.77	10.51	47.28	74.00	-26.72	peak
2	11411.000	33.69	16.41	50.10	74.00	-23.90	peak
3	11697.000	32.85	17.13	49.98	74.00	-24.02	peak
4	13820.000	28.56	21.43	49.99	74.00	-24.01	peak
5	17241.000	27.43	21.62	49.05	74.00	-24.95	peak
6	18000.000	23.95	26.12	50.07	74.00	-23.93	peak

Test Mode:	802.11n HT20	Channel:	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

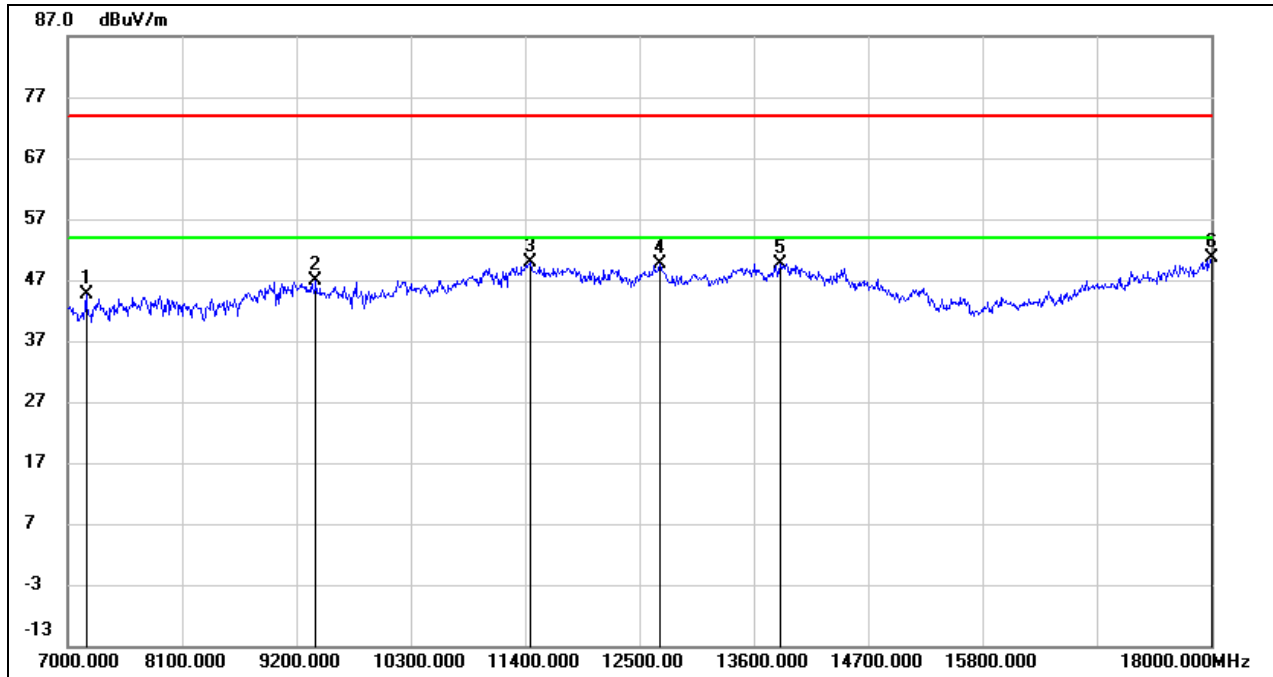


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7176.000	37.70	6.98	44.68	74.00	-29.32	peak
2	9387.000	36.28	10.58	46.86	74.00	-27.14	peak
3	11455.000	33.34	16.58	49.92	74.00	-24.08	peak
4	12698.000	31.51	18.08	49.59	74.00	-24.41	peak
5	13853.000	28.15	21.52	49.67	74.00	-24.33	peak
6	18000.000	24.49	26.12	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT20	Channel:	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

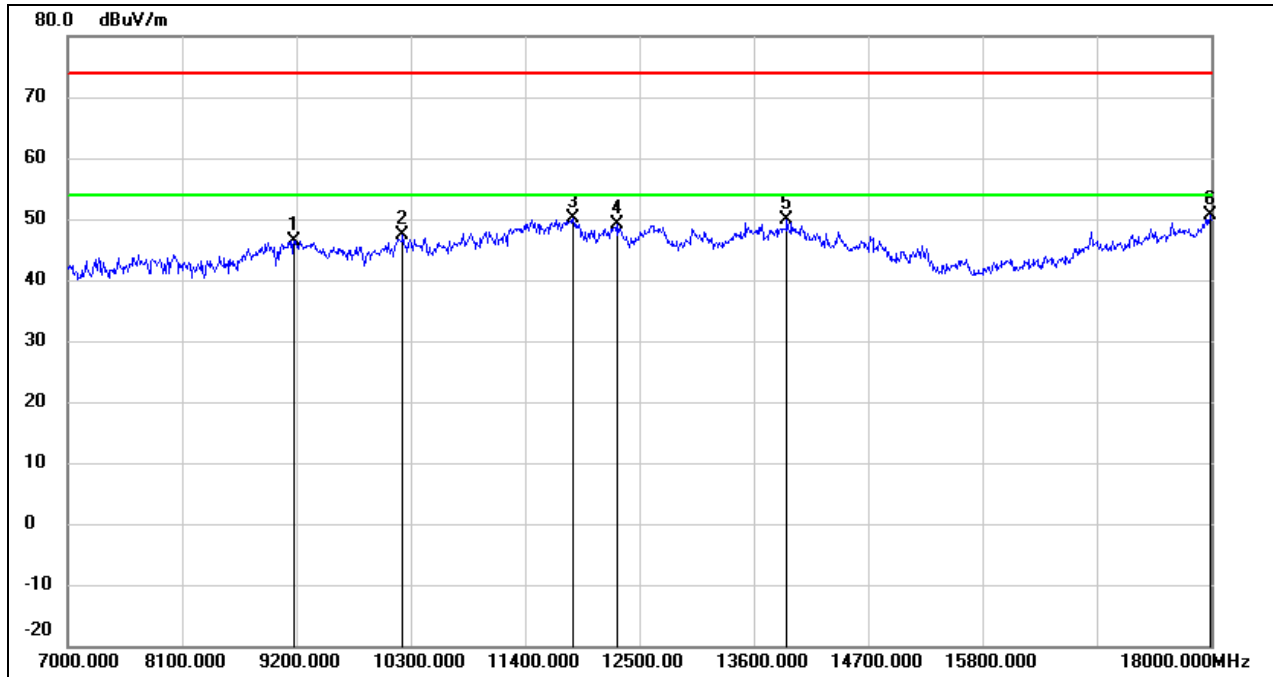


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.98	10.45	46.43	74.00	-27.57	peak
2	10223.000	35.13	12.24	47.37	74.00	-26.63	peak
3	11862.000	32.56	17.45	50.01	74.00	-23.99	peak
4	12291.000	31.23	17.78	49.01	74.00	-24.99	peak
5	13919.000	28.15	21.68	49.83	74.00	-24.17	peak
6	17989.000	24.57	26.04	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT20	Channel:	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

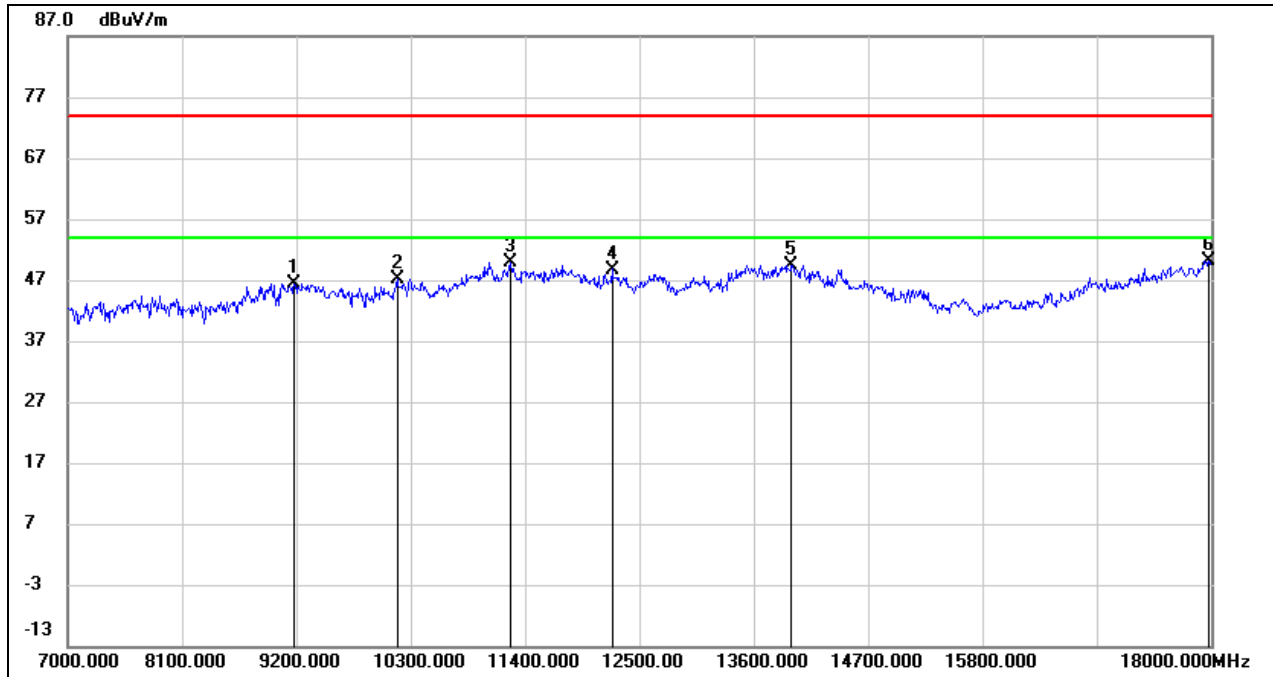


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.95	10.45	46.40	74.00	-27.60	peak
2	10168.000	35.09	12.13	47.22	74.00	-26.78	peak
3	11257.000	34.14	15.78	49.92	74.00	-24.08	peak
4	12236.000	30.99	17.76	48.75	74.00	-25.25	peak
5	13963.000	27.69	21.78	49.47	74.00	-24.53	peak
6	17978.000	24.21	25.97	50.18	74.00	-23.82	peak

Test Mode:	802.11n HT20	Channel:	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

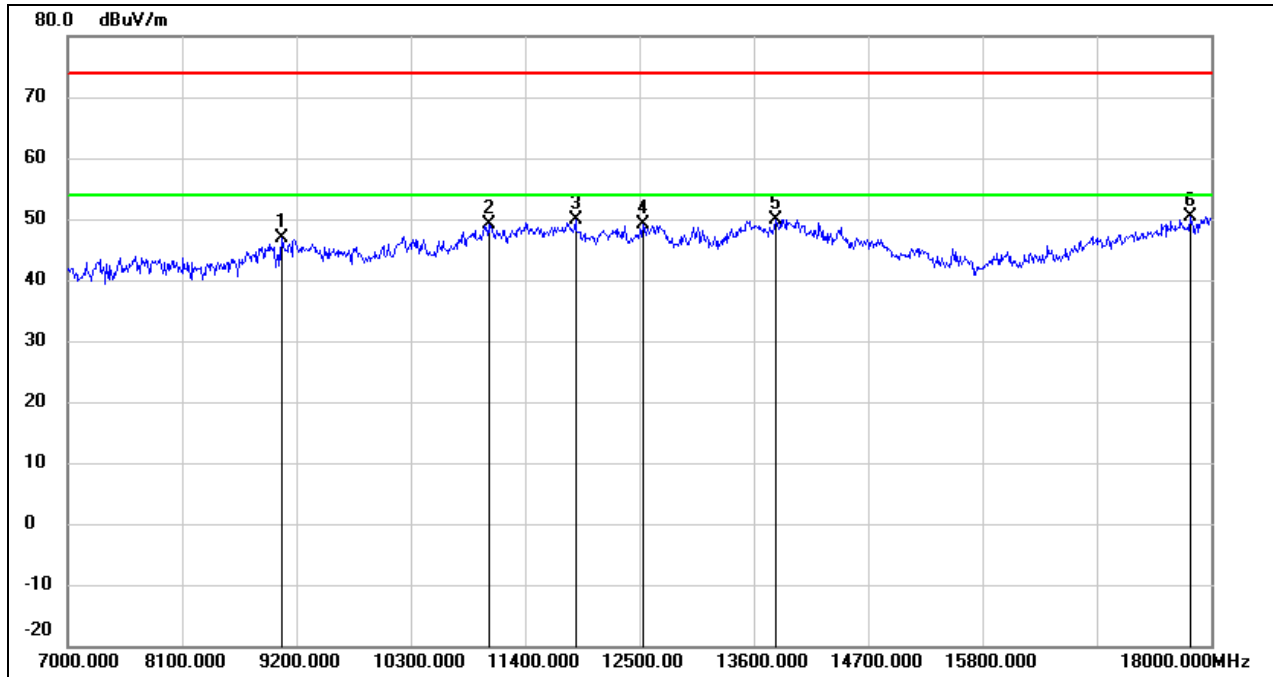


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.41	10.38	46.79	74.00	-27.21	peak
2	11048.000	34.15	14.91	49.06	74.00	-24.94	peak
3	11884.000	32.33	17.48	49.81	74.00	-24.19	peak
4	12533.000	31.15	17.87	49.02	74.00	-24.98	peak
5	13809.000	28.57	21.41	49.98	74.00	-24.02	peak
6	17802.000	25.60	24.76	50.36	74.00	-23.64	peak

Test Mode:	802.11n HT20	Channel:	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

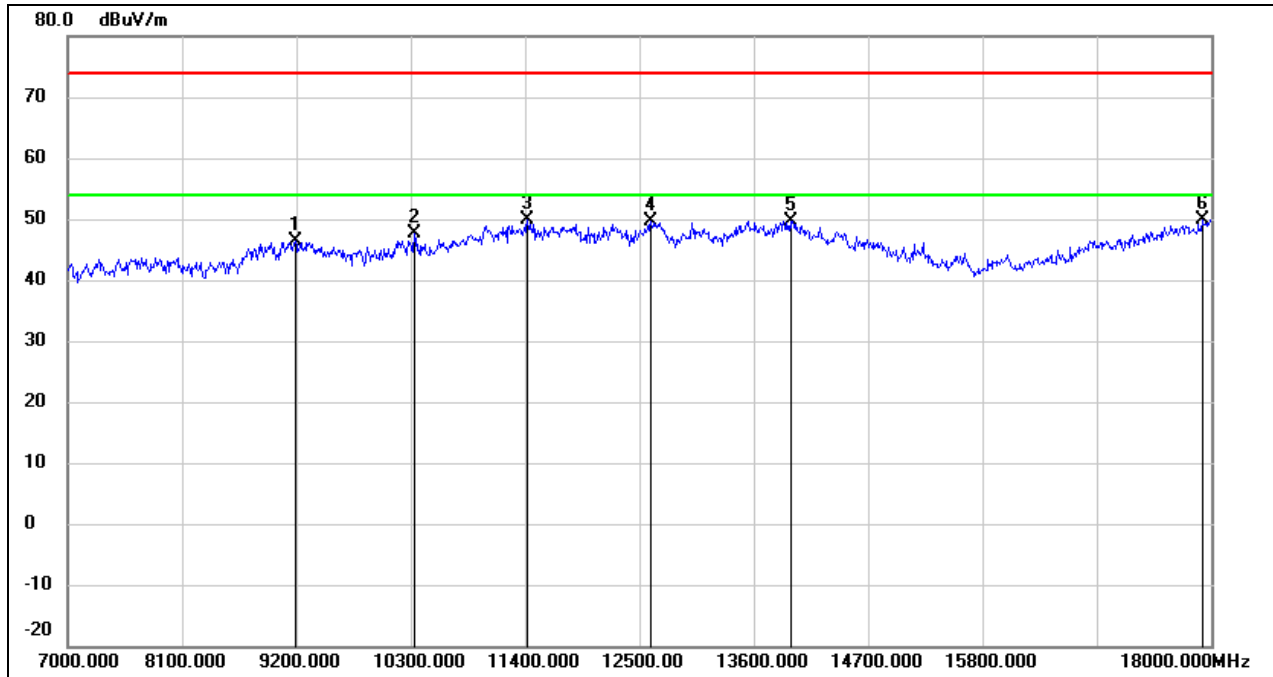


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	35.87	10.46	46.33	74.00	-27.67	peak
2	10333.000	35.22	12.47	47.69	74.00	-26.31	peak
3	11422.000	33.31	16.46	49.77	74.00	-24.23	peak
4	12610.000	31.55	17.97	49.52	74.00	-24.48	peak
5	13952.000	27.92	21.76	49.68	74.00	-24.32	peak
6	17912.000	24.47	25.52	49.99	74.00	-24.01	peak

Test Mode:	802.11n HT40	Channel:	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

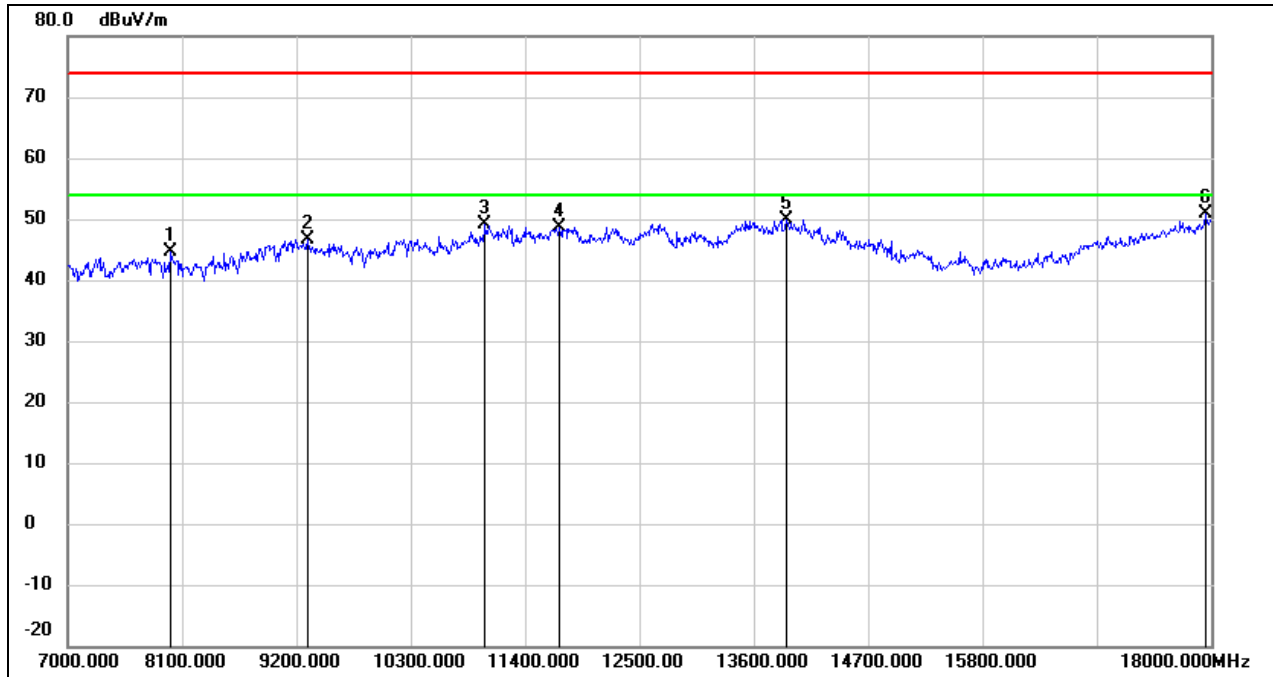


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7990.000	38.15	6.43	44.58	74.00	-29.42	peak
2	9310.000	36.02	10.54	46.56	74.00	-27.44	peak
3	11015.000	34.22	14.79	49.01	74.00	-24.99	peak
4	11730.000	31.51	17.19	48.70	74.00	-25.30	peak
5	13908.000	28.32	21.66	49.98	74.00	-24.02	peak
6	17945.000	25.08	25.75	50.83	74.00	-23.17	peak

Test Mode:	802.11n HT40	Channel:	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

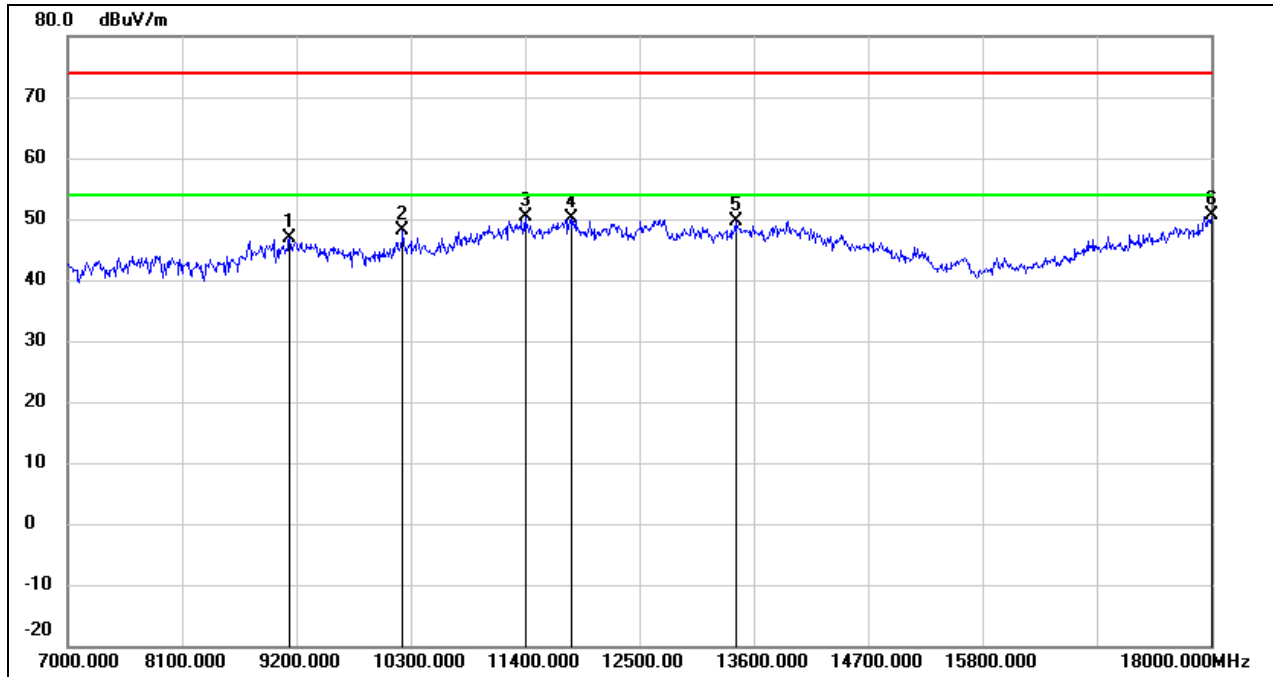


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.35	10.41	46.76	74.00	-27.24	peak
2	10223.000	35.87	12.24	48.11	74.00	-25.89	peak
3	11400.000	34.05	16.36	50.41	74.00	-23.59	peak
4	11851.000	32.61	17.43	50.04	74.00	-23.96	peak
5	13424.000	29.24	20.30	49.54	74.00	-24.46	peak
6	18000.000	24.53	26.12	50.65	74.00	-23.35	peak

Test Mode:	802.11n HT40	Channel:	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

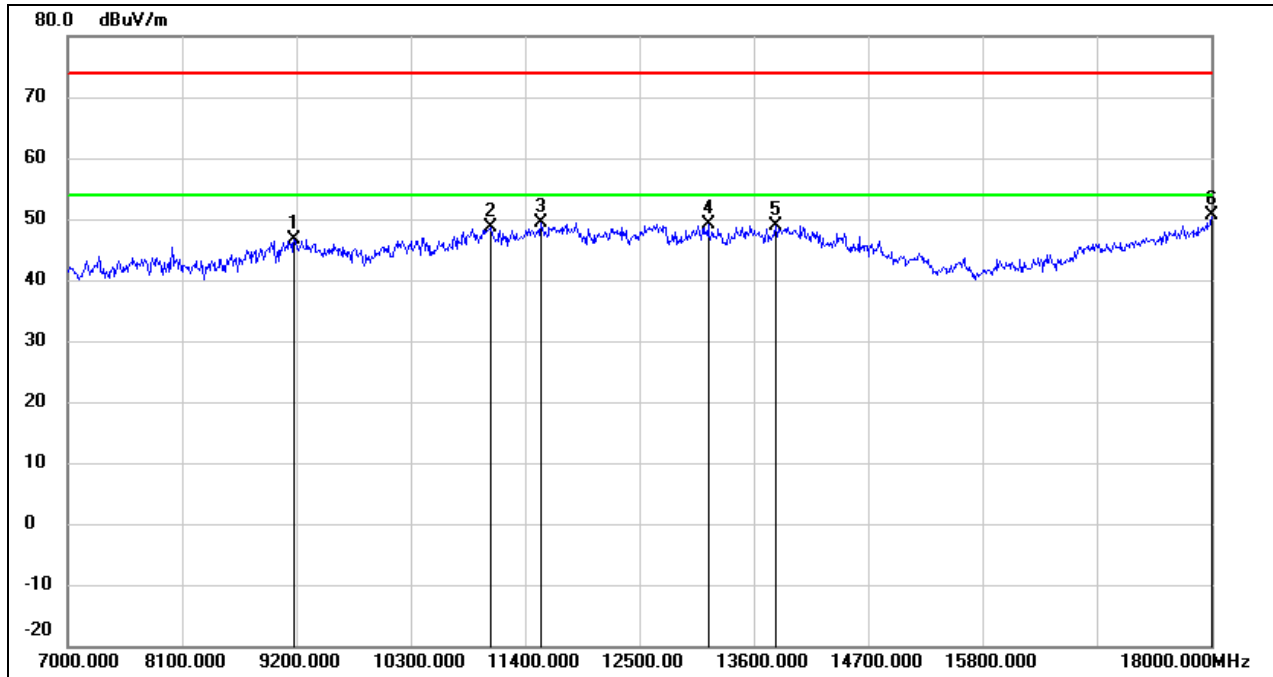


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.25	10.45	46.70	74.00	-27.30	peak
2	11070.000	33.67	15.01	48.68	74.00	-25.32	peak
3	11554.000	32.42	16.87	49.29	74.00	-24.71	peak
4	13160.000	29.90	19.15	49.05	74.00	-24.95	peak
5	13809.000	27.52	21.41	48.93	74.00	-25.07	peak
6	18000.000	24.57	26.12	50.69	74.00	-23.31	peak

Test Mode:	802.11n HT40	Channel:	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

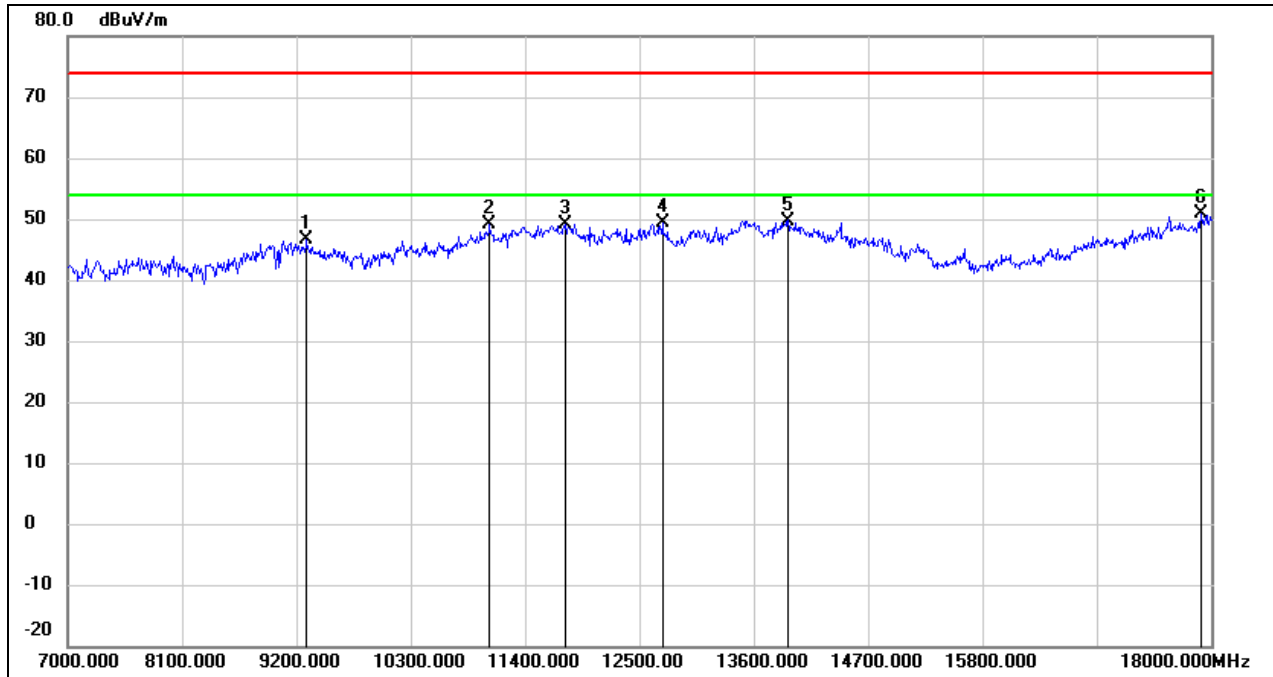


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	35.99	10.53	46.52	74.00	-27.48	peak
2	11059.000	34.25	14.96	49.21	74.00	-24.79	peak
3	11785.000	31.85	17.30	49.15	74.00	-24.85	peak
4	12720.000	31.18	18.09	49.27	74.00	-24.73	peak
5	13930.000	28.04	21.71	49.75	74.00	-24.25	peak
6	17901.000	25.31	25.45	50.76	74.00	-23.24	peak

Test Mode:	802.11n HT40	Channel:	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

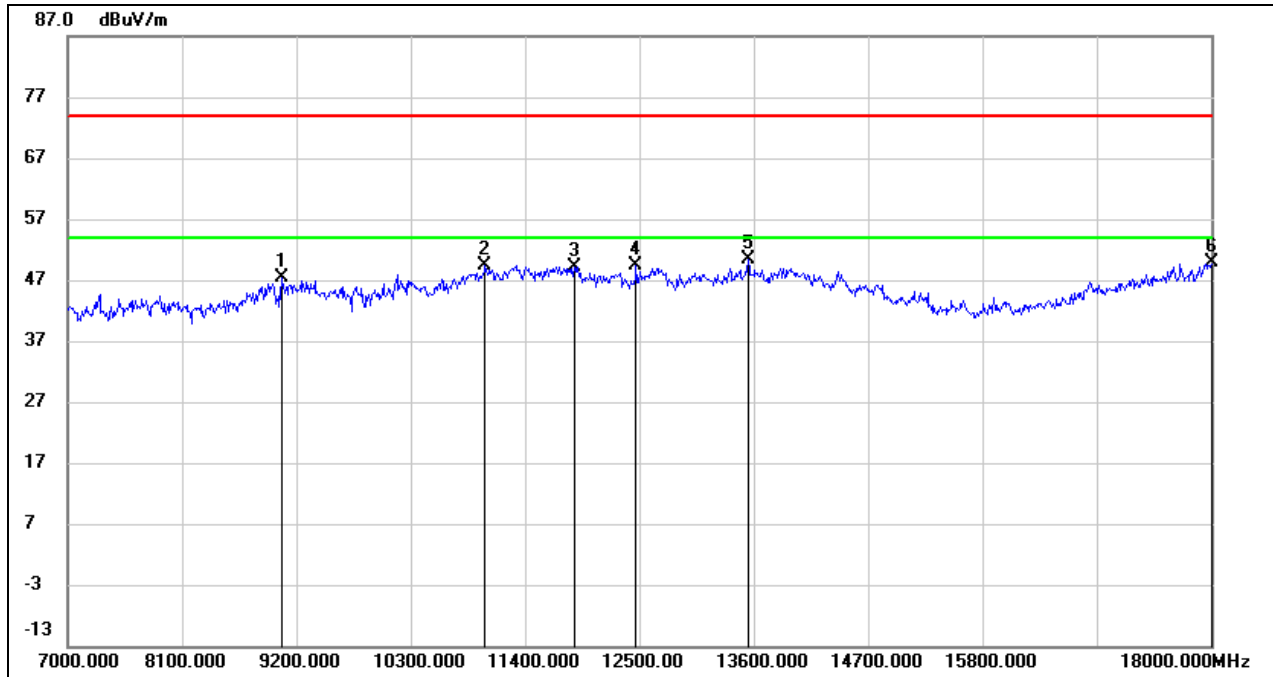


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.06	10.38	47.44	74.00	-26.56	peak
2	11015.000	34.70	14.79	49.49	74.00	-24.51	peak
3	11873.000	31.68	17.46	49.14	74.00	-24.86	peak
4	12467.000	31.64	17.82	49.46	74.00	-24.54	peak
5	13545.000	29.57	20.75	50.32	74.00	-23.68	peak
6	18000.000	23.71	26.12	49.83	74.00	-24.17	peak

Test Mode:	802.11n HT40	Channel:	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

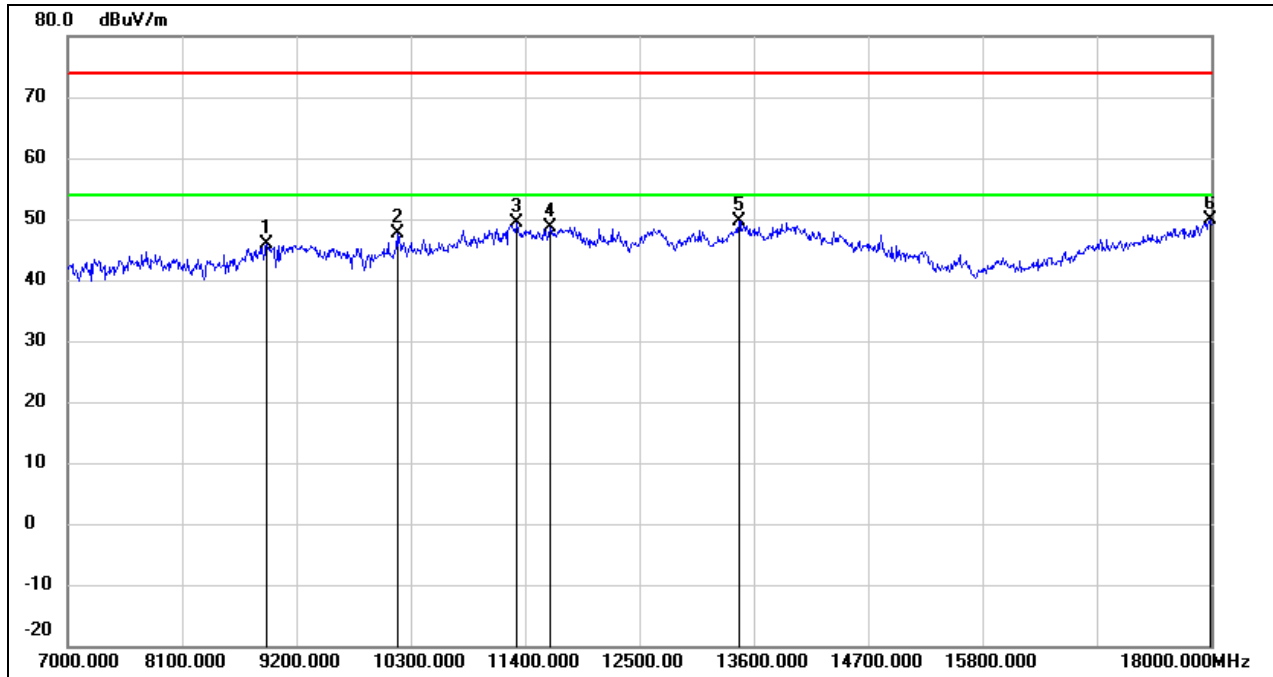


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8914.000	36.21	9.75	45.96	74.00	-28.04	peak
2	10168.000	35.45	12.13	47.58	74.00	-26.42	peak
3	11323.000	33.44	16.05	49.49	74.00	-24.51	peak
4	11642.000	31.70	17.03	48.73	74.00	-25.27	peak
5	13457.000	29.12	20.46	49.58	74.00	-24.42	peak
6	17989.000	23.72	26.04	49.76	74.00	-24.24	peak

Test Mode:	802.11n HT40	Channel:	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

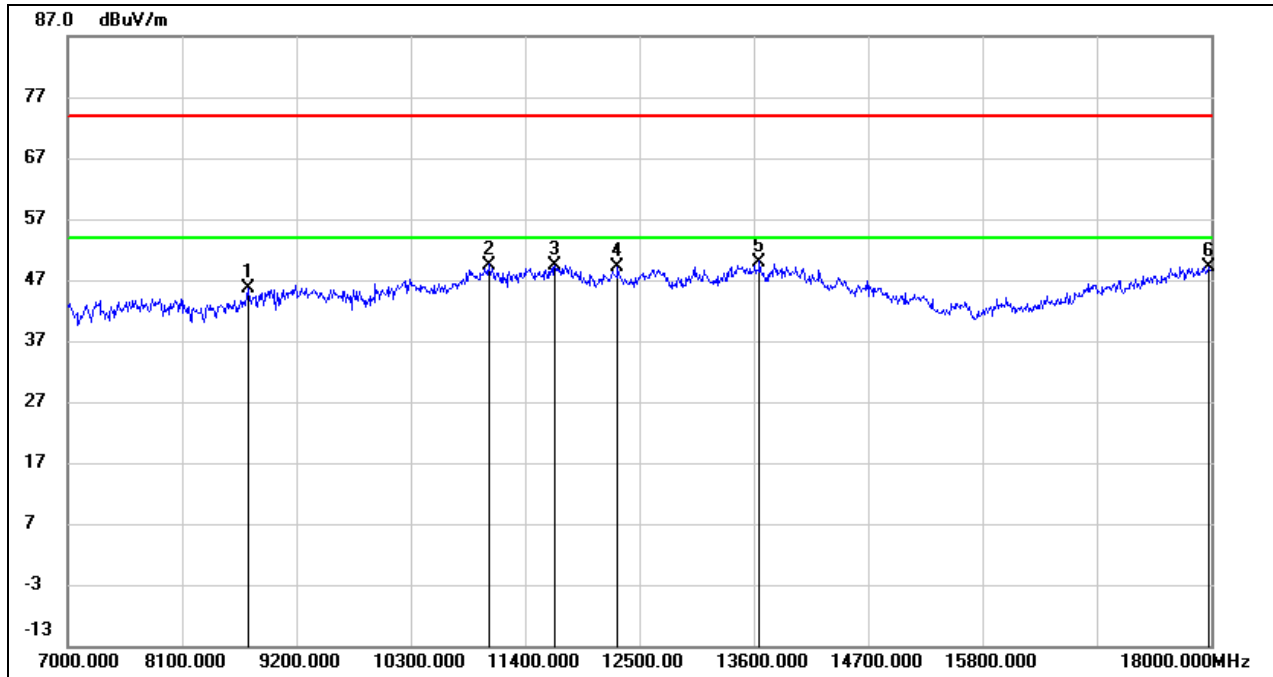


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8738.000	36.99	8.53	45.52	74.00	-28.48	peak
2	11048.000	34.59	14.91	49.50	74.00	-24.50	peak
3	11686.000	32.19	17.12	49.31	74.00	-24.69	peak
4	12291.000	31.36	17.78	49.14	74.00	-24.86	peak
5	13655.000	28.97	21.03	50.00	74.00	-24.00	peak
6	17978.000	23.12	25.97	49.09	74.00	-24.91	peak

Test Mode:	802.11n HT40	Channel:	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

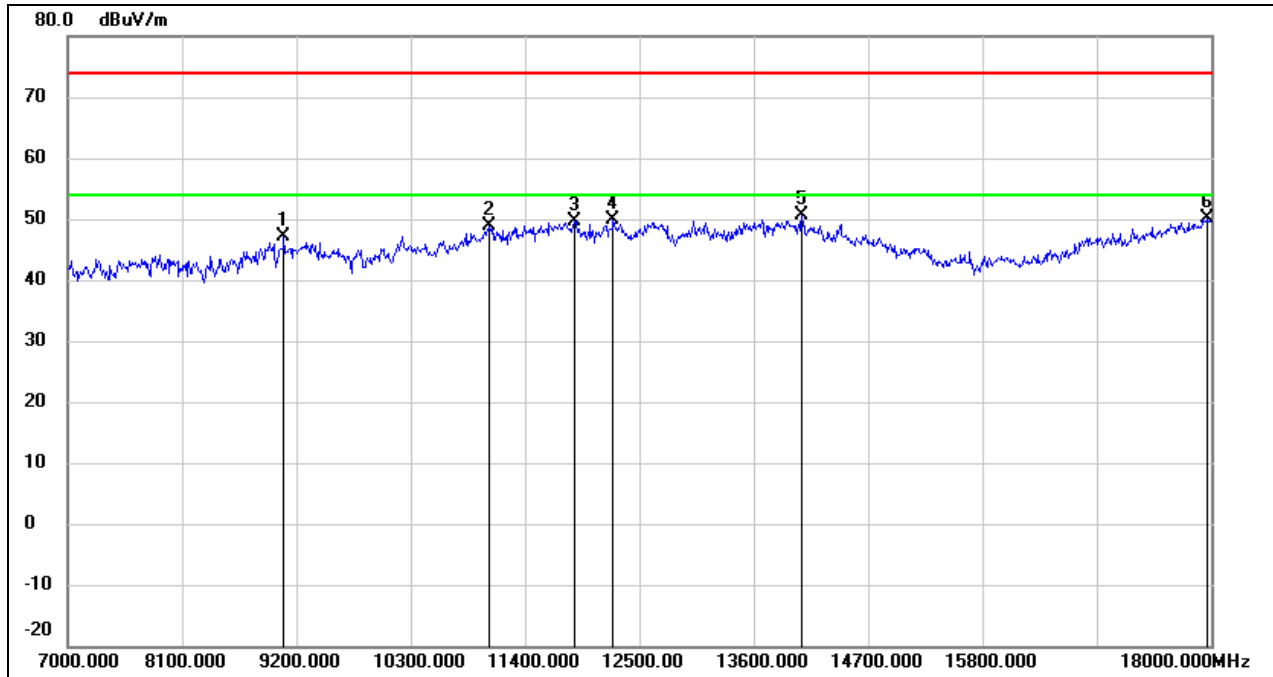


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	36.80	10.39	47.19	74.00	-26.81	peak
2	11059.000	33.98	14.96	48.94	74.00	-25.06	peak
3	11873.000	32.15	17.46	49.61	74.00	-24.39	peak
4	12247.000	32.12	17.77	49.89	74.00	-24.11	peak
5	14062.000	28.89	21.62	50.51	74.00	-23.49	peak
6	17967.000	24.36	25.89	50.25	74.00	-23.75	peak

Test Mode:	802.11n HT40	Channel:	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

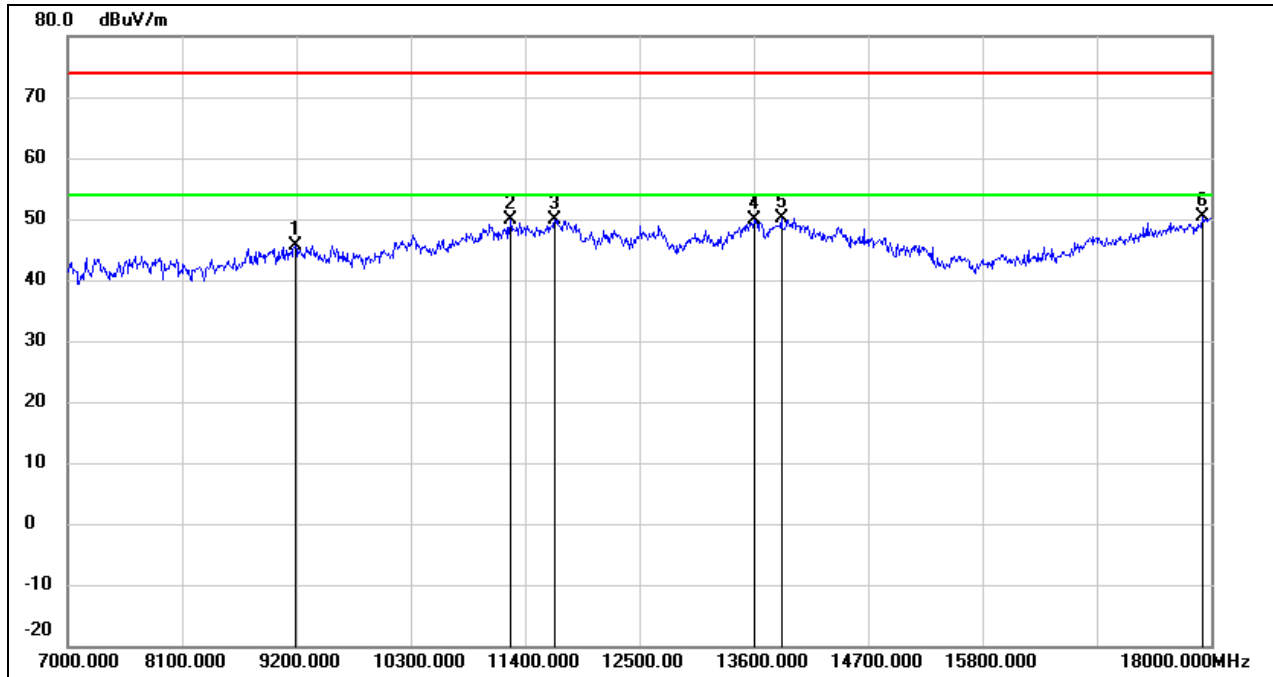


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	35.16	10.46	45.62	74.00	-28.38	peak
2	11257.000	34.14	15.78	49.92	74.00	-24.08	peak
3	11686.000	32.76	17.12	49.88	74.00	-24.12	peak
4	13600.000	29.06	20.89	49.95	74.00	-24.05	peak
5	13864.000	28.56	21.53	50.09	74.00	-23.91	peak
6	17923.000	24.85	25.60	50.45	74.00	-23.55	peak

Test Mode:	802.11n HT40	Channel:	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

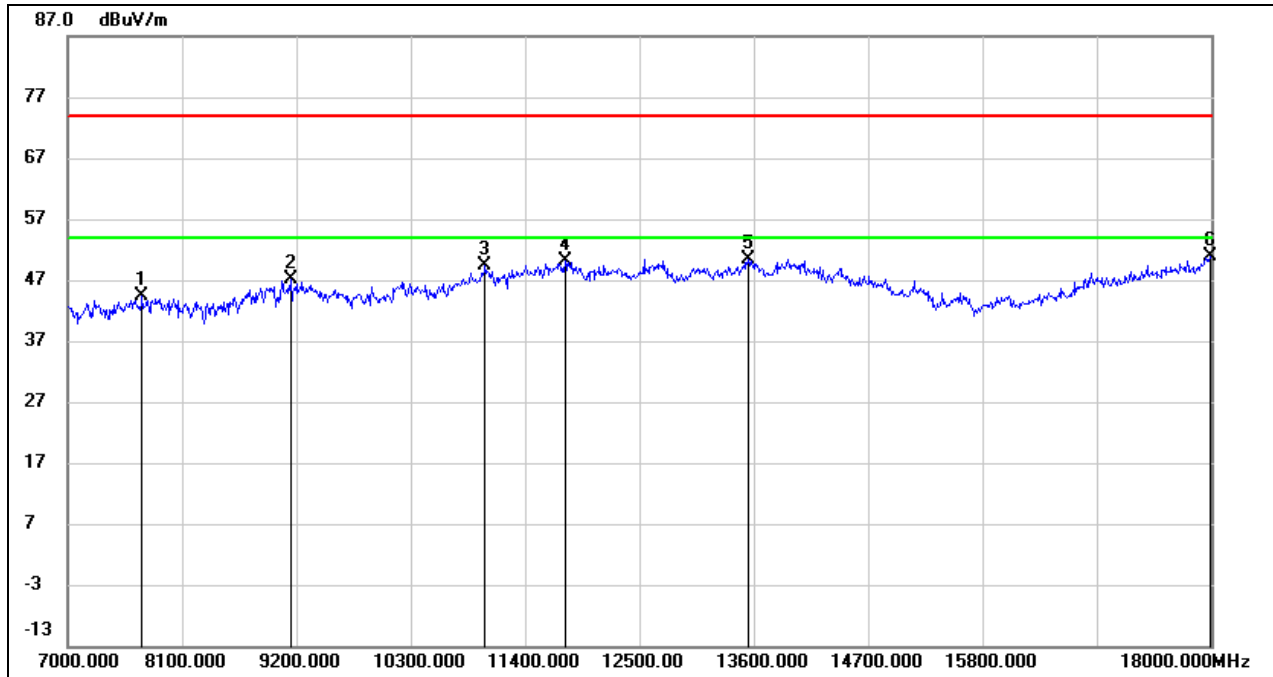


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	37.59	6.68	44.27	74.00	-29.73	peak
2	9145.000	36.77	10.43	47.20	74.00	-26.80	peak
3	11015.000	34.53	14.79	49.32	74.00	-24.68	peak
4	11785.000	32.82	17.30	50.12	74.00	-23.88	peak
5	13545.000	29.65	20.75	50.40	74.00	-23.60	peak
6	17989.000	24.91	26.04	50.95	74.00	-23.05	peak

Test Mode:	802.11n HT40	Channel:	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

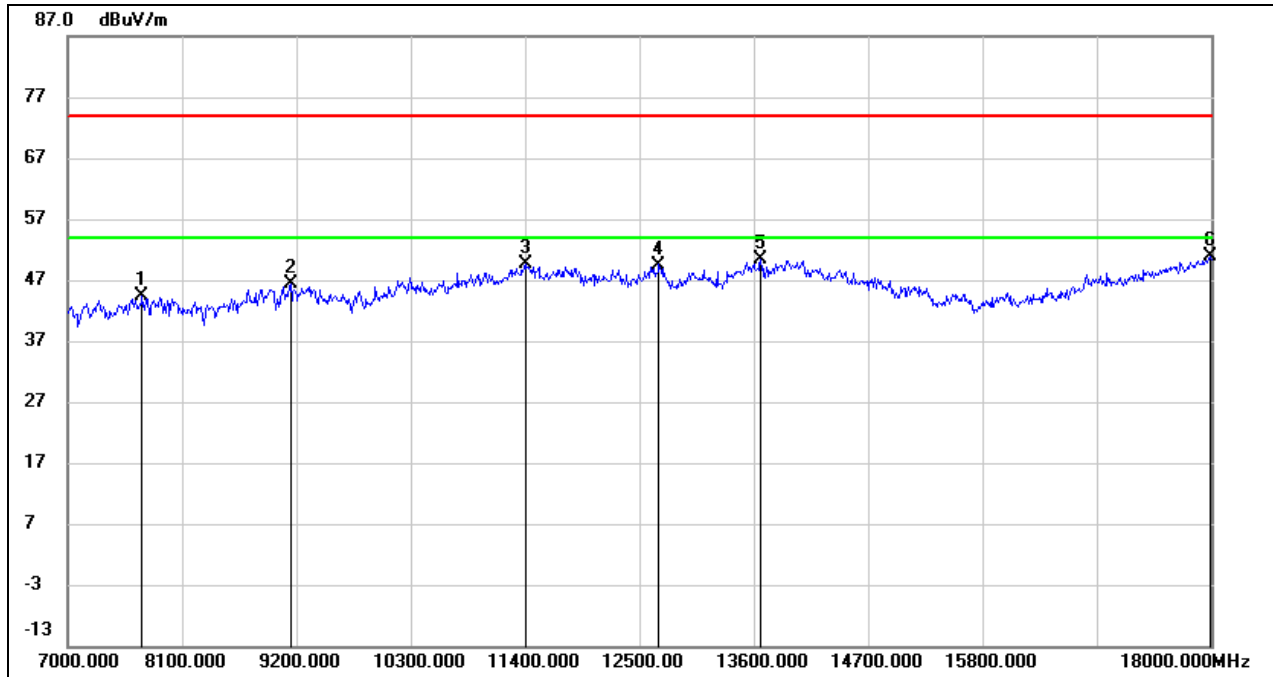


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	37.59	6.68	44.27	74.00	-29.73	peak
2	9145.000	35.94	10.43	46.37	74.00	-27.63	peak
3	11400.000	33.37	16.36	49.73	74.00	-24.27	peak
4	12687.000	31.45	18.05	49.50	74.00	-24.50	peak
5	13666.000	29.24	21.05	50.29	74.00	-23.71	peak
6	17989.000	24.72	26.04	50.76	74.00	-23.24	peak

Test Mode:	802.11n HT40	Channel:	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

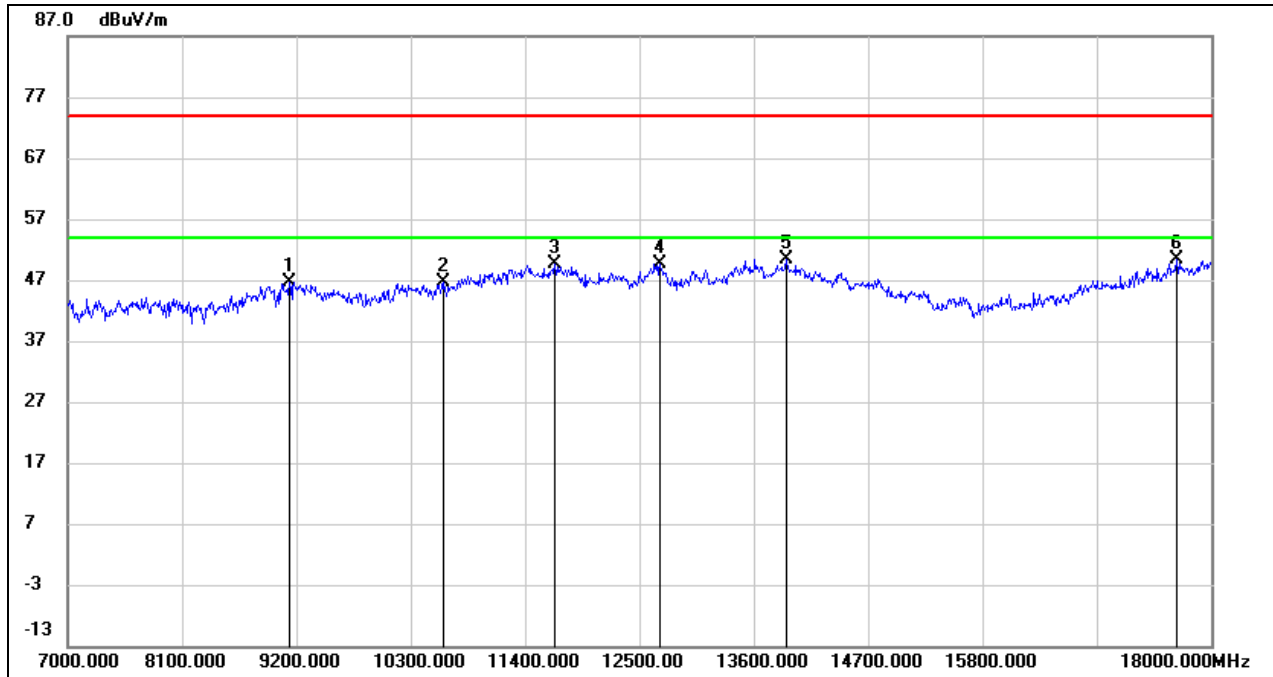


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.31	10.41	46.72	74.00	-27.28	peak
2	10608.000	33.38	13.23	46.61	74.00	-27.39	peak
3	11686.000	32.39	17.12	49.51	74.00	-24.49	peak
4	12698.000	31.62	18.08	49.70	74.00	-24.30	peak
5	13908.000	28.65	21.66	50.31	74.00	-23.69	peak
6	17670.000	26.64	23.86	50.50	74.00	-23.50	peak

Test Mode:	802.11n HT40	Channel:	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

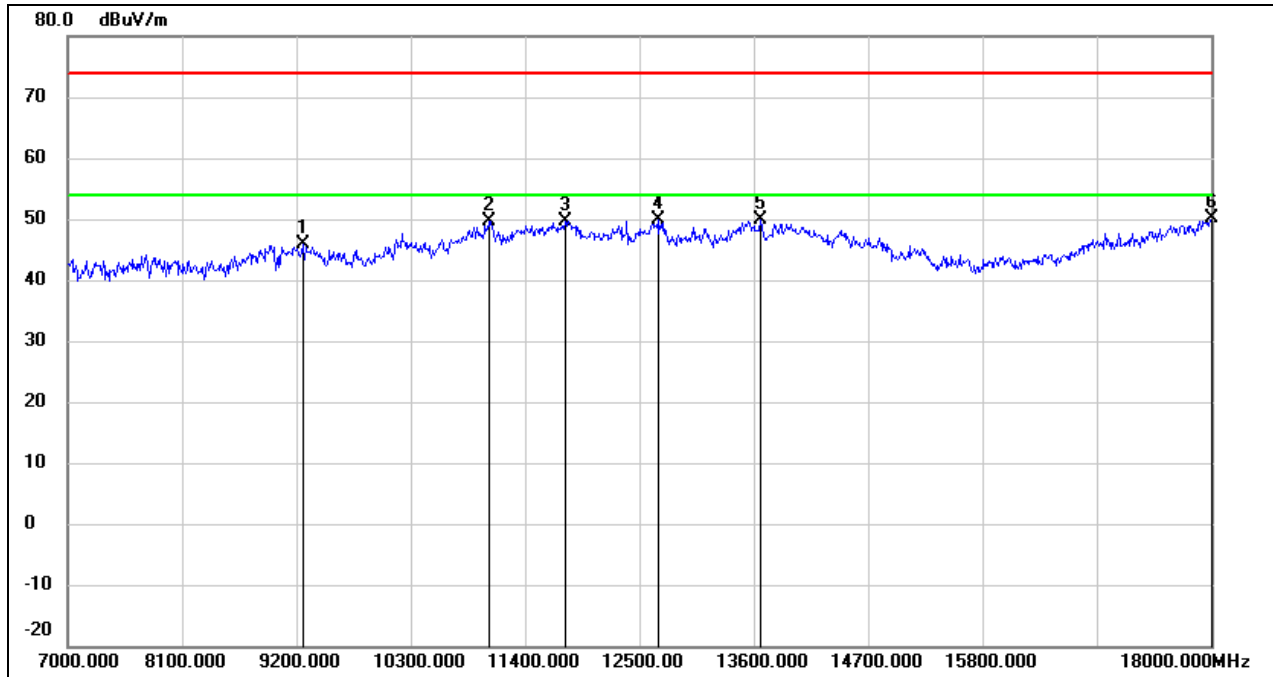


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	35.43	10.51	45.94	74.00	-28.06	peak
2	11048.000	34.77	14.91	49.68	74.00	-24.32	peak
3	11785.000	32.35	17.30	49.65	74.00	-24.35	peak
4	12676.000	31.73	18.05	49.78	74.00	-24.22	peak
5	13666.000	28.74	21.05	49.79	74.00	-24.21	peak
6	18000.000	23.99	26.12	50.11	74.00	-23.89	peak

Test Mode:	802.11n HT40	Channel:	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

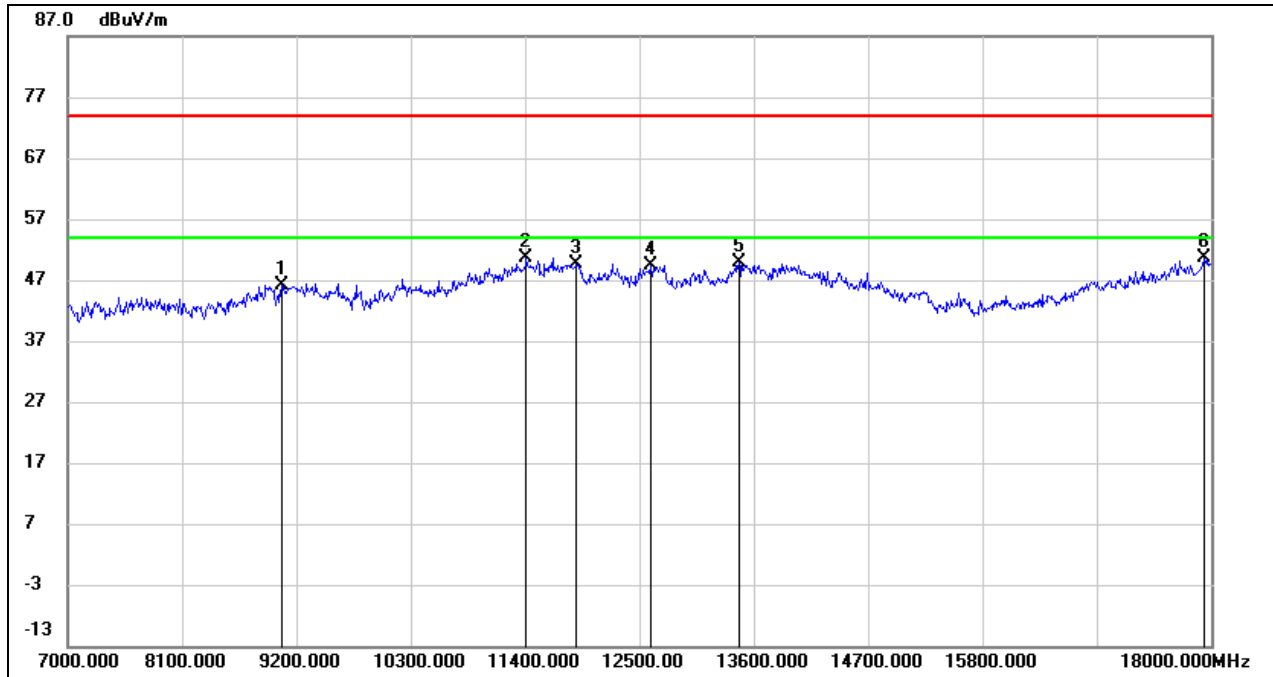


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	35.74	10.38	46.12	74.00	-27.88	peak
2	11411.000	34.19	16.41	50.60	74.00	-23.40	peak
3	11895.000	32.09	17.51	49.60	74.00	-24.40	peak
4	12610.000	31.49	17.97	49.46	74.00	-24.54	peak
5	13457.000	29.51	20.46	49.97	74.00	-24.03	peak
6	17934.000	24.92	25.67	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT40	Channel:	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

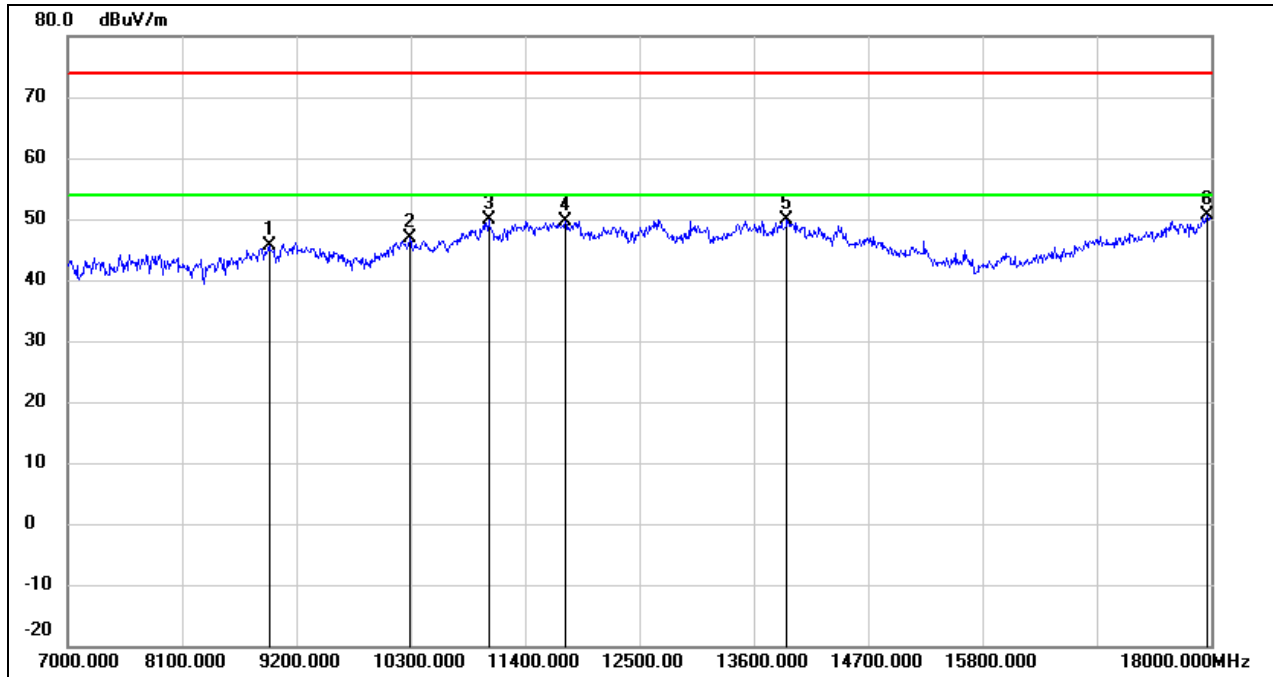


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	35.77	9.90	45.67	74.00	-28.33	peak
2	10289.000	34.38	12.38	46.76	74.00	-27.24	peak
3	11048.000	34.96	14.91	49.87	74.00	-24.13	peak
4	11785.000	32.22	17.30	49.52	74.00	-24.48	peak
5	13919.000	28.11	21.68	49.79	74.00	-24.21	peak
6	17967.000	24.74	25.89	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT40	Channel:	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

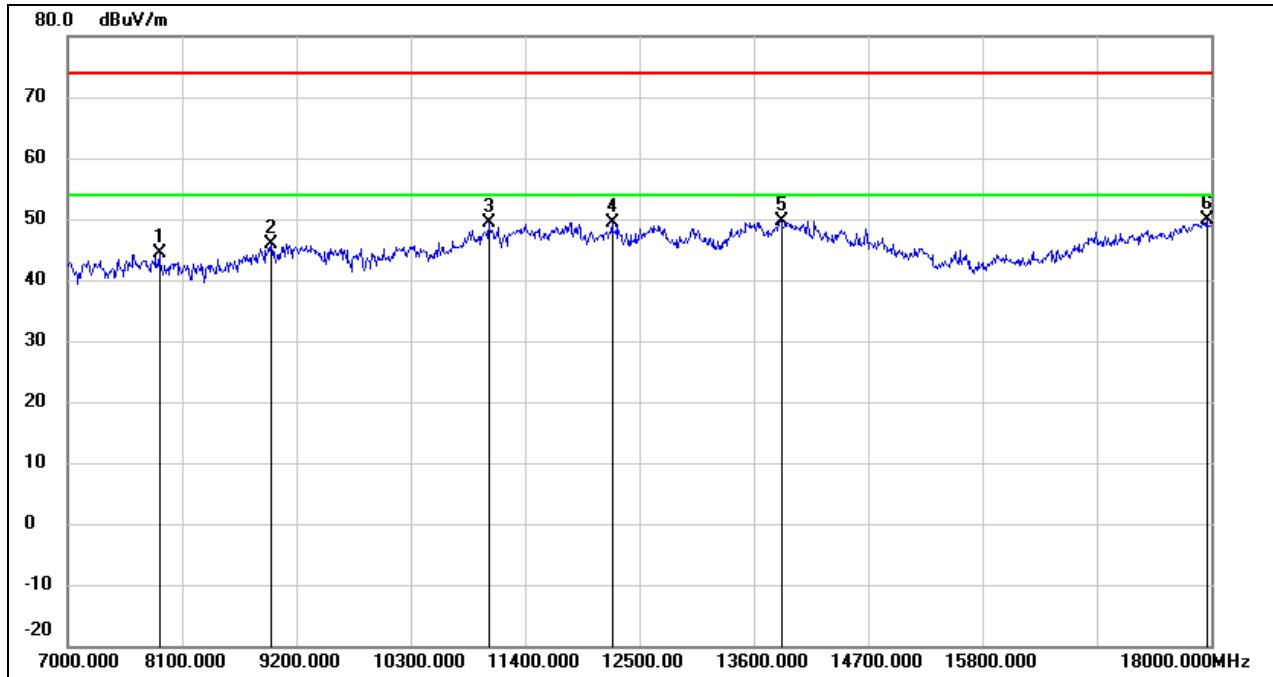


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	37.83	6.54	44.37	74.00	-29.63	peak
2	8958.000	35.90	10.05	45.95	74.00	-28.05	peak
3	11048.000	34.42	14.91	49.33	74.00	-24.67	peak
4	12236.000	31.53	17.76	49.29	74.00	-24.71	peak
5	13864.000	28.10	21.53	49.63	74.00	-24.37	peak
6	17956.000	24.13	25.82	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT40	Channel:	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

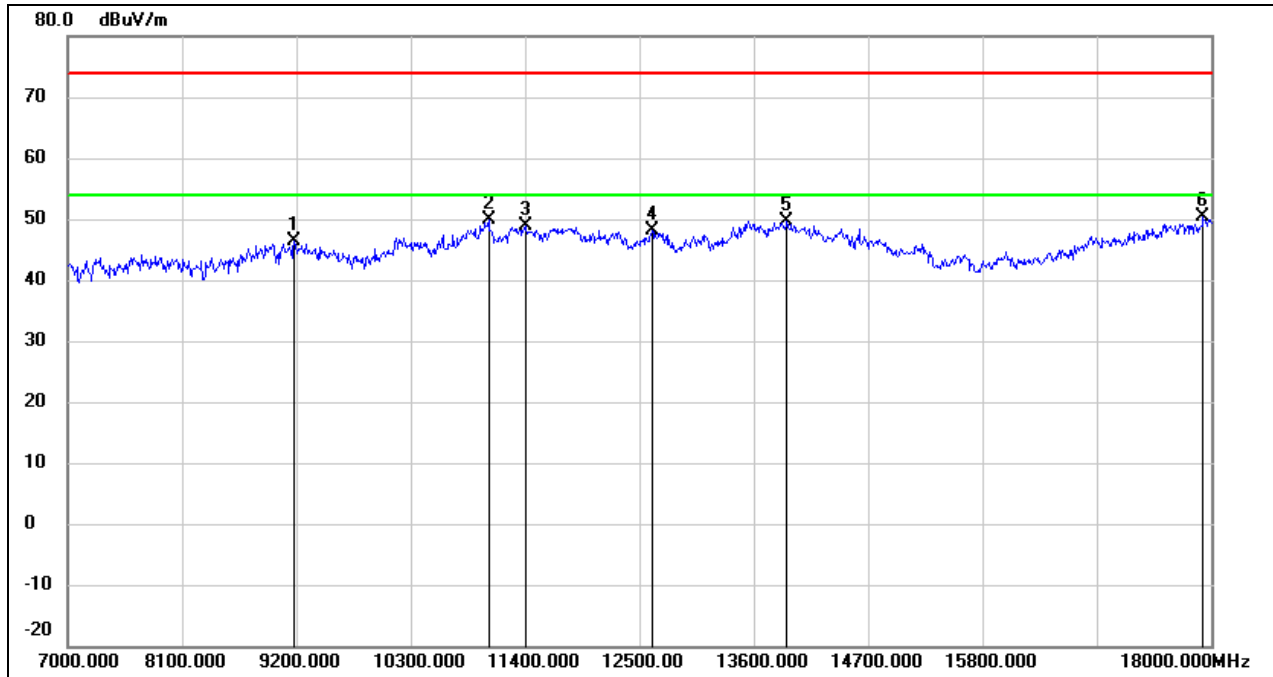


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.92	10.45	46.37	74.00	-27.63	peak
2	11048.000	34.93	14.91	49.84	74.00	-24.16	peak
3	11400.000	32.48	16.36	48.84	74.00	-25.16	peak
4	12621.000	30.05	17.98	48.03	74.00	-25.97	peak
5	13919.000	27.92	21.68	49.60	74.00	-24.40	peak
6	17923.000	24.74	25.60	50.34	74.00	-23.66	peak

Test Mode:	802.11n HT40	Channel:	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

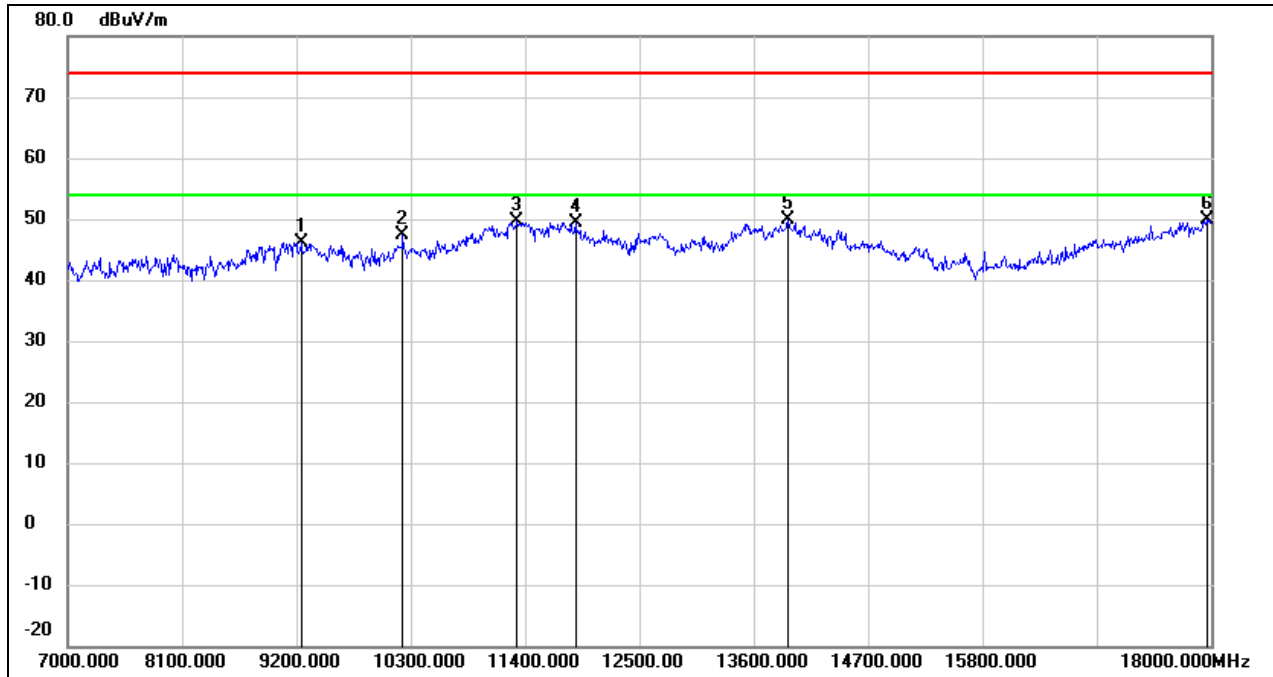


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	35.57	10.49	46.06	74.00	-27.94	peak
2	10223.000	35.26	12.24	47.50	74.00	-26.50	peak
3	11323.000	33.57	16.05	49.62	74.00	-24.38	peak
4	11884.000	31.96	17.48	49.44	74.00	-24.56	peak
5	13930.000	28.16	21.71	49.87	74.00	-24.13	peak
6	17956.000	24.15	25.82	49.97	74.00	-24.03	peak

Test Mode:	802.11n HT40	Channel:	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

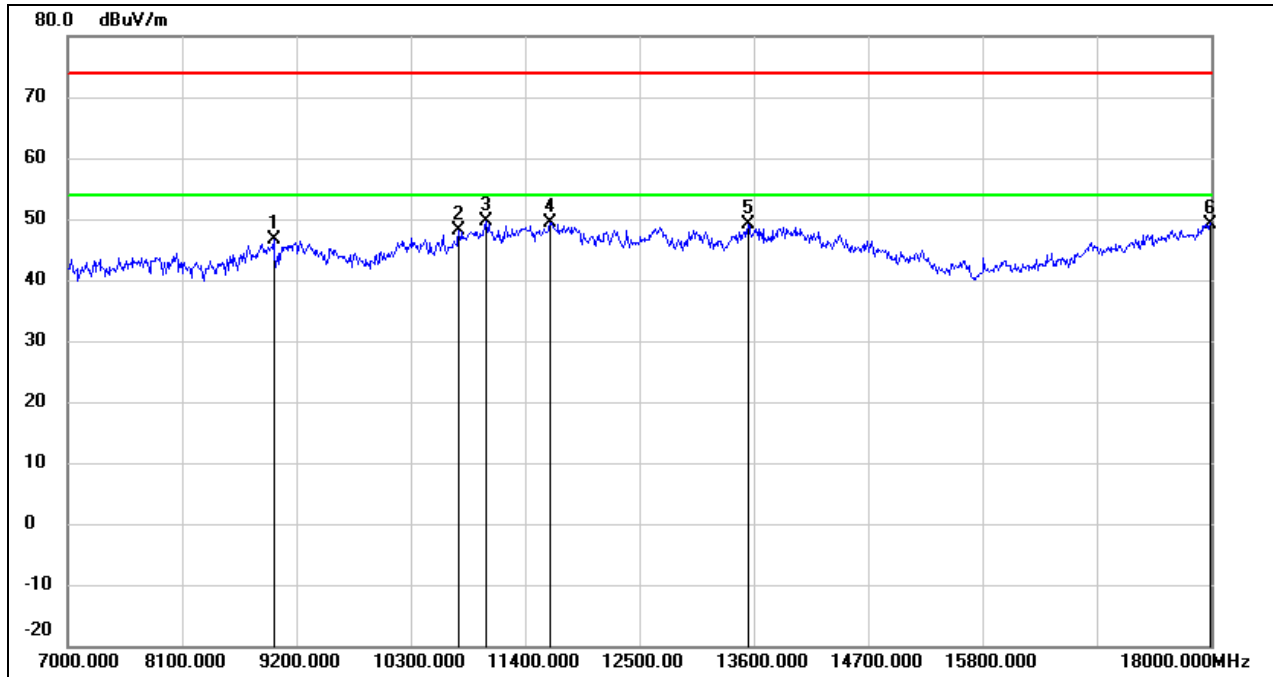


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	36.52	10.21	46.73	74.00	-27.27	peak
2	10762.000	34.19	13.82	48.01	74.00	-25.99	peak
3	11026.000	34.89	14.82	49.71	74.00	-24.29	peak
4	11642.000	32.45	17.03	49.48	74.00	-24.52	peak
5	13545.000	28.40	20.75	49.15	74.00	-24.85	peak
6	17989.000	23.21	26.04	49.25	74.00	-24.75	peak

Test Mode:	802.11n HT40	Channel:	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

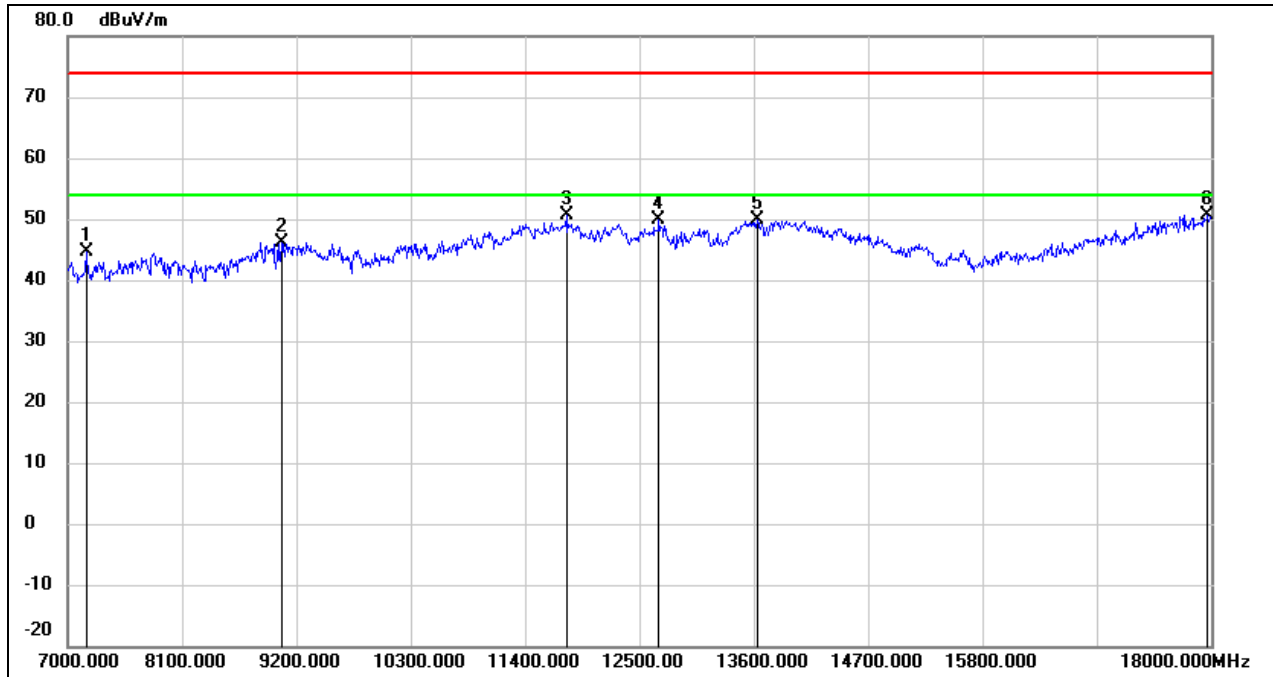


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7176.000	37.72	6.98	44.70	74.00	-29.30	peak
2	9057.000	35.76	10.38	46.14	74.00	-27.86	peak
3	11796.000	33.34	17.32	50.66	74.00	-23.34	peak
4	12687.000	31.90	18.05	49.95	74.00	-24.05	peak
5	13633.000	28.79	20.97	49.76	74.00	-24.24	peak
6	17967.000	24.85	25.89	50.74	74.00	-23.26	peak

Test Mode:	802.11ac VHT80	Channel:	5210
Polarity:	Horizontal	Test Voltage:	DC 5 V

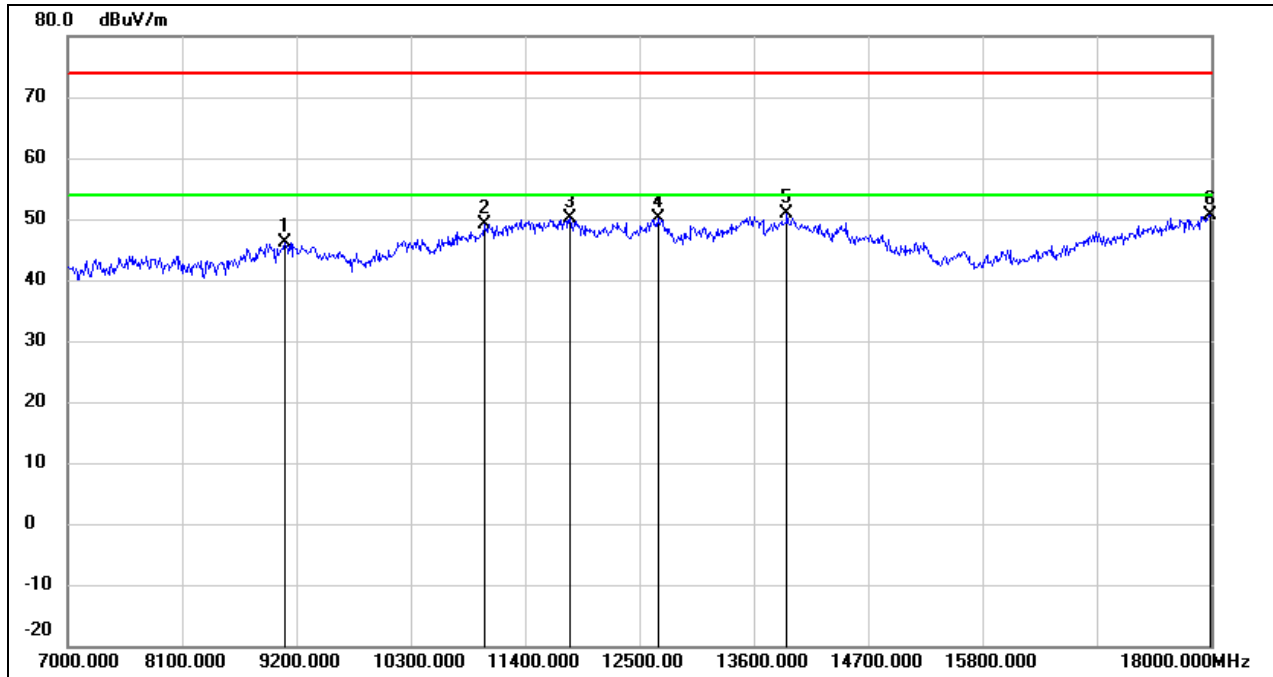


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9090.000	35.77	10.39	46.16	74.00	-27.84	peak
2	11004.000	34.43	14.74	49.17	74.00	-24.83	peak
3	11829.000	32.72	17.38	50.10	74.00	-23.90	peak
4	12676.000	31.96	18.05	50.01	74.00	-23.99	peak
5	13919.000	29.15	21.68	50.83	74.00	-23.17	peak
6	17989.000	24.51	26.04	50.55	74.00	-23.45	peak

Test Mode:	802.11ac VHT80	Channel:	5210
Polarity:	Vertical	Test Voltage:	DC 5 V

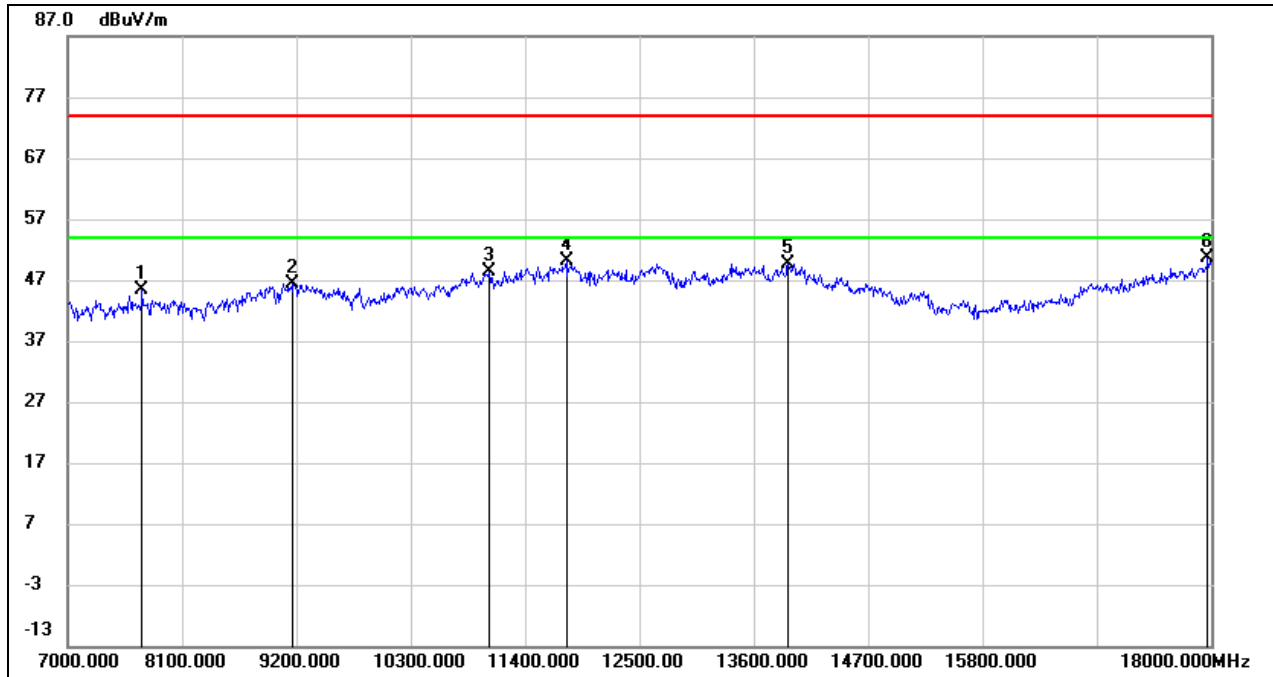


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.70	6.68	45.38	74.00	-28.62	peak
2	9167.000	36.02	10.45	46.47	74.00	-27.53	peak
3	11059.000	33.52	14.96	48.48	74.00	-25.52	peak
4	11796.000	32.78	17.32	50.10	74.00	-23.90	peak
5	13930.000	27.98	21.71	49.69	74.00	-24.31	peak
6	17967.000	24.74	25.89	50.63	74.00	-23.37	peak

Test Mode:	802.11ac VHT80	Channel:	5290
Polarity:	Horizontal	Test Voltage:	DC 5 V

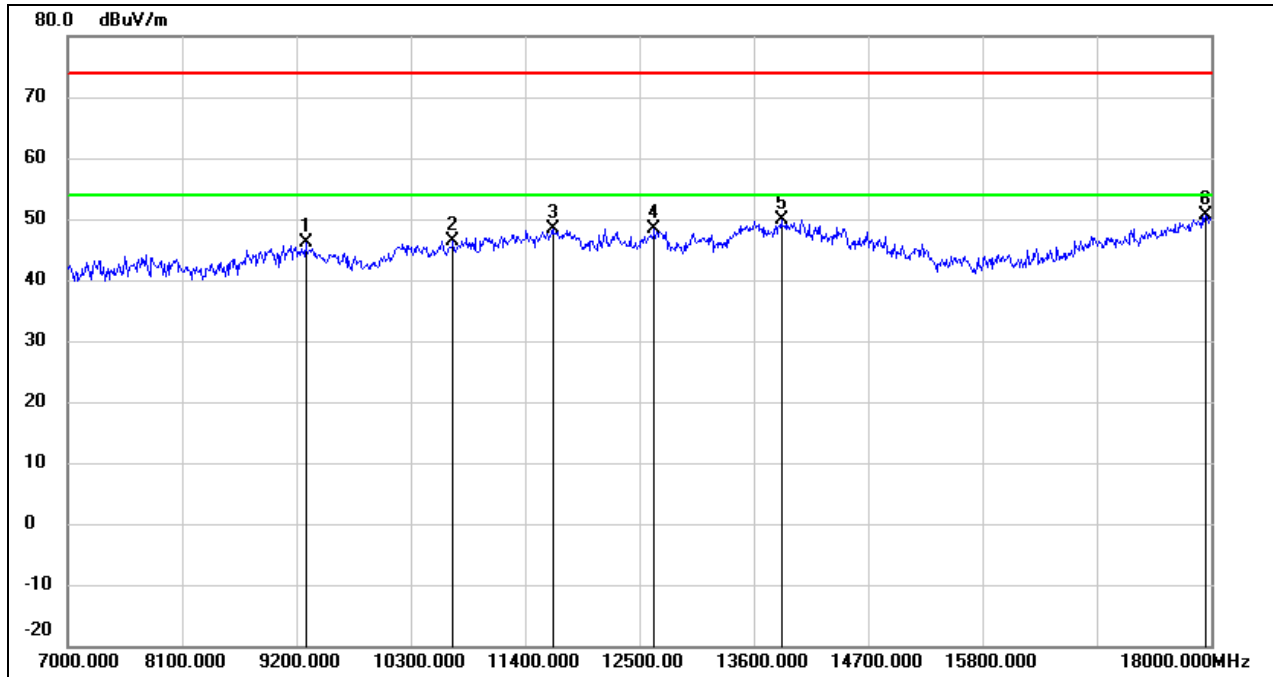


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	35.57	10.52	46.09	74.00	-27.91	peak
2	10707.000	32.76	13.60	46.36	74.00	-27.64	peak
3	11664.000	31.23	17.08	48.31	74.00	-25.69	peak
4	12643.000	30.48	18.01	48.49	74.00	-25.51	peak
5	13864.000	28.46	21.53	49.99	74.00	-24.01	peak
6	17945.000	24.87	25.75	50.62	74.00	-23.38	peak

Test Mode:	802.11ac VHT80	Channel:	5290
Polarity:	Vertical	Test Voltage:	DC 5 V

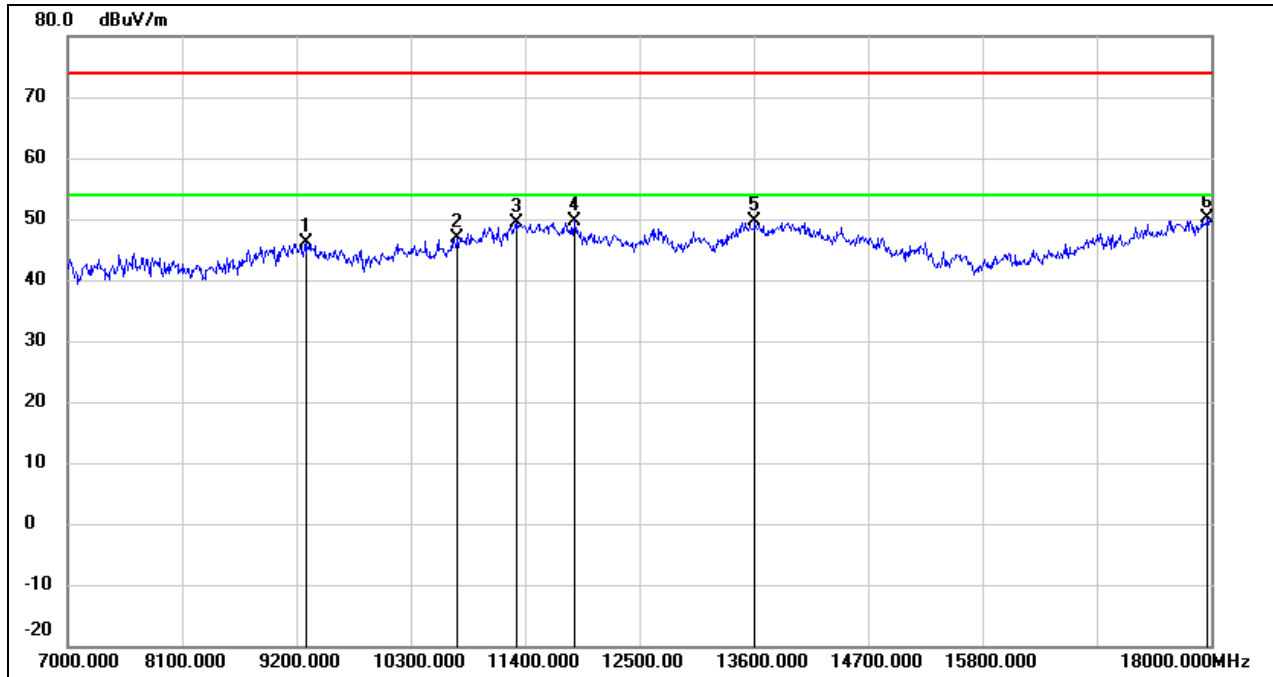


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	35.55	10.52	46.07	74.00	-27.93	peak
2	10751.000	33.01	13.78	46.79	74.00	-27.21	peak
3	11312.000	33.37	16.00	49.37	74.00	-24.63	peak
4	11873.000	32.20	17.46	49.66	74.00	-24.34	peak
5	13611.000	28.76	20.92	49.68	74.00	-24.32	peak
6	17967.000	24.20	25.89	50.09	74.00	-23.91	peak

Test Mode:	802.11ac VHT80	Channel:	5530
Polarity:	Horizontal	Test Voltage:	DC 5 V

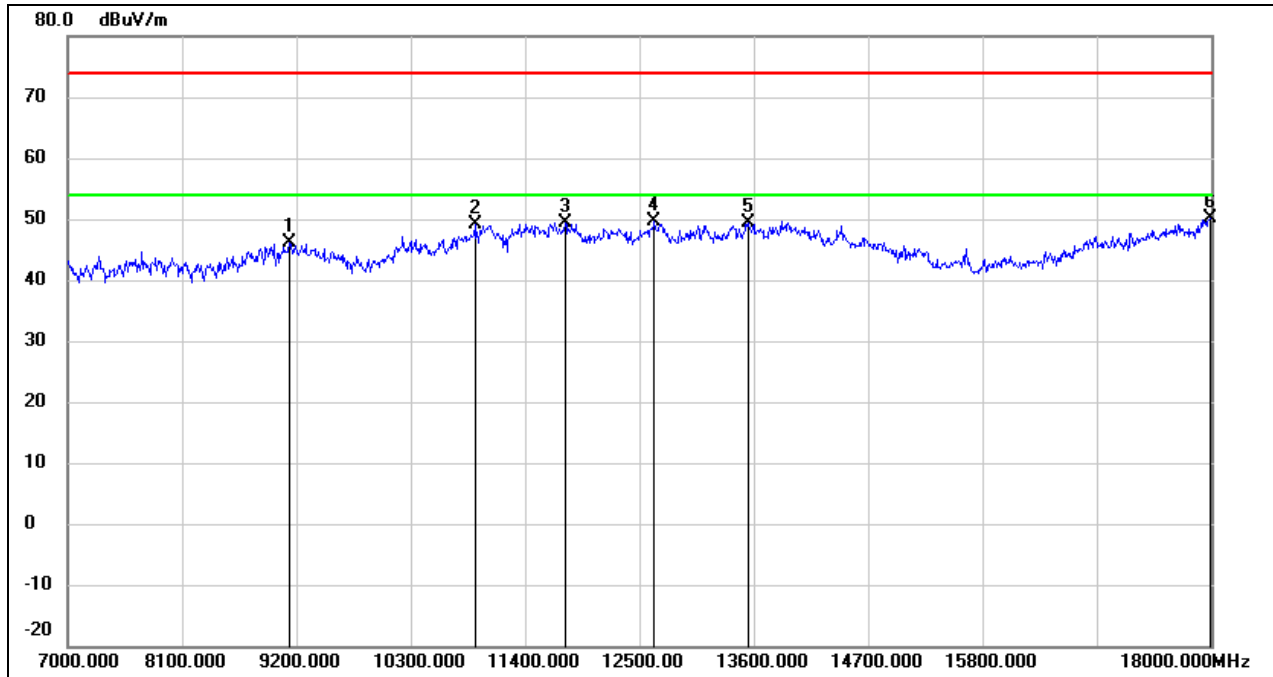


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	35.61	10.41	46.02	74.00	-27.98	peak
2	10916.000	34.67	14.39	49.06	74.00	-24.94	peak
3	11785.000	32.09	17.30	49.39	74.00	-24.61	peak
4	12643.000	31.52	18.01	49.53	74.00	-24.47	peak
5	13545.000	28.71	20.75	49.46	74.00	-24.54	peak
6	17989.000	24.18	26.04	50.22	74.00	-23.78	peak

Test Mode:	802.11ac VHT80	Channel:	5530
Polarity:	Vertical	Test Voltage:	DC 5 V

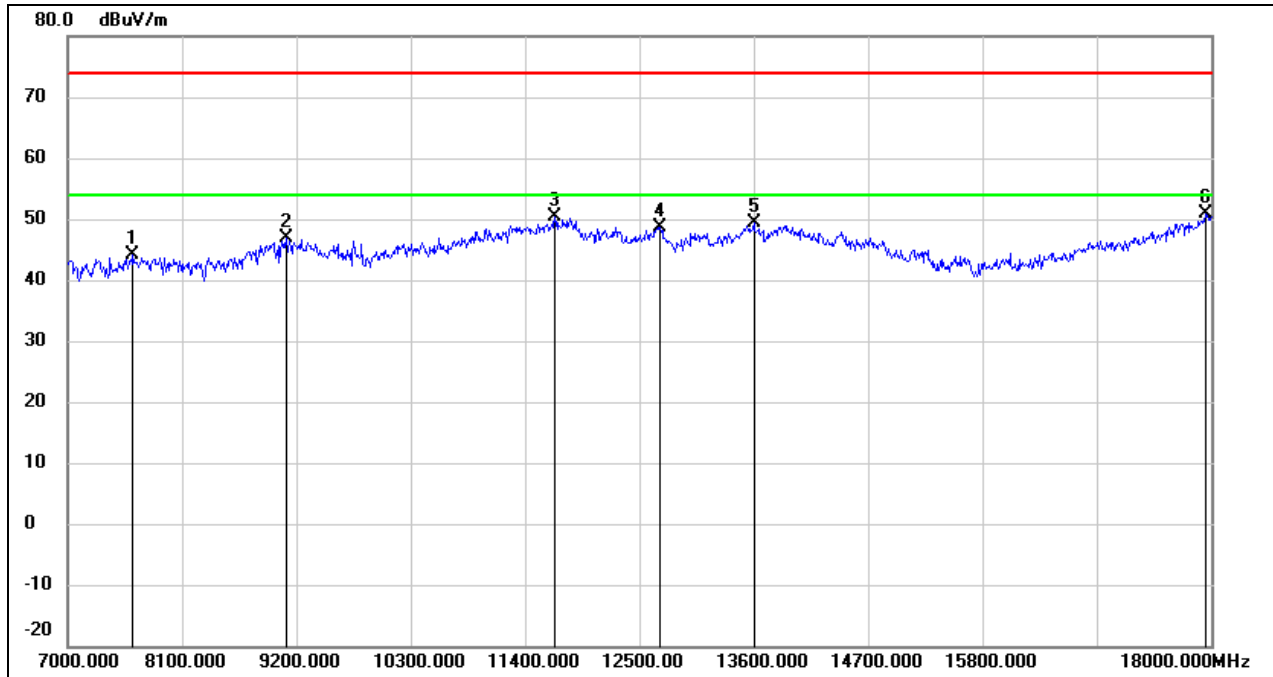


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7627.000	37.27	6.76	44.03	74.00	-29.97	peak
2	9101.000	36.40	10.40	46.80	74.00	-27.20	peak
3	11686.000	33.28	17.12	50.40	74.00	-23.60	peak
4	12698.000	30.61	18.08	48.69	74.00	-25.31	peak
5	13600.000	28.46	20.89	49.35	74.00	-24.65	peak
6	17945.000	25.10	25.75	50.85	74.00	-23.15	peak

Test Mode:	802.11ac VHT80	Channel:	5610
Polarity:	Horizontal	Test Voltage:	DC 5 V

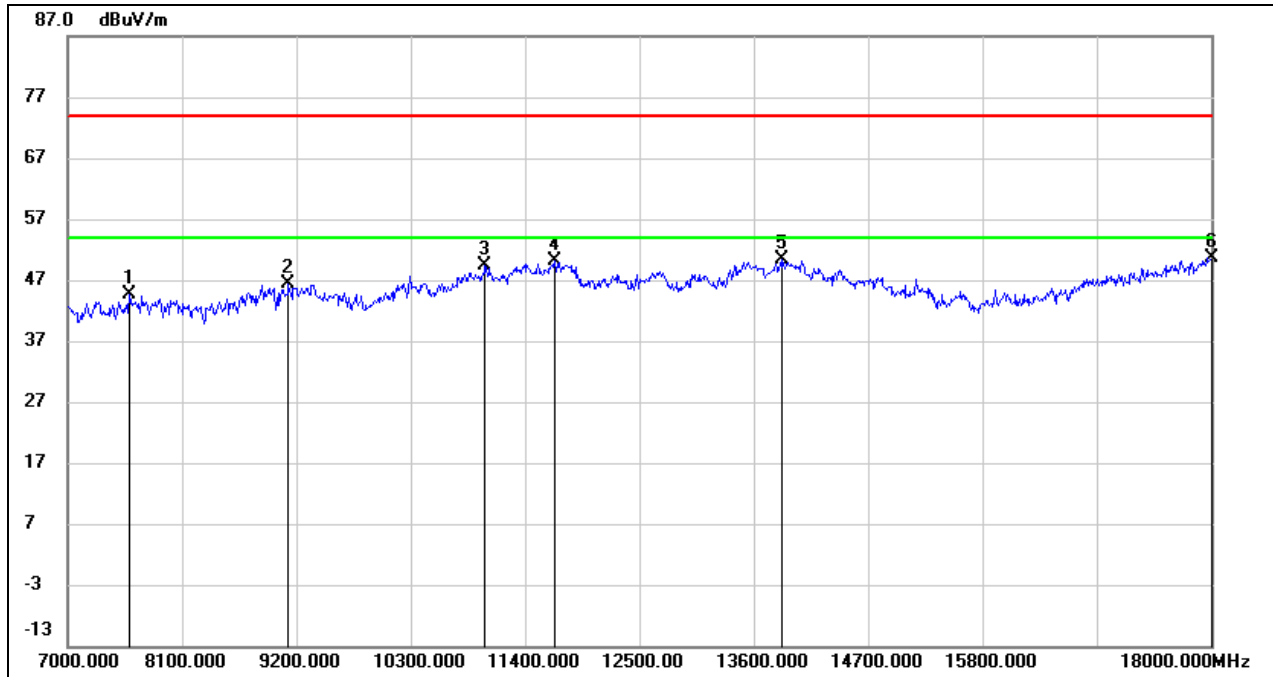


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7594.000	37.80	6.79	44.59	74.00	-29.41	peak
2	9123.000	35.97	10.42	46.39	74.00	-27.61	peak
3	11015.000	34.57	14.79	49.36	74.00	-24.64	peak
4	11686.000	33.07	17.12	50.19	74.00	-23.81	peak
5	13864.000	28.82	21.53	50.35	74.00	-23.65	peak
6	18000.000	24.58	26.12	50.70	74.00	-23.30	peak

Test Mode:	802.11ac VHT80	Channel:	5610
Polarity:	Vertical	Test Voltage:	DC 5 V

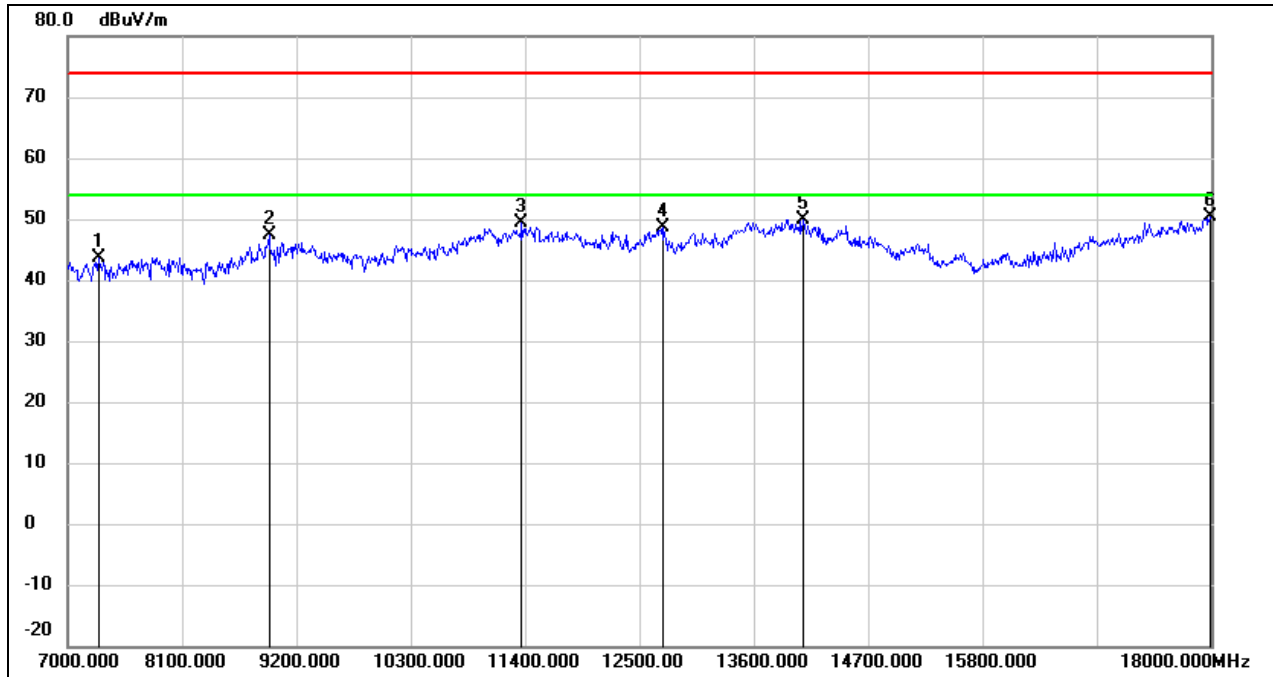


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.64	6.95	43.59	74.00	-30.41	peak
2	8936.000	37.51	9.90	47.41	74.00	-26.59	peak
3	11367.000	33.06	16.22	49.28	74.00	-24.72	peak
4	12731.000	30.42	18.12	48.54	74.00	-25.46	peak
5	14073.000	28.27	21.57	49.84	74.00	-24.16	peak
6	17989.000	24.41	26.04	50.45	74.00	-23.55	peak

Test Mode:	802.11ac VHT80	Channel:	5690
Polarity:	Horizontal	Test Voltage:	DC 5 V

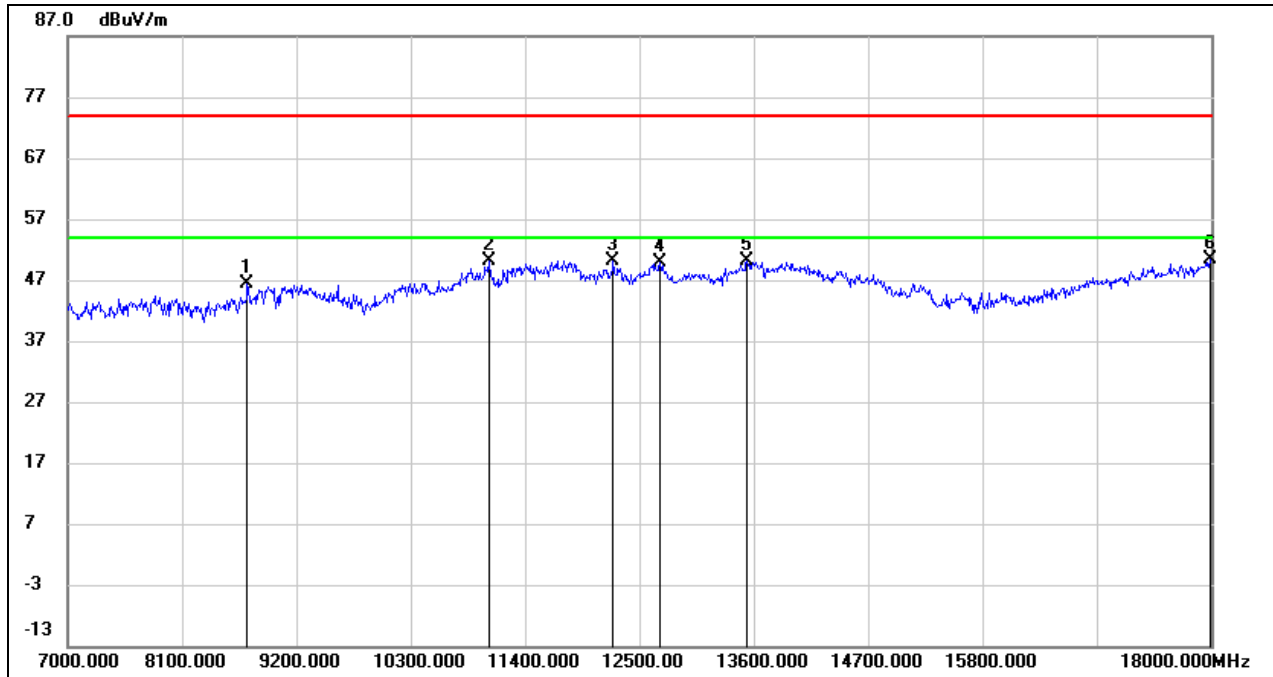


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8727.000	38.05	8.45	46.50	74.00	-27.50	peak
2	11048.000	35.27	14.91	50.18	74.00	-23.82	peak
3	12247.000	32.39	17.77	50.16	74.00	-23.84	peak
4	12698.000	31.80	18.08	49.88	74.00	-24.12	peak
5	13534.000	29.52	20.73	50.25	74.00	-23.75	peak
6	17989.000	24.36	26.04	50.40	74.00	-23.60	peak

Test Mode:	802.11ac VHT80	Channel:	5690
Polarity:	Vertical	Test Voltage:	DC 5 V

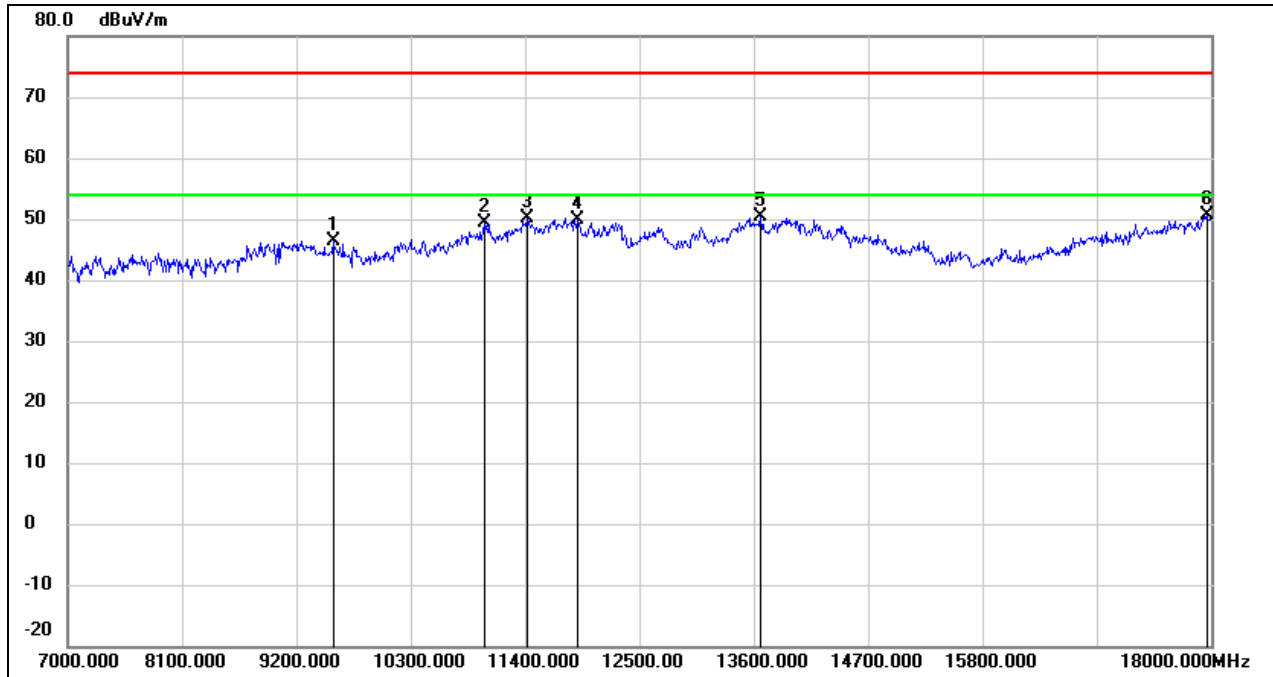


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	35.65	10.76	46.41	74.00	-27.59	peak
2	11004.000	34.55	14.74	49.29	74.00	-24.71	peak
3	11422.000	33.75	16.46	50.21	74.00	-23.79	peak
4	11906.000	32.29	17.52	49.81	74.00	-24.19	peak
5	13666.000	29.23	21.05	50.28	74.00	-23.72	peak
6	17956.000	24.74	25.82	50.56	74.00	-23.44	peak

Test Mode:	802.11ac VHT80	Channel:	5775
Polarity:	Horizontal	Test Voltage:	DC 5 V

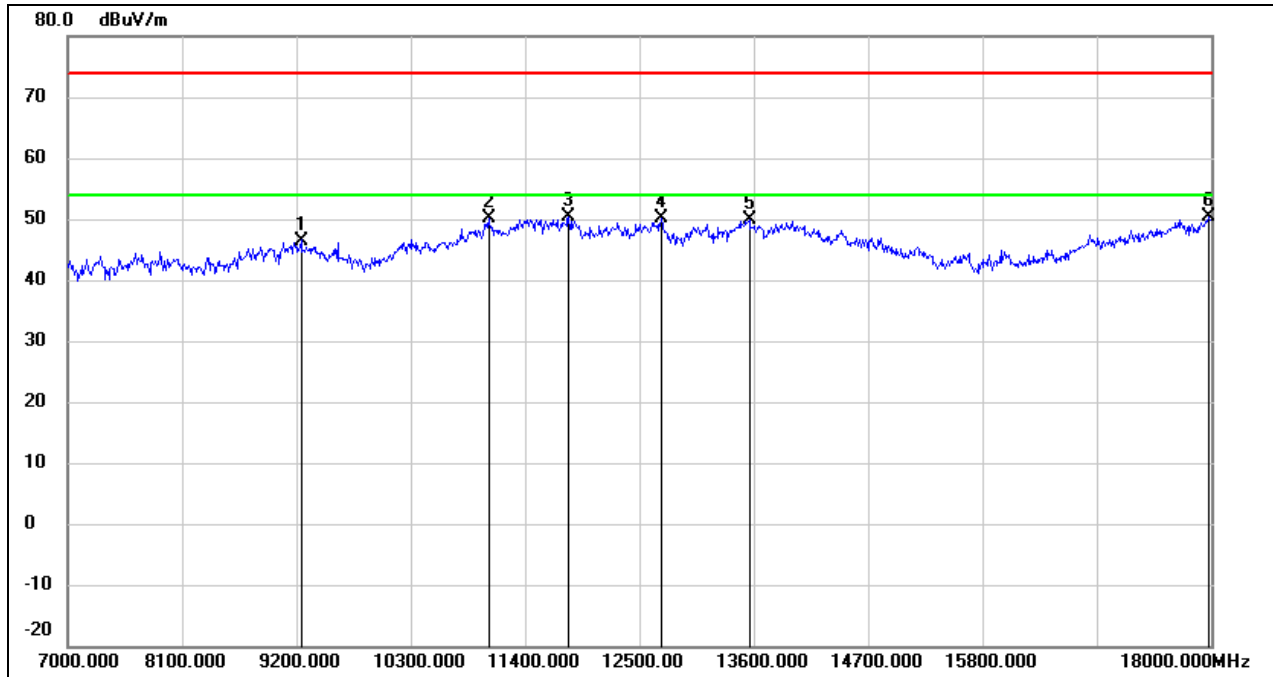


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.01	10.49	46.50	74.00	-27.50	peak
2	11048.000	35.24	14.91	50.15	74.00	-23.85	peak
3	11818.000	33.09	17.36	50.45	74.00	-23.55	peak
4	12709.000	32.04	18.09	50.13	74.00	-23.87	peak
5	13556.000	29.06	20.78	49.84	74.00	-24.16	peak
6	17978.000	24.43	25.97	50.40	74.00	-23.60	peak

Test Mode:	802.11ac VHT80	Channel:	5775
Polarity:	Vertical	Test Voltage:	DC 5 V

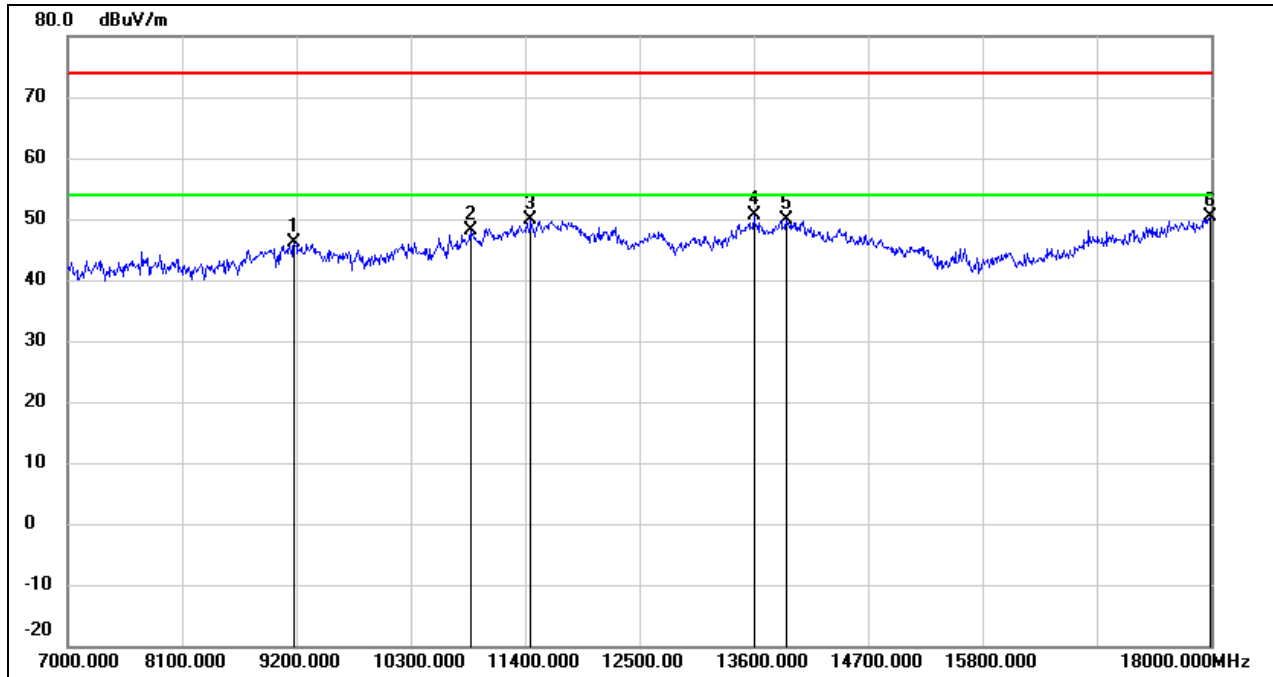


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.68	10.45	46.13	74.00	-27.87	peak
2	10872.000	33.86	14.23	48.09	74.00	-25.91	peak
3	11455.000	33.21	16.58	49.79	74.00	-24.21	peak
4	13600.000	29.64	20.89	50.53	74.00	-23.47	peak
5	13908.000	28.17	21.66	49.83	74.00	-24.17	peak
6	17989.000	24.26	26.04	50.30	74.00	-23.70	peak

Test Mode:	802.11ax HE20	Channel:	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

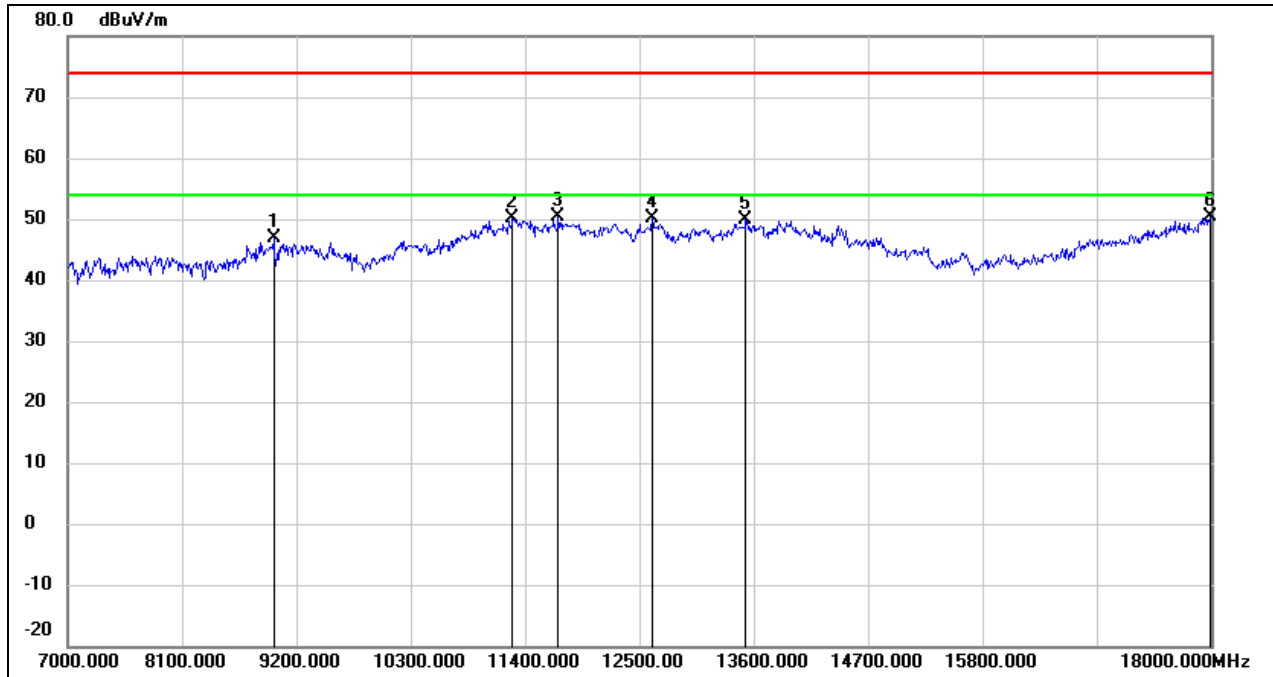


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	36.62	10.21	46.83	74.00	-27.17	peak
2	11279.000	34.37	15.86	50.23	74.00	-23.77	peak
3	11719.000	33.22	17.18	50.40	74.00	-23.60	peak
4	12621.000	32.18	17.98	50.16	74.00	-23.84	peak
5	13523.000	29.15	20.70	49.85	74.00	-24.15	peak
6	17989.000	24.38	26.04	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE20	Channel:	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

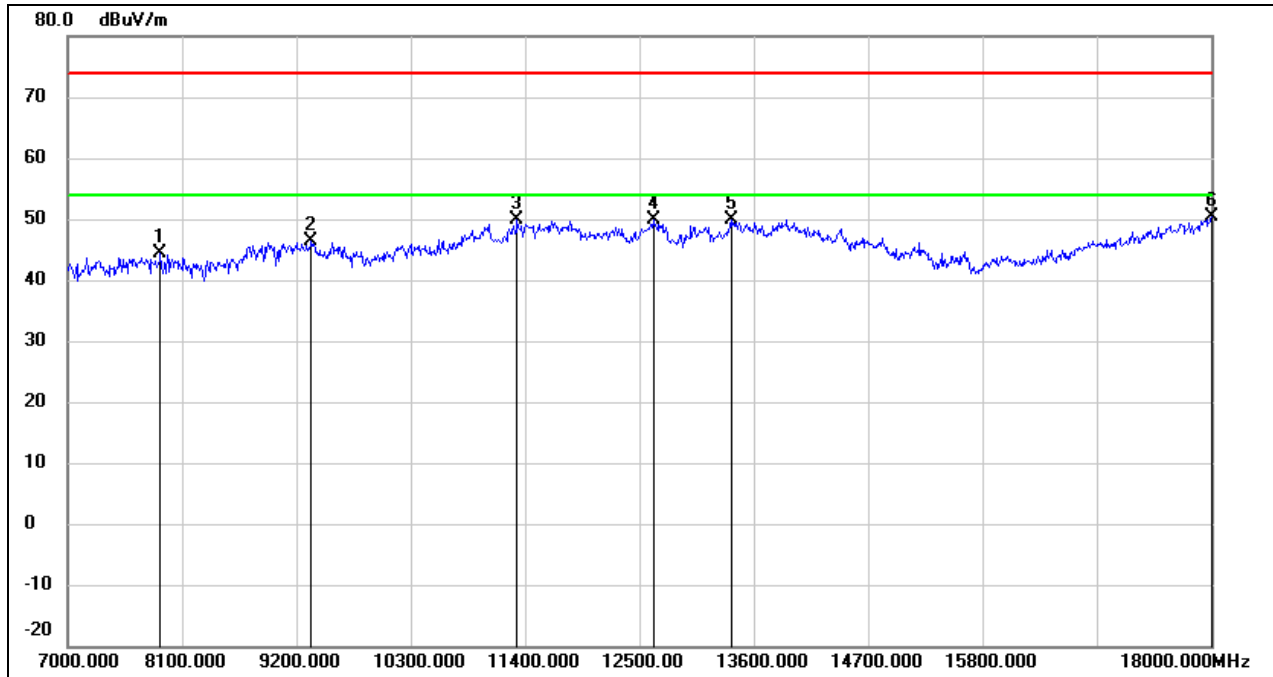


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	37.80	6.52	44.32	74.00	-29.68	peak
2	9343.000	35.73	10.55	46.28	74.00	-27.72	peak
3	11323.000	33.77	16.05	49.82	74.00	-24.18	peak
4	12632.000	31.85	17.99	49.84	74.00	-24.16	peak
5	13380.000	29.72	20.12	49.84	74.00	-24.16	peak
6	18000.000	24.38	26.12	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE20	Channel:	5200
Polarity:	Horizontal	Test Voltage:	DC 5 V

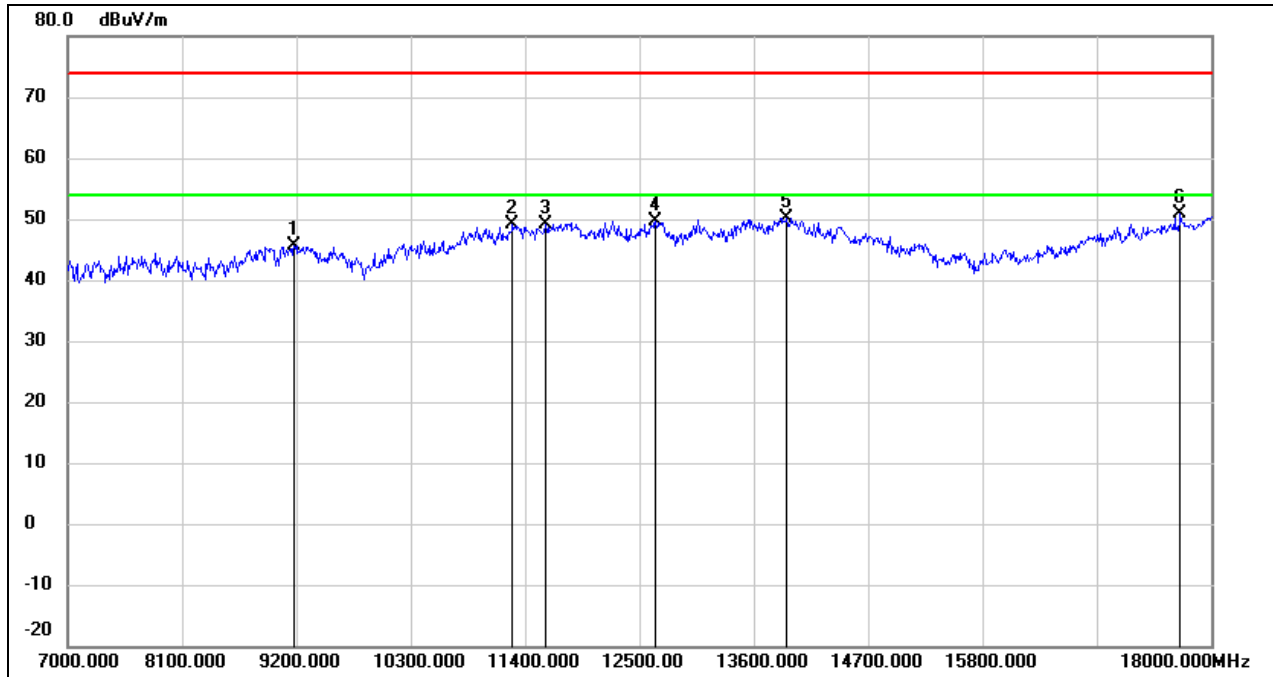


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.14	10.45	45.59	74.00	-28.41	peak
2	11279.000	33.19	15.86	49.05	74.00	-24.95	peak
3	11598.000	32.20	16.96	49.16	74.00	-24.84	peak
4	12654.000	31.71	18.01	49.72	74.00	-24.28	peak
5	13919.000	28.45	21.68	50.13	74.00	-23.87	peak
6	17703.000	26.81	24.09	50.90	74.00	-23.10	peak

Test Mode:	802.11ax HE20	Channel:	5200
Polarity:	Vertical	Test Voltage:	DC 5 V

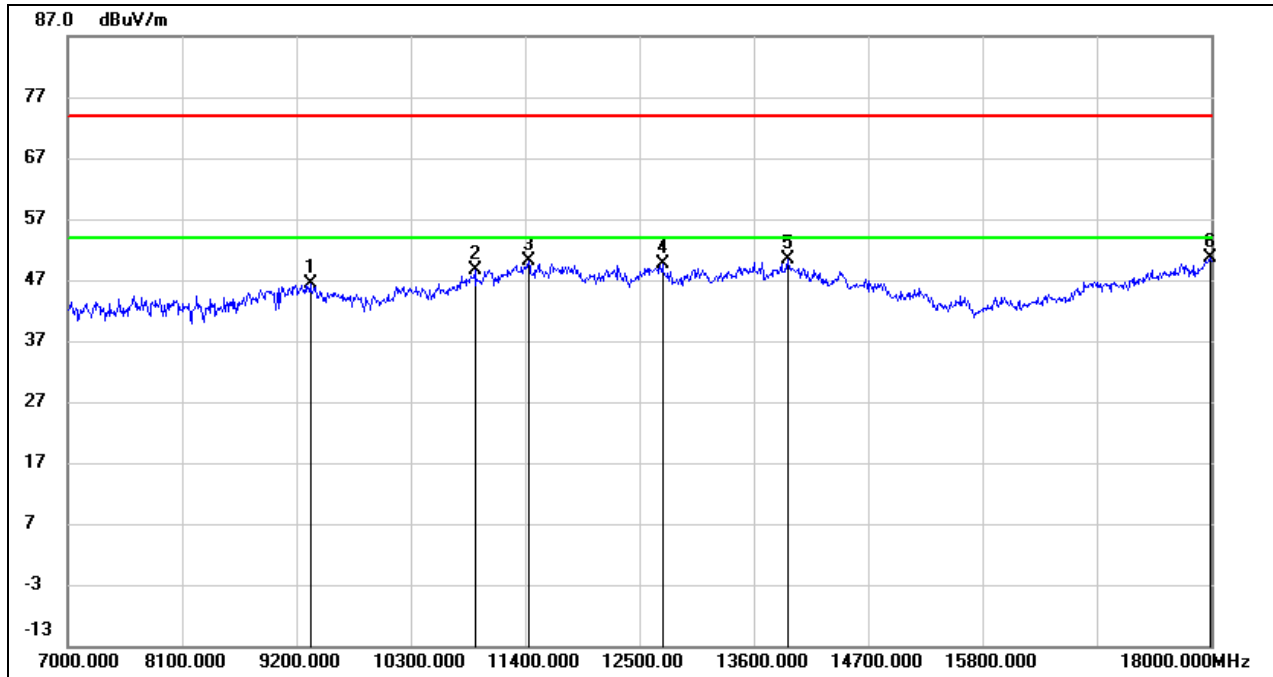


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	35.84	10.54	46.38	74.00	-27.62	peak
2	10916.000	34.25	14.39	48.64	74.00	-25.36	peak
3	11433.000	33.63	16.50	50.13	74.00	-23.87	peak
4	12720.000	31.50	18.09	49.59	74.00	-24.41	peak
5	13930.000	28.77	21.71	50.48	74.00	-23.52	peak
6	17989.000	24.60	26.04	50.64	74.00	-23.36	peak

Test Mode:	802.11ax HE20	Channel:	5240
Polarity:	Horizontal	Test Voltage:	DC 5 V

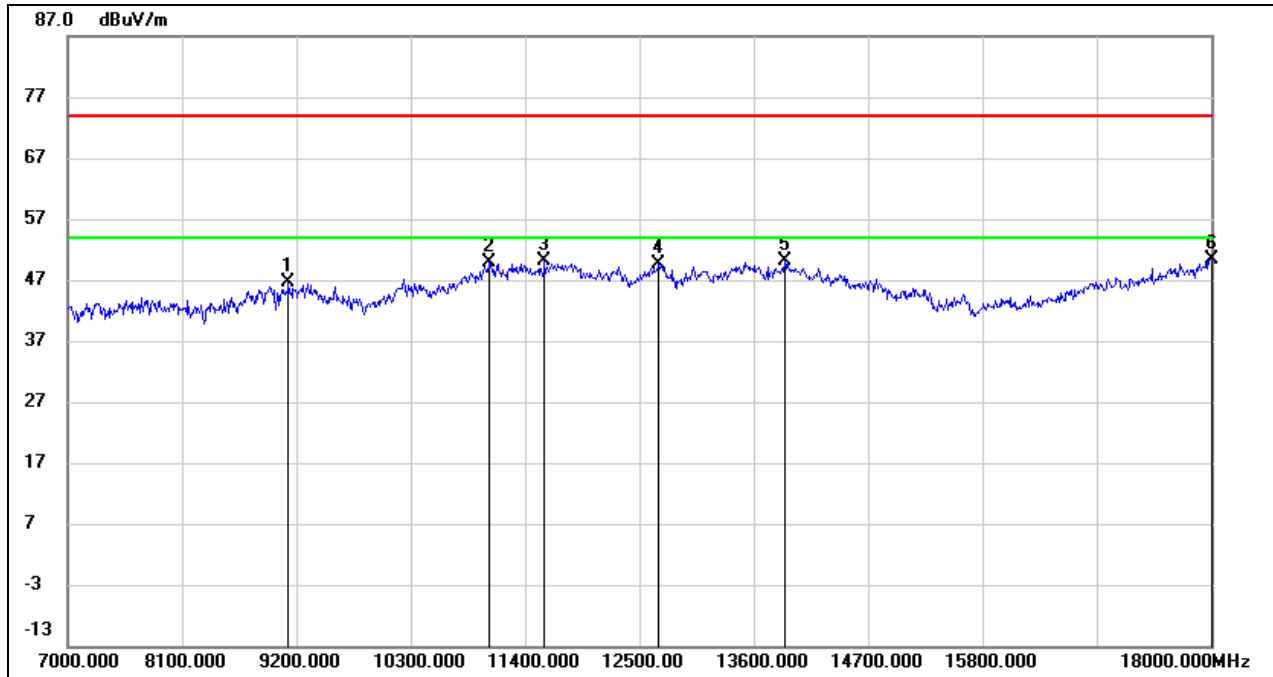


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.33	10.42	46.75	74.00	-27.25	peak
2	11059.000	34.93	14.96	49.89	74.00	-24.11	peak
3	11587.000	33.26	16.93	50.19	74.00	-23.81	peak
4	12687.000	31.63	18.05	49.68	74.00	-24.32	peak
5	13897.000	28.50	21.62	50.12	74.00	-23.88	peak
6	18000.000	24.32	26.12	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE20	Channel:	5240
Polarity:	Vertical	Test Voltage:	DC 5 V

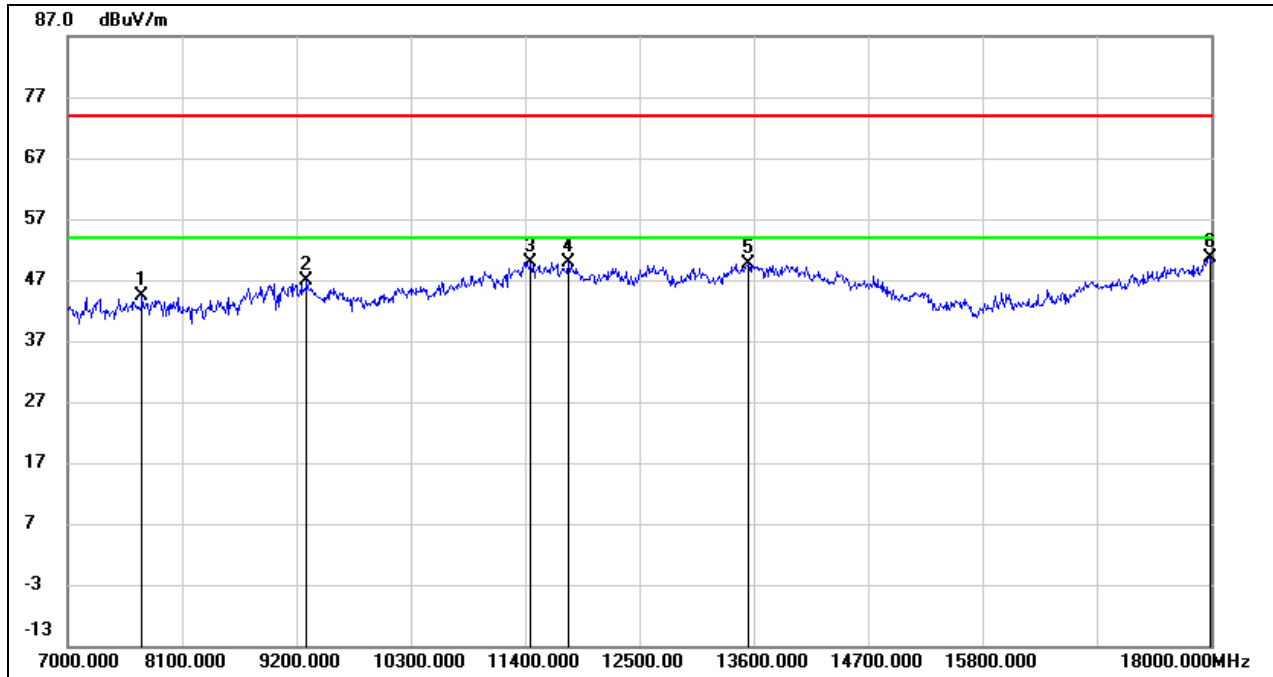


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	37.58	6.68	44.26	74.00	-29.74	peak
2	9299.000	36.46	10.53	46.99	74.00	-27.01	peak
3	11455.000	33.38	16.58	49.96	74.00	-24.04	peak
4	11818.000	32.61	17.36	49.97	74.00	-24.03	peak
5	13545.000	28.93	20.75	49.68	74.00	-24.32	peak
6	17989.000	24.53	26.04	50.57	74.00	-23.43	peak

Test Mode:	802.11ax HE20	Channel:	5260
Polarity:	Horizontal	Test Voltage:	DC 5 V

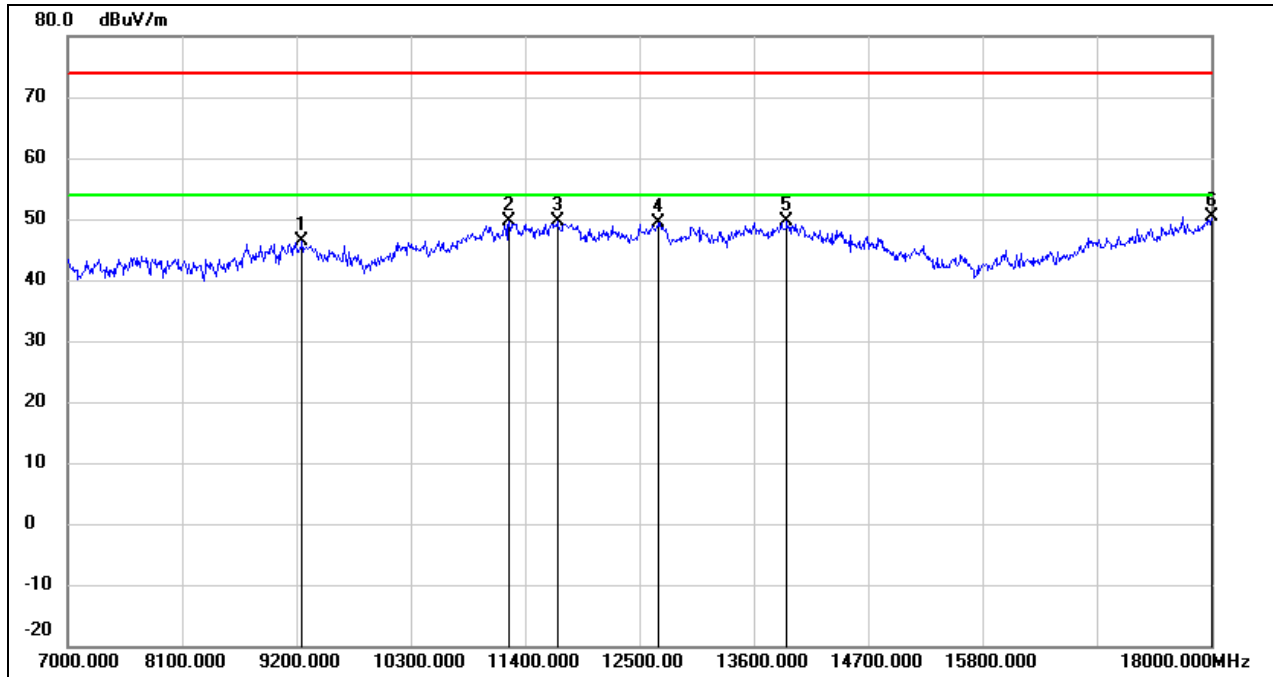


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	35.81	10.51	46.32	74.00	-27.68	peak
2	11246.000	33.94	15.73	49.67	74.00	-24.33	peak
3	11708.000	32.53	17.16	49.69	74.00	-24.31	peak
4	12687.000	31.29	18.05	49.34	74.00	-24.66	peak
5	13919.000	27.90	21.68	49.58	74.00	-24.42	peak
6	18000.000	24.32	26.12	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE20	Channel:	5260
Polarity:	Vertical	Test Voltage:	DC 5 V

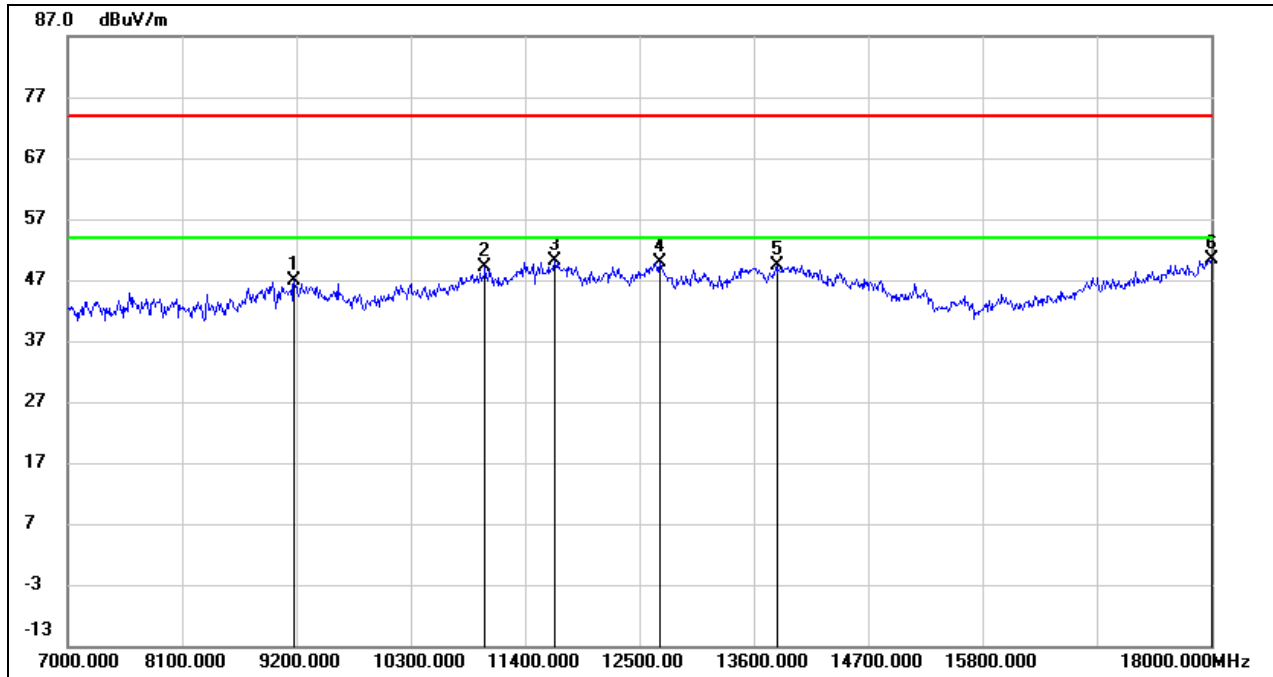


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.32	10.45	46.77	74.00	-27.23	peak
2	11015.000	34.36	14.79	49.15	74.00	-24.85	peak
3	11686.000	32.89	17.12	50.01	74.00	-23.99	peak
4	12698.000	31.77	18.08	49.85	74.00	-24.15	peak
5	13820.000	28.00	21.43	49.43	74.00	-24.57	peak
6	18000.000	24.38	26.12	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE20	Channel:	5280
Polarity:	Horizontal	Test Voltage:	DC 5 V

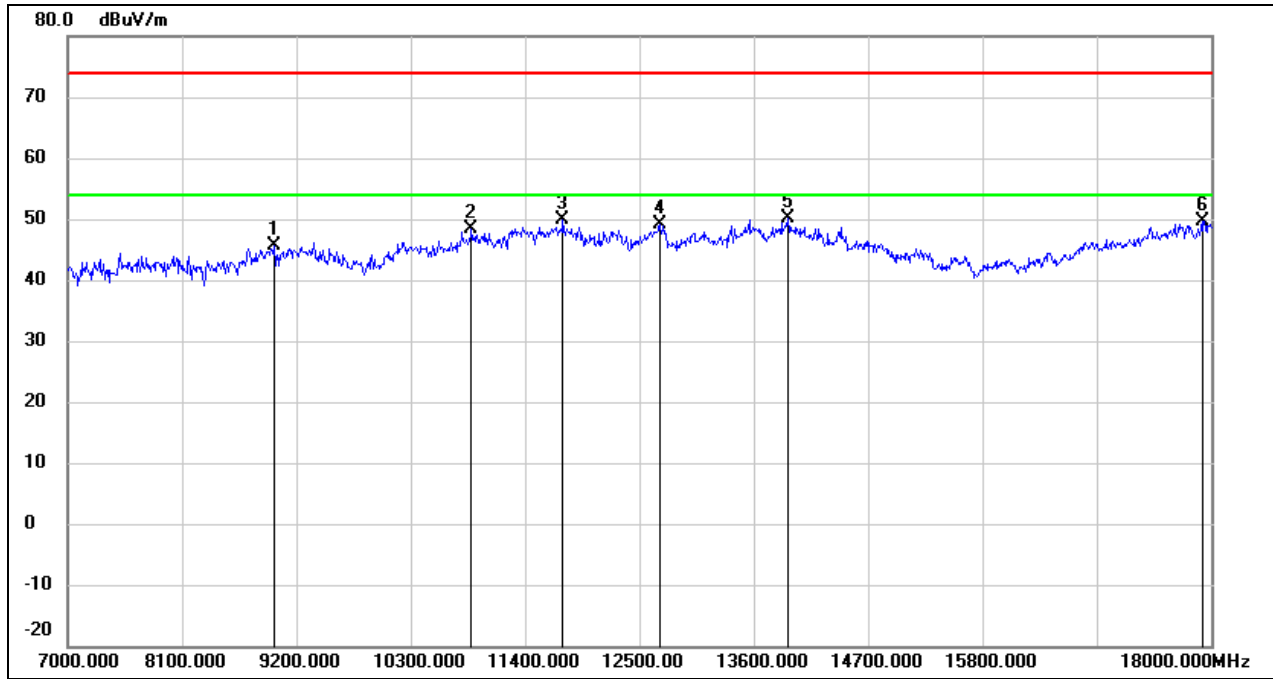


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	35.25	10.28	45.53	74.00	-28.47	peak
2	10883.000	34.06	14.27	48.33	74.00	-25.67	peak
3	11763.000	32.62	17.26	49.88	74.00	-24.12	peak
4	12698.000	31.04	18.08	49.12	74.00	-24.88	peak
5	13930.000	28.39	21.71	50.10	74.00	-23.90	peak
6	17912.000	24.10	25.52	49.62	74.00	-24.38	peak

Test Mode:	802.11ax HE20	Channel:	5280
Polarity:	Vertical	Test Voltage:	DC 5 V

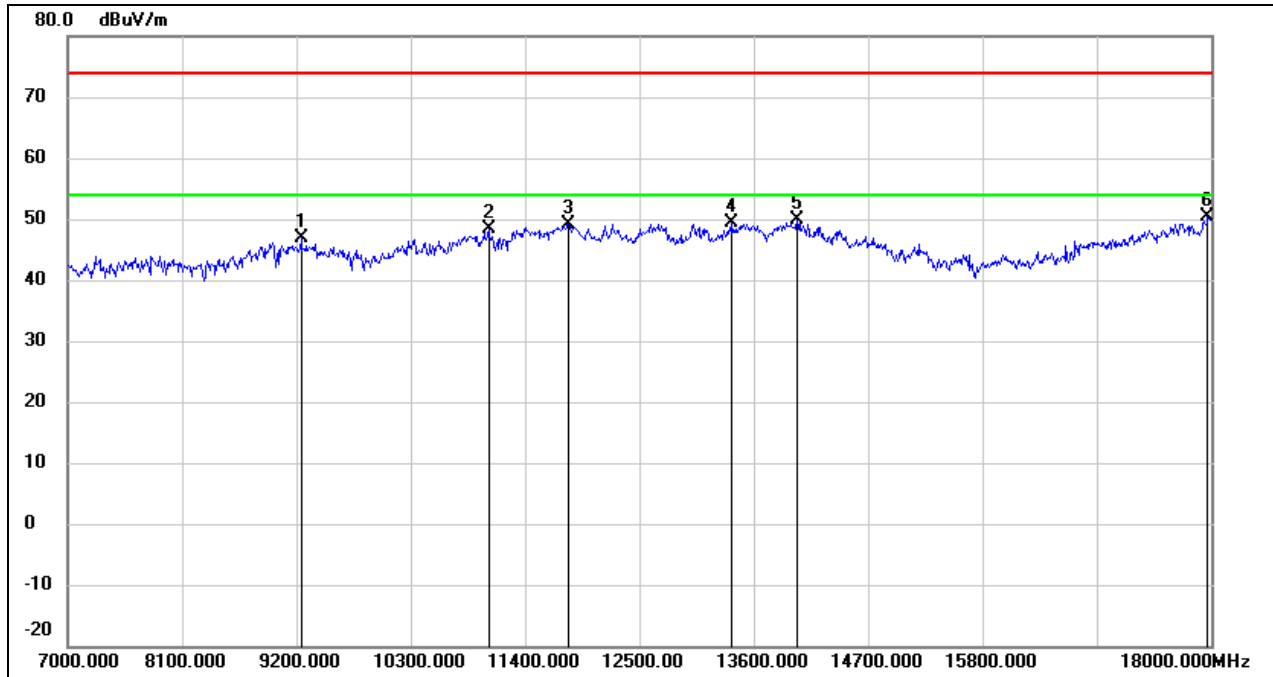


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.33	10.49	46.82	74.00	-27.18	peak
2	11048.000	33.54	14.91	48.45	74.00	-25.55	peak
3	11818.000	31.71	17.36	49.07	74.00	-24.93	peak
4	13391.000	29.14	20.16	49.30	74.00	-24.70	peak
5	14018.000	28.01	21.80	49.81	74.00	-24.19	peak
6	17967.000	24.37	25.89	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Channel:	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

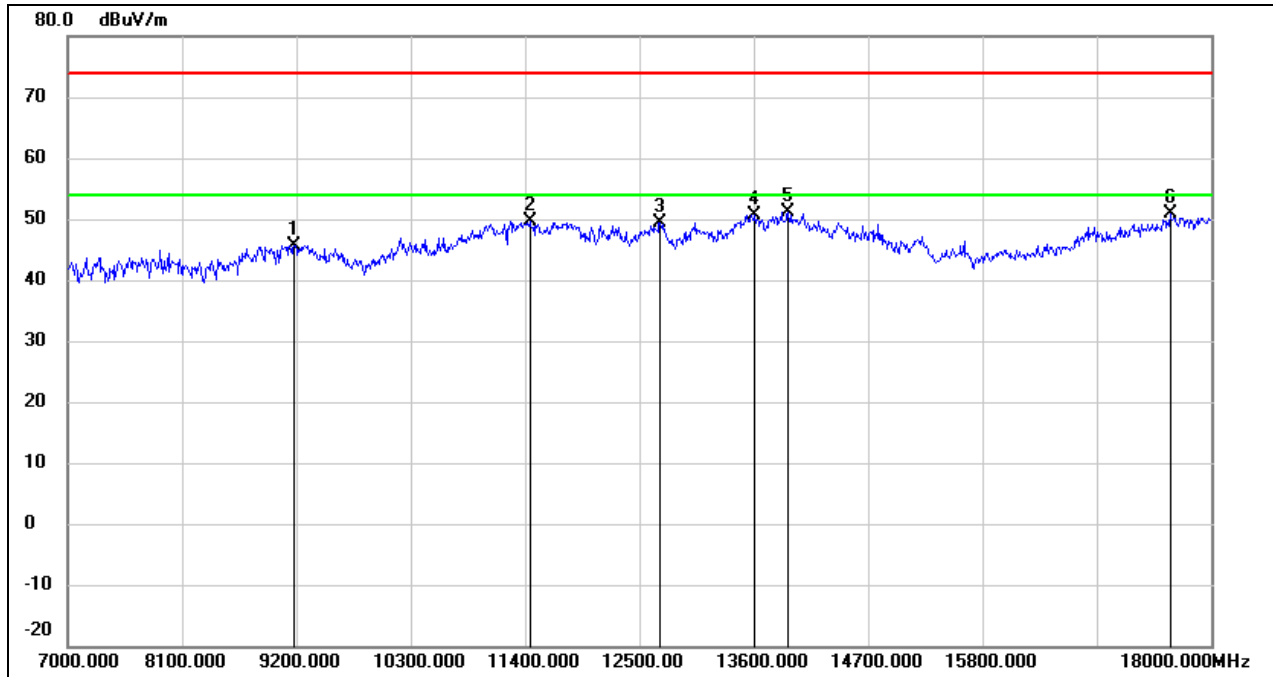


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.25	10.45	45.70	74.00	-28.30	peak
2	11444.000	33.21	16.53	49.74	74.00	-24.26	peak
3	12698.000	31.38	18.08	49.46	74.00	-24.54	peak
4	13611.000	29.74	20.92	50.66	74.00	-23.34	peak
5	13930.000	29.42	21.71	51.13	74.00	-22.87	peak
6	17604.000	27.42	23.41	50.83	74.00	-23.17	peak

Test Mode:	802.11ax HE20	Channel:	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

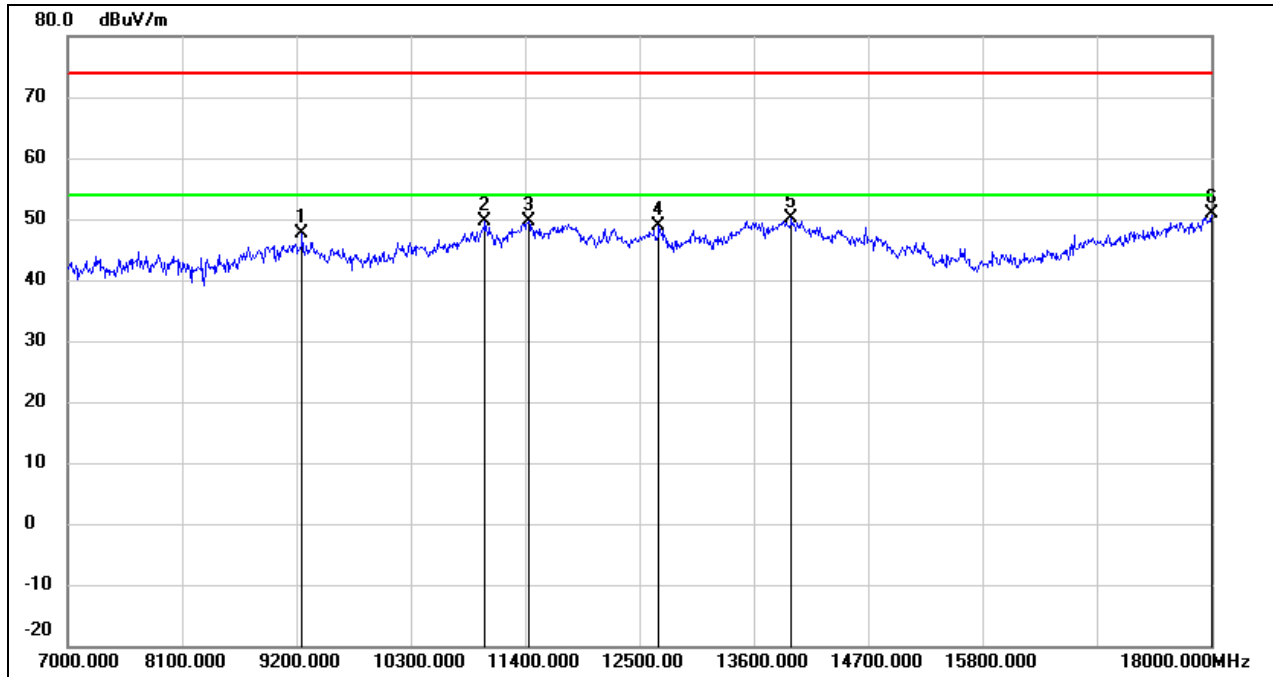


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.06	10.51	47.57	74.00	-26.43	peak
2	11015.000	34.72	14.79	49.51	74.00	-24.49	peak
3	11433.000	33.04	16.50	49.54	74.00	-24.46	peak
4	12687.000	30.87	18.05	48.92	74.00	-25.08	peak
5	13963.000	28.35	21.78	50.13	74.00	-23.87	peak
6	18000.000	24.71	26.12	50.83	74.00	-23.17	peak

Test Mode:	802.11ax HE20	Channel:	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

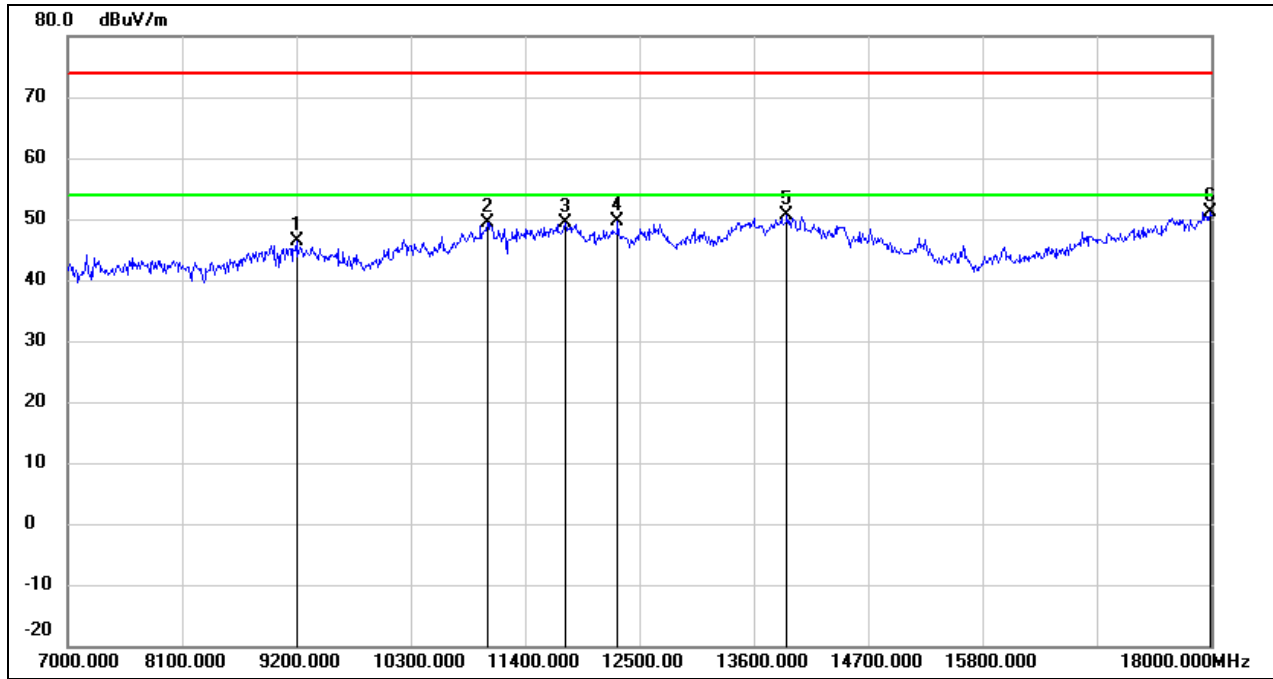


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	35.94	10.46	46.40	74.00	-27.60	peak
2	11037.000	34.58	14.87	49.45	74.00	-24.55	peak
3	11785.000	32.01	17.30	49.31	74.00	-24.69	peak
4	12291.000	31.73	17.78	49.51	74.00	-24.49	peak
5	13919.000	28.99	21.68	50.67	74.00	-23.33	peak
6	17989.000	25.11	26.04	51.15	74.00	-22.85	peak

Test Mode:	802.11ax HE20	Channel:	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

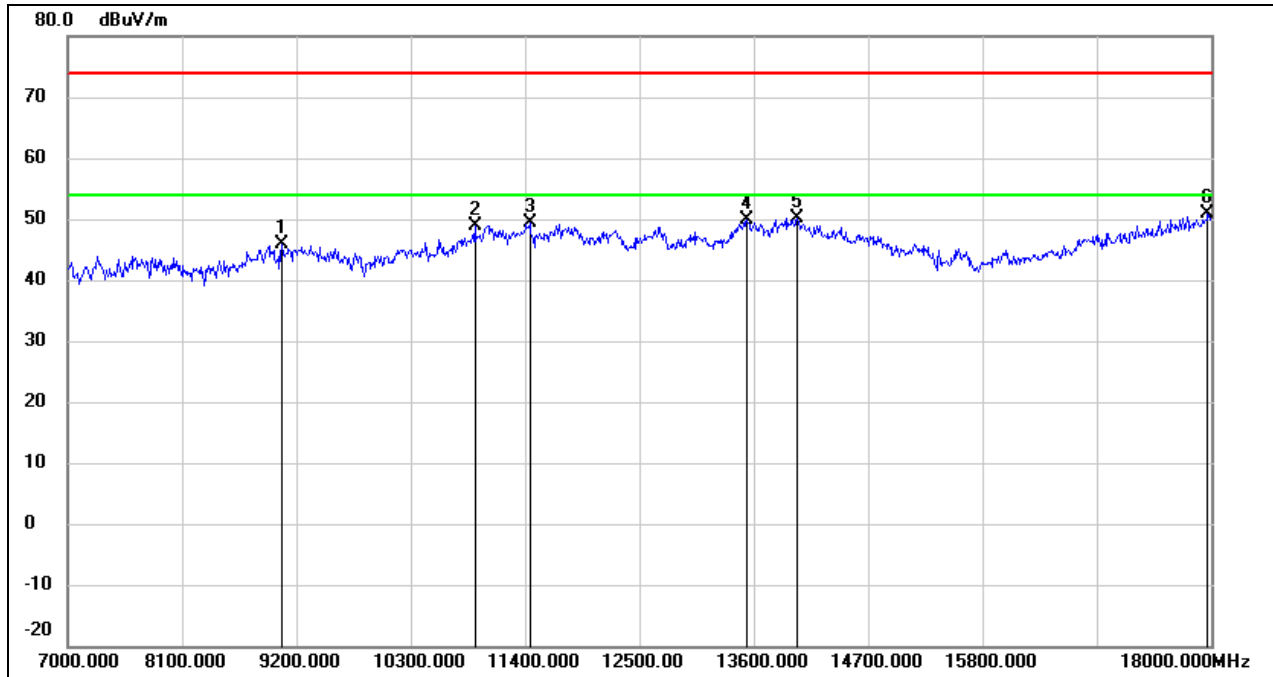


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	35.47	10.38	45.85	74.00	-28.15	peak
2	10916.000	34.44	14.39	48.83	74.00	-25.17	peak
3	11444.000	32.82	16.53	49.35	74.00	-24.65	peak
4	13534.000	29.15	20.73	49.88	74.00	-24.12	peak
5	14018.000	28.41	21.80	50.21	74.00	-23.79	peak
6	17967.000	24.87	25.89	50.76	74.00	-23.24	peak

Test Mode:	802.11ax HE20	Channel:	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

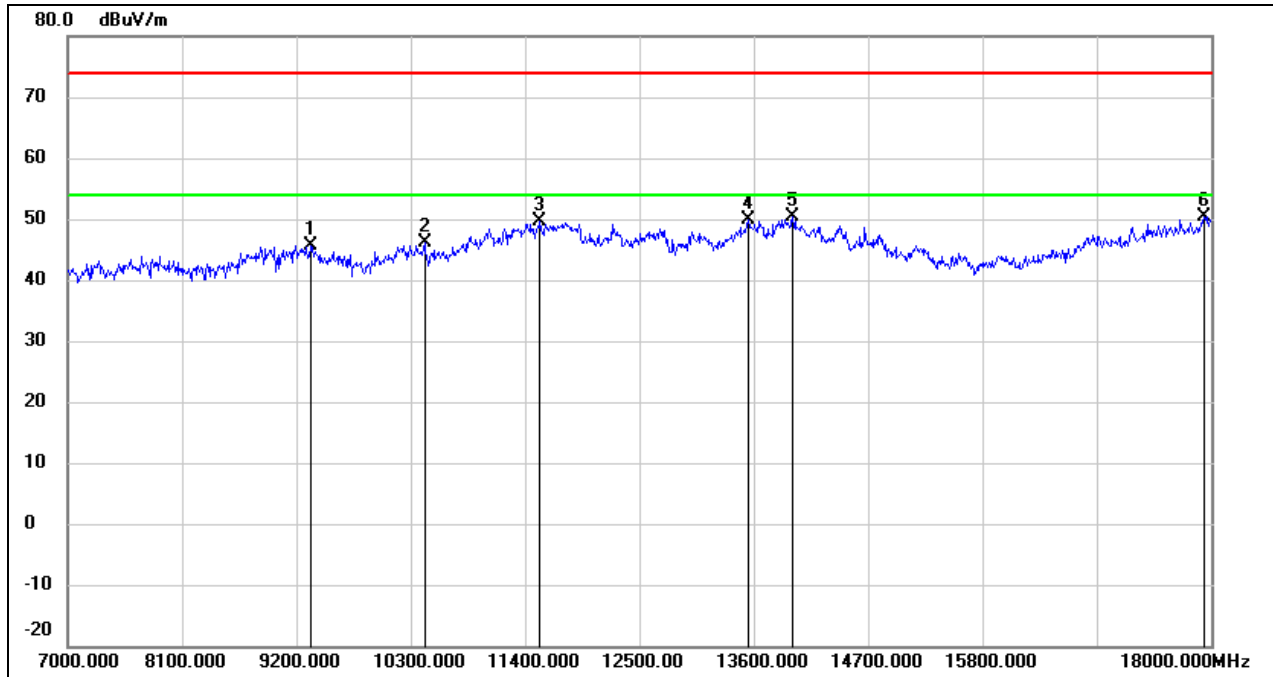


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	35.00	10.55	45.55	74.00	-28.45	peak
2	10432.000	33.56	12.67	46.23	74.00	-27.77	peak
3	11543.000	32.79	16.84	49.63	74.00	-24.37	peak
4	13545.000	29.22	20.75	49.97	74.00	-24.03	peak
5	13974.000	28.58	21.82	50.40	74.00	-23.60	peak
6	17934.000	24.80	25.67	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE20	Channel:	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

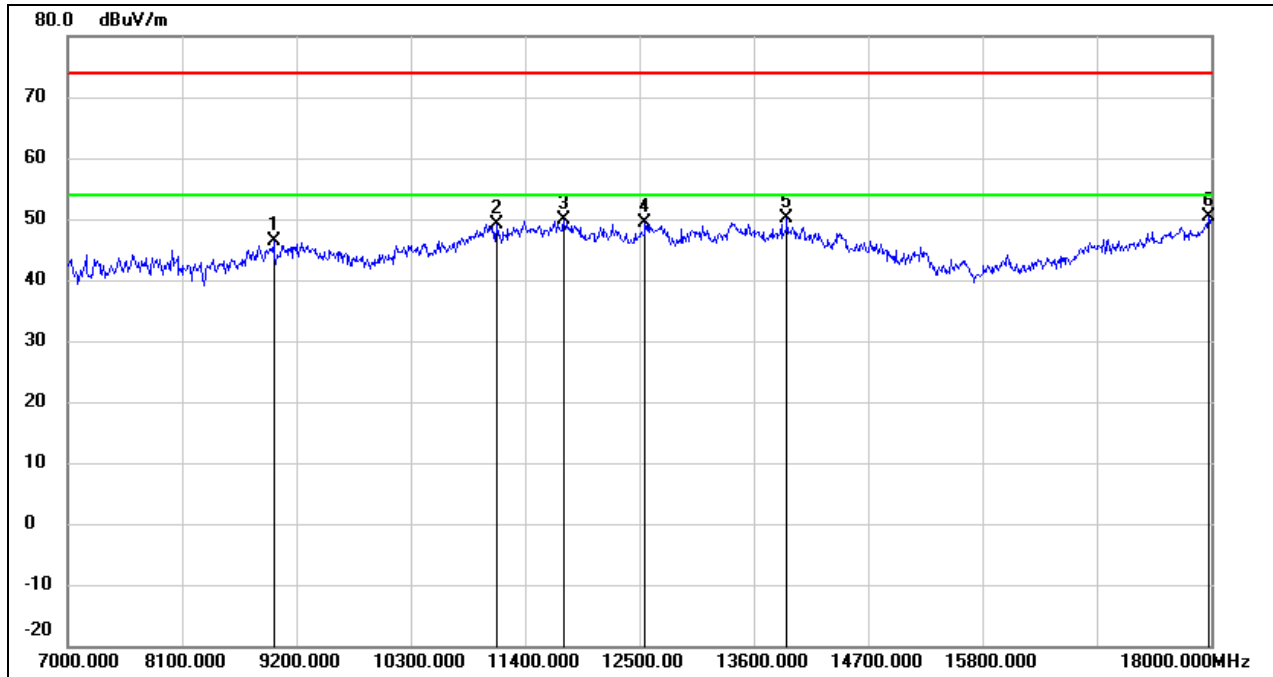


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	36.11	10.21	46.32	74.00	-27.68	peak
2	11125.000	33.96	15.22	49.18	74.00	-24.82	peak
3	11774.000	32.62	17.28	49.90	74.00	-24.10	peak
4	12555.000	31.54	17.90	49.44	74.00	-24.56	peak
5	13919.000	28.41	21.68	50.09	74.00	-23.91	peak
6	17978.000	24.48	25.97	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE20	Channel:	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

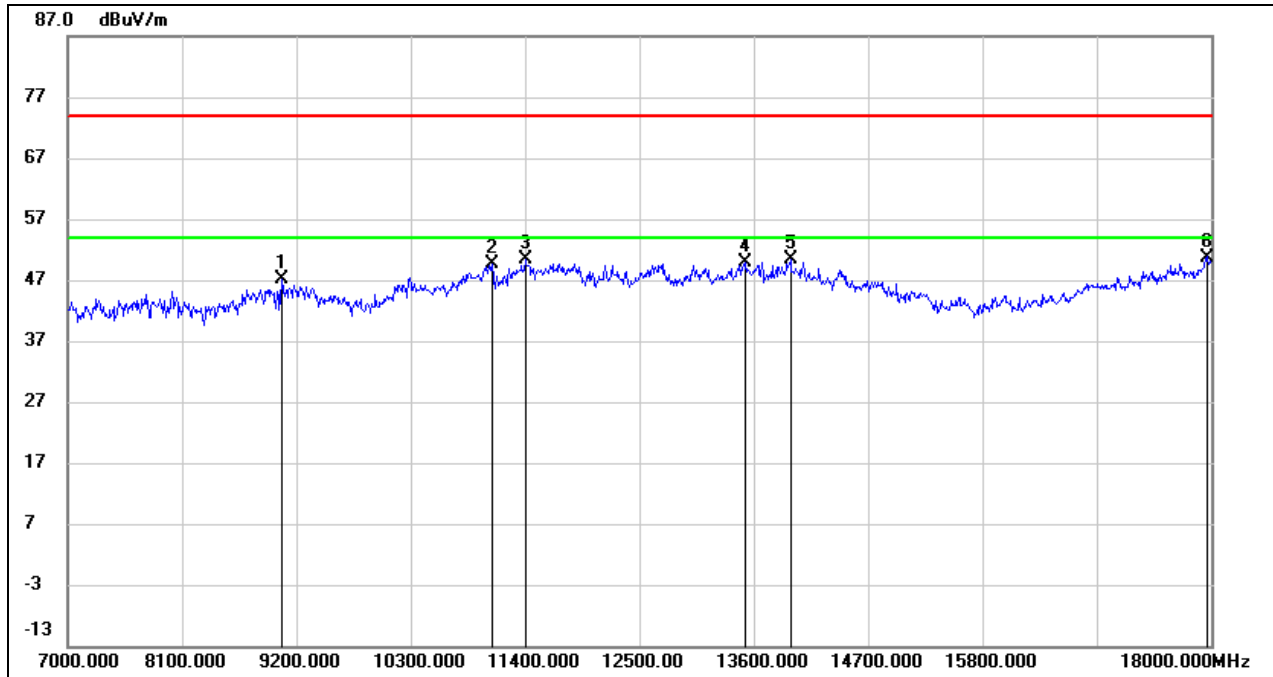


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.68	10.38	47.06	74.00	-26.94	peak
2	11081.000	34.63	15.05	49.68	74.00	-24.32	peak
3	11400.000	33.97	16.36	50.33	74.00	-23.67	peak
4	13523.000	29.16	20.70	49.86	74.00	-24.14	peak
5	13952.000	28.54	21.76	50.30	74.00	-23.70	peak
6	17956.000	24.93	25.82	50.75	74.00	-23.25	peak

Test Mode:	802.11ax HE20	Channel:	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

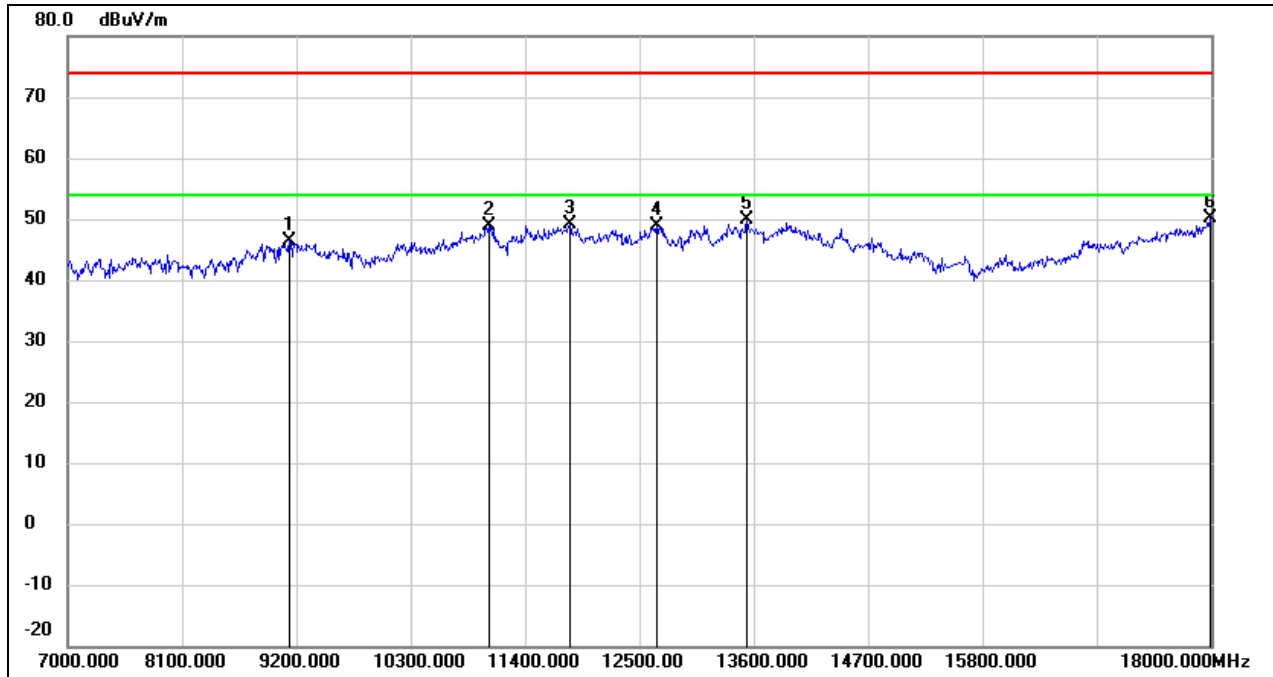


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	35.94	10.41	46.35	74.00	-27.65	peak
2	11048.000	34.08	14.91	48.99	74.00	-25.01	peak
3	11829.000	31.86	17.38	49.24	74.00	-24.76	peak
4	12665.000	30.83	18.04	48.87	74.00	-25.13	peak
5	13534.000	29.04	20.73	49.77	74.00	-24.23	peak
6	17989.000	24.10	26.04	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE20	Channel:	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

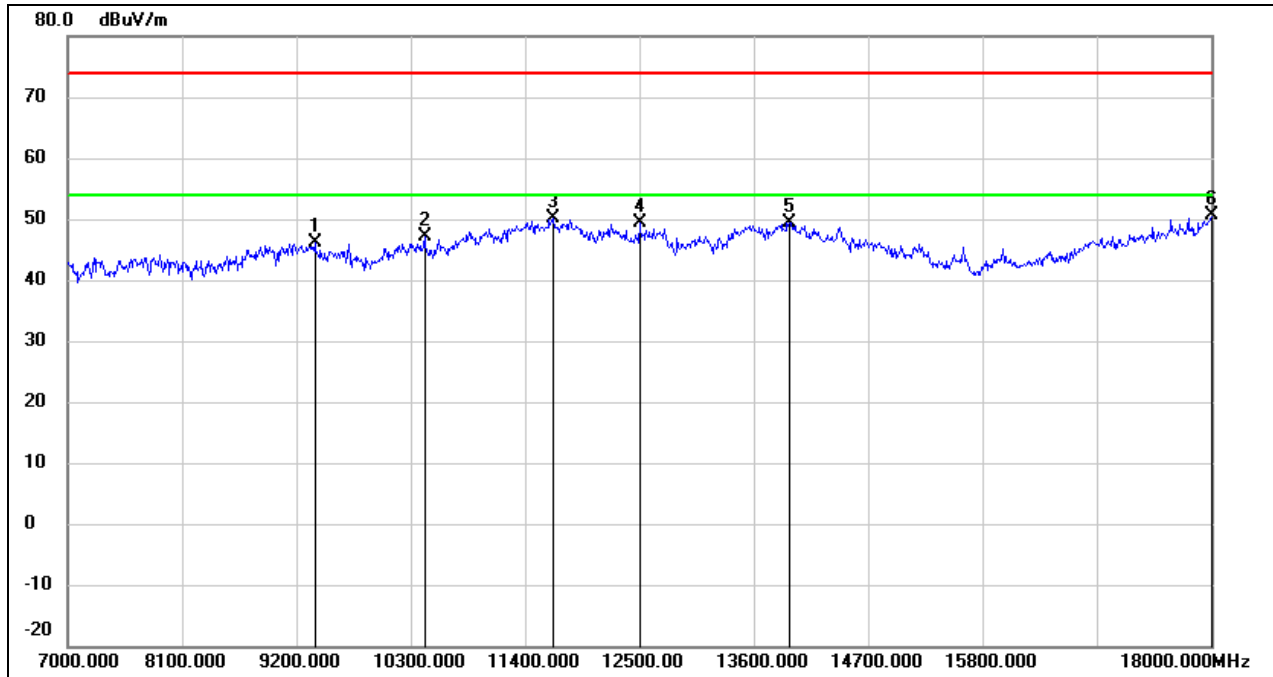


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	35.55	10.58	46.13	74.00	-27.87	peak
2	10432.000	34.42	12.67	47.09	74.00	-26.91	peak
3	11675.000	33.07	17.10	50.17	74.00	-23.83	peak
4	12500.000	31.51	17.83	49.34	74.00	-24.66	peak
5	13941.000	27.71	21.73	49.44	74.00	-24.56	peak
6	18000.000	24.59	26.12	50.71	74.00	-23.29	peak

Test Mode:	802.11ax HE20	Channel:	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

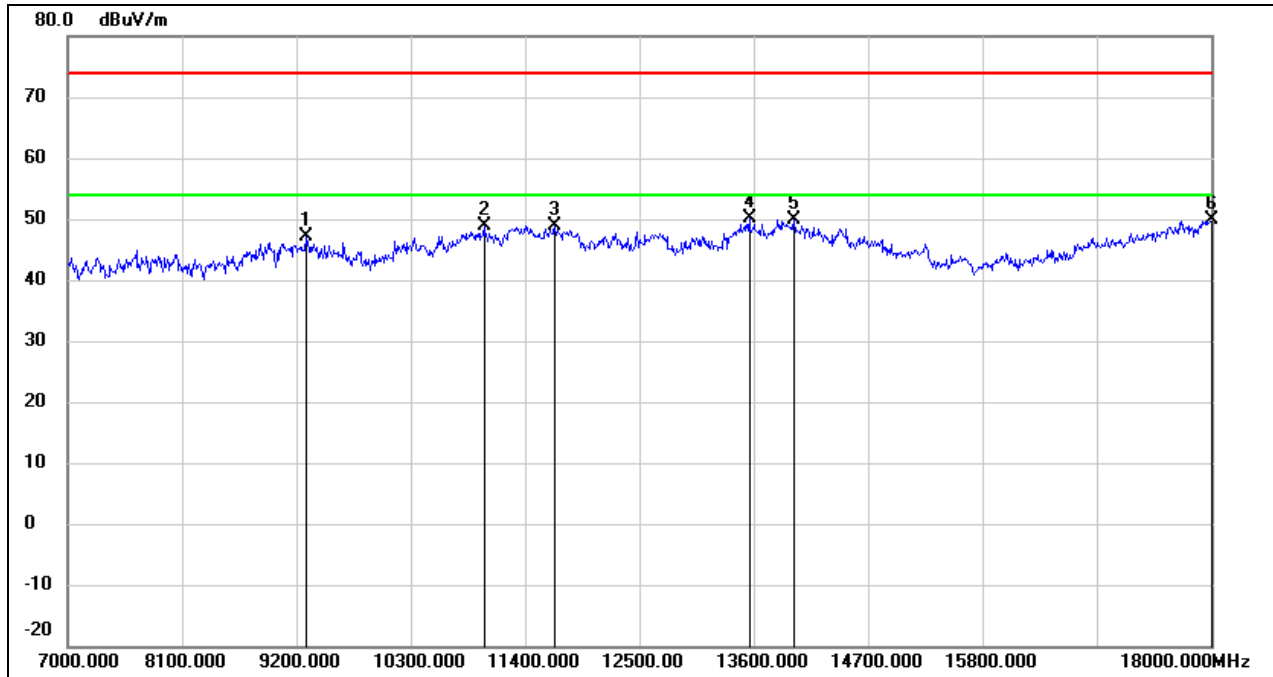


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	36.51	10.52	47.03	74.00	-26.97	peak
2	11004.000	34.04	14.74	48.78	74.00	-25.22	peak
3	11686.000	31.76	17.12	48.88	74.00	-25.12	peak
4	13556.000	29.26	20.78	50.04	74.00	-23.96	peak
5	13985.000	28.15	21.85	50.00	74.00	-24.00	peak
6	18000.000	23.81	26.12	49.93	74.00	-24.07	peak

Test Mode:	802.11ax HE20	Channel:	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

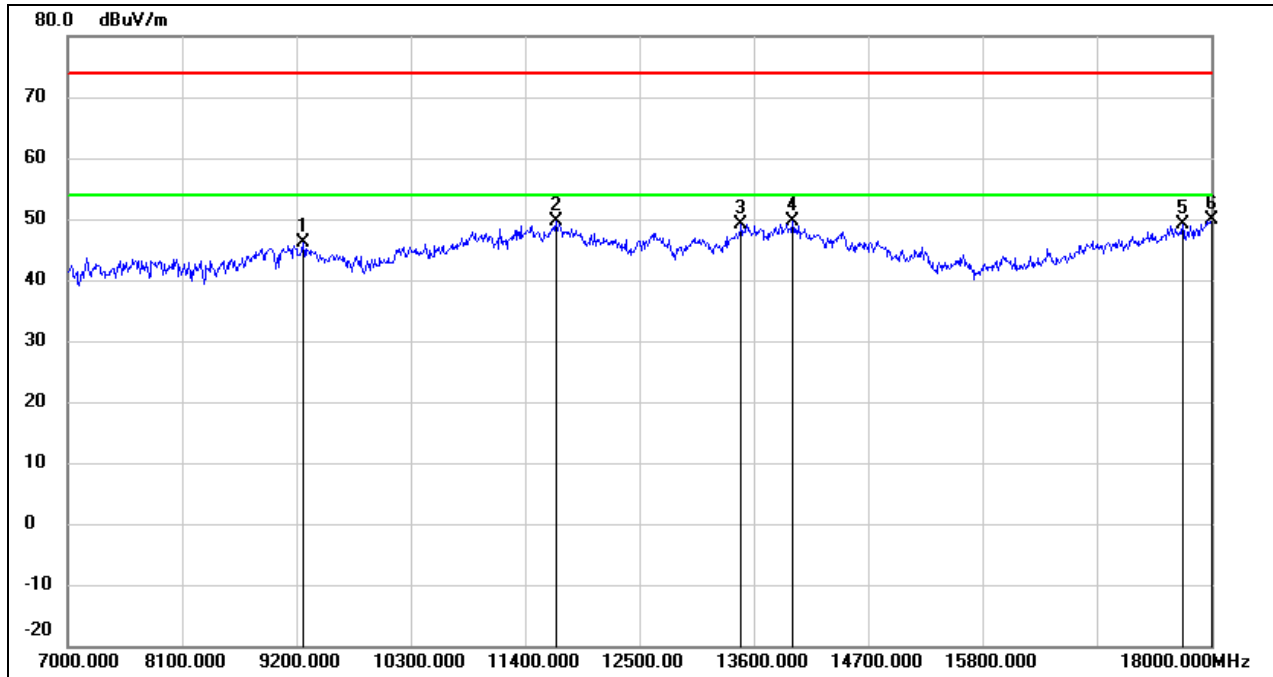


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	35.54	10.51	46.05	74.00	-27.95	peak
2	11697.000	32.61	17.13	49.74	74.00	-24.26	peak
3	13479.000	28.65	20.55	49.20	74.00	-24.80	peak
4	13974.000	27.93	21.82	49.75	74.00	-24.25	peak
5	17725.000	24.88	24.24	49.12	74.00	-24.88	peak
6	18000.000	23.68	26.12	49.80	74.00	-24.20	peak

Test Mode:	802.11ax HE20	Channel:	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

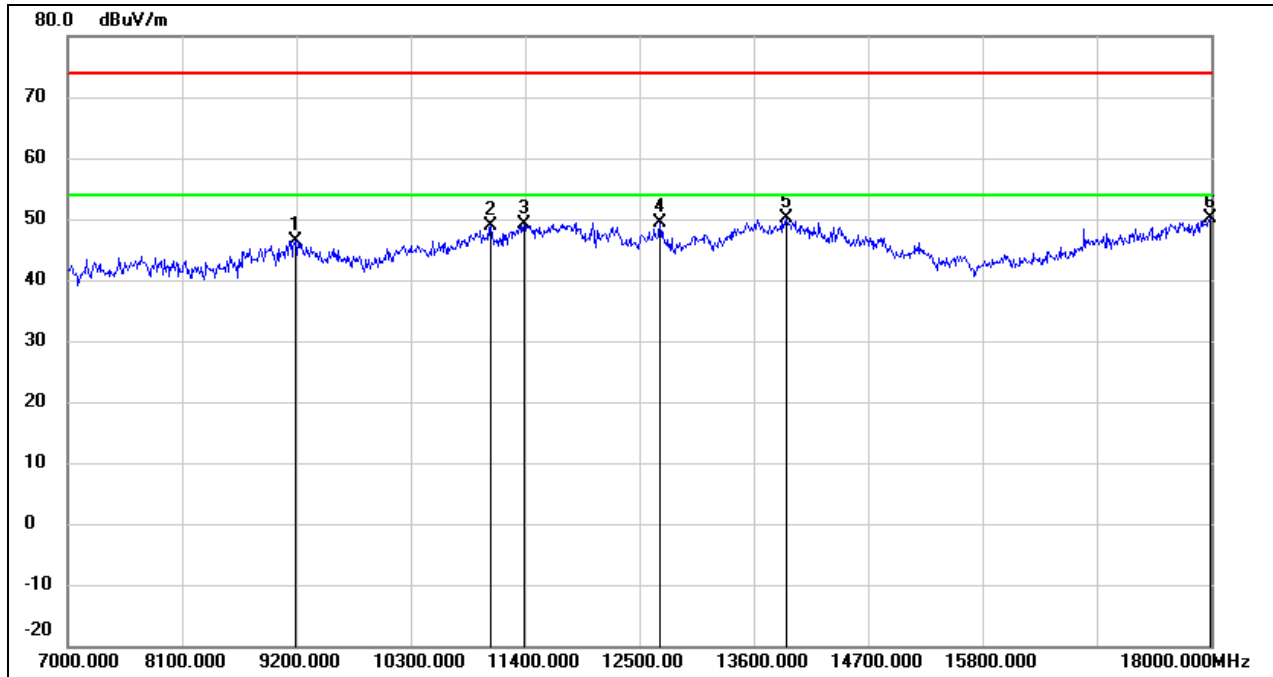


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	35.96	10.46	46.42	74.00	-27.58	peak
2	11070.000	33.76	15.01	48.77	74.00	-25.23	peak
3	11389.000	32.87	16.31	49.18	74.00	-24.82	peak
4	12698.000	31.20	18.08	49.28	74.00	-24.72	peak
5	13908.000	28.52	21.66	50.18	74.00	-23.82	peak
6	17989.000	24.16	26.04	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE20	Channel:	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

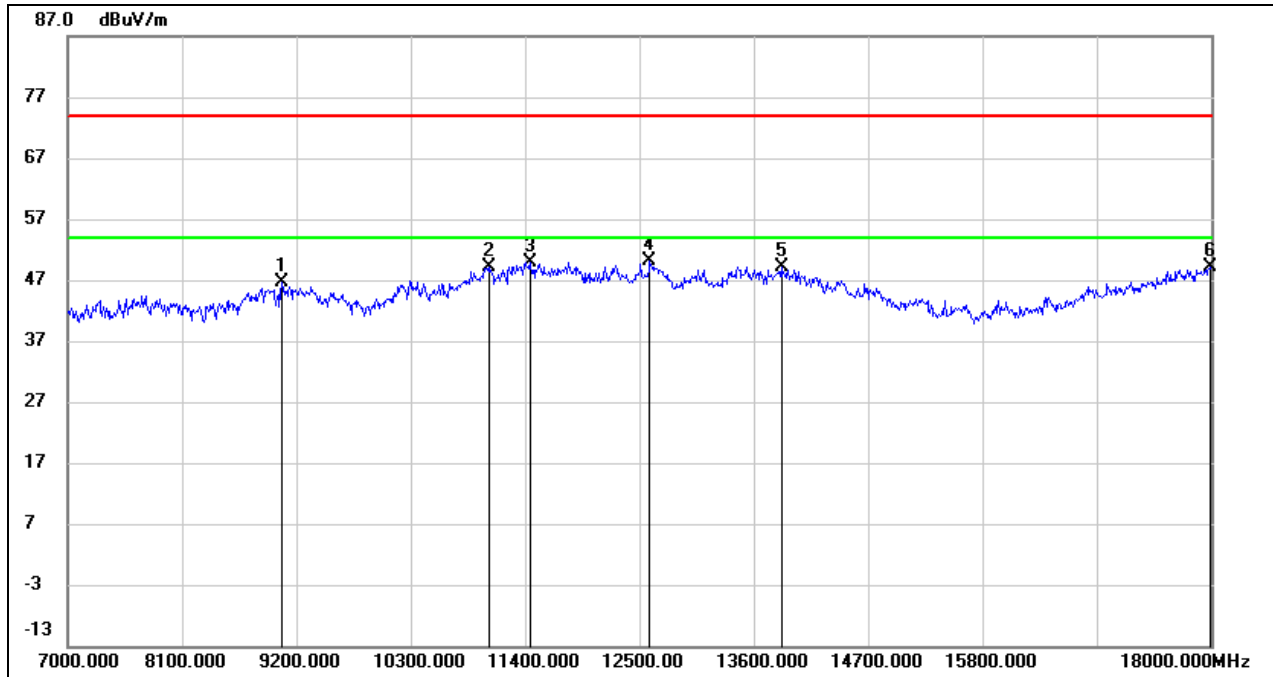


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.33	10.38	46.71	74.00	-27.29	peak
2	11048.000	34.26	14.91	49.17	74.00	-24.83	peak
3	11444.000	33.46	16.53	49.99	74.00	-24.01	peak
4	12599.000	32.09	17.95	50.04	74.00	-23.96	peak
5	13864.000	27.71	21.53	49.24	74.00	-24.76	peak
6	17989.000	23.20	26.04	49.24	74.00	-24.76	peak

Test Mode:	802.11ax HE20	Channel:	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

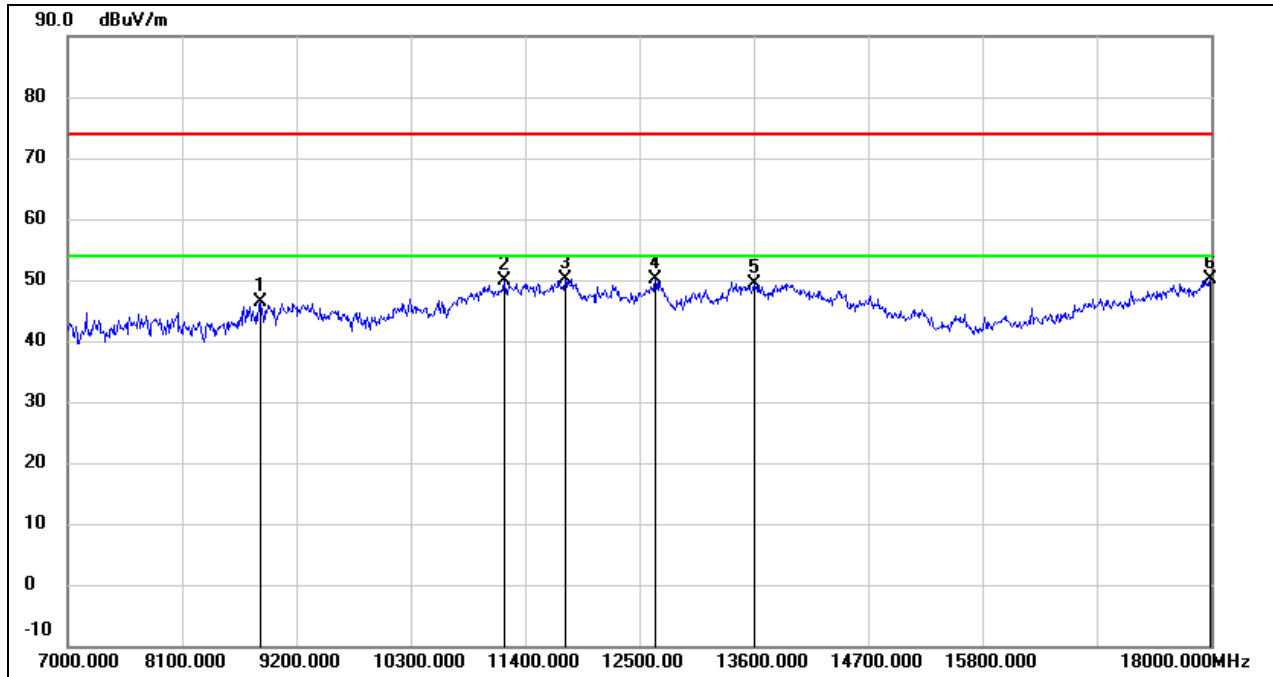


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8848.000	37.05	9.29	46.34	74.00	-27.66	peak
2	11202.000	34.28	15.55	49.83	74.00	-24.17	peak
3	11785.000	32.95	17.30	50.25	74.00	-23.75	peak
4	12654.000	32.05	18.01	50.06	74.00	-23.94	peak
5	13600.000	28.40	20.89	49.29	74.00	-24.71	peak
6	17989.000	24.01	26.04	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE20	Channel:	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

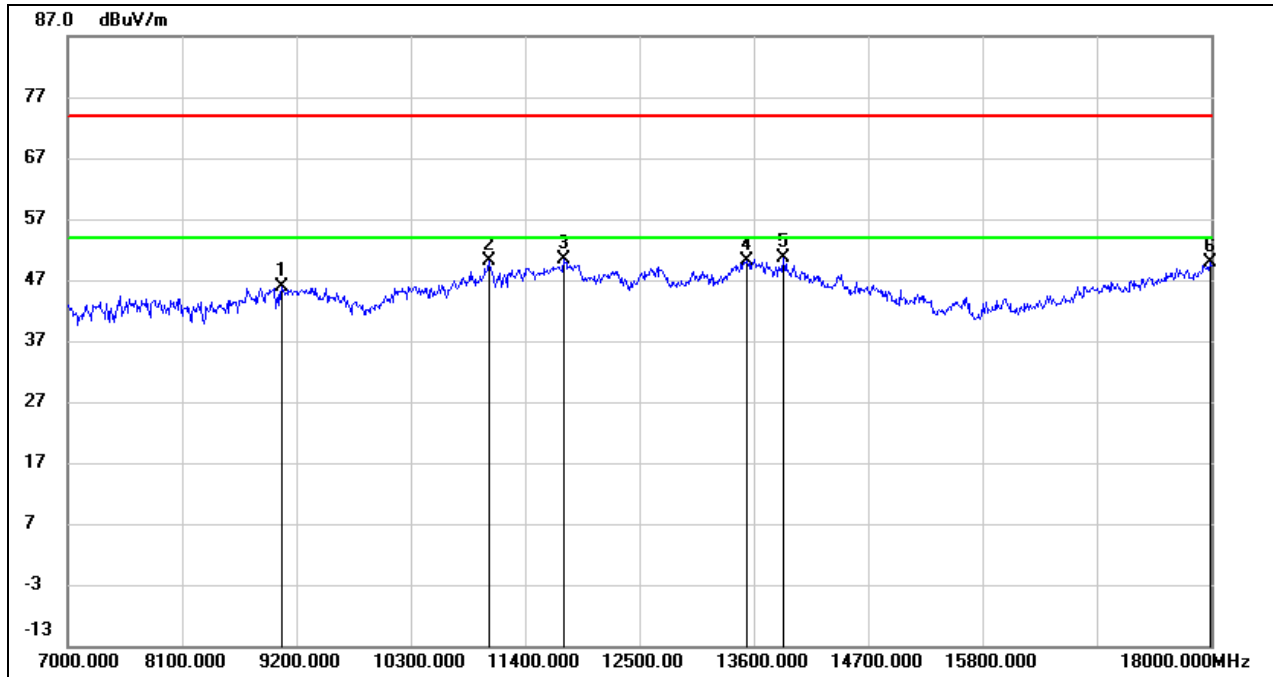


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	35.50	10.38	45.88	74.00	-28.12	peak
2	11048.000	35.31	14.91	50.22	74.00	-23.78	peak
3	11774.000	33.09	17.28	50.37	74.00	-23.63	peak
4	13534.000	29.49	20.73	50.22	74.00	-23.78	peak
5	13886.000	29.04	21.60	50.64	74.00	-23.36	peak
6	17989.000	23.80	26.04	49.84	74.00	-24.16	peak

Test Mode:	802.11ax HE20	Channel:	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

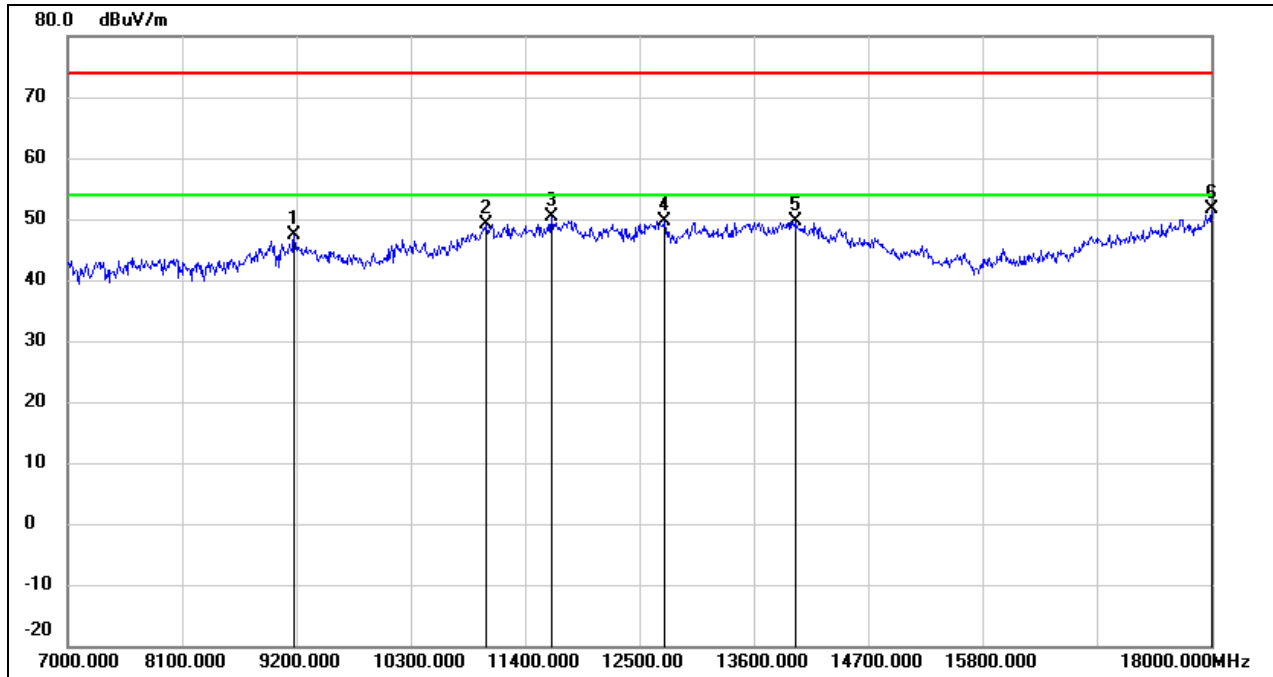


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.86	10.45	47.31	74.00	-26.69	peak
2	11026.000	34.32	14.82	49.14	74.00	-24.86	peak
3	11653.000	33.27	17.05	50.32	74.00	-23.68	peak
4	12742.000	31.62	18.13	49.75	74.00	-24.25	peak
5	13996.000	27.75	21.87	49.62	74.00	-24.38	peak
6	18000.000	25.61	26.12	51.73	74.00	-22.27	peak

Test Mode:	802.11ax HE40	Channel:	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

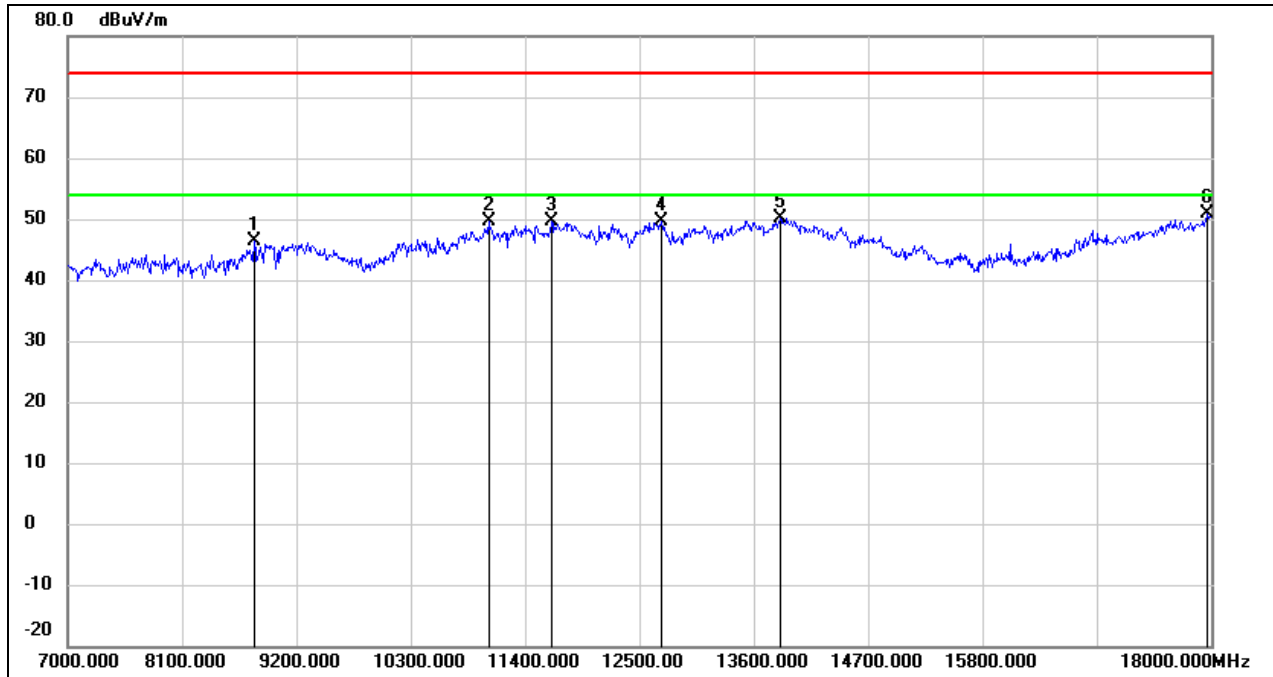


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8793.000	37.37	8.91	46.28	74.00	-27.72	peak
2	11048.000	34.75	14.91	49.66	74.00	-24.34	peak
3	11653.000	32.65	17.05	49.70	74.00	-24.30	peak
4	12709.000	31.50	18.09	49.59	74.00	-24.41	peak
5	13853.000	28.70	21.52	50.22	74.00	-23.78	peak
6	17967.000	24.95	25.89	50.84	74.00	-23.16	peak

Test Mode:	802.11ax HE40	Channel:	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

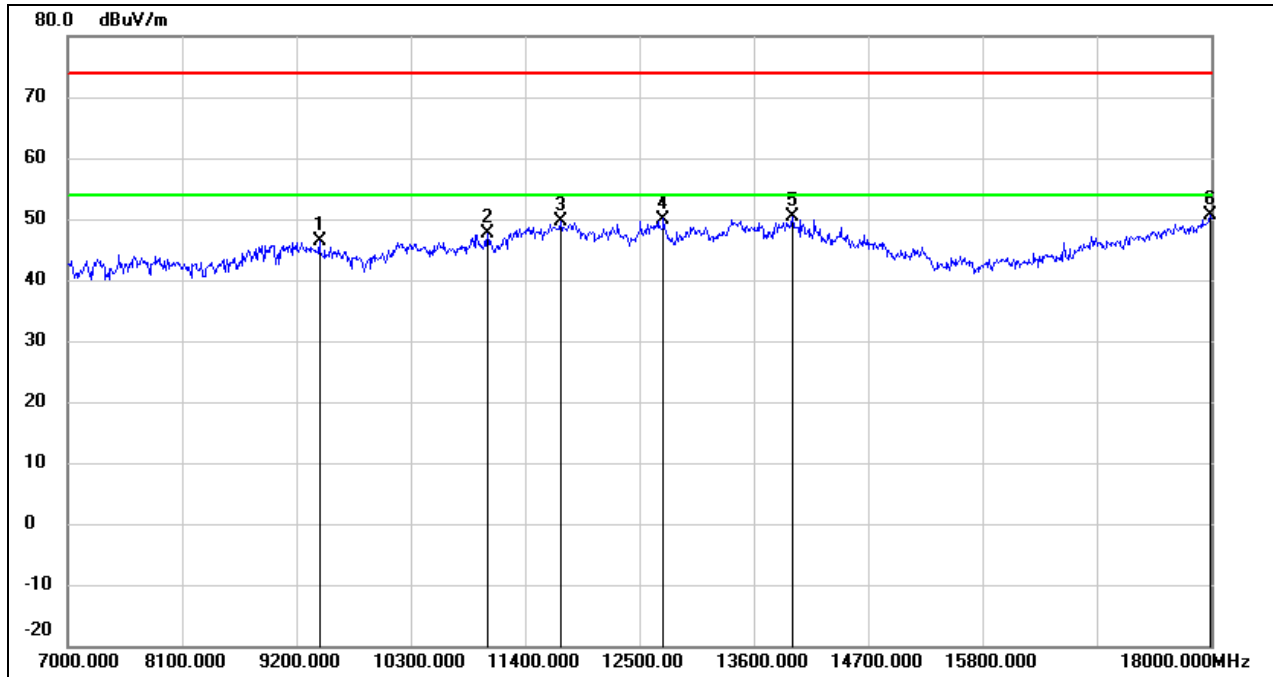


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9420.000	35.70	10.60	46.30	74.00	-27.70	peak
2	11037.000	32.69	14.87	47.56	74.00	-26.44	peak
3	11741.000	32.32	17.22	49.54	74.00	-24.46	peak
4	12731.000	31.88	18.12	50.00	74.00	-24.00	peak
5	13974.000	28.53	21.82	50.35	74.00	-23.65	peak
6	17989.000	24.50	26.04	50.54	74.00	-23.46	peak

Test Mode:	802.11ax HE40	Channel:	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

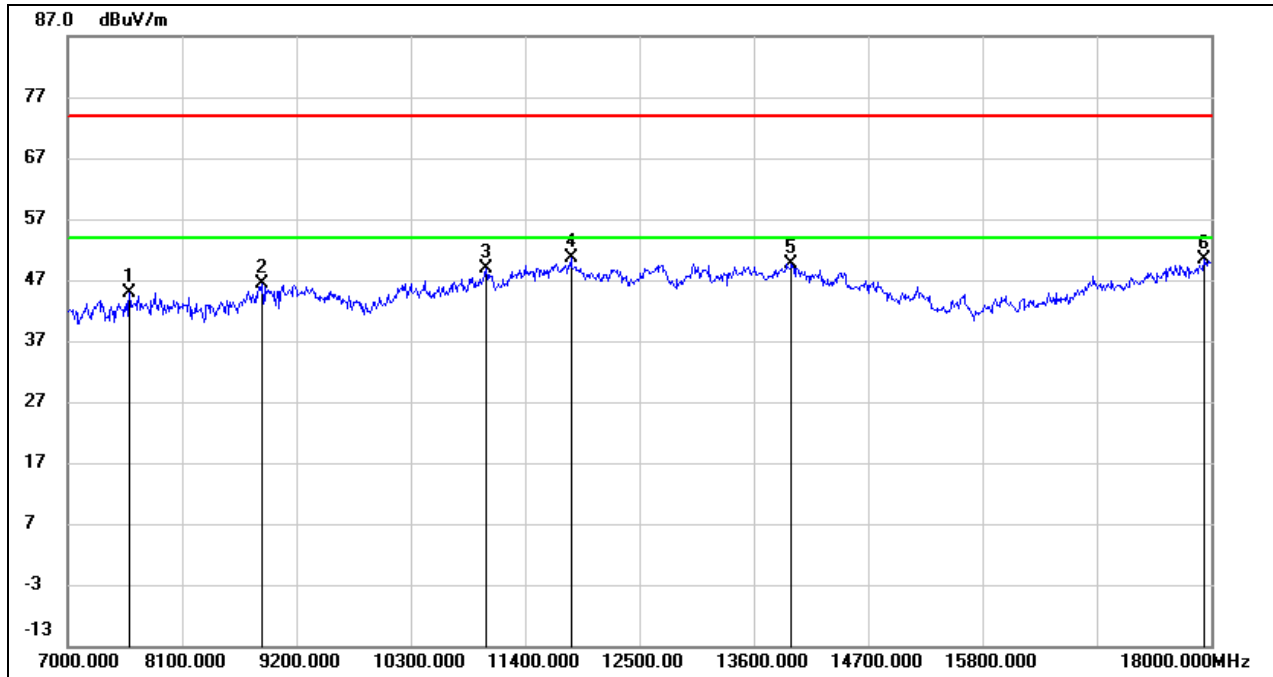


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7594.000	38.08	6.79	44.87	74.00	-29.13	peak
2	8870.000	37.01	9.44	46.45	74.00	-27.55	peak
3	11026.000	33.94	14.82	48.76	74.00	-25.24	peak
4	11840.000	33.33	17.40	50.73	74.00	-23.27	peak
5	13963.000	27.80	21.78	49.58	74.00	-24.42	peak
6	17934.000	24.77	25.67	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE40	Channel:	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

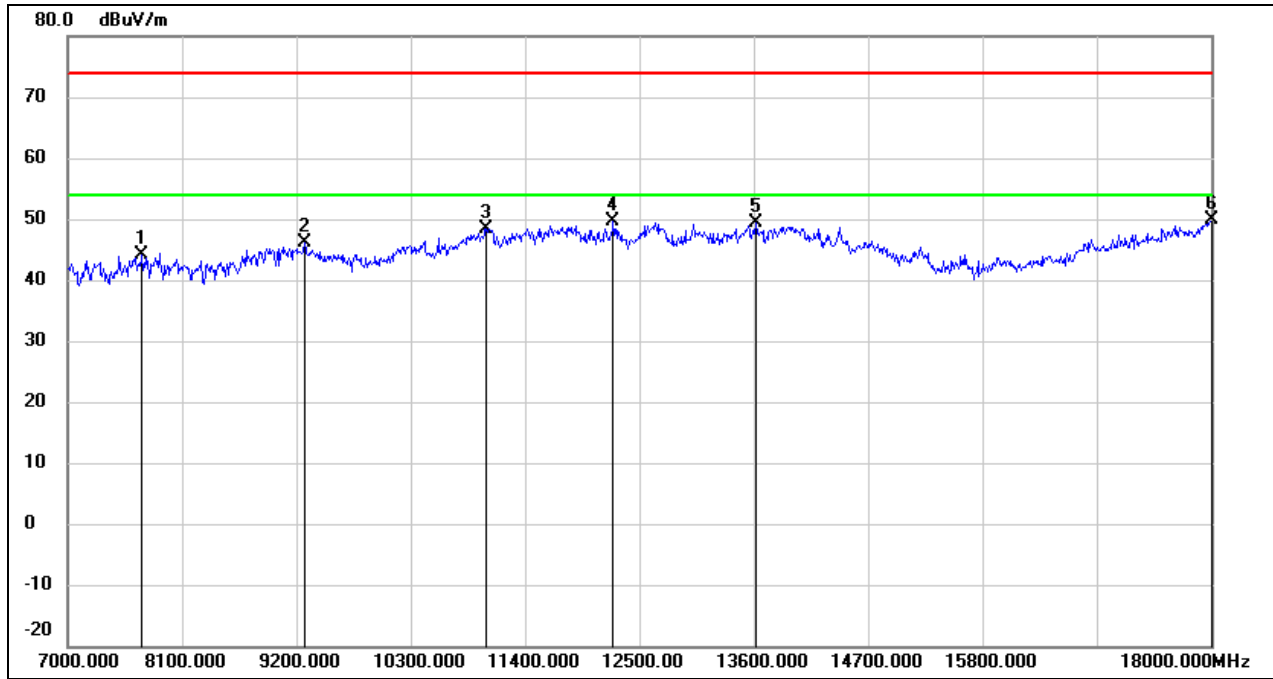


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	37.49	6.68	44.17	74.00	-29.83	peak
2	9277.000	35.58	10.51	46.09	74.00	-27.91	peak
3	11026.000	33.63	14.82	48.45	74.00	-25.55	peak
4	12247.000	31.81	17.77	49.58	74.00	-24.42	peak
5	13622.000	28.41	20.95	49.36	74.00	-24.64	peak
6	18000.000	23.69	26.12	49.81	74.00	-24.19	peak

Test Mode:	802.11ax HE40	Channel:	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

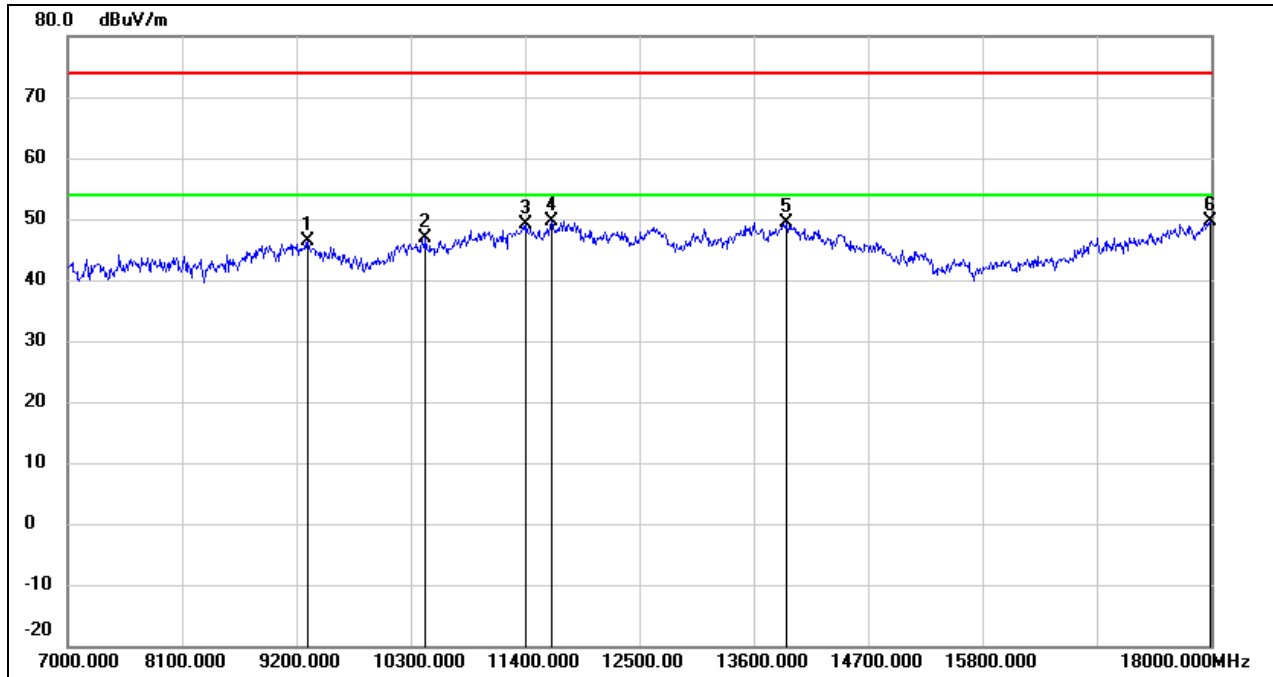


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	35.72	10.54	46.26	74.00	-27.74	peak
2	10443.000	34.21	12.70	46.91	74.00	-27.09	peak
3	11411.000	32.78	16.41	49.19	74.00	-24.81	peak
4	11653.000	32.70	17.05	49.75	74.00	-24.25	peak
5	13908.000	27.61	21.66	49.27	74.00	-24.73	peak
6	17989.000	23.62	26.04	49.66	74.00	-24.34	peak

Test Mode:	802.11ax HE40	Channel:	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

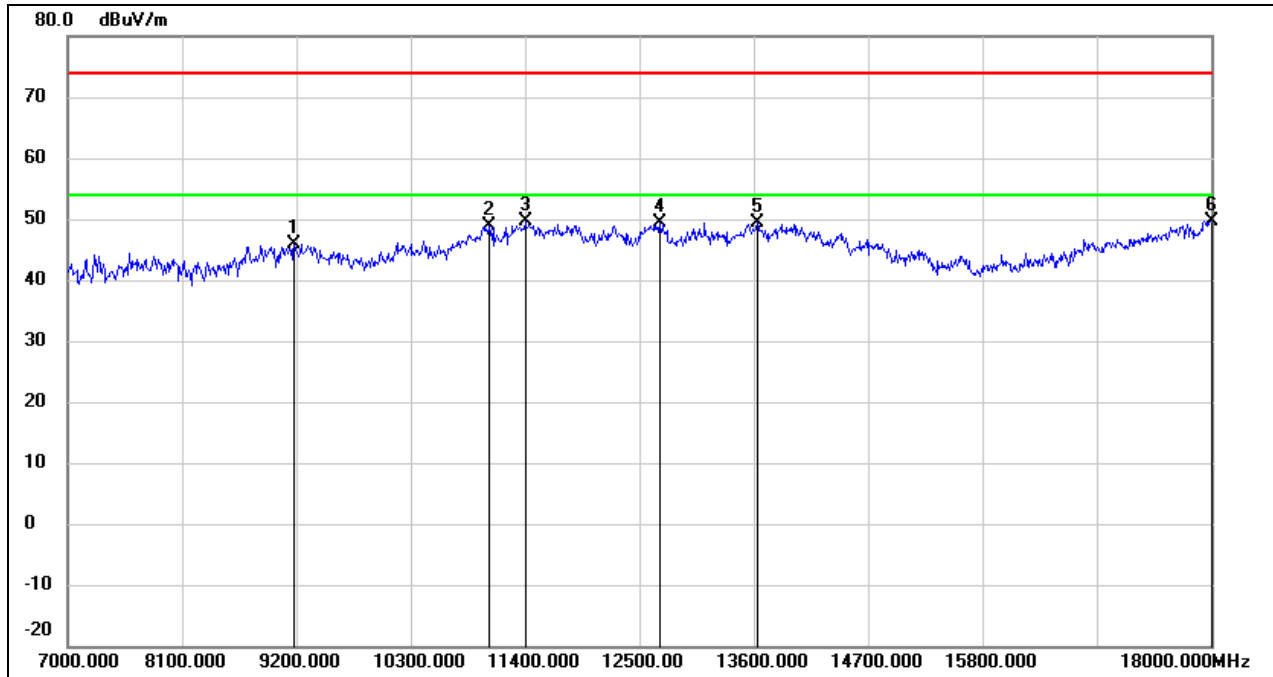


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.50	10.45	45.95	74.00	-28.05	peak
2	11048.000	34.01	14.91	48.92	74.00	-25.08	peak
3	11400.000	33.24	16.36	49.60	74.00	-24.40	peak
4	12698.000	31.40	18.08	49.48	74.00	-24.52	peak
5	13633.000	28.30	20.97	49.27	74.00	-24.73	peak
6	18000.000	23.56	26.12	49.68	74.00	-24.32	peak

Test Mode:	802.11ax HE40	Channel:	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

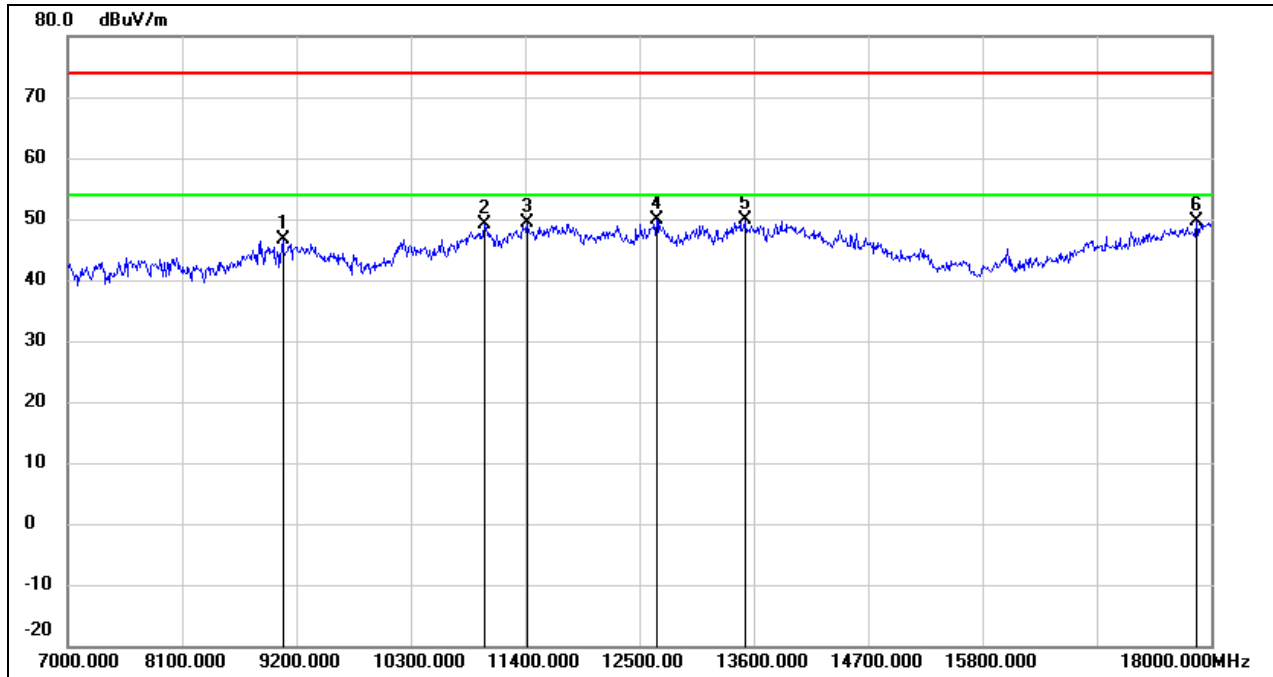


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.30	10.39	46.69	74.00	-27.31	peak
2	11004.000	34.49	14.74	49.23	74.00	-24.77	peak
3	11422.000	33.02	16.46	49.48	74.00	-24.52	peak
4	12665.000	31.76	18.04	49.80	74.00	-24.20	peak
5	13512.000	29.16	20.68	49.84	74.00	-24.16	peak
6	17857.000	24.54	25.14	49.68	74.00	-24.32	peak

Test Mode:	802.11ax HE40	Channel:	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

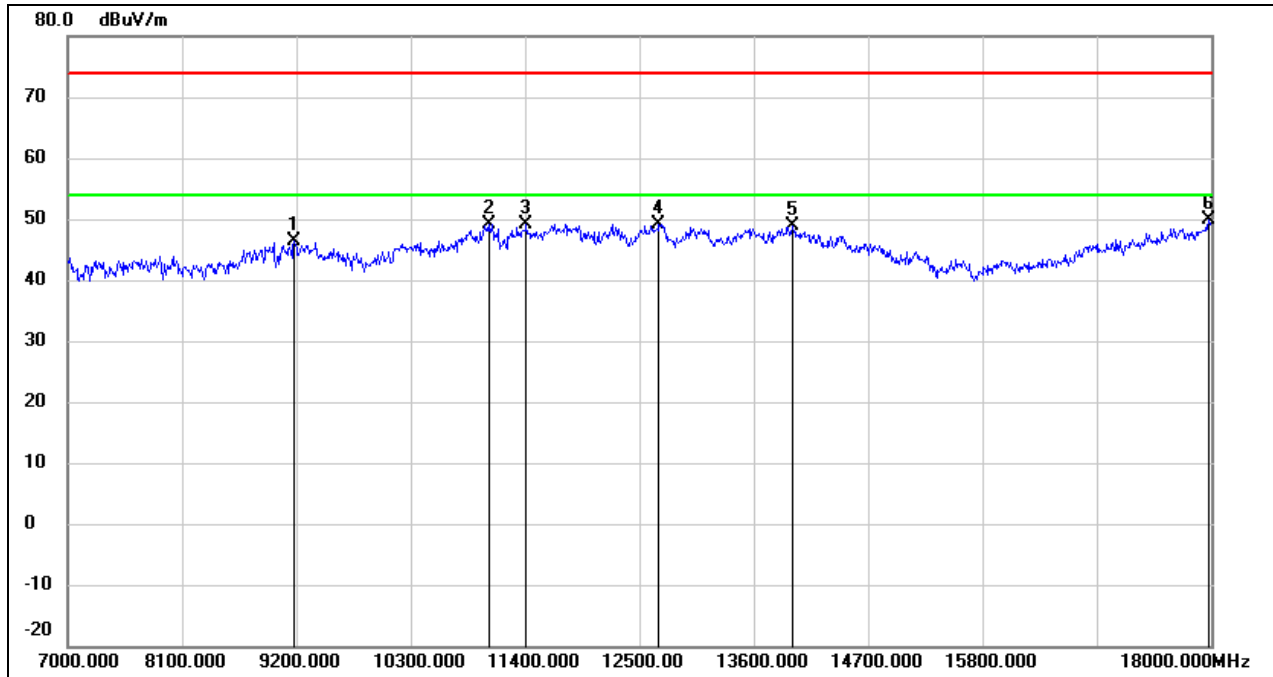


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.01	10.45	46.46	74.00	-27.54	peak
2	11048.000	34.24	14.91	49.15	74.00	-24.85	peak
3	11411.000	32.77	16.41	49.18	74.00	-24.82	peak
4	12687.000	31.16	18.05	49.21	74.00	-24.79	peak
5	13974.000	27.18	21.82	49.00	74.00	-25.00	peak
6	17978.000	24.02	25.97	49.99	74.00	-24.01	peak

Test Mode:	802.11ax HE40	Channel:	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

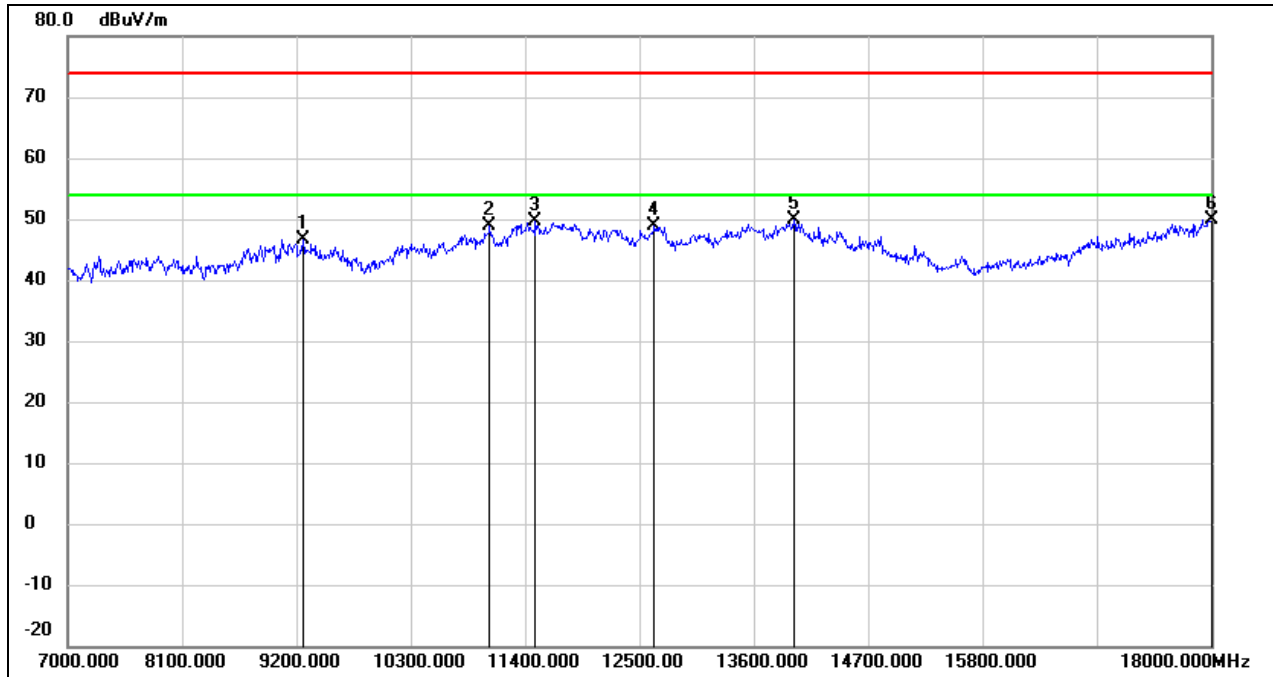


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	36.18	10.51	46.69	74.00	-27.31	peak
2	11059.000	33.87	14.96	48.83	74.00	-25.17	peak
3	11499.000	32.85	16.77	49.62	74.00	-24.38	peak
4	12643.000	30.76	18.01	48.77	74.00	-25.23	peak
5	13985.000	28.15	21.85	50.00	74.00	-24.00	peak
6	18000.000	23.81	26.12	49.93	74.00	-24.07	peak

Test Mode:	802.11ax HE40	Channel:	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

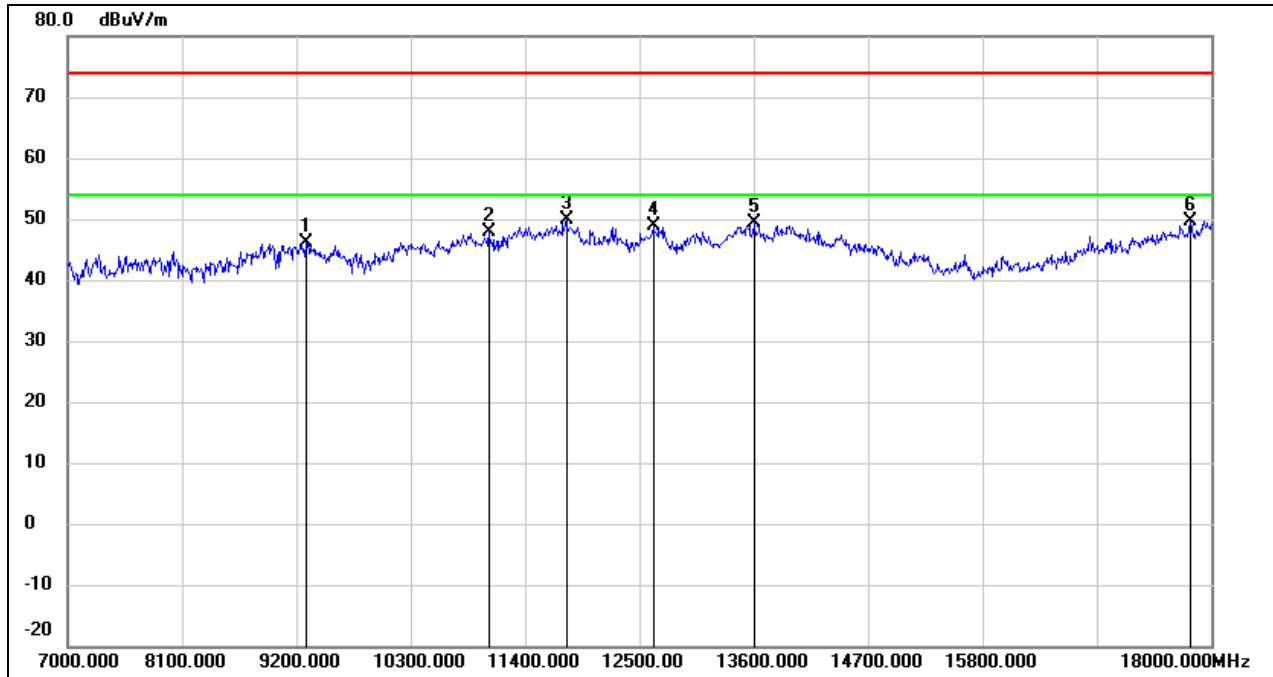


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	35.71	10.52	46.23	74.00	-27.77	peak
2	11048.000	33.09	14.91	48.00	74.00	-26.00	peak
3	11796.000	32.58	17.32	49.90	74.00	-24.10	peak
4	12632.000	30.93	17.99	48.92	74.00	-25.08	peak
5	13600.000	28.38	20.89	49.27	74.00	-24.73	peak
6	17802.000	24.93	24.76	49.69	74.00	-24.31	peak

Test Mode:	802.11ax HE40	Channel:	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

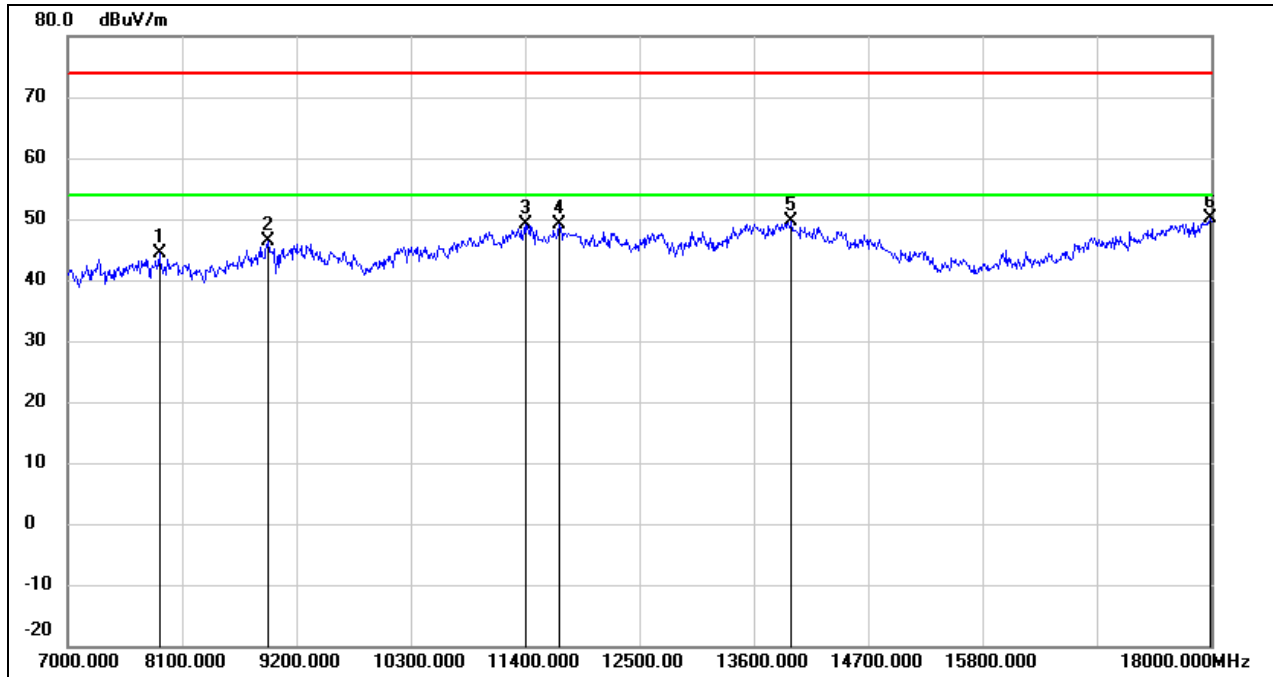


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	37.91	6.54	44.45	74.00	-29.55	peak
2	8925.000	36.59	9.82	46.41	74.00	-27.59	peak
3	11400.000	32.78	16.36	49.14	74.00	-24.86	peak
4	11730.000	31.85	17.19	49.04	74.00	-24.96	peak
5	13963.000	27.76	21.78	49.54	74.00	-24.46	peak
6	17989.000	24.01	26.04	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE40	Channel:	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

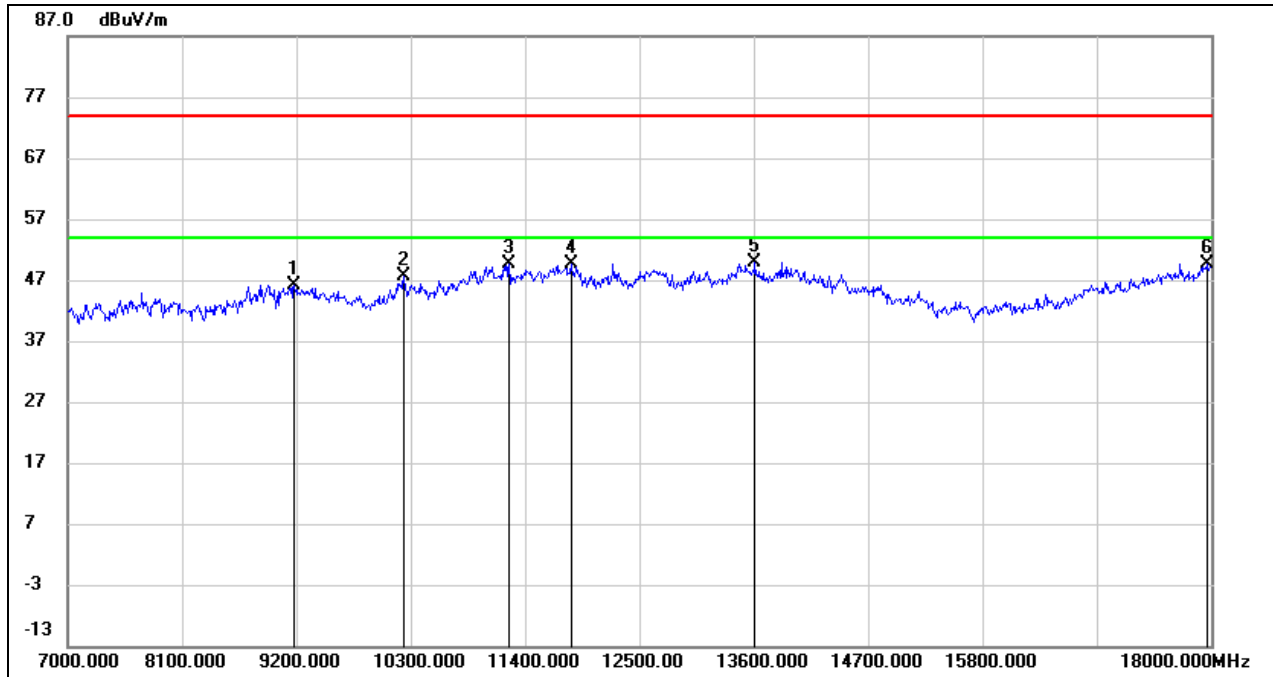


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.71	10.45	46.16	74.00	-27.84	peak
2	10234.000	35.46	12.26	47.72	74.00	-26.28	peak
3	11246.000	33.91	15.73	49.64	74.00	-24.36	peak
4	11840.000	32.27	17.40	49.67	74.00	-24.33	peak
5	13611.000	28.92	20.92	49.84	74.00	-24.16	peak
6	17956.000	23.74	25.82	49.56	74.00	-24.44	peak

Test Mode:	802.11ax HE40	Channel:	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

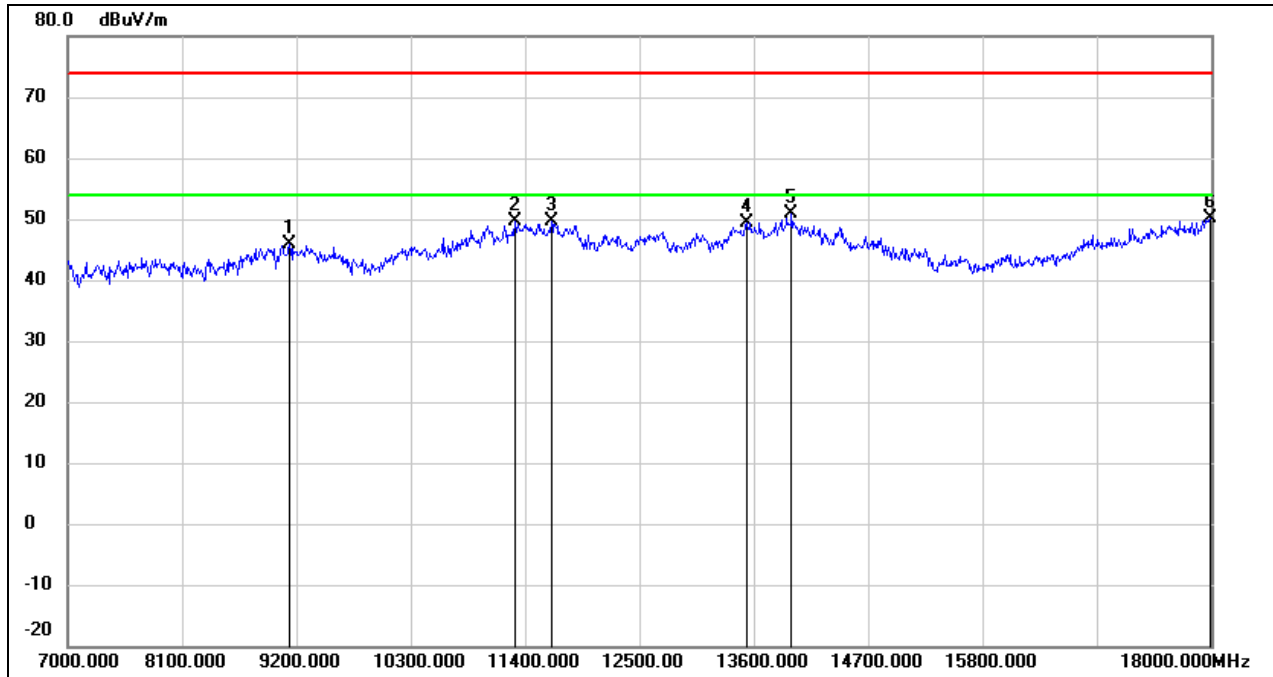


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	35.47	10.41	45.88	74.00	-28.12	peak
2	11301.000	33.71	15.95	49.66	74.00	-24.34	peak
3	11653.000	32.47	17.05	49.52	74.00	-24.48	peak
4	13534.000	28.77	20.73	49.50	74.00	-24.50	peak
5	13963.000	29.03	21.78	50.81	74.00	-23.19	peak
6	17989.000	24.18	26.04	50.22	74.00	-23.78	peak

Test Mode:	802.11ax HE40	Channel:	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

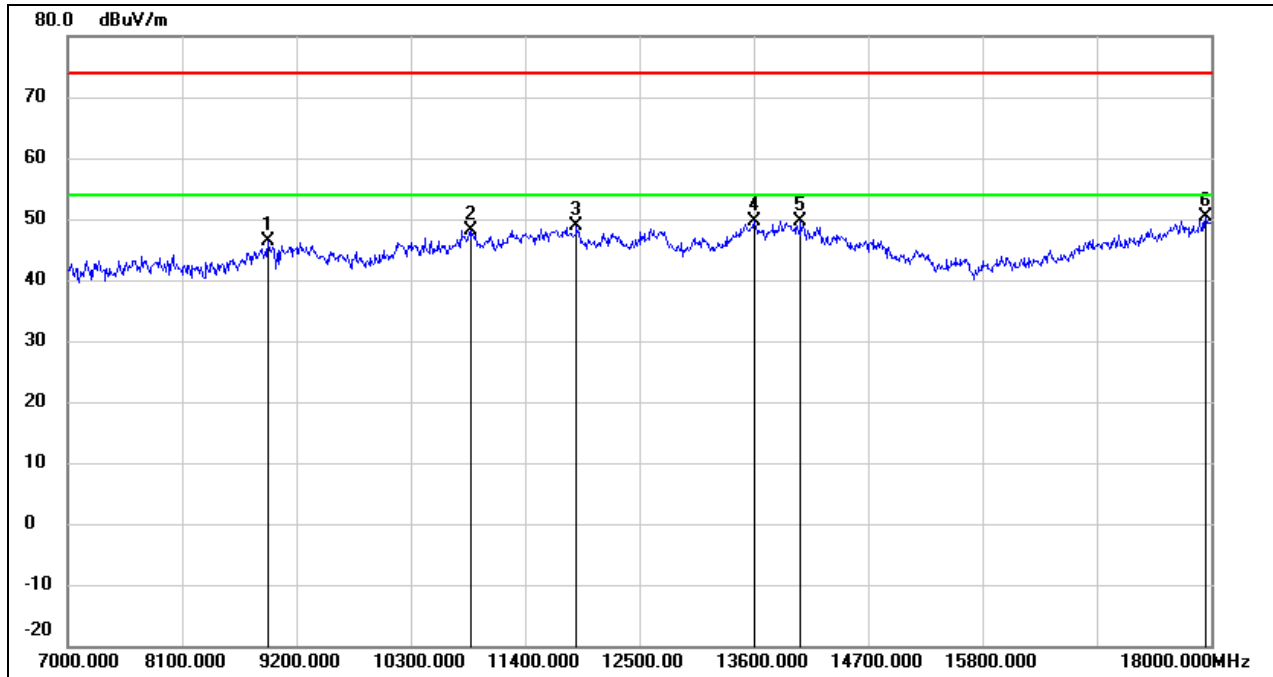


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8925.000	36.52	9.82	46.34	74.00	-27.66	peak
2	10883.000	33.88	14.27	48.15	74.00	-25.85	peak
3	11895.000	31.27	17.51	48.78	74.00	-25.22	peak
4	13600.000	28.74	20.89	49.63	74.00	-24.37	peak
5	14051.000	27.96	21.67	49.63	74.00	-24.37	peak
6	17945.000	24.66	25.75	50.41	74.00	-23.59	peak

Test Mode:	802.11ax HE40	Channel:	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

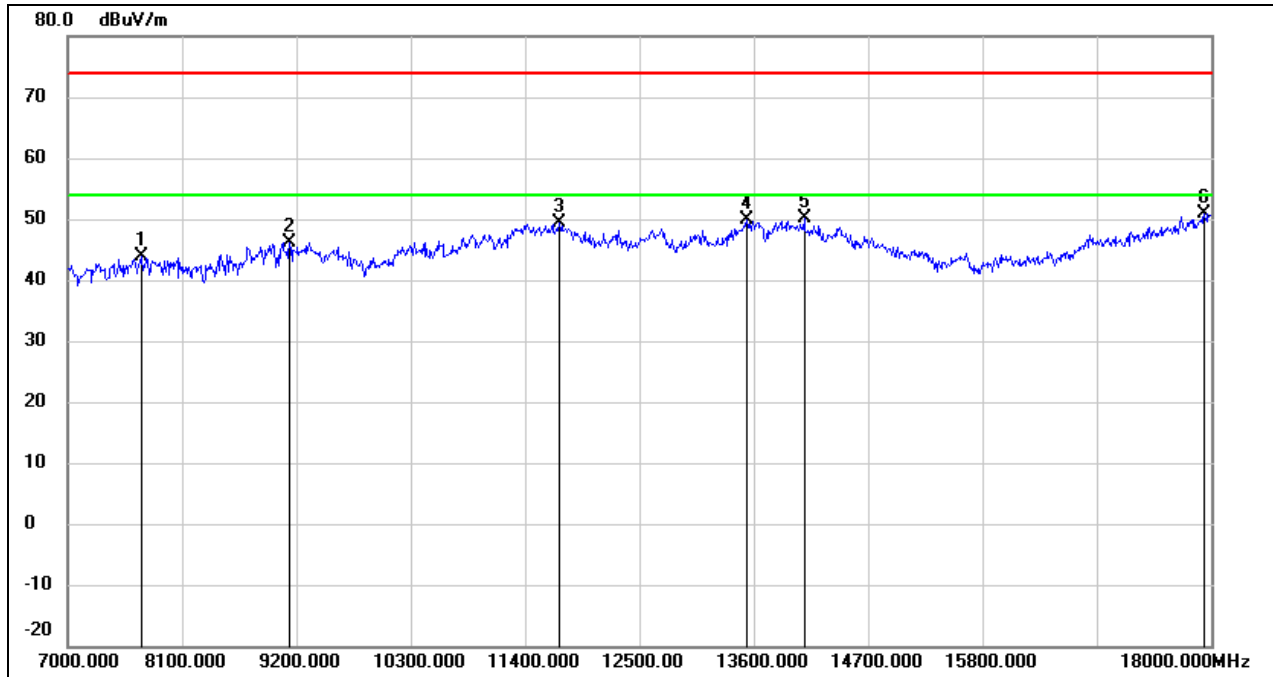


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	37.20	6.69	43.89	74.00	-30.11	peak
2	9134.000	35.81	10.41	46.22	74.00	-27.78	peak
3	11730.000	32.19	17.19	49.38	74.00	-24.62	peak
4	13534.000	29.19	20.73	49.92	74.00	-24.08	peak
5	14084.000	28.69	21.52	50.21	74.00	-23.79	peak
6	17934.000	25.33	25.67	51.00	74.00	-23.00	peak

Test Mode:	802.11ax HE40	Channel:	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

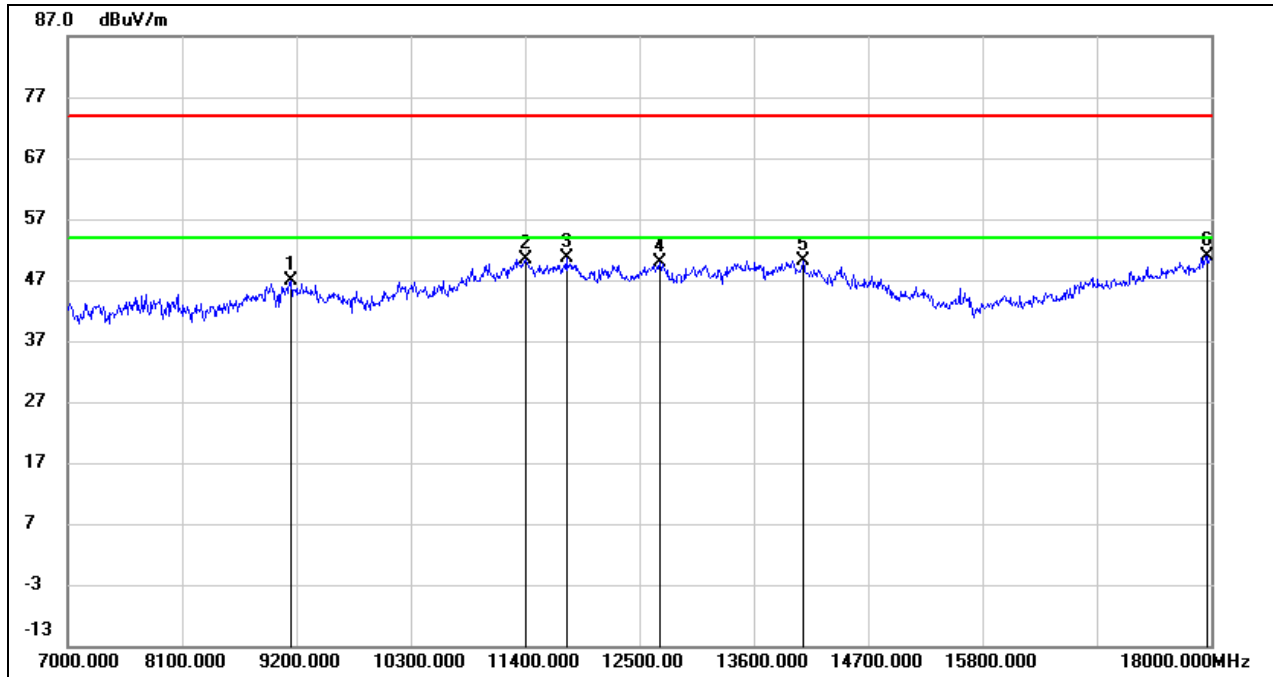


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.50	10.43	46.93	74.00	-27.07	peak
2	11411.000	34.00	16.41	50.41	74.00	-23.59	peak
3	11796.000	33.24	17.32	50.56	74.00	-23.44	peak
4	12698.000	31.91	18.08	49.99	74.00	-24.01	peak
5	14073.000	28.50	21.57	50.07	74.00	-23.93	peak
6	17967.000	24.95	25.89	50.84	74.00	-23.16	peak

Test Mode:	802.11ax HE40	Channel:	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

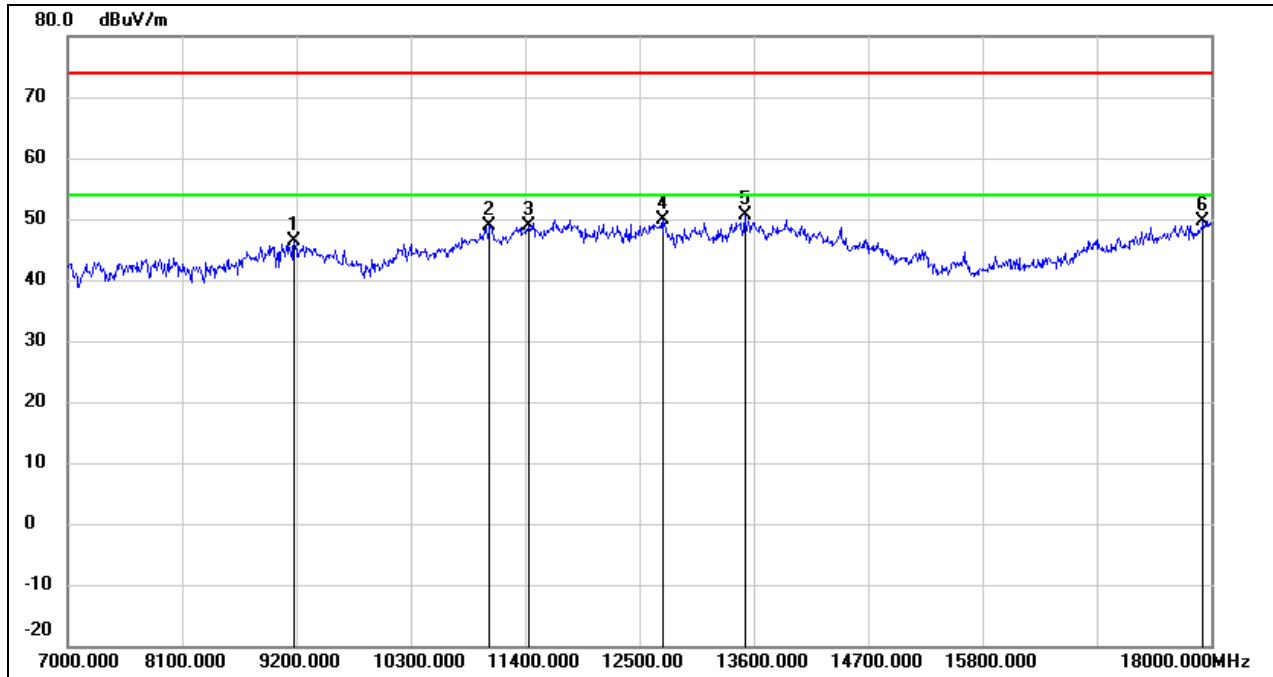


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.90	10.45	46.35	74.00	-27.65	peak
2	11059.000	33.81	14.96	48.77	74.00	-25.23	peak
3	11433.000	32.42	16.50	48.92	74.00	-25.08	peak
4	12731.000	31.69	18.12	49.81	74.00	-24.19	peak
5	13512.000	29.91	20.68	50.59	74.00	-23.41	peak
6	17923.000	24.09	25.60	49.69	74.00	-24.31	peak

Test Mode:	802.11ax HE40	Channel:	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

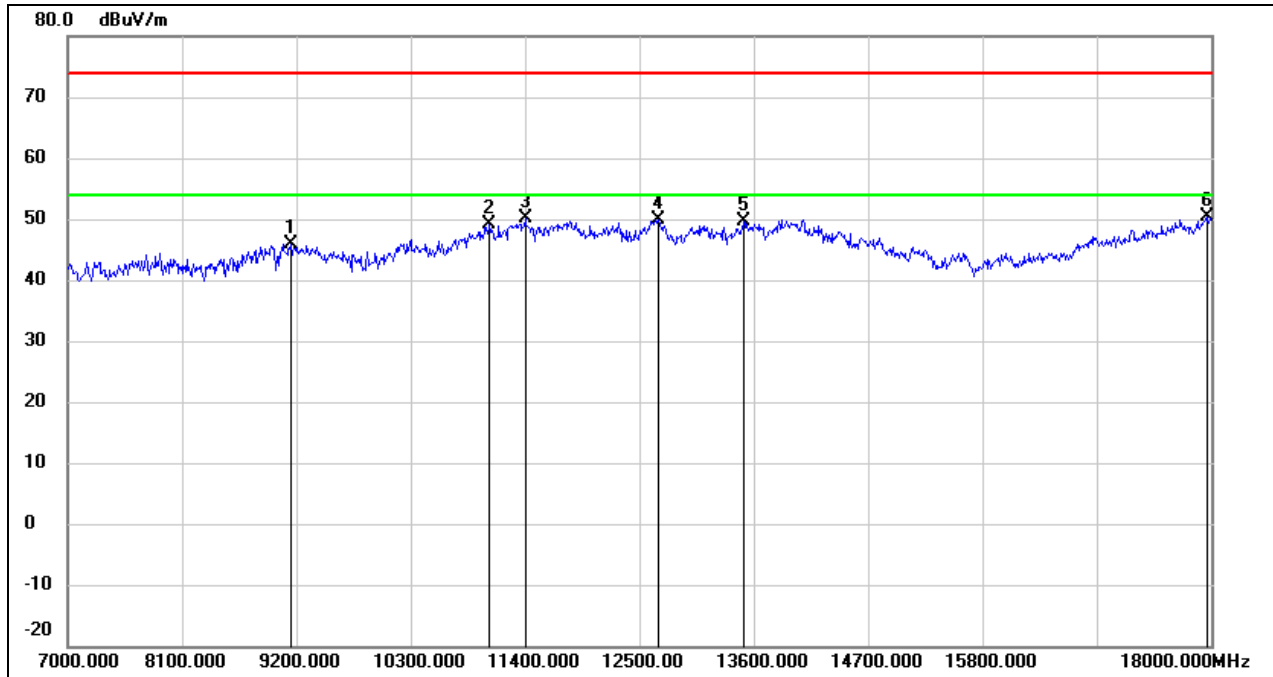


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	35.34	10.43	45.77	74.00	-28.23	peak
2	11059.000	34.11	14.96	49.07	74.00	-24.93	peak
3	11400.000	33.79	16.36	50.15	74.00	-23.85	peak
4	12676.000	31.89	18.05	49.94	74.00	-24.06	peak
5	13501.000	28.87	20.64	49.51	74.00	-24.49	peak
6	17956.000	24.56	25.82	50.38	74.00	-23.62	peak

Test Mode:	802.11ax HE40	Channel:	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

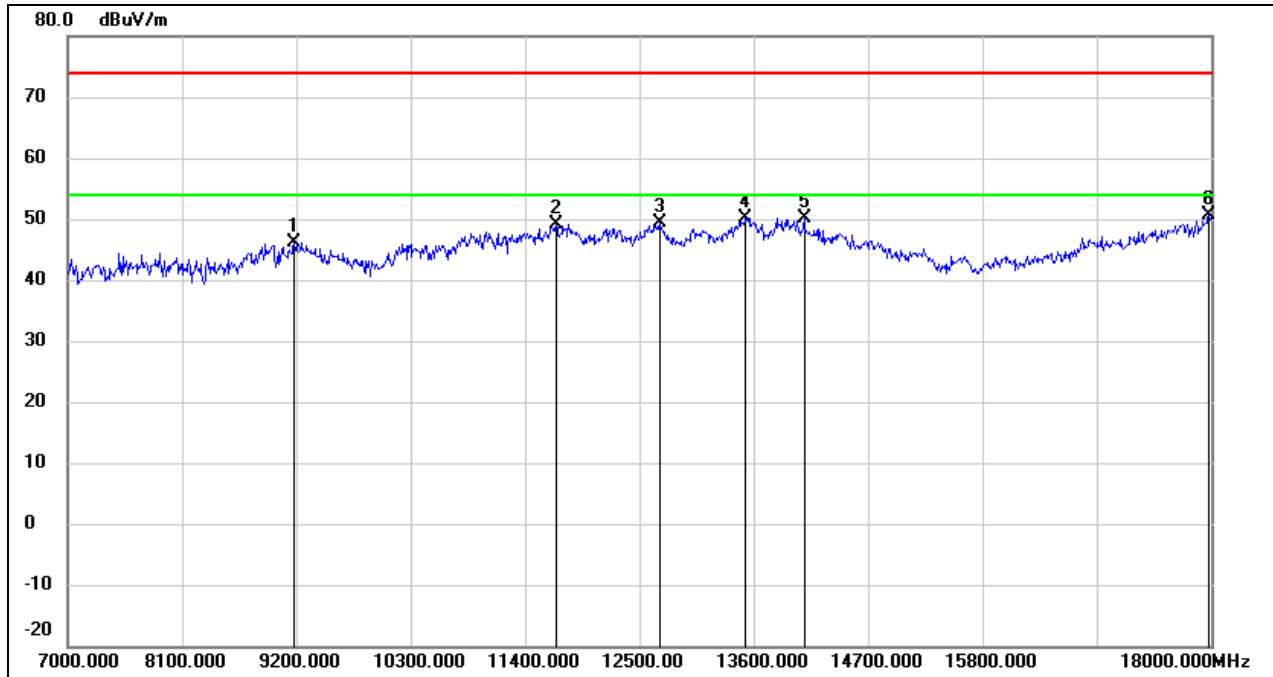


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.77	10.45	46.22	74.00	-27.78	peak
2	11697.000	32.03	17.13	49.16	74.00	-24.84	peak
3	12698.000	31.20	18.08	49.28	74.00	-24.72	peak
4	13523.000	29.42	20.70	50.12	74.00	-23.88	peak
5	14084.000	28.70	21.52	50.22	74.00	-23.78	peak
6	17978.000	24.59	25.97	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE40	Channel:	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

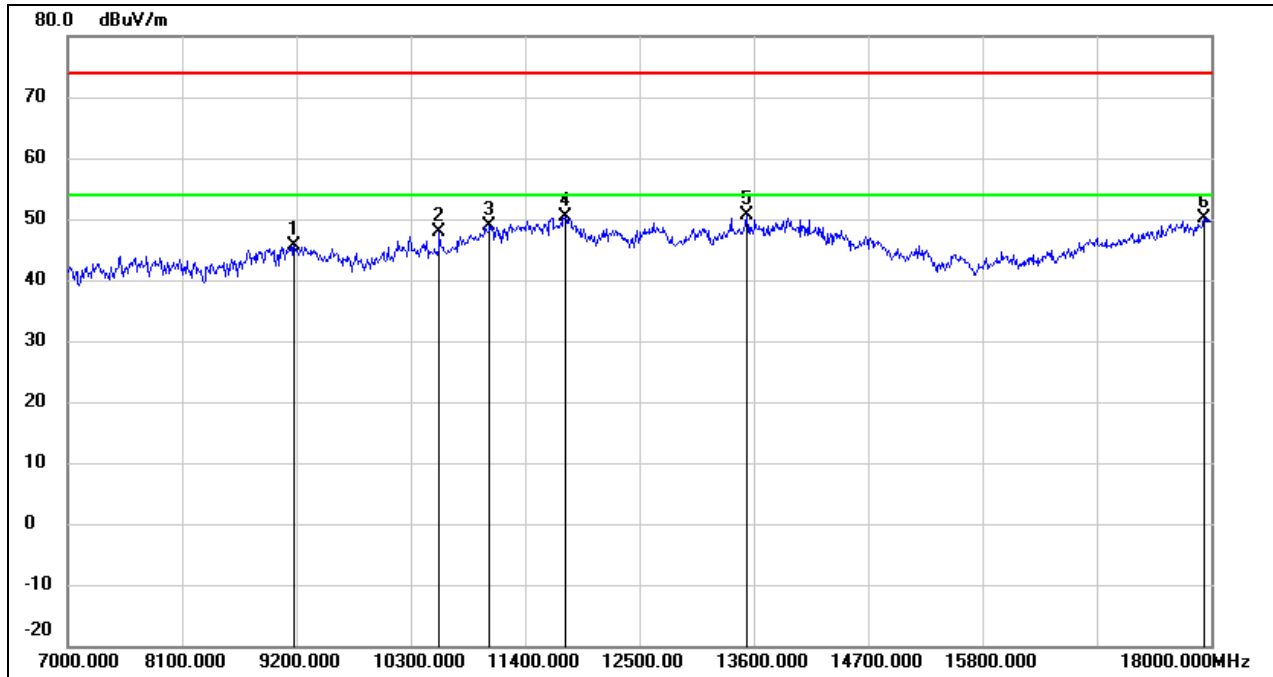


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.13	10.45	45.58	74.00	-28.42	peak
2	10575.000	34.73	13.10	47.83	74.00	-26.17	peak
3	11059.000	33.97	14.96	48.93	74.00	-25.07	peak
4	11785.000	33.06	17.30	50.36	74.00	-23.64	peak
5	13534.000	29.79	20.73	50.52	74.00	-23.48	peak
6	17934.000	24.43	25.67	50.10	74.00	-23.90	peak

Test Mode:	802.11ax HE80	Channel:	5210
Polarity:	Horizontal	Test Voltage:	DC 5 V

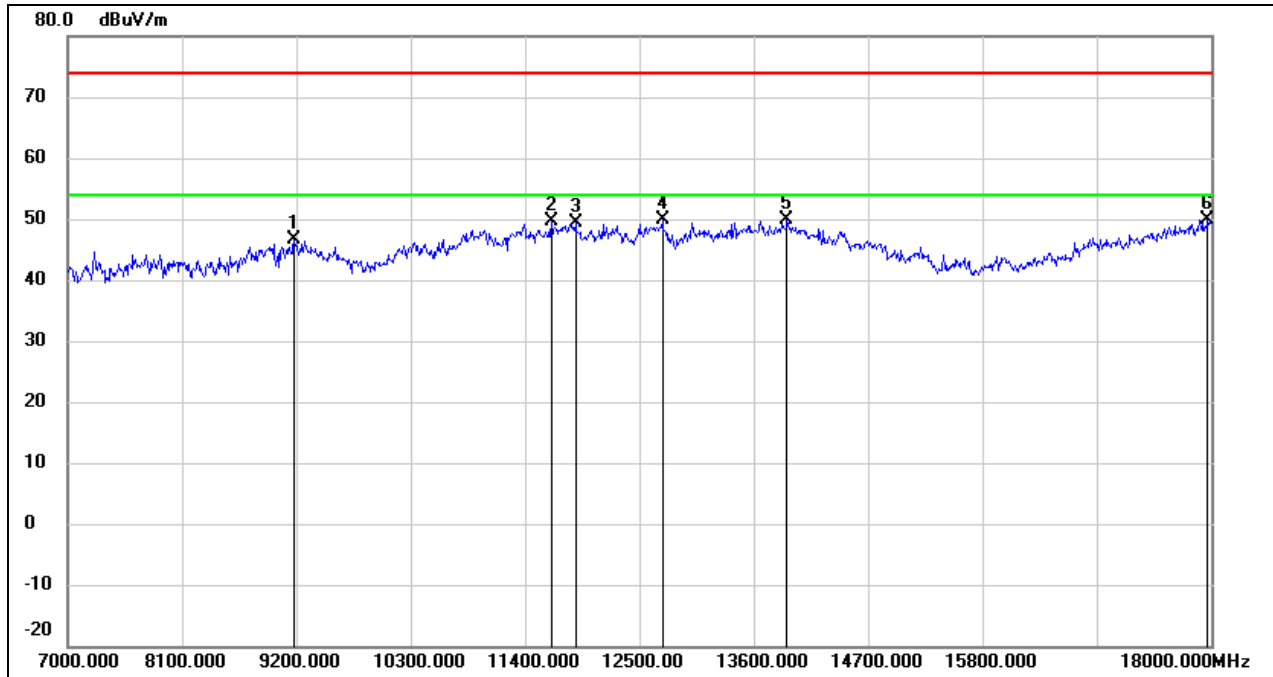


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.11	10.45	46.56	74.00	-27.44	peak
2	11653.000	32.57	17.05	49.62	74.00	-24.38	peak
3	11884.000	31.86	17.48	49.34	74.00	-24.66	peak
4	12720.000	31.86	18.09	49.95	74.00	-24.05	peak
5	13919.000	28.13	21.68	49.81	74.00	-24.19	peak
6	17967.000	24.07	25.89	49.96	74.00	-24.04	peak

Test Mode:	802.11ax HE80	Channel:	5210
Polarity:	Vertical	Test Voltage:	DC 5 V

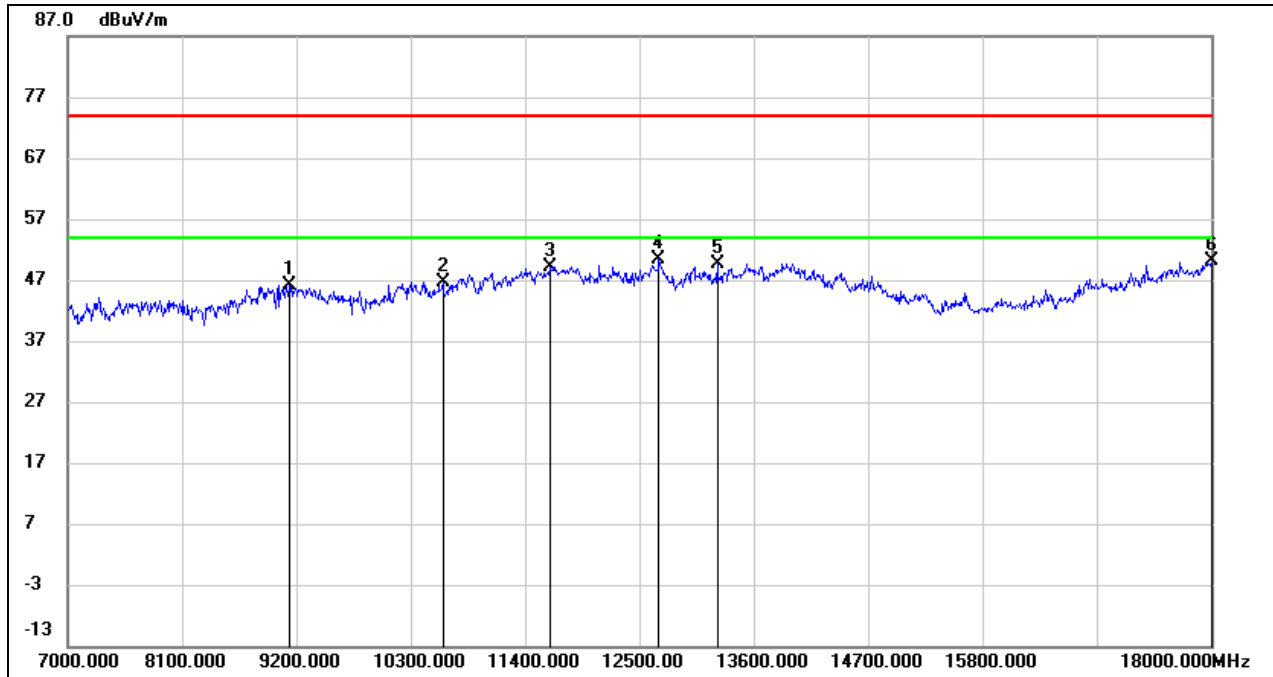


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	35.71	10.41	46.12	74.00	-27.88	peak
2	10608.000	33.50	13.23	46.73	74.00	-27.27	peak
3	11642.000	32.19	17.03	49.22	74.00	-24.78	peak
4	12687.000	32.33	18.05	50.38	74.00	-23.62	peak
5	13248.000	30.09	19.54	49.63	74.00	-24.37	peak
6	18000.000	23.89	26.12	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE80	Channel:	5290
Polarity:	Horizontal	Test Voltage:	DC 5 V

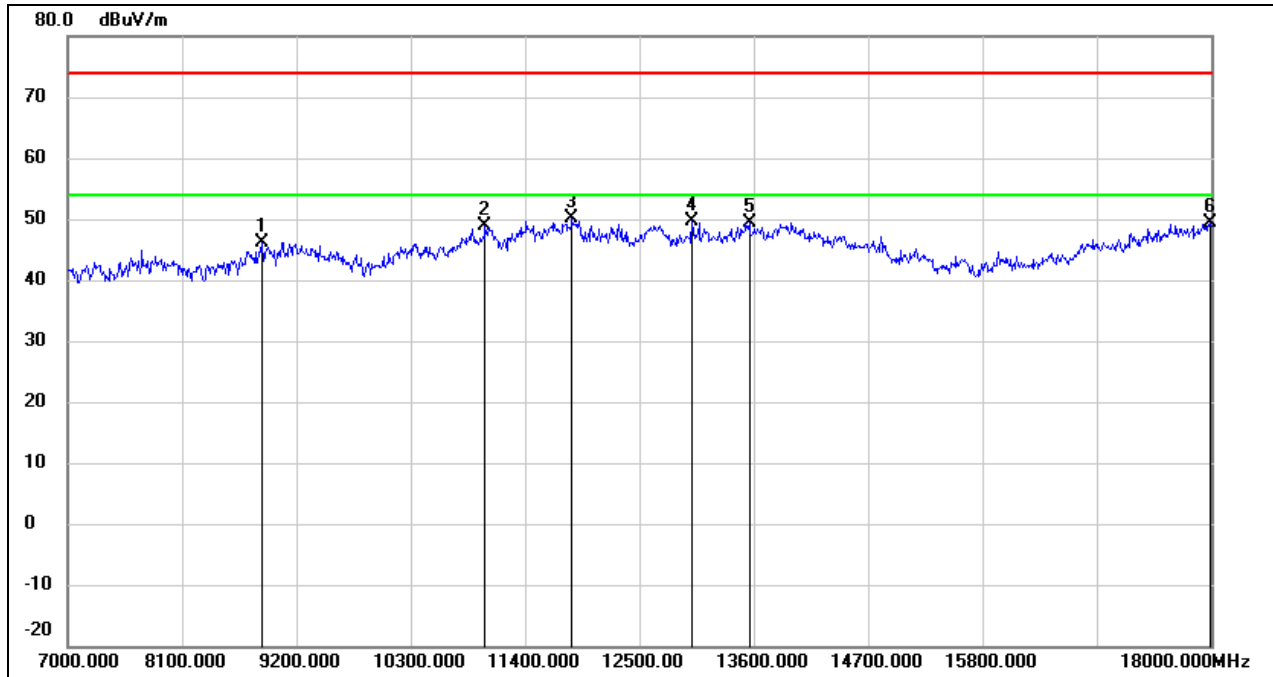


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8870.000	36.70	9.44	46.14	74.00	-27.86	peak
2	11015.000	34.02	14.79	48.81	74.00	-25.19	peak
3	11851.000	32.71	17.43	50.14	74.00	-23.86	peak
4	13006.000	31.07	18.47	49.54	74.00	-24.46	peak
5	13556.000	28.55	20.78	49.33	74.00	-24.67	peak
6	17989.000	23.27	26.04	49.31	74.00	-24.69	peak

Test Mode:	802.11ax HE80	Channel:	5290
Polarity:	Vertical	Test Voltage:	DC 5 V

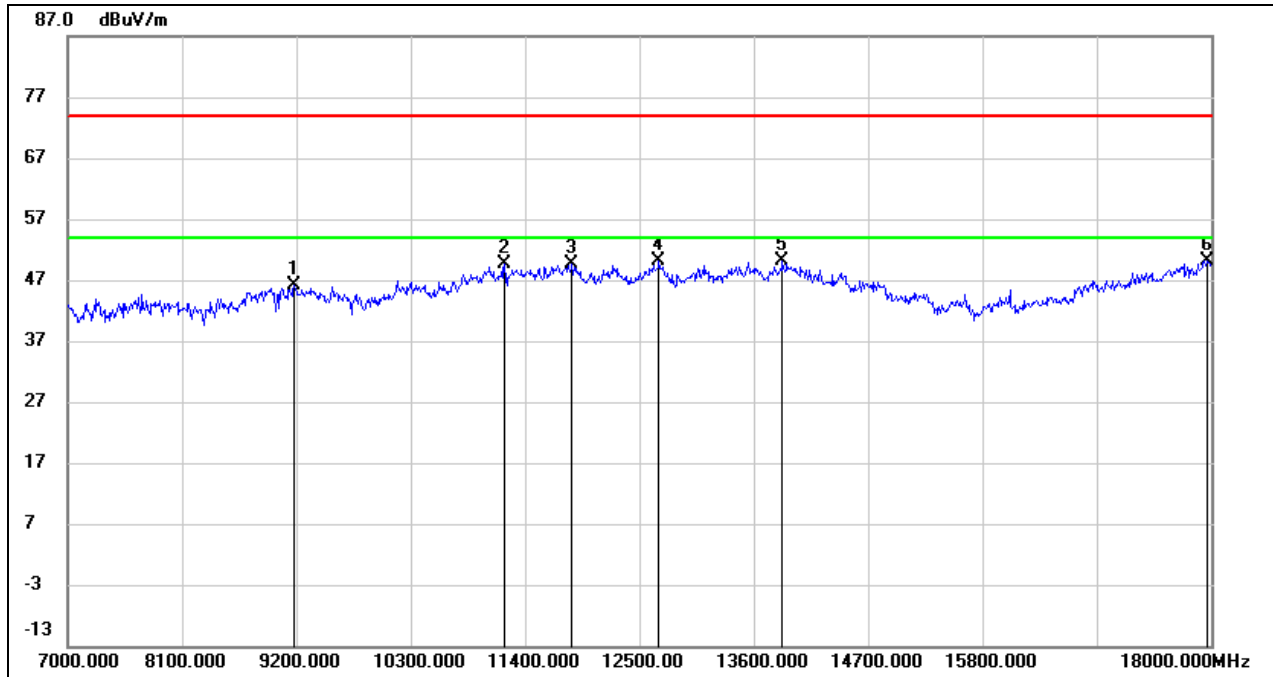


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	35.58	10.45	46.03	74.00	-27.97	peak
2	11202.000	34.10	15.55	49.65	74.00	-24.35	peak
3	11851.000	32.13	17.43	49.56	74.00	-24.44	peak
4	12687.000	32.00	18.05	50.05	74.00	-23.95	peak
5	13875.000	28.49	21.57	50.06	74.00	-23.94	peak
6	17956.000	24.20	25.82	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE80	Channel:	5530
Polarity:	Horizontal	Test Voltage:	DC 5 V

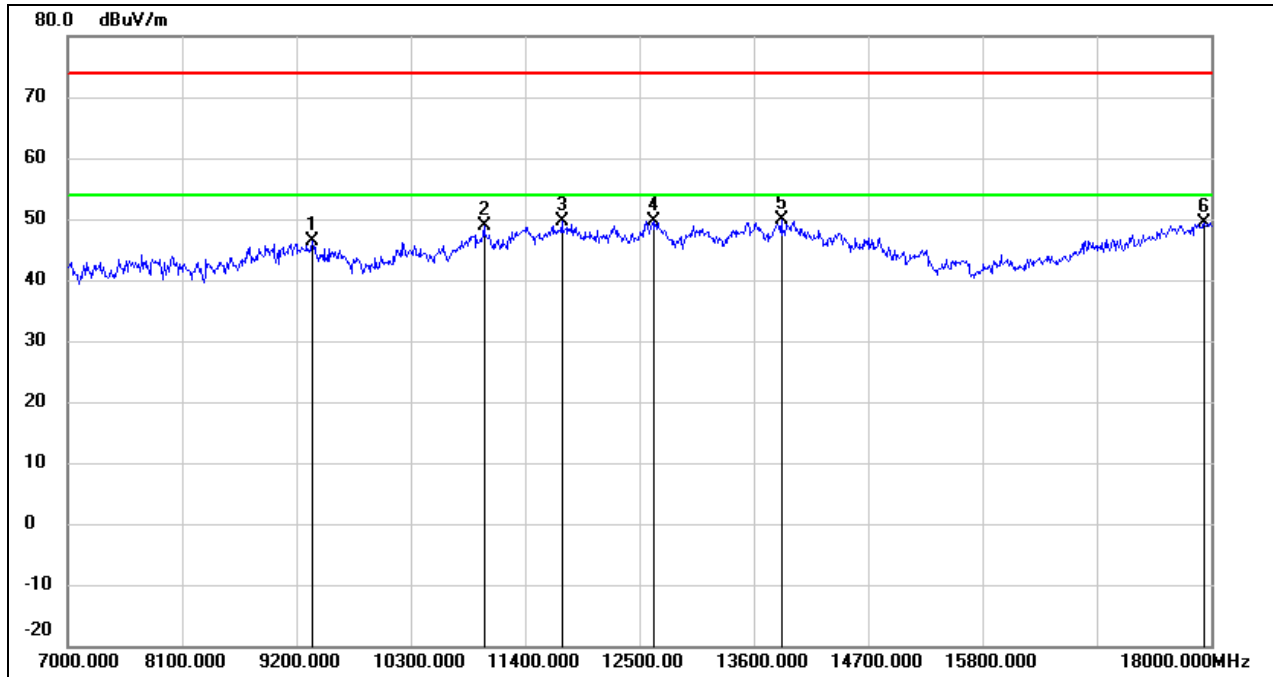


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	35.77	10.56	46.33	74.00	-27.67	peak
2	11004.000	34.11	14.74	48.85	74.00	-25.15	peak
3	11752.000	32.30	17.24	49.54	74.00	-24.46	peak
4	12632.000	31.68	17.99	49.67	74.00	-24.33	peak
5	13864.000	28.40	21.53	49.93	74.00	-24.07	peak
6	17934.000	23.75	25.67	49.42	74.00	-24.58	peak

Test Mode:	802.11ax HE80	Channel:	5530
Polarity:	Vertical	Test Voltage:	DC 5 V

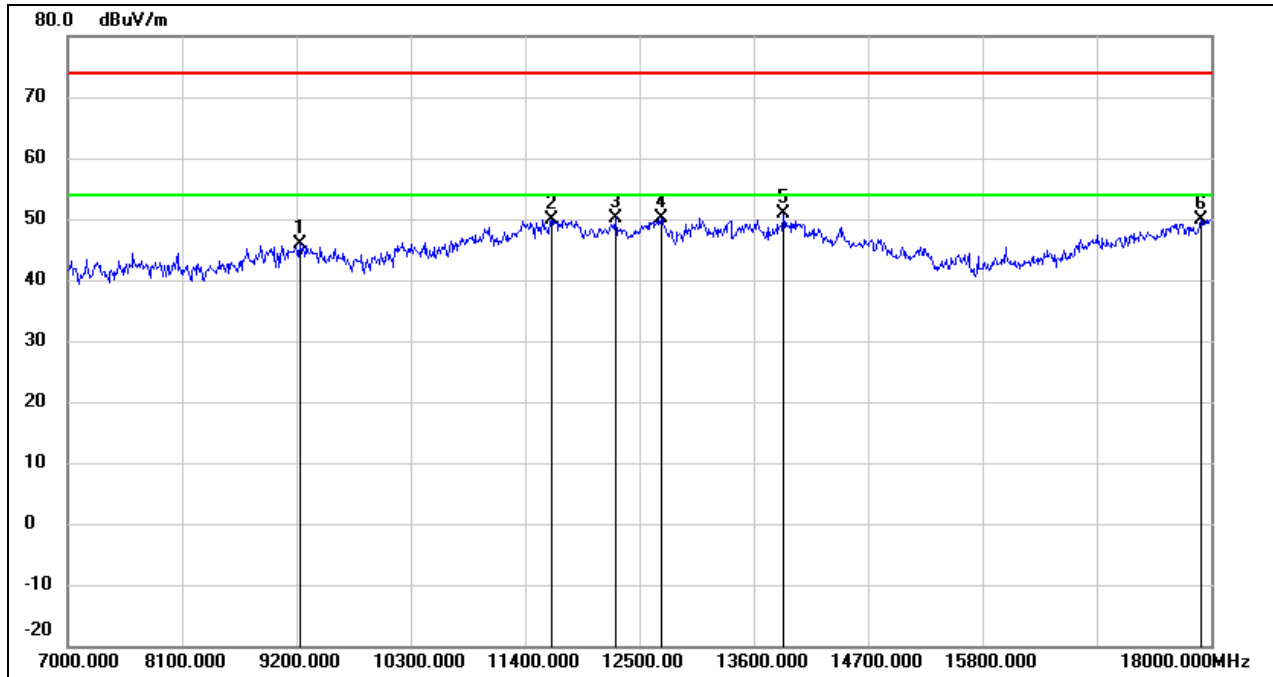


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	35.45	10.48	45.93	74.00	-28.07	peak
2	11653.000	32.83	17.05	49.88	74.00	-24.12	peak
3	12269.000	32.25	17.77	50.02	74.00	-23.98	peak
4	12709.000	32.09	18.09	50.18	74.00	-23.82	peak
5	13886.000	29.28	21.60	50.88	74.00	-23.12	peak
6	17901.000	24.37	25.45	49.82	74.00	-24.18	peak

Test Mode:	802.11ax HE80	Channel:	5610
Polarity:	Horizontal	Test Voltage:	DC 5 V

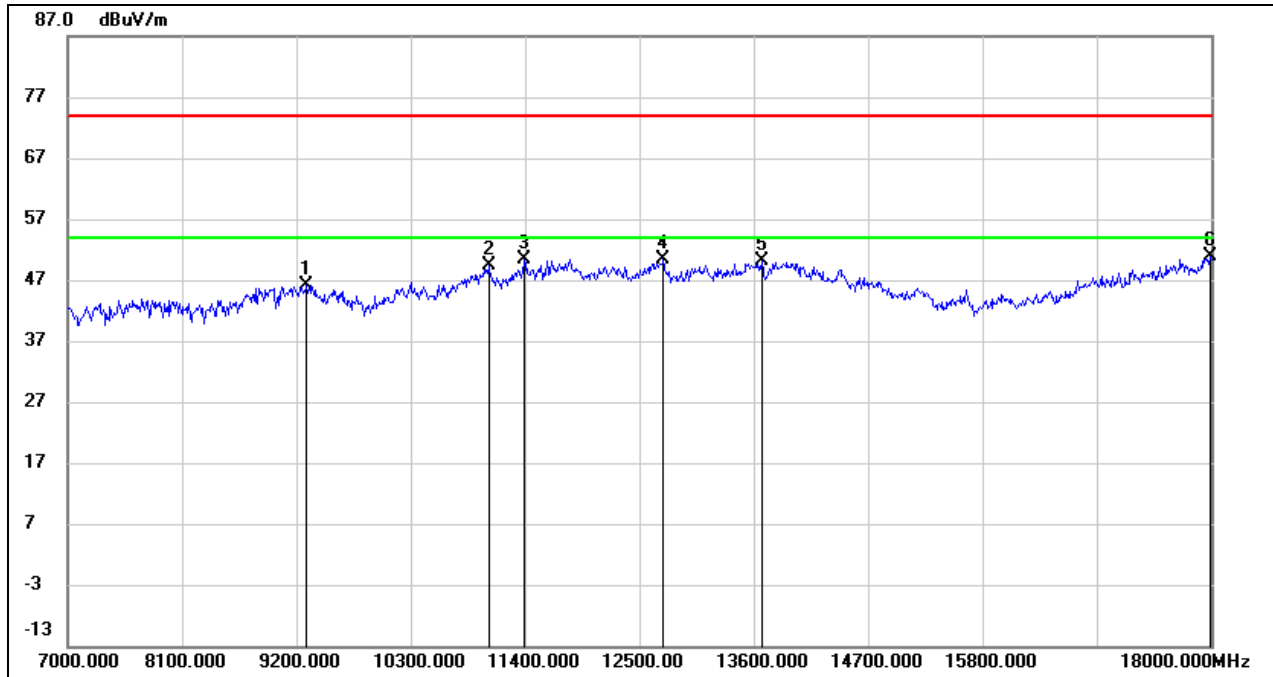


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	35.49	10.53	46.02	74.00	-27.98	peak
2	11048.000	34.48	14.91	49.39	74.00	-24.61	peak
3	11389.000	33.97	16.31	50.28	74.00	-23.72	peak
4	12731.000	32.17	18.12	50.29	74.00	-23.71	peak
5	13677.000	29.08	21.08	50.16	74.00	-23.84	peak
6	17989.000	24.72	26.04	50.76	74.00	-23.24	peak

Test Mode:	802.11ax HE80	Channel:	5610
Polarity:	Vertical	Test Voltage:	DC 5 V

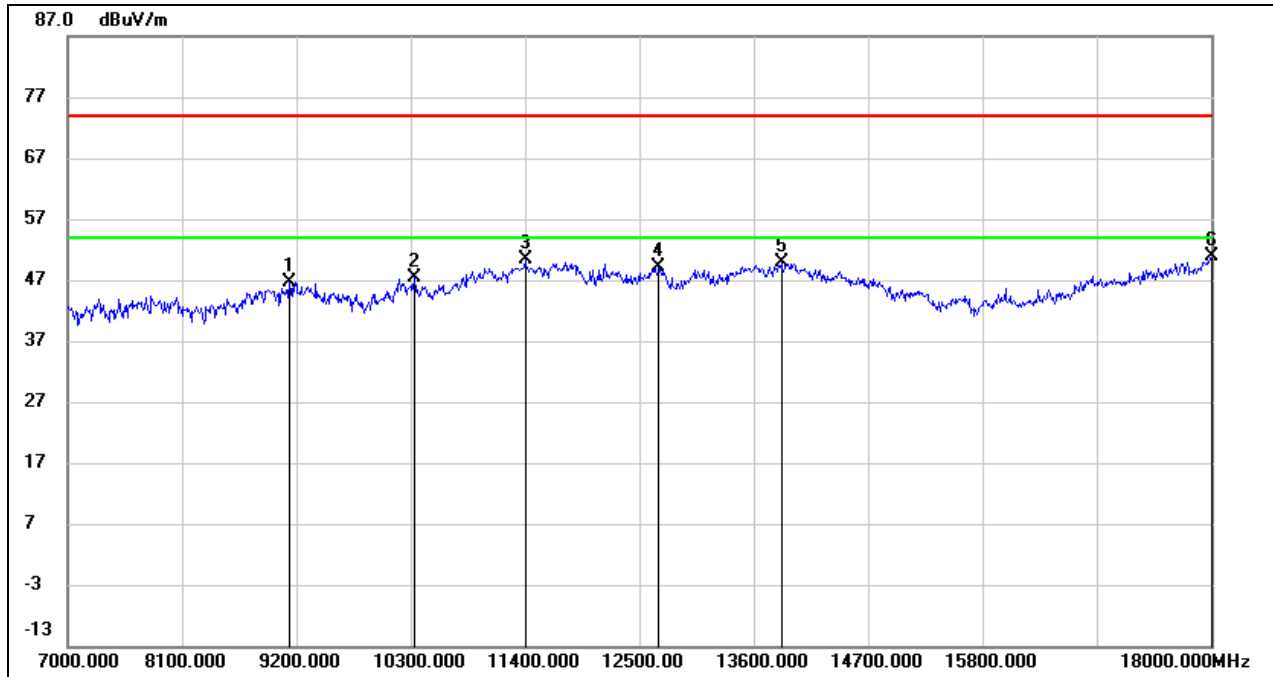


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.28	10.41	46.69	74.00	-27.31	peak
2	10333.000	34.80	12.47	47.27	74.00	-26.73	peak
3	11400.000	33.90	16.36	50.26	74.00	-23.74	peak
4	12687.000	31.05	18.05	49.10	74.00	-24.90	peak
5	13864.000	28.29	21.53	49.82	74.00	-24.18	peak
6	18000.000	24.88	26.12	51.00	74.00	-23.00	peak

Test Mode:	802.11ax HE80	Channel:	5690
Polarity:	Horizontal	Test Voltage:	DC 5 V

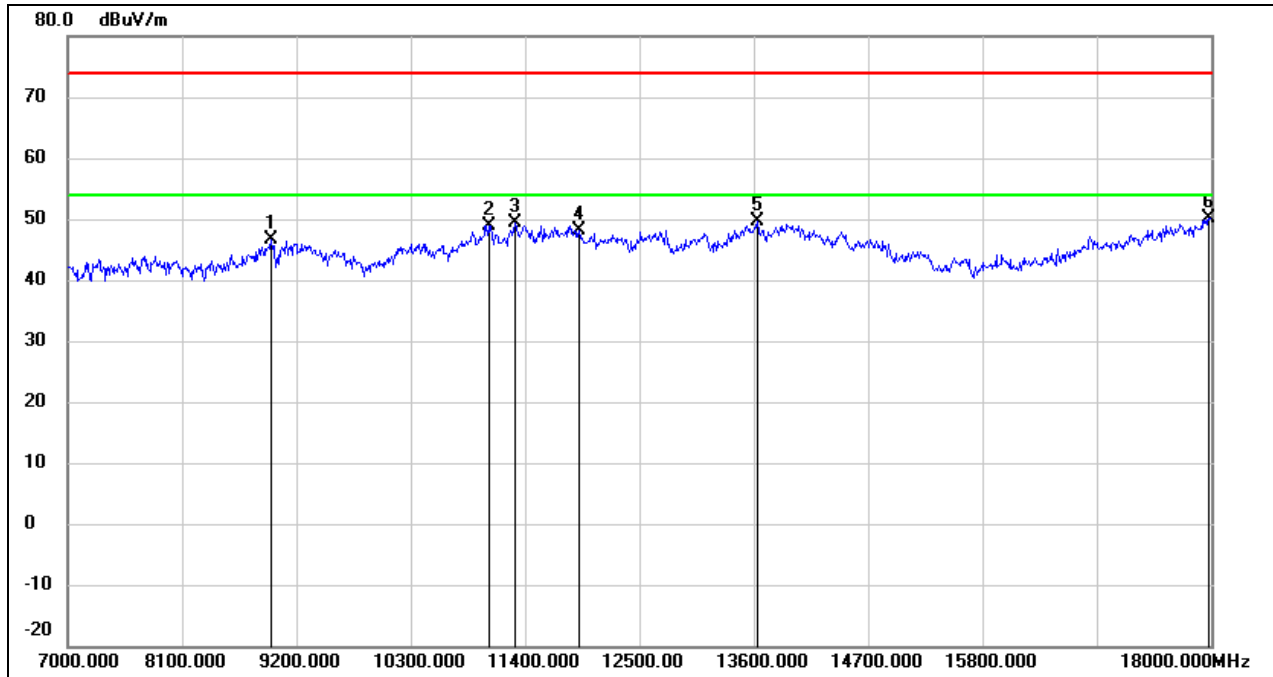


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	36.51	10.05	46.56	74.00	-27.44	peak
2	11048.000	34.06	14.91	48.97	74.00	-25.03	peak
3	11301.000	33.39	15.95	49.34	74.00	-24.66	peak
4	11917.000	30.54	17.54	48.08	74.00	-25.92	peak
5	13633.000	28.70	20.97	49.67	74.00	-24.33	peak
6	17978.000	24.27	25.97	50.24	74.00	-23.76	peak

Test Mode:	802.11ax HE80	Channel:	5690
Polarity:	Vertical	Test Voltage:	DC 5 V

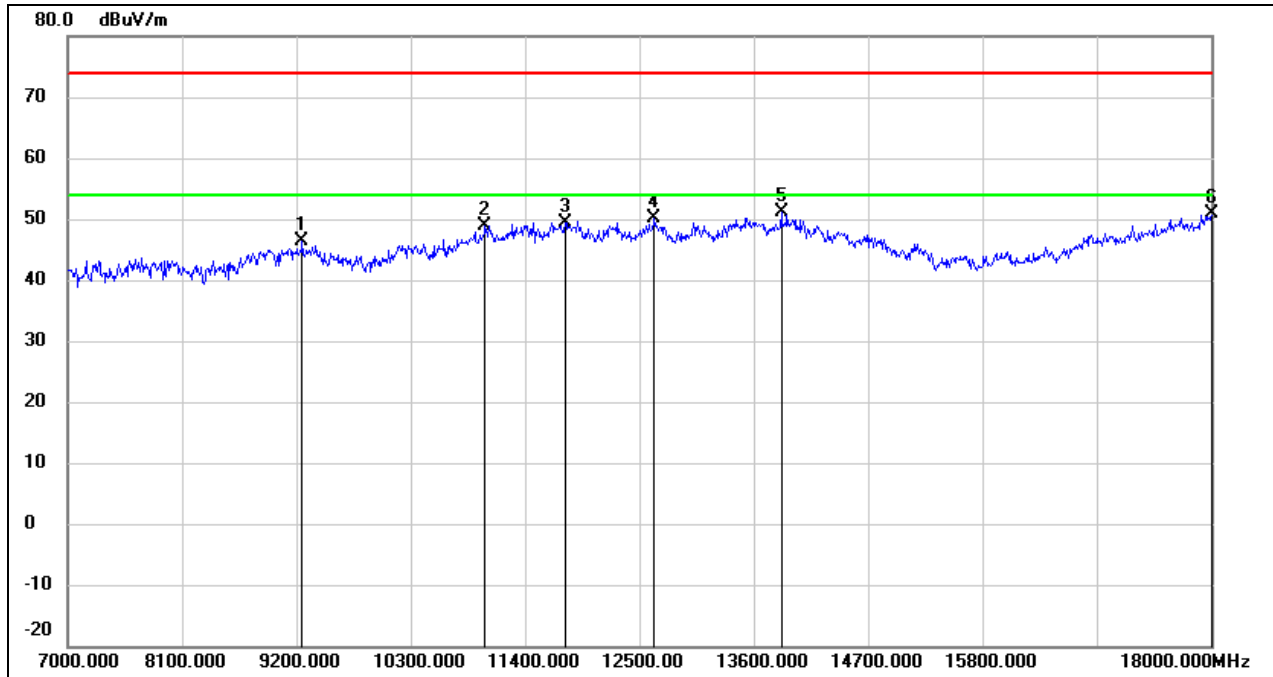


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	35.78	10.51	46.29	74.00	-27.71	peak
2	11015.000	34.12	14.79	48.91	74.00	-25.09	peak
3	11785.000	32.16	17.30	49.46	74.00	-24.54	peak
4	12643.000	32.04	18.01	50.05	74.00	-23.95	peak
5	13864.000	29.58	21.53	51.11	74.00	-22.89	peak
6	18000.000	24.86	26.12	50.98	74.00	-23.02	peak

Test Mode:	802.11ax HE80	Channel:	5775
Polarity:	Horizontal	Test Voltage:	DC 5 V

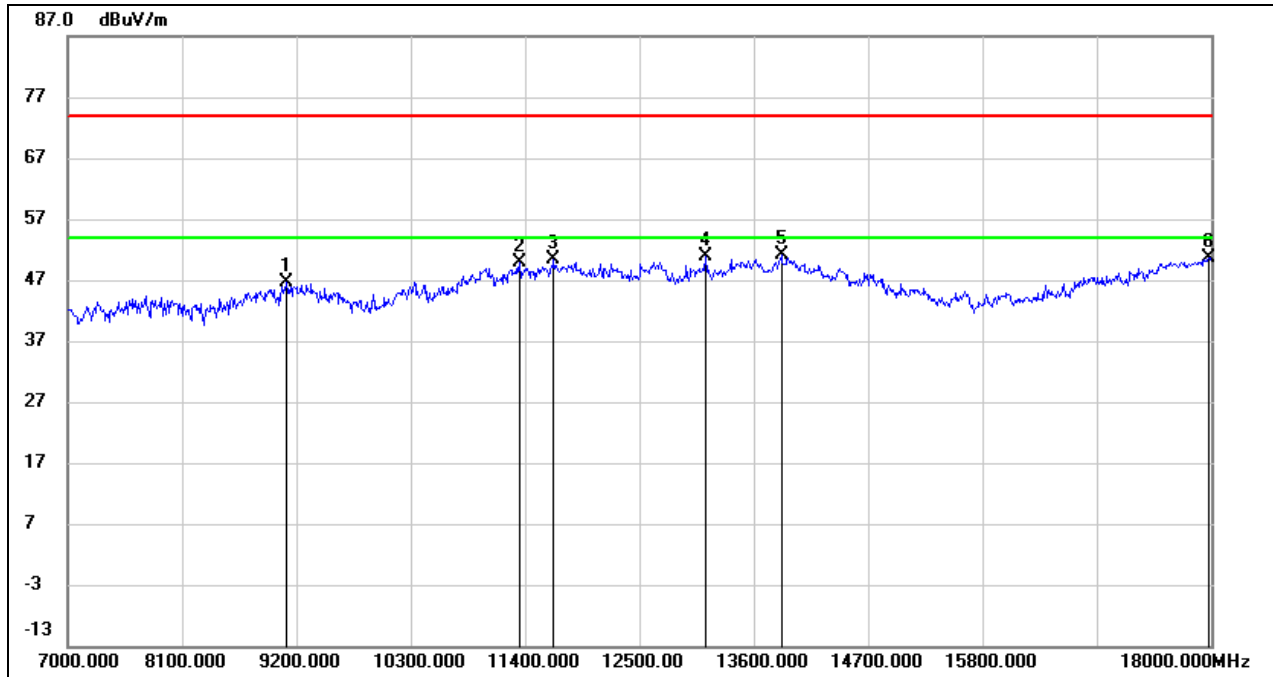

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	36.33	10.40	46.73	74.00	-27.27	peak
2	11345.000	33.65	16.14	49.79	74.00	-24.21	peak
3	11675.000	33.32	17.10	50.42	74.00	-23.58	peak
4	13138.000	31.74	19.05	50.79	74.00	-23.21	peak
5	13864.000	29.56	21.53	51.09	74.00	-22.91	peak
6	17978.000	24.73	25.97	50.70	74.00	-23.30	peak


Test Mode:	802.11ax HE80	Channel:	5775
Polarity:	Vertical	Test Voltage:	DC 5 V

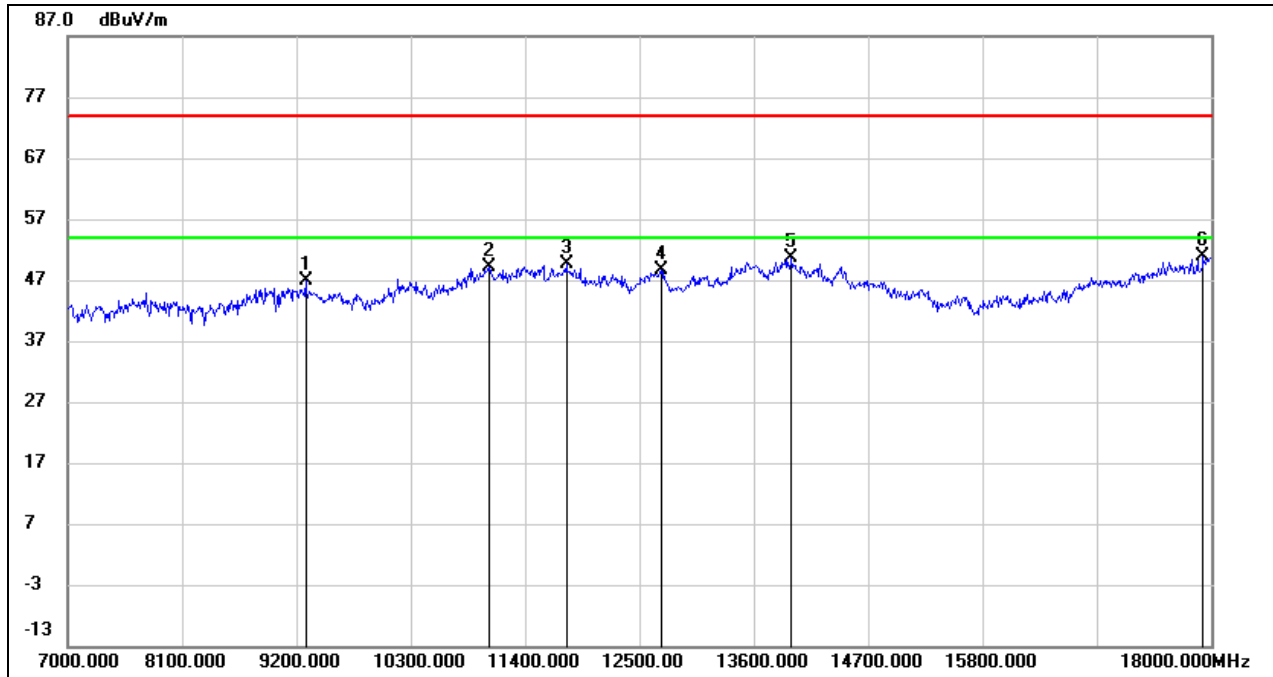

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	36.43	10.52	46.95	74.00	-27.05	peak
2	11048.000	34.15	14.91	49.06	74.00	-24.94	peak
3	11796.000	32.19	17.32	49.51	74.00	-24.49	peak
4	12709.000	30.63	18.09	48.72	74.00	-25.28	peak
5	13963.000	28.85	21.78	50.63	74.00	-23.37	peak
6	17923.000	25.22	25.60	50.82	74.00	-23.18	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a 20	Channel:	5180
Polarity:	FACE ON	Test Voltage:	DC 5 V

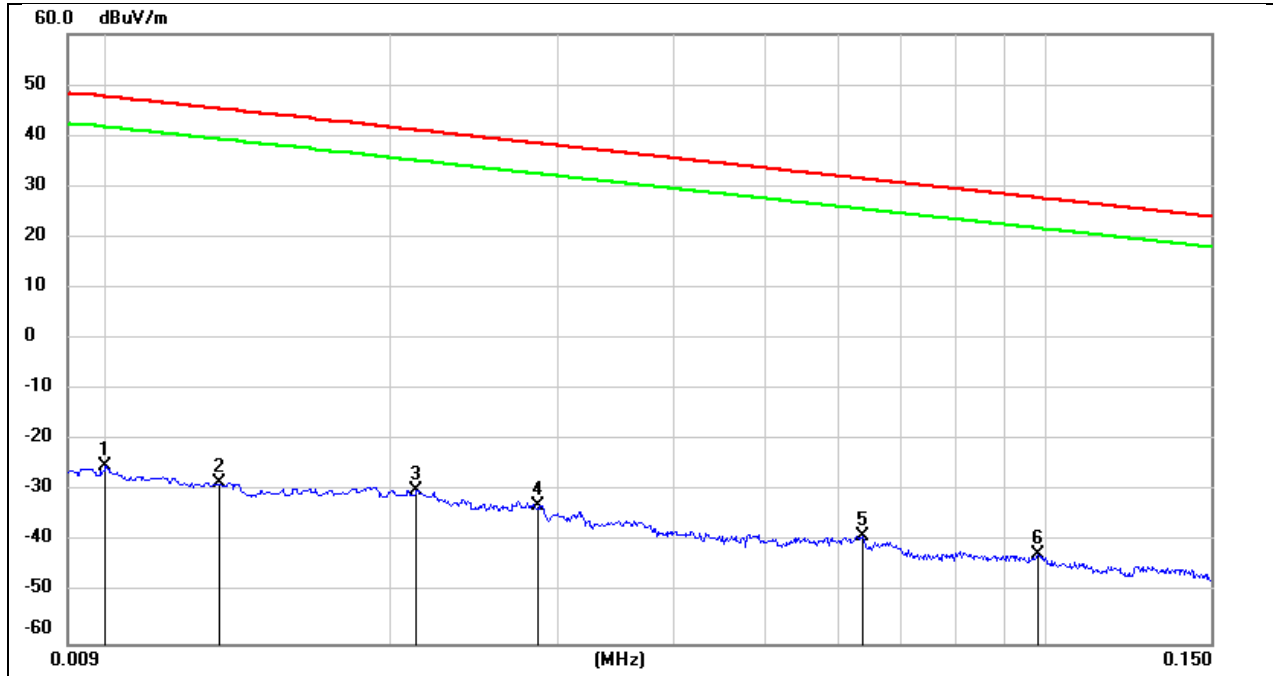


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.22	-101.40	-25.18	47.60	-76.68	-3.90	-72.78	peak
2	0.0131	72.95	-101.38	-28.43	45.25	-79.93	-6.25	-73.68	peak
3	0.0212	71.54	-101.35	-29.81	41.07	-81.31	-10.43	-70.88	peak
4	0.0286	68.46	-101.38	-32.92	38.47	-84.42	-13.03	-71.39	peak
5	0.0636	62.81	-101.54	-38.73	31.53	-90.23	-19.97	-70.26	peak
6	0.0981	59.27	-101.78	-42.51	27.77	-94.01	-23.73	-70.28	peak

Test Mode:	802.11a 20	Channel:	5180
Polarity:	FACE ON	Test Voltage:	DC 5 V

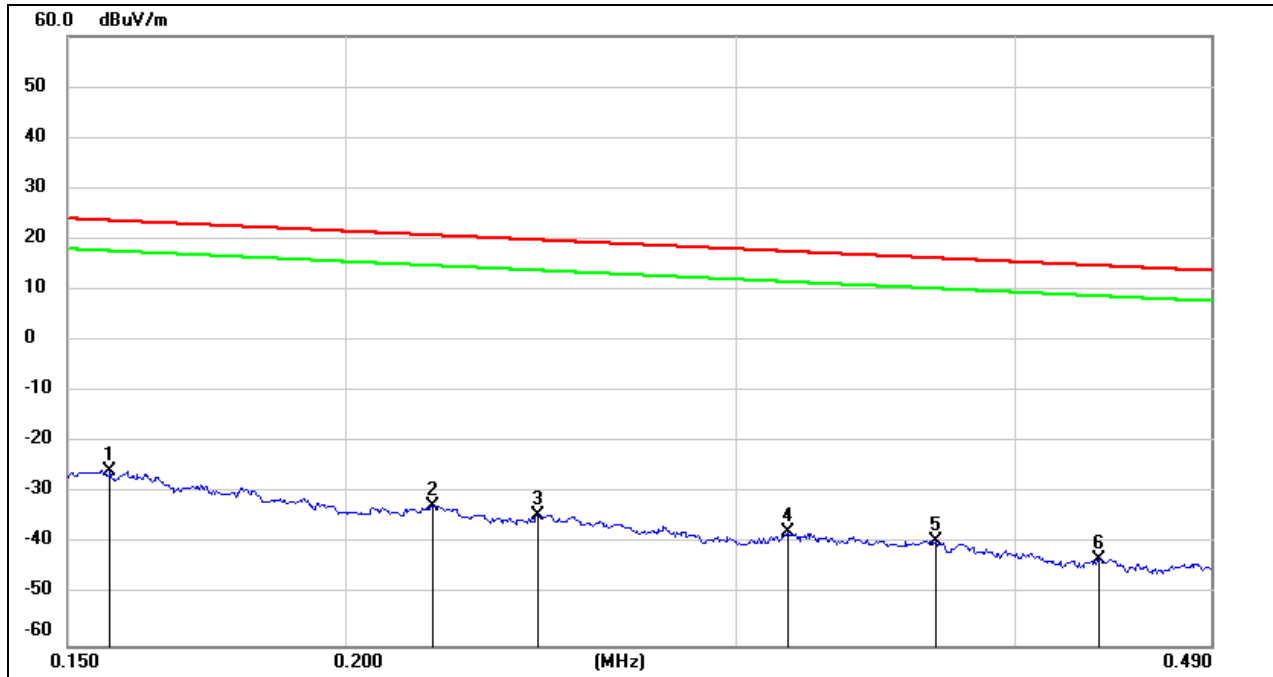

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1567	75.95	-101.65	-25.70	23.70	-77.20	-27.80	-49.40	peak
2	0.2190	69.27	-101.75	-32.48	20.79	-83.98	-30.71	-53.27	peak
3	0.2442	67.53	-101.79	-34.26	19.85	-85.76	-31.65	-54.11	peak
4	0.3163	64.20	-101.87	-37.67	17.60	-89.17	-33.90	-55.27	peak
5	0.3684	62.48	-101.93	-39.45	16.27	-90.95	-35.23	-55.72	peak
6	0.4364	58.86	-101.99	-43.13	14.80	-94.63	-36.70	-57.93	peak


Test Mode:	802.11a 20	Channel:	5180
Polarity:	FACE ON	Test Voltage:	DC 5 V

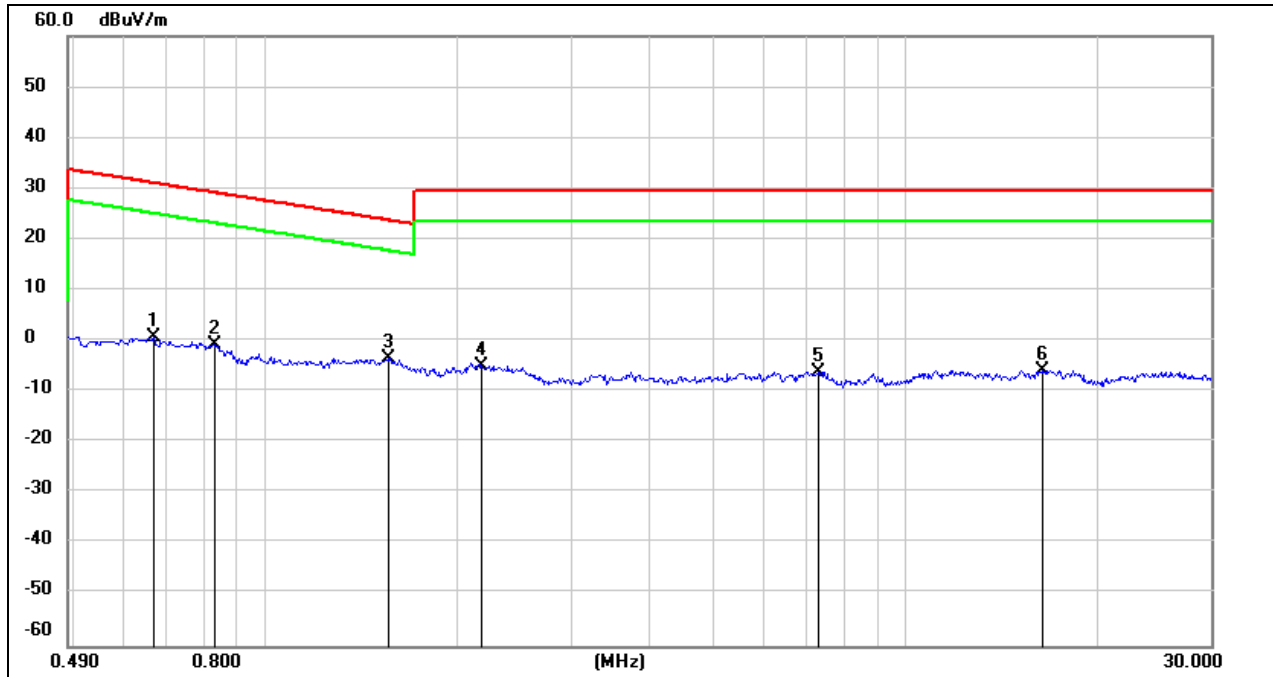

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6671	62.75	-62.10	0.65	31.12	-50.85	-20.38	-30.47	peak
2	0.8296	61.44	-62.17	-0.73	29.23	-52.23	-22.27	-29.96	peak
3	1.5564	58.68	-62.02	-3.34	23.76	-54.84	-27.74	-27.10	peak
4	2.1730	56.98	-61.78	-4.80	29.54	-56.30	-21.96	-34.34	peak
5	7.3361	55.08	-61.17	-6.09	29.54	-57.59	-21.96	-35.63	peak
6	16.3959	55.17	-60.96	-5.79	29.54	-57.29	-21.96	-35.33	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Channel:	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

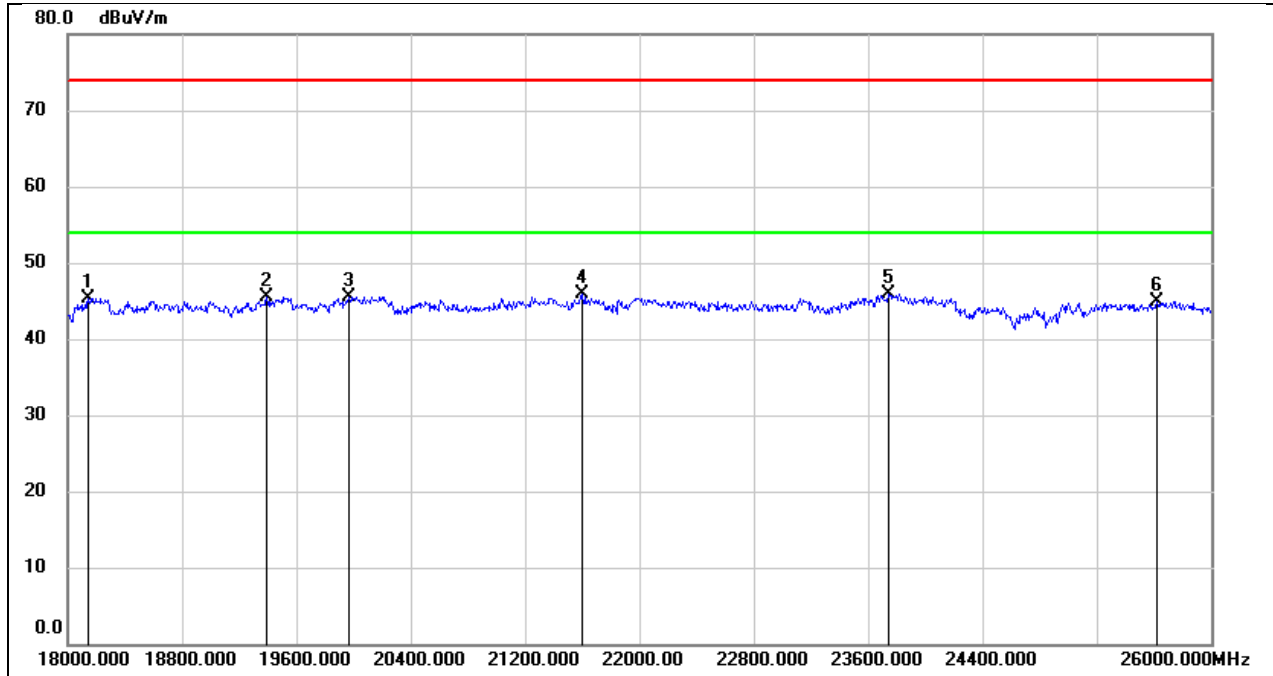

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.77	-5.48	45.29	74.00	-28.71	peak
2	19392.000	51.12	-5.57	45.55	74.00	-28.45	peak
3	19968.000	50.98	-5.42	45.56	74.00	-28.44	peak
4	21600.000	50.52	-4.54	45.98	74.00	-28.02	peak
5	23744.000	49.15	-3.20	45.95	74.00	-28.05	peak
6	25616.000	46.18	-1.24	44.94	74.00	-29.06	peak


Test Mode:	802.11a 20	Channel:	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

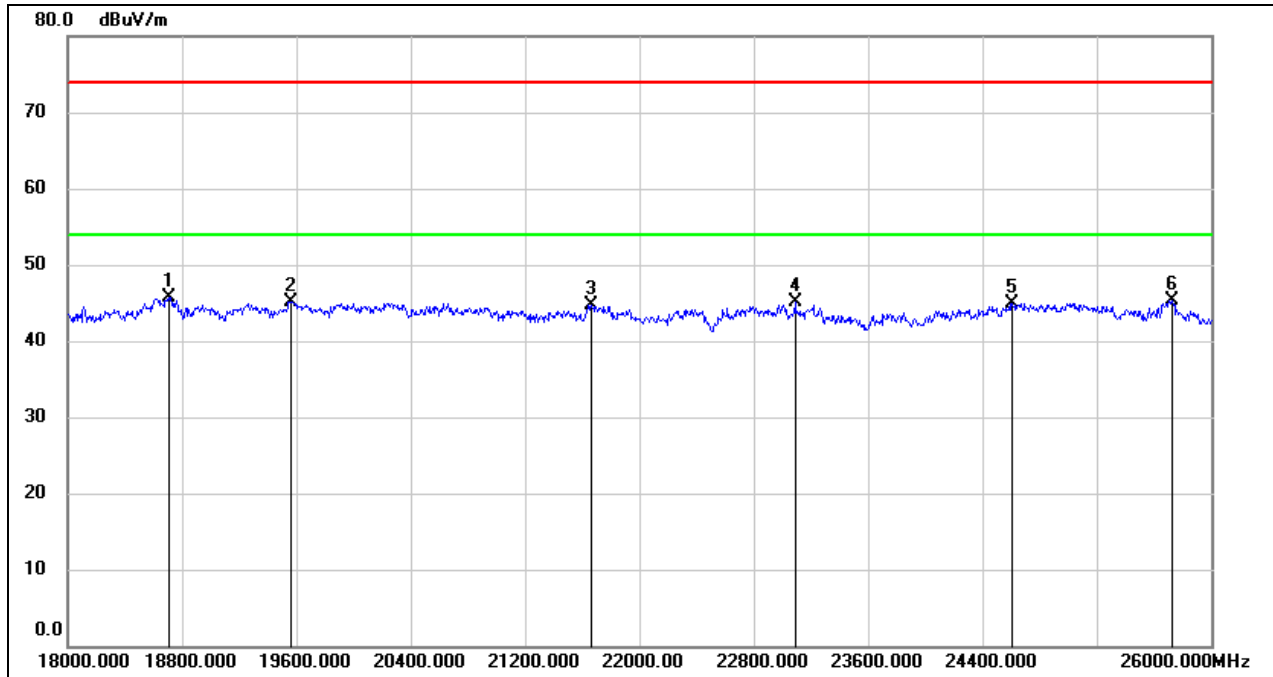

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18704.000	51.12	-5.39	45.73	74.00	-28.27	peak
2	19560.000	50.64	-5.48	45.16	74.00	-28.84	peak
3	21664.000	49.23	-4.45	44.78	74.00	-29.22	peak
4	23088.000	48.52	-3.41	45.11	74.00	-28.89	peak
5	24608.000	47.27	-2.32	44.95	74.00	-29.05	peak
6	25728.000	46.11	-0.72	45.39	74.00	-28.61	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Channel:	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

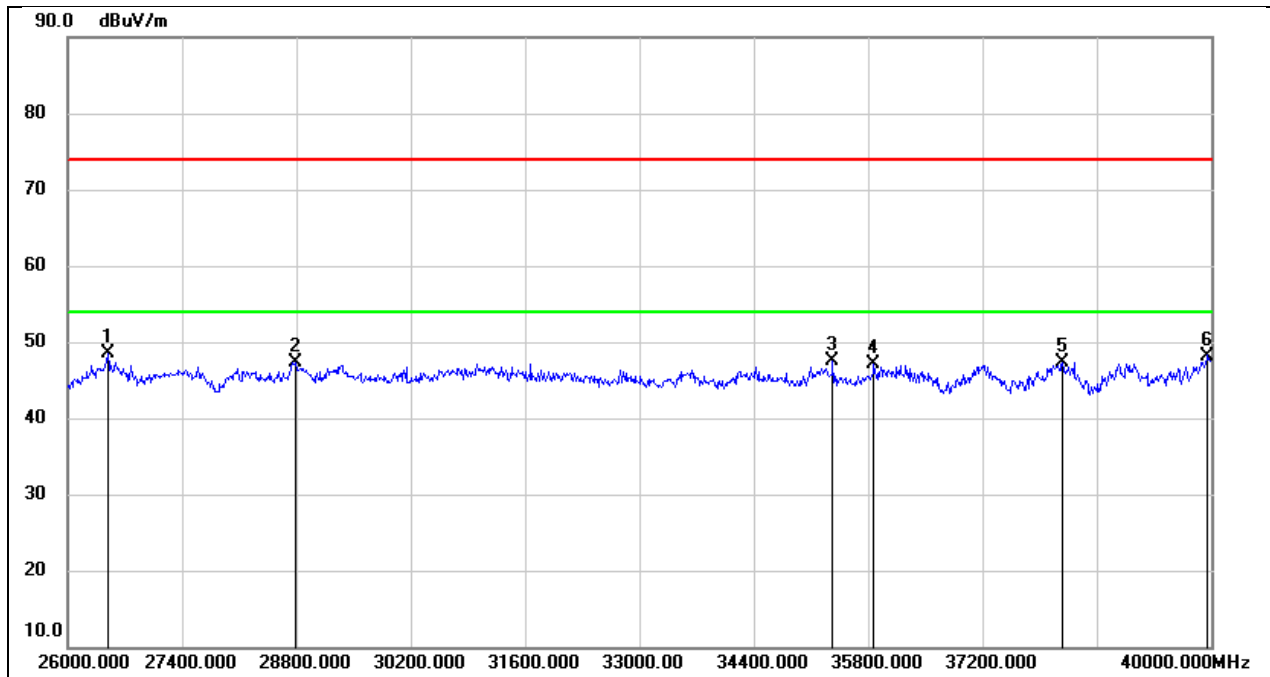

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	53.29	-4.74	48.55	74.00	-25.45	peak
2	28786.000	47.99	-0.64	47.35	74.00	-26.65	peak
3	35366.000	44.90	2.59	47.49	74.00	-26.51	peak
4	35870.000	43.33	3.75	47.08	74.00	-26.92	peak
5	38180.000	43.64	3.69	47.33	74.00	-26.67	peak
6	39958.000	43.08	5.12	48.20	74.00	-25.80	peak


Test Mode:	802.11a 20	Channel:	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

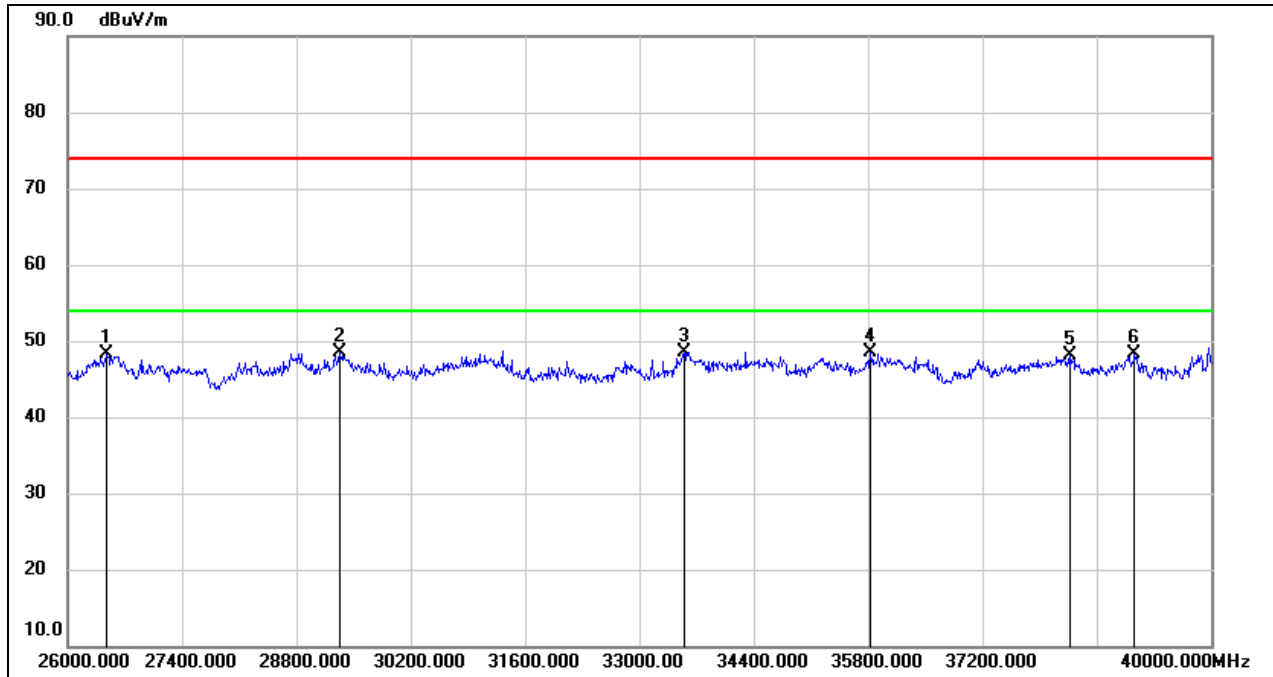

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	53.03	-4.78	48.25	74.00	-25.75	peak
2	29332.000	49.38	-0.93	48.45	74.00	-25.55	peak
3	33546.000	47.99	0.53	48.52	74.00	-25.48	peak
4	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
5	38278.000	44.32	3.82	48.14	74.00	-25.86	peak
6	39062.000	43.98	4.30	48.28	74.00	-25.72	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Channel:	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

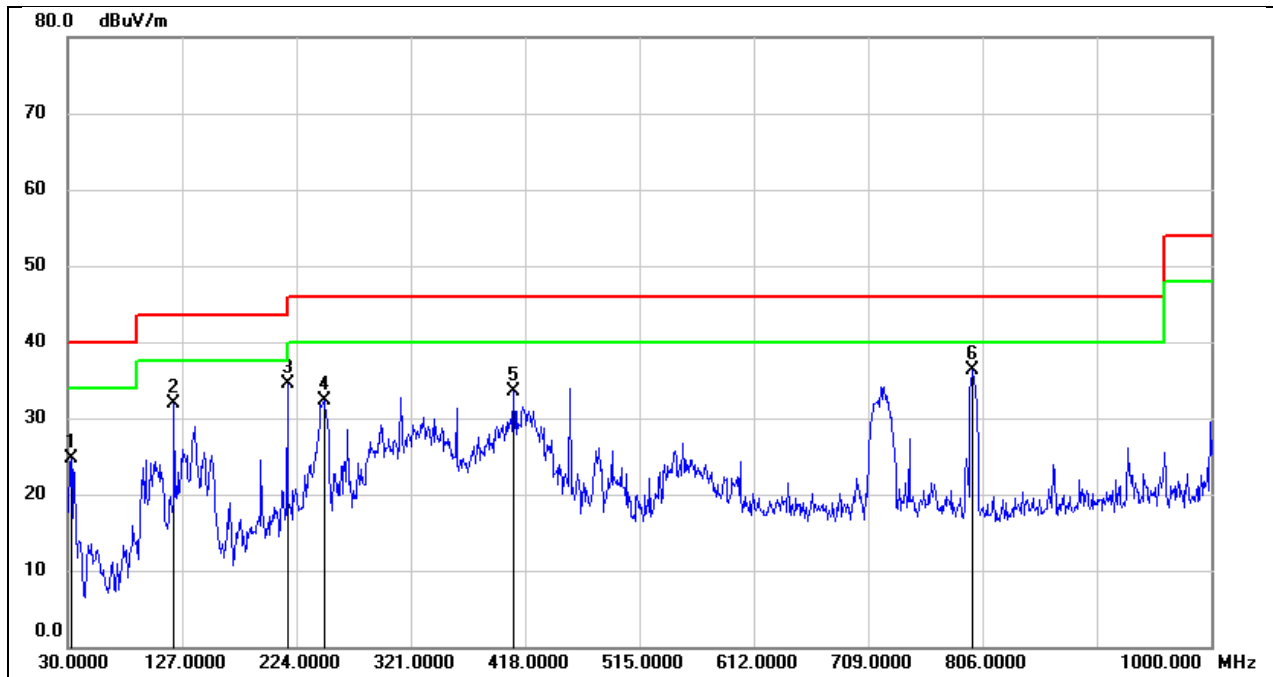

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	43.95	-19.22	24.73	40.00	-15.27	QP
2	120.2100	51.83	-19.85	31.98	43.50	-11.52	QP
3	216.2400	52.40	-17.84	34.56	46.00	-11.44	QP
4	247.2800	51.34	-18.99	32.35	46.00	-13.65	QP
5	408.3000	46.62	-13.17	33.45	46.00	-12.55	QP
6	797.2700	43.60	-7.35	36.25	46.00	-9.75	QP

Test Mode:	802.11a 20	Channel:	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

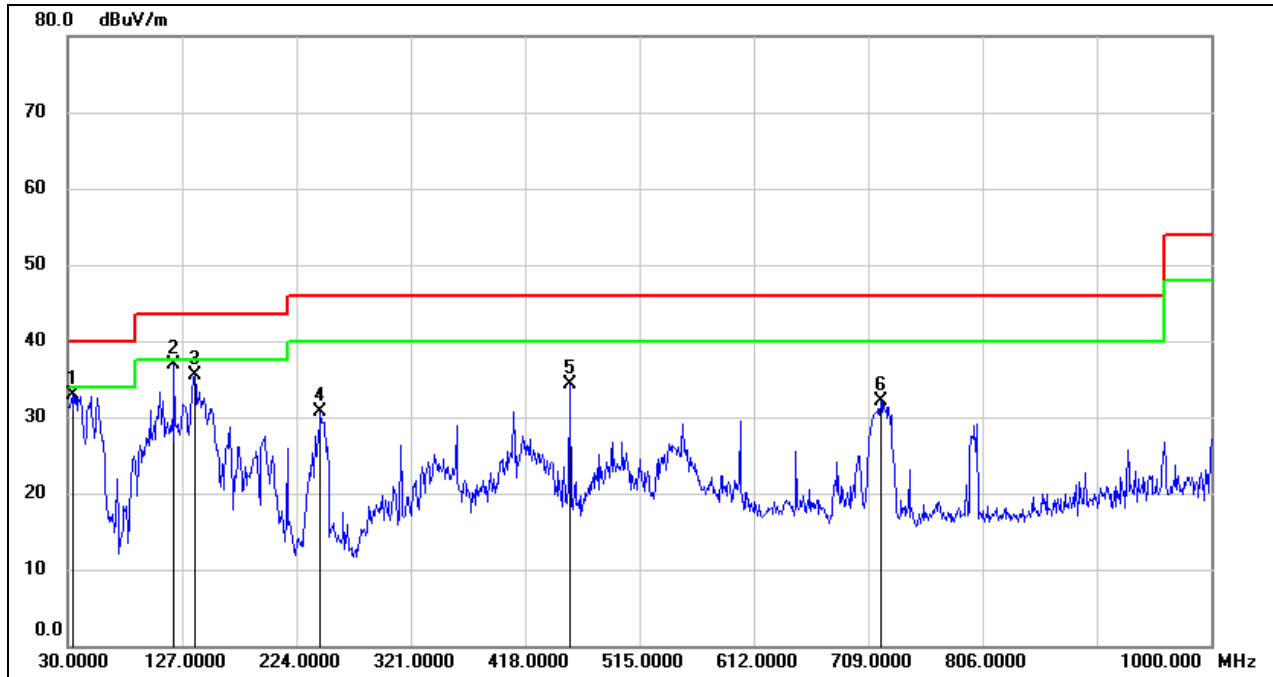

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	52.31	-19.31	33.00	40.00	-7.00	QP
2	120.2100	56.73	-19.85	36.88	43.50	-6.62	QP
3	137.6700	54.53	-18.95	35.58	43.50	-7.92	QP
4	244.3700	49.68	-19.07	30.61	46.00	-15.39	QP
5	455.8300	46.59	-12.27	34.32	46.00	-11.68	QP
6	719.6700	40.21	-8.08	32.13	46.00	-13.87	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

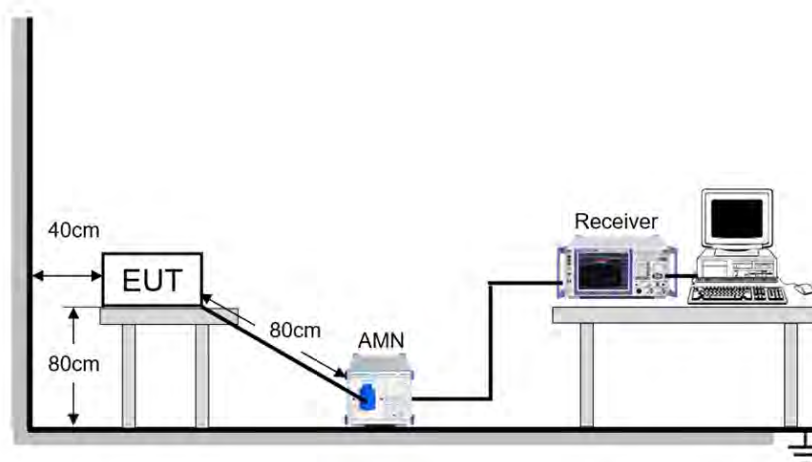

TEST ENVIRONMENT


Temperature	23.3°C	Relative Humidity	59.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	April 18, 2023	Test By	Wite Chen
-----------	----------------	---------	-----------

TEST RESULTS

Test Mode:	802.11a20	Channel:	5180
Line:	Line	Test Voltage:	AC 120 V, 60 Hz

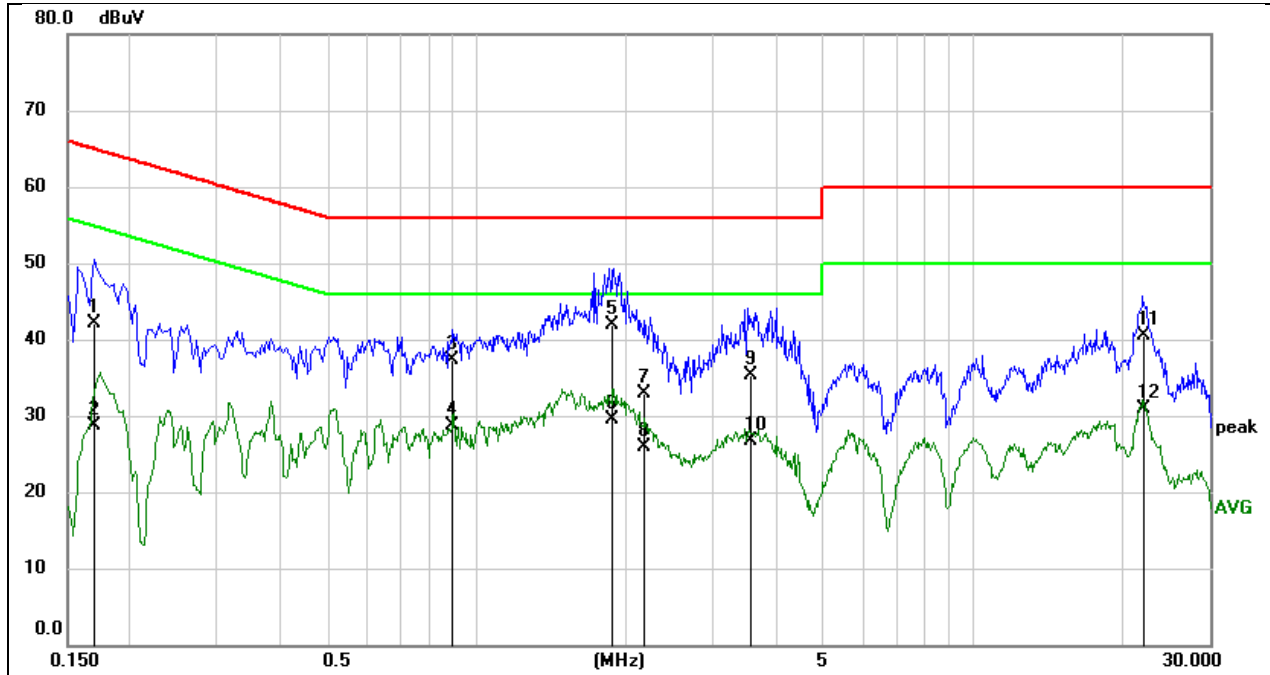


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1694	32.48	9.59	42.07	64.99	-22.92	QP
2	0.1694	19.14	9.59	28.73	54.99	-26.26	AVG
3	0.8961	27.79	9.60	37.39	56.00	-18.61	QP
4	0.8961	19.04	9.60	28.64	46.00	-17.36	AVG
5	1.8623	32.20	9.62	41.82	56.00	-14.18	QP
6	1.8623	19.90	9.62	29.52	46.00	-16.48	AVG
7	2.1791	23.17	9.64	32.81	56.00	-23.19	QP
8	2.1791	16.21	9.64	25.85	46.00	-20.15	AVG
9	3.5603	25.54	9.69	35.23	56.00	-20.77	QP
10	3.5603	17.07	9.69	26.76	46.00	-19.24	AVG
11	22.1073	30.67	9.82	40.49	60.00	-19.51	QP
12	22.1073	20.99	9.82	30.81	50.00	-19.19	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a20	Channel:	5180
Line:	Neutral	Test Voltage:	AC 120 V, 60 Hz

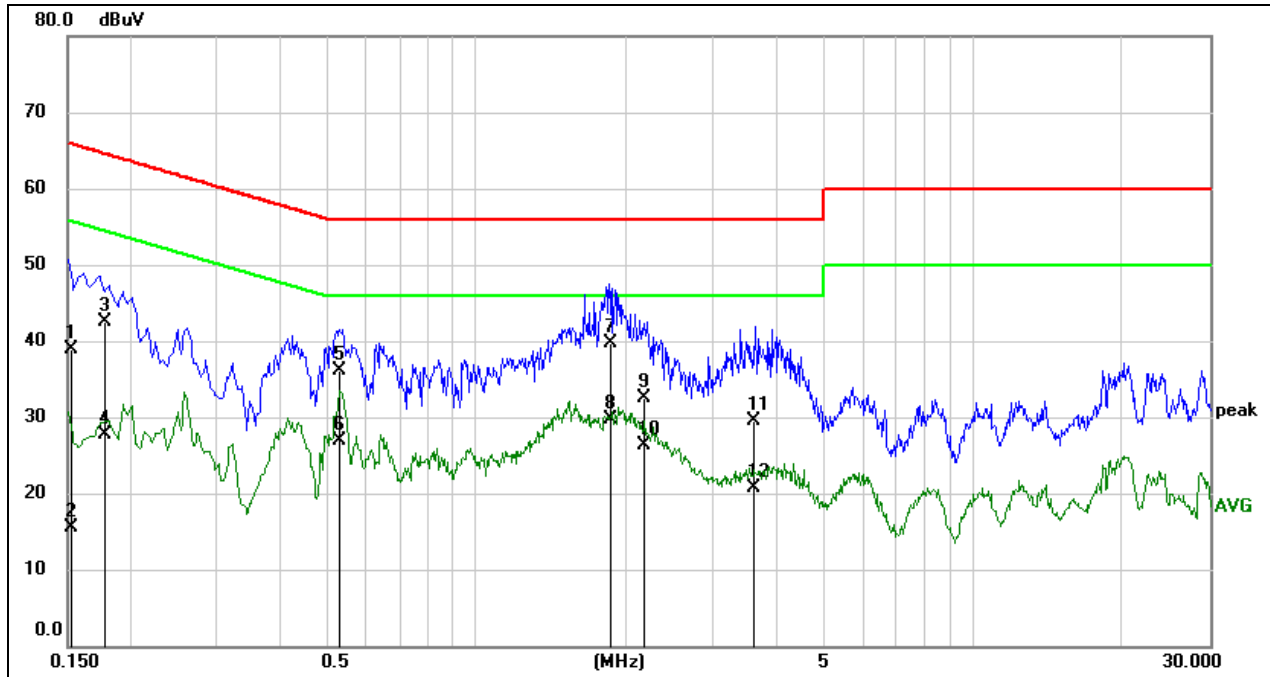

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1527	29.39	9.59	38.98	65.85	-26.87	QP
2	0.1527	5.96	9.59	15.55	55.85	-40.30	AVG
3	0.1785	33.00	9.59	42.59	64.56	-21.97	QP
4	0.1785	18.15	9.59	27.74	54.56	-26.82	AVG
5	0.5327	26.52	9.60	36.12	56.00	-19.88	QP
6	0.5327	17.28	9.60	26.88	46.00	-19.12	AVG
7	1.8695	30.15	9.62	39.77	56.00	-16.23	QP
8	1.8695	20.01	9.62	29.63	46.00	-16.37	AVG
9	2.1779	22.89	9.64	32.53	56.00	-23.47	QP
10	2.1779	16.62	9.64	26.26	46.00	-19.74	AVG
11	3.6002	19.72	9.69	29.41	56.00	-26.59	QP
12	3.6002	11.01	9.69	20.70	46.00	-25.30	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	23.20	5168.36	5191.56	PASS
	Ant2	5180	23.40	5168.16	5191.56	PASS
	Ant1	5200	23.68	5187.84	5211.52	PASS
	Ant2	5200	24.28	5186.80	5211.08	PASS
	Ant1	5240	23.60	5228.12	5251.72	PASS
	Ant2	5240	23.64	5227.92	5251.56	PASS
	Ant1	5260	24.32	5248.24	5272.56	PASS
	Ant2	5260	23.56	5248.04	5271.60	PASS
	Ant1	5280	23.80	5268.00	5291.80	PASS
	Ant2	5280	22.84	5268.44	5291.28	PASS
	Ant1	5320	23.52	5308.12	5331.64	PASS
	Ant2	5320	22.92	5308.28	5331.20	PASS
	Ant1	5500	23.88	5487.72	5511.60	PASS
	Ant2	5500	22.88	5488.24	5511.12	PASS
	Ant1	5580	23.56	5568.00	5591.56	PASS
	Ant2	5580	24.52	5568.20	5592.72	PASS
	Ant1	5700	24.40	5687.52	5711.92	PASS
	Ant2	5700	23.52	5688.20	5711.72	PASS
	Ant1	5720	23.56	5708.00	5731.56	PASS
	Ant2	5720	22.40	5708.28	5730.68	PASS
	Ant1	5720 UNII-2C	17	5708.00	5725	PASS
	Ant2	5720 UNII-2C	16.72	5708.28	5725	PASS
	Ant1	5720 UNII-3	6.56	5725	5731.56	PASS
	Ant2	5720 UNII-3	5.68	5725	5730.68	PASS
	Ant1	5745	23.52	5733.12	5756.64	PASS
	Ant2	5745	22.64	5734.08	5756.72	PASS
	Ant1	5785	23.40	5773.48	5796.88	PASS
	Ant2	5785	22.36	5773.40	5795.76	PASS
	Ant1	5825	22.56	5813.68	5836.24	PASS
	Ant2	5825	24.24	5813.28	5837.52	PASS
11N20MIMO	Ant1	5180	23.48	5168.12	5191.60	PASS
	Ant2	5180	22.12	5169.04	5191.16	PASS
	Ant1	5200	23.44	5188.20	5211.64	PASS
	Ant2	5200	21.32	5189.24	5210.56	PASS
	Ant1	5240	23.40	5228.36	5251.76	PASS
	Ant2	5240	24.36	5227.40	5251.76	PASS
	Ant1	5260	22.64	5248.20	5270.84	PASS
	Ant2	5260	22.12	5248.40	5270.52	PASS
	Ant1	5280	24.44	5268.08	5292.52	PASS
	Ant2	5280	22.32	5268.72	5291.04	PASS
	Ant1	5320	24.32	5308.48	5332.80	PASS
	Ant2	5320	22.84	5308.80	5331.64	PASS
	Ant1	5500	22.08	5488.88	5510.96	PASS
	Ant2	5500	22.52	5488.44	5510.96	PASS
	Ant1	5580	24.48	5567.12	5591.60	PASS
	Ant2	5580	23.08	5568.36	5591.44	PASS
	Ant1	5700	23.56	5688.16	5711.72	PASS
	Ant2	5700	22.80	5688.32	5711.12	PASS
	Ant1	5720	22.92	5708.20	5731.12	PASS
	Ant2	5720	22.72	5708.36	5731.08	PASS
	Ant1	5720 UNII-2C	16.8	5708.20	5725	PASS
	Ant2	5720 UNII-2C	16.64	5708.36	5725	PASS
	Ant1	5720 UNII-3	6.12	5725	5731.12	PASS
	Ant2	5720 UNII-3	6.08	5725	5731.08	PASS
	Ant1	5745	22.64	5733.44	5756.08	PASS

	Ant2	5745	22.12	5733.80	5755.92	PASS
	Ant1	5785	25.24	5773.08	5798.32	PASS
	Ant2	5785	23.52	5773.20	5796.72	PASS
	Ant1	5825	24.40	5813.16	5837.56	PASS
	Ant2	5825	23.80	5812.44	5836.24	PASS
11N40MIMO	Ant1	5190	40.88	5169.68	5210.56	PASS
	Ant2	5190	40.32	5169.92	5210.24	PASS
	Ant1	5230	40.88	5209.68	5250.56	PASS
	Ant2	5230	40.08	5210.00	5250.08	PASS
	Ant1	5270	40.40	5249.76	5290.16	PASS
	Ant2	5270	40.64	5249.92	5290.56	PASS
	Ant1	5310	40.80	5289.84	5330.64	PASS
	Ant2	5310	40.56	5289.84	5330.40	PASS
	Ant1	5510	40.88	5489.52	5530.40	PASS
	Ant2	5510	40.40	5489.76	5530.16	PASS
	Ant1	5550	40.88	5529.60	5570.48	PASS
	Ant2	5550	40.24	5530.00	5570.24	PASS
	Ant1	5670	40.88	5649.60	5690.48	PASS
	Ant2	5670	41.20	5649.52	5690.72	PASS
	Ant1	5710	41.20	5689.28	5730.48	PASS
	Ant2	5710	40.48	5689.52	5730.00	PASS
	Ant1	5710 UNII-2C	35.72	5689.28	5725	PASS
	Ant2	5710 UNII-2C	35.48	5689.52	5725	PASS
	Ant1	5710 UNII-3	5.48	5725	5730.48	PASS
	Ant2	5710 UNII-3	5	5725	5730.00	PASS
	Ant1	5755	41.44	5734.36	5775.80	PASS
	Ant2	5755	40.64	5734.60	5775.24	PASS
	Ant1	5795	40.80	5774.60	5815.40	PASS
	Ant2	5795	40.64	5774.76	5815.40	PASS
11AC80MIMO	Ant1	5210	80.64	5169.68	5250.32	PASS
	Ant2	5210	79.84	5170.16	5250.00	PASS
	Ant1	5290	80.16	5250.00	5330.16	PASS
	Ant2	5290	80.00	5250.16	5330.16	PASS
	Ant1	5530	80.32	5490.00	5570.32	PASS
	Ant2	5530	79.84	5490.16	5570.00	PASS
	Ant1	5610	80.16	5570.00	5650.16	PASS
	Ant2	5610	80.48	5569.84	5650.32	PASS
	Ant1	5690	80.32	5650.00	5730.32	PASS
	Ant2	5690	79.84	5650.16	5730.00	PASS
	Ant1	5690 UNII-2C	75	5650.00	5725	PASS
	Ant2	5690 UNII-2C	74.84	5650.16	5725	PASS
	Ant1	5690 UNII-3	5.32	5725	5730.32	PASS
	Ant2	5690 UNII-3	5	5725	5730.00	PASS
	Ant1	5775	80.48	5734.68	5815.16	PASS
	Ant2	5775	80.00	5735.16	5815.16	PASS
11AX20MIMO	Ant1	5180	23.52	5167.56	5191.08	PASS
	Ant2	5180	22.32	5168.92	5191.24	PASS
	Ant1	5200	23.32	5188.28	5211.60	PASS
	Ant2	5200	24.04	5187.64	5211.68	PASS
	Ant1	5240	22.80	5228.60	5251.40	PASS
	Ant2	5240	23.64	5228.12	5251.76	PASS
	Ant1	5260	22.28	5249.12	5271.40	PASS
	Ant2	5260	21.56	5249.28	5270.84	PASS
	Ant1	5280	22.08	5268.92	5291.00	PASS
	Ant2	5280	21.28	5269.36	5290.64	PASS
	Ant1	5320	21.92	5309.40	5331.32	PASS
	Ant2	5320	21.08	5309.44	5330.52	PASS
	Ant1	5500	25.32	5486.16	5511.48	PASS
	Ant2	5500	21.84	5489.24	5511.08	PASS
	Ant1	5580	23.56	5568.64	5592.20	PASS
	Ant2	5580	23.04	5568.88	5591.92	PASS
	Ant1	5700	21.88	5688.84	5710.72	PASS
	Ant2	5700	22.00	5688.92	5710.92	PASS