

FCC 47 CFR PART 15 SUBPART C

Applicant : Meshreen Technology Ltd.
Product Type : module
Trade Name : Meshreen
Model Number : ZSB-6801, ZSB-6800
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Dec. 02, 2015
Test Period : Dec. 03 ~ Dec. 23, 2015
Issue Date : Jan. 06, 2016

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jan. 06, 2016	Initial Issue	

Verification of Compliance

Issued Date: 01/06/2016

Applicant : Meshreen Technology Ltd.
Product Type : module
Trade Name : Meshreen
Model Number : ZSB-6801, ZSB-6800
FCC ID : 2AC2E-ZSB-6801
EUT Rated Voltage : DC 3.3V
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu

(Manager)

(Fly Lu)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology.....	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	9
4	Conducted Emission Measurement	10
4.1.	Limit.....	10
4.2.	Test Instruments	10
4.3.	Test Setup	10
4.4.	Test Procedure	11
4.5.	Test Result	12
5	Radiated Emission Measurement	14
5.1.	Limit.....	14
5.2.	Test Instruments	14
5.3.	Setup	15
5.4.	Test Procedure	16
5.5.	Test Result	18
6	Maximum Conducted Output Power Measurement	23
6.1.	Limit.....	23
6.2.	Test Setup	23
6.3.	Test Instruments	23
6.4.	Test Procedure	23
6.5.	Test Result	24
7	6dB RF Bandwidth Measurement	25
7.1.	Limit.....	25
7.2.	Test Setup	25
7.3.	Test Instruments	25
7.4.	Test Procedure	25
7.5.	Test Result	26
7.6.	Test Graphs	27

8	Maximum Power Density Measurement	28
8.1.	Limit.....	28
8.2.	Test Setup	28
8.3.	Test Instruments	28
8.4.	Test Procedure	28
8.5.	Test Result	29
8.6.	Test Graphs	30
9	Out of Band Conducted Emissions Measurement	31
9.1.	Limit.....	31
9.2.	Test Setup	31
9.3.	Test Instruments	31
9.4.	Test Procedure	31
9.5.	Test Graphs	32
10	Antenna Measurement.....	35
10.1.	Limit.....	35
10.2.	Antenna Connector Construction	35

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(c)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	9kHz ~ 30MHz	1.457
	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054

2 EUT Description

Applicant	Meshreen Technology Ltd. No.11-3, Xiashe, Guishan Township, Taoyuan County 333, Taiwan
Manufacturer	Meshreen Technology Ltd. No.11-3, Xiashe, Guishan Township, Taoyuan County 333, Taiwan
Product Type	module
Trade Name	Meshreen
Model No.	ZSB-6801, ZSB-6800
Model Different Description	The only difference between the two models is ZSB-6800 doesn't have flash, ZSB-6801 has flash for marketing purpose.
FCC ID	2AC2E-ZSB-6801
Frequency Range	2405 MHz ~ 2475 MHz
Modulation Type	O-QPSK
Channel Number	15CH
Antenna Type	PCB Antenna
Antenna Gain	1.2 dBi
RF Output Power	0.06067 W / 17.83 dBm

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: ZigBee Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

ZigBee Link Mode:

Channel Low (2405MHz), Channel Mid (2440MHz) and Channel High (2475MHz) were chosen for full testing.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.


3.2. EUT Exercise Software

1	Setup the EUT shown on 3.3.
2	Turn on the power of all equipment.
3	Turn on Zigbee function link to Notebook and run test program
4	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emissions

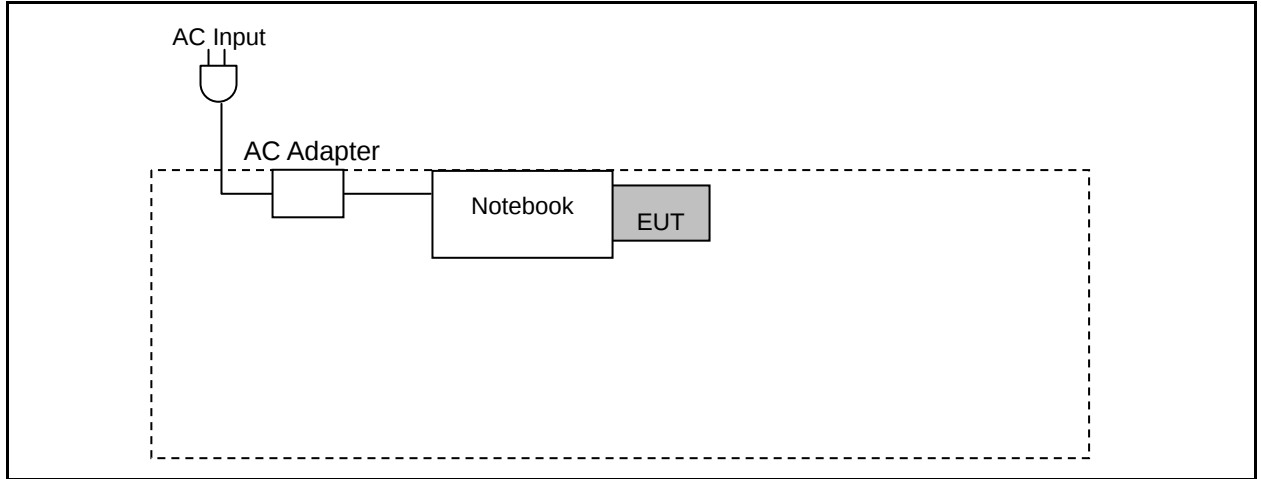

Radiated Emissions

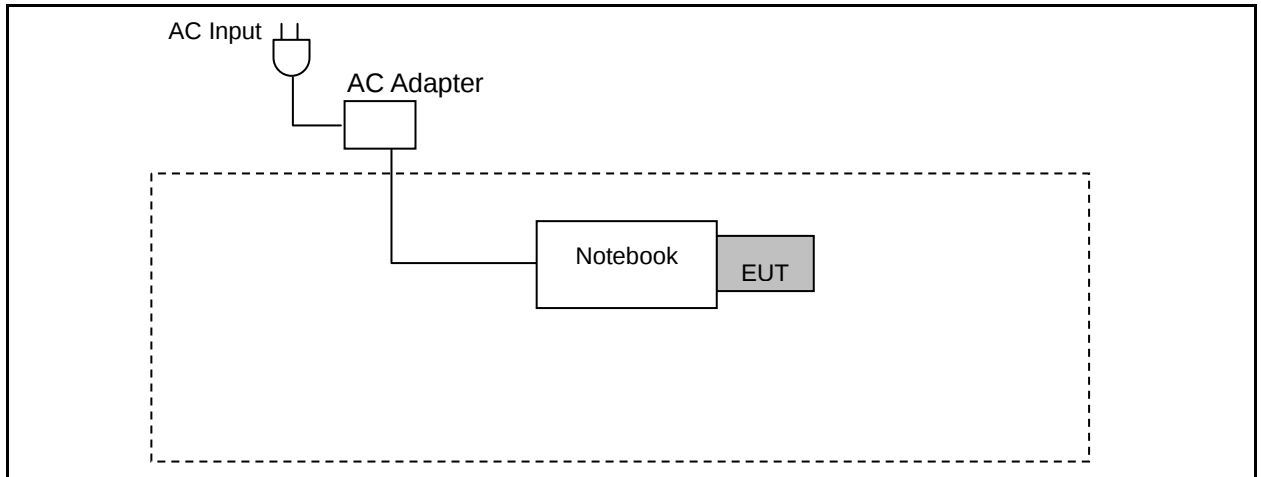

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/25/2015	(1)
LISN	R&S	ENV216	101040	03/10/2015	(1)
LISN	R&S	ENV216	101041	03/06/2015	(1)
RF Cable	Woken	00100D1380194M	TE-02-02	06/26/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

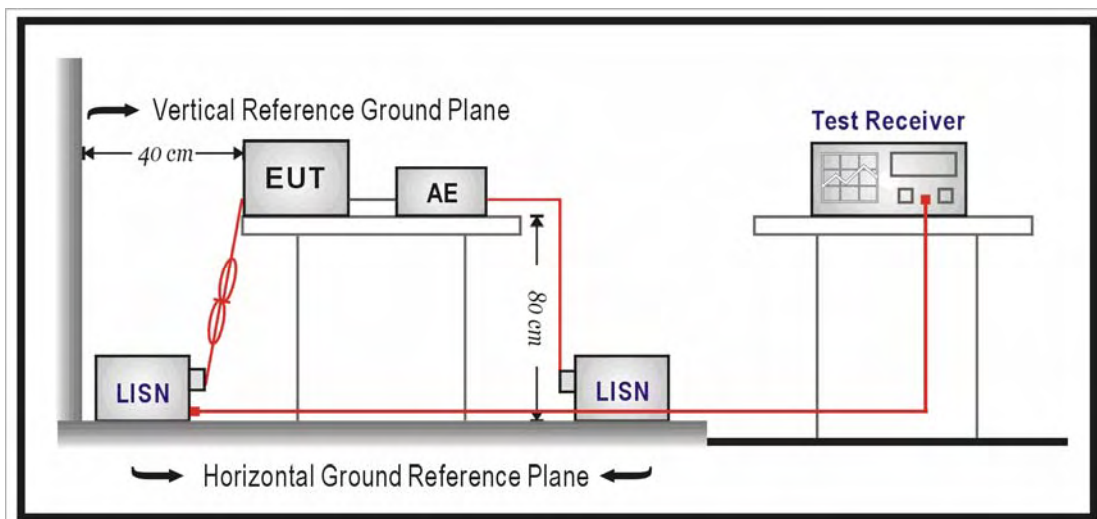

4.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.


For A.C. mains conducted interference, measured both sides of A.C. lines and carried out using quasi-peak and average detector receivers of maximum conducted interference.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz. The equipment under test (EUT) shall meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. The voltage limits shall be met. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ZSB-6801	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	12/07/2015
		Test By:	Eric Ou Yang
Description:			

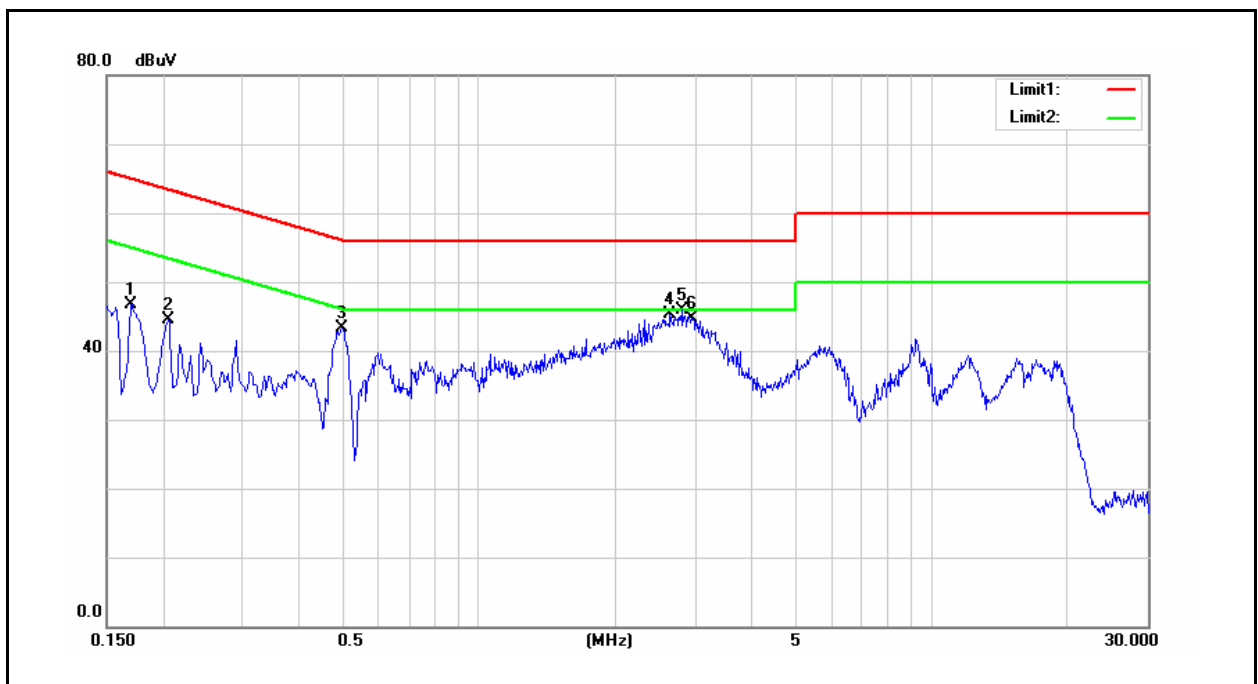


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1700	35.71	22.76	9.69	45.40	32.45	64.96	54.96	-19.56	-22.51	Pass
2	0.2060	29.08	20.72	9.68	38.76	30.40	63.37	53.37	-24.61	-22.97	Pass
3	0.4980	31.58	26.66	9.70	41.28	36.36	56.03	46.03	-14.75	-9.67	Pass
4	2.6460	32.13	27.39	9.79	41.92	37.18	56.00	46.00	-14.08	-8.82	Pass
5	2.7980	31.83	27.52	9.79	41.62	37.31	56.00	46.00	-14.38	-8.69	Pass
6	2.9580	32.18	27.33	9.80	41.98	37.13	56.00	46.00	-14.02	-8.87	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ZSB-6801	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	12/07/2015
		Test By:	Eric Ou Yang

Description:

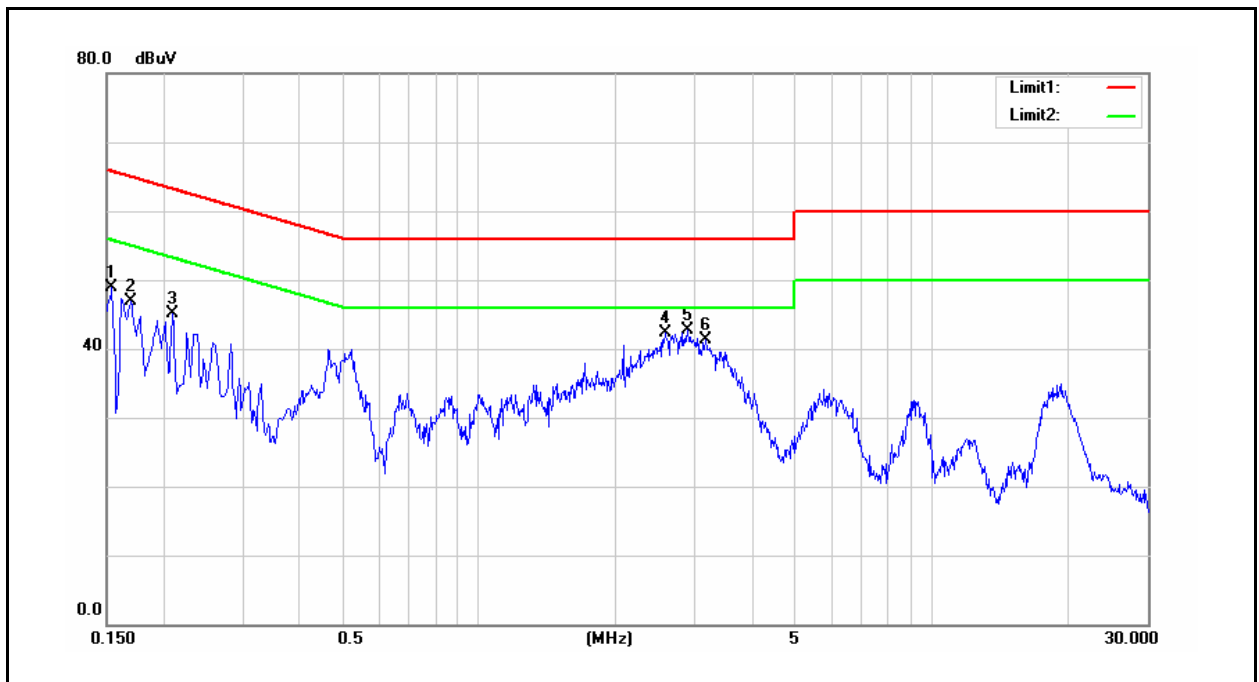

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	35.44	18.31	9.66	45.10	27.97	65.78	55.78	-20.68	-27.81	Pass
2	0.1700	33.89	20.24	9.66	43.55	29.90	64.96	54.96	-21.41	-25.06	Pass
3	0.2100	28.34	20.38	9.65	37.99	30.03	63.21	53.21	-25.22	-23.18	Pass
4	2.5780	29.06	24.18	9.77	38.83	33.95	56.00	46.00	-17.17	-12.05	Pass
5	2.8980	30.18	25.25	9.78	39.96	35.03	56.00	46.00	-16.04	-10.97	Pass
6	3.1580	29.31	24.59	9.78	39.09	34.37	56.00	46.00	-16.91	-11.63	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	08/11/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/02/2015	(1)
Test Site	ATL	TE01	888001	08/27/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

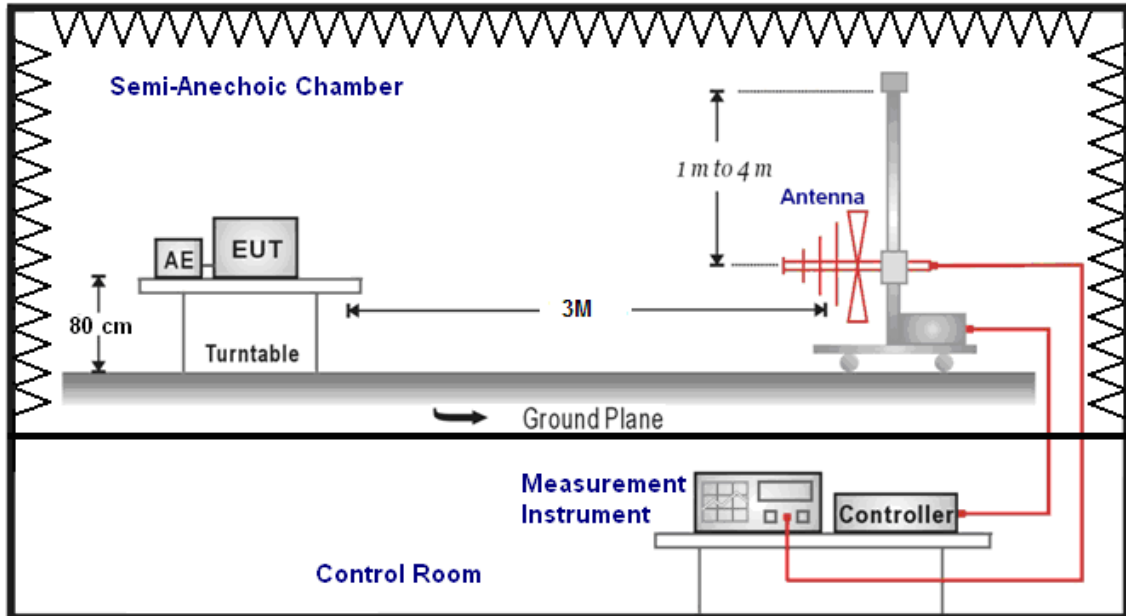

Above 1GHz

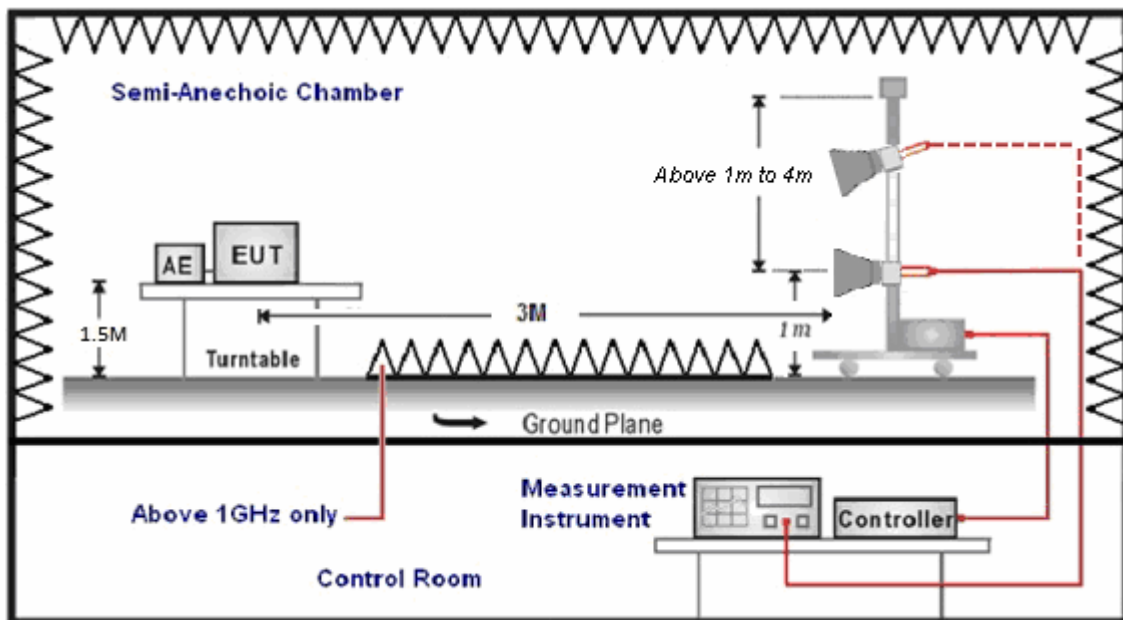

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ZSB-6801		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		12/09/2015	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
229.5000	48.82	-11.78	37.04	46.00	-8.96	QP	H
266.5000	46.32	-10.49	35.83	46.00	-10.17	QP	H
305.0000	44.51	-9.13	35.38	46.00	-10.62	QP	H
374.0000	43.58	-7.79	35.79	46.00	-10.21	QP	H
687.0000	28.79	-1.54	27.25	46.00	-18.75	QP	H
872.0000	27.67	2.13	29.80	46.00	-16.20	QP	H
229.5000	44.02	-11.78	32.24	46.00	-13.76	QP	V
304.5000	40.82	-9.13	31.69	46.00	-14.31	QP	V
419.0000	39.10	-6.84	32.26	46.00	-13.74	QP	V
522.0000	38.47	-4.82	33.65	46.00	-12.35	QP	V
535.0000	36.35	-4.53	31.82	46.00	-14.18	QP	V
791.0000	30.00	0.41	30.41	46.00	-15.59	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ZSB-6801		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		12/23/2015	
Frequency:		2405 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	38.68	1.46	40.14	74.00	-33.86	peak	H
4808.000	40.95	7.40	48.35	74.00	-25.65	peak	H
7216.000	38.36	13.31	51.67	74.00	-22.33	peak	H
9620.000	35.02	16.43	51.45	74.00	-22.55	peak	H
3023.000	37.23	1.42	38.65	74.00	-35.35	peak	V
4810.000	44.36	7.40	51.76	74.00	-22.24	peak	V
7215.000	38.22	13.31	51.53	74.00	-22.47	peak	V
9620.000	34.67	16.43	51.10	74.00	-22.90	peak	V
12025.000	34.58	20.01	54.59	74.00	-19.41	peak	V
12025.000	27.20	20.01	47.21	54.00	-6.79	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ZSB-6801		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		12/23/2015	
Frequency:		2440 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3086.000	36.69	1.71	38.40	74.00	-35.60	peak	H
4880.000	40.55	7.66	48.21	74.00	-25.79	peak	H
7320.000	38.09	13.59	51.68	74.00	-22.32	peak	H
9760.000	41.36	16.64	58.00	74.00	-16.00	peak	H
9760.000	32.11	16.64	48.75	54.00	-5.25	AVG	H
12200.000	35.10	20.08	55.18	74.00	-18.82	peak	H
12200.000	28.73	20.08	48.81	54.00	-5.19	AVG	H
3051.000	37.98	1.55	39.53	74.00	-34.47	peak	V
4880.000	46.42	7.66	54.08	74.00	-19.92	peak	V
4880.000	38.25	7.66	45.91	54.00	-8.09	AVG	V
7320.000	40.66	13.59	54.25	74.00	-19.75	peak	V
7320.000	31.59	13.59	45.18	54.00	-8.82	AVG	V
9760.000	41.51	16.64	58.15	74.00	-15.85	peak	V
9760.000	32.96	16.64	49.60	54.00	-4.40	AVG	V
12200.000	38.02	20.08	58.10	74.00	-15.90	peak	V
12200.000	31.12	20.08	51.20	54.00	-2.80	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ZSB-6801		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		12/23/2015	
Frequency:		2475 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	38.66	1.25	39.91	74.00	-34.09	peak	H
4948.000	40.59	7.89	48.48	74.00	-25.52	peak	H
7425.000	42.14	13.88	56.02	74.00	-17.98	peak	H
7425.000	34.39	13.88	48.27	54.00	-5.73	AVG	H
9900.000	43.64	16.86	60.50	74.00	-13.50	peak	H
9900.000	35.34	16.86	52.20	54.00	-1.80	AVG	H
12375.000	35.70	20.16	55.86	74.00	-18.14	peak	H
12375.000	27.91	20.16	48.07	54.00	-5.93	AVG	H
3051.000	37.09	1.55	38.64	74.00	-35.36	peak	V
4950.000	42.80	7.89	50.69	74.00	-23.31	peak	V
7425.000	42.87	13.88	56.75	74.00	-17.25	peak	V
7425.000	34.65	13.88	48.53	54.00	-5.47	AVG	V
9900.000	43.53	16.86	60.39	74.00	-13.61	peak	V
9900.000	34.69	16.86	51.55	54.00	-2.45	AVG	V
12375.000	41.66	20.16	61.82	74.00	-12.18	peak	V
12375.000	33.01	20.16	53.17	54.00	-0.83	AVG	V

Band Edge

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	ZSB-6801			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	12/23/2015		
Frequency:	2405 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2372.590	52.25	-0.39	51.86	74.00	-22.14	peak	H
2390.000	49.96	-0.33	49.63	74.00	-24.37	peak	H
2389.420	48.83	-0.33	48.50	74.00	-25.50	peak	V
2390.000	43.63	-0.33	43.30	74.00	-30.70	peak	V


Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	ZSB-6801			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	12/23/2015		
Frequency:	2475 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	59.13	0.03	59.16	74.00	-14.84	peak	H
2483.500	49.03	0.03	49.06	54.00	-4.94	AVG	H
2483.775	58.41	0.03	58.44	74.00	-15.56	peak	H
2483.775	48.21	0.03	48.24	54.00	-5.76	AVG	H
2483.500	55.51	0.03	55.54	74.00	-18.46	peak	V
2483.500	45.84	0.03	45.87	54.00	-8.13	AVG	V
2483.725	55.77	0.03	55.80	74.00	-18.20	peak	V
2483.725	45.24	0.03	45.27	54.00	-8.73	AVG	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

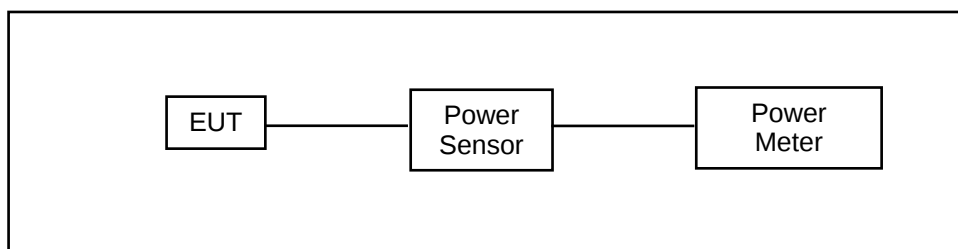

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result


Model Number	ZSB-6801				
Test Item	Maximum Conducted Output Power				
Test Mode	Mode 2: ZigBee Link Mode				
Date of Test	12/03/2015			Test Site	TE05
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2405	17.79	0.06012	17.83	0.06067	< 30
2440	17.21	0.05260	17.25	0.05309	< 30
2475	16.62	0.04592	16.66	0.04634	< 30

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

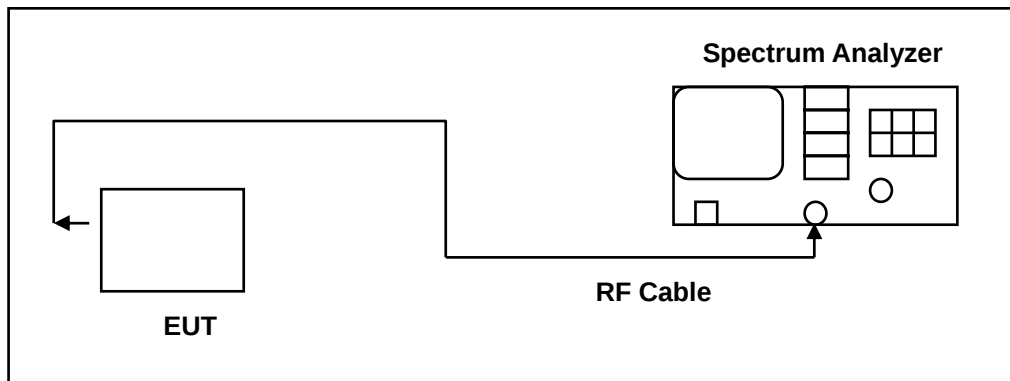

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.




6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

7.5. Test Result

Model Number	ZSB-6801		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: ZigBee Link Mode		
Date of Test	12/03/2015	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
2405	1427	> 500	
2440	1530	> 500	
2475	1532	> 500	

7.6. Test Graphs

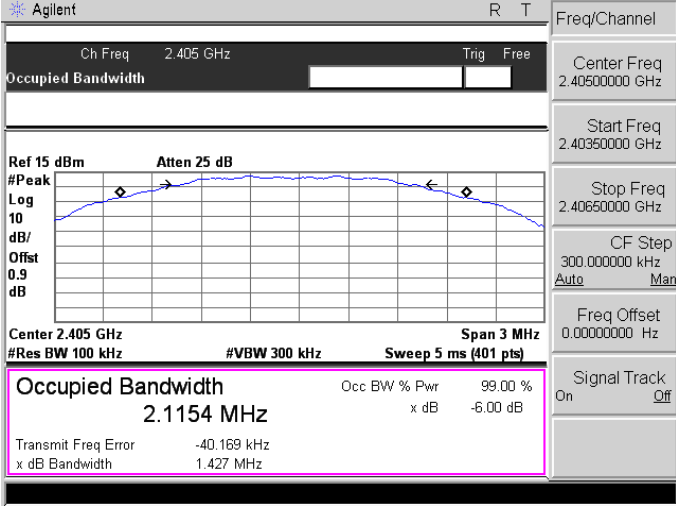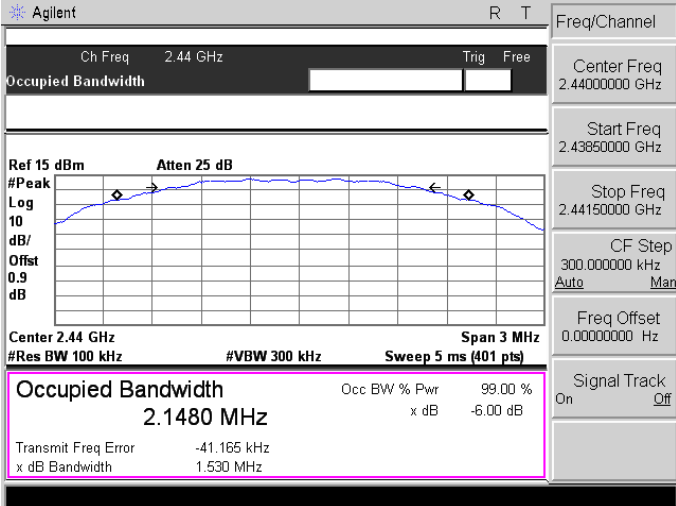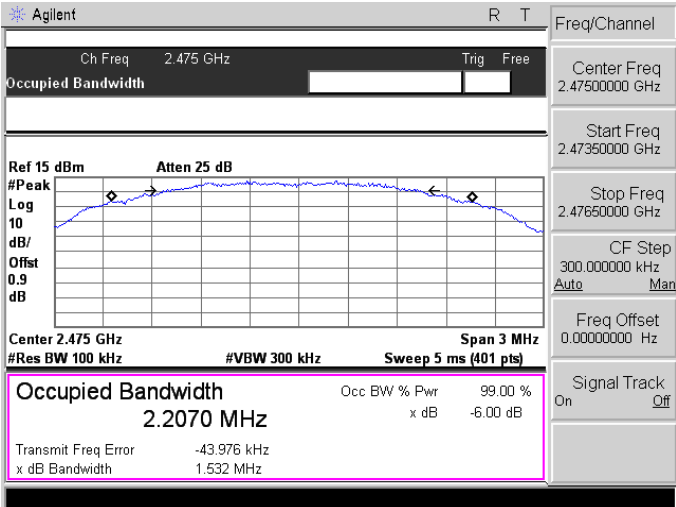
Mode 2: ZigBee Link Mode	
2405	 Agilent R T Ch Freq 2.405 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 25 dB #Peak Log 10 dB/Offset 0.9 dB Center 2.405 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 2.1154 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -40.169 kHz x dB Bandwidth 1.427 MHz Freq/Channel Center Freq 2.40500000 GHz Start Freq 2.40350000 GHz Stop Freq 2.40650000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2440	 Agilent R T Ch Freq 2.44 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 25 dB #Peak Log 10 dB/Offset 0.9 dB Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 2.1480 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -41.165 kHz x dB Bandwidth 1.530 MHz Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2475	 Agilent R T Ch Freq 2.475 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 25 dB #Peak Log 10 dB/Offset 0.9 dB Center 2.475 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 2.2070 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -43.976 kHz x dB Bandwidth 1.532 MHz Freq/Channel Center Freq 2.47500000 GHz Start Freq 2.47350000 GHz Stop Freq 2.47650000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

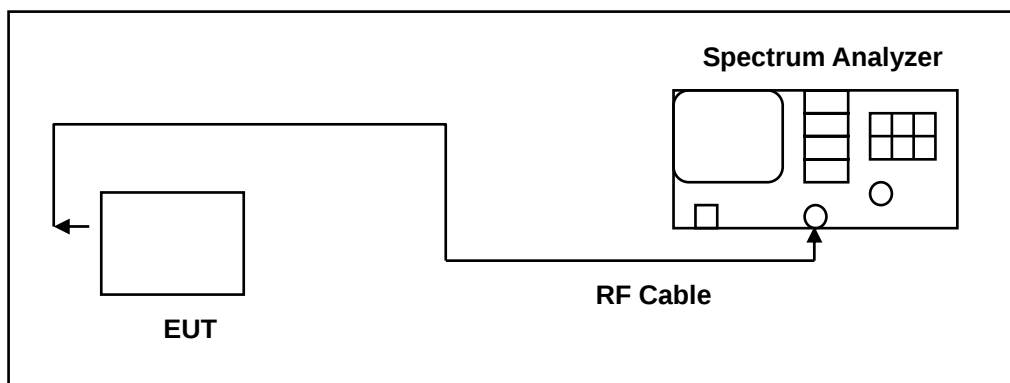

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	ZSB-6801		
Test Item	Maximum Power Density		
Test Mode	Mode 2: ZigBee Link Mode		
Date of Test	12/03/2015	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2405	6.498		< 8
2440	5.624		< 8
2475	4.947		< 8

8.6. Test Graphs


Mode 2: ZigBee Link Mode	
2405	Agilent R T Ref 15 dBm Atten 25 dB Mkr1 2.4048875 GHz 6.498 dBm Peak Log 10 dB/Offset 1 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.405 GHz Span 3 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (401 pts) Freq/Channel Center Freq 2.40500000 GHz Start Freq 2.40350000 GHz Stop Freq 2.40650000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2440	Agilent R T Ref 15 dBm Atten 25 dB Mkr1 2.4398500 GHz 5.624 dBm Peak Log 10 dB/Offset 1 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.44 GHz Span 3 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (401 pts) Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2475	Agilent R T Ref 15 dBm Atten 25 dB Mkr1 2.4748500 GHz 4.947 dBm Peak Log 10 dB/Offset 1 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.475 GHz Span 3 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (401 pts) Freq/Channel Center Freq 2.47500000 GHz Start Freq 2.47350000 GHz Stop Freq 2.47650000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

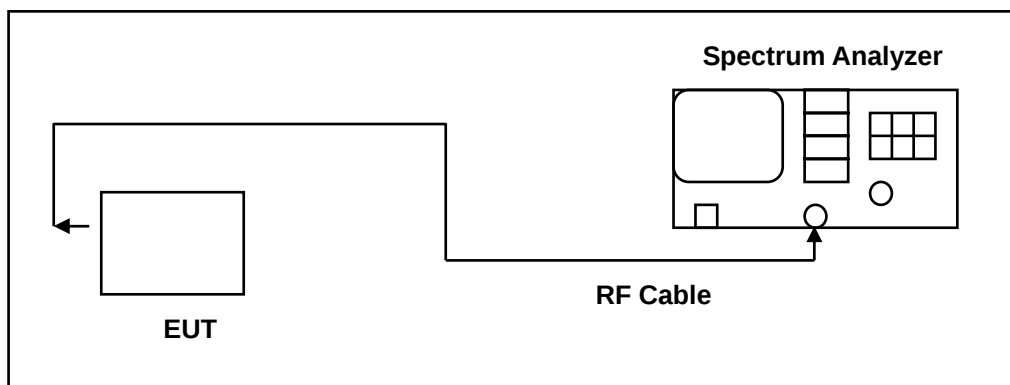

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure




In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels (Channel low, middle, high)

9.5. Test Graphs

Reference level

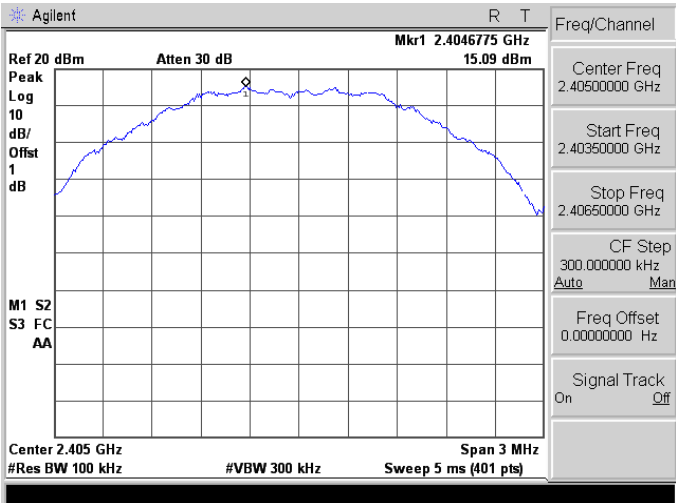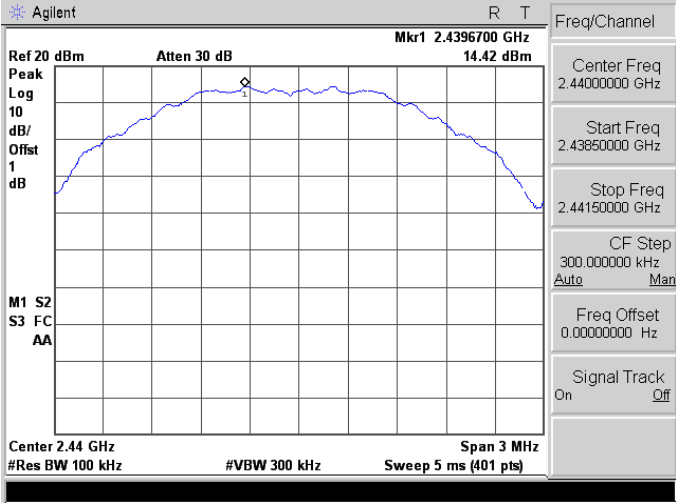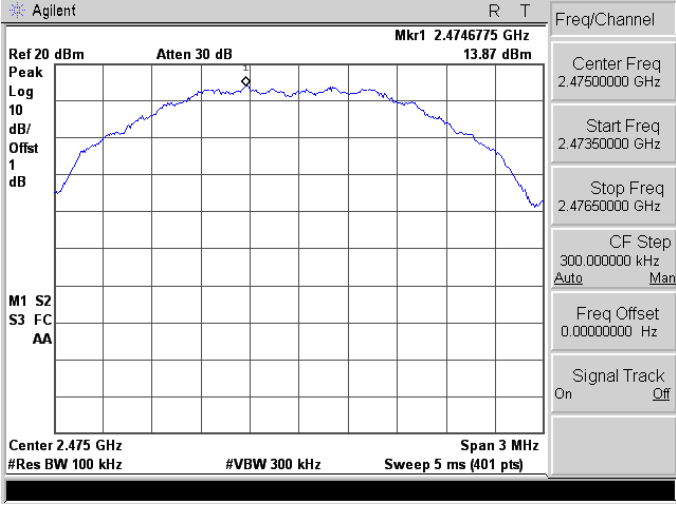Mode 2: ZigBee Link Mode	
2405	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.4046775 GHz 15.09 dBm Peak Log 10 dB/Offset 1 dB M1 S2 S3 FC AA Center 2.405 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Freq/Channel Center Freq 2.40500000 GHz Start Freq 2.40350000 GHz Stop Freq 2.40650000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2440	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.4396700 GHz 14.42 dBm Peak Log 10 dB/Offset 1 dB M1 S2 S3 FC AA Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2475	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.4746775 GHz 13.87 dBm Peak Log 10 dB/Offset 1 dB M1 S2 S3 FC AA Center 2.475 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Freq/Channel Center Freq 2.47500000 GHz Start Freq 2.47350000 GHz Stop Freq 2.47650000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off


Out of Band Conducted Emissions

Mode 2: ZigBee Link Mode	
2405	
2440	
2475	


Conducted Band Edge

Mode 2: ZigBee Link Mode

2405

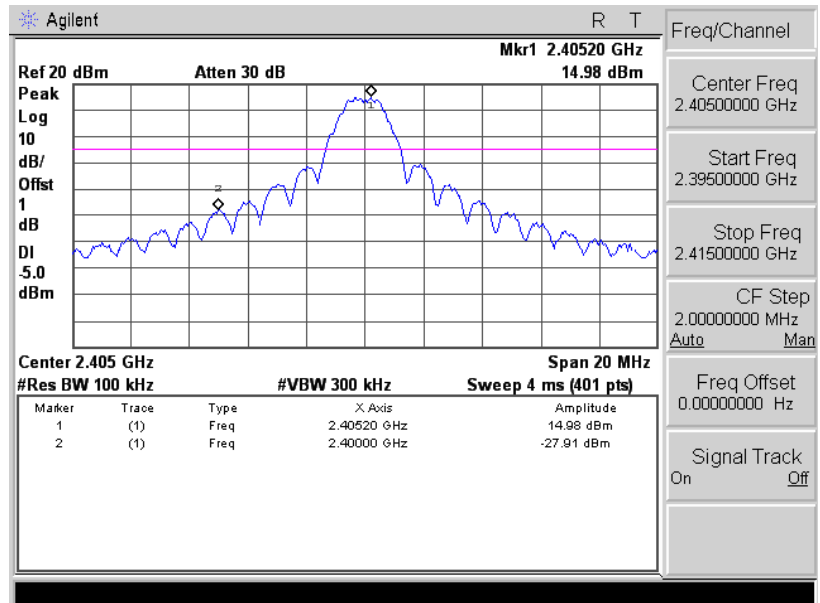

2475

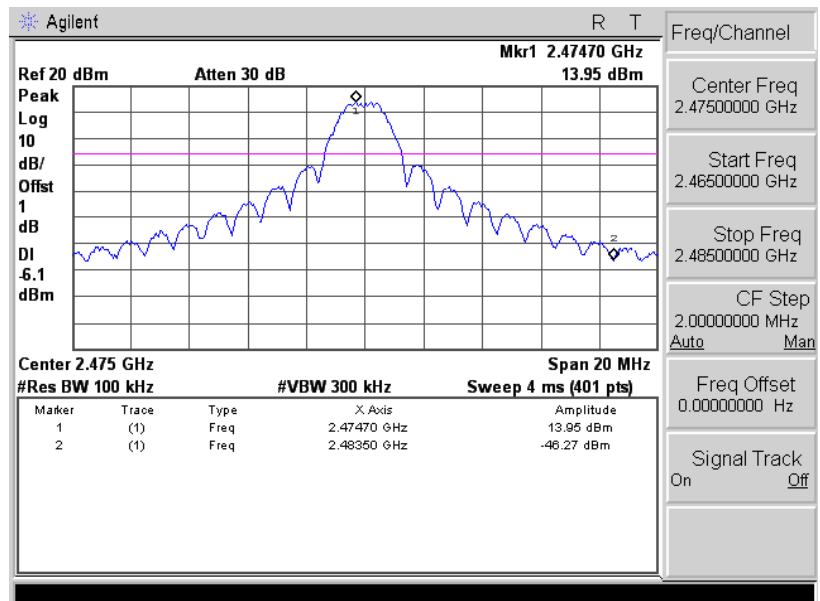

10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Connector Construction

The antenna used in this product is PCB antenna. And the maximum Gain of this antenna is 1.2 dBi.