

CTC advanced
member of RWTÜV group



Bundesnetzagentur

BNetzA-CAB-02/21-102



Deutsche
Akkreditierungsstelle
D-PL-12076-01-04

SAR Test exclusion documentation according to FCC KDB 447498, RSS-102


Report identification number: 1-4289/22-01-04 Exclusion (FCC)

contains the module with the following certification numbers

FCC ID	2AC2O-CHU200M-C
--------	-----------------


This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorised:



cn=Alexander Hnatovskiy, o=CTC advaced
GmbH, ou=HNA-211126,
email=alexander.hnatovskiy@ctcadvanced.c
om, c=DE
2022.07.19 14:23:53 +02'00'

Alexander Hnatovskiy
Lab Manager
Radio Communications & EMC



cn=Marco Scigliano, o=CTC advanced
GmbH, ou=SCI-211118,
email=marco.scigliano@ctcadvanced.com,
c=DE
2022.07.19 14:08:41 +02'00'

Marco Scigliano
Testing Manager
Radio Communications & EMC

EUT technologies:

Technologies:	Max. declared cond. AVG Power	Max. measured EIRP @ 10m ¹⁾	Antenna gain
NFC 13.56 MHz	21.58 dBm (Ask – duty cycle 10%)	63.8 dB μ V (Peak) = -20.97 dBm	< 0 dBi

NOTE:

The measured PEAK EIRP @10m proofs that the EUT antenna gain is far below 0dBi and that considering the max. declared average output power of 21.58dBm (=144mW) is by far larger than the EIRP. Thus for it is correct to use the conducted value as the worst case base for the RF exposure calculation.

Further a duty cycle²⁾ of 10.0% was used to correct the max. declared peak power of 1.44 W.

¹⁾ Pictures of the measurement are added in Annex A of this document.

²⁾ The duty cycle can be found in Annex B of this document.

SAR test exclusion according to KDB447498 (General RF Exposure Guidance v06)

Equation from Chapter 4.3.1: Standalone SAR test exclusion considerations page 11 and ff and tables in Annex C.

(c) (2) Standalone SAR test exclusion below 100 MHz < 50mm

$$0.5 \times (\text{Threshold}_{100\text{MHz}}) \times (1 + \log(100/f))$$

where

$\text{Threshold}_{1\text{-g};10\text{-g}}$

is 3 for 1-g; 7.5 for 10-g

f


is the RF channel transmit frequency

$\text{Threshold}_{100\text{MHz},50\text{mm}}$

is $\text{Threshold}_{1\text{-g};10\text{-g}} \times d / f^{0.5}$; with $f = 100\text{MHz}$ and $d=50\text{mm}$

The table below gives the calculated maximal power that could be used for source based time averaged conducted power, adjusted for tune up tolerance. If this is below the calculated value SAR testing is excluded.

frequency [MHz]	Threshold _{1-g;10-g}	Threshold _{100MHz,50mm}	Powerlimit [mW]	P _{max-declared}		Exclusion
				[dBm]	[mW]	
13.56	3	474.34	442.97	21.58	143.9	yes

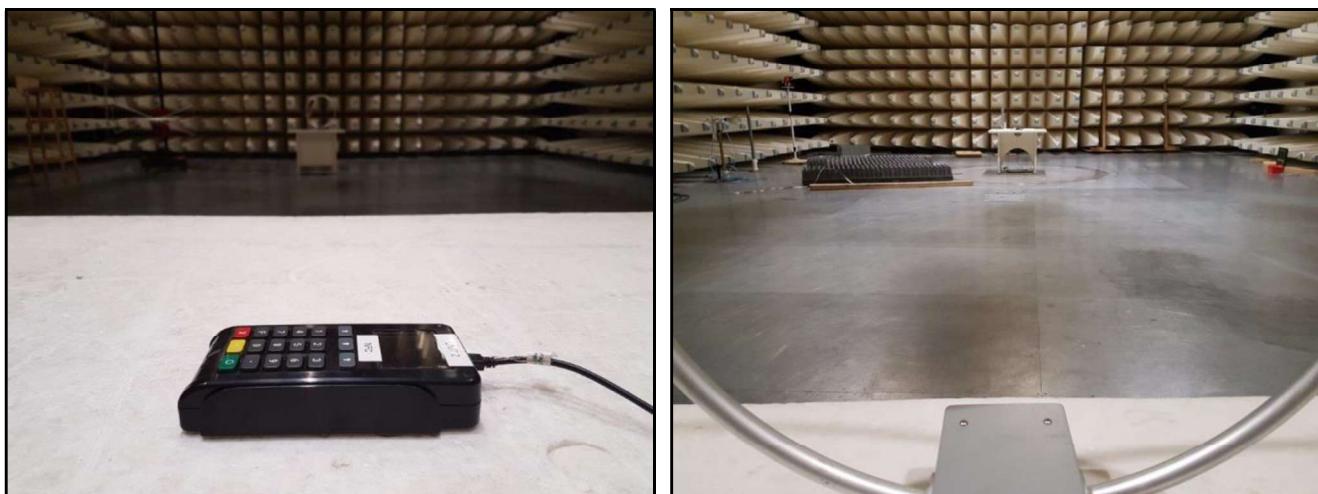Annex A: Pictures of the EIRP measurement for 13.56MHz with 10m distance

Loop-Antenna: EMCO 6502A (Correction factor @ 13.56MHz +9.5 dB)

Annex B: Duty cycle of the EUT:
