




TEST REPORT

| | | | |
|--|---|---|---------------|
| Report No.: | E201608174969-1 | Application No.: | E201608174969 |
| Client: | Building 36 Technologies ,LLC | | |
| Address: | 150 A Street, Suite 104,NEEDHAM MA 02494 USA | | |
| Sample Description: | Water Sensor | | |
| Model: | B36-S12 | | |
| FCC ID: | 2AC3T-B36S12RA | | |
| Test Specification: | FCC Part 15,Subpart C:2015(15.249) | | |
| Test Date: | 2016-08-22 to 2016-08-24 | | |
| Issue Date: | 2016-08-24 | | |
| Test Result: | Pass. | | |
| Prepared By: | Reviewed By: | Approved By: | |
| Brian Xiao / Test Engineer | Lynn Xiao / Technical Manager | Yong Dai / Manager | |
|  |  |  | |
| Date:2016-08-24 | Date:2016-08-24 | Date:2016-08-24 | |
| Other Aspects: | | | |
| None | | | |
| Abbreviations: ok / P = passed; fail / F = failed; n.a. / N = not applicable | | | |
| The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT. | | | |

GRG Metrology and Test Technology Co., Ltd.

Address: 163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, P.R. China

Tel:+86-20-38699960

Fax:+86-20-38695185

Email: emc@grg.net.cn

http://www.grgtest.com

Ver.:2.0/ 01. Jan. 2011

DIRECTIONS OF TEST

- 1. This station carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.**
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.**
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.**

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. TEST RESULT SUMMARY | 4 |
| 2. GENERAL DESCRIPTION OF EUT | 5 |
| 2.1 APPLICANT | 5 |
| 2.2 MANUFACTURER | 5 |
| 2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST | 5 |
| 2.4 TEST OPERATION MODES | 5 |
| 2.5 LOCAL SUPPORTIVE INSTRUMENTS | 5 |
| 3. LABORATORY AND ACCREDITATIONS..... | 6 |
| 3.1 LABORATORY | 6 |
| 3.2 ACCREDITATIONS | 6 |
| 3.3 MEASUREMENT UNCERTAINTY..... | 6 |
| 3.4 LIST OF USED TEST EQUIPMENT AT GRGT | 7 |
| 4. ANTENNA REQUIREMENT | 8 |
| 5. EMISSION TEST | 9 |
| 5.1 INTENTIONAL RADIATORS FIELD STRENGTH | 9 |
| 5.1.1 LIMITS..... | 9 |
| 5.1.2 TEST PROCEDURE..... | 9 |
| 5.1.3 TEST SETUP | 10 |
| 5.1.4 TEST RESULTS | 11 |
| 5.2 RADIATED ELECTROMAGNETIC DISTURBANCE..... | 14 |
| 5.2.1 LIMITS..... | 14 |
| 5.2.2 TEST PROCEDURES..... | 14 |
| 5.2.3 TEST SETUP | 16 |
| 5.2.4 TEST RESULTS | 17 |
| 5.3 OUT OF BAND EMISSIONS | 21 |
| 5.3.1 LIMITS..... | 21 |
| 5.3.2 TEST PROCEDURES..... | 21 |
| 5.3.3 TEST SETUP | 22 |
| 5.3.4 TEST RESULTS | 23 |
| 5.4 CONDUCTED EMISSION MEASUREMENT | 25 |
| 5.4.1 LIMITS..... | 25 |
| 5.4.2 TEST PROCEDURES..... | 25 |
| 5.4.3 TEST SETUP | 26 |
| 5.4.4 TEST RESULTS | 26 |
| APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT..... | 30 |
| APPENDIX B: PHOTOGRAPH OF EUT | 31 |

1. TEST RESULT SUMMARY

| FCC Part 15,Subpart C:2015(15.249) | | | |
|------------------------------------|--|---------------------|------------------|
| Standard | Item | Limit / Severity | Result |
| FCC Part 15,Subpart C:2015(15.249) | Antenna Requirement | FCC Part 15.203 | PASS |
| | Intentional radiators Field Strength | FCC Part 15.249(a) | PASS |
| | Radiated Electromagnetic Disturbance | FCC Part 15.249 (e) | PASS |
| | Conduction Emissions | FCC Part 15.249 (f) | N/A ^a |
| | Out of Band Emissions | FCC Part 15.249(d) | PASS |
| | 20dB Bandwidth | FCC Part 15.215(c) | PASS |

Note:

N/A^a:The EUT is own DC 3.0V battery supply.

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name: Building 36 Technologies ,LLC
 Address: 150 A Street, Suite 104,NEEDHAM MA 02494 USA

2.2 MANUFACTURER

Name: Building 36 Technologies ,LLC
 Address: 150 A Street, Suite 104,NEEDHAM MA 02494 USA

2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Water Sensor
 Model No.: B36-S12
 Trade Name: Building 36
 Power Supply: DC 3.0V(battery)
 Frequency 908.42MHz
 Channel number 1
 Note: /

2.4 TEST OPERATION MODES

Test mode: Mode 1:continuous transmission

2.5 LOCAL SUPPORTIVE INSTRUMENTS

| Name of Equipment | Manufacturer | Model | Serial Number |
|-------------------|--------------|-------|---------------|
| / | / | / | / |

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests and measurements refer to this report were performed by EMC Laboratory of Guangzhou GRG Metrology and Test Co., Ltd.

Add. : 163 Pingyun Rd, West of Huangpu Ave, Guangzhou, 510656, P. R. China

Telephone: +86-20-38699959, 38699960, 38699961

Fax : +86-20-38695185

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

| | |
|---------------|---------------------------|
| USA | FCC Listed Lab No. 688188 |
| Canada | Registration No.:8355A-1 |

3.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | | Frequency | Uncertainty |
|--|------------|---------------|-------------|
| Radiated Electromagnetic disturbance | Horizontal | 30MHz~1000MHz | 4.2dB |
| | Horizontal | 1GHz~10GHz | 4.2dB |
| | Vertical | 30MHz~1000MHz | 4.4dB |
| | Vertical | 1GHz~10GHz | 4.4dB |
| Intentional Radiator Field | Horizontal | 30MHz~1000MHz | 4.2dB |
| | Vertical | 30MHz~1000MHz | 4.4dB |
| Out of Band Emission | Horizontal | 30MHz~1000MHz | 4.2dB |
| | Vertical | 30MHz~1000MHz | 4.4dB |
| Conducted Emission Measurement | | 9kHz~30MHz | 3.1dB |
| 20dB Bandwidth | | 30MHz~1000MHz | 6.4Hz |


This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3.4 LIST OF USED TEST EQUIPMENT AT GRGT

| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
|--|---------------------|------------------|----------------------|------------------------|
| Radiated Emission | | | | |
| Bi-Log Antenna | ETS-LINDGREN | 3142C | 75971 | 2017-03-14 |
| Receiver | R&S | ESU26 | 100526 | 2017-02-16 |
| Horn antenna | ETS.LINDGREN | 3117C | 75824 | 2017-04-15 |
| Per-Amplifier | SCHWARZBECK | bbv9718 | 9718-276 | 2017-06-10 |
| Semi-anechoic chamber | ETS | 966(RFD-F/A-100) | 3730 | 2016-12-31 |
| Intentional radiators Field Strength/ 20dB Bandwidth/ Out of Band Emissions | | | | |
| Receiver | R&S | ESU26 | 100526 | 2017-02-16 |
| Bi-Log Antenna | ETS-LINDGREN | 3142C | 75971 | 2017-03-14 |
| Semi-anechoic chamber | ETS | 966(RFD-F/A-100) | 3730 | 2016-12-31 |
| CE | | | | |
| L.I.S.N | SCHWARZBECK | NSLK 8127 | 8127450 | 2017-06-22 |
| EMI Receiver | R&S | ESCI | 100529 | 2017-02-15 |
| Shielding room | ETS | RFD_100 | 3728 | 2016-12-31 |

4. ANTENNA REQUIREMENT

The EUT antenna is Linear Antenna. Antenna gain is -0.5dBi which accordance 15.203 is considered sufficient to comply with the provisions of this section.

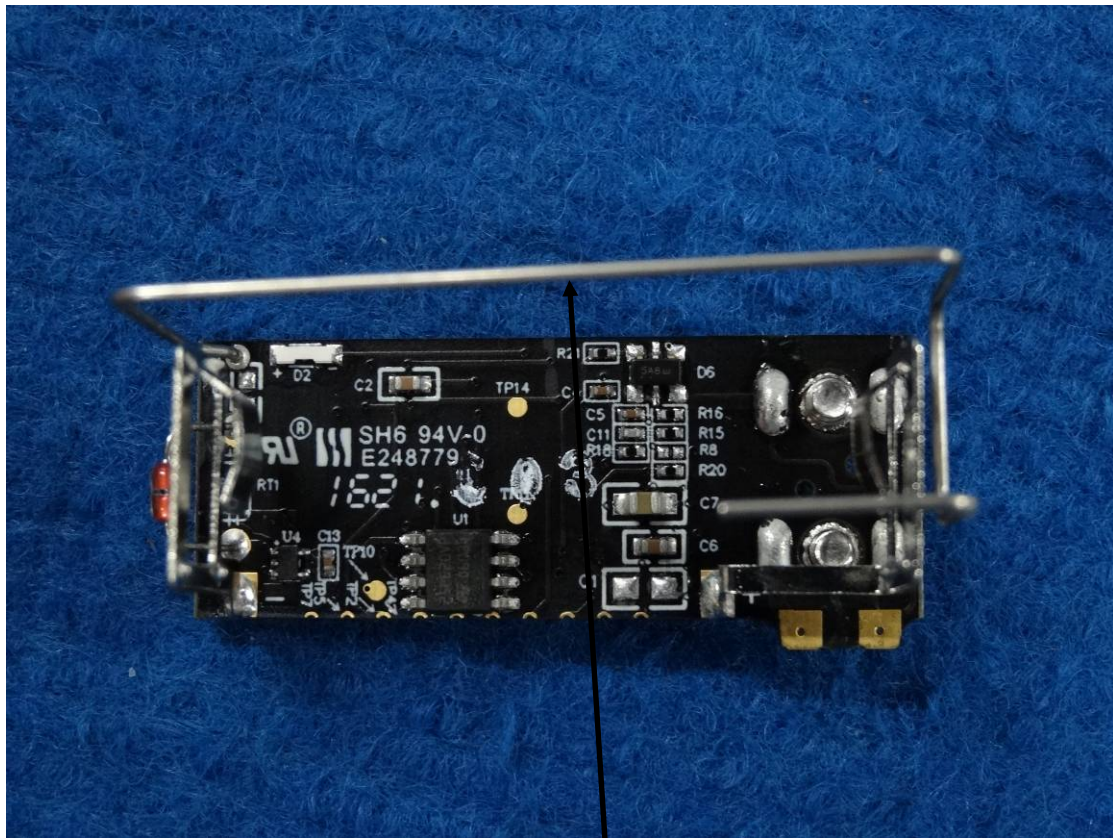

Antenna

5. EMISSION TEST

5.1 INTENTIONAL RADIATORS FIELD STRENGTH

5.1.1 LIMITS

| Frequency (MHz) | Field Strength |
|-----------------------------|-----------------------|
| 908.42 | 50(millivolts/meter) |
| Field Strength of Harmonics | 500(microvolts/meter) |

5.1.2 TEST PROCEDURE

Procedure of Preliminary Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.


The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$ for emission measurement below 1GHz and for emission measurements above 1 GHz, the EUT shall be placed at height 1.5m, ANSI C63.10:2013 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.


The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

5.1.3 TEST SETUP

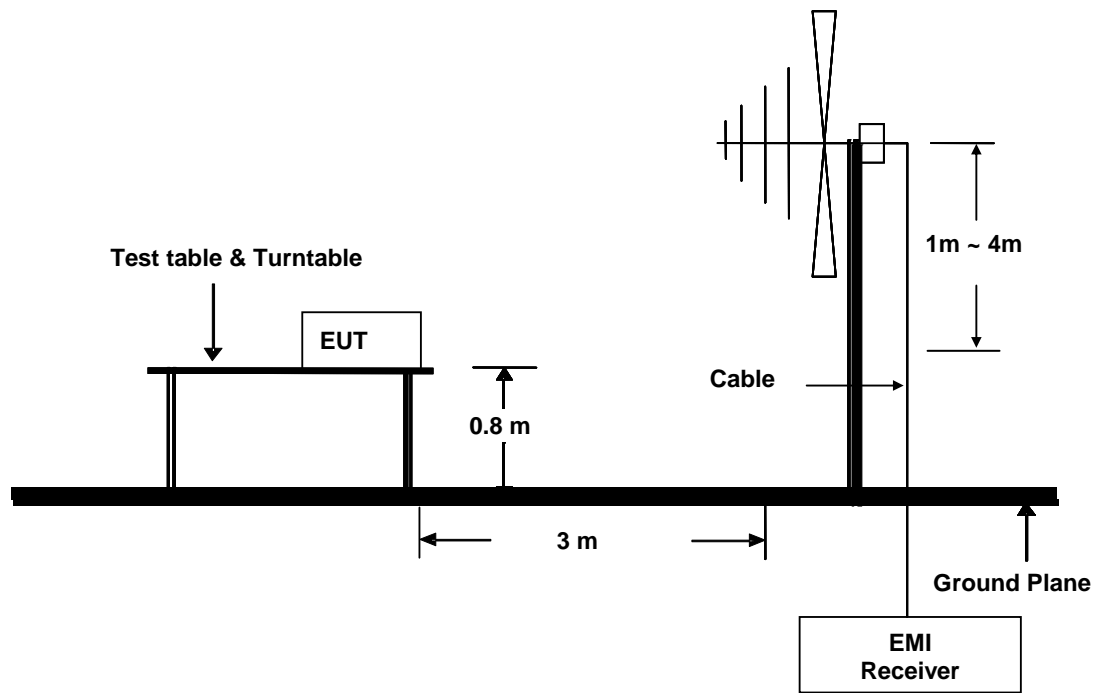

5.1.4 TEST RESULTS


Duty Cycle:

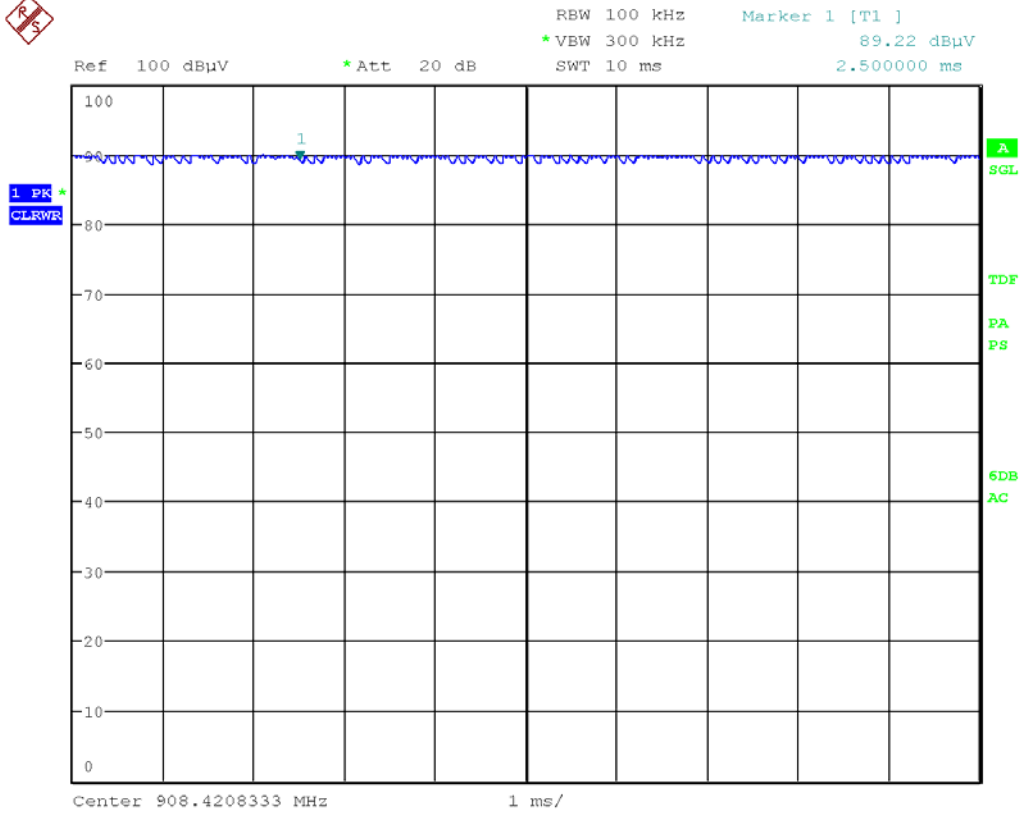

So, the EUT Duty Cycle is 100%.


The field strength was measured with an EMI measuring receiver.
 Set 100kHz RBW/VBW for Peak detector at a distance of 3m.
 Set 120kHz RBW/VBW for QP detector at a distance of 3m.

| | | | |
|-------------------------|-----------------------------------|----------------------|------------------|
| Project No.: | E201608174969 | Polarization: | Vertical |
| Standard: | (RE)FCC PART 15 class B 3m | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 11:12:40 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | | Brian Xiao | |

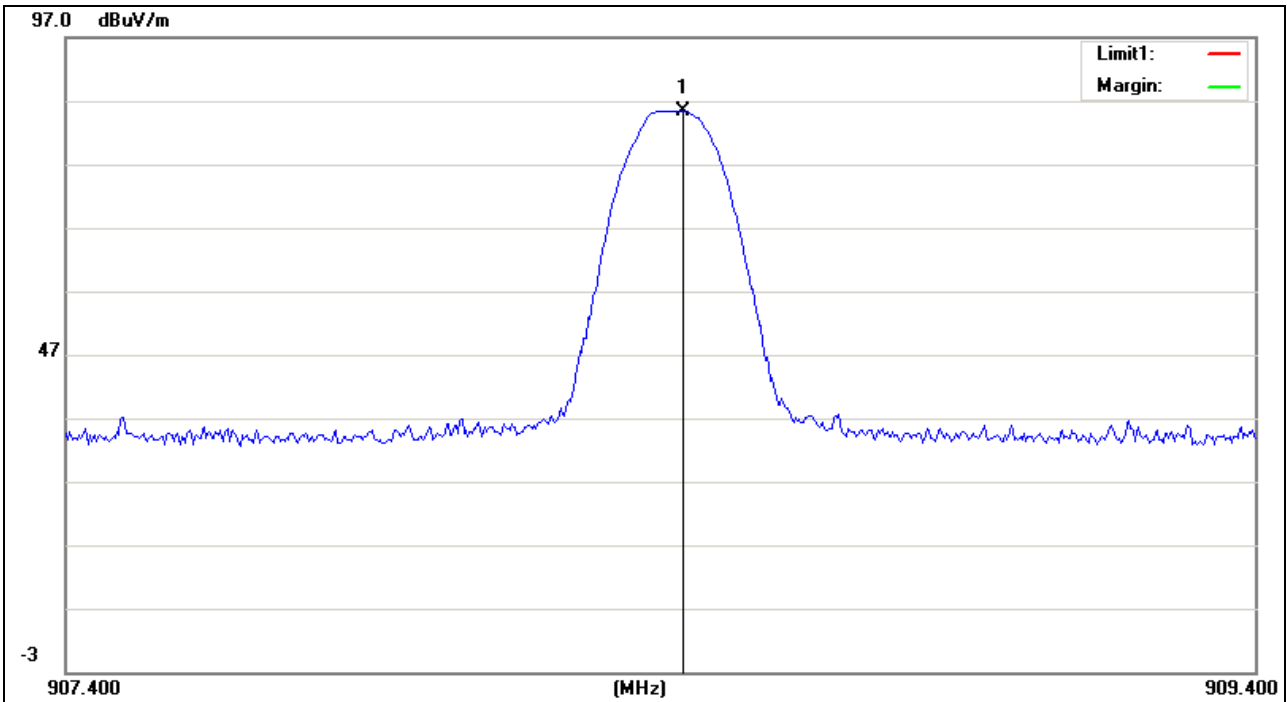

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 908.4353 | 58.36 | 26.98 | 85.34 | 94.00 | -8.6 | QP |

| | | | |
|-------------------------|-----------------------------------|----------------------|-------------------|
| Project No.: | E201608174969 | Polarziation: | Horizontal |
| Standard: | (RE)FCC PART 15 class B 3m | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 11:13:27 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

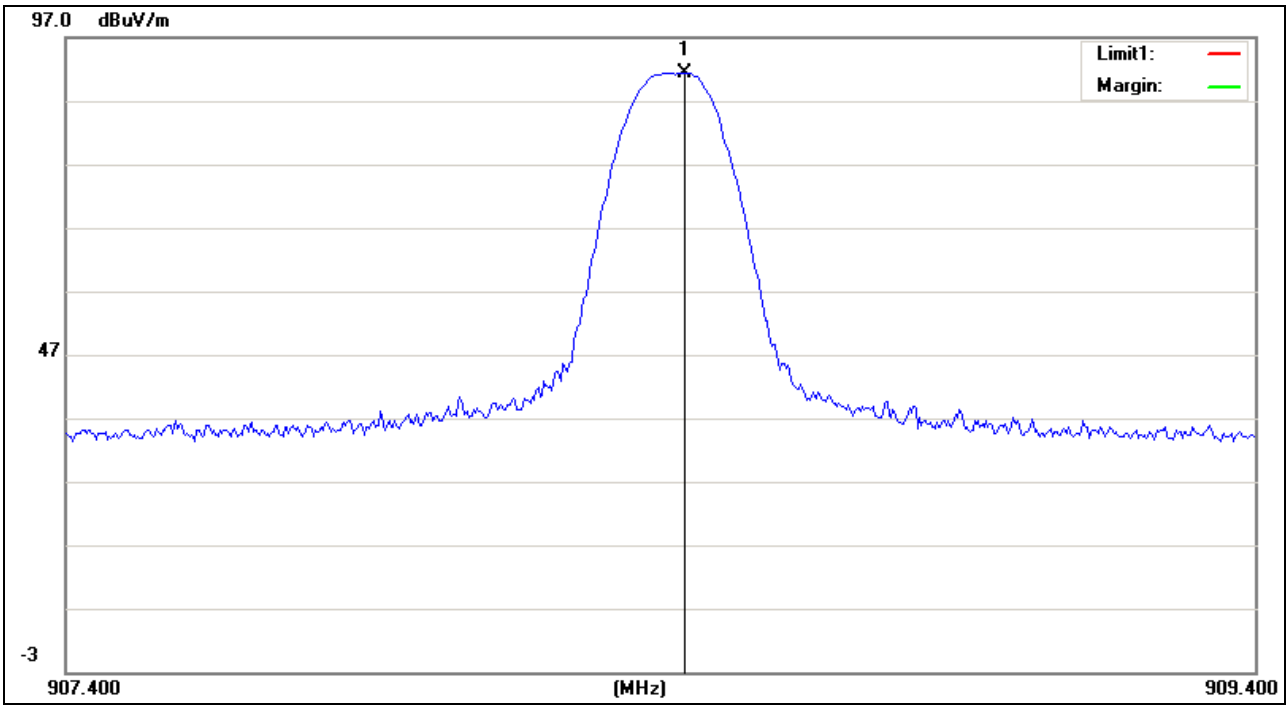

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 908.4417 | 64.38 | 26.98 | 91.36 | 94.00 | -2.64 | QP |

5.2 RADIATED ELECTROMAGNETIC DISTURBANCE

5.2.1 LIMITS

| Frequency (MHz) | Quasi-peak(dB μ V/m) |
|-----------------|--------------------------|
| 30 ~ 88 | 40 |
| 88~216 | 43.5 |
| 216 ~ 960 | 46 |
| Above 960 | 54 |

NOTE: (1) The lower limit shall apply at the transition frequencies.

| Frequency (GHz) | PEAK and AVG(dB μ V/m) |
|-----------------|----------------------------|
| Above 1G | 74 PEAK |
| Above 1G | 54 AVG |

5.2.2 TEST PROCEDURES

Procedure of Preliminary Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.

The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height 0,8 m \pm 0,01 m for emission measurement below 1GHz and for emission measurements above 1 GHz, the EUT shall be placed at height 1.5m, ANSI C63.10:2013 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test. The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level. Record at least six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only QP reading is presented. The test data of the worst-case condition(s) was recorded.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.2.3 TEST SETUP

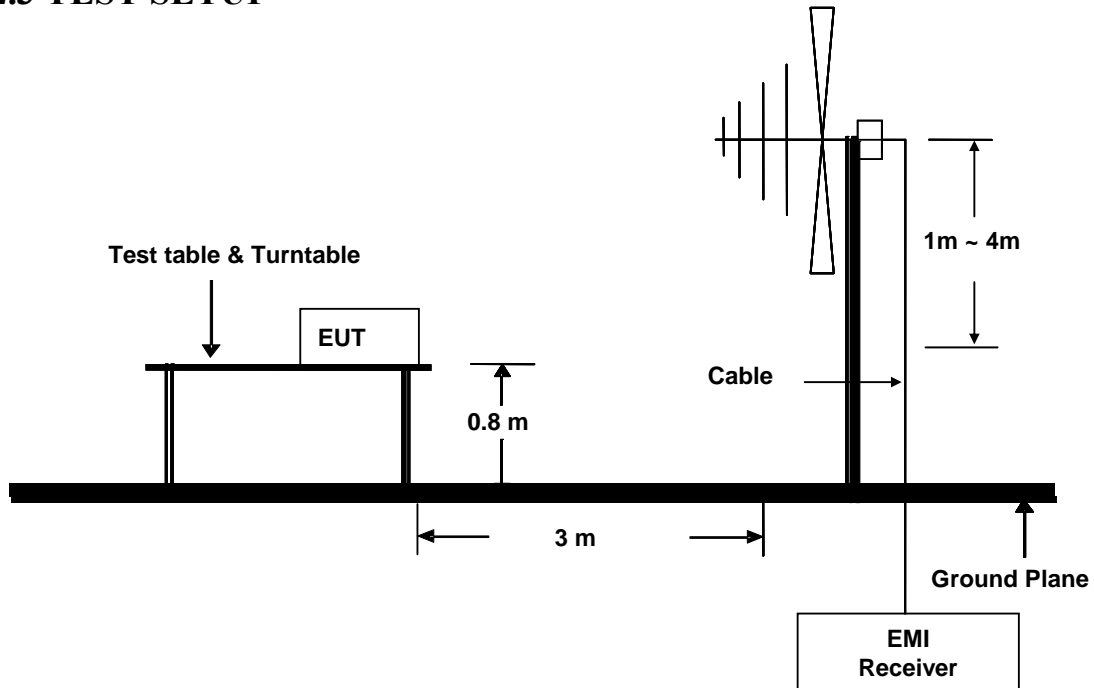


Figure 1. 30MHz to 1GHz radiated emissions test configuration

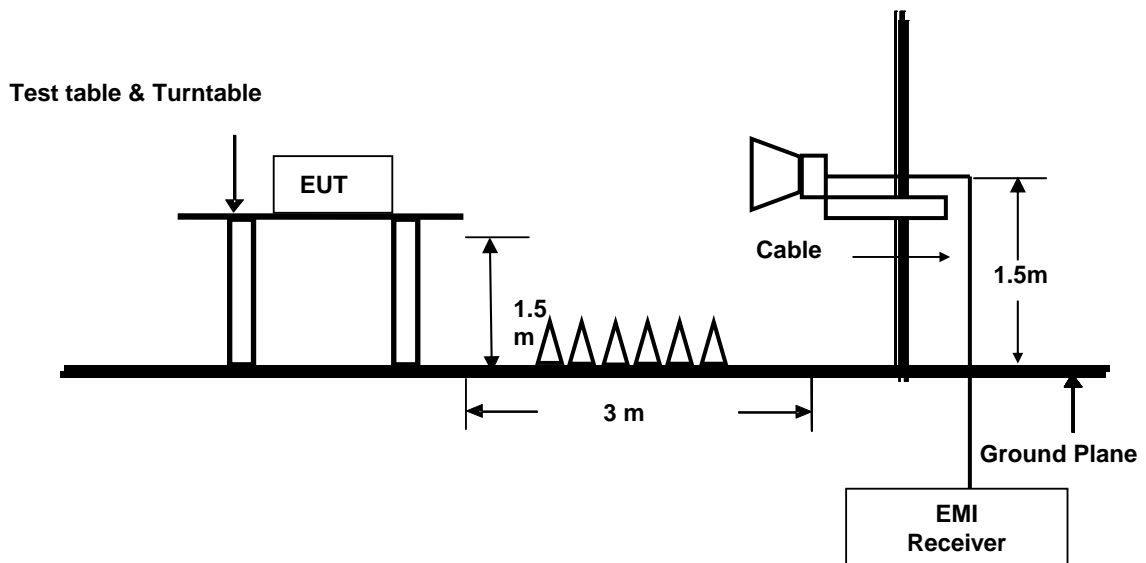


Figure 2 Above 1GHz radiated emissions test configuration


5.2.4 TEST RESULTS

The field strength was measured with an EMI measuring receiver.

Set 100 kHz RBW/VBW for Peak detector and Set 120 kHz RBW/VBW for QP detector at a distance of 3m when we test below 1GHz.


Set 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m when we test above 1GHz.

| | | | |
|-------------------------|-----------------------------------|----------------------|------------------|
| Project No.: | E201608174969 | Polarziation: | Vertical |
| Standard: | (RE)FCC PART 15 class B 3m | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 11:27:14 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

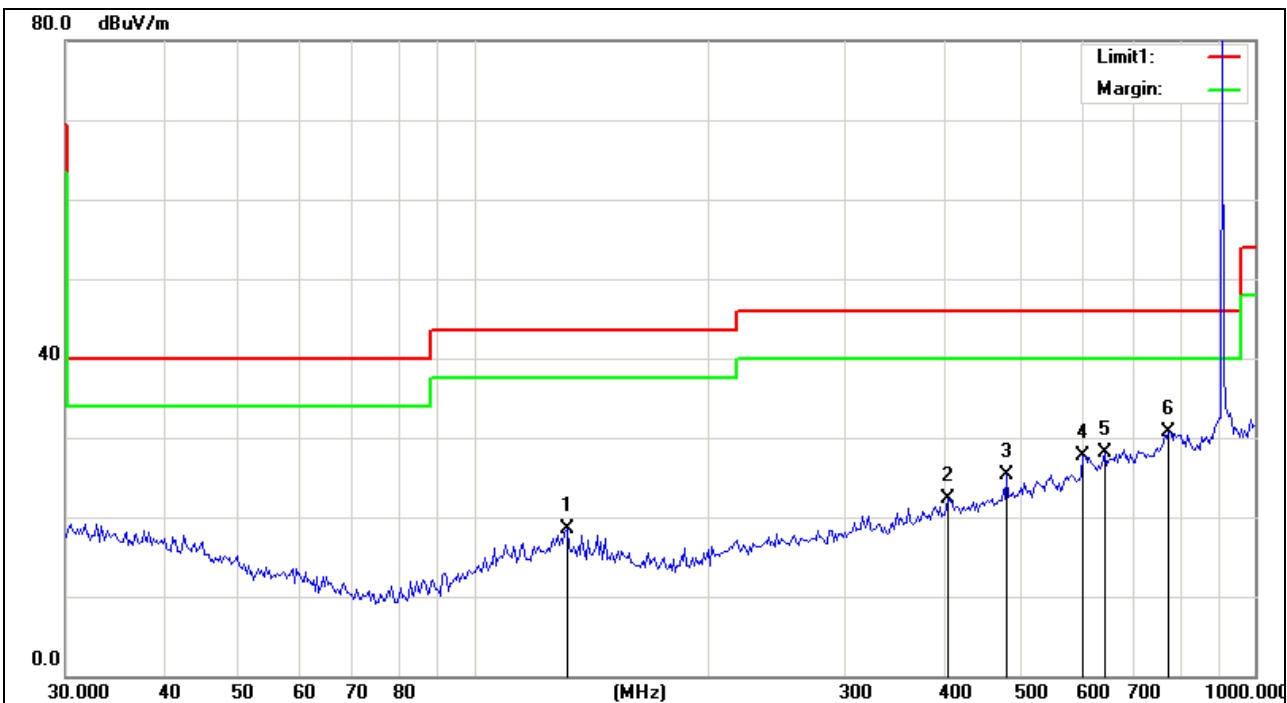


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 131.5151 | 5.44 | 13.14 | 18.58 | 43.50 | -24.92 | peak |
| 2 | 404.6482 | 4.41 | 17.98 | 22.39 | 46.00 | -23.61 | peak |
| 3 | 481.6523 | 6.43 | 18.82 | 25.25 | 46.00 | -20.75 | peak |
| 4 | 603.0510 | 6.95 | 20.76 | 27.71 | 46.00 | -18.29 | peak |
| 5 | 641.5044 | 6.89 | 21.21 | 28.10 | 46.00 | -17.90 | peak |
| 6 | 776.5636 | 6.92 | 23.76 | 30.68 | 46.00 | -15.32 | peak |

| | | | |
|-------------------------|-----------------------------------|----------------------|-------------------|
| Project No.: | E201608174969 | Polarziation: | Horizontal |
| Standard: | (RE)FCC PART 15 class B 3m | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 11:28:06 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

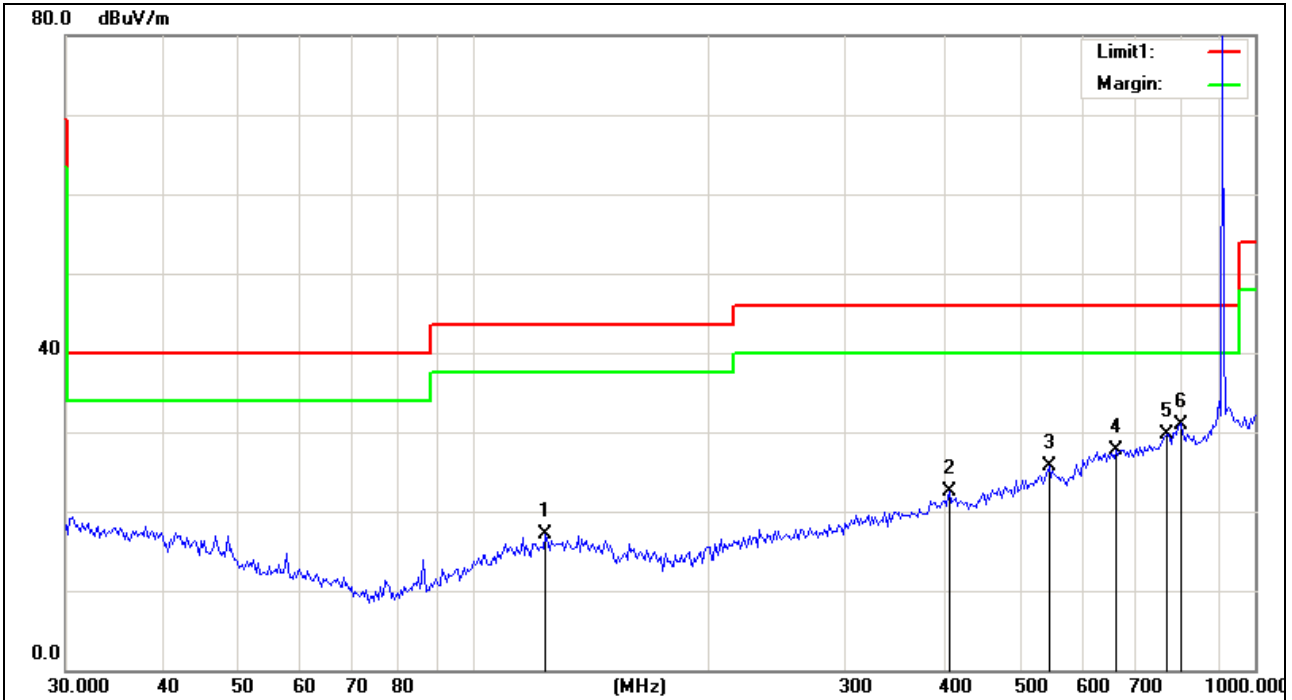


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 123.6317 | 4.14 | 12.95 | 17.09 | 43.50 | -26.41 | peak |
| 2 | 406.9287 | 4.51 | 18.08 | 22.59 | 46.00 | -23.41 | peak |
| 3 | 545.0356 | 5.16 | 20.50 | 25.66 | 46.00 | -20.34 | peak |
| 4 | 663.5027 | 5.73 | 22.07 | 27.80 | 46.00 | -18.20 | peak |
| 5 | 772.2119 | 5.89 | 23.84 | 29.73 | 46.00 | -16.27 | peak |
| 6 | 803.1933 | 6.70 | 24.30 | 31.00 | 46.00 | -15.00 | peak |

| | | | |
|-------------------------|--|----------------------|------------------|
| Project No.: | E201608174969 | Polarization: | Vertical |
| Standard: | (RE)FCC PART 15 class B 3m_PEAK | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 13:05:29 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

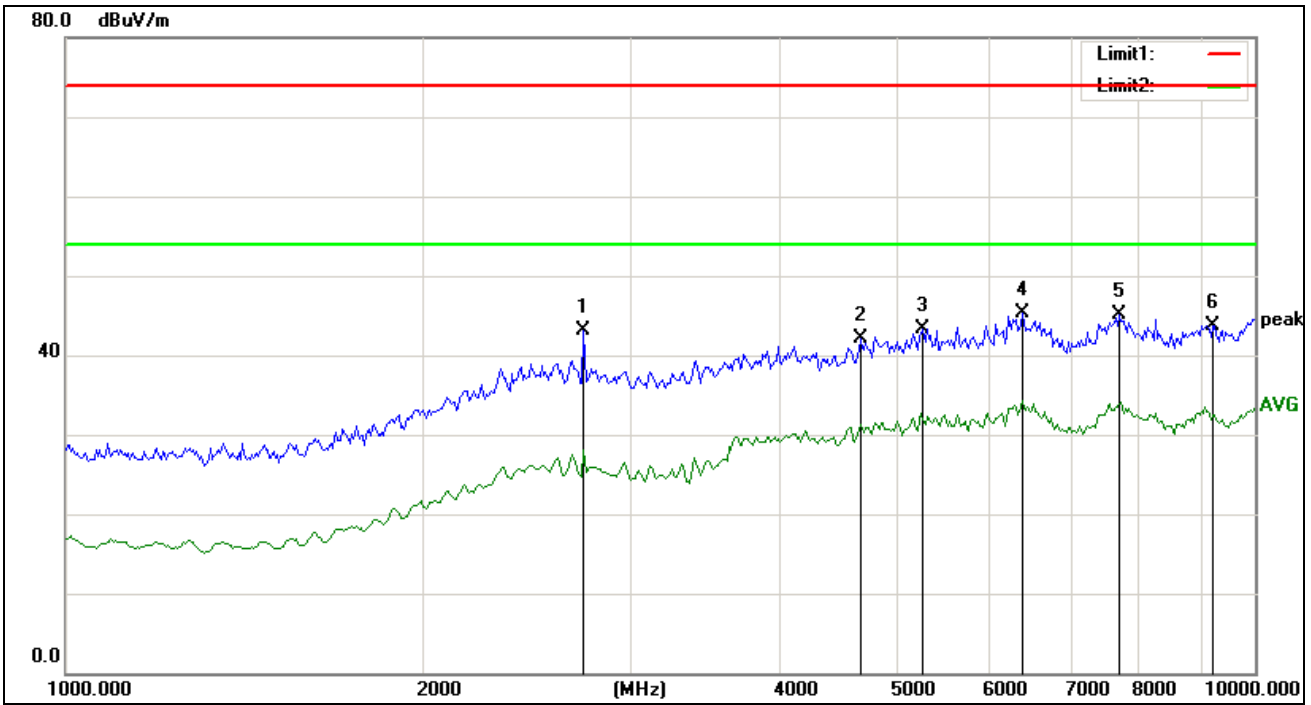

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 2728.333 | 35.14 | 7.89 | 43.03 | 74.00 | -30.97 | peak |
| 2 | 4658.748 | 31.54 | 10.52 | 42.06 | 74.00 | -31.94 | peak |
| 3 | 5262.036 | 31.24 | 11.97 | 43.21 | 74.00 | -30.79 | peak |
| 4 | 6375.103 | 32.04 | 13.19 | 45.23 | 74.00 | -28.77 | peak |
| 5 | 7695.165 | 30.89 | 14.12 | 45.01 | 74.00 | -28.99 | peak |
| 6 | 9220.269 | 29.62 | 14.12 | 43.74 | 74.00 | -30.26 | peak |

| | | | |
|-------------------------|--|----------------------|-------------------|
| Project No.: | E201608174969 | Polarziation: | Horizontal |
| Standard: | (RE)FCC PART 15 class B 3m_PEAK | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 13:04:50 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

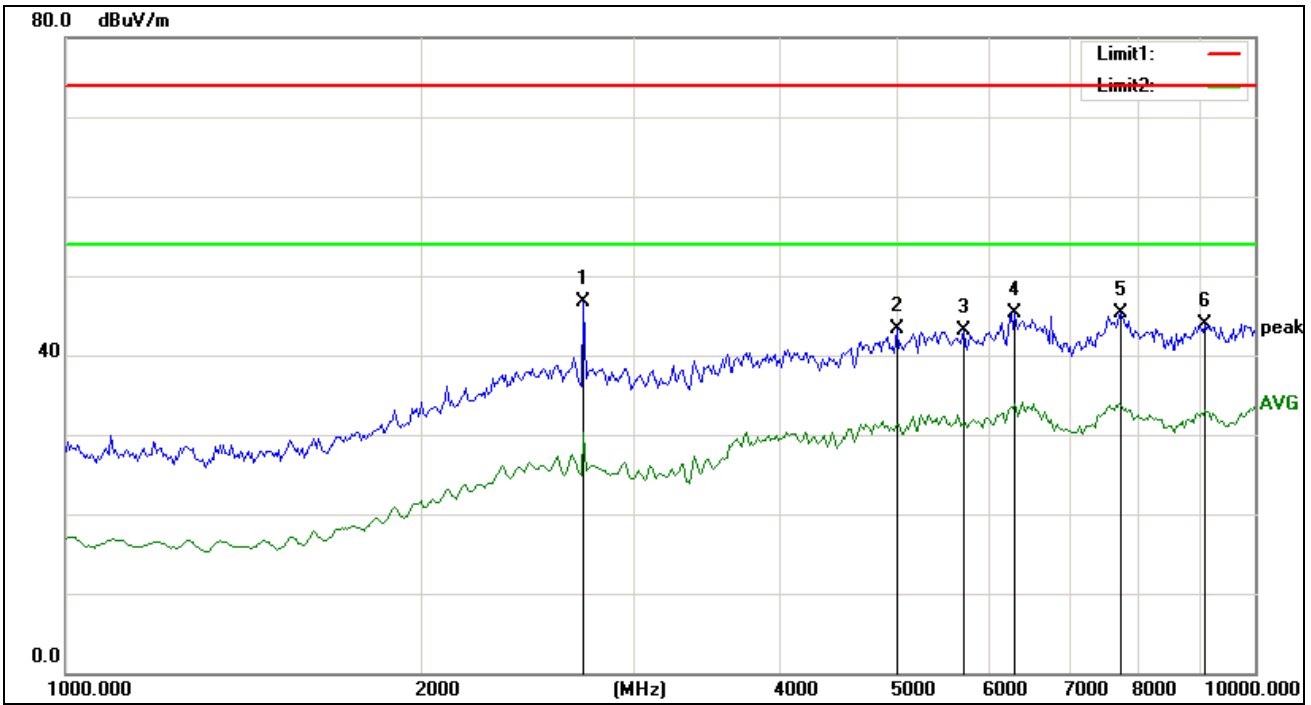

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 2728.333 | 38.74 | 7.89 | 46.63 | 74.00 | -27.37 | peak |
| 2 | 4997.099 | 32.19 | 11.20 | 43.39 | 74.00 | -30.61 | peak |
| 3 | 5686.011 | 30.35 | 12.73 | 43.08 | 74.00 | -30.92 | peak |
| 4 | 6281.696 | 32.18 | 13.09 | 45.27 | 74.00 | -28.73 | peak |
| 5 | 7723.613 | 31.26 | 14.11 | 45.37 | 74.00 | -28.63 | peak |
| 6 | 9085.176 | 29.89 | 13.93 | 43.82 | 74.00 | -30.18 | peak |

5.3 OUT OF BAND EMISSIONS

5.3.1 LIMITS

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

5.3.2 TEST PROCEDURES

Procedure of Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.


The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2013 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the test.

5.3.3 TEST SETUP

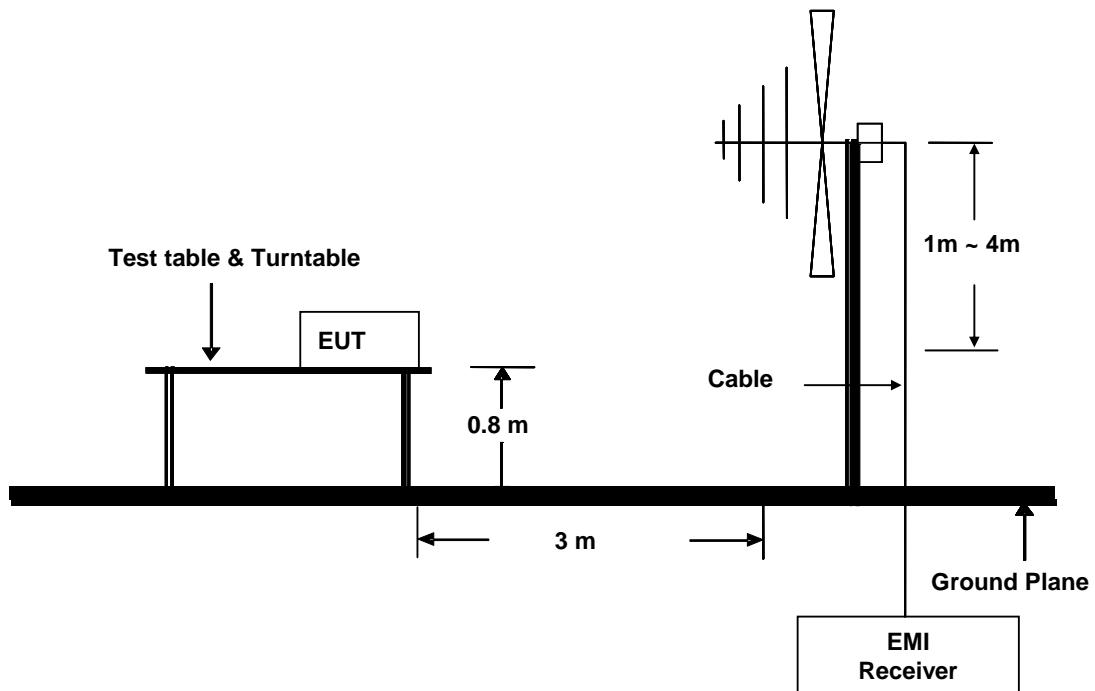


5.3.4 TEST RESULTS

The field strength was measured with an EMI measuring receiver and 100 kHz RBW / VBW for Peak and 120kHz RBW/VBW for QP at a distance of 3m.


Measurement result:

| | | | |
|-------------------------|-----------------------------------|----------------------|------------------|
| Project No.: | E201608174969 | Polarziation: | Vertical |
| Standard: | (RE)FCC PART 15 class B 3m | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 11:23:06 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

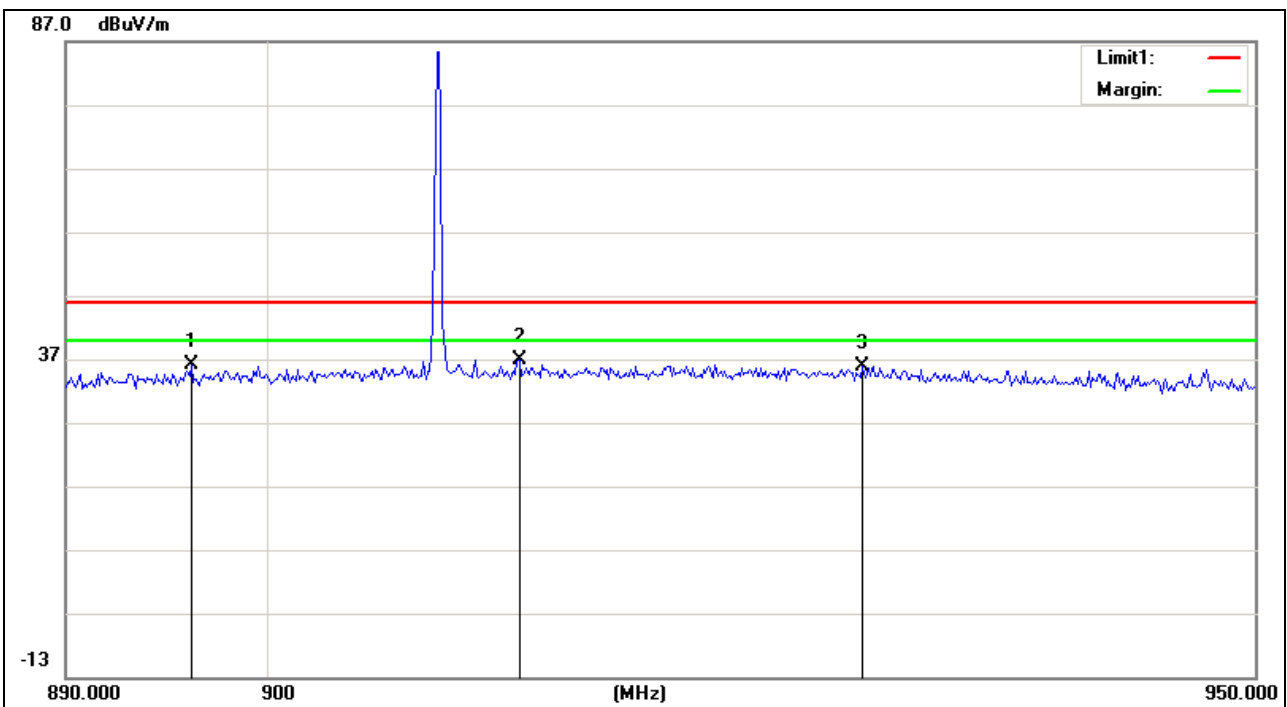

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 896.2500 | 9.93 | 26.11 | 36.04 | 46.00 | -9.96 | peak |
| 2 | 912.5000 | 9.72 | 27.05 | 36.77 | 46.00 | -9.23 | peak |
| 3 | 929.8075 | 9.16 | 26.81 | 35.97 | 46.00 | -10.03 | peak |

| | | | |
|-------------------------|-----------------------------------|----------------------|-------------------|
| Project No.: | E201608174969 | Polarziation: | Horizontal |
| Standard: | (RE)FCC PART 15 class B 3m | Power Source: | DC 3V |
| Test item: | Radiation Test | Date: | 2016-8-23 |
| Temp./Hum.(%RH): | 21.5/54%RH | Time: | 11:23:36 |
| EUT: | Water Sensor | Distance: | 3m |
| Model: | B36-S12 | Test Result: | Pass |
| Note: | | | |
| Test by: | Brian Xiao | | |

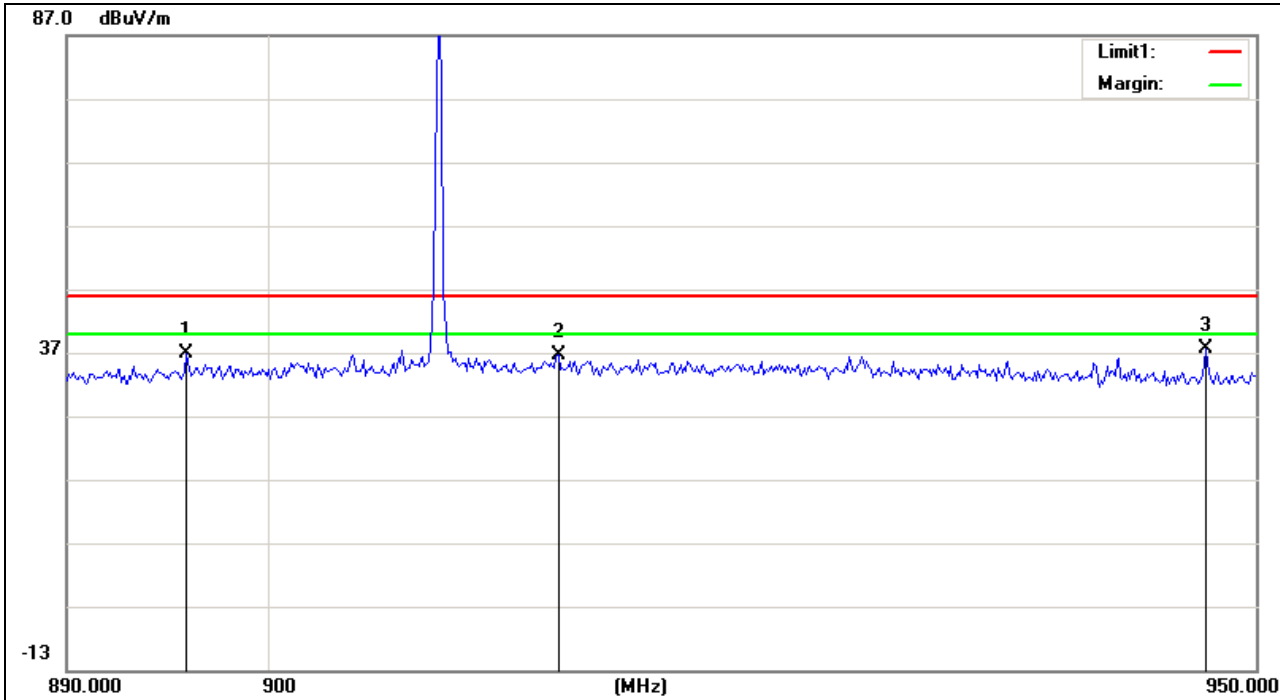

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-------------|--------|
| 1 | 895.9615 | 10.67 | 26.09 | 36.76 | 46.00 | -9.24 | peak |
| 2 | 914.4231 | 9.69 | 27.04 | 36.73 | 46.00 | -9.27 | peak |
| 3 | 947.5000 | 12.35 | 25.18 | 37.53 | 46.00 | -8.47 | peak |

5.4 CONDUCTED EMISSION MEASUREMENT

5.4.1 LIMITS

| Frequency range | Limits (dB μ V) | |
|-----------------|---------------------|---------|
| | Quasi-peak | Average |
| 150kHz ~ 0.5MHz | 66~56 | 56~46 |
| 0.5 MHz ~ 5 MHz | 56 | 46 |
| 5 MHz ~ 30 MHz | 60 | 50 |

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150kHz to 0.5MHz.

5.4.2 TEST PROCEDURES

Procedure of Preliminary Test

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:

- 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or

- 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;

- All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;

- The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;

- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.

- I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.


The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines,

recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.4.3 TEST SETUP

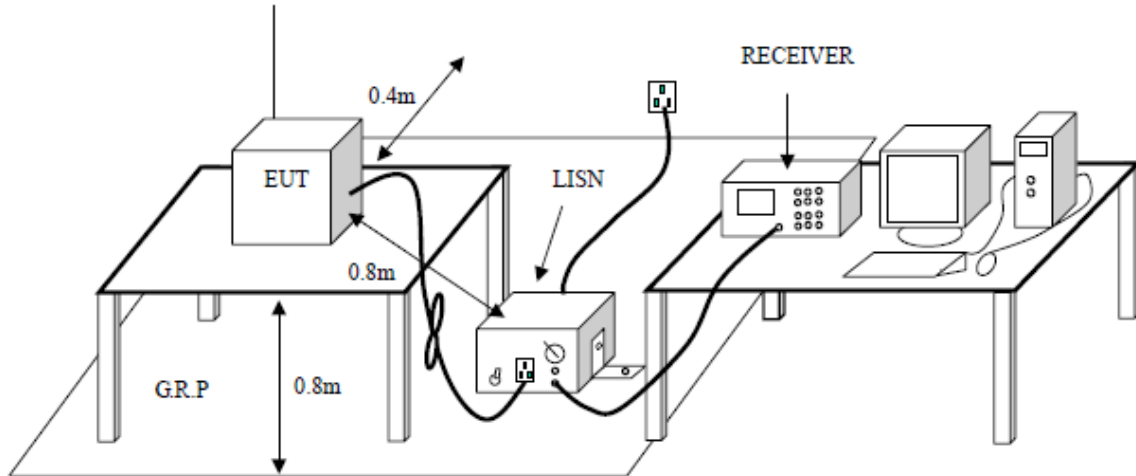

5.4.4 TEST RESULTS

N/A: The EUT is own DC 3.0V battery supply.

5.5 20dB BANDWIDTH

5.5.1 LIMITS

When an occupied bandwidth value is not specified in the applicable FCC, the transmitted signal bandwidth to be reported is to be its 20dB emission bandwidth, as calculated or measured

5.5.2 TEST PROCEDURES

Procedure of Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.

The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height $0,8\text{ m} \pm 0,01\text{ m}$, ANSI C63.10:2013 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.

Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the test.


Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centered on a test channel;

Set the spectrum analyzer: RBW \geq 1% of the 20dB bandwidth (set 10 kHz). VBW \geq RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.

Mark the peak frequency 20dB bandwidth.

Bandwidth value is OBW value.

5.5.3 TEST SETUP

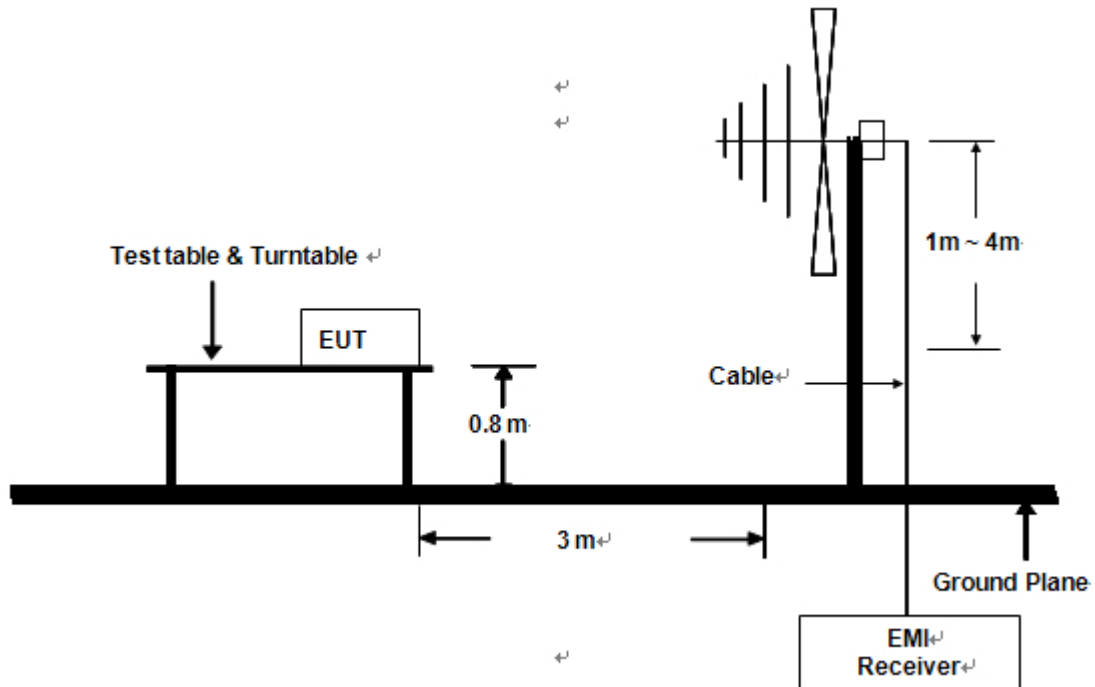


5.5.4 TEST RESULTS

Pre-scan the Vertical and Horizontal data, found that Horizontal data is the worst case. So only report the worst case.

Worst case: Horizontal

| Frequency (GHz) | bandwidth | F1 | FH |
|-----------------|-----------|-----------|-----------|
| 908.42 | 80.13kHz | 908.38MHz | 908.46MHz |

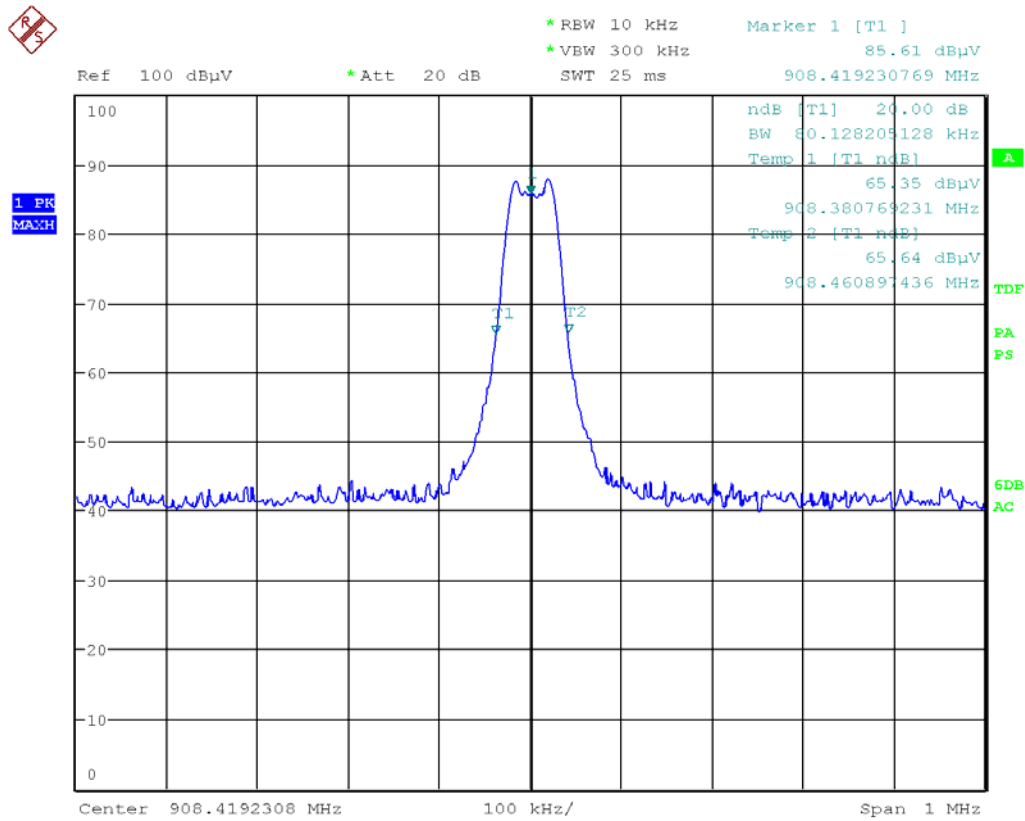


APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT


Radiated Emission (Below 1GHZ)





Radiated Emission (Above 1GHz)

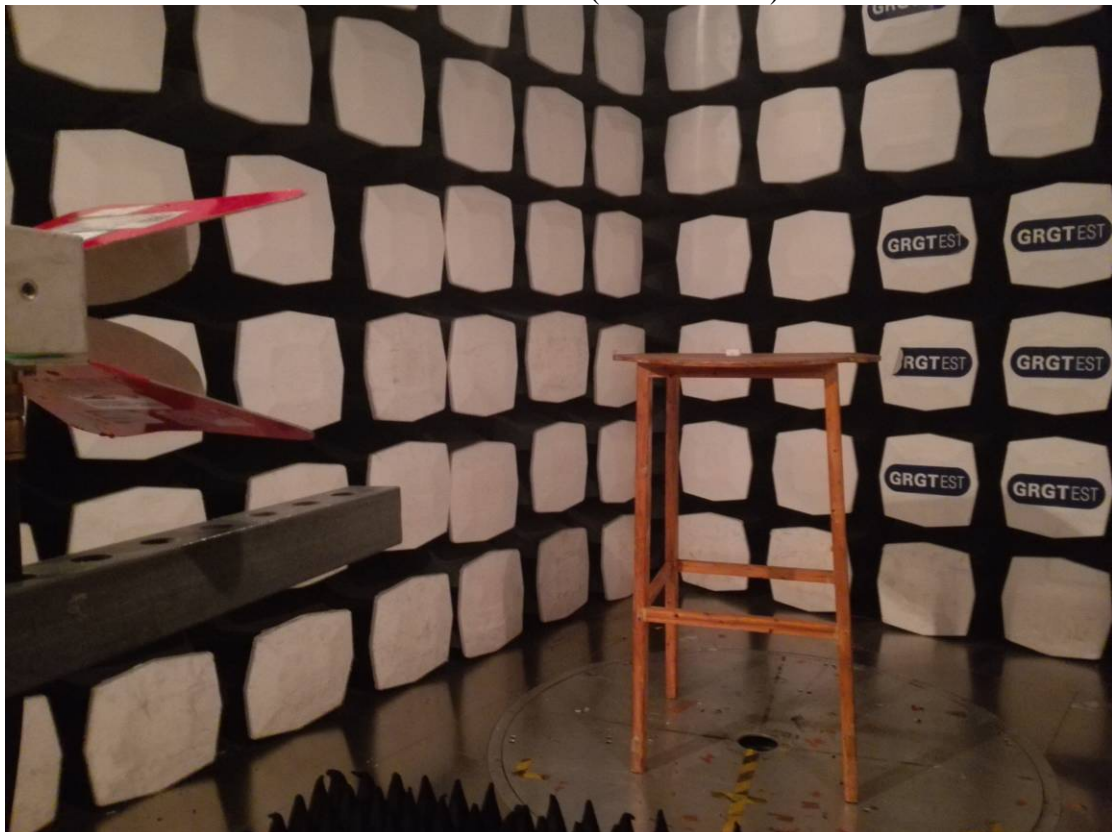



APPENDIX B: PHOTOGRAPH OF EUT

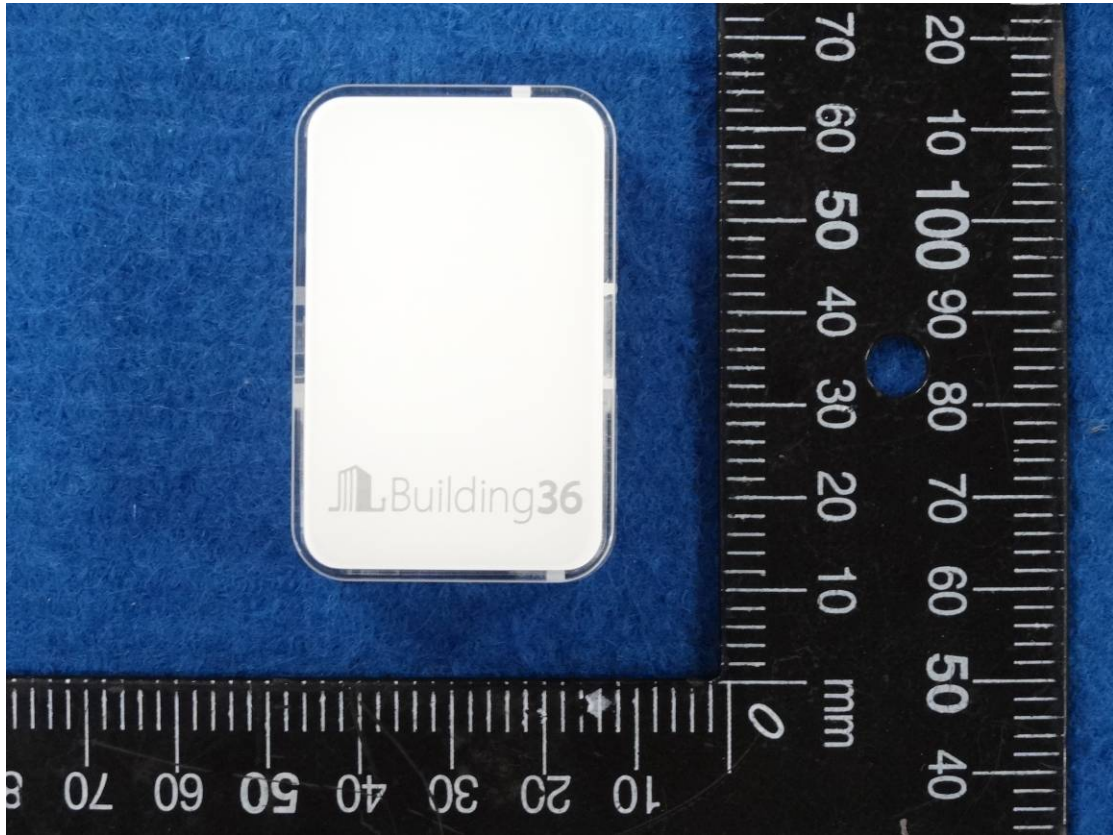

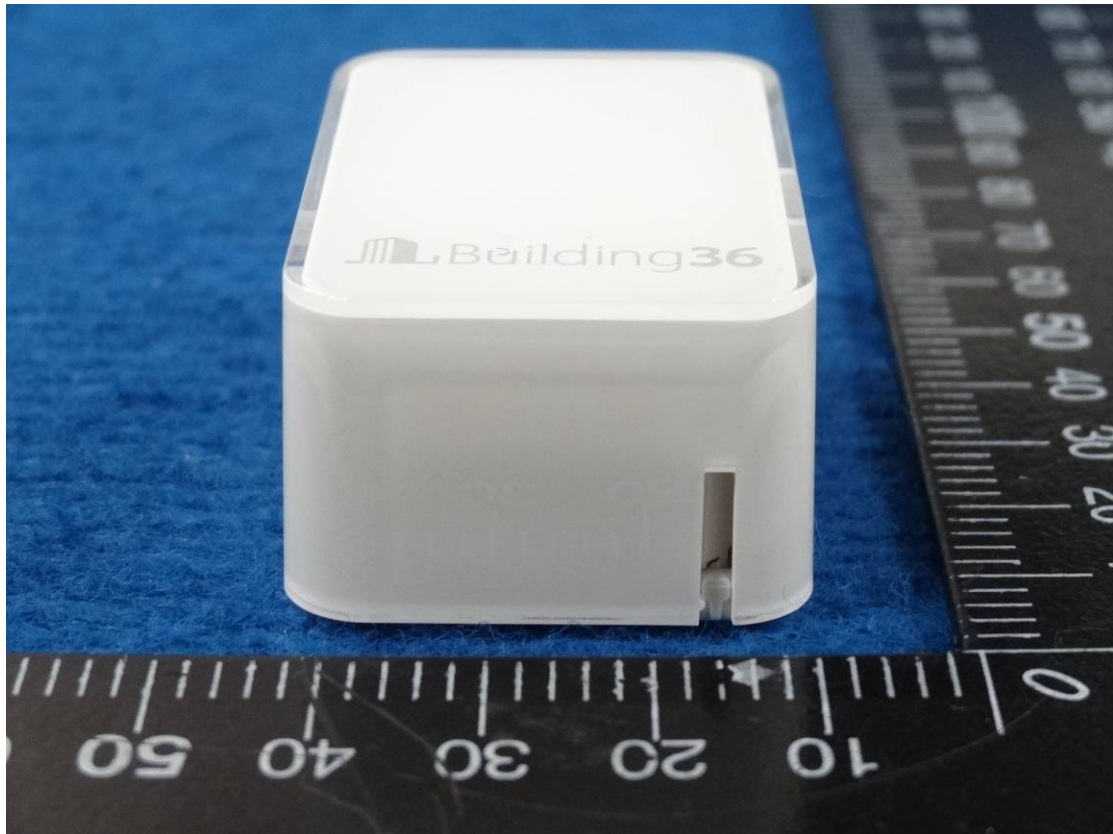

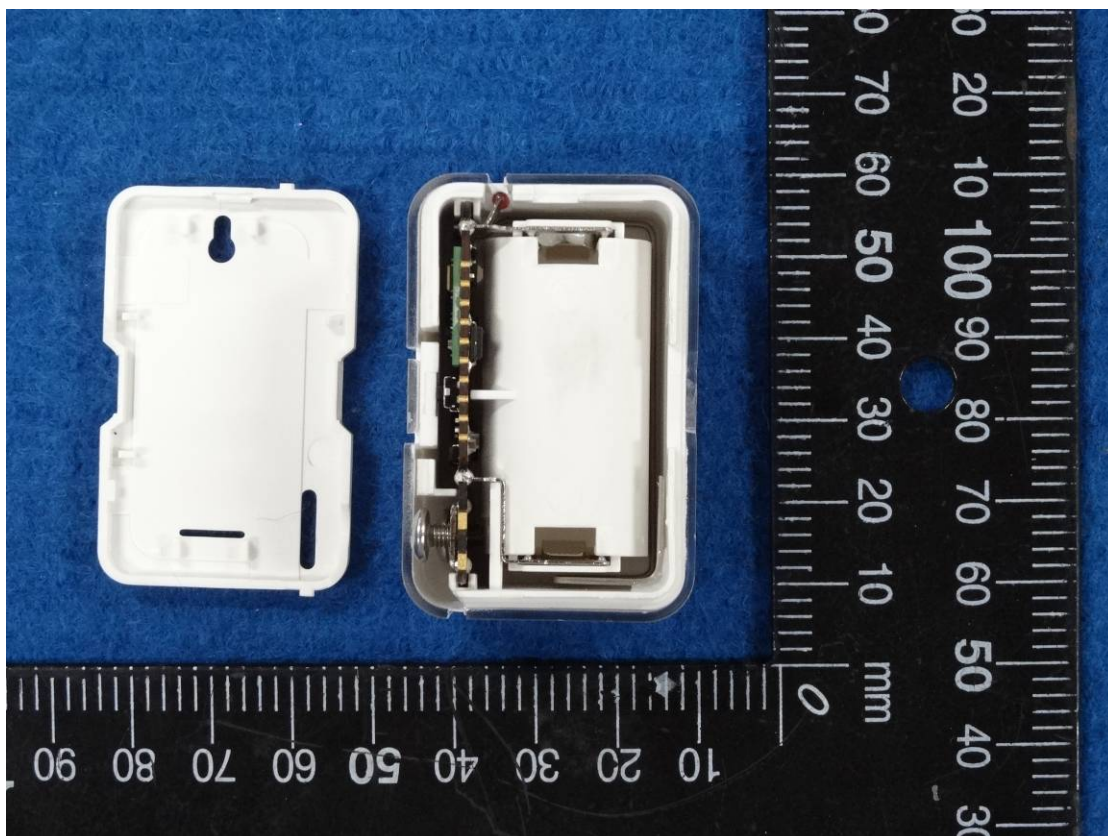

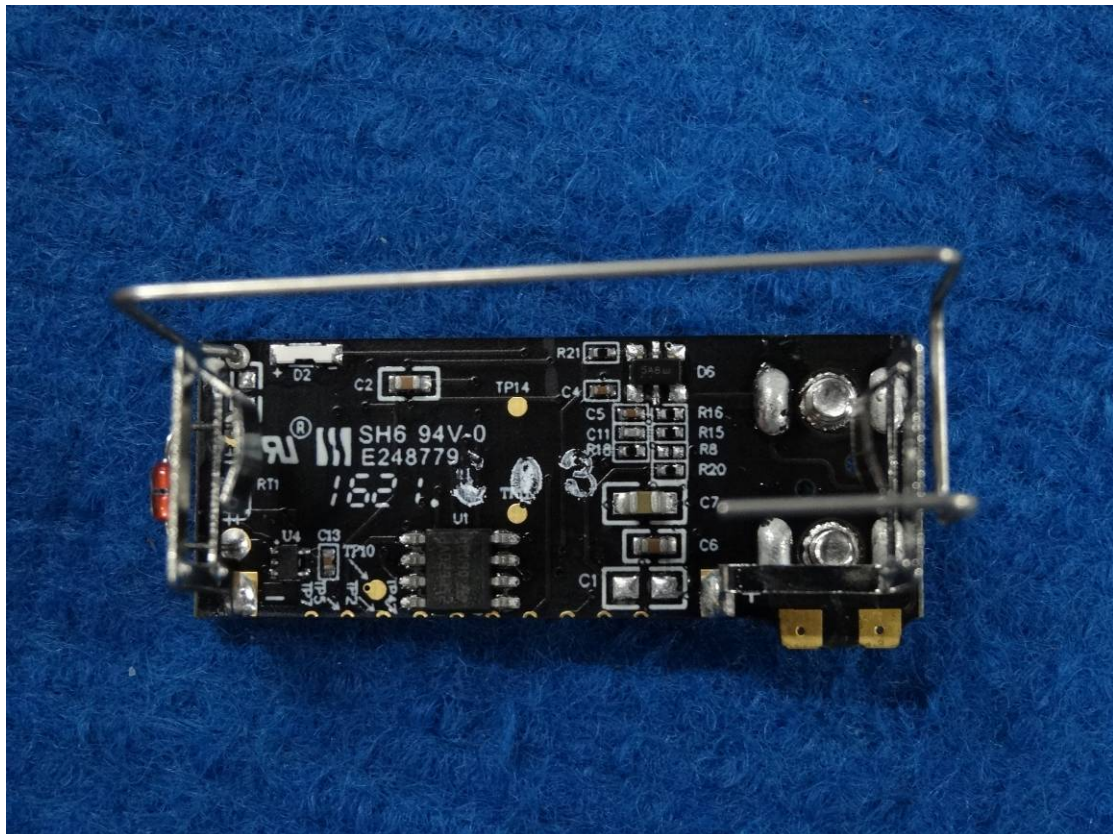

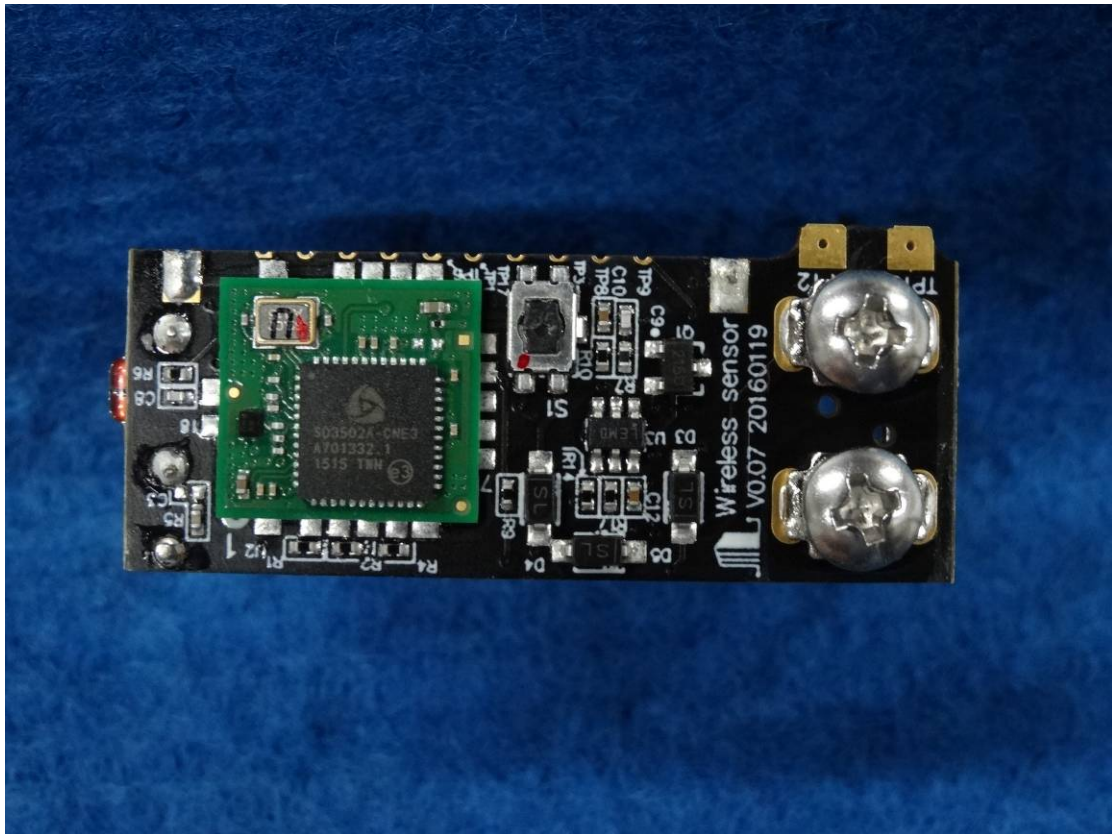

-----This is the last page of the report. -----