



## Appendix B

### RF Test Data for BT LE (Conducted Measurement)

Product Name: 24 inch FHD All-in-One Desktop Computer

Test Model: SC-4424AIO

#### Environmental Conditions

Temperature:	23.8 °C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Mening Su





### B.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.664	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.683	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.693	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.335	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.316	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.364	0.5	Pass






Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

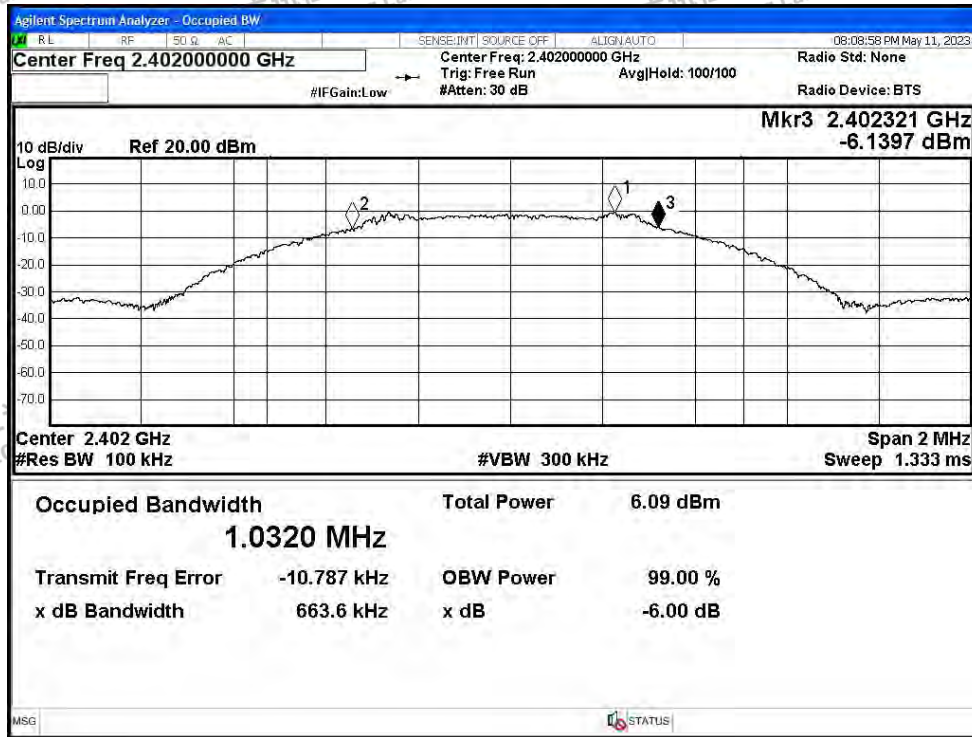


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

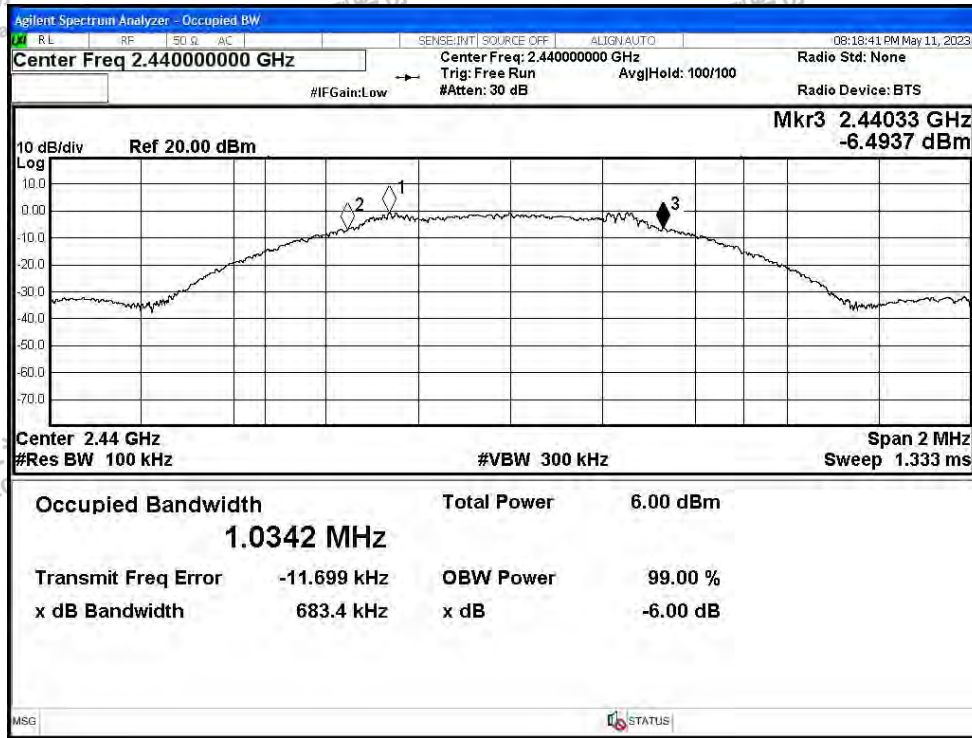




-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

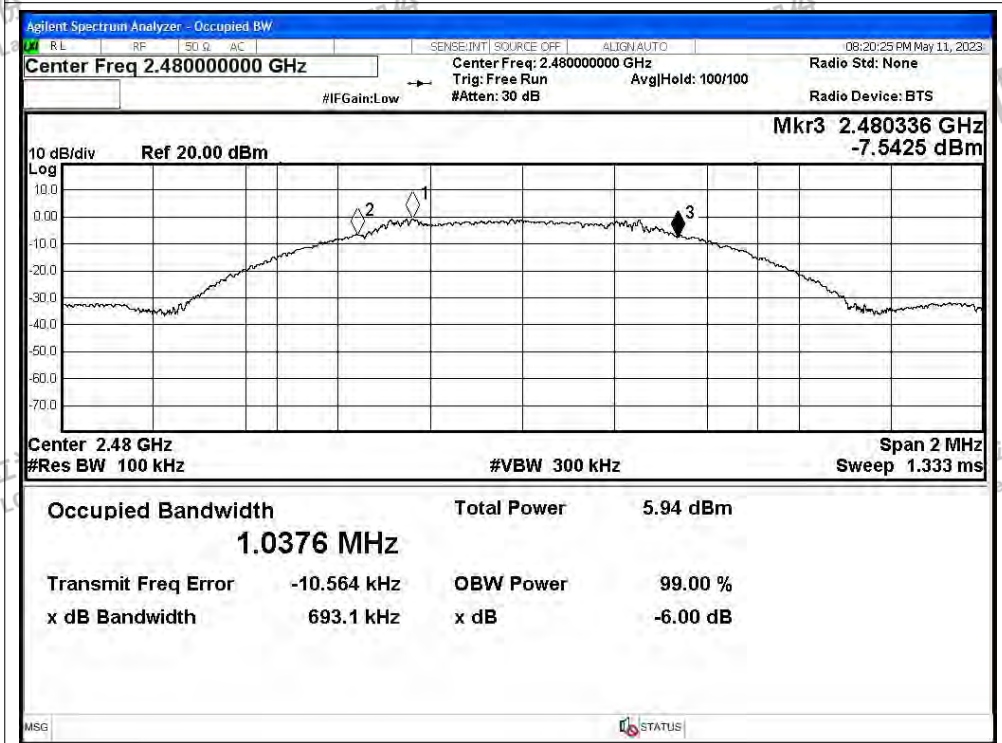


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

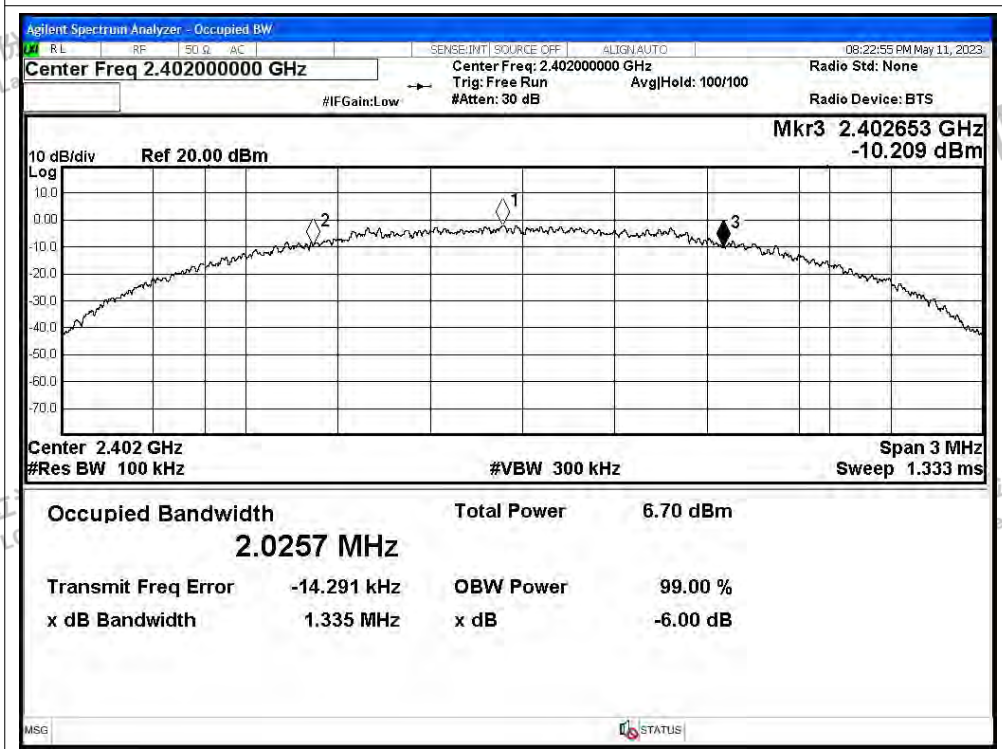




-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

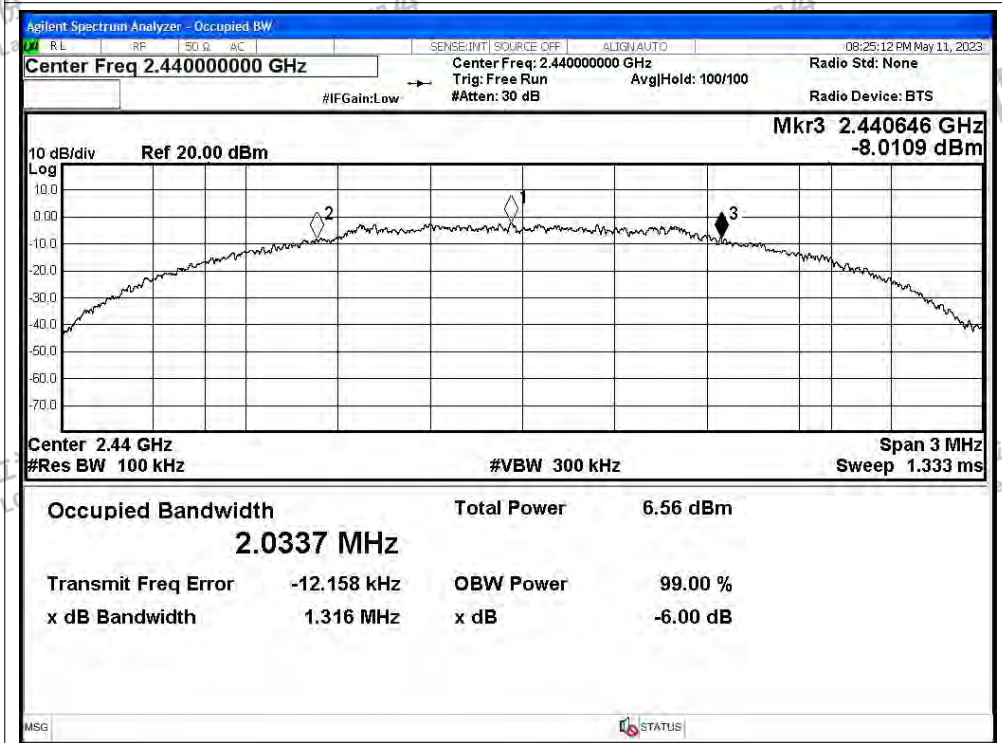

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

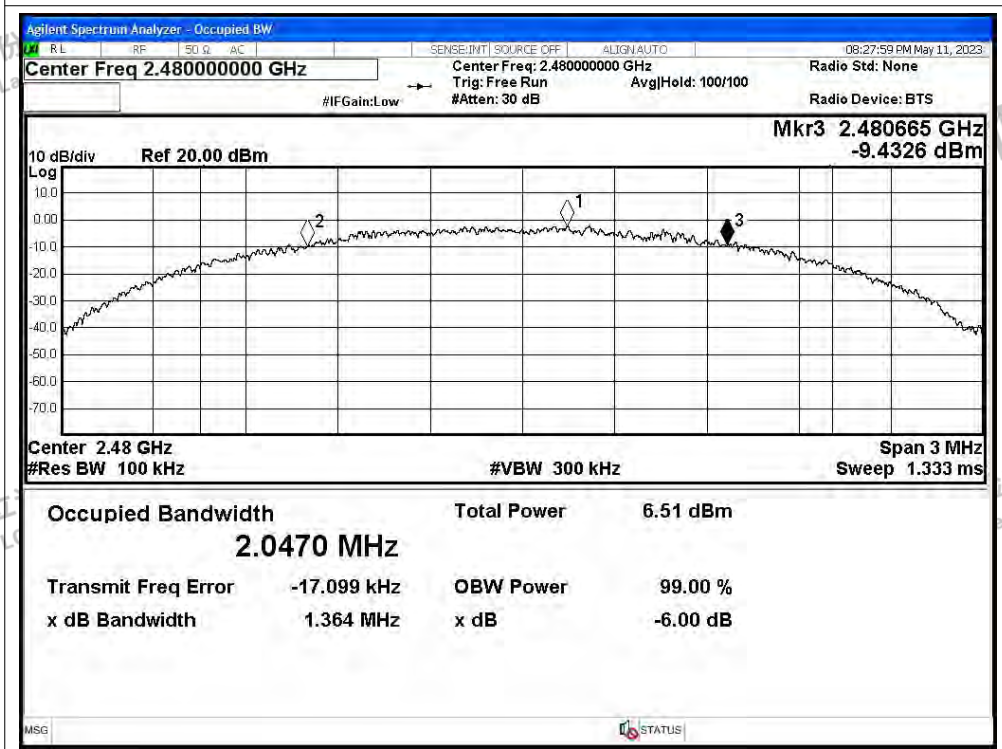



## B.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.03	30	Pass
NVNT	BLE 1M	2440	Ant1	-0.01	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.02	30	Pass
NVNT	BLE 2M	2402	Ant1	-0.07	30	Pass
NVNT	BLE 2M	2440	Ant1	-0.07	30	Pass
NVNT	BLE 2M	2480	Ant1	-0.1	30	Pass








Test Graphs

Power NVNT BLE 1M 2402MHz Ant1


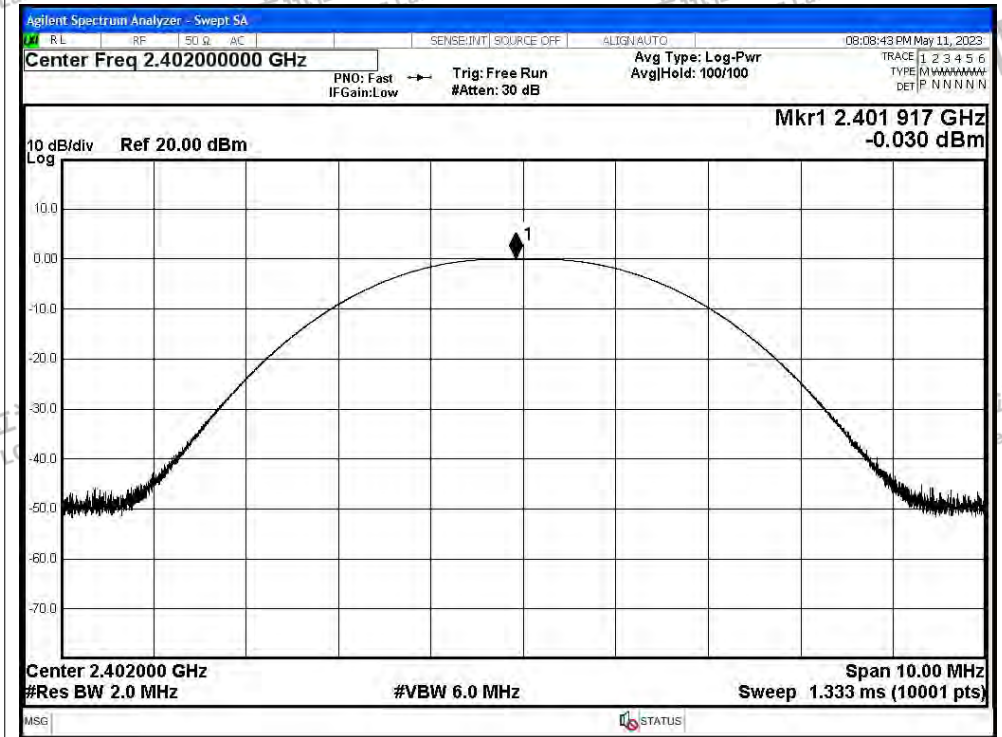


Power NVNT BLE 1M 2440MHz Ant1

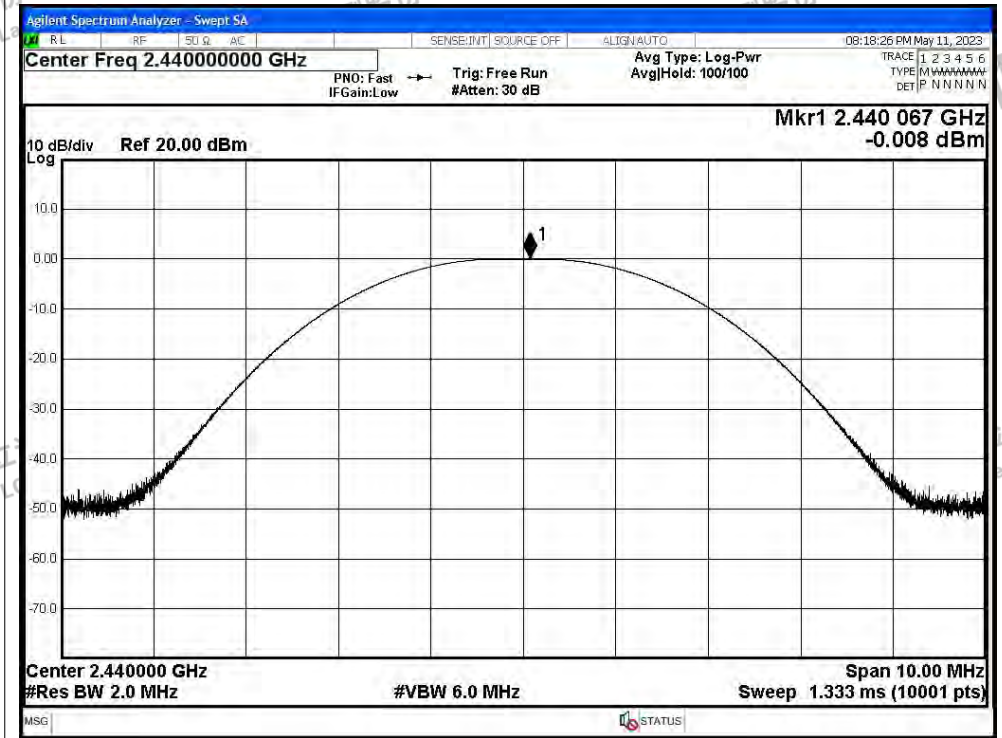

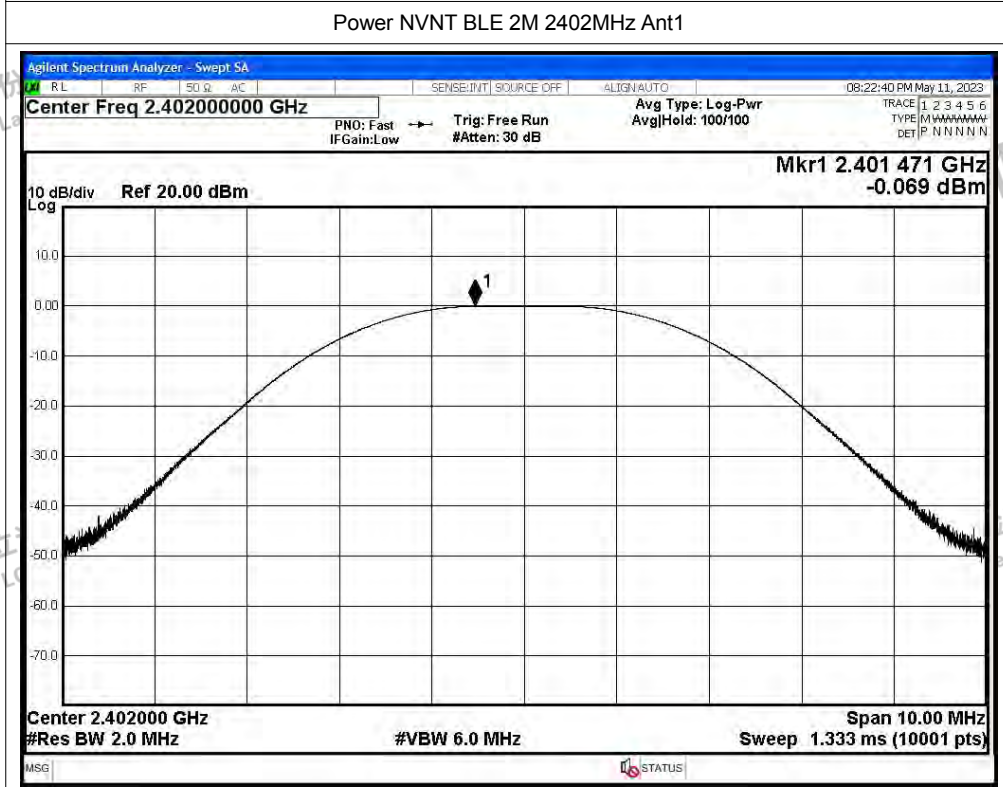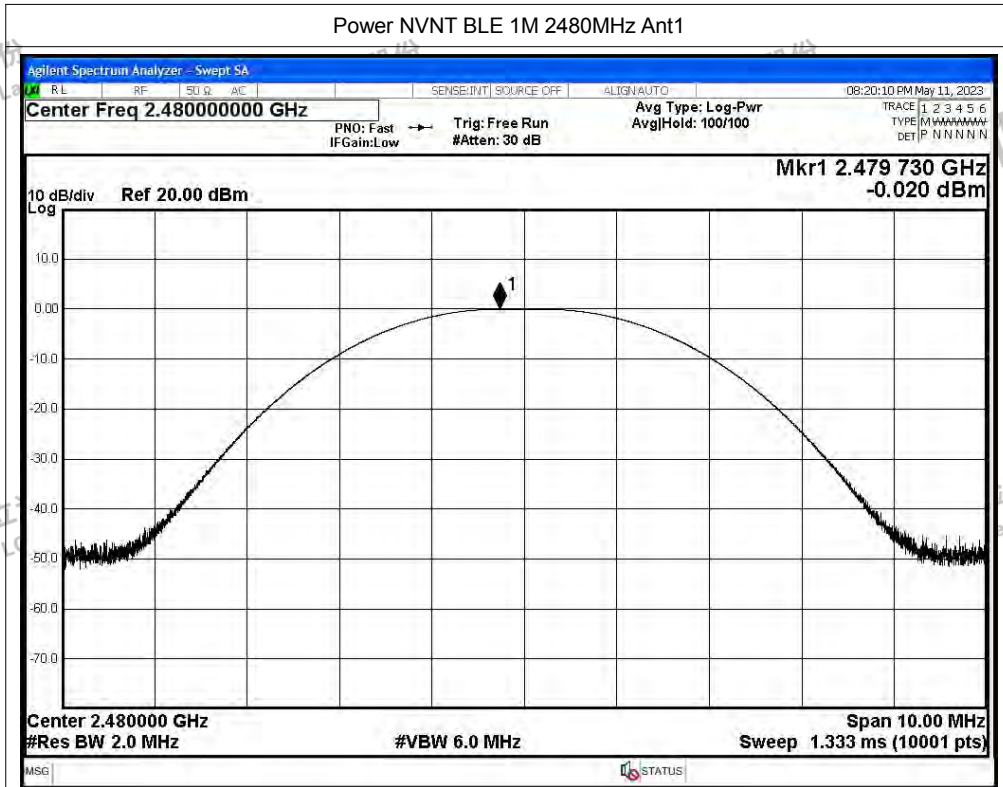



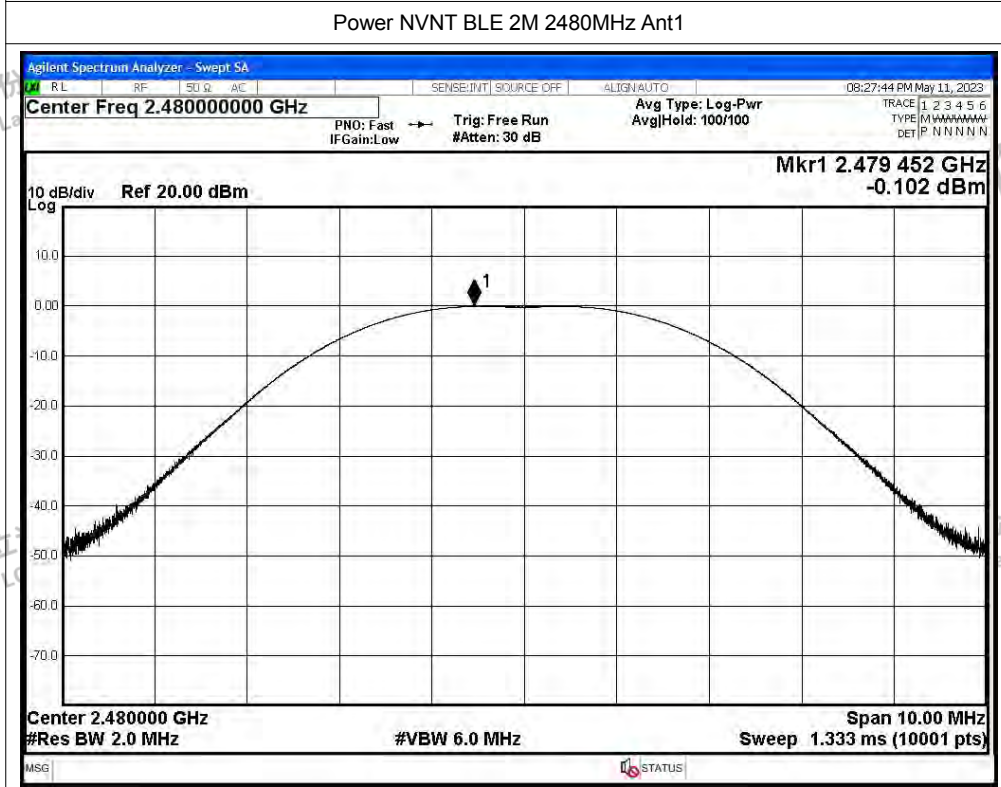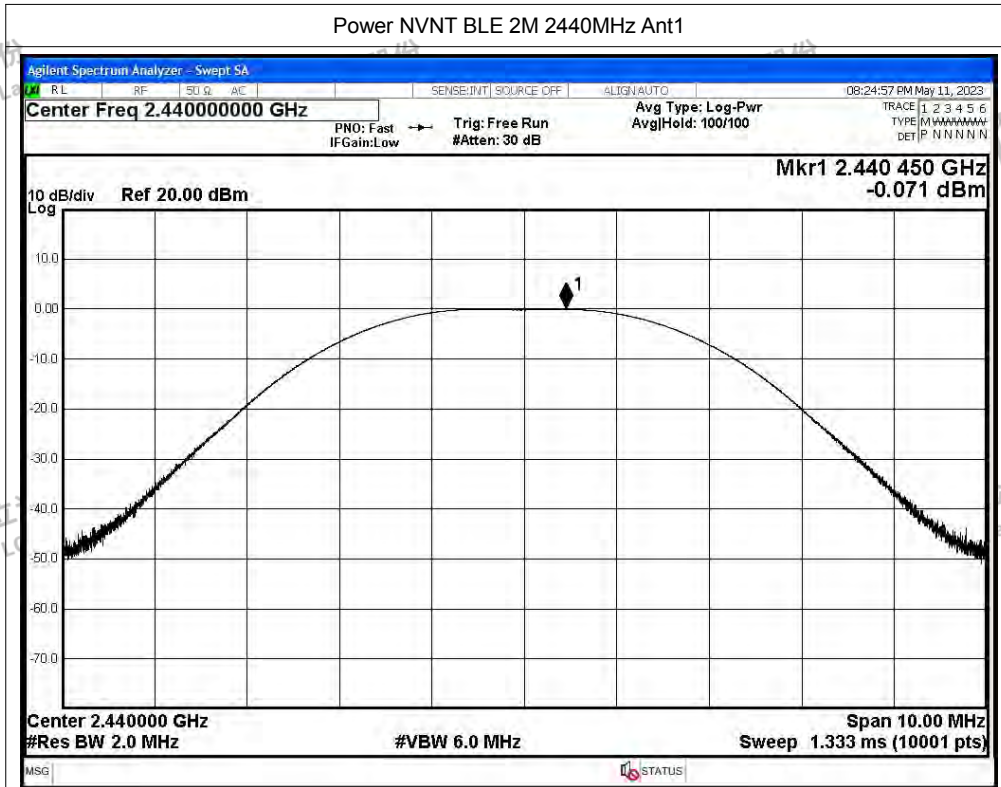



### B.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-11.34	8	Pass
NVNT	BLE 1M	2440	Ant1	-11.76	8	Pass
NVNT	BLE 1M	2480	Ant1	-11.76	8	Pass
NVNT	BLE 2M	2402	Ant1	-14.6	8	Pass
NVNT	BLE 2M	2440	Ant1	-13.36	8	Pass
NVNT	BLE 2M	2480	Ant1	-15.01	8	Pass








Test Graphs



PSD NVNT BLE 1M 2402MHz Ant1

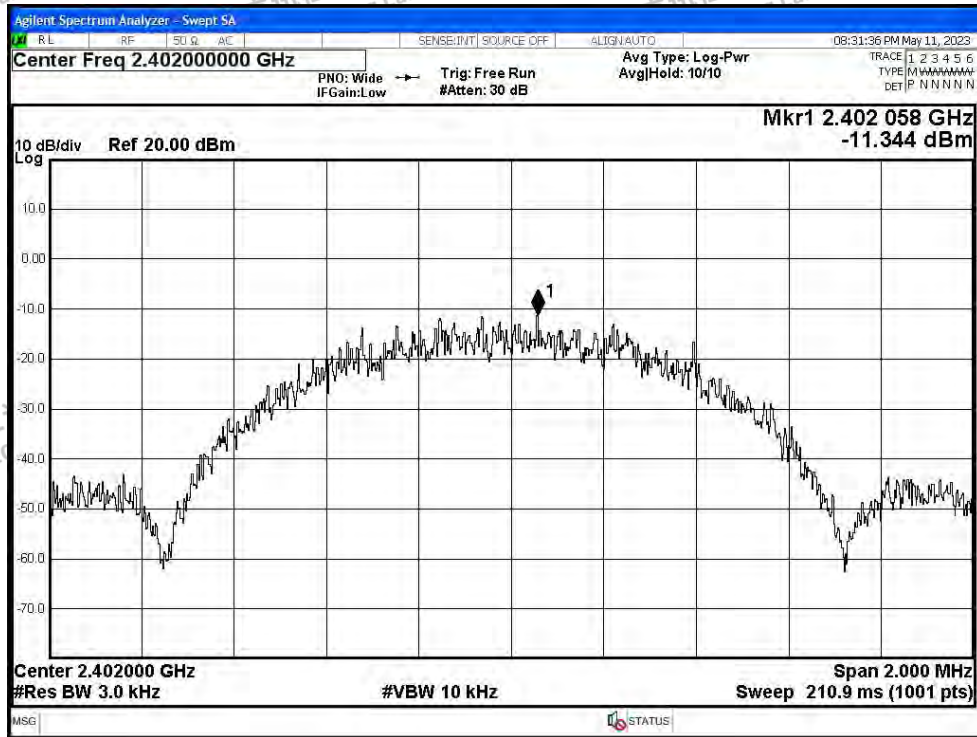

PSD NVNT BLE 1M 2440MHz Ant1

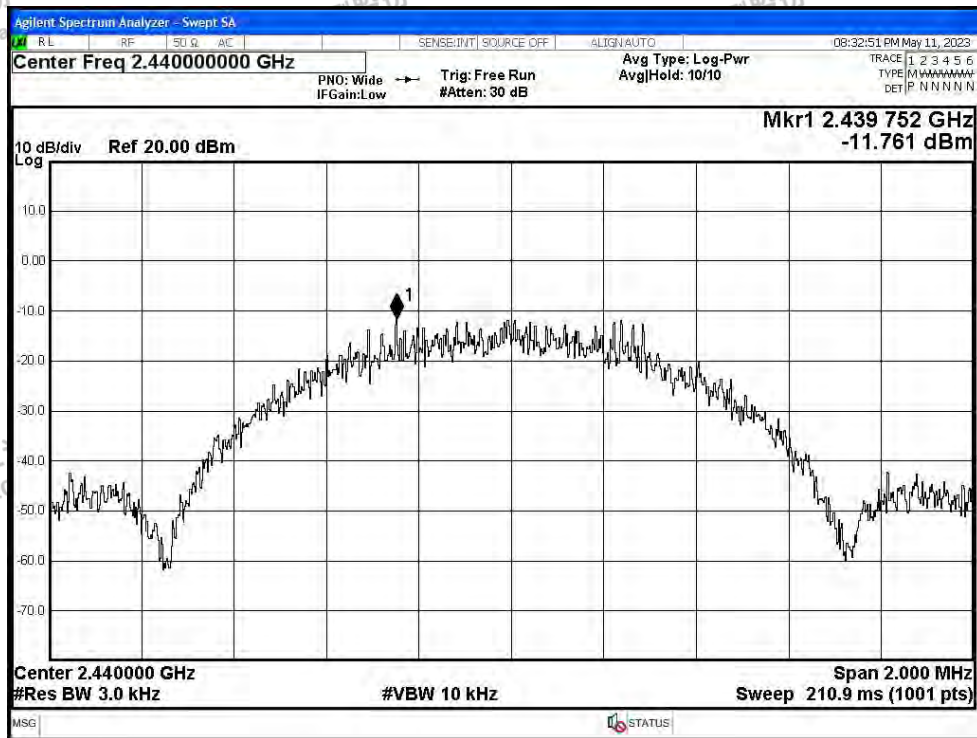

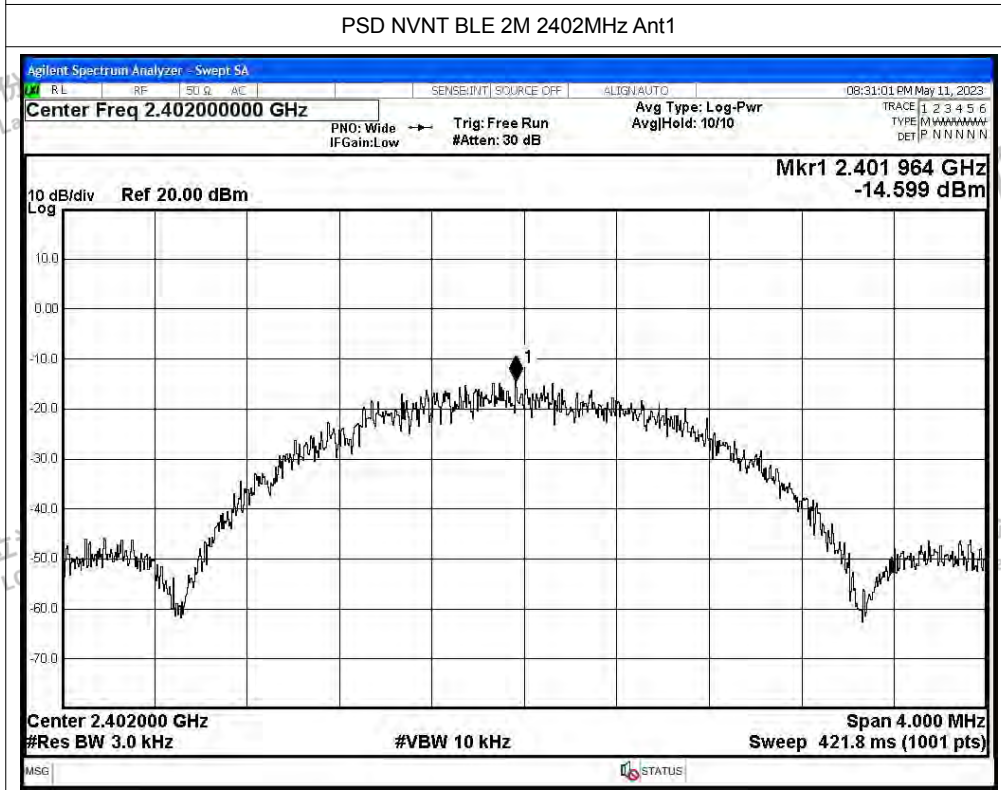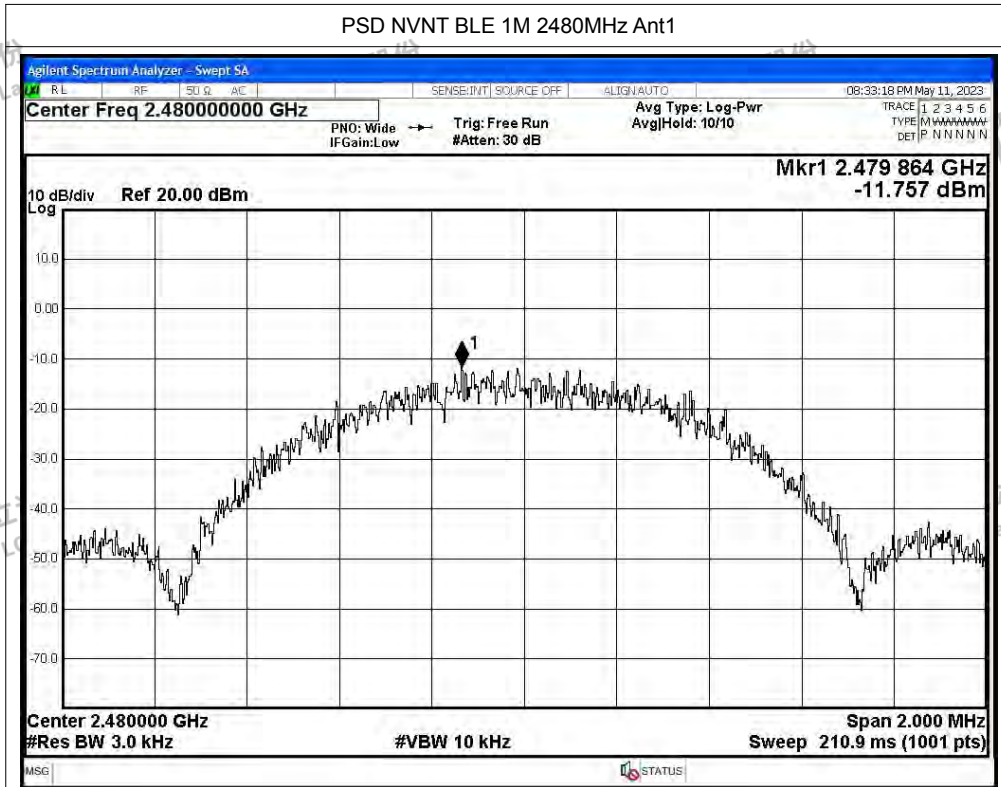

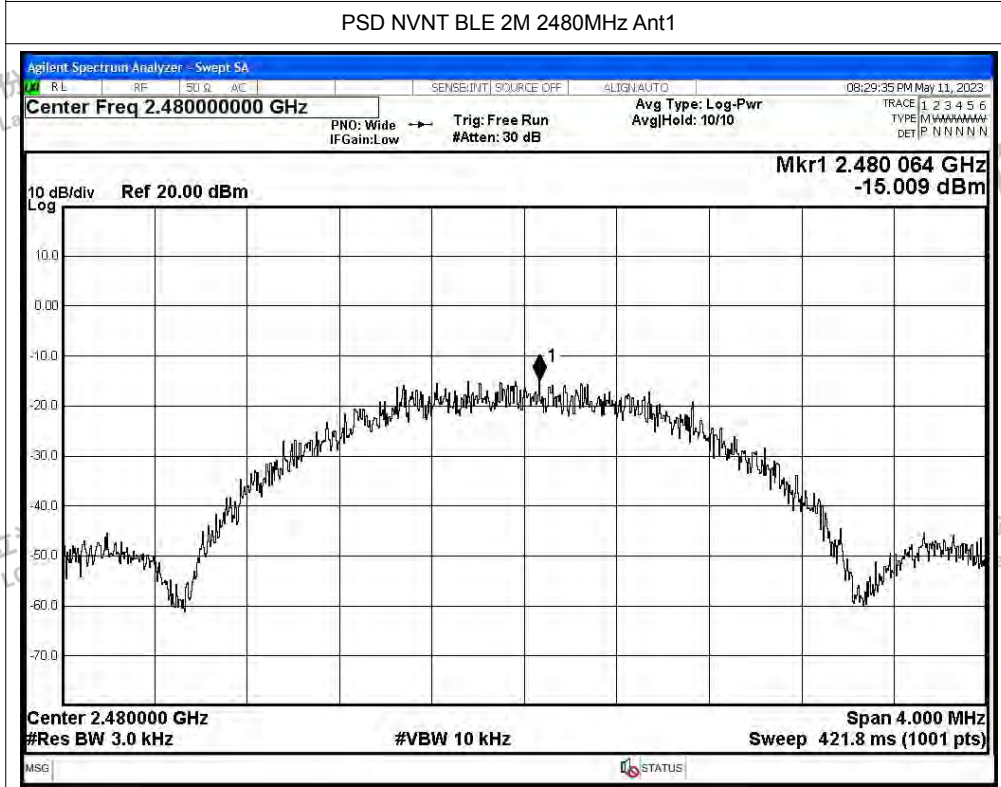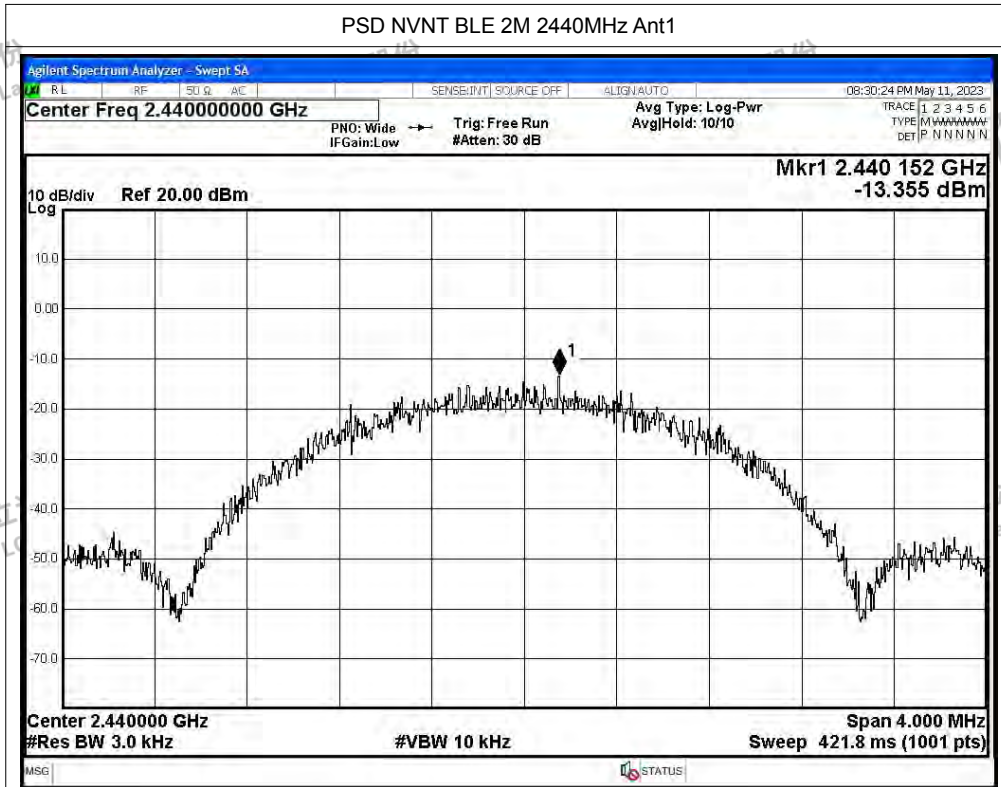



### B.4 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-57	-20	Pass
NVNT	BLE 1M	2480	Ant1	-58.45	-20	Pass
NVNT	BLE 2M	2402	Ant1	-33.13	-20	Pass
NVNT	BLE 2M	2480	Ant1	-57.08	-20	Pass








Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref


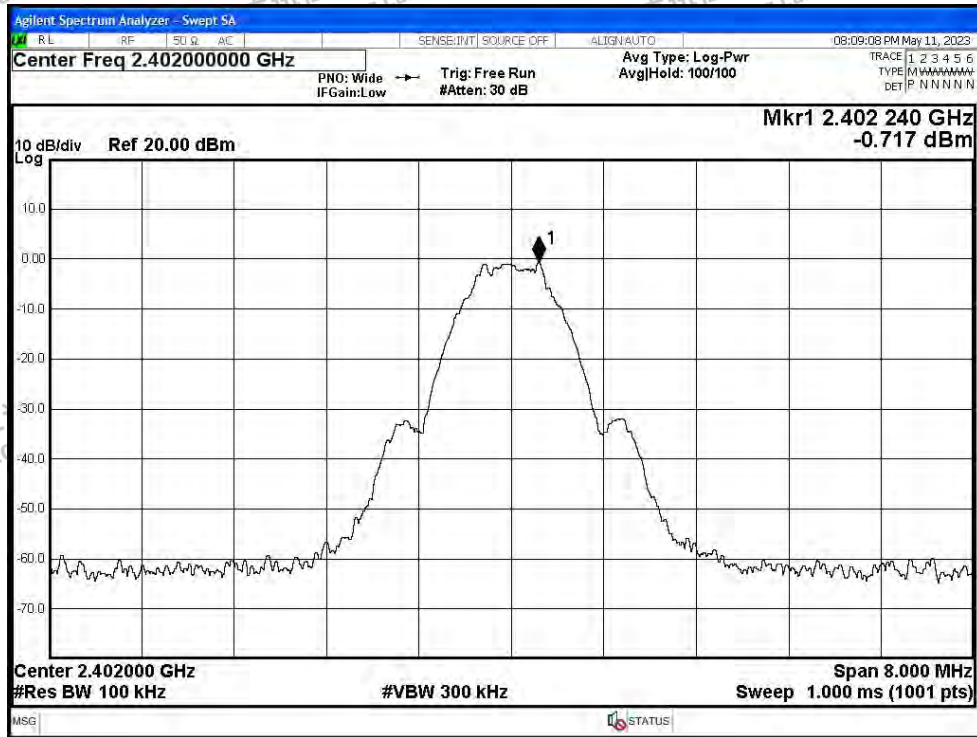




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

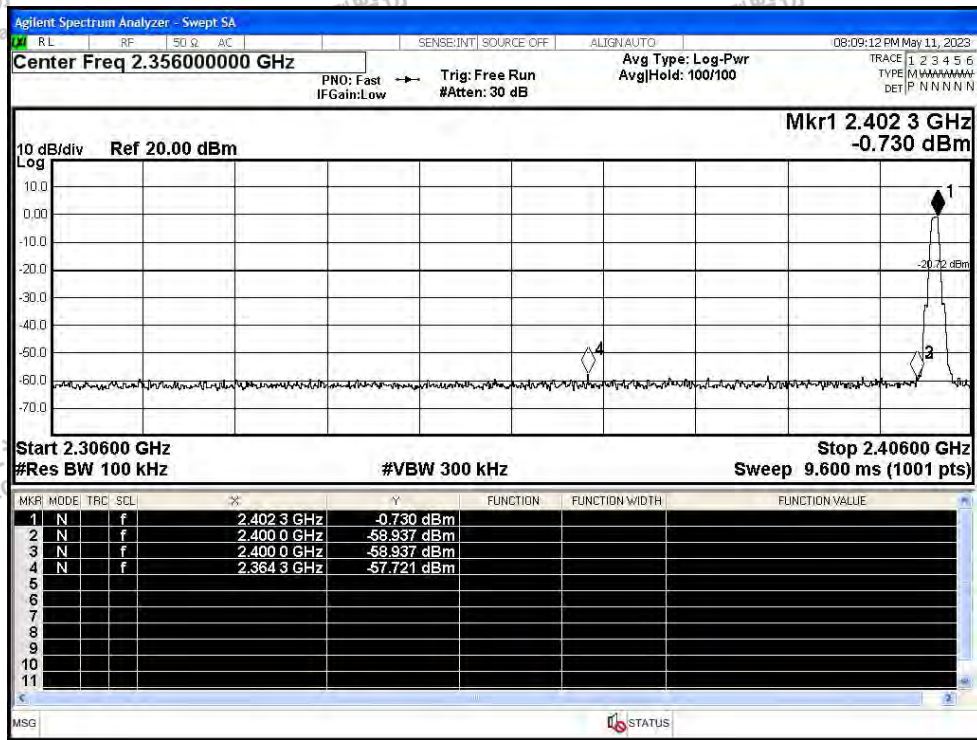

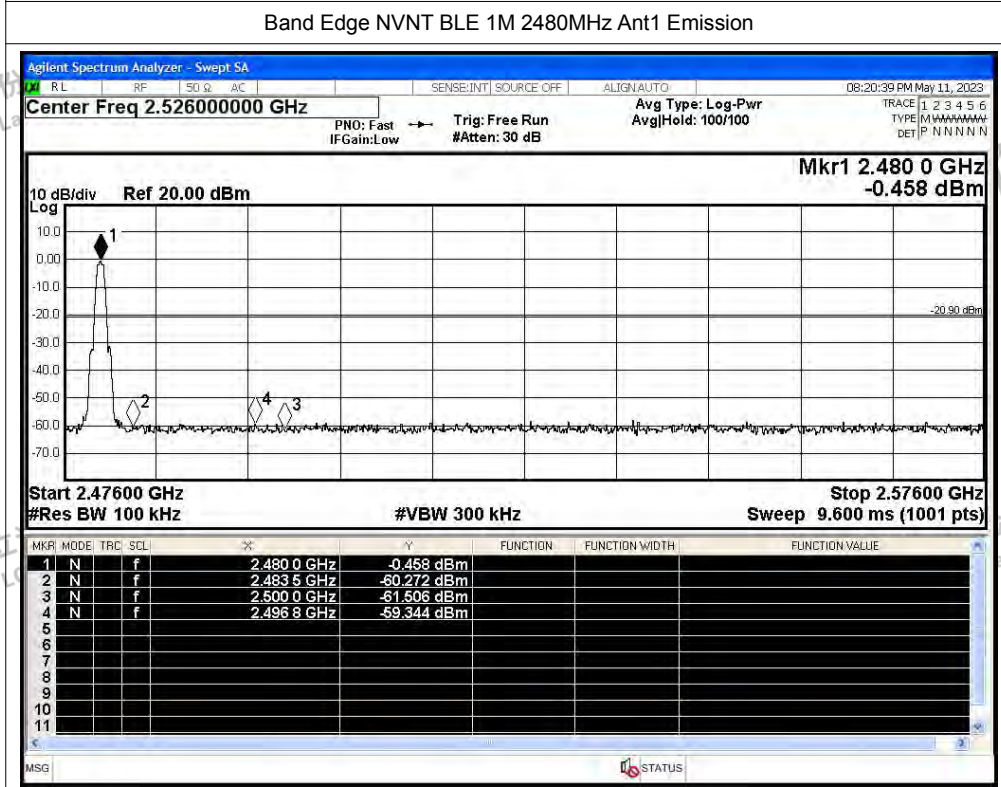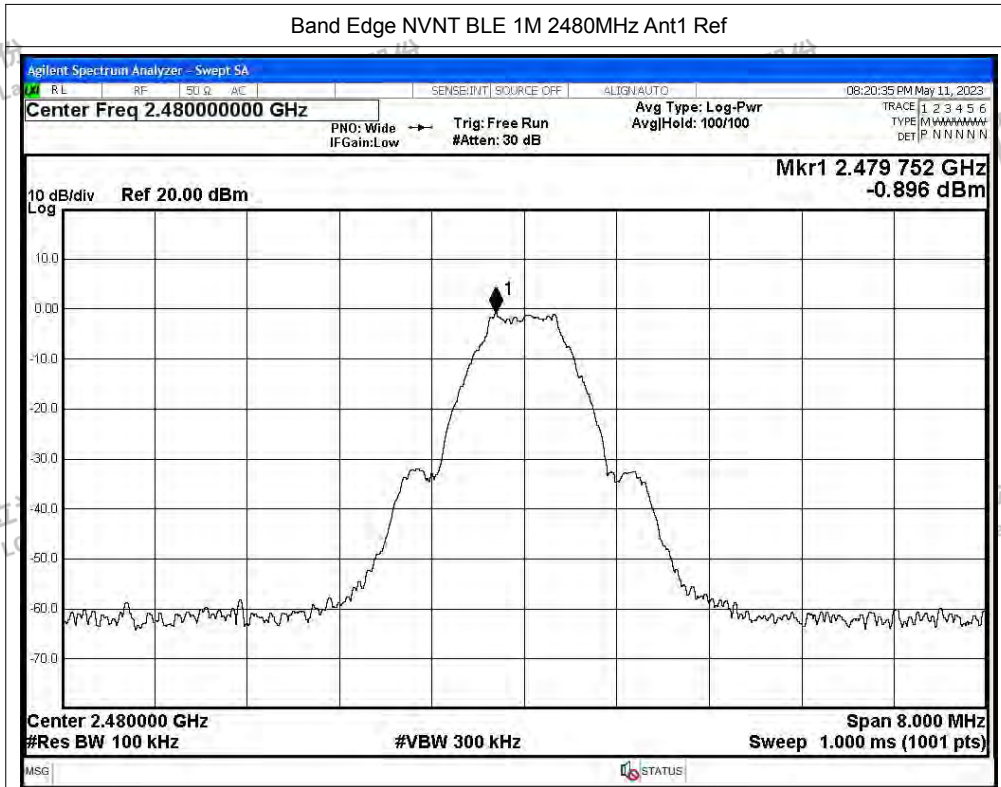



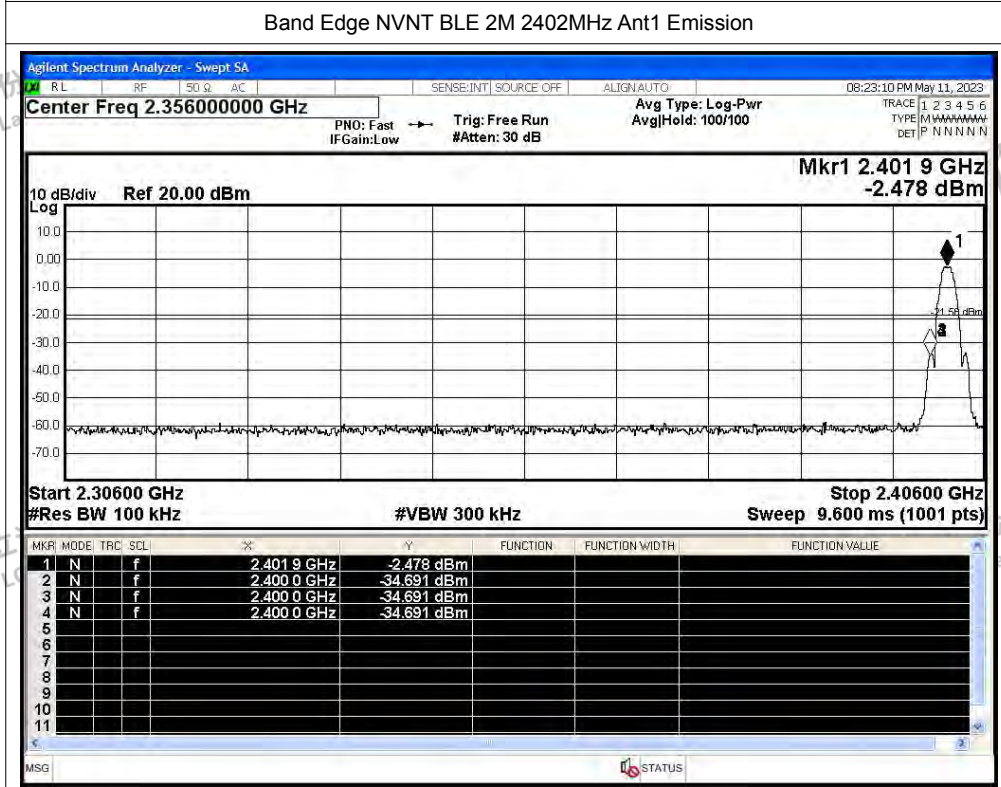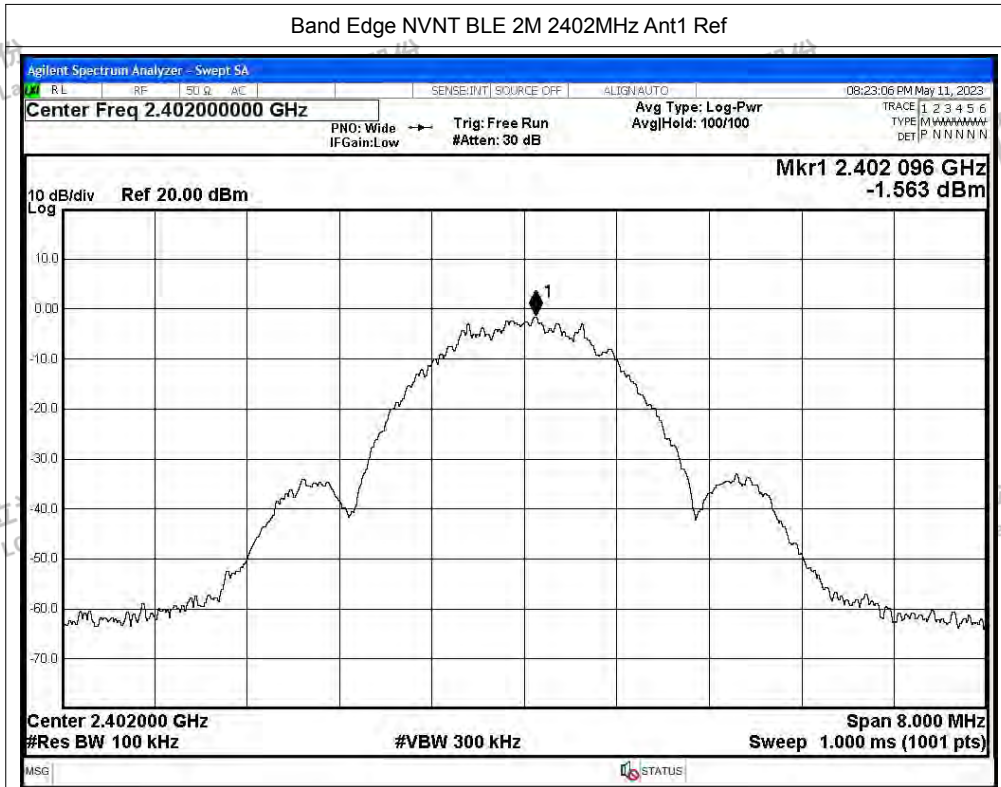

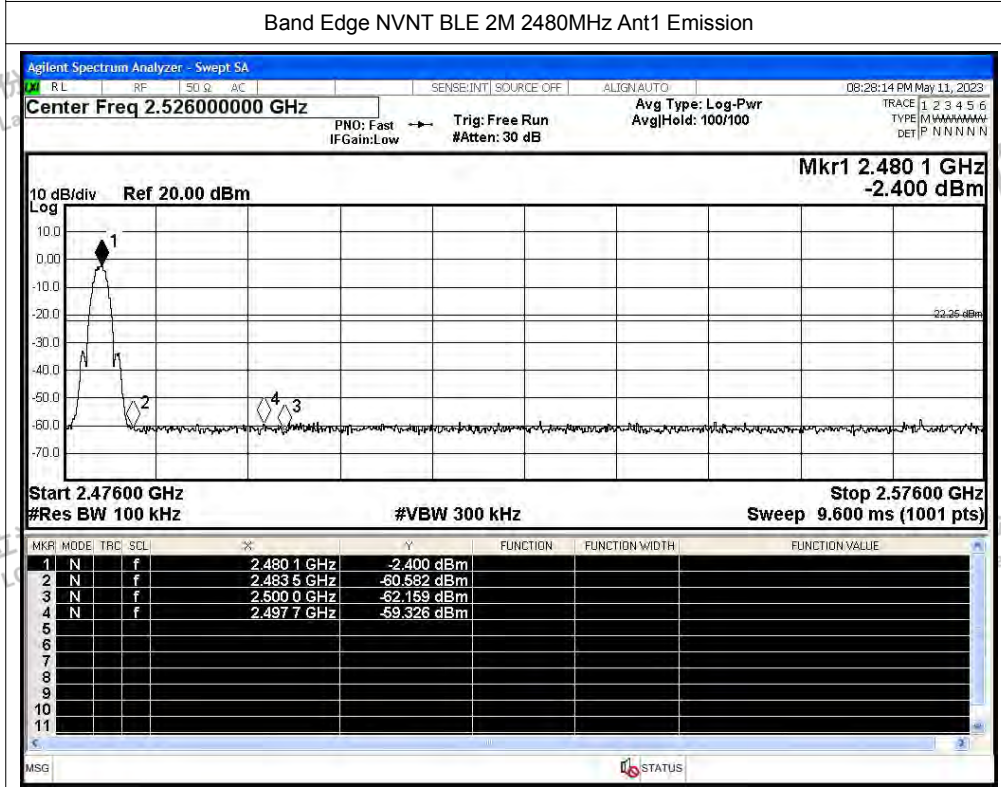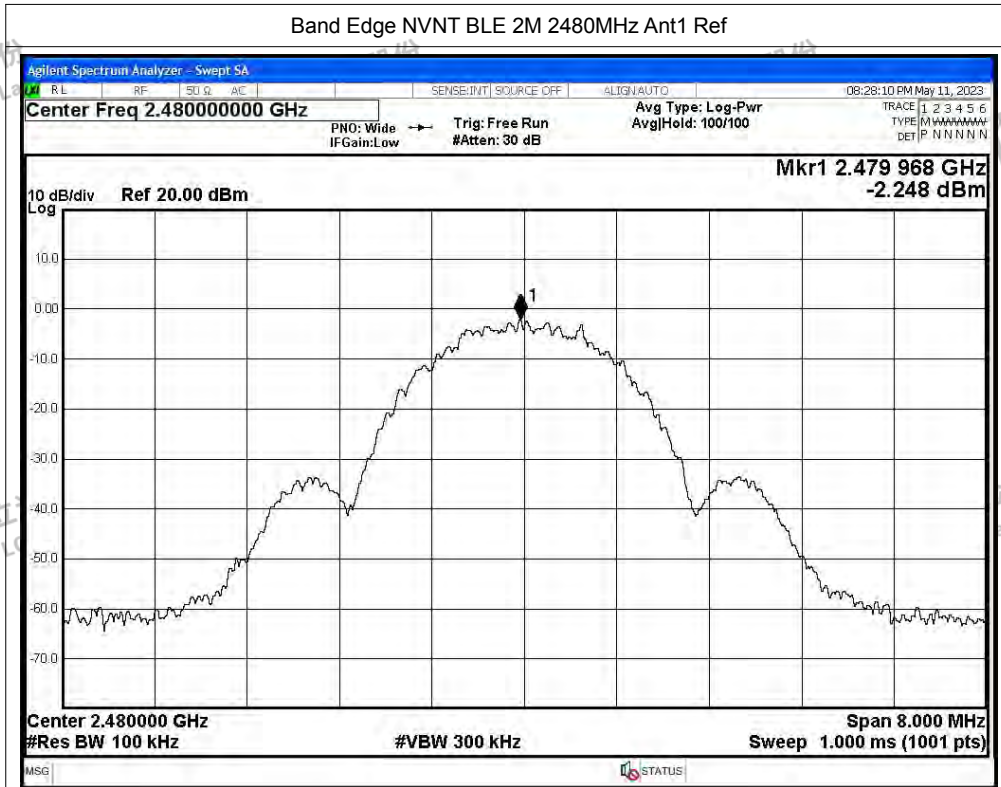



### B.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.2	-20	Pass
NVNT	BLE 1M	2440	Ant1	-56.87	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.93	-20	Pass
NVNT	BLE 2M	2402	Ant1	-56.07	-20	Pass
NVNT	BLE 2M	2440	Ant1	-56.06	-20	Pass
NVNT	BLE 2M	2480	Ant1	-55.36	-20	Pass






Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

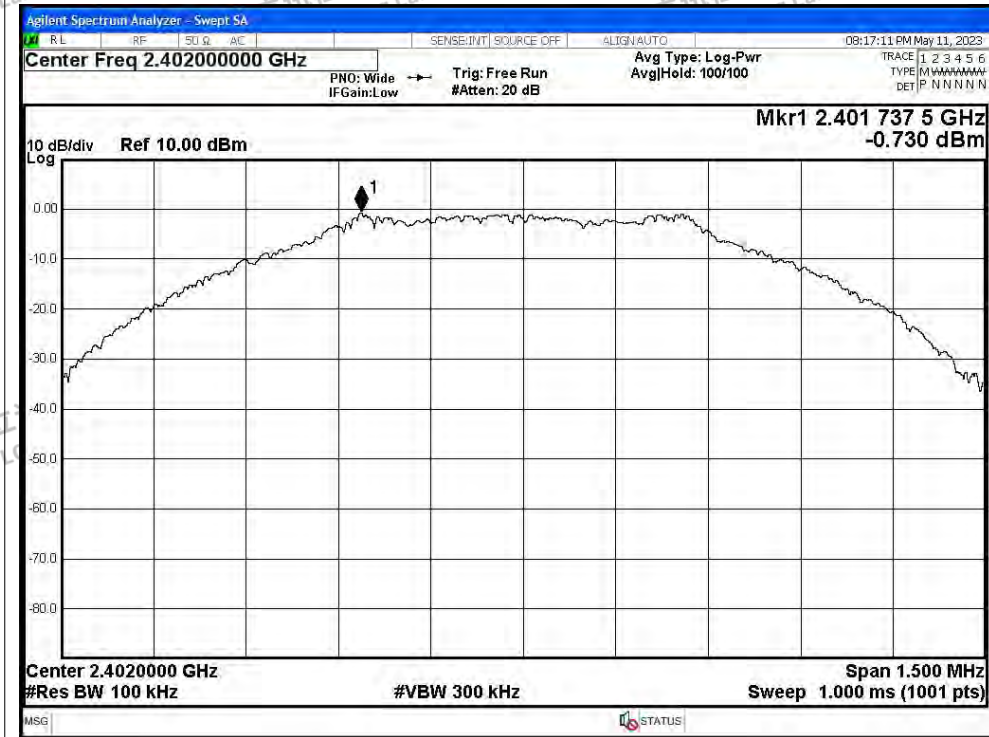


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

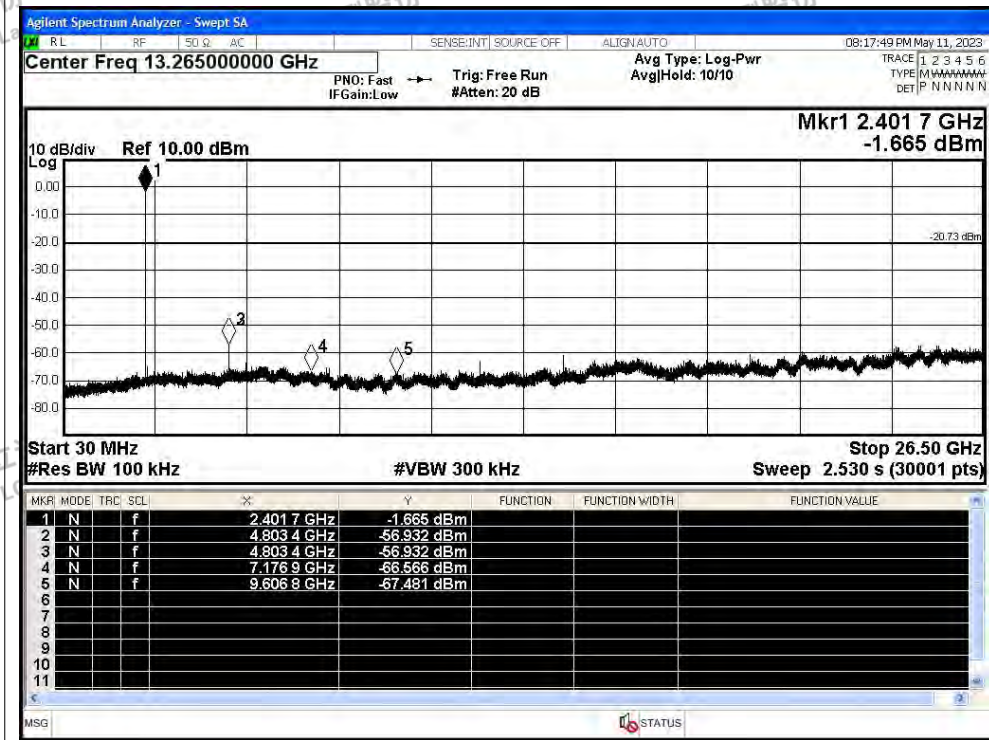




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

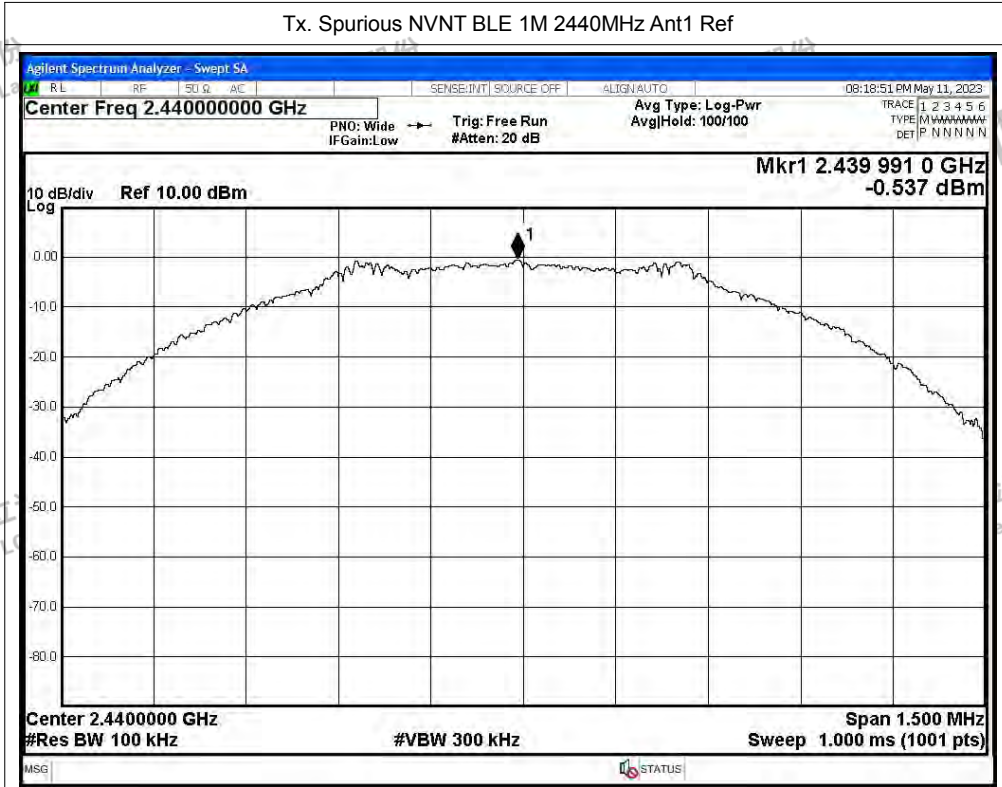


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

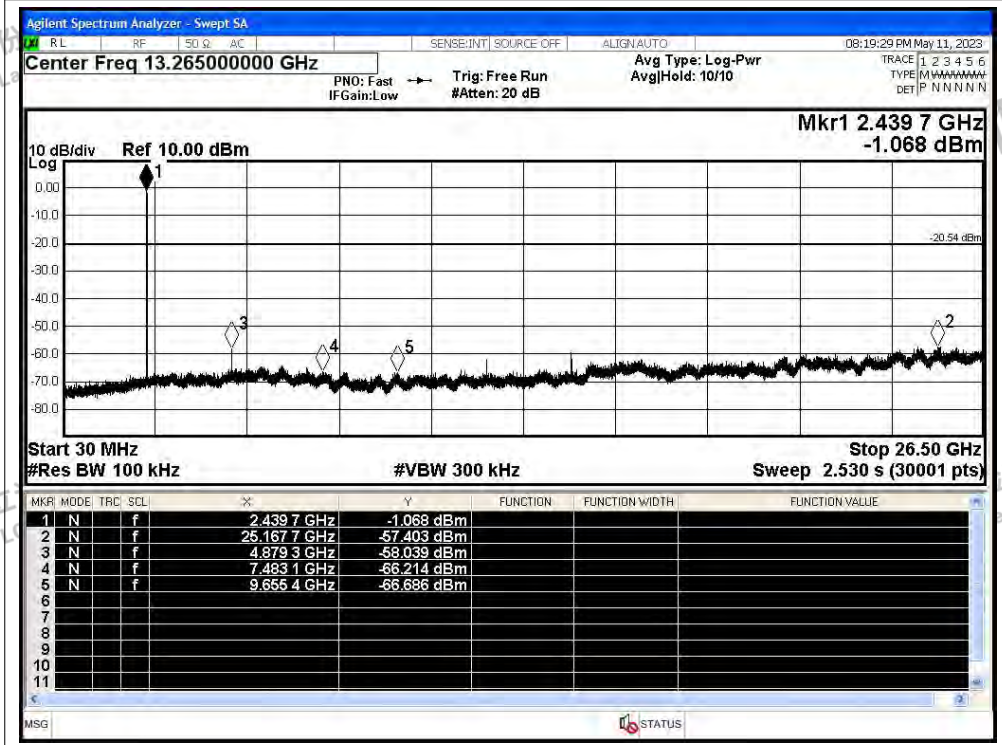




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

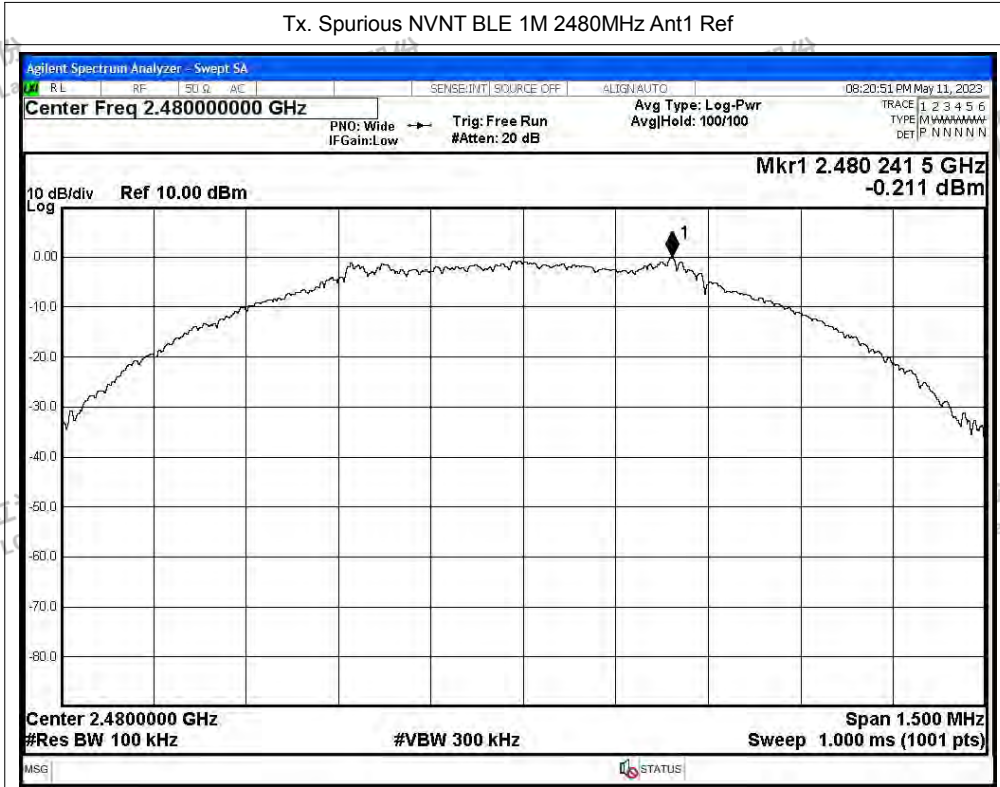


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

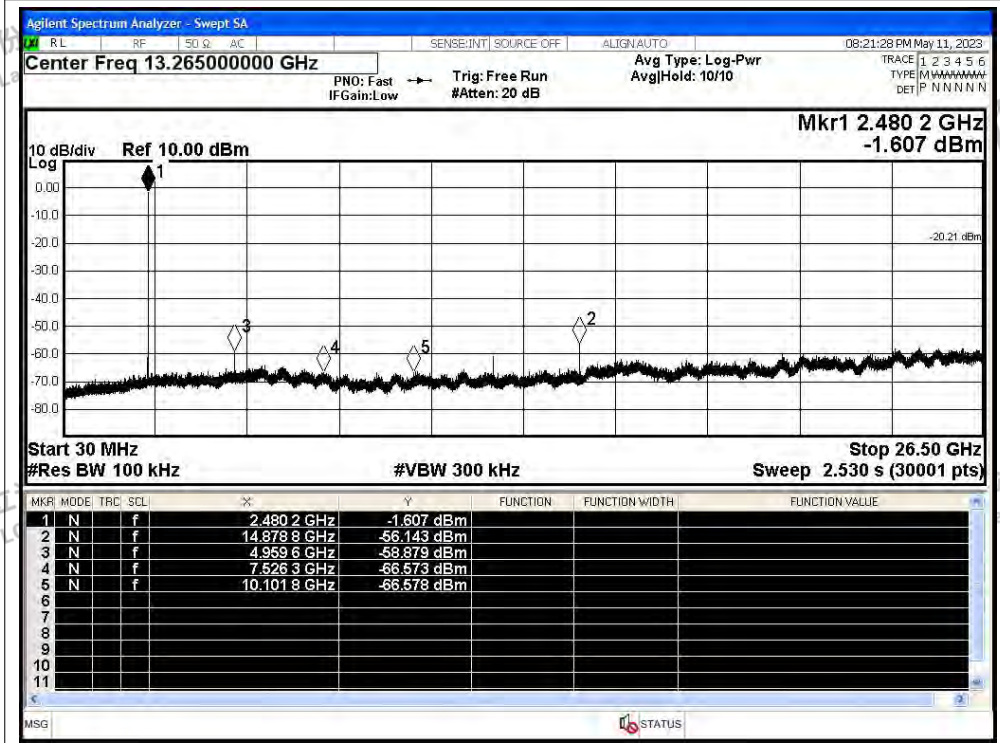




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

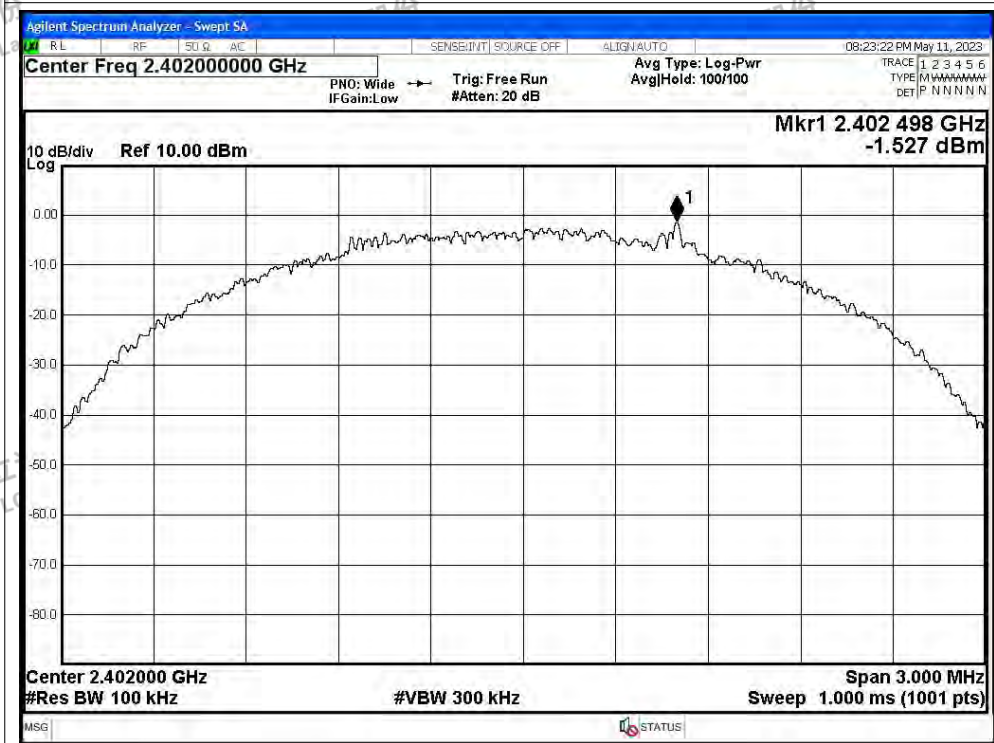


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

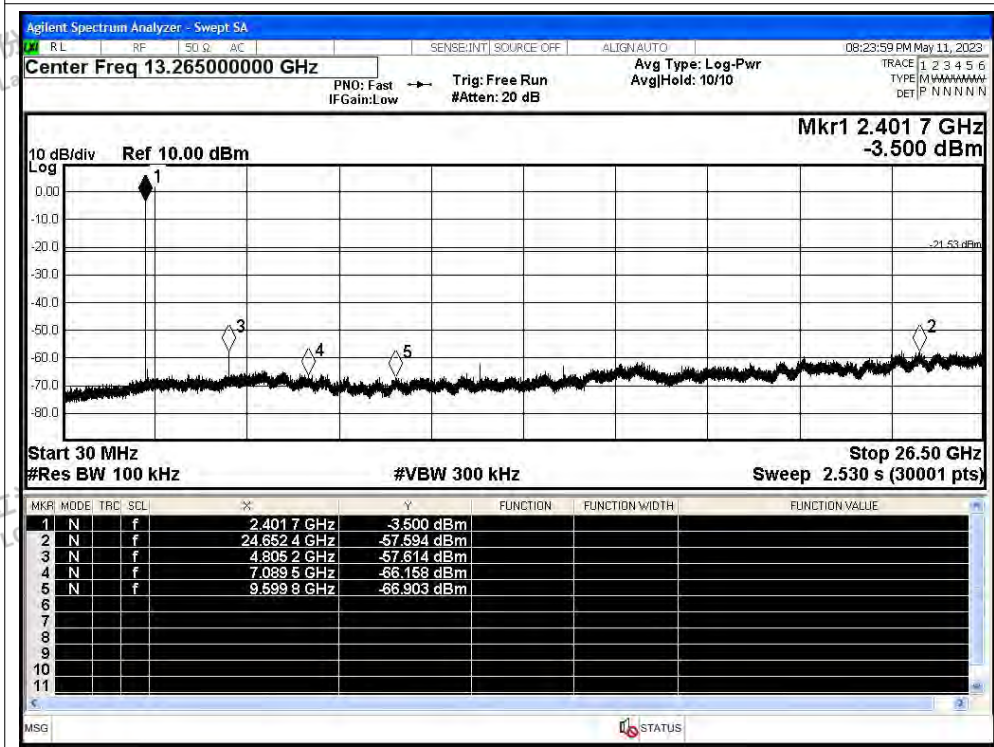




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

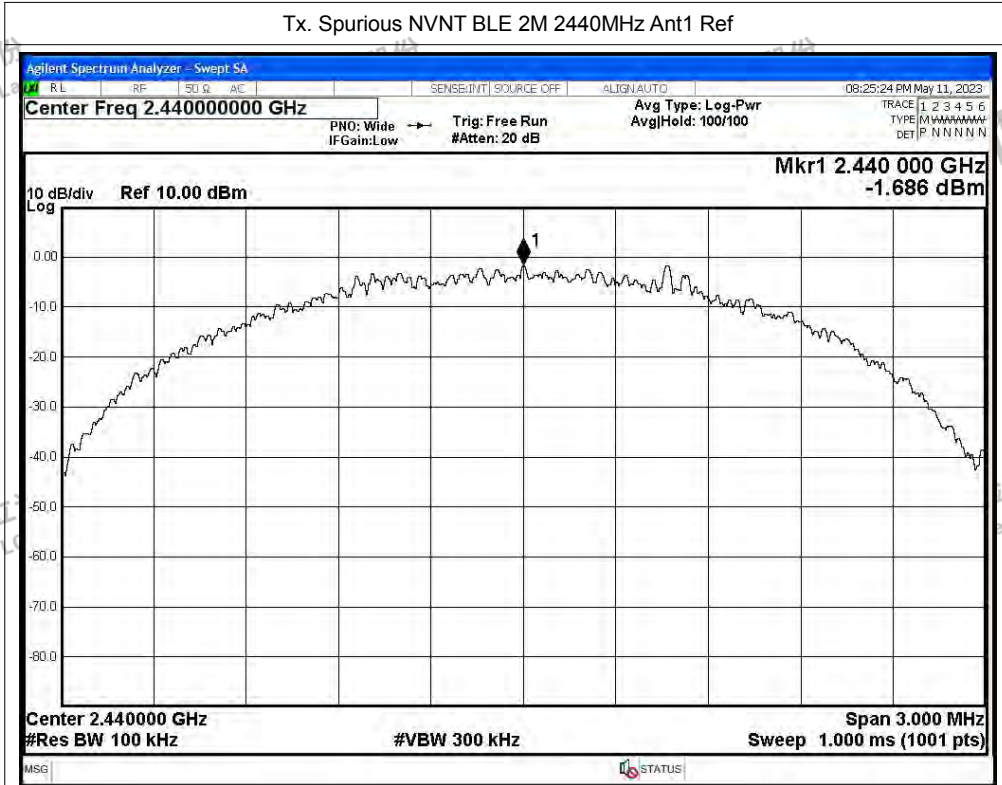


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

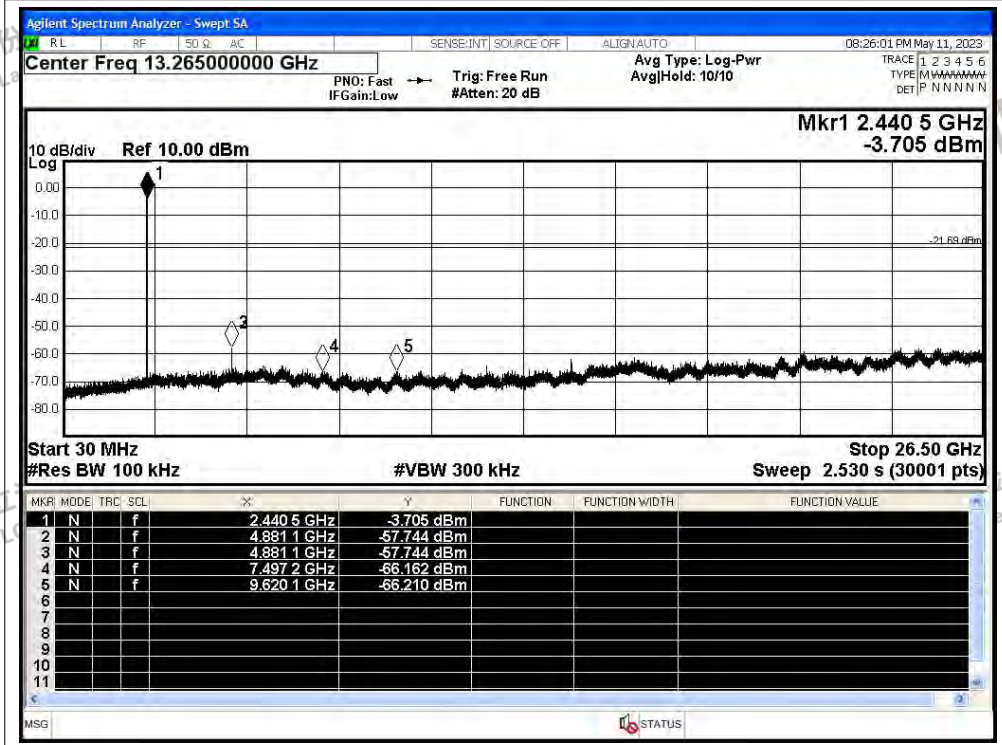






Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

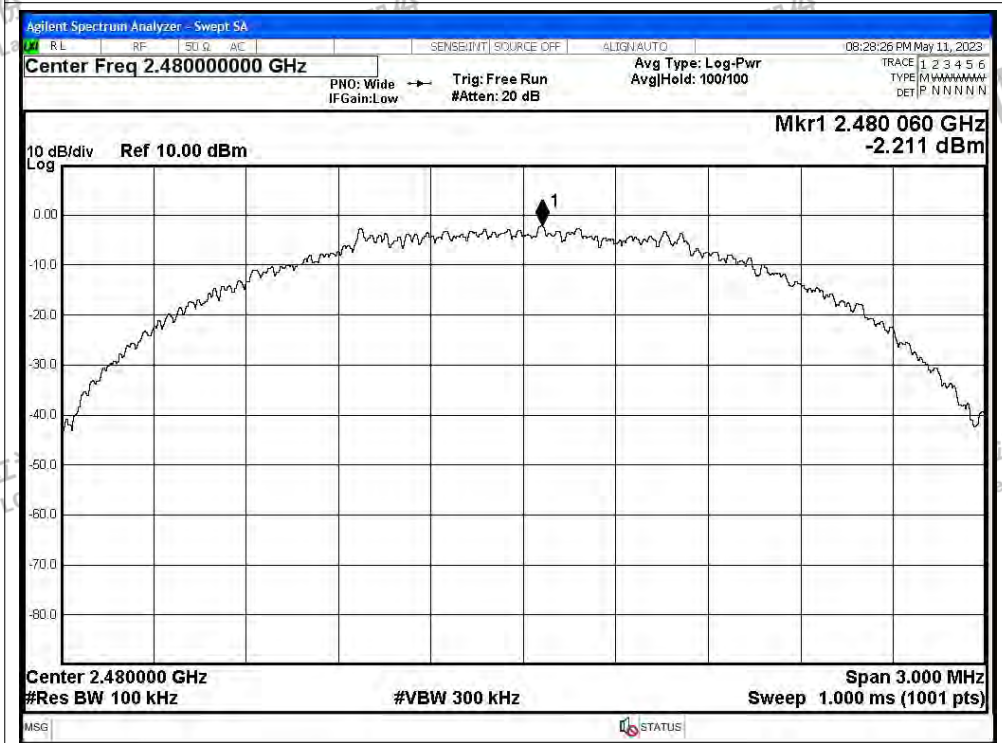

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

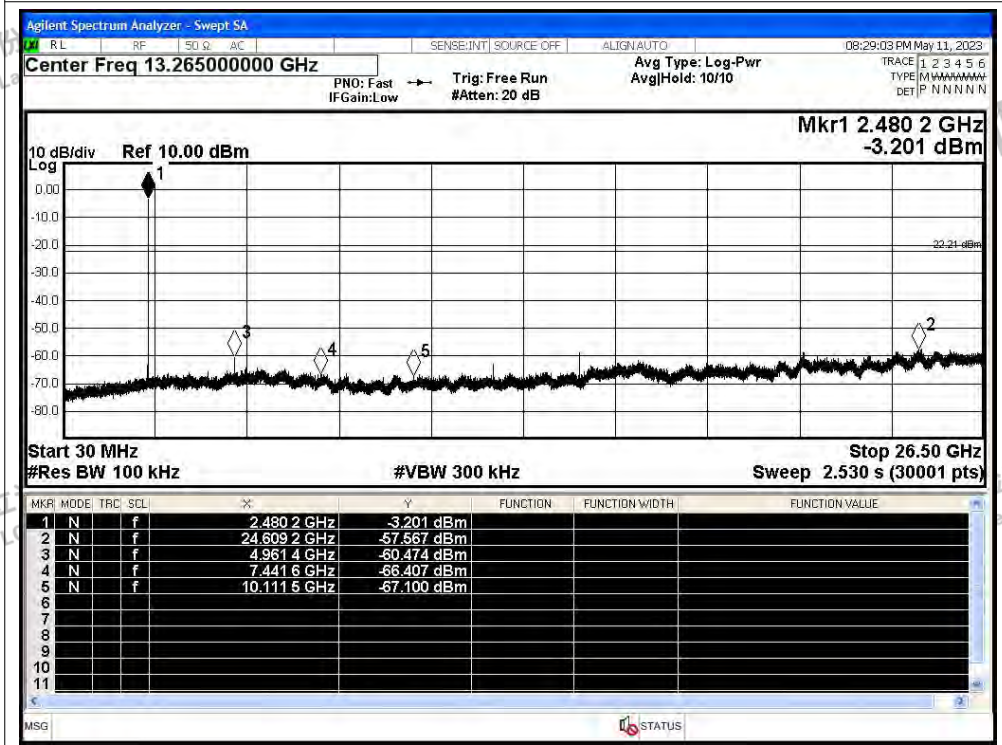



### B.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	100	0	0
NVNT	BLE 1M	2440	Ant1	100	0	0
NVNT	BLE 1M	2480	Ant1	100	0	0
NVNT	BLE 2M	2402	Ant1	100	0	0
NVNT	BLE 2M	2440	Ant1	100	0	0
NVNT	BLE 2M	2480	Ant1	100	0	0








Test Graphs



Duty Cycle NVNT BLE 1M 2402MHz Ant1

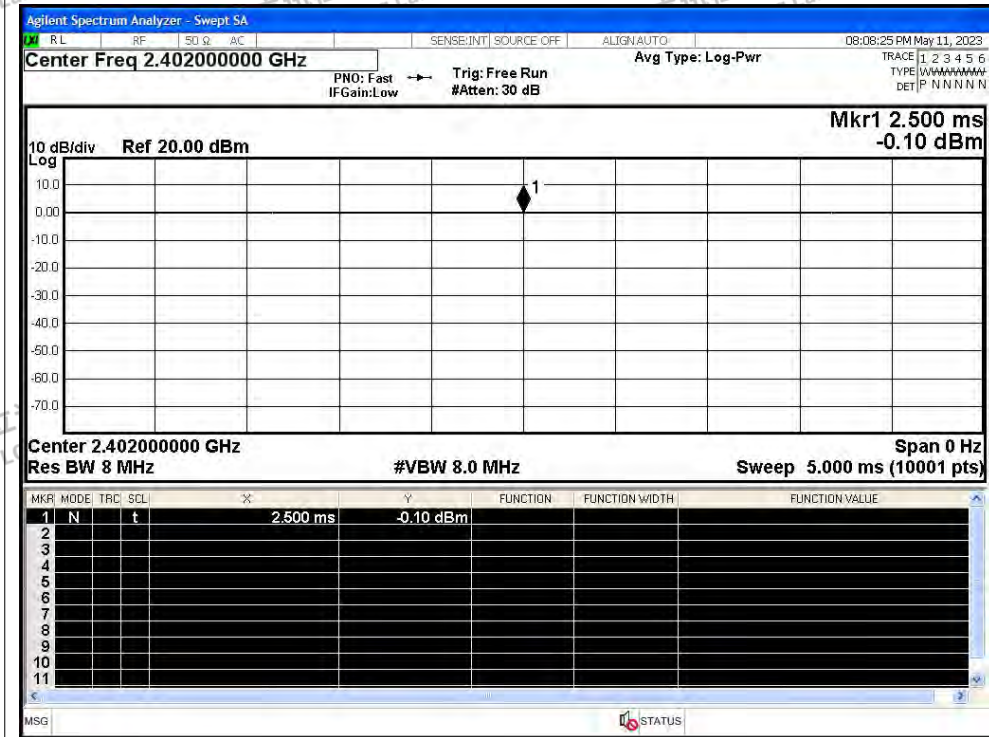

Duty Cycle NVNT BLE 1M 2440MHz Ant1

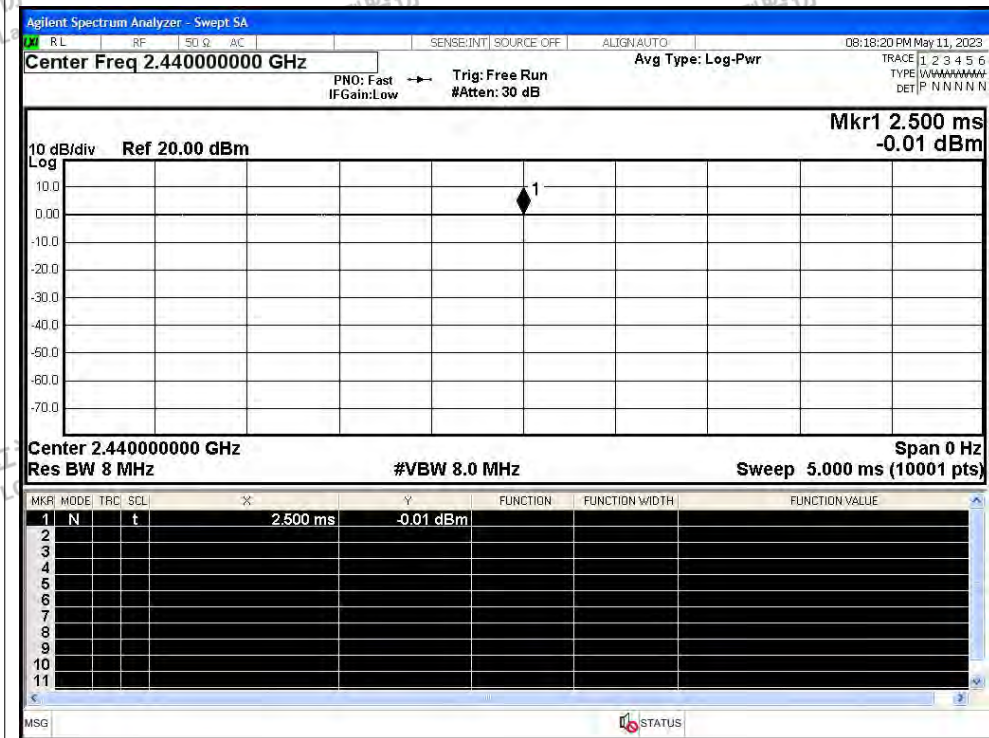

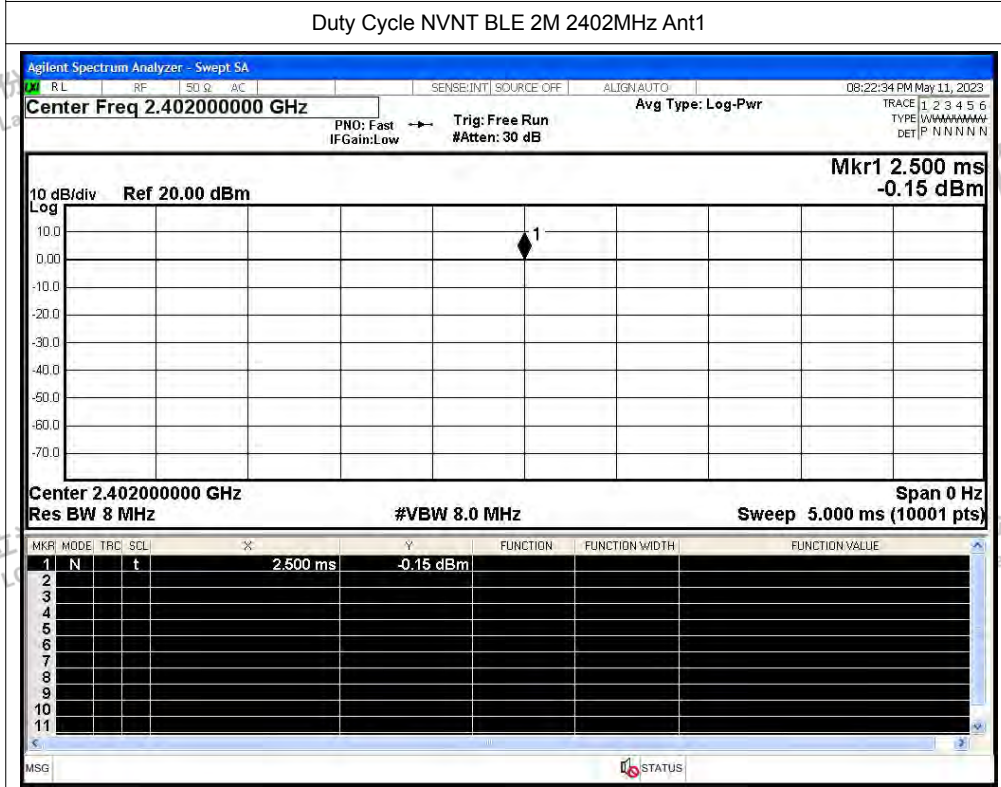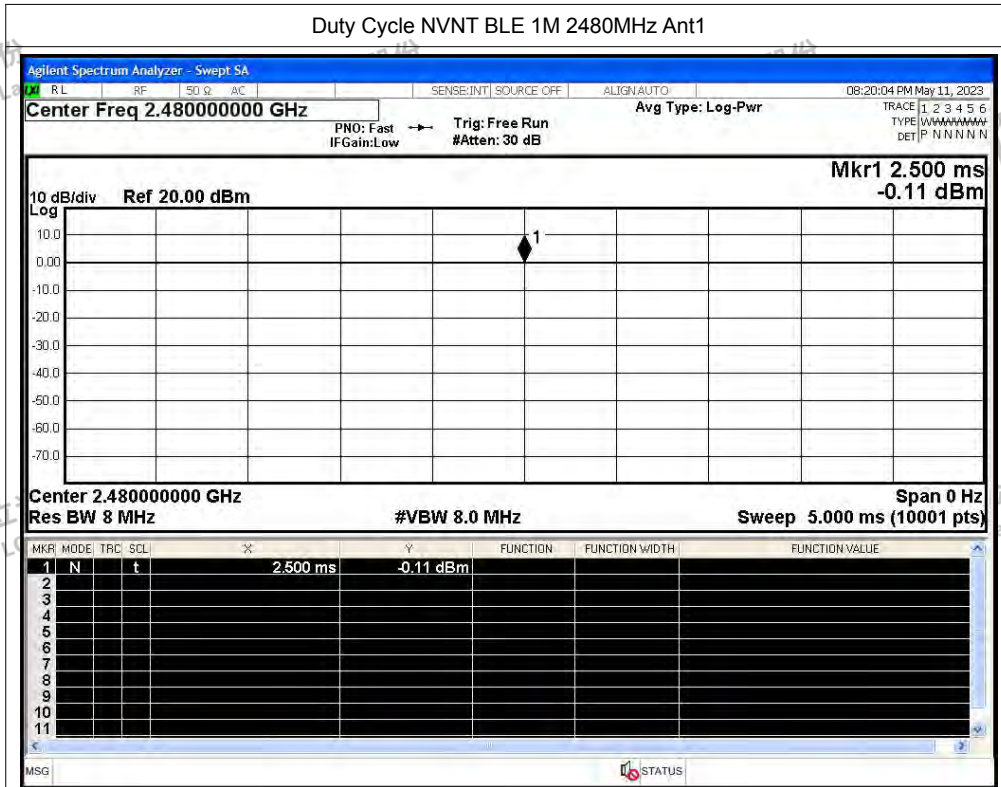

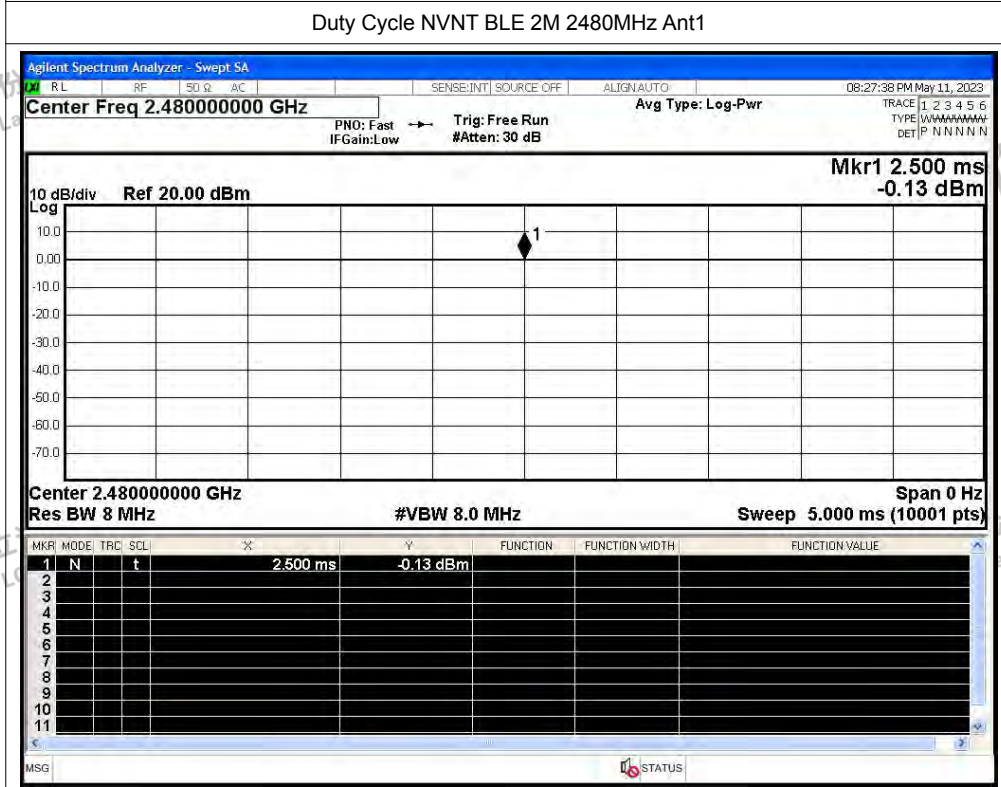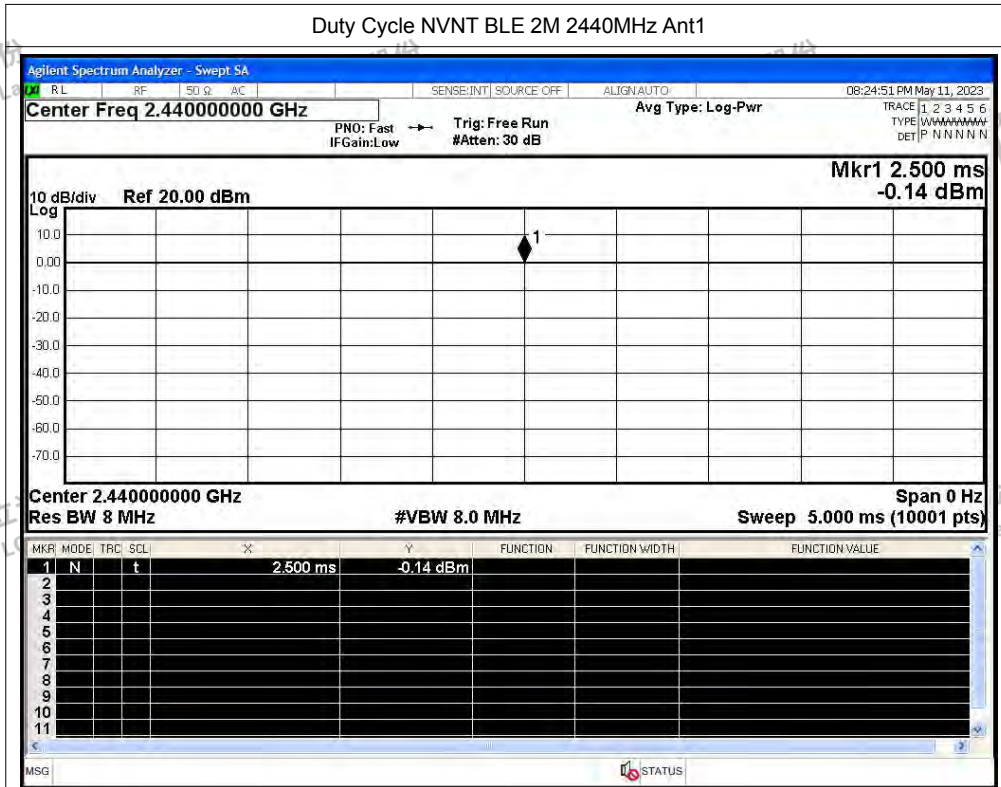



## B.7 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-53.2	2	44.06	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-62.37	2	34.89	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2361.648	-48.87	2	48.39	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2384.112	-62.01	2	35.25	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.18	2	46.08	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-62.03	2	35.23	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-50.34	2	46.92	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-60.99	2	36.27	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2492.536	-49.01	2	48.25	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2485.288	-60.56	2	36.7	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-53.24	2	44.02	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-61.01	2	36.25	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-52.61	2	44.65	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2310	-61.19	2	36.07	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2372.016	-48.77	2	48.49	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2380.176	-60.31	2	36.95	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-53.04	2	44.22	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-61.02	2	36.24	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-50.01	2	47.25	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-58.21	2	39.05	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.704	-48.02	2	49.24	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.536	-58.17	2	39.09	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-51.26	2	46	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-61.09	2	36.17	Average	54	Pass





Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

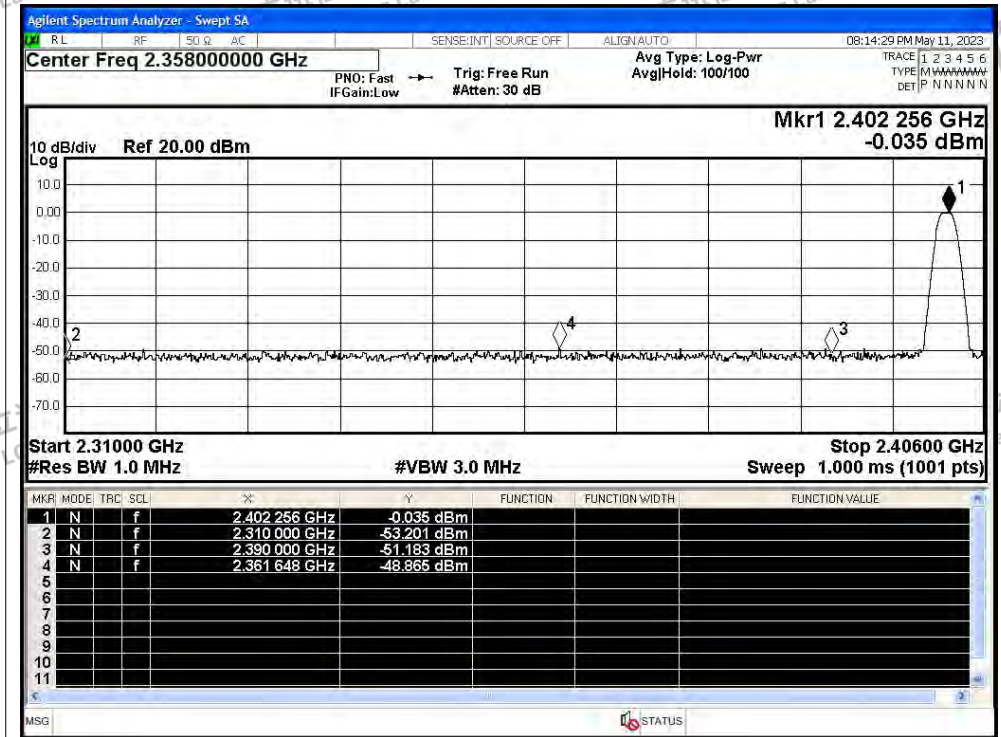

Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

