


### Spurious Emission 30MHz ~ 25GHz

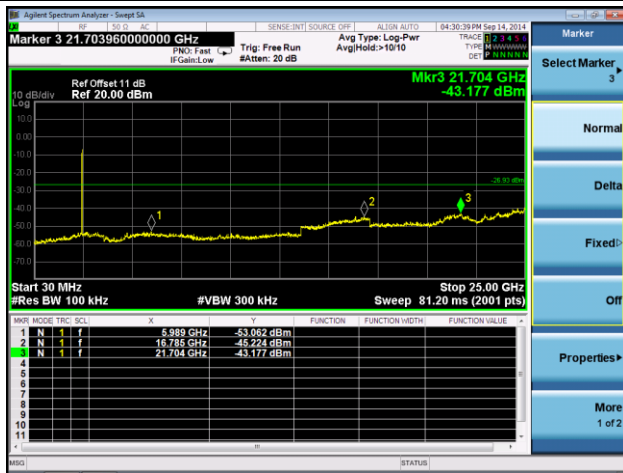


### 802.11g Out-of-Band Emissions

#### Channel 01 (2412MHz)


#### 100kHz PSD reference Level



#### Low Band Edge

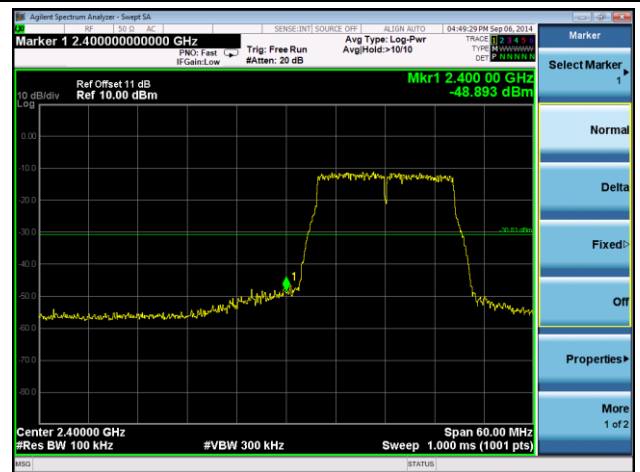


### Spurious Emission 30MHz ~ 25GHz

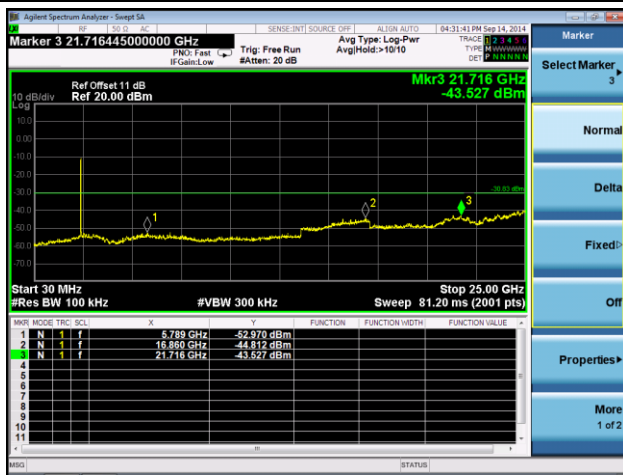


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

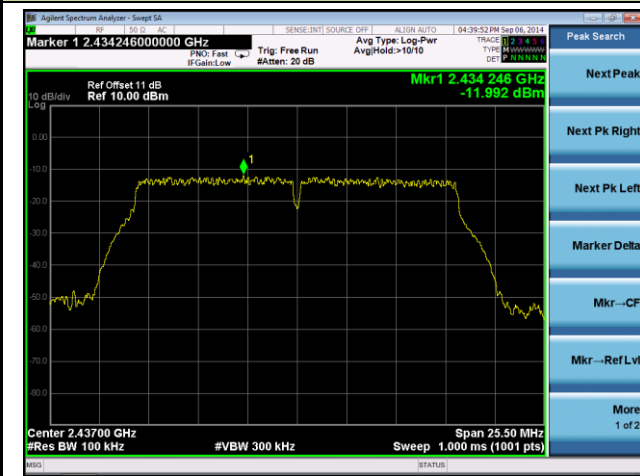

#### Spurious Emission 30MHz ~ 25GHz

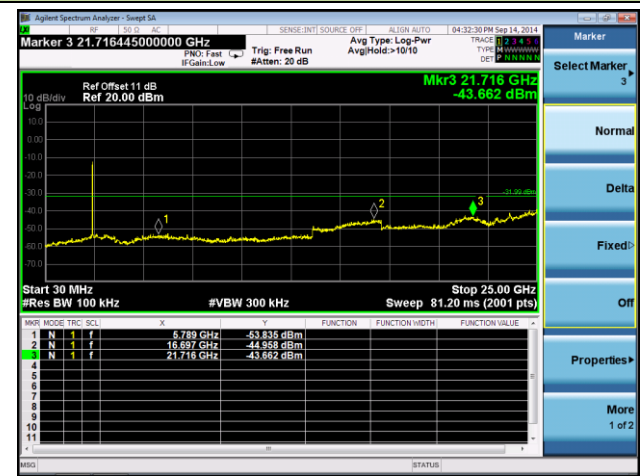


### Channel 11 (2462MHz)


#### 100kHz PSD reference Level



#### High Band Edge

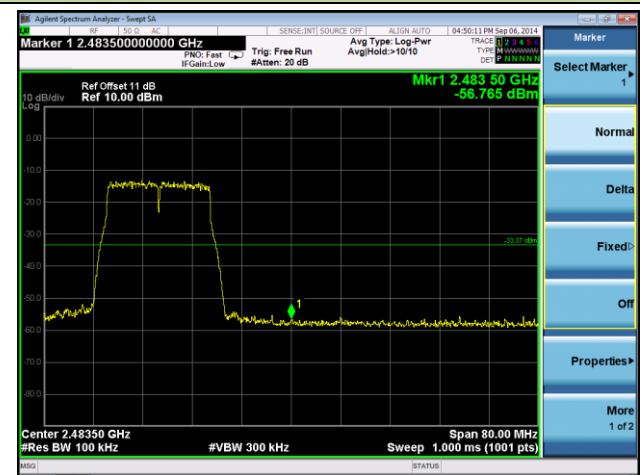


#### Spurious Emission 30MHz ~ 25GHz

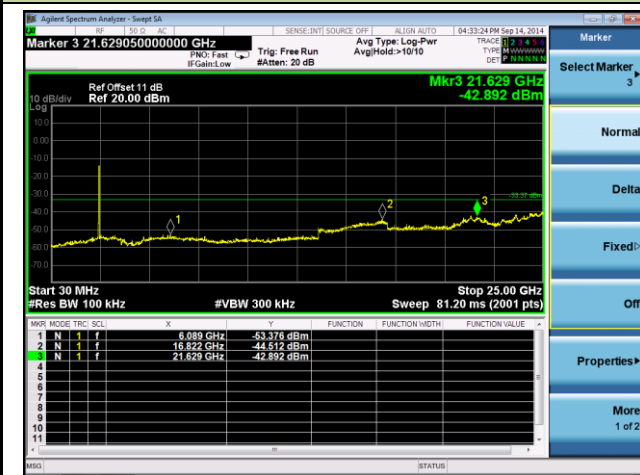


### 802.11n-HT20 Out-of-Band Emissions

#### Channel 01 (2412MHz)


##### 100kHz PSD reference Level

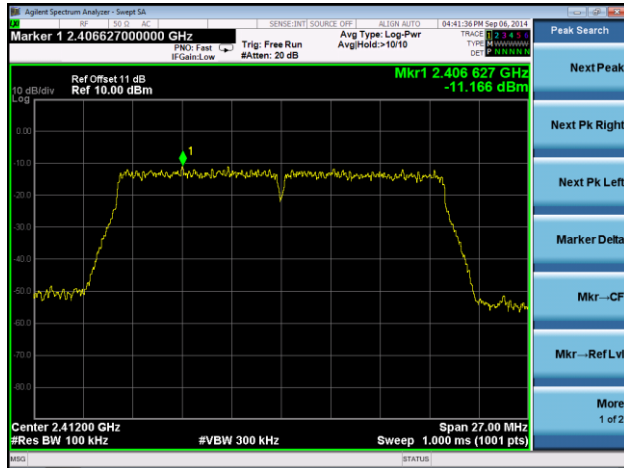

##### Low Band Edge

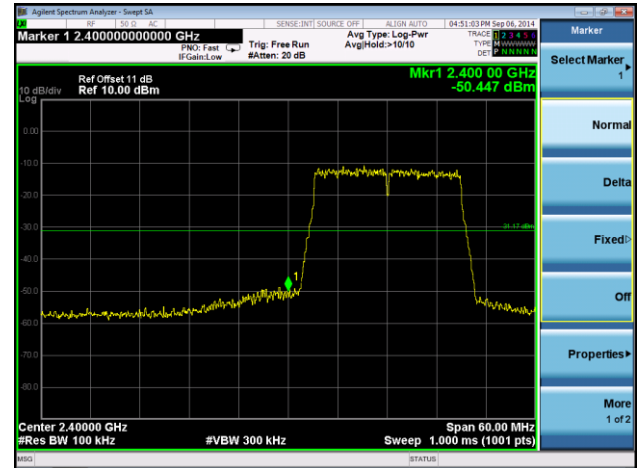


##### Spurious Emission 30MHz ~ 25GHz

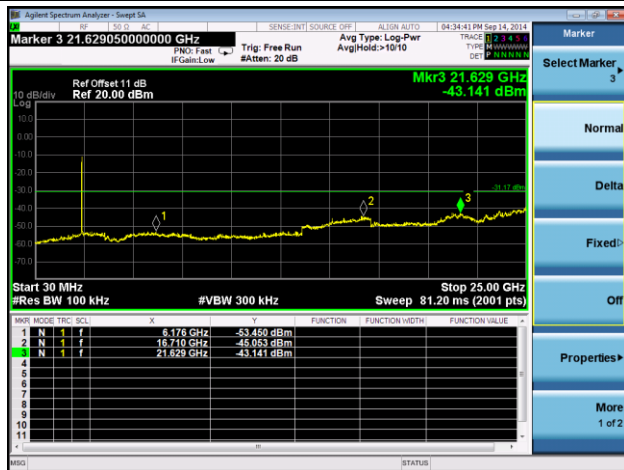

#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level

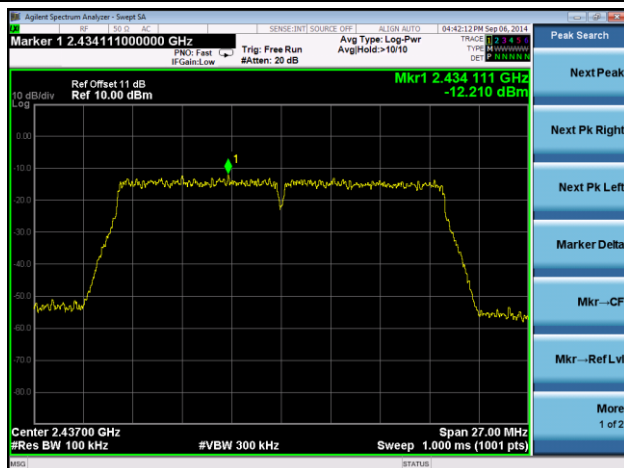


##### Spurious Emission 30MHz ~ 25GHz



### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

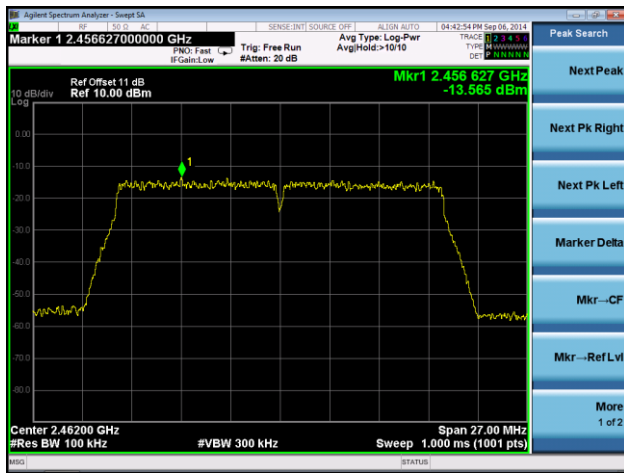

#### High Band Edge




### Spurious Emission 30MHz ~ 25GHz

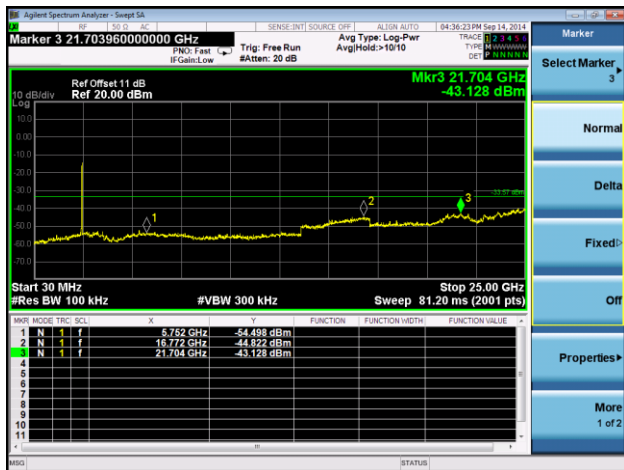


### 802.11n-HT40 Out-of-Band Emissions

### Channel 03 (2422MHz)


#### 100kHz PSD reference Level

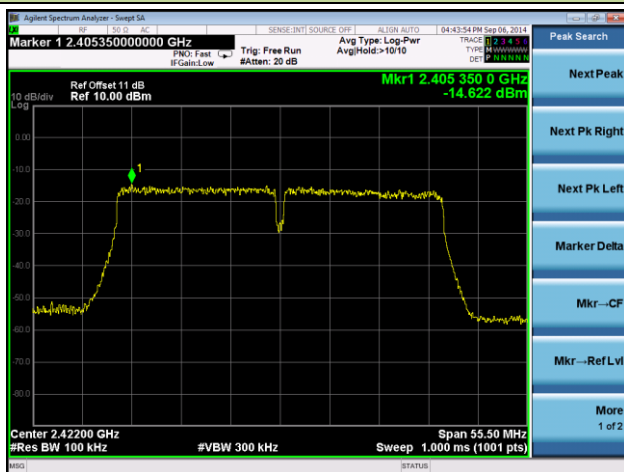

#### Low Band Edge

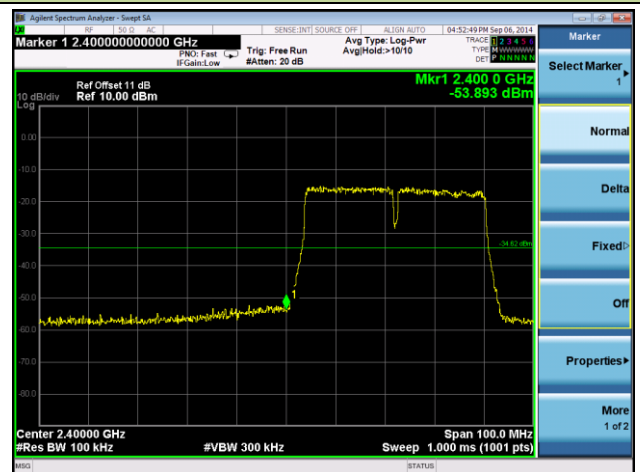


### Spurious Emission 30MHz ~ 25GHz

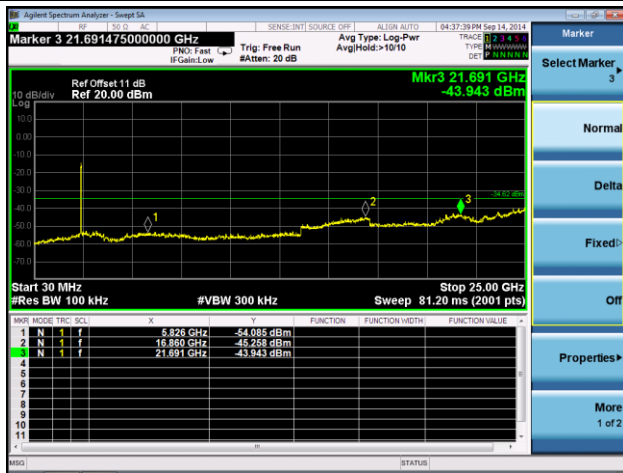


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

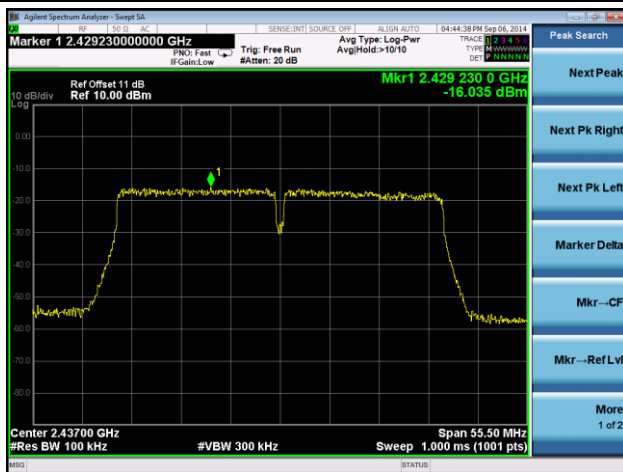

#### Spurious Emission 30MHz ~ 25GHz

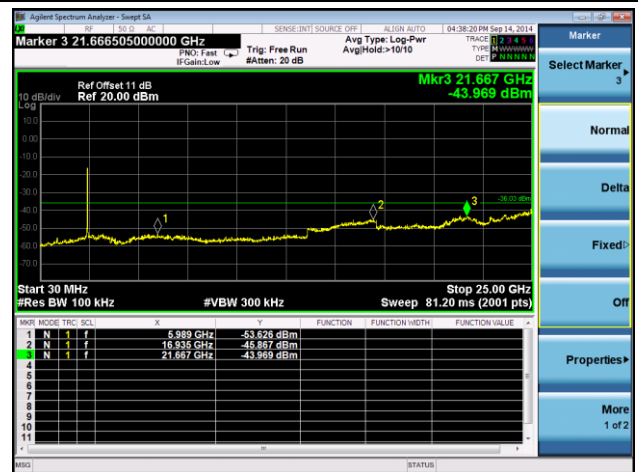


### Channel 09 (2452MHz)


#### 100kHz PSD reference Level



#### High Band Edge

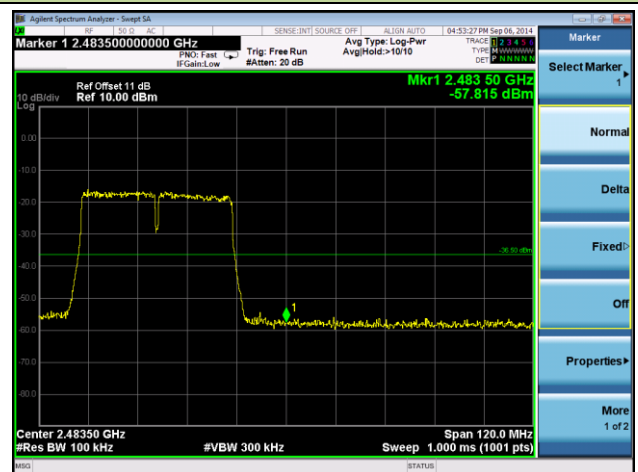

### Spurious Emission 30MHz ~ 25GHz

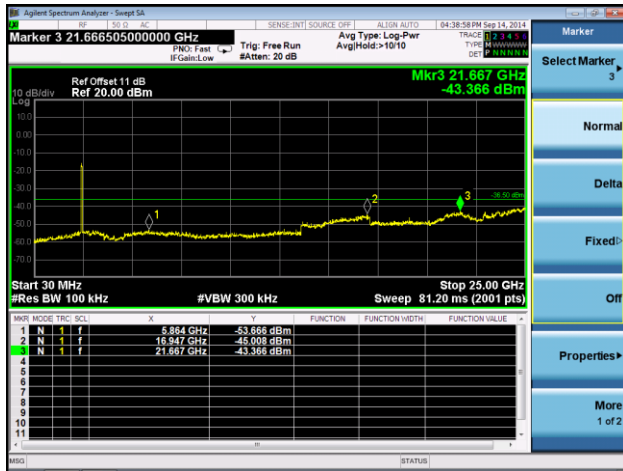

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

KDB 558074 D01v03r02 – Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r02 – Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r02 – Section 12.2.5 (average power measurements)

### 7.6.3. Test Setting

#### **Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r02**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz


**Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 D01v03r02**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq$  1/T
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces




### 7.6.4. Test Setup


#### 9kHz ~ 30MHz Test Setup:

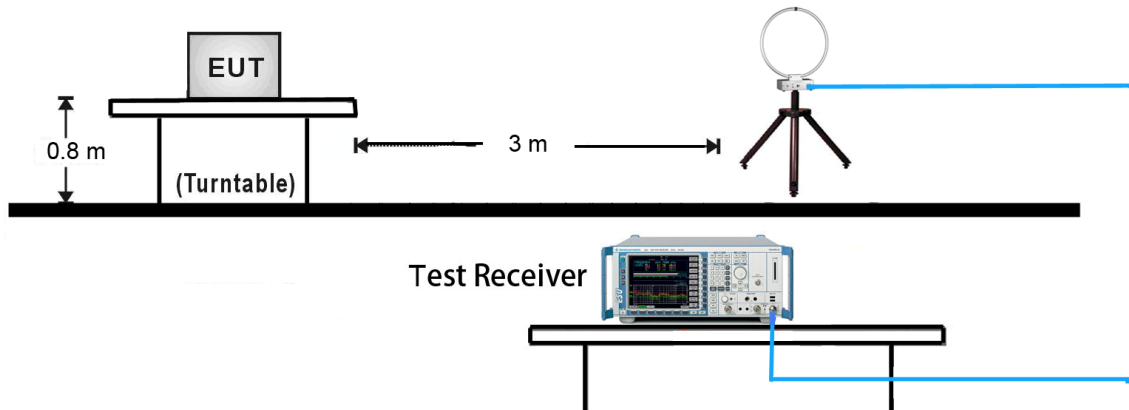

#### 30MHz ~ 1GHz Test Setup:

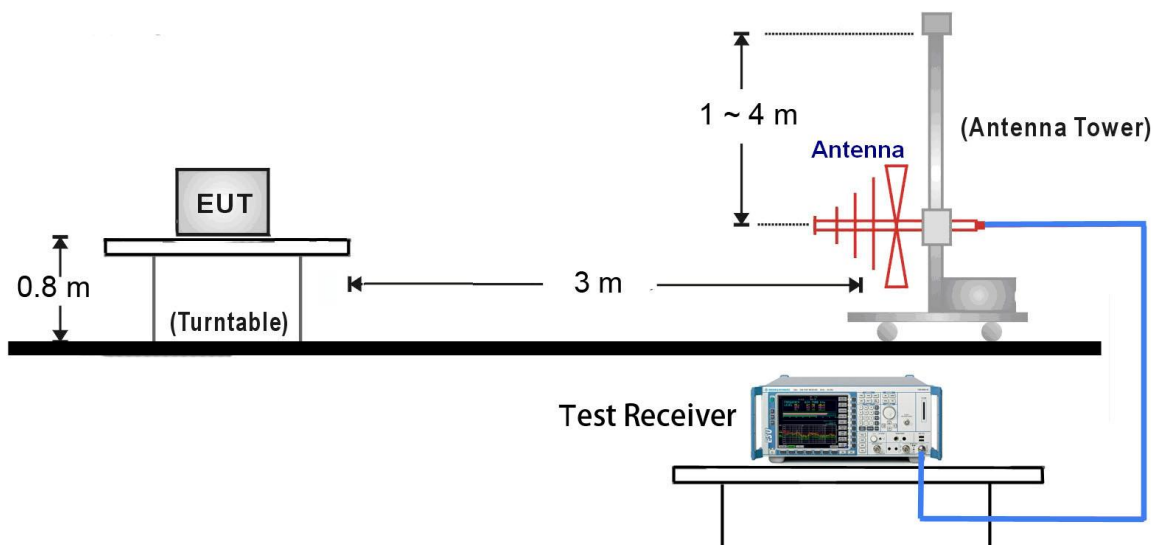

1GHz ~ 25GHz Test Setup:

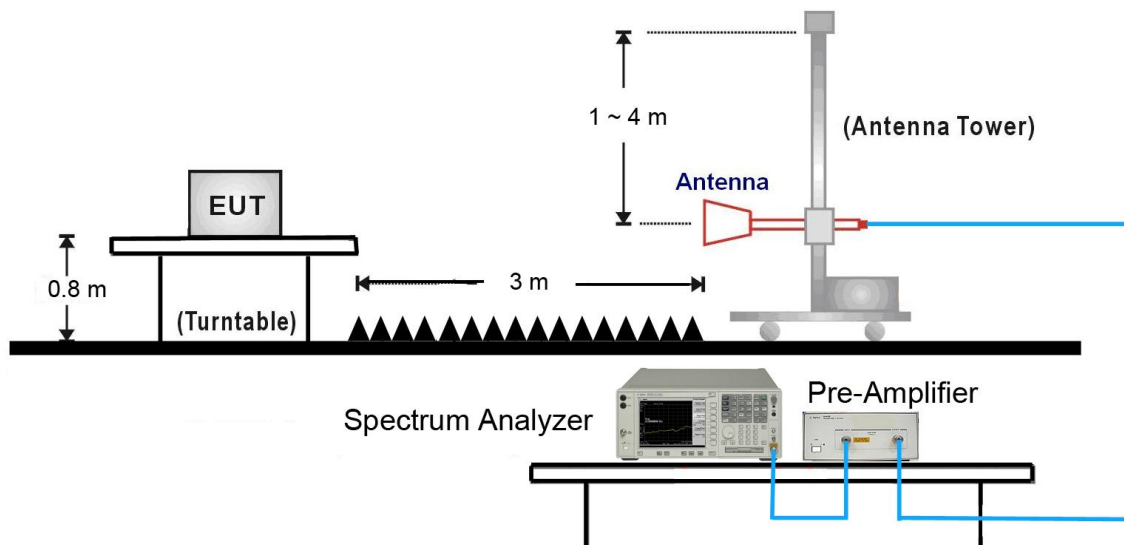

### 7.6.5. Test Result

Test Mode:	802.11n-HT40	Test Site:	AC1
Test Channel:	06	Test Engineer:	Milo Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. <b>The worst case of Radiated Spurious Emission.</b> 3. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	3185.4	35.9	3.6	39.5	78.0	-38.5	Peak	Horizontal
*	4412.0	35.4	5.5	40.9	78.0	-37.1	Peak	Horizontal
	4844.0	34.8	6.5	41.3	74.0	-32.7	Peak	Horizontal
	7266.0	35.3	13.9	49.2	74.0	-24.8	Peak	Horizontal
*	3282.7	34.9	3.3	38.2	78.0	-39.8	Peak	Vertical
*	4412.0	35.2	5.5	40.7	78.0	-37.3	Peak	Vertical
	4844.0	35.3	6.5	41.8	74.0	-32.2	Peak	Vertical
	7266.0	34.4	13.9	48.3	74.0	-25.7	Peak	Vertical


Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.0dB $\mu$ V/m).

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The worst case of Radiated Emission below 1GHz:**

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11b at channel 2462MHz	

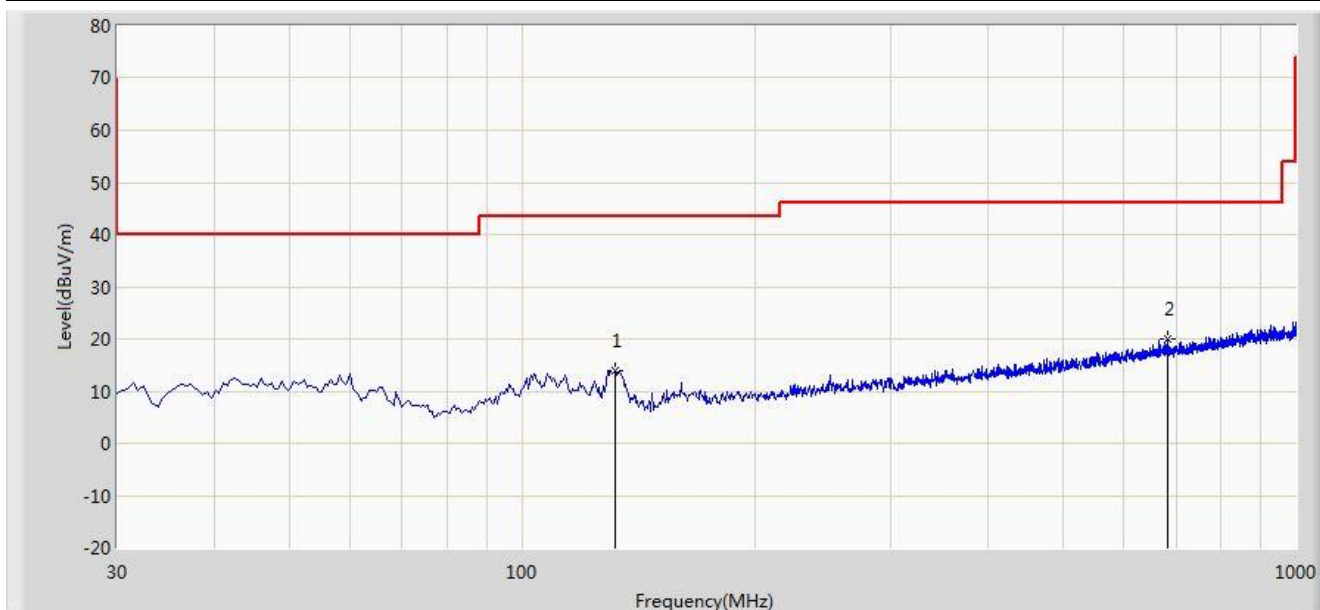


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			131.850	14.015	35.644	-29.485	43.500	-21.629	QP
2		*	684.265	19.879	30.346	-26.121	46.000	-10.467	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11b at channel 2462MHz	

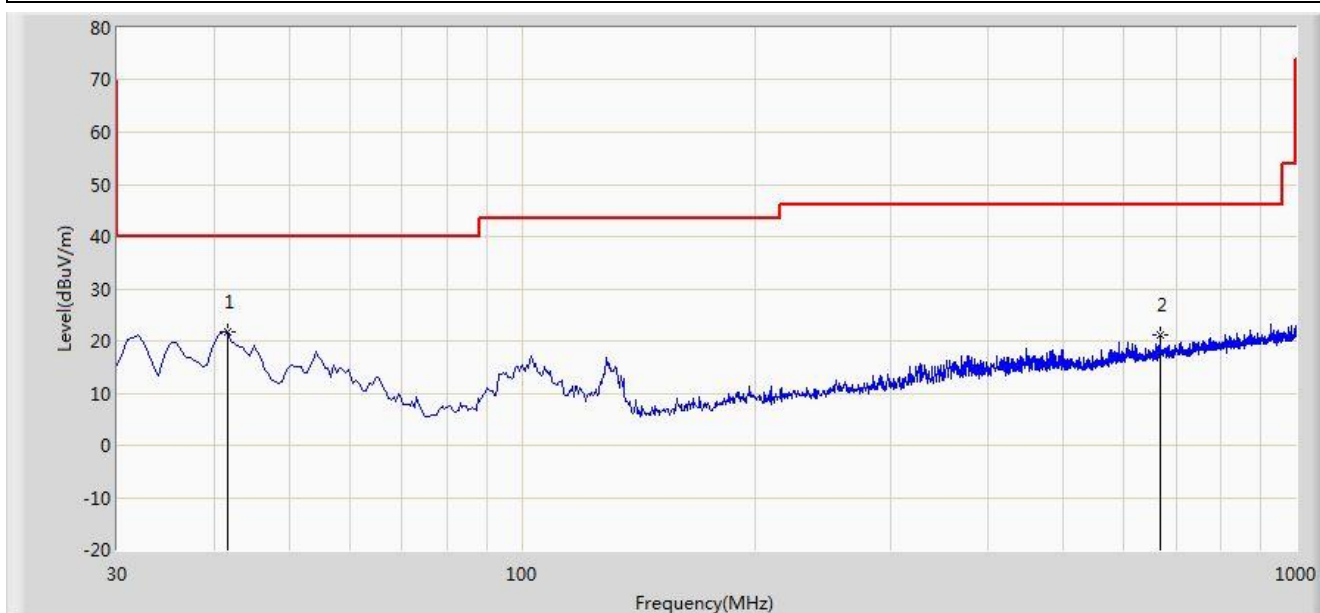


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	41.640	21.660	38.927	-18.340	40.000	-17.267	QP
2			666.805	21.269	31.994	-24.731	46.000	-10.725	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/09/11 - 16:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

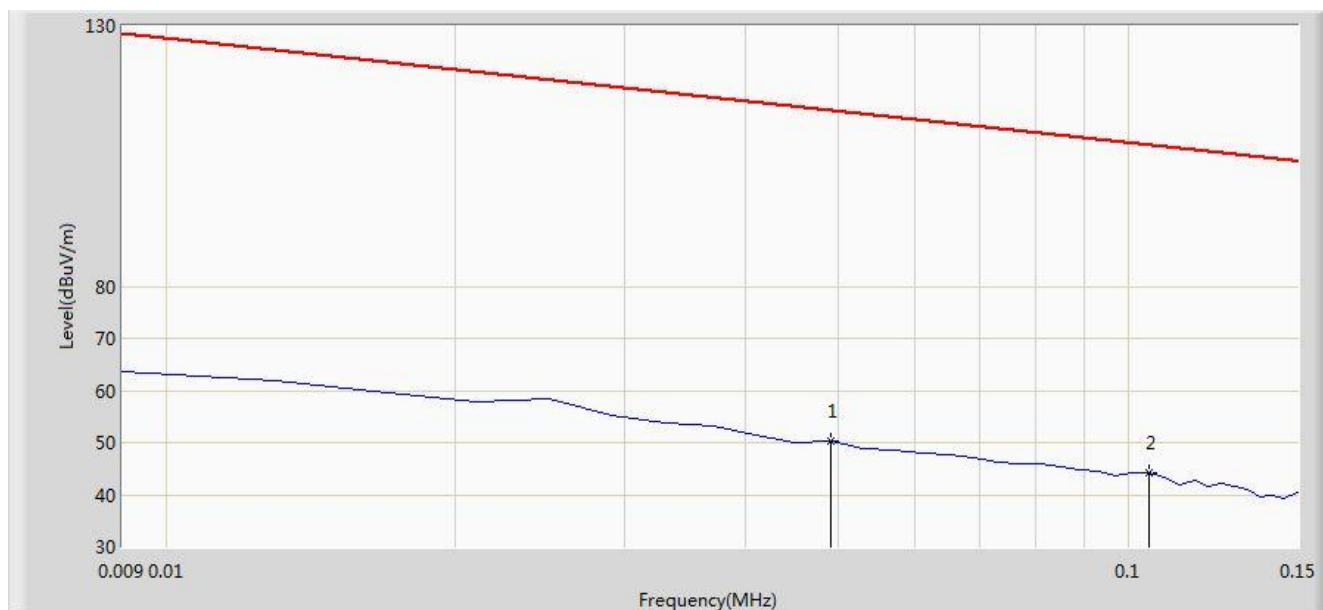


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.367	29.861	-63.422	113.789	20.505	QP
2		*	0.105	44.143	23.996	-63.029	107.173	20.147	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/09/11 - 16:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

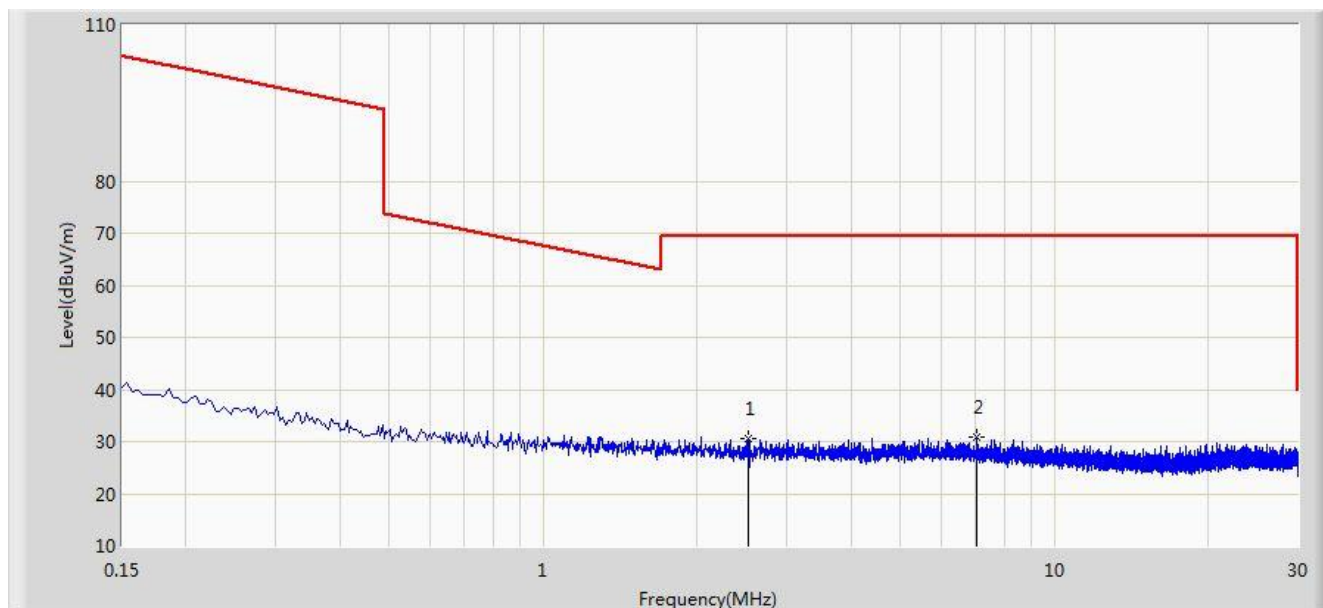


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2.513	30.495	10.336	-39.005	69.500	20.159	QP
2		*	7.041	30.974	10.579	-38.526	69.500	20.395	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/09/11 - 17:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 18 ~ 25GHz.</b>	

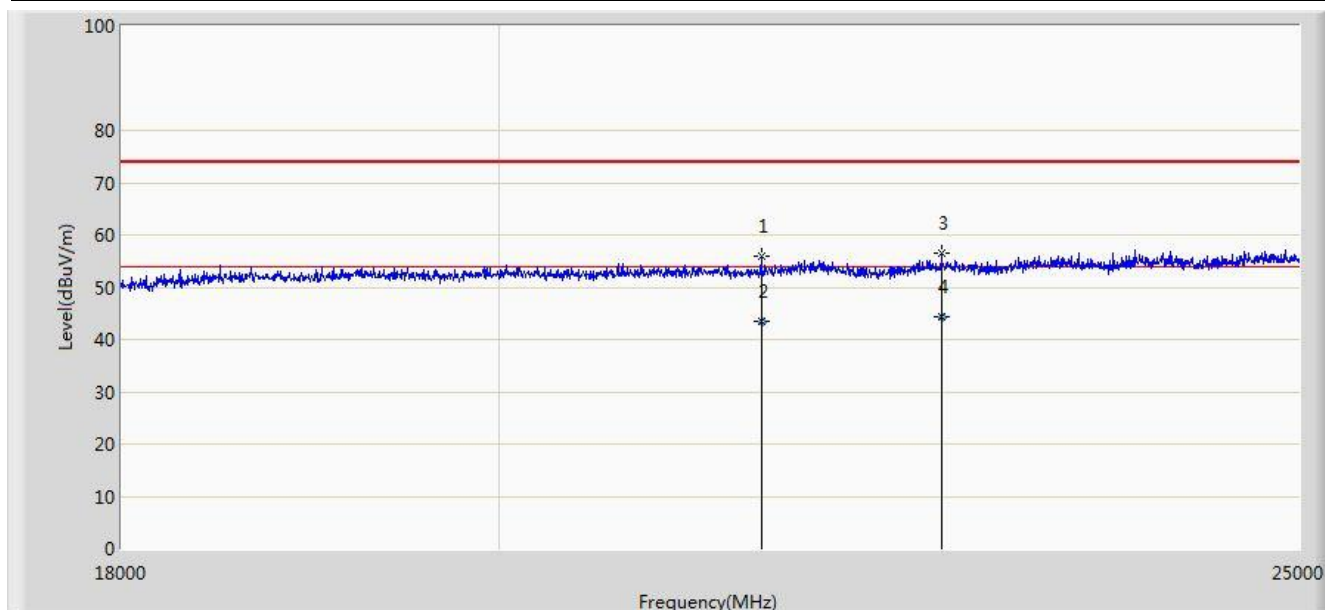


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			21517.500	55.869	17.883	-18.131	74.000	37.986	PK
2			21517.650	43.351	5.365	-10.649	54.000	37.986	AV
3			22630.500	56.509	18.223	-17.491	74.000	38.286	PK
4		*	22630.540	44.310	6.024	-9.690	54.000	38.286	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Engineer: Roy Cheng	
Site: AC1	Time: 2014/09/11 - 17:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 18 ~ 25GHz.</b>	

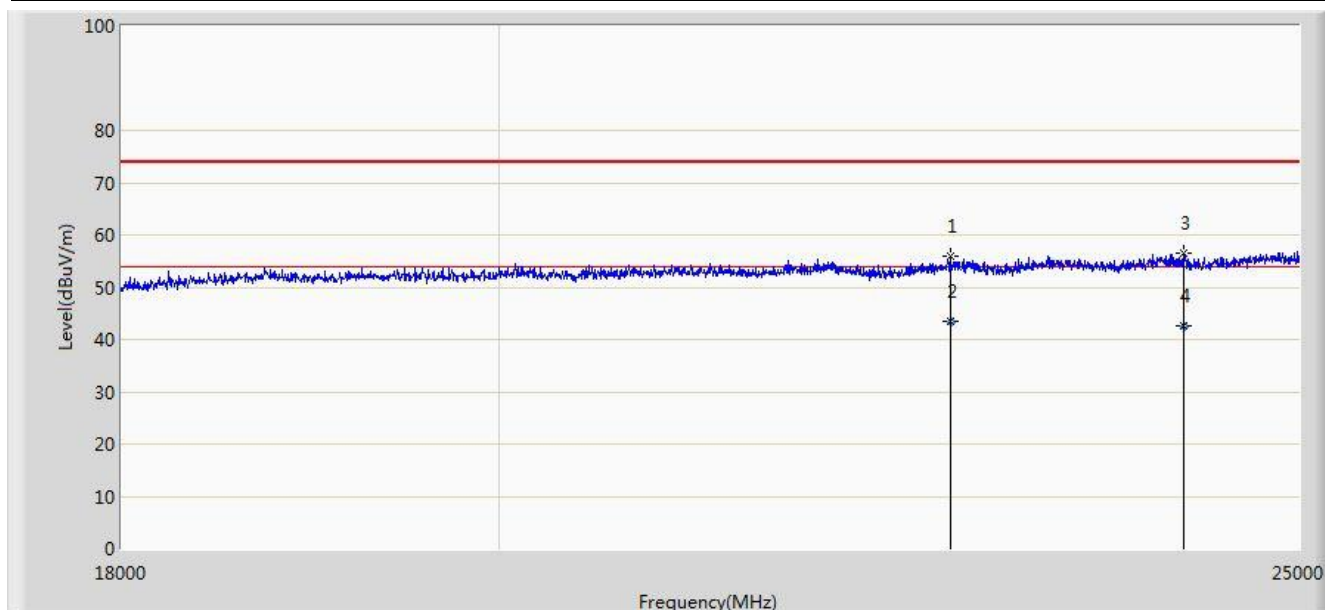

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			22686.500	55.811	17.457	-18.189	74.000	38.354	PK
2		*	22686.540	43.598	5.244	-10.402	54.000	38.354	AV
3			24205.500	56.430	17.607	-17.570	74.000	38.823	PK
4			24205.658	42.518	3.695	-11.482	54.000	38.823	AV


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11b at channel 2412MHz	

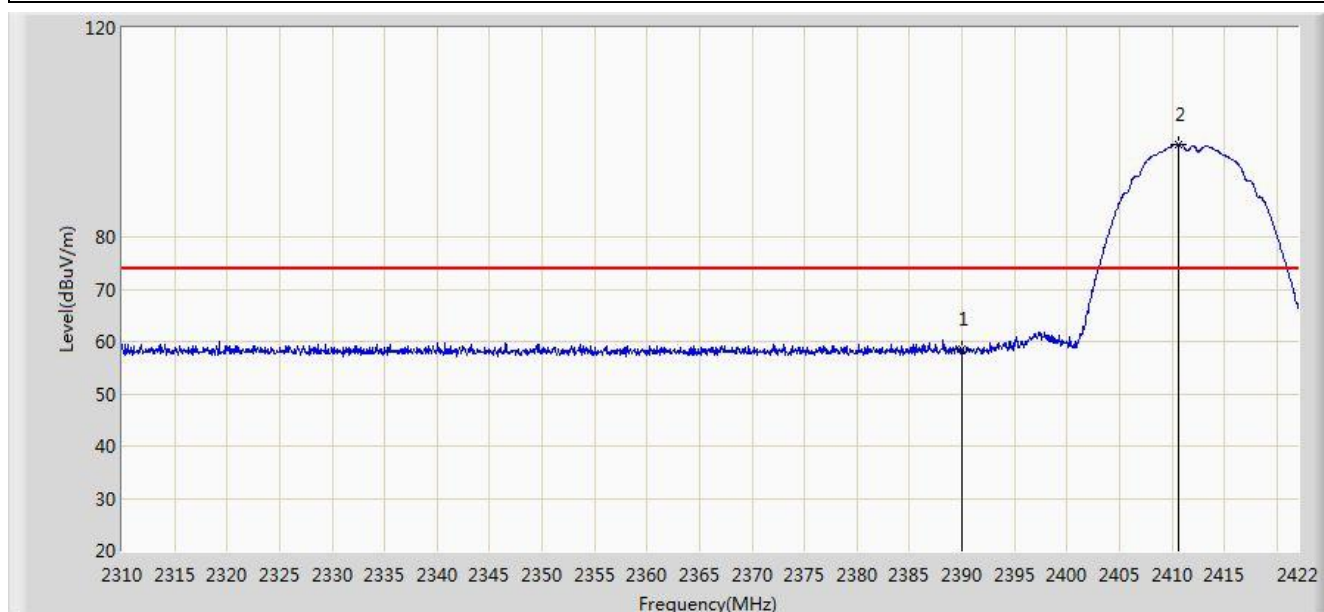

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.449	27.765	-15.551	74.000	30.684	PK
2		*	2410.632	97.668	67.021	N/A	N/A	30.647	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11b at channel 2412MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.638	14.954	-8.362	54.000	30.684	AV
2		*	2412.704	92.980	62.336	N/A	N/A	30.643	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11b at channel 2412MHz	

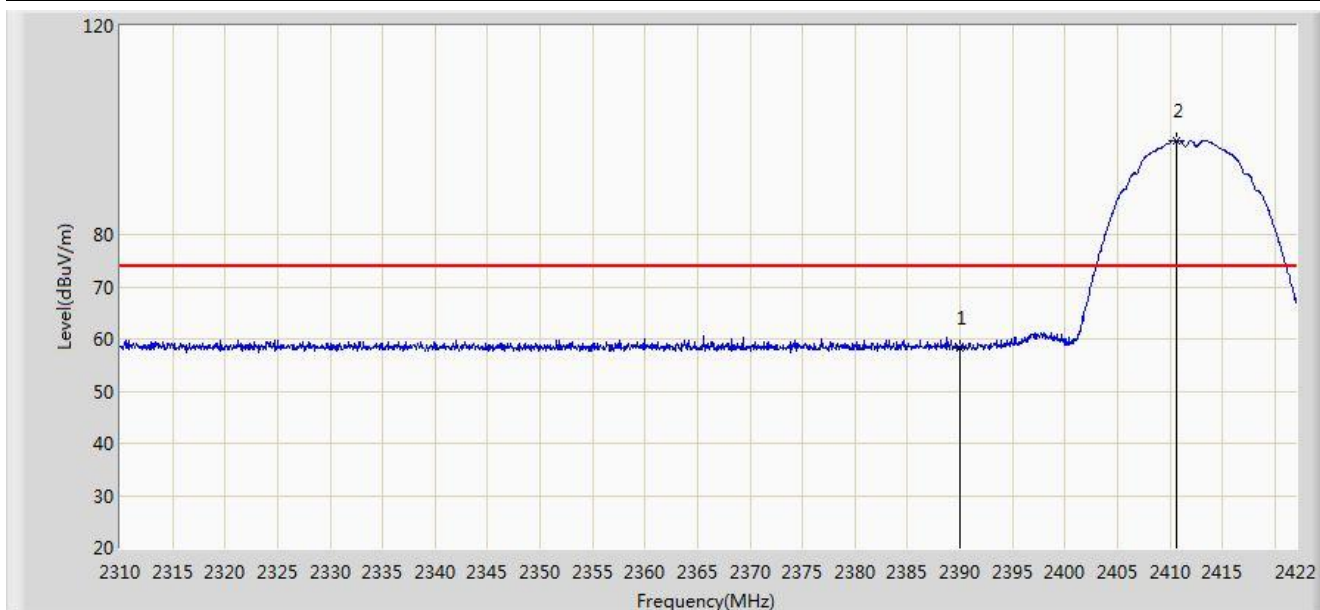


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.398	27.714	-15.602	74.000	30.684	PK
2		*	2410.632	98.007	67.360	N/A	N/A	30.647	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11b at channel 2412MHz</b>	

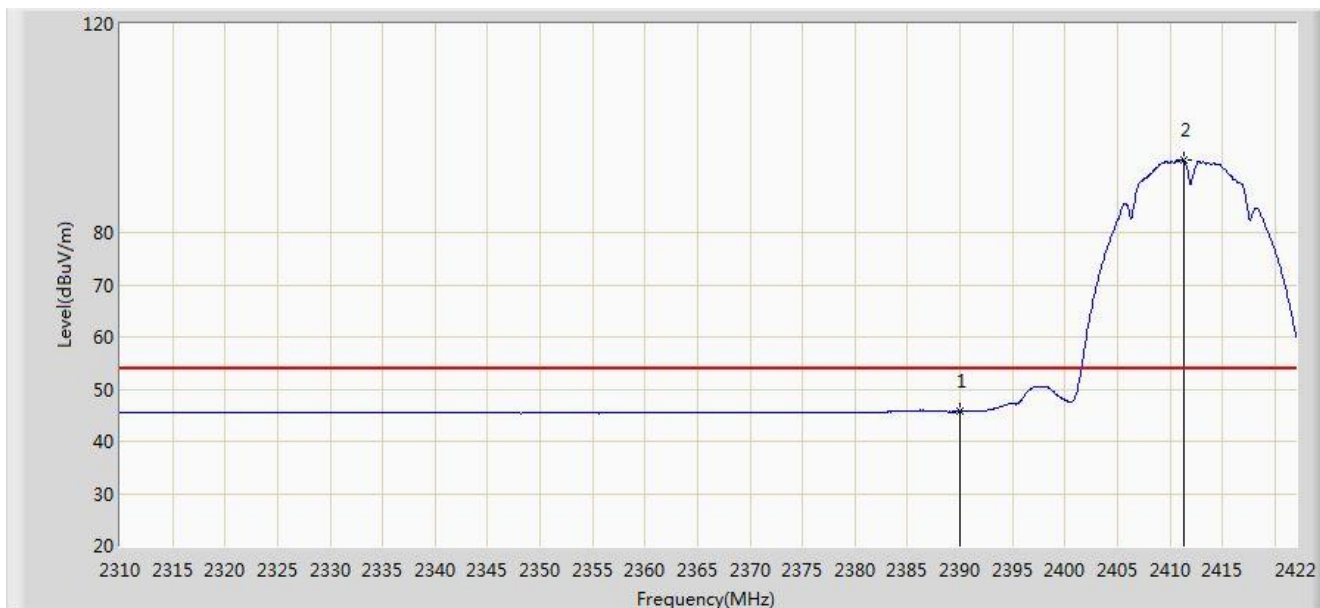


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.684	15.000	-8.316	54.000	30.684	AV
2		*	2411.304	93.913	63.267	N/A	N/A	30.646	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 at channel 2462MHz	

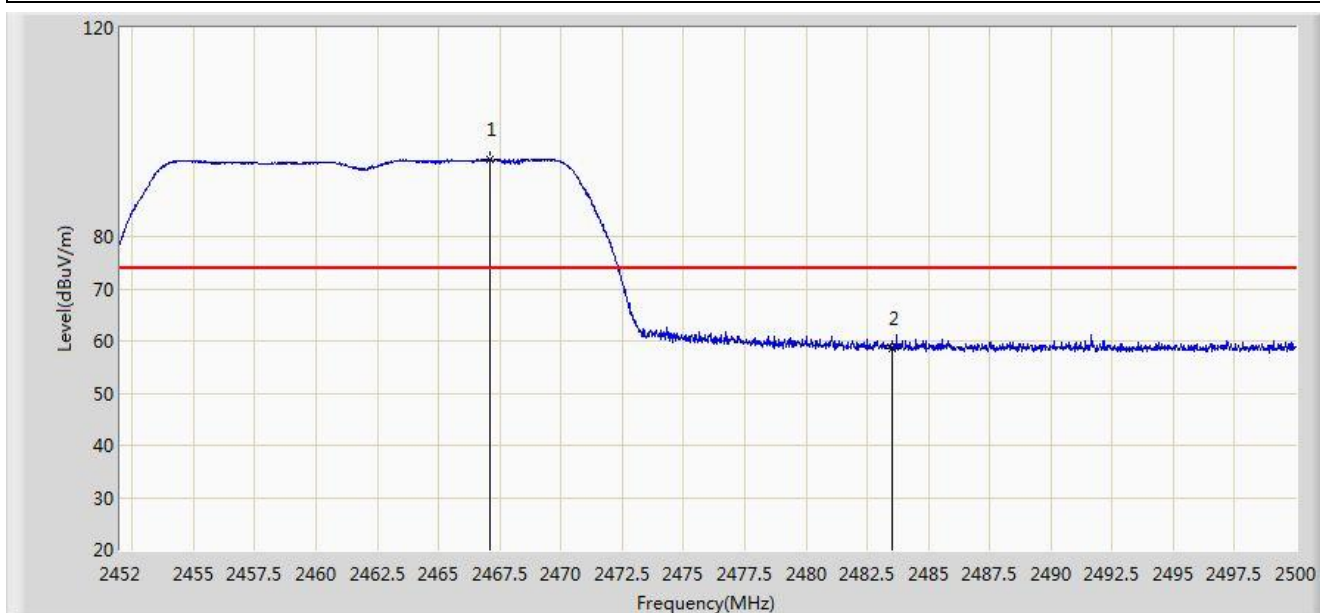

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.120	94.733	64.108	N/A	N/A	30.625	PK
2			2483.500	58.557	27.884	-15.443	74.000	30.673	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.792	83.873	53.271	N/A	N/A	30.602	AV
2			2483.500	45.803	15.130	-8.197	54.000	30.673	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 at channel 2462MHz	

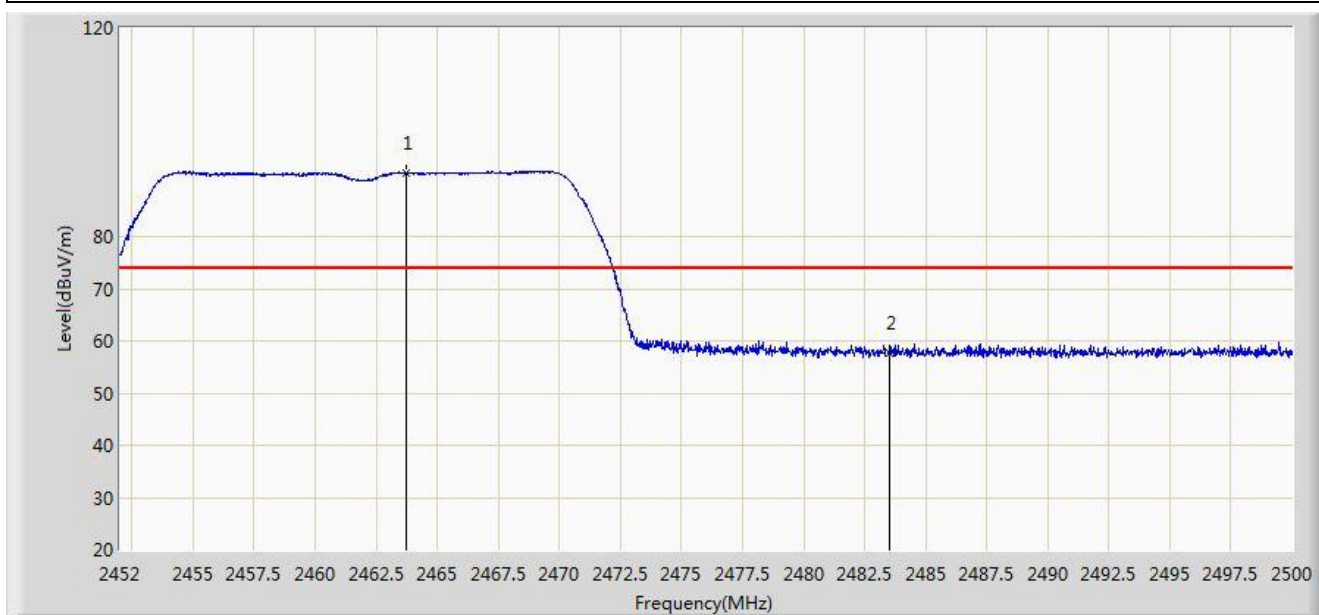


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.712	92.238	61.623	N/A	N/A	30.615	PK
2			2483.500	57.618	26.945	-16.382	74.000	30.673	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Engineer: Milo Li	
Site: AC1	Time: 2014/09/08 - 17:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IP CAMERA	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 at channel 2462MHz	

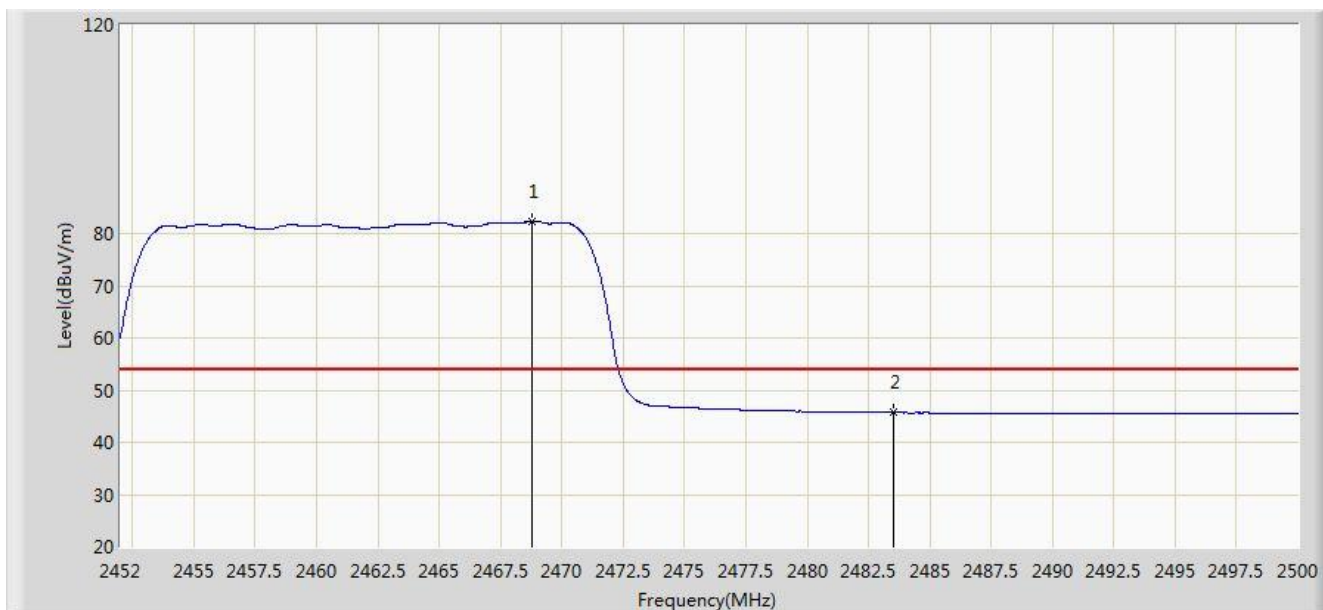

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.776	82.307	51.677	N/A	N/A	30.630	AV
2			2483.500	45.681	15.008	-8.319	54.000	30.673	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

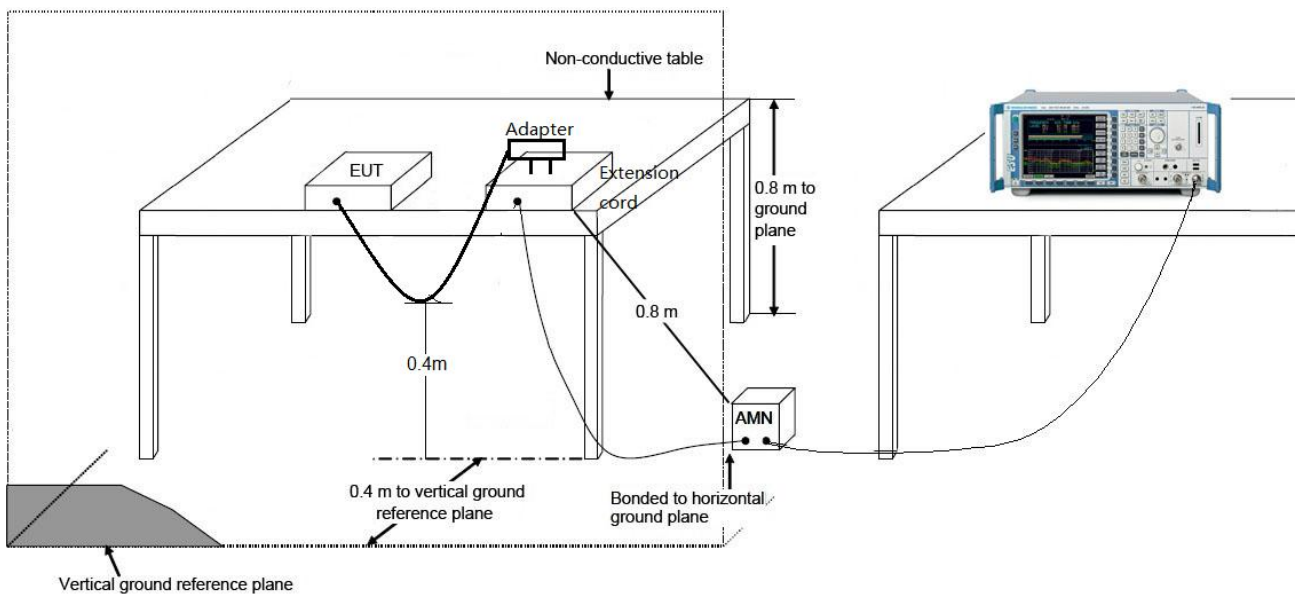

### 7.8.3. Test Result

Engineer: Milo Li	
Site: SR2	Time: 2014/09/11 - 16:58
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: IP CAMERA	Power: AC 120V/60Hz
Note: Normal Operation	

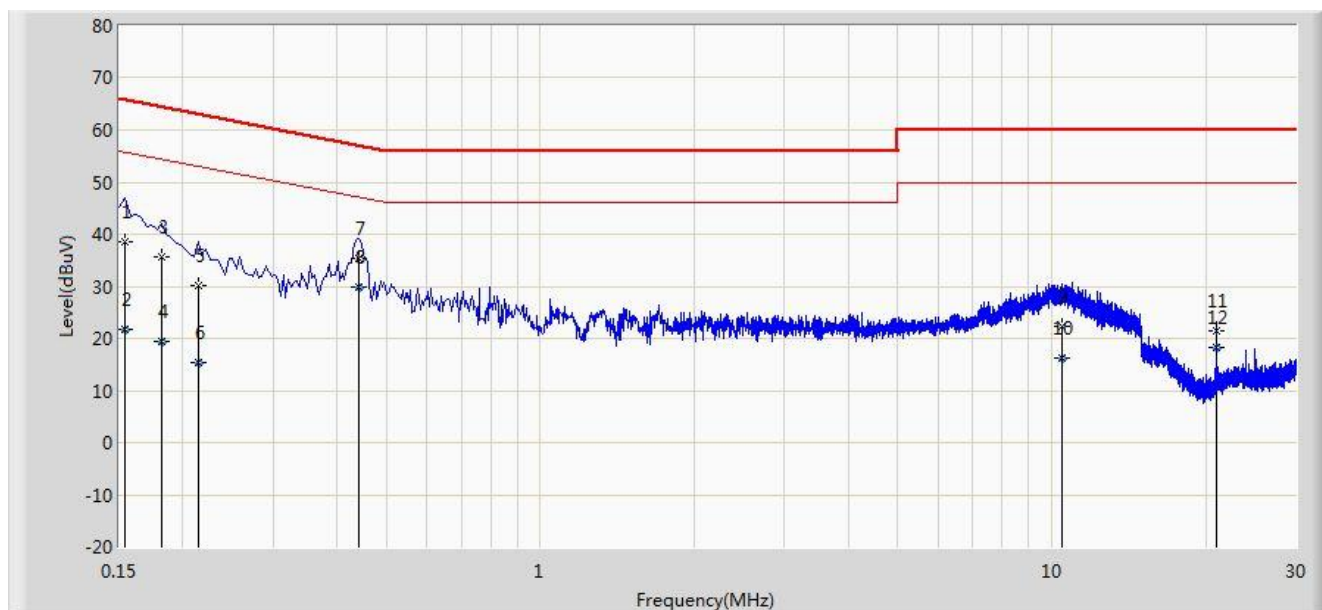


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	38.479	27.740	-27.302	65.781	10.740	QP
2			0.154	21.835	11.095	-33.946	55.781	10.740	AV
3			0.182	35.522	25.474	-28.872	64.394	10.048	QP
4			0.182	19.297	9.249	-35.097	54.394	10.048	AV
5			0.214	30.157	20.200	-32.892	63.049	9.957	QP
6			0.214	15.504	5.548	-37.544	53.049	9.957	AV
7			0.442	35.298	25.179	-21.726	57.024	10.120	QP
8		*	0.442	29.870	19.750	-17.154	47.024	10.120	AV
9			10.498	22.392	12.268	-37.608	60.000	10.124	QP
10			10.498	16.213	6.089	-33.787	50.000	10.124	AV
11			20.990	21.323	11.177	-38.677	60.000	10.145	QP
12			20.990	18.375	8.230	-31.625	50.000	10.145	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Engineer: Milo Li	
Site: SR2	Time: 2014/09/11 - 17:03
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: IP CAMERA	Power: AC 120V/60Hz
Note: Normal Operation	

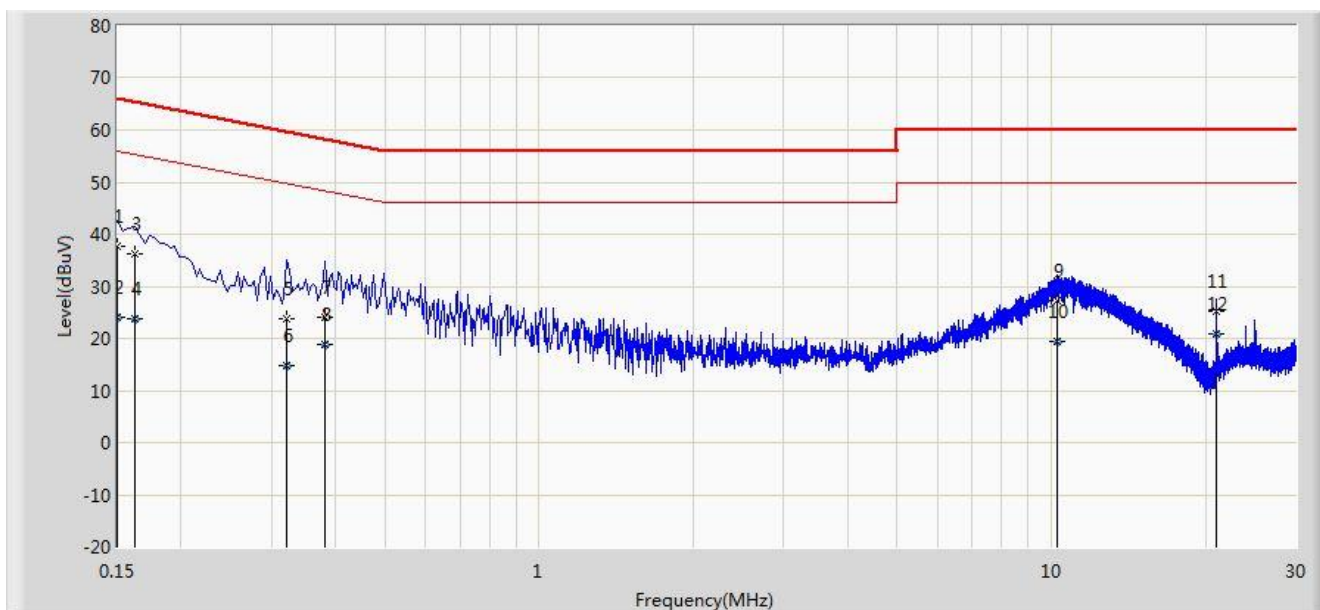

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	37.695	26.553	-28.305	66.000	11.142	QP
2			0.150	23.959	12.817	-32.041	56.000	11.142	AV
3			0.162	36.355	26.276	-29.006	65.361	10.078	QP
4			0.162	23.832	13.754	-31.529	55.361	10.078	AV
5			0.322	23.890	13.836	-35.765	59.655	10.054	QP
6			0.322	14.781	4.727	-34.874	49.655	10.054	AV
7			0.382	24.116	14.017	-34.120	58.236	10.099	QP
8			0.382	18.787	8.688	-29.449	48.236	10.099	AV
9			10.278	27.370	17.213	-32.630	60.000	10.156	QP
10			10.278	19.414	9.258	-30.586	50.000	10.156	AV
11			20.990	25.332	15.145	-34.668	60.000	10.187	QP
12			20.990	20.917	10.730	-29.083	50.000	10.187	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **IP CAMERA FCC ID:**

**2AC5ZH806P** is in compliance with Part 15C of the FCC Rules.

---

The End