

# TESTREPORT

Applicant Name : Xiamen VBeT Electronic Co., Ltd.  
 Address : N403, Weiye Building, Xiamen Pioneering Park for Overseas Chinese Scholars, PRC  
 ReportNumber: SZNS220303-07022E-RF-00B  
 FCC ID: 2AC67-X300BT

**Test Standard (s)**  
 FCC PART 15B, CLASS B

### Sample Description


Product Type: X300 Bluetooth Headset  
 Model No.: VT X300 BT DUO  
 Multiple Model(s) No.: VT X300 BT, X300 BT DUO, X300 BT  
 Trade Mark: VT  
 Date Received: 2022/03/03  
 Date of Test: 2022/04/07  
 Report Date: 2022/04/11

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

**Approved By:**

Black Ding  
 EMC Engineer

Candy Li  
 EMC Engineer

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "\*\*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

## TABLE OF CONTENTS

<b>1. TEST RESULTS SUMMARY</b>	<b>4</b>
<b>2. GENERAL INFORMATION</b>	<b>5</b>
2.1. Description of Device (EUT)	5
2.2. Test Mode	5
2.3. Description of Test Facility	6
2.4. Measurement Uncertainty	6
<b>3. MEASURING DEVICE AND TEST EQUIPMENT</b>	<b>7</b>
3.1. For Conducted Emission Test	7
3.2. For Radiated Emission Measurement	7
<b>4. POWER LINE CONDUCTED MEASUREMENT</b>	<b>8</b>
4.1. Block Diagram of Test Setup	8
4.2. Power Line Conducted Emission Measurement Limits (Class B)	9
4.3. Test mode description	9
4.4. Manufacturer	9
4.5. Operating Condition of EUT	9
4.6. Test Procedure	9
4.7. Data Explain	10
4.8. Power Line Conducted Emission Measurement Results	10
<b>5. RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
5.1. Block Diagram of Test Setup	15
5.2. Radiated Emission Limit (Class B)	16
5.3. Test Mode Description	16
5.4. Manufacturer	17
5.5. Operating Condition of EUT	17
5.6. Test Procedure	17
5.7. Data Sample	18
5.8. Radiated Emission Measurement Result	18

### Test Report Declaration

Applicant .: Xiamen VBeT Electronic Co., Ltd.  
Manufacturer : Xiamen VBeT Electronic Co., Ltd.  
Product : X300 Bluetooth Headset  
Model No. : VT X300 BT DUO, VT X300 BT, X300 BT DUO, X300 BT  
Trade Mark : VT

Measurement Procedure Used:

#### **FCC Rules and Regulations Part 15 Subpart B Class B ANSI C63.4: 2014**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

## 1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission (0.15-30MHz)	FCC Part 15 Subpart B	Pass
Radiated Emission (30-1000MHz)	FCC Part 15 Subpart B	Pass
Radiated Emission (Above 1GHz)	FCC Part 15 Subpart B	Pass

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product : X300 Bluetooth Headset  
Model No. : VT X300 BT DUO, VT X300 BT, X300 BT DUO, X300 BT  
Rating : DC 3.8V from battery or DC 5V from USB port  
Trade Mark : VT

Remark(s) : The highest operation frequency is 2480MHz.

Applicant : Xiamen VBeT Electronic Co., Ltd.

Address : N403, Weiye Building, Xiamen Pioneering Park for Overseas  
Chinese Scholars, PRC

Manufacturer : Xiamen VBeT Electronic Co., Ltd.

Address : N403, Weiye Building, Xiamen Pioneering Park for Overseas  
Chinese Scholars, PRC

Date of sample received : Mar. 03, 2022  
Date of Test : Apr. 7, 2022

Sample Number : SZNS220303-07022E-RF-S1

### 2.2. Test Mode

Mode 1: Direct Charging  
Mode 2: Base Charging

#### Accessory and Auxiliary Equipment

Adapter : ZTE  
Model: STC-A51A

Base : VT  
Model: Charging base

### 2.3. Description of Test Facility

EMC Lab : Accredited by American Association for Laboratory Accreditation (A2LA)  
The Certificate Number is 4297.01

Listed by Innovation, Science and Economic Development Canada (ISED)  
The Registration Number is 5077A

Accredited by China National Accreditation Service for Conformity Assessment (CNAS)  
The Registration Number is CNAS L3193

Name of Firm : Shenzhen Accurate Technology Co., Ltd.

Site Location : 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

### 2.4. Measurement Uncertainty

Radiated emission expanded uncertainty :  $U=4.28dB, k=2$   
(30MHz-1000MHz)

Radiated emission expanded uncertainty :  $U=4.98dB, k=2$   
(1GHz -18GHz)

Radiated emission expanded uncertainty :  $U=5.06dB, k=2$   
(18GHz - 26.5GHz)

Radiated emission expanded uncertainty :  $U=4.72dB, k=2$   
(26.5GHz - 40GHz)

Conduction Emission Expanded Uncertainty :  $U=2.72dB, k=2$   
(0.15kHz-30MHz)

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For Conducted Emission Test

Item	Manufacturer	Equipment	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
2.	Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
3.	Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
4.	Conducted Emission Test Software: e3 19821b (V9)					

#### 3.2. For Radiated Emission Measurement


Item	Manufacturer	Equipment	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
2.	Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
3.	SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
4.	A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
5.	Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
6.	Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
7.	Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
8.	Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
9.	Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
10.	Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
11.	Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
12.	Radiated Emission Test Software: e3 19821b (V9)					

## 4. POWER LINE CONDUCTED MEASUREMENT


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators


Mode1:

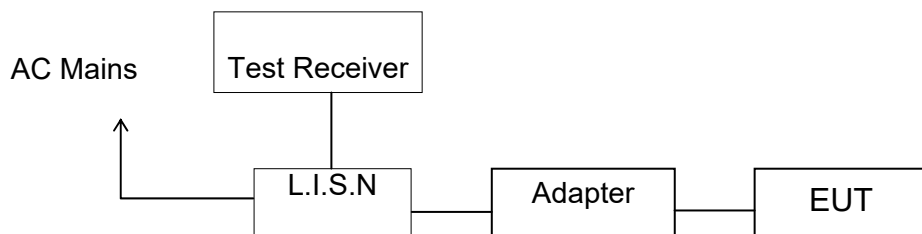

Mode2:

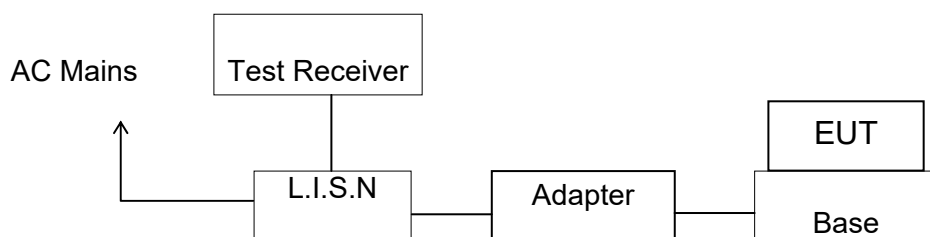

#### 4.1.2. Test System Setup

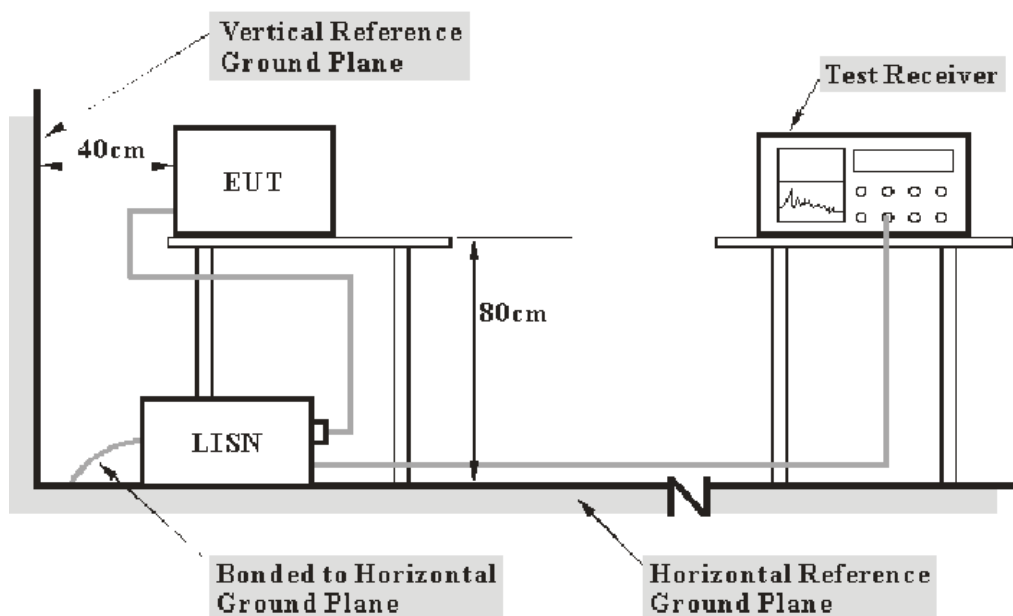

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.



### 4.2. Power Line Conducted Emission Measurement Limits (Class B)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.3. Test mode description

- Mode 1: Direct Charging
- Mode 2: Base Charging

### 4.4. Manufacturer

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

#### 4.4.1. X300 Bluetooth Headset

- Model Number : VT X300 BT DUO
- Manufacturer : Xiamen VBeT Electronic Co., Ltd.

### 4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.5.2. Turn on the power of all equipment.
- 4.5.3. Let the EUT work in test mode and measure it.

### 4.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9kHz.  
 The frequency range from 150kHz to 30MHz is checked.

#### 4.7.DataExplain

$$\text{Over Limit} = \text{Level (dB}\mu\text{V)} - \text{Limit(dB}\mu\text{V)}$$

#### 4.8.Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.


Maximizing procedure was performed on the six (6) highest emissions of the EUT. Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


<b>Job No.:</b>	<b>SZNS220303-07022E-RF</b>	<b>Power:</b>	<b>AC 120V 60Hz</b>
<b>Mode:</b>	<b>1. Direct charging 2. Base charging</b>	<b>Test By:</b>	<b>Jason Liu</b>
<b>Limit:</b>	<b>FCC PART 15B</b>	<b>Test item:</b>	<b>Conducted Emission</b>
<b>Climatic:</b>	<b>25° C 55%RH 101kPa</b>	<b>Date:</b>	<b>2022-04-07</b>

Mode 1:

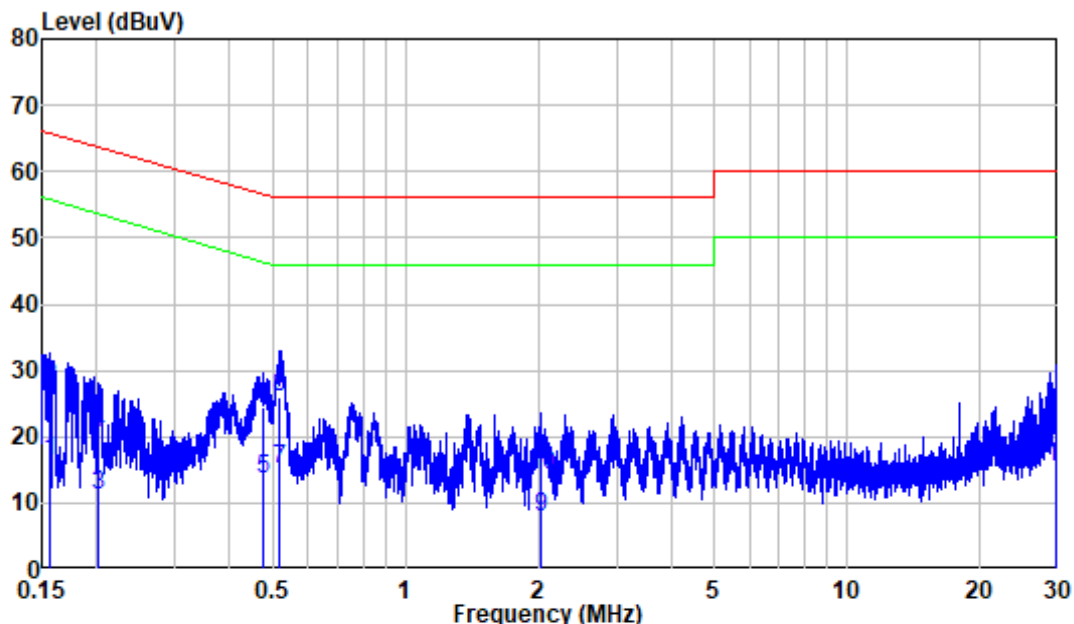

Site : Shielding Room  
 Condition: Line  
 Mode : Direct charging  
 Model : VT X300 BT DUO  
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.80	6.51	16.31	55.67	-39.36	Average
2	0.156	9.80	17.52	27.32	65.67	-38.35	QP
3	0.201	9.80	1.39	11.19	53.58	-42.39	Average
4	0.201	9.80	10.62	20.42	63.58	-43.16	QP
5	0.475	9.80	3.89	13.69	46.43	-32.74	Average
6	0.475	9.80	14.59	24.39	56.43	-32.04	QP
7	0.520	9.81	5.36	15.17	46.00	-30.83	Average
8	0.520	9.81	16.15	25.96	56.00	-30.04	QP
9	2.029	9.82	-2.11	7.71	46.00	-38.29	Average
10	2.029	9.82	4.32	14.14	56.00	-41.86	QP
11	29.822	10.10	5.20	15.30	50.00	-34.70	Average
12	29.822	10.10	10.03	20.13	60.00	-39.87	QP

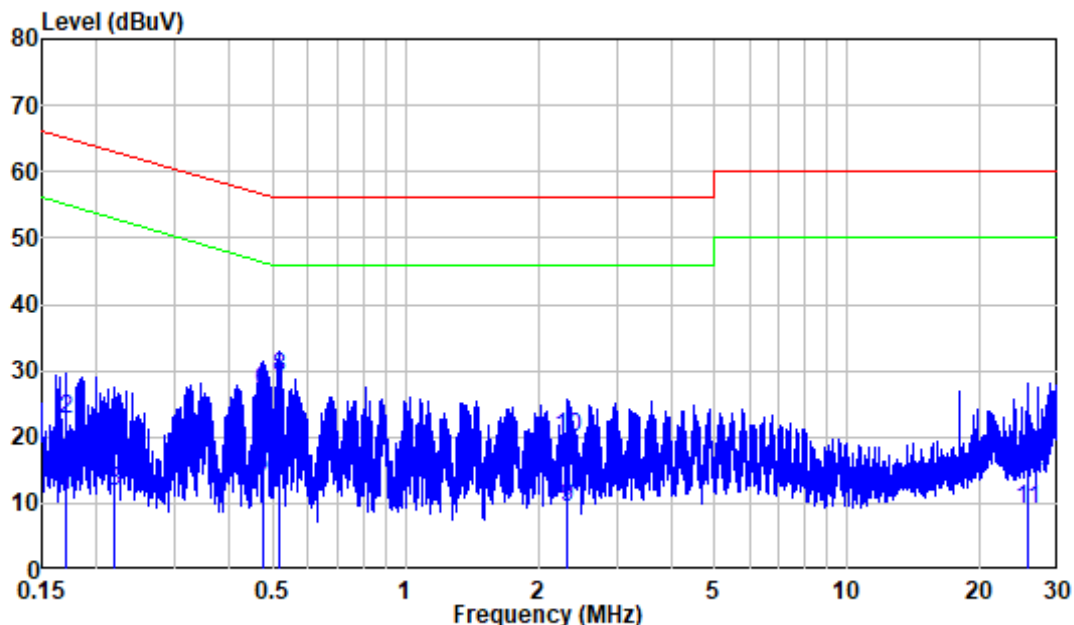

Site : Shielding Room  
 Condition: Neutral  
 Mode : Direct charging  
 Model : VT X300 BT DUO  
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.170	9.80	1.47	11.27	54.97	-43.70	Average
2	0.170	9.80	12.77	22.57	64.97	-42.40	QP
3	0.218	9.80	2.10	11.90	52.88	-40.98	Average
4	0.218	9.80	11.81	21.61	62.88	-41.27	QP
5	0.473	9.80	4.17	13.97	46.46	-32.49	Average
6	0.473	9.80	17.08	26.88	56.46	-29.58	QP
7	0.518	9.81	5.85	15.66	46.00	-30.34	Average
8	0.518	9.81	19.25	29.06	56.00	-26.94	QP
9	2.331	9.82	-0.36	9.46	46.00	-36.54	Average
10	2.331	9.82	9.97	19.79	56.00	-36.21	QP
11	25.591	10.16	-1.17	8.99	50.00	-41.01	Average
12	25.591	10.16	4.61	14.77	60.00	-45.23	QP

Mode 2:

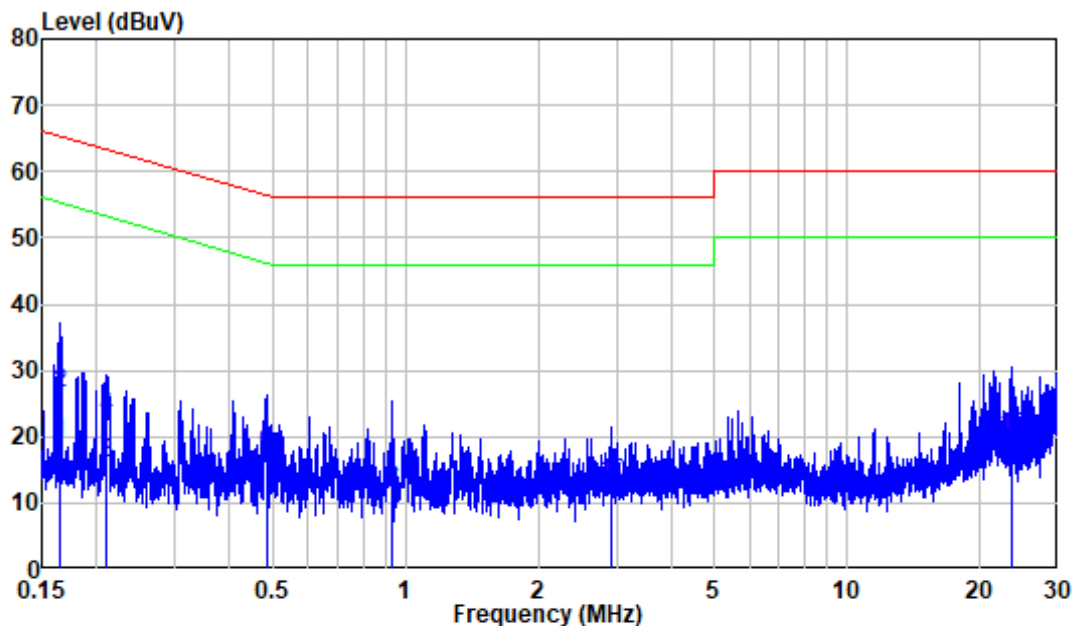

Site : Shielding Room  
 Condition: Line  
 Mode : Base charging  
 Model : VT X300 BT DUO  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.164	9.80	9.34	19.14	55.24	-36.10	Average
2	0.164	9.80	16.88	26.68	65.24	-38.56	QP
3	0.211	9.80	6.28	16.08	53.18	-37.10	Average
4	0.211	9.80	13.11	22.91	63.18	-40.27	QP
5	0.483	9.80	6.02	15.82	46.28	-30.46	Average
6	0.483	9.80	7.59	17.39	56.28	-38.89	QP
7	0.934	9.81	1.57	11.38	46.00	-34.62	Average
8	0.934	9.81	2.19	12.00	56.00	-44.00	QP
9	2.931	9.83	0.42	10.25	46.00	-35.75	Average
10	2.931	9.83	3.22	13.05	56.00	-42.95	QP
11	23.558	10.04	4.45	14.49	50.00	-35.51	Average
12	23.558	10.04	9.92	19.96	60.00	-40.04	QP

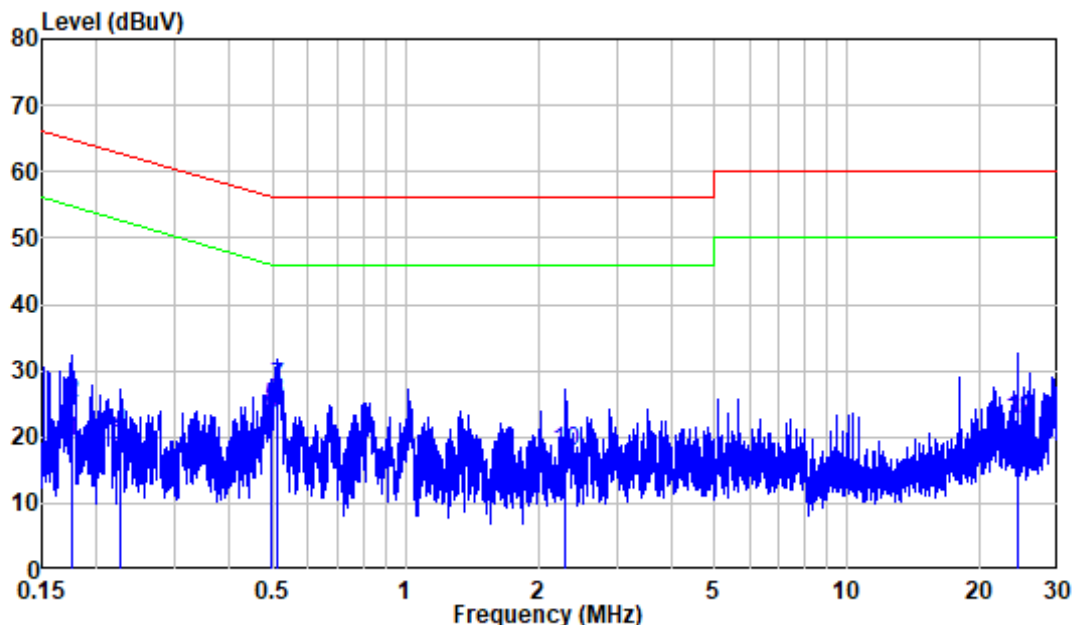

Site : Shielding Room  
 Condition: Neutral  
 Mode : Base charging  
 Model : VT X300 BT DUO  
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.176	9.80	9.56	19.36	54.69	-35.33	Average
2	0.176	9.80	15.24	25.04	64.69	-39.65	QP
3	0.226	9.80	8.49	18.29	52.59	-34.30	Average
4	0.226	9.80	10.64	20.44	62.59	-42.15	QP
5	0.494	9.80	14.68	24.48	46.10	-21.62	Average
6	0.494	9.80	13.40	23.20	56.10	-32.90	QP
7	0.512	9.81	17.80	27.61	46.00	-18.39	Average
8	0.512	9.81	15.67	25.48	56.00	-30.52	QP
9	2.292	9.82	5.24	15.06	46.00	-30.94	Average
10	2.292	9.82	8.02	17.84	56.00	-38.16	QP
11	24.416	10.14	12.37	22.51	50.00	-27.49	Average
12	24.416	10.14	12.54	22.68	60.00	-37.32	QP

## 5. RADIATED EMISSION MEASUREMENT


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators

Mode 1:

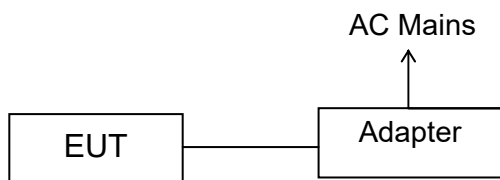


Mode 2:

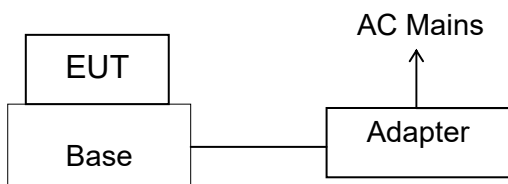


#### 5.1.2. Test System Setup

**Below 1GHz:**

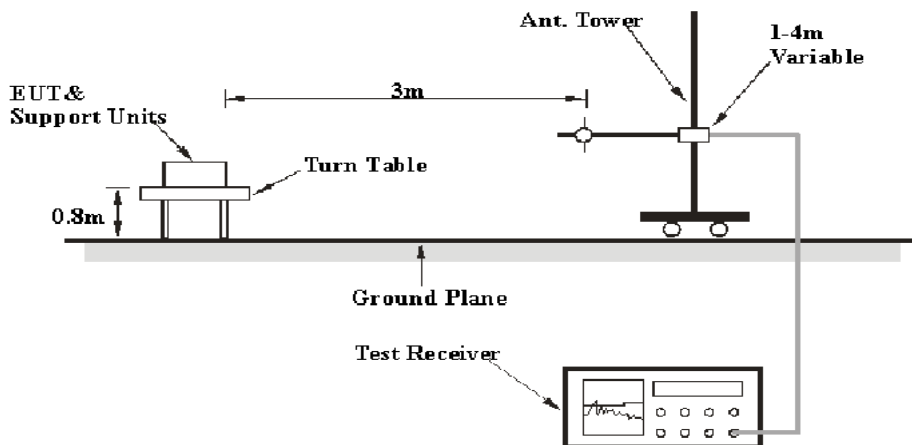

**Above 1GHz:**

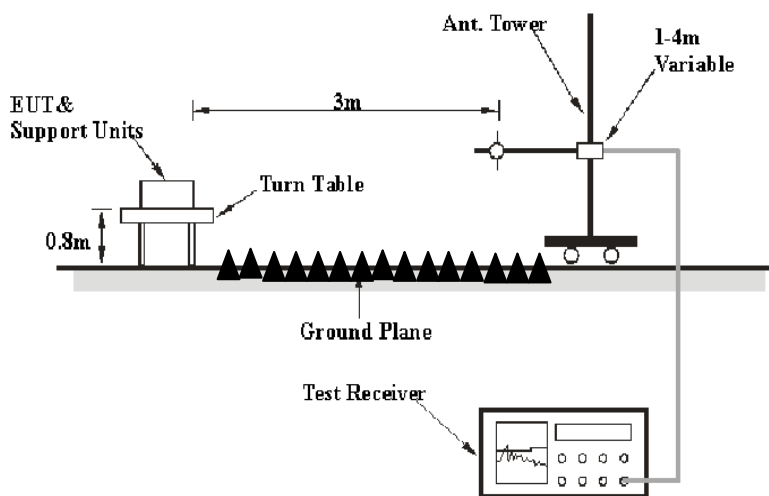

**5.2. Radiated Emission Limit (Class B)**

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency MHz	Distance Meters	Field Strengths QP Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V/m})$
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Remark:

- (1) Emission level  $\text{dB}(\mu\text{V}) = 20 \log$  Emission level  $\mu\text{V/m}$ .
- (2) The lower limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

Frequency MHz	Distance Meters	Field Strengths Limit	
		Peak $\text{dB}(\mu\text{V/m})$	AVG $\text{dB}(\mu\text{V/m})$
Above 1GHz	3	74	54

**5.3. Test Mode Description**

- Mode 1: Direct charging
- Mode 2: base charging



## 5.4.Manufacturer

The following equipments are installed on Radiated Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 5.4.1.X300 Bluetooth Headset

Model Number : VT X300 BT DUO  
Manufacturer : Xiamen VBeT Electronic Co., Ltd.

## 5.5.Operating Condition of EUT

- 5.5.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.5.2. Turn on the power of all equipment.
- 5.5.3. Let the EUT work in test mode and measure it.

## 5.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2014 on radiated emission measurement.

The bandwidth of the Receiver/Spectrum Analyzer is set at 9kHz in 9kHz-30MHz, 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 30MHz to 13000MHz is investigated.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705-108 .....	1000.
108-500 .....	2000.
500-1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 5.7.Data Sample

Over limit (dB) = Result(dBµv/m) - Limit (dBµv/m)  
 QP = Quasi-peak Reading

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7dB means the emission is 7dB below the limit.

### 5.8.Radiated Emission Measurement Result

**PASS.**

The frequency range from 30MHz to 13GHz is investigated.  
 The spectral diagrams are attached as below.

Note 1: For 30MHz-1GHz, when the test result of peak was less than the limit of QP more than 6dB, just peak values were recorded.

Note 2: For above 1GHz, The test result of peak was less than the limit of average, so just peak values were recorded.


Note 3: For above 1GHz, the spurious emission is 20dB below to the limit or in the noise floor was not recorded.

Note 4: Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded

<b>Job No.:</b>	SZNS220303-07022E-RF	<b>Power:</b>	120V 60Hz
<b>EUT:</b>	X300 Bluetooth Headset	<b>Test By:</b>	Level Li
<b>Model:</b>	1. Direct charging 2. Base charging	<b>Test item:</b>	Radiated emission
<b>Climatic:</b>	25° C 55%RH	<b>Date:</b>	2022.4.7


30MHz~1GHz

Mode 1:

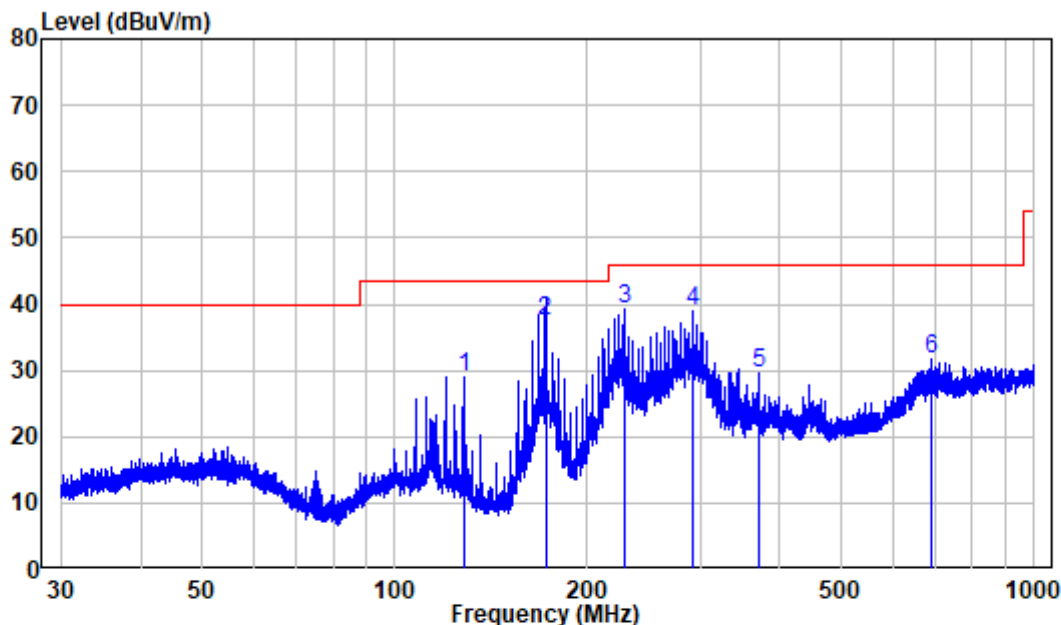

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Direct charging


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	128.001	-14.70	43.82	29.12	43.50	-14.38	Peak
2	171.995	-13.38	50.69	37.31	43.50	-6.19	QP
3	227.990	-11.17	50.48	39.31	46.00	-6.69	Peak
4	292.058	-9.29	48.16	38.87	46.00	-7.13	Peak
5	372.005	-7.29	36.88	29.59	46.00	-16.41	Peak
6	691.987	-1.52	33.13	31.61	46.00	-14.39	Peak

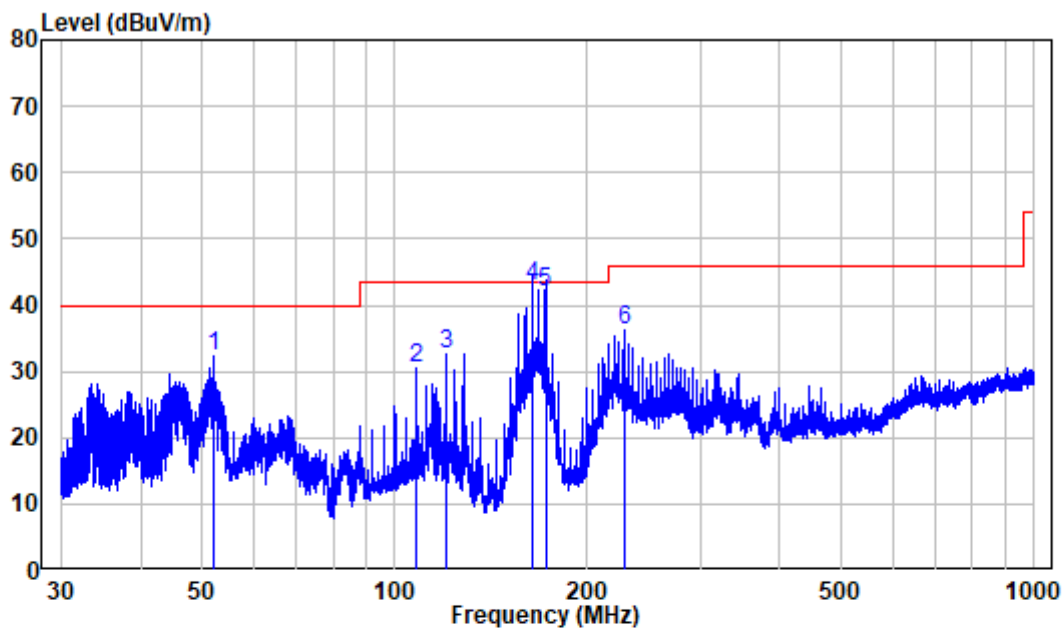

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Direct charging


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	51.980	-9.97	42.22	32.25	40.00	-7.75	Peak
2	107.982	-11.99	42.51	30.52	43.50	-12.98	Peak
3	120.013	-13.53	46.23	32.70	43.50	-10.80	Peak
4	163.971	-14.28	57.24	42.96	43.50	-0.54	QP
5	171.995	-13.38	55.25	41.87	43.50	-1.63	QP
6	227.990	-11.17	47.52	36.35	46.00	-9.65	Peak

Mode 2:

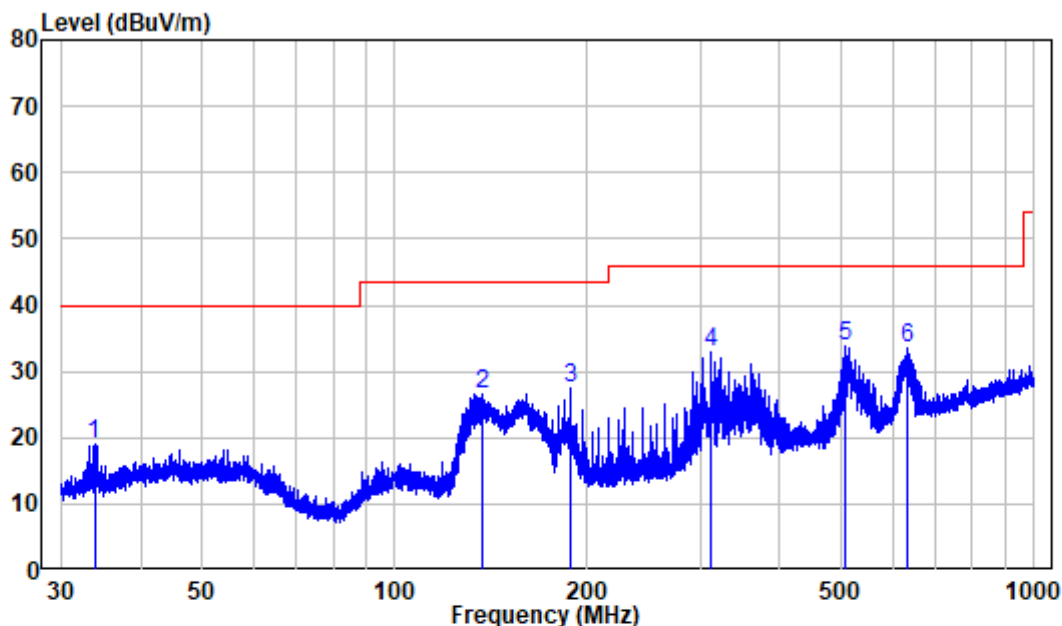

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Base Charging

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.873	-11.87	31.04	19.17	40.00	-20.83	Peak
2	137.180	-15.24	41.93	26.69	43.50	-16.81	Peak
3	188.000	-11.82	39.27	27.45	43.50	-16.05	Peak
4	312.043	-8.82	41.63	32.81	46.00	-13.19	Peak
5	504.706	-4.26	38.03	33.77	46.00	-12.23	Peak
6	632.797	-2.03	35.56	33.53	46.00	-12.47	Peak

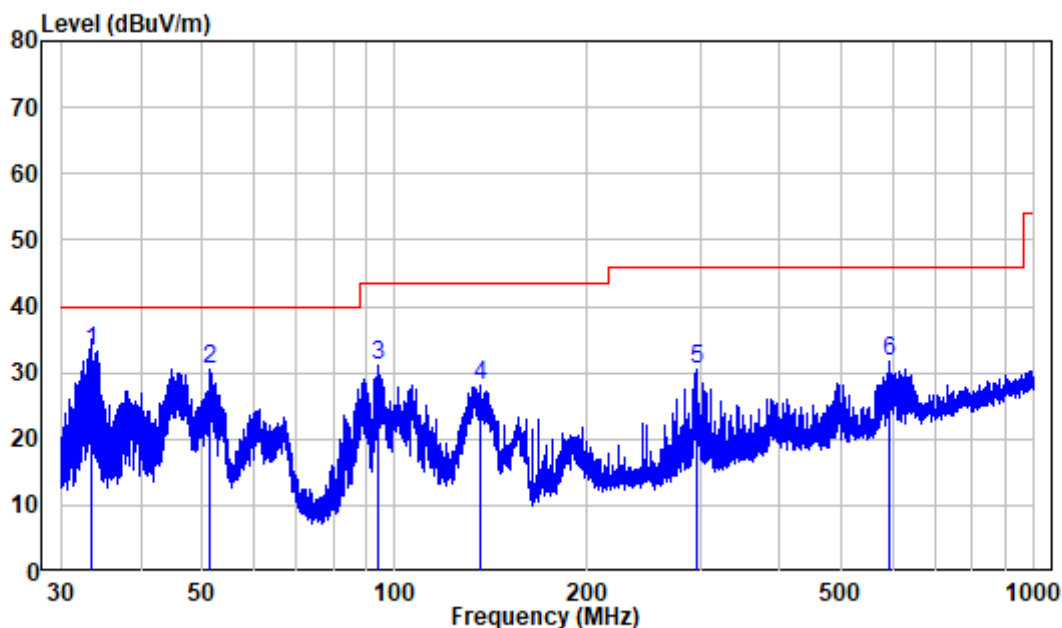


Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Base Charging

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.518	-11.93	45.25	33.32	40.00	-6.68	QP
2	51.278	-9.95	40.38	30.43	40.00	-9.57	Peak
3	94.387	-12.61	43.67	31.06	43.50	-12.44	Peak
4	135.982	-15.07	43.00	27.93	43.50	-15.57	Peak
5	296.054	-9.26	39.90	30.64	46.00	-15.36	Peak
6	595.133	-2.68	34.47	31.79	46.00	-14.21	Peak


Above 1GHz:

Mode 1:

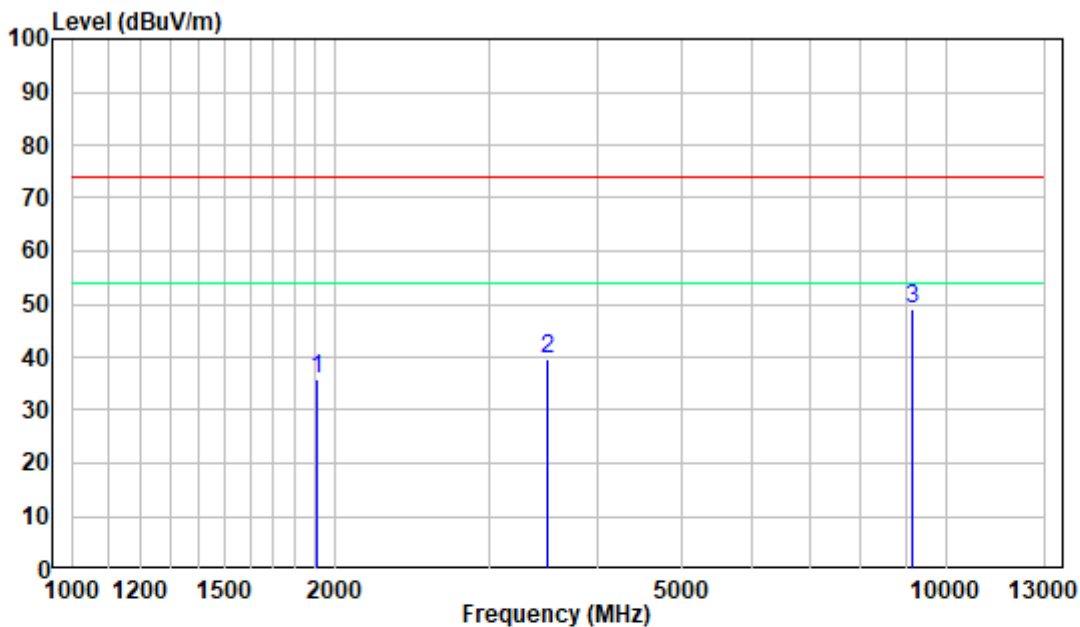

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Direct charging

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1904.500	-7.99	43.75	35.76	74.00	-38.24	Peak
2	3502.000	-6.02	45.52	39.50	74.00	-34.50	Peak
3	9176.500	5.54	43.46	49.00	74.00	-25.00	Peak

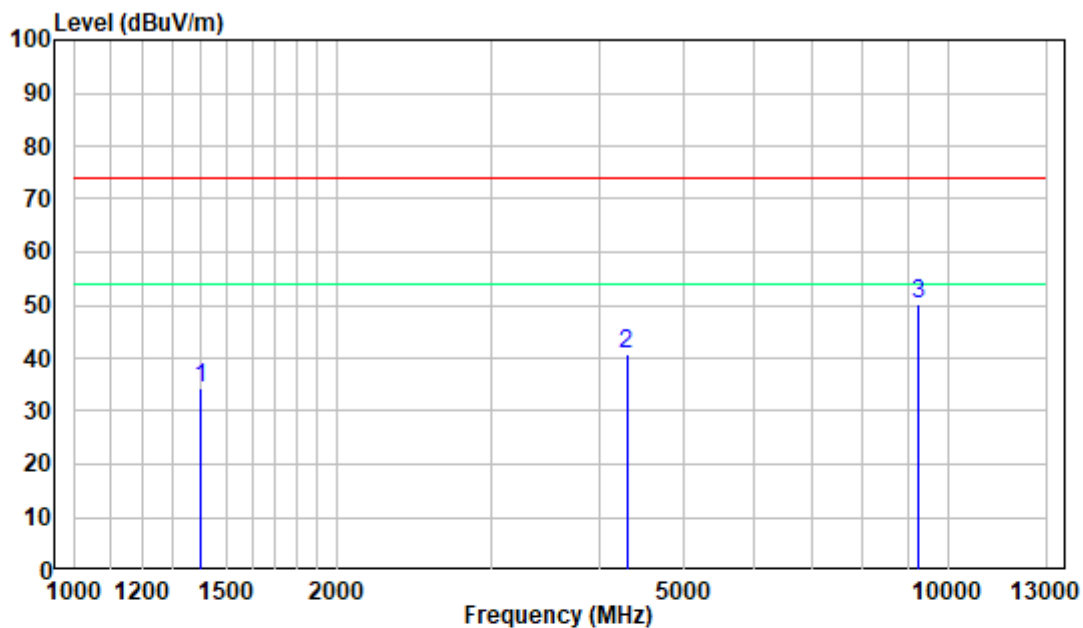


Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Direct charging

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1400.500	-9.97	44.30	34.33	74.00	-39.67	Peak
2	4292.500	-4.93	45.87	40.94	74.00	-33.06	Peak
3	9236.500	5.77	44.53	50.30	74.00	-23.70	Peak




Mode 2:

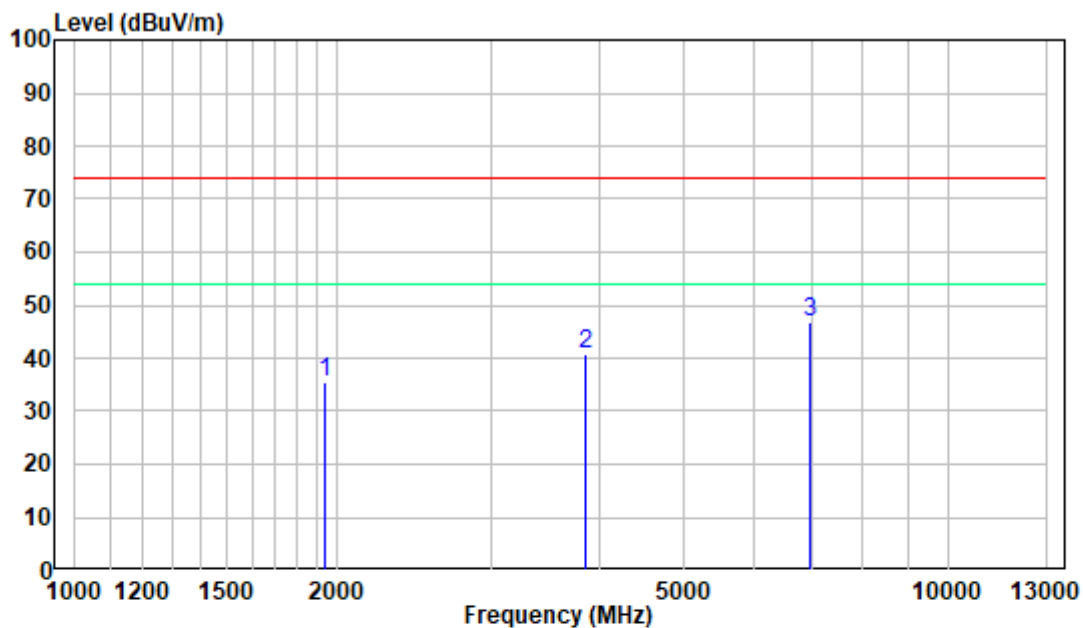

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Base Charging

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1942.000	-7.68	43.32	35.64	74.00	-38.36	Peak
2	3854.500	-5.58	46.31	40.73	74.00	-33.27	Peak
3	6958.000	2.15	44.58	46.73	74.00	-27.27	Peak

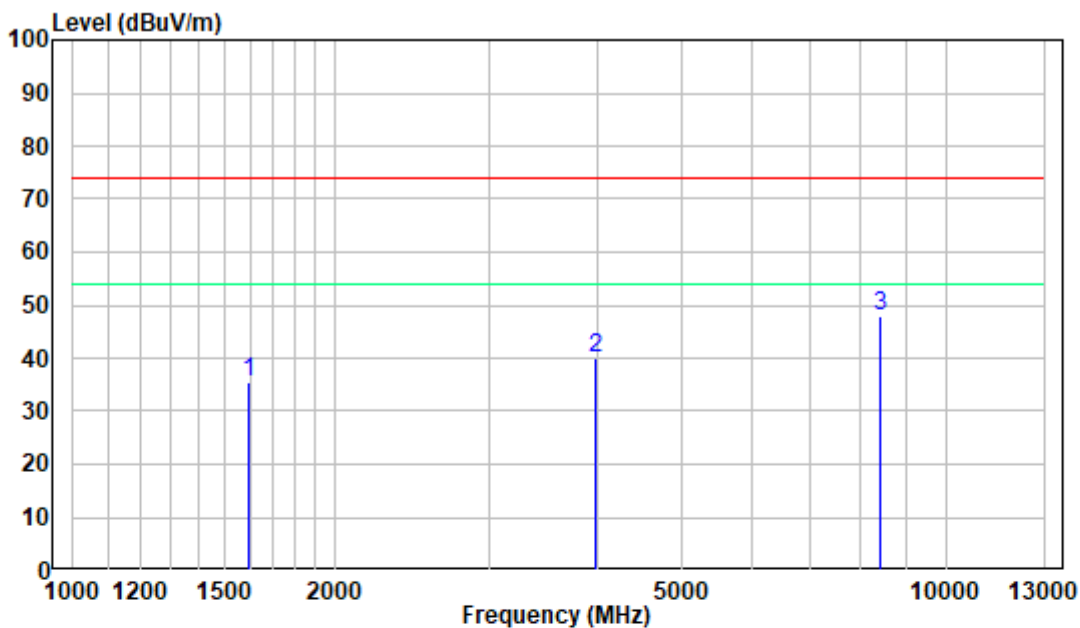

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220303-07022E-RF  
 Test Mode: Base Charging

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1595.500	-9.04	44.42	35.38	74.00	-38.62	Peak
2	3983.500	-5.46	45.45	39.99	74.00	-34.01	Peak
3	8398.000	5.01	42.96	47.97	74.00	-26.03	Peak

----- THE END OF TEST REPORT -----