



TEST REPORT

APPLICANT : Shenzhen Chainway Information
Technology Co.,Ltd.

PRODUCT NAME : Mobile Data Terminal

MODEL NAME : C72

BRAND NAME : CHAINWAY

FCC ID : 2AC6AC72

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-01-19 to 2018-03-29

ISSUE DATE : 2018-03-29

Tested by: Su Hang
Su Hang (Test Engineer)

Approved by: Andy Yeh
Andy Yeh (Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 4
 - 1.1. Applicant and Manufacturer Information 4
 - 1.2. Equipment Under Test (EUT) Description 4
 - 1.3. The channel number and frequency of EUT 5
 - 1.4. Test Standards and Results 6
 - 1.5. Environmental Conditions 6
- 2. 47 CFR Part 15C Requirements 7
 - 2.1. Antenna requirement 7
 - 2.2. Number of Hopping Frequency 7
 - 2.3. Peak Output Power 9
 - 2.4. 20dB Bandwidth 12
 - 2.5. Carried Frequency Separation 15
 - 2.6. Time of Occupancy (Dwell time) 17
 - 2.7. Conducted Spurious Emissions 19
 - 2.8. Conducted Emission 24
 - 2.9. Radiated Emission 28
- Annex A Test Uncertainty 35
- Annex B Testing Laboratory Information 36



Change History		
Issue	Date	Reason for change
1.0	2018-03-29	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Chainway Information Technology Co.,Ltd.
Applicant Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen
Manufacturer:	Shenzhen Chainway Information Technology Co.,Ltd.
Manufacturer Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile Data Terminal
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	C70SE_MB_V11
Software Version:	C72A_MT6735_V1.1-AM_GIT938ee72_20171205
Modulation Technology:	FHSS
Modulation Type:	ASK
Operating Frequency Range:	The frequency range used is 902.75MHz – 927.25MHz (50 channels, at intervals of 0.5MHz); The frequency block is 902-928MHz.
Antenna Type:	PCB Antenna
Antenna Gain:	4.0 dBi

Note 1: The frequencies allocated for the EUT is $F \text{ (MHz)} = 902.75 + 0.5 * n$ ($1 \leq n \leq 50$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (902.75MHz), 26 (915.25MHz) and 50 (927.25MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. The channel number and frequency of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.75	18	911.25	35	919.75
2	903.25	19	911.75	36	920.25
3	903.75	20	912.25	37	920.75
4	904.25	21	912.75	38	921.25
5	904.75	22	913.25	39	921.75
6	905.25	23	913.75	40	922.25
7	905.75	24	914.25	41	922.75
8	906.25	25	914.75	42	923.25
9	906.75	26	915.25	43	923.75
10	907.25	27	915.75	44	924.25
11	907.75	28	916.25	45	924.75
12	908.25	29	916.75	46	925.25
13	908.75	30	917.25	47	925.75
14	909.25	31	917.75	48	926.25
15	909.75	32	918.25	49	926.75
16	910.25	33	918.75	50	927.25
17	910.75	34	919.25		

Note 1: The black bold channels were selected for test.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Jan 19, 2018	Su Hang	PASS
3	15.247(b)	Peak Output Power	Jan 19, 2018	Su Hang	PASS
4	15.247(a)	20dB Bandwidth	Jan 19, 2018	Su Hang	PASS
5	15.247(a)	Carrier Frequency Separation	Jan 19, 2018	Su Hang	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Mar 29, 2018	Su Hang	PASS
7	15.247(d)	Conducted Spurious Emission	Jan 19, 2018	Su Hang	PASS
8	15.209, 15.247(d)	Radiated Emission	Feb 06, 2018	Wu Zhognwen	PASS
9	15.207	Conducted Emission	Mar 14, 2018	Wu Zhognwen	PASS

Note: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC section 15.247(a)(1)(i), frequency hopping systems operating in the 902MHz to 928MHz bands shall use at least 50 hopping frequencies if the 20dB bandwidth of the hopping channel is less than 250KHz; or at least 25 hopping frequencies if the 20dB bandwidth of the hopping channel is 250KHz or greater.

2.2.2. Test Description

Test Setup:

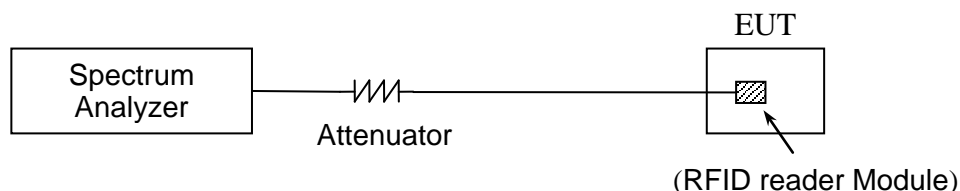

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.



2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4. Test Result

The EUT operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:

Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
902-928	50	50	PASS

B. Test Plots:

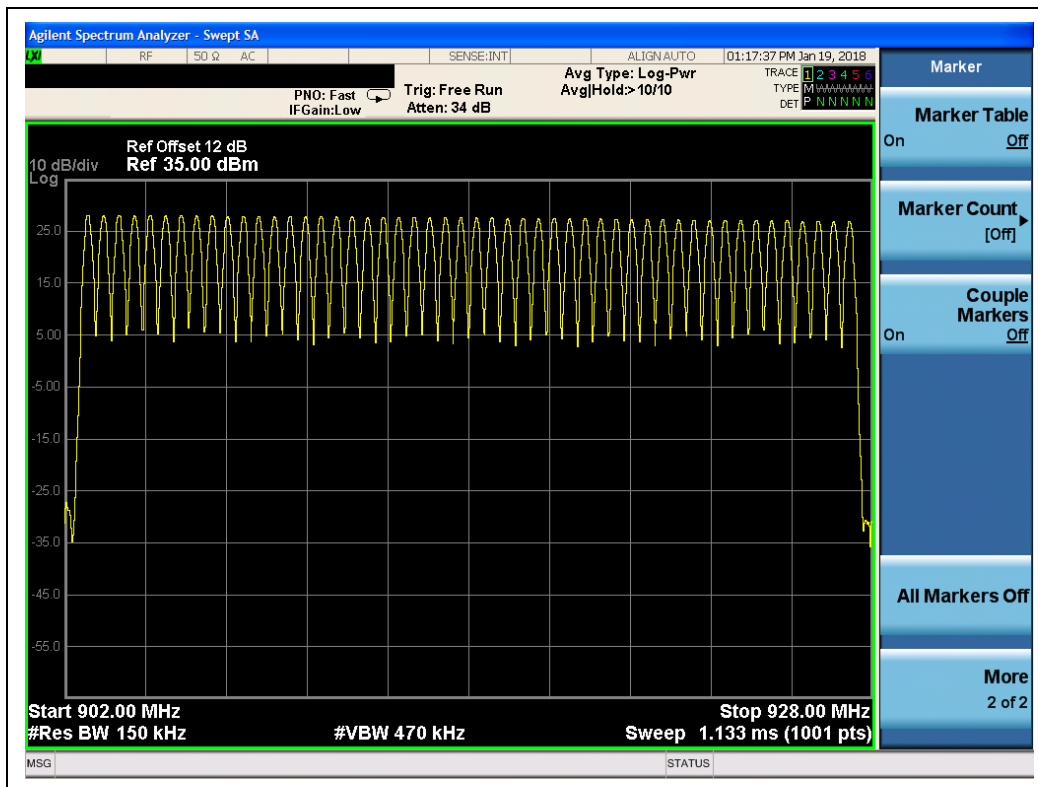

(Number of Hopping Frequency)

2.3. Peak Output Power

2.3.1. Requirement

According to FCC section 15.247(b)(2), for frequency hopping systems that operates in the 902MHz to 928MHz band employing at least 50 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt, and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

2.3.2. Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.


2.3.3. Test Result

The EUT operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	902.75	29.20	0.83176	30	1	PASS
26	915.25	28.93	0.78163			PASS
50	927.25	28.33	0.68077			PASS


B. Test Plots:

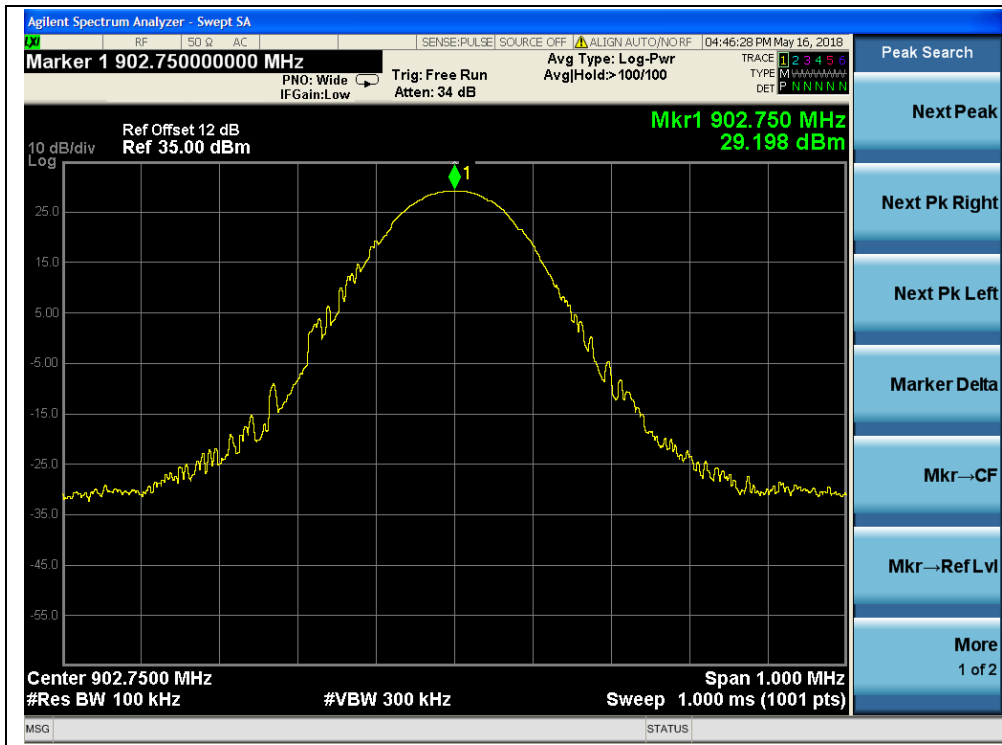

(Power, Channel 1, 902.75MHz)

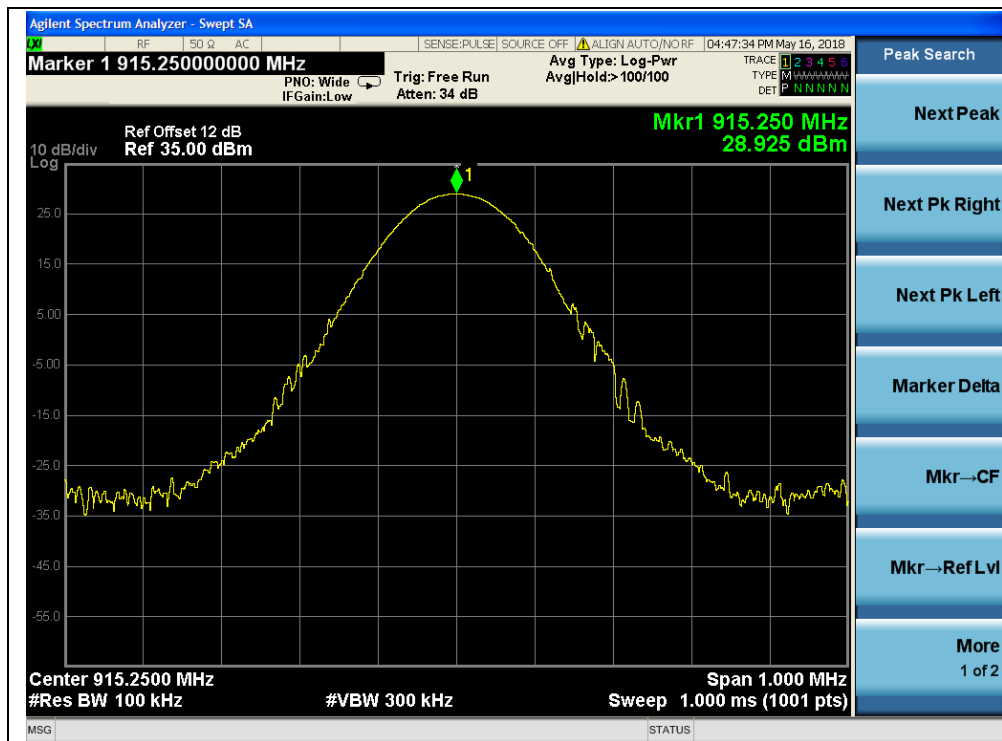

(Power, Channel 26, 915.25MHz)

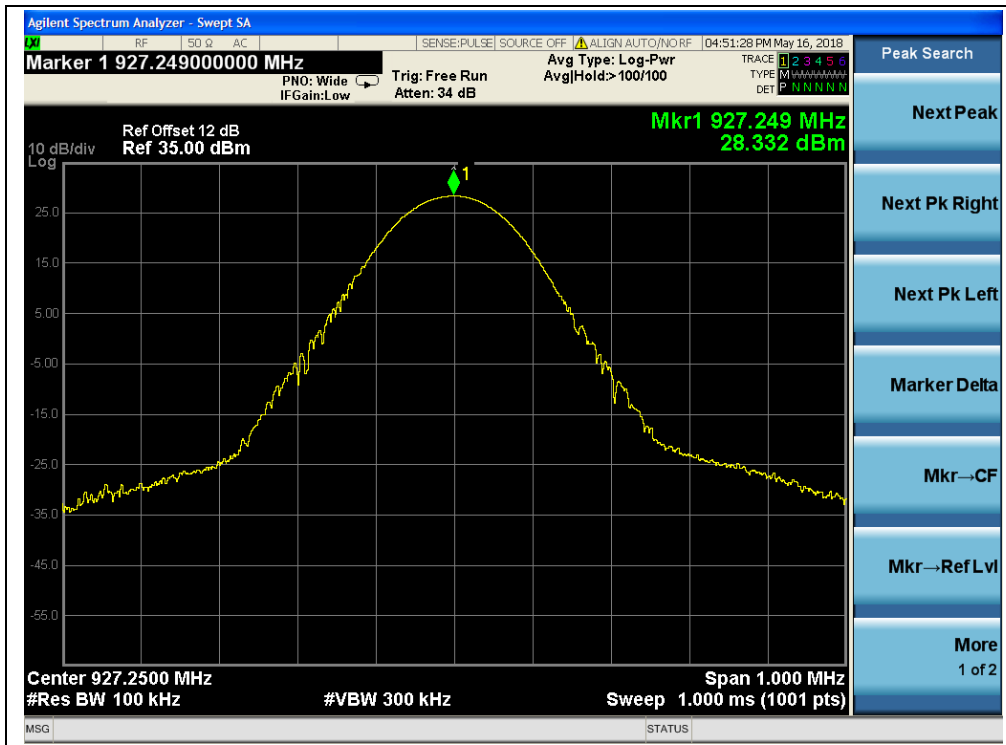

(Power, Channel 50, 927.25MHz)


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

Test Setup:

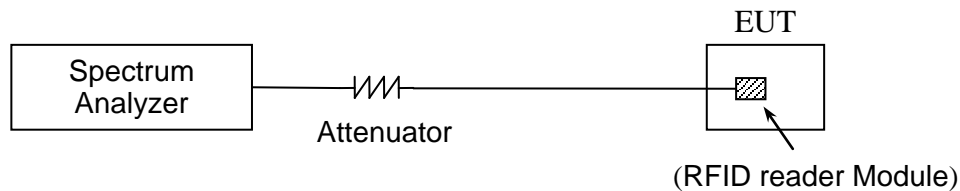

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold




2.4.4. Test Result

The EUT operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (kHz)	Result
1	902.75	70.34	PASS
26	915.25	69.99	PASS
50	927.25	71.33	PASS


B. Test Plots:

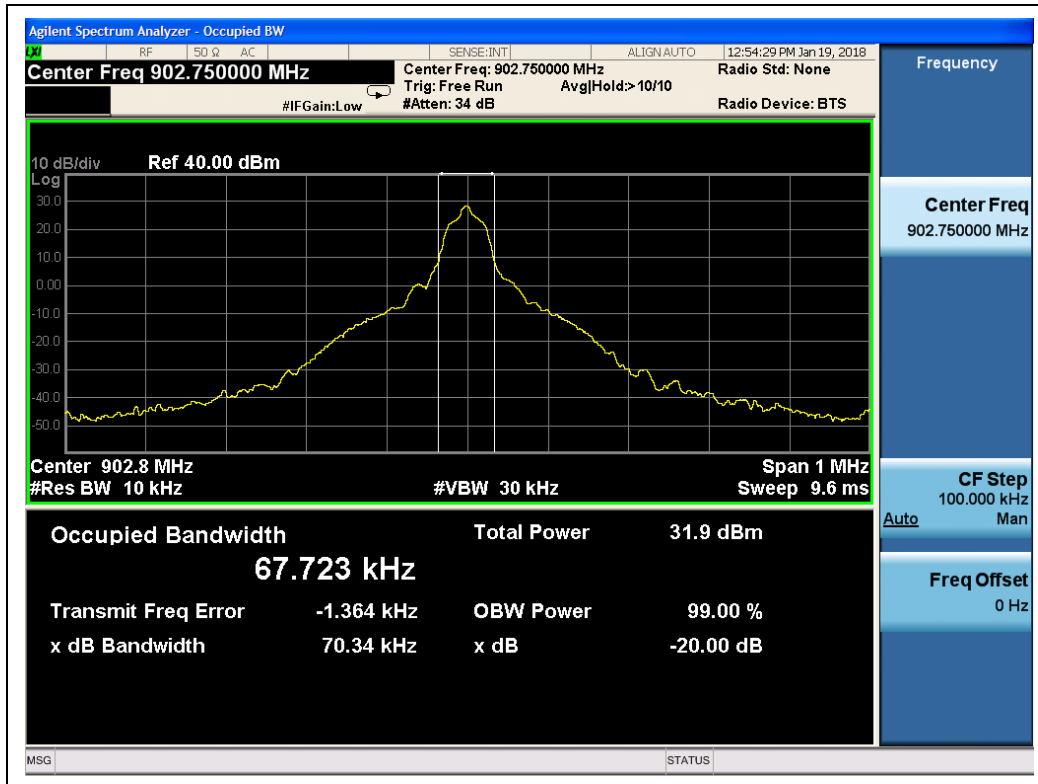

(Bandwidth, Channel 1, 902.75MHz)

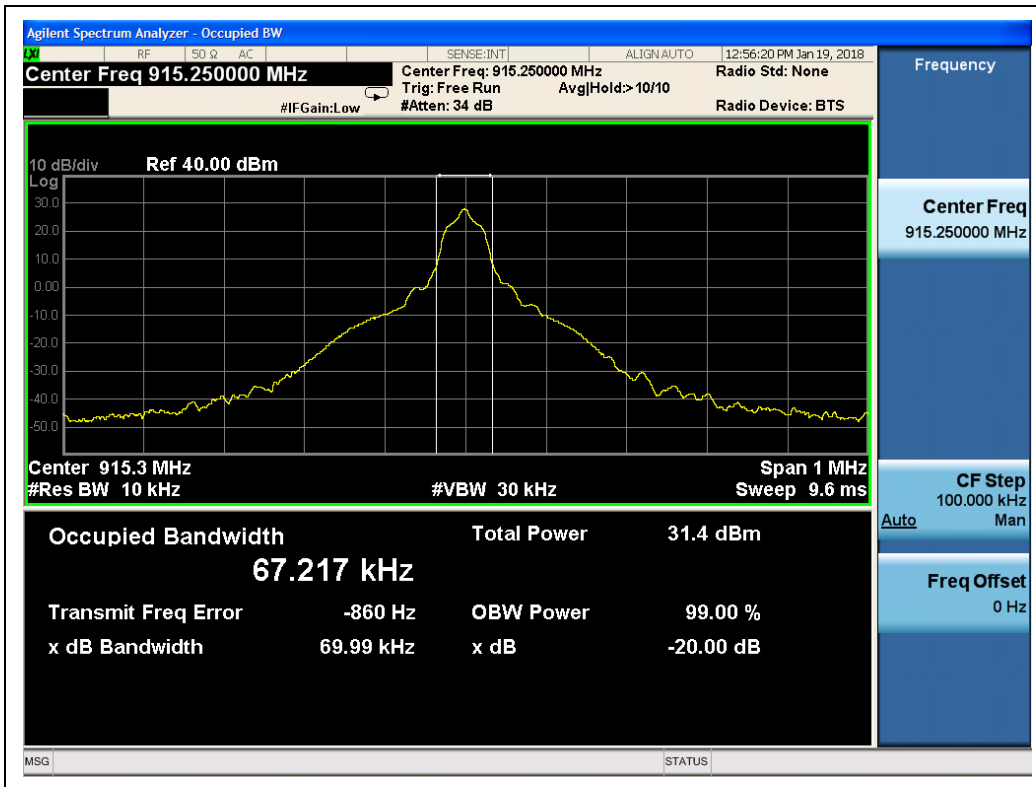

(Bandwidth, Channel 26, 915.25MHz)

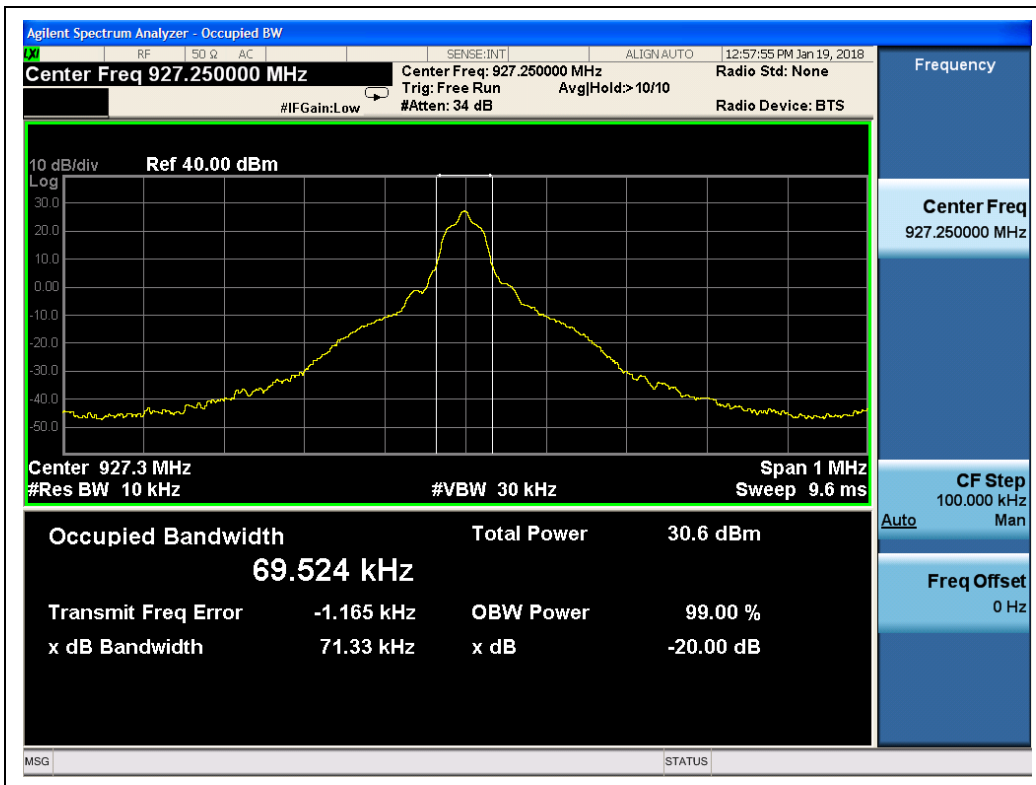

(Bandwidth, Channel 50, 927.25MHz)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

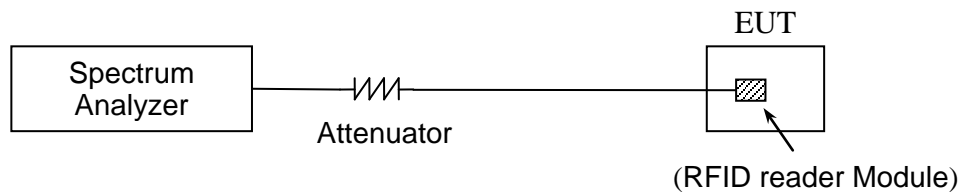

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

2.5.4. Test Result

The EUT operates at hopping-on test mode. For any adjacent channels (e.g. the channel 26 and 27), the EUT does have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is **PASSING**

Measured Channel Numbers	Carried Frequency Separation (kHz)	20dB bandwidth (kHz)	Min. Limit	Verdict
26 and 27	500	69.99	20dB bandwidth	PASS

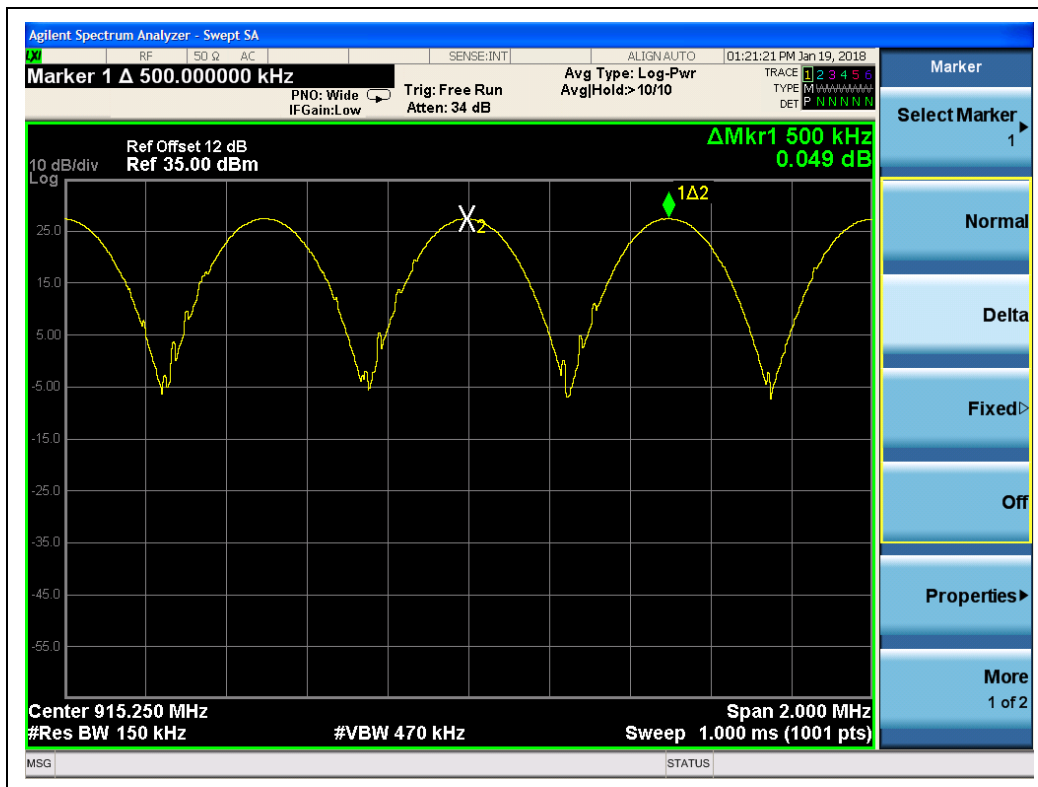

(Frequency Separation)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC section 15.247(a)(1)(i), frequency hopping systems in the 902 - 928MHz band shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

2.6.2. Test Description

Test Setup:

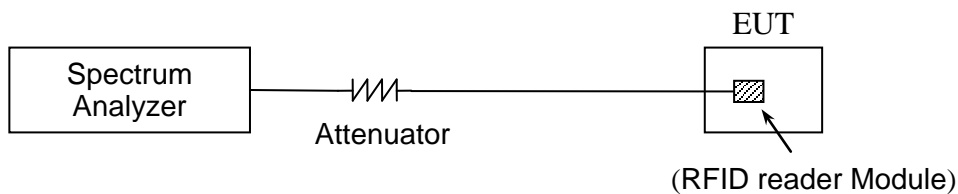

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.

2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in 20 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 20 second period is equal to (# of pulses in 20s) * pulse width.


2.6.4. Test Result

A. Test Verdict:

Pulse Width (sec)	Number of pulse in 20 seconds	Average Time of Occupancy (sec)	Limit (sec)	Verdict
0.016	4	0.064	0.4	PASS



B. Test Plots:

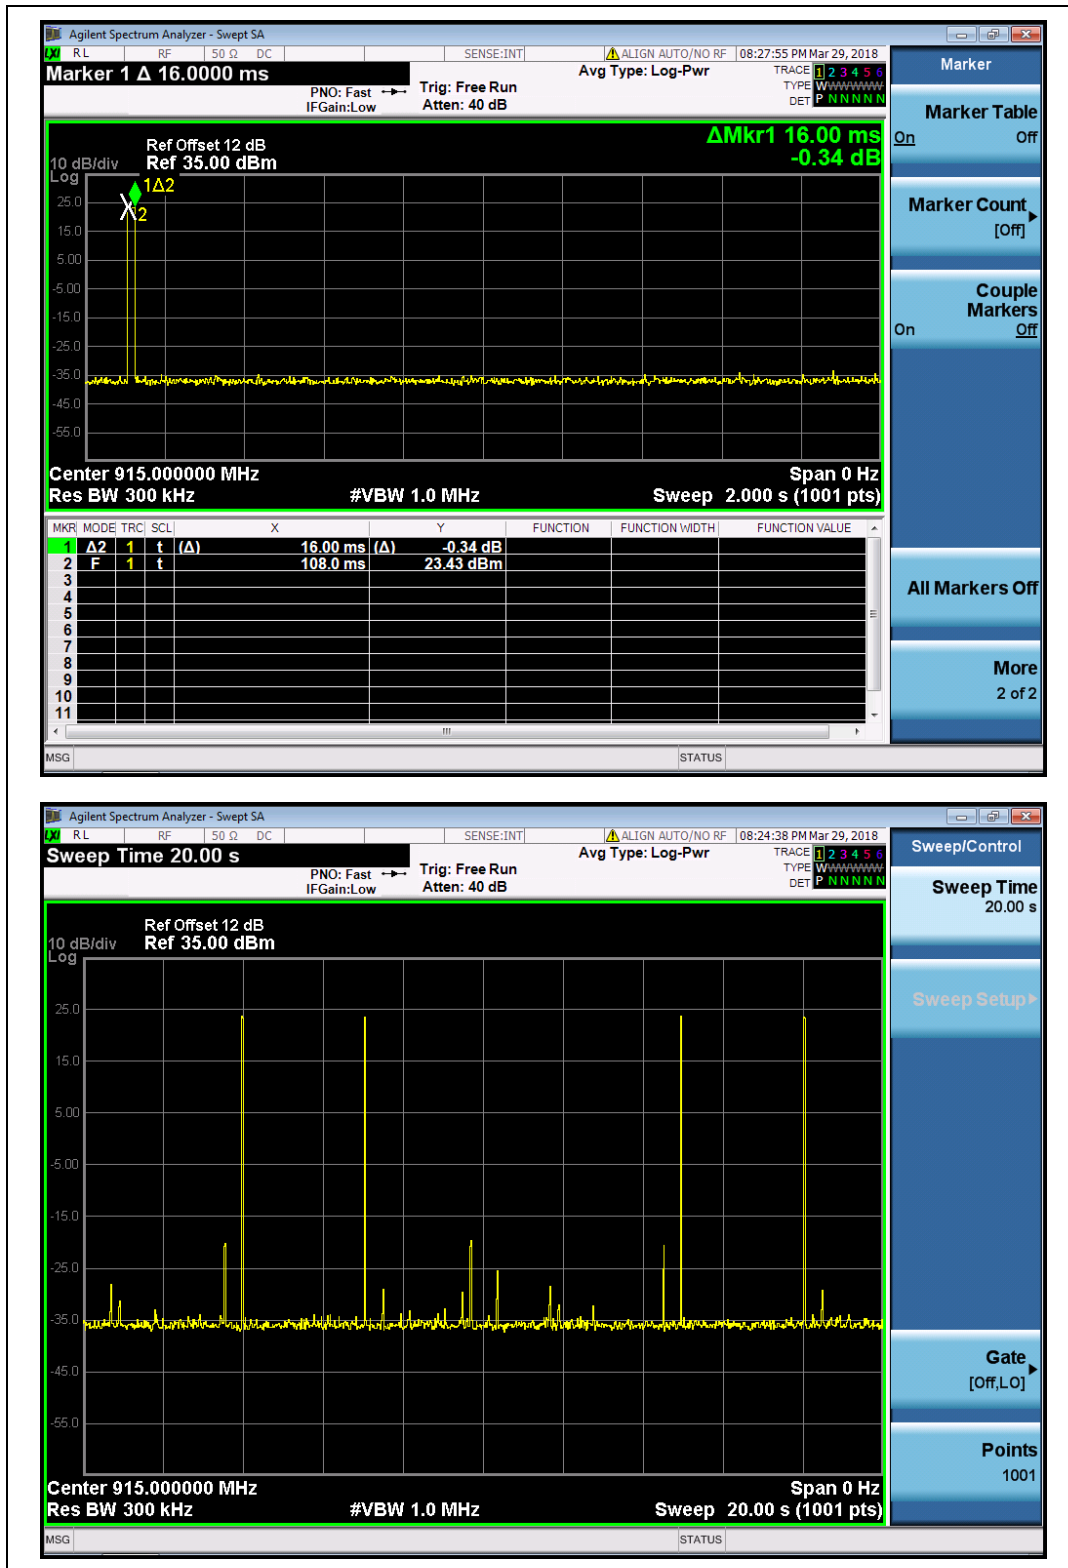

(Dwell time)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

Test Setup:

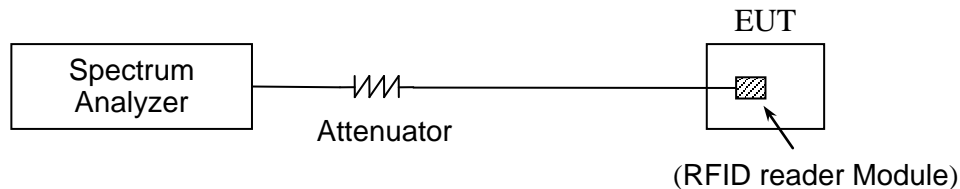

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4. Test Result


The EUT operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	902.75	-31.52	27.99	7.99	PASS
26	915.25	-34.40	27.58	7.58	PASS
50	927.25	-34.36	26.82	6.82	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

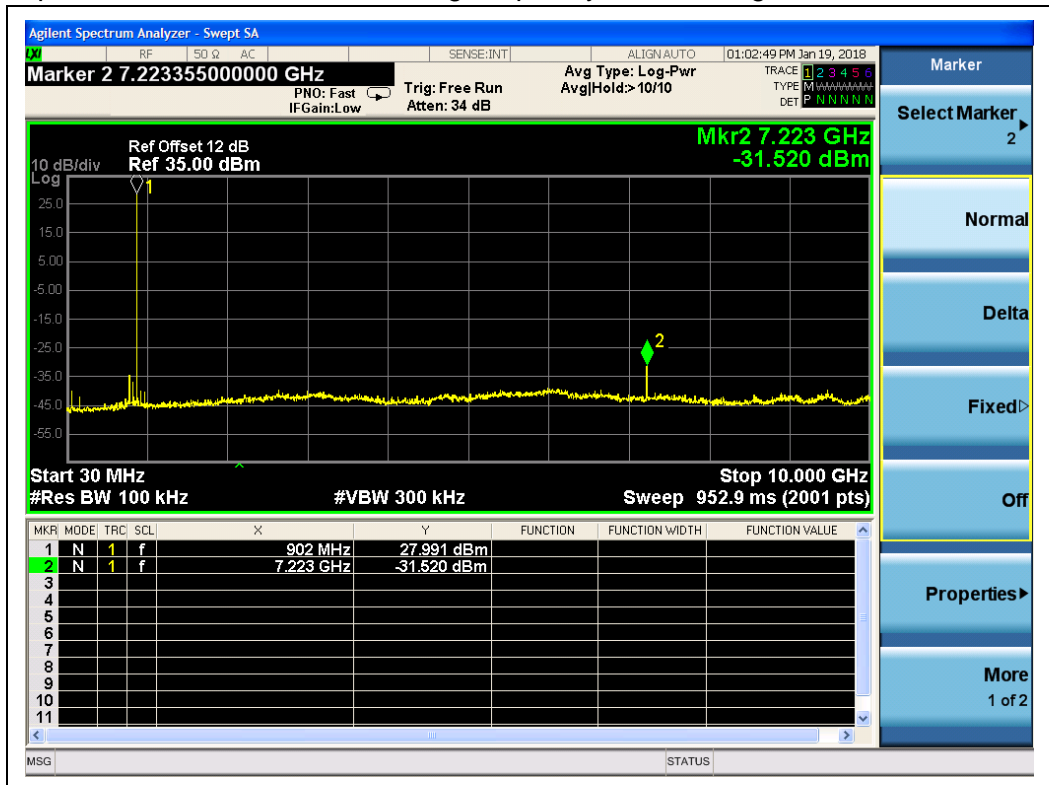


(Channel = 1, 30MHz to 25GHz)

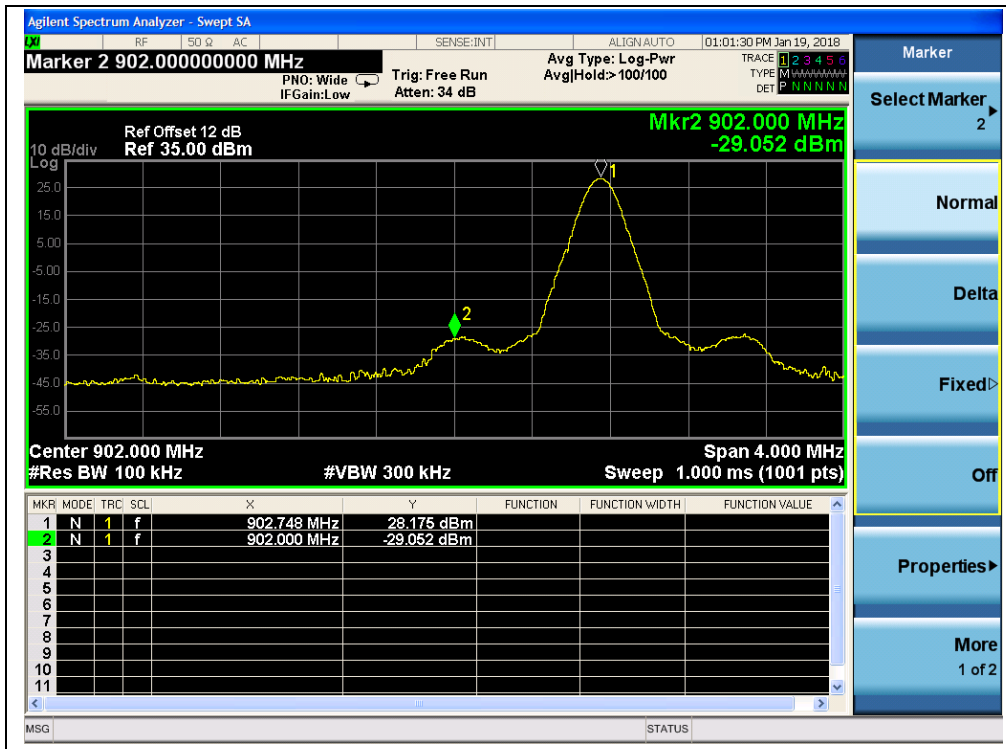


(Channel = 1, Band edge)

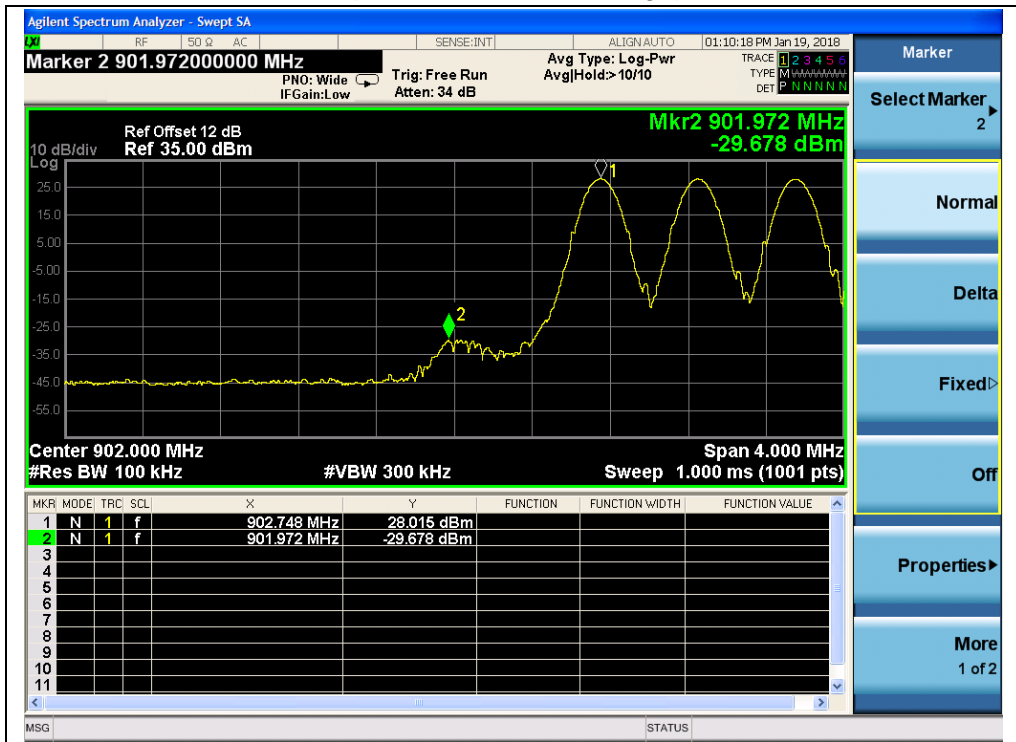


(Channel = 1, Band edge with hopping on)

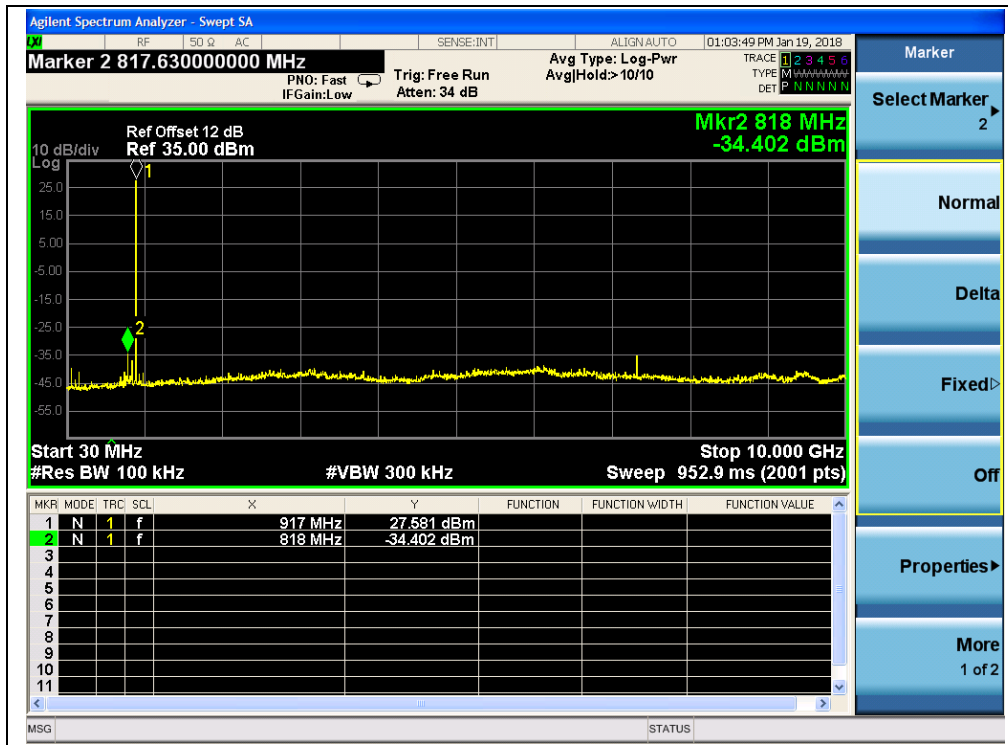


(Channel = 26, 30MHz to 25GHz)

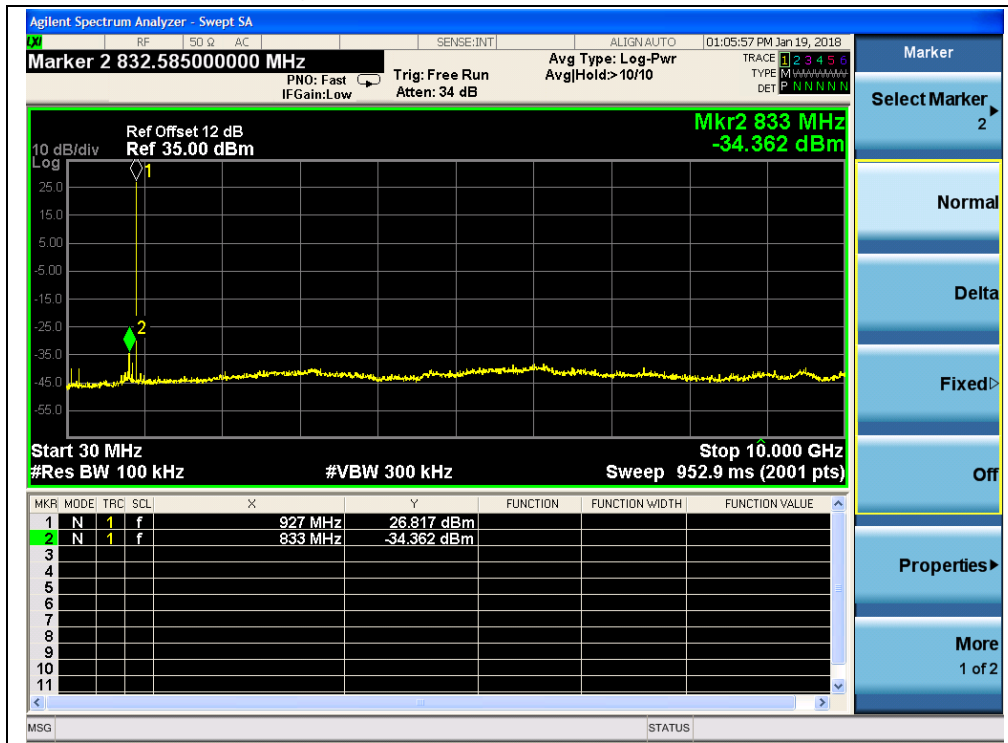

(Channel = 50, 30MHz to 25GHz)

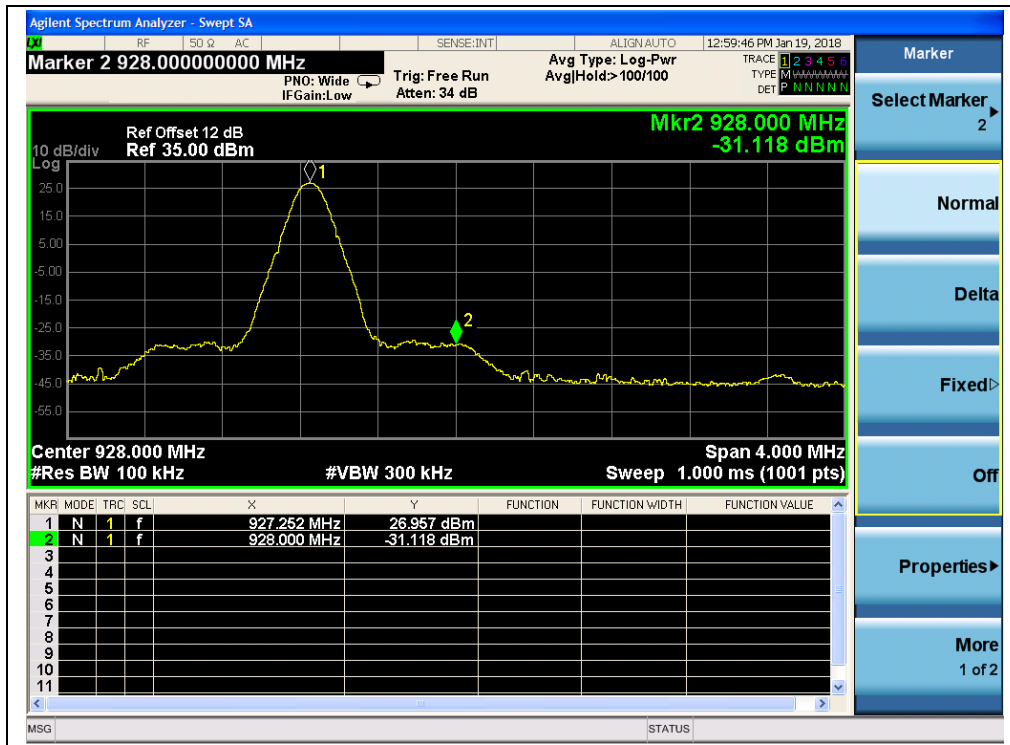

(Channel = 50, Band edge)

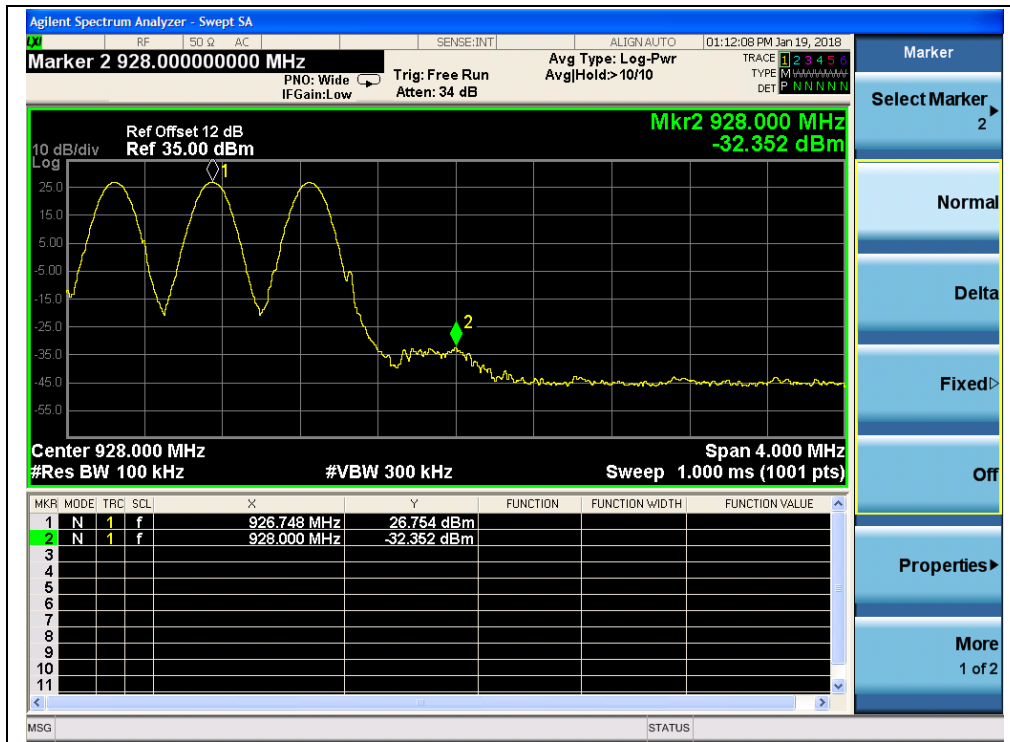

(Channel = 50, Band edge with hopping on)

2.8. Conducted Emission

2.8.1. Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

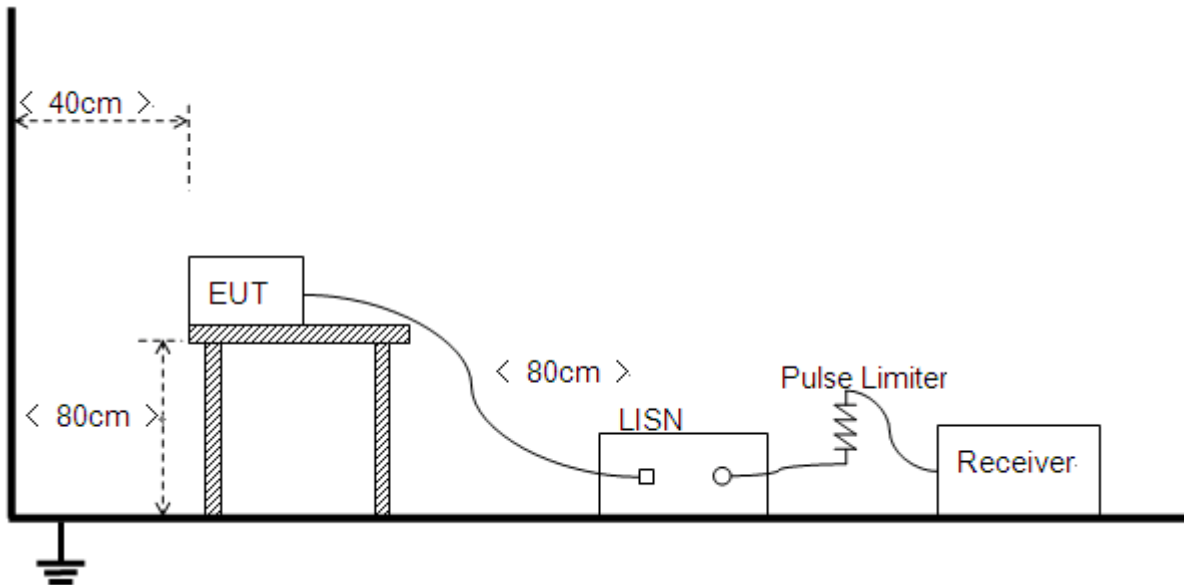

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth



EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

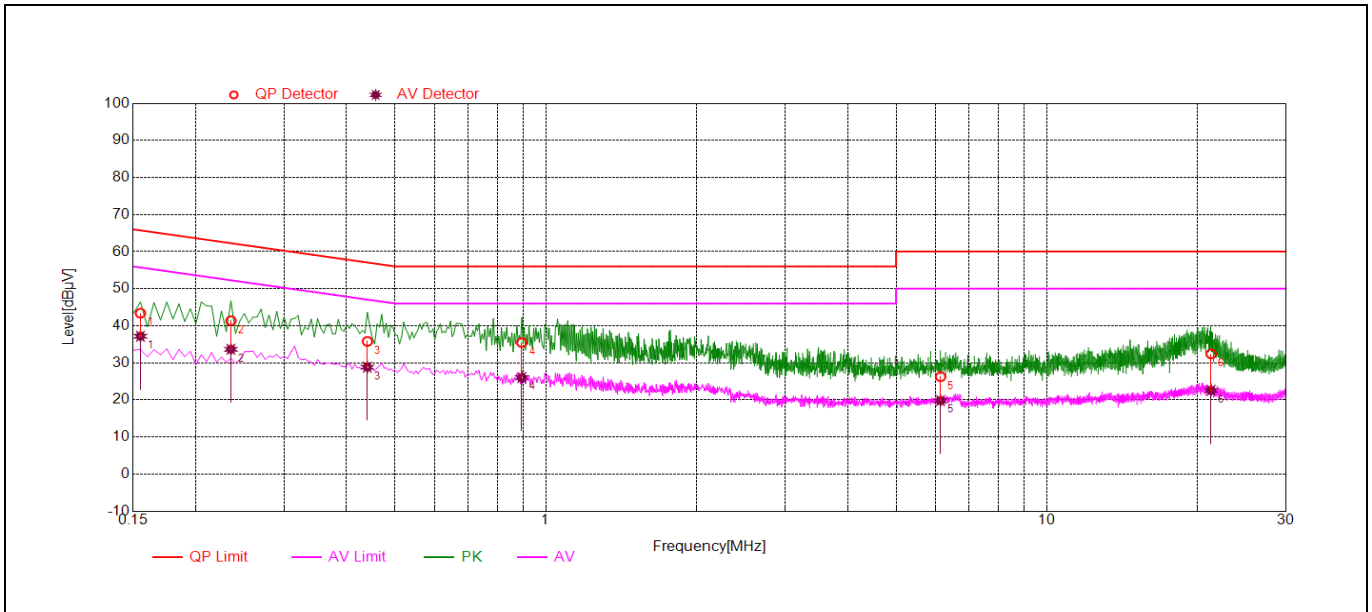

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.16	43.40	37.18	65.73	55.73	Line	PASS
2	0.24	41.36	33.64	62.27	52.27		PASS
3	0.44	35.79	28.83	57.06	47.06		PASS
4	0.89	35.47	26.03	56.00	46.00		PASS
5	6.13	26.26	19.80	60.00	50.00		PASS
6	21.28	32.40	22.58	60.00	50.00		PASS

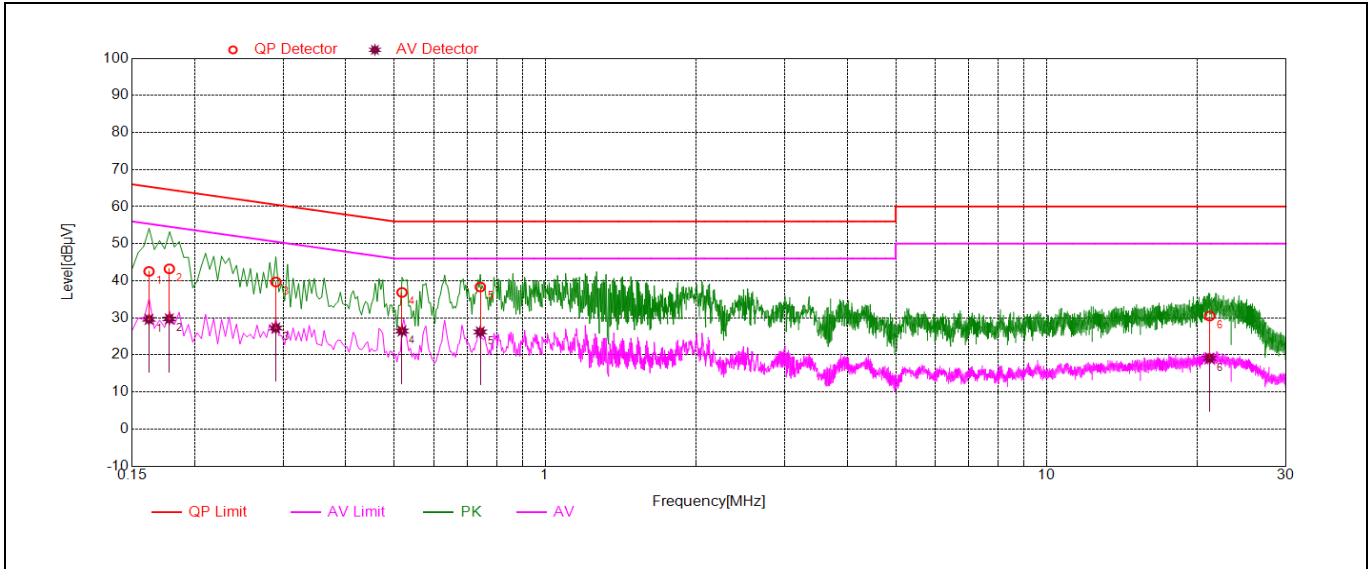

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.17	42.53	29.59	65.37	55.37	Neutral	PASS
2	0.18	43.22	29.71	64.59	54.59		PASS
3	0.29	39.67	27.24	60.53	50.53		PASS
4	0.52	36.86	26.45	56.00	46.00		PASS
5	0.74	38.34	26.20	56.00	46.00		PASS
6	21.15	30.49	19.07	60.00	50.00		PASS



2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.9.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

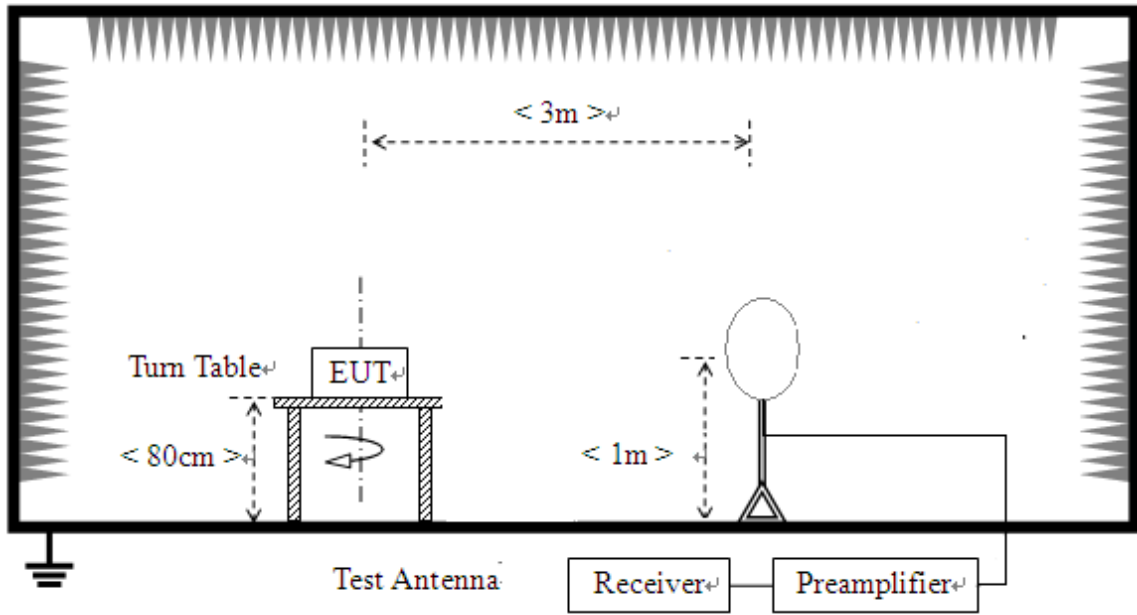

- 2) For radiated emissions from 30MHz to 1GHz

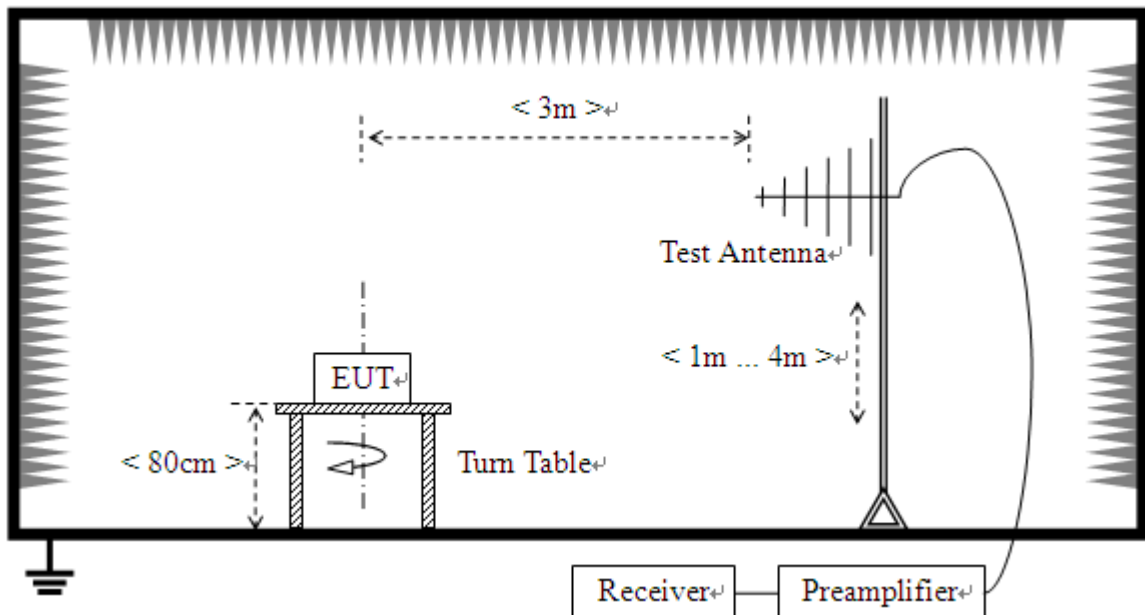

3) For radiated emissions above 1GHz

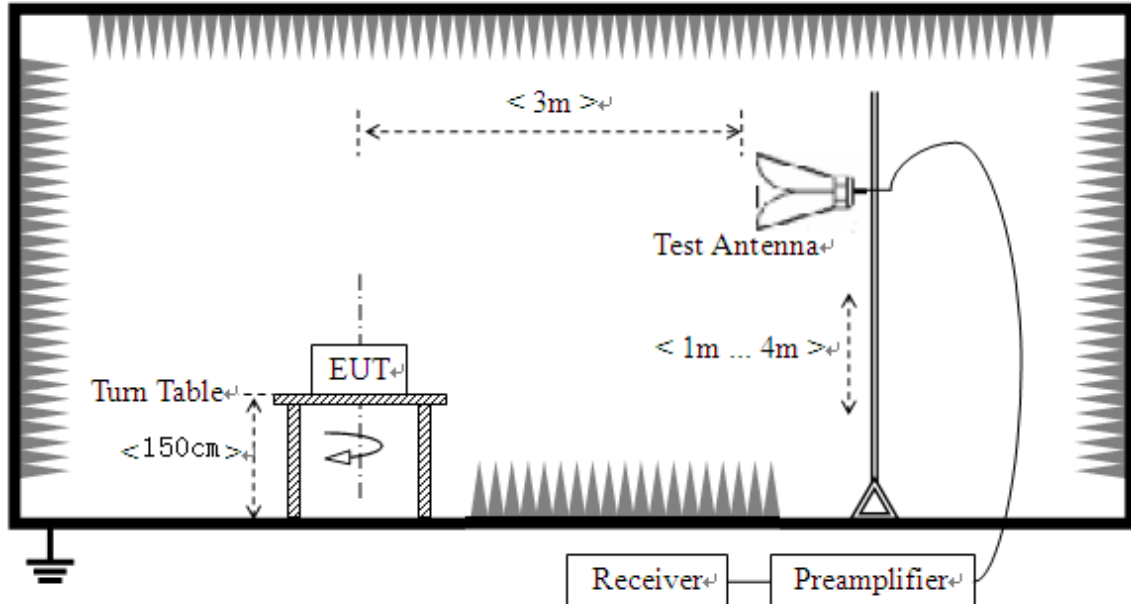

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please refer ANNEX A(1.5).

2.9.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.9.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 10dB lower than the limit was not recorded.

Plots for Channel = 1

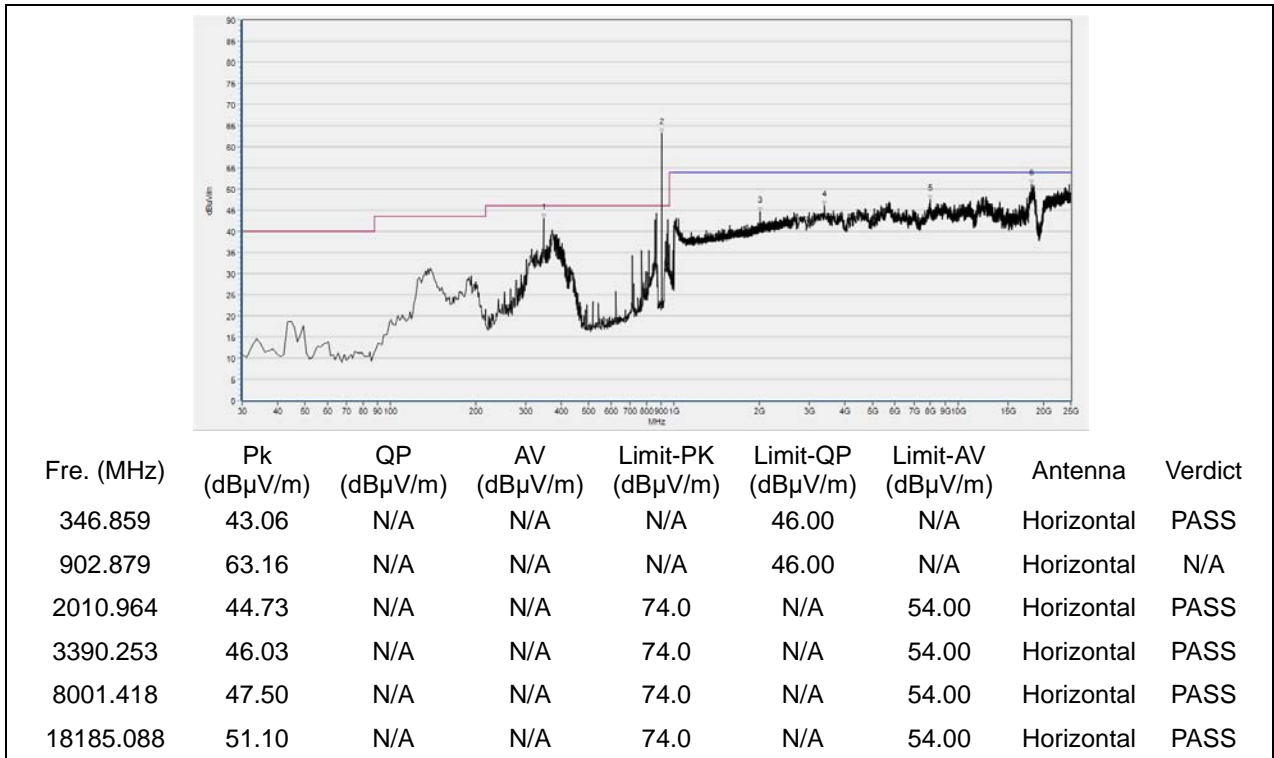


(30MHz to 25GHz, Antenna Horizontal, channel 0)

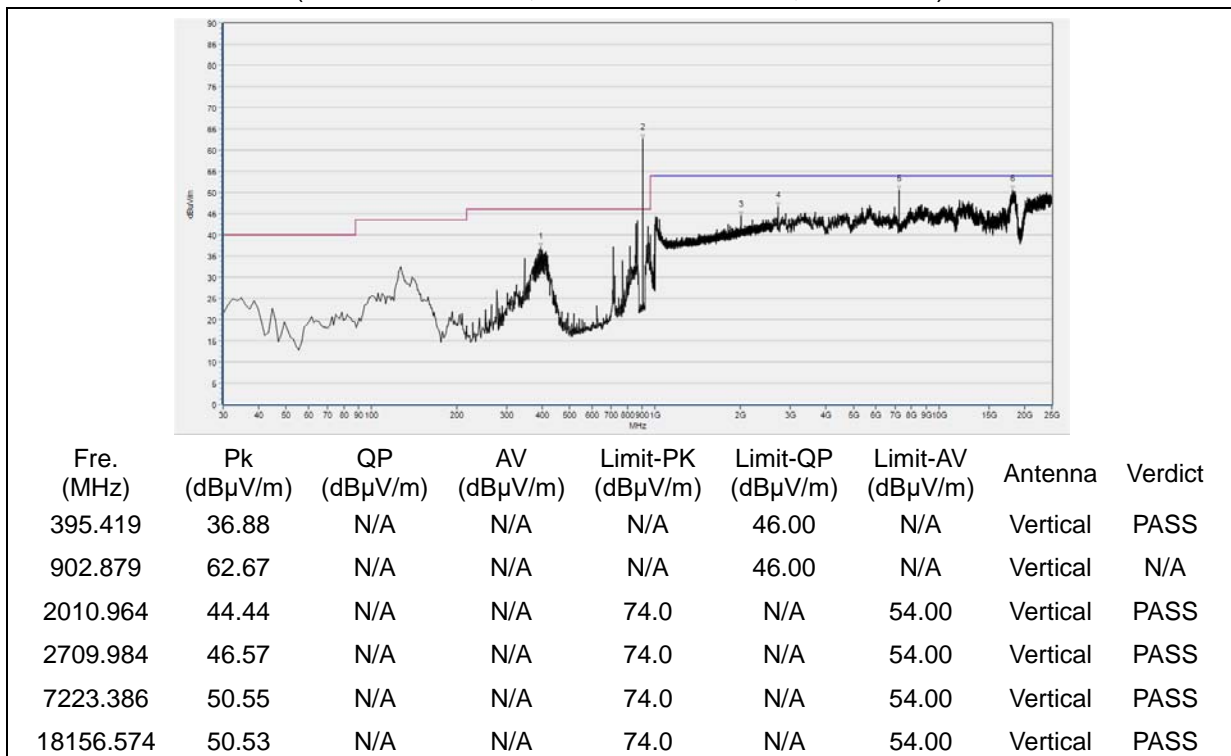


(30MHz to 25GHz, Antenna Vertical, channel 0)

Plot for Channel = 26

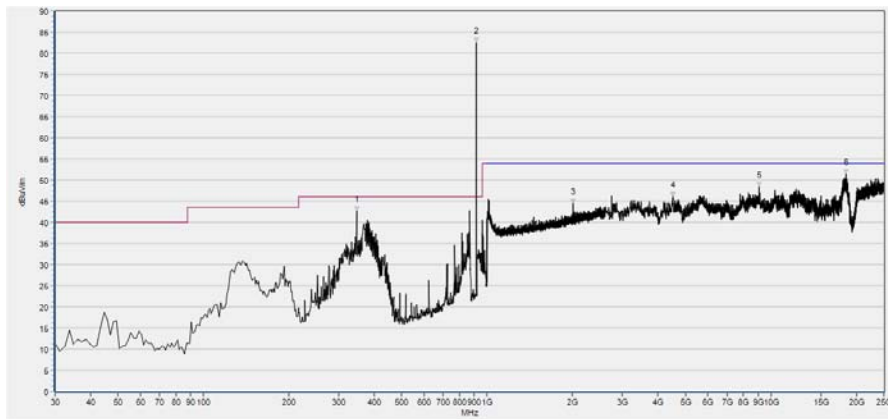

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
346.859	42.75	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
915.019	82.47	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
2010.324	44.47	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4514.530	46.01	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
9105.328	48.34	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18437.643	51.36	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, channel 39)

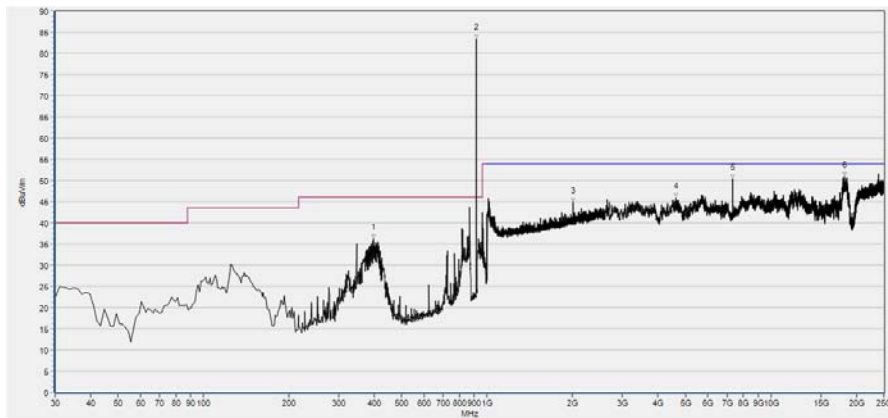


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
397.847	36.26	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
915.019	83.42	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
2010.324	44.89	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4632.660	45.88	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
7321.149	50.41	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
18221.749	50.97	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, channel 39)

Plot for Channel = 50

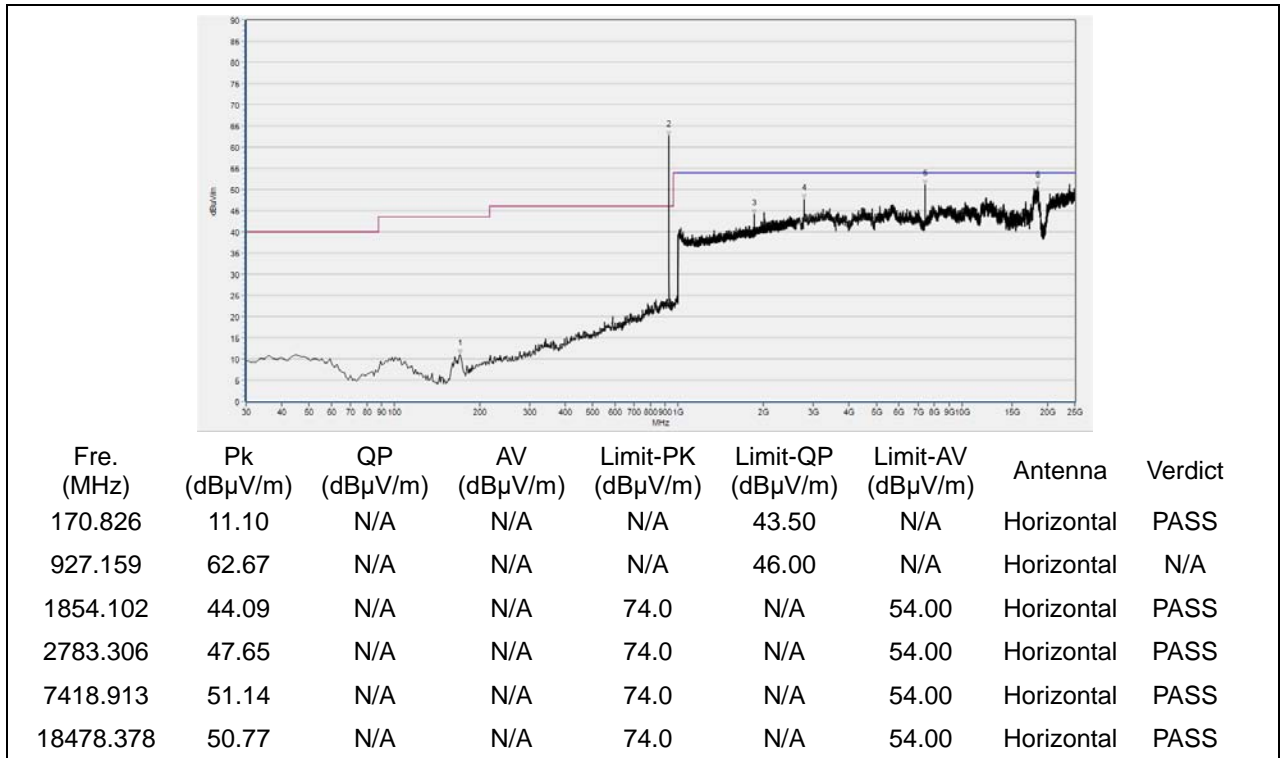

(30MHz to 25GHz, Antenna Horizontal, channel 78)

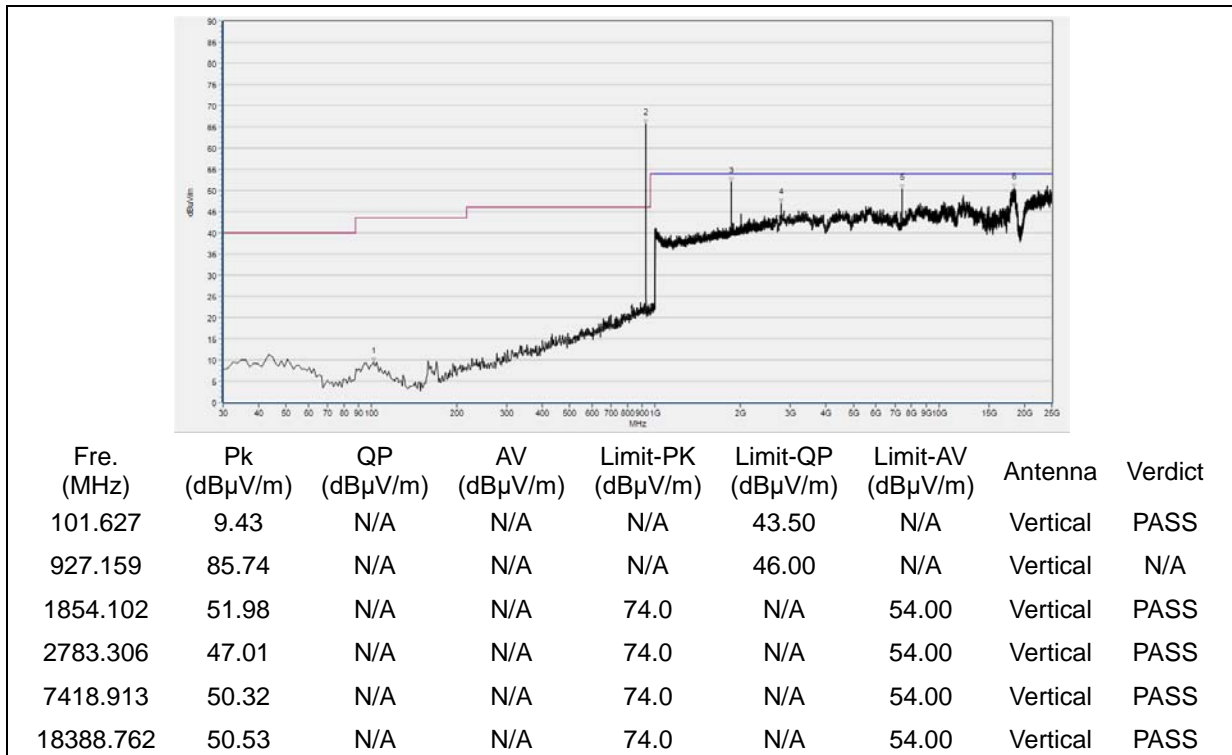



(30MHz to 25GHz, Antenna Vertical, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2017.05.24	2018.05.23
Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
EXA Signal Analyser	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2017.07.13	2018.07.12
LISN	812744	NSLK 8127	Schwarzbeck	2017.05.17	2018.05.16
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.17	2018.05.16
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal. Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2017.05.14	2018.05.13
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT _____