



TEST REPORT

APPLICANT : Shenzhen Chainway Information
Technology Co.,Ltd.

PRODUCT NAME : Mobile Data Terminal

MODEL NAME : C75

BRAND NAME : CHAINWAY

FCC ID : 2AC6AC75

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-01-12 and 2018-06-13

ISSUE DATE : 2018-06-27

Tested by: Su Hang
Su Hang (Test Engineer)

Approved by: Andy Yeh
Andy Yeh (Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna requirement	6
2.2. Peak Output Power	6
2.3. Bandwidth	9
2.4. Conducted Spurious Emissions and Band Edge	18
2.5. Power spectral density (PSD)	31
2.6. Restricted Frequency Bands	40
2.7. Conducted Emission	52
2.8. Radiated Emission	55
Annex A Test Uncertainty	71
Annex B Testing Laboratory Information	72



Change History		
Issue	Date	Reason for change
1.0	2018-06-27	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Chainway Information Technology Co.,Ltd.
Applicant Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen
Manufacturer:	Shenzhen Chainway Information Technology Co.,Ltd.
Manufacturer Address:	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile Data Terminal
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	C70_MB_V11
Software Version:	C75A_MT6737_V1.2_AM_GITe4dc346_201805181532
Modulation Type:	DSSS, OFDM
Operating Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
Antenna Type:	PIFA Antenna
Antenna Gain:	0.29 dBi

Note 1: The EUT is operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($3 \leq n \leq 9$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



Note 4: This test report is updated from report SZ18010063W03, based on the similarity between before, the model name, the software and hardware version, the antenna and the appearance of EUT are changed. And remove the RFID function. The changes only affect the test results of Antenna Requirement, Restricted Frequency Bands and Radiated Emission.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Peak Output Power	Jan 12, 2018	Su Hang	PASS _{Note1}
3	15.247(a)	Bandwidth	Jan 12, 2018	Su Hang	PASS _{Note1}
4	15.247(d)	Conducted Spurious Emission and Band Edge	Jan 12, 2018	Su Hang	PASS _{Note1}
5	15.247(e)	Power spectral density (PSD)	Jan 12, 2018	Su Hang	PASS _{Note1}
6	15.247(d)	Restricted Frequency Bands	Jun 13, 2018	Wu Zhongwen	PASS
7	15.207	Conducted Emission	Jun 13, 2018	Wu Zhongwen	PASS
8	15.209, 15.247(d)	Radiated Emission	Jun 11, 2018	Wu Zhongwen	PASS

Note 1: The test results of these test items in this report refer to the test report (Report No.: SZ18010063W03).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013 and KDB558074 D01 v04 (04/05/2017).

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:

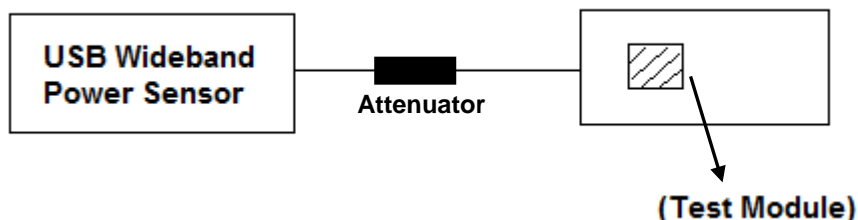



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX A(1.5).

2.2.3. Test Result

2.2.3.1 802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.55	0.07161	30	1	PASS
6	2437	18.85	0.07674			PASS
11	2462	18.33	0.06808			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.07	0.04046	30	1	PASS
6	2437	16.09	0.04064			PASS
11	2462	15.96	0.03945			PASS

2.2.3.2 802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.03	0.12677	30	1	PASS
6	2437	22.26	0.16827			PASS
11	2462	21.52	0.14191			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.09	0.01618	30	1	PASS
6	2437	14.06	0.02547			PASS
11	2462	13.84	0.02421			PASS

**2.2.3.3 802.11n-20MHz Test mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.13	0.12972	30	1	PASS
6	2437	21.91	0.15524			PASS
11	2462	21.71	0.14825			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.04	0.01600	30	1	PASS
6	2437	14.01	0.02518			PASS
11	2462	13.83	0.02415			PASS

2.2.3.4 802.11n-40MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	21.82	0.15205	30	1	PASS
6	2437	21.48	0.14060			PASS
9	2452	21.21	0.13213			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	13.20	0.02089	30	1	PASS
6	2437	13.19	0.02084			PASS
9	2452	13.05	0.02018			PASS


2.3. Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:

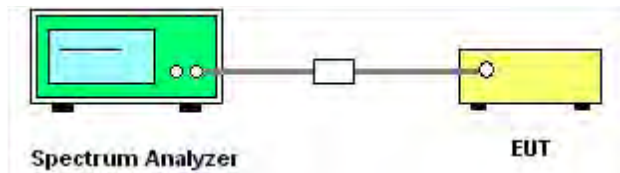

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX A(1.5).



2.3.3. Test Result

2.3.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.594	≥500	PASS
6	2437	9.579	≥500	PASS
11	2462	9.587	≥500	PASS

B. Test Plots



(Channel 1, 2412MHz, 802.11b)



(Channel 6, 2437 MHz, 802.11b)



(Channel 11, 2462MHz, 802.11b)




2.3.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.50	≥500	PASS
6	2437	15.31	≥500	PASS
11	2462	15.74	≥500	PASS


B. Test Plots:

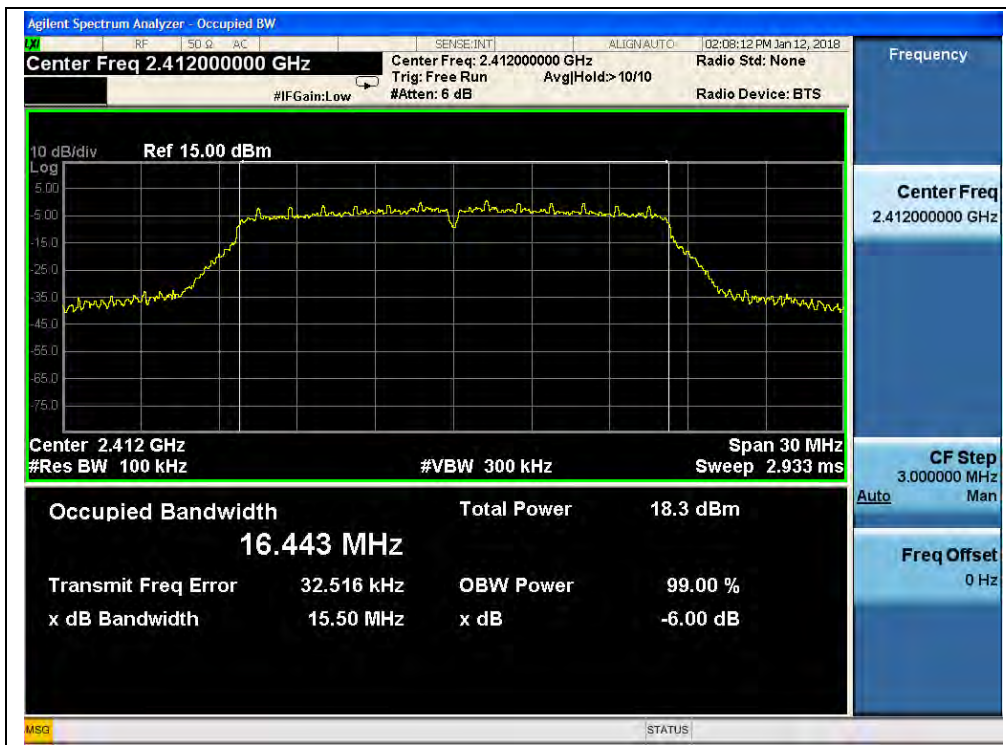

(Channel 1, 2412MHz, 802.11g)



(Channel 6, 2437MHz, 802.11g)

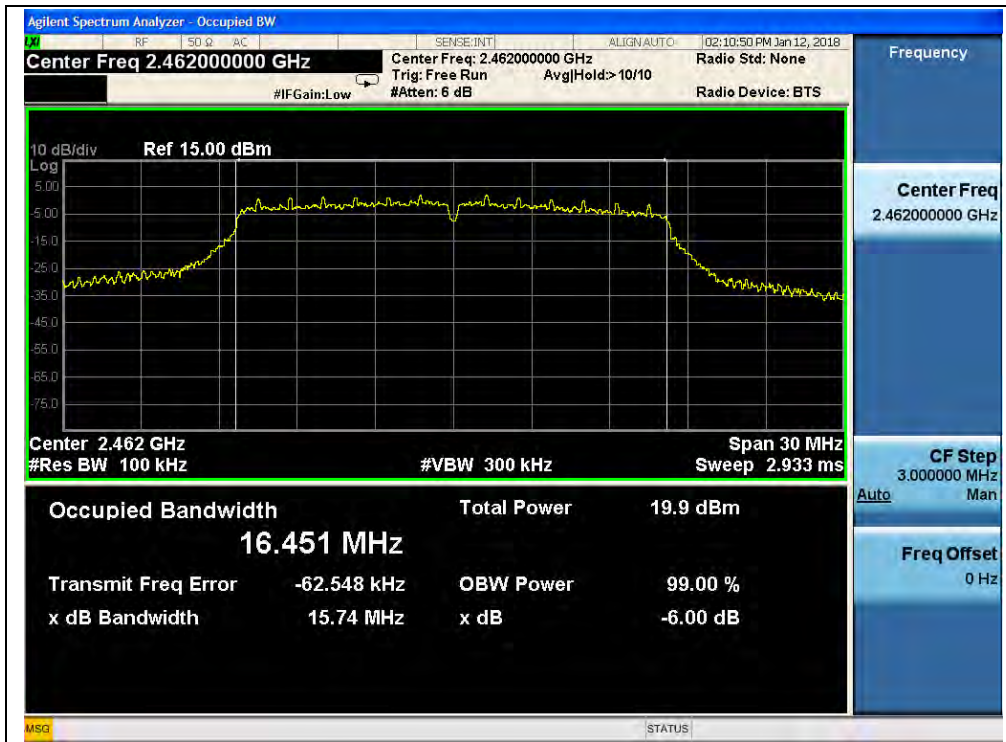

(Channel 11, 2462MHz, 802.11g)




2.3.3.3 802.11n-20 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.10	≥500	PASS
6	2437	15.33	≥500	PASS
11	2462	16.13	≥500	PASS


B. Test Plots:

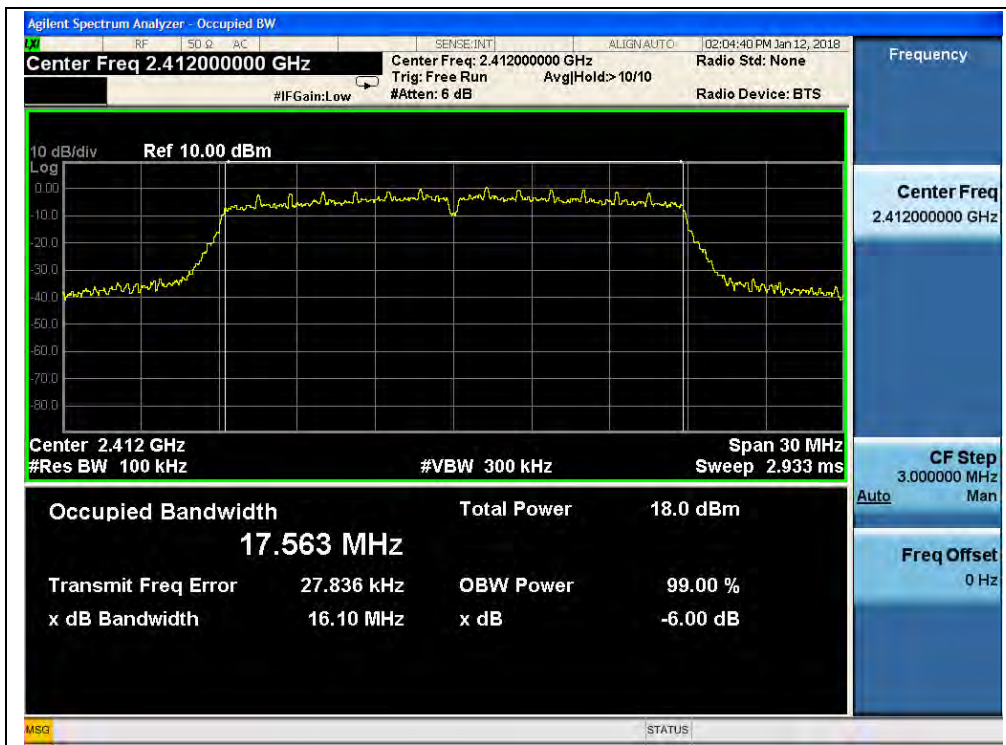

(Channel 1, 2412MHz, 802.11n-20)

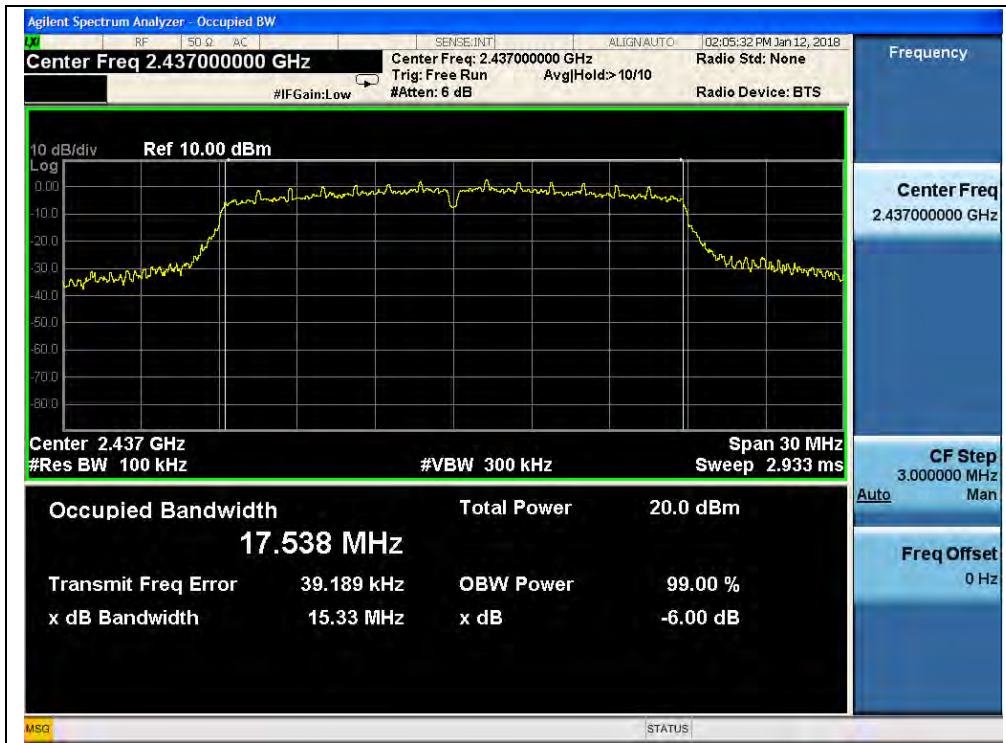

(Channel 6, 2437MHz, 802.11n-20)

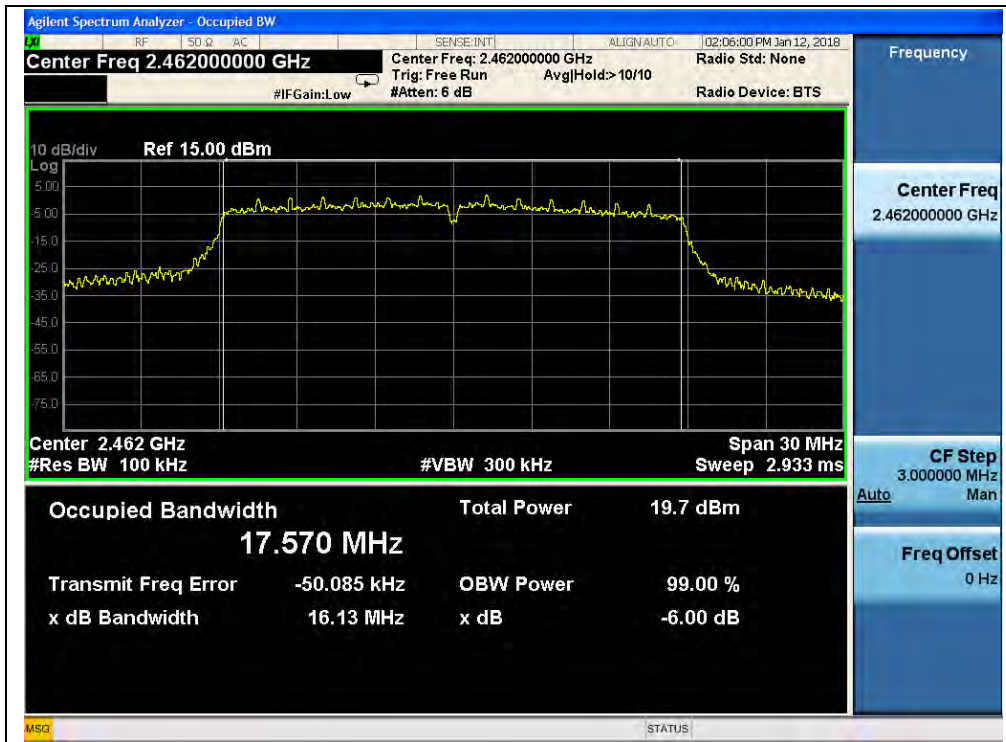

(Channel 11, 2462MHz, 802.11n-20)




2.3.3.4 802.11n-40 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	35.48	≥500	PASS
6	2437	35.17	≥500	PASS
9	2452	35.20	≥500	PASS


B. Test Plots:

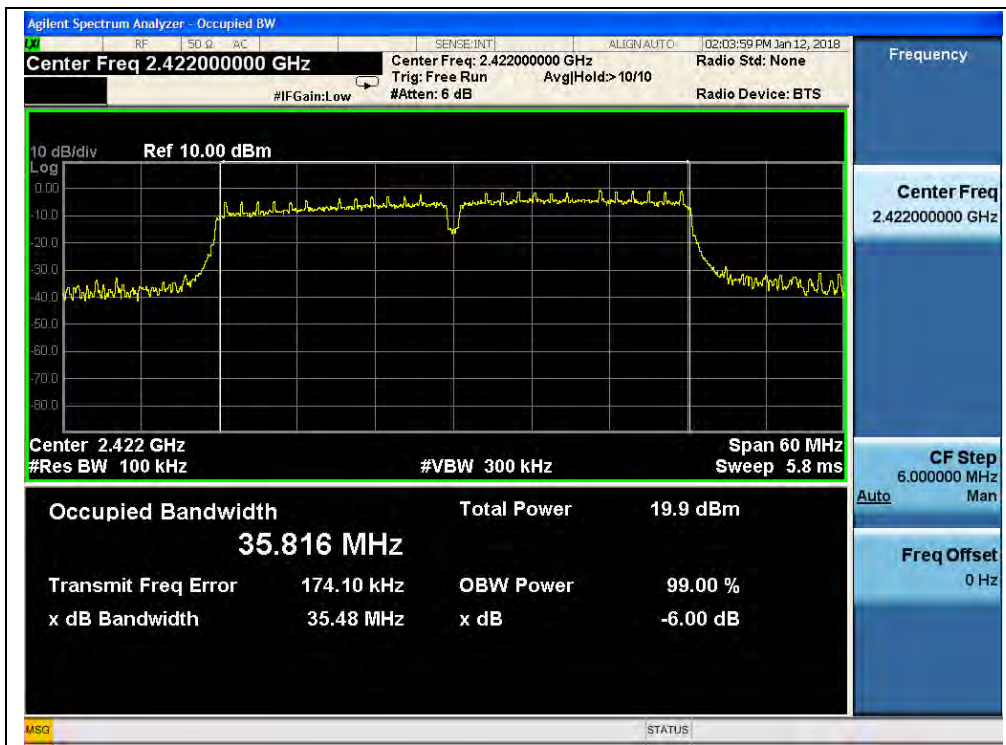

(Channel 3, 2422Mz, 802.11n-40)

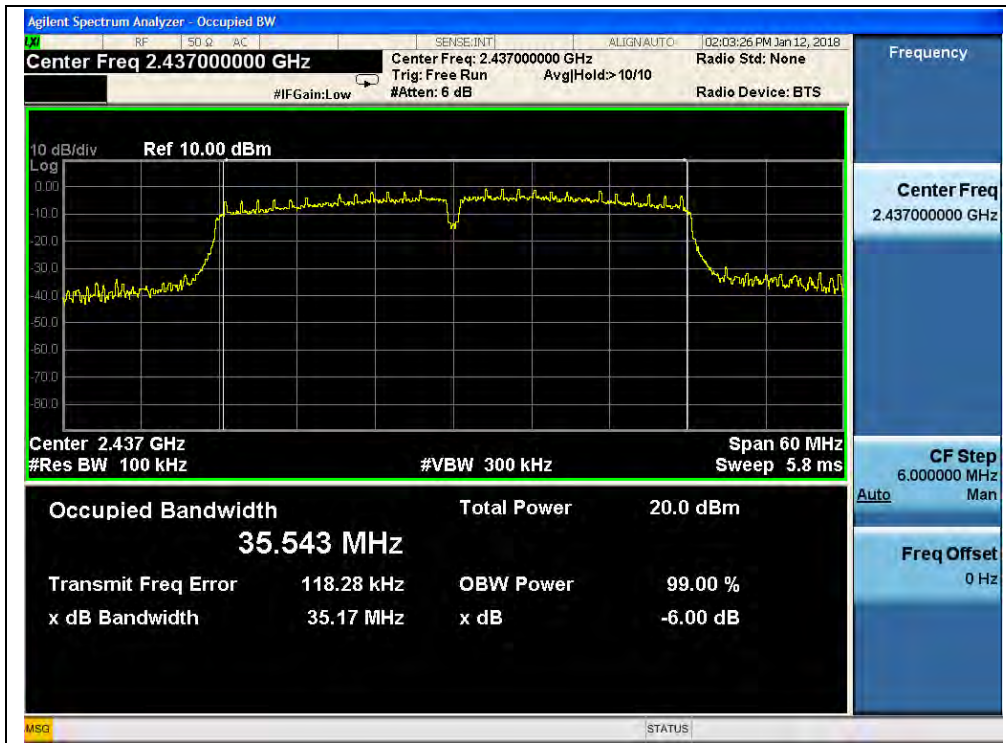

(Channel 6, 2437MHz, 802.11n-40)

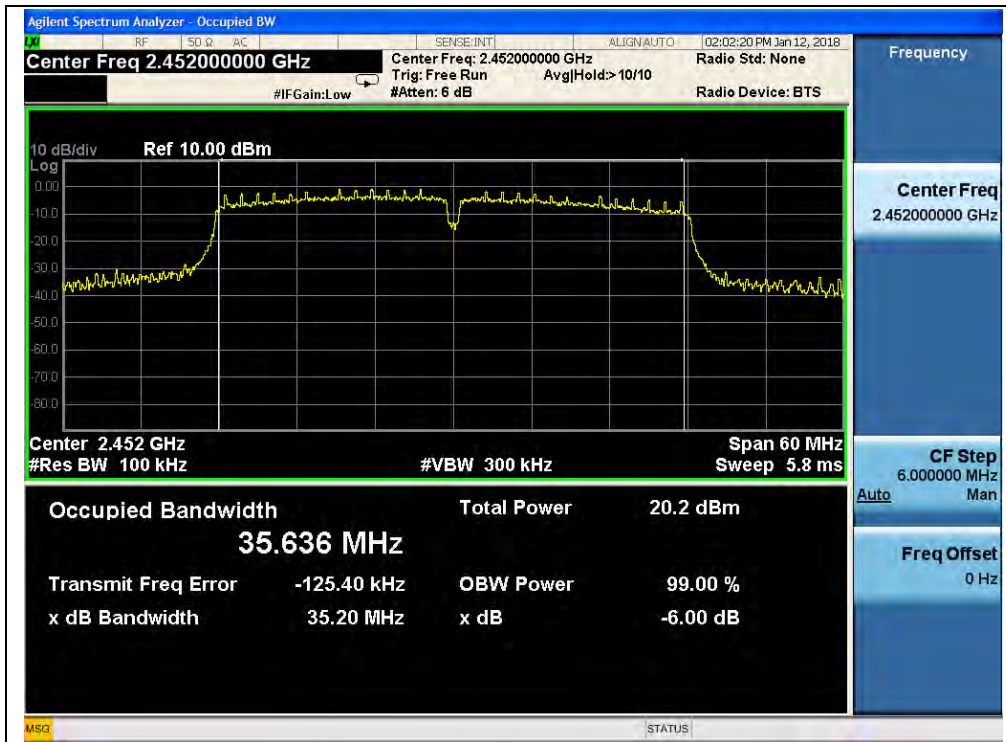

(Channel 9, 2452MHz, 802.11n-40)


2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:

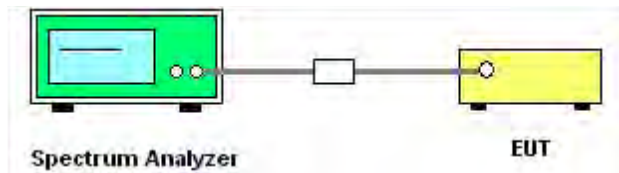

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX A(1.5).



2.4.3. Test Result

2.4.3.1 802.11b Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.92	5.46	-14.54	PASS
6	2437	-45.45	6.00	-14.00	PASS
11	2462	-44.68	4.80	-15.20	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.



(Channel = 1, 30MHz to 25GHz)

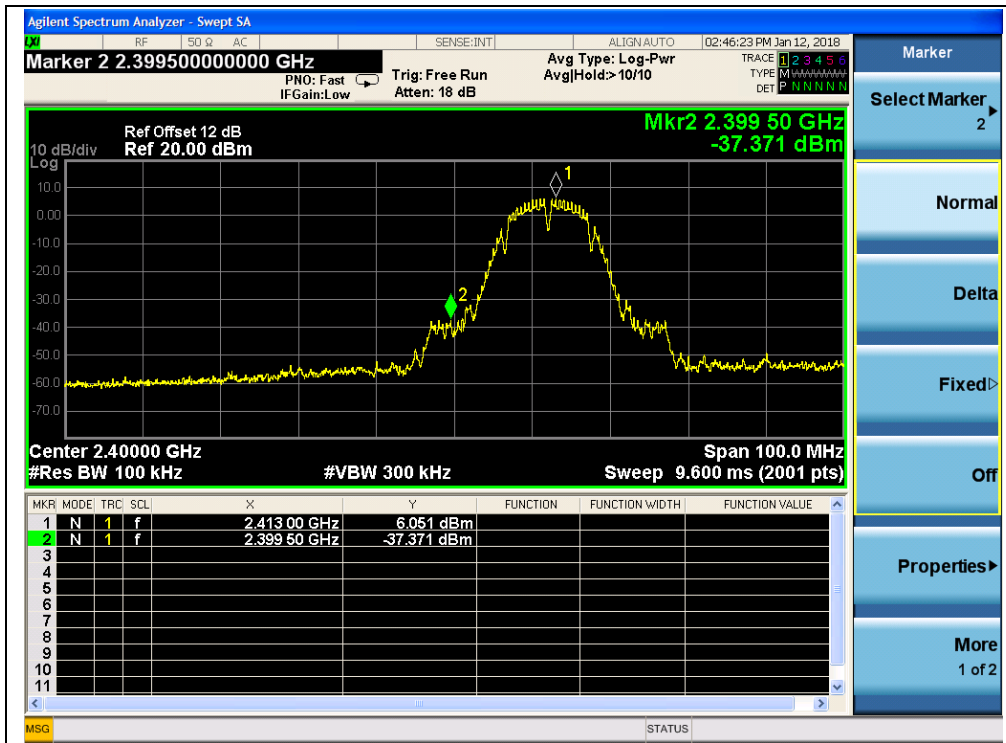


(Band Edge @ Channel = 1)

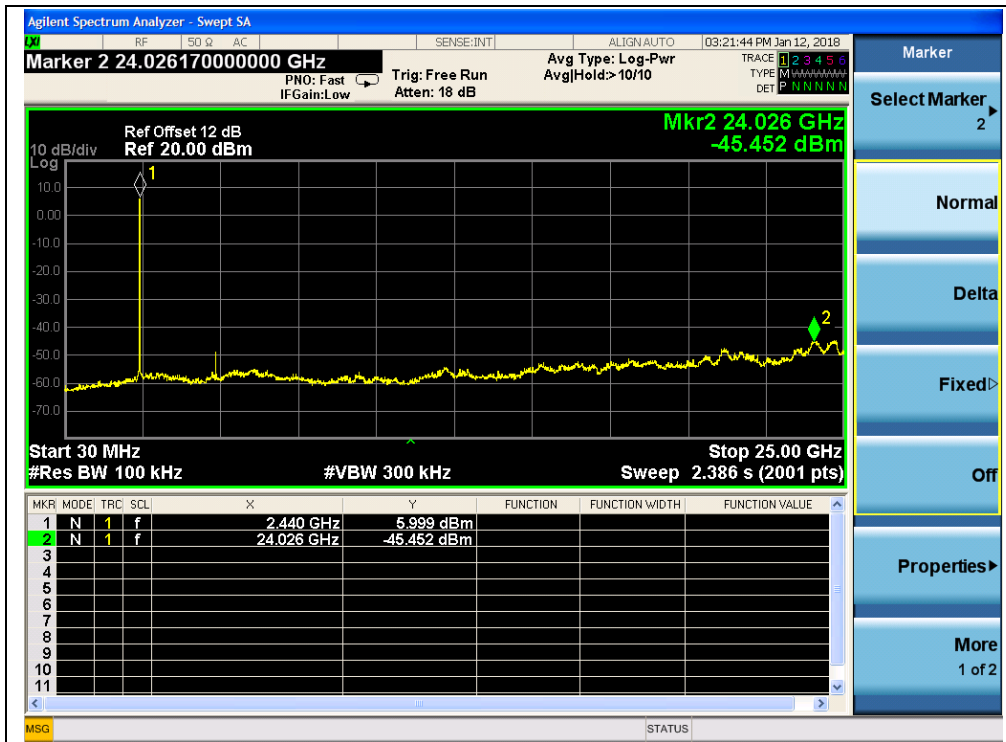

(Channel = 6, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)

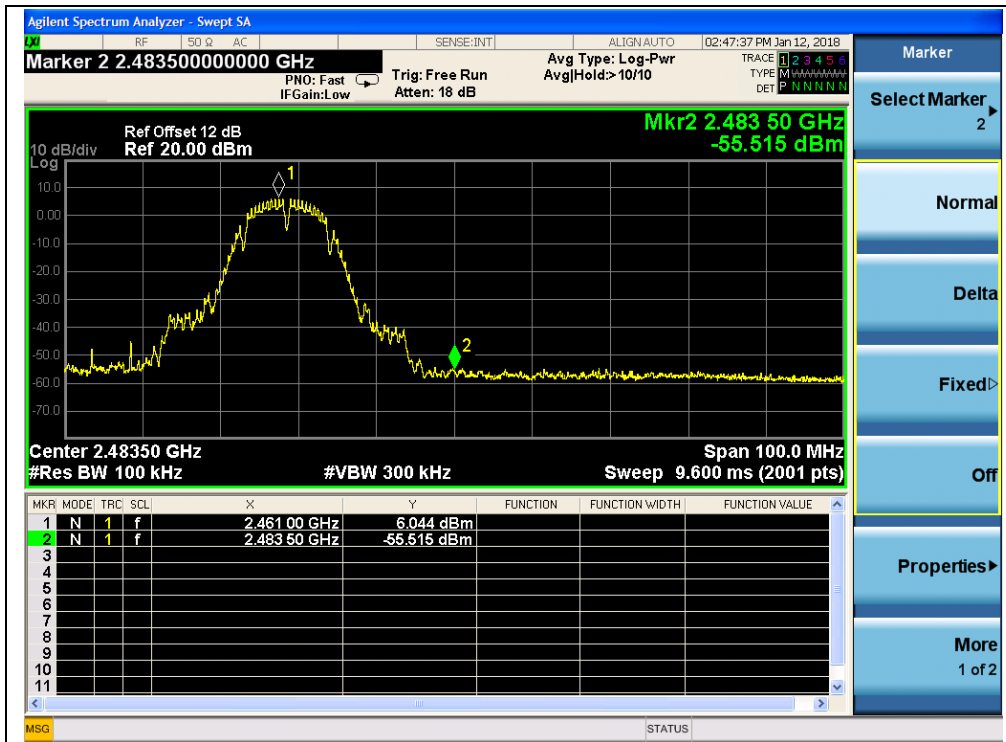

(Band Edge @ Channel = 11)




2.4.3.2 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.82	-0.33	-20.33	PASS
6	2437	-44.18	0.52	-19.48	PASS
11	2462	-44.11	0.55	-19.45	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

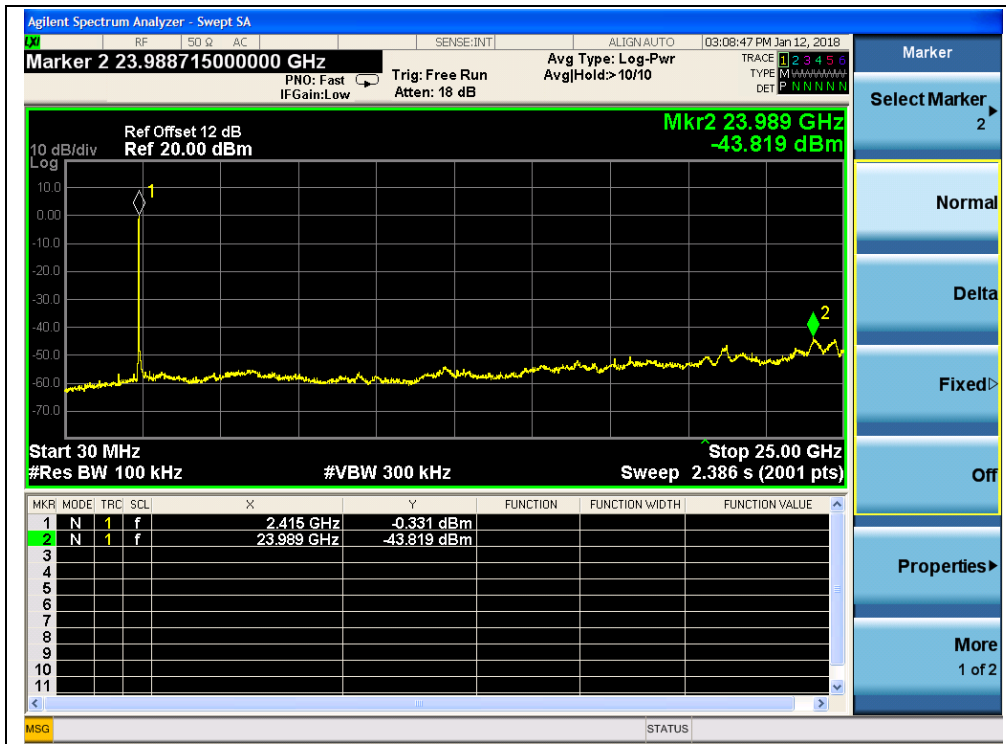


(Channel = 1, 30MHz to 25GHz)

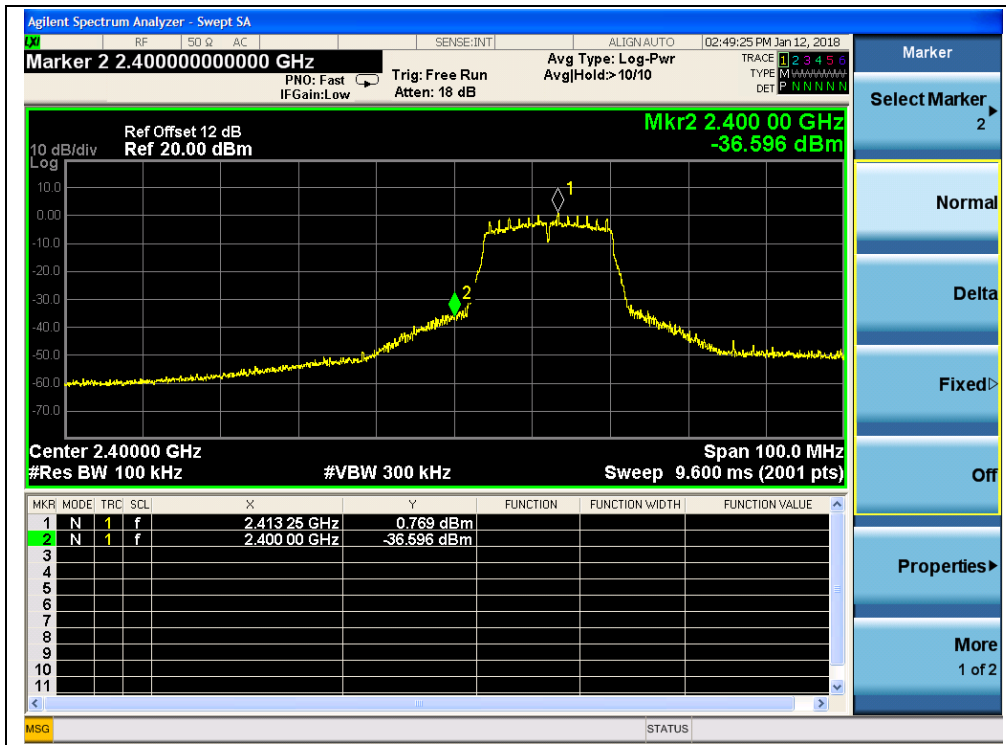


(Band Edge @ Channel = 1)

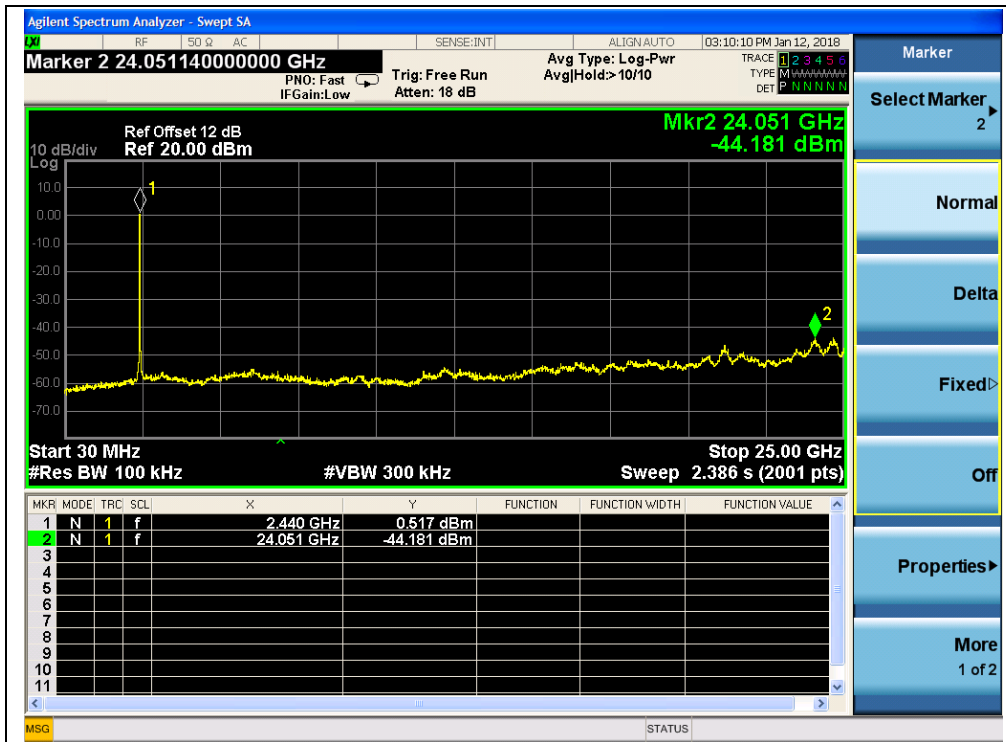

(Channel = 6, 30MHz to 25GHz)

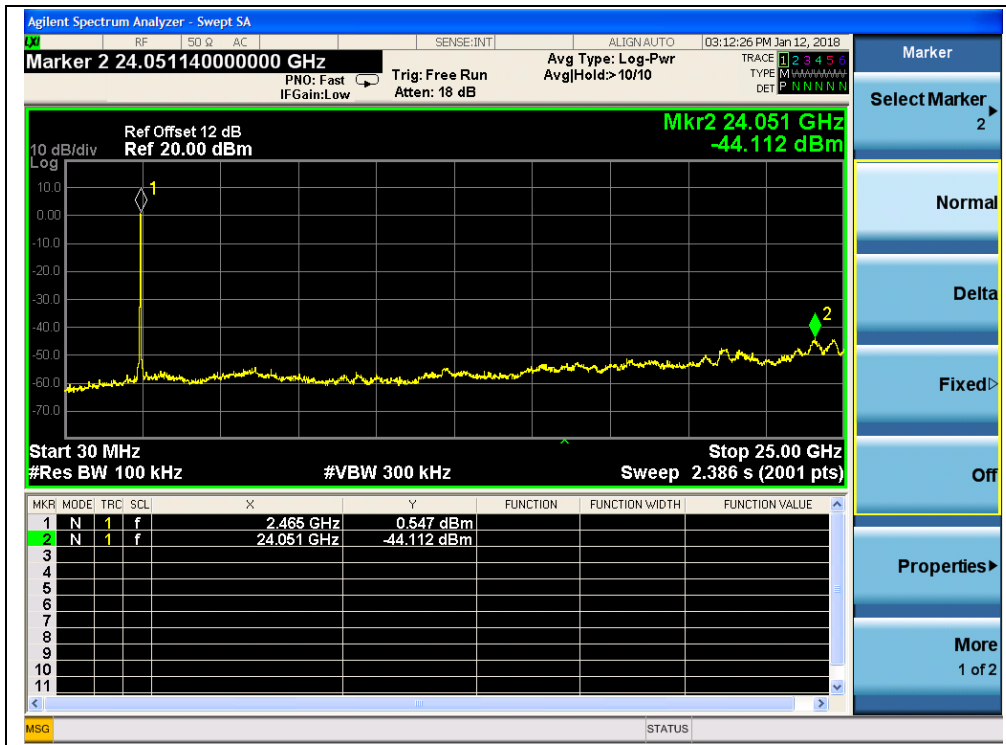

(Channel = 11, 30MHz to 25GHz)

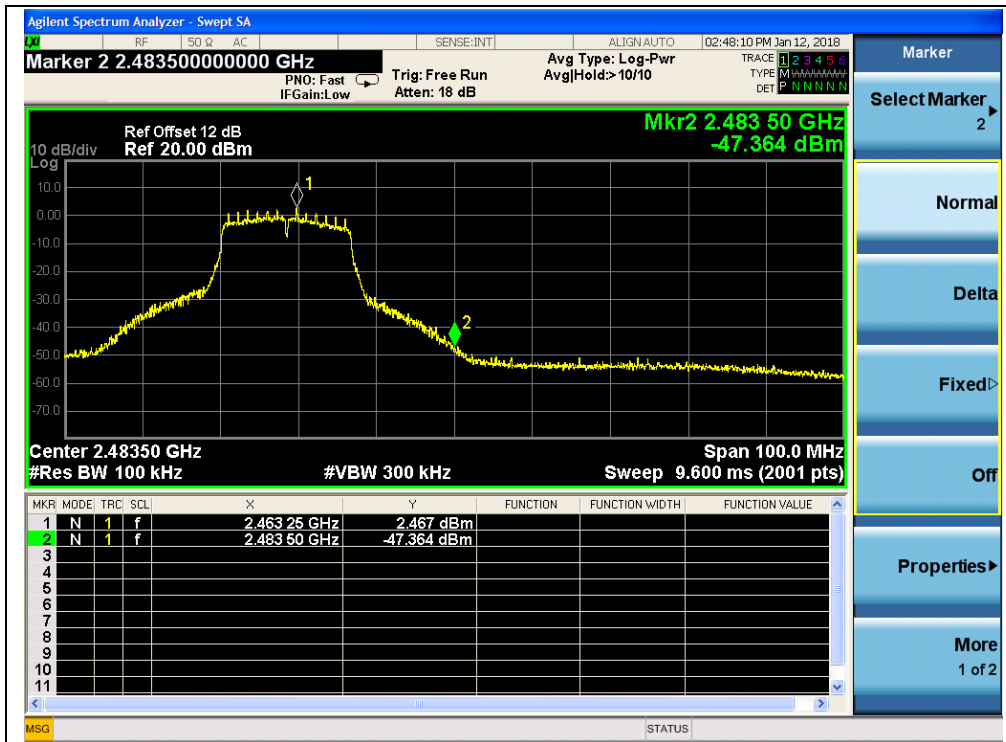

(Band Edge @ Channel = 11)




2.4.3.3 802.11n -20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-44.30	-0.40	-20.40	PASS
6	2437	-44.55	3.09	-16.91	PASS
11	2462	-43.90	0.31	-19.69	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

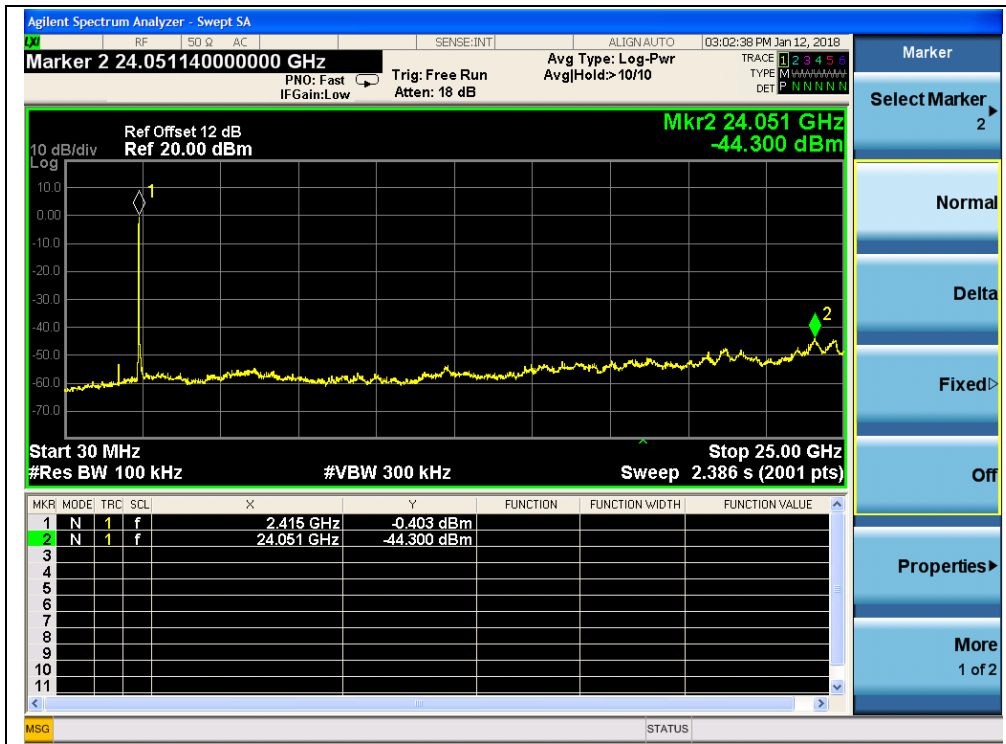


(Channel = 1, 30MHz to 25GHz)

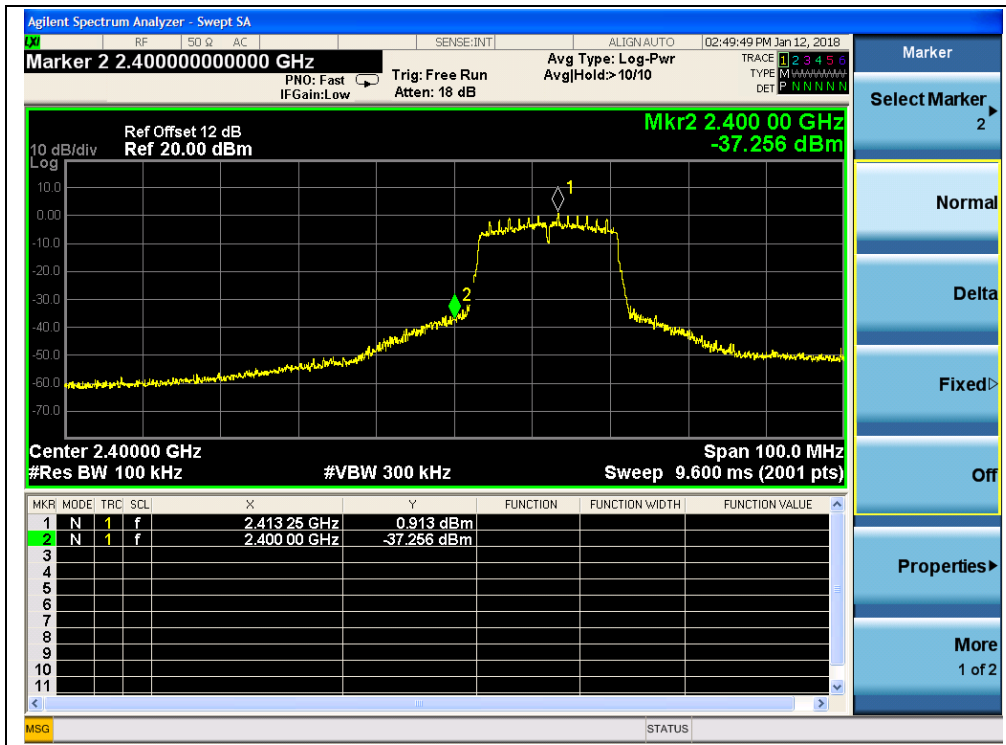


(Band Edge @ Channel = 1)

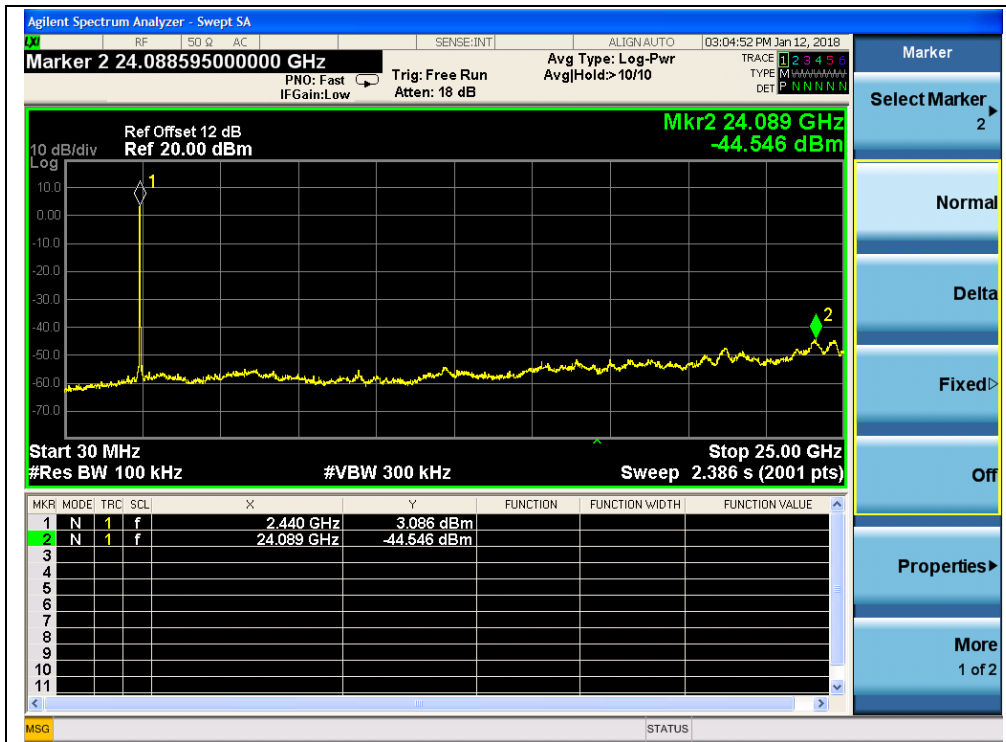

(Channel = 6, 30MHz to 25GHz)

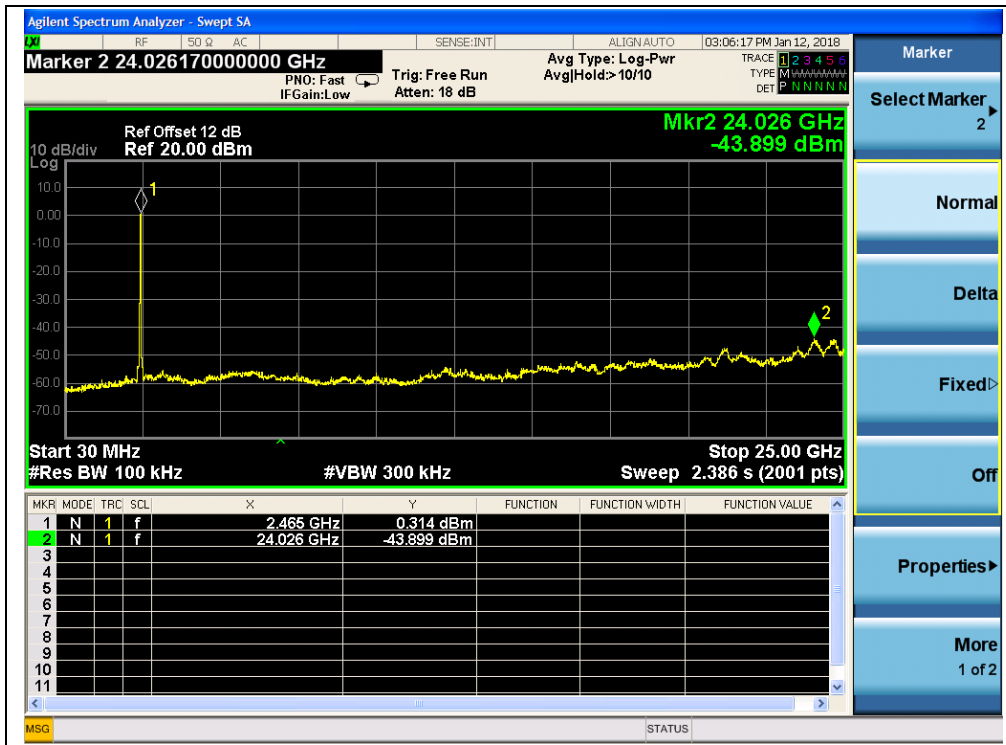

(Channel = 11, 30MHz to 25GHz)

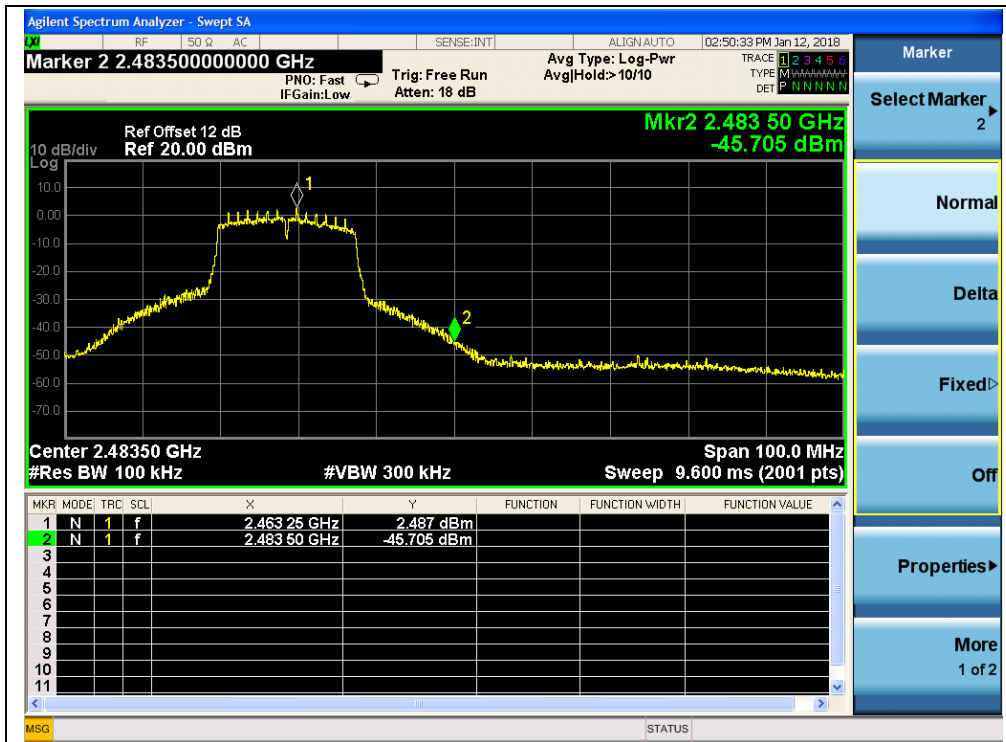

(Band Edge @ Channel = 11)




2.4.3.4 802.11n -40MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-44.50	-1.66	-21.66	PASS
6	2437	-44.30	-1.14	-21.14	PASS
9	2452	-44.25	-1.85	-21.85	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

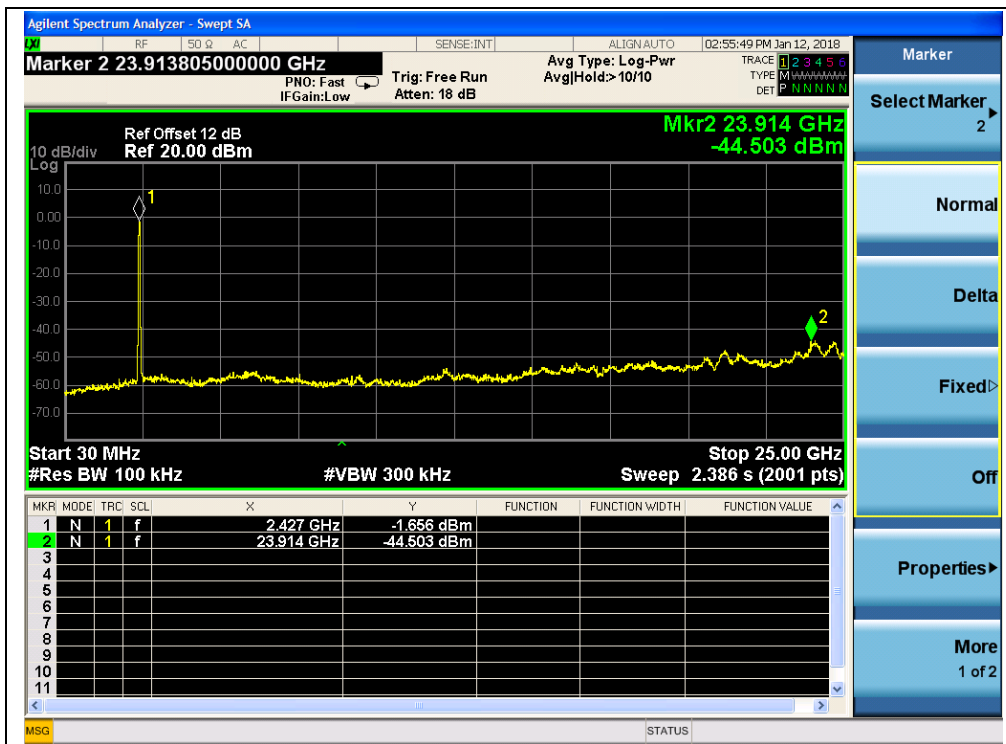


(Channel = 3, 30MHz to 25GHz)




(Band Edge @ Channel = 3)

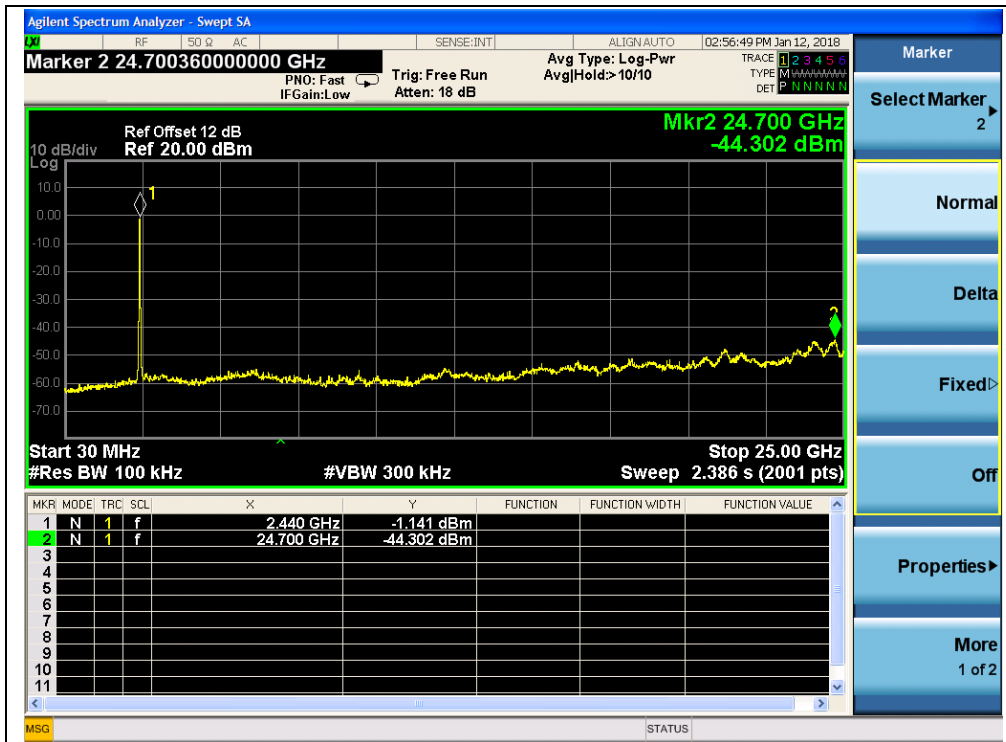

(Channel = 6, 30MHz to 25GHz)

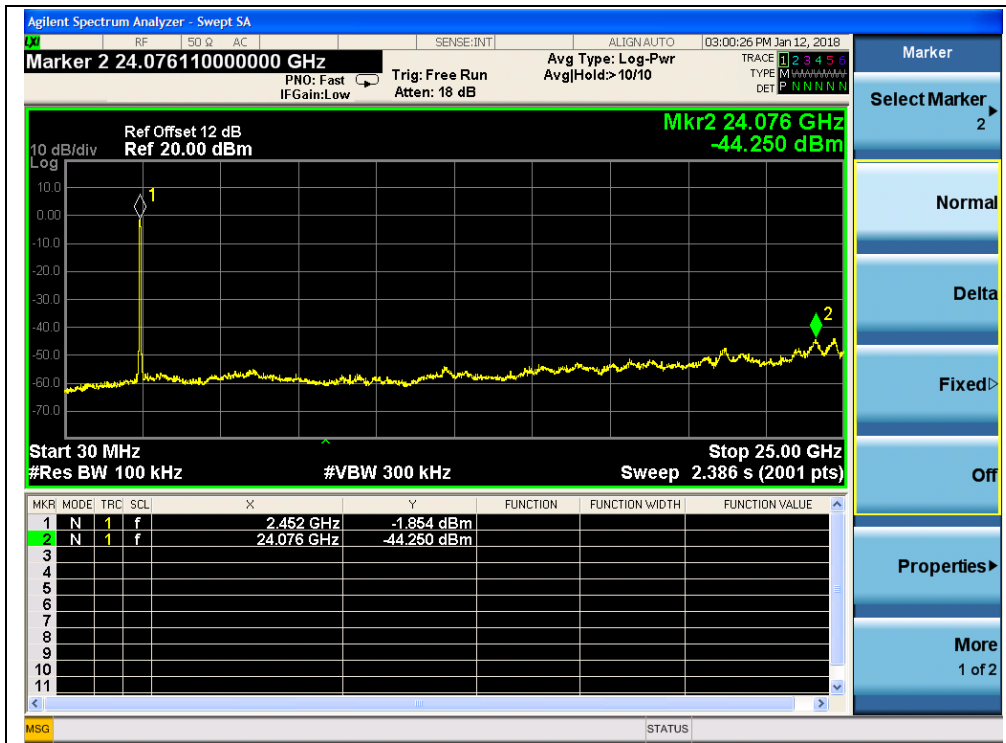

(Channel = 9, 30MHz to 25GHz)

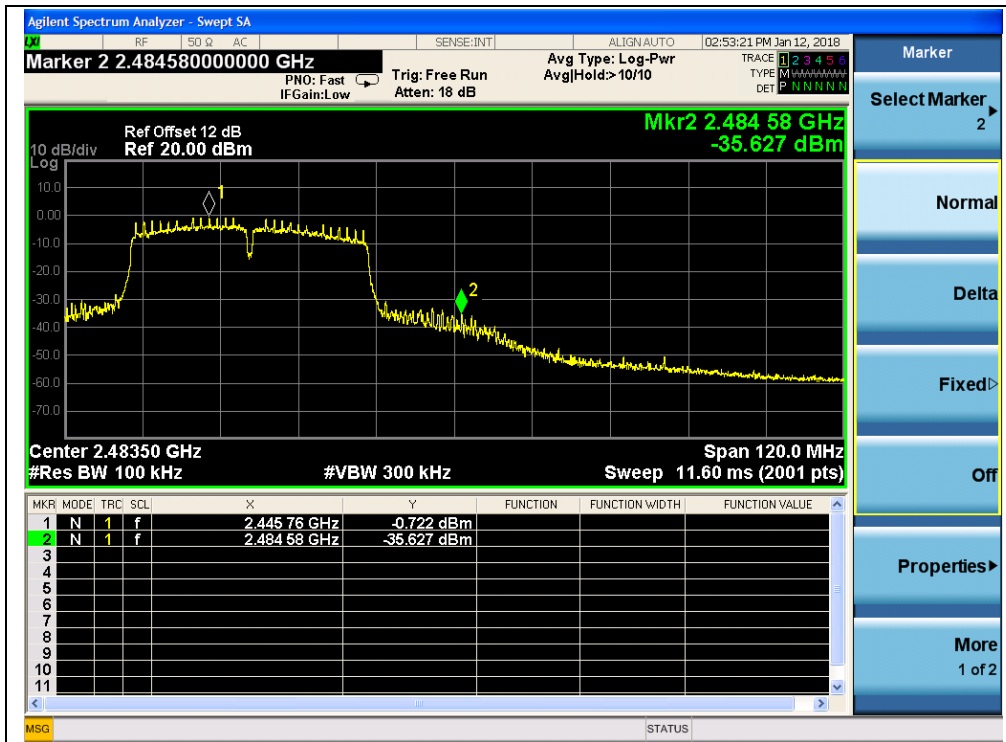

(Band Edge @ Channel = 9)

2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.5.2. Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:

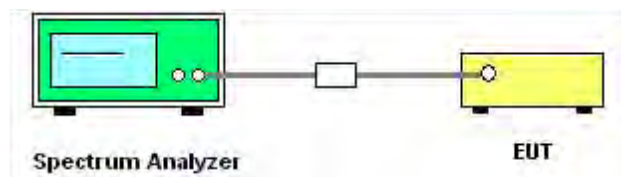

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please refer ANNEX A(1.5).



2.5.3. Test Result

2.5.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-7.75	8	PASS
6	2437	-5.61	8	PASS
11	2462	-2.93	8	PASS

B. Test Plots:



(Channel = 1, 802.11b)



(Channel = 6, 802.11b)



(Channel = 11, 802.11b)




2.5.3.2 802.11g Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.53	8	PASS
6	2437	-10.17	8	PASS
11	2462	-11.79	8	PASS


B. Test Plots:

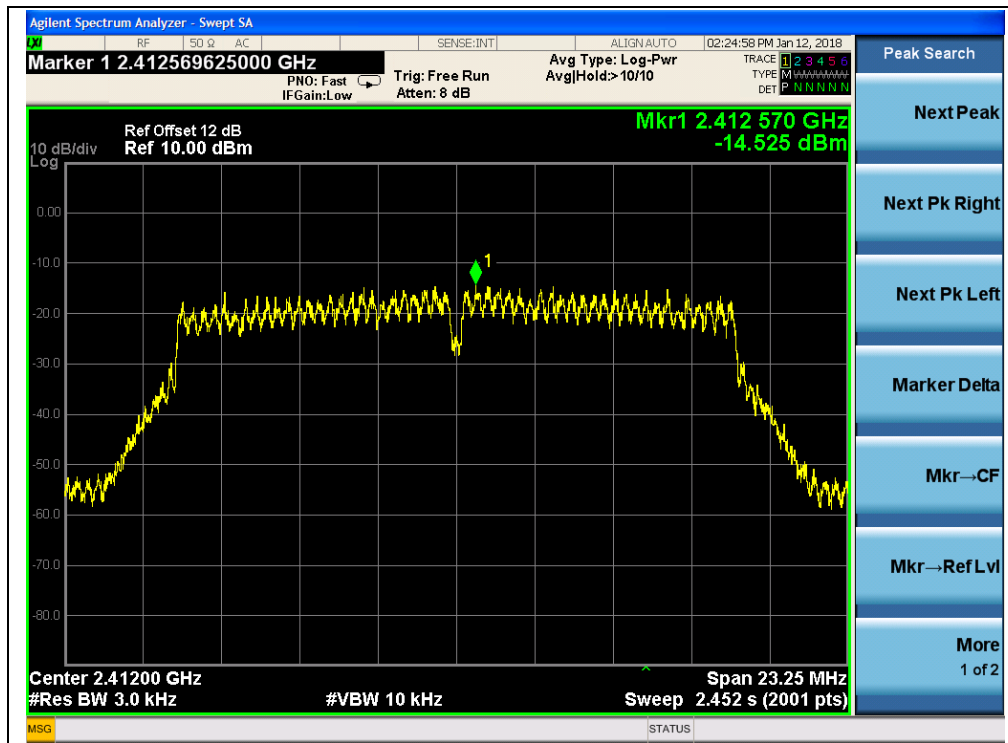

(Channel = 1, 802.11g)

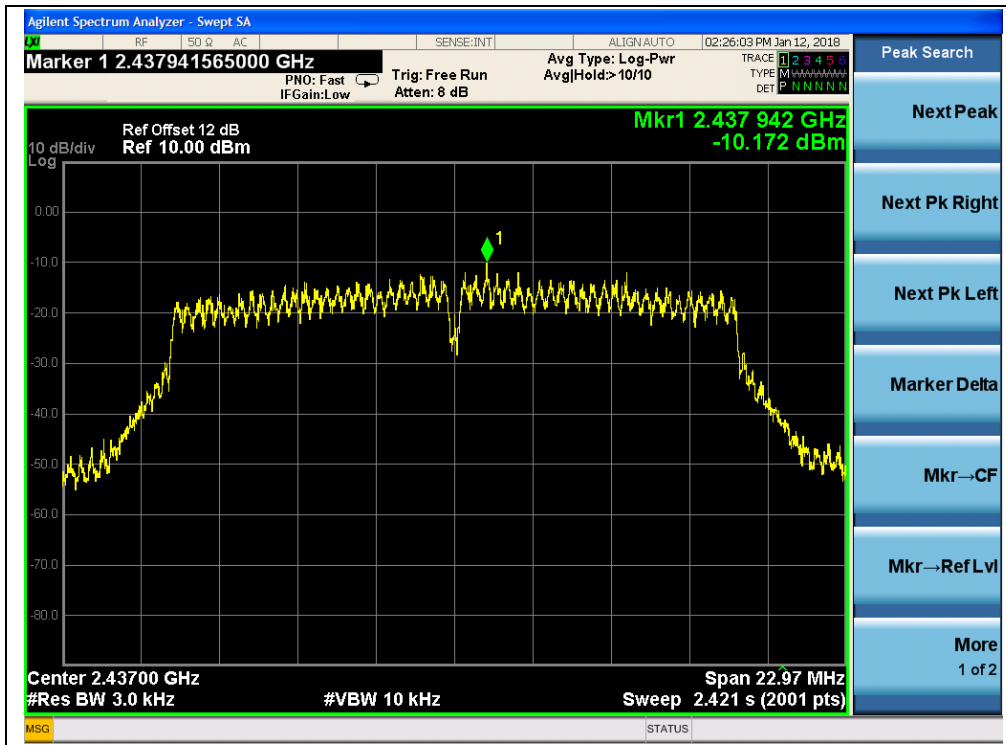

(Channel = 6, 802.11g)

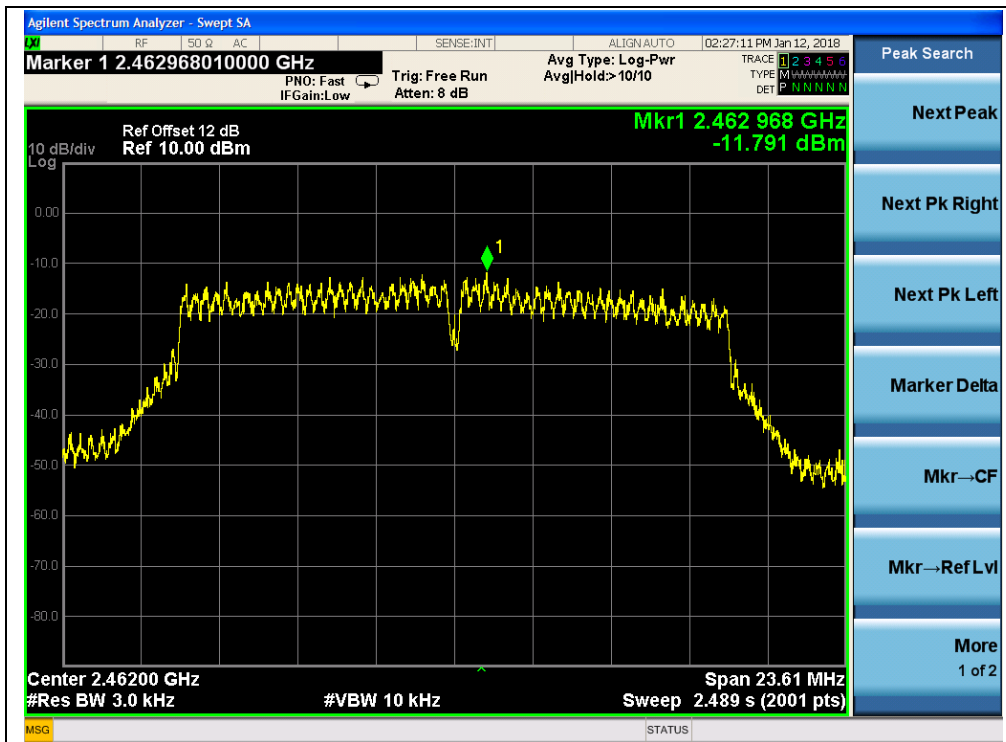

(Channel = 11, 802.11g)




2.5.3.3 802.11n-20MHz Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-13.21	8	PASS
6	2437	-10.28	8	PASS
11	2462	-11.48	8	PASS


B. Test Plots:

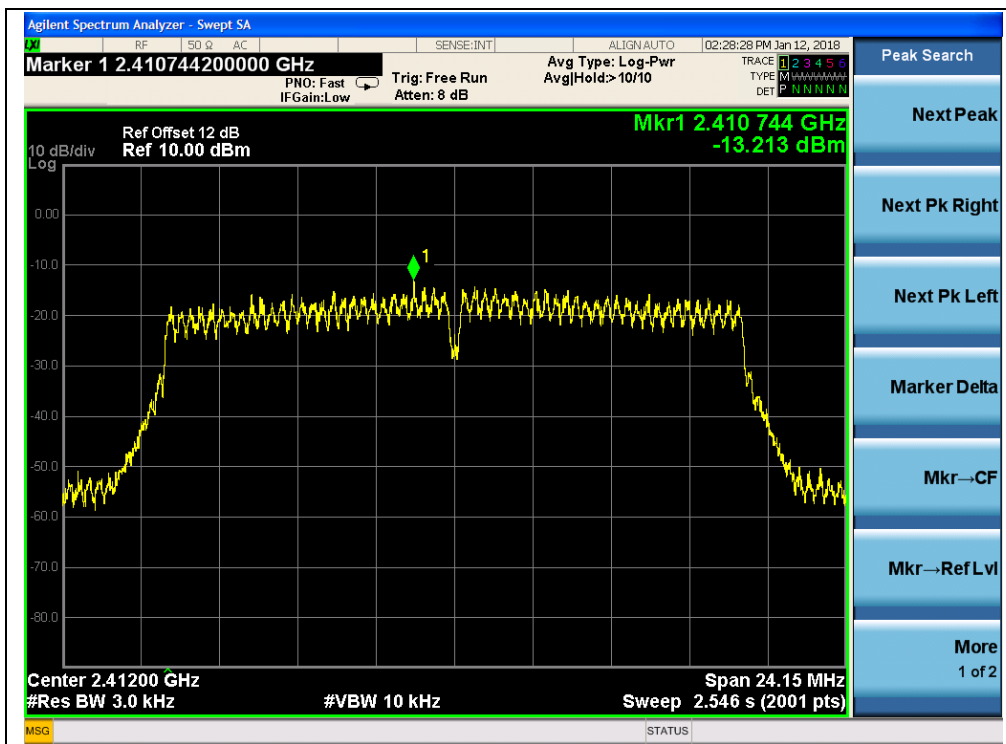

(Channel = 1, 802.11n-20MHz)

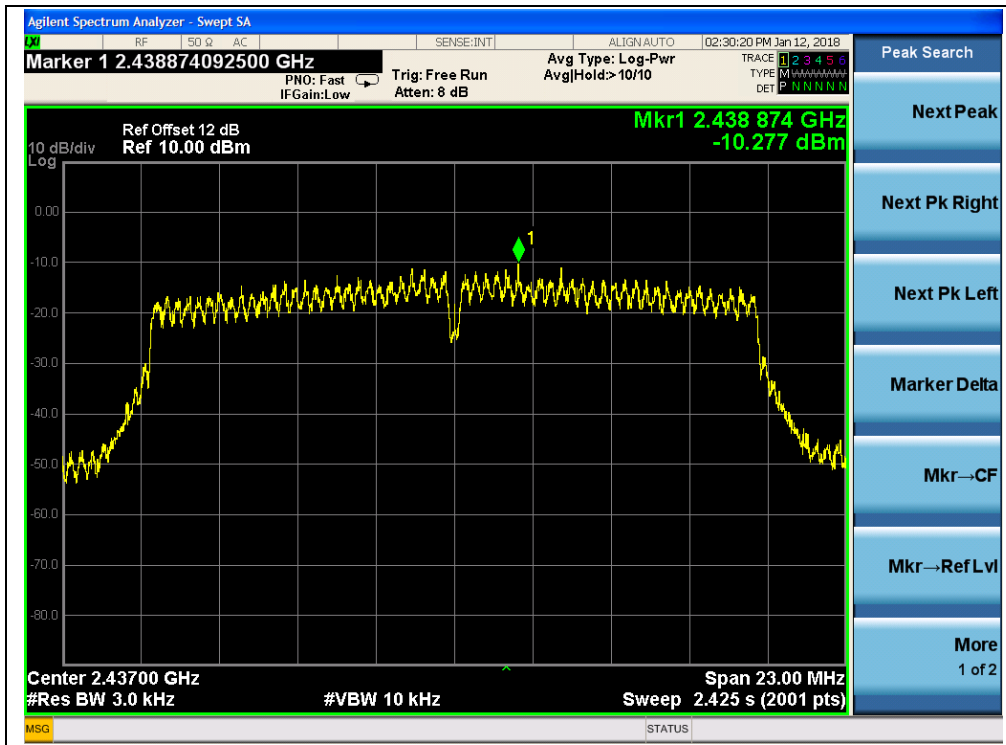

(Channel = 6, 802.11n-20MHz)

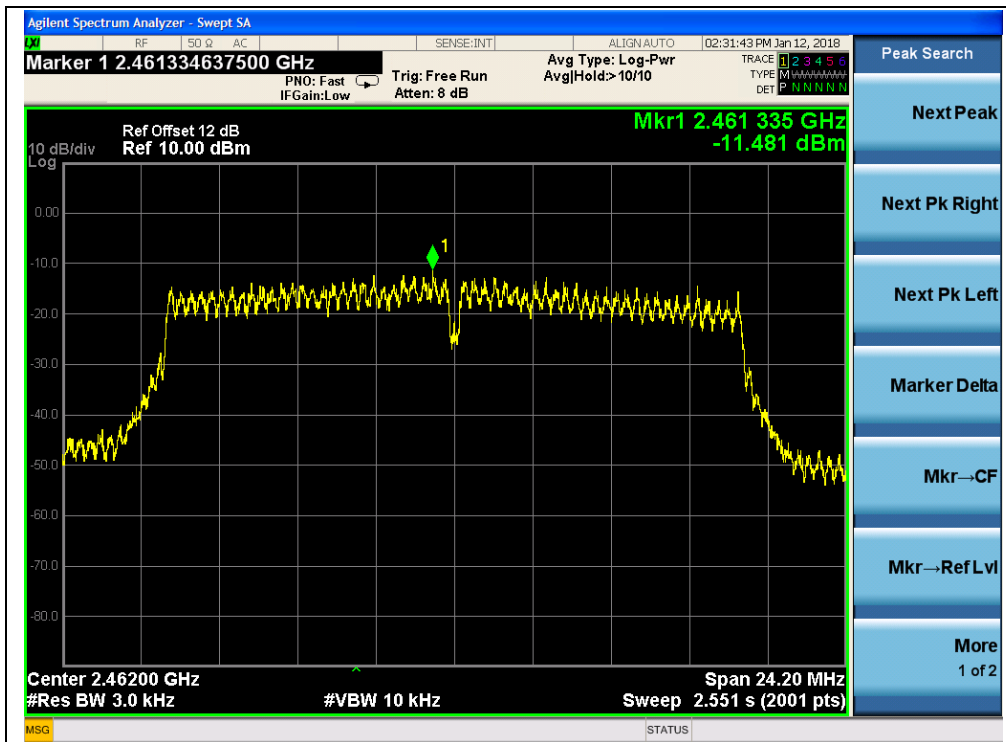

(Channel = 11, 802.11n-20MHz)




2.5.3.4 802.11n-40MHz Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-14.33	8	PASS
6	2437	-13.92	8	PASS
9	2452	-14.13	8	PASS


B. Test Plots:

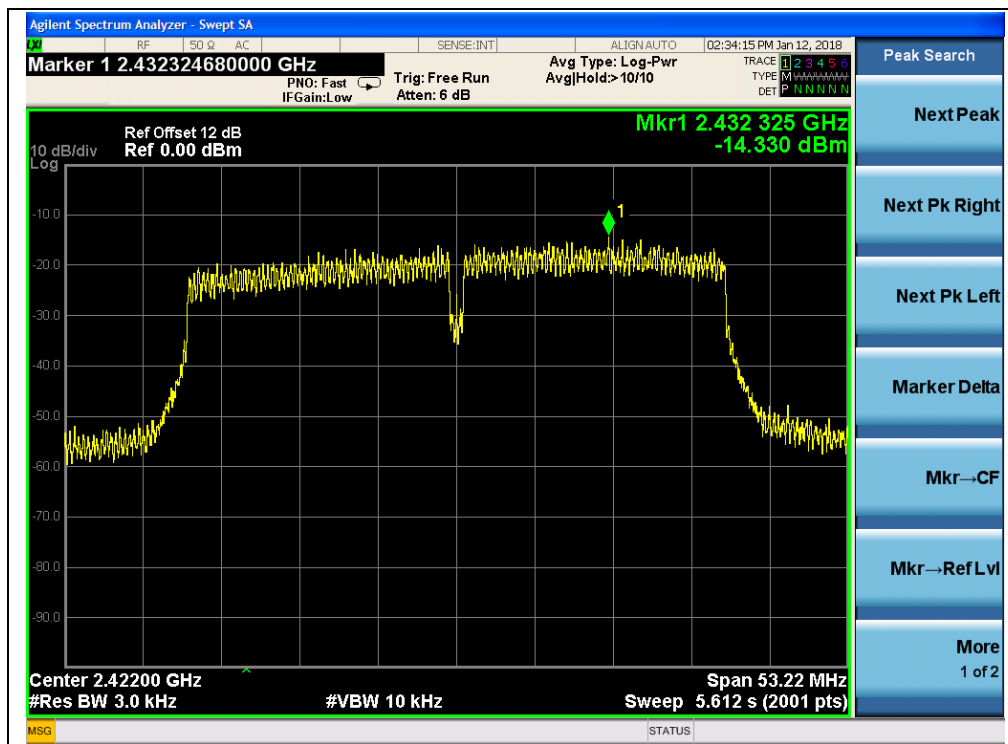

(Channel = 3, 802.11n-40MHz)

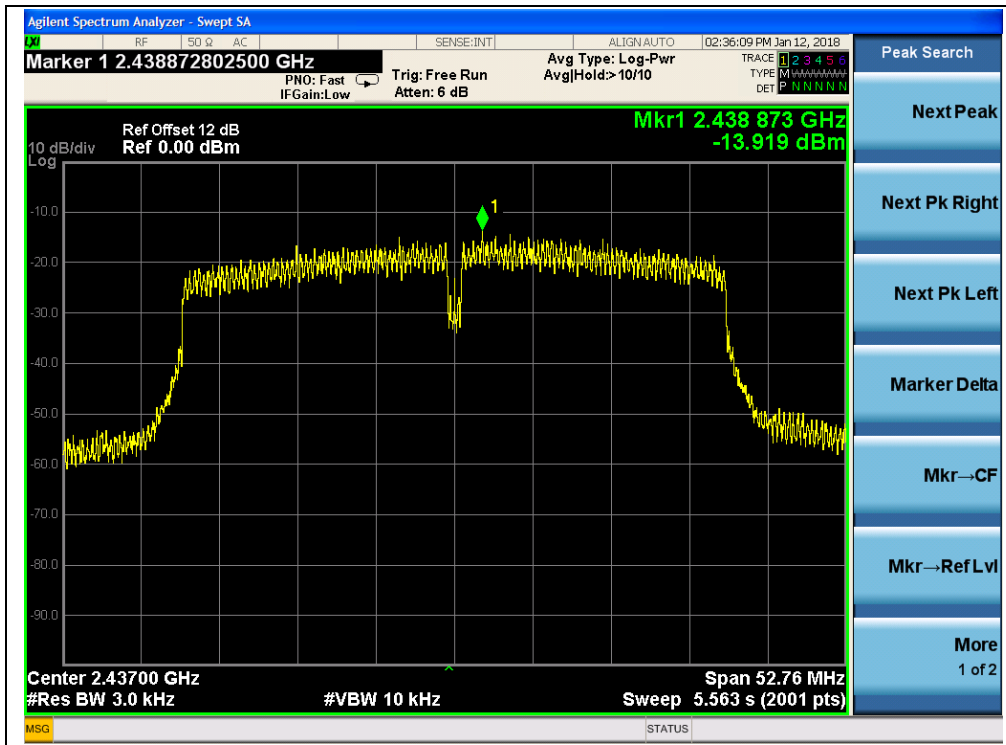

(Channel = 6, 802.11n-40MHz)

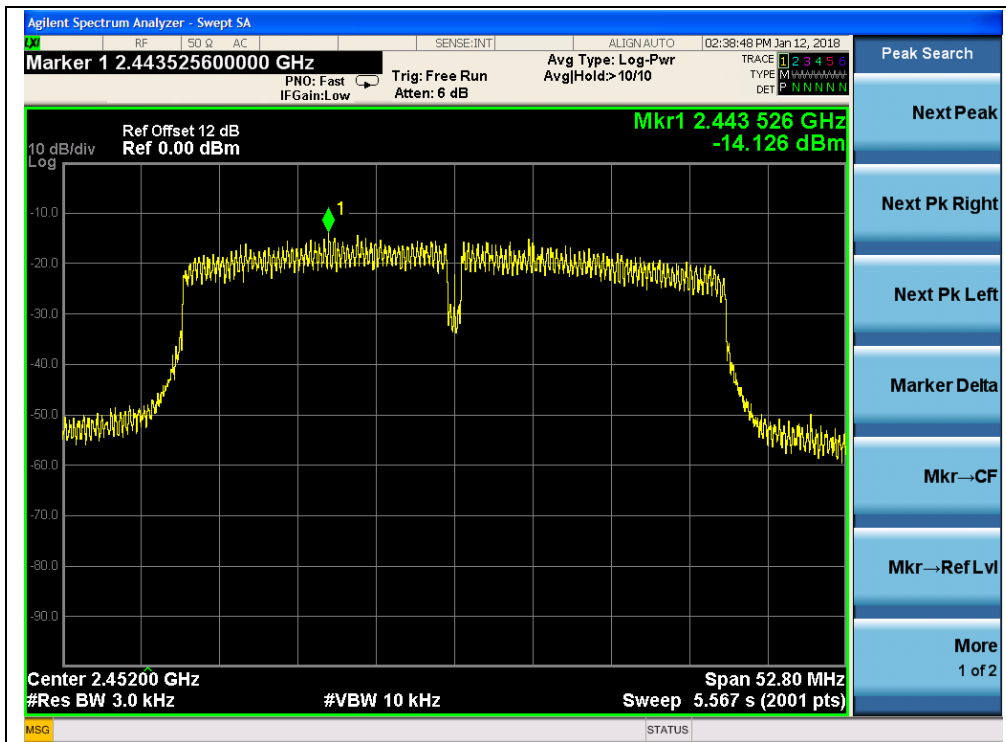

(Channel = 9, 802.11n-40MHz)


2.6. Restricted Frequency Bands

2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2. Test Description

A. Test Setup

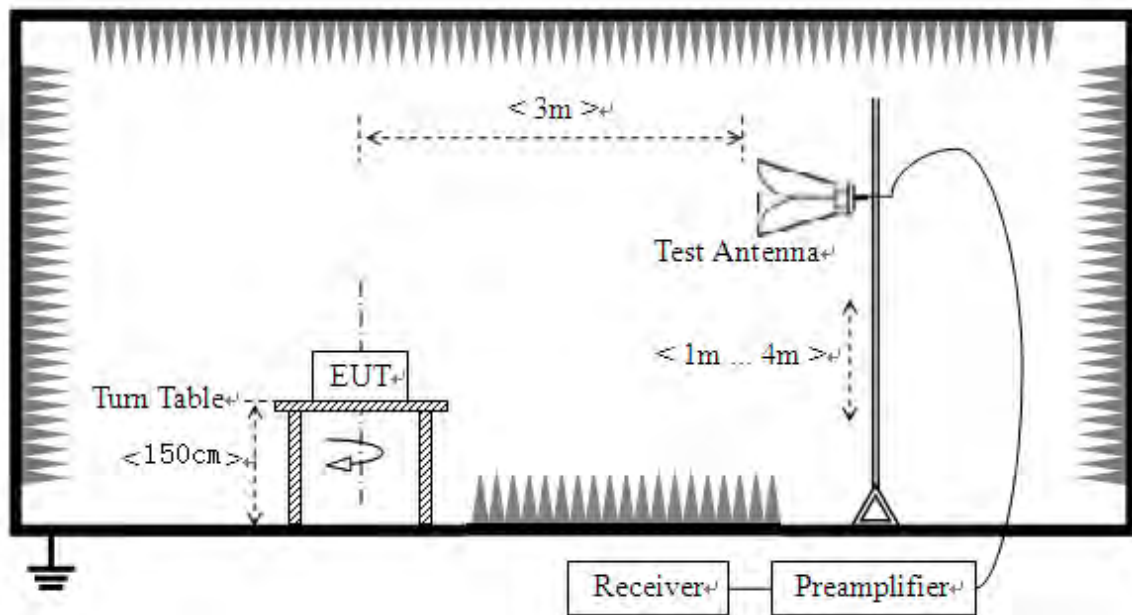

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.



B. Equipments List:

Please refer ANNEX A(1.5).

2.6.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.6.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2380.00	PK	50.49	-33.63	32.56	49.42	74	Pass
1	2387.17	AV	37.20	-33.63	32.56	36.13	54	Pass
11	2486.66	PK	49.81	-33.18	32.50	49.13	74	Pass
11	2485.86	AV	37.46	-33.18	32.50	36.78	54	Pass



B. Test Plots:

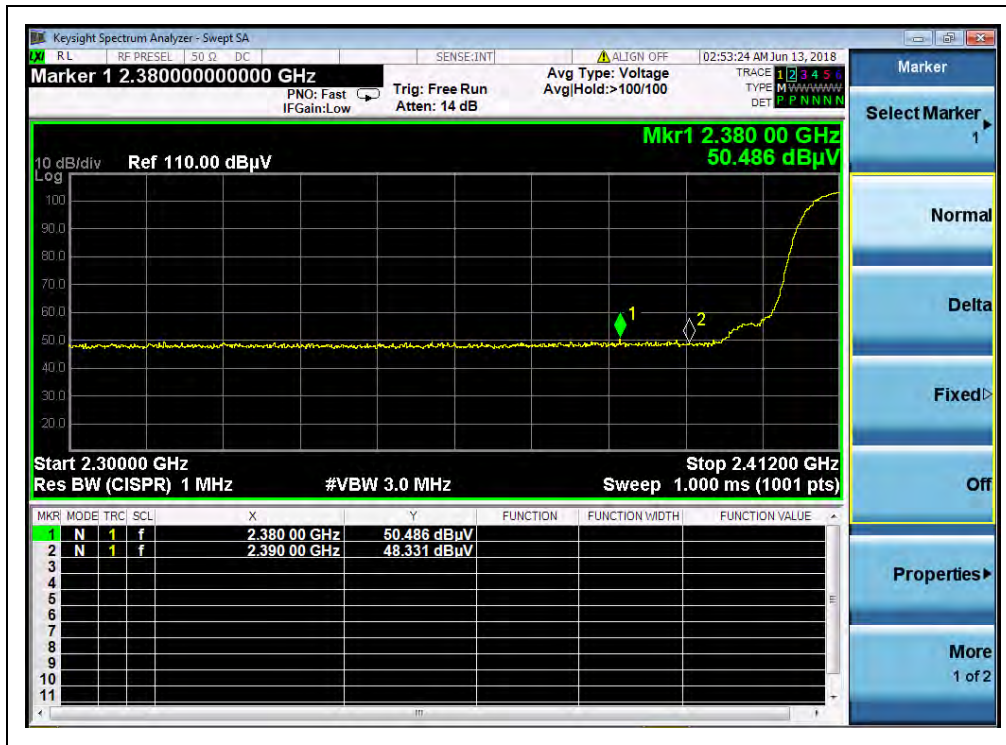


(Channel = 1 PEAK, 802.11b)



(Channel = 1 AVG, 802.11b)



(Channel = 11 PEAK, 802.11b)

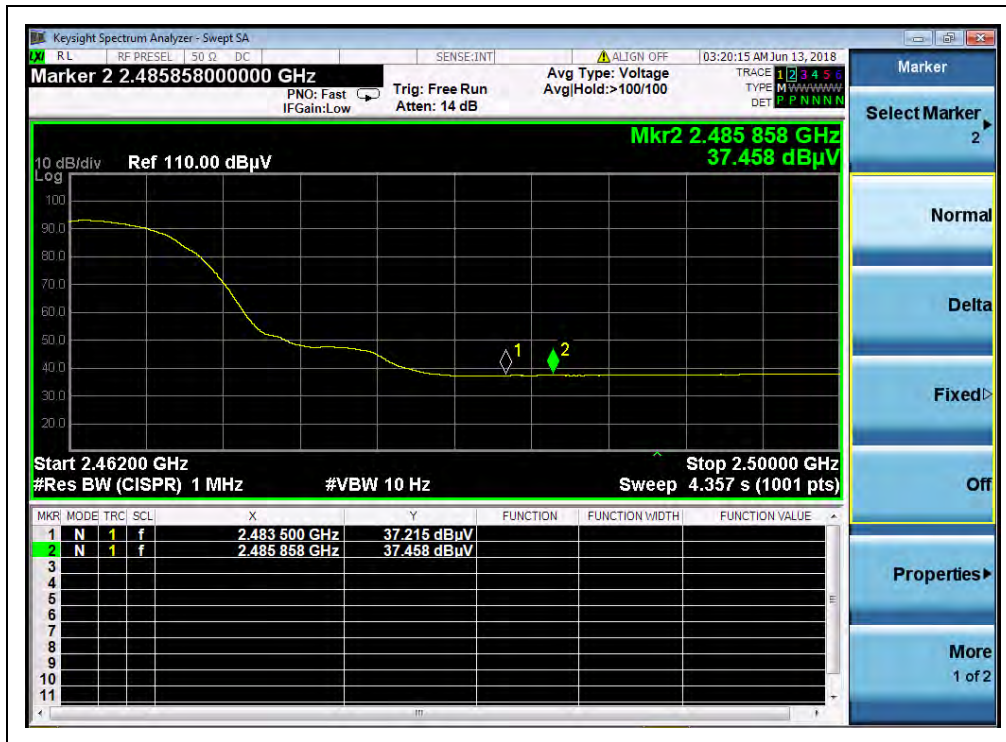

(Channel = 11 AVG, 802.11b)




2.6.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2375.63	PK	50.81	-33.63	32.56	49.74	74	Pass
1	2388.29	AV	38.37	-33.63	32.56	37.30	54	Pass
11	2484.38	PK	59.99	-33.18	32.50	59.31	74	Pass
11	2483.69	AV	43.21	-33.18	32.50	42.53	54	Pass

B. Test Plots:

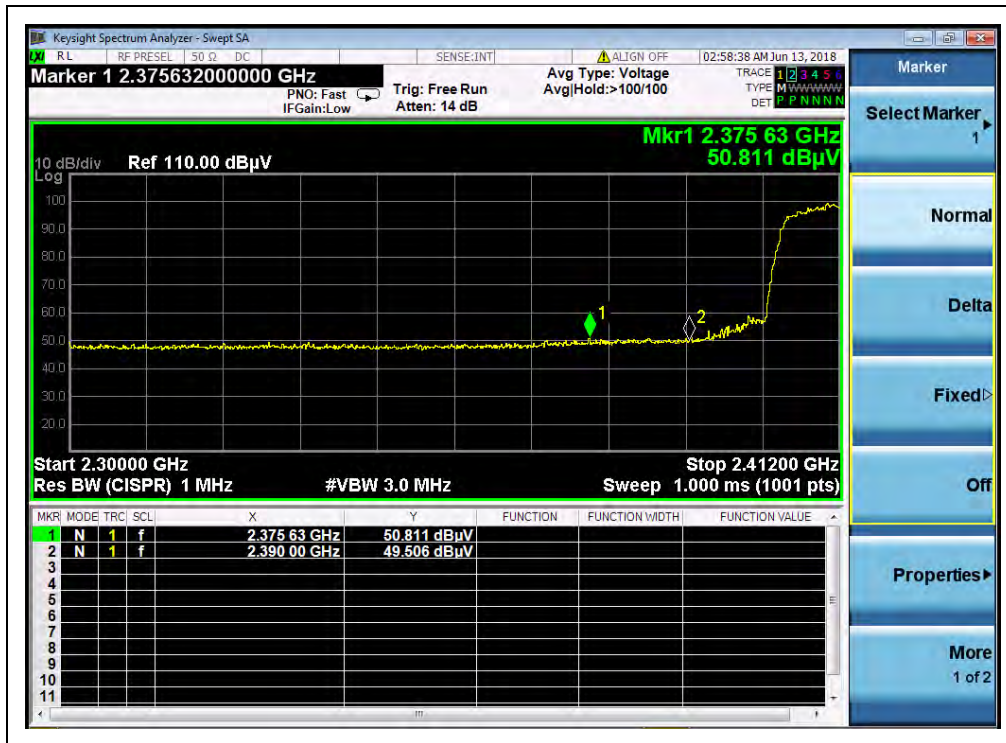


(Channel = 1 PEAK, 802.11g)



(Channel = 1 AVG, 802.11g)



(Channel = 11 PEAK, 802.11g)

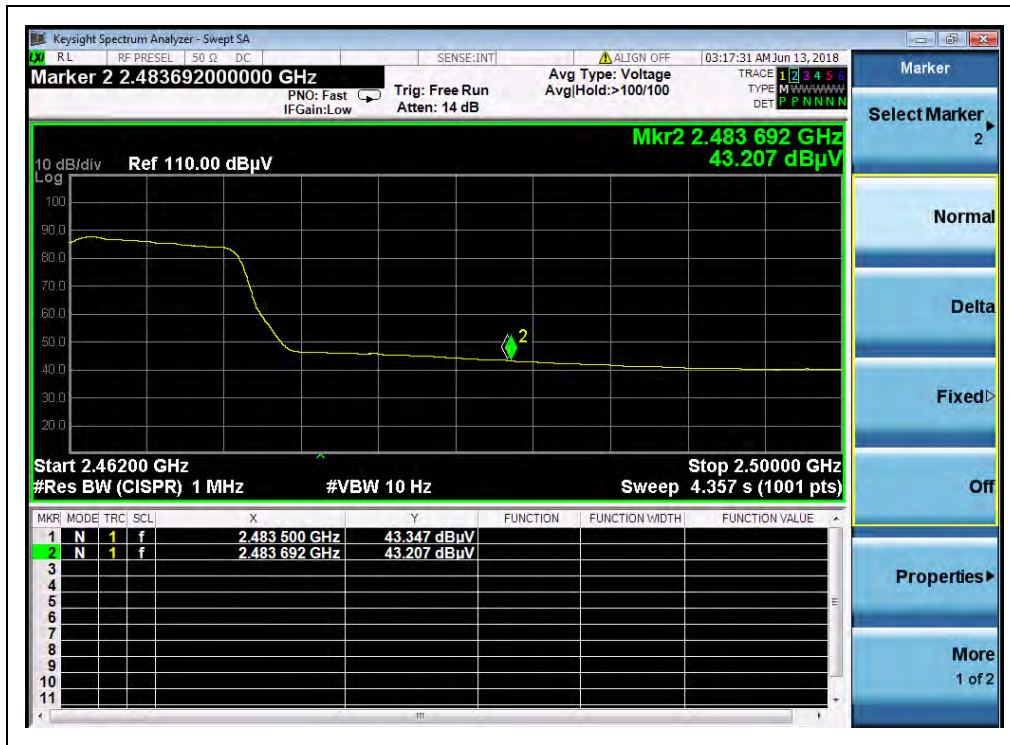

(Channel = 11 AVG, 802.11g)


2.6.3.3 802.11n-20MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
1	2389.07	PK	52.76	-33.63	32.56	51.69	74	Pass
1	2389.74	AV	38.91	-33.63	32.56	37.84	54	Pass
11	2484.57	PK	60.35	-33.18	32.50	59.67	74	Pass
11	2483.69	AV	42.98	-33.18	32.50	42.30	54	Pass




B. Test Plots:

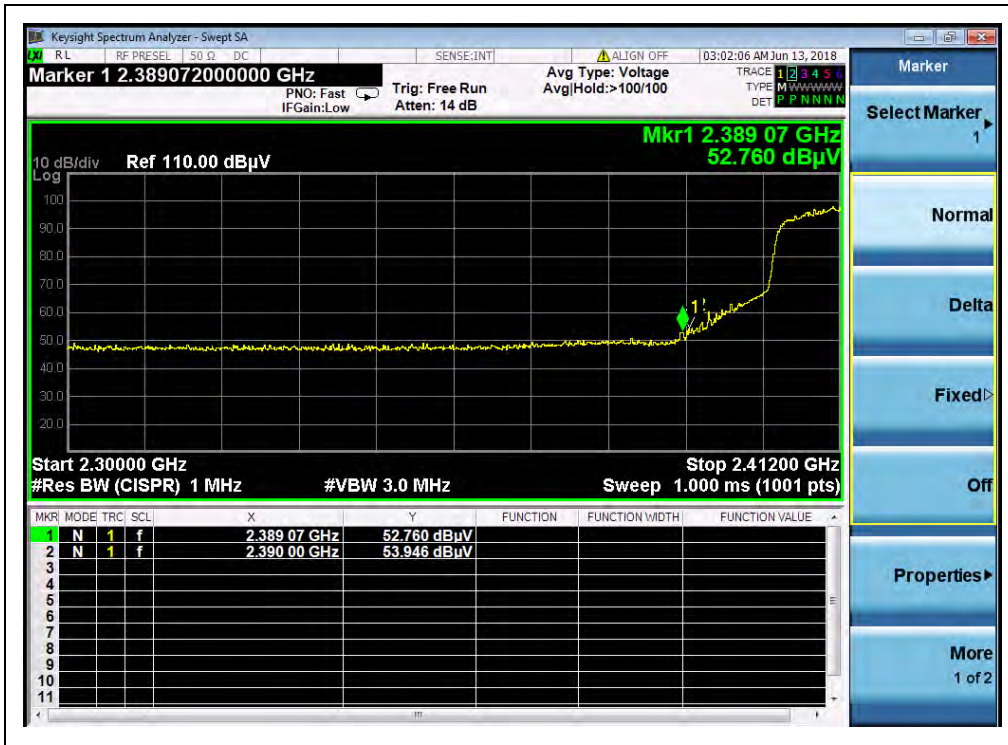

(Channel = 1 PEAK, 802.11n-20)



(Channel = 1 AVG, 802.11n-20)

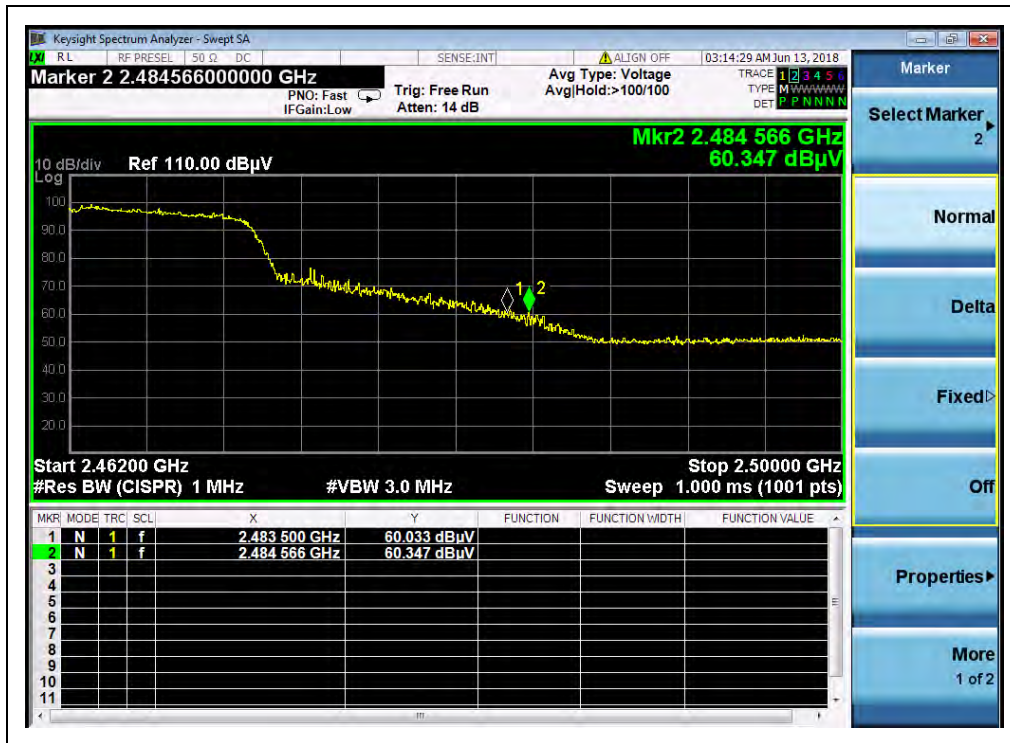

(Channel = 11 PEAK, 802.11n-20)



(Channel = 11 AVG, 802.11n-20)




2.6.3.4 802.11n-40MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
3	2383.02	PK	51.19	-33.63	32.56	50.12	74	Pass
3	2388.29	AV	38.78	-33.63	32.56	37.71	54	Pass
9	2495.59	PK	57.39	-33.18	32.50	56.71	74	Pass
9	2484.60	AV	41.19	-33.18	32.50	40.51	54	Pass

B. Test Plots:

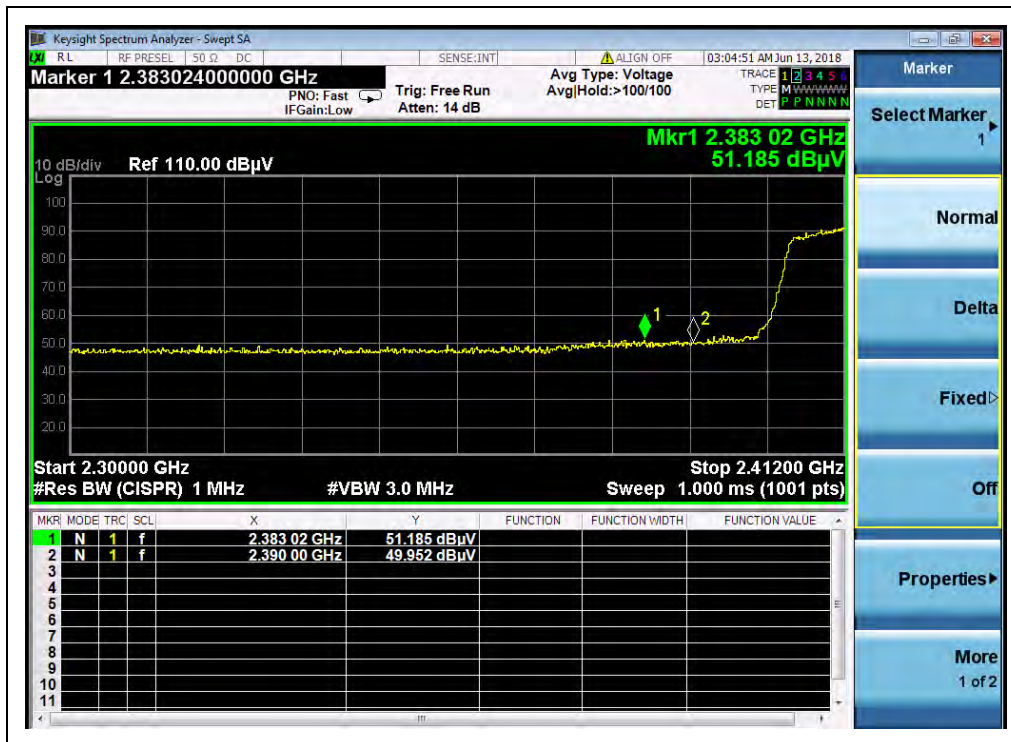

(Channel = 3 PEAK, 802.11n-40)



(Channel = 3 AVG, 802.11n-40)



(Channel = 9 PEAK, 802.11n-40)



(Channel = 9 AVG, 802.11n-40)

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

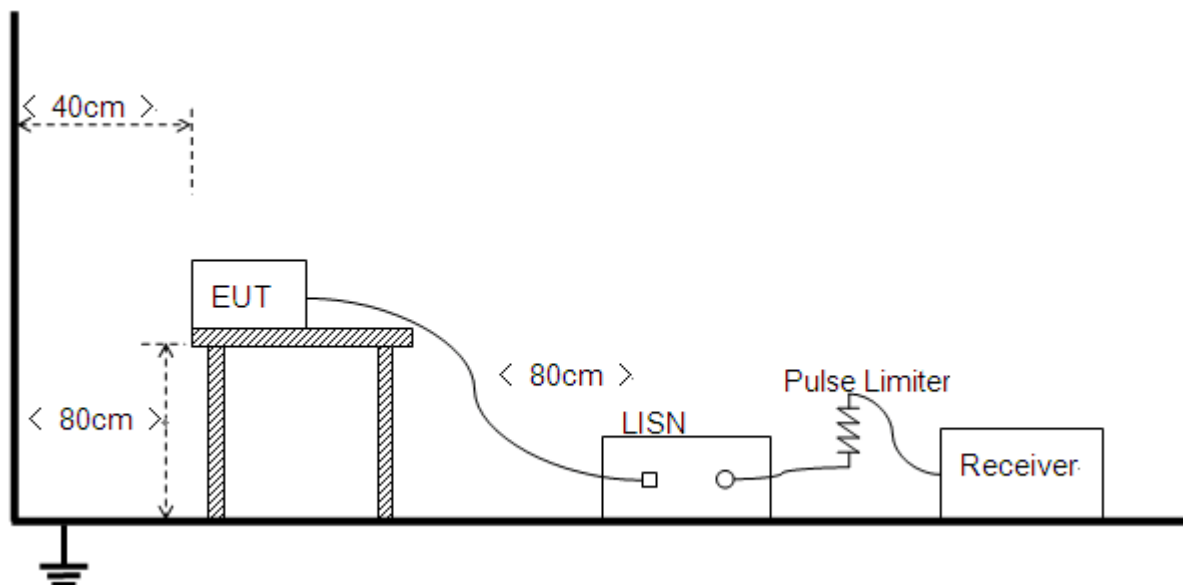

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

B. Equipments List:

Please refer ANNEX A(1.5).

2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

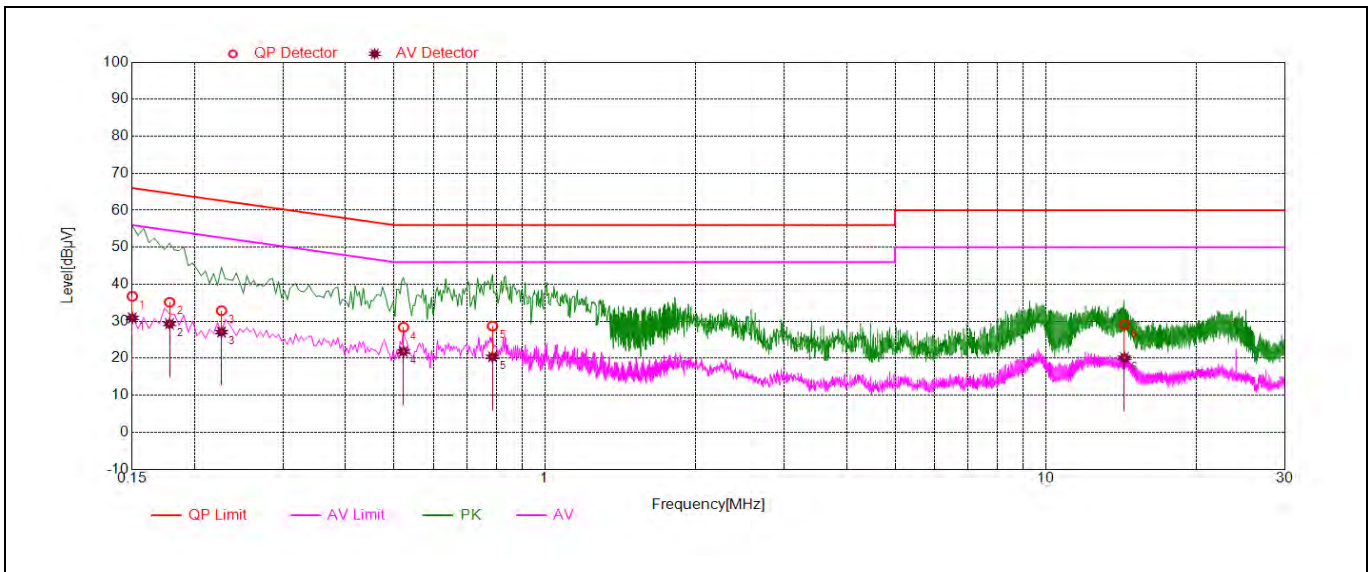

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	36.75	30.91	66.00	56.00	Line	PASS
2	0.18	35.15	29.29	64.58	54.58		PASS
3	.23	32.87	27.09	62.60	52.60		PASS
4	0.52	28.39	21.84	56.00	46.00		PASS
5	0.79	28.72	20.40	56.00	46.00		PASS
6	14.36	29.13	20.14	60.00	50.00		PASS

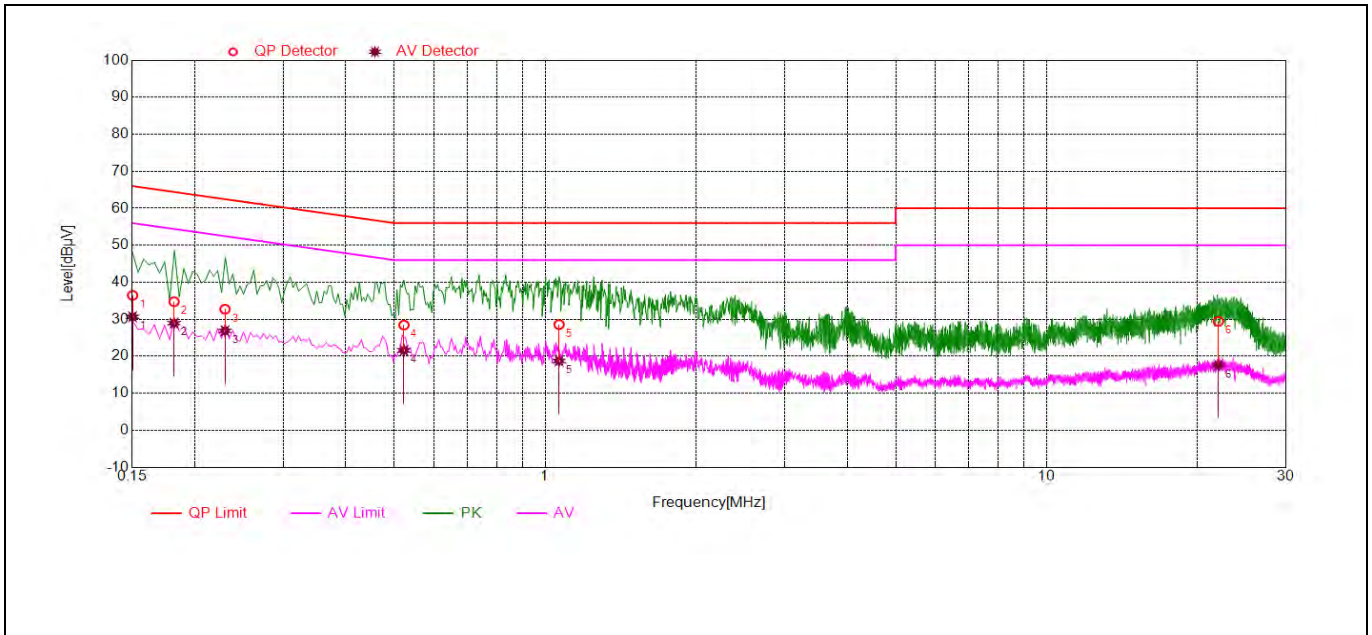

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	36.46	30.68	65.99	55.99	Neutral	PASS
2	0.18	34.76	28.94	64.41	54.41		PASS
3	0.23	32.72	26.88	62.47	52.47		PASS
4	0.52	28.43	21.59	56.00	46.00		PASS
5	1.07	28.57	18.74	56.00	46.00		PASS
6	2.01	29.42	17.58	60.00	50.00		PASS



2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

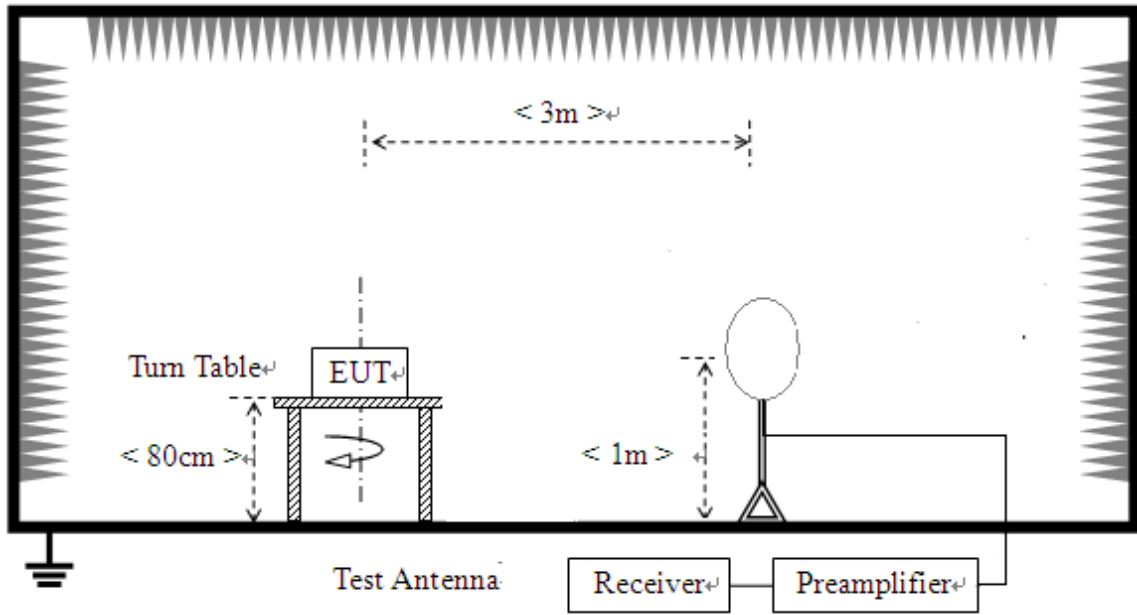

- 2) For radiated emissions from 30MHz to 1GHz

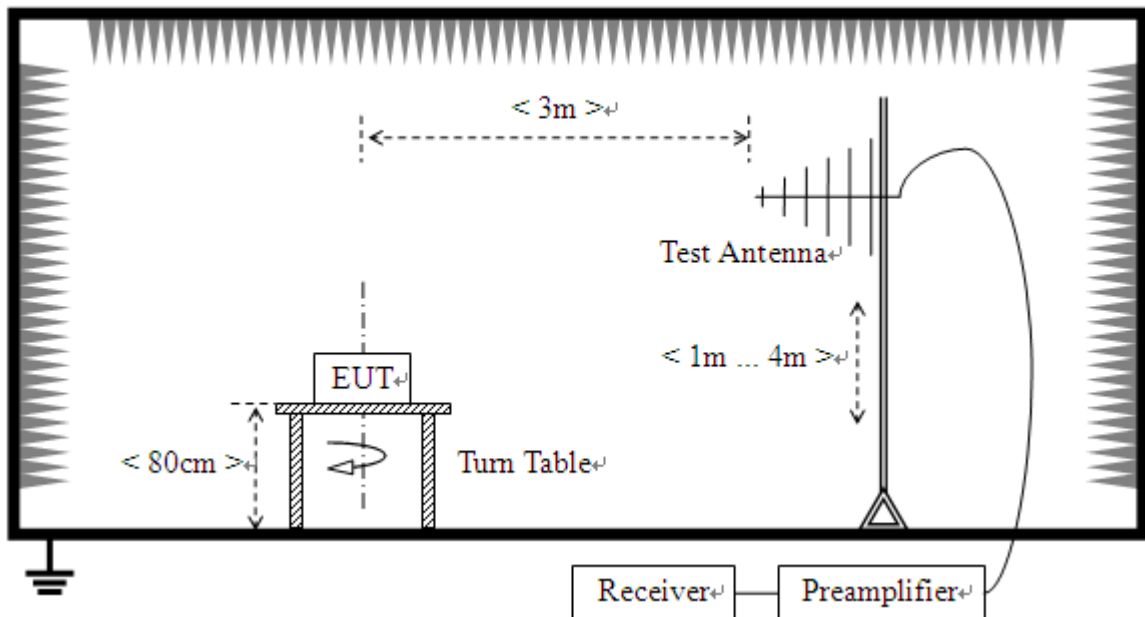

3) For radiated emissions above 1GHz

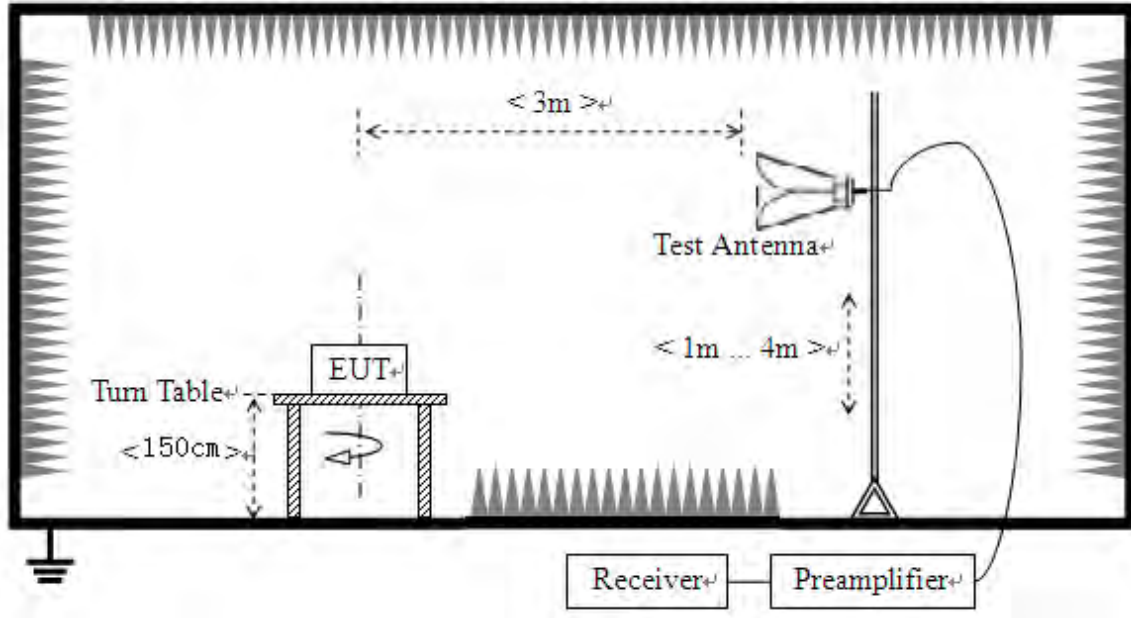

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading



For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

A. Equipments List:

Please refer to ANNEX A(1.5).

2.8.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform a quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 10dB lower than the limit was not recorded.

2.8.3.1 802.11b Test mode

Plots for Channel = 1

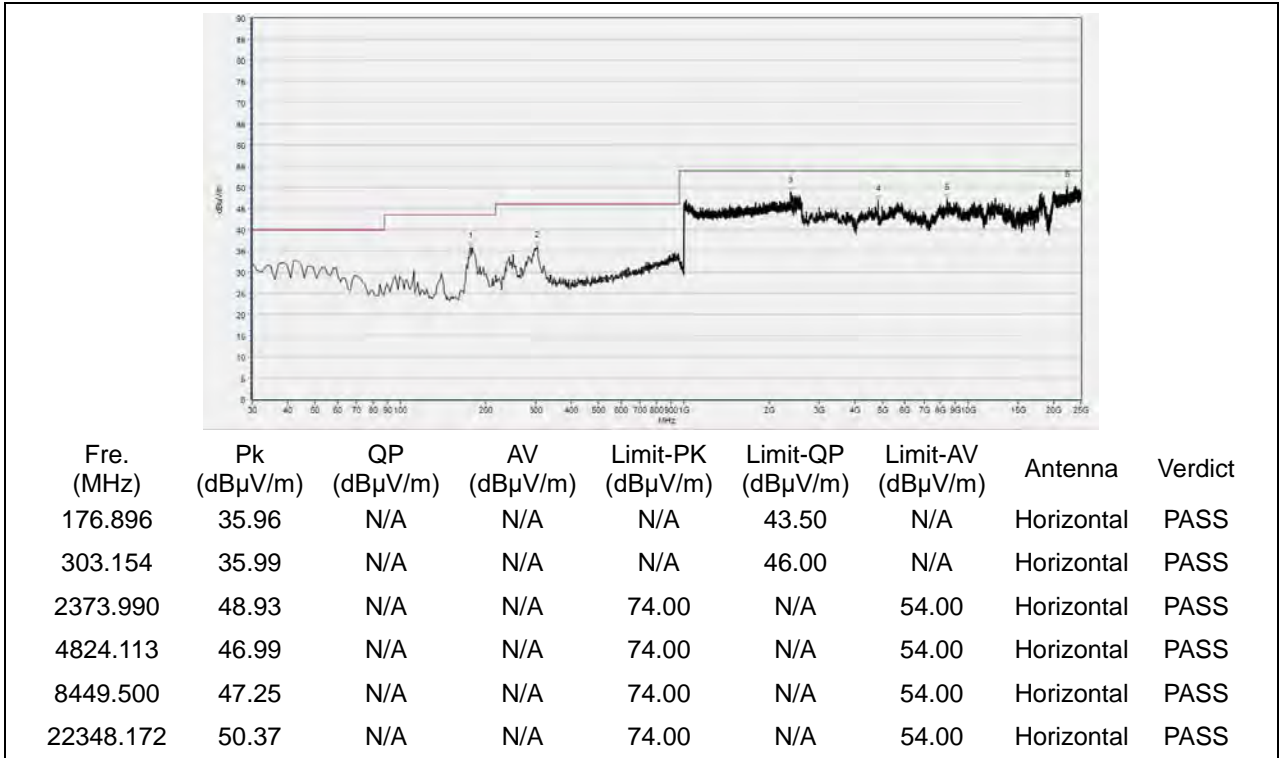


(Antenna Horizontal, 30MHz to 25GHz)

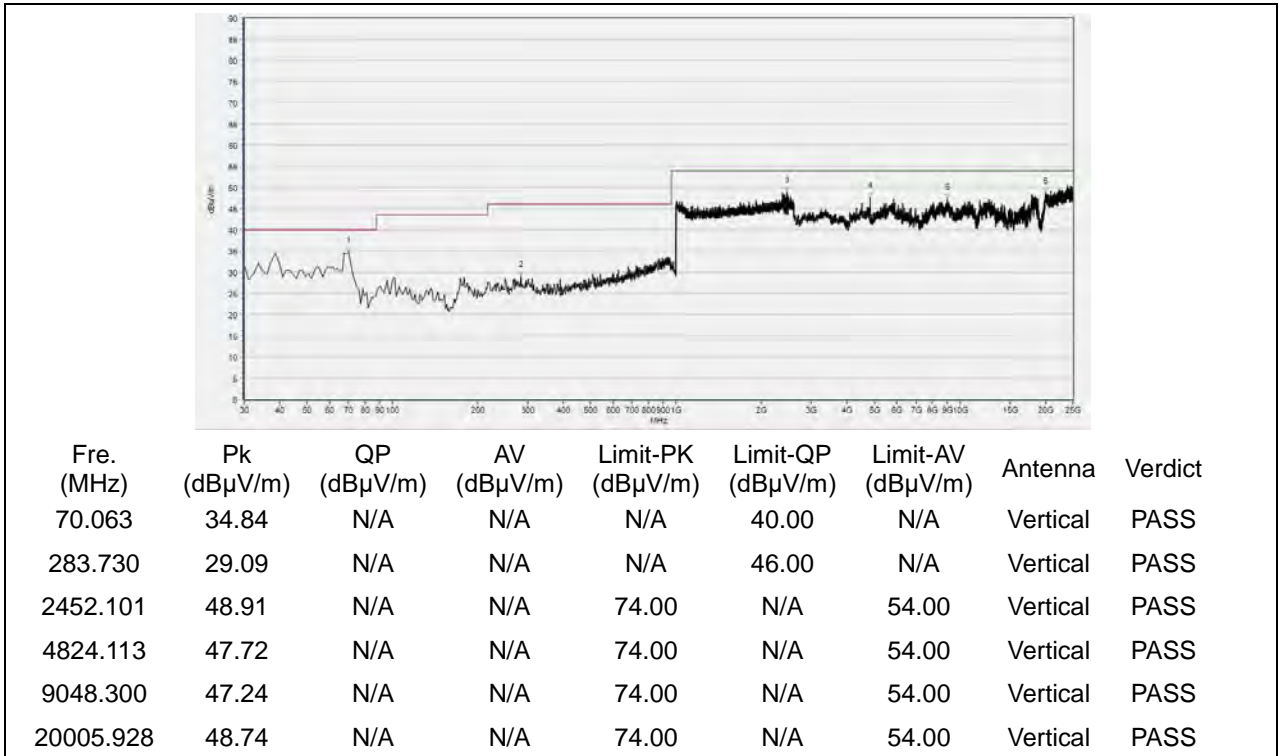


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

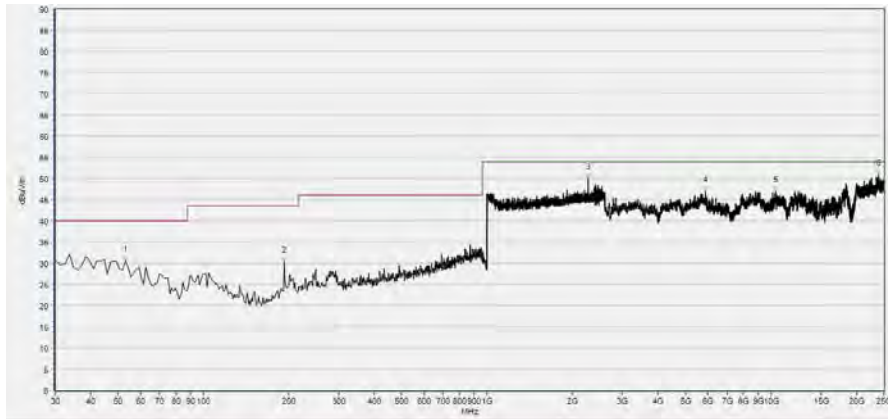

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.066	30.47	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
192.678	30.30	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2263.225	50.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5870.995	46.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10368.103	46.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
23928.678	50.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

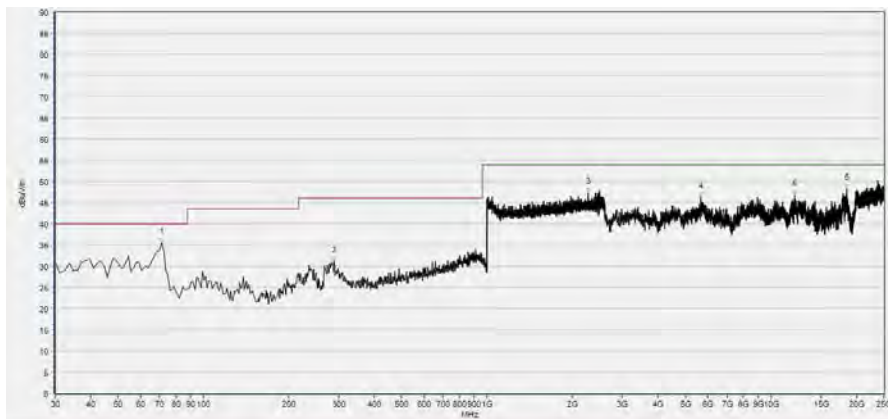

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	35.58	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
288.586	31.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2265.146	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5651.027	46.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12152.282	46.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18531.333	48.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

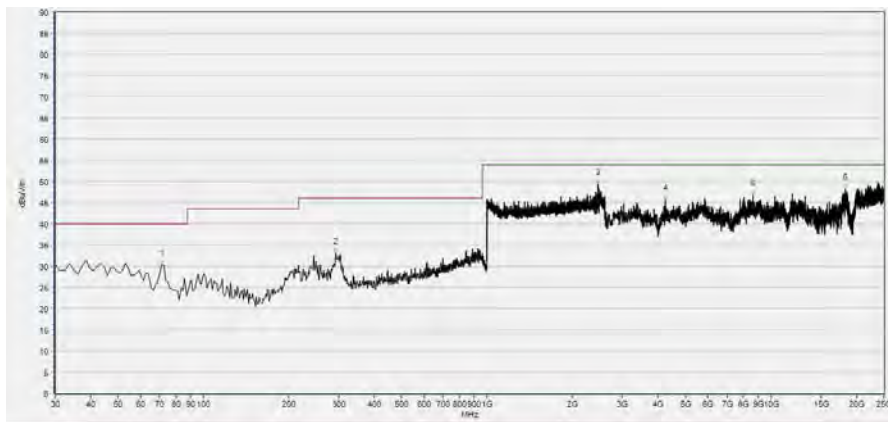

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	30.38	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
292.228	32.97	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2463.625	49.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4237.534	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8624.659	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18278.778	48.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

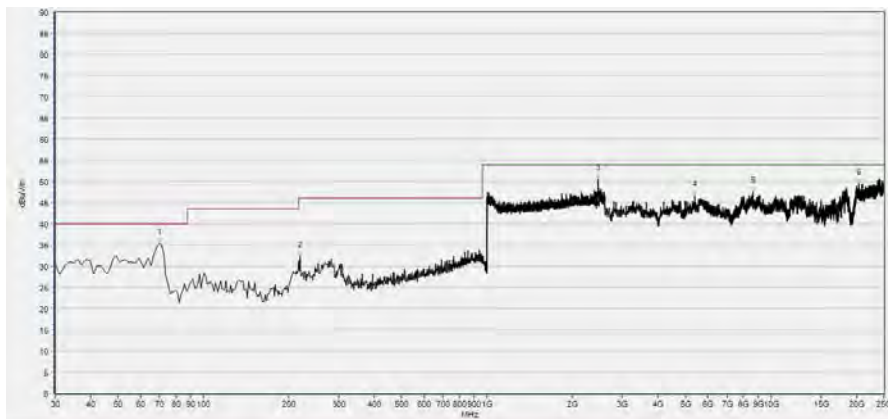


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
70.063	35.40	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
219.387	32.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2462.985	50.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5402.546	46.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8636.879	47.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20380.687	49.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


2.8.3.2 802.11g Test mode

Plots for Channel = 1

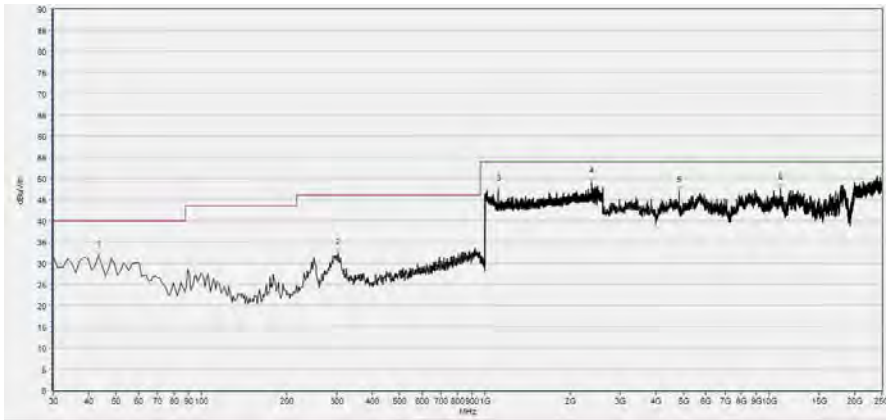

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
43.354	31.77	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
303.154	32.36	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1110.764	47.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2375.910	49.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4824.113	46.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10999.491	47.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

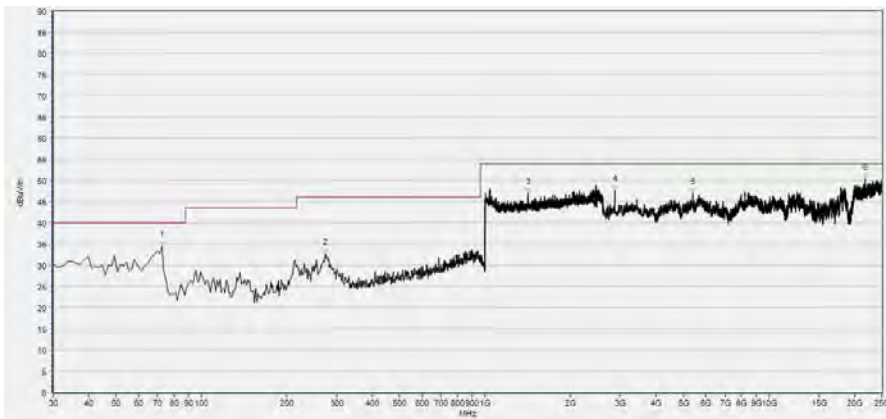

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
72.491	34.47	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
272.804	32.61	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1416.807	46.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2860.702	47.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5394.399	46.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
21859.356	50.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

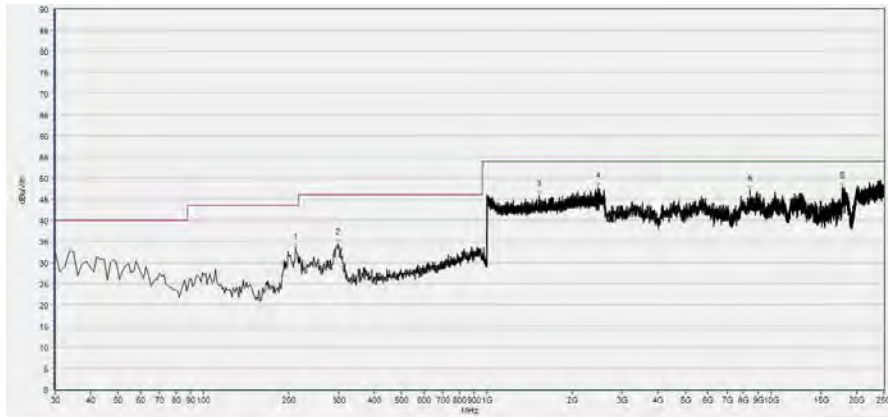

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
210.889	33.33	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
298.298	34.48	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1525.650	45.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2455.302	47.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8425.059	47.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
17842.917	47.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

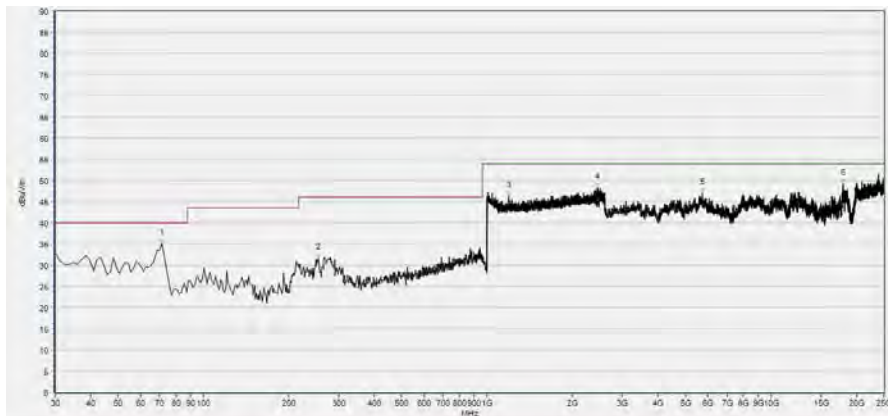

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	34.93	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
254.593	31.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1188.235	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2450.180	48.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5728.423	46.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18001.782	49.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

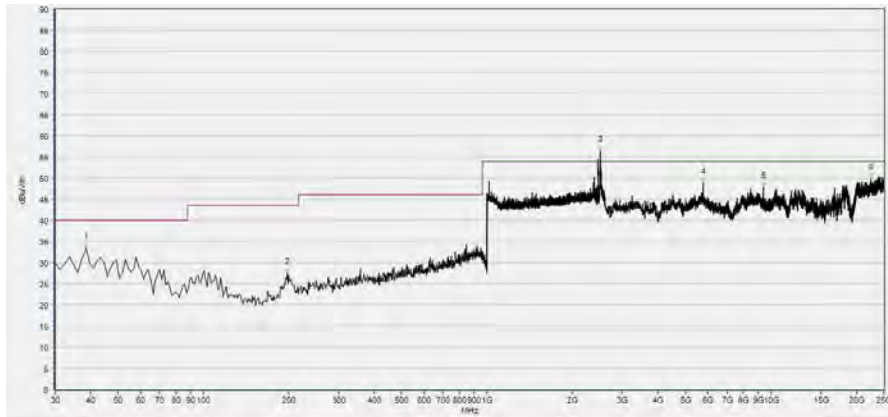

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
38.498	33.39	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
197.534	27.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2504.600	56.35	N/A	40.37	74.00	N/A	54.00	Horizontal	PASS
5765.085	48.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9394.544	47.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
22580.360	49.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

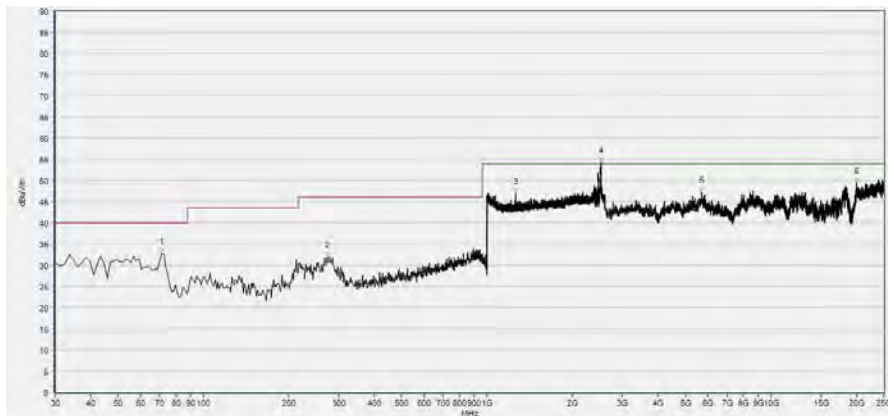


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
71.277	32.86	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
272.804	31.88	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1261.865	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2510.500	56.60	N/A	41.37	74.00	N/A	54.00	Vertical	PASS
5695.836	47.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20071.104	49.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

2.8.3.3 802.11n-20MHz Test mode

Plots for Channel = 1

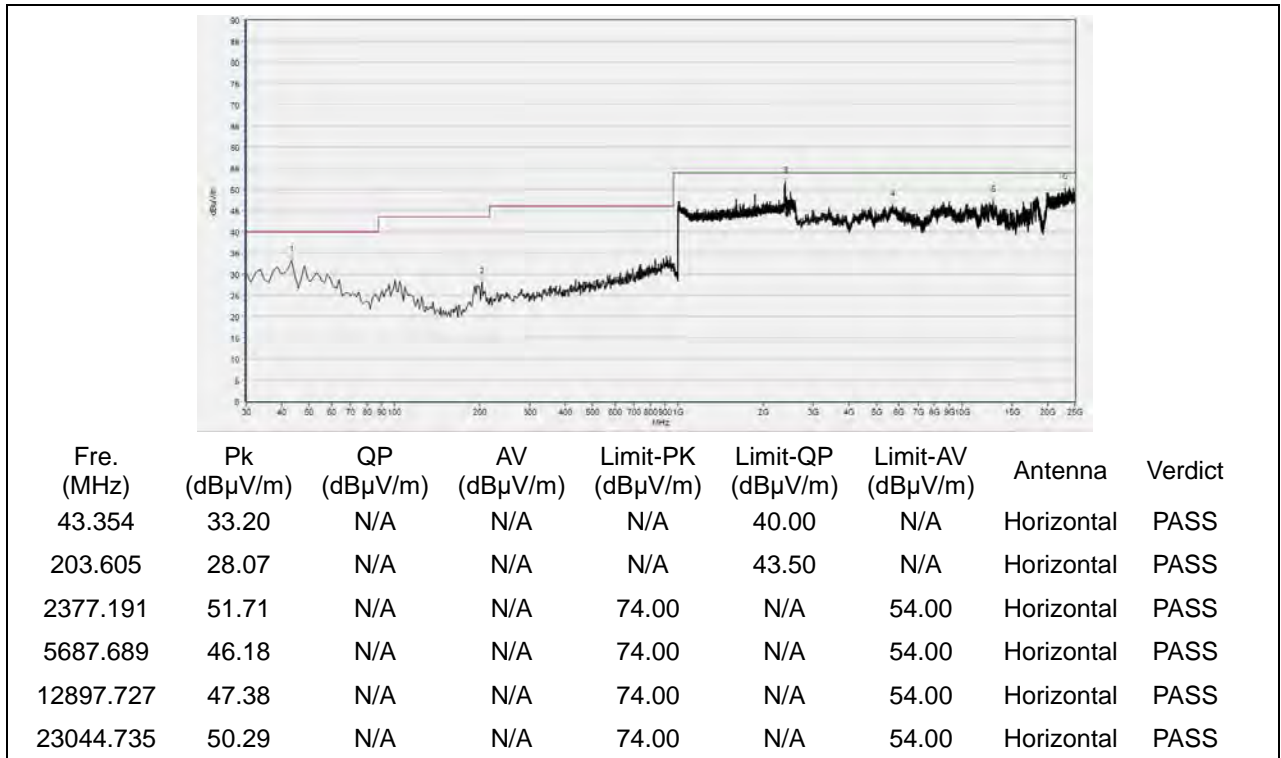


(Antenna Horizontal, 30MHz to 25GHz)

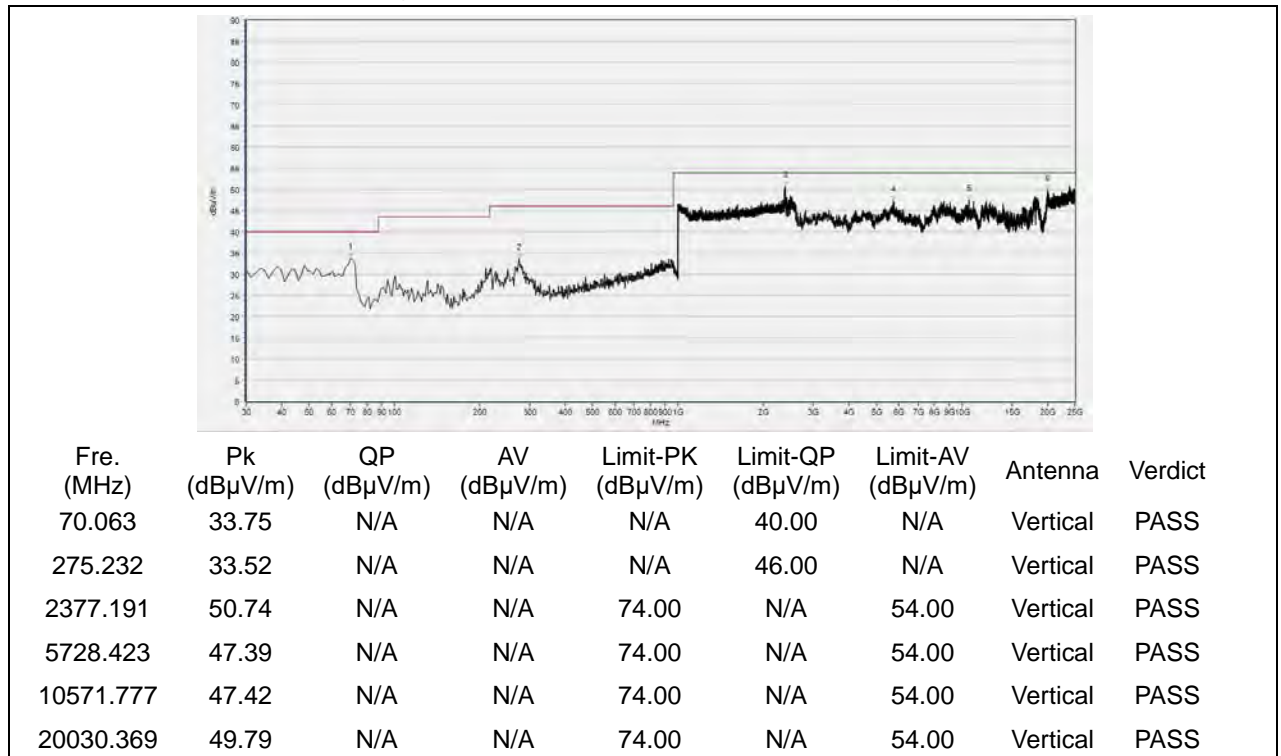


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

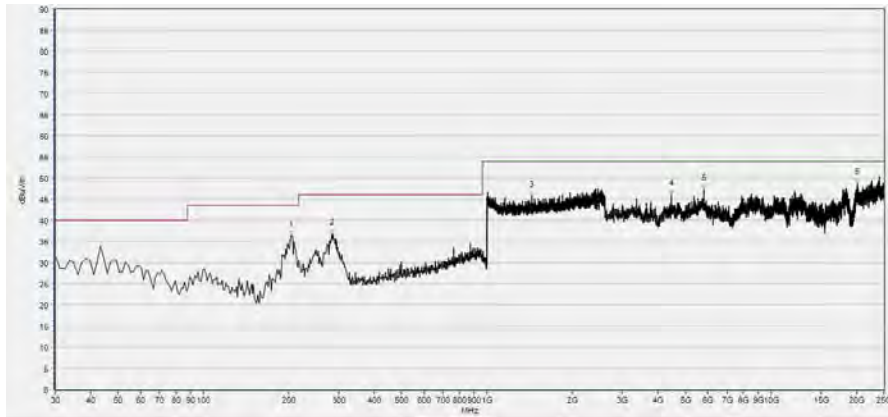

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
203.605	36.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
283.730	36.82	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1436.655	45.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4449.354	46.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5793.599	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20107.765	48.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

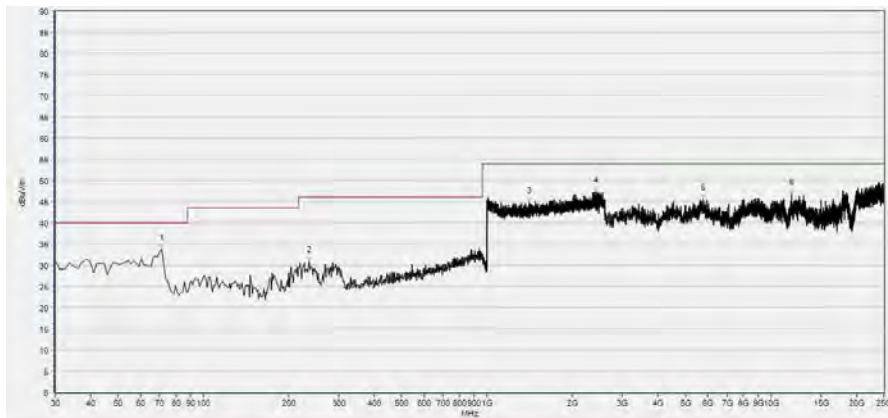

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	33.70	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
235.169	30.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1406.563	44.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2418.167	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5752.864	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11850.846	46.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

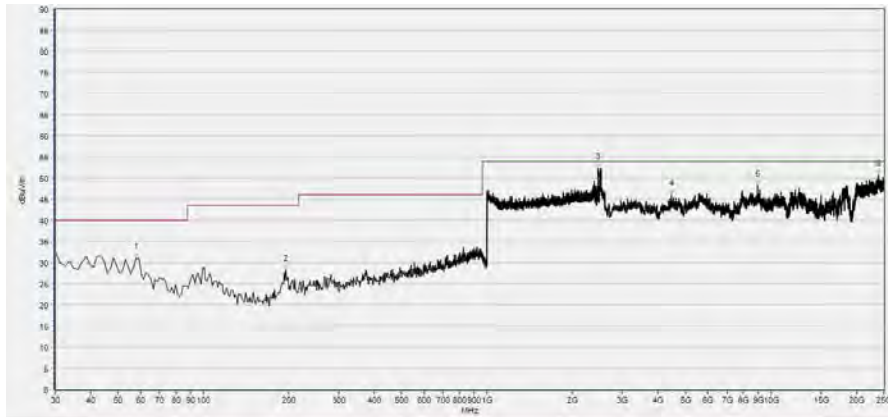

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
57.922	31.16	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
195.106	28.30	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2463.625	52.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4465.648	46.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8979.051	48.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
23973.486	50.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

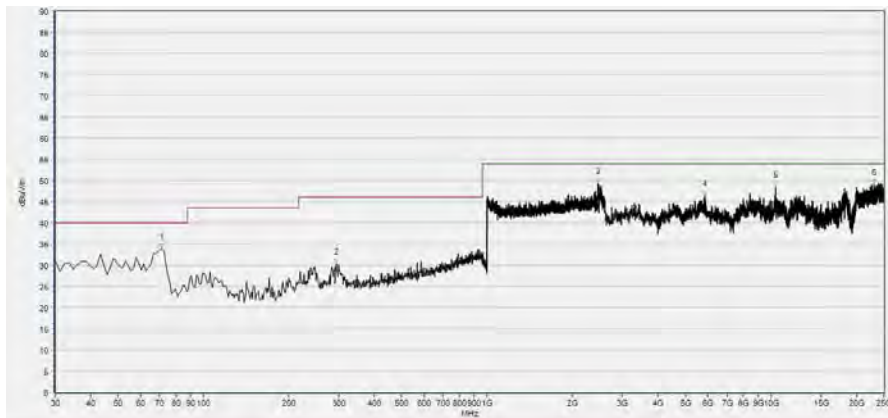


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	33.86	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
293.442	30.38	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2462.985	49.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5854.701	46.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10364.030	48.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
23089.544	49.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

2.8.3.4 802.11n-40MHz Test mode

Plots for Channel = 3

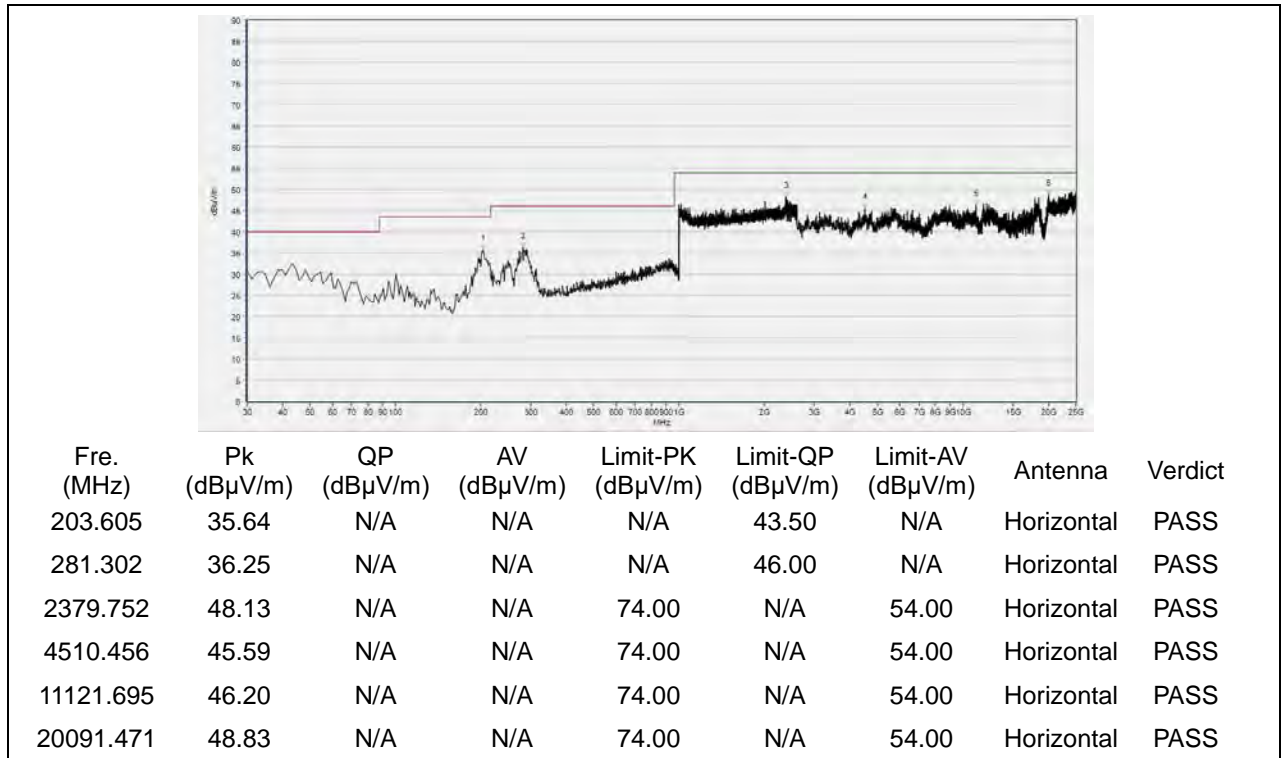


(Antenna Horizontal, 30MHz to 25GHz)

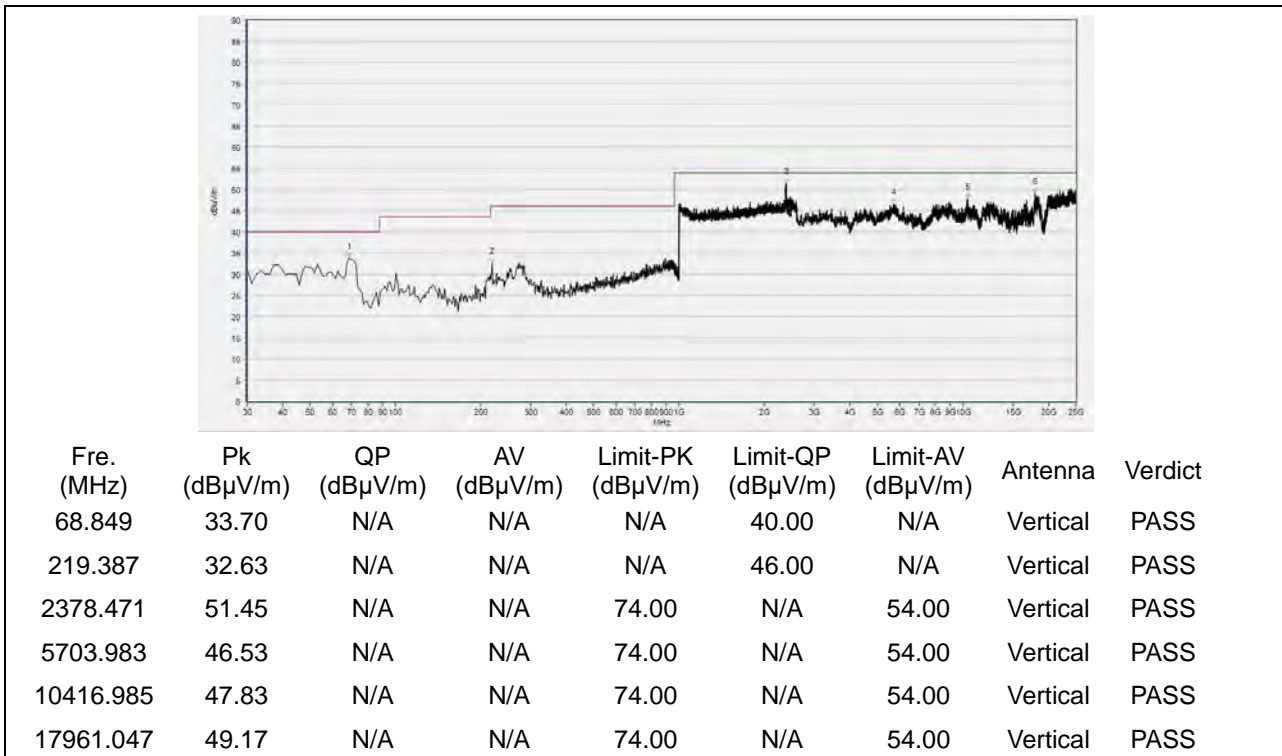


(Antenna Vertical, 30MHz to 25GHz)

Plots for Channel = 6

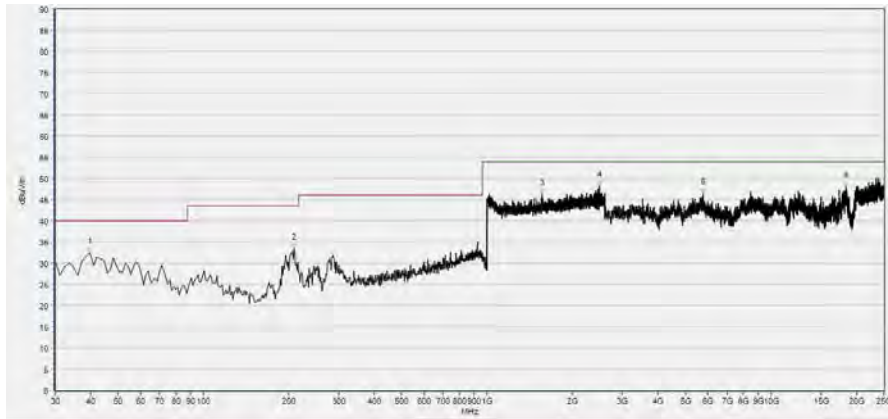

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.712	32.54	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
208.461	33.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1561.505	46.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2493.077	48.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5781.378	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18364.321	47.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

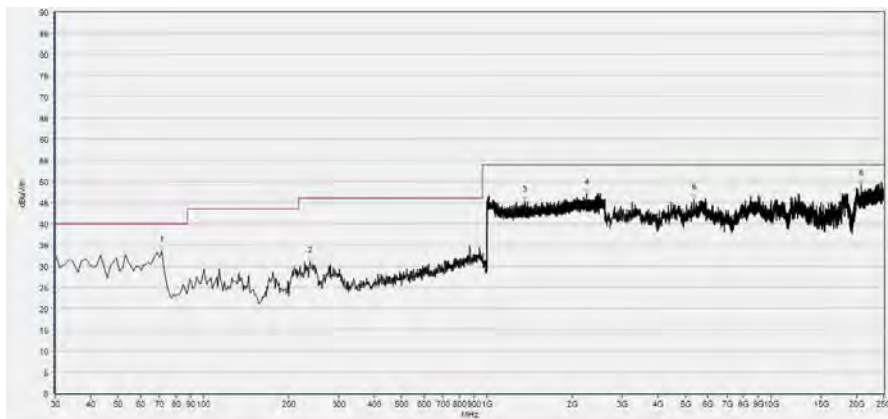

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.277	33.59	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
237.597	31.13	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1359.184	45.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2239.536	47.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5357.738	45.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20820.622	49.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plots for Channel = 9

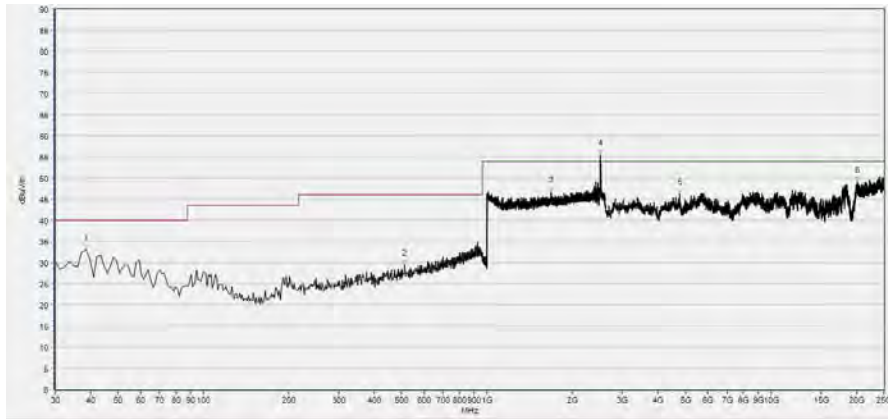

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
38.498	33.09	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
511.965	29.39	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1683.794	46.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2506.400	57.92	N/A	39.35	74.00	N/A	54.00	Horizontal	PASS
4758.938	46.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
20140.353	49.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

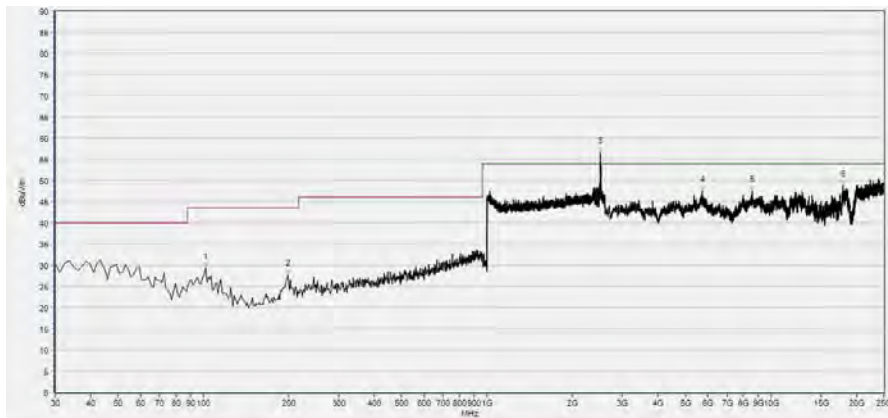

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
101.627	29.37	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
198.748	27.63	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2506.500	55.39	N/A	37.91	74.00	N/A	54.00	Vertical	PASS
5716.203	47.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8612.439	47.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17981.415	48.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2018.04.17	2019.04.16
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2017.07.13	2018.07.12
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.5 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
Receiver	MY54130016	N9038A	Agilent	2018.05.08	2019.05.07
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.08	2019.05.07
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————