

FCC SAR Test Report

Product : Handheld UHF Reader
Trade mark : CHAINWAY
Model/Type reference : C76
Serial Number : N/A
Report Number : EED32K00243606
FCC ID : 2AC6AC76
Date of Issue : Mar. 28, 2019
Test Standards : Refer to Section 1.5
Test result : PASS

Prepared for:

Shenzhen Chainway Information Technology Co., Ltd.

9/F, Building 2, Daqian Industrial Park, Longchang Rd.,

District 67, Bao'an, Shenzhen

Prepared by:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District,

Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested By:

Huang xiao le

Huang xiaole

Compiled by:

Kevin Lan

Kevin Lan

Reviewed by:

Ware Xin

Ware Xin

Approved by:

Kevin Yang

Kevin yang

Date:

Mar. 28, 2019

Check No.:3096338075



Table of contents

1 General information..... 5

- 1.1 Notes.....5**
- 1.2 Application details..... 5**
- 1.3 Statement of Compliance..... 6**
- 1.4 EUT Information..... 7**
- 1.5 Test standard/s..... 9**
- 1.6 RF exposure limits..... 10**
- 1.7 SAR Definition.....10**
- 1.8 Testing laboratory..... 11**
- 1.9 Test Environment..... 11**
- 1.10 Applicant and Manufacturer..... 11**

2 SAR Measurement System Description and Setup..... 12

- 2.1 The Measurement System Description..... 12**
- 2.2 Probe description..... 13**
- 2.3 Data Acquisition Electronics description..... 14**
- 2.4 SAM Twin Phantom description..... 15**
- 2.5 ELI4 Phantom description..... 16**
- 2.6 Device Holder description..... 17**

3 SAR Test Equipment List..... 18

4 SAR Measurement Procedures..... 19

- 4.1 Spatial Peak SAR Evaluation..... 19**
- 4.2 Data Storage and Evaluation..... 20**
- 4.3 Data Storage and Evaluation..... 24**

5 SAR Verification Procedure..... 26

- 5.1 Tissue Verification..... 26**
- 5.2 System check procedure..... 28**
- 5.3 System check results..... 29**

6 SAR Measurement variability and uncertainty..... 30

- 6.1 SAR measurement variability..... 30**
- 6.2 SAR measurement uncertainty..... 30**

7 SAR Test Configuration..... 31

- 7.1 WIFI 5G Test Configurations..... 31**
- 7.2 WIFI 2.4G Test Configurations..... 33**

8 SAR Test Results..... 35

8.1 Conducted Power Measurements	35
8.1.1 Conducted Power of Bluetooth.....	35
8.1.2 ASK 900.....	35
8.1.3 Conducted Power of WiFi 2.4G.....	36
8.1.4 Conducted power of WiFi 5G.....	37
8.2 SAR test results	40
8.2.1 Results overview of ASK 900.....	40
8.2.2 Results overview of WiFi 2.4G.....	41
8.2.3 Results overview of WiFi 5G.....	42
8.3 Multiple Transmitter Information	43
8.4 Stand-alone SAR	44
8.5 Simultaneous Transmission Possibilities	45
8.6 SAR Summation Scenario	45
8.7 Simultaneous Transmission Conclusion	45
Annex A: Appendix A: SAR System performance Check Plots	46
Annex B: Appendix B: SAR Measurement results Plots	46
Annex C: Appendix C: Calibration reports	46
Annex D: Appendix D: Photo documentation	46

Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Release	Mar. 28, 2019	

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report.

Centre Testing International Group Co., Ltd. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

1.2 Application details

Date of receipt of test item: 2018-09-05

Start of test: 2018-10-11

End of test: 2018-10-17

1.3 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Shenzhen Chainway Information Technology Co., Ltd. Model Name: C76 are as below:

Frequency Band	MAX Reported SAR (W/kg)	SAR Limit (W/kg)
	10-g Handheld (0mm)	
ASK 900	0.653	4.0
WiFi 2.4G	0.064	
WiFi 5G (U-NII-1&U-NII-2A)	0.256	
WiFi 5G(U-NII-2C)	0.317	
WiFi 5G(U-NII-3)	0.223	

Remark: N/A: This devices are designed and intended for use in extremity exposure conditions, that is Handheld only and doesn't support voice and Hotspot mode, the head and hotspot mode is not applicable.

Note:

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits(1.6W/kg) according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013

1.4 EUT Information

Device Information:			
Product Name:	Handheld UHF Reader		
Model:	C76		
FCC ID:	2AC6AC76		
SN:	N/A		
Device Type:	Portable device		
Exposure Category:	uncontrolled environment / general population		
Firmware version:	C76E_LWG_M0_V0.4.6_S171219		
Hardware version:	C70SEA_MB_V11		
Antenna Type:	BT: Antenna type: PFC, WiFi: Antenna type: PFC, RFID: 13.56MHz: Antenna type: Ceramic antenna, 902.75MHz: Antenna type: PFC,		
Antenna Gain:	BT: 0.49dBi WiFi: 0.43dBi RFID: 13.56MHz: 0.49dBi, 902.75MHz: 4dBi		
Device Operating Configurations:			
Supporting Mode(s) :	BT: 4.0 BT Single mode: WiFi: 2.4GHz Wi-Fi: 802.11b/g/n(HT20)(HT40): 5GHz Wi-Fi: U-NII-1;U-NII-2A;U-NII-2C; U-NII-3; 802.11a; 802.11n(20MHz/40MHz), ASK 900: 902MHz to 928MHz; NFC: 13.56MHz;		
Modulation:	DSSS, OFDM, ASK		
Operating Frequency Range(s)	Band	TX(MHz)	RX(MHz)
	NFC		13.56
	ASK 900		902~928
	BT		2402~2480
	WIFI 2.4G		2412~2462
	WIFI 5G		5150~5250; 5250~5350 5470~5725 5725-5850
Test Channels (low-mid-high):	1-6-11 (WiFi 2.4G)		
	WIFI 5G 802.11a/n(20M):		

	36-40-44-48-52-56-60-64-100-104-108-112-116-132-136-140-149-153-157-161-165 WIFI 5G 802.11n(40M): 38-46-54-62-102-110-134-151-159 ASK 900:902.75-915.25-927.25
Power Source:	Adapter: Model: GME10D-050200FUu Input: 100-240V~ 50/60Hz, 0.28A Output: 5V---2A

Remark: The tested samples and the sample information are provided by the client.

1.5 Test standard/s

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 of March 2015)
KDB 248227 D01	SAR guidance for IEEE 802.11(Wi-Fi) transmitters v02r02
KDB 447498 D01	General RF Exposure Guidance v06
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.7 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)
ρ = mass density of the tissue (kg/m³)
E = rms electric field strength (V/m)

1.8 Testing laboratory

Test Site	Centre Testing International Group Co., Ltd.
Test Location	Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China
Telephone	+86 (0) 755 3368 3668
Fax	+86 (0) 755 3368 3385

1.9 Test Environment


	Required	Actual
Ambient temperature:	18 – 25 °C	22 ± 2.0 °C
Tissue Simulating liquid:	18 – 25 °C	22 ± 2.0 °C
Relative humidity content:	30 – 70 %	30 – 70 %

1.10 Applicant and Manufacturer

Applicant/Client Name	Shenzhen Chainway Information Technology Co., Ltd.
Applicant Address	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen
Manufacturer Name	Shenzhen Chainway Information Technology Co., Ltd.
Manufacturer Address	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen
Factory	Shenzhen Chainway Information Technology Co., Ltd.
Address of Factory	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen

2 SAR Measurement System Description and Setup

2.1 The Measurement System Description

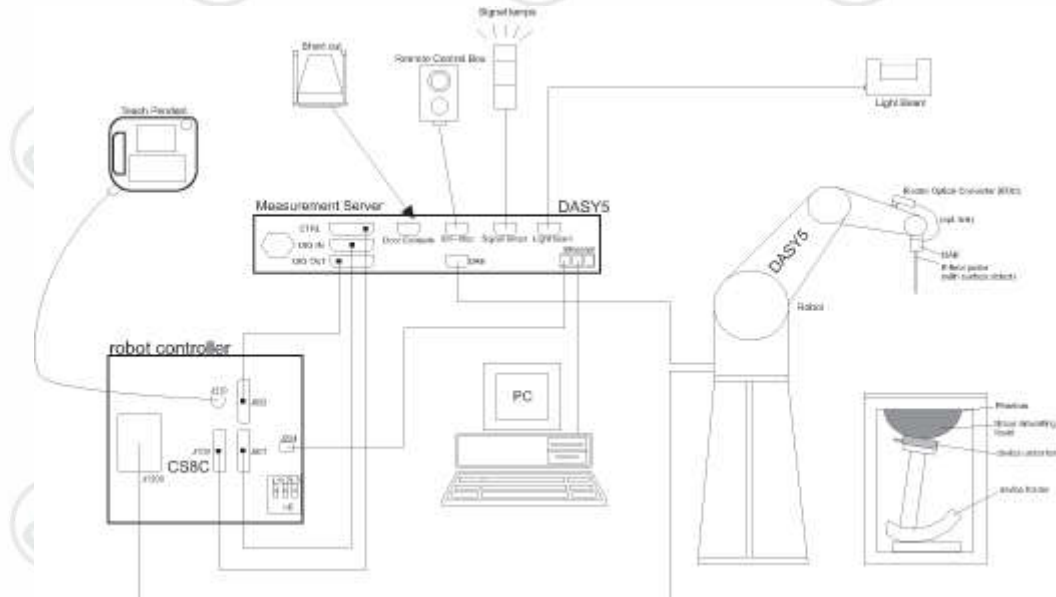

The DASYS system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASYS software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.2 Probe description

Dosimetric Probes: These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor(± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Dynamic range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB



2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.


Batteries: The DAE works with either two standard 9V batteries or two 9V (actually 8.4V or 9.6 V) rechargeable batteries. Because the electronics automatically power-down unused components during braking or between measurements, the battery lifetime depends on system usage. Typical lifetimes are >20 hours for batteries and >10 hours for accus. Remove the batteries if you do not plan to use the DAE for a long period of time.



2.4 SAM Twin Phantom description

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- ◆ Left hand
- ◆ Right hand
- ◆ Flat phantom

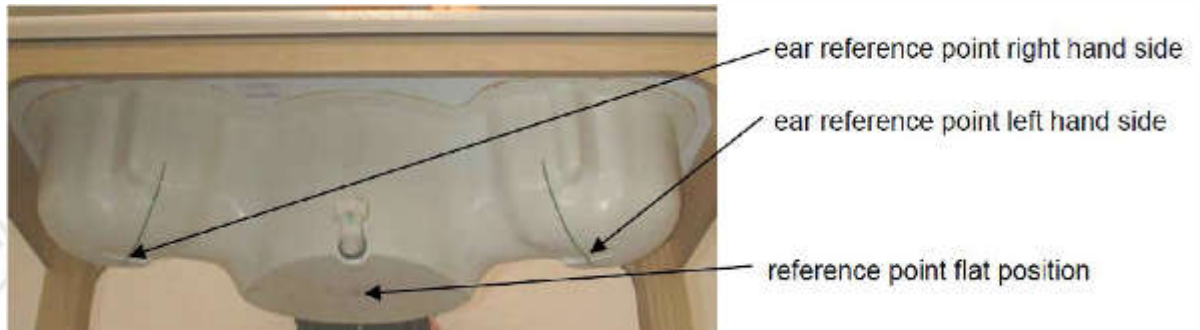

The phantom table for the DASY systems have the size of 100 x 50 x 85 cm (L xWx H). These tables are reinforced for mounting of the robot onto the table. For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters.


Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



2.5 ELI4 Phantom description

The ELI4 phantom is intended for compliance testing of handheld and body mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

ELI4 has been optimized regarding its performance and can be integrated into a SPEAG standard phantom table. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points

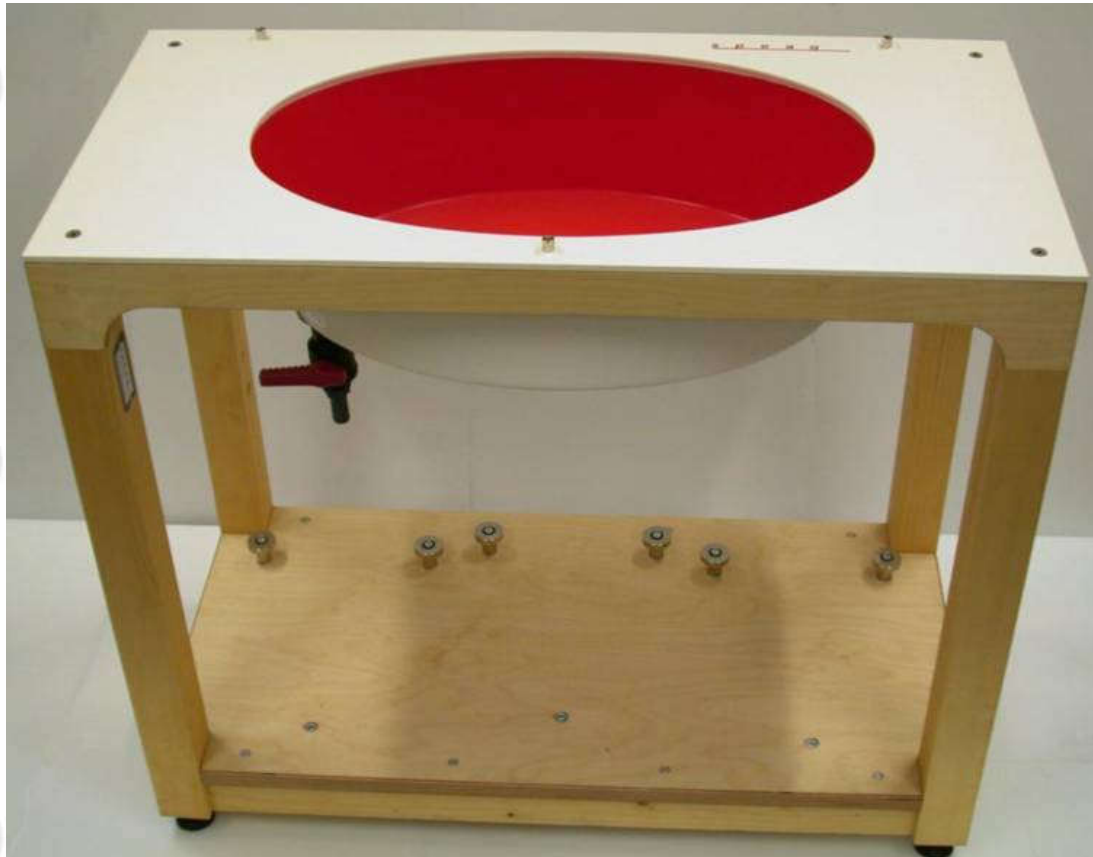

2.6 Device Holder description

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



3 SAR Test Equipment List

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	E-Field Probe	EX3DV4	7328	2018-02-23	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d193	2018-02-19	Three years
<input type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1134	2018-02-22	Three years
<input type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d198	2018-02-22	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1078	2018-02-22	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1082	2017-01-25	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	959	2018-02-16	Three years
<input type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1101	2018-02-16	Three years
<input checked="" type="checkbox"/>	SPEAG	5 GHz Dipole	D5GHzV2	1208	2018-02-21	Three years
<input type="checkbox"/>	SPEAG	DAKS probe	DAKS-3.5	1052	2018-02-20	Three years
<input checked="" type="checkbox"/>	SPEAG	Planar R140 Vector Reflectometer	DAKS-VNA R140	0200514	2018-02-20	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1458	2018-05-07	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	NA	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM V5.0	1875	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI V6.0	2024	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU200	101553	2018-03-16	One year
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY50142334	2018-03-13	One year
<input checked="" type="checkbox"/>	BONN	Power Amplifier and directional coupler	SU319W	BL-SZ1550140	2018-02-05	One year
<input checked="" type="checkbox"/>	KEITHLEY	RF Power Meter	3500	1128079	2018-08-01	One year
<input checked="" type="checkbox"/>	KEITHLEY	RF Power Meter	3500	1128081	2018-08-01	One year

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

4 SAR Measurement Procedures

4.1 Spatial Peak SAR Evaluation

The DASY5 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. The base for the evaluation is a "cube" measurement in a volume of 30mm³ (7x7x7 points). The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD X). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location. The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD X). The system always gives the maximum values for the 1 g and 10 g cubes.

The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. extraction of the measured data (grid and values) from the Zoom Scan
2. calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. generation of a high-resolution mesh within the measured volume
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. calculation of the averaged SAR within masses of 1 g and 10 g

4. 2 Data Storage and Evaluation

Data Storage

The DASY5 software stores the measured voltage acquired by the Data Acquisition Electronics (DAE) as raw data together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and communication system parameters) in measurement files with the extension .da5x. The postprocessing software evaluates the data every time the data is visualized or exported. This allows the verification and modification of the setup after completion of the measurement. For example, if a measurement has been performed with an incorrect crest factor, the parameter can be corrected afterwards and the data can be reevaluated.

To avoid unintentional parameter changes or data manipulations, the parameters in measured files are locked. In the administrator access mode of the software, the parameters can be unlocked. After changing the parameters, the measured scans can be reevaluated in the postprocessing engine.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., E-field, H-field, SAR). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The fields and SAR are calculated from the measured voltage (probe voltage acquired by the DAE) and the following parameters:

Probe parameters:

- Sensitivity

norm_i, a_{i0}, a_{i1}, a_{i2}

- Conversion Factor

convF_i

- Diode Compression Point

dcp_i

- Probe Modulation Response Factors

a_i, b_i, c_i, d

Device parameters:

- Frequency

f

- Crest factor

cf

Media parameters:

- Conductivity

σ

- Relative Permittivity

ρ

This parameters are stored in the DASY5 V52 measurement file.

These parameters must be correctly set in the DASY5 V52 software setup. They are available as configuration file and can be imported into the measurement file. The values displayed in the multimeter window are assessed using the parameters of the actual system setup. In the scan visualization and export modes, the parameters stored in the measurement file are used.

The measured voltage is not proportional to the exciting. It must be first linearized.

Approximated Probe Response Linearization using Crest Factor.

This linearization method is enabled when a custom defined communication system is measured. The compensation applied is a function of the measured voltage, the detector diode compression point and the crest factor of the measured signal.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

- with
- V_i = linearized voltage of channel i (uV) (i = x,y,z)
 - U_i = measured voltage of channel i (uV) (i = x,y,z)
 - cf = crest factor of exciting field (DASY parameter)
 - dcp_i = diode compression point of channel i (uV) (Probe parameter, i = x,y,z)

Field and SAR Calculation

The primary field data for each channel are calculated using the linearized voltage:

E - fieldprobes :
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H - fieldprobes :
$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = linearized voltage of channel i (i = x,y,z)

$Norm_i$ = sensor sensitivity of channel i (i = x,y,z)

$\mu V/(V/m)^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RMS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

Spatial Peak SAR for 1 g and 10 g

The DASY5 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. The base for the evaluation is a "cube" measurement at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD X). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. extraction of the measured data (grid and values) from the Zoom Scan.
2. calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
3. generation of a high-resolution mesh within the measured volume.
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
6. calculation of the averaged SAR within masses of 1 g and 10 g.

4.3 Data Storage and Evaluation

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

Step 1: Power reference measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. By default, the Minimum distance of probe sensors to surface is 4 mm. This distance can be modified by the user, but cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hotspot. The sophisticated interpolation routines implemented in DASY5 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

The Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The default Zoom Scan is defined in the following table. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Area scan and Zoom scan resolutions per FCC KDB Publication 865664 D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{Area}, \Delta y_{Area}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{Zoom}, \Delta y_{Zoom}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤ 2GHz	≤ 15mm	≤ 8mm	≤ 5mm	≤ 4mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 30mm
2-3GHz	≤ 12mm	≤ 5mm	≤ 5mm	≤ 4mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 30mm
3-4GHz	≤ 12mm	≤ 5mm	≤ 4mm	≤ 3mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 28mm
4-5GHz	≤ 10mm	≤ 4mm	≤ 3mm	≤ 2.5mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 25mm
5-6GHz	≤ 10mm	≤ 4mm	≤ 2mm	≤ 2mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 22mm

Step 4: Power Drift Monitoring

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. If the value changed by more than 5%, the evaluation should be retested.

5 SAR Verification Procedure

5.1 Tissue Verification

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Frequency (MHz)						
	Head Tissue						
Tissue Type	835	1800	2000	2300	2450	2600	5200-5800
frequency band	835	1800	2000	2300	2450	2600	5200-5800
Water	41.45	52.64	54.9	62.82	62.7	55.242	65.52
Salt (NaCl)	1.45	0.36	0.18	0.51	0.5	0.306	0.0
Sugar	56.0	0.0	0.0	0.0	0.0	0.0	0.0
HEC	1.0	0.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.0	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	36.8	0.0	17.24
DGBE	0.0	47.0	44.92	36.67	0.0	44.452	0.0
Diethylenglycol monohexylether	0.0	0.0	0.0	0.0	0.0	0.0	17.24
Ingredients (% of weight)	Body Tissue						
Tissue Type	835	1750	1900	2450	2600	5200-5800	
frequency band	835	1750	1900	2450	2600	5200-5800	
Water	52.5	69.91	69.91	73.20	64.50	76.3	
Salt (NaCl)	1.40	0.13	0.13	0.04	0.02	0.0	
Sugar	45.0	0.0	0.0	0.0	0.0	0.0	
HEC	1.0	0.0	0.0	0.0	0.0	0.0	
Bactericide	0.1	0.0	0.0	0.0	0.0	0.0	
Triton X-100	0.0	0.0	0.0	0.0	0.0	10.2	
DGBE	0.0	29.96	29.96	26.76	35.48	0.0	
Diethylenglycol monohexylether	0.0	0.0	0.0	0.0	0.0	13.5	

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue simulating liquids: parameters:


Used Target Frequency	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
	ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.52	0.951	22.90°C	2018/10/11
835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.45	0.957		
850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	55.44	0.968		
2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	53.12	1.954	22.40°C	2018/10/12
2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	53.19	1.968		
2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	53.12	1.999		
2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	53.09	2.011		
5300	49.00 (46.55~51.45)	5.30 (5.03~5.56)	49.28	5.173	22.10°C	2018/10/15
5500	48.60 (46.17~51.03)	5.65 (5.367~5.932)	48.41	5.640	21.90°C	2018/10/16
5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	47.27	5.884	21.60°C	2018/10/17

ϵ_r = Relative permittivity, σ = Conductivity

5.2 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

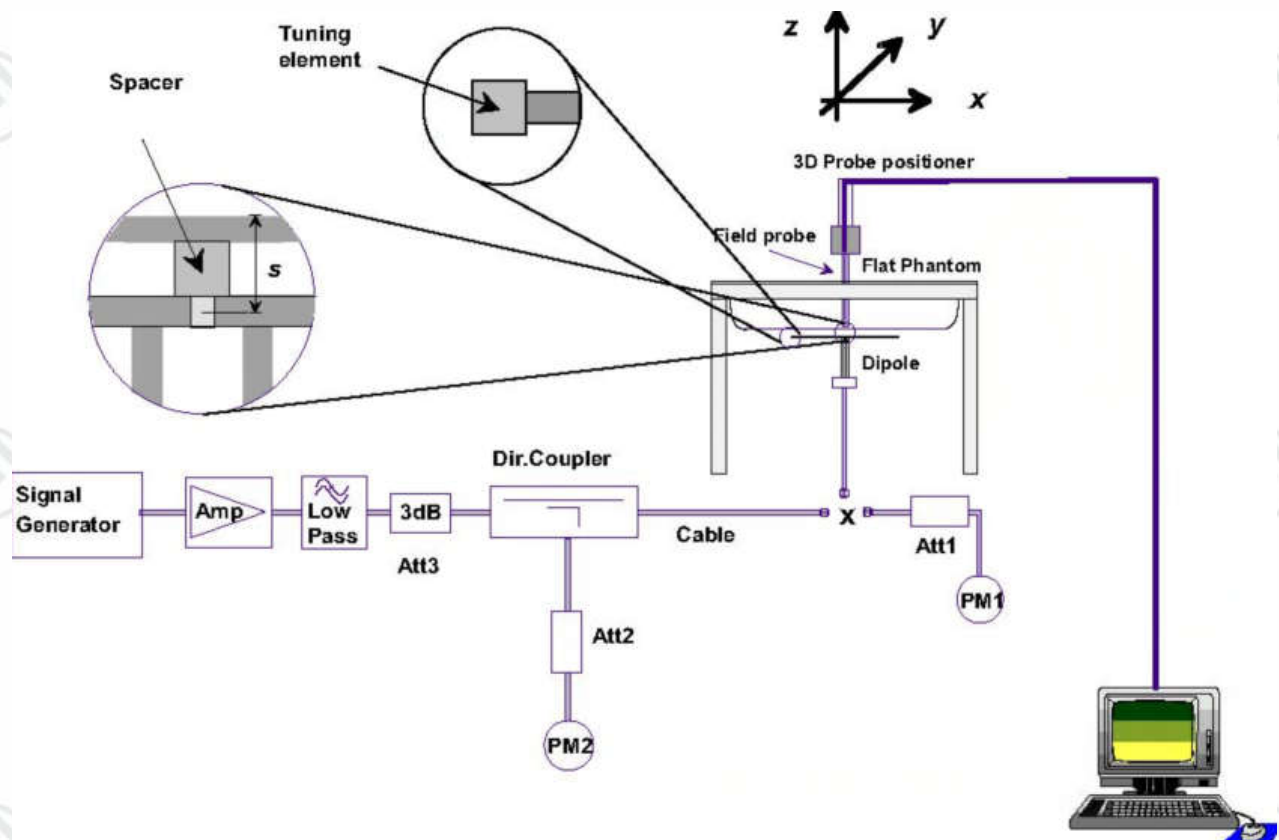

5.3 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

Tissue Type	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Body	9.64 (8.676~10.604)	6.32 (5.688~6.952)	9.68	6.52	22.90°C	2018/10/11
D2450V2 Body	50.60 (45.54~55.66)	23.70 (21.33~26.07)	49.20	23.96	22.40°C	2018/10/12
D5300V2 Body	75.80 (68.22~83.38)	21.20 (19.08~23.32)	76.20	21.90	22.10°C	2018/10/15
D5500V2 Body	79.80 (71.82~87.78)	22.00 (19.80~24.20)	82.00	23.50	21.90°C	2018/10/16
D5800V2 Body	75.60 (68.04~83.16)	20.90 (18.81~22.99)	70.90	21.10	21.60°C	2018/10/17

Note: All SAR values are normalized to 1W forward power.

6 SAR Measurement variability and uncertainty

6.1 SAR measurement variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure.

- 1) Repeated measurement is not required when the original highest measured SAR is < 2.0 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 2.0 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 3.0 or when the original or repeated measurement is ≥ 3.6 W/kg (~ 10% from the 10-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 3.75 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

7 SAR Test Configuration

7.1 WIFI 5G Test Configurations

1) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1.1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.

1.2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

1.3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

2) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be

grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

3) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

3.1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.

3.2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.

3.3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.

3.4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

3.4.1) The channel closest to mid-band frequency is selected for SAR measurement.

3.4.2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

4) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output

power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2 WIFI 2.4G Test Configurations

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227D01 v02r02 are applied.

Per KDB 248227 D01 802.11 Wi-Fi SAR v02r02, SAR Test Reduction criteria are as follows:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The relative SAR levels of multiple exposure test positions can be established by area scan measurements on the highest measured output power channel to determine the initial test position. The area scans must be measured using the same SAR measurement configurations, including test channel, maximum output power, probe tip to phantom distance, scan resolution etc.

When the reported SAR for the initial test position is:

- 1) ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 2) > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance

and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.

- 3) For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.

SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

8 SAR Test Results

8.1 Conducted Power Measurements

8.1.1 Conducted Power of Bluetooth

BT 4.0	Average Conducted Power (dBm)		
Channel	0CH	19CH	39CH
GFSK	-5.20	-3.91	-4.77

8.1.2 ASK 900

ASK 900	Average Conducted Power (dBm)		
Channel	902.75CH	915.25CH	927.25CH
ASK	24.56	24.12	23.64

8.1.3 Conducted Power of WiFi 2.4G

The output power of WiFi 2.4G is as following:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power(dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	17.0	15.45	Yes
	6	2437		17.0	15.54	Yes
	11	2462		17.0	16.08	Yes
802.11g	1	2412	6	16.0	Not Required	No
	6	2437		16.0	Not Required	No
	11	2462		16.0	Not Required	No
802.11n (HT20)	1	2412	6.5	15.0	Not Required	No
	6	2437		15.0	Not Required	No
	11	2462		15.0	Not Required	No
802.11n (HT40)	3	2422	13.5	14.0	Not Required	No
	6	2437		14.0	Not Required	No
	9	2452		14.0	Not Required	No

Note: An entry of "Not Required" means power measurement is not required according to the default power measurement procedures in KDB248227D01.

8.1.4 Conducted power of WiFi 5G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
WiFi 5G (U-NII-1&U-NII-2A)	802.11a	36	5180	6	12.50	Not Required	NO
		40	5200		12.50	Not Required	NO
		44	5220		12.50	Not Required	NO
		48	5240		12.50	Not Required	NO
	802.11n HT20	36	5180	6.5	12.50	Not Required	NO
		40	5200		12.50	Not Required	NO
		44	5220		12.50	Not Required	NO
		48	5240		12.50	Not Required	NO
	802.11n HT40	38	5190	13.5	12.50	Not Required	NO
		46	5230		12.50	Not Required	NO
	802.11a	52	5260	6	13.50	12.03	Yes
		56	5280		13.50	12.32	Yes
		60	5300		13.50	12.38	Yes
		64	5320		13.50	12.45	Yes
	802.11n HT20	52	5260	6.5	12.50	Not Required	NO
		56	5280		12.50	Not Required	NO
		60	5300		12.50	Not Required	NO
		64	5320		12.50	Not Required	NO
	802.11n HT40	54	5270	13.5	12.50	Not Required	NO
		62	5310		12.50	Not Required	NO

Note: An entry of "Not Required" means power measurement is not required according to the default power measurement procedures in KDB248227D01.

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
WiFi 5G (U-NII-2C)	802.11a	100	5500	6	13.50	12.11	Yes
		104	5520		13.50	12.06	Yes
		108	5540		13.50	12.03	Yes
		112	5560		13.50	11.36	Yes
		116	5580		13.50	11.13	Yes
		132	5660		13.50	11.34	Yes
		136	5680		13.50	11.63	Yes
		140	5700		13.50	11.72	Yes
	802.11n HT20	100	5500	6.5	12.50	Not Required	NO
		104	5520		12.50	Not Required	NO
		108	5540		12.50	Not Required	NO
		112	5560		12.50	Not Required	NO
		116	5580		12.50	Not Required	NO
		132	5660		12.50	Not Required	NO
		136	5680		12.50	Not Required	NO
		140	5700		12.50	Not Required	NO
	802.11n HT40	102	5510	13.5	12.50	Not Required	NO
		110	5550		12.50	Not Required	NO
		134	5670		12.50	Not Required	NO

Note: An entry of "Not Required" means power measurement is not required according to the default power measurement procedures in KDB248227D01.

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
WiFi 5G (U-NII-3)	802.11a	149	5745	6	13.00	11.95	Yes
		153	5765		13.00	11.83	Yes
		157	5785		13.00	12.19	Yes
		161	5805		13.00	11.54	Yes
		165	5825		13.00	11.38	Yes
	802.11n HT20	149	5745	6.5	12.00	Not Required	NO
		153	5765		12.00	Not Required	NO
		157	5785		12.00	Not Required	NO
		161	5805		12.00	Not Required	NO
		165	5825		12.00	Not Required	NO
	802.11n HT40	151	5755	13.5	12.00	Not Required	NO
		159	5795		12.00	Not Required	NO

Note: An entry of "Not Required" means power measurement is not required according to the default power measurement procedures in KDB248227D01.

8.2 SAR test results

Notes:

1) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

2) Per KDB447498 D01v06, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.

4) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

5) The NFC antenna is integrated onto the shell. The SAR tests were performed with the shell. Per KDB 648474 D04 devices with built-in NFC functions do not require separate SAR testing and can generally be tested according to the SAR measurement procedures normally required for the devices. Influences of the hardware introduced by the built-in NFC functions are inherently considered through testing of the other transmitters that require SAR.

8.2.1 Results overview of ASK 900

Test position with 0mm	channel/ Frequency	Test Mode	SAR Value (W/Kg)		Power Drift (dB)	Conducted Power (dBm)	Tune up Power (dBm)	Scaled SAR _{10-g} (W/kg)	Limit (W/Kg)
			1-g	10-g					
Front Side	902.75	ASK	0.035	0.025	-0.170	24.56	25.00	0.028	4.0
Back Side	902.75	ASK	0.387	0.251	0.030	24.56	25.00	0.278	4.0
Left Side	902.75	ASK	0.313	0.183	-0.080	24.56	25.00	0.203	4.0
Right Side	902.75	ASK	0.356	0.207	0.050	24.56	25.00	0.229	4.0
Top Side	902.75	ASK	0.743	0.590	-0.040	24.56	25.00	0.653	4.0

8.2.2 Results overview of WiFi 2.4G

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dBm)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{10-g} (W/kg)	Actual duty factor	Reported SAR _{10-g} (W/kg)
			1-g	10-g						
Front Side	11/2462	802.11b	0.049	0.026	-0.120	16.08	16.5	0.029	97.75%	0.029
Left Side	11/2462	802.11b	0.024	0.011	0.190	16.08	16.5	0.012	97.75%	0.012
Right Side	11/2462	802.11b	0.130	0.057	-0.120	16.08	16.5	0.063	97.75%	0.064
Top Side	11/2462	802.11b	0.054	0.025	-0.150	16.08	16.5	0.028	97.75%	0.028

Note: Per KDB248227D01:

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using initial test position procedure.
- 2) As the highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for OFDM 802.11g is not required.
- 3) As the highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11n(20MHz&40MHz) to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for OFDM 802.11n(20MHz&40MHz) is not required.

8.2.3 Results overview of WiFi 5G

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dBm)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{10-g} (W/kg)	Actual duty factor	Reported SAR _{10-g} (W/kg)
			1-g	10-g						
WiFi 5G(U-NII-1&U-NII-2A)										
Front Side	64/5320	802.11a	0.212	0.122	-0.190	12.45	13.50	0.155	97.16%	0.160
Left Side	64/5320	802.11a	0.133	0.061	0.030	12.45	13.50	0.078	97.16%	0.080
Right Side	64/5320	802.11a	0.386	0.195	-0.070	12.45	13.50	0.248	97.16%	0.256
Top Side	64/5320	802.11a	0.278	0.139	-0.110	12.45	13.50	0.177	97.16%	0.182
WiFi 5G(U-NII-2C)										
Front Side	100/5500	802.11a	0.254	0.135	0.130	12.11	13.50	0.186	96.99%	0.192
Left Side	100/5500	802.11a	0.135	0.067	-0.070	12.11	13.50	0.092	96.99%	0.095
Right Side	100/5500	802.11a	0.406	0.206	0.000	12.11	13.50	0.284	96.99%	0.293
Top Side	100/5500	802.11a	0.410	0.223	0.110	12.11	13.50	0.307	96.99%	0.317
WiFi 5G(U-NII-3)										
Front Side	157/5785	802.11a	0.207	0.090	0.110	12.19	13.00	0.108	97.16%	0.112
Left Side	157/5785	802.11a	0.113	0.057	0.090	12.19	13.00	0.069	97.16%	0.071
Right Side	157/5785	802.11a	0.343	0.180	0.170	12.19	13.00	0.217	97.16%	0.223
Top Side	157/5785	802.11a	0.236	0.130	-0.170	12.19	13.00	0.157	97.16%	0.161

8.3 Multiple Transmitter Information

The location of the antennas inside C76 is shown as below picture:



The SAR measurement positions of each side are as below:

Test Band	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
ASK 900	Yes	Yes	Yes	Yes	Yes	No
WiFi 2.4G	Yes	No	Yes	Yes	Yes	No
WiFi 5G	Yes	No	Yes	Yes	Yes	No

8.4 Stand-alone SAR

Per FCC KDB 447498D01:

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	F (GHz)	Calculation Result	SAR test exclusion Threshold	SAR test exclusion
BT	Handheld	0.00	1.00	5.00	2.450	0.31	7.50	Yes

Note: maximum possible output power (including tune-up tolerance) declared by manufacturer

- 2) When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 18.5$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Handheld	0.00	1.00	5.00	2.45	18.50	0.017

Note: 1) maximum possible output power (including tune-up tolerance) declared by manufacturer

- 3) When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg. For conditions where the estimated SAR is overly conservative for certain conditions, the test lab may choose to perform standalone SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.

8.5 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

Simultaneous Tx Combination	Configuration	Handheld
1	ASK 900 + WiFi 2.4G	Yes
2	ASK 900 + WiFi 5G	Yes
3	ASK 900 + BT	Yes

Note: 1)The device does not support simultaneous BT and WiFi, because the BT and WiFi share the same antenna and can't transmit simultaneously.

8.6 SAR Summation Scenario

Test Position	WiFi/BT Antenna SAR _{max}					RFID Antenna SAR _{max}	Σ10-g SAR	SPLSR
	WiFi 2.4G	U-NII-1&U-NII-2A	U-NII-2C	U-NII-3	BT	ASK 900		
Handheld 0mm	Front Side	0.029	0.160	0.192	0.112	0.017	0.028	NO
	Back Side	0.400	0.400	0.400	0.400	0.017	0.278	NO
	Left Side	0.012	0.080	0.095	0.071	0.017	0.203	NO
	Right Side	0.064	0.256	0.293	0.223	0.017	0.229	NO
	Top Side	0.028	0.182	0.317	0.161	0.017	0.653	NO
	Bottom Side	0.400	0.400	0.400	0.400	0.017	0.400	0.800

8.7 Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06

Annex A: Appendix A: SAR System performance Check Plots

(Please See Appendix A)

Annex B: Appendix B: SAR Measurement results Plots

(Please See Appendix B)

Annex C: Appendix C: Calibration reports

(Please See Appendix C)

Annex D: Appendix D: Photo documentation

(Please See Appendix D)

—END OF REPORT—

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.