

FCC TEST REPORT

For

DIGILINK GROUP CO.,LTD.

Smart Watch

Model No.: DW-007Fit+

Additional Model NO. : DW-009Fit+, DW-010Fit+, DW-011Fit+, DW-012Fit+,

DW-013Fit+

Prepared for : DIGILINK GROUP CO.,LTD.
Address : 3th Floor, Block B3, HengFeng Industrial Park, Bao an district,ShenZhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 23, 2016
Number of tested samples : 1
Serial number : /
Date of Test : May 23, 2016 - June 14, 2016
Date of Report : June 14, 2016

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247): 2015

Report Reference No. : LCS1605191743E

Date of Issue..... : June 14, 2016

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
 Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards ☒
 Partial application of Harmonised standards ☐
 Other standard testing method ☐

Applicant's Name..... : DIGILINK GROUP CO.,LTD.

Address..... : 3th Floor, Block B3, HengFeng Industrial Park, Bao an
 district,ShenZhen, China

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.247): 2015

Test Report Form No. : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Smart Watch

Trade Mark..... : N/A

Model/ Type reference : DW-007Fit+

Ratings..... : DC 3.7V by battery(100mAh)

Recharged by DC 5V/120mA

Result : **Positive**

Compiled by:




Dick Su/ File administrators

Supervised by:



Glin Lu / Technique principal

Approved by:



Gavin Liang/ Manager

FCC -- TEST REPORT**Test Report No. : LCS1605191743E**June 14, 2016

Date of issue

Type / Model..... : DW-007Fit+

EUT..... : Smart Watch

Applicant..... : DIGILINK GROUP CO.,LTD.Address..... : 3th Floor, Block B3, HengFeng Industrial Park, Bao an
district,ShenZhen, China

Telephone..... : /

Fax..... : /

Manufacturer..... : DIGILINK GROUP CO.,LTD.Address..... : 3th Floor, Block B3, HengFeng Industrial Park, Bao an
district,ShenZhen, China

Telephone..... : /

Fax..... : /

Factory..... : DIGILINK GROUP CO.,LTD.Address..... : 3th Floor, Block B3, HengFeng Industrial Park, Bao an
district,ShenZhen, China

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|---------------|---------------|-------------|
| 00 | June 14, 2016 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| 1. GENERAL INFORMATION | 6 |
| 1.1. DESCRIPTION OF DEVICE (EUT) | 6 |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS | 7 |
| 1.3. EXTERNAL I/O | 7 |
| 1.4. DESCRIPTION OF TEST FACILITY | 7 |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 7 |
| 1.6. MEASUREMENT UNCERTAINTY | 8 |
| 1.7. DESCRIPTION OF TEST MODES | 8 |
| 2. TEST METHODOLOGY | 9 |
| 2.1. EUT CONFIGURATION | 9 |
| 2.2. EUT EXERCISE | 9 |
| 2.3. GENERAL TEST PROCEDURES | 9 |
| 3. SYSTEM TEST CONFIGURATION | 10 |
| 3.1. JUSTIFICATION | 10 |
| 3.2. EUT EXERCISE SOFTWARE | 10 |
| 3.3. SPECIAL ACCESSORIES | 10 |
| 3.4. BLOCK DIAGRAM/SCHEMATICS | 10 |
| 3.5. EQUIPMENT MODIFICATIONS | 10 |
| 3.6. TEST SETUP | 10 |
| 4. SUMMARY OF TEST RESULTS..... | 11 |
| 5. SUMMARY OF TEST EQUIPMENT | 12 |
| 6. TEST RESULT | 14 |
| 6.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT | 14 |
| 6.2. POWER SPECTRAL DENSITY MEASUREMENT | 15 |
| 6.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT | 18 |
| 6.4. RADIATED EMISSIONS MEASUREMENT | 21 |
| 6.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST | 31 |
| 6.6. POWER LINE CONDUCTED EMISSIONS | 35 |
| 7. ANTENNA REQUIREMENT | 38 |
| 7.1 STANDARD APPLICABLE | 38 |
| 7.2 ANTENNA CONNECTED CONSTRUCTION | 38 |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Smart Watch

Model No. : DW-007Fit+

Hardware Version : V1.0

Software Version : V 1.0

Frequency Range : 2.402-2.480GHz

Channel Number : 40 channels

Channel Spacing : 2MHz

Modulation Type : GFSK

Bluetooth Version : V4.0

Antenna Gain : FPC antenna, 2.41dBi (Max.)

Power Supply : DC 3.7V by battery(100mAh)
Recharged by DC 5V/120mA

| Additional models No. | | | |
|--|------------|------------|------------|
| DW-009Fit+ | DW-010Fit+ | DW-011Fit+ | DW-012Fit+ |
| DW-013Fit+ | -- | -- | -- |
| Remark: PCB board, structure and internal of these model(s) are the same, So no additional models were tested. | | | |

1.2. Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| -- | -- | -- | -- | -- |

1.3. External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| -- | -- | -- |

1.4. Description of Test Facility

Site Description

EMC Lab. : CNAS Registration Number. is L4595.
FCC Registration Number. is 899208.
Industry Canada Registration Number. is 9642A-1.
VCCI Registration Number. is C-4260 and R-3804.
ESMD Registration Number. is ARCB0108.
UL Registration Number. is 100571-492.
TUV SUD Registration Number. is SCN1081.
TUV RH Registration Number. is UA 50296516-001

Name of Firm : Shenzhen LCS Compliance Testing Laboratory Ltd.

Site Location : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

| Test Item | | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty | : | 9KHz~30MHz | 3.10dB | (1) |
| | | 30MHz~200MHz | 2.96dB | (1) |
| | | 200MHz~1000MHz | 3.10dB | (1) |
| | | 1GHz~26.5GHz | 3.80dB | (1) |
| | | 26.5GHz~40GHz | 3.90dB | (1) |
| Conduction Uncertainty | : | 170kHz~30MHz | 1.63dB | (1) |
| Power disturbance | : | 30MHz~300MHz | 1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The following operating modes were applied for the related test items.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position. During test, the EUT is set to transmit in 100% duty cycle. And its related average correction factor is 0.

All test modes were tested, only the result of the worst case was recorded in the report.

All test modes were tested, only the result of the worst case was recorded in the Report.

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|--------------------------|---------------------|
| GFSK | 2402 | 1 |
| | 2440 | 1 |
| | 2480 | 1 |
| For Conducted Emission | | |
| Test Mode | TX Mode | |
| For Radiated Emission | | |
| Test Mode | TX Mode | |

The EUT has been tested under operating condition.

For AC Conducted Emission pre-testing, when performed power line conducted emission measurement, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

For AC Conducted Emission pre-testing, we tested charging at USB from PC.

The EUT was set to transmit at 100% duty cycle. This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be TX mode.

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be TX mode.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013 and KDB558074 D01 v03r03, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements of ANSI C63.10:2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table; The EUT was placed on the top of the turntable 0.8 meter above ground below 1GHz and above 1GHz test at 1.5 meter above ground. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements of ANSI C63.10-2013.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.247(b) | Maximum Conducted Output Power | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(a) | Occupied Bandwidth | Compliant |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205 | Emissions at Restricted Band | Compliant |
| §15.207(a) | Line Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |

5. SUMMARY OF TEST EQUIPMENT

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|----------------------------|----------------|----------------------------------|-------------|------------|------------|
| 1 | EMC Receiver | R&S | ESCS 30 | 100174 | 2015-06-18 | 2016-06-17 |
| 2 | Signal analyzer | Agilent | E4448A(External mixers to 40GHz) | US44300469 | 2015-07-16 | 2016-07-15 |
| 3 | LISN | MESS Tec | NNB-2/16Z | 99079 | 2015-06-18 | 2016-06-17 |
| 4 | LISN (Support Unit) | EMCO | 3819/2NM | 9703-1839 | 2015-06-18 | 2016-06-17 |
| 5 | RF Cable-CON | UTIFLEX | 3102-26886-4 | CB049 | 2015-06-18 | 2016-06-17 |
| 6 | ISN | SCHAFFNER | ISN ST08 | 21653 | 2015-06-18 | 2016-06-17 |
| 7 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2015-06-18 | 2016-06-17 |
| 8 | Amplifier | SCHAFFNER | COA9231A | 18667 | 2015-06-18 | 2016-06-17 |
| 9 | Amplifier | Agilent | 8449B | 3008A02120 | 2015-07-16 | 2016-07-15 |
| 10 | Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 2015-07-16 | 2016-07-15 |
| 11 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | 2015-07-16 | 2016-07-15 |
| 12 | Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 2015-06-18 | 2016-06-17 |
| 13 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2016-06-10 | 2017-06-09 |
| 14 | Horn Antenna | EMCO | 3115 | 6741 | 2016-06-10 | 2017-06-09 |
| 15 | Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 2016-06-10 | 2017-06-09 |
| 16 | RF Cable-R03m | Jye Bao | RG142 | CB021 | 2015-06-18 | 2016-06-17 |
| 17 | RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 2015-06-18 | 2016-06-17 |
| 18 | Spectrum Meter | R&S | FSP 30 | 100023 | 2015-07-16 | 2016-07-15 |
| 19 | Power Meter | R&S | NRVS | 100444 | 2015-06-18 | 2016-06-17 |
| 20 | Power Sensor | R&S | NRV-Z51 | 100458 | 2015-06-18 | 2016-06-17 |
| 21 | Power Sensor | R&S | NRV-Z32 | 10057 | 2015-06-18 | 2016-06-17 |
| 22 | AC Power Source | HPC | HPA-500E | HPA-9100024 | 2015-06-18 | 2016-06-17 |
| 23 | DC power Source | GW | GPC-6030D | C671845 | 2015-06-18 | 2016-06-17 |
| 24 | Temp. and Humidity Chamber | Giant Force | GTH-225-20-S | MAB0103-00 | 2015-06-18 | 2016-06-17 |
| 25 | RF CABLE-1m | JYE Bao | RG142 | CB034-1m | 2015-06-18 | 2016-06-17 |
| 26 | RF CABLE-2m | JYE Bao | RG142 | CB)35-2m | 2015-06-18 | 2016-06-17 |
| 27 | Vector signal Generator | R&S | SMU200A | 102098 | 2015-06-18 | 2016-06-17 |
| 28 | Signal Generator | R&S | SMR40 | 10016 | 2015-07-16 | 2016-07-15 |

| | | | | | | |
|----|-----------------------------|---------|---------|------------|------------|------------|
| 29 | MXA Signal Analyzer | Agilent | N9020A | MY50510140 | 2015-10-27 | 2016-10-26 |
| 30 | Temporary Antenna Connector | ALT | E203950 | N/A | 2015-07-18 | 2016-07-17 |

6. TEST RESULT

6.1. Maximum Conducted Output Power Measurement

6.1.1. Standard Applicable

According to §15.247(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.


6.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

6.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

6.1.4. Test Setup Layout

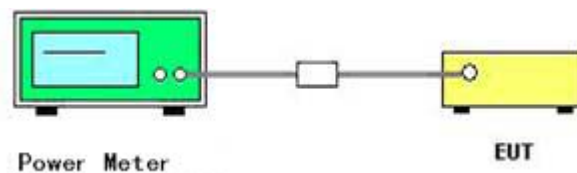

6.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.1.6. Test Result of Maximum Conducted Output Power (Peak)

| Modulation | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Limit (mW) | Result |
|------------|-----------------|--------------------|-------------------|------------|--------|
| GFSK | 2402 | 0.11 | 1.025 | 1000 | Pass |
| | 2440 | 0.36 | 1.087 | 1000 | Pass |
| | 2480 | 0.44 | 1.108 | 1000 | Pass |

6.2. Power Spectral Density Measurement

6.2.1. Standard Applicable

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


6.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

6.2.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

6.2.4. Test Setup Layout

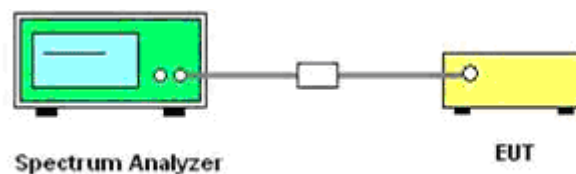

6.2.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

6.2.6. Test Result of Power Spectral Density

| Modulation | Frequency (MHz) | Reading Level (dBm/3KHz) | Max. Limit (dBm/3KHz) | Result |
|------------|-----------------|--------------------------|-----------------------|--------|
| GFSK | 2402 | -14.172 | 8 | Pass |
| | 2440 | -13.378 | 8 | Pass |
| | 2480 | -14.613 | 8 | Pass |

The test data refer to the following page.

Low Channel, 2402MHz

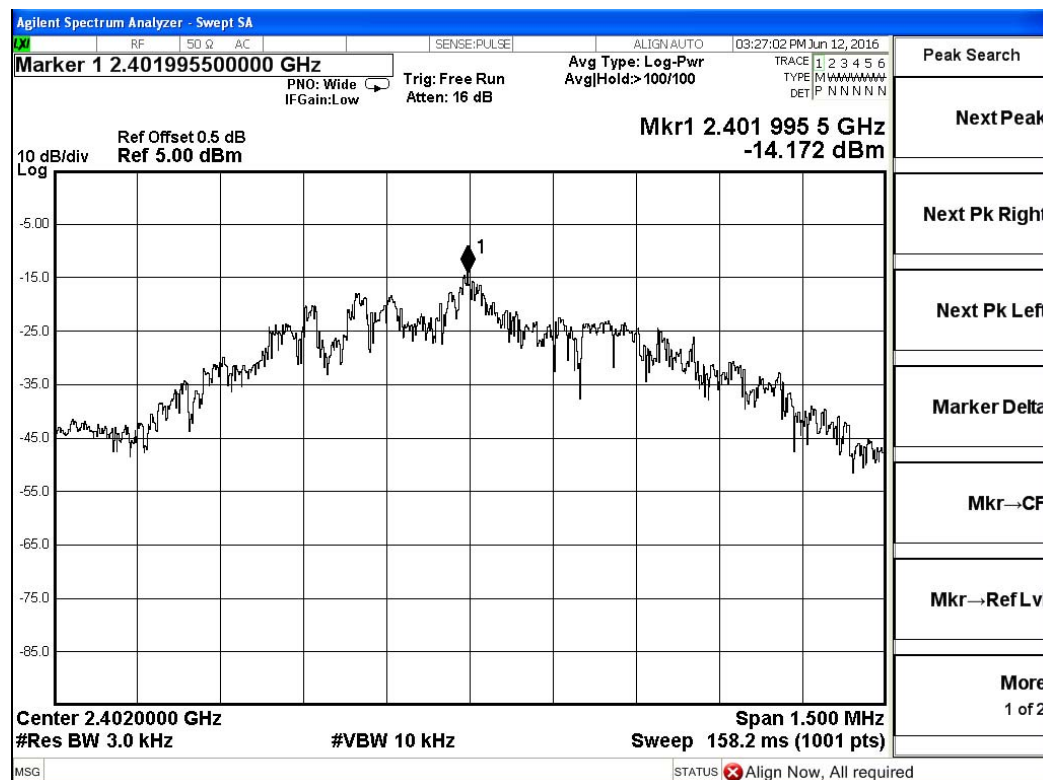

Middle Channel, 2440MHz



High Channel, 2480MHz



6.3. 6 dB Spectrum Bandwidth Measurement

6.3.1. Standard Applicable

According to §15.247(a)(2) For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

6.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| Span Frequency | > RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | 100ms |


6.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to ANSI C63.10:2013 bandwidth measurement method.

RBW=1%-5% OBW, VBW \geq 3RBW

3. Measured the spectrum width with power higher than 6dB below carrier.

6.3.4. Test Setup Layout

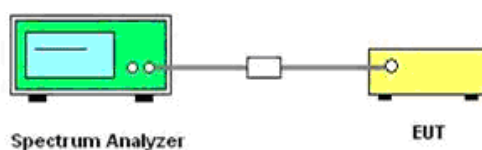

6.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

6.3.6. Test Result of 6dB Spectrum Bandwidth


| Modulation | Frequency (MHz) | 6dB Bandwidth (KHz) | Min. Limit (KHz) | Result |
|------------|-----------------|---------------------|------------------|----------|
| GFSK | 2402 | 738.7 | 500 | Complies |
| | 2440 | 685.5 | 500 | Complies |
| | 2480 | 679.1 | 500 | Complies |

The test data refer to the following page.


Low Channel, 2402MHz

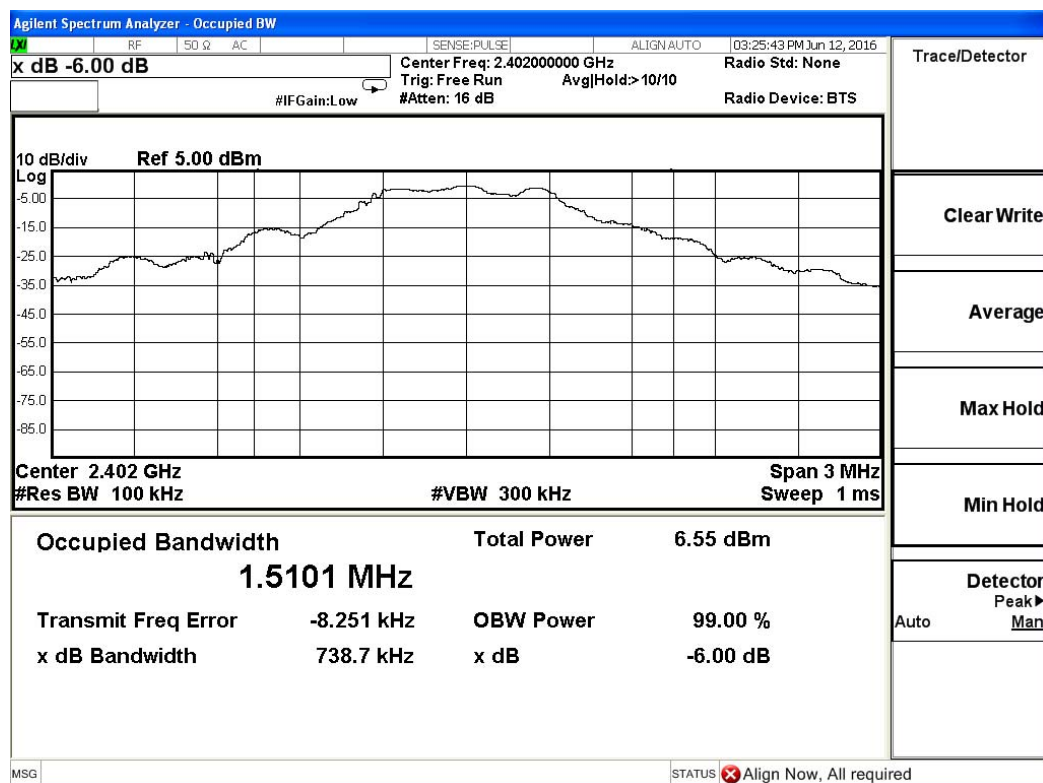

Middle Channel, 2440MHz



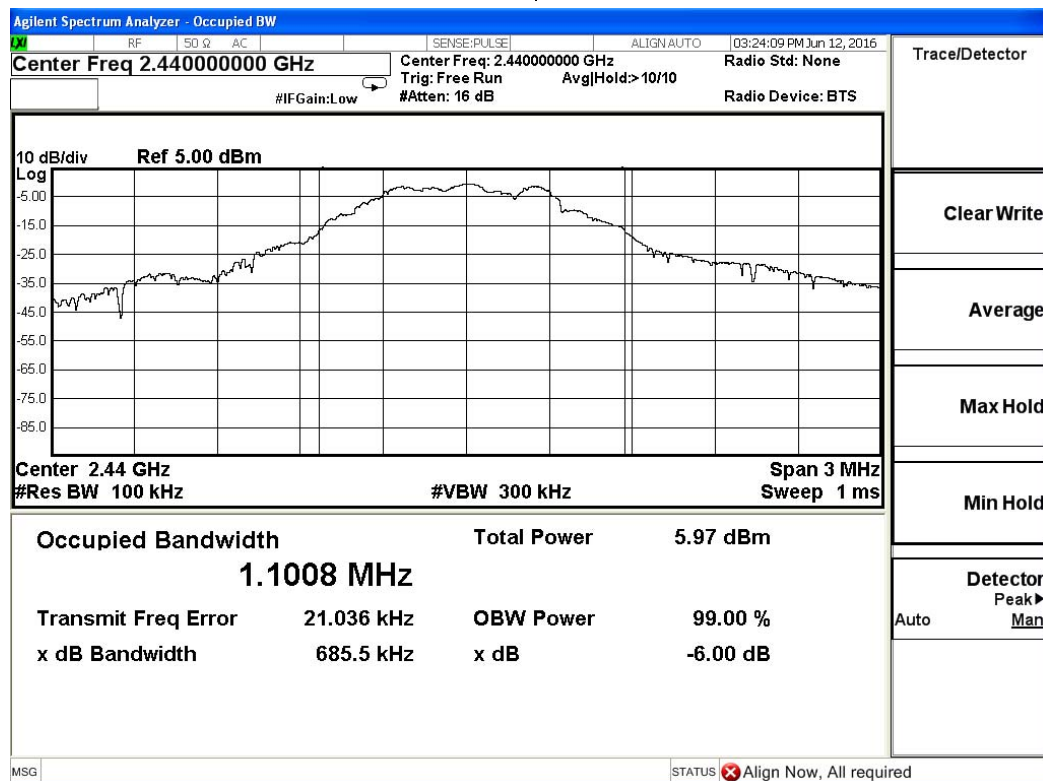


High Channel, 2480MHz

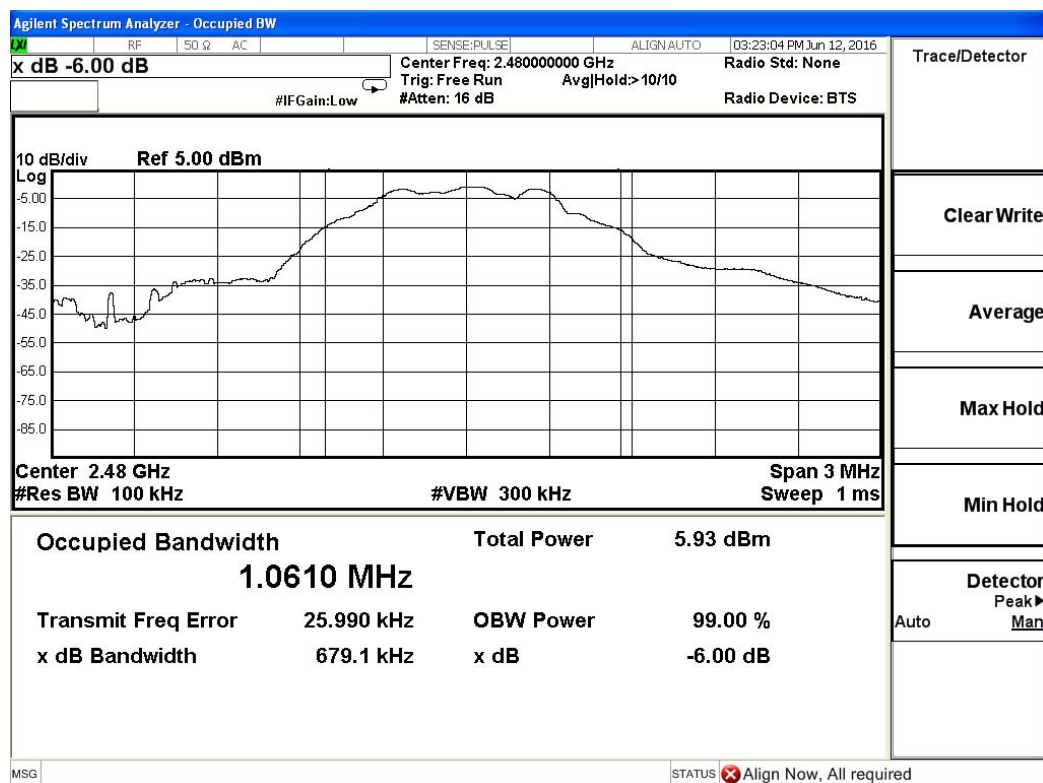

6.4. Radiated Emissions Measurement

6.4.1. Test Setup Layout

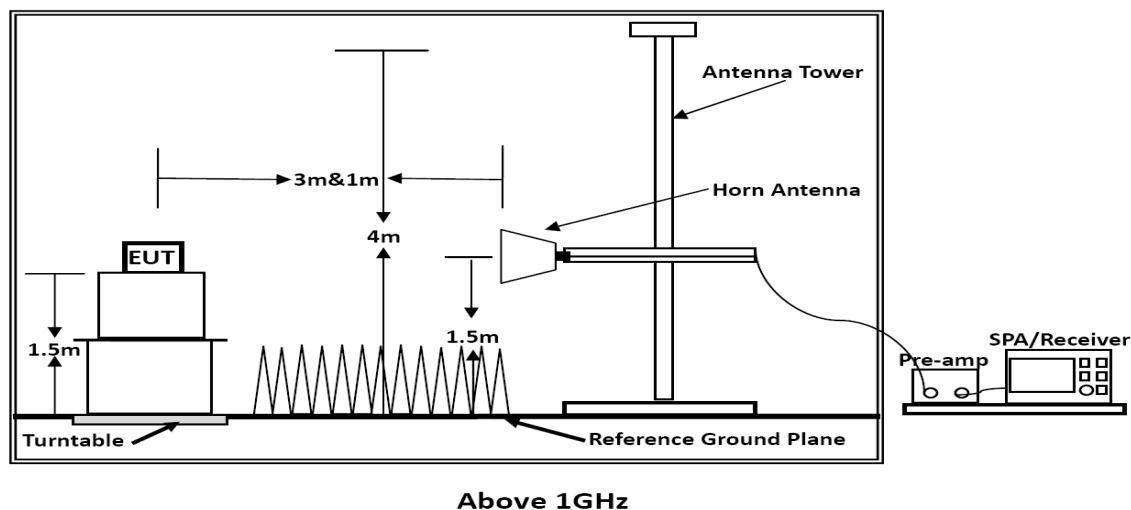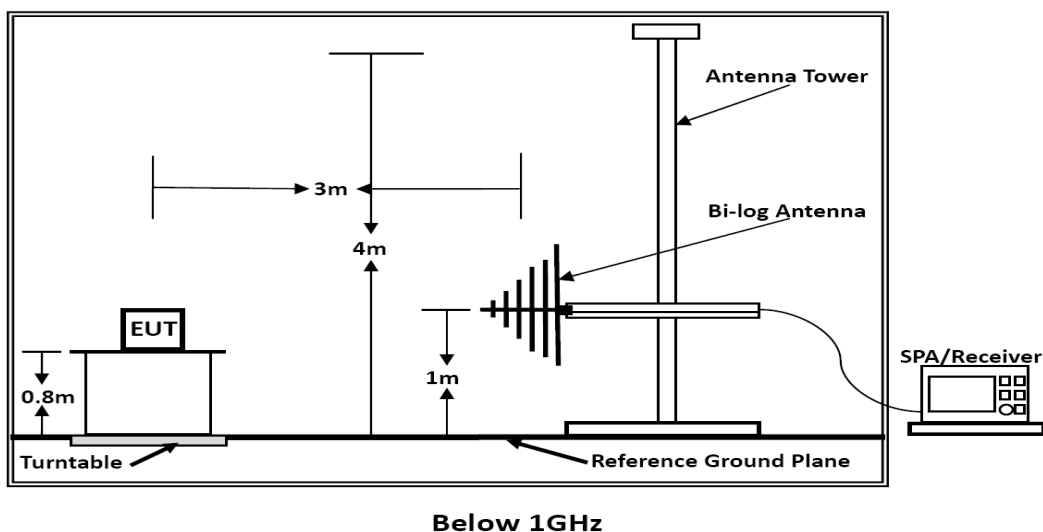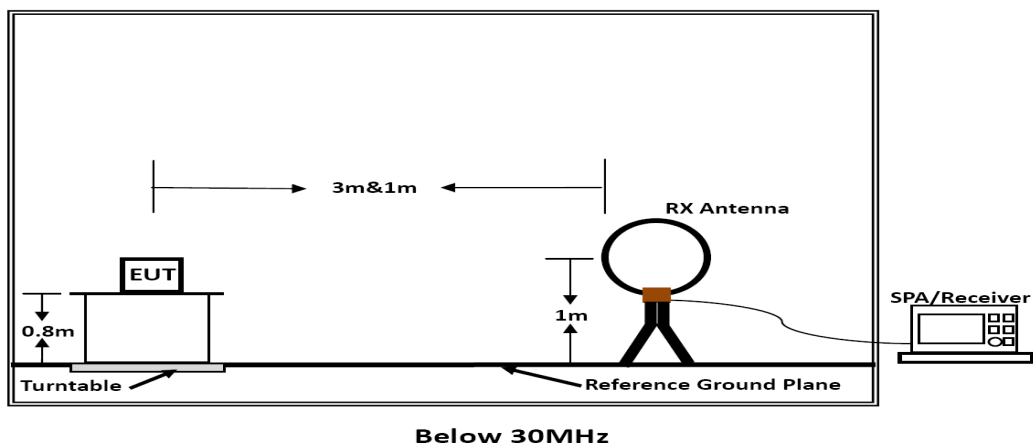

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

6.4.2. Standard Applicable

According to §15.247 (d) 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies(MHz) | Field Strength(microvolts/meter) | Measurement Distance(meters) |
|------------------|----------------------------------|------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 170 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.4.3. Measuring Instruments and Setting

Please refer to section 6 of equipment's list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Spectrum Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~170kHz / RB/VB 200Hz/1KHz for QP/Average |
| Start ~ Stop Frequency | 170kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

6.4.4 Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

6.4.5 Results for Radiated Emissions

PASS.

*Only record the worst test result in this report.
The test data please refer to following page:*

6.4.6. Results of Radiated Emissions (9 kHz~30MHz)

| | | | |
|---------------|------|----------------|---------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Dick | Configurations | BT V4.0 |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|----------------|-----------------|--------------------|----------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

6.4.7. Results of Radiated Emissions (30MHz~1GHz)

PASS.


The test data please refer to following page:

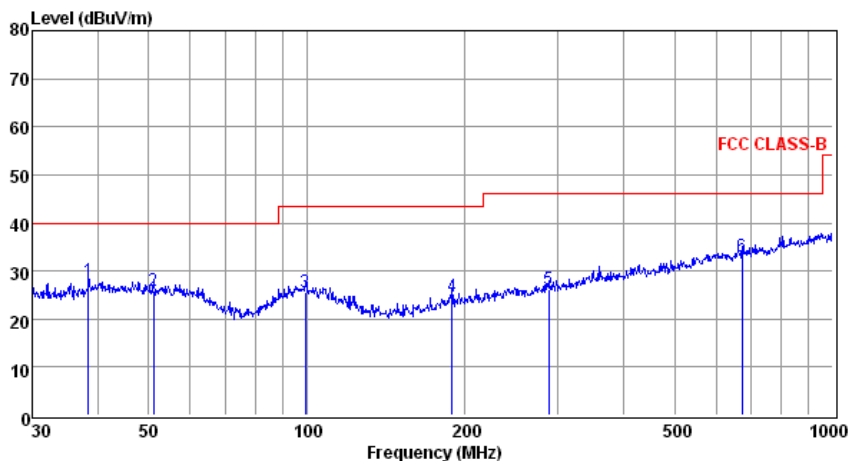

Env./Ins: 24°C/56%
pol: VERTICAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 38.35 | 14.35 | 0.38 | 13.16 | 27.89 | 40.00 | -12.11 | QP |
| 2 | 51.12 | 12.00 | 0.54 | 13.20 | 25.74 | 40.00 | -14.26 | QP |
| 3 | 99.18 | 11.83 | 0.61 | 13.11 | 25.55 | 43.50 | -17.95 | QP |
| 4 | 189.07 | 13.24 | 0.86 | 10.48 | 24.58 | 43.50 | -18.92 | QP |
| 5 | 287.99 | 12.18 | 1.05 | 12.83 | 26.06 | 46.00 | -19.94 | QP |
| 6 | 672.84 | 12.77 | 1.65 | 18.71 | 33.13 | 46.00 | -12.87 | QP |

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the official limit are not reported

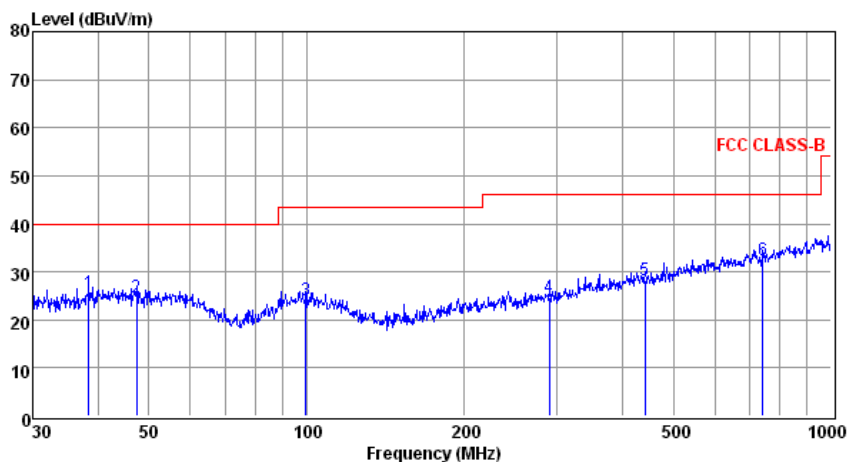

Env./Ins: 24°C/56%
pol: HORIZONTAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 38.35 | 12.02 | 0.38 | 13.16 | 25.56 | 40.00 | -14.44 | QP |
| 2 | 47.33 | 10.84 | 0.35 | 13.41 | 24.60 | 40.00 | -15.40 | QP |
| 3 | 99.53 | 10.24 | 0.61 | 13.13 | 23.98 | 43.50 | -19.52 | QP |
| 4 | 290.02 | 10.89 | 1.01 | 12.87 | 24.77 | 46.00 | -21.23 | QP |
| 5 | 441.74 | 11.37 | 1.25 | 15.56 | 28.18 | 46.00 | -17.82 | QP |
| 6 | 742.26 | 11.34 | 1.78 | 19.34 | 32.46 | 46.00 | -13.54 | QP |

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the official limit are not reported

***Note: Pre-scan all modes and recorded the worst case results in this report.

6.4.8. Results for Radiated Emissions (Above 1GHz)

Channel 0

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 43.36 | 33.06 | 35.04 | 3.94 | 45.32 | 74 | -28.68 | Peak | Horizontal |
| 4804.00 | 36.60 | 33.06 | 35.04 | 3.94 | 38.56 | 54 | -15.44 | Average | Horizontal |
| 4804.00 | 41.98 | 33.06 | 35.04 | 3.94 | 43.94 | 74 | -30.06 | Peak | Vertical |
| 4804.00 | 32.90 | 33.06 | 35.04 | 3.94 | 34.86 | 54 | -19.14 | Average | Vertical |

Channel 19

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4880.00 | 42.03 | 33.16 | 35.15 | 3.96 | 44.00 | 74 | -30.00 | Peak | Horizontal |
| 4880.00 | 36.87 | 33.16 | 35.15 | 3.96 | 38.84 | 54 | -15.16 | Average | Horizontal |
| 4880.00 | 37.43 | 33.16 | 35.15 | 3.96 | 39.40 | 74 | -34.60 | Peak | Vertical |
| 4880.00 | 36.26 | 33.16 | 35.15 | 3.96 | 38.23 | 54 | -15.77 | Average | Vertical |

Channel 39

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 38.55 | 33.26 | 35.14 | 3.98 | 40.65 | 74 | -33.35 | Peak | Horizontal |
| 4960.00 | 27.48 | 33.26 | 35.14 | 3.98 | 29.58 | 54 | -24.42 | Average | Horizontal |
| 4960.00 | 46.82 | 33.26 | 35.14 | 3.98 | 48.92 | 74 | -25.08 | Peak | Vertical |
| 4960.00 | 39.73 | 33.26 | 35.14 | 3.98 | 41.83 | 54 | -12.17 | Average | Vertical |

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6.4.9. Results for Band edge Testing (Radiated)

Tx-2402

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 2365.05 | 45.47 | 32.89 | 35.16 | 3.51 | 46.71 | 74 | -27.29 | Peak | Horizontal |
| 2364.66 | 31.88 | 32.90 | 35.16 | 3.51 | 33.13 | 54 | -20.87 | Average | Horizontal |
| 2400.00 | 48.12 | 32.92 | 35.16 | 3.54 | 49.42 | 74 | -24.58 | Peak | Horizontal |
| 2400.00 | 37.89 | 32.92 | 35.16 | 3.54 | 39.19 | 54 | -14.81 | Average | Horizontal |
| 2380.07 | 40.66 | 32.89 | 35.16 | 3.51 | 41.90 | 74 | -32.10 | Peak | Vertical |
| 2381.71 | 35.03 | 32.90 | 35.16 | 3.51 | 36.28 | 54 | -17.72 | Average | Vertical |
| 2400.00 | 49.05 | 32.92 | 35.16 | 3.54 | 50.35 | 74 | -23.65 | Peak | Vertical |
| 2400.00 | 38.69 | 32.92 | 35.16 | 3.54 | 39.99 | 54 | -14.01 | Average | Vertical |

Tx-2480

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 2483.50 | 54.13 | 33.06 | 35.18 | 3.60 | 55.61 | 74 | -18.39 | Peak | Horizontal |
| 2483.50 | 36.31 | 33.08 | 35.18 | 3.60 | 37.81 | 54 | -16.19 | Average | Horizontal |
| 2490.60 | 45.28 | 33.08 | 35.18 | 3.62 | 46.80 | 74 | -27.20 | Peak | Horizontal |
| 2490.68 | 36.51 | 33.08 | 35.18 | 3.62 | 38.03 | 54 | -15.97 | Average | Horizontal |
| 2483.50 | 50.71 | 33.06 | 35.18 | 3.60 | 52.19 | 74 | -21.81 | Peak | Vertical |
| 2483.50 | 32.00 | 33.08 | 35.18 | 3.60 | 33.50 | 54 | -20.50 | Average | Vertical |
| 2497.62 | 43.84 | 33.08 | 35.18 | 3.62 | 45.36 | 74 | -28.64 | Peak | Vertical |
| 2497.76 | 32.39 | 33.08 | 35.18 | 3.62 | 33.91 | 54 | -20.09 | Average | Vertical |

6.5. Conducted Spurious Emissions and Band Edges Test

6.5.1. Standard Applicable

According to §15.247 (d) & A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|---------------|
| Detector | Peak |
| Attenuation | Auto |
| RB / VB (Emission in restricted band) | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

6.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

6.5.4. Test Setup Layout


This test setup layout is the same as that shown in section 5.4.4.

6.5.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

6.5.6. Test Results of Conducted Spurious Emissions


Test Result of Low Channel:

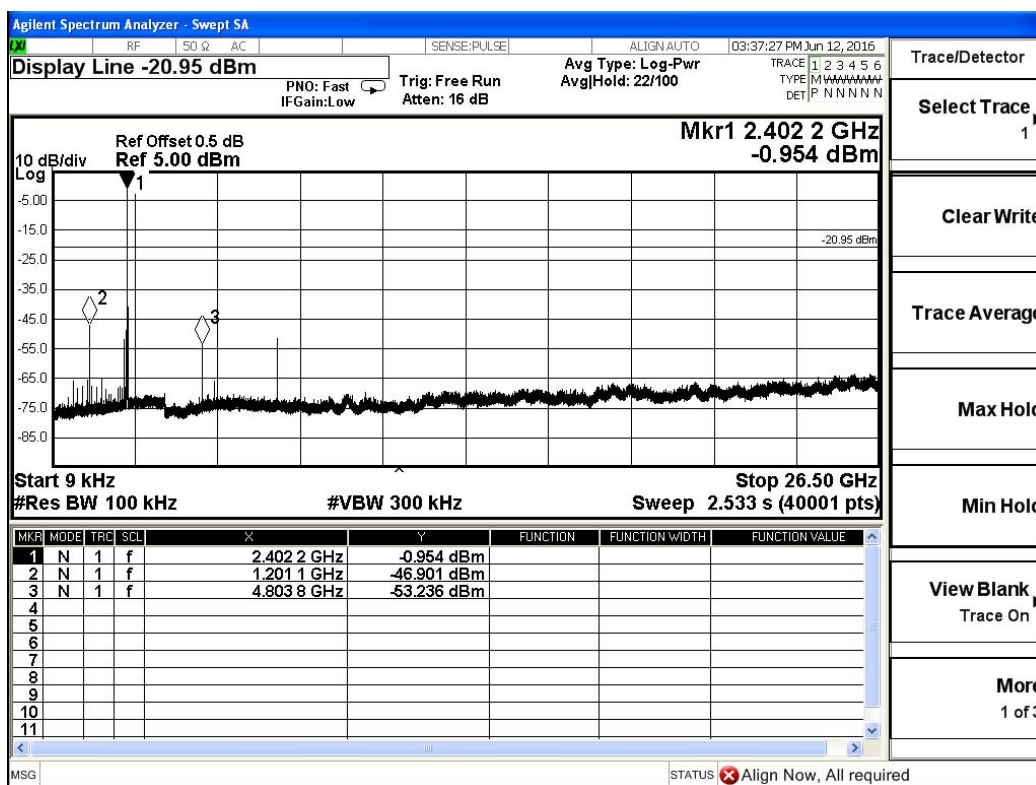



Test Result of Middle Channel:

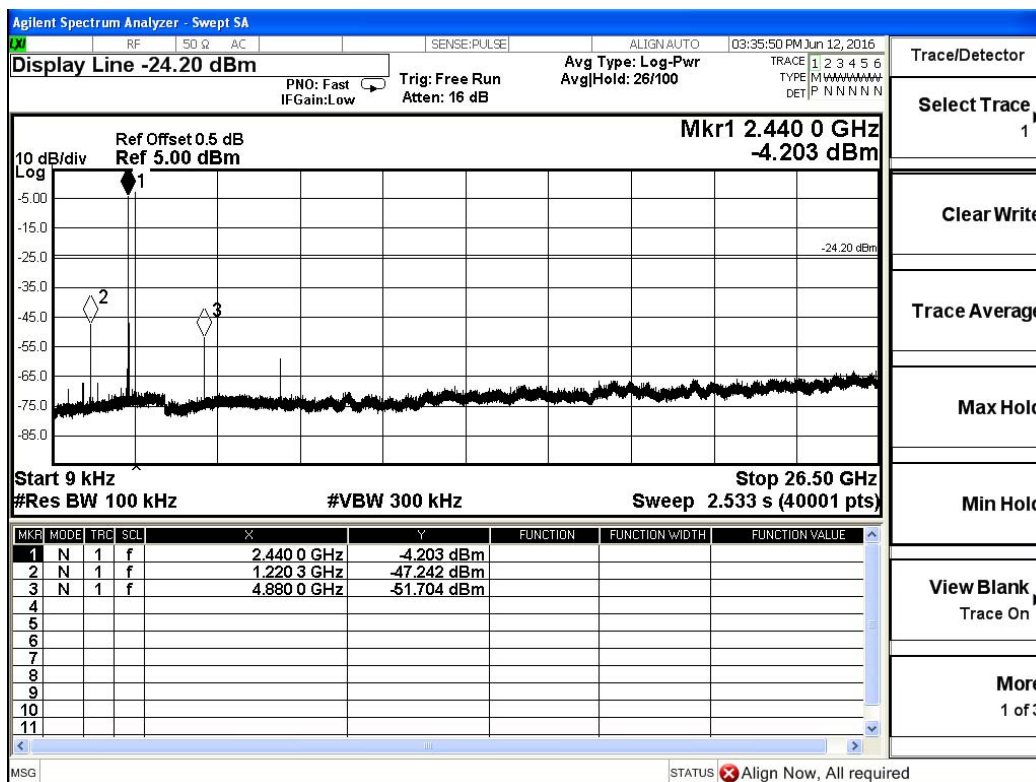

Test Result of High Channel:

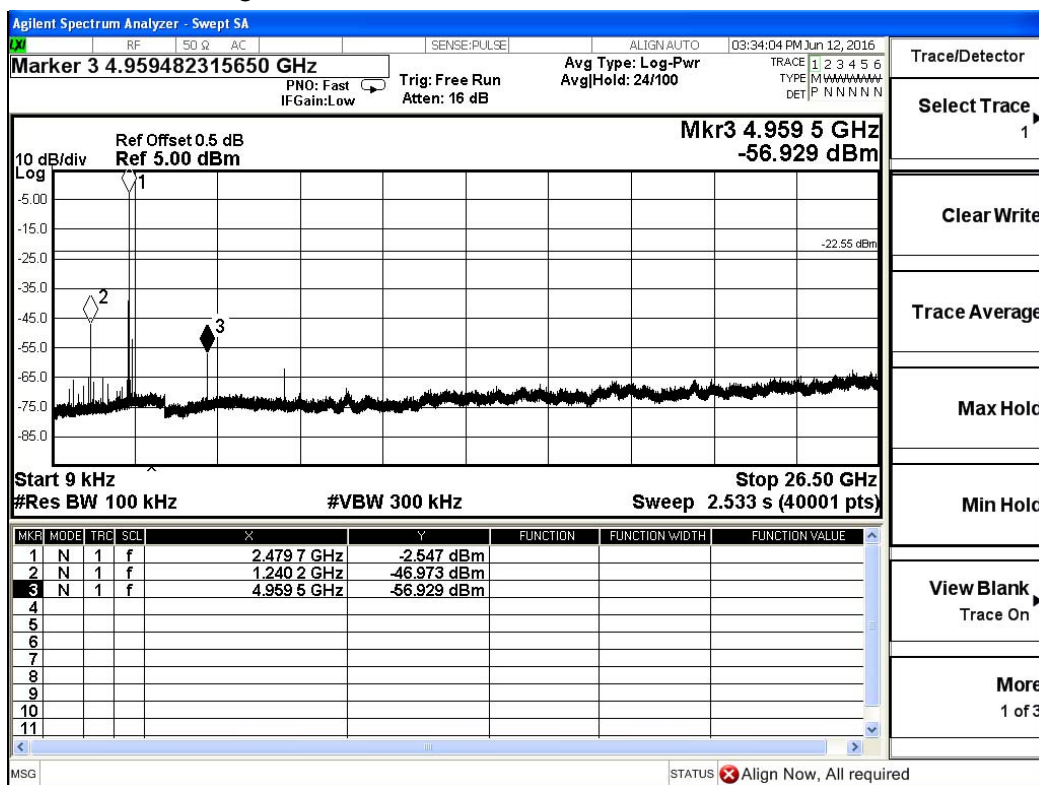

6.5.7. Test Results of Band Edges Test

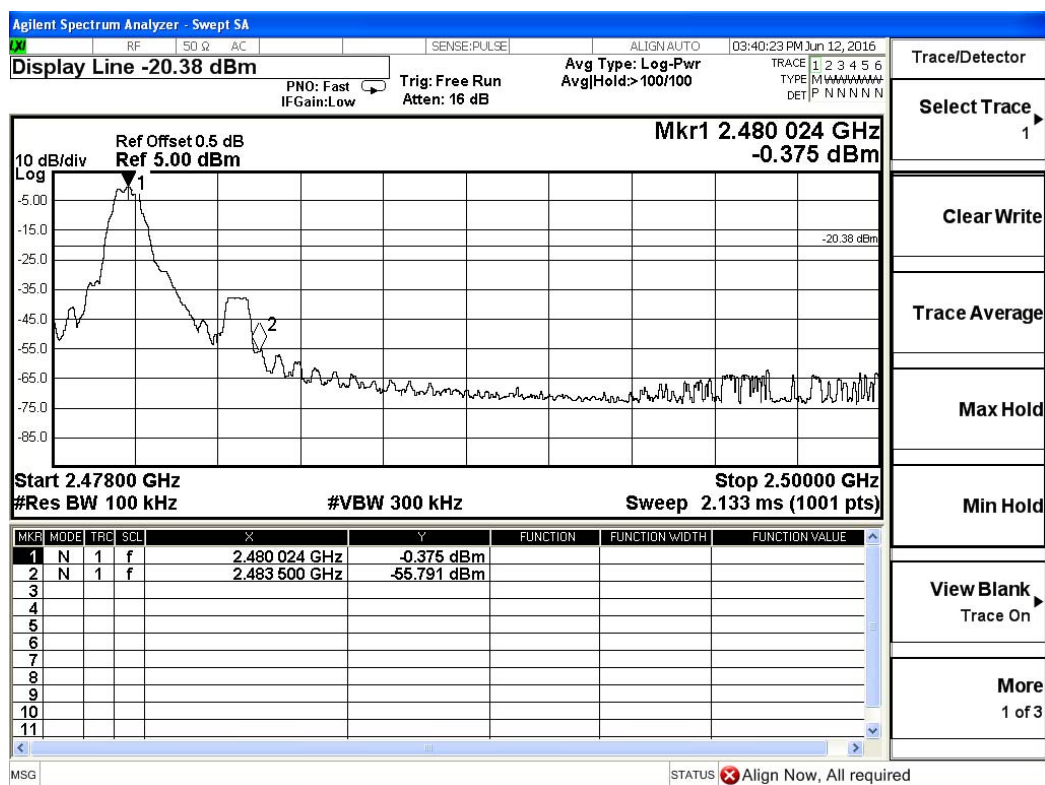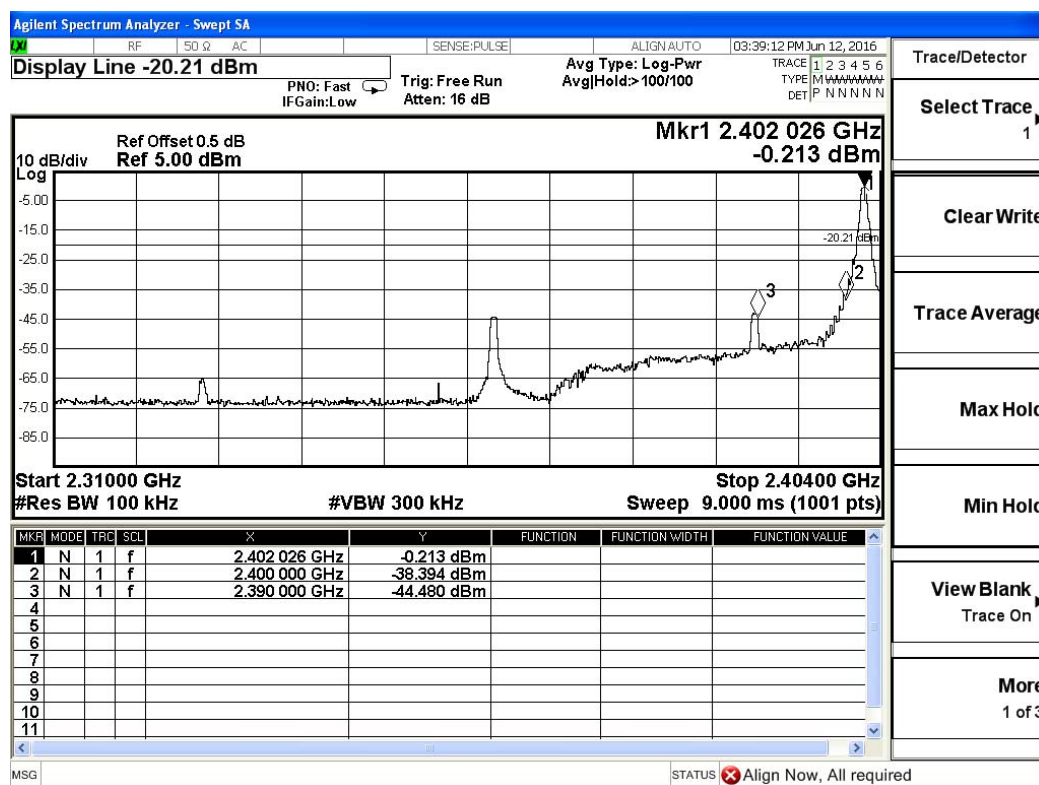


6.6. Power line conducted emissions

6.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 170 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

6.6.2 Block Diagram of Test Setup

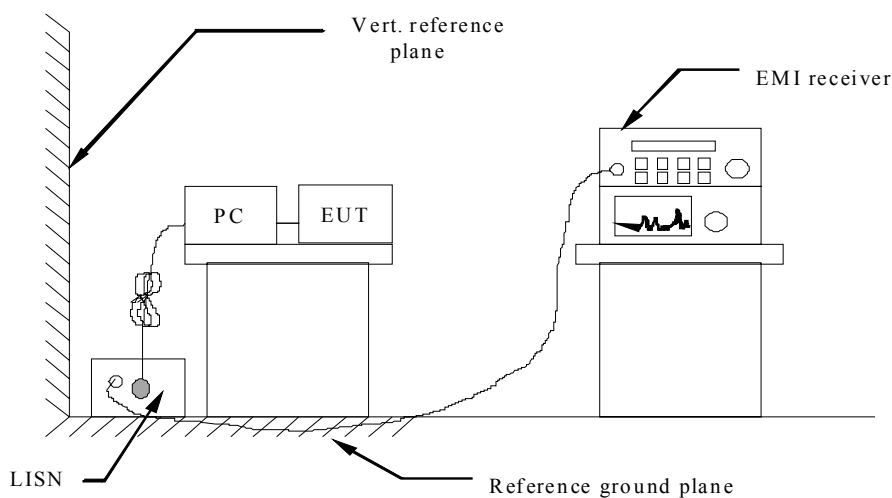


6.6.3 Test Results

PASS.

The test data please refer to following page.


Test result for GFSK (High Channel) 120V/60Hz

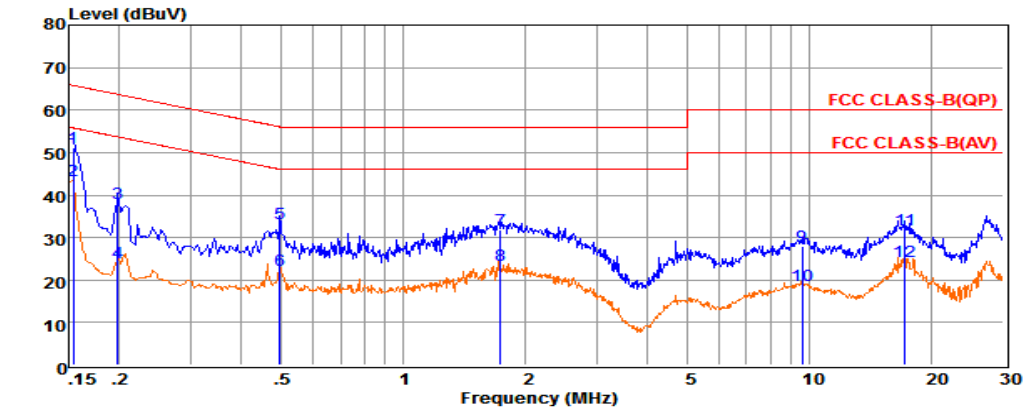

Env. Ins: 24*/56%
Pol: LINE

| | Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|----|----------|---------|---------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.15403 | 31.51 | 9.58 | 0.02 | 10.00 | 51.11 | 65.78 | -14.67 | QP |
| 2 | 0.15413 | 23.89 | 9.58 | 0.02 | 10.00 | 43.49 | 55.77 | -12.28 | Average |
| 3 | 0.19758 | 18.37 | 9.63 | 0.02 | 10.00 | 38.02 | 63.71 | -25.69 | QP |
| 4 | 0.19768 | 4.58 | 9.63 | 0.02 | 10.00 | 24.23 | 53.71 | -29.48 | Average |
| 5 | 0.49673 | 13.55 | 9.62 | 0.04 | 10.00 | 33.21 | 56.05 | -22.84 | QP |
| 6 | 0.49683 | 2.65 | 9.62 | 0.04 | 10.00 | 22.31 | 46.05 | -23.74 | Average |
| 7 | 1.73447 | 12.11 | 9.64 | 0.05 | 10.00 | 31.80 | 56.00 | -24.20 | QP |
| 8 | 1.73547 | 3.66 | 9.64 | 0.05 | 10.00 | 23.35 | 46.00 | -22.65 | Average |
| 9 | 9.60284 | 8.30 | 9.69 | 0.08 | 10.00 | 28.07 | 60.00 | -31.93 | QP |
| 10 | 9.60384 | -1.09 | 9.69 | 0.08 | 10.00 | 18.68 | 50.00 | -31.32 | Average |
| 11 | 17.19939 | 11.96 | 9.73 | 0.11 | 10.00 | 31.80 | 60.00 | -28.20 | QP |
| 12 | 17.20039 | 4.60 | 9.73 | 0.11 | 10.00 | 24.44 | 50.00 | -25.56 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

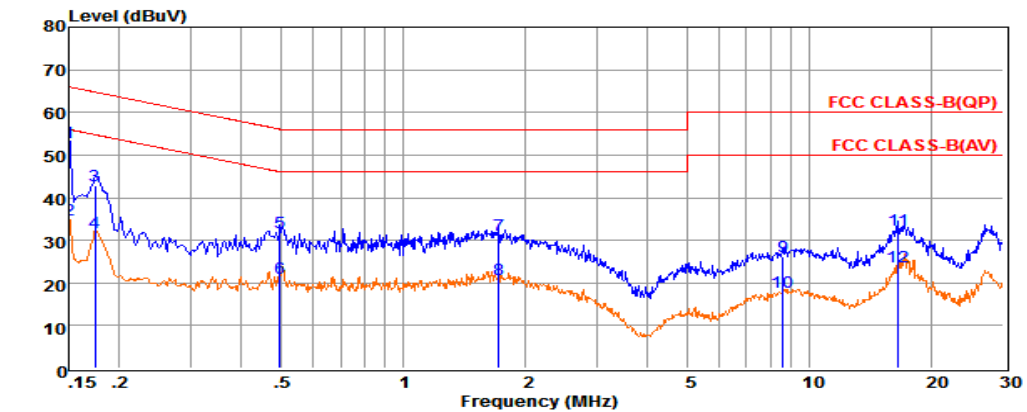


Env. Ins: 24*/56%
Pol: NEUTRAL

| | Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|----|----------|---------|---------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.15000 | 33.19 | 9.70 | 0.02 | 10.00 | 52.91 | 66.00 | -13.09 | QP |
| 2 | 0.15010 | 14.99 | 9.70 | 0.02 | 10.00 | 34.71 | 55.99 | -21.28 | Average |
| 3 | 0.17399 | 23.22 | 9.64 | 0.02 | 10.00 | 42.88 | 64.77 | -21.89 | QP |
| 4 | 0.17409 | 12.21 | 9.64 | 0.02 | 10.00 | 31.87 | 54.76 | -22.89 | Average |
| 5 | 0.49673 | 12.08 | 9.62 | 0.04 | 10.00 | 31.74 | 56.05 | -24.31 | QP |
| 6 | 0.49683 | 1.47 | 9.62 | 0.04 | 10.00 | 21.13 | 46.05 | -24.92 | Average |
| 7 | 1.71619 | 11.50 | 9.63 | 0.05 | 10.00 | 31.18 | 56.00 | -24.82 | QP |
| 8 | 1.71719 | 1.11 | 9.63 | 0.05 | 10.00 | 20.79 | 46.00 | -25.21 | Average |
| 9 | 8.59168 | 6.45 | 9.71 | 0.08 | 10.00 | 26.24 | 60.00 | -33.76 | QP |
| 10 | 8.59268 | -2.09 | 9.71 | 0.08 | 10.00 | 17.70 | 50.00 | -32.30 | Average |
| 11 | 16.57318 | 12.49 | 9.76 | 0.11 | 10.00 | 32.36 | 60.00 | -27.64 | QP |
| 12 | 16.57418 | 3.96 | 9.76 | 0.11 | 10.00 | 23.83 | 50.00 | -26.17 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.


Test result for GFSK (High Channel) 240V/60Hz

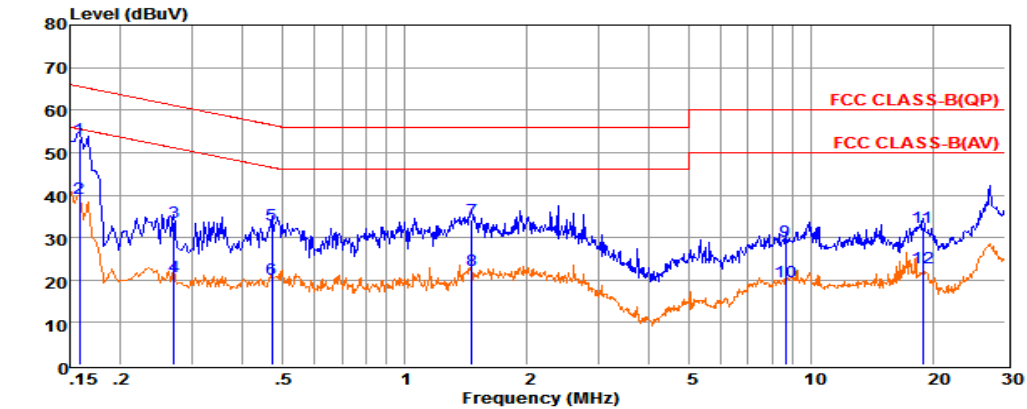

Env. Ins: 24*/56%
Pol: LINE

| | Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|----|----------|---------|---------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.15816 | 33.50 | 9.58 | 0.02 | 10.00 | 53.10 | 65.56 | -12.46 | QP |
| 2 | 0.15826 | 19.67 | 9.58 | 0.02 | 10.00 | 39.27 | 55.55 | -16.28 | Average |
| 3 | 0.27009 | 13.81 | 9.63 | 0.03 | 10.00 | 33.47 | 61.12 | -27.65 | QP |
| 4 | 0.27019 | 1.11 | 9.63 | 0.03 | 10.00 | 20.77 | 51.11 | -30.34 | Average |
| 5 | 0.47110 | 13.40 | 9.62 | 0.04 | 10.00 | 33.06 | 56.49 | -23.43 | QP |
| 6 | 0.47120 | 0.63 | 9.62 | 0.04 | 10.00 | 20.29 | 46.49 | -26.20 | Average |
| 7 | 1.46398 | 14.46 | 9.64 | 0.05 | 10.00 | 34.15 | 56.00 | -21.85 | QP |
| 8 | 1.46498 | 2.49 | 9.64 | 0.05 | 10.00 | 22.18 | 46.00 | -23.82 | Average |
| 9 | 8.63732 | 9.52 | 9.69 | 0.08 | 10.00 | 29.29 | 60.00 | -30.71 | QP |
| 10 | 8.63832 | -0.06 | 9.69 | 0.08 | 10.00 | 19.71 | 50.00 | -30.29 | Average |
| 11 | 18.82048 | 12.50 | 9.75 | 0.11 | 10.00 | 32.36 | 60.00 | -27.64 | QP |
| 12 | 18.82148 | 3.11 | 9.75 | 0.11 | 10.00 | 22.97 | 50.00 | -27.03 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

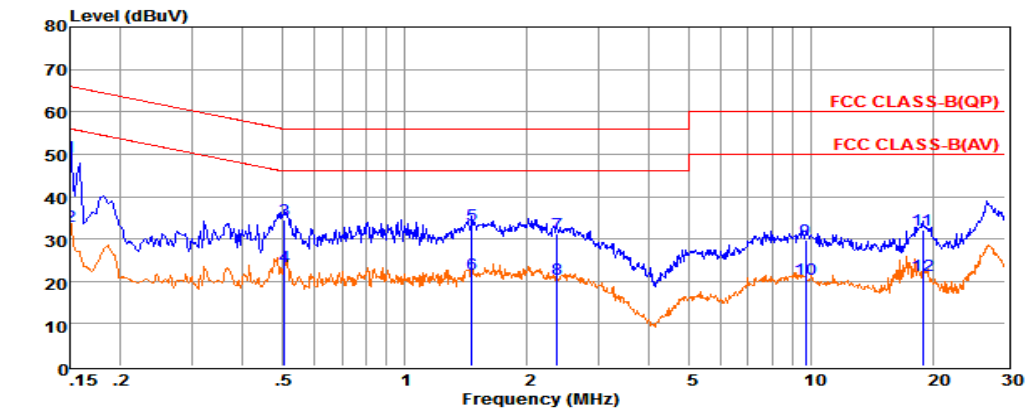

Env. Ins: 24*/56%
Pol: NEUTRAL

| | Freq | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over | Remark |
|----|----------|---------|---------|--------|-----------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.15000 | 29.77 | 9.70 | 0.02 | 10.00 | 49.49 | 66.00 | -16.51 | QP |
| 2 | 0.15010 | 13.44 | 9.70 | 0.02 | 10.00 | 33.16 | 55.99 | -22.83 | Average |
| 3 | 0.50469 | 14.85 | 9.62 | 0.04 | 10.00 | 34.51 | 56.00 | -21.49 | QP |
| 4 | 0.50479 | 3.87 | 9.62 | 0.04 | 10.00 | 23.53 | 46.00 | -22.47 | Average |
| 5 | 1.46398 | 13.71 | 9.63 | 0.05 | 10.00 | 33.39 | 56.00 | -22.61 | QP |
| 6 | 1.46498 | 2.14 | 9.63 | 0.05 | 10.00 | 21.82 | 46.00 | -24.18 | Average |
| 7 | 2.37098 | 11.48 | 9.64 | 0.05 | 10.00 | 31.17 | 56.00 | -24.83 | QP |
| 8 | 2.37198 | 0.72 | 9.64 | 0.05 | 10.00 | 20.41 | 46.00 | -25.59 | Average |
| 9 | 9.70514 | 10.04 | 9.72 | 0.08 | 10.00 | 29.84 | 60.00 | -30.16 | QP |
| 10 | 9.70614 | 0.61 | 9.72 | 0.08 | 10.00 | 20.41 | 50.00 | -29.59 | Average |
| 11 | 18.82048 | 12.25 | 9.84 | 0.11 | 10.00 | 32.20 | 60.00 | -27.80 | QP |
| 12 | 18.82148 | 1.42 | 9.84 | 0.11 | 10.00 | 21.37 | 50.00 | -28.63 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

7.2 Antenna Connected Construction

7.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2.2. Antenna Connector Construction

The sample use internal antenna and maximum gain is 2.41dBi. Please see EUT photo for details.

7.2.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

| Measurement parameter | |
|-----------------------|----------|
| Detector: | Peak |
| Sweep Time: | Auto |
| Resolution bandwidth: | 1MHz |
| Video bandwidth: | 3MHz |
| Trace-Mode: | Max hold |

Limits

| | |
|--------------|----|
| FCC | IC |
| Antenna Gain | |
| 6 dBi | |

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

| T_{nom} | V_{nom} | Lowest Channel 2402 MHz | Middle Channel 2440 MHz | Highest Channel 2480 MHz |
|---|-----------|----------------------------|--|-----------------------------|
| Conducted power [dBm] Measured with GFSK modulation | | 0.16 | 0.32 | 0.39 |
| Radiated power [dBm] Measured with GFSK modulation | | 1.12 | 2.59 | 1.67 |
| Gain [dBi] Calculated | | 0.96 | 2.27 | 1.28 |
| Measurement uncertainty | | | ± 1.6 dB (cond.) / ± 3.8 dB (rad.) | |

Result: -/-

-----THE END OF REPORT-----