



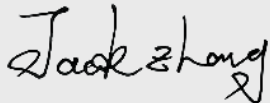

Test report No:
2230387R-RF-US-P06V01

FCC TEST REPORT

Product Name	Wi-Fi & Bluetooth Internet of Things Module
TradeMark	ESPRESSIF
Model and /or type reference	ESP32-MINI-1
Contain FCC ID	2AC7Z-ESP32MINI1
Contain IC	21098-ESP32MINI1
Applicant's name / address	Espressif System (Shanghai) Co.,Ltd. Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KDB558074 D01v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented By (name / position & signature)	Tim Cao/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2022-06-21
Report Version	V1.1
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees.....	3
General conditions.....	3
Environmental conditions	3
Possible test case verdicts.....	4
Abbreviations.....	4
Document History	5
ReMarks and Comments	5
Used Equipment	6
Uncertainty	7
1 General Information	8
1.1 General Description of the Item(s).....	8
1.2 Antenna Information.....	9
1.3 Data Rate.....	10
1.4 Channel List.....	11
2 Description of Test Setup	12
2.1 Operating mode(s) used for tests	12
2.2 Support / Auxiliary equipment / unit / Test software for the EUT	12
2.3 Test Configuration / Block diagram used for tests	13
2.4 Testing process.....	14
3 Verdict summary section	15
3.1 Standards	15
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	15
3.3 Overview of results.....	16
3.4 Test Facility.....	17
4 Test Results.....	18
4.1 Fundamental emission output power	18
4.1.1 Limit.....	18
4.1.2 Test Setup.....	18
4.1.3 Test Procedure.....	19
4.1.4 Test Data	20
4.2 Antenna Requirement	21
4.2.1 Limit:	21
4.2.2 Antenna Connector Construction:	21
5 Test setup photo and EUT Photo	22

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial PEUT: Handheld Thermal Binoculars Suzhou, 215006, P.R. China
Date(receive sample)	Mar. 10, 2022
Date (start test)	Mar. 14, 2022
Date (finish test)	Mar. 18, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2230387R-RF-US-P06V01	V1.0	Initial issue of report.	2022-05-06
2230387R-RF-US-P06V01	V1.1	Whole report: Add ISED standards. (The test report No.: 2230387R-RF-US-P06V01 V1.1 is to replace the test report No.: 2230387R-RF-US-P06V01 V1.0, and test report 2230387R-RF-US-P06V01 V1.0 is obsoleted.)	2022-06-21

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2..
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China Market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Data Rate;
 - Chapter 1.4 Channel List.

USED EQUIPMENT

Fundamental emission output power / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
Coaxial Cable	Woken	A50-SMAMSMAM-1m	20111443	2021.06.10	2022.06.09
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
Peak Power Output	± 1.27 dB
RF antenna conducted test	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	Wi-Fi & Bluetooth Internet of Things Module
Model No. :	ESP32-MINI-1
TradeMark :	ESPRESSIF
Manufacturer..... :	Espressif System (Shanghai) Co.,Ltd.
Manufacturer address :	Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China.

Wireless specification..... :	WIFI
Operating frequency range(s)..... :	2400~2483.5MHz
Type of modulation :	DSSS: BPSK,QPSK,CCK OFDM: BPSK, QPSK, 16QAM, 64QAM
Number of channel..... :	802.11b/g/n(20MHz): 11 802.11n(40MHz): 9

Rated power supply..... :	Voltage and Frequency	
	<input type="checkbox"/>	AC: 220 – 230 V, 50/60 Hz
	<input type="checkbox"/>	AC: 100 – 240 V, 50/60 Hz
	<input checked="" type="checkbox"/>	DC: 3.0 ~ 3.6 V
	<input type="checkbox"/>	Battery:
	<input type="checkbox"/>	PoE:
Mounting position :	<input type="checkbox"/>	Table top equipment
	<input type="checkbox"/>	Wall/Ceiling mounted equipment
	<input type="checkbox"/>	Floor standing equipment
	<input type="checkbox"/>	Hand-held equipment
	<input checked="" type="checkbox"/>	Other: RF Module.

1.2 Antenna Information

Antenna model / type number	N/A		
Antenna serial number	N/A		
Antenna Delivery	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> Basic
			<input type="checkbox"/> CDD
			<input type="checkbox"/> Sectorized
			<input type="checkbox"/> Beam-forming
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole
			<input type="checkbox"/> Sectorized
			<input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/>	PCB	
	<input type="checkbox"/>	Metal Antenna	
	Antenna Gain.....	2.7 dBi	

1.3 Data Rate

IEEE 802.11b

Modulation	Data Rate(Mb/s)
DSSS	1
DSSS	2
CCK	5.5
CCK	11

IEEE 802.11g

Modulation	Coding rate	Data Rate(Mb/s)
BPSK	1/2	6
BPSK	3/4	9
QPSK	1/2	12
QPSK	3/4	18
16-QAM	1/2	24
16-QAM	3/4	36
64-QAM	2/3	48
64-QAM	3/4	54

IEEE 802.11n

Spatial streams	MCS Index	Modulation	Coding rate	Data Rate(Mb/s)			
				20MHz		40MHz	
				800ns GI	400ns GI	800ns GI	400ns GI
1	0	BPSK	1/2	6.5	7.2	13.5	15.0
1	1	QPSK	1/2	13.0	14.4	27.0	30.0
1	2	QPSK	3/4	19.5	21.7	40.5	45.0
1	3	16-QAM	1/2	26.0	28.9	54.0	60.0
1	4	16-QAM	3/4	39.0	43.3	81.0	90.0
1	5	64-QAM	2/3	52.0	57.8	108.0	120.0
1	6	64-QAM	3/4	58.5	65.0	121.5	135.0
1	7	64-QAM	5/6	65.0	72.2	135.0	150.0

Note 1: Support of 400ns GI is optional on transmit and receive.

Symbol	Explanation
R	Code rate
GI	guard interval

1.4 Channel List

IEEE 802.11b/g & IEEE 802.11n(20MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
001	2412 MHz	002	2417 MHz	003	2422 MHz	004	2427 MHz
005	2432 MHz	006	2437 MHz	007	2442 MHz	008	2447 MHz
009	2452 MHz	010	2457 MHz	011	2462 MHz	-	-

IEEE 802.11n(40MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
003	2422 MHz	004	2427 MHz	005	2432 MHz	006	2437 MHz
007	2442 MHz	008	2447 MHz	009	2452 MHz	-	-

Note: The General Description of the Item(s), antenna information, Data Rate and Channel List in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n(20MHz)
	Mode 4: Transmit by 802.11n(40MHz)


2.2 Support / Auxiliary equipment / unit / Test software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
Software	Type / Version	Manufacturer	Supplied by
ESP_RF_test_tool	V2.8	ESPRESSIF	N/A

2.3 Test Configuration / Block diagram used for tests

The following test setup / configuration / block diagram has been used during the tests:

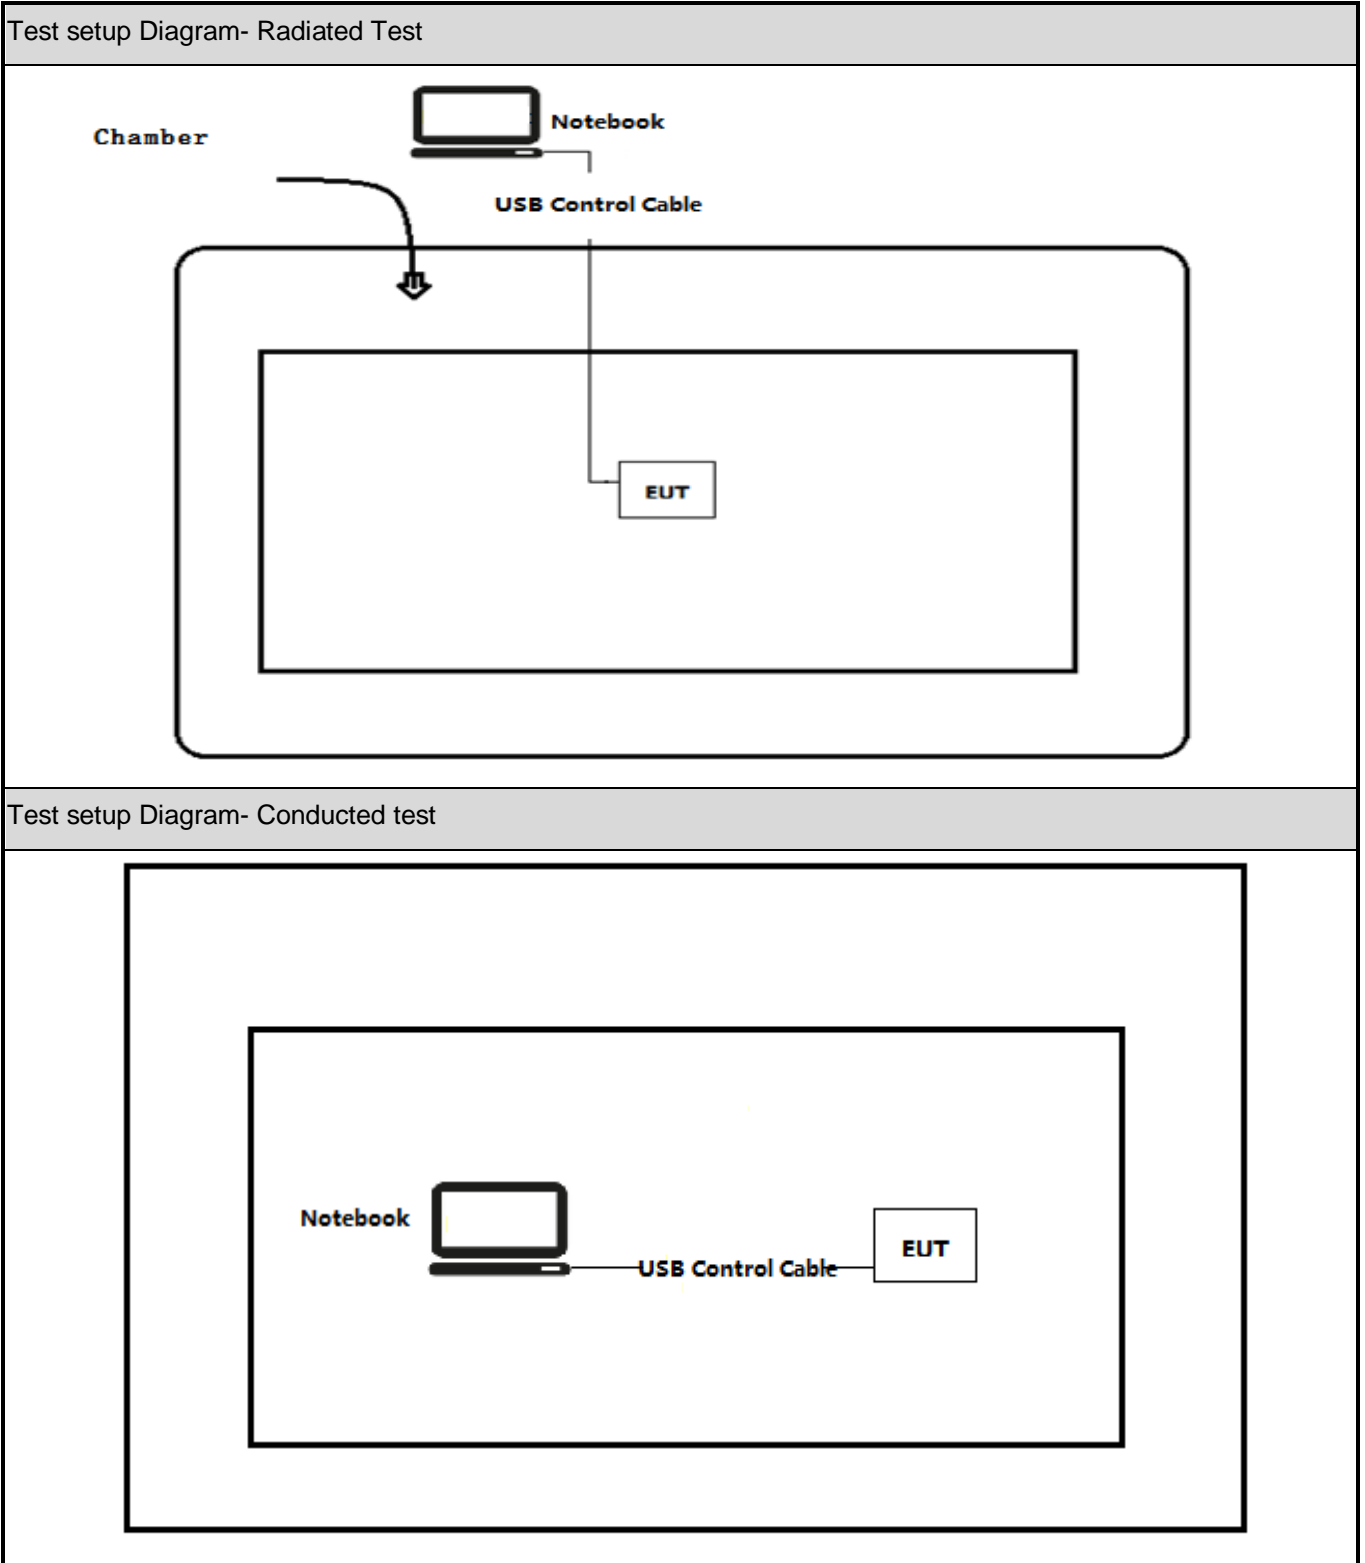

2.4 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Execute the test software “EspRFtestTool”.
3	Configure the test mode, the test channel, the test power, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2022	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test case	Basic standard(s)	Verdict	ReMark
Fundamental emission output power	FCC 15.247(b)(3); RSS-247 Issue 2 Section 5.4(d).	PASS	---
Antenna Requirement	FCC 15.203; RSS-Gen Issue 5 Section 6.8.	PASS	---

3.4 Test Facility


USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 Fundamental emission output power	VERDICT: PASS
----------------------------------------------	----------------------

4.1.1 Limit			
Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)	
<input checked="" type="checkbox"/>	GTX <6dBi	Pout≤30dBm	
<input type="checkbox"/>	GTX >6dBi		
<input type="checkbox"/>	Non-Fix point-point	Pout≤30-(GTX -6)	
<input type="checkbox"/>	Fix point-point	Pout≤30-[(GTX-6)]/3	
<input type="checkbox"/>	Point-to-multipoint	Pout≤30-(GTX-6)	
<input type="checkbox"/>	Overlap Beams	Pout≤30-[(GTX-6)]/3	
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3	
<input type="checkbox"/>	single directional beam	Pout≤30-[(GTX-6)]/3+8dB	

Note 1 : GTX directional gain of transmitting antennas.
 Note 2 : Pout is maximum peak conducted output power .

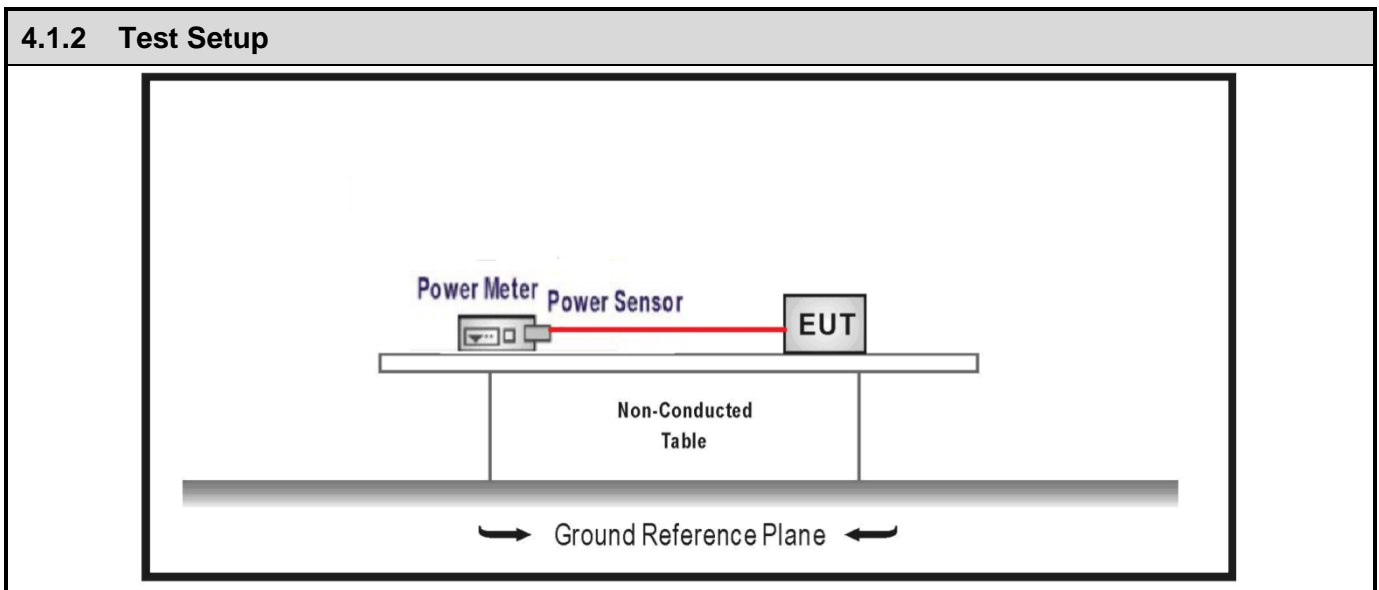

4.1.3 Test Procedure					
	References Rule		Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10		11.9	Fundamental emission output power	
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.1	Maximum peak conducted output power	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method	
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	<input type="checkbox"/>	ANSI C63.10		11.9.2	Maximum conducted (average) output power
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A	
	<input type="checkbox"/>	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM	
<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G		

4.1.4 Test Data

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	Result
Mode 1	1	2412	6.92	≤30	Pass
	6	2437	6.57	≤30	Pass
	11	2462	6.97	≤30	Pass
Mode 2	1	2412	7.12	≤30	Pass
	6	2437	6.88	≤30	Pass
	11	2462	7.10	≤30	Pass
Mode 3	1	2412	7.27	≤30	Pass
	6	2437	7.06	≤30	Pass
	11	2462	7.27	≤30	Pass
Mode 4	3	2422	6.83	≤30	Pass
	6	2437	7.08	≤30	Pass
	9	2452	6.93	≤30	Pass

4.2 Antenna Requirement	VERDICT: PASS
--------------------------------	----------------------

4.2.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.203
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>	

4.2.2 Antenna Connector Construction:

<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

5 TEST SETUP PHOTO AND EUT PHOTO

ReMark: The test setup photo and EUT Photo please see appendix.

_____ The End _____