



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP32-C3-SOLO-1
FCC ID : 2AC7Z-ESPC3SOLO
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 11, 2022 ~ Aug. 08, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 5

 1.5 Modification of EUT 5

 1.6 Testing Location 6

 1.7 Test Software 6

 1.8 Applicable Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode 7

 2.3 Connection Diagram of Test System 8

 2.4 Support Unit used in test configuration and system 9

 2.5 EUT Operation Test Setup 9

 2.6 Measurement Results Explanation Example 9

3 TEST RESULT 10

 3.1 6dB Bandwidth Measurement 10

 3.2 Output Power Measurement 12

 3.3 Power Spectral Density Measurement 13

 3.4 Conducted Band Edges and Spurious Emission Measurement 15

 3.5 Radiated Band Edges and Spurious Emission Measurement 28

 3.6 AC Conducted Emission Measurement 32

 3.7 Antenna Requirements 34

4 LIST OF MEASURING EQUIPMENT 35

5 UNCERTAINTY OF EVALUATION 37

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS

APPENDIX F. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.12 dB at 2389.950 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.73 dB at 0.176 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP32-C3-SOLO-1
FCC ID	2AC7Z-ESPC3SOLO
HW Version	V1.1
SW Version	V1.1.3.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 16.75 dBm (0.0473 W) 802.11g : 25.37 dBm (0.3443 W) 802.11n HT20 : 25.26 dBm (0.3357 W) 802.11n HT40 : 25.13 dBm (0.3258 W)
Antenna Type / Gain	PCB Antenna type with gain 3.26 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	03CH05-KS	AUDIX	E3	6.2009-8-24al
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :BT Link+ WLAN Link(2.4G)+Adapter

2.3 Connection Diagram of Test System

< AC Conducted Emission >

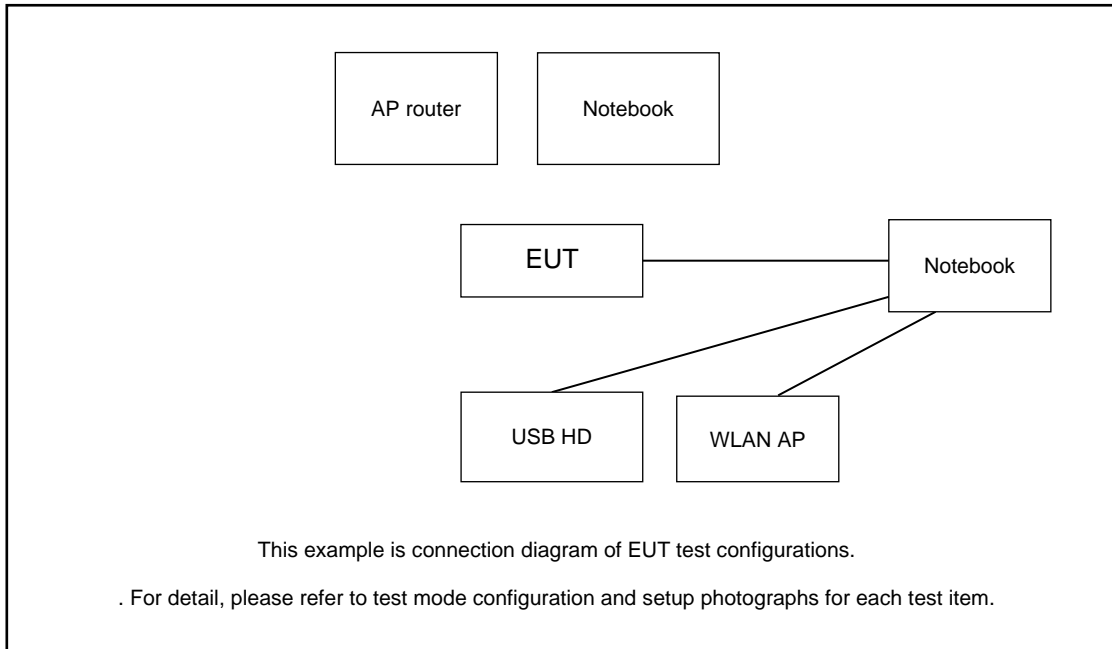

< Radiated Emission >

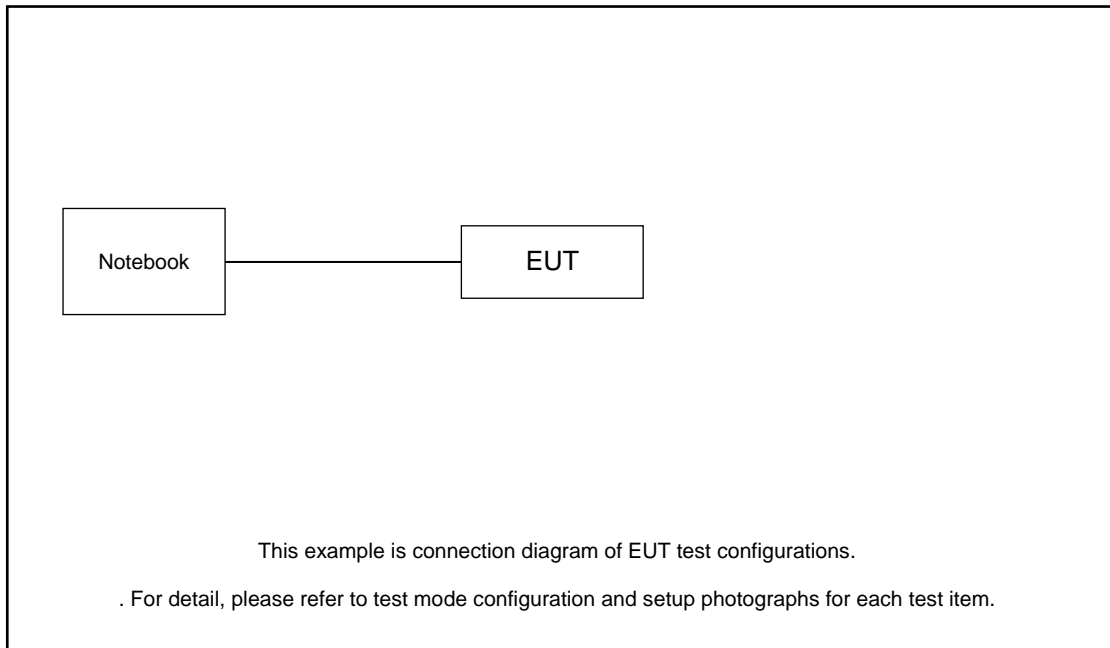

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	V130-14IKB004	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.4dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.4 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

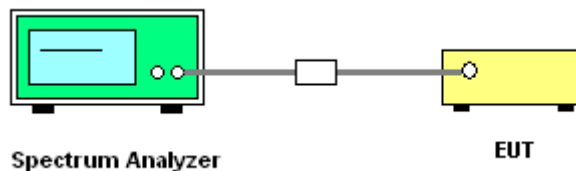



3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

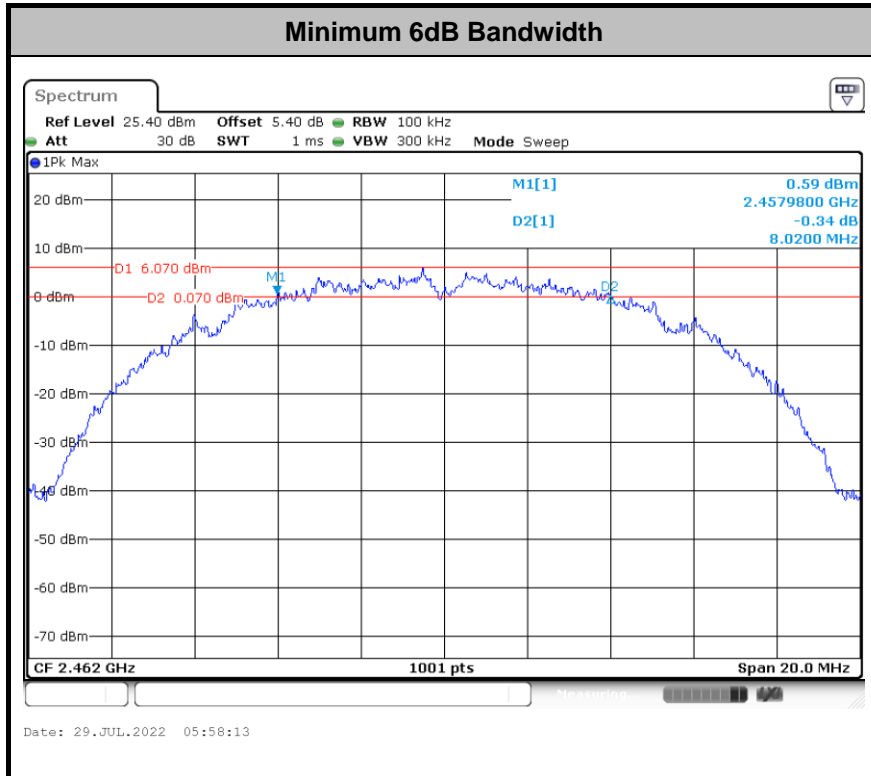

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

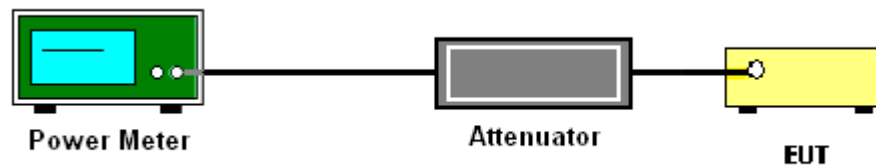

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

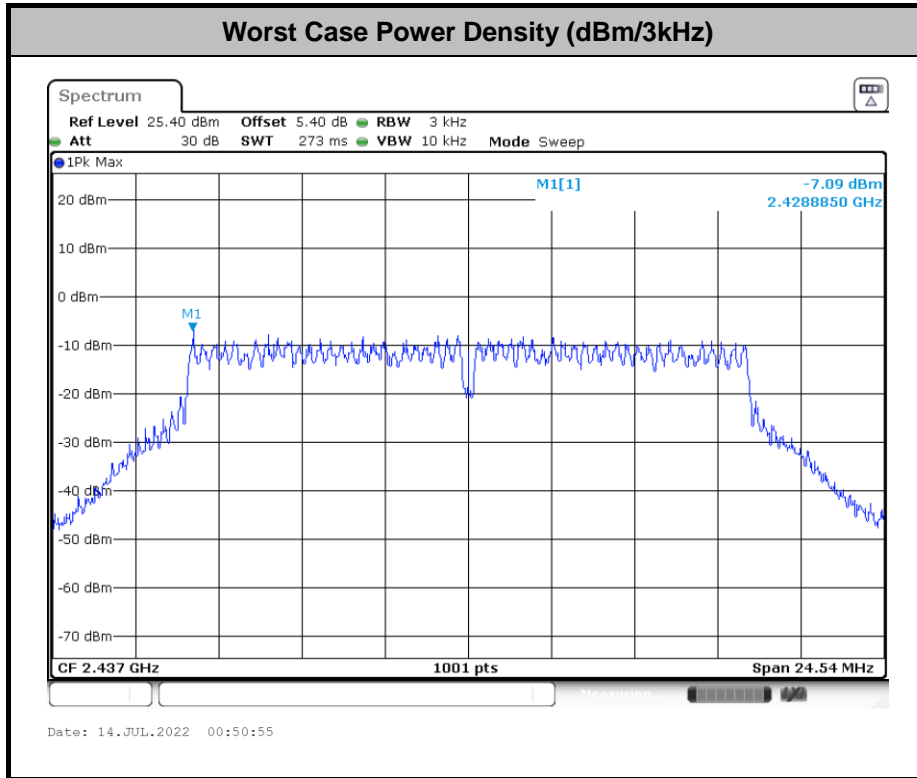

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

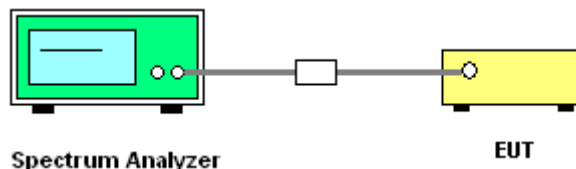




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Long Wu	Temperature :	21~25°C
	Relative Humidity :	51~54%



Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

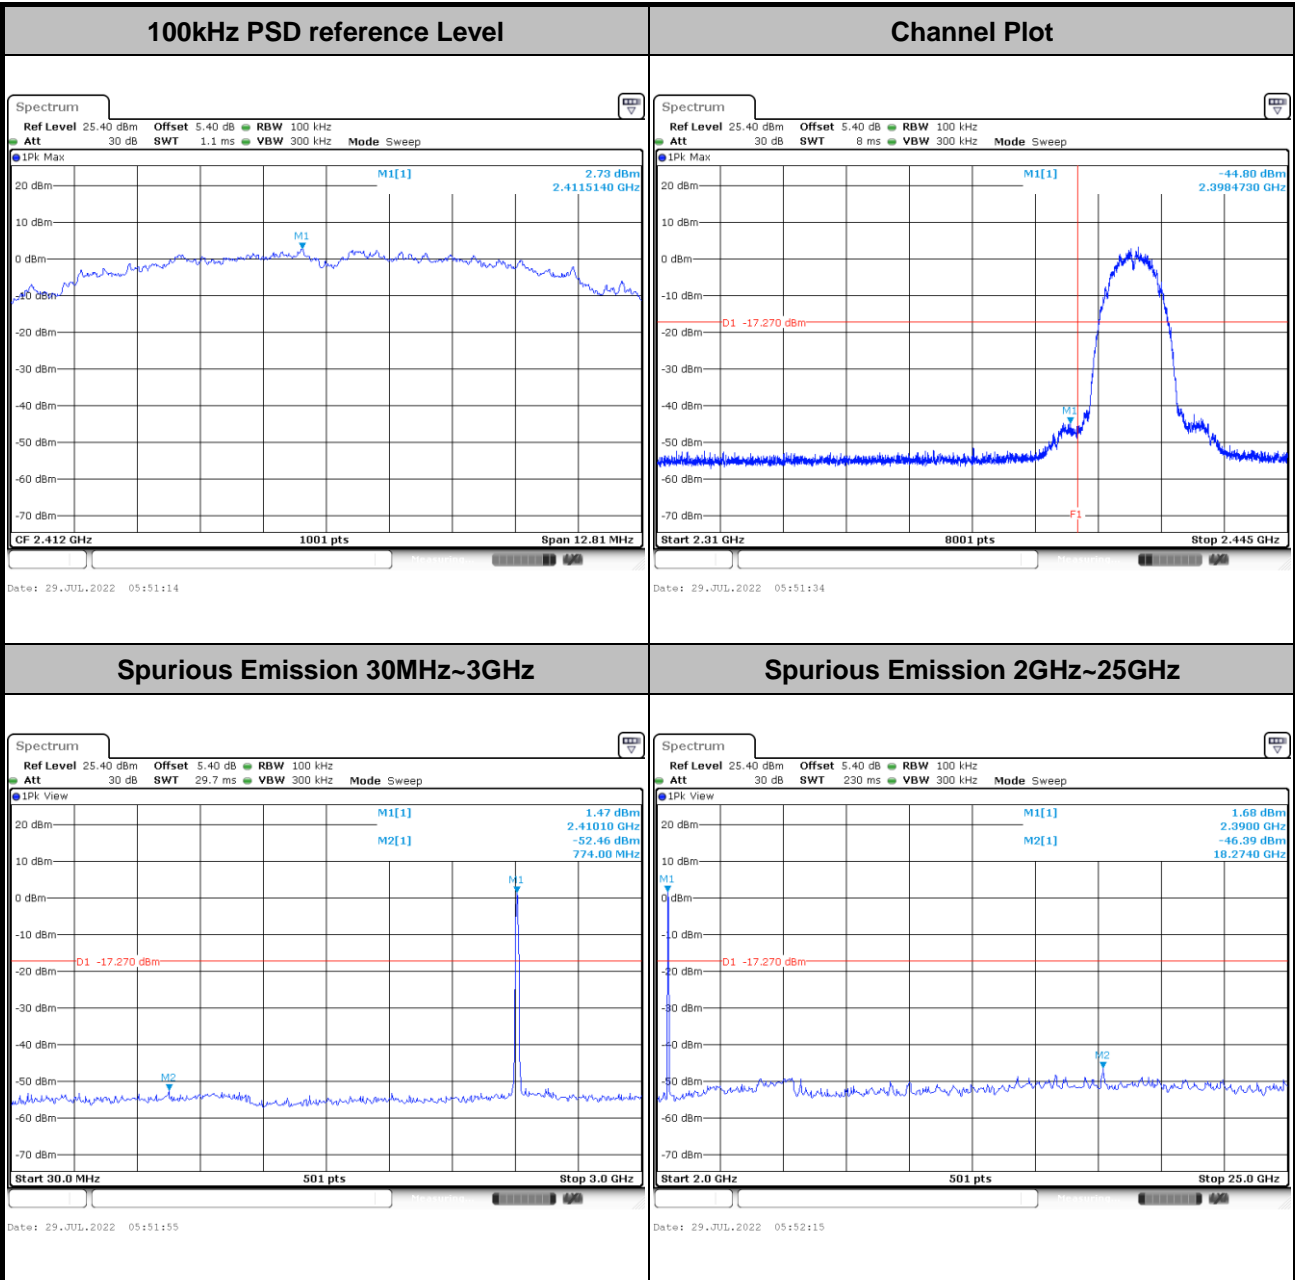





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

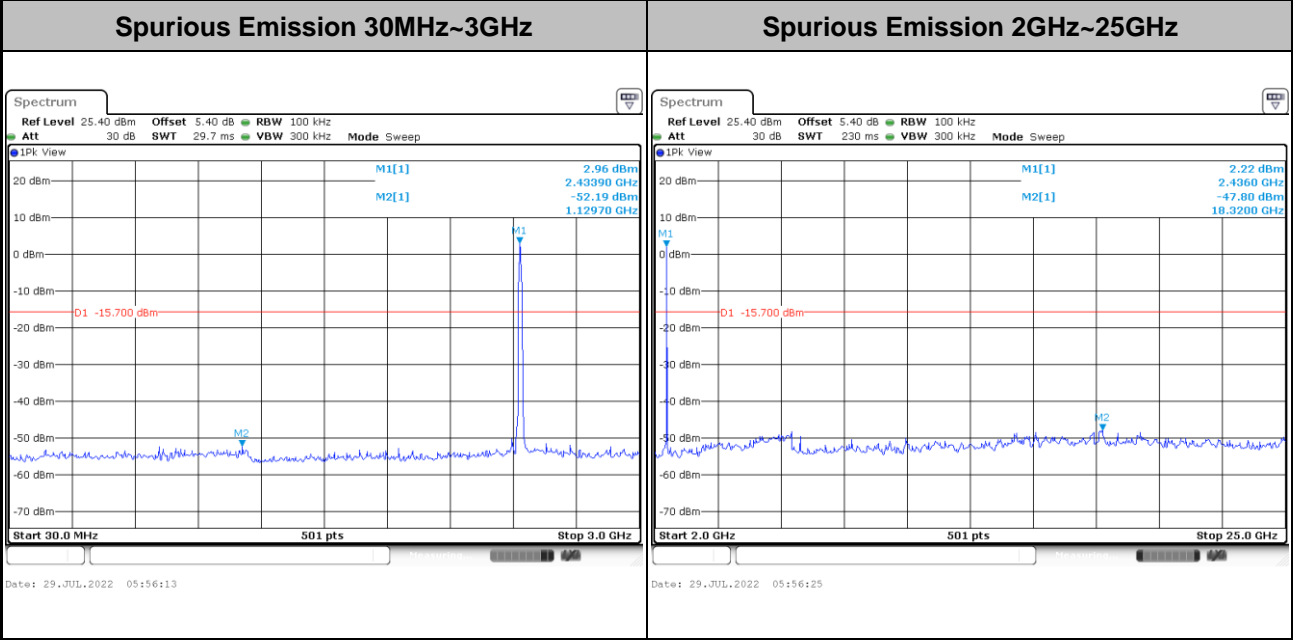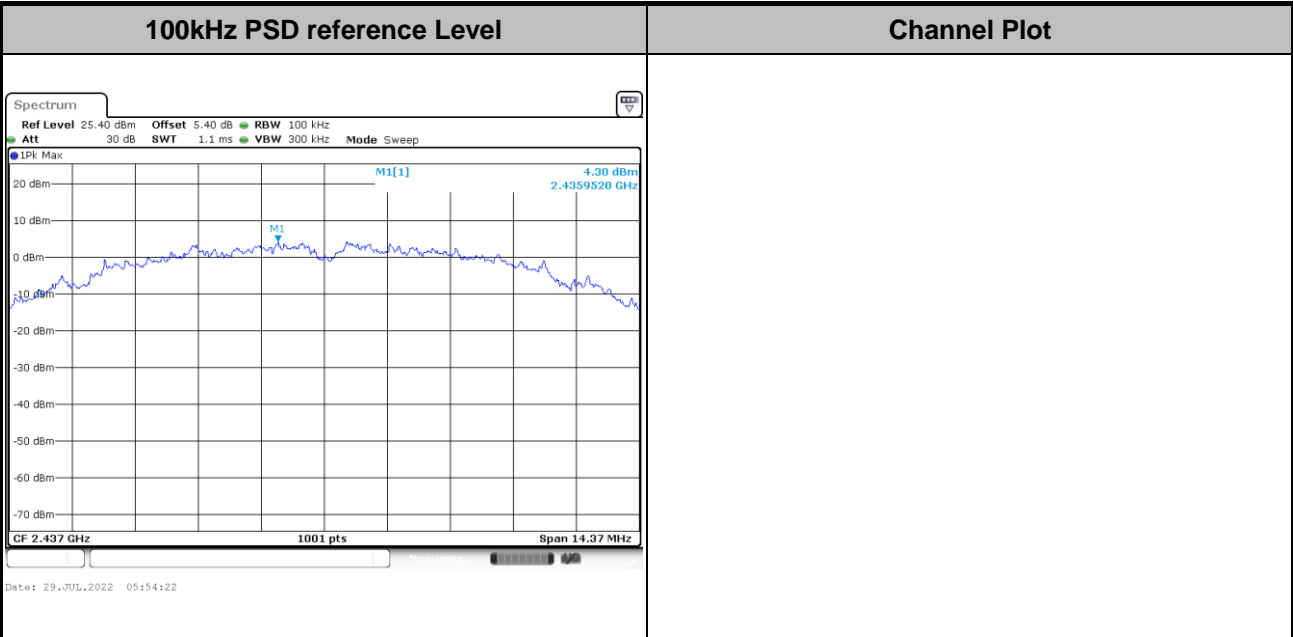





Test Mode : 802.11b Test Channel : 11

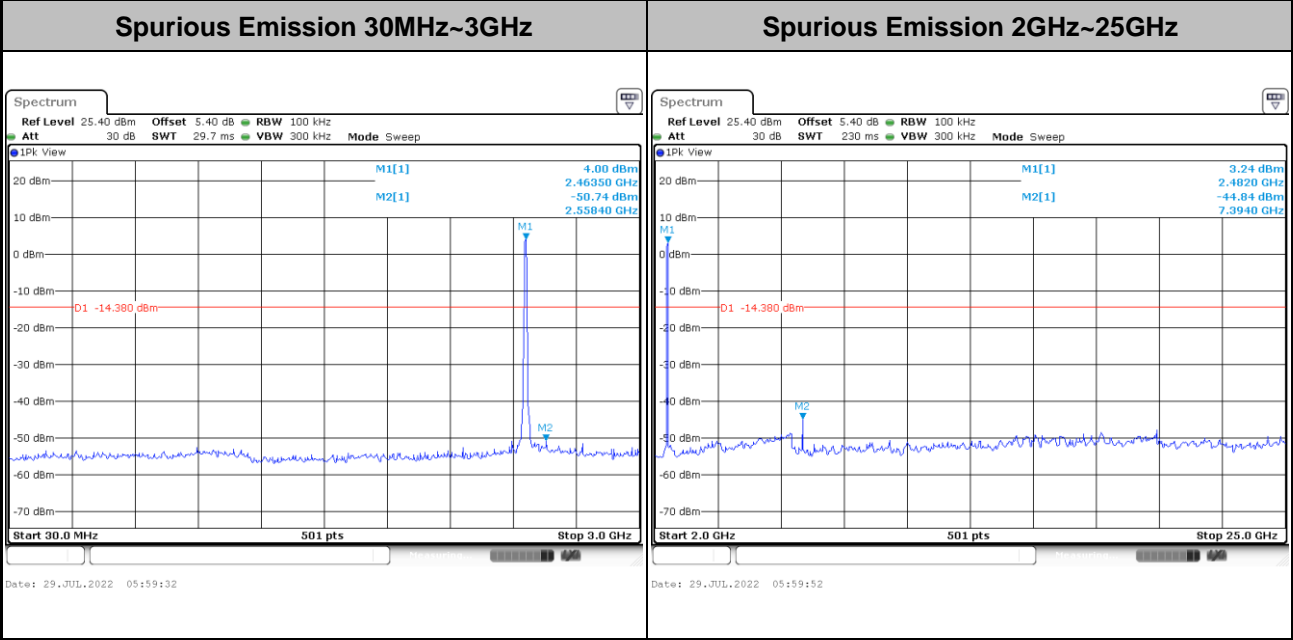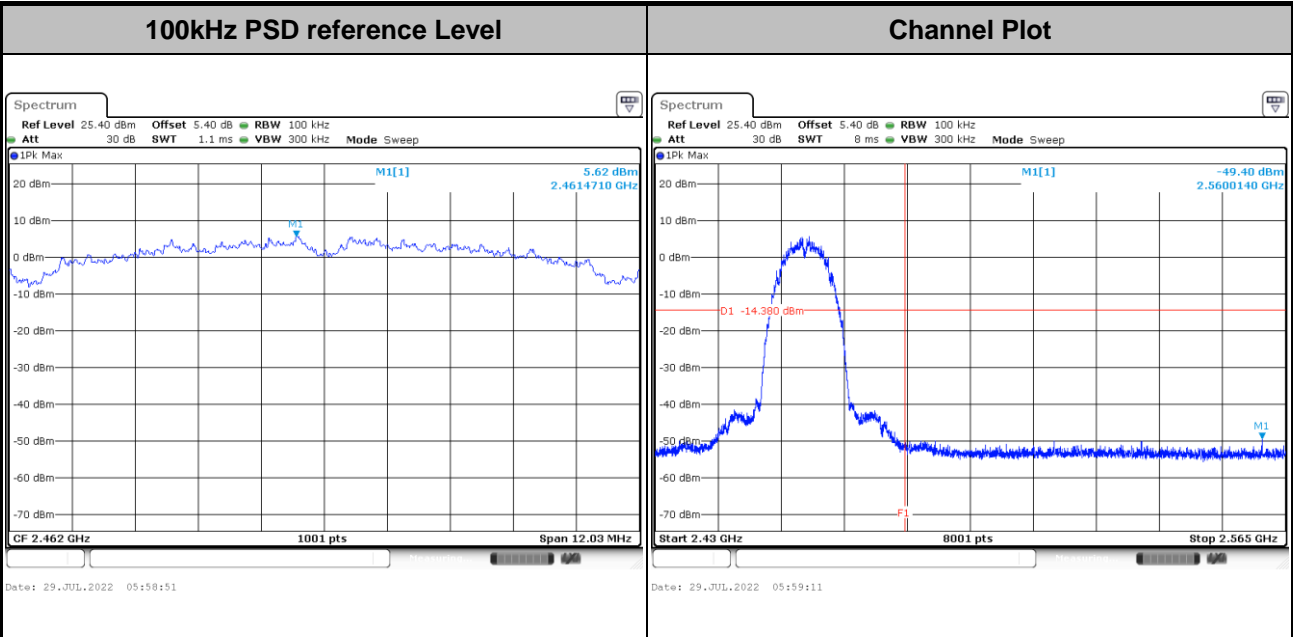





Test Mode : 802.11g Test Channel : 01

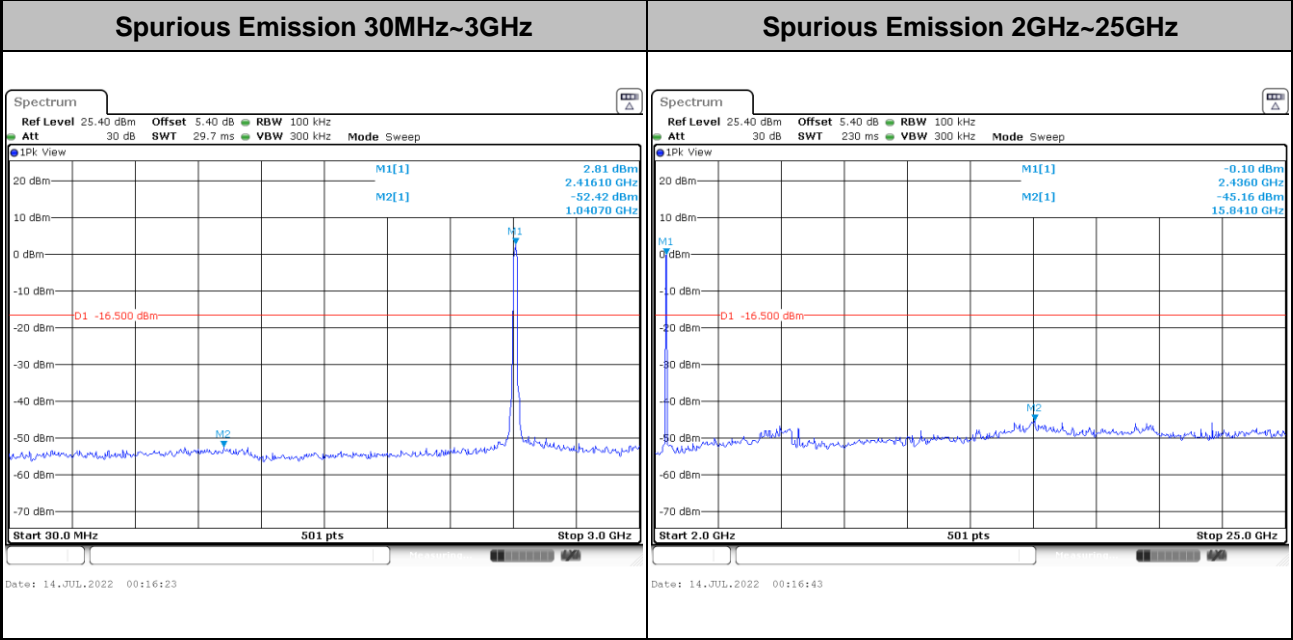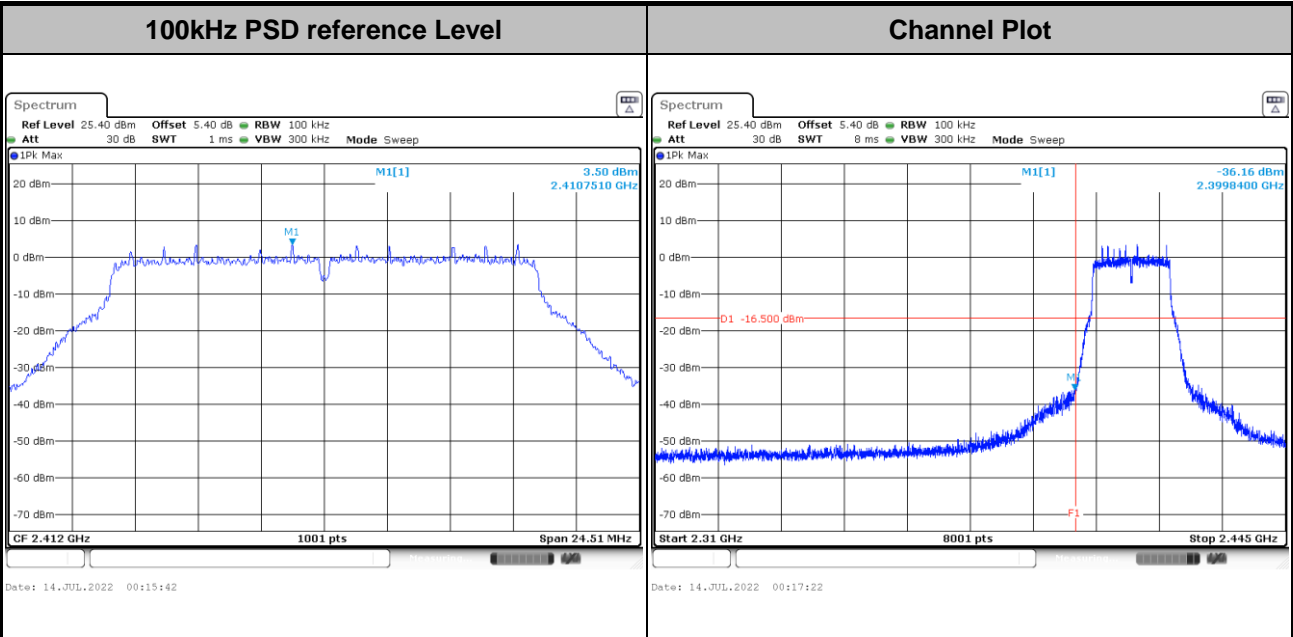





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

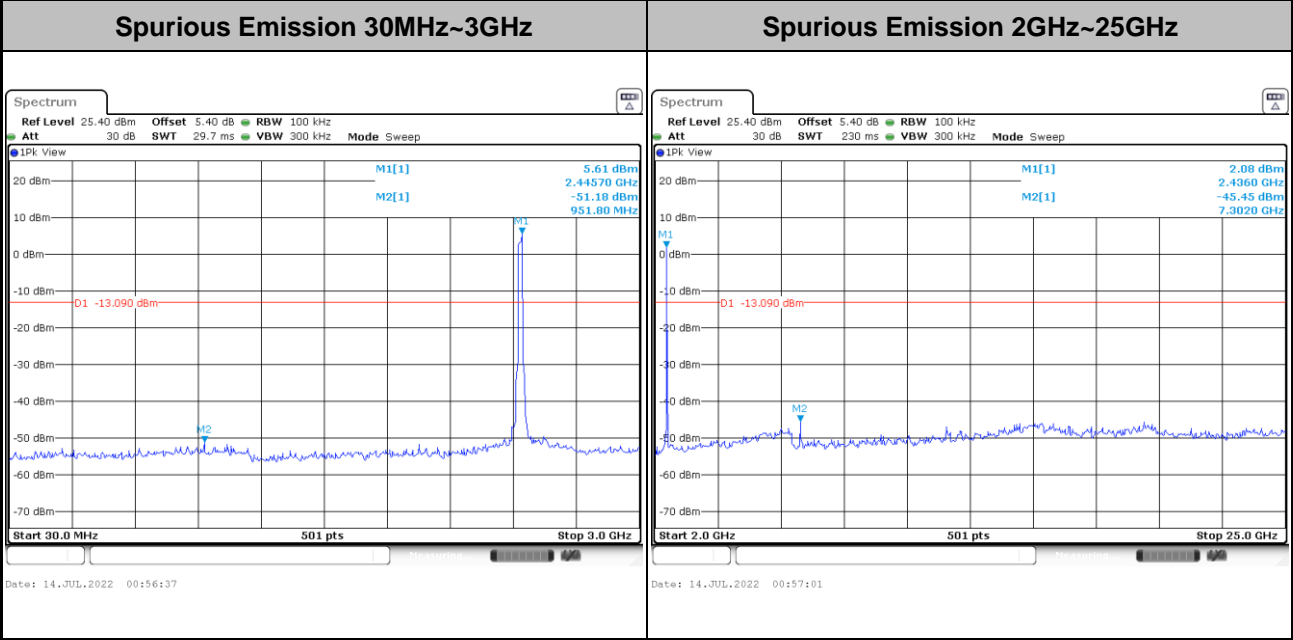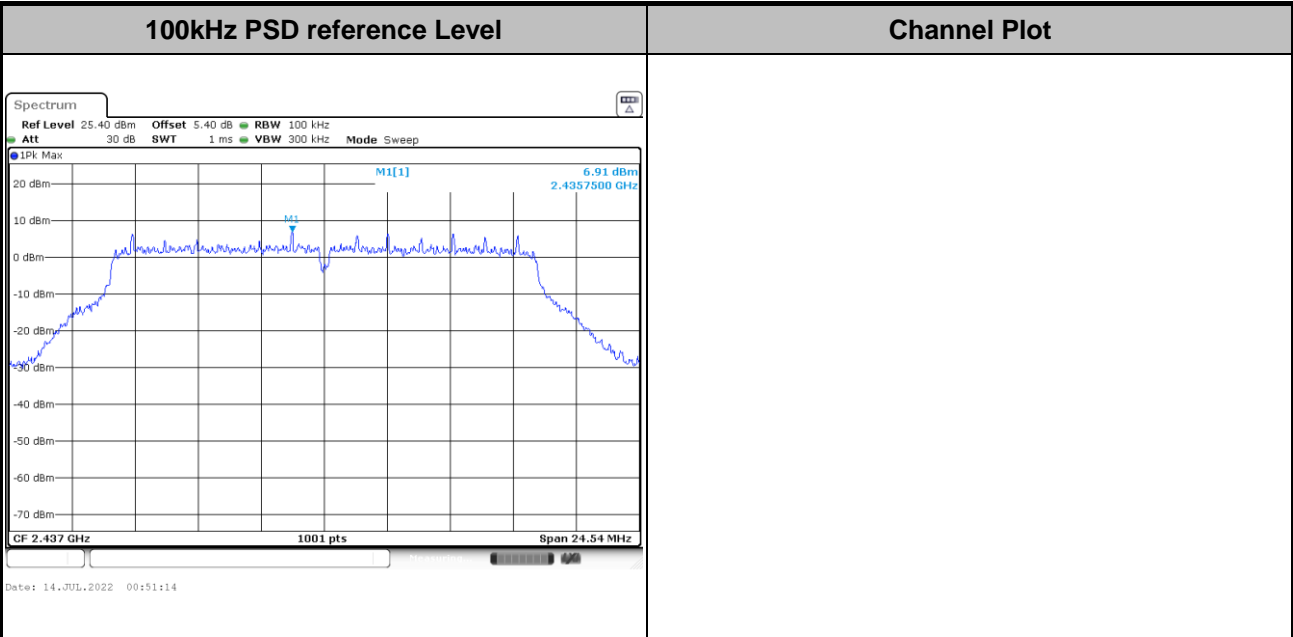





Test Mode : 802.11g Test Channel : 11

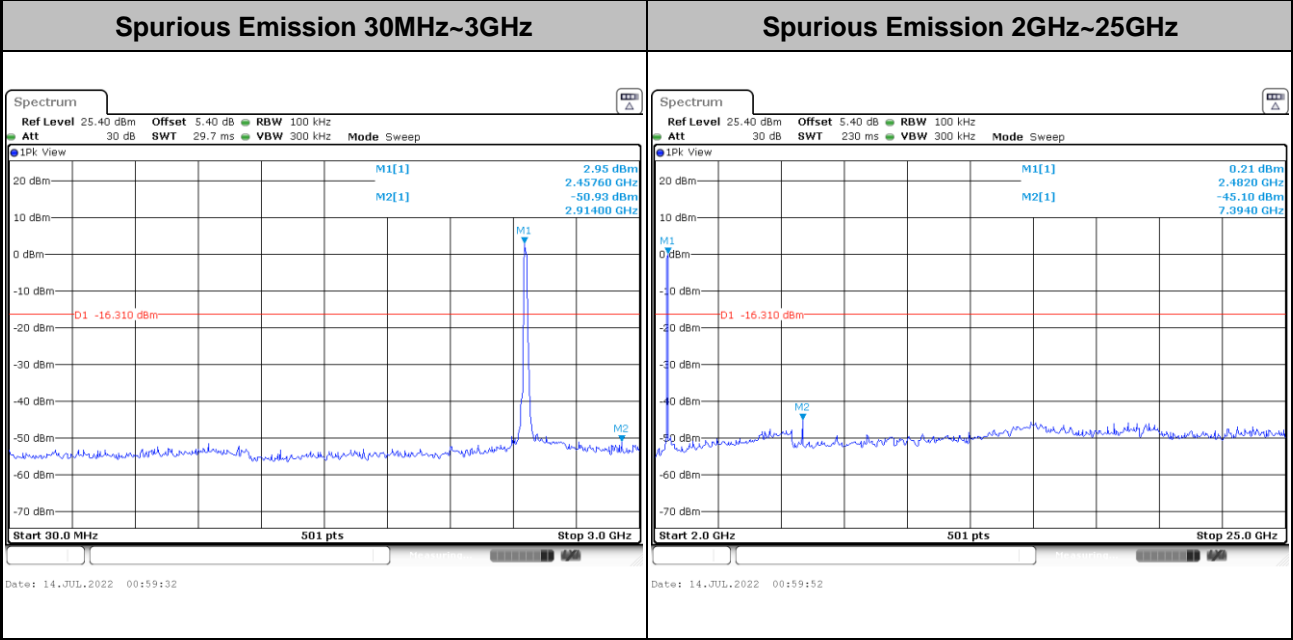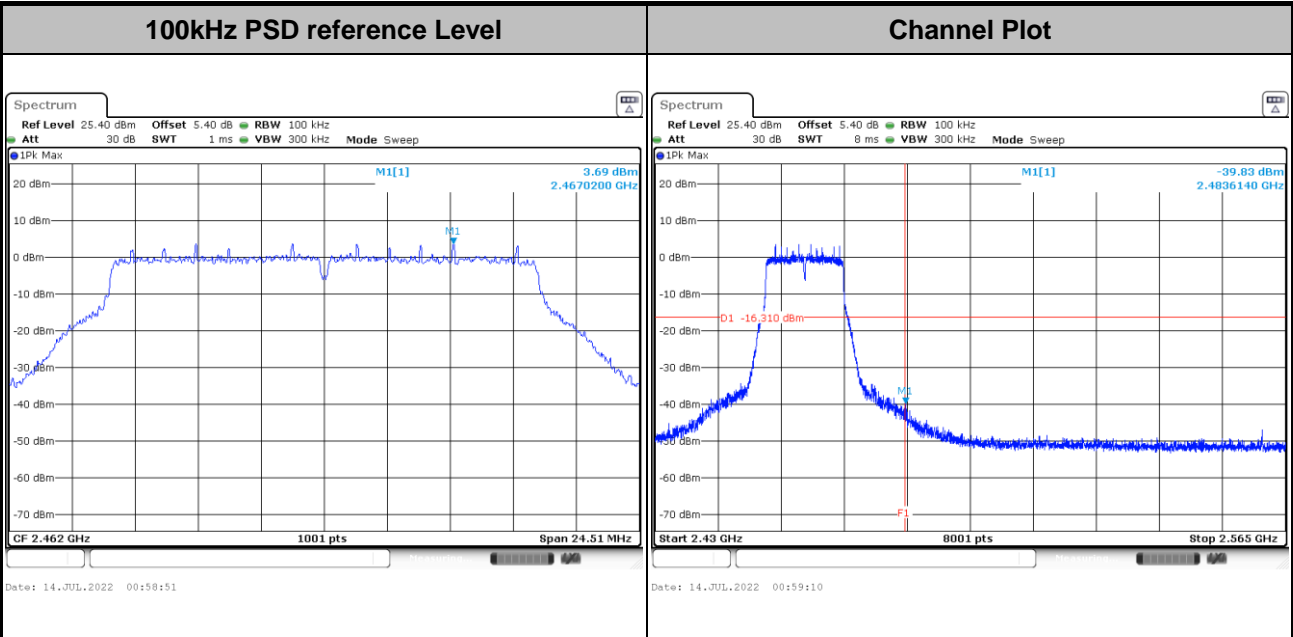





Test Mode : 802.11n HT20 Test Channel : 01

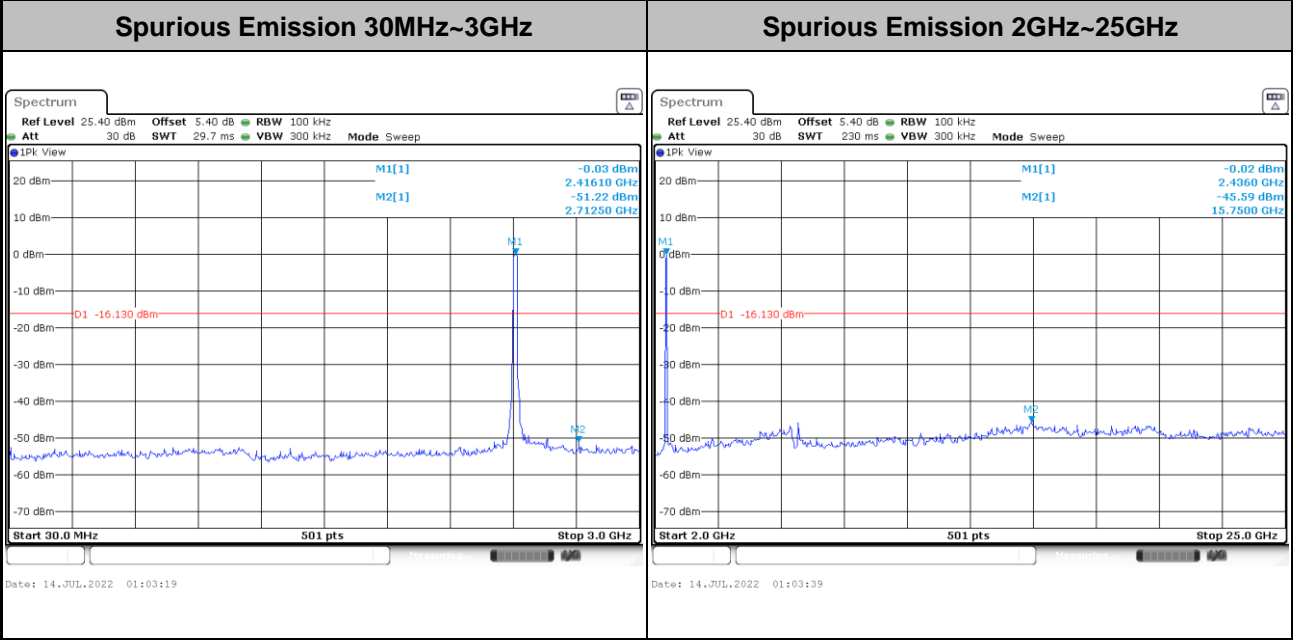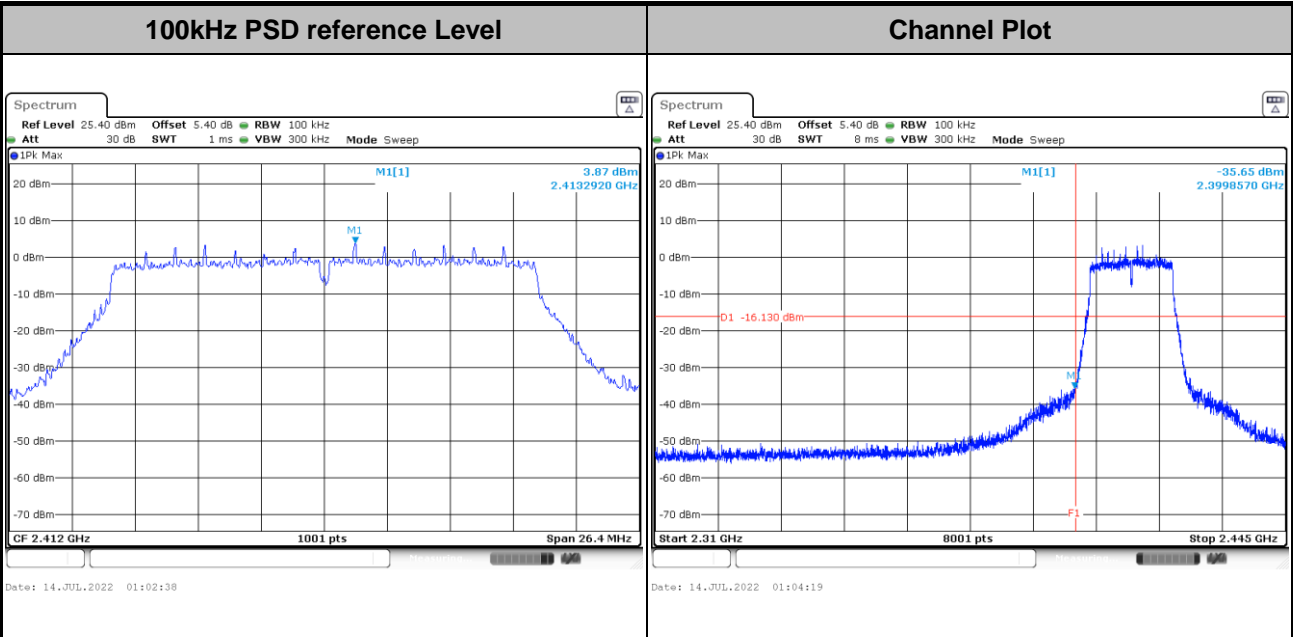





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

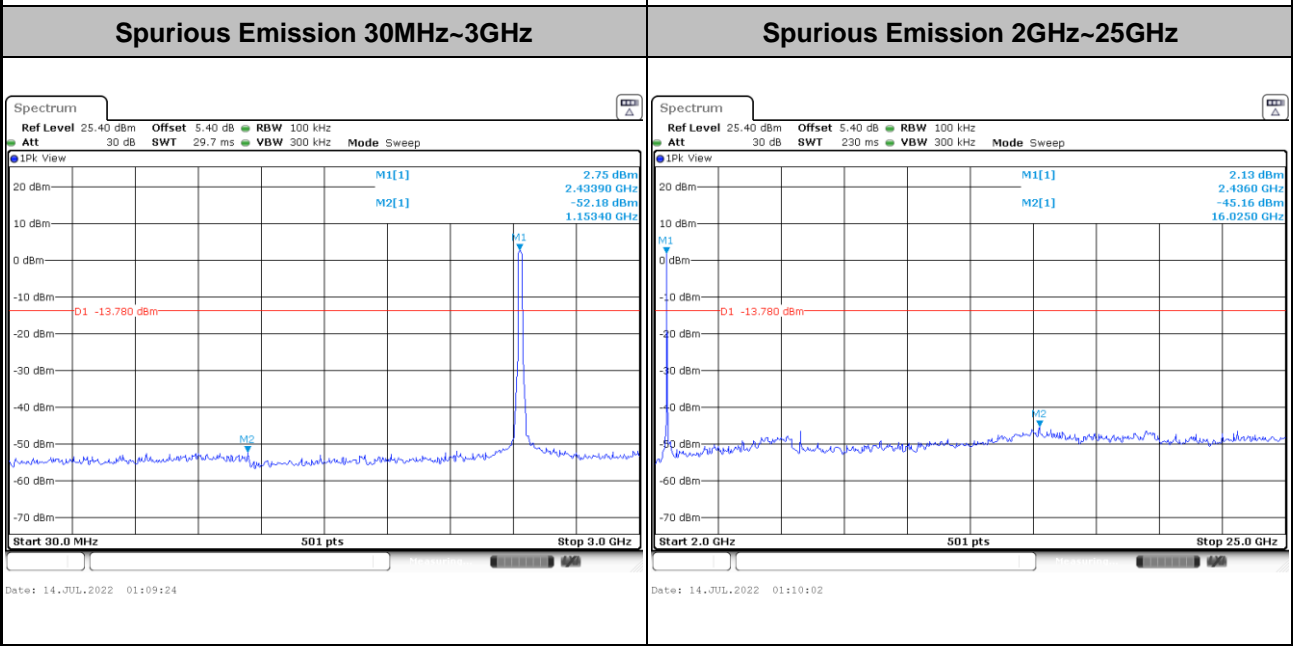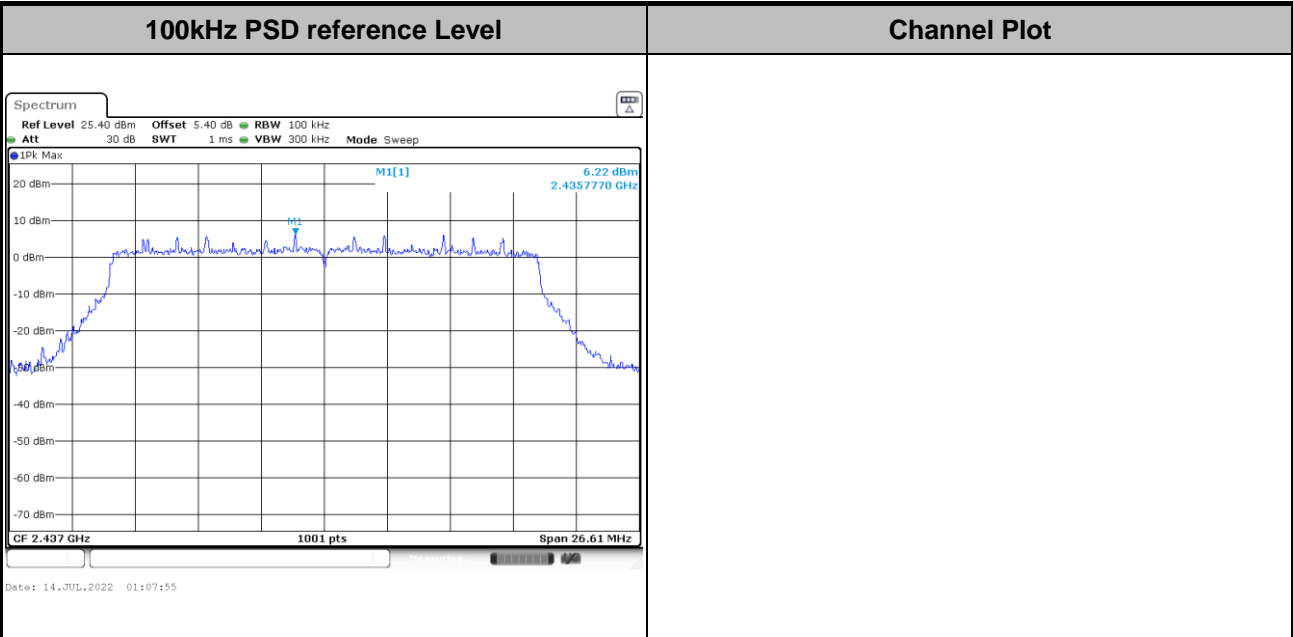





Test Mode : 802.11n HT20	Test Channel : 11
---------------------------------	--------------------------

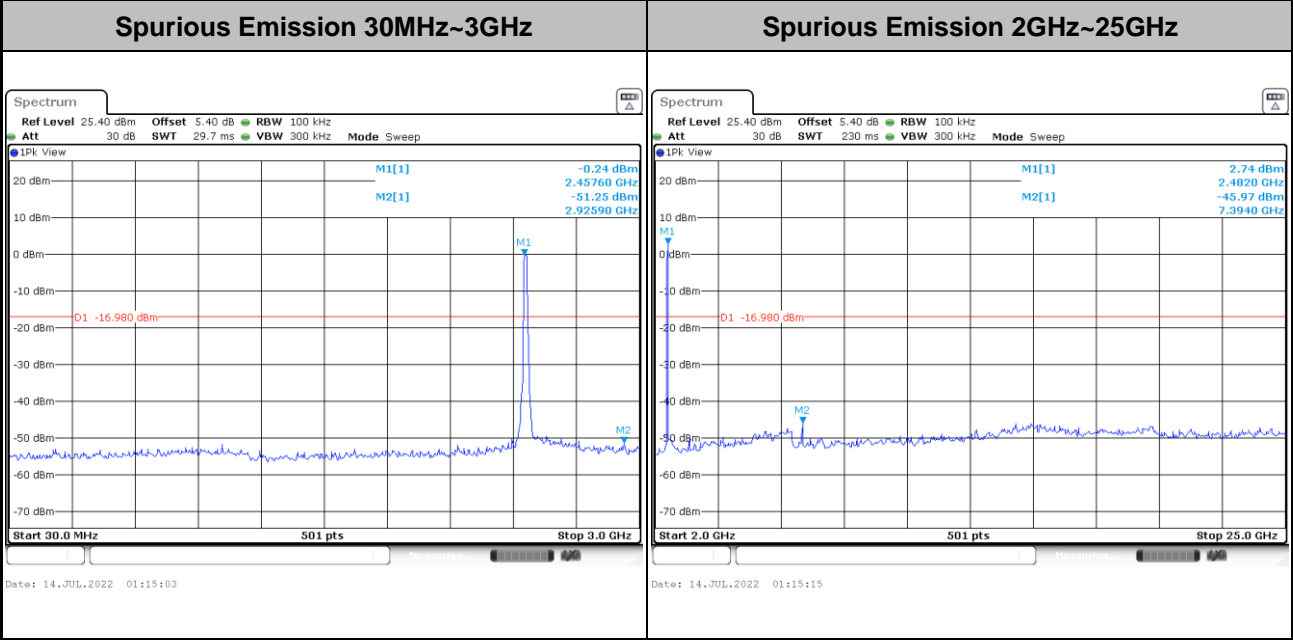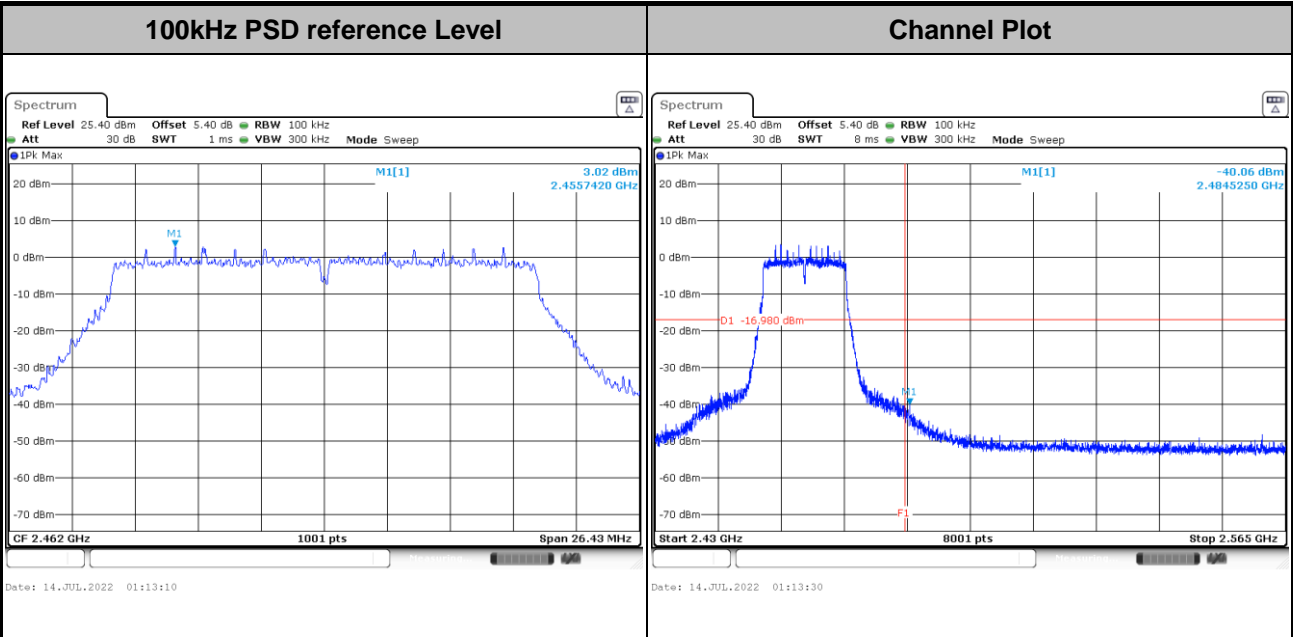





Test Mode : 802.11n HT40 Test Channel : 03

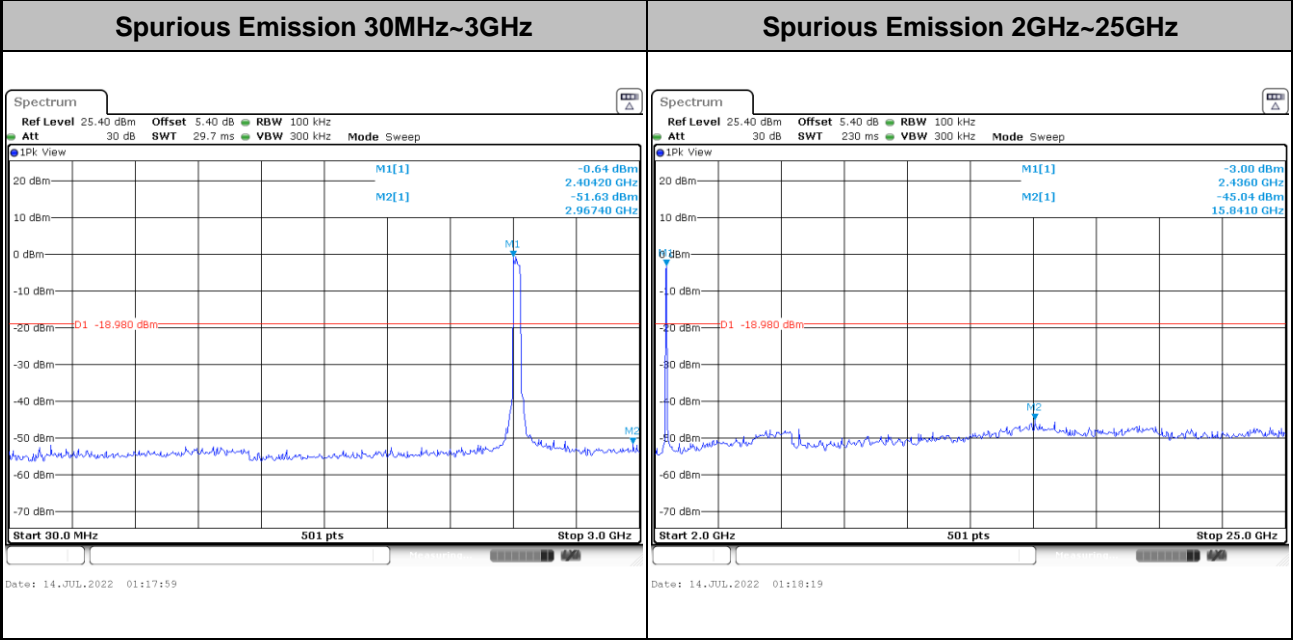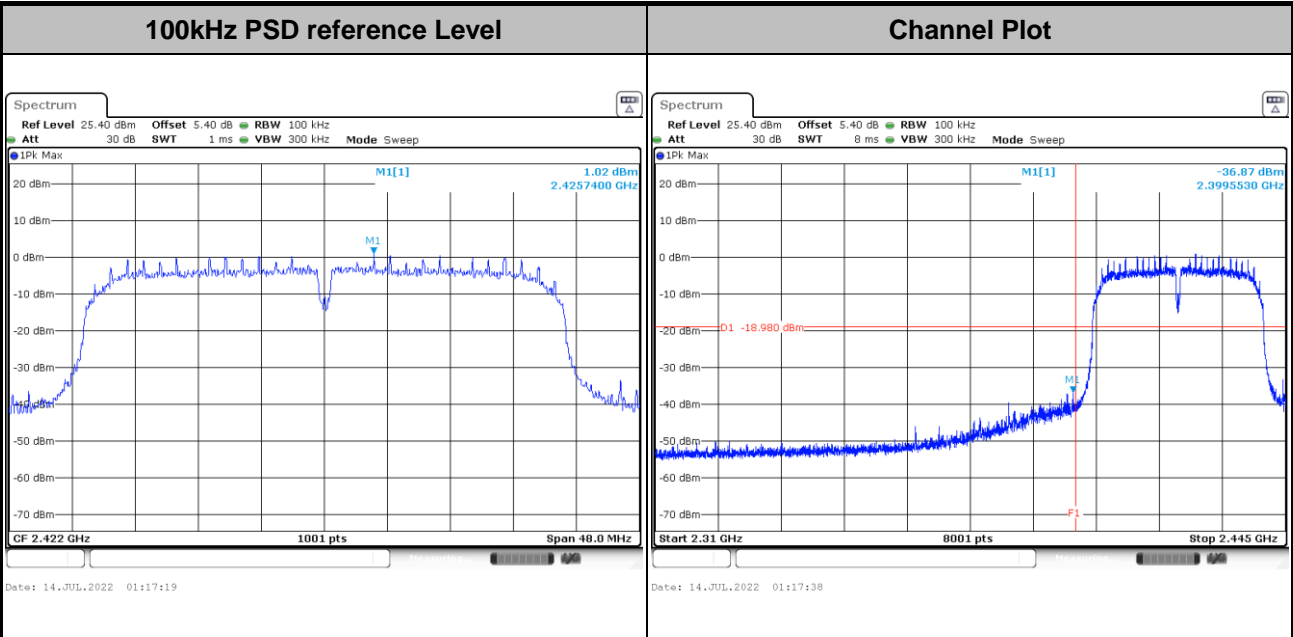





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

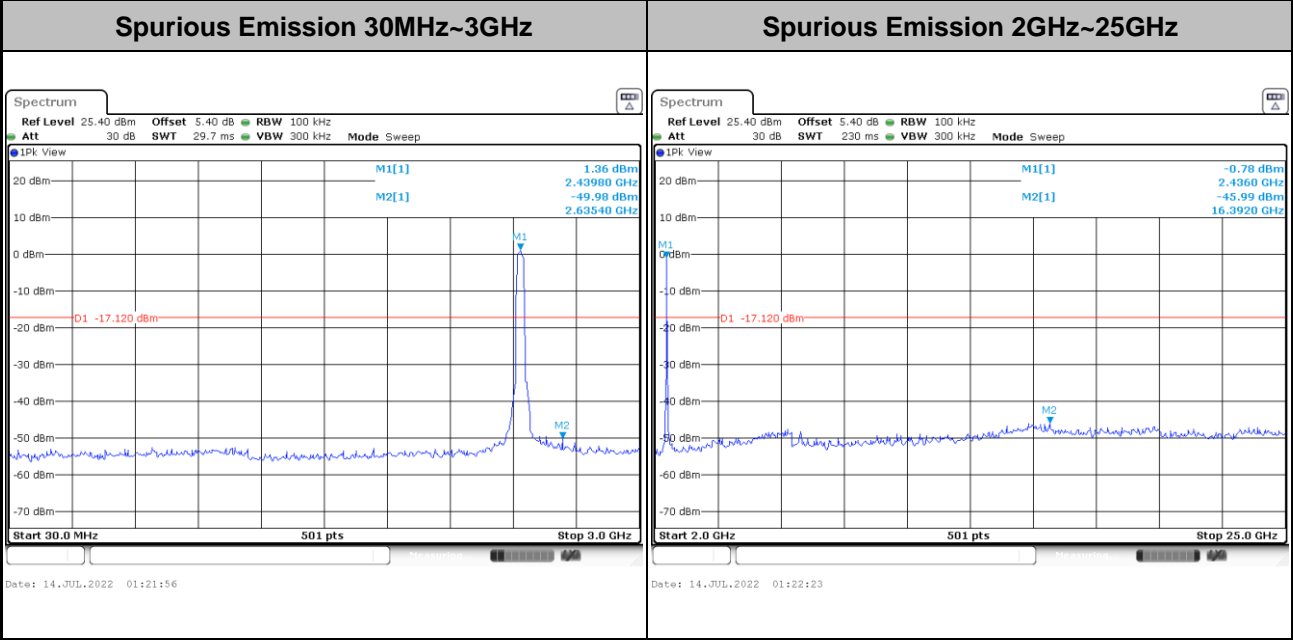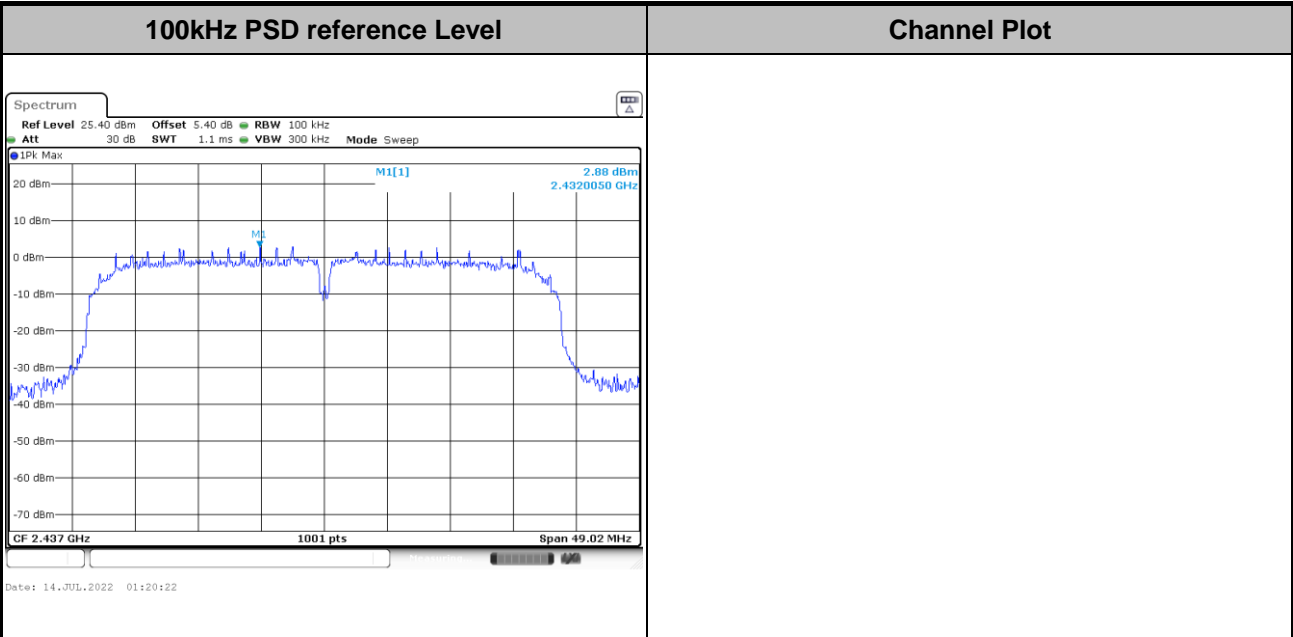



Test Mode : 802.11n HT40 Test Channel : 09

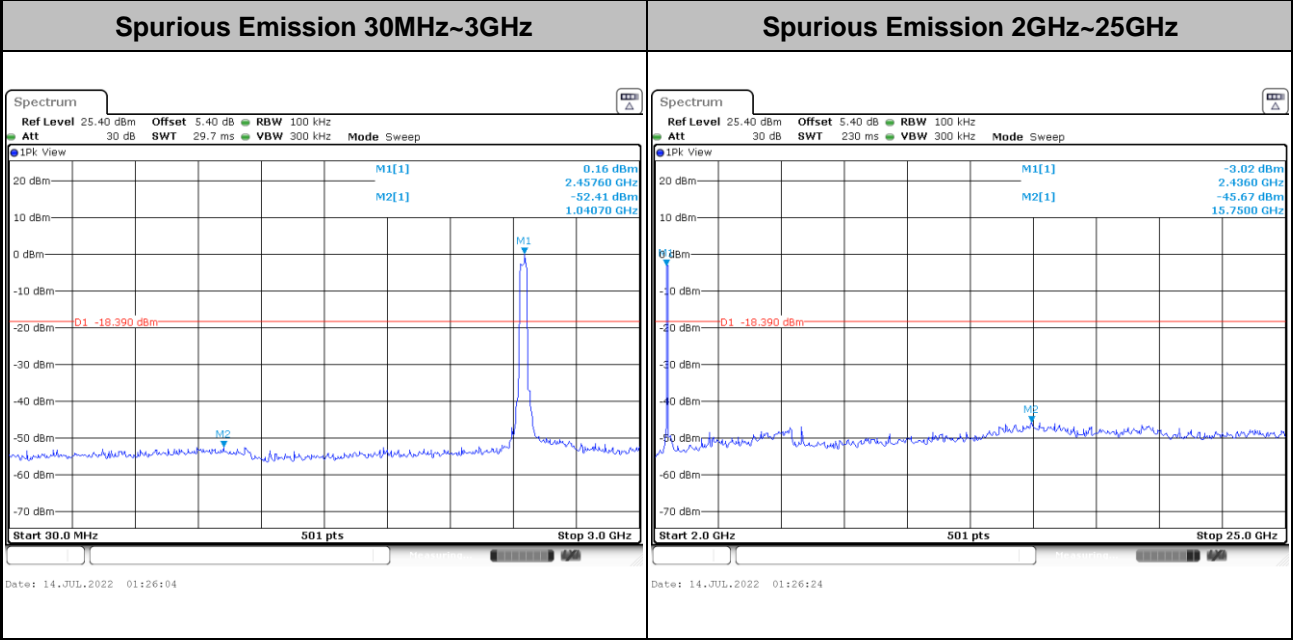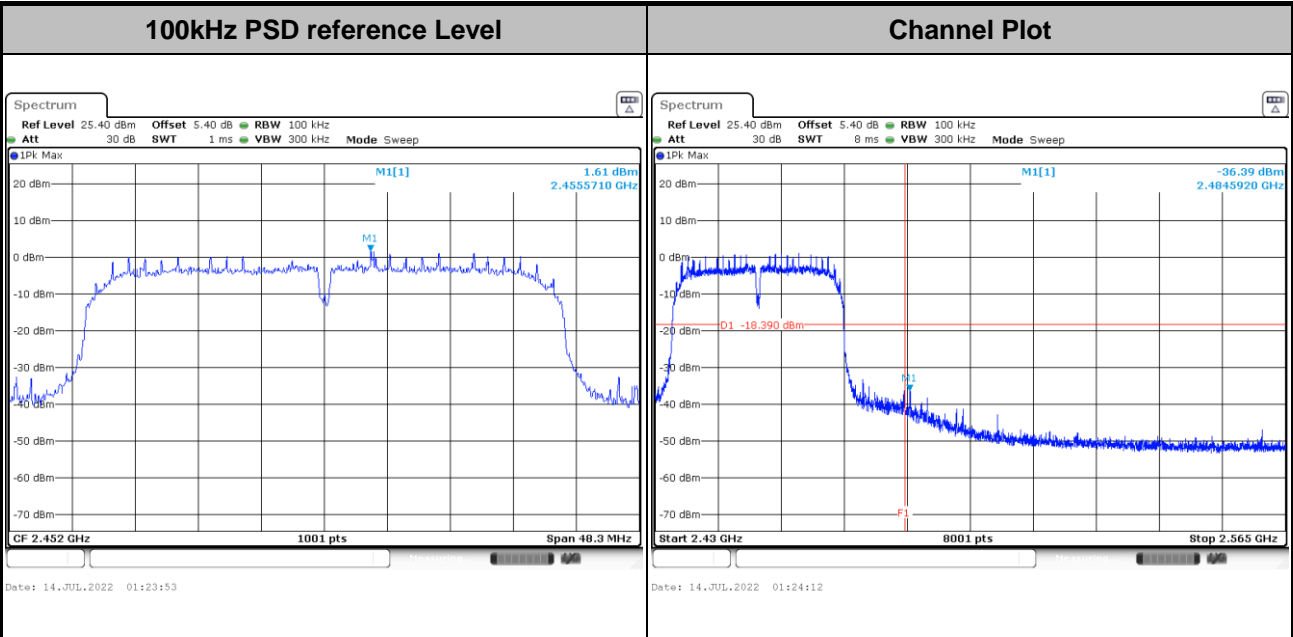



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

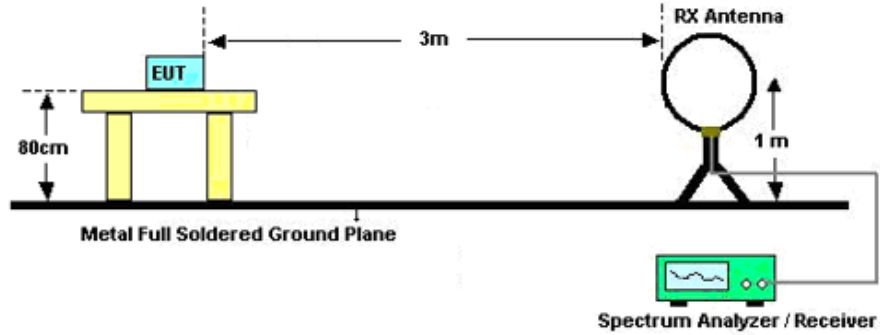

For radiated emissions from 30MHz to 1GHz

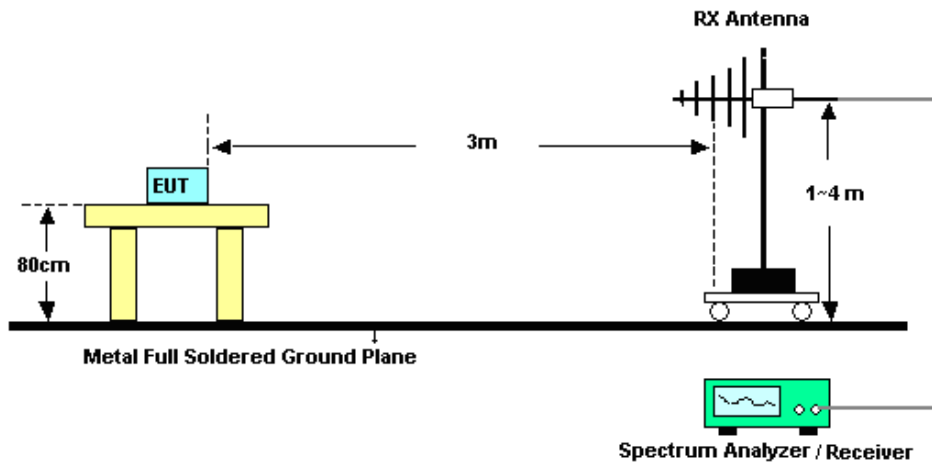

For radiated emissions above 1GHz

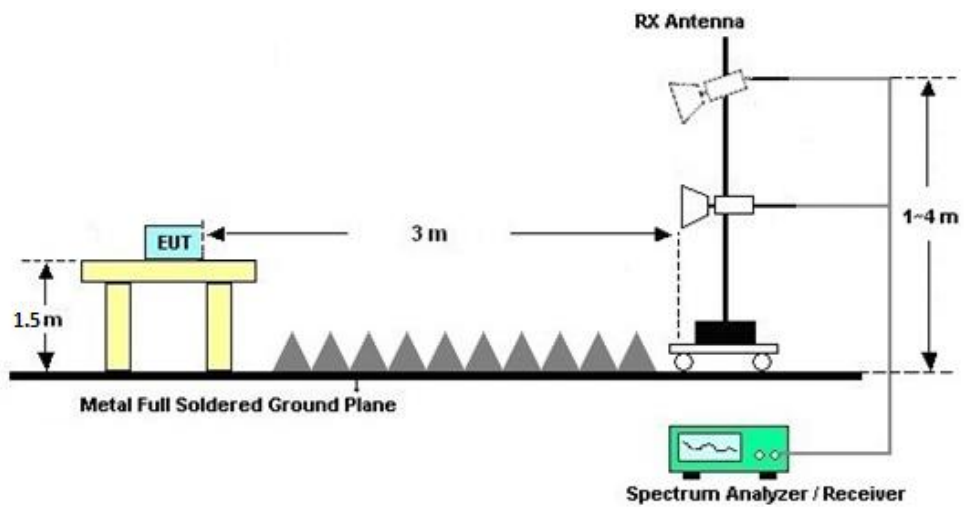



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and Appendix D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C and Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

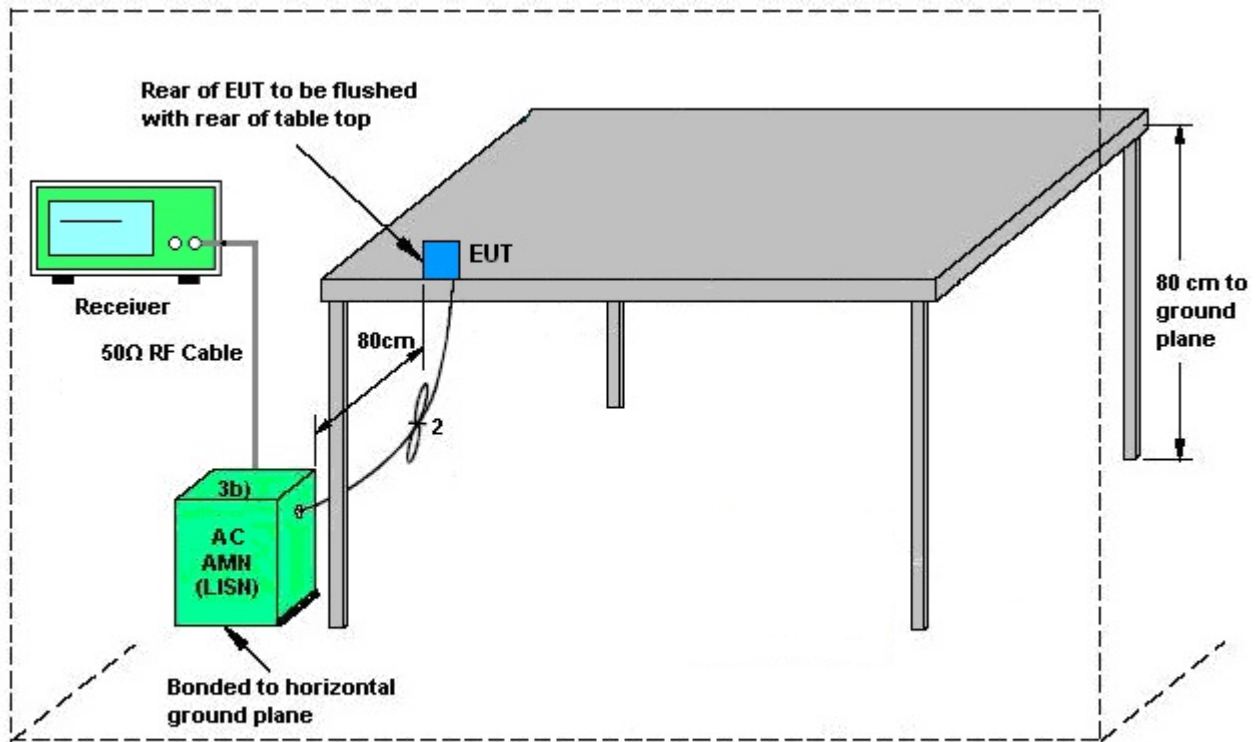

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jul. 14, 2022~ Jul. 29, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jul. 14, 2022~ Jul. 29, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jul. 14, 2022~ Jul. 29, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Aug. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2021	Aug. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 23, 2021	Aug. 08, 2022	Oct. 22, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Aug. 08, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Aug. 08, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Aug. 08, 2022	Jul. 29, 2023	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Aug. 08, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2022	Aug. 08, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Aug. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Aug. 08, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Aug. 08, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 08, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 08, 2022	NCR	Radiation (03CH02-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Aug. 08, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Mar. 24, 2022	Aug. 08, 2022	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Aug. 08, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Aug. 08, 2022	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Aug. 08, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Aug. 08, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 11, 2022	Aug. 08, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Aug. 08, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Aug. 08, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Aug. 08, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Jul. 11, 2022	May 23, 2023	Conduction (CO01-KS)



AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jul. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Jul. 11, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jul. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

03CH02:

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

03CH05:

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Long Wu	Temperature:	21~25	°C
Test Date:	2022/7/14~2022/7/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.24	8.54	0.50	Pass
11b	1Mbps	1	6	2437	13.24	9.58	0.50	Pass
11b	1Mbps	1	11	2462	13.24	8.02	0.50	Pass
11g	6Mbps	1	1	2412	18.63	16.34	0.50	Pass
11g	6Mbps	1	6	2437	18.78	16.36	0.50	Pass
11g	6Mbps	1	11	2462	18.58	16.34	0.50	Pass
HT20	MCS0	1	1	2412	19.23	17.60	0.50	Pass
HT20	MCS0	1	6	2437	19.33	17.74	0.50	Pass
HT20	MCS0	1	11	2462	19.23	17.62	0.50	Pass
HT40	MCS0	1	3	2422	34.87	32.00	0.50	Pass
HT40	MCS0	1	6	2437	34.97	32.68	0.50	Pass
HT40	MCS0	1	9	2452	34.87	32.20	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	14.15	30.00	3.26	17.41	36.00	Pass
11b	1Mbps	1	6	2437	15.37	30.00	3.26	18.63	36.00	Pass
11b	1Mbps	1	11	2462	16.75	30.00	3.26	20.01	36.00	Pass
11g	6Mbps	1	1	2412	23.72	30.00	3.26	26.98	36.00	Pass
11g	6Mbps	1	6	2437	25.37	30.00	3.26	28.63	36.00	Pass
11g	6Mbps	1	11	2462	23.99	30.00	3.26	27.25	36.00	Pass
HT20	MCS0	1	1	2412	23.67	30.00	3.26	26.93	36.00	Pass
HT20	MCS0	1	6	2437	25.26	30.00	3.26	28.52	36.00	Pass
HT20	MCS0	1	11	2462	23.58	30.00	3.26	26.84	36.00	Pass
HT40	MCS0	1	3	2422	23.65	30.00	3.26	26.91	36.00	Pass
HT40	MCS0	1	6	2437	25.13	30.00	3.26	28.39	36.00	Pass
HT40	MCS0	1	9	2452	24.18	30.00	3.26	27.44	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	11.07
11b	1Mbps	1	6	2437	0.00	12.45
11b	1Mbps	1	11	2462	0.00	13.65
11g	6Mbps	1	1	2412	0.00	14.85
11g	6Mbps	1	6	2437	0.00	17.22
11g	6Mbps	1	11	2462	0.00	15.03
HT20	MCS0	1	1	2412	0.00	14.42
HT20	MCS0	1	6	2437	0.00	17.12
HT20	MCS0	1	11	2462	0.00	14.38
HT40	MCS0	1	3	2422	0.05	14.26
HT40	MCS0	1	6	2437	0.05	16.60
HT40	MCS0	1	9	2452	0.05	14.73


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-11.34	3.26	8.00	Pass
11b	1Mbps	1	6	2437	-10.30	3.26	8.00	Pass
11b	1Mbps	1	11	2462	-8.65	3.26	8.00	Pass
11g	6Mbps	1	1	2412	-10.60	3.26	8.00	Pass
11g	6Mbps	1	6	2437	-7.09	3.26	8.00	Pass
11g	6Mbps	1	11	2462	-10.55	3.26	8.00	Pass
HT20	MCS0	1	1	2412	-11.02	3.26	8.00	Pass
HT20	MCS0	1	6	2437	-8.25	3.26	8.00	Pass
HT20	MCS0	1	11	2462	-9.92	3.26	8.00	Pass
HT40	MCS0	1	3	2422	-13.15	3.26	8.00	Pass
HT40	MCS0	1	6	2437	-9.87	3.26	8.00	Pass
HT40	MCS0	1	9	2452	-13.42	3.26	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

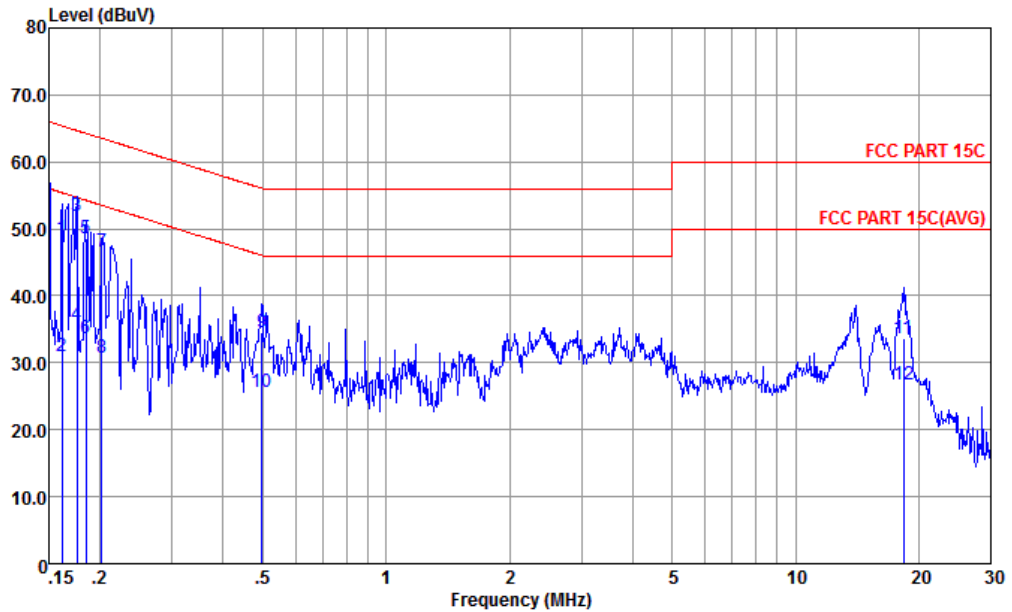


Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.162	48.67	-16.71	65.38	38.19	0.03	10.45	QP
2	0.162	31.07	-24.31	55.38	20.59	0.03	10.45	Average
3 *	0.176	51.95	-12.73	64.68	41.50	0.03	10.42	QP
4	0.176	35.65	-19.03	54.68	25.20	0.03	10.42	Average
5	0.184	48.63	-15.65	64.28	38.20	0.03	10.40	QP
6	0.184	33.73	-20.55	54.28	23.30	0.03	10.40	Average
7	0.202	46.60	-16.94	63.54	36.20	0.04	10.36	QP
8	0.202	30.70	-22.84	53.54	20.30	0.04	10.36	Average
9	0.497	34.54	-21.51	56.05	24.20	0.10	10.24	QP
10	0.497	25.64	-20.41	46.05	15.30	0.10	10.24	Average
11	18.328	33.69	-26.31	60.00	22.80	0.43	10.46	QP
12	18.328	26.79	-23.21	50.00	15.90	0.43	10.46	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

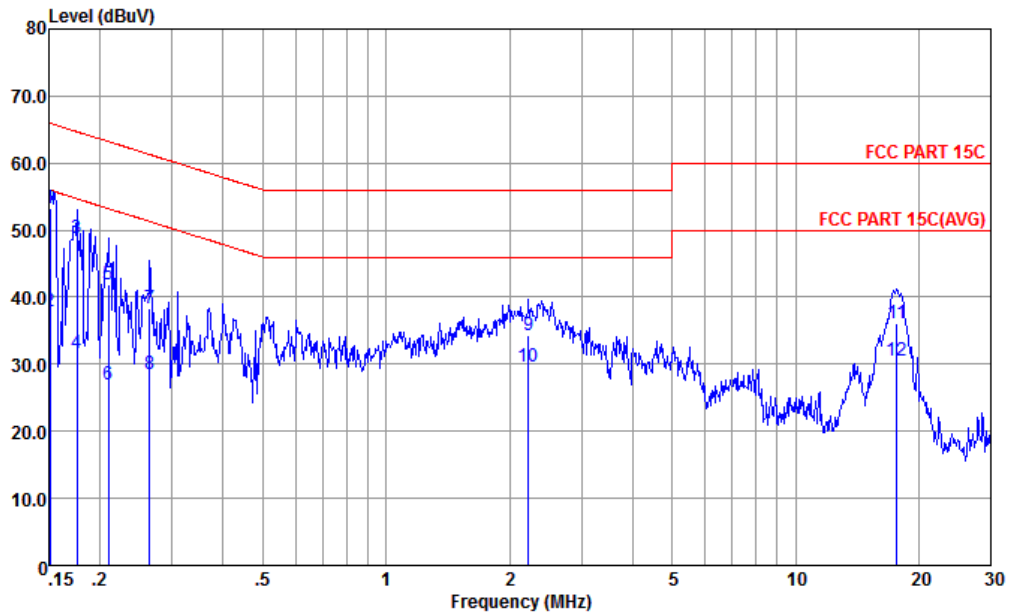

Site : CO01-KS
Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.151	53.19	-12.77	65.96	42.60	0.11	10.48	QP
2	0.151	37.89	-18.07	55.96	27.30	0.11	10.48	Average
3	0.176	48.72	-15.96	64.68	38.20	0.10	10.42	QP
4	0.176	31.72	-22.96	54.68	21.20	0.10	10.42	Average
5	0.209	41.96	-21.27	63.23	31.50	0.10	10.36	QP
6	0.209	27.06	-26.17	53.23	16.60	0.10	10.36	Average
7	0.264	38.32	-22.97	61.29	27.90	0.10	10.32	QP
8	0.264	28.62	-22.67	51.29	18.20	0.10	10.32	Average
9	2.225	34.27	-21.73	56.00	23.90	0.14	10.23	QP
10	2.225	29.57	-16.43	46.00	19.20	0.14	10.23	Average
11	17.661	36.08	-23.92	60.00	25.20	0.43	10.45	QP
12	17.661	30.48	-19.52	50.00	19.60	0.43	10.45	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Channel	Power setting
11b CH01	32
11b CH06	29
11b CH11	24
11g CH01	13
11g CH06	3
11g CH11	16
11n20 CH01	11
11n20 CH06	0
11n20 CH11	14
11n40 CH03	9
11n40 CH06	0
11n40 CH09	9



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2386.05	56.64	-17.36	74	53.52	32.88	7.1	36.86	350	290	P	H
		2385.92	48.17	-5.83	54	45.05	32.88	7.1	36.86	350	290	A	H
		2412	112.79	-	-	109.61	32.9	7.13	36.85	350	290	P	H
		2410	106.64	-	-	103.46	32.9	7.13	36.85	350	290	A	H
		2385.53	57.75	-16.25	74	54.63	32.88	7.1	36.86	394	221	P	V
		2385.92	47.27	-6.73	54	44.15	32.88	7.1	36.86	394	221	A	V
		2410	110.56	-	-	107.38	32.9	7.13	36.85	394	221	P	V
		2412	103.28	-	-	100.1	32.9	7.13	36.85	394	221	A	V
802.11b CH 11 2462MHz		2487.52	50.91	-23.09	74	47.47	33	7.25	36.81	100	174	P	H
		2487.82	40.67	-13.33	54	37.23	33	7.25	36.81	100	174	A	H
		2462	108.75	-	-	105.4	32.96	7.22	36.83	100	174	P	H
		2462	101.09	-	-	97.74	32.96	7.22	36.83	100	174	A	H
		2483.62	50.77	-23.23	74	47.36	32.98	7.25	36.82	377	232	P	V
		2487.82	40	-14	54	36.56	33	7.25	36.81	377	232	A	V
		2462	106.31	-	-	102.96	32.96	7.22	36.83	377	232	P	V
		2460	100.41	-	-	97.06	32.96	7.22	36.83	377	232	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4830	57.59	-16.41	74	78.52	34.2	10.25	65.38	100	272	P	H
		4830	52.39	-1.61	54	73.32	34.2	10.25	65.38	100	272	A	H
		4830	57.07	-16.93	74	78	34.2	10.25	65.38	100	258	P	V
		4830	51.93	-2.07	54	72.86	34.2	10.25	65.38	100	258	A	V
802.11b CH 06 2437MHz		4875	57.27	-16.73	74	78.17	34.23	10.29	65.42	100	280	P	H
		4875	52.31	-1.69	54	73.21	34.23	10.29	65.42	100	280	A	H
		7305	45.71	-28.29	74	63.04	35.86	12.72	65.91	300	0	P	H
		4875	56.87	-17.13	74	77.77	34.23	10.29	65.42	100	258	P	V
		4875	51.33	-2.67	54	72.23	34.23	10.29	65.42	100	258	A	V
		7305	44.18	-29.82	74	61.51	35.86	12.72	65.91	100	0	P	V
802.11b CH 11 2462MHz		4920	56.96	-17.04	74	77.81	34.26	10.34	65.45	100	268	P	H
		4920	52.27	-1.73	54	73.12	34.26	10.34	65.45	100	268	A	H
		7380	43.72	-30.28	74	61.22	35.88	12.73	66.11	300	0	P	H
		4920	56.84	-17.16	74	77.69	34.26	10.34	65.45	100	248	P	V
		4920	52.4	-1.6	54	73.25	34.26	10.34	65.45	100	248	A	V
		7380	43.84	-30.16	74	61.34	35.88	12.73	66.11	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.82	69.19	-4.81	74	66.07	32.88	7.1	36.86	276	292	P	H
		2389.95	52.33	-1.67	54	49.21	32.88	7.1	36.86	276	292	A	H
		2408	110.57	-	-	107.39	32.9	7.13	36.85	276	292	P	H
		2412	103.07	-	-	99.89	32.9	7.13	36.85	276	292	A	H
		2389.95	65.19	-8.81	74	62.07	32.88	7.1	36.86	393	230	P	V
		2389.95	49.67	-4.33	54	46.55	32.88	7.1	36.86	393	230	A	V
		2408	107.58	-	-	104.4	32.9	7.13	36.85	393	230	P	V
		2410	100.26	-	-	97.08	32.9	7.13	36.85	393	230	A	V
802.11g CH 11 2462MHz		2483.5	71.49	-2.51	74	68.08	32.98	7.25	36.82	379	287	P	H
		2483.5	52.79	-1.21	54	49.38	32.98	7.25	36.82	379	287	A	H
		2458	111.65	-	-	108.3	32.96	7.22	36.83	379	287	P	H
		2462	103.6	-	-	100.25	32.96	7.22	36.83	379	287	A	H
		2483.8	70.3	-3.7	74	66.89	32.98	7.25	36.82	376	227	P	V
		2483.5	52.18	-1.82	54	48.77	32.98	7.25	36.82	376	227	A	V
		2456	108.03	-	-	104.68	32.96	7.22	36.83	376	227	P	V
		2456	100.3	-	-	96.95	32.96	7.22	36.83	376	227	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4830	53.61	-20.39	74	74.54	34.2	10.25	65.38	100	293	P	H
		4830	43.36	-10.64	54	64.29	34.2	10.25	65.38	100	293	A	H
		7245	50.89	-23.11	74	68.02	35.85	12.72	65.7	300	0	P	H
		4830	49.89	-24.11	74	70.82	34.2	10.25	65.38	100	0	P	V
802.11g CH 06 2437MHz		4875	59.6	-14.4	74	80.5	34.23	10.29	65.42	114	293	P	H
		4875	50.92	-3.08	54	71.82	34.23	10.29	65.42	114	293	A	H
		7305	57.45	-16.55	74	74.78	35.86	12.72	65.91	300	0	P	H
		4875	56.68	-17.32	74	77.58	34.23	10.29	65.42	325	272	P	V
		4875	47.5	-6.5	54	68.4	34.23	10.29	65.42	325	272	A	V
		7305	52.65	-21.35	74	69.98	35.86	12.72	65.91	100	0	P	V
802.11g CH 11 2462MHz		4920	60.83	-13.17	74	81.68	34.26	10.34	65.45	100	292	P	H
		4920	50.38	-3.62	54	71.23	34.26	10.34	65.45	100	292	A	H
		7380	52.46	-21.54	74	69.96	35.88	12.73	66.11	300	0	P	H
		4920	56.02	-17.98	74	76.87	34.26	10.34	65.45	321	272	P	V
		4920	46.8	-7.2	54	67.65	34.26	10.34	65.45	321	272	A	V
		7380	50.99	-23.01	74	68.49	35.88	12.73	66.11	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.82	67.33	-6.67	74	64.21	32.88	7.1	36.86	392	292	P	H
		2389.95	52.88	-1.12	54	49.76	32.88	7.1	36.86	392	292	A	H
		2410	110.44	-	-	107.26	32.9	7.13	36.85	392	292	P	H
		2412	102.32	-	-	99.14	32.9	7.13	36.85	392	292	A	H
		2389.82	63.23	-10.77	74	60.11	32.88	7.1	36.86	392	231	P	V
		2389.95	49.93	-4.07	54	46.81	32.88	7.1	36.86	392	231	A	V
		2410	107.44	-	-	104.26	32.9	7.13	36.85	392	231	P	V
802.11n HT20 CH 11 2462MHz		2410	99.85	-	-	96.67	32.9	7.13	36.85	392	231	A	V
		2483.5	68.51	-5.49	74	65.1	32.98	7.25	36.82	379	286	P	H
		2483.5	52.38	-1.62	54	48.97	32.98	7.25	36.82	379	286	A	H
		2460	110.42	-	-	107.07	32.96	7.22	36.83	379	286	P	H
		2460	102.75	-	-	99.4	32.96	7.22	36.83	379	286	A	H
		2483.8	67.47	-6.53	74	64.06	32.98	7.25	36.82	375	228	P	V
		2483.5	51.51	-2.49	54	48.1	32.98	7.25	36.82	375	228	A	V
Remark		2468	106.26	-	-	102.91	32.96	7.22	36.83	375	228	P	V
		2456	99.4	-	-	96.05	32.96	7.22	36.83	375	228	A	V

- No other spurious found.
- All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4830	51.93	-22.07	74	72.86	34.2	10.25	65.38	100	330	P	H
		4830	42.14	-11.86	54	63.07	34.2	10.25	65.38	100	330	A	H
		4830	47.81	-26.19	74	68.74	34.2	10.25	65.38	100	0	P	V
802.11n HT20 CH 06 2437MHz		4875	58.67	-15.33	74	79.57	34.23	10.29	65.42	115	300	P	H
		4875	49.07	-4.93	54	69.97	34.23	10.29	65.42	115	300	A	H
		7305	56.75	-17.25	74	74.08	35.86	12.72	65.91	100	308	P	H
		7305	45.89	-8.11	54	63.22	35.86	12.72	65.91	100	308	A	H
		4875	48.8	-25.2	74	69.7	34.23	10.29	65.42	100	0	P	V
		7305	48.83	-25.17	74	66.16	35.86	12.72	65.91	100	0	P	V
802.11n HT20 CH 11 2462MHz		4920	58.59	-15.41	74	79.44	34.26	10.34	65.45	100	295	P	H
		4920	48.62	-5.38	54	69.47	34.26	10.34	65.45	100	295	A	H
		7380	50.52	-23.48	74	68.02	35.88	12.73	66.11	300	0	P	H
		4920	53.71	-20.29	74	74.56	34.26	10.34	65.45	102	360	P	V
		4920	43.41	-10.59	54	64.26	34.26	10.34	65.45	102	360	A	V
		7380	45.32	-28.68	74	62.82	35.88	12.73	66.11	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2388.91	69.72	-4.28	74	66.6	32.88	7.1	36.86	276	289	P	H
		2389.95	52.75	-1.25	54	49.63	32.88	7.1	36.86	276	289	A	H
		2412	107.69	-	-	104.51	32.9	7.13	36.85	276	289	P	H
		2412	99.91	-	-	96.73	32.9	7.13	36.85	276	289	A	H
		2485.48	53.17	-20.83	74	49.76	32.98	7.25	36.82	276	289	P	H
		2483.68	41.69	-12.31	54	38.28	32.98	7.25	36.82	276	289	A	H
		2388.91	64.43	-9.57	74	61.31	32.88	7.1	36.86	382	225	P	V
		2389.17	47.25	-6.75	54	44.13	32.88	7.1	36.86	382	225	A	V
		2430	104.38	-	-	101.15	32.92	7.16	36.85	382	225	P	V
		2430	97.02	-	-	93.79	32.92	7.16	36.85	382	225	A	V
		2484.04	53.07	-20.93	74	49.66	32.98	7.25	36.82	382	225	P	V
		2485.66	41.64	-12.36	54	38.23	32.98	7.25	36.82	382	225	A	V
802.11n HT40 CH 06 2437MHz		2389.95	64.27	-9.73	74	61.15	32.88	7.1	36.86	304	287	P	H
		2389.95	52.78	-1.22	54	49.66	32.88	7.1	36.86	304	287	A	H
		2440	109.55	-	-	106.26	32.94	7.19	36.84	304	287	P	H
		2438	101.96	-	-	98.67	32.94	7.19	36.84	304	287	A	H
		2483.5	64.11	-9.89	74	60.7	32.98	7.25	36.82	304	287	P	H
		2483.5	50.56	-3.44	54	47.15	32.98	7.25	36.82	304	287	A	H
		2389.95	61.69	-12.31	74	58.57	32.88	7.1	36.86	384	229	P	V
		2389.95	49.26	-4.74	54	46.14	32.88	7.1	36.86	384	229	A	V
		2434	107.11	-	-	103.88	32.92	7.16	36.85	384	229	P	V
		2434	99.46	-	-	96.23	32.92	7.16	36.85	384	229	A	V
	2483.5	60.05	-13.95	74	56.64	32.98	7.25	36.82	384	229	P	V	
	2483.5	46.44	-7.56	54	43.03	32.98	7.25	36.82	384	229	A	V	



802.11n HT40 CH 09 2452MHz		2358.75	53.03	-20.97	74	50.01	32.83	7.07	36.88	379	288	P	H
		2389.95	42.22	-11.78	54	39.1	32.88	7.1	36.86	379	288	A	H
		2454	107.89	-	-	104.54	32.96	7.22	36.83	379	288	P	H
		2454	100.39	-	-	97.04	32.96	7.22	36.83	379	288	A	H
		2483.56	70.16	-3.84	74	66.75	32.98	7.25	36.82	379	288	P	H
		2483.5	52.38	-1.62	54	48.97	32.98	7.25	36.82	379	288	A	H
		2389.95	53.35	-20.65	74	50.23	32.88	7.1	36.86	337	225	P	V
		2389.95	42.74	-11.26	54	39.62	32.88	7.1	36.86	337	225	A	V
		2450	104.23	-	-	100.94	32.94	7.19	36.84	337	225	P	V
		2450	97.07	-	-	93.78	32.94	7.19	36.84	337	225	A	V
		2483.56	66.81	-7.19	74	63.4	32.98	7.25	36.82	337	225	P	V
		2483.5	49.07	-4.93	54	45.66	32.98	7.25	36.82	337	225	A	V
Remark	<p>1. No other spurious found.</p> <p>2. All results are PASS against Peak and Average limit line.</p>												

2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4845	50.43	-23.57	74	71.36	34.21	10.25	65.39	103	301	P	H
		4845	40.31	-13.69	54	61.24	34.21	10.25	65.39	103	301	A	H
802.11n HT40 CH 06 2437MHz		7260	45.82	-28.18	74	63.01	35.85	12.72	65.76	300	0	P	H
		4845	44.95	-29.05	74	65.88	34.21	10.25	65.39	100	0	P	V
802.11n HT40 CH 09 2452MHz		7266	43.39	-30.61	74	60.62	35.86	12.72	65.81	100	0	P	V
		4875	55.08	-18.92	74	75.98	34.23	10.29	65.42	100	331	P	H
802.11n HT40 CH 09 2452MHz		4875	45.07	-8.93	54	65.97	34.23	10.29	65.42	100	331	A	H
		7305	52.06	-21.94	74	69.39	35.86	12.72	65.91	100	15	P	H
802.11n HT40 CH 09 2452MHz		7305	42	-12	54	59.33	35.86	12.72	65.91	100	15	A	H
		4875	48.28	-25.72	74	69.18	34.23	10.29	65.42	100	0	P	V
802.11n HT40 CH 09 2452MHz		7305	46.28	-27.72	74	63.61	35.86	12.72	65.91	100	0	P	V
		4905	53.45	-20.55	74	74.3	34.25	10.34	65.44	117	295	P	H
802.11n HT40 CH 09 2452MHz		4905	43.94	-10.06	54	64.79	34.25	10.34	65.44	117	295	A	H
		7356	46.86	-27.14	74	64.32	35.87	12.73	66.06	300	0	P	H



2452MHz	4905	48.58	-25.42	74	69.43	34.25	10.34	65.44	100	0	P	V
	7356	44.33	-29.67	74	61.79	35.87	12.73	66.06	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30.97	21.43	-18.57	40	28.37	24.7	0.76	32.4	-	-	P	H
		159.98	18.22	-25.28	43.5	32.58	16.2	1.84	32.4	-	-	P	H
		320.03	31.54	-14.46	46	42.01	19.3	2.63	32.4	-	-	P	H
		480.08	24.41	-21.59	46	30.27	23.4	3.14	32.4	-	-	P	H
		722.58	31.25	-14.75	46	32.41	27.18	4.01	32.35	-	-	P	H
		905.91	30.48	-15.52	46	28.41	29.02	4.5	31.45	-	-	P	H
		46.49	20.95	-19.05	40	36.49	15.9	0.96	32.4	-	-	P	V
		127	15.78	-27.72	43.5	29.01	17.5	1.67	32.4	-	-	P	V
		320.03	23.83	-22.17	46	34.3	19.3	2.63	32.4	-	-	P	V
		497.54	24.01	-21.99	46	29.52	23.75	3.14	32.4	-	-	P	V
		626.55	26.79	-19.21	46	29.37	26.13	3.69	32.4	-	-	P	V
	763.32	29.36	-16.64	46	29.36	28.14	4.11	32.25	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH01 2412MHz																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site: 030805-K3 Condition: FCC PART 15C 3e 3317 5M 75957 HORIZONTAL Project: RSM 1000 000MHz VSW 3000.000MHz SRT Auto Mode: (FR)262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2389.82</td> <td>48.19</td> <td>-4.81</td> <td>74.00</td> <td>66.07</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>276</td> <td>292</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	deg		1 1	2389.82	48.19	-4.81	74.00	66.07	32.88	7.10	36.86	276	292	Peak	HORIZONTAL	<p>Site: 030805-K3 Condition: FCC PART 15C 3e 3317 5M 75957 HORIZONTAL Project: RSM 1000 000MHz VSW 3000.000MHz SRT Auto Mode: (FR)262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2408.00</td> <td>110.57</td> <td>36.57</td> <td>74.00</td> <td>107.39</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>276</td> <td>292</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	deg		1 *	2408.00	110.57	36.57	74.00	107.39	32.90	7.13	36.85	276	292	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	deg																																																						
1 1	2389.82	48.19	-4.81	74.00	66.07	32.88	7.10	36.86	276	292	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	deg																																																						
1 *	2408.00	110.57	36.57	74.00	107.39	32.90	7.13	36.85	276	292	Peak	HORIZONTAL																																																
Avg.	<p>Site: 030805-K3 Condition: FCC PART 15C (AVG) 3e 3317 5M 75957 HORIZONTAL Project: RSM 1000 000MHz VSW 0.010MHz SRT Auto Mode: (FR)262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2389.95</td> <td>52.33</td> <td>-1.67</td> <td>54.00</td> <td>49.21</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>276</td> <td>292</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	deg		1 1	2389.95	52.33	-1.67	54.00	49.21	32.88	7.10	36.86	276	292	Average	HORIZONTAL	<p>Site: 030805-K3 Condition: FCC PART 15C (AVG) 3e 3317 5M 75957 HORIZONTAL Project: RSM 1000 000MHz VSW 0.010MHz SRT Auto Mode: (FR)262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>103.07</td> <td>49.07</td> <td>54.00</td> <td>99.89</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>276</td> <td>292</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	deg		1 *	2412.00	103.07	49.07	54.00	99.89	32.90	7.13	36.85	276	292	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	deg																																																						
1 1	2389.95	52.33	-1.67	54.00	49.21	32.88	7.10	36.86	276	292	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	deg																																																						
1 *	2412.00	103.07	49.07	54.00	99.89	32.90	7.13	36.85	276	292	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11g CH01 2412MHz																																																																	
1	Vertical	Fundamental																																																																
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site: 030805-K5 Condition: FCC PART 15C 3e 3317 5N 7957 VERTICAL Project: R8B 1000.000KHz V8R 3000.000KHz SMT Auto Mode: FRU262714 Plane: 10 Full-directivity: 2 PowerSetting: 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>65.19</td> <td>-8.81</td> <td>74.00</td> <td>62.07</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>393</td> <td>230 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2389.95	65.19	-8.81	74.00	62.07	32.88	7.10	36.86	393	230 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site: 030805-K5 Condition: FCC PART 15C 3e 3317 5N 7957 VERTICAL Project: R8B 1000.000KHz V8R 3000.000KHz SMT Auto Mode: FRU262714 Plane: 10 Full-directivity: 2 PowerSetting: 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2408.00</td> <td>107.58</td> <td>33.58</td> <td>74.00</td> <td>104.40</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>393</td> <td>230 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2408.00	107.58	33.58	74.00	104.40	32.90	7.13	36.85	393	230 Peak	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																										
1	2389.95	65.19	-8.81	74.00	62.07	32.88	7.10	36.86	393	230 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																										
1	2408.00	107.58	33.58	74.00	104.40	32.90	7.13	36.85	393	230 Peak	VERTICAL																																																							
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site: 030805-K5 Condition: FCC PART 15C (AVG) 3e 3317 5N 7957 VERTICAL Project: R8B 1000.000KHz V8R 3000.000KHz SMT Auto Mode: FRU262714 Plane: 10 Full-directivity: 2 PowerSetting: 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>49.67</td> <td>-4.33</td> <td>54.00</td> <td>45.55</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>393</td> <td>230 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2389.95	49.67	-4.33	54.00	45.55	32.88	7.10	36.86	393	230 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site: 030805-K5 Condition: FCC PART 15C (AVG) 3e 3317 5N 7957 VERTICAL Project: R8B 1000.000KHz V8R 3000.000KHz SMT Auto Mode: FRU262714 Plane: 10 Full-directivity: 2 PowerSetting: 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>100.26</td> <td>46.26</td> <td>54.00</td> <td>97.08</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>393</td> <td>230 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2410.00	100.26	46.26	54.00	97.08	32.90	7.13	36.85	393	230 Average	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																										
1	2389.95	49.67	-4.33	54.00	45.55	32.88	7.10	36.86	393	230 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																										
1	2410.00	100.26	46.26	54.00	97.08	32.90	7.13	36.85	393	230 Average	VERTICAL																																																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH11 2462MHz																																																													
1	Horizontal	Fundamental																																																												
Peak	<p>Site : 030H05-K3 Condition : FCC PART 15C 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR0262714 Mode : 12 Plane : Z Full-directivity : E PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2463.50</td> <td>71.49</td> <td>-2.51</td> <td>74.00</td> <td>68.08</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>379</td> <td>287 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 1 2463.50	71.49	-2.51	74.00	68.08	32.98	7.25	36.82	379	287 Peak	<p>Site : 030H05-K3 Condition : FCC PART 15C 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR0262714 Mode : 12 Plane : Z Full-directivity : E PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2462.00</td> <td>111.65</td> <td>37.65</td> <td>74.00</td> <td>108.30</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>379</td> <td>287 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 * 2462.00	111.65	37.65	74.00	108.30	32.96	7.22	36.83	379	287 Peak
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 1 2463.50	71.49	-2.51	74.00	68.08	32.98	7.25	36.82	379	287 Peak																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 * 2462.00	111.65	37.65	74.00	108.30	32.96	7.22	36.83	379	287 Peak																																																					
Avg.	<p>Site : 030H05-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR0262714 Mode : 12 Plane : Z Full-directivity : E PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2463.50</td> <td>52.79</td> <td>-1.21</td> <td>54.00</td> <td>49.38</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>379</td> <td>287 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 1 2463.50	52.79	-1.21	54.00	49.38	32.98	7.25	36.82	379	287 Average	<p>Site : 030H05-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR0262714 Mode : 12 Plane : Z Full-directivity : E PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2462.00</td> <td>103.60</td> <td>49.60</td> <td>54.00</td> <td>100.25</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>379</td> <td>287 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 * 2462.00	103.60	49.60	54.00	100.25	32.96	7.22	36.83	379	287 Average
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 1 2463.50	52.79	-1.21	54.00	49.38	32.98	7.25	36.82	379	287 Average																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 * 2462.00	103.60	49.60	54.00	100.25	32.96	7.22	36.83	379	287 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																											
ANT	802.11g CH11 2462MHz																											
1	Vertical	Fundamental																										
Peak	<p>Site : 030905-K3 Condition : FCC PART 15C 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 12 Plane : E Full-directivity : 8 PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>1</th> <th>2483.80</th> <th>70.30</th> <th>-3.70</th> <th>74.00</th> <th>66.89</th> <th>32.98</th> <th>7.25</th> <th>36.82</th> <th>376</th> <th>227</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2483.80	70.30	-3.70	74.00	66.89	32.98	7.25	36.82	376	227	Peak	VERTICAL	<p>Site : 030905-K3 Condition : FCC PART 15C 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 12 Plane : E Full-directivity : 8 PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>1</th> <th>2462.00</th> <th>108.03</th> <th>34.03</th> <th>74.00</th> <th>104.68</th> <th>32.96</th> <th>7.22</th> <th>36.83</th> <th>376</th> <th>227</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2462.00	108.03	34.03	74.00	104.68	32.96	7.22	36.83	376	227	Peak	VERTICAL
	1	2483.80	70.30	-3.70	74.00	66.89	32.98	7.25	36.82	376	227	Peak	VERTICAL															
1	2462.00	108.03	34.03	74.00	104.68	32.96	7.22	36.83	376	227	Peak	VERTICAL																
Avg.	<p>Site : 030905-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 12 Plane : E Full-directivity : 8 PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>1</th> <th>2483.50</th> <th>52.18</th> <th>-1.82</th> <th>54.00</th> <th>48.77</th> <th>32.98</th> <th>7.25</th> <th>36.82</th> <th>376</th> <th>227</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2483.50	52.18	-1.82	54.00	48.77	32.98	7.25	36.82	376	227	Average	VERTICAL	<p>Site : 030905-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 12 Plane : E Full-directivity : 8 PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>1</th> <th>2462.00</th> <th>100.30</th> <th>46.30</th> <th>54.00</th> <th>96.95</th> <th>32.96</th> <th>7.22</th> <th>36.83</th> <th>376</th> <th>227</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2462.00	100.30	46.30	54.00	96.95	32.96	7.22	36.83	376	227	Average	VERTICAL
	1	2483.50	52.18	-1.82	54.00	48.77	32.98	7.25	36.82	376	227	Average	VERTICAL															
1	2462.00	100.30	46.30	54.00	96.95	32.96	7.22	36.83	376	227	Average	VERTICAL																



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT20 CH01 2412MHz																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site: 030H05-K3 Condition: FCC PART 15C 3e 3317.5M 75957 HORIZONTAL Project: RSM 1000.000KHz VBR 3000.000KHz SRT Auto Mode: FR262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>67.33</td> <td>-6.67</td> <td>74.00</td> <td>64.21</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>392</td> <td>292</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	on	deg	1	2389.82	67.33	-6.67	74.00	64.21	32.88	7.10	36.86	392	292	Peak	HORIZONTAL	<p>Site: 030H05-K3 Condition: FCC PART 15C 3e 3317.5M 75957 HORIZONTAL Project: RSM 1000.000KHz VBR 3000.000KHz SRT Auto Mode: FR262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>110.44</td> <td>36.44</td> <td>74.00</td> <td>107.26</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>392</td> <td>292</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	on	deg	1	2410.00	110.44	36.44	74.00	107.26	32.90	7.13	36.85	392	292	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	on	deg																																																					
1	2389.82	67.33	-6.67	74.00	64.21	32.88	7.10	36.86	392	292	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	on	deg																																																					
1	2410.00	110.44	36.44	74.00	107.26	32.90	7.13	36.85	392	292	Peak	HORIZONTAL																																																
Avg.	<p>Site: 030H05-K3 Condition: FCC PART 15C (AVG) 3e 3317.5M 75957 HORIZONTAL Project: RSM 1000.000KHz VBR 0.010KHz SRT Auto Mode: FR262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.88</td> <td>-1.12</td> <td>54.00</td> <td>49.76</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>392</td> <td>292</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	on	deg	1	2389.95	52.88	-1.12	54.00	49.76	32.88	7.10	36.86	392	292	Average	HORIZONTAL	<p>Site: 030H05-K3 Condition: FCC PART 15C (AVG) 3e 3317.5M 75957 HORIZONTAL Project: RSM 1000.000KHz VBR 0.010KHz SRT Auto Mode: FR262714 Plane: X Full-directivity: X PowerSetting: #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.32</td> <td>48.32</td> <td>54.00</td> <td>99.14</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>392</td> <td>292</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	deg	on	deg	1	2412.00	102.32	48.32	54.00	99.14	32.90	7.13	36.85	392	292	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	on	deg																																																					
1	2389.95	52.88	-1.12	54.00	49.76	32.88	7.10	36.86	392	292	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dB	dB	deg	on	deg																																																					
1	2412.00	102.32	48.32	54.00	99.14	32.90	7.13	36.85	392	292	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH01 2412MHz																																																													
1	Vertical	Fundamental																																																												
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 13 Plane : E Full-directivity : E PowerSetting : 41</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2399.82</td> <td>63.23</td> <td>-10.77</td> <td>74.00</td> <td>60.11</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>392</td> <td>231 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 2399.82	63.23	-10.77	74.00	60.11	32.88	7.10	36.86	392	231 Peak VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 13 Plane : E Full-directivity : E PowerSetting : 41</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2410.00</td> <td>102.44</td> <td>33.44</td> <td>74.00</td> <td>104.26</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>392</td> <td>231 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 2410.00	102.44	33.44	74.00	104.26	32.90	7.13	36.85	392	231 Peak VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 2399.82	63.23	-10.77	74.00	60.11	32.88	7.10	36.86	392	231 Peak VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 2410.00	102.44	33.44	74.00	104.26	32.90	7.13	36.85	392	231 Peak VERTICAL																																																					
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 13 Plane : E Full-directivity : E PowerSetting : 41</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2399.82</td> <td>49.93</td> <td>-4.07</td> <td>54.00</td> <td>46.81</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>392</td> <td>231 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 2399.82	49.93	-4.07	54.00	46.81	32.88	7.10	36.86	392	231 Average VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 VERTICAL Project : FR262714 Mode : 13 Plane : E Full-directivity : E PowerSetting : 41</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2410.00</td> <td>99.85</td> <td>45.85</td> <td>54.00</td> <td>96.67</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>392</td> <td>231 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dB	dB	cm	deg			1 2410.00	99.85	45.85	54.00	96.67	32.90	7.13	36.85	392	231 Average VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 2399.82	49.93	-4.07	54.00	46.81	32.88	7.10	36.86	392	231 Average VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dB	dB	cm	deg																																																							
1 2410.00	99.85	45.85	54.00	96.67	32.90	7.13	36.85	392	231 Average VERTICAL																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11n HT20 CH11 2462MHz																																																																			
1	Horizontal	Fundamental																																																																		
Peak	<p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FRU262714 Mode : 15 Plane : 2 Full-directivity : 2 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2462.50</td> <td>68.51</td> <td>-5.49</td> <td>74.00</td> <td>65.10</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>379</td> <td>286 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 1 2462.50	68.51	-5.49	74.00	65.10	32.98	7.25	36.82	379	286 Peak	HORIZONTAL	<p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FRU262714 Mode : 15 Plane : 2 Full-directivity : 2 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2462.00</td> <td>110.42</td> <td>36.42</td> <td>74.00</td> <td>107.07</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>379</td> <td>286 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 1 2462.00	110.42	36.42	74.00	107.07	32.96	7.22	36.83	379	286 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 1 2462.50	68.51	-5.49	74.00	65.10	32.98	7.25	36.82	379	286 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 1 2462.00	110.42	36.42	74.00	107.07	32.96	7.22	36.83	379	286 Peak	HORIZONTAL																																																										
Avg.	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FRU262714 Mode : 15 Plane : 2 Full-directivity : 2 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2462.50</td> <td>52.38</td> <td>-11.62</td> <td>64.00</td> <td>48.97</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>379</td> <td>286 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 1 2462.50	52.38	-11.62	64.00	48.97	32.98	7.25	36.82	379	286 Average	HORIZONTAL	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FRU262714 Mode : 15 Plane : 2 Full-directivity : 2 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2462.00</td> <td>102.75</td> <td>48.75</td> <td>54.00</td> <td>99.40</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>379</td> <td>286 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 1 2462.00	102.75	48.75	54.00	99.40	32.96	7.22	36.83	379	286 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 1 2462.50	52.38	-11.62	64.00	48.97	32.98	7.25	36.82	379	286 Average	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 1 2462.00	102.75	48.75	54.00	99.40	32.96	7.22	36.83	379	286 Average	HORIZONTAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m																																																																			
ANT	802.11n HT20 CH11 2462MHz																																																																			
1	Vertical	Fundamental																																																																		
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 5N 79557 VERTICAL Project : FRU262714 Mode : 15 Plane : E Antenna : Full-directivity JMEI : 14 PowerRating : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2463.80</td> <td>67.47</td> <td>-6.53</td> <td>74.00</td> <td>64.06</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>375</td> <td>228 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 2463.80	67.47	-6.53	74.00	64.06	32.98	7.25	36.82	375	228 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 5N 79557 VERTICAL Project : FRU262714 Mode : 15 Plane : E Antenna : Full-directivity JMEI : 14 PowerRating : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2468.00</td> <td>106.26</td> <td>32.26</td> <td>74.00</td> <td>102.91</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>375</td> <td>228 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 * 2468.00	106.26	32.26	74.00	102.91	32.96	7.22	36.83	375	228 Peak	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 2463.80	67.47	-6.53	74.00	64.06	32.98	7.25	36.82	375	228 Peak	VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 * 2468.00	106.26	32.26	74.00	102.91	32.96	7.22	36.83	375	228 Peak	VERTICAL																																																										
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79557 VERTICAL Project : FRU262714 Mode : 15 Plane : E Antenna : Full-directivity JMEI : 14 PowerRating : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2463.50</td> <td>51.51</td> <td>-2.49</td> <td>54.00</td> <td>48.10</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>375</td> <td>228 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 2463.50	51.51	-2.49	54.00	48.10	32.98	7.25	36.82	375	228 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79557 VERTICAL Project : FRU262714 Mode : 15 Plane : E Antenna : Full-directivity JMEI : 14 PowerRating : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2456.00</td> <td>99.40</td> <td>45.40</td> <td>54.00</td> <td>96.05</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>375</td> <td>228 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 * 2456.00	99.40	45.40	54.00	96.05	32.96	7.22	36.83	375	228 Average	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 2463.50	51.51	-2.49	54.00	48.10	32.98	7.25	36.82	375	228 Average	VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1 * 2456.00	99.40	45.40	54.00	96.05	32.96	7.22	36.83	375	228 Average	VERTICAL																																																										



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT40 CH03 2422MHz - L																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL Project : RSM 1000.000MHz VSWR:3000.000MHz SRT:Auto Mode : FR262714 Plane : 10 Full-directivity : X PowerSetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2388.91</td> <td>69.72</td> <td>-4.28</td> <td>74.00</td> <td>66.60</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>276</td> <td>289</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	on	deg	1 1	2388.91	69.72	-4.28	74.00	66.60	32.88	7.10	36.86	276	289	Peak	HORIZONTAL	<p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL Project : RSM 1000.000MHz VSWR:3000.000MHz SRT:Auto Mode : FR262714 Plane : 10 Full-directivity : X PowerSetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>107.69</td> <td>33.69</td> <td>74.00</td> <td>104.51</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>276</td> <td>289</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	on	deg	1 *	2412.00	107.69	33.69	74.00	104.51	32.90	7.13	36.85	276	289	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dB	dB	on	deg																																																					
1 1	2388.91	69.72	-4.28	74.00	66.60	32.88	7.10	36.86	276	289	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dB	dB	on	deg																																																					
1 *	2412.00	107.69	33.69	74.00	104.51	32.90	7.13	36.85	276	289	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3m 3317.5M 75957 HORIZONTAL Project : RSM 1000.000MHz VSWR:3000.000MHz SRT:Auto Mode : FR262714 Plane : 10 Full-directivity : X PowerSetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2389.95</td> <td>52.75</td> <td>-1.25</td> <td>54.00</td> <td>49.63</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>276</td> <td>289</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	on	deg	1 1	2389.95	52.75	-1.25	54.00	49.63	32.88	7.10	36.86	276	289	Average	HORIZONTAL	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3m 3317.5M 75957 HORIZONTAL Project : RSM 1000.000MHz VSWR:3000.000MHz SRT:Auto Mode : FR262714 Plane : 10 Full-directivity : X PowerSetting : 01</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2412.00</td> <td>99.91</td> <td>45.91</td> <td>54.00</td> <td>96.73</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>276</td> <td>289</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	on	deg	1 *	2412.00	99.91	45.91	54.00	96.73	32.90	7.13	36.85	276	289	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dB	dB	on	deg																																																					
1 1	2389.95	52.75	-1.25	54.00	49.63	32.88	7.10	36.86	276	289	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dB	dB	on	deg																																																					
1 *	2412.00	99.91	45.91	54.00	96.73	32.90	7.13	36.85	276	289	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	802.11n HT40 CH03 2422MHz - R																															
1	Horizontal	Fundamental																														
<p>Peak</p>	<p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000 000kHz VBW 3000 000kHz SMT Auto FRU 262714 Mode : 15 Plane : H MEI : Full-directivity Powerstting : #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.48</td> <td>53.17</td> <td>-20.83</td> <td>74.00</td> <td>49.76</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>276</td> <td>289</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	2485.48	53.17	-20.83	74.00	49.76	32.98	7.25	36.82	276	289	Peak	HORIZONTAL	<p>Left Blank</p>
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																								
1	2485.48	53.17	-20.83	74.00	49.76	32.98	7.25	36.82	276	289	Peak	HORIZONTAL																				
<p>Avg.</p>	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000 000kHz VBW 3000 000kHz SMT Auto FRU 262714 Mode : 15 Plane : H MEI : Full-directivity Powerstting : #1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>41.69</td> <td>-12.31</td> <td>54.00</td> <td>38.28</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>276</td> <td>289</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	2483.68	41.69	-12.31	54.00	38.28	32.98	7.25	36.82	276	289	Average	HORIZONTAL	<p>Left Blank</p>
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																								
1	2483.68	41.69	-12.31	54.00	38.28	32.98	7.25	36.82	276	289	Average	HORIZONTAL																				







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT40 CH03 2422MHz - L																																																											
1	Vertical	Fundamental																																																										
Peak	<p>Site : 030905-K3 Condition : FCC PART 15C 3e 3317 5N 79597 VERTICAL Project : RSR 1000 000MHz VBR 3000 000MHz SMT Auto FR0262714 Mode : 16 Plane : 2 Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>64.43</td> <td>-9.57</td> <td>74.00</td> <td>61.31</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>382</td> <td>225</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2388.91	64.43	-9.57	74.00	61.31	32.88	7.10	36.86	382	225	Peak	VERTICAL	<p>Site : 030905-K3 Condition : FCC PART 15C 3e 3317 5N 79597 VERTICAL Project : RSR 1000 000MHz VBR 3000 000MHz SMT Auto FR0262714 Mode : 16 Plane : 2 Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2430.00</td> <td>104.38</td> <td>30.38</td> <td>74.00</td> <td>101.15</td> <td>32.92</td> <td>7.16</td> <td>36.85</td> <td>382</td> <td>225</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2430.00	104.38	30.38	74.00	101.15	32.92	7.16	36.85	382	225	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2388.91	64.43	-9.57	74.00	61.31	32.88	7.10	36.86	382	225	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2430.00	104.38	30.38	74.00	101.15	32.92	7.16	36.85	382	225	Peak	VERTICAL																																																
Avg.	<p>Site : 030905-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79597 VERTICAL Project : RSR 1000 000MHz VBR 3000 000MHz SMT Auto FR0262714 Mode : 16 Plane : 2 Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>47.25</td> <td>-6.75</td> <td>54.00</td> <td>44.13</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>382</td> <td>225</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2389.17	47.25	-6.75	54.00	44.13	32.88	7.10	36.86	382	225	Average	VERTICAL	<p>Site : 030905-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79597 VERTICAL Project : RSR 1000 000MHz VBR 3000 000MHz SMT Auto FR0262714 Mode : 16 Plane : 2 Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2430.00</td> <td>97.02</td> <td>43.02</td> <td>54.00</td> <td>93.79</td> <td>32.92</td> <td>7.16</td> <td>36.85</td> <td>382</td> <td>225</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2430.00	97.02	43.02	54.00	93.79	32.92	7.16	36.85	382	225	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2389.17	47.25	-6.75	54.00	44.13	32.88	7.10	36.86	382	225	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2430.00	97.02	43.02	54.00	93.79	32.92	7.16	36.85	382	225	Average	VERTICAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																					
ANT	802.11n HT40 CH03 2422MHz - R																																					
1	Vertical	Fundamental																																				
<p>Peak</p>	<p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317 5N 75957 VERTICAL Project : RSM 1000 000MHz VBW 3000 000MHz SRF Auto FR0262714 Mode : 10 Plane : X MEI : Full-directivity Powerstting : 01</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.04</td> <td>53.07</td> <td>-20.93</td> <td>74.00</td> <td>49.66</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>382</td> <td>225 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	2484.04	53.07	-20.93	74.00	49.66	32.98	7.25	30.82	382	225 Peak	VERTICAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																													
1	2484.04	53.07	-20.93	74.00	49.66	32.98	7.25	30.82	382	225 Peak	VERTICAL																											
<p>Avg.</p>	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3m 3317 5N 75957 VERTICAL Project : RSM 1000 000MHz VBW 3.0100MHz SRF Auto FR0262714 Mode : 10 Plane : X MEI : Full-directivity Powerstting : 01</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.66</td> <td>41.64</td> <td>-12.30</td> <td>54.00</td> <td>38.23</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>382</td> <td>225 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	2485.66	41.64	-12.30	54.00	38.23	32.98	7.25	30.82	382	225 Average	VERTICAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																													
1	2485.66	41.64	-12.30	54.00	38.23	32.98	7.25	30.82	382	225 Average	VERTICAL																											

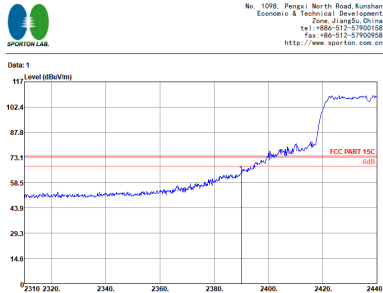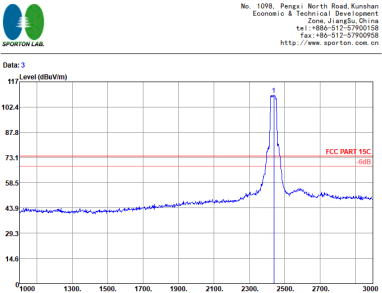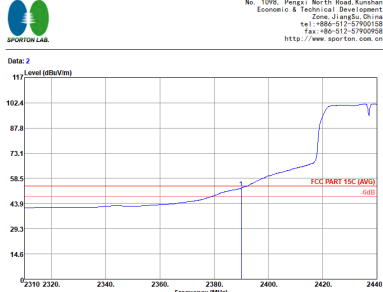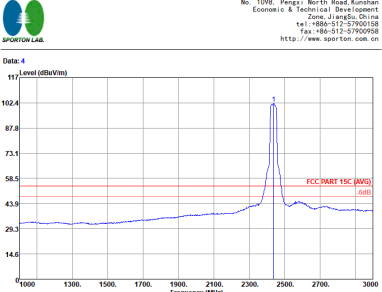

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11n HT40 CH06 2437MHz - L																																																																			
1	Horizontal	Fundamental																																																																		
Peak	 <p>Site : 030H05-K3 Condition : FCC PART 15C 3e 3317 SN 79957 HORIZONTAL Project : R88-1000-000KHZ VBR-3000-000KHZ SMT-Auto Mode : FR262714 Plane : 17 Polarization : Full-directivity PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>64.27</td> <td>-9.73</td> <td>74.00</td> <td>61.15</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>304</td> <td>287</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2389.95	64.27	-9.73	74.00	61.15	32.88	7.10	36.86	304	287	Peak	HORIZONTAL	 <p>Site : 030H05-K3 Condition : FCC PART 15C 3e 3317 SN 79957 HORIZONTAL Project : R88-1000-000KHZ VBR-3000-000KHZ SMT-Auto Mode : FR262714 Plane : 17 Polarization : Full-directivity PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>109.55</td> <td>35.55</td> <td>74.00</td> <td>106.26</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>304</td> <td>287</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2440.00	109.55	35.55	74.00	106.26	32.94	7.19	36.84	304	287	Peak	HORIZONTAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2389.95	64.27	-9.73	74.00	61.15	32.88	7.10	36.86	304	287	Peak	HORIZONTAL																																																								
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2440.00	109.55	35.55	74.00	106.26	32.94	7.19	36.84	304	287	Peak	HORIZONTAL																																																								
Avg.	 <p>Site : 030H05-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79957 HORIZONTAL Project : R88-1000-000KHZ VBR-3000-000KHZ SMT-Auto Mode : FR262714 Plane : 17 Polarization : Full-directivity PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.78</td> <td>-11.22</td> <td>54.00</td> <td>49.66</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>304</td> <td>287</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2389.95	52.78	-11.22	54.00	49.66	32.88	7.10	36.86	304	287	Average	HORIZONTAL	 <p>Site : 030H05-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79957 HORIZONTAL Project : R88-1000-000KHZ VBR-3000-000KHZ SMT-Auto Mode : FR262714 Plane : 17 Polarization : Full-directivity PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>101.96</td> <td>47.96</td> <td>54.00</td> <td>98.67</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>304</td> <td>287</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2438.00	101.96	47.96	54.00	98.67	32.94	7.19	36.84	304	287	Average	HORIZONTAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2389.95	52.78	-11.22	54.00	49.66	32.88	7.10	36.86	304	287	Average	HORIZONTAL																																																								
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2438.00	101.96	47.96	54.00	98.67	32.94	7.19	36.84	304	287	Average	HORIZONTAL																																																								



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	802.11n HT40 CH06 2437MHz - R																															
1	Horizontal	Fundamental																														
<p>Peak</p>	<p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317 5N 79557 HORIZONTAL Project : RBM 1000 000kHz VBW 3000 000kHz SFT Auto FRU 262714 Mode : 17 Plane : X MEI : Full-directivity PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>64.11</td> <td>-9.89</td> <td>74.00</td> <td>60.70</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>304</td> <td>287 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2483.50	64.11	-9.89	74.00	60.70	32.98	7.25	30.82	304	287 Peak	<p>Left blank</p>
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																									
1 2483.50	64.11	-9.89	74.00	60.70	32.98	7.25	30.82	304	287 Peak																							
<p>Avg.</p>	<p>Site : 030805-K3 Condition : FCC PART 15C (Ave) 3m 3317 5N 79557 HORIZONTAL Project : RBM 1000 000kHz VBW 0.0100kHz SFT Auto FRU 262714 Mode : 17 Plane : X MEI : Full-directivity PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>50.56</td> <td>-3.44</td> <td>54.00</td> <td>47.15</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>304</td> <td>287 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2483.50	50.56	-3.44	54.00	47.15	32.98	7.25	30.82	304	287 Average	<p>Left blank</p>
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																									
1 2483.50	50.56	-3.44	54.00	47.15	32.98	7.25	30.82	304	287 Average																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																											
ANT	802.11n HT40 CH06 2437MHz - L																											
1	Vertical	Fundamental																										
Peak	<p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 17 Plane : E Full-directivity : 1 PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.95</th> <th>61.69</th> <th>-12.31</th> <th>74.00</th> <th>58.57</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>384</th> <th>229</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2389.95	61.69	-12.31	74.00	58.57	32.88	7.10	36.86	384	229	Peak	VERTICAL	<p>Site : 030805-K3 Condition : FCC PART 15C 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 17 Plane : E Full-directivity : 1 PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>1</th> <th>2434.00</th> <th>107.11</th> <th>33.11</th> <th>74.00</th> <th>103.88</th> <th>32.92</th> <th>7.16</th> <th>36.85</th> <th>384</th> <th>229</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2434.00	107.11	33.11	74.00	103.88	32.92	7.16	36.85	384	229	Peak	VERTICAL
1	2389.95	61.69	-12.31	74.00	58.57	32.88	7.10	36.86	384	229	Peak	VERTICAL																
1	2434.00	107.11	33.11	74.00	103.88	32.92	7.16	36.85	384	229	Peak	VERTICAL																
Avg.	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 17 Plane : E Full-directivity : 1 PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.95</th> <th>49.26</th> <th>-4.74</th> <th>54.00</th> <th>46.14</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>384</th> <th>229</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2389.95	49.26	-4.74	54.00	46.14	32.88	7.10	36.86	384	229	Average	VERTICAL	<p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 17 Plane : E Full-directivity : 1 PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>1</th> <th>2434.00</th> <th>99.46</th> <th>45.46</th> <th>54.00</th> <th>96.23</th> <th>32.92</th> <th>7.16</th> <th>36.85</th> <th>384</th> <th>229</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2434.00	99.46	45.46	54.00	96.23	32.92	7.16	36.85	384	229	Average	VERTICAL
1	2389.95	49.26	-4.74	54.00	46.14	32.88	7.10	36.86	384	229	Average	VERTICAL																
1	2434.00	99.46	45.46	54.00	96.23	32.92	7.16	36.85	384	229	Average	VERTICAL																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																	
ANT	802.11n HT40 CH06 2437MHz - R																																	
1	Horizontal	Fundamental																																
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317 5N 79507 VERTICAL Project : RSM 1000 000MHz VSW: 3000.000MHz SMT Auto FRU:262714 Mode : 17 Plane : H Full-directivity : 0 IMEI : 01 PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>60.06</td> <td>-13.95</td> <td>74.00</td> <td>56.64</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>384</td> <td>229 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2483.50	60.06	-13.95	74.00	56.64	32.98	7.25	36.82	384	229 Peak	VERTICAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																											
1	2483.50	60.06	-13.95	74.00	56.64	32.98	7.25	36.82	384	229 Peak	VERTICAL																							
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K3 Condition : FCC PART 15C (Ave) 3m 3317 5N 79507 VERTICAL Project : RSM 1000 000MHz VSW: 3.0100MHz SMT Auto FRU:262714 Mode : 17 Plane : H Full-directivity : 0 IMEI : 01 PowerSetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.44</td> <td>-7.50</td> <td>54.00</td> <td>43.03</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>384</td> <td>229 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2483.50	46.44	-7.50	54.00	43.03	32.98	7.25	36.82	384	229 Average	VERTICAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																											
1	2483.50	46.44	-7.50	54.00	43.03	32.98	7.25	36.82	384	229 Average	VERTICAL																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																					
ANT	802.11n HT40 CH09 2452MHz - L																																																					
1	Horizontal	Fundamental																																																				
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030H05-K3 Condition : FCC PART 15C 3e 3317 SN 79597 HORIZONTAL Project : FR262714 Mode : IS Plane : E Full-directivity : 0 Powerstting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2368.75</th> <th>53.03</th> <th>-20.97</th> <th>74.00</th> <th>50.01</th> <th>32.83</th> <th>7.07</th> <th>36.88</th> <th>379</th> <th>288</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> </table>	1	2368.75	53.03	-20.97	74.00	50.01	32.83	7.07	36.88	379	288	Peak	HORIZONTAL	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg			<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030H05-K3 Condition : FCC PART 15C 3e 3317 SN 79597 HORIZONTAL Project : FR262714 Mode : IS Plane : E Full-directivity : 0 Powerstting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2454.00</th> <th>107.89</th> <th>33.89</th> <th>74.00</th> <th>104.54</th> <th>32.96</th> <th>7.22</th> <th>36.83</th> <th>379</th> <th>288</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> </table>	1	2454.00	107.89	33.89	74.00	104.54	32.96	7.22	36.83	379	288	Peak	HORIZONTAL	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg		
1	2368.75	53.03	-20.97	74.00	50.01	32.83	7.07	36.88	379	288	Peak	HORIZONTAL																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																												
1	2454.00	107.89	33.89	74.00	104.54	32.96	7.22	36.83	379	288	Peak	HORIZONTAL																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																												
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030H05-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 HORIZONTAL Project : FR262714 Mode : IS Plane : E Full-directivity : 0 Powerstting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.95</th> <th>42.22</th> <th>-11.78</th> <th>54.00</th> <th>39.10</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>379</th> <th>288</th> <th>Average</th> <th>HORIZONTAL</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> </table>	1	2389.95	42.22	-11.78	54.00	39.10	32.88	7.10	36.86	379	288	Average	HORIZONTAL	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg			<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030H05-K3 Condition : FCC PART 15C (AVG) 3e 3317 SN 79597 HORIZONTAL Project : FR262714 Mode : IS Plane : E Full-directivity : 0 Powerstting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2454.00</th> <th>100.39</th> <th>46.39</th> <th>54.00</th> <th>97.04</th> <th>32.96</th> <th>7.22</th> <th>36.83</th> <th>379</th> <th>288</th> <th>Average</th> <th>HORIZONTAL</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> </table>	1	2454.00	100.39	46.39	54.00	97.04	32.96	7.22	36.83	379	288	Average	HORIZONTAL	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg		
1	2389.95	42.22	-11.78	54.00	39.10	32.88	7.10	36.86	379	288	Average	HORIZONTAL																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																												
1	2454.00	100.39	46.39	54.00	97.04	32.96	7.22	36.83	379	288	Average	HORIZONTAL																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																												

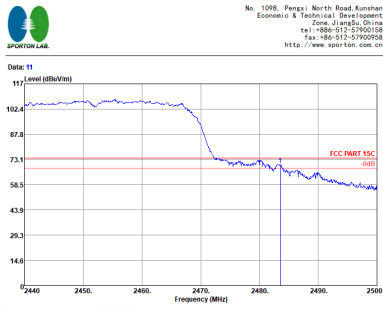
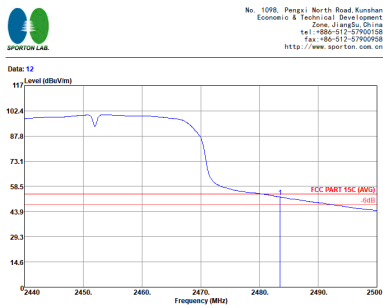


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH09 2452MHz - R																																
1	Horizontal	Fundamental																															
<p>Peak</p>	 <p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317 5N 75957 HORIZONTAL Project : RBM 1000 000MHz VBW 3000 000MHz SMT Auto FRU 262714 Mode : IS Plane : X MEI : Full-directivity Powerstting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2483.56</td> <td>70.16</td> <td>-3.84</td> <td>74.00</td> <td>66.75</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>379</td> <td>288 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 1 2483.56	70.16	-3.84	74.00	66.75	32.98	7.25	30.82	379	288 Peak	HORIZONTAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																										
1 1 2483.56	70.16	-3.84	74.00	66.75	32.98	7.25	30.82	379	288 Peak	HORIZONTAL																							
<p>Avg.</p>	 <p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3m 3317 5N 75957 HORIZONTAL Project : RBM 1000 000MHz VBW 3.010MHz SMT Auto FRU 262714 Mode : IS Plane : X MEI : Full-directivity Powerstting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2483.50</td> <td>52.38</td> <td>-1.62</td> <td>54.00</td> <td>48.97</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>379</td> <td>288 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 1 2483.50	52.38	-1.62	54.00	48.97	32.98	7.25	30.82	379	288 Average	HORIZONTAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																										
1 1 2483.50	52.38	-1.62	54.00	48.97	32.98	7.25	30.82	379	288 Average	HORIZONTAL																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																											
ANT	802.11n HT40 CH09 2452MHz - L																											
1	Vertical	Fundamental																										
Peak	<p>Site : 030905-K3 Condition : FCC PART 15C 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 1B Plane : Z Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.95</th> <th>53.35</th> <th>-20.45</th> <th>74.00</th> <th>50.23</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>337</th> <th>225</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2389.95	53.35	-20.45	74.00	50.23	32.88	7.10	36.86	337	225	Peak	VERTICAL	<p>Site : 030905-K3 Condition : FCC PART 15C 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 1B Plane : Z Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2450.00</th> <th>104.23</th> <th>30.23</th> <th>74.00</th> <th>100.94</th> <th>32.94</th> <th>7.19</th> <th>36.84</th> <th>337</th> <th>225</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2450.00	104.23	30.23	74.00	100.94	32.94	7.19	36.84	337	225	Peak	VERTICAL
	1	2389.95	53.35	-20.45	74.00	50.23	32.88	7.10	36.86	337	225	Peak	VERTICAL															
1	2450.00	104.23	30.23	74.00	100.94	32.94	7.19	36.84	337	225	Peak	VERTICAL																
Avg.	<p>Site : 030905-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 1B Plane : Z Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.95</th> <th>42.74</th> <th>-11.26</th> <th>54.00</th> <th>39.62</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>337</th> <th>225</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2389.95	42.74	-11.26	54.00	39.62	32.88	7.10	36.86	337	225	Average	VERTICAL	<p>Site : 030905-K3 Condition : FCC PART 15C (AVG) 3e 3317 5N 79597 VERTICAL Project : FR262714 Mode : 1B Plane : Z Full-directivity : 2 PowerSetting : 9</p> <table border="1"> <thead> <tr> <th>1</th> <th>2450.00</th> <th>97.07</th> <th>43.07</th> <th>54.00</th> <th>93.78</th> <th>32.94</th> <th>7.19</th> <th>36.84</th> <th>337</th> <th>225</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	2450.00	97.07	43.07	54.00	93.78	32.94	7.19	36.84	337	225	Average	VERTICAL
	1	2389.95	42.74	-11.26	54.00	39.62	32.88	7.10	36.86	337	225	Average	VERTICAL															
1	2450.00	97.07	43.07	54.00	93.78	32.94	7.19	36.84	337	225	Average	VERTICAL																

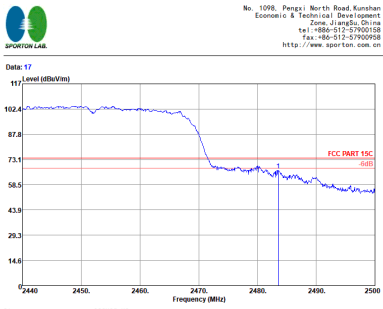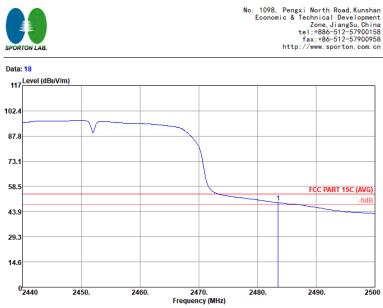

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																			
ANT	802.11n HT40 CH09 2452MHz - R																																			
1	Vertical	Fundamental																																		
<p>Peak</p>	 <p>Site : 030805-K3 Condition : FCC PART 15C 3m 3317 SN 79957 VERTICAL Project : FR262714 Mode : IS Plane : X MEI : Full-directivity PowerRating : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>66.81</td> <td>-7.19</td> <td>74.00</td> <td>63.40</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>337</td> <td>225 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	2483.56	66.81	-7.19	74.00	63.40	32.98	7.25	36.82	337	225 Peak	VERTICAL	<p>Left blank</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																												
1	2483.56	66.81	-7.19	74.00	63.40	32.98	7.25	36.82	337	225 Peak	VERTICAL																									
<p>Avg.</p>	 <p>Site : 030805-K3 Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 VERTICAL Project : FR262714 Mode : IS Plane : X MEI : Full-directivity PowerRating : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>49.07</td> <td>-4.93</td> <td>54.00</td> <td>45.66</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>337</td> <td>225 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	2483.50	49.07	-4.93	54.00	45.66	32.98	7.25	36.82	337	225 Average	VERTICAL	<p>Left blank</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																												
1	2483.50	49.07	-4.93	54.00	45.66	32.98	7.25	36.82	337	225 Average	VERTICAL																									



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	802.11b CH01 2412MHz																																																																																					
1	Horizontal	Vertical																																																																																				
Peak Avg.	<p>Site : 030805-K5 Condition : FCC PART 15C 3m 3117 5W 75957 HORIZONTAL Project : RSM 1000 000KHz VSW 3000 000KHz SRT Auto Mode : Z Plane : 7 Full-directivity : 1 PowerSetting : 32</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>57.59</td> <td>-16.41</td> <td>74.00</td> <td>78.52</td> <td>34.20</td> <td>10.25</td> <td>65.38</td> <td>100</td> <td>272</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4830.00</td> <td>52.39</td> <td>-11.61</td> <td>54.00</td> <td>73.32</td> <td>34.20</td> <td>10.25</td> <td>65.38</td> <td>100</td> <td>277</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Level	Level	Level	Level	Level	Level	1	4830.00	57.59	-16.41	74.00	78.52	34.20	10.25	65.38	100	272	Peak	HORIZONTAL	2	4830.00	52.39	-11.61	54.00	73.32	34.20	10.25	65.38	100	277	Average	HORIZONTAL	<p>Site : 030805-K5 Condition : FCC PART 15C 3m 3117 5W 75957 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SRT Auto Mode : Z Plane : 7 Full-directivity : 1 PowerSetting : 32</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>57.07</td> <td>-16.93</td> <td>74.00</td> <td>78.00</td> <td>34.20</td> <td>10.25</td> <td>65.38</td> <td>100</td> <td>258</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>4830.00</td> <td>51.93</td> <td>-2.07</td> <td>54.00</td> <td>72.86</td> <td>34.20</td> <td>10.25</td> <td>65.38</td> <td>100</td> <td>258</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Level	Level	Level	Level	Level	Level	1	4830.00	57.07	-16.93	74.00	78.00	34.20	10.25	65.38	100	258	Peak	VERTICAL	2	4830.00	51.93	-2.07	54.00	72.86	34.20	10.25	65.38	100	258	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																														
Level	Level	Level	Level	Level	Level	Level	Level																																																																															
1	4830.00	57.59	-16.41	74.00	78.52	34.20	10.25	65.38	100	272	Peak	HORIZONTAL																																																																										
2	4830.00	52.39	-11.61	54.00	73.32	34.20	10.25	65.38	100	277	Average	HORIZONTAL																																																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Level	Level	Level	Level	Level	Level	Level	Level																																																																															
1	4830.00	57.07	-16.93	74.00	78.00	34.20	10.25	65.38	100	258	Peak	VERTICAL																																																																										
2	4830.00	51.93	-2.07	54.00	72.86	34.20	10.25	65.38	100	258	Average	VERTICAL																																																																										



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																			
ANT	802.11b CH06 2437MHz																																																																																																																			
1	Horizontal	Vertical																																																																																																																		
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K5 Condition : FCC PART 15C 3m 3117 5N 70957 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR262714 Mode : S Plane : H Full-directivity : S Power setting : 27</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm/1m</th> <th>dBm/1m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>cm</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>57.77</td> <td>-16.73</td> <td>74.00</td> <td>78.17</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>280</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4875.00</td> <td>52.31</td> <td>-11.49</td> <td>54.00</td> <td>73.21</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>280</td> <td>Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7305.00</td> <td>45.71</td> <td>-28.29</td> <td>74.00</td> <td>63.04</td> <td>35.86</td> <td>12.72</td> <td>65.91</td> <td>100</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg	1	4875.00	57.77	-16.73	74.00	78.17	34.23	10.29	65.42	100	280	Peak	HORIZONTAL	2	4875.00	52.31	-11.49	54.00	73.21	34.23	10.29	65.42	100	280	Average	HORIZONTAL	3	7305.00	45.71	-28.29	74.00	63.04	35.86	12.72	65.91	100	0	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K5 Condition : FCC PART 15C 3m 3117 5N 70957 VERTICAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR262714 Mode : S Plane : V Full-directivity : S Power setting : 27</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm/1m</th> <th>dBm/1m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>cm</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>56.87</td> <td>-17.13</td> <td>74.00</td> <td>77.77</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>258</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>4875.00</td> <td>51.33</td> <td>-12.67</td> <td>54.00</td> <td>72.23</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>258</td> <td>Average</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>7305.00</td> <td>44.18</td> <td>-29.82</td> <td>74.00</td> <td>61.91</td> <td>35.86</td> <td>12.72</td> <td>65.91</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg	1	4875.00	56.87	-17.13	74.00	77.77	34.23	10.29	65.42	100	258	Peak	VERTICAL	2	4875.00	51.33	-12.67	54.00	72.23	34.23	10.29	65.42	100	258	Average	VERTICAL	3	7305.00	44.18	-29.82	74.00	61.91	35.86	12.72	65.91	100	0	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																											
dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg																																																																																																												
1	4875.00	57.77	-16.73	74.00	78.17	34.23	10.29	65.42	100	280	Peak	HORIZONTAL																																																																																																								
2	4875.00	52.31	-11.49	54.00	73.21	34.23	10.29	65.42	100	280	Average	HORIZONTAL																																																																																																								
3	7305.00	45.71	-28.29	74.00	63.04	35.86	12.72	65.91	100	0	Peak	HORIZONTAL																																																																																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																												
dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg																																																																																																												
1	4875.00	56.87	-17.13	74.00	77.77	34.23	10.29	65.42	100	258	Peak	VERTICAL																																																																																																								
2	4875.00	51.33	-12.67	54.00	72.23	34.23	10.29	65.42	100	258	Average	VERTICAL																																																																																																								
3	7305.00	44.18	-29.82	74.00	61.91	35.86	12.72	65.91	100	0	Peak	VERTICAL																																																																																																								



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																			
ANT	802.11b CH11 2462MHz																																																																																																																			
1	Horizontal	Vertical																																																																																																																		
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K5 Condition : FCC PART 15C 3m 3117 5N 79957 HORIZONTAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR262714 Mode : P Plane : X Full-directivity : 2 IMEI : 87 PowerSetting : 24</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm/1m</th> <th>dBm/1m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>cm</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>56.96</td> <td>-17.04</td> <td>74.00</td> <td>77.81</td> <td>34.26</td> <td>10.34</td> <td>65.45</td> <td>100</td> <td>248</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4920.00</td> <td>52.27</td> <td>-11.73</td> <td>54.00</td> <td>73.12</td> <td>34.26</td> <td>10.34</td> <td>65.45</td> <td>100</td> <td>248</td> <td>Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7380.00</td> <td>43.19</td> <td>-20.78</td> <td>74.00</td> <td>61.22</td> <td>35.88</td> <td>12.73</td> <td>66.11</td> <td>200</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg	1	4920.00	56.96	-17.04	74.00	77.81	34.26	10.34	65.45	100	248	Peak	HORIZONTAL	2	4920.00	52.27	-11.73	54.00	73.12	34.26	10.34	65.45	100	248	Average	HORIZONTAL	3	7380.00	43.19	-20.78	74.00	61.22	35.88	12.73	66.11	200	0	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-K5 Condition : FCC PART 15C 3m 3117 5N 79957 VERTICAL Project : RBM 1000 000kHz VBR 3000 000kHz SMT Auto FR262714 Mode : P Plane : X Full-directivity : 2 IMEI : 87 PowerSetting : 24</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm/1m</th> <th>dBm/1m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>cm</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>56.84</td> <td>-17.16</td> <td>74.00</td> <td>77.69</td> <td>34.26</td> <td>10.34</td> <td>65.45</td> <td>100</td> <td>248</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>4920.00</td> <td>52.40</td> <td>-11.60</td> <td>54.00</td> <td>73.25</td> <td>34.26</td> <td>10.34</td> <td>65.45</td> <td>100</td> <td>248</td> <td>Average</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>7380.00</td> <td>43.34</td> <td>-20.16</td> <td>74.00</td> <td>61.34</td> <td>35.88</td> <td>12.73</td> <td>66.11</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg	1	4920.00	56.84	-17.16	74.00	77.69	34.26	10.34	65.45	100	248	Peak	VERTICAL	2	4920.00	52.40	-11.60	54.00	73.25	34.26	10.34	65.45	100	248	Average	VERTICAL	3	7380.00	43.34	-20.16	74.00	61.34	35.88	12.73	66.11	100	0	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																											
dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg																																																																																																												
1	4920.00	56.96	-17.04	74.00	77.81	34.26	10.34	65.45	100	248	Peak	HORIZONTAL																																																																																																								
2	4920.00	52.27	-11.73	54.00	73.12	34.26	10.34	65.45	100	248	Average	HORIZONTAL																																																																																																								
3	7380.00	43.19	-20.78	74.00	61.22	35.88	12.73	66.11	200	0	Peak	HORIZONTAL																																																																																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																												
dBm/1m	dBm/1m	dBm	dB	dB	cm	cm	dB	deg																																																																																																												
1	4920.00	56.84	-17.16	74.00	77.69	34.26	10.34	65.45	100	248	Peak	VERTICAL																																																																																																								
2	4920.00	52.40	-11.60	54.00	73.25	34.26	10.34	65.45	100	248	Average	VERTICAL																																																																																																								
3	7380.00	43.34	-20.16	74.00	61.34	35.88	12.73	66.11	100	0	Peak	VERTICAL																																																																																																								



Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI	2.4GHz 2400~2483.5MHz																																																																																																																																																																																																	
ANT	802.11n HT20 LF																																																																																																																																																																																																	
1	Horizontal	Vertical																																																																																																																																																																																																
QP / Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technological Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032602-KS Condition : FCC PART 15C 3m CBL 61110 59913 HORIZONTAL Project : RSM 100.0000KHz VSW:300.0000KHz SRT:Auto Mode : FR262714 Plane : 13 Full-directivity : 1 IME1 : 81</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>21.43</td> <td>-18.57</td> <td>40.00</td> <td>28.37</td> <td>24.70</td> <td>0.76</td> <td>33.40</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>159.98</td> <td>18.22</td> <td>-25.28</td> <td>43.50</td> <td>32.58</td> <td>10.20</td> <td>1.86</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>3</td> <td>320.03</td> <td>31.54</td> <td>-14.46</td> <td>46.00</td> <td>42.01</td> <td>19.30</td> <td>2.63</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>4</td> <td>480.08</td> <td>24.41</td> <td>-21.09</td> <td>46.00</td> <td>35.27</td> <td>23.40</td> <td>3.14</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>5</td> <td>722.58</td> <td>31.25</td> <td>-14.75</td> <td>46.00</td> <td>32.41</td> <td>27.18</td> <td>4.01</td> <td>33.35</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>6</td> <td>920.91</td> <td>30.48</td> <td>-15.52</td> <td>46.00</td> <td>28.41</td> <td>29.62</td> <td>4.26</td> <td>31.42</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	deg		1	30.97	21.43	-18.57	40.00	28.37	24.70	0.76	33.40	---	---	Peak HORIZONTAL	2	159.98	18.22	-25.28	43.50	32.58	10.20	1.86	32.40	---	---	Peak HORIZONTAL	3	320.03	31.54	-14.46	46.00	42.01	19.30	2.63	32.40	---	---	Peak HORIZONTAL	4	480.08	24.41	-21.09	46.00	35.27	23.40	3.14	32.40	---	---	Peak HORIZONTAL	5	722.58	31.25	-14.75	46.00	32.41	27.18	4.01	33.35	---	---	Peak HORIZONTAL	6	920.91	30.48	-15.52	46.00	28.41	29.62	4.26	31.42	---	---	Peak HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technological Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032602-KS Condition : FCC PART 15C 3m CBL 61110 59913 VERTICAL Project : RSM 100.0000KHz VSW:300.0000KHz SRT:Auto Mode : FR262714 Plane : 13 Full-directivity : 2 IME1 : 81</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>46.49</td> <td>20.95</td> <td>-19.05</td> <td>40.00</td> <td>36.49</td> <td>15.93</td> <td>0.96</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>132.00</td> <td>15.28</td> <td>-27.72</td> <td>43.50</td> <td>29.01</td> <td>12.20</td> <td>1.02</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>3</td> <td>320.03</td> <td>22.82</td> <td>-22.17</td> <td>46.00</td> <td>34.30</td> <td>19.30</td> <td>2.63</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>4</td> <td>497.54</td> <td>24.25</td> <td>-21.99</td> <td>46.00</td> <td>29.32</td> <td>23.75</td> <td>3.14</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>5</td> <td>626.55</td> <td>26.79</td> <td>-19.21</td> <td>46.00</td> <td>29.37</td> <td>26.13</td> <td>3.69</td> <td>32.40</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>6</td> <td>100.32</td> <td>29.36</td> <td>-16.64</td> <td>46.00</td> <td>29.36</td> <td>28.14</td> <td>4.11</td> <td>32.25</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	deg		1	46.49	20.95	-19.05	40.00	36.49	15.93	0.96	32.40	---	---	Peak VERTICAL	2	132.00	15.28	-27.72	43.50	29.01	12.20	1.02	32.40	---	---	Peak VERTICAL	3	320.03	22.82	-22.17	46.00	34.30	19.30	2.63	32.40	---	---	Peak VERTICAL	4	497.54	24.25	-21.99	46.00	29.32	23.75	3.14	32.40	---	---	Peak VERTICAL	5	626.55	26.79	-19.21	46.00	29.37	26.13	3.69	32.40	---	---	Peak VERTICAL	6	100.32	29.36	-16.64	46.00	29.36	28.14	4.11	32.25	---	---	Peak VERTICAL
	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	deg																																																																																																																																																																																								
1	30.97	21.43	-18.57	40.00	28.37	24.70	0.76	33.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
2	159.98	18.22	-25.28	43.50	32.58	10.20	1.86	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
3	320.03	31.54	-14.46	46.00	42.01	19.30	2.63	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
4	480.08	24.41	-21.09	46.00	35.27	23.40	3.14	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
5	722.58	31.25	-14.75	46.00	32.41	27.18	4.01	33.35	---	---	Peak HORIZONTAL																																																																																																																																																																																							
6	920.91	30.48	-15.52	46.00	28.41	29.62	4.26	31.42	---	---	Peak HORIZONTAL																																																																																																																																																																																							
Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	deg																																																																																																																																																																																								
1	46.49	20.95	-19.05	40.00	36.49	15.93	0.96	32.40	---	---	Peak VERTICAL																																																																																																																																																																																							
2	132.00	15.28	-27.72	43.50	29.01	12.20	1.02	32.40	---	---	Peak VERTICAL																																																																																																																																																																																							
3	320.03	22.82	-22.17	46.00	34.30	19.30	2.63	32.40	---	---	Peak VERTICAL																																																																																																																																																																																							
4	497.54	24.25	-21.99	46.00	29.32	23.75	3.14	32.40	---	---	Peak VERTICAL																																																																																																																																																																																							
5	626.55	26.79	-19.21	46.00	29.37	26.13	3.69	32.40	---	---	Peak VERTICAL																																																																																																																																																																																							
6	100.32	29.36	-16.64	46.00	29.36	28.14	4.11	32.25	---	---	Peak VERTICAL																																																																																																																																																																																							




Appendix E. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	98.84	-	-	10Hz



802.11b

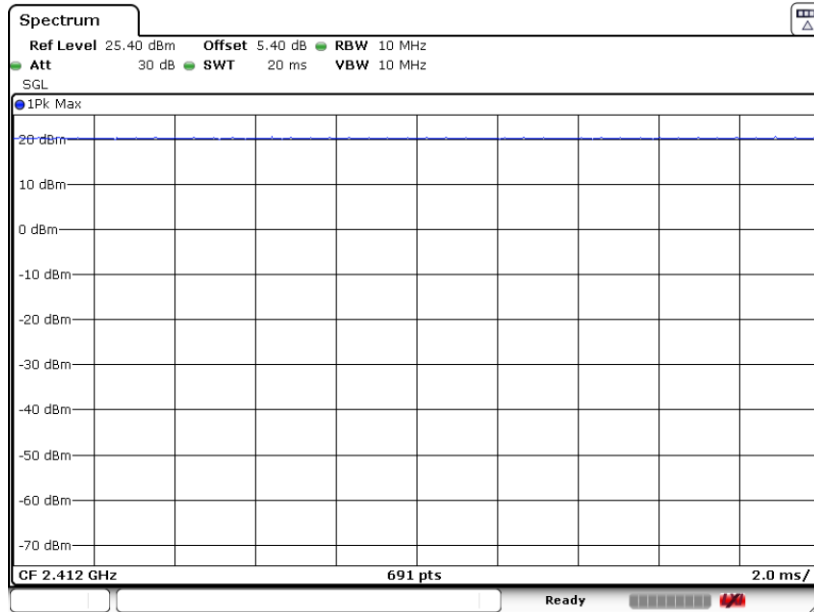


802.11g

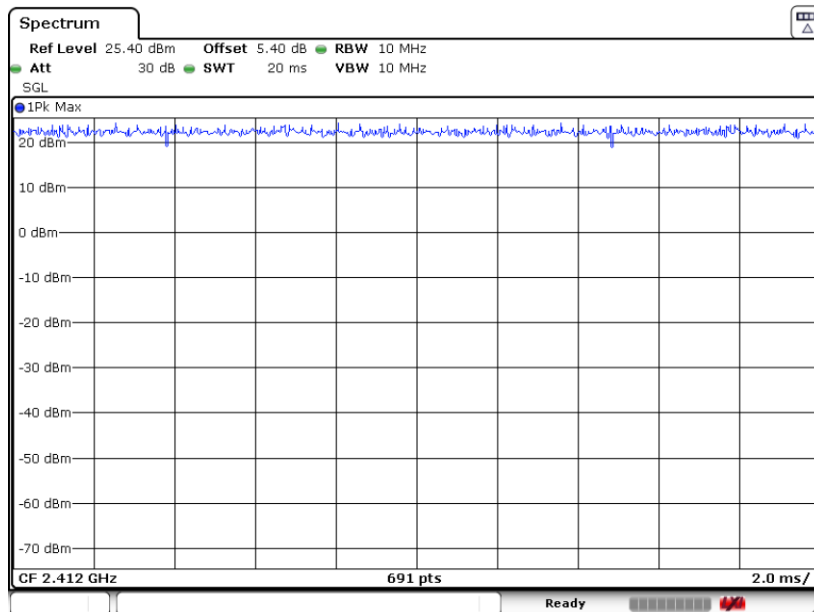



802.11n HT20

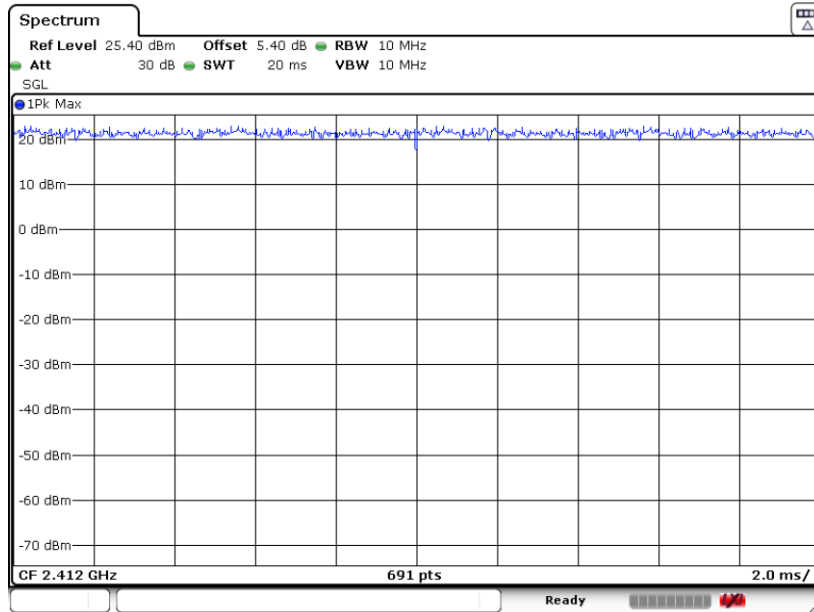

802.11n HT40

