



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP32-C6-WROOM-1U
FCC ID : 2AC7Z-ESPC6WROOMU
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 28, 2023 ~ Dec. 22, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

1.1 Applicant 5

1.2 Manufacturer 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 5

1.5 Modification of EUT 6

1.6 Testing Location 6

1.7 Test Software..... 6

1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

2.1 Carrier Frequency Channel 7

2.2 Test Mode 8

2.3 Connection Diagram of Test System 9

2.4 Support Unit used in test configuration and system 10

2.5 EUT Operation Test Setup 10

2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

3.1 6dB and 99% Bandwidth Measurement 11

3.2 Output Power Measurement..... 16

3.3 Power Spectral Density Measurement 17

3.4 Conducted Band Edges and Spurious Emission Measurement 22

3.5 Spurious Emission Measurement in the Restricted Band 27

3.6 AC Conducted Emission Measurement..... 31

3.7 Antenna Requirements..... 33

4 LIST OF MEASURING EQUIPMENT 34

5 MEASUREMENT UNCERTAINTY 35

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330802B	Rev. 01	Initial issue of report	Jan. 26, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.93 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 4.62 dB at 0.396 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP32-C6-WROOM-1U
FCC ID	2AC7Z-ESPC6WROOMU
S/N Code	Conducted: d8bc38cecd8c Conduction:d8bc38ced89c Radiation: d8bc38cecdb0
HW Version	V1.2
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ... 2475MHz , 2480MHz
Maximum Output Power to Antenna	Zigbee: 18.26 dBm (0.0670 W) Thread: 18.12 dBm (0.0649 W)
99% Occupied Bandwidth	Zigbee: 2.103MHz
Antenna Type / Gain	Sleeve Monopole Antenna with gain 2.33 dBi
Type of Modulation	O-QPSK

Note: For Thread & ZigBee mode, the whole testing has assessed only ZigBee mode by referring to their higher conducted power.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH05-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH18_2440 MHz Mode 3: Zigbee Tx CH25_2475 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH18_2440 MHz Mode 3: Zigbee Tx CH25_2475 MHz
AC Conducted Emission	Mode 1: Thread TX + WLAN Link(2.4G) + Charging from test Jig Mode 1: Zigbee TX + WLAN Link(2.4G) + Charging from test Jig
Remark: <ol style="list-style-type: none"> 1. The worst case of conducted emission is mode 1; only the test data of it was reported. 2. For Radiated TCs, The tests were performance with Test Jig. 	

2.3 Connection Diagram of Test System

AC Conducted Emission:

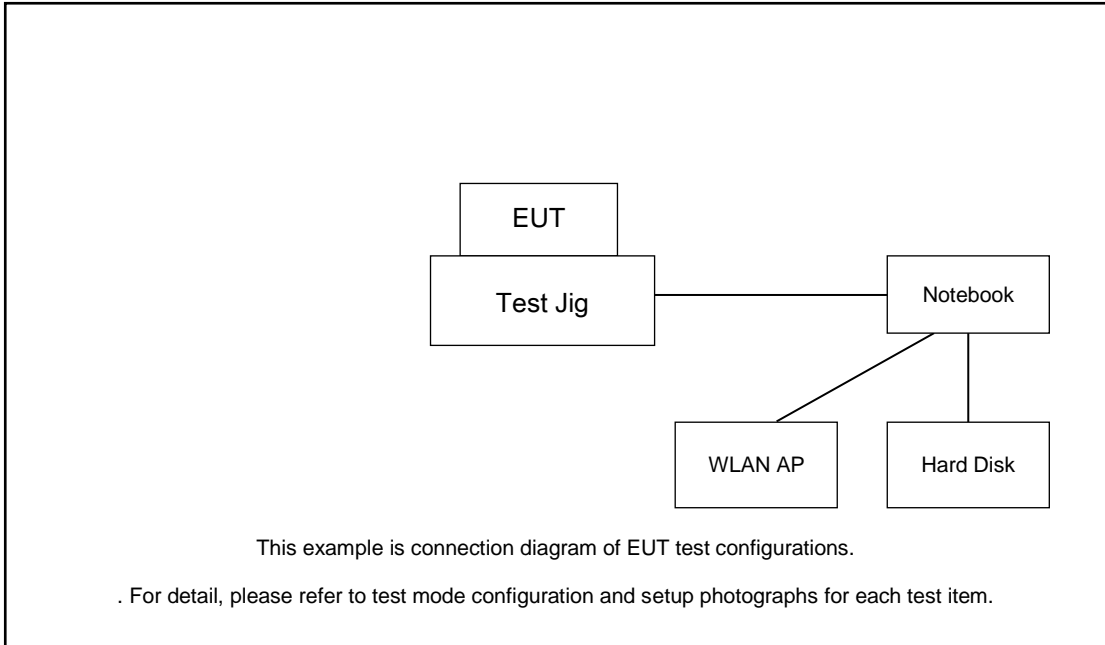

Radiated Emission:

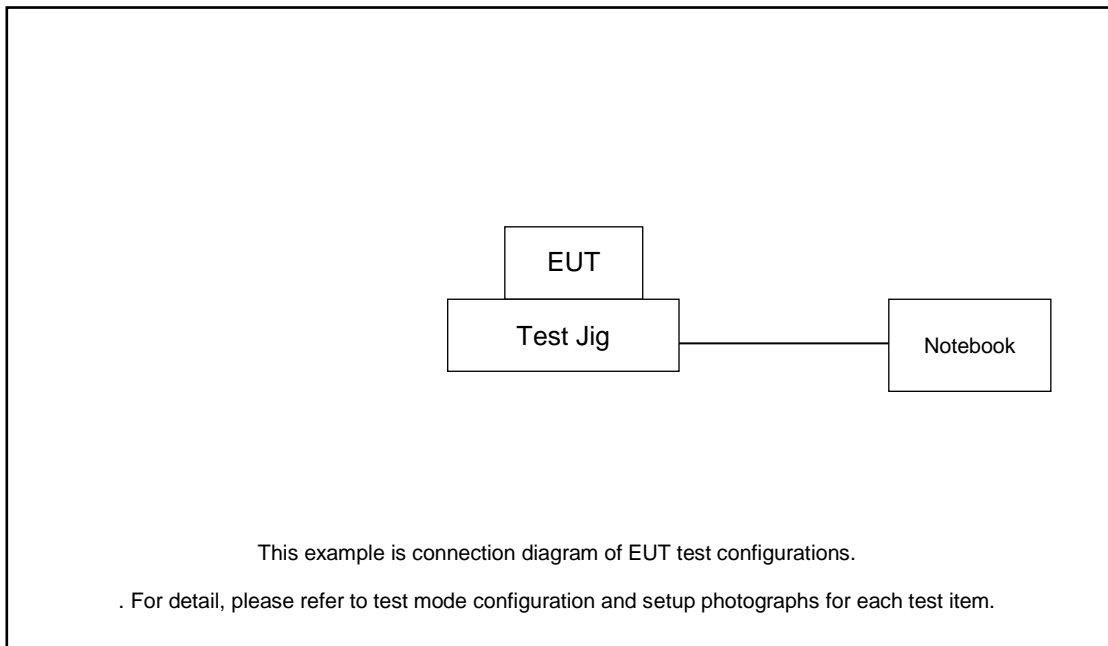

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For ZigBee function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.8 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 11

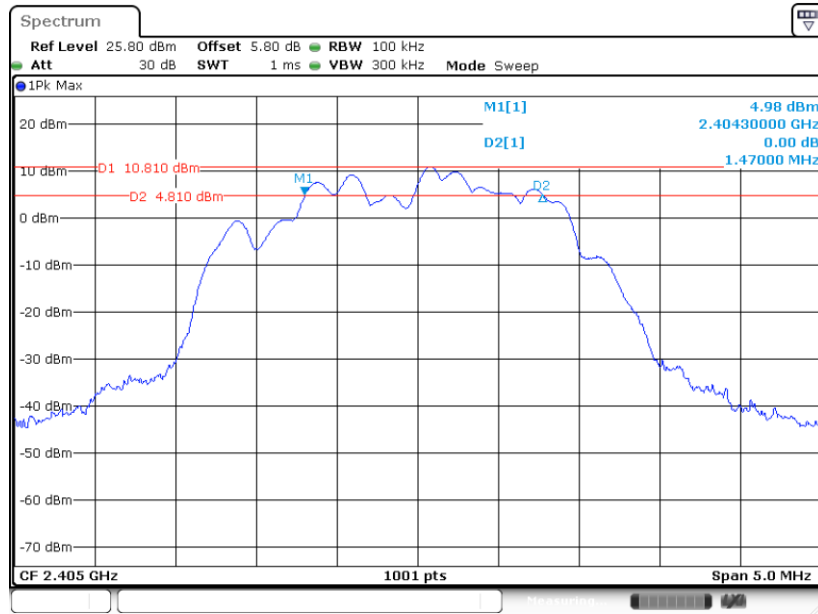

Date: 6.NOV.2027 21:12:03


6 dB Bandwidth Plot on Channel 18

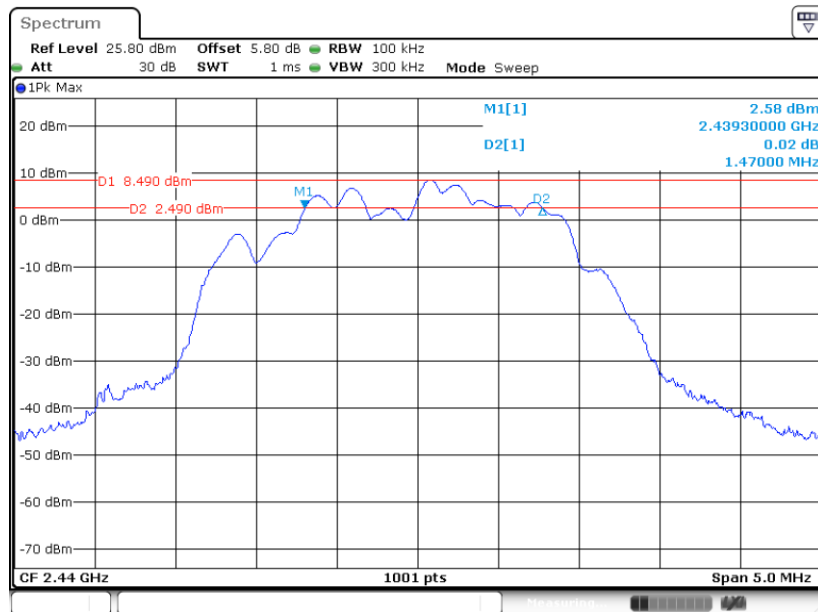

Date: 6.NOV.2027 21:22:03



6 dB Bandwidth Plot on Channel 26

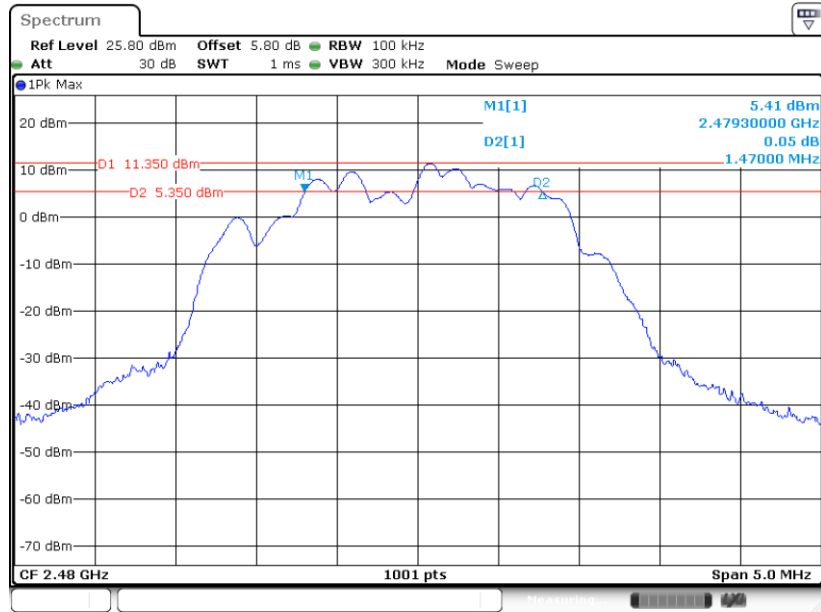


Date: 6.NOV.2027 21:26:01



3.1.6 Test Result of 99% Occupied Bandwidth


Test data refer to Appendix A.

99% Bandwidth Plot on Channel 11

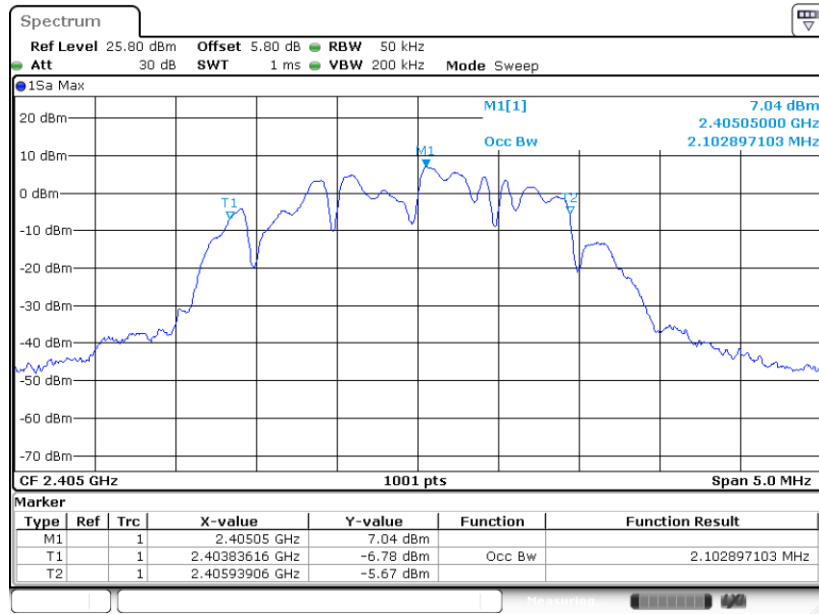

Date: 6.NOV.2027 21:19:47


99% Occupied Bandwidth Plot on Channel 18

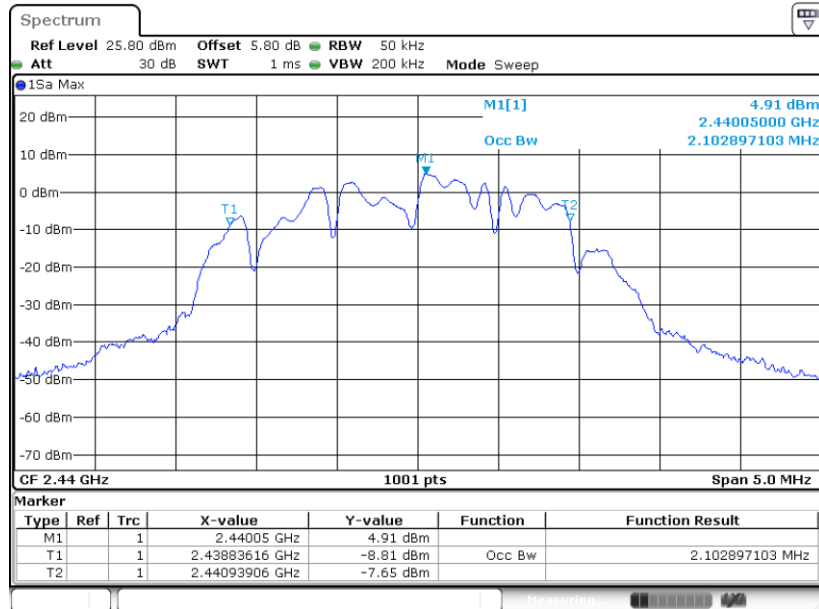

Date: 6.NOV.2027 21:25:07



99% Occupied Bandwidth Plot on Channel 26

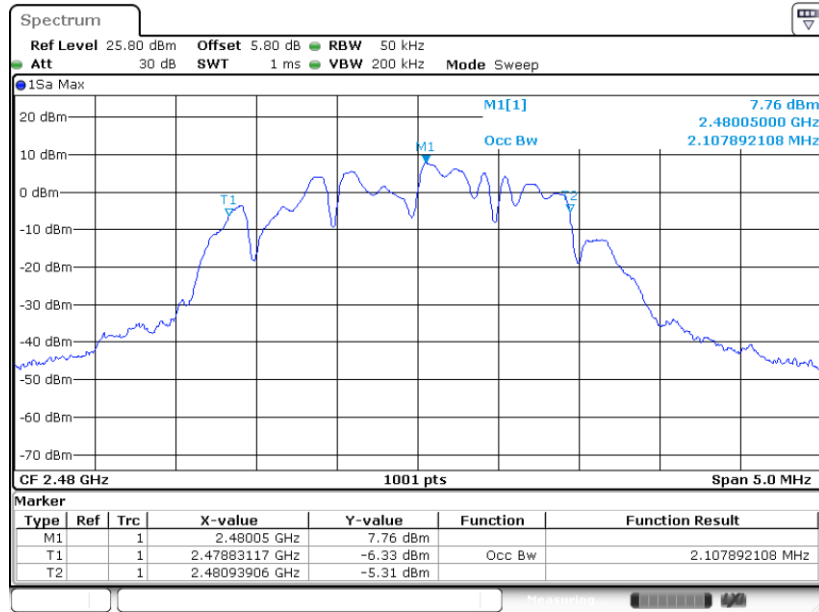

Date: 6.NOV.2027 21:28:21

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

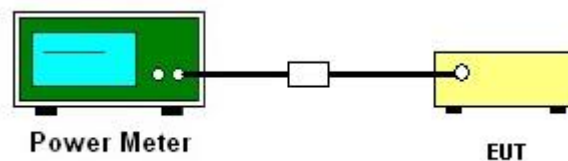

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

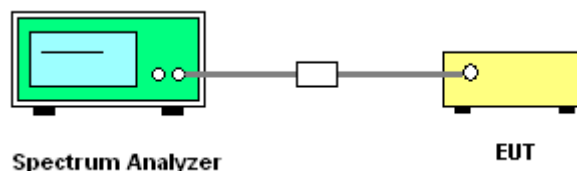


3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

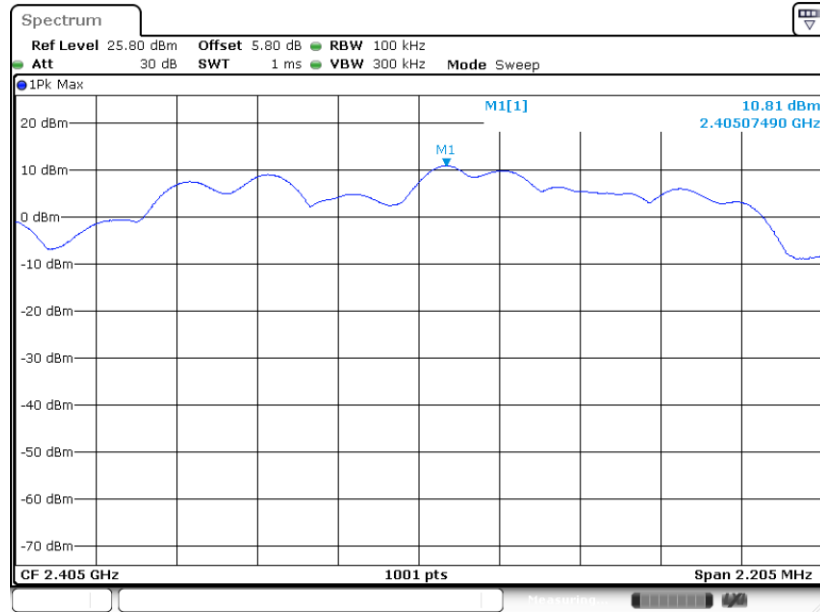

Date: 6.NOV.2027 21:12:41


PSD 100kHz Plot on Channel 18

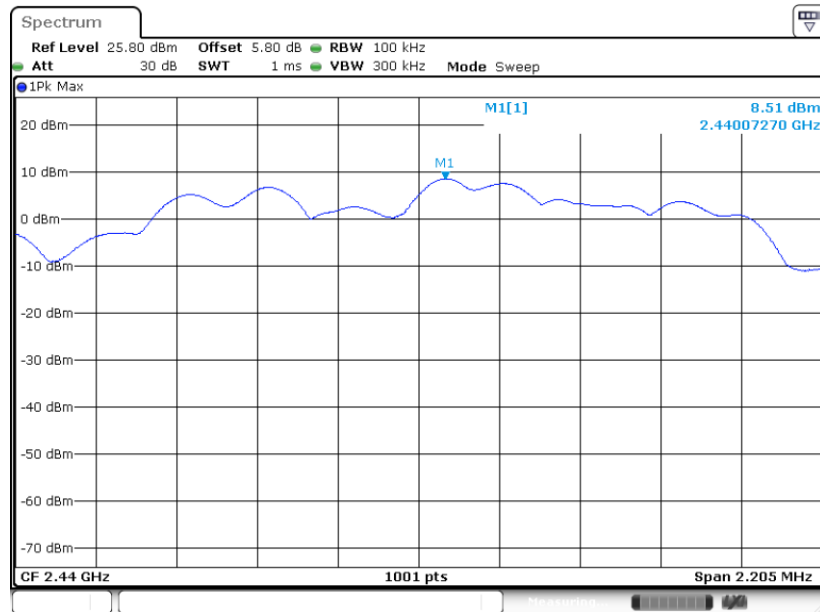

Date: 6.NOV.2027 21:22:41



PSD 100kHz Plot on Channel 26

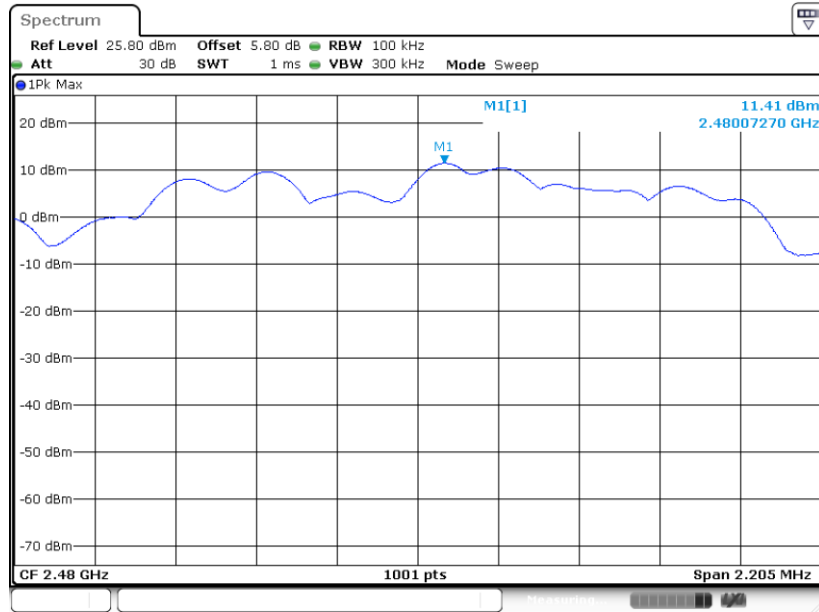


Date: 6.NOV.2027 21:26:39




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 11

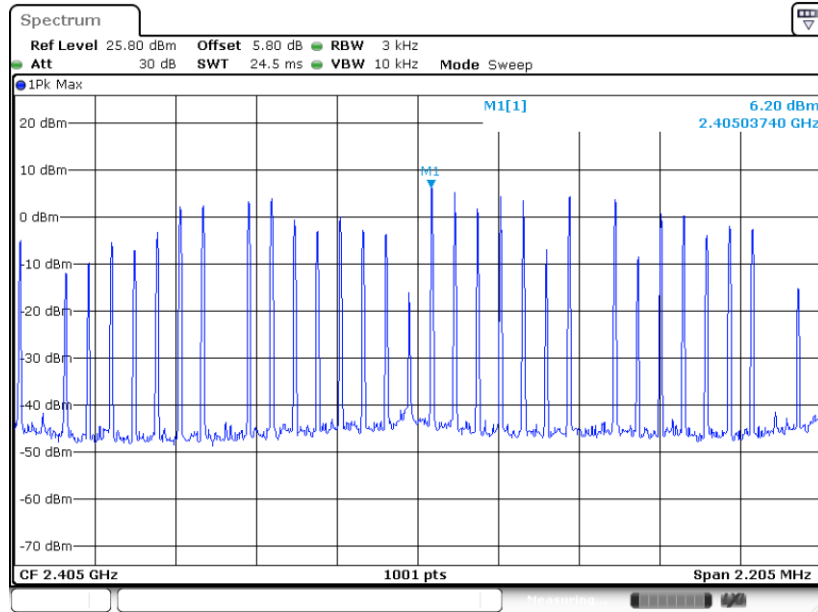

Date: 6.NOV.2027 21:12:22


PSD 3kHz Plot on Channel 18

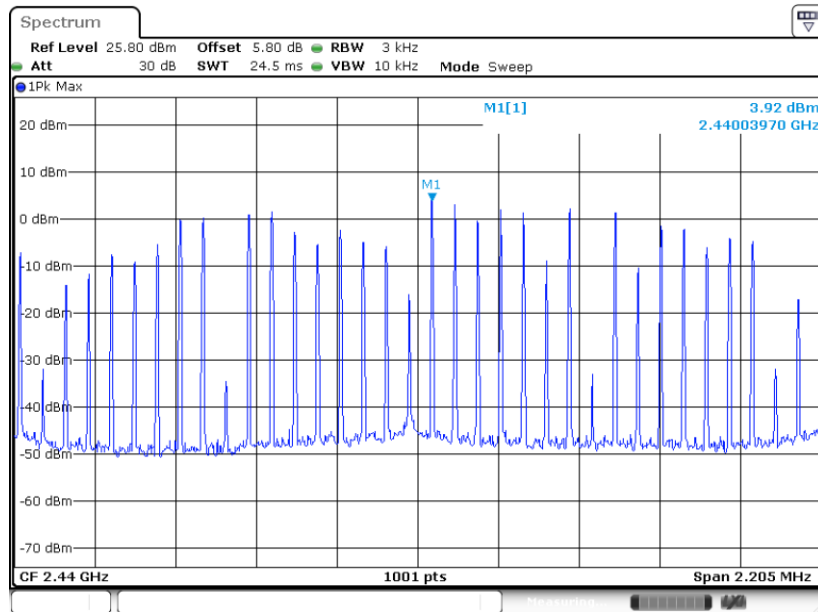

Date: 6.NOV.2027 21:22:22



PSD 3kHz Plot on Channel 26

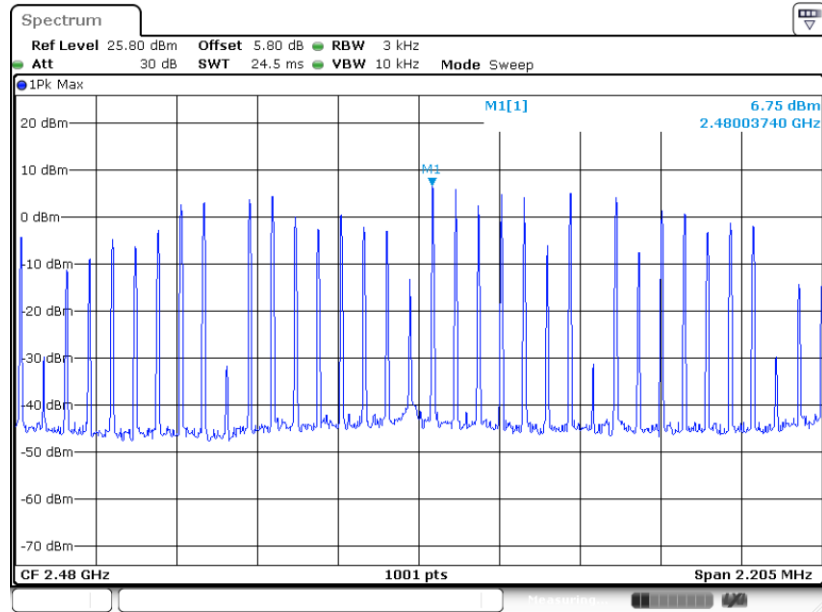

Date: 6.NOV.2027 21:26:20

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

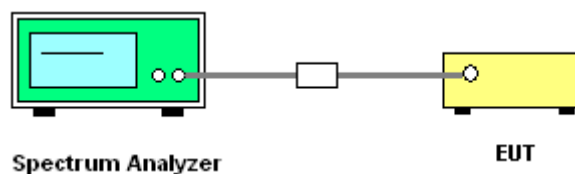




3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 11

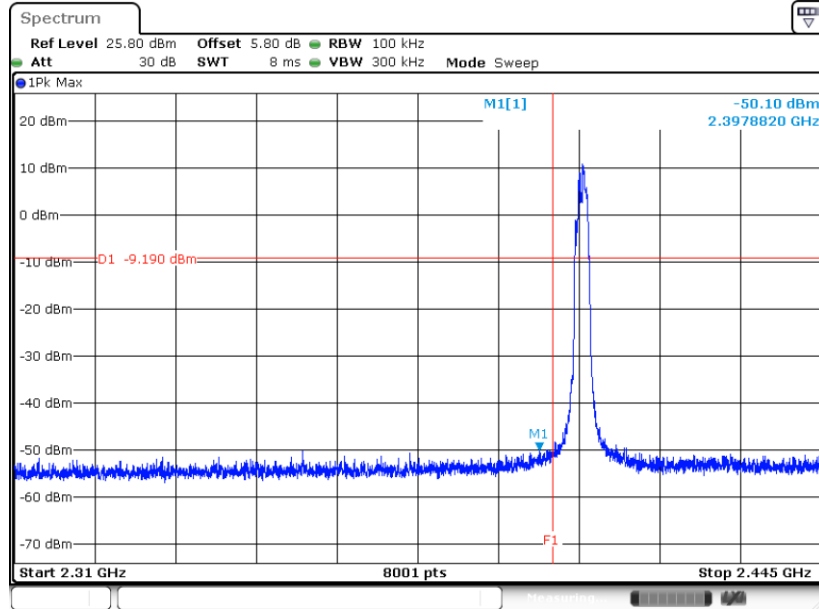

Date: 6.NOV.2027 21:19:17

High Band Edge Plot on Channel 26

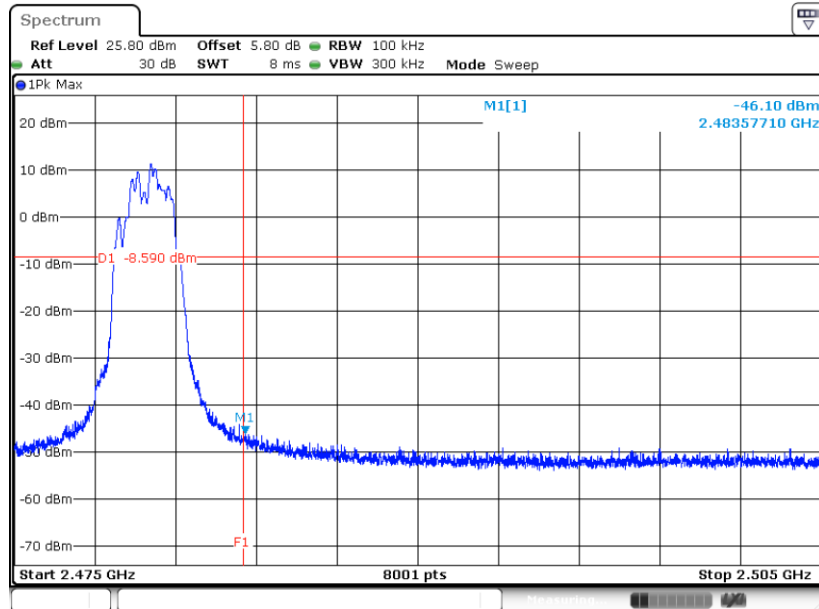


Date: 6.NOV.2027 21:26:58




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Zigbee Channel 11

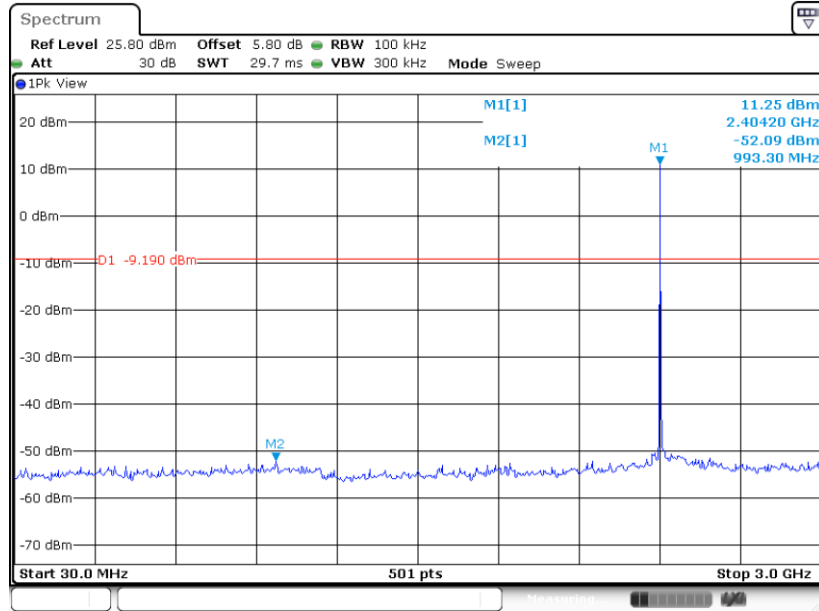

Date: 6.NOV.2027 21:13:21


Conducted Spurious Emission Plot on Zigbee Channel 11

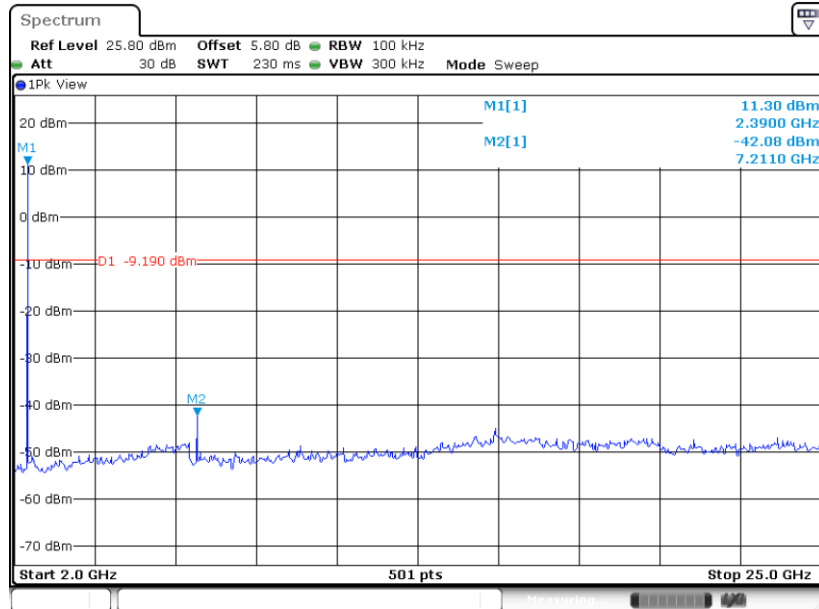

Date: 6.NOV.2027 21:13:41




Conducted Spurious Emission Plot on Zigbee Channel 18

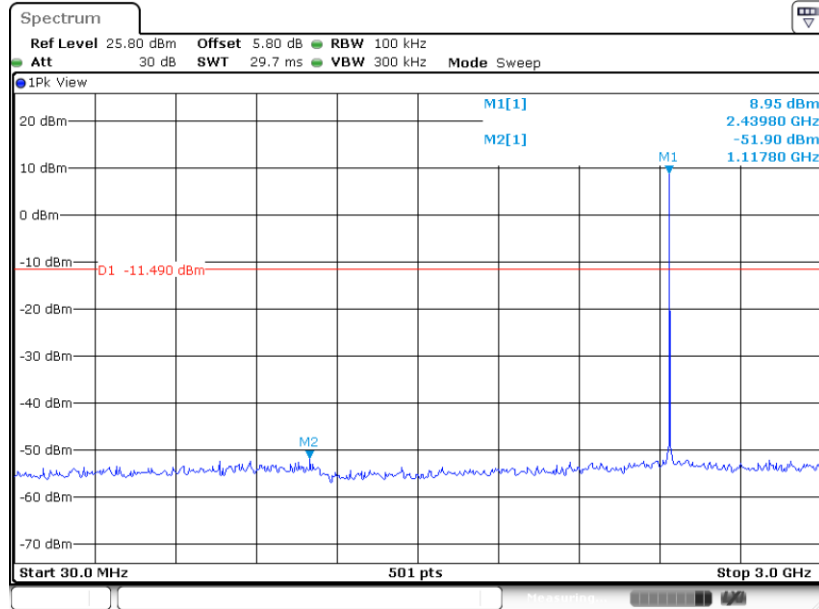

Date: 6.NOV.2027 21:23:02


Conducted Spurious Emission Plot on Zigbee Channel 18

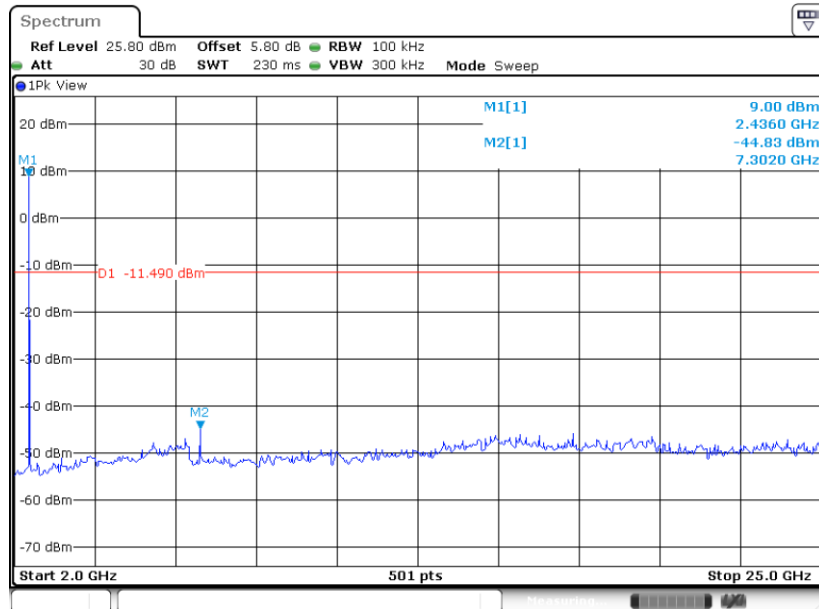

Date: 6.NOV.2027 21:23:22




Conducted Spurious Emission Plot on Zigbee Channel 26

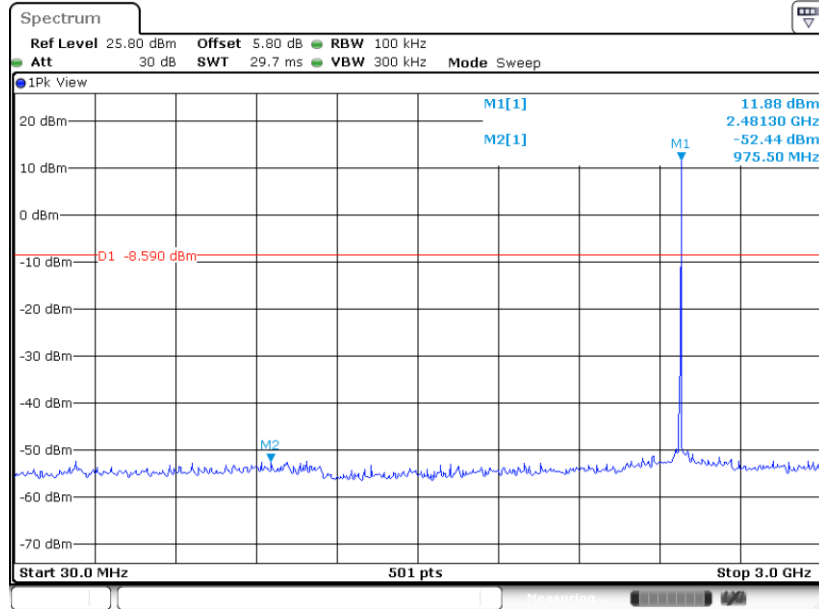

Date: 6.NOV.2027 21:27:19

Conducted Spurious Emission Plot on Zigbee Channel 26

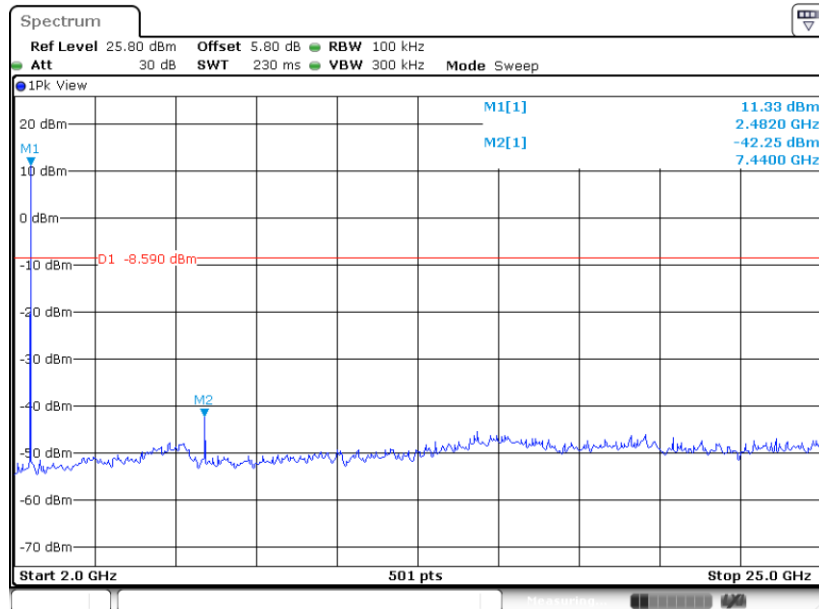

Date: 6.NOV.2027 21:27:39



3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

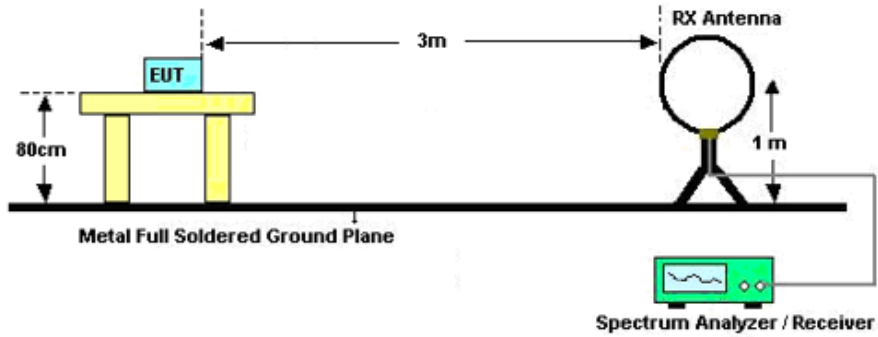

For radiated emissions from 30MHz to 1GHz

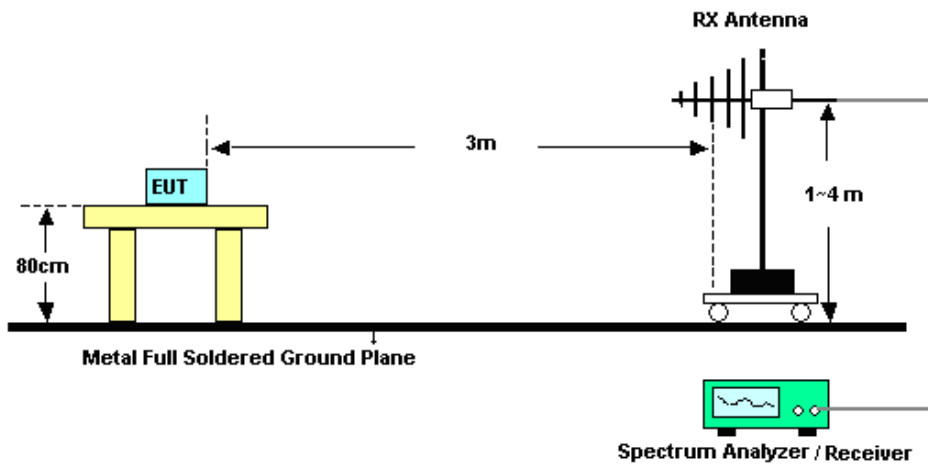

For radiated emissions above 1GHz

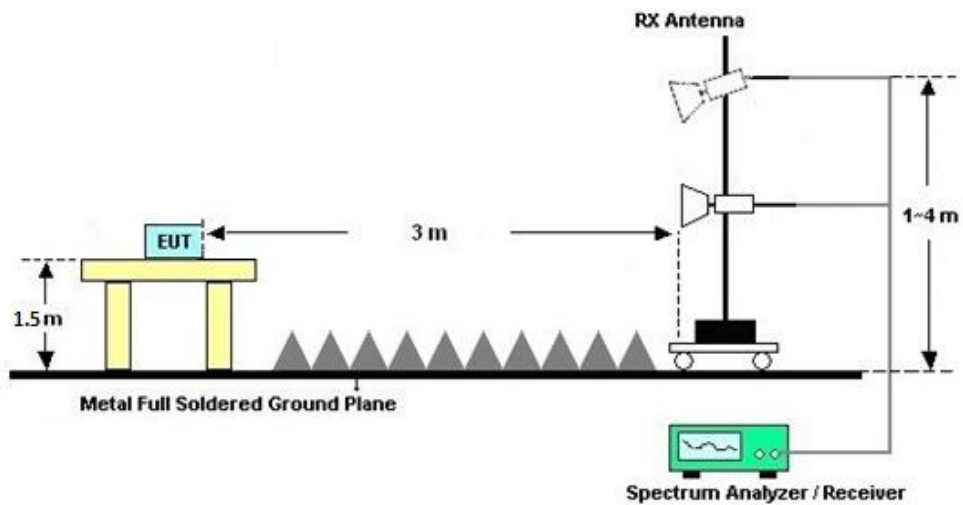



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

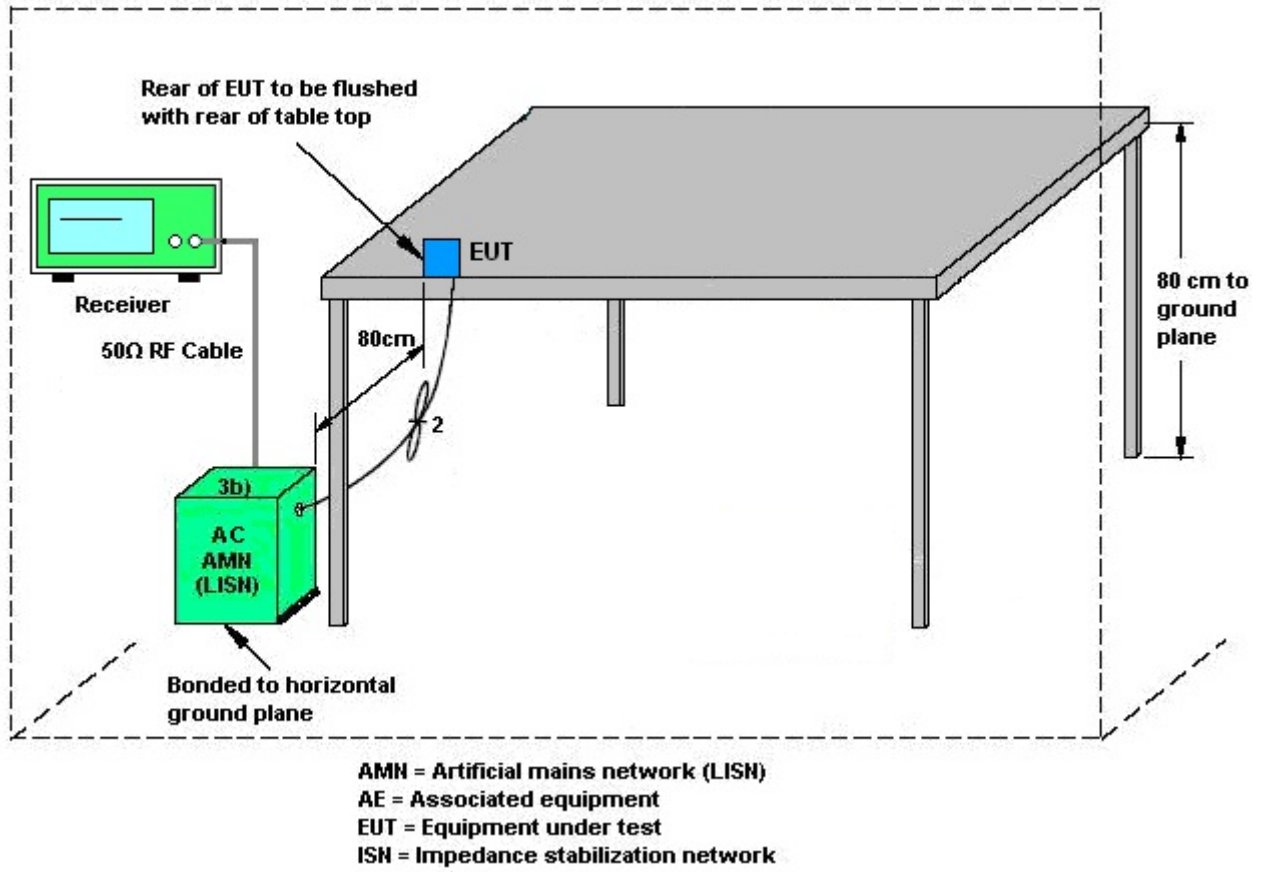

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Aug. 28, 2023~ Nov. 29, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023		Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Aug. 28, 2023~ Nov. 29, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Aug. 28, 2023~ Nov. 29, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2023	Nov. 29, 2023~ Dec. 01, 2023	Oct. 09, 2024	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar. 24, 2023	Nov. 29, 2023~ Dec. 01, 2023	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Nov. 29, 2023~ Dec. 01, 2023	Oct. 09, 2024	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	Nov. 29, 2023~ Dec. 01, 2023	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Nov. 29, 2023~ Dec. 01, 2023	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Nov. 29, 2023~ Dec. 01, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 06, 2023	Nov. 29, 2023~ Dec. 01, 2023	Jul. 05, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Nov. 29, 2023~ Dec. 01, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 10, 2023	Nov. 29, 2023~ Dec. 01, 2023	Oct. 09, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 05, 2023	Nov. 29, 2023~ Dec. 01, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 29, 2023~ Dec. 01, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 29, 2023~ Dec. 01, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 29, 2023~ Dec. 01, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Dec. 22, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Dec. 22, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Dec. 22, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Dec. 22, 2023	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Denstiy	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Zigbee

Test Engineer:	Long Wu	Temperature:	20~26	°C
Test Date:	2023.8.28~2023.11.29	Relative Humidity:	40~51	%

Power setting	
CH 11	14
CH 18	13
CH 26	14

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250Kbps	1	11	2405	2.10	1.47	0.50	Pass
Zigbee	250Kbps	1	18	2440	2.10	1.47	0.50	Pass
Zigbee	250Kbps	1	26	2480	2.10	1.47	0.50	Pass

TEST RESULTS DATA
Peak Power Zigbee

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250Kbps	1	11	2405	18.26	30.00	2.33	20.59	36.00	Pass
Zigbee	250Kbps	1	18	2440	15.43	30.00	2.33	17.76	36.00	Pass
Zigbee	250Kbps	1	26	2480	18.18	30.00	2.33	20.51	36.00	Pass

TEST RESULTS DATA
Average Power Zigbee
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
Zigbee	250Kbps	1	11	2405	0.00	16.78
Zigbee	250Kbps	1	18	2440	0.00	13.85
Zigbee	250Kbps	1	26	2480	0.00	16.67

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250Kbps	1	11	2405	10.81	6.20	2.33	8.00	Pass
Zigbee	250Kbps	1	18	2440	8.51	3.92	2.33	8.00	Pass
Zigbee	250Kbps	1	26	2480	11.41	6.75	2.33	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Thread

Test Engineer:	Long Wu	Temperature:	20~26	°C
Test Date:	2023.8.28~2023.11.29	Relative Humidity:	40~51	%

Power setting	
CH 11	14
CH 18	13
CH 26	14


TEST RESULTS DATA										
Peak Power Thread										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Thread	250Kbps	1	11	2405	18.12	30.00	2.33	20.45	36.00	Pass
Thread	250Kbps	1	18	2440	15.30	30.00	2.33	17.63	36.00	Pass
Thread	250Kbps	1	26	2480	18.07	30.00	2.33	20.40	36.00	Pass

TEST RESULTS DATA						
Average Power Thread						
(Reporting Only)						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
Thread	250Kbps	1	11	2405	0.00	16.68
Thread	250Kbps	1	18	2440	0.00	13.73
Thread	250Kbps	1	26	2480	0.00	16.55



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

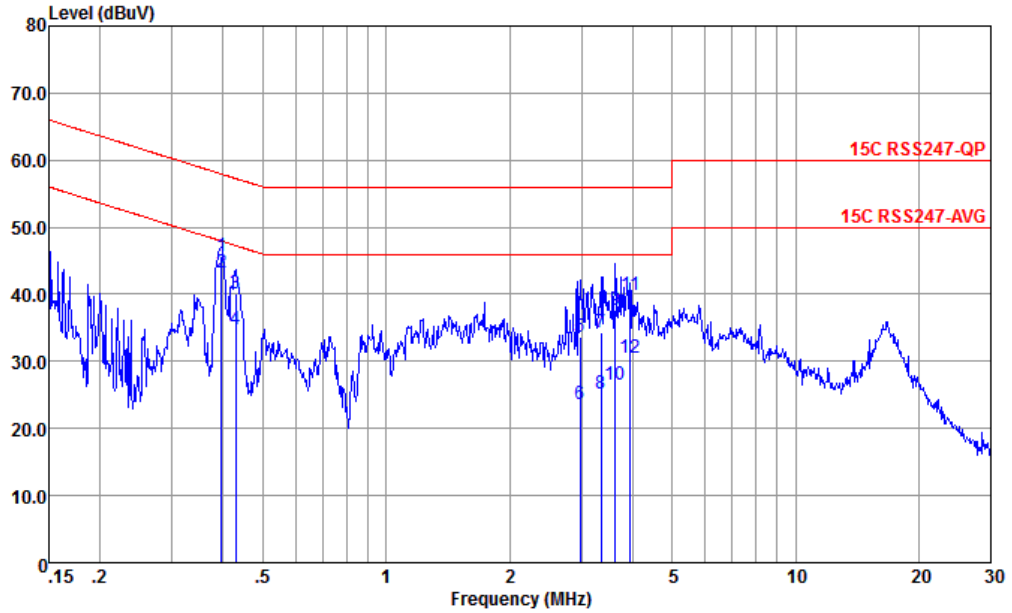


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.396	45.78	-12.17	57.95	35.50	0.00	10.28	QP
2 *	0.396	43.18	-4.77	47.95	32.90	0.00	10.28	Average
3	0.428	40.15	-17.14	57.29	29.90	-0.01	10.26	QP
4	0.428	34.85	-12.44	47.29	24.60	-0.01	10.26	Average
5	2.978	33.59	-22.41	56.00	23.60	-0.08	10.07	QP
6	2.978	23.59	-22.41	46.00	13.60	-0.08	10.07	Average
7	3.346	34.27	-21.73	56.00	24.29	-0.09	10.07	QP
8	3.346	25.17	-20.83	46.00	15.19	-0.09	10.07	Average
9	3.623	37.76	-18.24	56.00	27.79	-0.10	10.07	QP
10	3.623	26.46	-19.54	46.00	16.49	-0.10	10.07	Average
11	3.943	39.95	-16.05	56.00	30.00	-0.11	10.06	QP
12	3.943	30.45	-16.55	46.00	20.50	-0.11	10.06	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

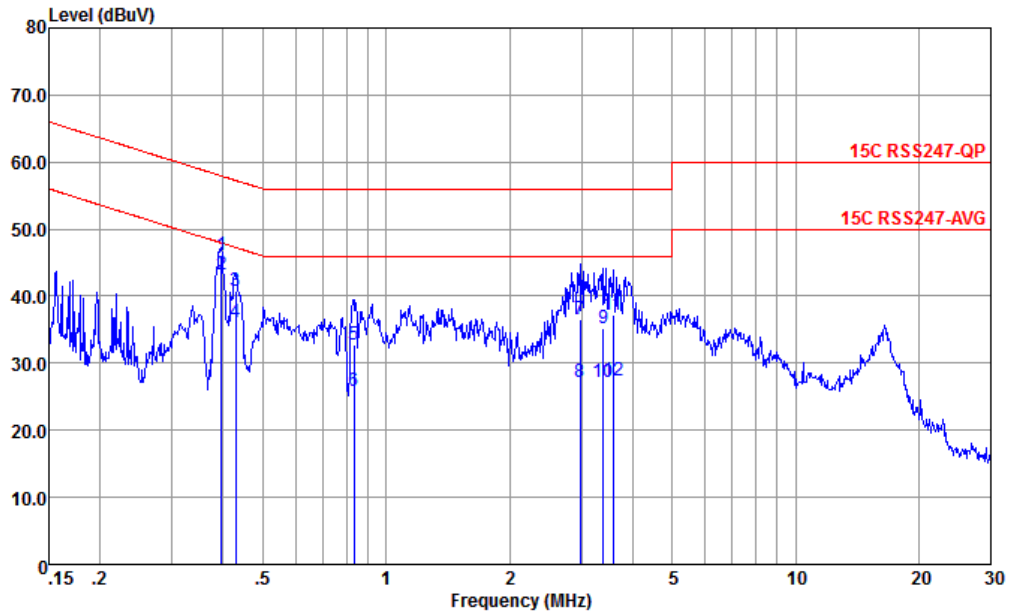

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.396	46.13	-11.82	57.95	35.91	-0.06	10.28	QP
2 *	0.396	43.33	-4.62	47.95	33.11	-0.06	10.28	Average
3	0.428	40.80	-16.49	57.29	30.60	-0.06	10.26	QP
4	0.428	36.10	-11.19	47.29	25.90	-0.06	10.26	Average
5	0.835	32.82	-23.18	56.00	22.79	-0.08	10.11	QP
6	0.835	25.92	-20.08	46.00	15.89	-0.08	10.11	Average
7	2.978	36.64	-19.36	56.00	26.70	-0.13	10.07	QP
8	2.978	27.14	-18.86	46.00	17.20	-0.13	10.07	Average
9	3.399	35.24	-20.76	56.00	25.30	-0.13	10.07	QP
10	3.399	27.14	-18.86	46.00	17.20	-0.13	10.07	Average
11	3.584	37.14	-18.86	56.00	27.20	-0.13	10.07	QP
12	3.584	27.44	-18.56	46.00	17.50	-0.13	10.07	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	30~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark	Power setting
Mode 1	2400-2483.5	1	Zigbee	11	2405	250Kbps	-	14
Mode 2	2400-2483.5	1	Zigbee	18	2440	250Kbps	-	13
Mode 3	2400-2483.5	1	Zigbee	26	2480	250Kbps	-	14
Mode 4	2400-2483.5	1	Zigbee	26	2480	250Kbps	LF	14

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Zigbee	11	2389.95	45.68	54.00	-8.32	H	AVERAGE	Pass	Band Edge
	Zigbee	11	4810.00	47.96	54.00	-6.04	H	AVERAGE	Pass	Harmonic
2	Zigbee	18	-	-	-	-	-	-	-	Band Edge
	Zigbee	18	4880.00	49.12	54.00	-4.88	H	AVERAGE	Pass	Harmonic
3	Zigbee	26	2483.50	52.07	54.00	-1.93	H	AVERAGE	Pass	Band Edge
	Zigbee	26	4960.00	50.87	54.00	-3.13	V	AVERAGE	Pass	Harmonic
4	Zigbee	26	98.87	28.84	43.50	-14.66	H	Peak	Pass	Harmonic



Mode	1																																																																											
	Band Edge																																																																											
	2400-2483.5_Zigbee_CH11_2405MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>57.52</td> <td>74.00</td> <td>-16.48</td> <td>49.26</td> <td>32.07</td> <td>7.11</td> <td>36.92</td> <td>6.00</td> <td>232</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.69	57.52	74.00	-16.48	49.26	32.07	7.11	36.92	6.00	232	176	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>117.82</td> <td>-----</td> <td>-----</td> <td>109.49</td> <td>32.12</td> <td>7.13</td> <td>36.92</td> <td>6.00</td> <td>232</td> <td>176</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2405.00	117.82	-----	-----	109.49	32.12	7.13	36.92	6.00	232	176	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.69	57.52	74.00	-16.48	49.26	32.07	7.11	36.92	6.00	232	176	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2405.00	117.82	-----	-----	109.49	32.12	7.13	36.92	6.00	232	176	PEAK																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>45.68</td> <td>54.00</td> <td>-8.32</td> <td>37.42</td> <td>32.07</td> <td>7.11</td> <td>36.92</td> <td>6.00</td> <td>232</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.95	45.68	54.00	-8.32	37.42	32.07	7.11	36.92	6.00	232	176	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>114.40</td> <td>-----</td> <td>-----</td> <td>106.06</td> <td>32.13</td> <td>7.13</td> <td>36.92</td> <td>6.00</td> <td>232</td> <td>176</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2405.00	114.40	-----	-----	106.06	32.13	7.13	36.92	6.00	232	176	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.95	45.68	54.00	-8.32	37.42	32.07	7.11	36.92	6.00	232	176	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2405.00	114.40	-----	-----	106.06	32.13	7.13	36.92	6.00	232	176	AVERAGE																																																																



Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>50.15</td> <td>74.00</td> <td>-23.85</td> <td>41.90</td> <td>32.07</td> <td>7.10</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>264</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	50.15	74.00	-23.85	41.90	32.07	7.10	36.92	6.00	300	264	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>107.83</td> <td>-----</td> <td>-----</td> <td>99.50</td> <td>32.12</td> <td>7.13</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>264</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	107.83	-----	-----	99.50	32.12	7.13	36.92	6.00	300	264	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.17	50.15	74.00	-23.85	41.90	32.07	7.10	36.92	6.00	300	264	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2405.00	107.83	-----	-----	99.50	32.12	7.13	36.92	6.00	300	264	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>38.64</td> <td>54.00</td> <td>-15.36</td> <td>30.38</td> <td>32.07</td> <td>7.11</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>264</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	38.64	54.00	-15.36	30.38	32.07	7.11	36.92	6.00	300	264	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>104.47</td> <td>-----</td> <td>-----</td> <td>96.13</td> <td>32.13</td> <td>7.13</td> <td>36.92</td> <td>6.00</td> <td>300</td> <td>264</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	104.47	-----	-----	96.13	32.13	7.13	36.92	6.00	300	264	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.69	38.64	54.00	-15.36	30.38	32.07	7.11	36.92	6.00	300	264	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2405.00	104.47	-----	-----	96.13	32.13	7.13	36.92	6.00	300	264	AVERAGE																																																																								



Mode	1																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4810.00</td> <td>52.32</td> <td>74.00</td> <td>-21.68</td> <td>73.46</td> <td>33.90</td> <td>10.21</td> <td>65.25</td> <td>0.00</td> <td>314</td> <td>21</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4810.00</td> <td>47.96</td> <td>54.00</td> <td>-6.04</td> <td>69.10</td> <td>33.90</td> <td>10.21</td> <td>65.25</td> <td>0.00</td> <td>314</td> <td>21</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	52.32	74.00	-21.68	73.46	33.90	10.21	65.25	0.00	314	21	PEAK	2	4810.00	47.96	54.00	-6.04	69.10	33.90	10.21	65.25	0.00	314	21	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4810.00</td> <td>50.78</td> <td>74.00</td> <td>-23.22</td> <td>71.92</td> <td>33.90</td> <td>10.21</td> <td>65.25</td> <td>0.00</td> <td>302</td> <td>160</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4810.00</td> <td>44.33</td> <td>54.00</td> <td>-9.67</td> <td>65.47</td> <td>33.90</td> <td>10.21</td> <td>65.25</td> <td>0.00</td> <td>302</td> <td>160</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	50.78	74.00	-23.22	71.92	33.90	10.21	65.25	0.00	302	160	PEAK	2	4810.00	44.33	54.00	-9.67	65.47	33.90	10.21	65.25	0.00	302	160	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4810.00	52.32	74.00	-21.68	73.46	33.90	10.21	65.25	0.00	314	21	PEAK																																																																																																		
2	4810.00	47.96	54.00	-6.04	69.10	33.90	10.21	65.25	0.00	314	21	AVERAGE																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4810.00	50.78	74.00	-23.22	71.92	33.90	10.21	65.25	0.00	302	160	PEAK																																																																																																		
2	4810.00	44.33	54.00	-9.67	65.47	33.90	10.21	65.25	0.00	302	160	AVERAGE																																																																																																		



Mode	2																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5_Zigbee_CH18_2440MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>53.62</td> <td>74.00</td> <td>-20.38</td> <td>74.70</td> <td>33.90</td> <td>10.30</td> <td>65.28</td> <td>0.00</td> <td>307</td> <td>23</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4880.00</td> <td>49.12</td> <td>54.00</td> <td>-4.88</td> <td>70.20</td> <td>33.90</td> <td>10.30</td> <td>65.28</td> <td>0.00</td> <td>307</td> <td>23</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7320.00</td> <td>44.33</td> <td>74.00</td> <td>-29.67</td> <td>62.38</td> <td>35.70</td> <td>12.72</td> <td>66.47</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4880.00	53.62	74.00	-20.38	74.70	33.90	10.30	65.28	0.00	307	23	PEAK	2	4880.00	49.12	54.00	-4.88	70.20	33.90	10.30	65.28	0.00	307	23	AVERAGE	3	7320.00	44.33	74.00	-29.67	62.38	35.70	12.72	66.47	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>52.17</td> <td>74.00</td> <td>-21.83</td> <td>73.25</td> <td>33.90</td> <td>10.30</td> <td>65.28</td> <td>0.00</td> <td>141</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4880.00</td> <td>47.41</td> <td>54.00</td> <td>-6.59</td> <td>68.49</td> <td>33.90</td> <td>10.30</td> <td>65.28</td> <td>0.00</td> <td>141</td> <td>188</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7321.50</td> <td>48.15</td> <td>74.00</td> <td>-25.85</td> <td>66.21</td> <td>35.70</td> <td>12.72</td> <td>66.48</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4880.00	52.17	74.00	-21.83	73.25	33.90	10.30	65.28	0.00	141	188	PEAK	2	4880.00	47.41	54.00	-6.59	68.49	33.90	10.30	65.28	0.00	141	188	AVERAGE	3	7321.50	48.15	74.00	-25.85	66.21	35.70	12.72	66.48	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	4880.00	53.62	74.00	-20.38	74.70	33.90	10.30	65.28	0.00	307	23	PEAK																																																																																																																										
2	4880.00	49.12	54.00	-4.88	70.20	33.90	10.30	65.28	0.00	307	23	AVERAGE																																																																																																																										
3	7320.00	44.33	74.00	-29.67	62.38	35.70	12.72	66.47	0.00	---	---	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	4880.00	52.17	74.00	-21.83	73.25	33.90	10.30	65.28	0.00	141	188	PEAK																																																																																																																										
2	4880.00	47.41	54.00	-6.59	68.49	33.90	10.30	65.28	0.00	141	188	AVERAGE																																																																																																																										
3	7321.50	48.15	74.00	-25.85	66.21	35.70	12.72	66.48	0.00	---	---	PEAK																																																																																																																										



Mode	3																																																																											
	Band Edge																																																																											
	2400-2483.5_Zigbee_CH26_2480MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.86</td> <td>63.83</td> <td>74.00</td> <td>-10.17</td> <td>55.01</td> <td>32.52</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>255</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.86	63.83	74.00	-10.17	55.01	32.52	7.26	36.96	6.00	255	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>115.74</td> <td>-----</td> <td>-----</td> <td>106.95</td> <td>32.50</td> <td>7.25</td> <td>36.96</td> <td>6.00</td> <td>255</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	115.74	-----	-----	106.95	32.50	7.25	36.96	6.00	255	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2483.86	63.83	74.00	-10.17	55.01	32.52	7.26	36.96	6.00	255	0	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2480.00	115.74	-----	-----	106.95	32.50	7.25	36.96	6.00	255	0	PEAK																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>52.07</td> <td>54.00</td> <td>-1.93</td> <td>43.25</td> <td>32.52</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>255</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.50	52.07	54.00	-1.93	43.25	32.52	7.26	36.96	6.00	255	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>112.32</td> <td>-----</td> <td>-----</td> <td>103.53</td> <td>32.50</td> <td>7.25</td> <td>36.96</td> <td>6.00</td> <td>255</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	112.32	-----	-----	103.53	32.50	7.25	36.96	6.00	255	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2483.50	52.07	54.00	-1.93	43.25	32.52	7.26	36.96	6.00	255	0	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2480.00	112.32	-----	-----	103.53	32.50	7.25	36.96	6.00	255	0	AVERAGE																																																																



Mode	3																																																																											
	Band Edge																																																																											
	2400-2483.5_Zigbee_CH26_2480MHz																																																																											
ANT	1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>57.18</td> <td>74.00</td> <td>-16.82</td> <td>48.36</td> <td>32.52</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>399</td> <td>80 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.50	57.18	74.00	-16.82	48.36	32.52	7.26	36.96	6.00	399	80 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>109.58</td> <td>-----</td> <td>-----</td> <td>100.79</td> <td>32.50</td> <td>7.25</td> <td>36.96</td> <td>6.00</td> <td>399</td> <td>80 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	109.58	-----	-----	100.79	32.50	7.25	36.96	6.00	399	80 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.50	57.18	74.00	-16.82	48.36	32.52	7.26	36.96	6.00	399	80 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2480.00	109.58	-----	-----	100.79	32.50	7.25	36.96	6.00	399	80 PEAK																																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>45.59</td> <td>54.00</td> <td>-8.41</td> <td>36.77</td> <td>32.52</td> <td>7.26</td> <td>36.96</td> <td>6.00</td> <td>399</td> <td>80 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.50	45.59	54.00	-8.41	36.77	32.52	7.26	36.96	6.00	399	80 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>106.09</td> <td>-----</td> <td>-----</td> <td>97.30</td> <td>32.50</td> <td>7.25</td> <td>36.96</td> <td>6.00</td> <td>399</td> <td>80 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	106.09	-----	-----	97.30	32.50	7.25	36.96	6.00	399	80 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.50	45.59	54.00	-8.41	36.77	32.52	7.26	36.96	6.00	399	80 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2480.00	106.09	-----	-----	97.30	32.50	7.25	36.96	6.00	399	80 AVERAGE																																																																		



Mode	3																																																																																																																																																				
	Harmonic																																																																																																																																																				
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																																																				
ANT	1																																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																																			
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3307.50</td> <td>43.17</td> <td>86.18</td> <td>-43.01</td> <td>67.64</td> <td>32.69</td> <td>8.42</td> <td>65.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>52.39</td> <td>74.00</td> <td>-21.61</td> <td>73.28</td> <td>34.02</td> <td>10.40</td> <td>65.31</td> <td>0.00</td> <td>105</td> <td>272</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4960.00</td> <td>47.71</td> <td>54.00</td> <td>-6.29</td> <td>68.60</td> <td>34.02</td> <td>10.40</td> <td>65.31</td> <td>0.00</td> <td>105</td> <td>272</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7438.50</td> <td>48.59</td> <td>74.00</td> <td>-25.41</td> <td>66.88</td> <td>35.74</td> <td>12.78</td> <td>66.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3307.50	43.17	86.18	-43.01	67.64	32.69	8.42	65.58	0.00	---	---	PEAK	2	4960.00	52.39	74.00	-21.61	73.28	34.02	10.40	65.31	0.00	105	272	PEAK	3	4960.00	47.71	54.00	-6.29	68.60	34.02	10.40	65.31	0.00	105	272	AVERAGE	4	7438.50	48.59	74.00	-25.41	66.88	35.74	12.78	66.81	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>55.10</td> <td>74.00</td> <td>-18.90</td> <td>75.99</td> <td>34.02</td> <td>10.40</td> <td>65.31</td> <td>0.00</td> <td>100</td> <td>186</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>50.87</td> <td>54.00</td> <td>-3.13</td> <td>71.76</td> <td>34.02</td> <td>10.40</td> <td>65.31</td> <td>0.00</td> <td>100</td> <td>186</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7438.50</td> <td>48.78</td> <td>74.00</td> <td>-25.22</td> <td>67.07</td> <td>35.74</td> <td>12.78</td> <td>66.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	55.10	74.00	-18.90	75.99	34.02	10.40	65.31	0.00	100	186	PEAK	2	4960.00	50.87	54.00	-3.13	71.76	34.02	10.40	65.31	0.00	100	186	AVERAGE	3	7438.50	48.78	74.00	-25.22	67.07	35.74	12.78	66.81	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1	3307.50	43.17	86.18	-43.01	67.64	32.69	8.42	65.58	0.00	---	---	PEAK																																																																																																																																									
2	4960.00	52.39	74.00	-21.61	73.28	34.02	10.40	65.31	0.00	105	272	PEAK																																																																																																																																									
3	4960.00	47.71	54.00	-6.29	68.60	34.02	10.40	65.31	0.00	105	272	AVERAGE																																																																																																																																									
4	7438.50	48.59	74.00	-25.41	66.88	35.74	12.78	66.81	0.00	---	---	PEAK																																																																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1	4960.00	55.10	74.00	-18.90	75.99	34.02	10.40	65.31	0.00	100	186	PEAK																																																																																																																																									
2	4960.00	50.87	54.00	-3.13	71.76	34.02	10.40	65.31	0.00	100	186	AVERAGE																																																																																																																																									
3	7438.50	48.78	74.00	-25.22	67.07	35.74	12.78	66.81	0.00	---	---	PEAK																																																																																																																																									
Peak Avg																																																																																																																																																					




Mode	4																																																																																																																																																																																																	
	18G-25G																																																																																																																																																																																																	
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak QP	<table border="1"> <thead> <tr> <th></th> <th>Over Freq</th> <th>Limit Level</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>PoI/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.91</td> <td>19.54</td> <td>+20.46</td> <td>40.00</td> <td>10.21</td> <td>41.51</td> <td>0.76</td> <td>32.94</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>98.87</td> <td>28.04</td> <td>-14.06</td> <td>43.50</td> <td>32.75</td> <td>27.46</td> <td>1.50</td> <td>32.87</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>3</td> <td>239.52</td> <td>23.42</td> <td>-22.50</td> <td>46.00</td> <td>28.02</td> <td>25.82</td> <td>2.36</td> <td>32.78</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>4</td> <td>288.99</td> <td>27.33</td> <td>-18.67</td> <td>46.00</td> <td>30.07</td> <td>27.48</td> <td>2.59</td> <td>32.81</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>5</td> <td>559.62</td> <td>25.19</td> <td>-20.81</td> <td>46.00</td> <td>21.41</td> <td>33.27</td> <td>3.61</td> <td>33.10</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>6</td> <td>880.69</td> <td>29.43</td> <td>-16.57</td> <td>46.00</td> <td>20.41</td> <td>36.51</td> <td>4.54</td> <td>32.03</td> <td>---</td> <td>---</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>		Over Freq	Limit Level	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	PoI/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	32.91	19.54	+20.46	40.00	10.21	41.51	0.76	32.94	---	---	Peak HORIZONTAL	2	98.87	28.04	-14.06	43.50	32.75	27.46	1.50	32.87	---	---	Peak HORIZONTAL	3	239.52	23.42	-22.50	46.00	28.02	25.82	2.36	32.78	---	---	Peak HORIZONTAL	4	288.99	27.33	-18.67	46.00	30.07	27.48	2.59	32.81	---	---	Peak HORIZONTAL	5	559.62	25.19	-20.81	46.00	21.41	33.27	3.61	33.10	---	---	Peak HORIZONTAL	6	880.69	29.43	-16.57	46.00	20.41	36.51	4.54	32.03	---	---	Peak HORIZONTAL	<table border="1"> <thead> <tr> <th></th> <th>Over Freq</th> <th>Limit Level</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>PoI/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>44.55</td> <td>23.14</td> <td>-16.86</td> <td>40.00</td> <td>32.46</td> <td>22.70</td> <td>0.96</td> <td>32.98</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>99.84</td> <td>20.36</td> <td>-23.14</td> <td>43.50</td> <td>23.64</td> <td>28.08</td> <td>1.51</td> <td>32.87</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>3</td> <td>263.77</td> <td>20.40</td> <td>-25.60</td> <td>46.00</td> <td>19.41</td> <td>31.29</td> <td>2.48</td> <td>32.78</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>4</td> <td>324.88</td> <td>20.44</td> <td>-25.56</td> <td>46.00</td> <td>19.27</td> <td>31.31</td> <td>2.74</td> <td>32.88</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>5</td> <td>558.65</td> <td>26.35</td> <td>-19.65</td> <td>46.00</td> <td>20.16</td> <td>35.68</td> <td>3.61</td> <td>33.10</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>6</td> <td>856.44</td> <td>29.48</td> <td>-16.52</td> <td>46.00</td> <td>19.23</td> <td>38.08</td> <td>4.47</td> <td>32.30</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>		Over Freq	Limit Level	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	PoI/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	44.55	23.14	-16.86	40.00	32.46	22.70	0.96	32.98	---	---	Peak VERTICAL	2	99.84	20.36	-23.14	43.50	23.64	28.08	1.51	32.87	---	---	Peak VERTICAL	3	263.77	20.40	-25.60	46.00	19.41	31.29	2.48	32.78	---	---	Peak VERTICAL	4	324.88	20.44	-25.56	46.00	19.27	31.31	2.74	32.88	---	---	Peak VERTICAL	5	558.65	26.35	-19.65	46.00	20.16	35.68	3.61	33.10	---	---	Peak VERTICAL	6	856.44	29.48	-16.52	46.00	19.23	38.08	4.47	32.30	---	---	Peak VERTICAL
		Over Freq	Limit Level	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	PoI/Phas																																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																																																																																																																									
1	32.91	19.54	+20.46	40.00	10.21	41.51	0.76	32.94	---	---	Peak HORIZONTAL																																																																																																																																																																																							
2	98.87	28.04	-14.06	43.50	32.75	27.46	1.50	32.87	---	---	Peak HORIZONTAL																																																																																																																																																																																							
3	239.52	23.42	-22.50	46.00	28.02	25.82	2.36	32.78	---	---	Peak HORIZONTAL																																																																																																																																																																																							
4	288.99	27.33	-18.67	46.00	30.07	27.48	2.59	32.81	---	---	Peak HORIZONTAL																																																																																																																																																																																							
5	559.62	25.19	-20.81	46.00	21.41	33.27	3.61	33.10	---	---	Peak HORIZONTAL																																																																																																																																																																																							
6	880.69	29.43	-16.57	46.00	20.41	36.51	4.54	32.03	---	---	Peak HORIZONTAL																																																																																																																																																																																							
	Over Freq	Limit Level	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	PoI/Phas																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																																																																																																																									
1	44.55	23.14	-16.86	40.00	32.46	22.70	0.96	32.98	---	---	Peak VERTICAL																																																																																																																																																																																							
2	99.84	20.36	-23.14	43.50	23.64	28.08	1.51	32.87	---	---	Peak VERTICAL																																																																																																																																																																																							
3	263.77	20.40	-25.60	46.00	19.41	31.29	2.48	32.78	---	---	Peak VERTICAL																																																																																																																																																																																							
4	324.88	20.44	-25.56	46.00	19.27	31.31	2.74	32.88	---	---	Peak VERTICAL																																																																																																																																																																																							
5	558.65	26.35	-19.65	46.00	20.16	35.68	3.61	33.10	---	---	Peak VERTICAL																																																																																																																																																																																							
6	856.44	29.48	-16.52	46.00	19.23	38.08	4.47	32.30	---	---	Peak VERTICAL																																																																																																																																																																																							



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee	96.08	4.261	0.235	0.24KHz

zigbee

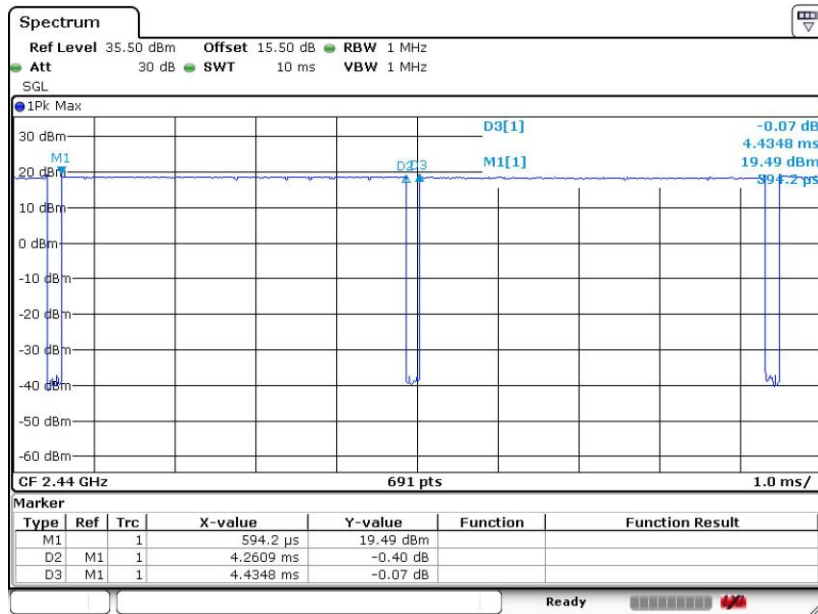

Date: 21.AUG.2023 16:33:47