



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC Part 22 Subpart H / Part 24 Subpart E

Report Reference No. : CTL1611246101-WF

Compiled by:
(position+printed name+signature)

Allen Wang
(File administrators)

Allen Wang

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name : Wireless Infrared Scouting Camera

Model/Type reference : UM595-HD-3GV

List Model(s)..... : /

Trade Mark..... : Covert

FCC ID..... : 2AC8CUM595-HD-3GV

Applicant's name : UOVision Technology (HONGKONG) Co., Ltd

Address of applicant..... : UNIT A3, 9/F SILVER INTERNATIONAL TOWER, 707-713
NATHAN ROAD, MONGKOK, KOWLOON, HONGKONG

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification :

Standard : FCC CFR Title 47 Part 2, Part 22H and Part 24E
EIA/TIA 603-D: 2010
KDB 971168 D01

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF : Dated 2011-01

Date of Receipt..... : Jun. 08, 2017

Date of Test Date..... : Jun. 09, 2017–Jul. 07, 2017

Data of Issue..... : Jul. 08, 2017

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1611246101-WF	Jul. 08, 2017
		Date of issue

Equipment under Test : Wireless Infrared Scouting Camera

Model /Type : UM595-HD-3GV

Listed Models : /

Applicant : **UOVision Technology (HONGKONG) Co., Ltd**

Address : UNIT A3, 9/F SILVER INTERNATIONAL TOWER,
707-713 NATHAN ROAD, MONGKOK,
KOWLOON, HONGKONG

Manufacturer : **UOVision Technology (Shenzhen) Co., Ltd.**

Address : 3rd Floor, East Wing, the 4th Building, ZhongGuan
HongHualing Industrial Zone, 1268# Liuxian BLVD,
Nanshan District, Shenzhen, CHN 518055

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.


**** Modified History ****

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2017-07-08	CTL1611246101-WF	Tracy Qi



Contents

1	SUMMARY.....	5
1.1	TEST STANDARDS	5
1.2	TEST DESCRIPTION.....	5
1.3	TEST FACILITY	6
1.4	STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2	GENERAL INFORMATION	7
2.1	ENVIRONMENTAL CONDITIONS	7
2.2	GENERAL DESCRIPTION OF EUT	7
2.3	DESCRIPTION OF TEST MODES AND TEST FREQUENCY	7
2.4	EQUIPMENTS USED DURING THE TEST	8
2.5	RELATED SUBMITTAL(S) / GRANT (S)	8
2.6	MODIFICATIONS.....	8
3	TEST CONDITIONS AND RESULTS	9
3.1	OUTPUT POWER	9
3.2	OCCUPIED BANDWIDTH	13
3.3	BAND EDGE COMPLIANCE	16
3.4	SPURIOUS EMISSION	19
3.5	FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS	29
4	TEST SETUP PHOTOS OF THE EUT	31

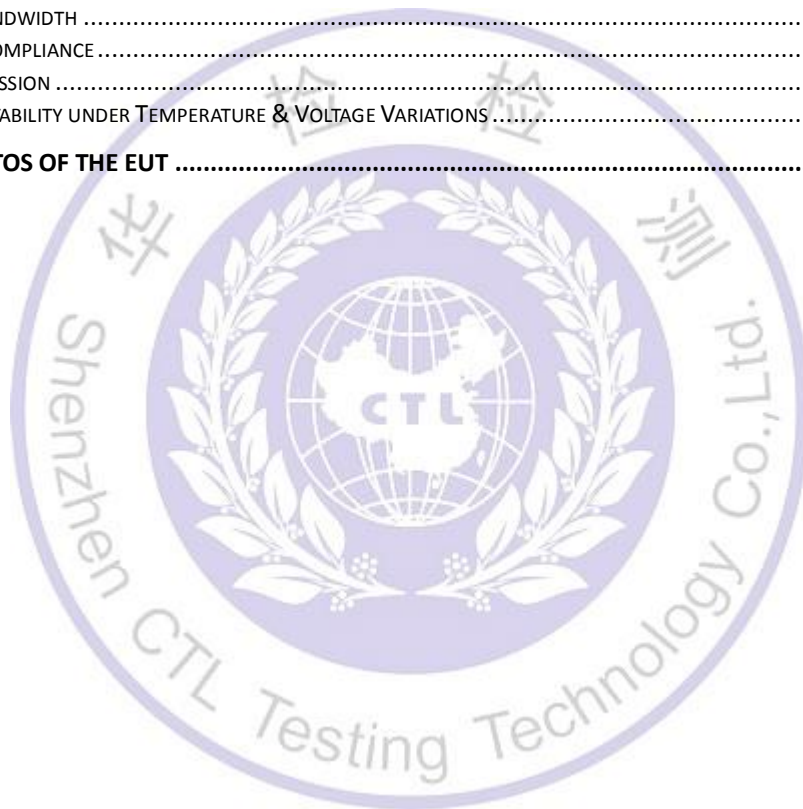

1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24](#): [PUBLIC](#) MOBILE SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01:v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.26-2015](#) American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 ©	Pass
Peak-to-Average Ratio	Part 24.232 (d)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability	Part 2.1055 Part 22.355 Part 24.235	Pass

1.2 Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. Quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	Wireless Infrared Scouting Camera
Model/Type reference:	UM595-HD-3GV
Power supply:	DC 6.0V from battery
CDMA	
Operation Band:	BC0 TX: 824.70 MHz ~ 848.31 MHz
	BC1 TX: 1851.25 MHz ~ 1908.75 MHz
	BC0 RX: 869.70 MHz ~ 893.31 MHz
	BC1 RX: 1931.25 MHz ~ 1988.75 MHz
Supported Type:	CDMA200 1x RTT/CDMA2000 1xEV-DO - Revision A
Modulation Type:	QPSK
Antenna type:	External antenna
Antenna gain:	5dBi

Note: For more details, refer to the user's manual of the EUT.

2.3 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CUM200 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Test Frequency:

Cellular Band		PCS Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1013	824.70	25	1851.25
384	836.52	600	1880.00
777	848.31	1175	1908.75

2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2017/06/02	2018/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061714	2017/06/02	2018/06/01
EMI Test Receiver	R&S	ESCI	103710	2017/06/02	2018/06/01
Spectrum Analyzer	Agilent	E4407B	MY45108355	2017/06/02	2018/06/01
Controller	EM Electronics	Controller EM 1000	N/A	2017/05/21	2018/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2017/05/19	2018/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062014	2017/05/19	2018/05/18
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2017/05/19	2018/05/18
Amplifier	Agilent	8349B	3008A02306	2017/05/19	2018/05/18
Amplifier	Agilent	8447D	2944A10176	2017/05/19	2018/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2017/05/20	2018/05/19
Radio Communication Tester	R&S	CMU200	115419	2017/05/22	2018/05/21
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2017/05/20	2018/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2017/05/20	2018/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2017/05/20	2018/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2017/05/20	2018/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2017/05/20	2018/05/19
Directional Coupler	Agilent	87300B	3116A03638	2017/05/20	2018/05/19

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AC8CUM595-HD-3GV filing to comply with of the FCC Part 22 and Part 24 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.

3 TEST CONDITIONS AND RESULTS

3.1 Output Power



LIMIT

BC0: 7W

BC1: 2W

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

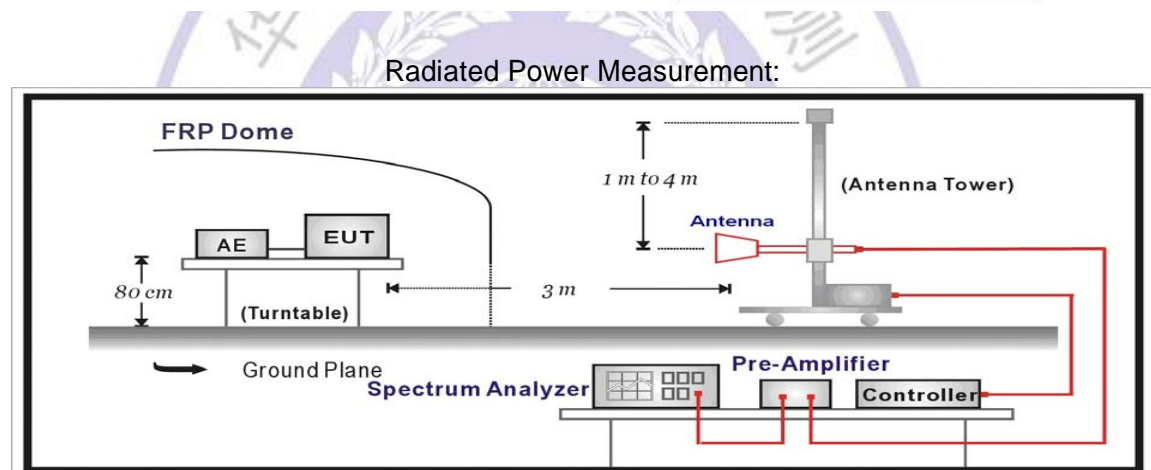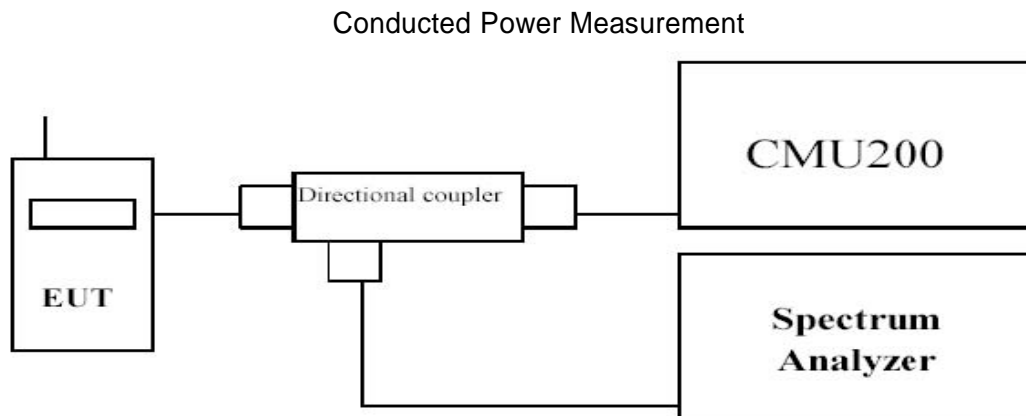

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter

- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

TEST RESULTS**Conducted Measurement:**

EUT Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)	Peak-to-Average Ratio (dB)	Limit (dBm)	Result
CDMA 1xRTT, BC0, CELL BAND	1013	824.7	23.15	/	38.45	Pass
	384	836.52	23.22	/		
	777	848.31	23.19	/		
CDMA2000 EVDO REV A 850MHz BAND	1013	824.7	23.41	/	38.45	Pass
	384	836.52	23.25	/		
	777	848.31	23.32	/		
CDMA2000 1xRTT, BC1, PCS BAND	25	1851.25	23.20	3.15	33.01	Pass
	600	1880.00	23.26	3.26		
	1175	1908.75	23.21	3.45		
CDMA2000 EVDO REV A 1900MHz BAND	25	1851.25	23.19	3.22	33.01	Pass
	600	1880.00	23.22	3.56		
	1175	1908.75	23.23	3.74		

Note:

1. maximum PK burst power=maximum Avg. burst power+Peak-to-Average Ratio.
2. The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.
3. This device was tested under all R.C.s and S.O.s. The worst case is reported with RC1/SO55 for 1xRTT and FTAP Rate 2Slot 307.2 kbps/RETAP Rate 2048 bits for EVDO Rev.A with 'All Up' power control bits.

Radiated Measurement:

Note: 1. The field strength of radiation emission was measured in the following position: EUT stand-up position (Zaxis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis was reported.

Note: 2 We test the H direction and V direction and V direction is worse.

CDMA 1xRTT, BC0, CELL BAND

Channel	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1013	-14.55	2.42	8.45	2.15	36.82	26.15	38.45	12.30	V
384	-13.77	2.46	8.45	2.15	36.82	26.89	38.45	11.56	V
777	-14.08	2.53	8.36	2.15	36.82	26.42	38.45	12.03	V

CDMA2000 EVDO REV A 850MHz BAND

Channel	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1013	-14.49	2.42	8.45	2.15	36.82	26.21	38.45	12.24	V
384	-14.11	2.46	8.45	2.15	36.82	26.55	38.45	11.90	V
777	-14.18	2.53	8.36	2.15	36.82	26.32	38.45	12.13	V

CDMA2000 1xRTT, BC1, PCS BAND

Channel	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
25	-15.28	3.41	10.24	33.6	25.15	33.01	7.86	V
600	-14.10	3.49	10.24	33.6	26.25	33.01	6.76	V
1175	-14.30	3.55	10.23	33.6	25.98	33.01	7.03	V

CDMA2000 EVDO REV A 1900MHz BAND

Channel	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
25	-14.99	3.41	10.24	33.6	25.44	33.01	7.57	V
600	-14.21	3.49	10.24	33.6	26.14	33.01	6.87	V
1175	-14.04	3.55	10.23	33.6	26.24	33.01	6.77	V

Remark:


1. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
2. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.

3.2 Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

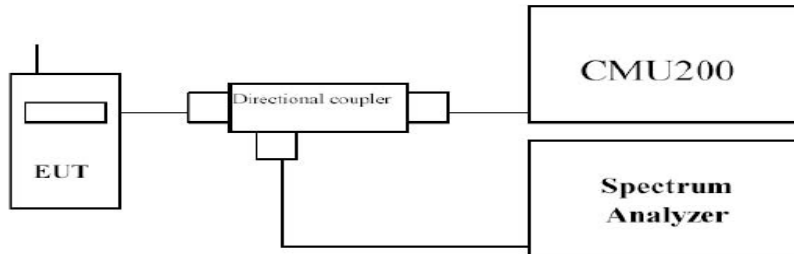



TEST PROCEDURE

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, VBW \geq 3 times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (MHz)	-26dB bandwidth (MHz)
CDMA 1xRTT, BC0, CELL BAND	1013	824.70	1.2822	1.432
	384	836.52	1.2735	1.433
	777	848.31	1.2816	1.444
CDMA2000 EVDO REV A 850MHz BAND	1013	824.70	1.2747	1.431
	384	836.52	1.2812	1.447
	777	848.31	1.2781	1.440
CDMA2000 1xRTT, BC1, PCS BAND	25	1851.25	1.2789	1.461
	600	1880.00	1.2700	1.422
	1175	1908.75	1.2747	1.432
CDMA2000 EVDO REV A 1900MHz BAND	25	1851.25	1.2764	1.448
	600	1880.00	1.2713	1.427
	1175	1908.75	1.2769	1.434

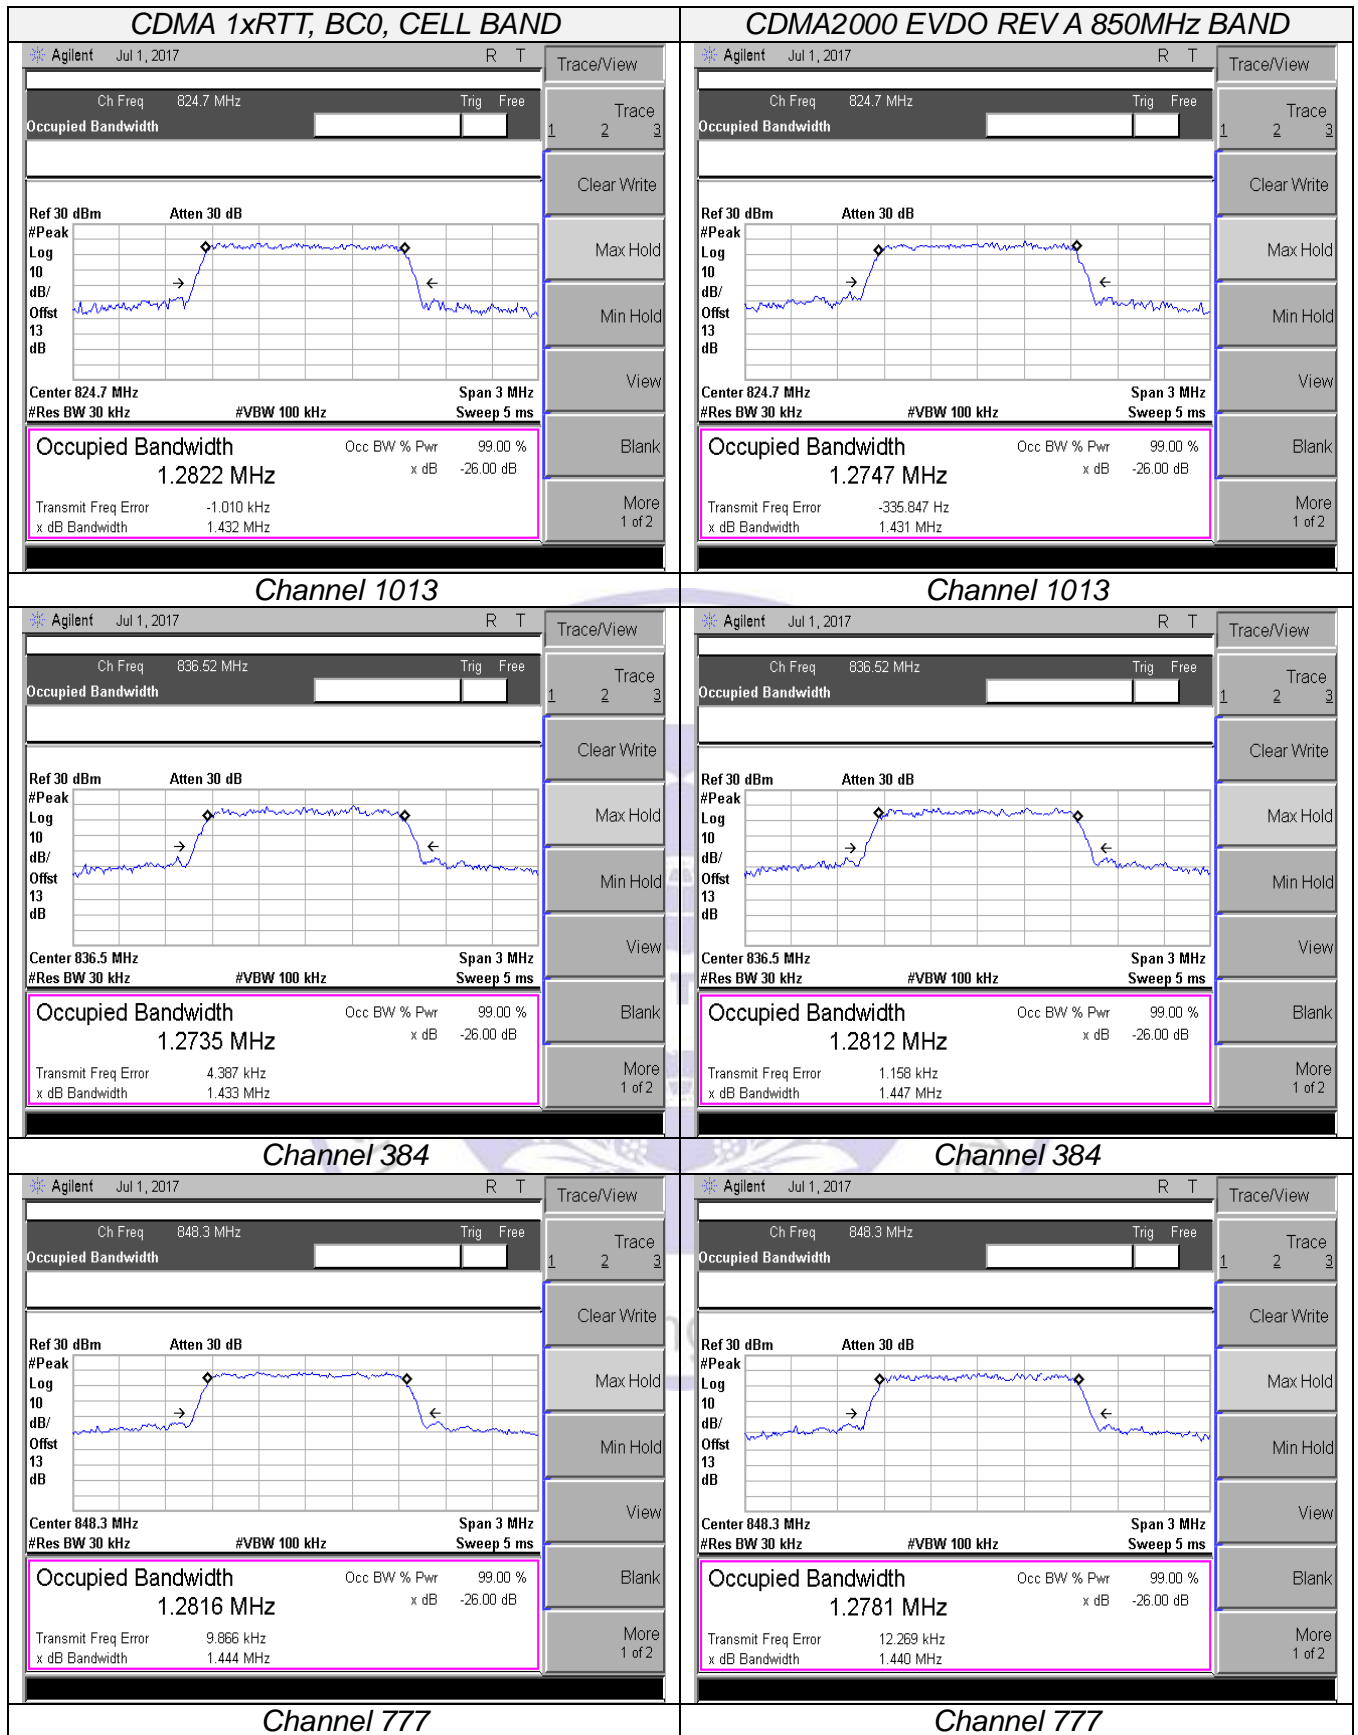

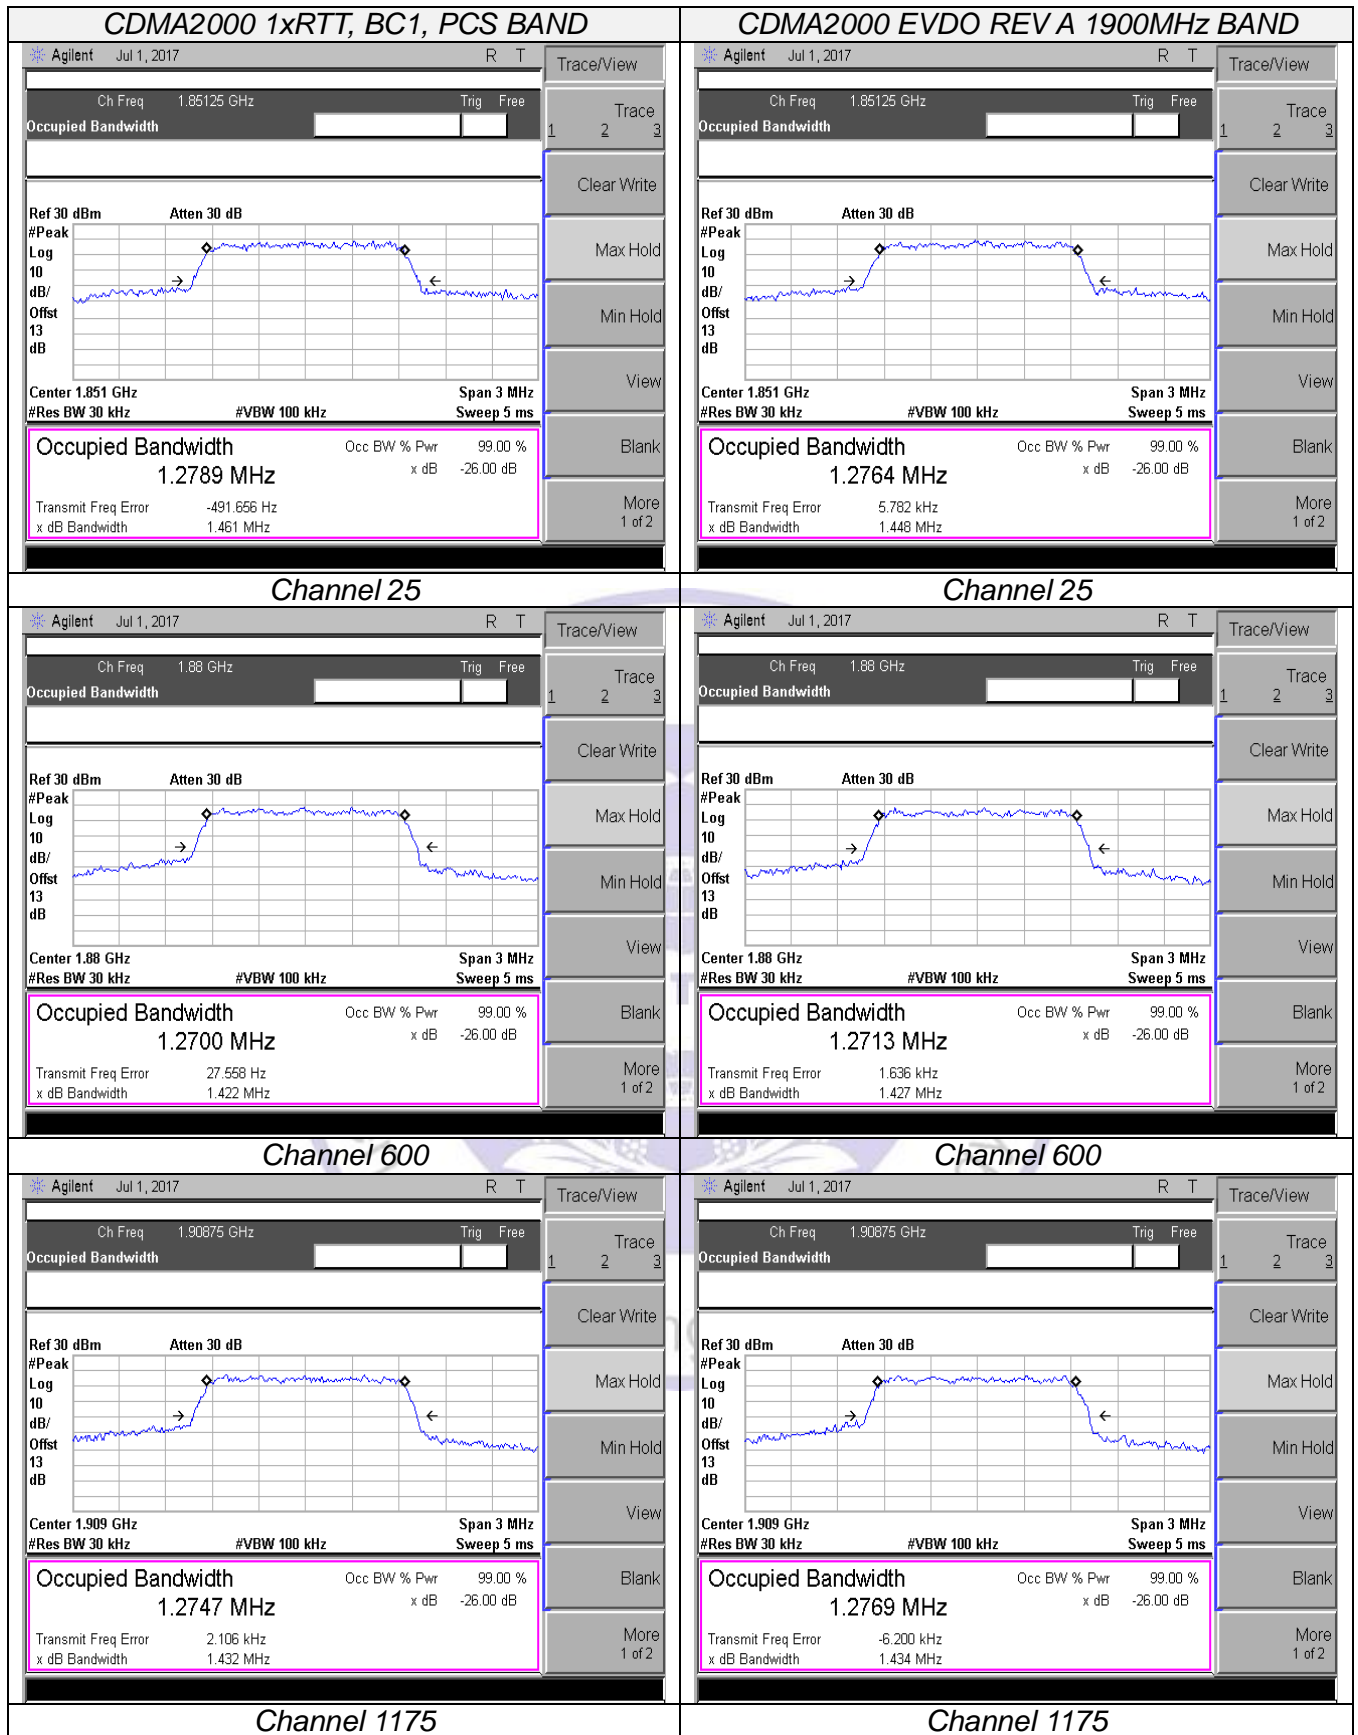


3.3 Band Edge compliance

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


TEST CONFIGURATION


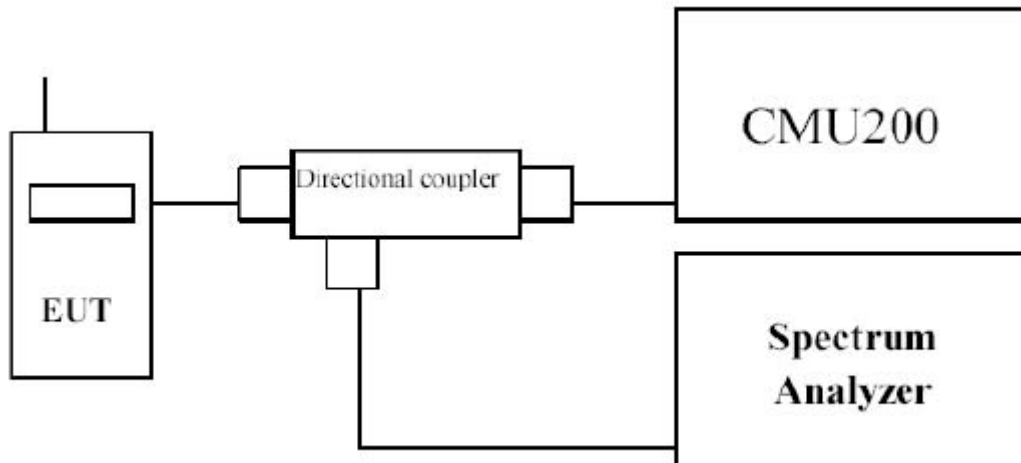



TEST PROCEDURE

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

TEST RESULTS

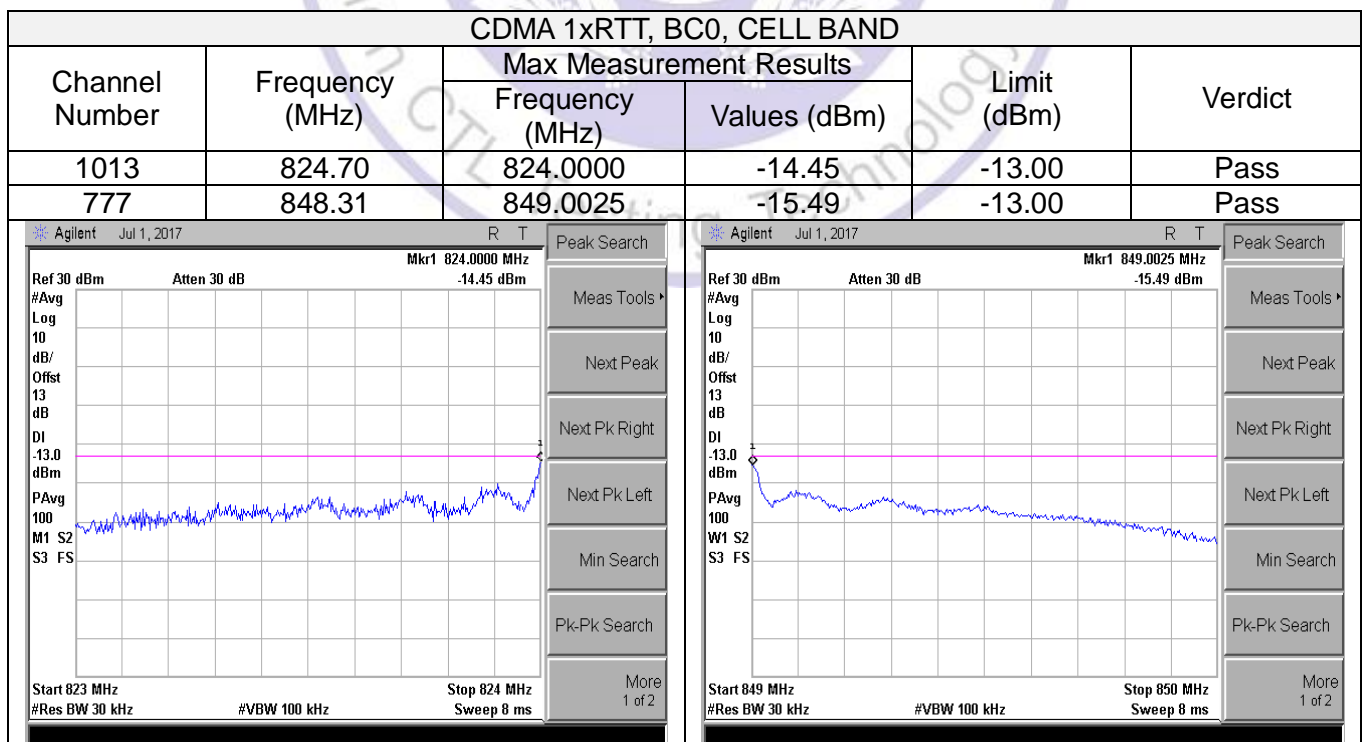

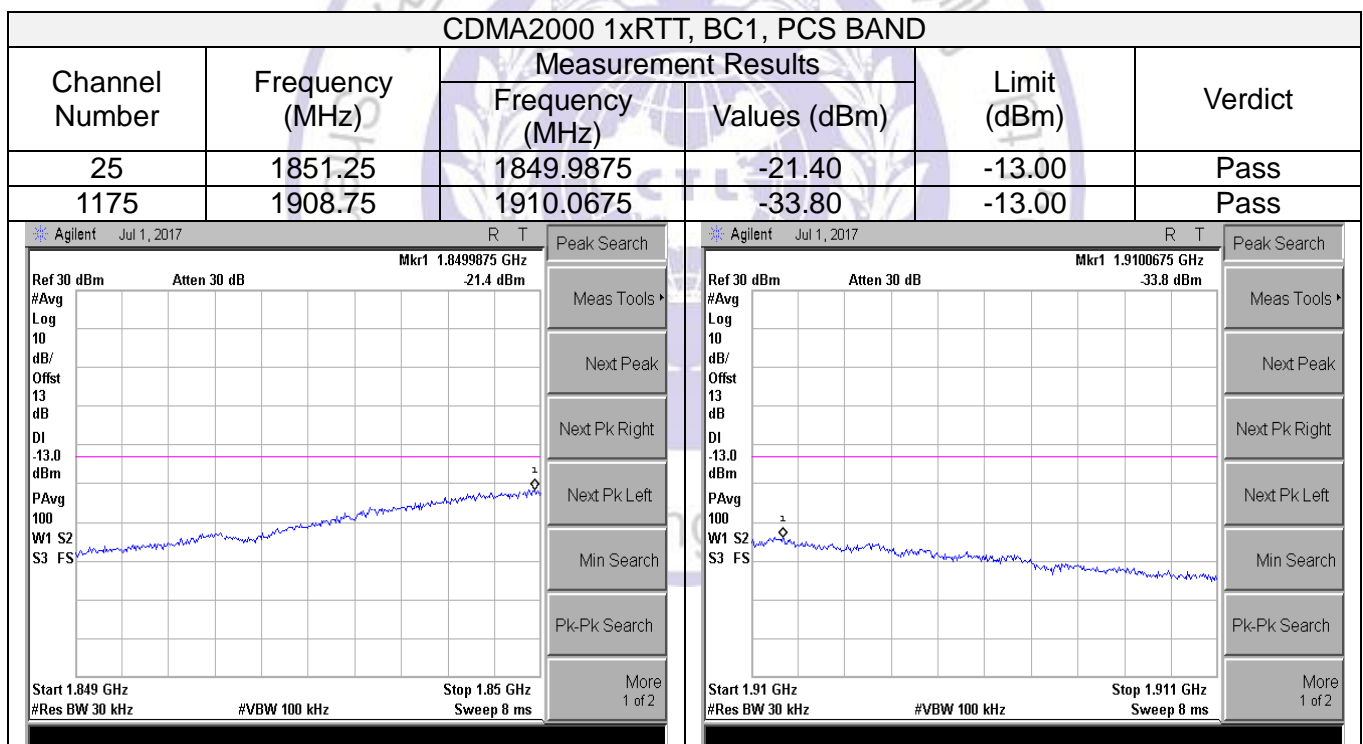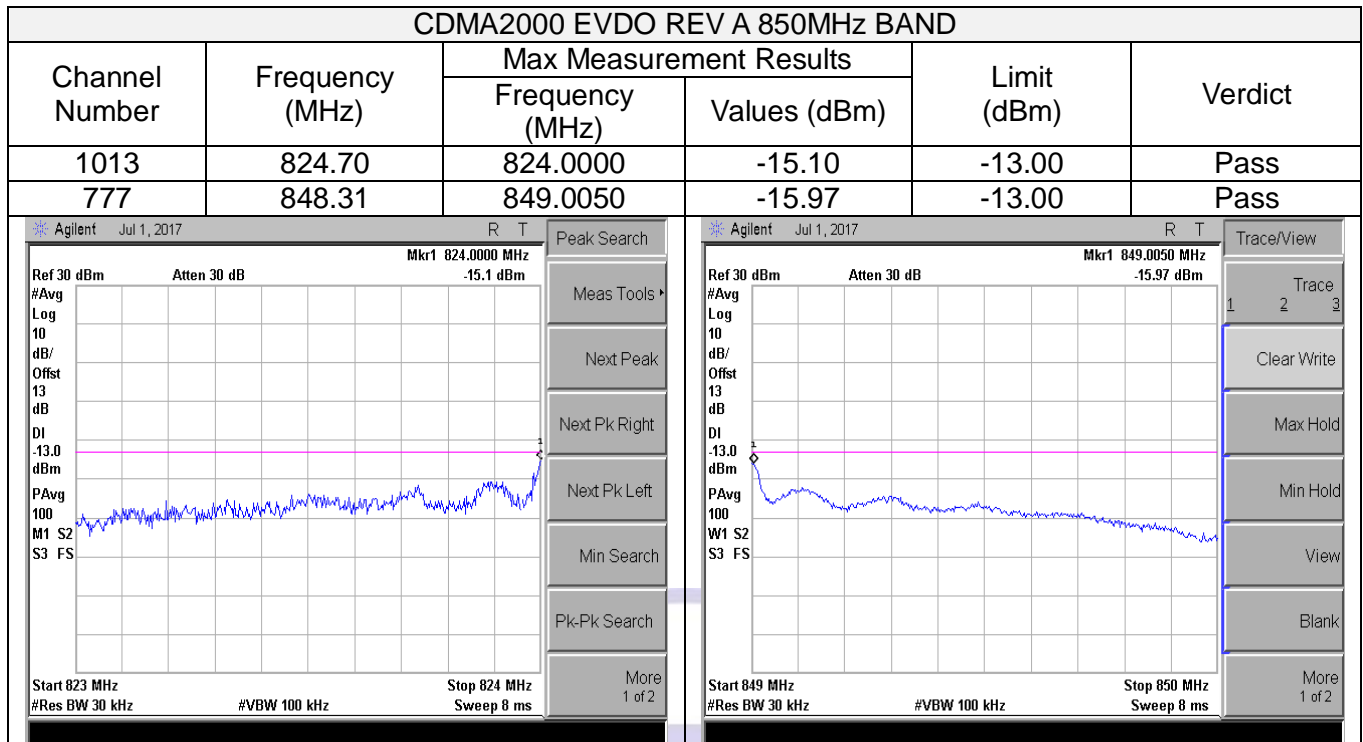

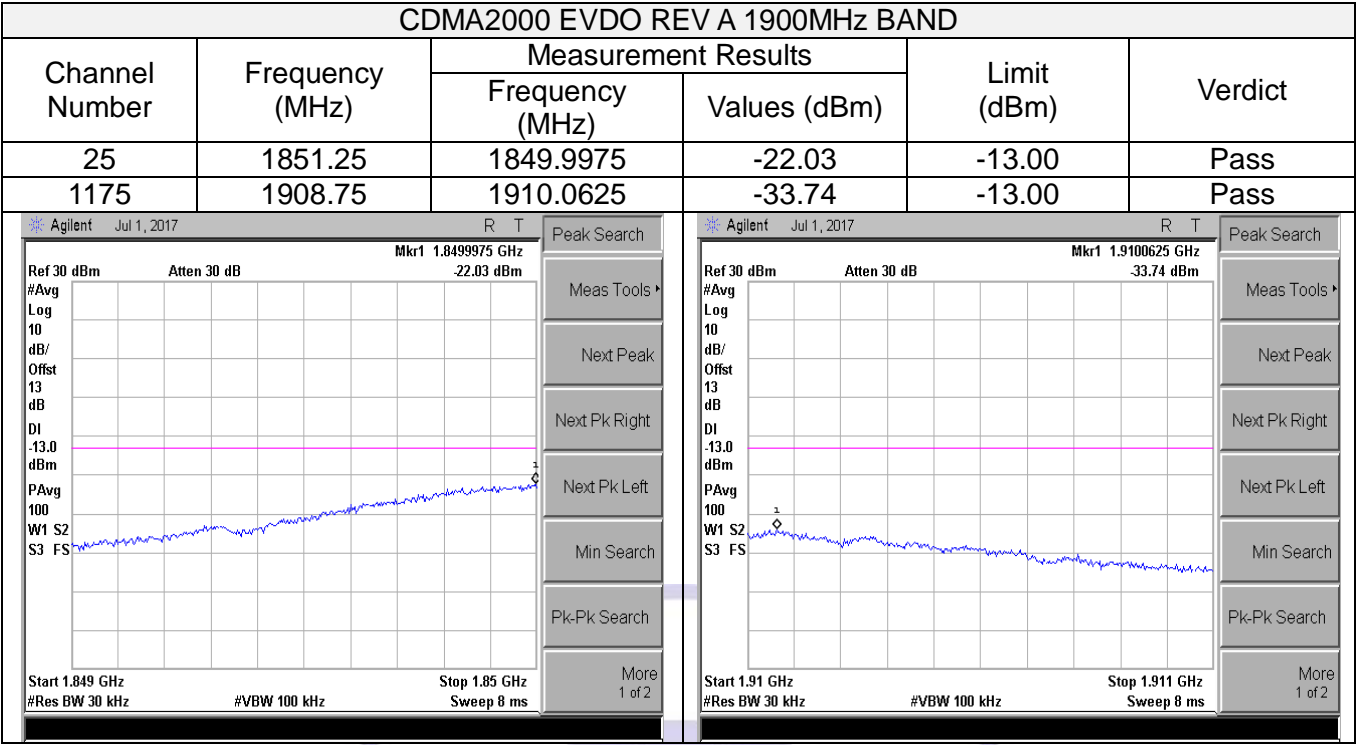


3.4 Spurious Emission

LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

Conducted Spurious Measurement:

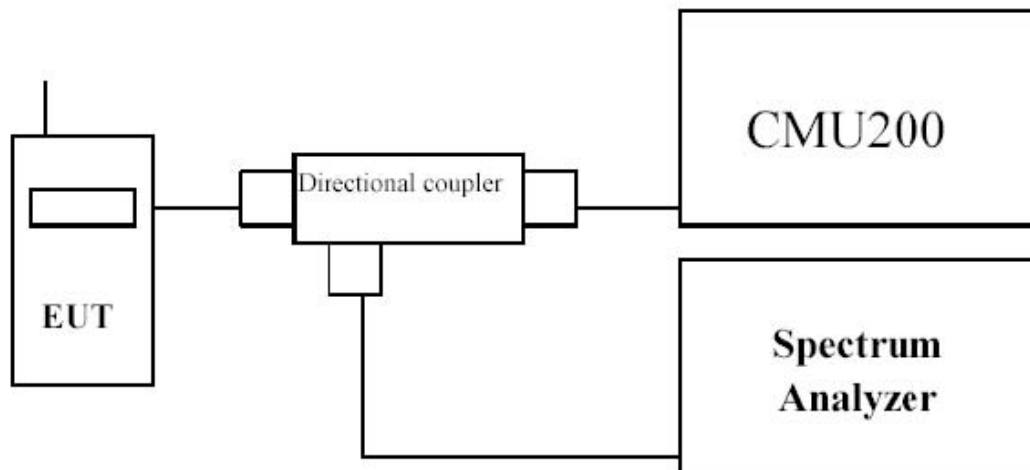

Radiated Spurious Measurement:

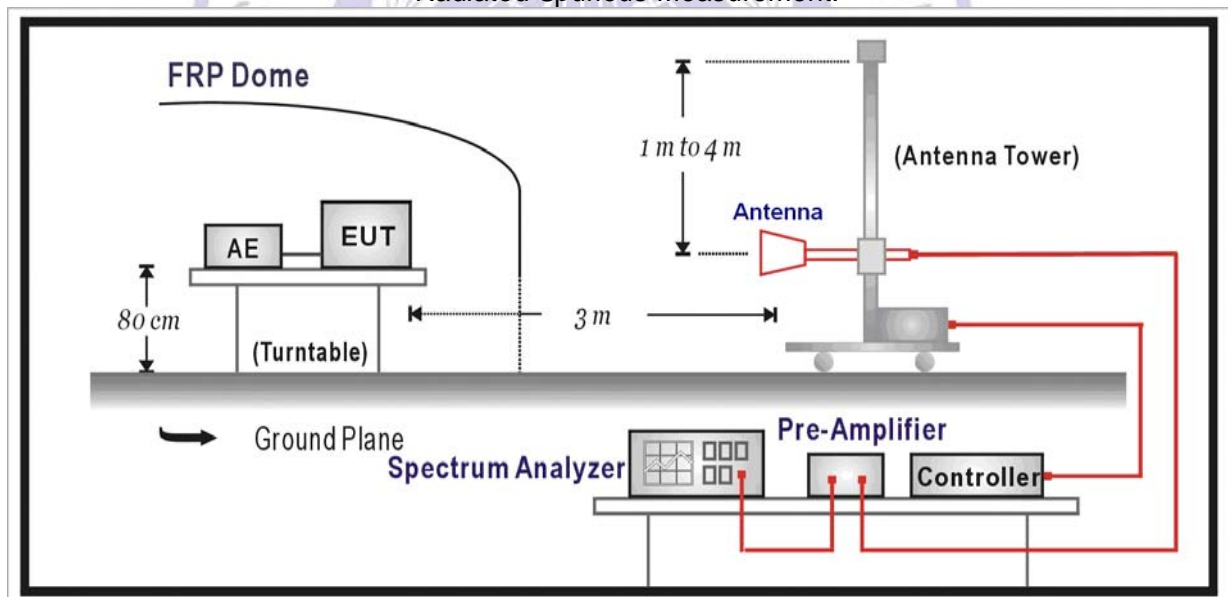

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Spurious Measurement:




- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200 then selects a channel for testing.




- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1MHz for Part 22 and 1MHz for Part 24, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:



- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.



TEST RESULTS**Conducted Measurement:**

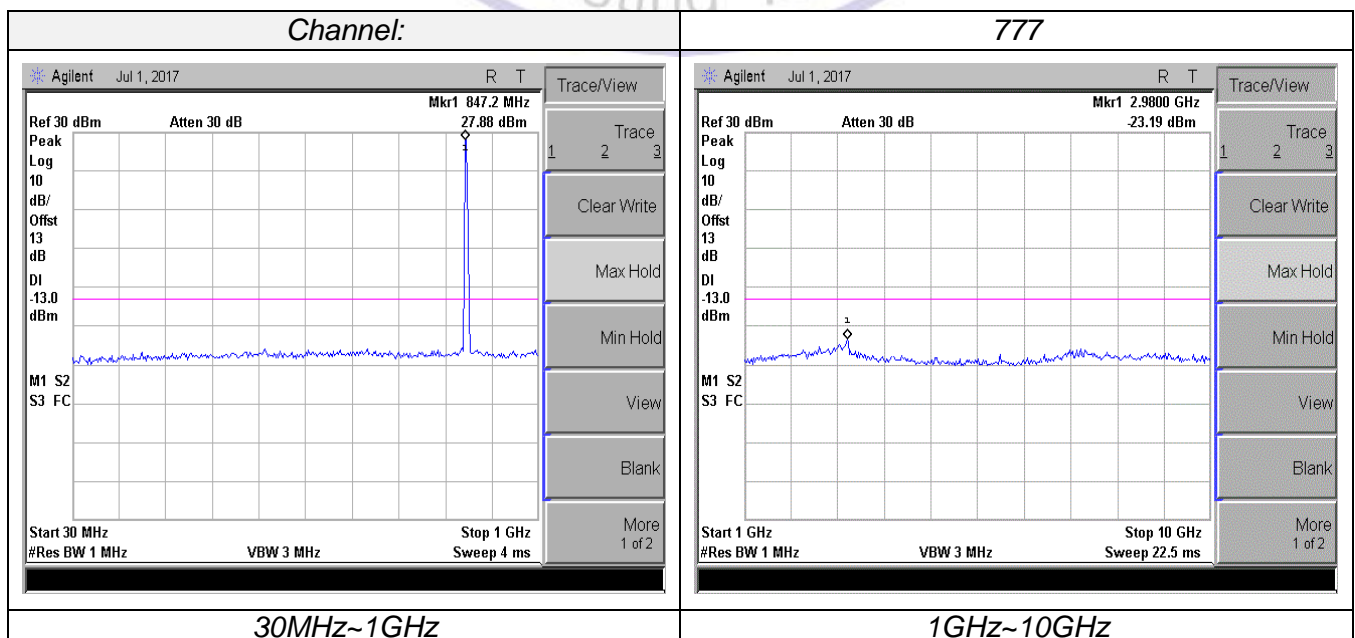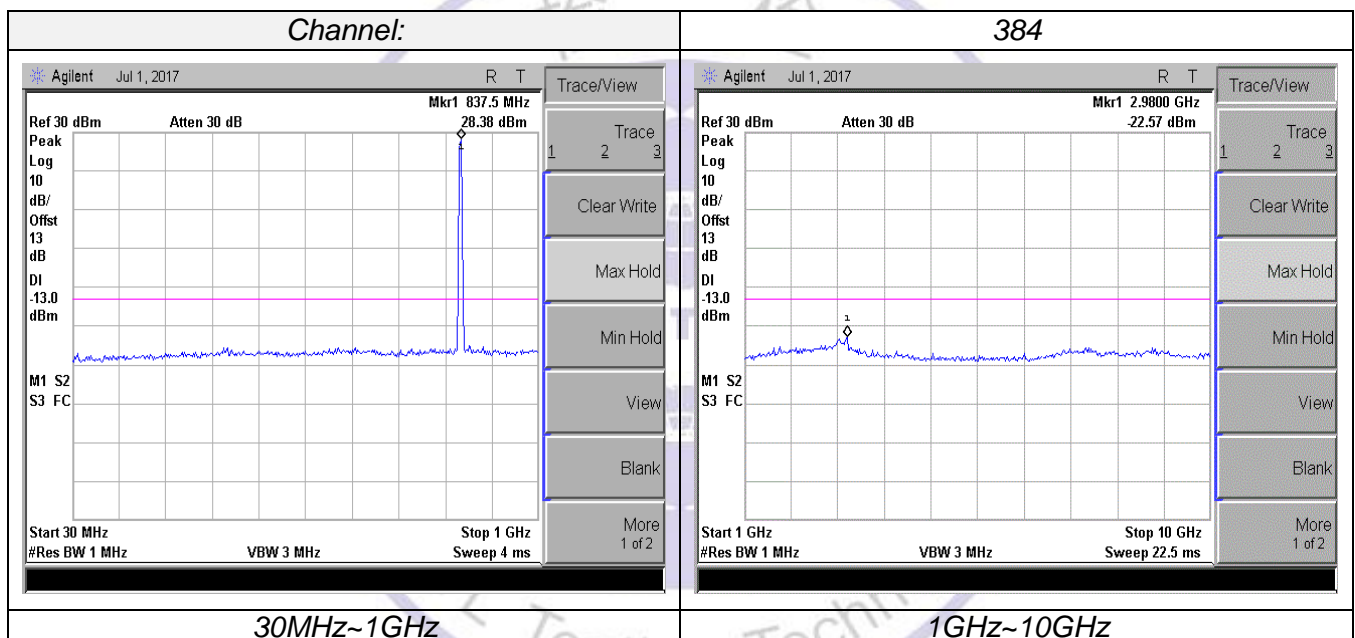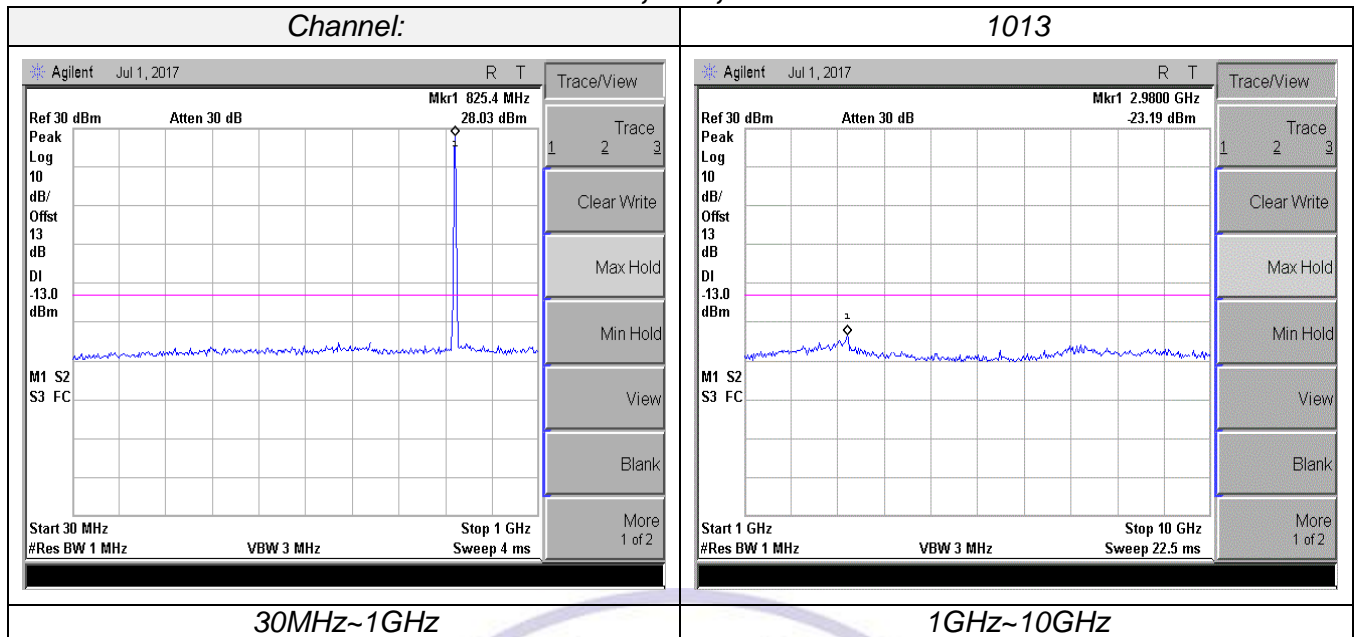CDMA 1xRTT, BC0, CELL BAND

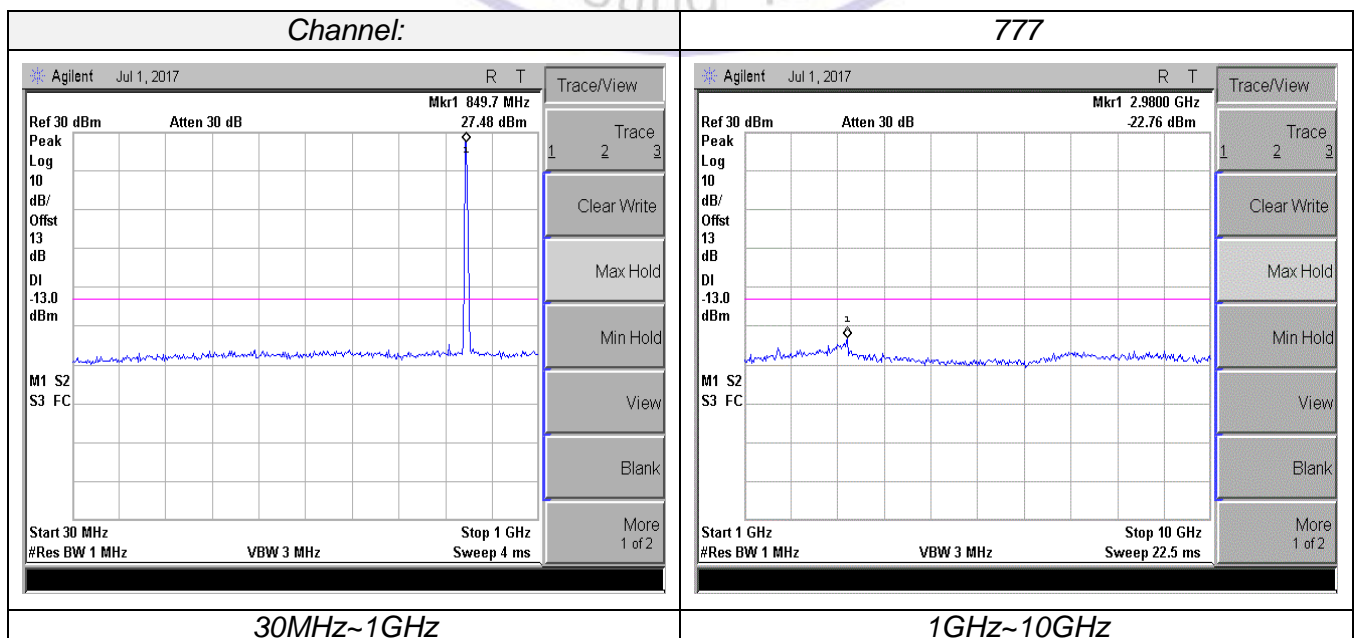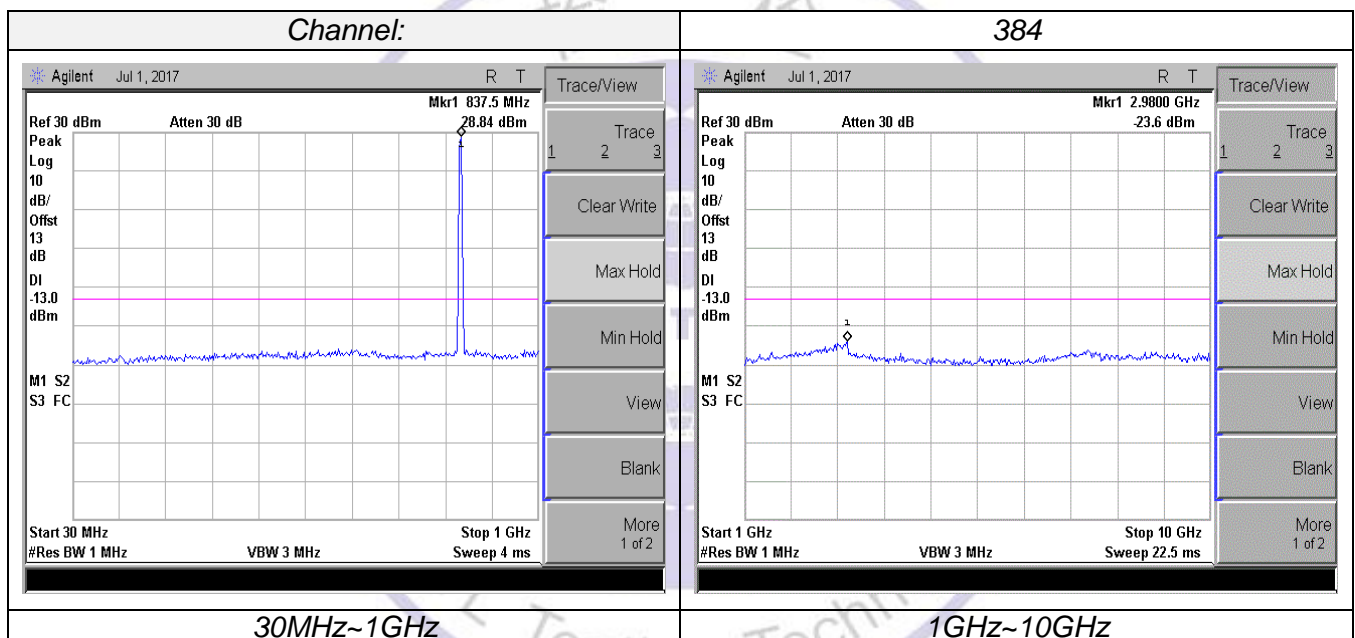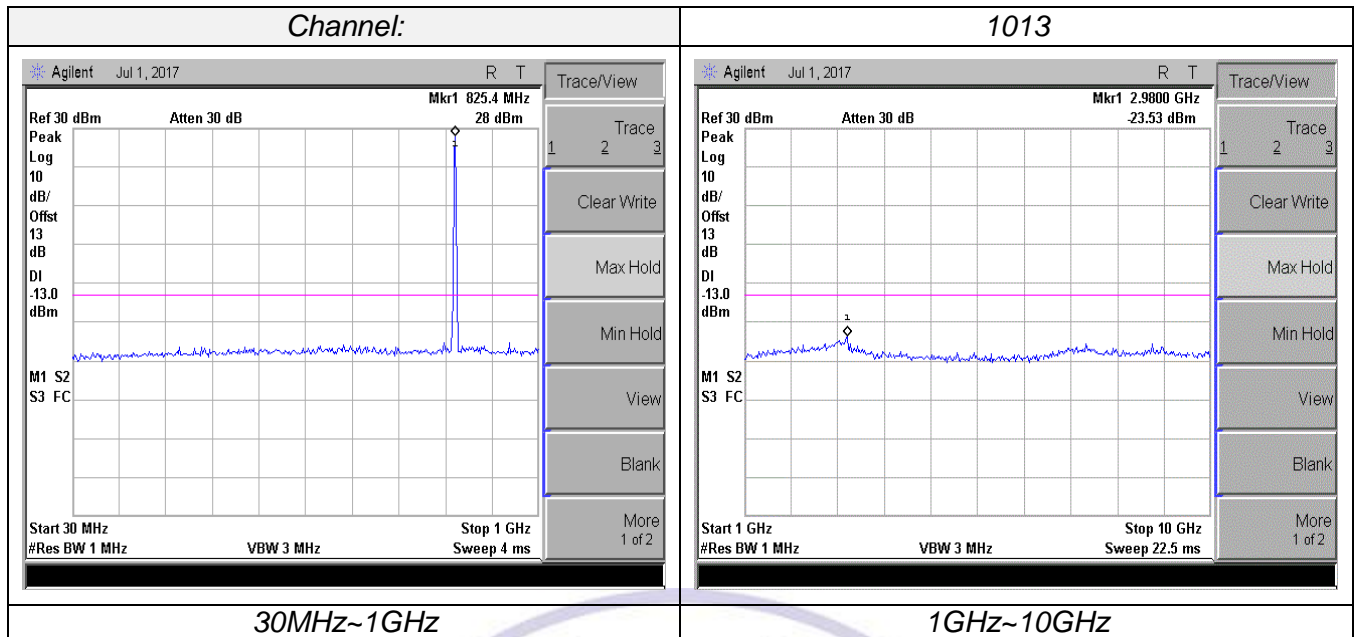
CDMA2000 EVDO REV A 850MHz BAND



CDMA2000 1xRTT, BC1, PCS BAND

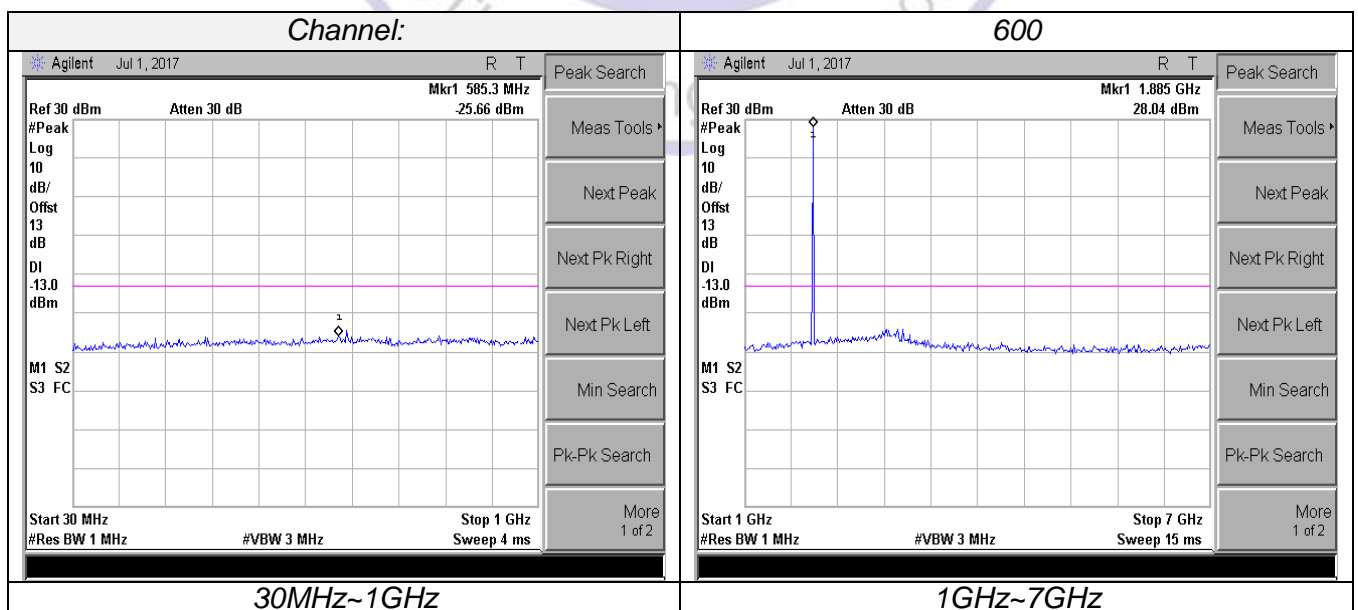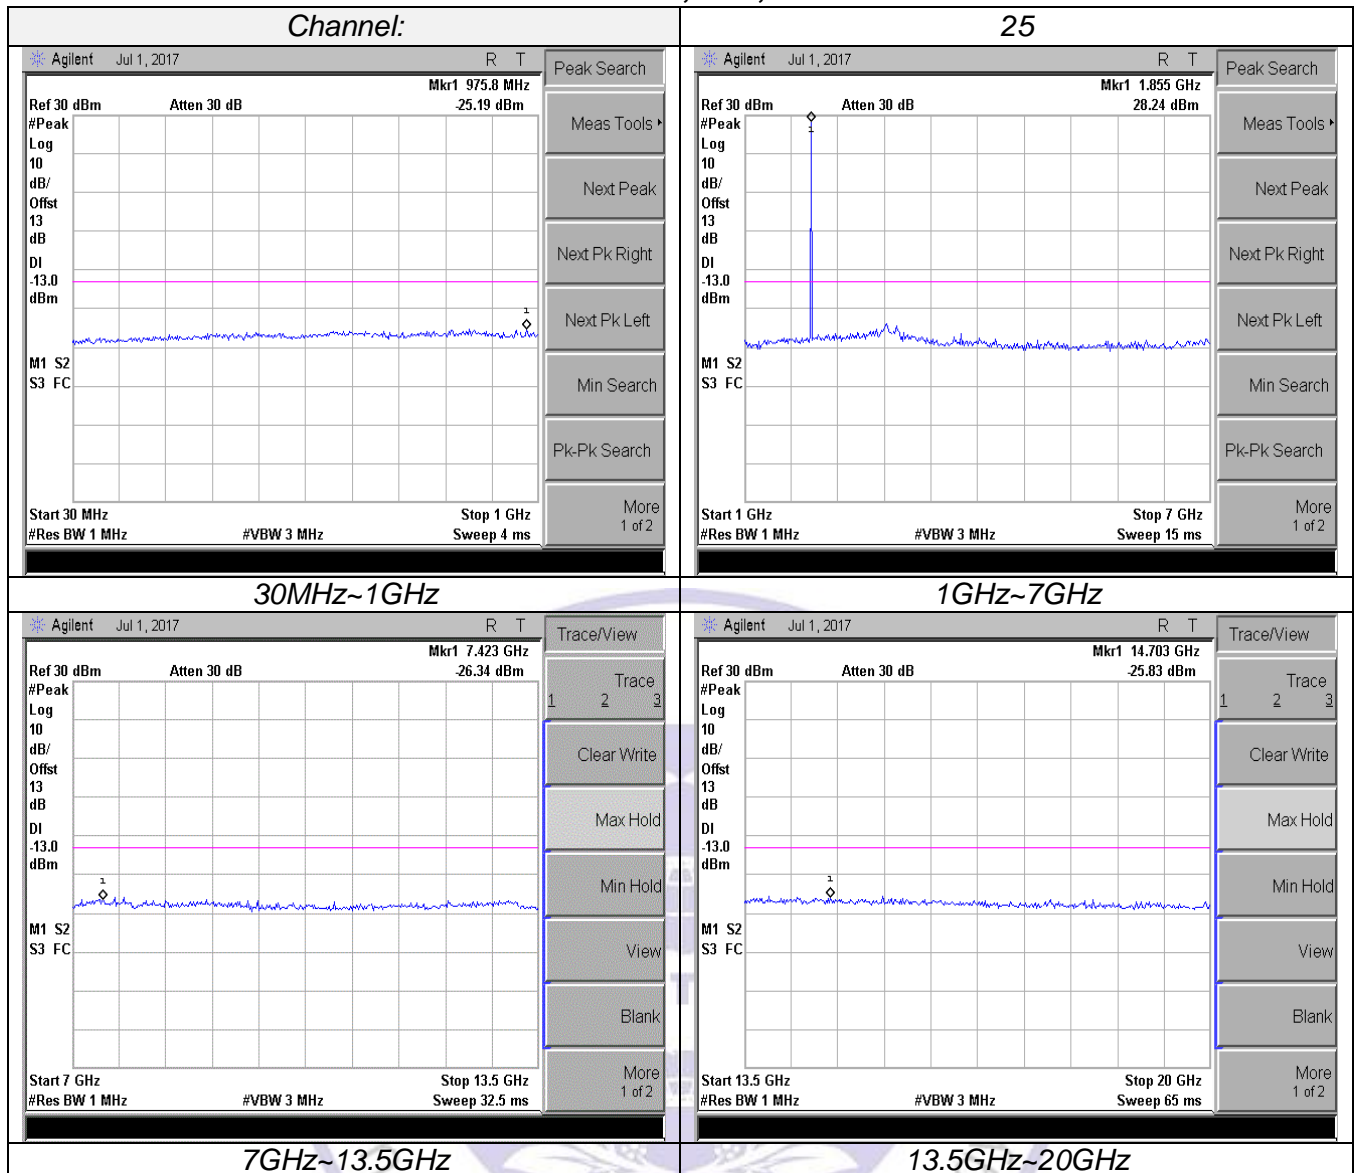

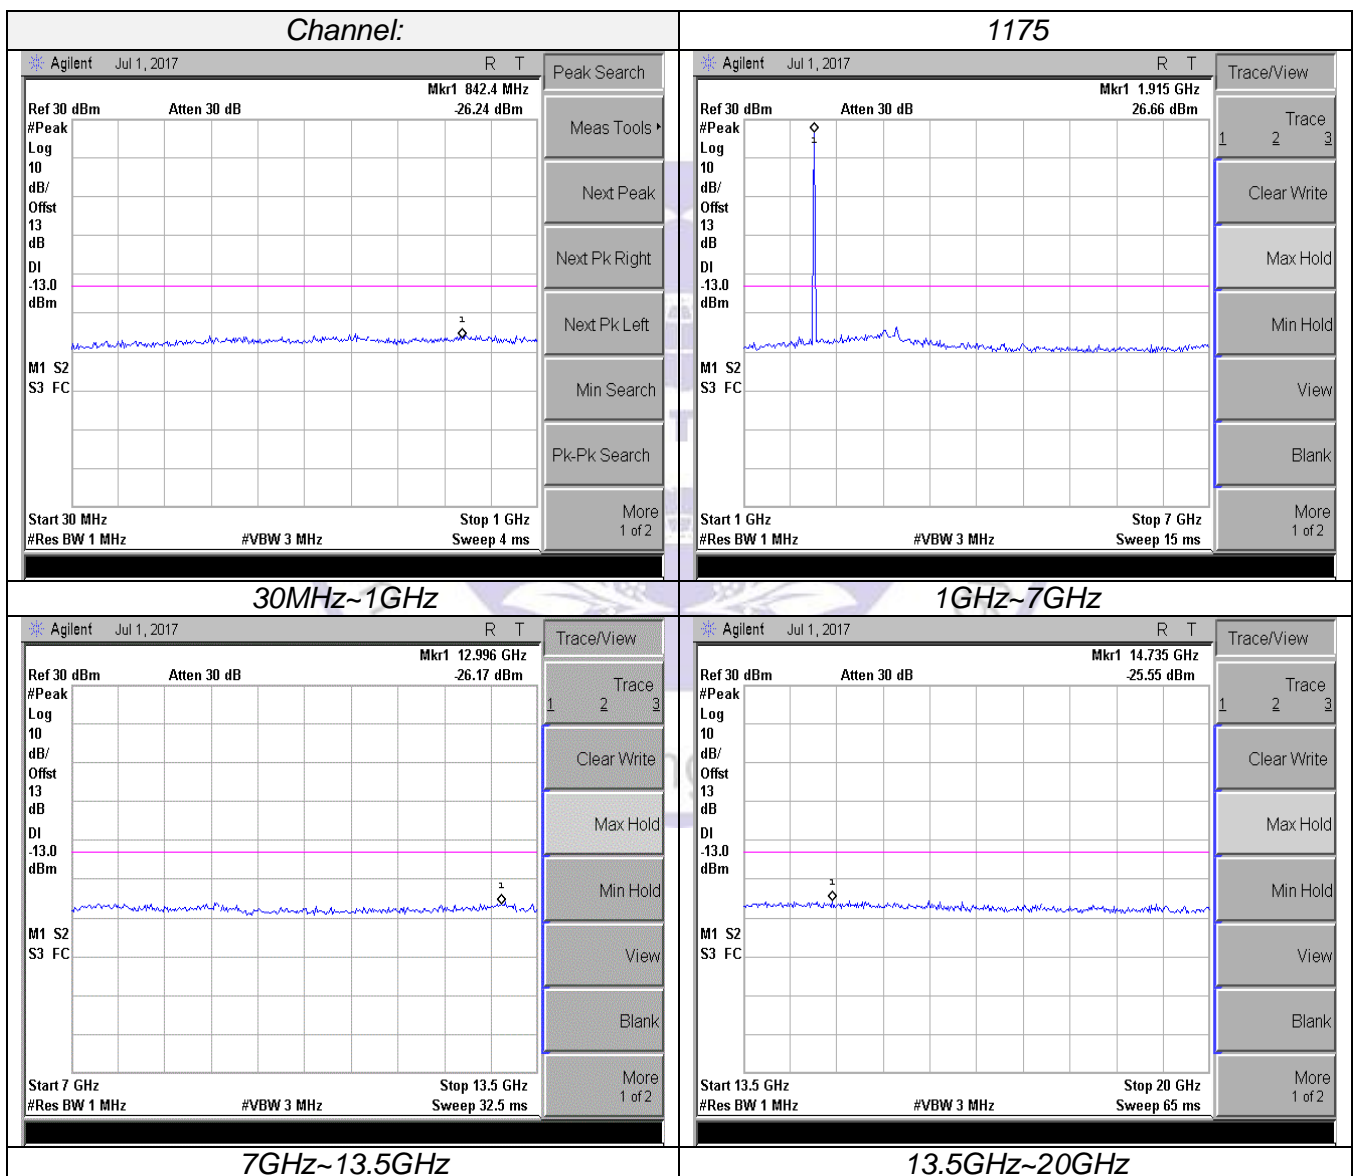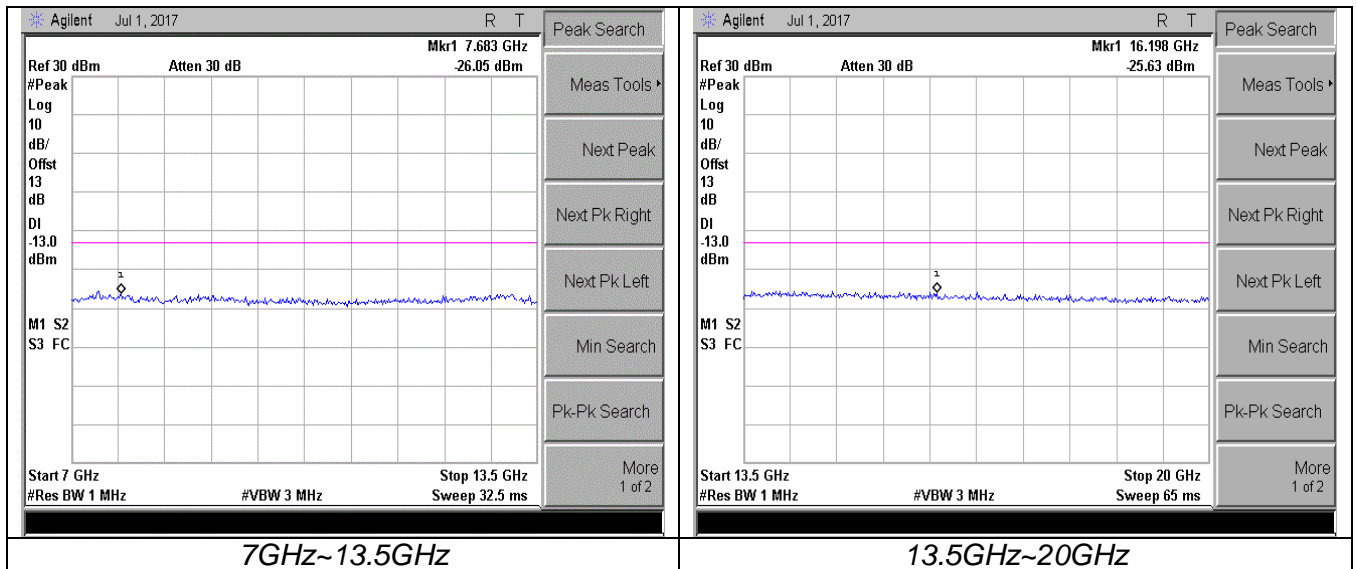

CDMA2000 EVDO REV A 1900MHz BAND

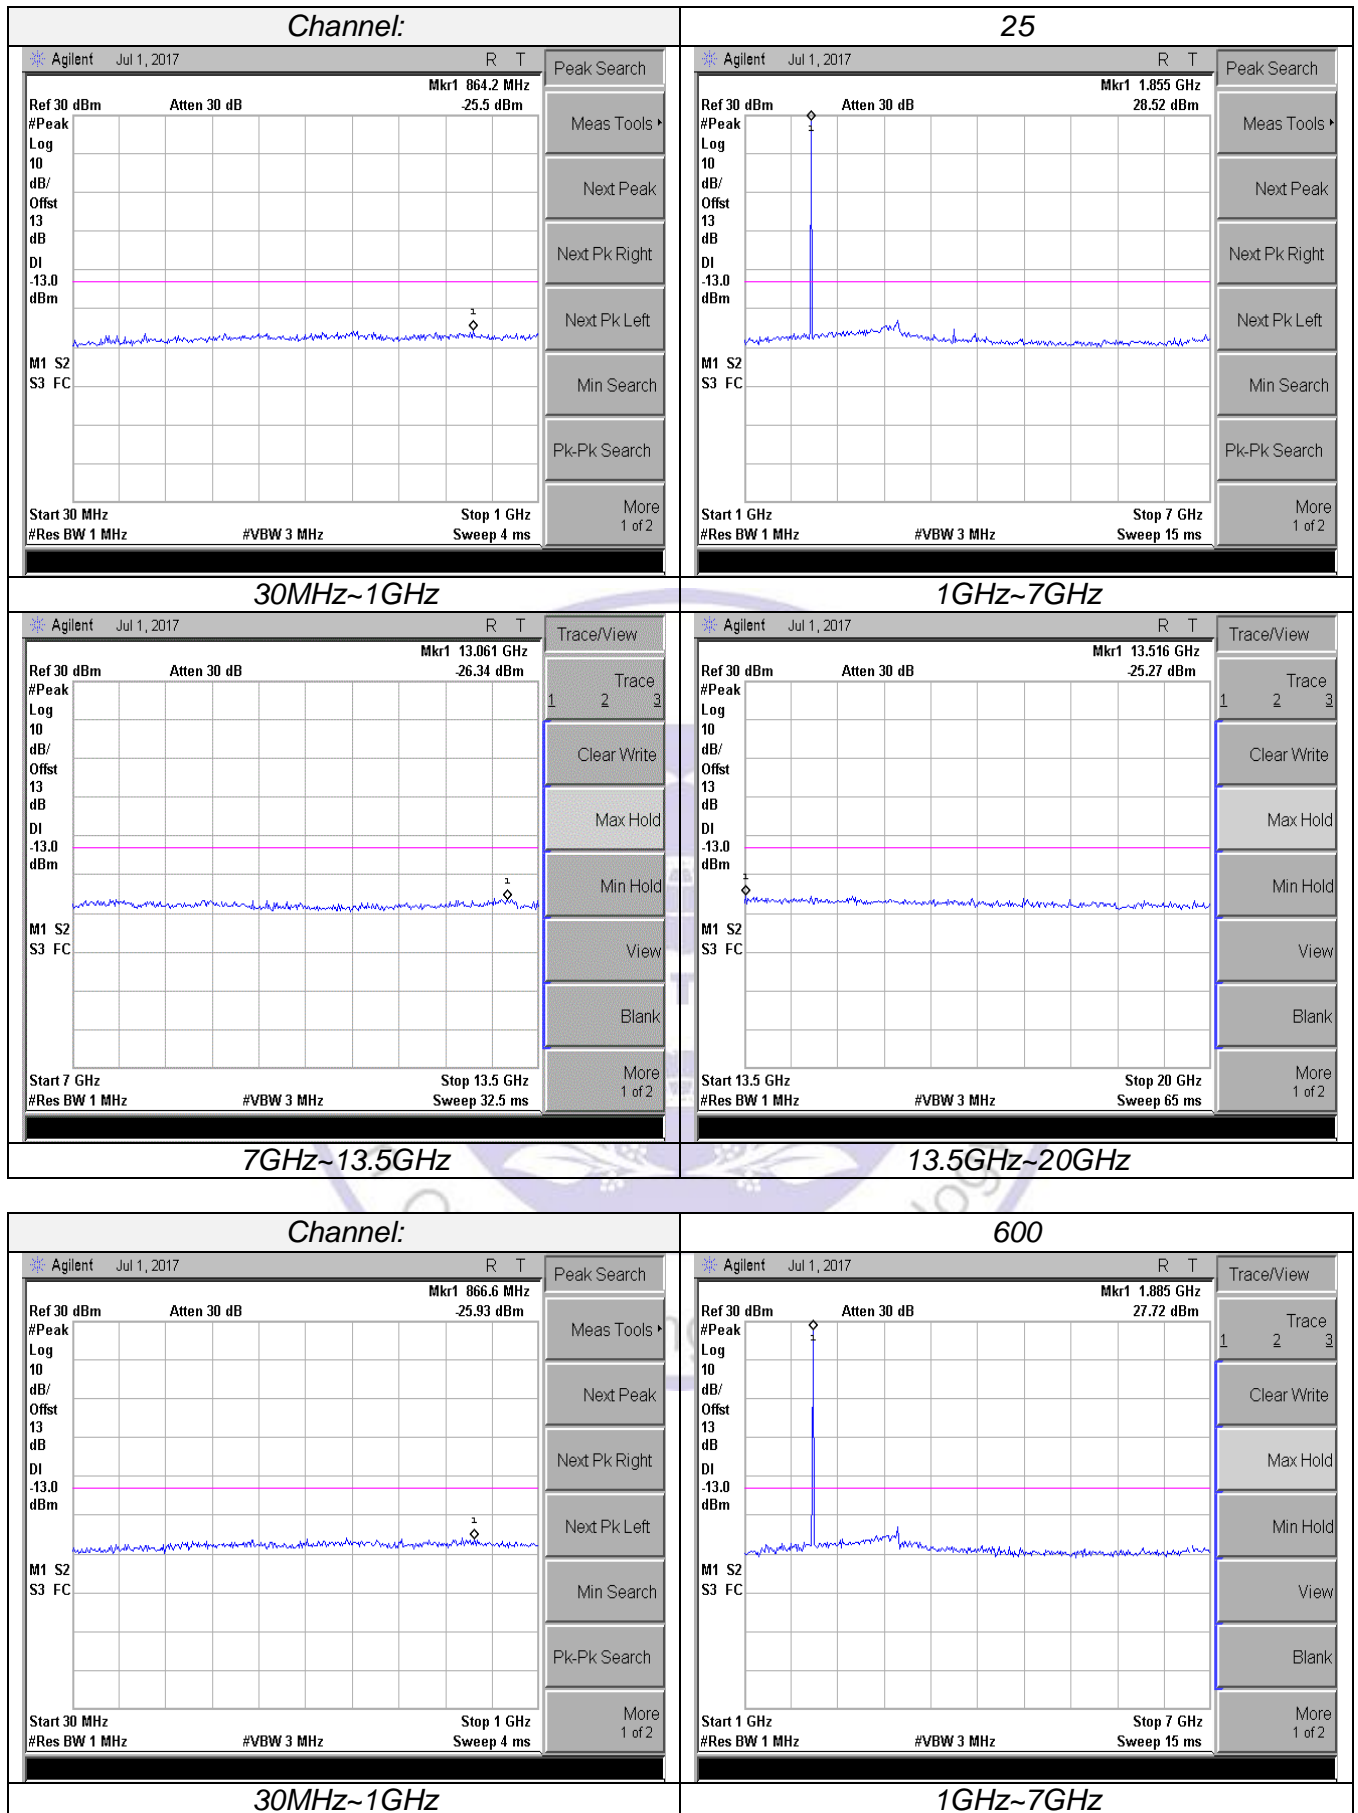

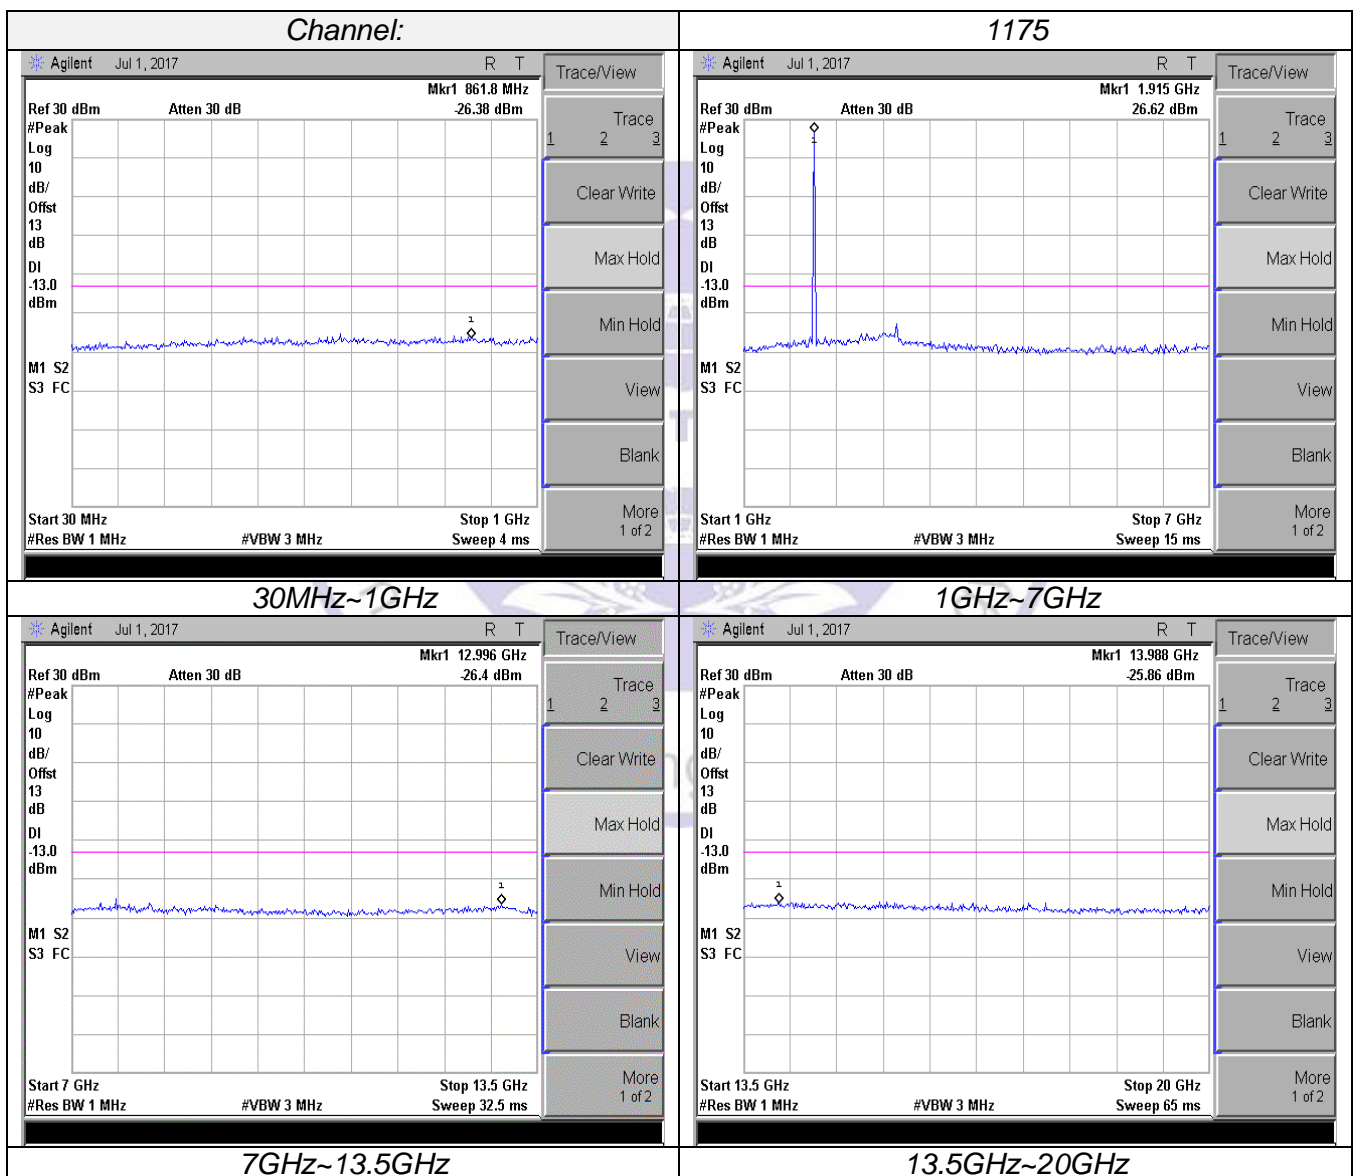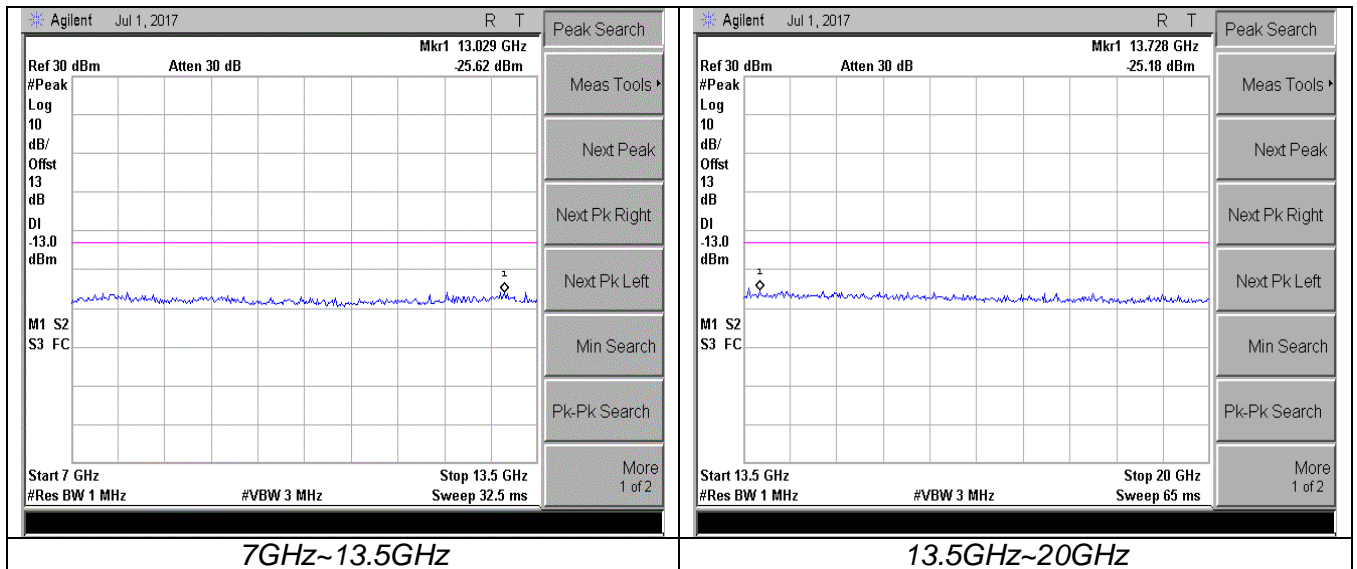

Radiated Measurement:**CDMA 1xRTT, BC0, CELL BAND**

Channel	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1013	1649.40	-30.83	3.00	3.00	9.58	-24.25	-13.00	11.25	H
	2474.10	-35.72	3.47	3.00	10.72	-28.47	-13.00	15.47	H
	1649.40	-29.93	3.00	3.00	9.68	-23.25	-13.00	10.25	V
	2474.10	-34.60	3.47	3.00	10.72	-27.35	-13.00	14.35	V
384	1673.00	-31.03	3.14	3.00	9.61	-24.56	-13.00	11.56	H
	2509.50	-34.93	3.59	3.00	10.77	-27.75	-13.00	14.75	H
	1673.00	-30.03	3.14	3.00	9.61	-23.56	-13.00	10.56	V
	2509.50	-34.04	3.59	3.00	10.77	-26.86	-13.00	13.86	V
777	1696.60	-30.96	3.26	3.00	9.77	-24.45	-13.00	11.45	H
	2544.90	-35.89	3.69	3.00	10.89	-28.69	-13.00	15.69	H
	1696.60	-30.38	3.26	3.00	9.77	-23.87	-13.00	10.87	V
	2544.90	-34.83	3.69	3.00	10.89	-27.63	-13.00	14.63	V

CDMA2000 EVDO REV A 850MHz BAND

Channel	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1013	1649.40	-31.47	3.00	3.00	9.58	-24.89	-13.00	11.89	H
	2474.10	-35.91	3.47	3.00	10.72	-28.66	-13.00	15.66	H
	1649.40	-30.13	3.00	3.00	9.68	-23.45	-13.00	10.45	V
	2474.10	-34.51	3.47	3.00	10.72	-27.26	-13.00	14.26	V
384	1673.00	-31.21	3.14	3.00	9.61	-24.74	-13.00	11.74	H
	2509.50	-34.76	3.59	3.00	10.77	-27.58	-13.00	14.58	H
	1673.00	-29.68	3.14	3.00	9.61	-23.21	-13.00	10.21	V
	2509.50	-33.70	3.59	3.00	10.77	-26.52	-13.00	13.52	V
777	1696.60	-30.98	3.26	3.00	9.77	-24.47	-13.00	11.47	H
	2544.90	-35.56	3.69	3.00	10.89	-28.36	-13.00	15.36	H
	1696.60	-30.30	3.26	3.00	9.77	-23.79	-13.00	10.79	V
	2544.90	-34.35	3.69	3.00	10.89	-27.15	-13.00	14.15	V

CDMA 1xRTT, BC1, PCS BAND


Channel	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
25	3702.50	-33.67	4.25	3.00	12.34	-25.58	-13.00	12.58	H
	5553.75	-38.03	4.97	3.00	13.52	-29.48	-13.00	16.48	H
	3702.50	-32.56	4.25	3.00	12.34	-24.47	-13.00	11.47	V
	5553.75	-35.81	4.97	3.00	13.52	-27.26	-13.00	14.26	V
600	3760.00	-33.62	4.38	3.00	12.34	-25.66	-13.00	12.66	H
	5640.00	-38.04	5.01	3.00	13.58	-29.47	-13.00	16.47	H
	3760.00	-32.21	4.38	3.00	12.34	-24.25	-13.00	11.25	V
	5640.00	-35.90	5.01	3.00	13.58	-27.33	-13.00	14.33	V
1175	3817.50	-33.81	4.49	3.00	12.45	-25.85	-13.00	12.85	H
	5726.25	-37.66	5.26	3.00	13.66	-29.26	-13.00	16.26	H
	3817.50	-32.94	4.49	3.00	12.45	-24.98	-13.00	11.98	V
	5726.25	-36.15	5.26	3.00	13.66	-27.75	-13.00	14.75	V

CDMA2000 EVDO REV A 1900MHz BAND

Channel	Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
25	3702.50	-33.45	4.25	3.00	12.34	-25.36	-13.00	12.36	H
	5553.75	-38.20	4.97	3.00	13.52	-29.65	-13.00	16.65	H
	3702.50	-32.93	4.25	3.00	12.34	-24.84	-13.00	11.84	V
	5553.75	-35.70	4.97	3.00	13.52	-27.15	-13.00	14.15	V
600	3760.00	-33.94	4.38	3.00	12.34	-25.98	-13.00	12.98	H
	5640.00	-38.41	5.01	3.00	13.58	-29.84	-13.00	16.84	H
	3760.00	-32.48	4.38	3.00	12.34	-24.52	-13.00	11.52	V
	5640.00	-36.35	5.01	3.00	13.58	-27.78	-13.00	14.78	V
1175	3817.50	-33.52	4.49	3.00	12.45	-25.56	-13.00	12.56	H
	5726.25	-37.65	5.26	3.00	13.66	-29.25	-13.00	16.25	H
	3817.50	-32.74	4.49	3.00	12.45	-24.78	-13.00	11.78	V
	5726.25	-35.86	5.26	3.00	13.66	-27.46	-13.00	14.46	V

Remark:

1. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
2. We were not recorded other points as values lower than limits.
3. $Margin = Limit - EIRP$

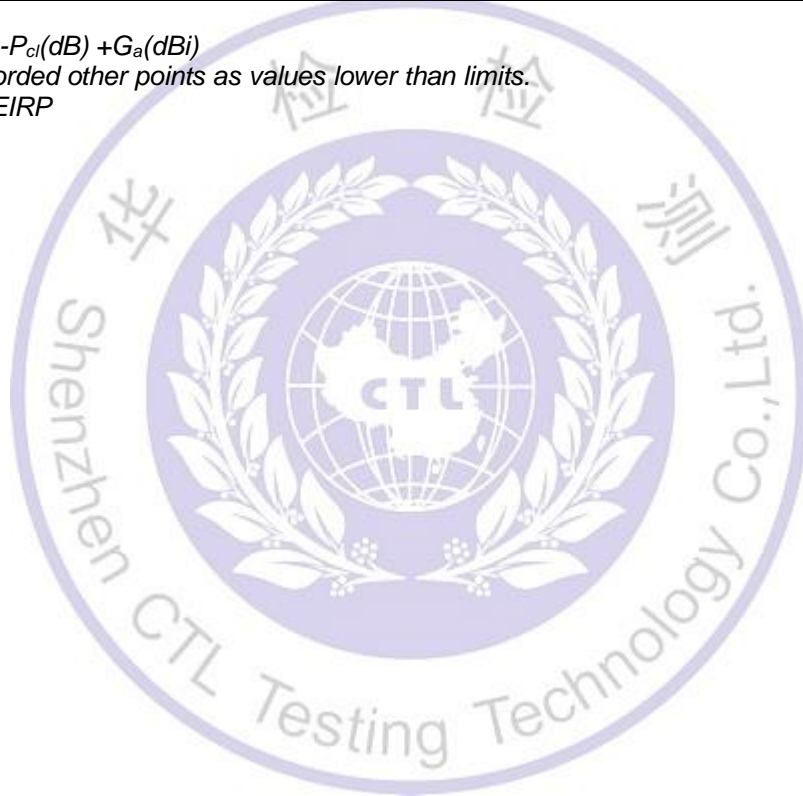


3.5 Frequency Stability under Temperature & Voltage Variations

LIMIT

Cellular Band: ± 2.5 ppm PCS Band: Within the authorized frequency block

TEST CONFIGURATION

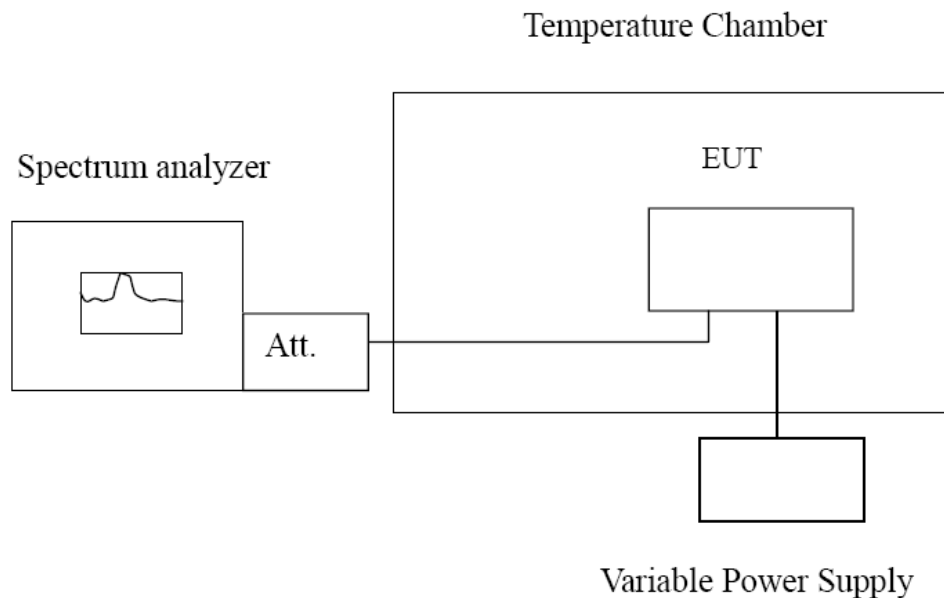

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Reference Frequency: Cell Band Middle channel=384 frequency=836.52MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
6.00	-30	70.17	0.084	2.5	Pass
	-20	68.23	0.082		
	-10	70.23	0.084		
	0	69.53	0.083		
	10	81.28	0.097		
	20	44.50	0.053		
	30	72.18	0.086		
	40	65.75	0.079		
	50	72.34	0.086		
5.10	25	63.78	0.076	2.5	Pass
End point 4.50	25	37.49	0.045		


Reference Frequency: PCS Band Middle channel=600 frequency=1880MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
6.00	-30	92.42	0.049	Within the authorized frequency block	Pass
	-20	43.82	0.023		
	-10	66.80	0.036		
	0	68.17	0.036		
	10	93.54	0.050		
	20	34.01	0.018		
	30	39.38	0.021		
	40	44.81	0.024		
	50	96.37	0.051		
5.10	25	37.83	0.020	Within the authorized frequency block	Pass
End point 4.50	25	70.72	0.038		

4 Test Setup Photos of the EUT




5 External and Internal Photos of the EUT




External photos



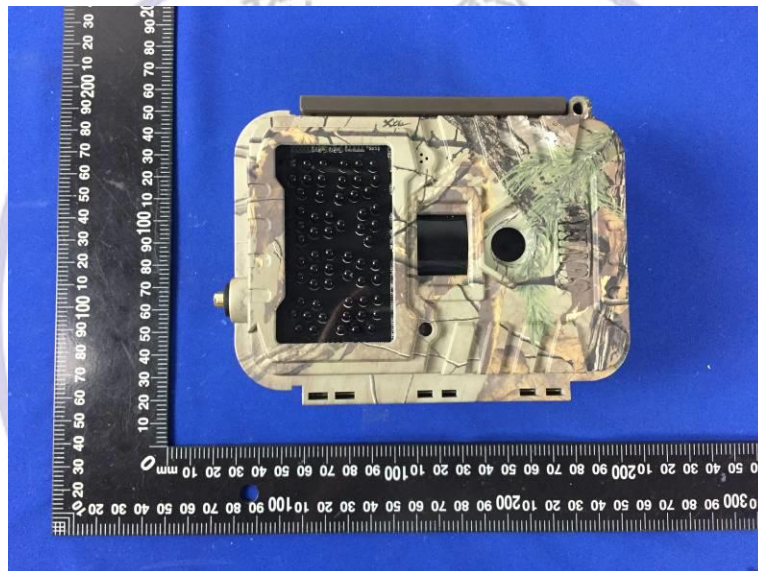





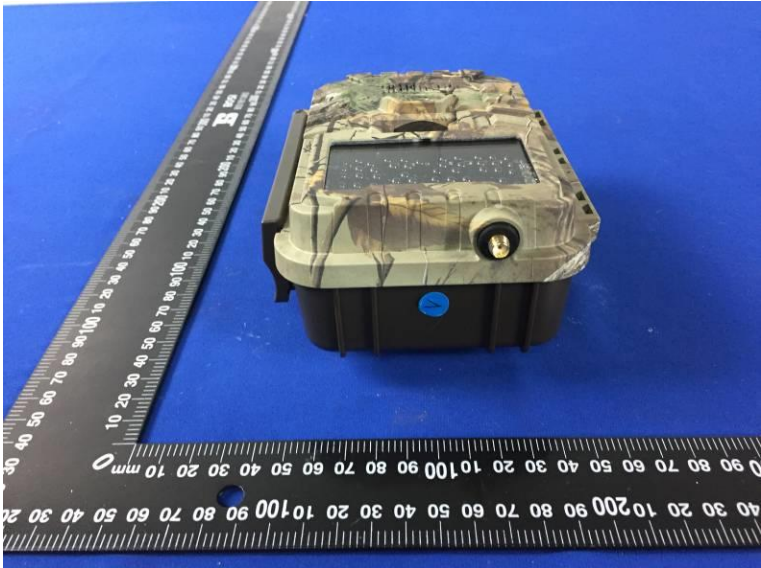



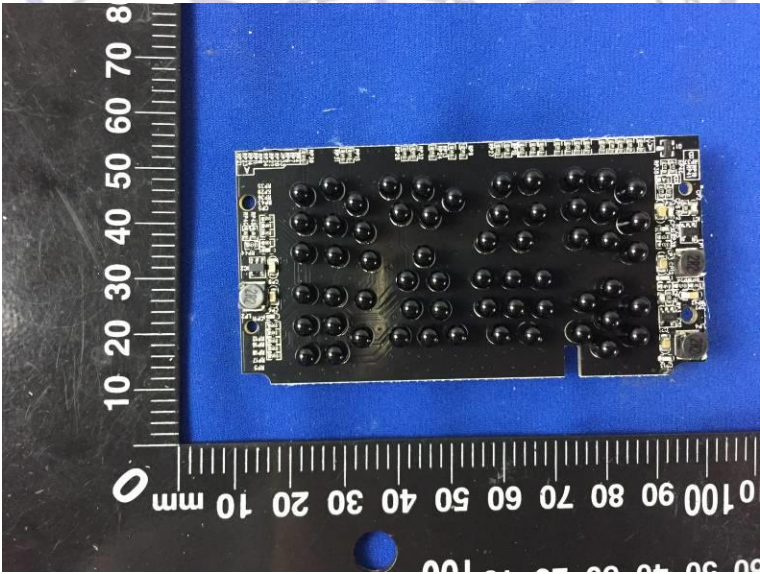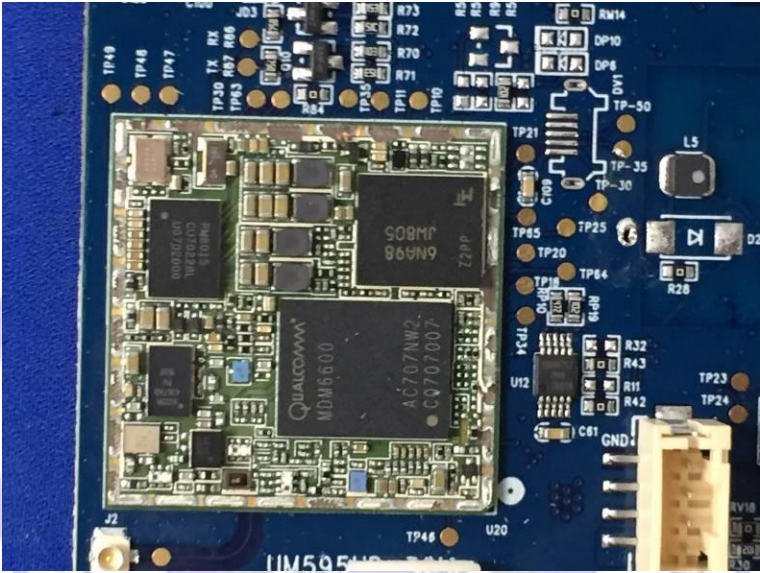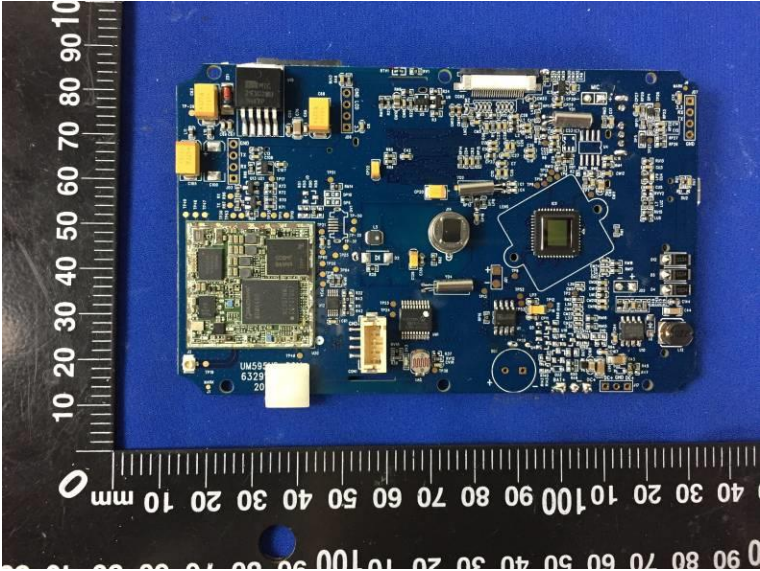

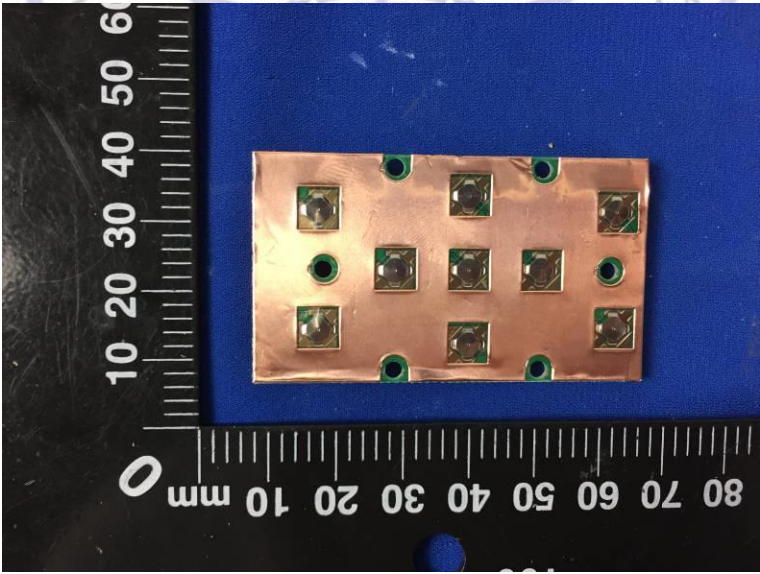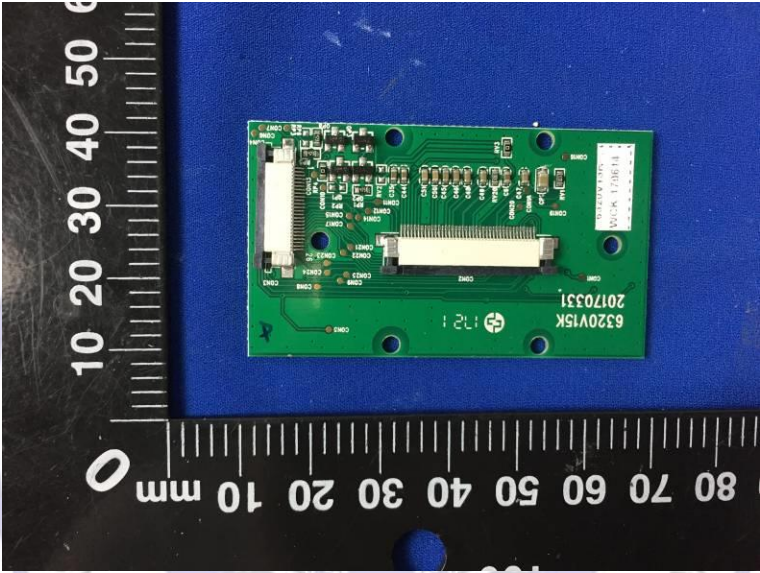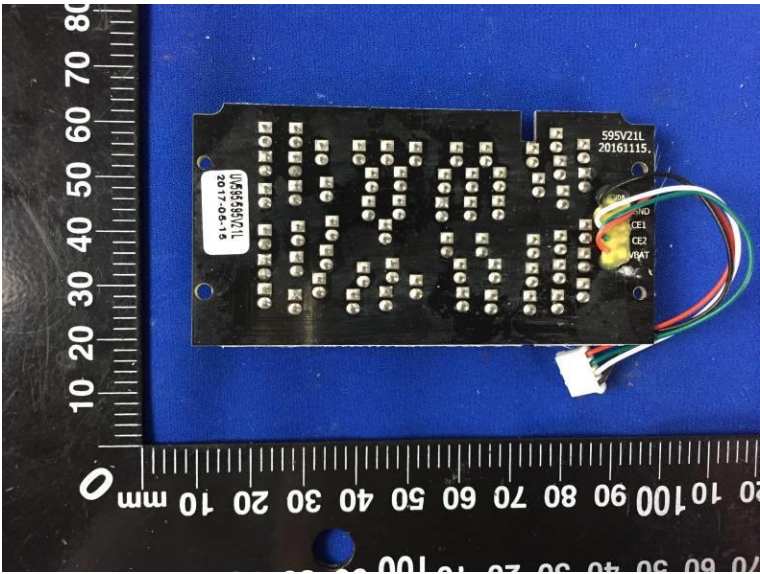

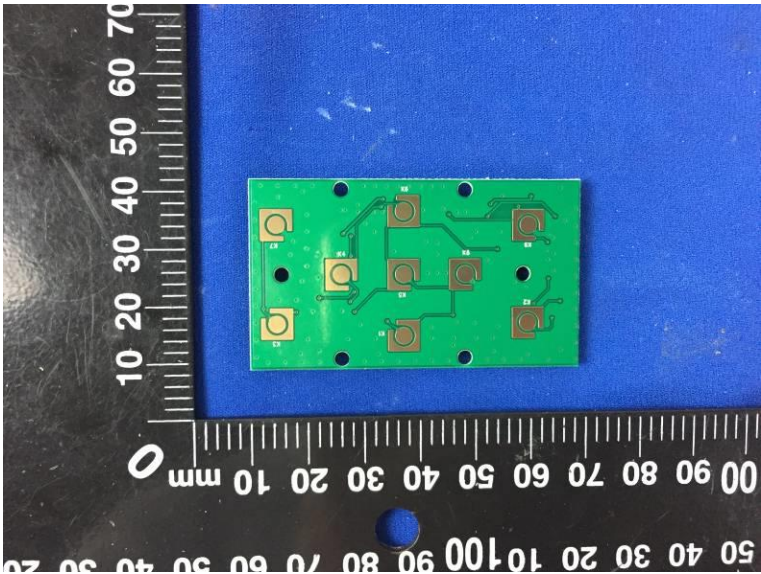

***** End of Report *****

