



1.6 dB Bandwidth


Test Mode	Test Channel	EBW[MHz]	Limit[MHz]	Verdict
BLE	2402	0.6749	0.5	PASS
BLE	2440	0.6729	0.5	PASS
BLE	2480	0.6680	0.5	PASS

6 dB Bandwidth_BLE_2402

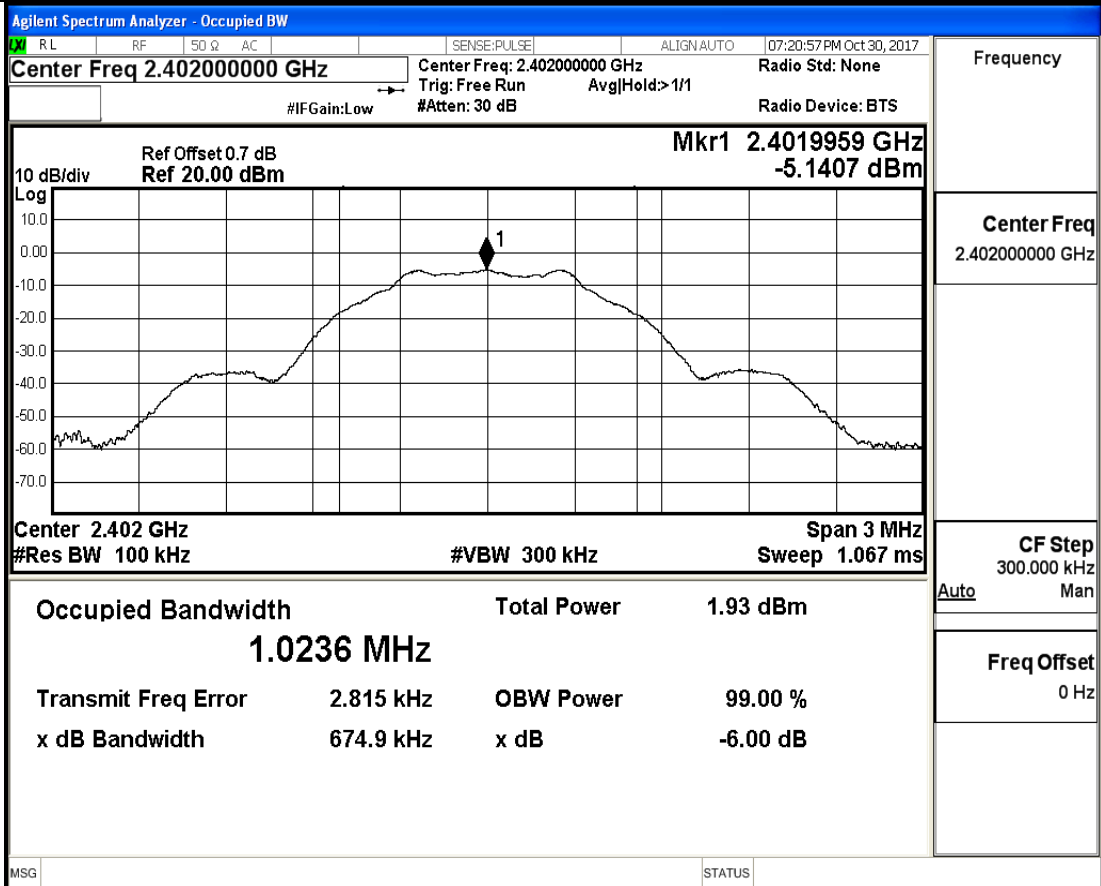

6 dB Bandwidth_BLE_2440

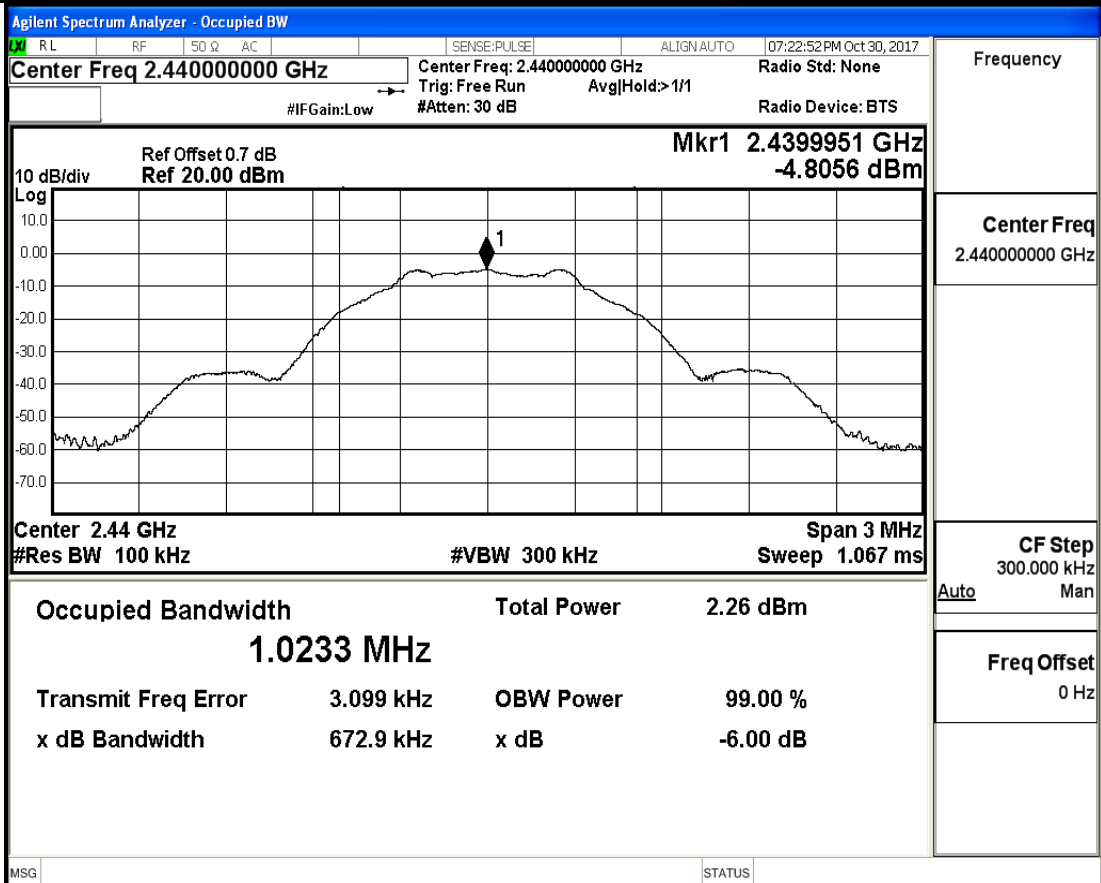


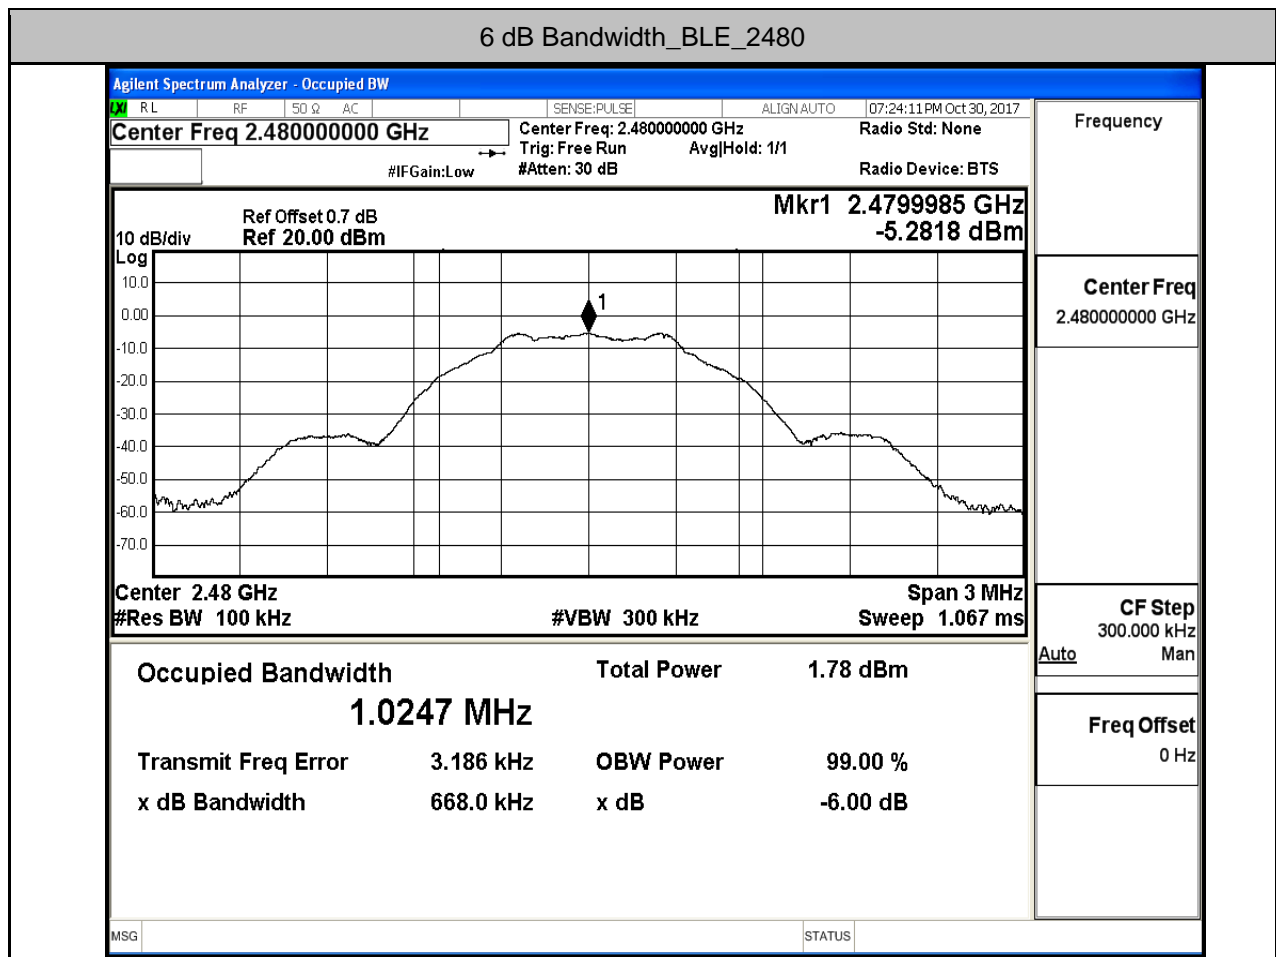


2. Conducted Peak Output Power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	-4.247	30	PASS
BLE	2440	-3.882	30	PASS
BLE	2480	-4.348	30	PASS


Conducted Peak Output Power_BLE_2402

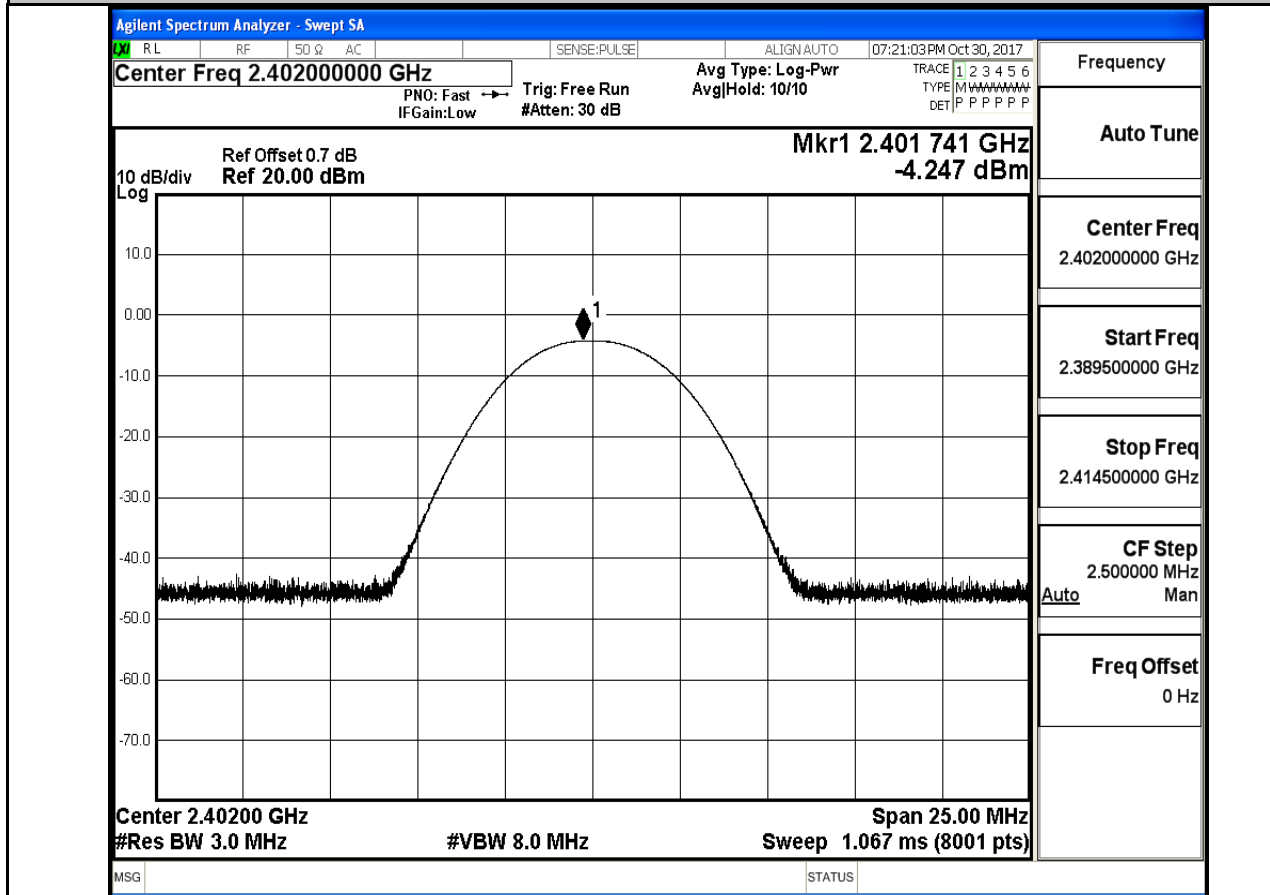

Conducted Peak Output Power_BLE_2440

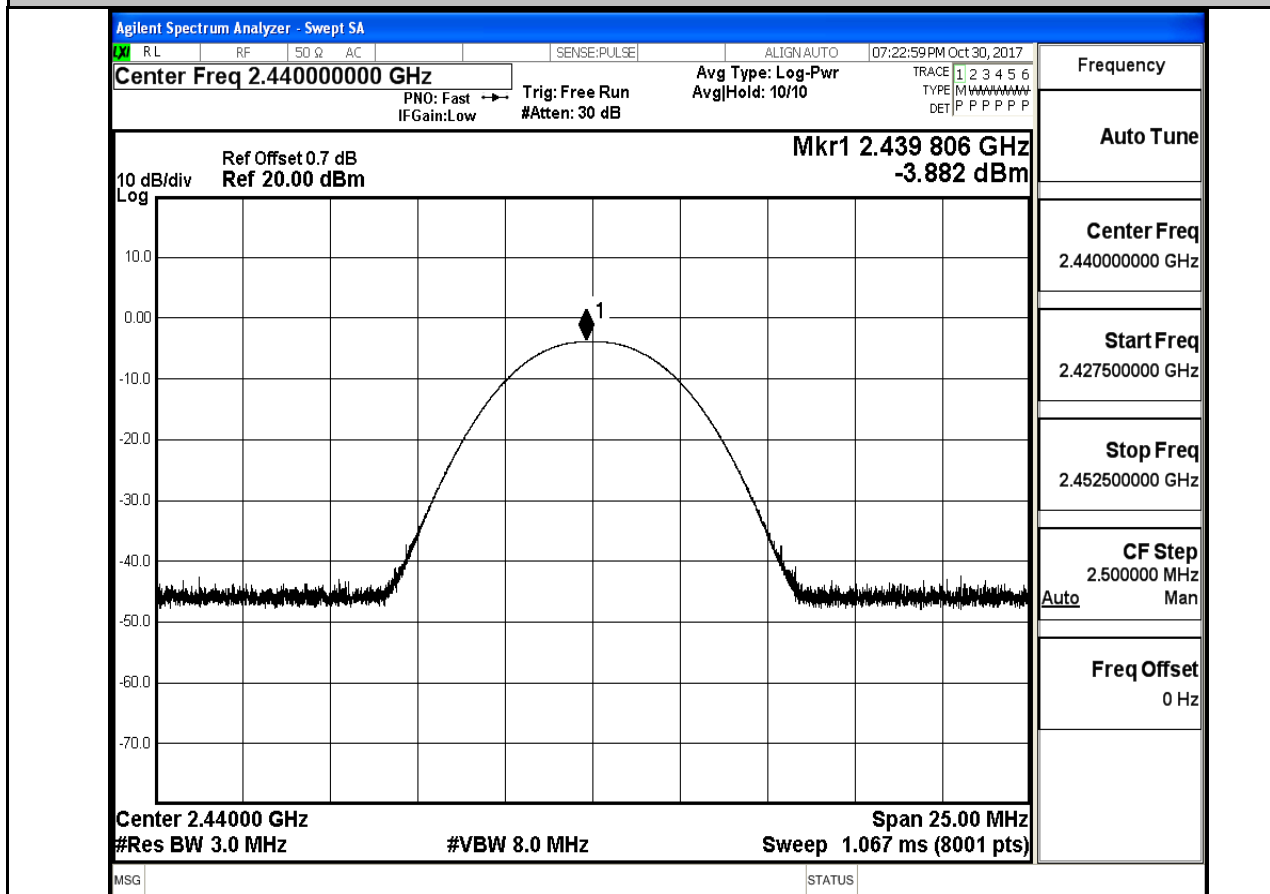

Conducted Peak Output Power_BLE_2480

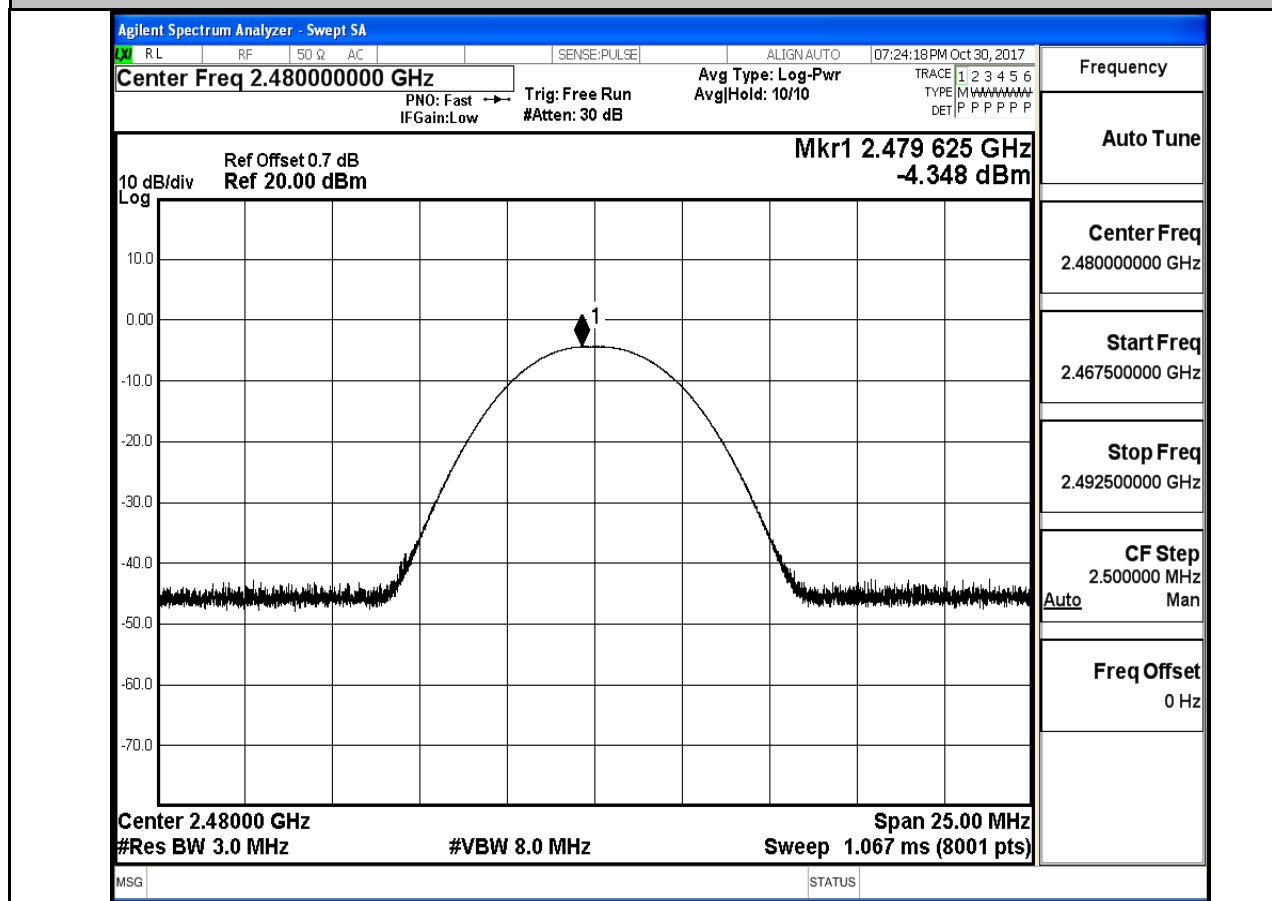



3.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
BLE	2402	Off	-5.007	-57.559	-25.01	PASS
BLE	2480	Off	-5.093	-56.530	-25.09	PASS


4.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	30	25000	100	300	-5.233	-51.232	<-25.233	PASS
BLE	2440	30	25000	100	300	-4.794	-50.919	<-24.794	PASS
BLE	2480	30	25000	100	300	-5.263	-50.887	<-25.263	PASS


RF Conducted Spurious Emissions_BLE_2402

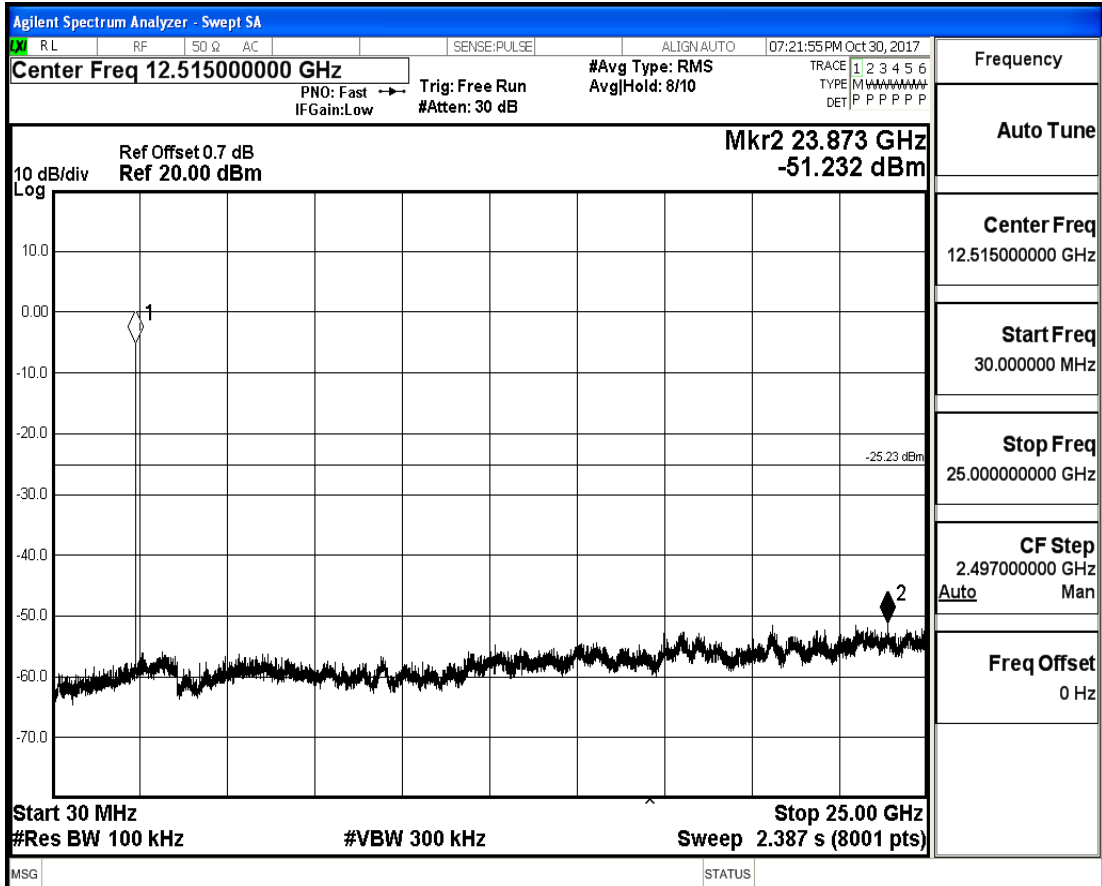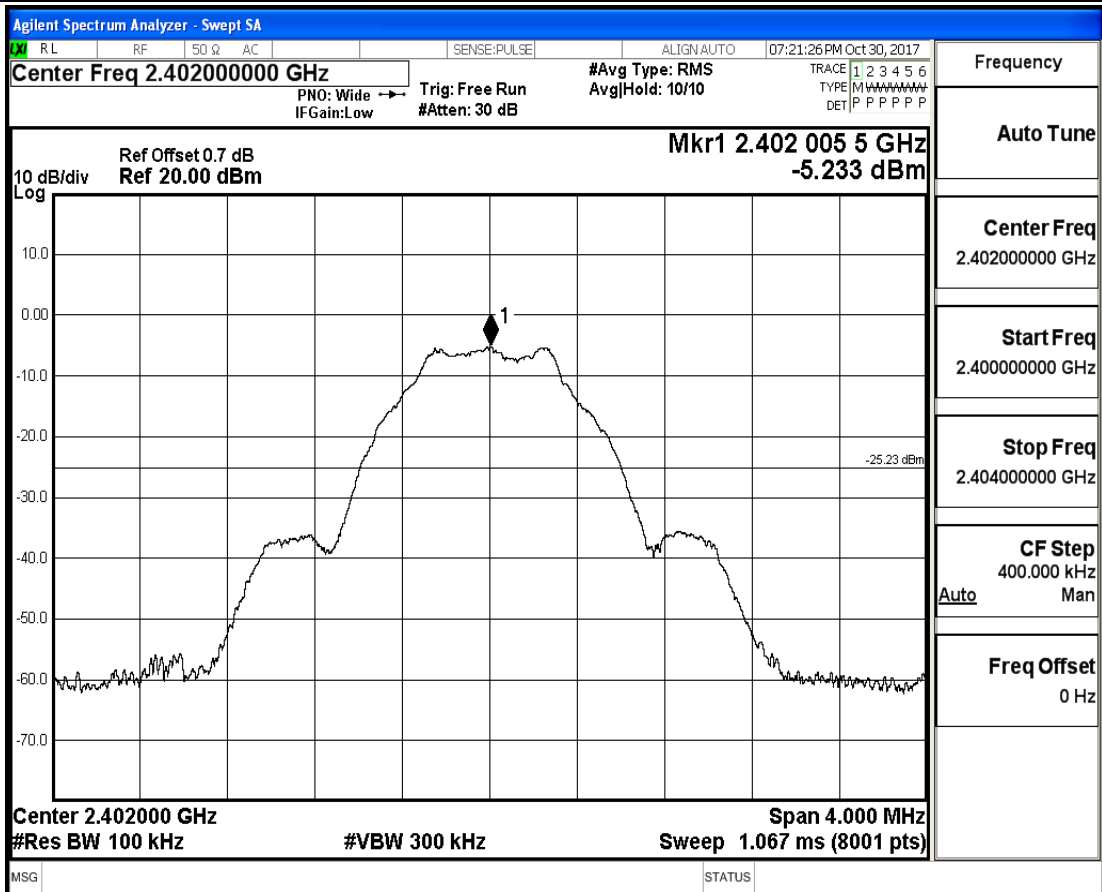

RF Conducted Spurious Emissions_BLE_2440

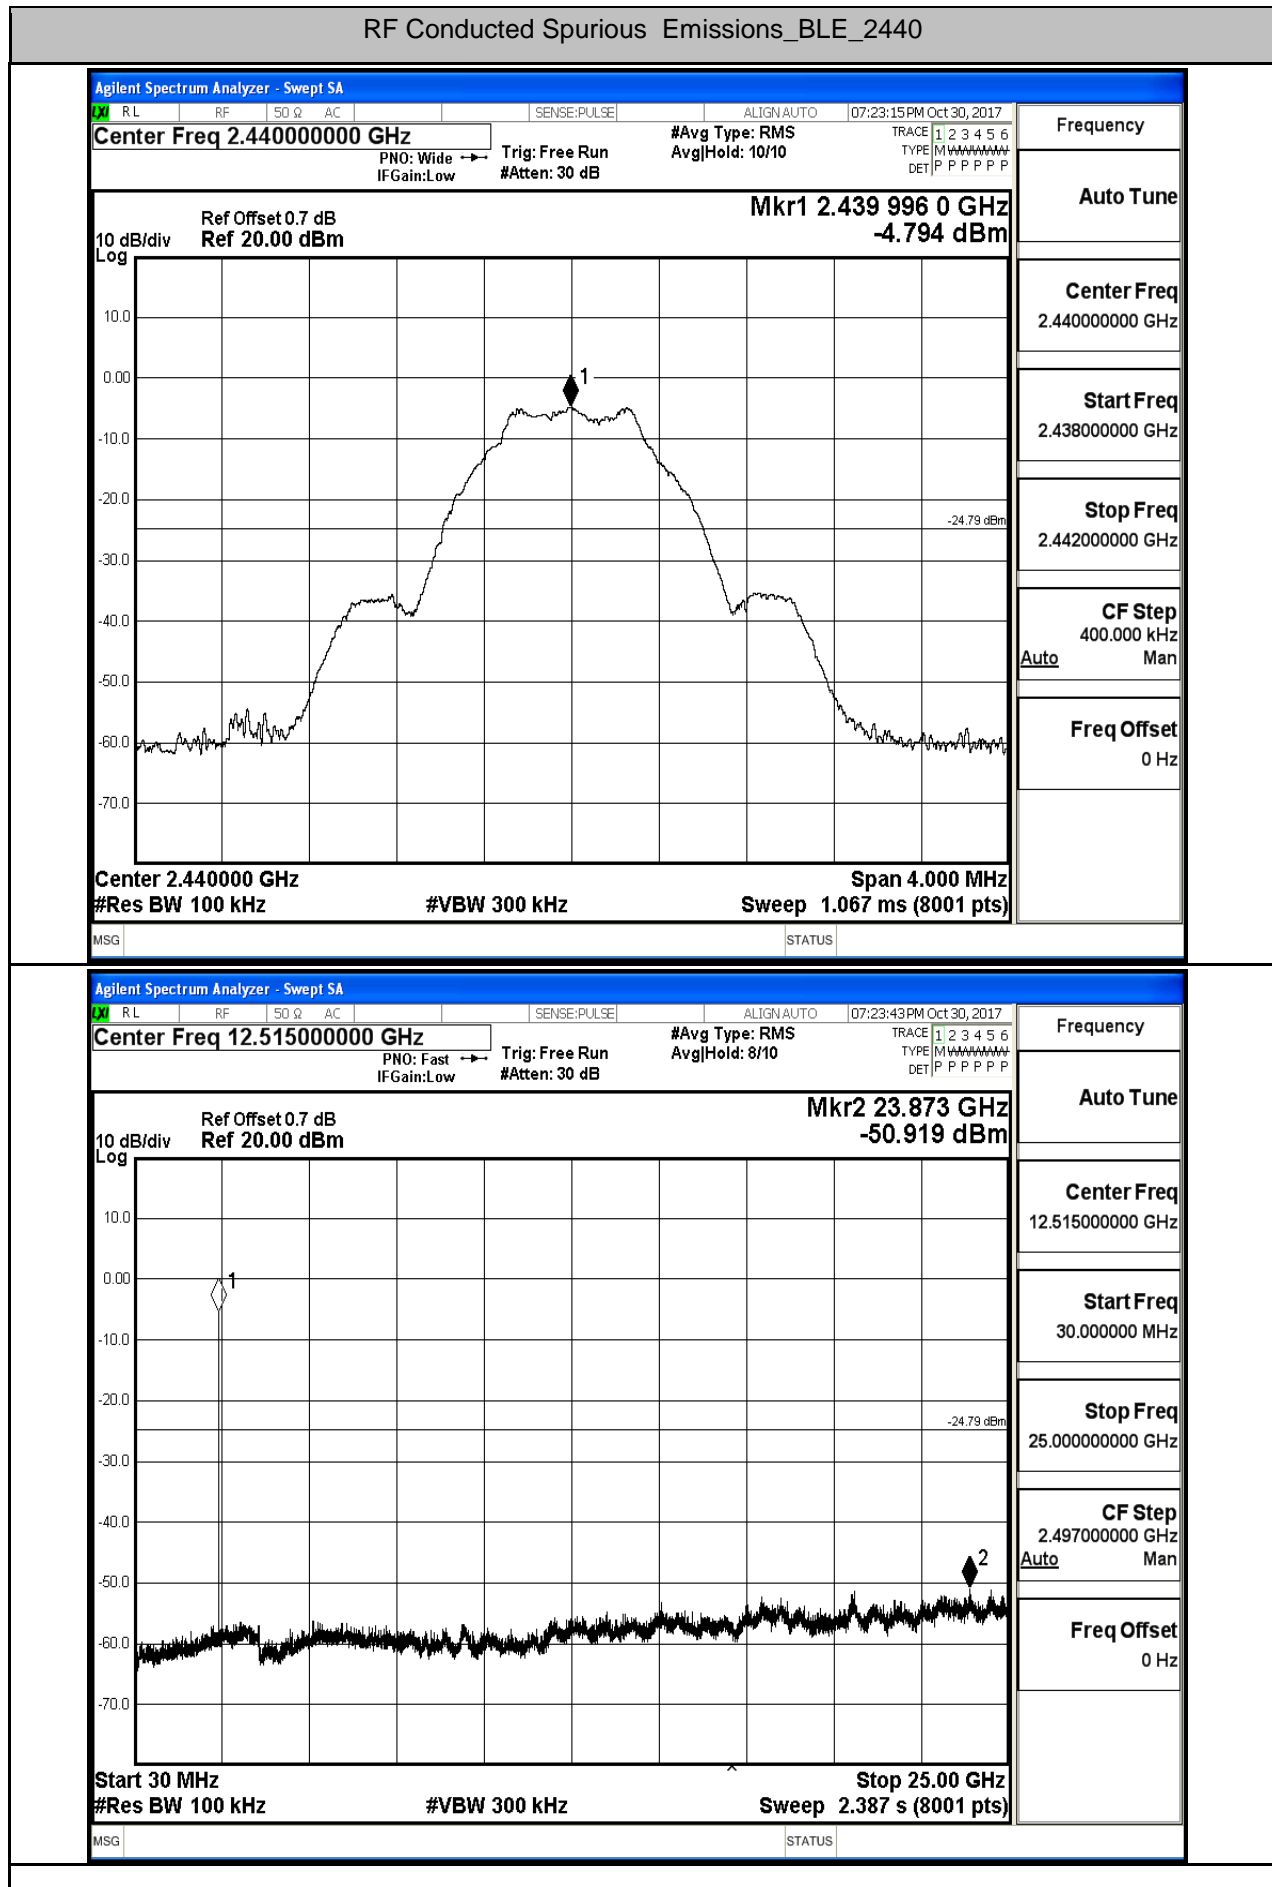


RF Conducted Spurious Emissions_BLE_2480

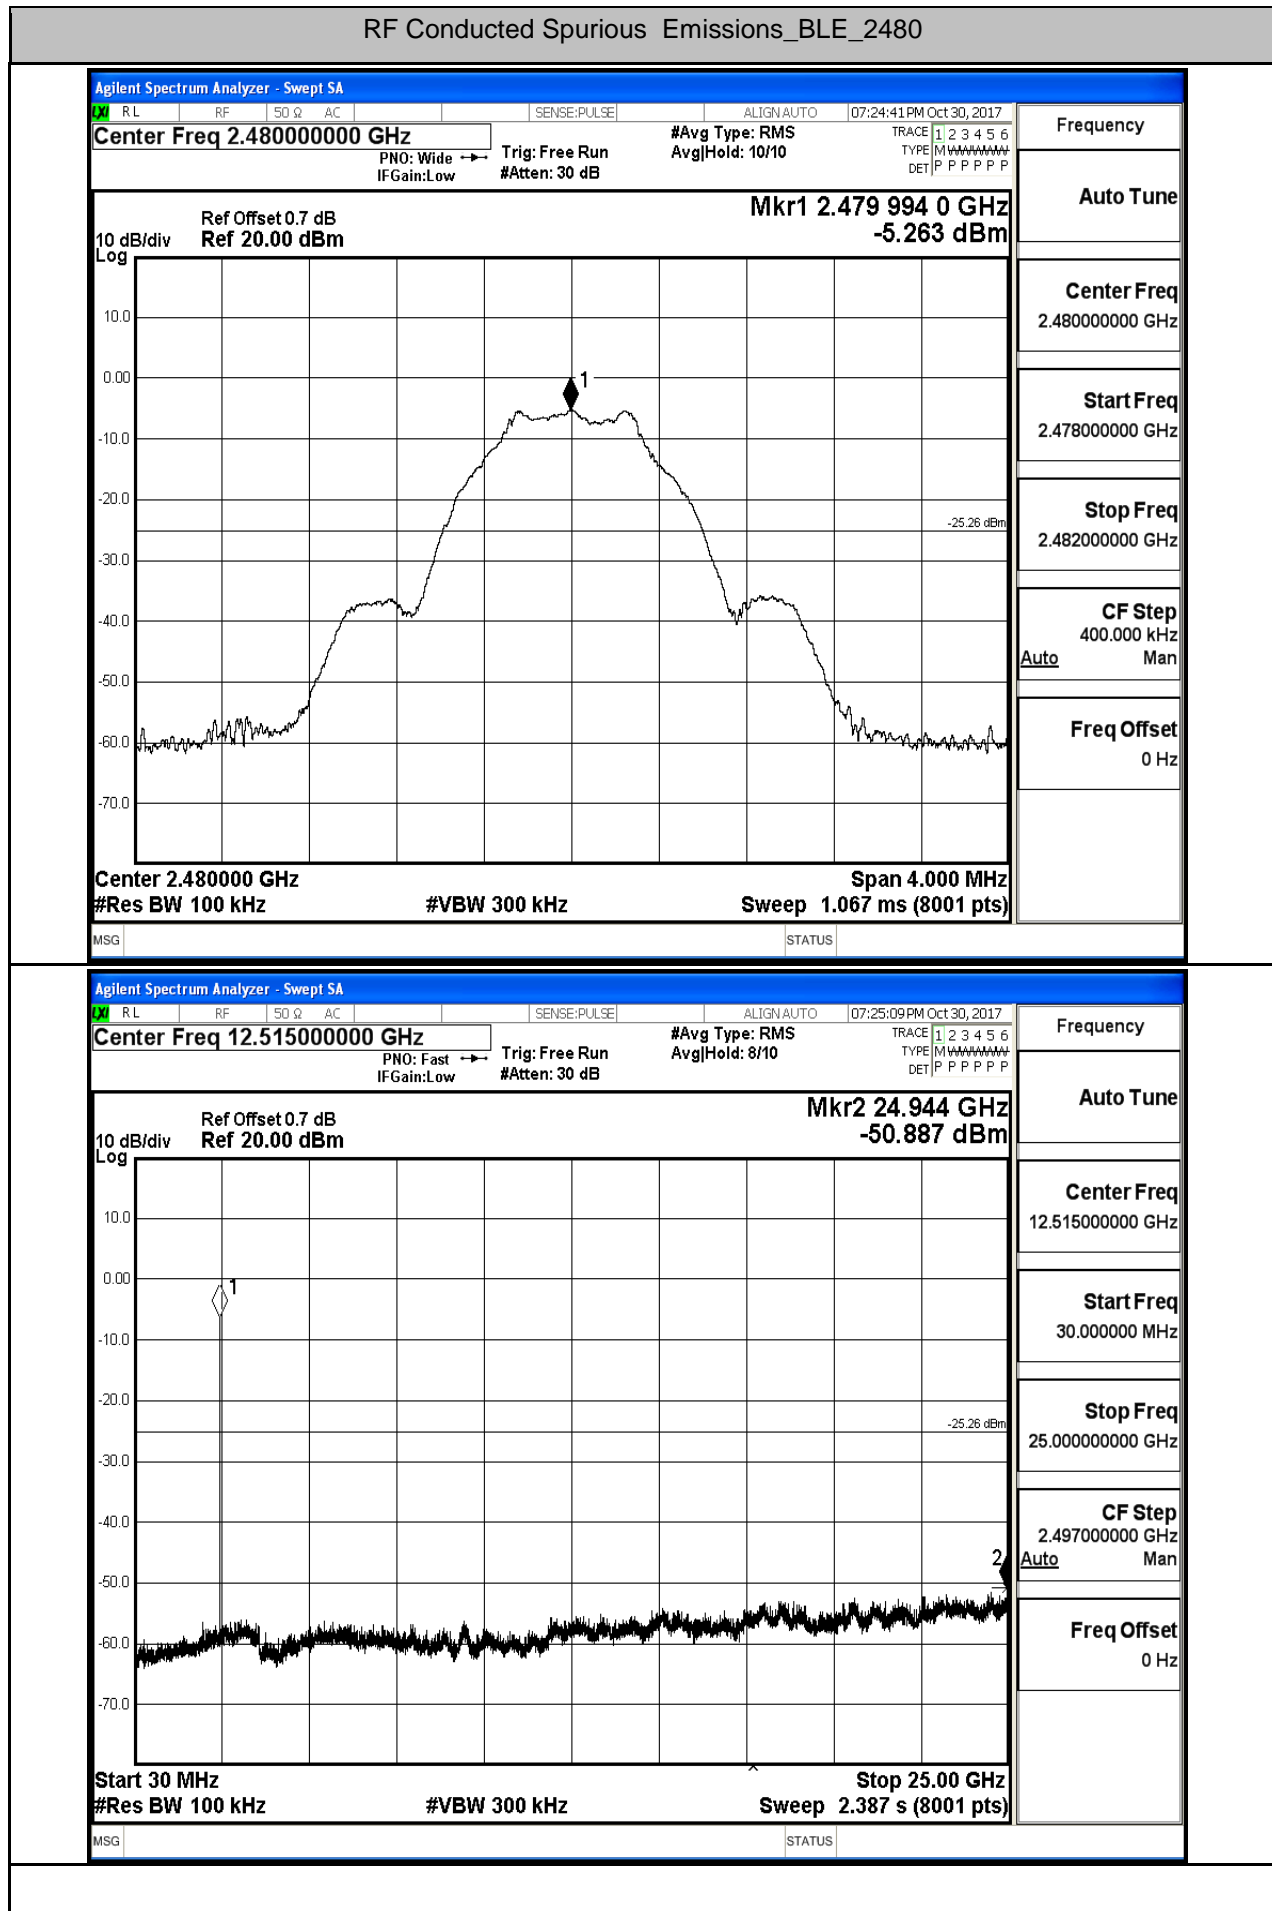


5.Restrict-band band-edge measurements

Test Mode	Hopping	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BLE	Off	2310.0	-48.65	0	0	48.58	PEAK	74	PASS
BLE	Off	2310.0	-61.40	0	0	35.83	AV	54	PASS
BLE	Off	2390.0	-51.12	0	0	46.11	PEAK	74	PASS
BLE	Off	2390.0	-61.17	0	0	36.06	AV	54	PASS
BLE	Off	2483.5	-49.11	0	0	48.12	PEAK	74	PASS
BLE	Off	2483.5	-60.84	0	0	36.39	AV	54	PASS
BLE	Off	2500.0	-49.77	0	0	47.46	PEAK	74	PASS
BLE	Off	2500.0	-60.80	0	0	36.43	AV	54	PASS

Restrict-band band-edge measurements_PEAK

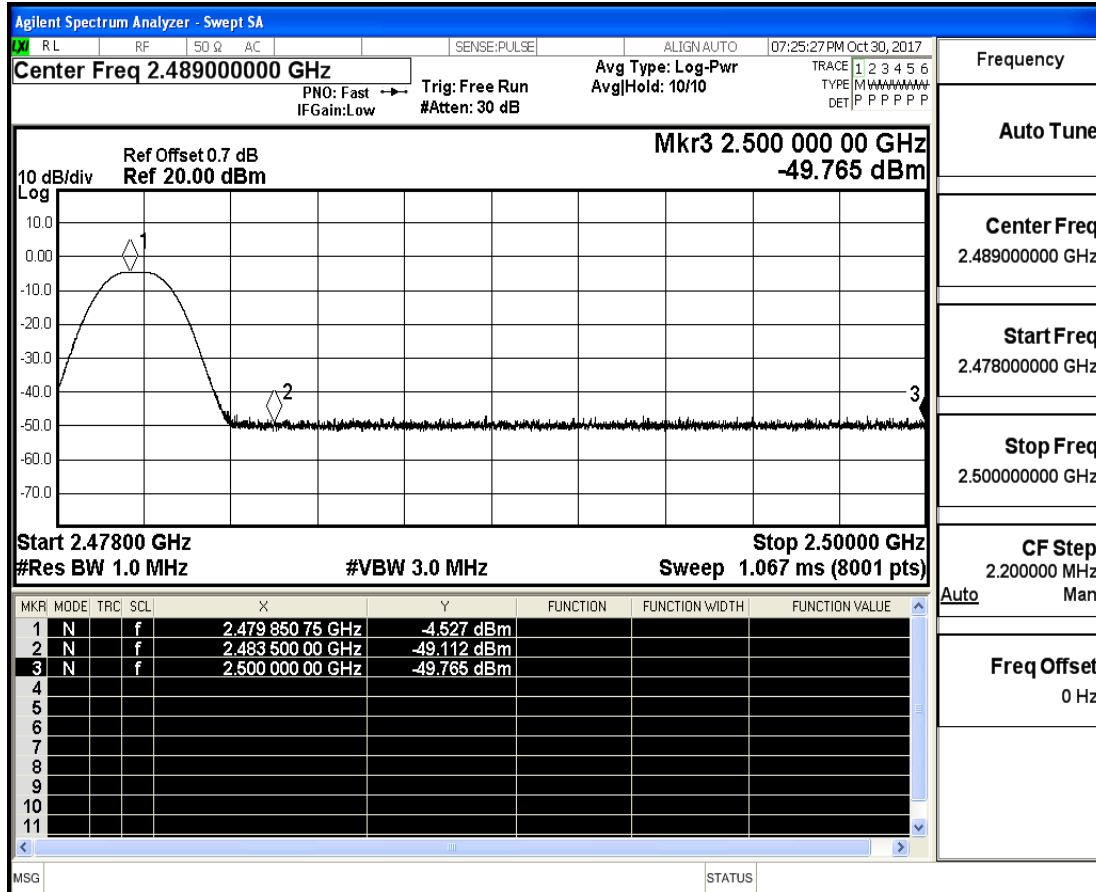

Restrict-band band-edge measurements_AV

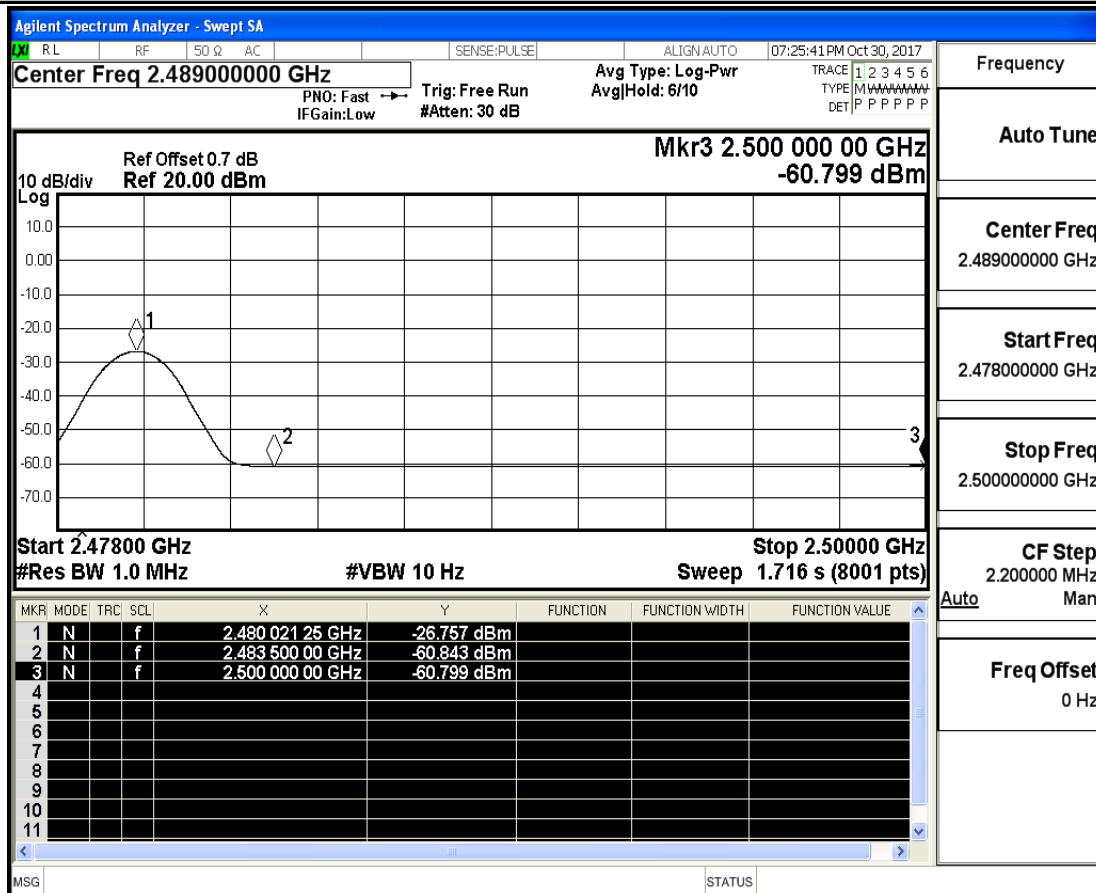

7. On Time and Duty Cycle

Test Graphs

