



No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM180100017602
Page: 1 of 26

TEST REPORT

Application No.: SZEM1801000176CR (SHEM1712008629CR)
FCC ID: 2AC8UA1619
Applicant: Anhui Huami Information Technology Co.,Ltd.
Address of Applicant: Building A4, 12th Floor, No.800 Wangjiang Road, Hefei, China (230088)
Manufacturer: Anhui Huami Information Technology Co.,Ltd.
Address of Manufacturer: Building A4, 12th Floor, No.800 Wangjiang Road, Hefei, China (230088)
Factory: Anhui Huami Information Technology Co.,Ltd.
Address of Factory: Building A4, 12th Floor, No.800 Wangjiang Road, Hefei, China (230088)
Equipment Under Test (EUT):
EUT Name: Amazfit Stratos
Model No.: A1619
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2017-12-15
Date of Test: 2017-12-26 to 2018-01-23
Date of Issue: 2018-01-26

| | |
|---------------------|--------------|
| Test Result: | Pass* |
|---------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu



EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



| <i>Revision Record</i> | | | | |
|------------------------|----------------|-------------|-----------------|---------------|
| <i>Version</i> | <i>Chapter</i> | <i>Date</i> | <i>Modifier</i> | <i>Remark</i> |
| 01 | / | 2018-01-26 | / | Original |
| | | | | |
| | | | | |

| | | | | |
|---------------------------------|--|---|--|--|
| Authorized for issue by: | | | | |
| | |  | | |
| | | <hr/> Foray Chen /Project Engineer | | |
| | |  | | |
| | | <hr/> Eric Fu /Reviewer | | |



2 Test Summary

| Radio Spectrum Technical Requirement | | | | |
|--------------------------------------|-------------------------------------|--------|--|--------|
| Item | Standard | Method | Requirement | Result |
| Antenna Requirement | 47 CFR Part 15, Subpart C 15.247 | N/A | 47 CFR Part 15, Subpart C 15.203 & 15.247(c) | Pass |

| Radio Spectrum Matter Part | | | | |
|---|-------------------------------------|---------------------------------------|---|--------|
| Item | Standard | Method | Requirement | Result |
| Minimum 6dB Bandwidth | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.8.1 | 47 CFR Part 15, Subpart C 15.247a(2) | Pass |
| Conducted Peak Output Power | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.9.1 | 47 CFR Part 15, Subpart C 15.247(b)(3) | Pass |
| Power Spectrum Density | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.10.2 | 47 CFR Part 15, Subpart C 15.247(e) | Pass |
| Conducted Band Edges Measurement | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.13 | 47 CFR Part 15, Subpart C 15.247(d) | Pass |
| Conducted Spurious Emissions | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.11 | 47 CFR Part 15, Subpart C 15.247(d) | Pass |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.12 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |
| Radiated Spurious Emissions | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 11.12 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |



3 Contents

| | Page |
|---|-----------|
| 1 COVER PAGE | 1 |
| 2 TEST SUMMARY | 3 |
| 3 CONTENTS | 4 |
| 4 GENERAL INFORMATION | 6 |
| 4.1 DETAILS OF E.U.T. | 6 |
| 4.2 DESCRIPTION OF SUPPORT UNITS | 6 |
| 4.3 TEST ENVIRONMENT | 6 |
| 4.4 MEASUREMENT UNCERTAINTY | 7 |
| 4.5 TEST LOCATION..... | 8 |
| 4.6 TEST FACILITY..... | 8 |
| 4.7 DEVIATION FROM STANDARDS..... | 8 |
| 4.8 ABNORMALITIES FROM STANDARD CONDITIONS | 8 |
| 5 EQUIPMENT LIST | 9 |
| 6 RADIO SPECTRUM TECHNICAL REQUIREMENT | 10 |
| 6.1 ANTENNA REQUIREMENT | 10 |
| 6.1.1 <i>Test Requirement:</i> | 10 |
| 6.1.2 <i>Conclusion</i> | 10 |
| 7 RADIO SPECTRUM MATTER TEST RESULTS | 11 |
| 7.1 MINIMUM 6DB BANDWIDTH..... | 11 |
| 7.1.1 <i>E.U.T. Operation</i> | 11 |
| 7.1.2 <i>Test Setup Diagram</i> | 11 |
| 7.1.3 <i>Measurement Procedure and Data</i> | 11 |
| 7.2 CONDUCTED PEAK OUTPUT POWER..... | 12 |
| 7.2.1 <i>E.U.T. Operation</i> | 12 |
| 7.2.2 <i>Test Setup Diagram</i> | 12 |
| 7.2.3 <i>Measurement Procedure and Data</i> | 12 |
| 7.3 POWER SPECTRUM DENSITY..... | 13 |
| 7.3.1 <i>E.U.T. Operation</i> | 13 |
| 7.3.2 <i>Test Setup Diagram</i> | 13 |
| 7.3.3 <i>Measurement Procedure and Data</i> | 13 |
| 7.4 CONDUCTED BAND EDGES MEASUREMENT..... | 14 |
| 7.4.1 <i>E.U.T. Operation</i> | 14 |
| 7.4.2 <i>Test Setup Diagram</i> | 14 |
| 7.4.3 <i>Measurement Procedure and Data</i> | 14 |
| 7.5 CONDUCTED SPURIOUS EMISSIONS..... | 15 |
| 7.5.1 <i>E.U.T. Operation</i> | 15 |
| 7.5.2 <i>Test Setup Diagram</i> | 15 |
| 7.5.3 <i>Measurement Procedure and Data</i> | 15 |
| 7.6 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS | 16 |
| 7.6.1 <i>E.U.T. Operation</i> | 17 |
| 7.6.2 <i>Test Setup Diagram</i> | 17 |
| 7.6.3 <i>Measurement Procedure and Data</i> | 18 |
| 7.7 RADIATED SPURIOUS EMISSIONS | 21 |
| 7.7.1 <i>E.U.T. Operation</i> | 22 |
| 7.7.2 <i>Test Setup Diagram</i> | 22 |



7.7.3 *Measurement Procedure and Data*.....23

8 TEST SETUP PHOTOGRAPHS26

9 EUT CONSTRUCTIONAL DETAILS26



4 General Information

4.1 Details of E.U.T.

| | |
|---------------------|--|
| Power supply: | DC 3.8V by Built-in lithium-ion polymer battery (290mAH) |
| Channel Spacing | 2MHz |
| Modulation Type | GFSK |
| Number of Channels | 40 |
| Operation Frequency | 2402MHz to 2480MHz |
| Antenna Type | PCB antenna (It is shared by WiFi & BT) |
| Antenna Gain: | -0.5 dBi |

4.2 Description of Support Units

| Description | Manufacturer | Model No. |
|-------------|--------------|-----------|
| Laptop | LENOVO | R400 |

4.3 Test Environment

| Environment Parameter | Selected Values During Tests | |
|-----------------------|------------------------------|------------|
| Relative Humidity | Ambient | |
| Value | Temperature(°C) | Voltage(V) |
| TNVN | 21 | DC 3.8 |

Note:

VN:Normal Voltage VL:Low Extreme Test Voltage VH:High Extreme Test Voltage
 TN:Normal Temperature TL:Low Extreme Test Temperature TH:High Extreme Test Temperature

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402MHz | 11 | 2422MHz | 21 | 2442MHz | 31 | 2462MHz |
| 2 | 2404MHz | 12 | 2424MHz | 22 | 2444MHz | 32 | 2464MHz |
| 3 | 2406MHz | 13 | 2426MHz | 23 | 2446MHz | 33 | 2466MHz |
| 4 | 2408MHz | 14 | 2428MHz | 24 | 2448MHz | 34 | 2468MHz |
| 5 | 2410MHz | 15 | 2430MHz | 25 | 2450MHz | 35 | 2470MHz |
| 6 | 2412MHz | 16 | 2432MHz | 26 | 2452MHz | 36 | 2472MHz |
| 7 | 2414MHz | 17 | 2434MHz | 27 | 2454MHz | 37 | 2474MHz |
| 8 | 2416MHz | 18 | 2436MHz | 28 | 2456MHz | 38 | 2476MHz |
| 9 | 2418MHz | 19 | 2438MHz | 29 | 2458MHz | 39 | 2478MHz |
| 10 | 2420MHz | 20 | 2440MHz | 30 | 2460MHz | 40 | 2480MHz |

Using test software was control EUT work in continuous transmitting mode. And select test channel as below:

| Channel | Frequency |
|----------------------------|-----------|
| The lowest channel (CH1) | 2402MHz |
| The middle channel (CH20) | 2440MHz |
| The highest channel (CH40) | 2480MHz |



4.4 Measurement Uncertainty

| No. | Parameter | Measurement Uncertainty |
|-----|-------------------------------|--|
| 1 | Radio Frequency | $< \pm 1 \times 10^{-5}$ |
| 2 | Total RF power, conducted | $< \pm 1.5 \text{ dB}$ |
| 3 | RF power density, conducted | $< \pm 3 \text{ dB}$ |
| 4 | Spurious emissions, conducted | $< \pm 3 \text{ dB}$ |
| 5 | All emissions, radiated | $< \pm 6 \text{ dB}$ (Below 1GHz) $< \pm 6 \text{ dB}$ (Above 1GHz) |
| 6 | Temperature | $< \pm 1^\circ\text{C}$ |
| 7 | Humidity | $< \pm 5 \%$ |
| 8 | DC and low frequency voltages | $< \pm 3 \%$ |



4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



5 Equipment List

| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
|--|--------------|--------------------|--------------|------------|--------------|
| Conducted Emission at AC Power Line | | | | | |
| EMI test receiver | R&S | ESR7 | SHEM162-1 | 2017-12-20 | 2018-12-19 |
| LISN | Schwarzbeck | NSLK8127 | SHEM061-1 | 2017-12-20 | 2018-12-19 |
| LISN | EMCO | 3816/2 | SHEM019-1 | 2017-12-20 | 2018-12-19 |
| Pulse limiter | R&S | ESH3-Z2 | SHEM029-1 | 2017-12-20 | 2018-12-19 |
| CE test Cable | / | CE01 | / | 2017-12-26 | 2018-12-25 |
| Conducted Test | | | | | |
| Spectrum Analyzer | R&S | FSP-30 | SHEM002-1 | 2017-12-20 | 2018-12-19 |
| Spectrum Analyzer | Agilent | N9020A | SHEM181-1 | 2017-09-26 | 2018-09-25 |
| Power meter | R&S | NRP | SHEM057-1 | 2017-12-26 | 2018-12-25 |
| Power Sensor | R&S | NRP-Z22 | SHEM136-1 | 2017-07-22 | 2018-07-21 |
| Power Sensor | R&S | NRP-Z91 | SHEM057-2 | 2017-12-26 | 2018-12-25 |
| Signal Generator | R&S | SMR40 | SHEM058-1 | 2017-07-03 | 2018-07-02 |
| Signal Generator | Agilent | N5182A | SHEM182-1 | 2017-09-26 | 2018-09-25 |
| Communication Tester | R&S | CMW270 | SHEM183-1 | 2017-10-22 | 2018-10-21 |
| Switcher | Tonscend | JS0806 | SHEM184-1 | 2017-09-26 | 2018-09-25 |
| Splitter | Anritsu | MA1612A | SHEM185-1 | / | / |
| Coupler | e-meca | 803-S-1 | SHEM186-1 | / | / |
| High-low Temp Cabinet | Suzhou Zhihe | TL-40 | SHEM087-1 | 2017-09-26 | 2018-09-25 |
| AC Power Stabilizer | WOCEN | 6100 | SHEM045-1 | 2017-12-26 | 2018-12-25 |
| DC Power Supply | QJE | QJ30003SII | SHEM046-1 | 2017-12-26 | 2018-12-25 |
| Conducted test Cable | / | RF01, RF 02 | / | 2017-12-26 | 2018-12-25 |
| Radiated Test | | | | | |
| EMI test receiver | R&S | ESU40 | SHEM051-1 | 2017-12-20 | 2018-12-19 |
| Spectrum Analyzer | R&S | FSP-30 | SHEM002-1 | 2017-12-20 | 2018-12-19 |
| Loop Antenna (9kHz-30MHz) | Schwarzbeck | FMZB1519 | SHEM135-1 | 2017-04-10 | 2020-04-09 |
| Antenna (25MHz-2GHz) | Schwarzbeck | VULB9168 | SHEM048-1 | 2017-02-28 | 2020-02-27 |
| Antenna (25MHz-3GHz) | Schwarzbeck | HL562 | SHEM010-1 | 2017-02-28 | 2020-02-27 |
| Horn Antenna (1-8GHz) | Schwarzbeck | HF906 | SHEM009-1 | 2017-10-24 | 2020-10-23 |
| Horn Antenna (1-18GHz) | Schwarzbeck | BBHA9120D | SHEM050-1 | 2017-01-14 | 2020-01-13 |
| Horn Antenna (14-40GHz) | Schwarzbeck | BBHA 9170 | SHEM049-1 | 2017-12-03 | 2020-12-02 |
| Pre-amplifier (9kHz-2GHz) | CLAVIIO | BDLNA-0001-412010 | SHEM164-1 | 2017-08-22 | 2018-08-21 |
| Pre-amplifier (1-18GHz) | CLAVIIO | BDLNA-0118-352810 | SHEM050-2 | 2017-08-22 | 2018-08-21 |
| High-amplifier (14-40GHz) | Schwarzbeck | 10001 | SHEM049-2 | 2017-12-20 | 2018-12-19 |
| Band filter | LORCH | 9BRX-875/X150-SR | SHEM156-1 | / | / |
| Band filter | LORCH | 13BRX-1950/X500-SR | SHEM083-2 | / | / |
| Band filter | LORCH | 5BRX-2400/X200-SR | SHEM155-1 | / | / |
| Band filter | LORCH | 5BRX-5500/X1000-SR | SHEM157-2 | / | / |
| High pass Filter | Wainwright | WHK3.0/18G-100SS | SHEM157-1 | / | / |
| High pass Filter | Wainwright | WHKS1700-3SS | SHEM157-3 | / | / |
| Semi/Fully Anechoic | ST | 11*6*6M | SHEM078-2 | 2017-07-22 | 2020-07-21 |
| RE test Cable | / | RE01, RE02, RE06 | / | 2017-12-26 | 2018-12-25 |

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.5dBi .

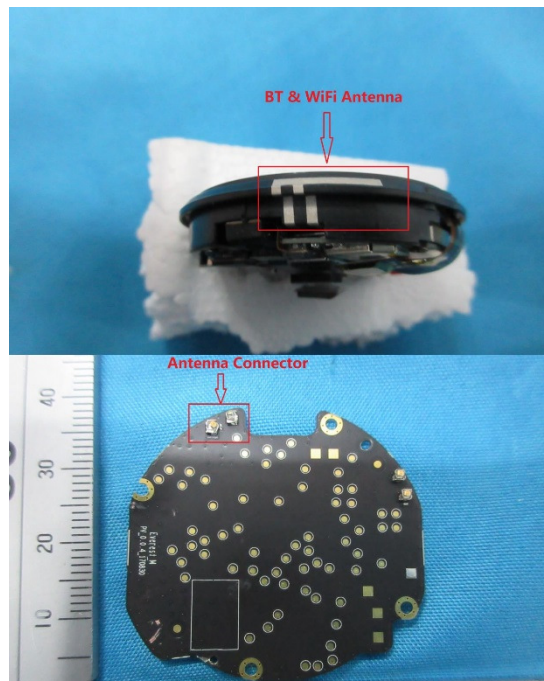

7 Radio Spectrum Matter Test Results

7.1 Minimum 6dB Bandwidth

| | |
|------------------|--------------------------------------|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247a(2) |
| Test Method: | ANSI C63.10 (2013) Section 11.8.1 |
| Limit: | ≥500 kHz |


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar

Test mode c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.1.2 Test Setup Diagram

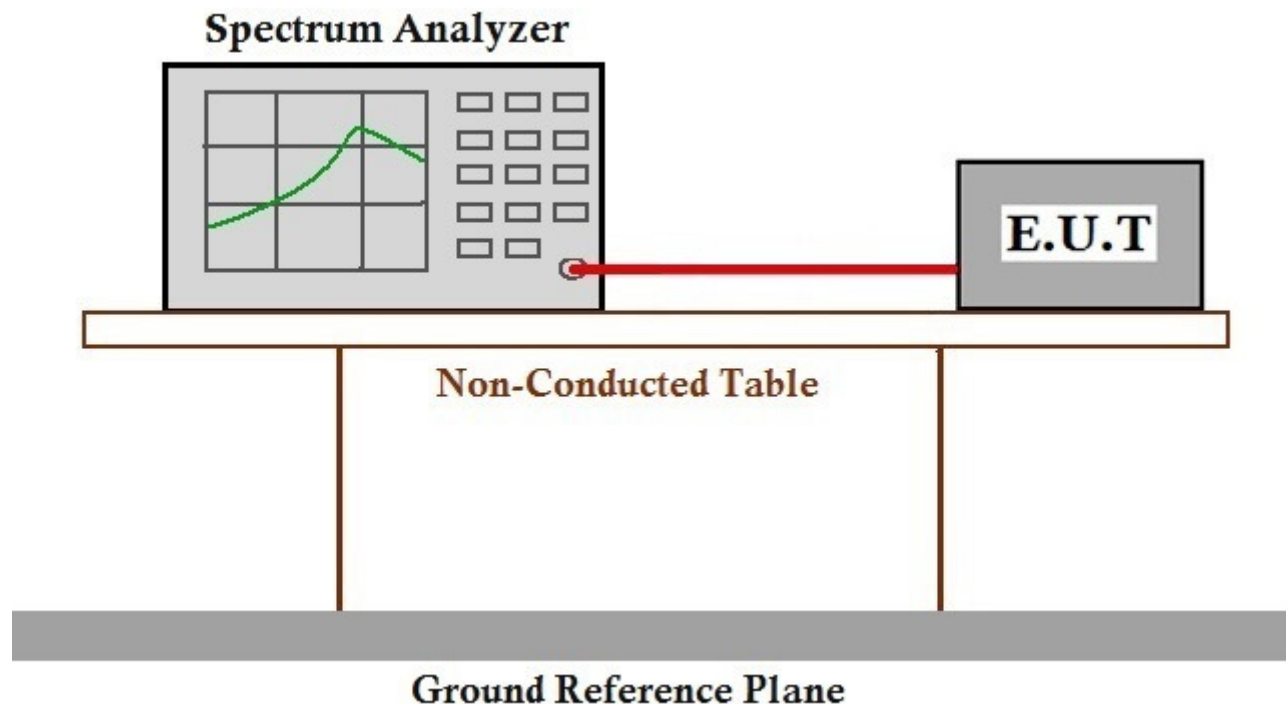

7.1.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247 SZEM180100017602 (BLE)

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 7.8.5
Limit:


| Frequency range(MHz) | Output power of the intentional radiator(watt) |
|----------------------|--|
| 902-928 | 1 for ≥ 50 hopping channels |
| | 0.25 for $25 \leq$ hopping channels < 50 |
| | 1 for digital modulation |
| 2400-2483.5 | 1 for ≥ 75 non-overlapping hopping channels |
| | 0.125 for all other frequency hopping systems |
| | 1 for digital modulation |
| 5725-5850 | 1 for frequency hopping systems and digital modulation |

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar
Test mode c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.2.2 Test Setup Diagram

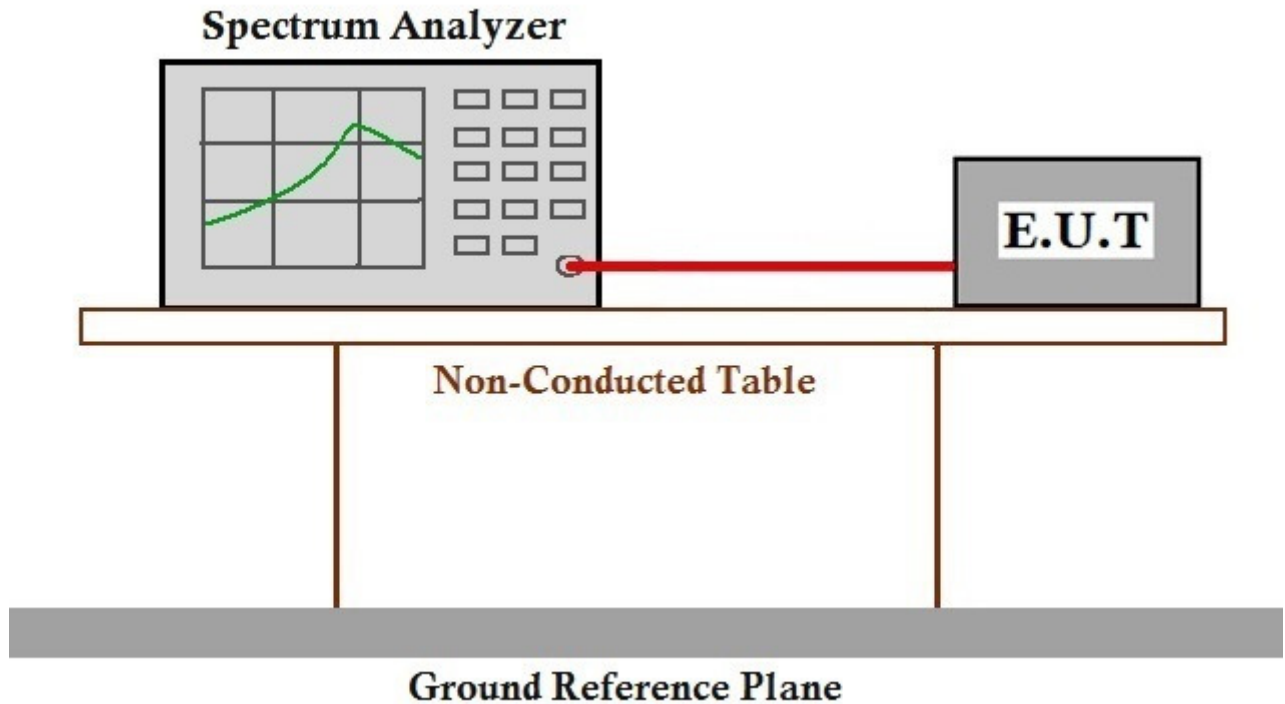

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247 SZEM180100017602 (BLE)


7.3 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
 Test Method: ANSI C63.10 (2013) Section 11.10.2
 Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar
 Test mode c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.3.2 Test Setup Diagram

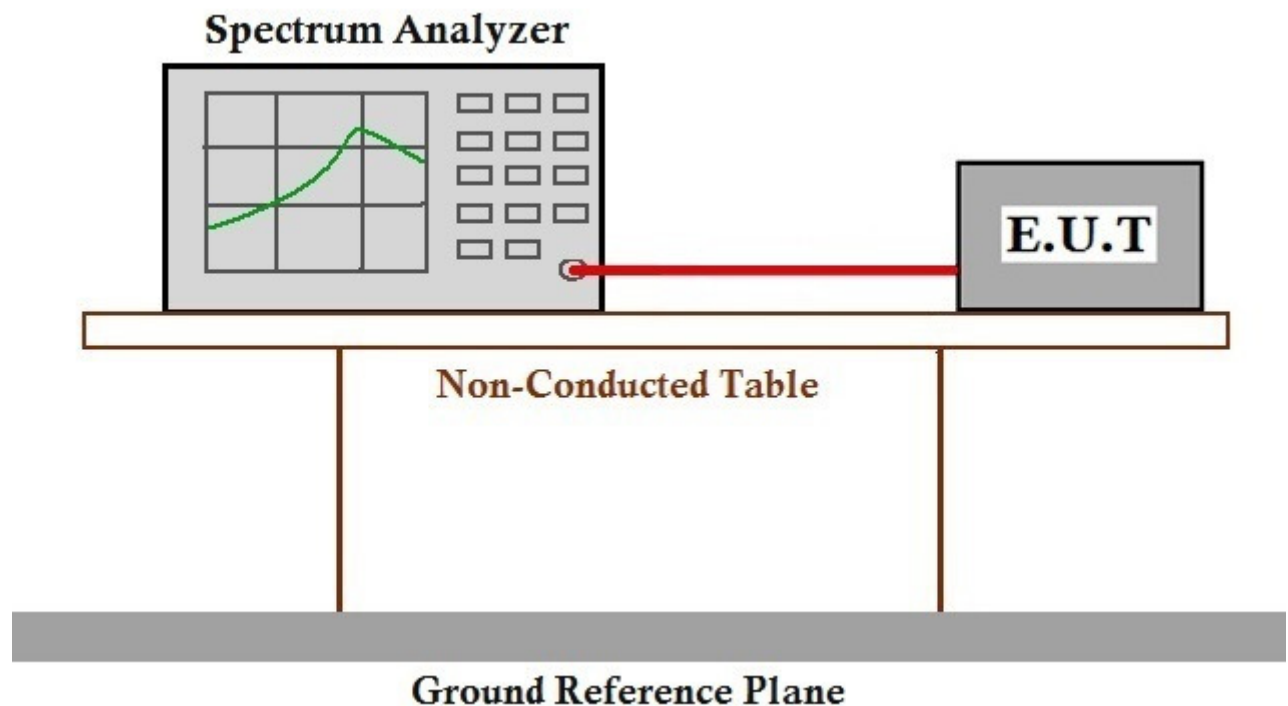

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247 SZEM180100017602 (BLE)


7.4 Conducted Band Edges Measurement

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 7.8.6
 Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.4.1 E.U.T. Operation

Operating Environment:
 Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar
 Test mode: c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.4.2 Test Setup Diagram

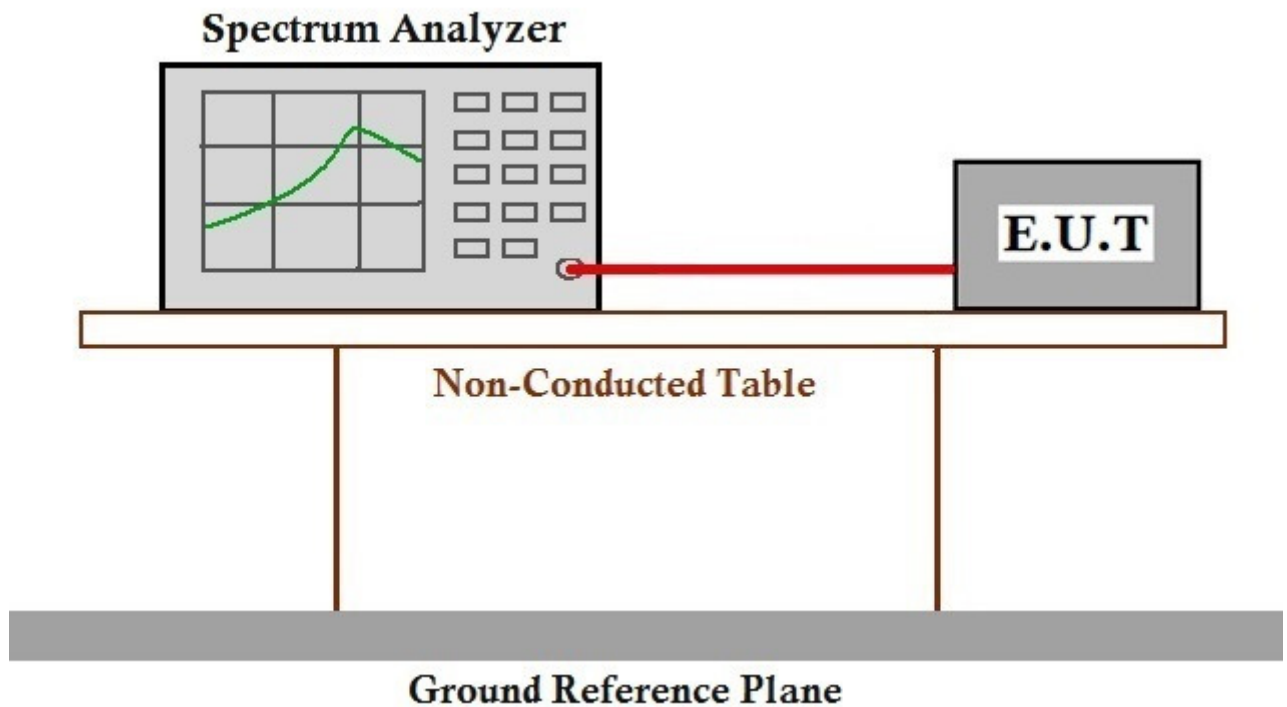

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247 SZEM180100017602 (BLE)


7.5 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 7.8.8
 Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.5.1 E.U.T. Operation

Operating Environment:
 Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar
 Test mode: c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.5.2 Test Setup Diagram

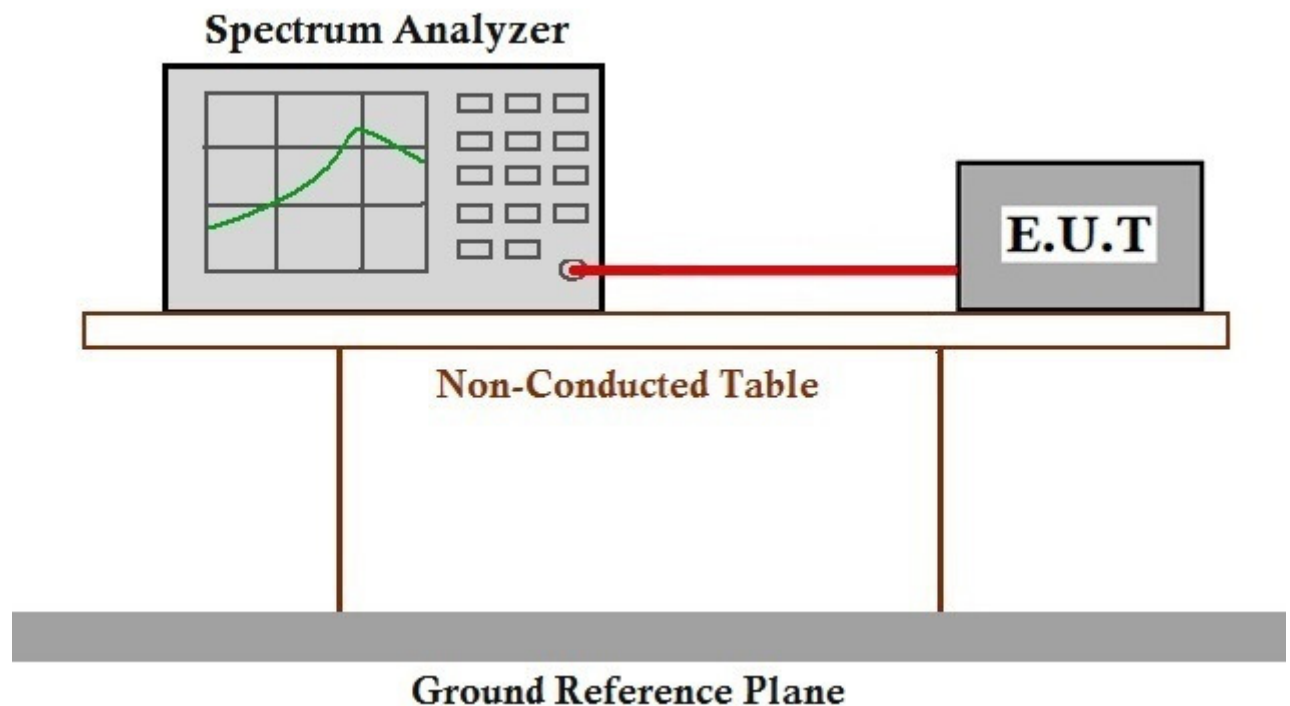

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247 SZEM180100017602 (BLE)



7.6 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.




7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar

Test mode c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.6.2 Test Setup Diagram

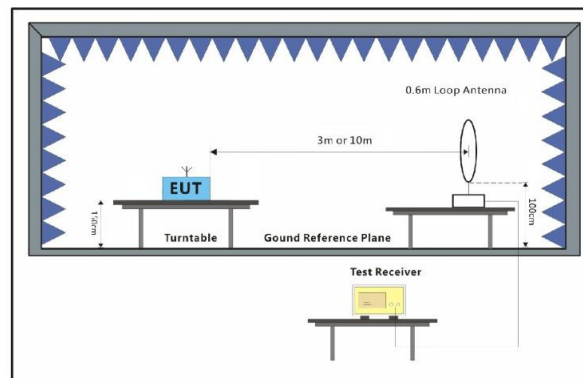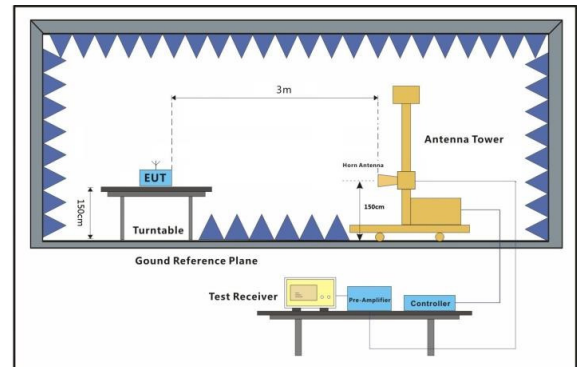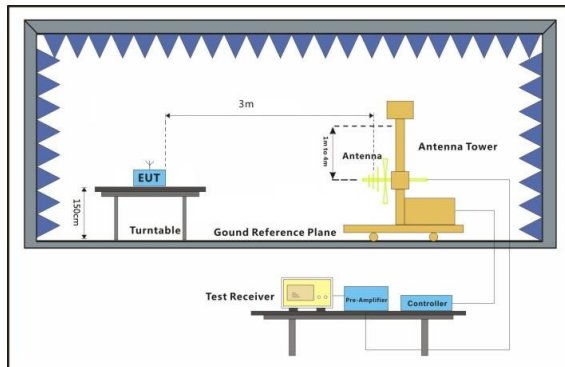



7.6.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor




Lowest Channel (2402MHz)

| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2349.4 | 47.47 | -3.76 | 43.71 | 54 | -10.29 | Peak | Horizontal |
| 2 | 2390 | 43.73 | -3.89 | 39.84 | 54 | -14.16 | Peak | Horizontal |
| 2 | 2402.2 | 96.73 | -3.92 | 92.81 | 54 | 38.81 | Peak | Horizontal |
| 1 | 2355.3 | 47.72 | -3.79 | 43.93 | 54 | -10.07 | Peak | Vertical |
| 2 | 2390 | 43.48 | -3.89 | 39.59 | 54 | -14.41 | Peak | Vertical |
| 3 | 2402.2 | 88.62 | -3.92 | 84.7 | 54 | 30.7 | Peak | Vertical |

Horizontal:

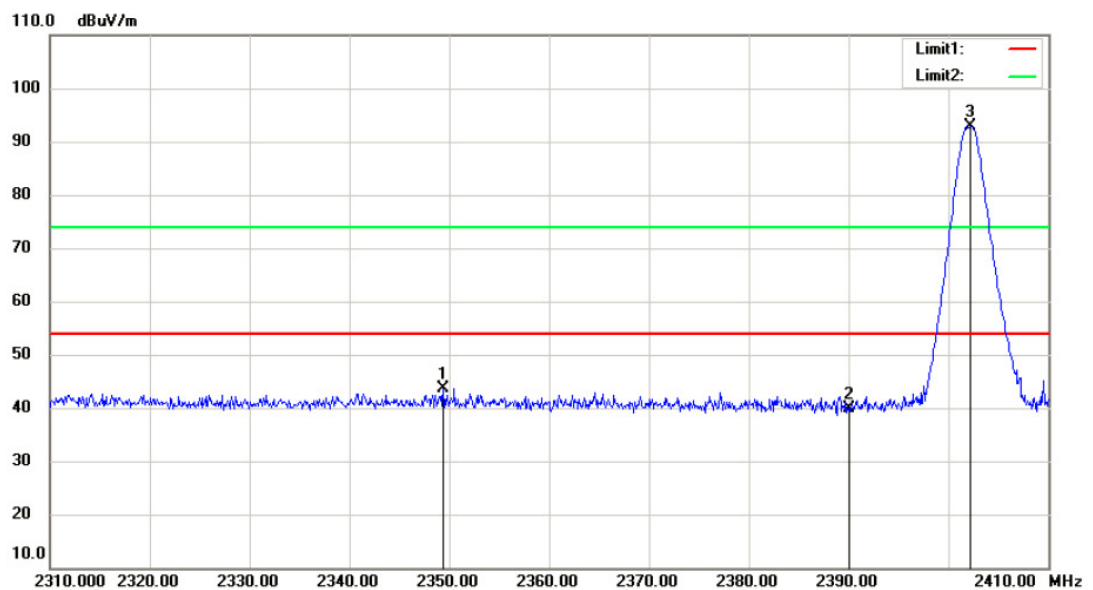

Vertical:

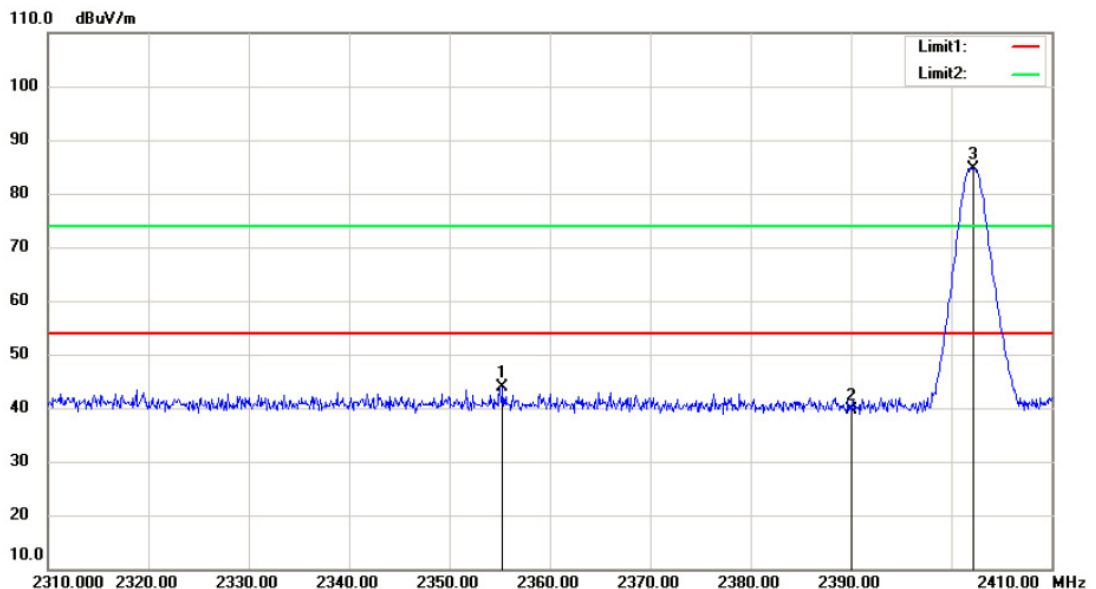





Highest Channel (2480MHz)

| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2479.725 | 92.79 | -4.01 | 88.78 | 54 | 34.78 | Peak | Horizontal |
| 2 | 2483.5 | 56.05 | -4.01 | 52.04 | 54 | -1.96 | Peak | Horizontal |
| 3 | 2483.925 | 52.3 | -4.02 | 48.28 | 54 | -5.72 | Peak | Horizontal |
| 1 | 2479.725 | 90.22 | -4.01 | 86.21 | 54 | 32.21 | Peak | Vertical |
| 2 | 2483.5 | 53.32 | -4.01 | 49.31 | 54 | -4.69 | Peak | Vertical |
| 3 | 2483.925 | 50.58 | -4.02 | 46.56 | 54 | -7.44 | Peak | Vertical |

Horizontal:

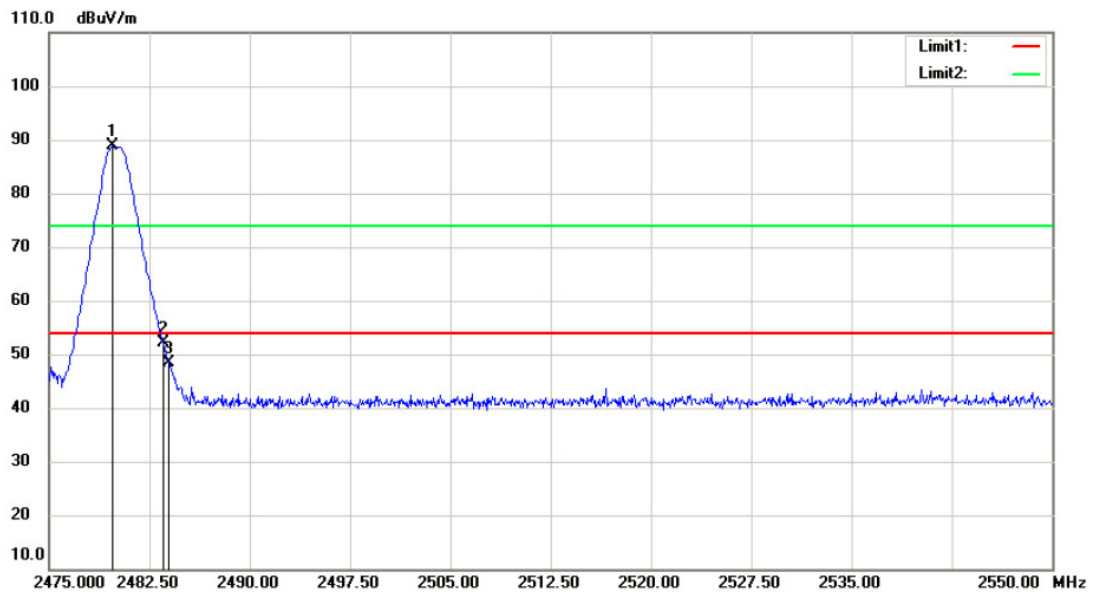

Vertical:

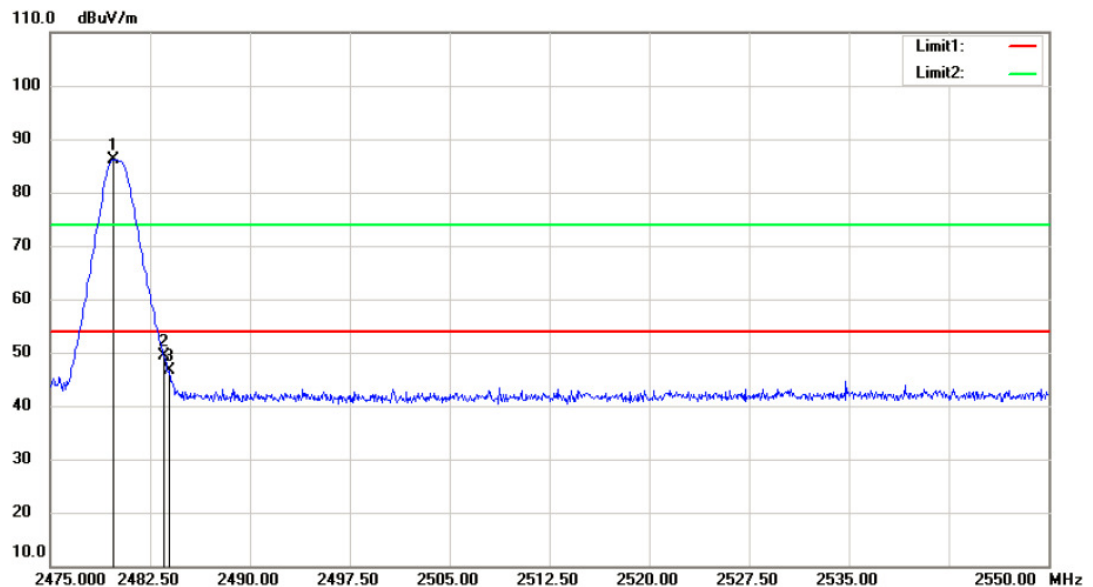



7.7 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.10.4
Measurement Distance: 3m
Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.




7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C Humidity: 45 % RH Atmospheric Pressure: 1010 mbar

Test mode c: Engineering mode: Using test software to control EUT working in continuous transmitting and receiving, and select channel and modulation type

7.7.2 Test Setup Diagram

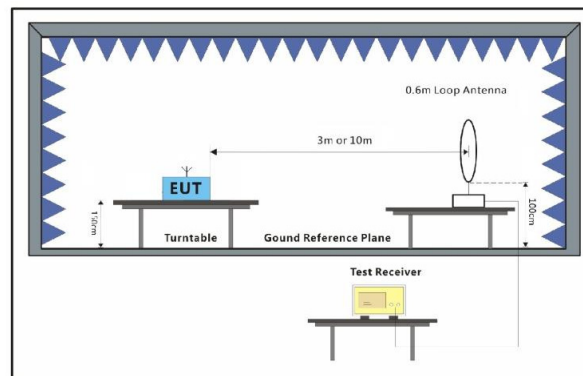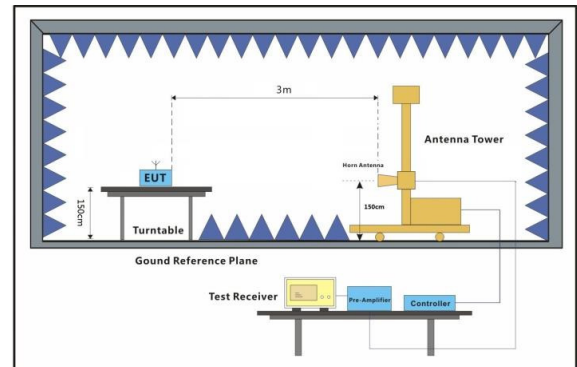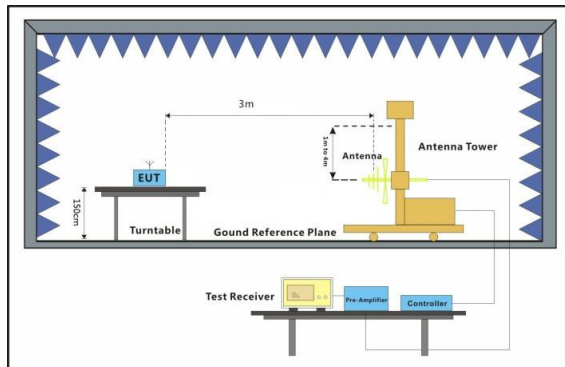



7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

Horizontal Test data

Operator:
Temperature(C): 26
Humidity(%): 60
Table Pos Detector
deg.

| Mark | Frequency MHz | RX_R dBuV | Factor dB | Emission dBuV/m | Limit dBuV/m | Margin dB | Ant.Pos cm | Table Pos deg. | Detector |
|------|------------------|--------------|--------------|--------------------|-----------------|--------------|---------------|-------------------|----------|
| | 4804 | 38.81 | 6.18 | 44.99 | 54 | -9.01 | | | peak |
| | 7206 | 37.74 | 10.63 | 48.37 | 54 | -5.63 | | | peak |
| * | 9608 | 34.3 | 14.38 | 48.68 | 54 | -5.32 | | | peak |

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

Vertical Test data

Operator:
Temperature(C): 26
Humidity(%): 60
Table Pos Detector
deg.

| Mark | Frequency MHz | RX_R dBuV | Factor dB | Emission dBuV/m | Limit dBuV/m | Margin dB | Ant.Pos cm | Table Pos deg. | Detector |
|------|------------------|--------------|--------------|--------------------|-----------------|--------------|---------------|-------------------|----------|
| | 4804 | 37.06 | 6.18 | 43.24 | 54 | -10.76 | | | peak |
| | 7206 | 33.82 | 10.63 | 44.45 | 54 | -9.55 | | | peak |
| * | 9608 | 37.85 | 14.38 | 52.23 | 54 | -1.77 | | | peak |

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

Horizontal Test data

Operator:
Temperature(C): 26
Humidity(%): 60
Table Pos Detector
deg.

| Mark | Frequency MHz | RX_R dBuV | Factor dB | Emission dBuV/m | Limit dBuV/m | Margin dB | Ant.Pos cm | Table Pos deg. | Detector |
|------|------------------|--------------|--------------|--------------------|-----------------|--------------|---------------|-------------------|----------|
| | 4880 | 37.38 | 6.97 | 44.35 | 54 | -9.65 | | | peak |
| | 7320 | 35.46 | 11.12 | 46.58 | 54 | -7.42 | | | peak |
| * | 9760 | 34.51 | 14.35 | 48.86 | 54 | -5.14 | | | peak |



Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

Vertical Test data

Operator:

Temperature(C): 26

Humidity(%): 60

| Mark | Frequency MHz | RX_R dBuV | Factor dB | Emission dBuV/m | Limit dBuV/m | Margin dB | Ant.Pos cm | Table Pos | Detector |
|------|------------------|--------------|--------------|--------------------|-----------------|--------------|---------------|-----------|----------|
| | 4880 | 36.36 | 6.97 | 43.33 | 54 | -10.67 | | | peak |
| | 7320 | 36.5 | 11.12 | 47.62 | 54 | -6.38 | | | peak |
| * | 9760 | 35.74 | 14.35 | 50.09 | 54 | -3.91 | | | peak |

Mode:c; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

Horizontal Test data

Operator:

Temperature(C): 26

Humidity(%): 60

| Mark | Frequency MHz | RX_R dBuV | Factor dB | Emission dBuV/m | Limit dBuV/m | Margin dB | Ant.Pos cm | Table Pos | Detector |
|------|------------------|--------------|--------------|--------------------|-----------------|--------------|---------------|-----------|----------|
| | 4960 | 41.24 | 7.49 | 48.73 | 54 | -5.27 | | | peak |
| * | 7440 | 36.42 | 11.65 | 48.07 | 54 | -5.93 | | | peak |
| | 9920 | 34.23 | 14.4 | 48.63 | 54 | -5.37 | | | peak |

Mode:c; Polarization:Vertical; Modulation:GFSK; ; Channel:High

Vertical Test data

Operator:

Temperature(C): 26

Humidity(%): 60

| Mark | Frequency MHz | RX_R dBuV | Factor dB | Emission dBuV/m | Limit dBuV/m | Margin dB | Ant.Pos cm | Table Pos | Detector |
|------|------------------|--------------|--------------|--------------------|-----------------|--------------|---------------|-----------|----------|
| | 4960 | 38.46 | 7.49 | 45.95 | 54 | -8.05 | | | peak |
| * | 7440 | 37 | 11.65 | 48.65 | 54 | -5.35 | | | peak |
| | 9920 | 34.14 | 14.4 | 48.54 | 54 | -5.46 | | | peak |



8 Test Setup Photographs

Refer to the < Test Setup Photos-FCC >

9 EUT Constructional Details

Refer to the <External Photos > & <Internal Photos >.

- End of the Report -